UHF Tag

RFID Protocol:



EPC Class1 Gen2, ISO18000-6C

Functional Specifications:

Frequency:	(US) 902-928MHz
IC type:	NXP Ucode 8
Memory:	EPC 128 bits , USER 0 bits, TID 96 bits
Write Cycles:	100,000 times
Functionality:	Read/write
Data Retention:	Up to 50 Years
Applicable Surface:	Off-metal surfaces

Read Range : 2.5m - (US) 902-928MHz, Off metal surfaces

Read Range : 1.2m - (US) 902-928MHz, Off metal surfaces

Warranty: 1 Year

Physical Specification:

Size:	60.0x19.0mm, (Hole: D5.0mmx2)
Thickness:	4.8mm
Material:	PPS
Colour:	Black
Mounting Methods:	Adhesive, Screw, binding
Weight:	13g

Environmenal Specification:

IP Rating:

Withstands Exposure To:

Fuel B, mineral oil, petroleum, salt mist, vegetable oil;

-55°C to +200°C


(230°C for 30 minutes, 180°C for 120minutes)

Operation Temperature:

-40°C to +150°C (working 10hours in 180°C)

Dimensions:

Certifications:

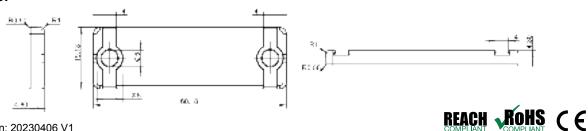

Reach Approved, RoHS Approved, CE Approved



FCC Warnning:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection againstharmful interference in a residential installation. This equipment generates, uses and can radiateradio frequency energy and, if not installed and used in accordance with the instructions, maycause harmful interference to radio communications. However, there is no guarantee thatinterference will not occur in a particular installation. If this equipment does cause harmfulinterference to radio or television reception, which can be determined by turning the equipmentoff and on, the user is encouraged to try to correct the interference by one or more of thefollowing measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1)This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.