

RRA-100-18-100646-1-A

E.M.C. TESTS REPORT

According to the standard:

FCC 47 CFR part 15 : 2017 (§15.225)

Equipment under test:

TABLE TOP PRD7330002C02
(FCC ID: 2AKUFPRD73302C)

Company:

BIOLOG-ID

FCC accredited: FR0004

Distribution: Mrs. BAYEUX

(Company: BIOLOG-ID)

Number of pages: 30 with 1 annex

Ed.	Date	Modified page(s)	Written by		Technical Verification and Quality	
			Name	Visa	Name	Visa
0	12/04/2018	Creation	G. SCIPION GS		B. Pellerin B. Pellerin	

Duplication of this report is only permitted for an integral photographic facsimile. It includes the number of pages referenced above.

This document is the result of testing a specimen or a sample of the product submitted. It does not imply an assessment of the conformity of the whole production of the item tested.



DESIGNATION OF PRODUCT: TABLE TOP PRD7330002C02

Serial number (S/N): BI1802000102

Reference / model (P/N): -

Software version: -

MANUFACTURER: BIOLOG-ID

COMPANY SUBMITTING THE PRODUCT:

Company: BIOLOG-ID

Address: 1 rue du commandant Robert Malrait
27300 BERNAY
FRANCE

Responsible: Mrs. BAYEUX

Person(s) present during the tests: -

TECHNICAL SUPPORT:

Company: BIOLOG-ID

Address: 1 rue du commandant Robert Malrait
27300 BERNAY
FRANCE

Responsible: Mrs. BAYEUX

DATES OF TEST: 15/01/2018 to 17/01/2018

TESTING LOCATIONS: EMITECH Laboratory at Montigny le Bretonneux (78) France

TESTED BY: G. SCIPION

TUTOR TESTS: B. PELLERIN

TABLE OF CONTENTS

1.	INTRODUCTION	4
2.	REFERENCE DOCUMENTS	4
3.	EQUIPMENT UNDER TEST CONFIGURATION	5
4.	SUMMARY OF TESTS RESULTS	6
5.	INTENTIONAL RADIATED EMISSIONS IN THE BAND 13.553 MHz – 13.567 MHz	8
6.	INTENTIONAL RADIATED EMISSIONS IN THE BAND 13.120 MHz – 14.010 MHz	10
7.	UNINTENTIONAL RADIATED EMISSIONS IN THE BAND 9 KHz – 30 MHz	12
8.	UNINTENTIONAL RADIATED EMISSIONS IN THE BAND 30 MHz – 6 GHz	14
9.	CONDUCTED EMISSION	16
10.	FREQUENCY DRIFT	18
11.	20 dB BANDWIDTH	23

ANNEX: PHOTOGRAPHS

1. INTRODUCTION

This document submits the results of Electromagnetic Compatibility tests performed on the equipment «**TABLE TOP PRD7330002C02**» (denominated hereafter E.U.T.: equipment under test) according to documents listed below.

2. REFERENCE DOCUMENTS

FCC 47 CFR Part 15: 2017

Code of Federal Regulations

Title 47- Telecommunication

Chapter 1- Federal Communication Commission

Part 15- Radio frequency devices

C63.10 : 2013


American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

3. EQUIPMENT UNDER TEST CONFIGURATION

Equipment under test (E.U.T.) description:

Class: B (residential environment)

RFID tag system

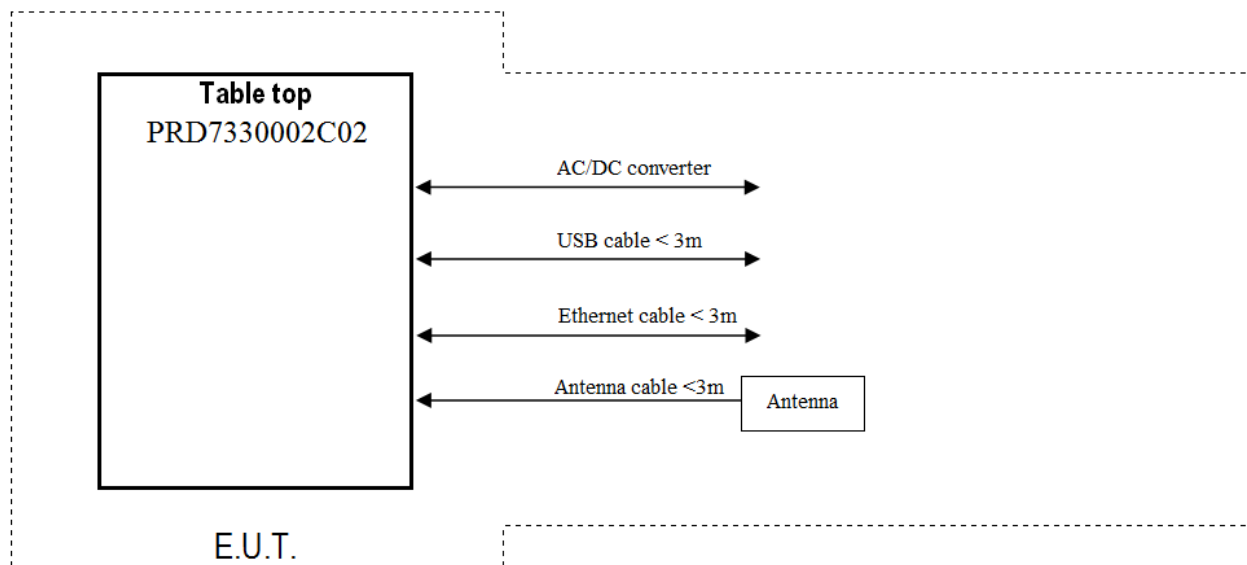

Antenna type and gain: internal antenna

Operating frequency range: from 13.553 MHz to 13.567 MHz

Number of channels: 1

Power source: 120Vac/60Hz

Modification of the equipment during the tests: No.

Cycle and operating mode during emission tests:

The equipment under test is in a constant modulated RF emission mode.

4. SUMMARY OF TESTS RESULTS

The following table summarizes test results of the EUT.

Subpart B of the standard FCC part 15 – Unintentional radiators

Test procedure	Designation of test	Test results				Comments
		Pass	Fail	N.A.	N.P.	
15.107	Measurement of conducted emission on AC mains ports	X				
15.109	Radiated emission limits	X				

Subpart C of the standard FCC part 15 – Intentional radiators

Test procedure	Designation of test	Test results				Comments
		Pass	Fail	N.A.	N.P.	
15.205	Restricted bands of operation	X				
15.207	Measurement of conducted emission on AC mains ports	X				
15.209	Radiated emission limits; general requirements	X				
15.215	Additional provisions to the general radiated emission limitations					
	(a) Alternative to general radiated emission limits	X				
	(b) Unwanted emissions outside of § 15.247 frequency bands			X		
	(c) 20 dB bandwidth and band-edge compliance	X				
15.225	intentional radiated emissions in the band 13.120 MHz – 14.010 MHz					
	a) 13.553 MHz - 13.567 MHz	X				
	b) 13.410-13.553 MHz and 13.567-13.710 MHz	X				
	c) 13.120-13.410 MHz and 13.710-14.010 MHz	X				
	d) outside 13.120 MHz and 14.010 MHz	X				
	e) Frequency drift	X				
	f) Tag			X		

N.A.: Not Applicable

N.P.: Not Performed

Conclusion:

The tested sample "**TABLE TOP PRD7330002C02**" submitted to the tests complies with the requirements of the standard:

- FCC 47 CFR PART 15: 2017

According to the limits specified in this report.

To declare or not compliance with the specification, it has not been given explicit account of the uncertainty associated with results.

5. INTENTIONAL RADIATED EMISSIONS IN THE BAND 13.553 MHz – 13.567 MHz

Standard: FCC 47 CFR PART 15: 2017

Section: 15.225 (a)

Test configuration:

The system is tested in open area test site.

The equipment under test (EUT) is placed on a non-conductive test table at 1 m above the horizontal reference ground plane.

Antenna height is 1 m above the ground plane.

For each frequency corresponding to an emission, EUT carried out a rotation through 360° with the aid of the turntable, with the aim to find the maximum of signal.

The test antenna is oriented in all orientations. Only the highest level is recorded.

Frequency range: 13.553 MHz – 13.567 MHz

Detection mode: Quasi-peak

Resolution bandwidth: 9 kHz

Measurement distance: 10 meters

Limit:

Frequency range (MHz)	Frequency field strength		Frequency measurement distance (meters)
	μV/m	dBμV/m	
13.553 – 13.567	15848	84	30
	-	103.08	10

①: $84 \text{ dB}\mu\text{V/m} + 20 \log (30/10)^2$

Operating mode during the test:

RF ON mode.

Instrumentation test list:

CATEGORY	BRAND	TYPE	N° EMITECH	LAST VALIDITY DATE	NEXT VALIDITY DATE
Antenna	Emco	6502	7179	10/04/2018	10/06/2020
Cable	/	N-2m	4358	21/06/2016	21/08/2018
Cable	câbles et connectiques	N-13m	2452	05/07/2017	05/09/2019
Cable	/	N-30m	4359	03/08/2016	03/10/2018
OATS	Emitech	Aunainville	0187	-	-
Receiver	Rohde & Schwarz	ESH3 (V 335.8017.52)	0181	01/07/2016	01/09/2018
Spectrum analyzer	Rohde & Schwarz	FSP7 (V 2.80FP3-V1.4-26-2)	6801	15/09/2017	15/11/2019

Results:

Ambient temperature (°C): 16

Relative humidity (%): 40

Power source: 120 Vac / 60 Hz

FREQUENCY (MHz)	ANTENNA ORIENTATION	AZIMUTH (degrees)	MEASUREMENT (dBμV/m)	LIMIT (dBμV/m)	MARGIN (dB)
13.5601	90°	90	72.58	103.08	30.5

Test conclusion: Complies with the requirements of the standard.

6. INTENTIONAL RADIATED EMISSIONS IN THE BAND 13.120 MHz – 14.010 MHz

Standards: FCC 47 CFR PART 15: 2017

Section: 15.225 (b) and (c)

Test configuration:

The measure is realized in near field and the results are correlated with the intentional radiated emission at 10 meters.

Frequency range: 13.120 MHz – 14.010 MHz

Detection mode: Peak

Resolution bandwidth: 10 kHz

Instrumentation test list:

CATEGORY	BRAND	TYPE	N° EMITECH	LAST VALIDITY DATE	NEXT VALIDITY DATE
Antenna	Emco	6502	7179	10/04/2018	10/06/2020
Cable	/	N-2m	4358	21/06/2016	21/08/2018
Cable	câbles et connectiques	N-13m	2452	05/07/2017	05/09/2019
Cable	/	N-30m	4359	03/08/2016	03/10/2018
OATS	Emitech	Aunainville	0187	-	-
Receiver	Rohde & Schwarz	ESH3 (V 335.8017.52)	0181	01/07/2016	01/09/2018
Spectrum analyzer	Rohde & Schwarz	FSP7 (V 2.80FP3-V1.4-26-2)	6801	15/09/2017	15/11/2019


Limit:

Frequencies range (MHz)	Frequency field strength		Frequency measurement distance (meters)
	μV/m	dBμV/m	
13.110 – 13.410 and 13.710 – 14.010	106.0	40.5	30
13.410 – 13.553 and 13.567 – 13.710	334.0	50.5	30
13.110 – 13.410 and 13.710 – 14.010	-	59.6①	10
13.410 – 13.553 and 13.567 – 13.710	-	69.6①	10


①: $E \text{ (dB}\mu\text{V/m)} + 20\log(30/10)^2$

Results:

Ambient temperature (°C): 20
Relative humidity (%): 40
Power source: 120 Vac / 60 Hz

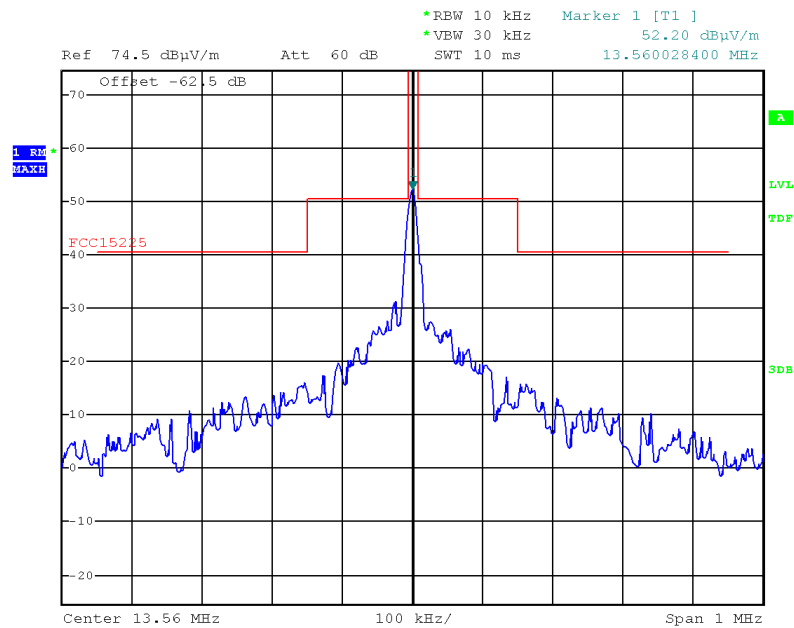Curves 1 and 2


Date: 15.FEB.2018 10:06:33

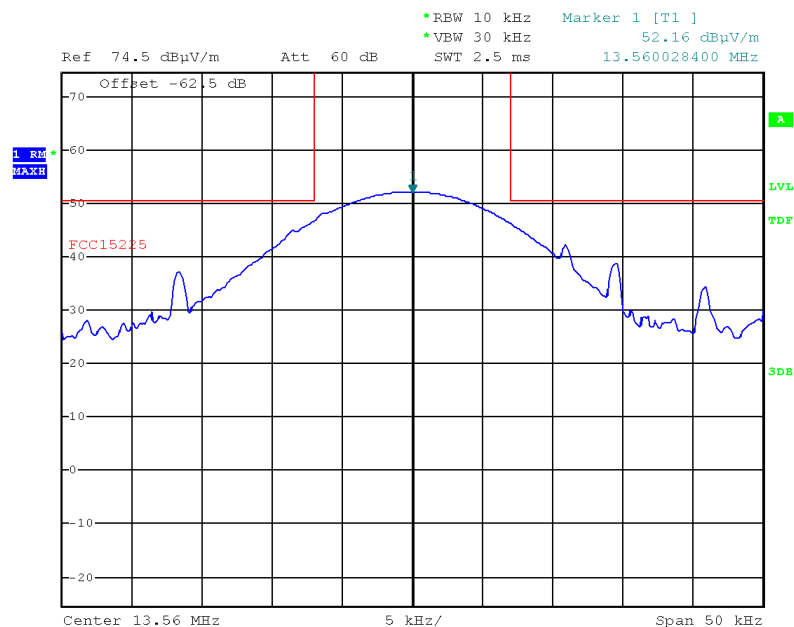

Date: 15.FEB.2018 10:07:37

Test conclusion: Complies with the requirements of the standard.

7. UNINTENTIONAL RADIATED EMISSIONS IN THE BAND 9 KHz – 30 MHz

Standard: FCC 47 CFR PART 15: 2017

Sections: 15.109 and 15.209

Equipment under test arrangement

The system is tested in open area test site.

The equipment under test (EUT) is placed on a non-conductive test table at 1 m above the horizontal reference ground plane.

Antenna height is 1 m.

For each frequency corresponding to an emission, EUT carried out a rotation through 360° with the aid of the turntable, with the aim to find the maximum of signal.

The test antenna is oriented in all orientations. Only the highest level is recorded.

Frequency range: 9 kHz - 30 MHz.

Detection mode: Quasi-peak except frequency bands 9-90 kHz and 120-490 kHz (average).

Resolution bandwidth: 200 Hz from 9 kHz to 150 kHz.
9 kHz from 150 kHz to 30 MHz

Measurement distance: 10 meters.

Limit:

Frequency range (MHz)	Frequency field strength (μV/m)	Frequency measurement distance (meters)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30

Limits in dBμV/m can be extrapolated to 30 m using 40 dB / decade.

Instrumentation test list:

CATEGORY	BRAND	TYPE	N° EMITECH	LAST VALIDITY DATE	NEXT VALIDITY DATE
Antenna	Emco	6502	7179	10/04/2018	10/06/2020
Cable	/	N-2m	4358	21/06/2016	21/08/2018
Cable	câbles et connectiques	N-13m	2452	05/07/2017	05/09/2019
Cable	/	N-30m	4359	03/08/2016	03/10/2018
OATS	Emitech	Aunainville	0187	-	-
Receiver	Rohde & Schwarz	ESH3 (V 335.8017.52)	0181	01/07/2016	01/09/2018
Spectrum analyzer	Rohde & Schwarz	FSP7 (V 2.80FP3-V1.4-26-2)	6801	15/09/2017	15/11/2019

Results:

Ambient temperature (°C): 16

Relative humidity (%): 40

Power source: 120 Vac / 60 Hz

Not any spurious has been detected.

Test conclusion: Complies with the requirements of the standard.

8. UNINTENTIONAL RADIATED EMISSIONS IN THE BAND 30 MHz – 6 GHz

Standard: FCC 47 CFR PART 15: 2017

Sections: 15.109 and 15.209

Equipment under test arrangement:

The system is tested in normalized test site.

The equipment under test (EUT) is placed on a non-conductive test table at 1 m above the horizontal reference ground plane.

For maximum meter reading at each frequency, the antenna height is adjusted between 1 m and 4 m above the ground plane. A 360 degrees rotation of the EUT is performed in vertical and horizontal polarization. The frequency azimuth and antenna height are presented in the tables on the next pages.

Frequency range: 30 MHz – 1 GHz

Detection mode: Quasi-peak

Resolution bandwidth: 120 kHz

Measurement distance: 3 meters

Limit: The EUT must satisfy requirements of the section 15.109 and 15.209 as shown in table below.

Frequency range (MHz)	Limit (Db μ V/m)
30 to 88	40.0
88 to 216	43.5
216 to 960	46.0
960 to 1000	54.0

Instrumentation test list :

CATEGORY	BRAND	TYPE	N° EMITECH	LAST VALIDITY DATE	NEXT VALIDITY DATE
Amplifier	Mini-circuit	ZFL-1000LN	5744	25/09/2017	25/11/2018
Antenna	Rohde & Schwarz	HK116	0293	12/06/2015	12/08/2018
Antenna	Rohde & Schwarz	HL223	0294	05/07/2017	05/09/2020
Antenna	Emco	DB-2	1383	27/09/2017	27/11/2020
Antenna	Emco	3121C-DB1	14696	27/09/2017	27/11/2020
Antenna	Emco	3121C-DB3	14694	27/09/2017	27/11/2020
Cable	C&C	N-4m	14227	02/09/2016	02/11/2018
Cable	C&C	N-4m	14226	02/09/2016	02/11/2018
Cable	C&C	N-2m	11176	18/04/2016	18/06/2018
Cable	C&C	N-6m	14224	02/09/2016	02/11/2018
Cable	C&C	N-10m	11170	16/04/2016	16/06/2018
Shielded enclosure	Comtest	SAC 3m	14622	-	-
Spectrum analyzer	Rohde & Schwarz	ESR7	12811	01/08/2017	01/10/2018
Synthesizer	Rohde & Schwarz	SMBV100A	14566	09/06/2017	09/08/2019

Results:

Ambient temperature (°C): 20

Relative humidity (%): 40

Power source: 120 Vac / 60 Hz

Frequency (MHz)	Polarization	Antenna Height (cm)	Azimuth (degrees)	Q-Peak Measure (dBμV/m)	Limit (dBμV/m)	Margin
40.675	Vertical	100	100	30.3	40.0	9.7
54.234	Vertical	100	170	24.7	40.0	14.3
108.48	Vertical	100	200	19.9	43.5	23.6
155.79	Horizontal	100	300	22.5	43.5	21
169.44	Horizontal	100	Transient			
176.29	Horizontal	100	270	17.8	43.5	25.7

V = Vertical; H = Horizontal

Test conclusion: Complies with the requirements of the standard.

9. CONDUCTED EMISSION

Standard: FCC 47 CFR PART 15: 2016

Test method: Part 15.107 and 15.207

Test configuration:

Tested cable	Measure with	E.U.T. height
Power supply 120 Vac / 60 Hz	L.I.S.N.	80 cm

Frequencies band	Tested cable	Resolution bandwidth	Video bandwidth
150 kHz - 30 MHz	Power supply 120 Vac / 60 Hz	10 kHz	30 kHz
150 kHz - 30 MHz	Power supply 120 Vac / 60 Hz	9 kHz	Auto (*)

(*) for measurement in average detection.

Test method deviation: No

Test equipment list:

CATEGORY	BRAND	TYPE	N° EMITECH	LAST VALIDITY DATE	NEXT VALIDITY DATE
Absorption clamp	Rohde & Schwarz	MDS21	5288	17/02/2016	17/04/2020
Cable	Sucoflex	N-3m	12919	29/04/2016	29/06/2018
Cable	C&C	BNC-0.3m	10027	29/04/2017	29/06/2019
Multimeter	Emitech	Absorbeur courant de gaine	12356	31/10/2017	31/12/2019
Power supply	Schaffner	NSG 1007-5-400	4637	30/03/2017	30/05/2018
QP adapter	Hewlett Packard	HP 85650 A	0491	14/03/2016	14/05/2018
Receiver	Rohde & Schwarz	ESH3 (V 335.8017.52)	6569	08/04/2016	08/06/2018
Resistor	Emitech	150 Ohms	14343	02/01/2017	02/03/2019
Spectrum analyzer	Hewlett Packard	HP 8568 B	0019	10/03/2016	10/05/2018
Test enclosure	Emitech	JD 3P1	14875	-	-



Results:

See curves below including detections and limits in peak (red), average (green) and quasi-peak (blue).

Curves 1 and 2

TABLE TOP PRD7330002C02 in peak detection (RED)

Conducted voltage emission (measurement): Power supply 120 Vac / 60 Hz in average value detection (GREEN)

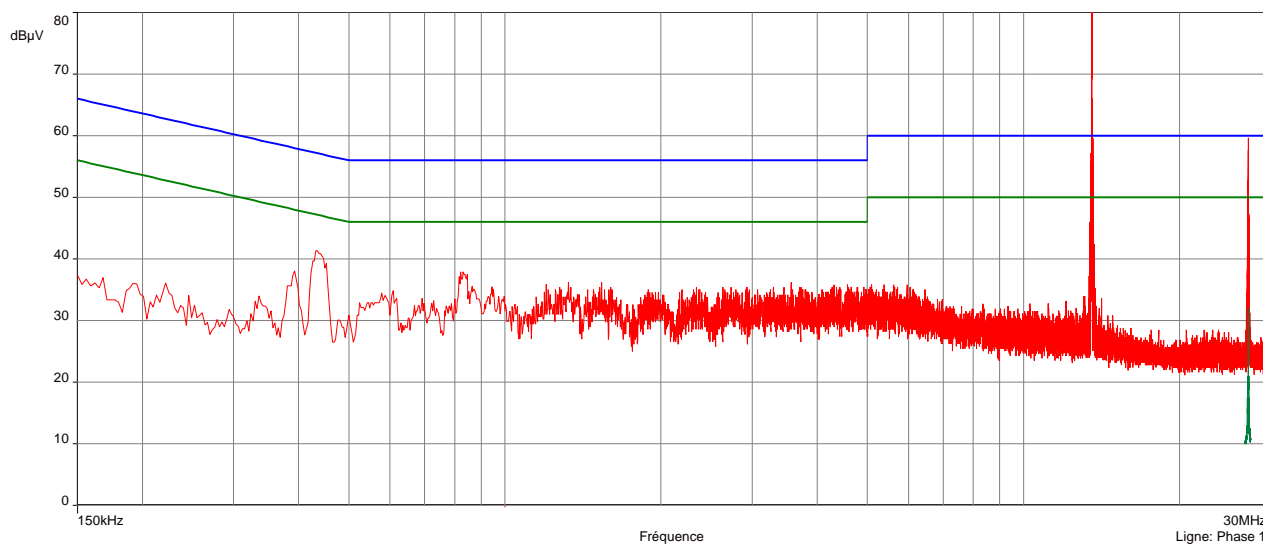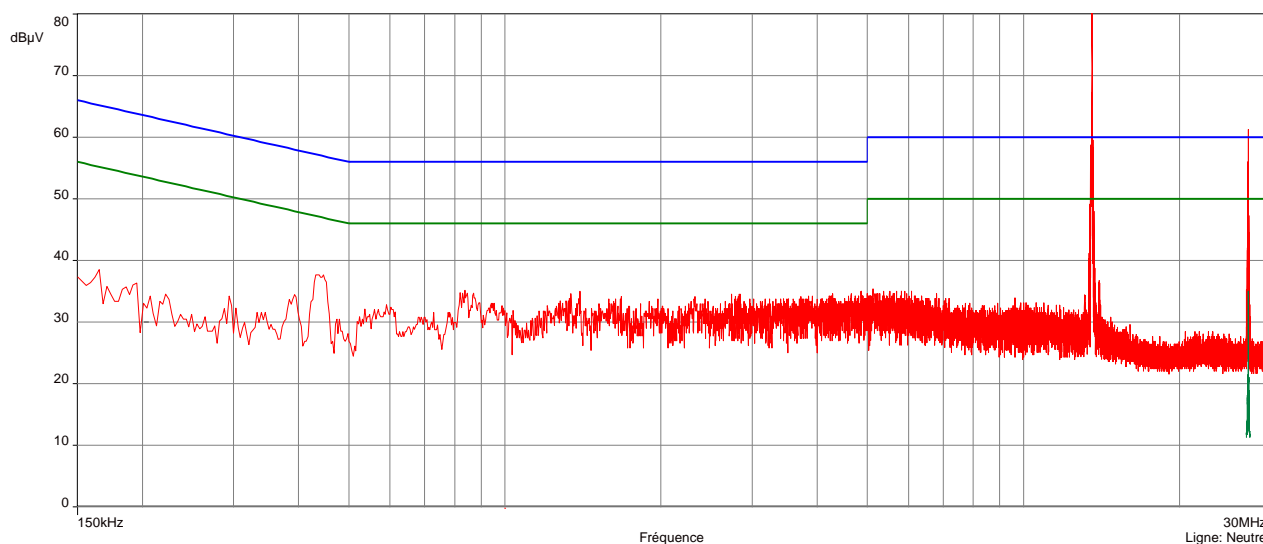

Class B of the standard FCC 47 CFR PART 15: 2017

10. FREQUENCY DRIFT

Standards: FCC 47 CFR Part 15: 2017

Section: 15.225 (e)

Test configuration:

The measure is realized in near field and the results are correlated with the intentional radiated emission at 30 meters.

Test equipment used:

CATEGORY	BRAND	TYPE	N° EMITECH	LAST VALIDITY DATE	NEXT VALIDITY DATE
Autotransformer	E.T.A.T.	Cx520P	0931	-	-
Climatic enclosure	Flonic Schlumberger	200P	2694	-	-
Power supply	APT	AC07040	10635	14/03/2018	14/05/2019
Resistance thermometer	GHM Greisinger	GMH 3710	12832	21/07/2017	21/09/2018
Spectrum analyzer	Rohde & Schwarz	FSP40 (V 4.00SP1-V3.0-10-2)	5175	01/04/2016	01/06/2018
Tests enclosure	Emitech	LER	12079	-	-

Measurement conditions:

Resolution bandwidth: 10 kHz

Video bandwidth: 30 kHz

Test operating conditions of the equipment:

The transmitter is in RF ON mode.

Results:



			F (MHz)	Deviation (kHz)	Curve	Limit (1)
Normal test conditions	Temperature (+20°C) Humidity (40%)	Nominal power source (120.0 V)	13.5599	0.1	1	± 1.356 kHz
		Minimal power source (102 V)	13.5599	0.1	2	
		Maximal power source (138 V)	13.5599	0.1	3	
Extreme test conditions	Minimal temperature (- 20°C)	Nominal power source (120 V)	13.5600	0	4	
	Minimal temperature (- 30°C)		13.5599	0.1	5	
	Maximal temperature (+ 50°C)		13.5599	0.1	6	



(1) ± 0.01 % of the operating frequency.



N.A. : Not Applicable

Measurement uncertainty: ± 1 x 10⁻⁷

Test conclusion: Complies with the requirements of the standard.

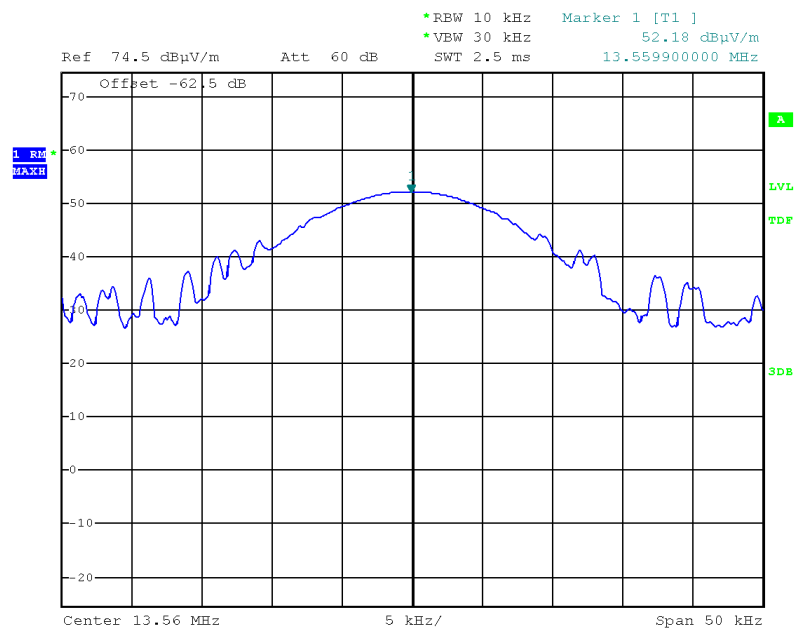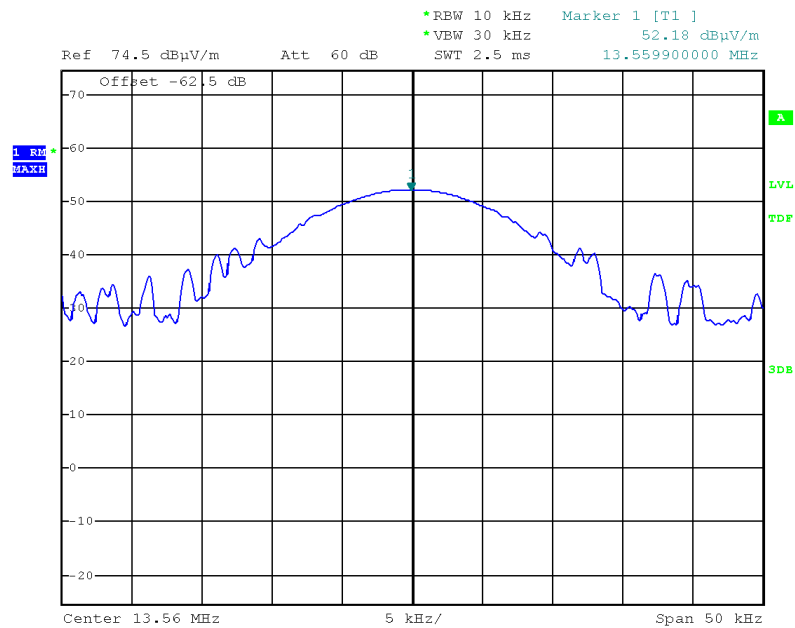Curves 3 and 4

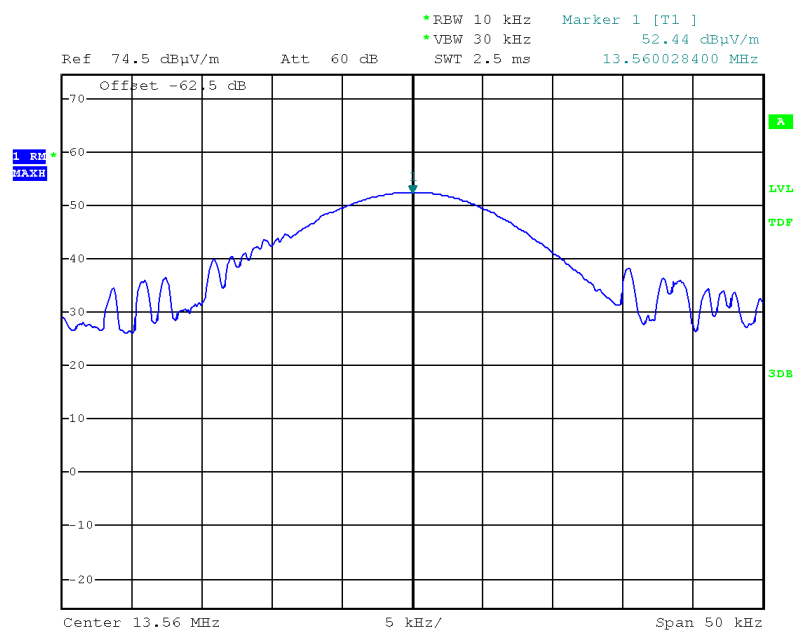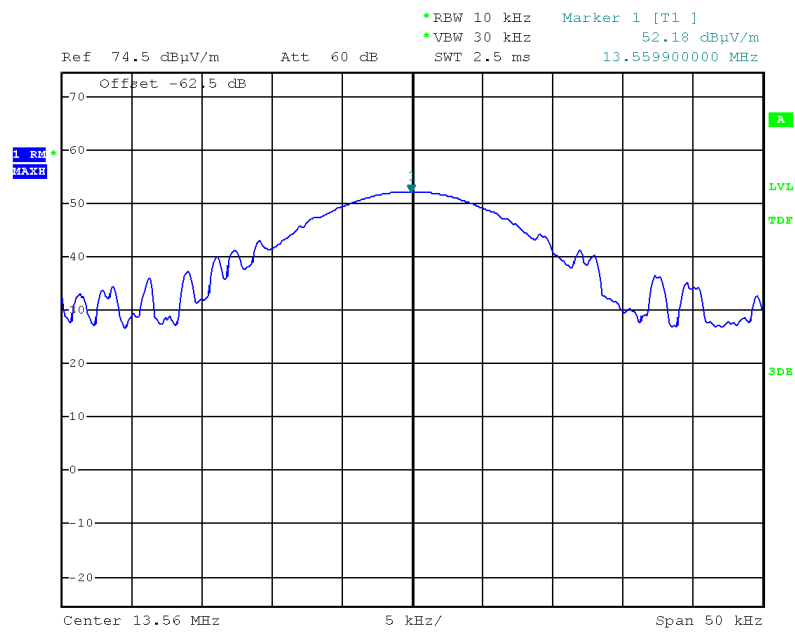
Curves 5 and 6

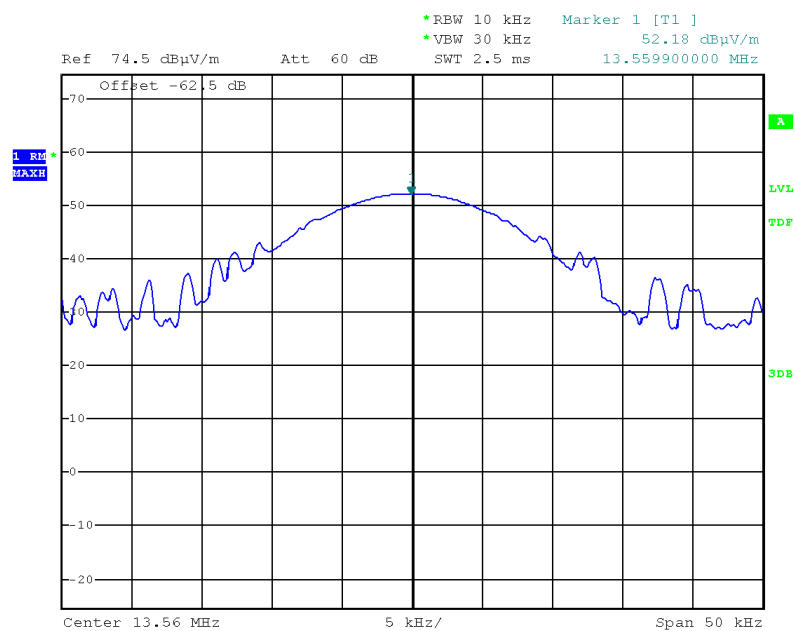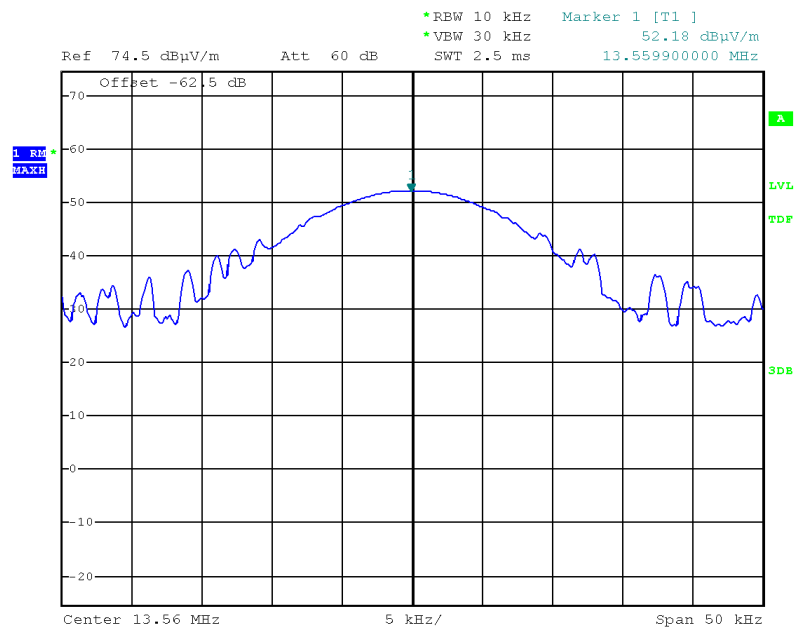
Curves 7 and 8


11. 20 dB BANDWIDTH

Standard: FCC 47 CFR Part 15: 2017

Section: 15.215 (c)

Test configuration:

The measure is realized in near field and the results are correlated with the intentional radiated emission at 30 meters.

Test equipment used:

CATEGORY	BRAND	TYPE	N ^R EMITECH	LAST VALIDITY DATE	NEXT VALIDITY DATE
Climatic enclosure	Flonic Schlumberger	200P	2694	-	-
Spectrum analyzer	Rohde & Schwarz	FSP40 (V 4.00SP1-V3.0-10-2)	5175	01/04/2016	01/06/2018
Tests enclosure	Emitech	LER	12079	-	-

Measurement conditions:

Resolution bandwidth: 1 kHz


Video bandwidth: 3 kHz

Test operating conditions of the equipment:

The transmitter is in RF ON mode.

Results:

20 dBc point (Low)	20 dBc point (High)	Operating frequency band (MHz)
13.558600 MHz	13.561200 MHz	13.553 to 13.567

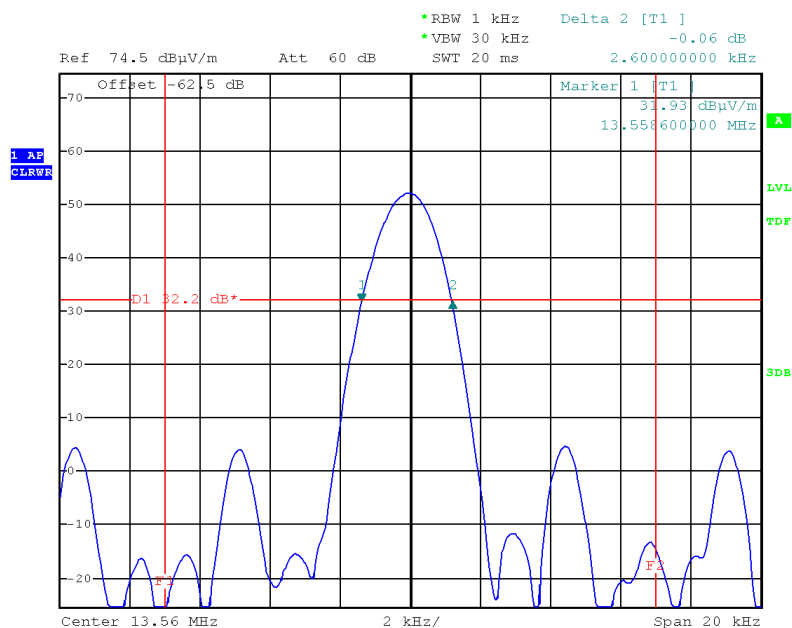


□□□ End of report - 1 annex to be forwarded □□□

ANNEX:



PHOTOGRAPHS

EQUIPMENT UNDER TEST (E.U.T.) PHOTOGRAPHS

E.U.T. PHOTOGRAPHS:

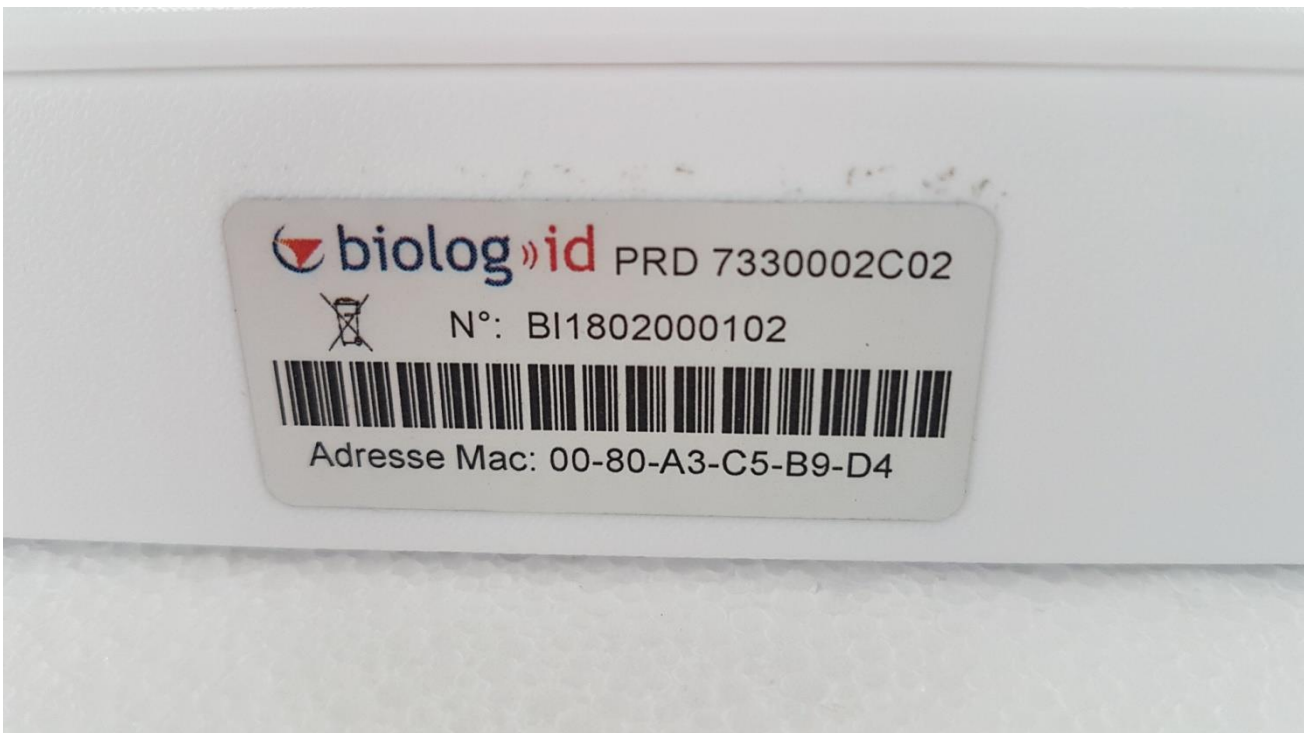

E.U.T. PHOTOGRAPHS:

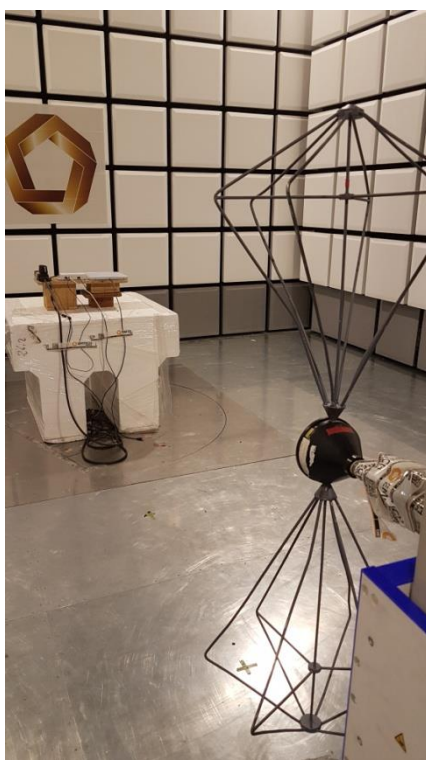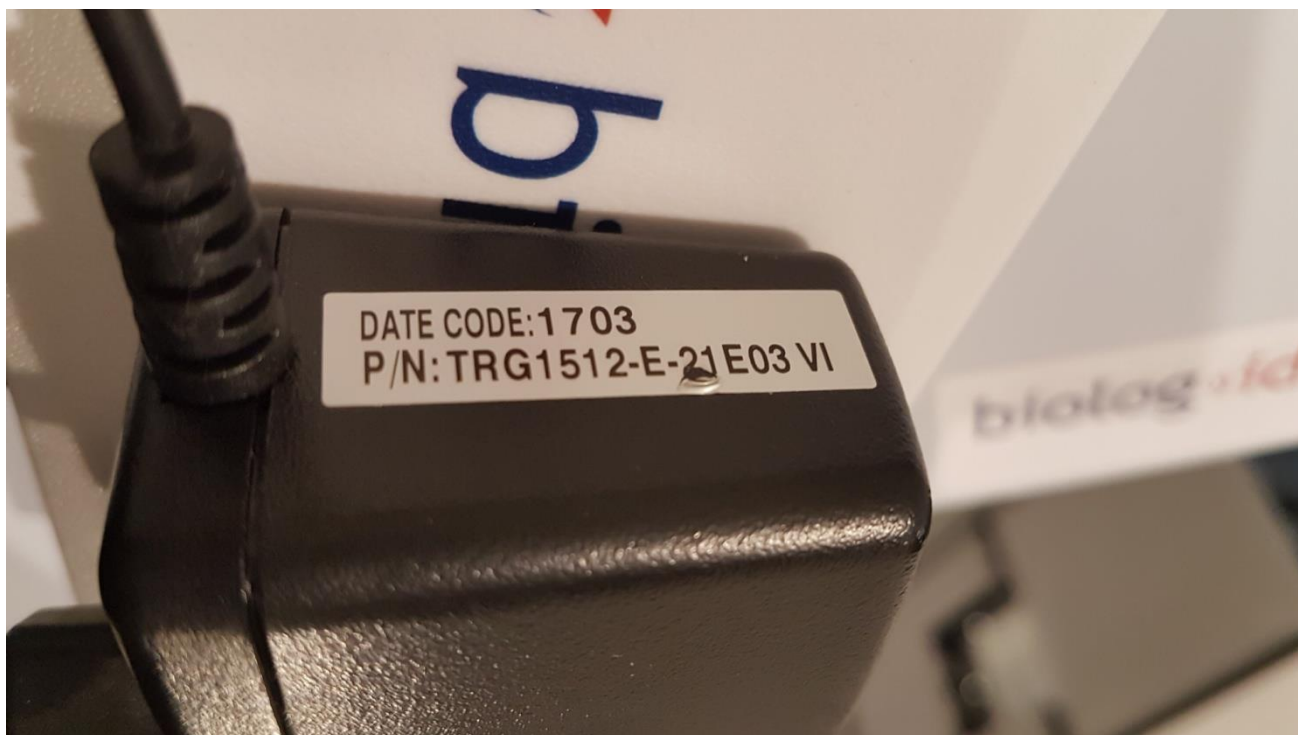

E.U.T. PHOTOGRAPHS:



E.U.T. PHOTOGRAPHS:



Radiated emission:



Conducted emission:

