

**intertek**

Total Quality. Assured.

Intertek  
731 Enterprise Drive  
Lexington, KY 40510

Tel 859 226 1000  
Fax 859 226 1040

[www.intertek.com](http://www.intertek.com)

# QOLSYS TEST REPORT

**SCOPE OF WORK**

EMC TESTING – DS1 94V-0

**REPORT NUMBER**

103686968LEX-001

**ISSUE DATE**

11/20/2018

**PAGES**

23

**DOCUMENT CONTROL NUMBER**

Non-Specific EMC Report Shell Rev. December 2017  
© 2017 INTERTEK



**EMC TEST REPORT**  
(FULL COMPLIANCE)

**Report Number:** 103686968LEX-001

**Project Number:** G103686968

**Report Issue Date:** 11/20/2018

**Model(s) Tested:** DS1 94V-0

**Standards:** FCC Part 15.231  
RSS-210 Issue 9

Tested by:  
Intertek Testing Services NA, Inc.  
731 Enterprise Dr.  
Lexington, KY 40510  
USA

Client:  
QOLSYS  
1900 The Alameda, 4th Floor  
San Jose, CA 95126  
USA

Report prepared by



Brian Daffin,  
Engineer

Report reviewed by



Bryan Taylor,  
Team Leader

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.





Table of Contents

<b>1</b>	<b><i>Introduction and Conclusion</i></b> .....	<b>4</b>
<b>2</b>	<b><i>Test Summary</i></b> .....	<b>4</b>
<b>3</b>	<b><i>Description of Equipment Under Test</i></b> .....	<b>5</b>
<b>4</b>	<b><i>Duty Cycle Correction Factor</i></b> .....	<b>8</b>
<b>5</b>	<b><i>Transmission Timing</i></b> .....	<b>11</b>
<b>6</b>	<b><i>Occupied Bandwidth</i></b> .....	<b>14</b>
<b>7</b>	<b><i>Radiated Spurious Emissions (Transmitter)</i></b> .....	<b>17</b>
<b>8</b>	<b><i>Measurement Uncertainty</i></b> .....	<b>22</b>
<b>9</b>	<b><i>Revision History</i></b> .....	<b>23</b>



## 1 Introduction and Conclusion

The tests indicated in section 2 were performed on the product constructed as described in section 3. The remaining test sections are the verbatim text from the actual data sheets used during the investigation. These test sections include the test name, the specified test method, a list of the actual test equipment used, documentation photos, results and raw data. No additions, deviations, or exclusions have been made from the standard(s) unless specifically noted.

Based on the results of our investigation, we have concluded the product tested complied with the requirements of the standard(s) indicated. The results obtained in this test report pertain only to the item(s) tested.

The INTERTEK-Lexington is located at 731 Enterprise Drive, Lexington Kentucky, 40510. The radiated emission test site is a 10-meter semi-anechoic chamber. The chamber meets the characteristics of CISPR 16-1 and ANSI C63.4: 2009. For measurements, a remotely controlled flush-mount metal-top turntable is used to rotate the EUT a full 360 degrees. A remote controlled non-conductive antenna mast is used to scan the antenna height from one to four meters. The test site is listed with the FCC under registration number 485103. The test site is listed with Industry Canada under site number IC 2042M-1.

## 2 Test Summary

Page	Test full name	FCC Reference	IC Reference	Result
8	Duty Cycle Correction Factor	ANSI C63.10: 2013	ANSI C63.10: 2013	---
11	Transmission Timing Measurements	§ 15.231(a)	RSS-210 (A1.1.1)	Pass
14	Occupied Bandwidth	§ 15.231(c)	RSS-210 (A1.1.3)	Pass
15	Radiated Emissions	§ 15.231(b)	RSS-210 (A1.1.2)	Pass
21	Antenna Requirement per FCC Part 15.203	§ 15.203	RSS-Gen (7.1.2)	Pass
---	Conducted Emission Limits	§ 15.207	RSS-Gen (7.2.4)	N/A <sup>1</sup>

1: The test is not applicable because the device is battery powered and does not connect to the AC Mains



### 3 Description of Equipment Under Test

Equipment Under Test	
Manufacturer	QOLSYS
Model Number	DS1 94V-0
Serial Number	3-008 and 3-018
Receive Date	10/8/2018
Test Start Date	10/8/2018
Test End Date	10/23/2018
Device Received Condition	Good
Test Sample Type	Production
Transmission Control	Firmware
Transmit Frequencies	319.5 MHz
Fundamental Transmission Field Strength	69.32 dB $\mu$ V/m at 3m
Antenna Type (15.203)	Permanent internal PCB antenna
Operating Voltage	3V Battery

Description of Equipment Under Test
Wireless door and window sensor.

#### Operating modes of the EUT:


No.	Descriptions of EUT Exercising
1	Normal Operation, transmits when the magnet is removed from the sensor.
2	Continuously transmitting



### 3.1 Photographs of Test Sample



Front

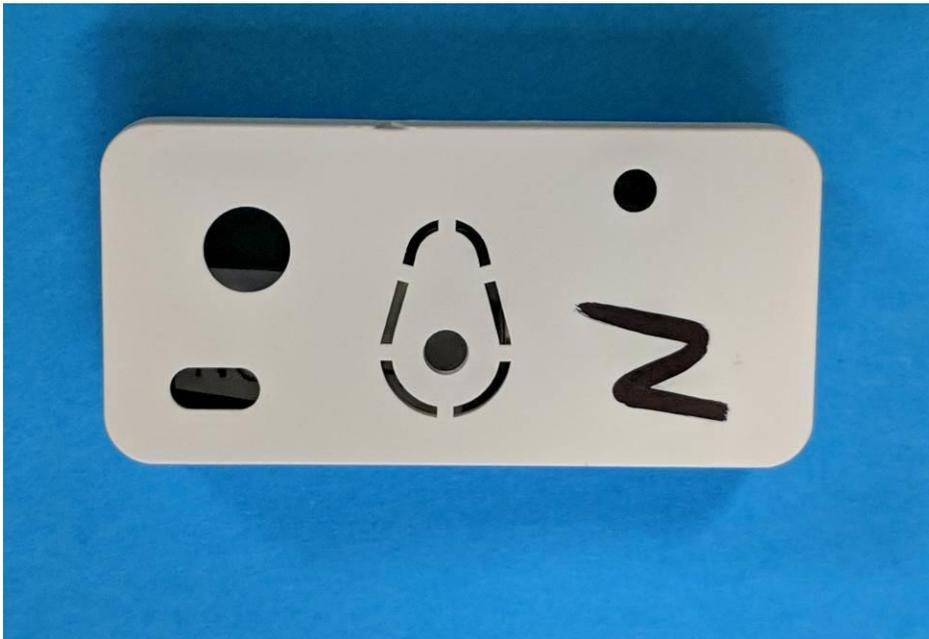


Back



### 3.2 System setup including cable interconnection details, support equipment and simplified block diagram

### 3.3 EUT Block Diagram:



### 3.4 Cables:

None

### 3.5 Support Equipment:

None



### 4 Duty Cycle Correction Factor


#### 4.1 Test Procedure

ANSI C63.10: 2013 Section 7.5 was followed for measuring the duty cycle and calculating the duty cycle correction factor. When necessary the duty cycle correction factor was used to compute the average value of pulsed emissions during the radiated testing.

#### 4.2 Test Equipment Used:

Description	Serial Number	Manufacturer	Model	Cal. Date	Cal. Due
EMI Test Receiver	10887490.26	Rohde & Schwarz	ESU40	10/12/2017	10/12/2018

#### 4.3 Duty Cycle Correction Factor Results (319.5MHz):

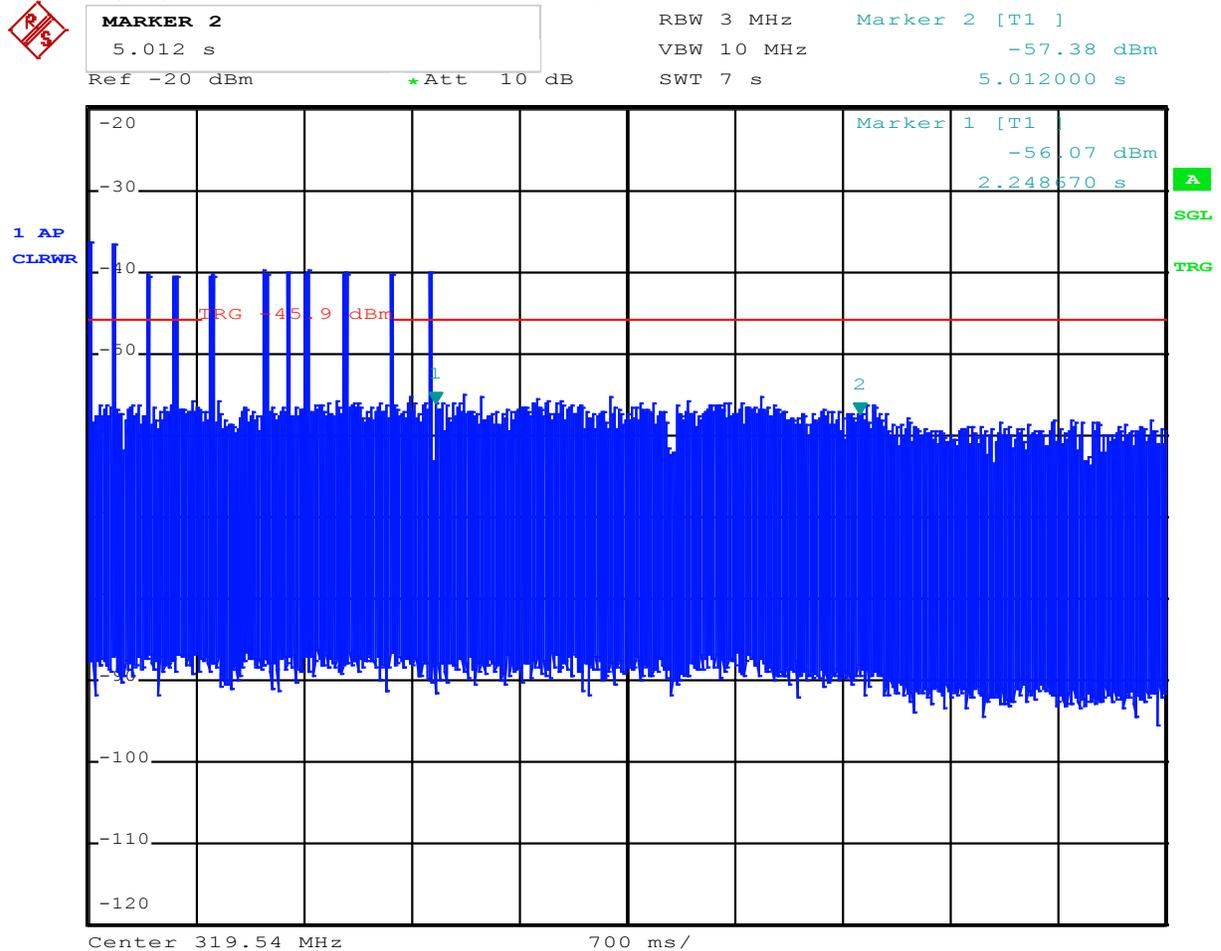


Pulse train exceeds 100ms, so duty cycle correction factor is calculated based on 100ms window




**MARKER 1**  
22.67 ms  
Ref -20 dBm Att 10 dB

RBW 3 MHz Marker 1 [T1 ]  
VBW 10 MHz -67.15 dBm  
SWT 100 ms 22.670000 ms

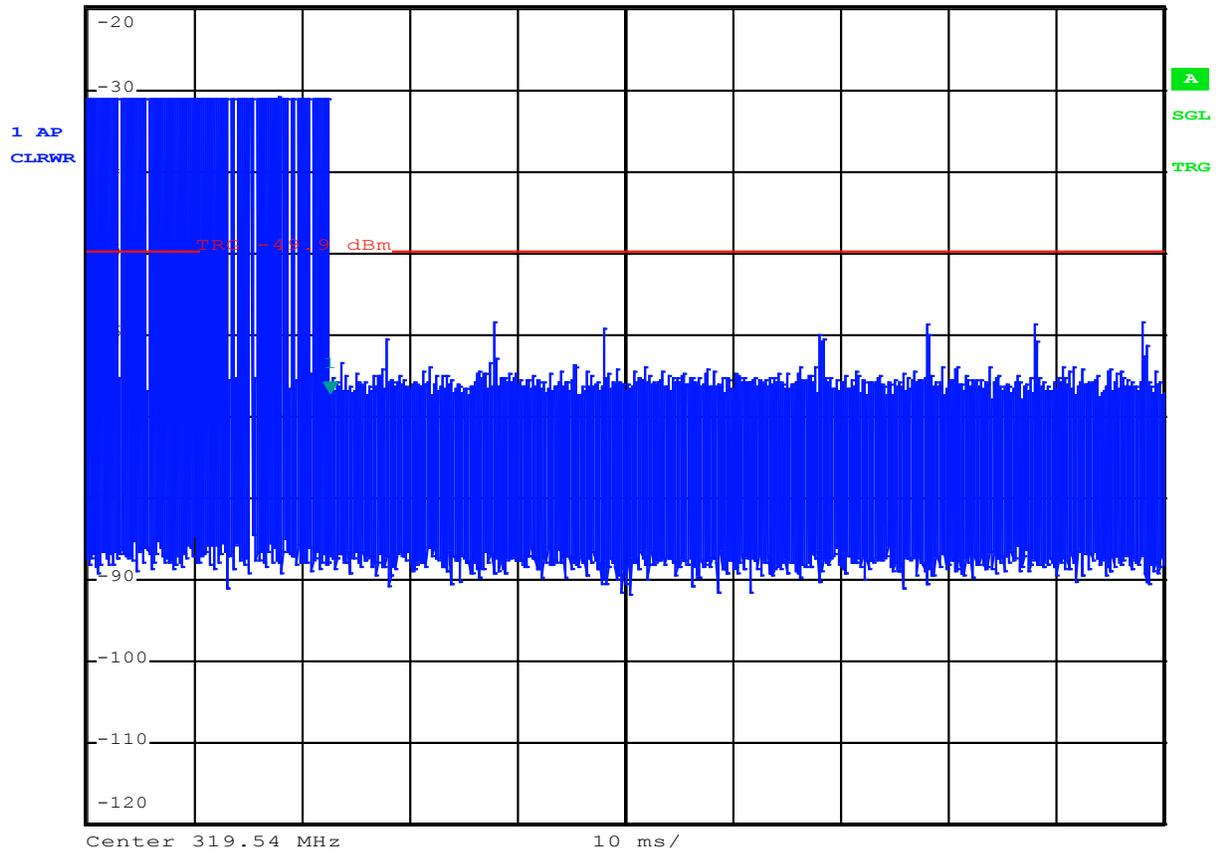

100ms window

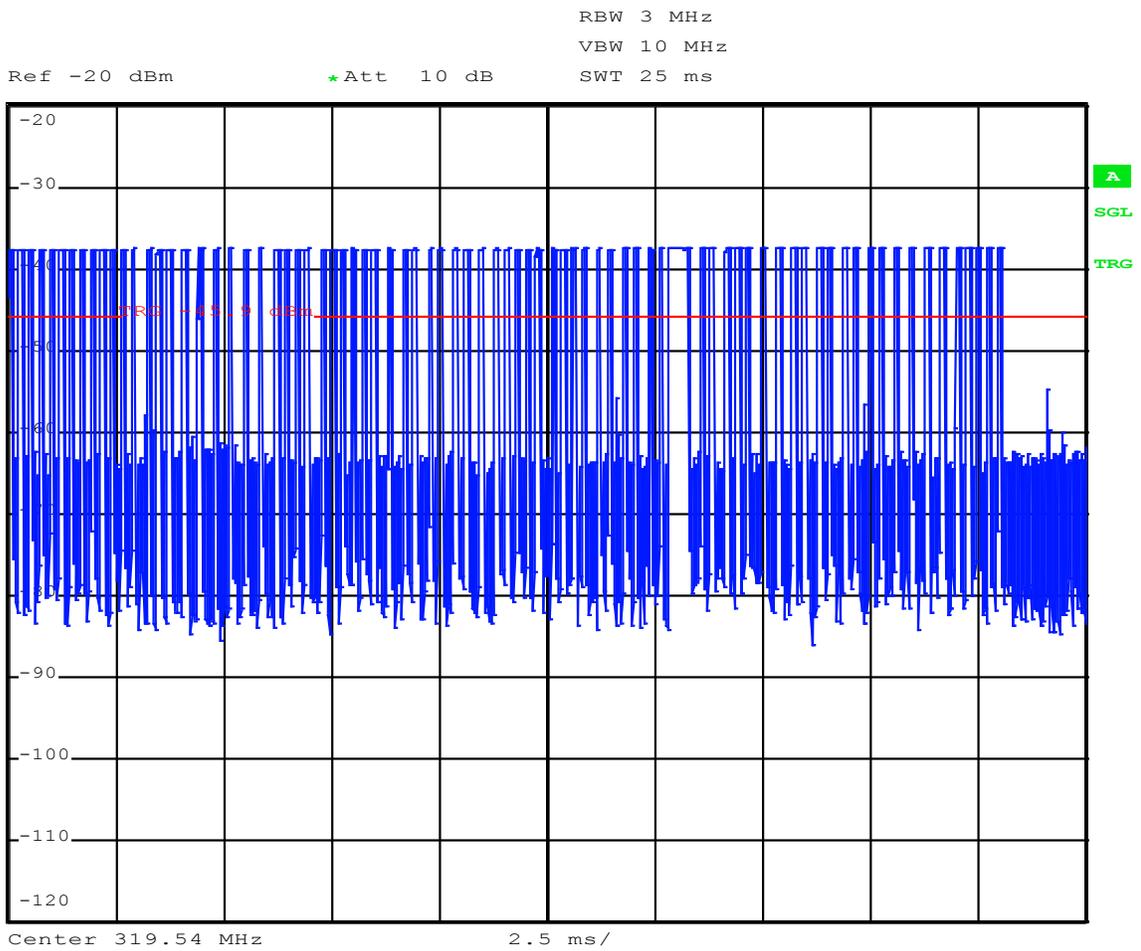

Short Pulse = 0.125ms

Long Pulse = .4875ms

Time On = .4875 + 79\*(0.125) = 10.3625 ms

Duty Cycle Correction Factor = 20 \* log(Time On/Time Total) = 20\*log(10.3625/100) = -19.69 dB



## 5 Transmission Timing

### § 15.231(a):

The provisions of this section are restricted to periodic operation within the band 40.66-40.70 MHz and above 70 MHz. Except as shown in paragraph (e) of this section, the intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Continuous transmissions, voice, video and the radio control of toys are not permitted. Data is permitted to be sent with a control signal. The following conditions shall be met to comply with the provisions for this periodic operation:

(1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

(2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.

(3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.

(4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition

(5) Transmission of set-up information for security systems may exceed the transmission duration limits in paragraphs (a)(1) and (a)(2) of this section, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

### 5.1 Test Procedure

The sample was set up in its normal operating mode. A small antenna connected to a spectrum analyzer was placed in close proximity to the sample. The scope was configured to trigger when the sample transmitted data. Conditions 1, 2, and 3 above were used to evaluate compliance.

### 5.2 Test Equipment Used:

Description	Serial Number	Manufacturer	Model	Cal. Date	Cal. Due
EMI Test Receiver	10887490.26	Rohde & Schwarz	ESU40	10/12/2017	10/12/2018




### 5.3 Transmission Timing Results

The device is used in a security system and is automatically triggered when a door or window is opened. Deactivation time is shown below.

No transmissions occurred during the one hour sweep.

**Manual/Automatic Deactivation Time – 2.856s, which is less than the required 5 second maximum**

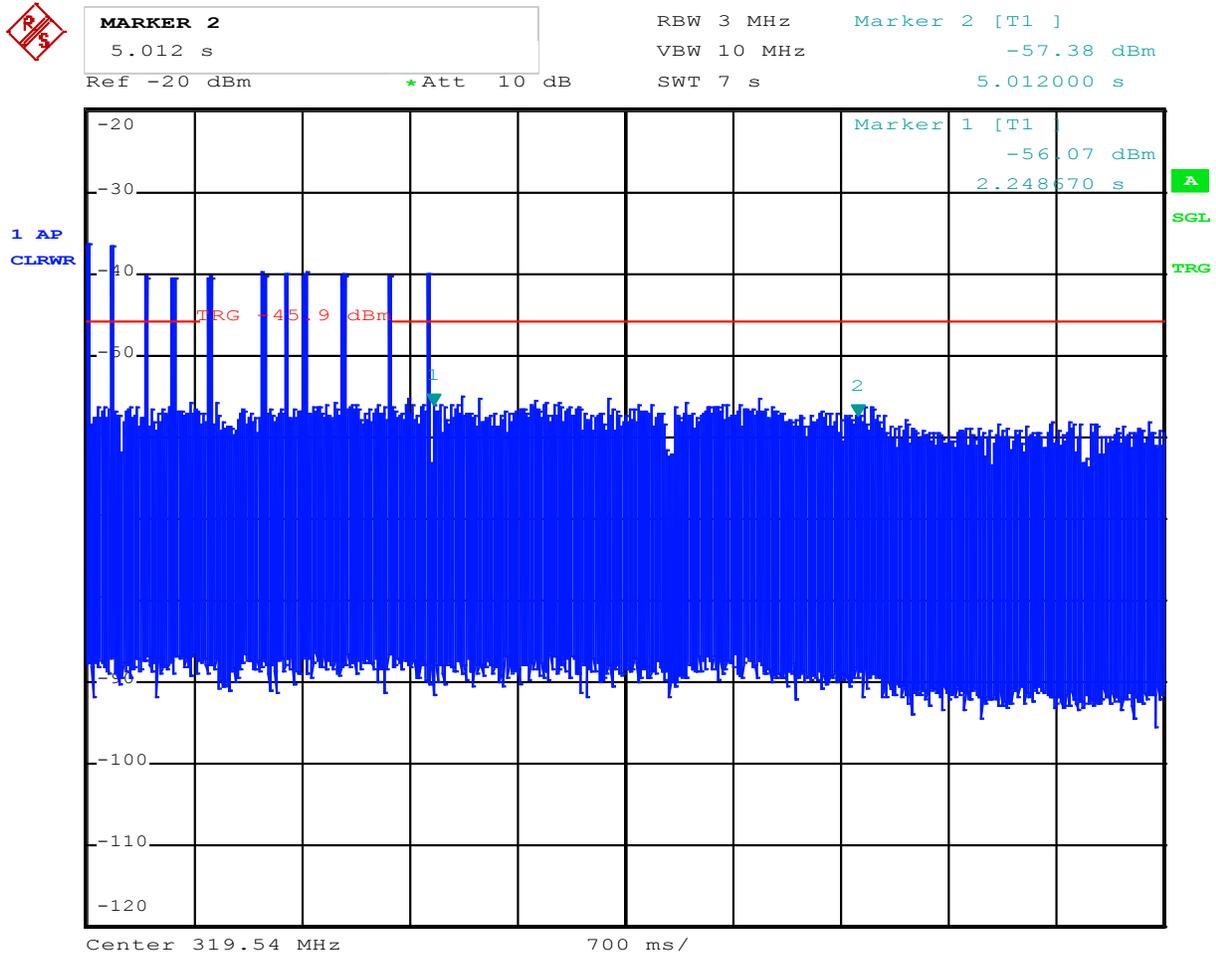




### 1 Hour Sweep



**CENTER FREQUENCY**  
319.54 MHz

RBW 3 MHz  
VBW 10 MHz  
SWT 3600 s

Ref 0 dBm \*Att 10 dB

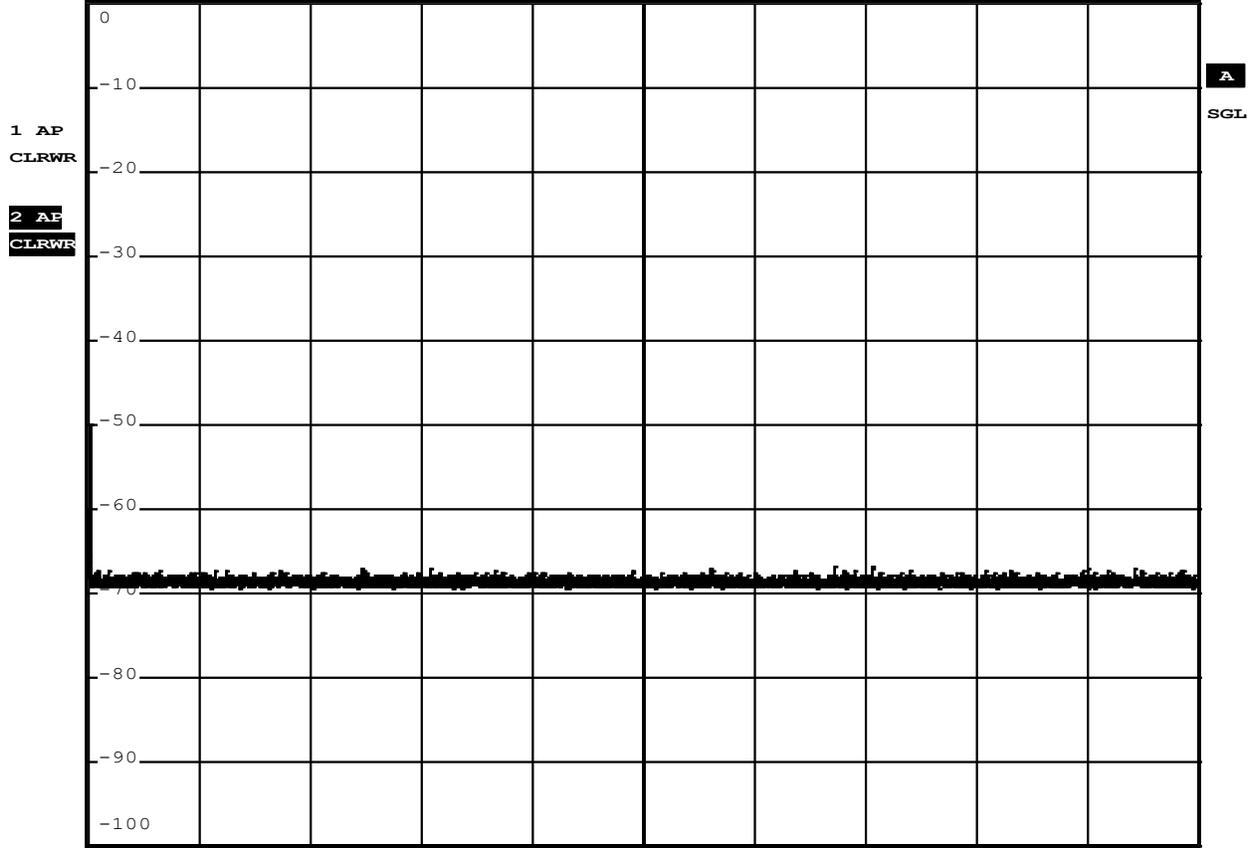



## 6 Occupied Bandwidth

### 6.1 Test Limits

§ 15.231(c): The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

### 6.2 Test Procedure


ANSI C63.10: 2013

### 6.3 Test Equipment Used:

Description	Serial Number	Manufacturer	Model	Cal. Date	Cal. Due
EMI Test Receiver	10887490.26	Rohde & Schwarz	ESU40	10/12/2017	10/12/2018



### 6.4 Results: 20dB Bandwidth Measurement

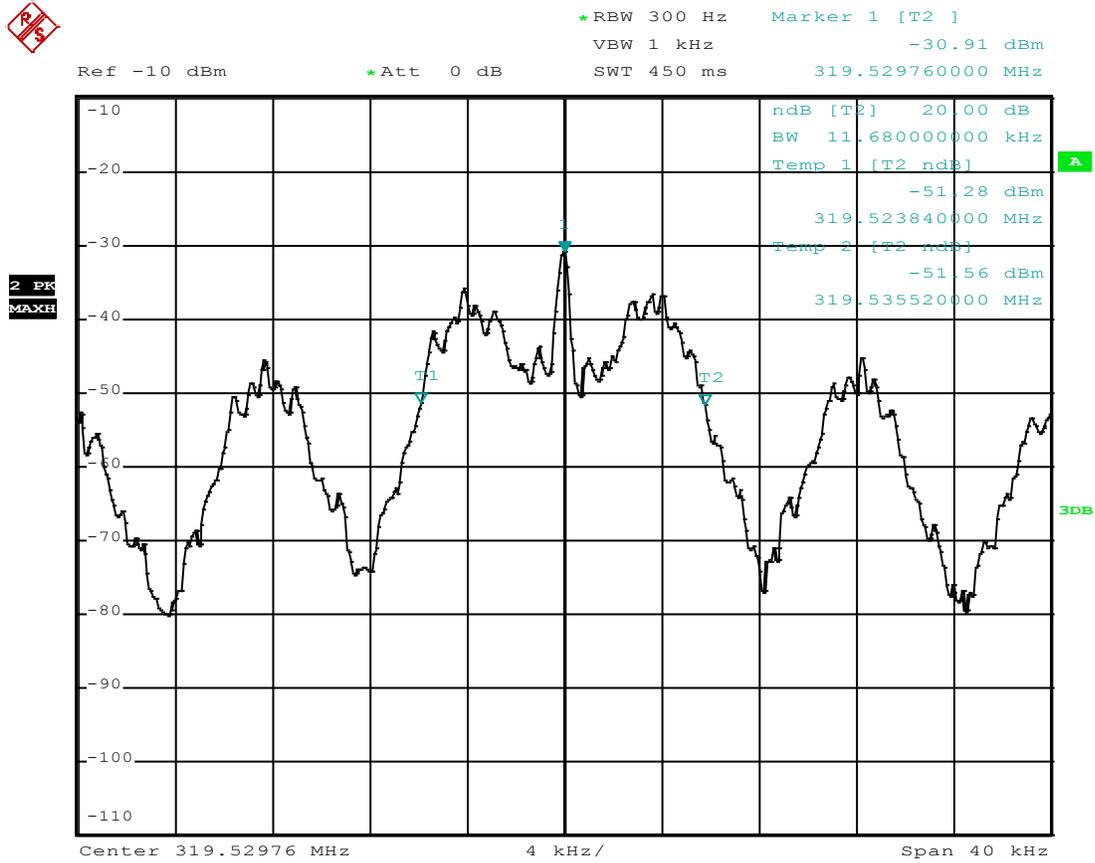

319.5MHz 20dB Bandwidth = 11.68kHz




### 6.1 Results: 20dB Bandwidth Measurement



**POWER BW (%)**  
 99 %

\*RBW 1 kHz      Marker 1 [T1 ]  
 VBW 3 kHz      -29.32 dBm  
 Ref -17 dBm      Att 10 dB      SWT 200 ms      319.529800000 MHz

1 PK  
 MAXH

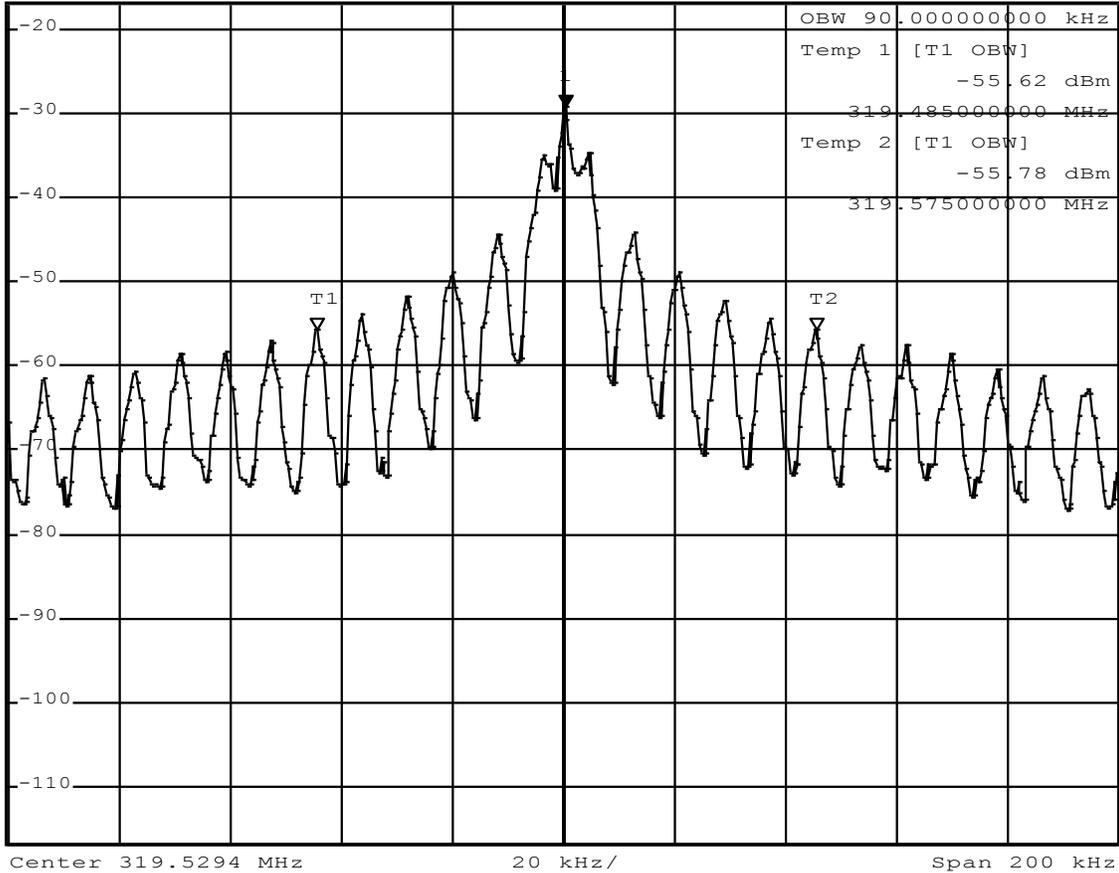

319.5MHz 99% Bandwidth = 90.0kHz



## 7 Radiated Spurious Emissions (Transmitter)

### 7.1 Test Limits

§ 15.231(a): The provisions of this section are restricted to periodic operation within the band 40.66-40.70 MHz and above 70 MHz. Except as shown in paragraph (e) of this section, the intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Continuous transmissions, voice, video and the radio control of toys are not permitted. Data is permitted to be sent with a control signal. The following conditions shall be met to comply with the provisions for this periodic operation

(2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.

(4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.

(b) In addition to the provisions of §15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	<sup>1</sup> 1,250 to 3,750	<sup>1</sup> 125 to 375
174-260	3,750	375
260-470	<sup>1</sup> 3,750 to 12,500	<sup>1</sup> 375 to 1,250
Above 470	12,500	1,250

<sup>1</sup>Linear interpolations.

(1) The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges.

(2) Intentional radiators operating under the provisions of this section shall demonstrate compliance with the limits on the field strength of emissions, as shown in the above table, based on the average value of the measured emissions. As an alternative, compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR quasi-peak detector. The specific method of measurement employed shall be specified in the application for equipment authorization. If average emission measurements are employed, the provisions in §15.35 for averaging pulsed emissions and for limiting peak emissions apply. Further, compliance with the provisions of §15.205 shall be demonstrated using the measurement instrumentation specified in that section.

(3) The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in §15.209, whichever limit permits a higher field strength.



**Part 15.205(a): Restricted Bands of Operations**

MHz	MHz	MHz	GHz
0.090–0.110 .....	16.42–16.423	399.9–410	4.5–5.15
10.495–0.505 .....	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905 .....	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128 .....	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775 .....	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775 .....	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218 .....	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825 .....	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225 .....	123–138	2200–2300	14.47–14.5
8.291–8.294 .....	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366 .....	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675 .....	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475 .....	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293 .....	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025 .....	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725 .....	322–335.4	3600–4400	( <sup>2</sup> )
13.36–13.41.			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490–0.510 MHz.

<sup>2</sup> Above 38.6

**Part 15.209(a): Field Strength Limits for Restricted Bands of Operation**

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 - 0.490	2,400 / F (kHz)	300
0.490 - 1.705	24,000 / F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3



## 7.2 Test Procedure

ANSI C63.10: 2013

### 7.3 Example of Field Strength Calculation Method:

The measured field strength was calculated by summing the readings taken from the spectrum analyzer with the appropriate correction factors associated with the antenna losses and cable losses. The calculation formula and sample calculations are listed below:

Formula:

$$FS = RA + AF + CF$$

FS = Field Strength in dB $\mu$ V/m

RA = Receiver Amplitude in dB $\mu$ V

AF = Antenna Factor in dB

CF = Cable Attenuation Factor in dB (Including preamplifier and filter attenuation)

Example Calculation:

RA = 19.48 dB $\mu$ V

AF = 18.52 dB

CF = 0.78 dB

$$FS = 19.48 + 18.52 + 0.78 = 38.78 \text{ dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(38.78 \text{ dB}\mu\text{V/m})/20] = 86.89 \mu\text{V/m}$$

### 7.4 Test Equipment Used:

Description	Serial Number	Manufacturer	Model	Cal. Date	Cal. Due
EMI Test Receiver	10887490.26	Rohde & Schwarz	ESU40	10/12/2017	10/12/2018
Preamplifier	122005	Rohde&Schwarz	TS-PR18	11/29/2017	11/29/2018
Bilog Antenna	7088	SunaAR	JB6	7/24/2018	7/24/2019
Horn Antenna	00154521	ETS	3117	6/11/2018	6/11/2019
System Controller	121701-1	Sunol Sciences	SC99V	Time of Use	Time of Use
EMC Software	Version 9.15.02	Rohde&Schwarz	EMC32	Time of Use	Time of Use
High Pass Filter	1	Wainwright	WHKX12-2533.85-2710-18000-40SS	Time of Use	Time of Use



## 7.5 Results:

All fundamental and spurious emissions not falling into the restricted bands met the limits outlined in FCC Part 15.231(b). Additionally, all emissions falling within restricted bands of operation were found to be below the limit specified in Part 15.209(a). The emissions listed in the following tables are the worst case emissions and were investigated with the sample positioned in three orthogonal axis in order to report the highest possible field strength.

### Worst Case Spurious Measurements (319.5MHz)

#### Fundamental

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
319.520000	89.01	---	---	---	120.000	99.4	H	184.0	23.6
319.520000	---	69.32	75.89	6.57	120.000	99.4	H	184.0	23.6

Note: Average emission was calculated by applying the duty cycle correction factor of -19.69dB to the MaxPeak measurement

#### Spurious Emissions Below 1GHz(Max Peak)

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
639.080000	57.87	---	---	---	120.000	118.7	H	164.0	31.1
639.080000	---	38.18	55.89	17.71	120.000	118.7	H	164.0	31.1
958.480000	50.08	---	55.89	5.81	120.000	100.5	V	56.0	35.5

Note: Average emission was calculated by applying the duty cycle correction factor of -19.69 to the MaxPeak measurement

#### Spurious Emissions Above 1GHz(Max Peak)

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1278.000000	39.23	55.89	16.66	1000.000	312.0	H	203.0	-1.3
1597.600000	35.09	55.89	20.80	1000.000	344.0	H	204.0	-1.7
1917.200000	38.20	55.89	17.69	1000.000	361.0	H	275.0	1.5
2234.000000	38.17	55.89	17.72	1000.000	410.0	H	0.0	2.5
2434.400000	49.37	55.89	6.52	1000.000	273.0	V	183.0	3.3
2439.600000	48.22	55.89	7.67	1000.000	410.0	V	168.0	3.3
2552.800000	38.69	55.89	17.20	1000.000	410.0	V	118.0	3.6
2871.200000	38.66	55.89	17.23	1000.000	410.0	V	338.0	3.8
3195.200000	49.01	55.89	6.88	1000.000	410.0	H	239.0	4.5
3515.000000	45.99	55.89	9.90	1000.000	410.0	H	284.0	5.2
3834.000000	50.30	55.89	5.59	1000.000	367.0	H	275.0	6.1
4147.200000	40.98	55.89	14.91	1000.000	410.0	H	296.0	6.4
16898.400000	53.07	55.89	2.82	1000.000	410.0	H	306.0	21.7

Note: All MaxPeak Detected Emissions Meet the average limit



Antenna Requirement per FCC Part 15.203

## 7.6 Test Limits

**§ 15.203:** An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

## 7.7 Results:

The sample tested met the antenna requirement. The antenna used was permanently attached to the PCB.



## 8 Measurement Uncertainty

The measured value related to the corresponding limit will be used to decide whether the equipment meets the requirements.

The measurement uncertainty figures were calculated and correspond to a coverage factor of  $k = 2$ , providing a confidence level of respectively 95.45 % in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian).

Measurement uncertainty Table

Parameter	Uncertainty	Notes
Radiated emissions, 30 to 1000 MHz	$\pm 3.9\text{dB}$	
Radiated emissions, 1 to 18 GHz	$\pm 4.2\text{dB}$	
Radiated emissions, 18 to 40 GHz	$\pm 4.3\text{dB}$	
Power Port Conducted emissions, 150kHz to 30 MHz	$\pm 2.8\text{dB}$	



## 9 Revision History

Revision Level	Date	Report Number	Notes
0	11/20/2018	103686968LEX-001	Original Issue