

EMC EMISSION - TEST REPORT

Test Report No. **B023001** Issue Date September 11, 2000

Model / Serial No. DGR09 / 902-1164

Product Type Transceiver Module

Client Freewave Technologies

Manufacturer Freewave Technologies

License holder Freewave Technologies

Address 1880 Flatiron Court, Suite F

Boulder, CO 80301

Test Criteria Applied FCC Part 15 15.247C

Test Start Date: 10 July 2000


Test End Date: 18 August 2000

Test Result ☒ PASS ☐ FAIL

Test Report Project No. BC1G023001

Total Pages including
Appendices 52


Reviewed By : Felix J. Chavez


Reviewed By : Robert Cresswell

TÜV Product Service Inc is a subcontractor to TÜV Product Service, GmbH according to the principles outlined in ISO/IEC Guide 25 and EN 45001.

TÜV Product Service Inc reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. TÜV Product Service Inc shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV Product Service Inc issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval of TÜV Product Service. This report shall not be used by the client to claim product endorsement by NVLAP or any agency of the US government.

TÜV Product Service Inc and its professional staff hold government and professional organization certifications and are members of AAMI, ACIL, AEA, ANSI, IEEE, NVLAP, and VCCI

DIRECTORY - EMISSIONS

Documentation	Page(s)
Test report	<u>1 - 3</u>
Directory	<u>2</u>
Test Regulations	<u>3</u>
General Remarks	<u>3</u>
Test Equipment Used	<u>4 - 5</u>
Appendix A	
Transmitter Data Sheets	<u>A1 – A3</u>
Appendix B	
Detailed Test Data Sheets	<u>B1 – B16</u>
Appendix C	
Plot of Occupied Bandwidth of a Single Channel with Modulation	<u>C1 – C2</u>
Appendix D	
Plot of Nominal Channel Band Occupancy	<u>D1 – D3</u>
Appendix E	
Plot of Channel Spacing	<u>E1 – E2</u>
Appendix F	
Plot of Power Output	<u>F1 – F4</u>
Appendix G	
Plot of Out of Band Emissions	<u>G1 - G4</u>
Appendix H	
Test Plan/Constructional Data Form	<u>H1 – H10</u>
Appendix I	
Measurement of Protocol	<u>I1 – I3</u>

EMISSIONS TEST REGULATIONS :

The tests were performed according to following regulations :

- | | | |
|---|--|---|
| ☒ - Federal Communication Commission part 15 | ☐ - Class A | ☒ - Class B |
| ☒ - Federal Communication Commission part 15, Subpart C | ☒ - 15.209 | ☒ - 15.247 |

All tests performed according to ANSI C63.4.

Emission Test Results:

Conducted emissions 450 kHz - 30 MHz

Test Result ☒ - PASS ☐ - FAIL ☐ - Not Applicable

Passing Margin 3.5 dB at 1.785 MHz

Remarks: Conducted emissions test was performed on HP model E3620A DC power supply.

Radiated emissions (electric field) 30 MHz - 5000 MHz (Unintentional Radiator)

Test Result ☒ - PASS ☐ - FAIL ☐ - Not Applicable

Passing Margin 3.1 dB at 1864.84 MHz

Remarks: _____

Radiated emissions (electric field) 906 MHz - 9278.6 MHz (Intentional Radiator)

Test Result ☒ - PASS ☐ - FAIL ☐ - Not Applicable

Passing Margin 12.1 dB at 3608.1 MHz

Remarks: _____

Fundamental and Spurious Emissions

GENERAL REMARKS:

Modifications required to pass: None

Test Specification Deviations: Additions to or Exclusions from: None

Test Equipment Used

Equipment Report

Project Number: B0230
Company Name: Freewave

Project Date: 10-Jul-2000 to 18-Aug-2000

Equip ID	Manufacturer	Model Number	Serial Number	Description	Date	Calibration Interval	Due	Cal Code
Test Performed C		Conducted Emissions						
8004	RHODE & SCHWARZ	ESH3	872318/036	Low Frequency Receiver (9 kHz - 30 MHz)	13-Sep-1999	12	12-Sep-2000	G
8183	EMCO	3825/2	9202-1946	LISN				G
8258	POLARAD	ESH3-Z2	357.881J.32	Transient Limiter				Y
8308	EMCO	3825/2	9202-1945	LISN				G
Test Performed R		Radiated Emissions						
7514	A.H.SYSTEMS	SAS-200/512	104	Log Periodic Antenna (200-1500 MHz)	28-Jul-1999	13	27-Aug-2000	G
7575	MINI-CIRCUITS LAB	ZHL-1042j	D0122299-6	Pre Amplifier				B
7603	MINI-CIRCUITS LAB	ZHL-1042J	D012600-16	Amplifier				B
8051	HEWLETT PACKARD	85662A	2112A02220	Display Section	13-Jun-2000	12	13-Jun-2001	G
8052	HEWLETT PACKARD	8566B	2115A00853	Spectrum Analyzer	13-Jun-2000	12	13-Jun-2001	G
8207	AVANTEK	AWT-18037	1002	RF Pre-Amplifier (8-18 GHz)	02-Dec-1999	12	01-Dec-2000	G
8208	AVANTEK	AFT97-8434	1007	RF Pre-Amplifier (4-8 GHz)	02-Dec-1999	12	01-Dec-2000	G
8213	HEWLETT PACKARD	8566B	2410A00154	Spectrum Analyzer (dc-22 GHz)	12-May-2000	12	12-May-2001	G
8214	HEWLETT PACKARD	85662A	2403A08749	Display Section	12-May-2000	12	12-May-2001	G
8215	HEWLETT PACKARD	85650A	2043A00256	Quasi Peak Adapter	17-Jun-2000	12	17-Jun-2001	G
8219	HEWLETT PACKARD	8445B	2034A03223	Pre-Selector	15-Jun-2000	12	15-Jun-2001	G
8225	EMCO	3108	7059203-2457	Biconical Dipole Antenna	28-Jul-1999	13	27-Aug-2000	G
8264	EMCO	3115	9205-3886	Horn Antenna	20-May-2000	12	20-May-2001	G
8303	AH SYSTEMS	SAS-200/510	705	Log Periodic Antenna (300-1800 MHz)	30-Jul-1999	13	29-Aug-2000	Y
8345	HEWLETT-PACKARD	85650A	2811A01300	Q.P Adapter	23-Nov-1999	12	22-Nov-2000	G

Cal Code Legend: G=Out Source, Y=No Cal required, R=Out of Service, B=In-House Verification Required

1 of 1

Appendix A

Transmitter Data Sheets

15.247 SPREAD SPECTRUM INTENTIONAL RADIATOR DATA

Date: 10-Jul-00
EUT: DGR09 w/10 dB Yagi Antenna
Customer: Aleksey Pozhidaev

Measured @
 Low Freq.: 902.05 MHz
 Mid Freq: 914.95 MHz
 High Freq: 927.86 MHz

Tx Mode: Radiated Measurements

Calculated Averaging Factor: -24.8 dB (20*Log(duty cycle))
Max Averaging Factor Allowed: -20 dB
Averaging Factor Applied: -20 dB
Fundamental Field Strength: 131 dBuV/m

Range	Specification	Peak Measurement dBuV/m @ MHz	Average Measurement dBuV/m @ MHz	Delta dB
2nd harmonic (1804-1855.8 MHz)	20 dB down	65.9	45.9	1855.7 -45.1
3rd harmonic (2706-2783.6 MHz)	54 dBuV/m	59	39.0	2783.5 -15.0
4th harmonic (3608-3711.5 MHz)	54 dBuV/m	61.9	41.9	3608.1 -12.1
5th harmonic (4510-4639.3 MHz)	54 dBuV/m	48.7	28.7	4639.2 -25.3
6th harmonic (5412-5567.2 MHz)	54 dBuV/m	48.2	28.2	5489.7 -25.8
7th harmonic (6314-6495.1 MHz)	20 dB down	No emissions found above the receiver's noise floor		
8th harmonic (7216-7422.9 MHz)	54 dBuV/m	to 10th harmonic.		
9th harmonic (8118-8350.8 MHz)	54 dBuV/m			
10th harmonic (9020-9278.6 MHz)	54 dBuV/m			

Minimum Passing Margin: -12.1 dB

Ir04.xls

15.247 SPREAD SPECTRUM INTENTIONAL RADIATOR DATA

Date: 10-Jul-00

EUT: DGR09 w/5 dB Omni Directional Antenna

Customer: Aleksey Pozhidaev

Measured @

Low Freq.: 902.06 MHz

Mid Freq: 914.96 MHz

High Freq: 927.85 MHz

Tx Mode: Radiated Measurements

Calculated Averaging Factor: -24.8 dB (20*Log(duty cycle))

Max Averaging Factor Allowed: -20 dB

Averaging Factor Applied: -20 dB

Fundamental Field Strength: 127.8 dBuV/m

Range	Specification	Peak Measurement dBuV/m @ MHz	Average Measurement dBuV/m @ MHz	Delta dB
2nd harmonic (1804-1855.7 MHz)	20 dB down	59	1855.6	39.0
3rd harmonic (2706-2783.6 MHz)	54 dBuV/m	60.1	2706.1	40.1
4th harmonic (3608-3711.4 MHz)	54 dBuV/m	59.8	3608.1	39.8
5th harmonic (4510-4639.3 MHz)	54 dBuV/m	55.1	4639.2	35.1
6th harmonic (5412-5567.1 MHz)	54 dBuV/m	59.5	5566.8	39.5
7th harmonic (6314-6495 MHz)	20 dB down	56.3	6314.4	36.3
8th harmonic (7216-7422.8 MHz)	54 dBuV/m	No emissions found above the receiver's noise floor		
9th harmonic (8118-8350.7 MHz)	54 dBuV/m	to 10th harmonic.		
10th harmonic (9020-9278.5 MHz)	54 dBuV/m			

Minimum Passing Margin: -13.9 dB

Appendix B

Detailed Test Data Sheets

Radiated Electromagnetic Emissions



Test Report #: **B0230 Run 02** Test Area: **Pinewood Site 1 (3m)**
 Test Method: **N/A** Test Date: **10-Jul-2000**
 EUT Model #: **DGR09** EUT Power: **12VDC**
 EUT Serial #: **902-1164** Temperature: _____ °C
 Manufacturer: **Freewave Technologies** Relative Humidity: _____ %
 EUT Description: **Transceiver module** Air Pressure: _____ kPa
 Notes: _____ Page: **1** of **4**
10 dB Yagi antenna

FREQ (MHz)	LEVEL (dBuV)	CABLE / ANT / PREAMP (dB) (dBm) (dB)	FINAL (dBuV)	POL / HGT / AZ (m) (DEG)	DELTA1 (dB) N/A	DELTA2 (dB) N/A
902.06	105.6 Pk	2.0 / 22.7 / 0.0	130.3	H / 1.0 / 0.0	N/A	N/A
914.95	105.0 Pk	2.0 / 22.8 / 0.0	129.8	H / 1.0 / 0.0	N/A	N/A
927.86	101.4 Pk	2.0 / 23.4 / 0.0	126.8	H / 1.0 / 0.0	N/A	N/A
927.86	101.8 Pk	2.0 / 23.4 / 0.0	127.2	V / 1.0 / 0.0	N/A	N/A
914.96	104.9 Pk	2.0 / 22.8 / 0.0	129.7	V / 1.0 / 0.0	N/A	N/A
902.05	106.3 Pk	2.0 / 22.7 / 0.0	131.0	V / 1.0 / 0.0	N/A	N/A
1803.88	59.1 Pk	2.8 / 27.7 / 28.9	60.7	V / 1.0 / 0.0	N/A	N/A
2705.99	50.5 Pk	3.6 / 31.6 / 29.3	56.3	V / 1.4 / 334.0	N/A	N/A
3608.05	53.5 Pk	4.1 / 33.5 / 29.2	61.9	V / 1.2 / 45.0	N/A	N/A
3659.70	52.9 Pk	4.1 / 33.6 / 29.2	61.4	V / 1.2 / 45.0	N/A	N/A
2744.75	48.1 Pk	3.6 / 31.7 / 29.3	54.0	V / 1.2 / 334.0	N/A	N/A
1829.80	57.2 Pk	2.8 / 27.8 / 29.0	58.9	V / 1.0 / 0.0	N/A	N/A
1855.65	54.1 Pk	2.9 / 27.9 / 29.0	55.8	V / 1.0 / 0.0	N/A	N/A
2783.45	49.0 Pk	3.6 / 31.8 / 29.3	55.1	V / 1.3 / 330.0	N/A	N/A
3711.34	50.1 Pk	4.2 / 33.7 / 29.2	58.8	V / 1.2 / 43.0	N/A	N/A
1855.70	64.2 Pk	2.9 / 27.9 / 29.0	65.9	H / 1.1 / 199.0	N/A	N/A
2783.50	52.9 Pk	3.6 / 31.8 / 29.3	59.0	H / 1.1 / 205.0	N/A	N/A
3711.32	48.5 Pk	4.2 / 33.7 / 29.2	57.1	H / 1.1 / 328.0	N/A	N/A
1829.84	56.8 Pk	2.8 / 27.8 / 29.0	58.5	H / 1.2 / 233.0	N/A	N/A
2744.79	46.9 Pk	3.6 / 31.7 / 29.3	52.9	H / 1.2 / 200.0	N/A	N/A
3659.75	51.1 Pk	4.1 / 33.6 / 29.2	59.6	H / 1.2 / 45.0	N/A	N/A

Tested by: Shawn Singh
 Printed

Shawn Singh
 Signature

Reviewed by: Felix J. Chavez
 Printed

Felix J. Chavez
 Signature

Radiated Electromagnetic Emissions



Test Report #: **B0230 Run 02** Test Area: **Pinewood Site 1 (3m)**
 Test Method: **N/A** Test Date: **10-Jul-2000**
 EUT Model #: **DGR09** EUT Power: **12VDC**
 EUT Serial #: **902-1164** Temperature: _____ °C
 Manufacturer: **Freewave Technologies** Relative Humidity: _____ %
 EUT Description: **Transceiver module** Air Pressure: _____ kPa
 Notes: _____ Page: **2** of 4
 10 dB Yagi antenna

FREQ (MHz)	LEVEL (dBuV)	CABLE / ANT / PREAMP (dB) (dBm) (dB)	FINAL (dBuV)	POL / HGT / AZ (m) (DEG)	DELTA1 (dB) N/A	DELTA2 (dB) N/A
1803.88	62.4 Pk	2.8 / 27.7 / 28.9	64.0	H / 1.1 / 147.0	N/A	N/A
2705.97	51.1 Pk	3.6 / 31.6 / 29.3	56.9	H / 1.1 / 190.0	N/A	N/A
3608.24	53.1 Pk	4.1 / 33.5 / 29.2	61.5	H / 1.1 / 77.0	N/A	N/A
No emissions found above the receiver's noise floor to 10th harmonic.						
4510.22	49.0 Pk	4.7 / 33.3 / 40.9	46.0	H / 1.1 / 0.0	N/A	N/A
5412.29	46.2 Pk	5.2 / 36.7 / 40.8	47.3	H / 1.1 / 0.0	N/A	N/A
No emissions found above the receiver's noise floor to 10th harmonic.						
4574.74	46.8 Pk	4.8 / 33.6 / 41.0	44.2	H / 1.1 / 0.0	N/A	N/A
5489.69	46.8 Pk	5.2 / 36.9 / 40.7	48.2	H / 1.1 / 0.0	N/A	N/A
No emissions found above the receiver's noise floor to 10th harmonic.						
4639.29	47.0 Pk	4.9 / 34.0 / 41.0	44.8	H / 1.1 / 0.0	N/A	N/A
5567.15	45.2 Pk	5.2 / 37.0 / 40.7	46.8	H / 1.1 / 0.0	N/A	N/A
No emissions found above the receiver's noise floor to 10th harmonic.						
4639.24	51.0 Pk	4.9 / 34.0 / 41.0	48.7	V / 1.1 / 134.0	N/A	N/A
5567.13	43.8 Pk	5.2 / 37.0 / 40.7	45.3	V / 1.1 / 0.0	N/A	N/A
No emissions found above the receiver's noise floor to 10th harmonic.						
4574.75	49.3 Pk	4.8 / 33.6 / 41.0	46.7	V / 1.1 / 134.0	N/A	N/A
5489.69	45.2 Pk	5.2 / 36.9 / 40.7	46.6	V / 1.1 / 0.0	N/A	N/A
No emissions found above the receiver's noise floor to 10th harmonic.						

Tested by: **Shawn Singh**
 Printed

Shawn Singh
 Signature

Reviewed by: **Felix J. Chavez**
 Printed

Felix J. Chavez
 Signature

Radiated Electromagnetic Emissions



Test Report #: **B0230 Run 02** Test Area: **Pinewood Site 1 (3m)**
 Test Method: **N/A** Test Date: **10-Jul-2000**
 EUT Model #: **DGR09** EUT Power: **12VDC**
 EUT Serial #: **902-1164** Temperature: _____ °C
 Manufacturer: **Freewave Technologies** Relative Humidity: _____ %
 EUT Description: **Transceiver module** Air Pressure: _____ kPa
 Notes: _____ Page: **3** of 4
 10 dB Yagi antenna

FREQ (MHz)	LEVEL (dBuV)	CABLE / ANT / PREAMP (dB) (dB\m) (dB)	FINAL (dBuV)	POL / HGT / AZ (m) (DEG)	DELTA1 (dB) N/A	DELTA2 (dB) N/A
4510.29	49.7 Pk	4.7 / 33.3 / 40.9	46.8	V / 1.1 / 0.0	N/A	N/A
5412.35	45.1 Pk	5.2 / 36.7 / 40.8	46.1	V / 1.1 / 0.0	N/A	N/A
No emissions found above the receiver's noise floor to 10th harmonic.						

Tested by: Shawn Singh
 Printed

Shawn Singh

Signature

Reviewed by: Felix J. Chavez
 Printed

Felix J. Chavez

Signature

Radiated Electromagnetic Emissions



Test Report #: **B0230 Run 02** Test Area: **Pinewood Site 1 (3m)**
 Test Method: **N/A** Test Date: **10-Jul-2000**
 EUT Model #: **DGR09** EUT Power: **12VDC**
 EUT Serial #: **902-1164** Temperature: _____ °C
 Manufacturer: **Freewave Technologies** Relative Humidity: _____ %
 EUT Description: **Transceiver module** Air Pressure: _____ kPa
 Notes: **Hopping Mode** Page: **4** of **4**
10 dB Yagi antenna

FREQ (MHz)	LEVEL (dBuV)	CABLE / ANT / PREAMP (dB) (dBm) (dB)	FINAL (dBuV)	POL / HGT / AZ (m) (DEG)	DELTA1 (dB) N/A	DELTA2 (dB) N/A
---------------	-----------------	---	-----------------	-----------------------------	--------------------	--------------------

***** MEASUREMENT SUMMARY *****						
902.05	106.3 Pk	2.0 / 22.7 / 0.0	131.0	V / 1.0 / 0.0	N/A	N/A
914.95	105.0 Pk	2.0 / 22.8 / 0.0	129.8	H / 1.0 / 0.0	N/A	N/A
927.86	101.8 Pk	2.0 / 23.4 / 0.0	127.2	V / 1.0 / 0.0	N/A	N/A
1803.88	62.4 Pk	2.8 / 27.7 / 28.9	64.0	H / 1.1 / 147.0	N/A	N/A
1829.80	57.2 Pk	2.8 / 27.8 / 29.0	58.9	V / 1.0 / 0.0	N/A	N/A
1855.70	64.2 Pk	2.9 / 27.9 / 29.0	65.9	H / 1.1 / 199.0	N/A	N/A
2705.97	51.1 Pk	3.6 / 31.6 / 29.3	56.9	H / 1.1 / 190.0	N/A	N/A
2744.75	48.1 Pk	3.6 / 31.7 / 29.3	54.0	V / 1.2 / 334.0	N/A	N/A
2783.50	52.9 Pk	3.6 / 31.8 / 29.3	59.0	H / 1.1 / 205.0	N/A	N/A
3608.05	53.5 Pk	4.1 / 33.5 / 29.2	61.9	V / 1.2 / 45.0	N/A	N/A
3659.70	52.9 Pk	4.1 / 33.6 / 29.2	61.4	V / 1.2 / 45.0	N/A	N/A
3711.34	50.1 Pk	4.2 / 33.7 / 29.2	58.8	V / 1.2 / 43.0	N/A	N/A
4510.29	49.7 Pk	4.7 / 33.3 / 40.9	46.8	V / 1.1 / 0.0	N/A	N/A
4574.75	49.3 Pk	4.8 / 33.6 / 41.0	46.7	V / 1.1 / 134.0	N/A	N/A
4639.24	51.0 Pk	4.9 / 34.0 / 41.0	48.7	V / 1.1 / 134.0	N/A	N/A
5412.29	46.2 Pk	5.2 / 36.7 / 40.8	47.3	H / 1.1 / 0.0	N/A	N/A
5489.69	46.8 Pk	5.2 / 36.9 / 40.7	48.2	H / 1.1 / 0.0	N/A	N/A
5567.15	45.2 Pk	5.2 / 37.0 / 40.7	46.8	H / 1.1 / 0.0	N/A	N/A

Tested by: Shawn Singh
Printed

Shawn Singh

Signature

Reviewed by: Felix J. Chavez
Printed

Felix J. Chavez

Signature

File No. BC1G023001, Page B5 of B16

Radiated Electromagnetic Emissions



Test Report #: **B0230 Run 04** Test Area: **Pinewood Site 1 (3m)**
 Test Method: **N/A** Test Date: **11-Jul-2000**
 EUT Model #: **DGR09** EUT Power: **12VDC**
 EUT Serial #: **902-1164**
 Manufacturer: **Freewave Technologies**
 EUT Description: **Transceiver module**
 Notes: **Hopping Mode**
5 dB Omni Directional Antenna

Temperature: _____ °C
 Relative Humidity: _____ %
 Air Pressure: _____ kPa
 Page: **1** of 4

FREQ (MHz)	LEVEL (dBuV)	CABLE / ANT / PREAMP (dB) (dBm) (dB)	FINAL (dBuV)	POL / HGT / AZ (m) (DEG)	DELTA1 (dB) N/A	DELTA2 (dB) N/A
902.06	102.3 Pk	2.0 / 22.7 / 0.0	127.0	V / 1.0 / 0.0	N/A	N/A
Antenna height 1.3 meters for above reading.						
914.96	103.0 Pk	2.0 / 22.8 / 0.0	127.8	V / 1.0 / 1.4	N/A	N/A
927.79	101.6 Pk	2.0 / 23.4 / 0.0	127.0	V / 1.0 / 1.4	N/A	N/A
927.85	91.7 Pk	2.0 / 23.4 / 0.0	117.1	H / 1.0 / 323.0	N/A	N/A
Antenna height 1.4 meters for above reading.						
914.96	93.8 Pk	2.0 / 22.8 / 0.0	118.6	H / 1.3 / 323.0	N/A	N/A
902.03	92.5 Pk	2.0 / 22.7 / 0.0	117.2	H / 1.3 / 323.0	N/A	N/A
1804.02	48.1 Pk	2.8 / 27.7 / 28.9	49.7	V / 1.2 / 0.0	N/A	N/A
2706.05	50.0 Pk	3.6 / 31.6 / 29.3	55.7	V / 1.2 / 0.0	N/A	N/A
3608.08	50.2 Pk	4.1 / 33.5 / 29.2	58.6	V / 1.2 / 0.0	N/A	N/A
1829.92	53.5 Pk	2.8 / 27.8 / 29.0	55.1	V / 1.2 / 0.0	N/A	N/A
2744.85	50.4 Pk	3.6 / 31.7 / 29.3	56.4	V / 1.2 / 292.0	N/A	N/A
3659.81	50.9 Pk	4.1 / 33.6 / 29.2	59.4	V / 1.2 / 82.0	N/A	N/A
1855.56	54.3 Pk	2.9 / 27.9 / 29.0	56.0	V / 1.2 / 296.0	N/A	N/A
2783.35	47.6 Pk	3.6 / 31.8 / 29.3	53.8	V / 1.2 / 20.0	N/A	N/A
3711.28	46.7 Pk	4.2 / 33.7 / 29.2	55.3	V / 1.2 / 124.0	N/A	N/A
1855.63	57.3 Pk	2.9 / 27.9 / 29.0	59.0	H / 1.1 / 0.0	N/A	N/A
2783.42	45.2 Pk	3.6 / 31.8 / 29.3	51.4	H / 1.1 / 350.0	N/A	N/A
3711.21	48.3 Pk	4.2 / 33.7 / 29.2	56.9	H / 1.1 / 45.0	N/A	N/A
1829.78	55.6 Pk	2.8 / 27.8 / 29.0	57.2	H / 1.1 / 0.0	N/A	N/A
2744.74	47.0 Pk	3.6 / 31.7 / 29.3	52.9	H / 1.1 / 31.0	N/A	N/A
3659.70	50.8 Pk	4.1 / 33.6 / 29.2	59.3	H / 1.1 / 47.0	N/A	N/A

Tested by: Shawn Singh
 Printed

Shawn Singh

Signature

Reviewed by: Felix J. Chavez
 Printed

Felix J. Chavez

Signature

File No. BC1G023001, Page B6 of B16

Radiated Electromagnetic Emissions



Test Report #: **B0230 Run 04** Test Area: Pinewood Site 1 (3m)
 Test Method: N/A Test Date: 11-Jul-2000
 EUT Model #: DGR09 EUT Power: 12VDC
 EUT Serial #: 902-1164
 Manufacturer: Freewave Technologies
 EUT Description: Transceiver module
 Notes: Hopping Mode
 5 dB Omni Directional Antenna

Temperature: _____ °C
 Relative Humidity: _____ %
 Air Pressure: _____ kPa
 Page: 2 of 4

FREQ (MHz)	LEVEL (dBuV)	CABLE / ANT / PREAMP (dB) (dBm) (dB)	FINAL (dBuV)	POL / HGT / AZ (m) (DEG)	DELTA1 (dB) N/A	DELTA2 (dB) N/A
1804.04	56.8 Pk	2.8 / 27.7 / 28.9	58.3	H / 1.4 / 22.0	N/A	N/A
2706.06	54.4 Pk	3.6 / 31.6 / 29.3	60.1	H / 1.4 / 350.0	N/A	N/A
3608.14	51.4 Pk	4.1 / 33.5 / 29.2	59.8	H / 1.4 / 33.0	N/A	N/A
4510.22	54.1 Pk	4.7 / 33.3 / 40.9	51.2	H / 1.1 / 0.0	N/A	N/A
5412.30	54.6 Pk	5.2 / 36.7 / 40.8	55.7	H / 1.1 / 0.0	N/A	N/A
6314.38	54.6 Pk	5.4 / 36.7 / 40.5	56.3	H / 1.1 / 0.0	N/A	N/A
No emissions found above the noise floor to 10th harmonic.						
4574.79	56.6 Pk	4.8 / 33.6 / 41.0	54.1	H / 1.1 / 305.0	N/A	N/A
5489.66	56.1 Pk	5.2 / 36.9 / 40.7	57.5	H / 1.1 / 305.0	N/A	N/A
6404.63	53.2 Pk	5.5 / 36.6 / 40.5	54.8	H / 1.1 / 312.0	N/A	N/A
No emissions found above the noise floor to 10th harmonic.						
4639.15	54.5 Pk	4.9 / 34.0 / 41.0	52.3	H / 1.1 / 312.0	N/A	N/A
5566.84	58.0 Pk	5.2 / 37.0 / 40.7	59.5	H / 1.1 / 312.0	N/A	N/A
6495.00	52.4 Pk	5.5 / 36.4 / 40.5	53.8	H / 1.1 / 312.0	N/A	N/A
No emissions found above the noise floor to 10th harmonic.						
4639.23	57.4 Pk	4.9 / 34.0 / 41.0	55.1	V / 1.1 / 0.0	N/A	N/A
5567.02	54.9 Pk	5.2 / 37.0 / 40.7	56.4	V / 1.1 / 70.0	N/A	N/A
6494.81	51.1 Pk	5.5 / 36.4 / 40.5	52.5	V / 1.1 / 70.0	N/A	N/A
No emissions found above the noise floor to 10th harmonic.						
4574.80	54.4 Pk	4.8 / 33.6 / 41.0	51.8	V / 1.1 / 0.0	N/A	N/A
5489.76	55.2 Pk	5.2 / 36.9 / 40.7	56.6	V / 1.1 / 80.0	N/A	N/A
6404.72	52.5 Pk	5.5 / 36.6 / 40.5	54.1	V / 1.1 / 90.0	N/A	N/A
No emissions found above the noise floor to 10th harmonic.						

Tested by: Shawn Singh
 Printed

Shawn Singh

Signature

Reviewed by: Felix J. Chavez
 Printed

Felix J. Chavez

Signature

File No. BC1G023001, Page B7 of B16

Radiated Electromagnetic Emissions



Test Report #: **B0230 Run 04** Test Area: Pinewood Site 1 (3m)
 Test Method: N/A Test Date: 11-Jul-2000
 EUT Model #: DGR09 EUT Power: 12VDC
 EUT Serial #: 902-1164 Temperature: _____ °C
 Manufacturer: Freewave Technologies Relative Humidity: _____ %
 EUT Description: Transceiver module Air Pressure: _____ kPa
 Notes: Hopping Mode Page: 3 of 4
 5 dB Omni Directional Antenna

FREQ (MHz)	LEVEL (dBuV)	CABLE / ANT / PREAMP (dB) (dBm) (dB)	FINAL (dBuV)	POL / HGT / AZ (m) (DEG)	DELTA1 (dB) N/A	DELTA2 (dB) N/A
4510.33	56.2 Pk	4.7 / 33.3 / 40.9	53.3	V / 1.1 / 90.0	N/A	N/A
5412.41	54.5 Pk	5.2 / 36.7 / 40.8	55.6	V / 1.1 / 90.0	N/A	N/A
6314.53	52.5 Pk	5.4 / 36.7 / 40.5	54.2	V / 1.1 / 90.0	N/A	N/A
No emissions found above the noise floor to 10th harmonic.						

Tested by: Shawn Singh
 Printed

Shawn Singh

Signature

Reviewed by: Felix J. Chavez
 Printed

Felix J. Chavez

Signature

Radiated Electromagnetic Emissions



Test Report #: **B0230 Run 04** Test Area: **Pinewood Site 1 (3m)**
 Test Method: **N/A** Test Date: **11-Jul-2000**
 EUT Model #: **DGR09** EUT Power: **12VDC**
 EUT Serial #: **902-1164** Temperature: _____ °C
 Manufacturer: **Freewave Technologies** Relative Humidity: _____ %
 EUT Description: **Transceiver module** Air Pressure: _____ kPa
 Notes: **Hopping Mode** Page: **4** of 4
5 dB Omni Directional Antenna

FREQ (MHz)	LEVEL (dBuV)	CABLE / ANT / PREAMP (dB) (dB/m) (dB)	FINAL (dBuV)	POL / HGT / AZ (m) (DEG)	DELTA1 (dB) N/A	DELTA2 (dB) N/A
---------------	-----------------	--	-----------------	-----------------------------	--------------------	--------------------

***** MEASUREMENT SUMMARY *****						
902.06	102.3 Pk	2.0 / 22.7 / 0.0	127.0	V / 1.0 / 0.0	N/A	N/A
914.96	103.0 Pk	2.0 / 22.8 / 0.0	127.8	V / 1.0 / 1.4	N/A	N/A
927.79	101.6 Pk	2.0 / 23.4 / 0.0	127.0	V / 1.0 / 1.4	N/A	N/A
927.85	91.7 Pk	2.0 / 23.4 / 0.0	117.1	H / 1.0 / 323.0	N/A	N/A
1804.04	56.8 Pk	2.8 / 27.7 / 28.9	58.3	H / 1.4 / 22.0	N/A	N/A
1829.78	55.6 Pk	2.8 / 27.8 / 29.0	57.2	H / 1.1 / 0.0	N/A	N/A
1855.63	57.3 Pk	2.9 / 27.9 / 29.0	59.0	H / 1.1 / 0.0	N/A	N/A
2706.06	54.4 Pk	3.6 / 31.6 / 29.3	60.1	H / 1.4 / 350.0	N/A	N/A
2744.85	50.4 Pk	3.6 / 31.7 / 29.3	56.4	V / 1.2 / 292.0	N/A	N/A
2783.35	47.6 Pk	3.6 / 31.8 / 29.3	53.8	V / 1.2 / 20.0	N/A	N/A
3608.14	51.4 Pk	4.1 / 33.5 / 29.2	59.8	H / 1.4 / 33.0	N/A	N/A
3659.81	50.9 Pk	4.1 / 33.6 / 29.2	59.4	V / 1.2 / 82.0	N/A	N/A
3711.21	48.3 Pk	4.2 / 33.7 / 29.2	56.9	H / 1.1 / 45.0	N/A	N/A
4510.33	56.2 Pk	4.7 / 33.3 / 40.9	53.3	V / 1.1 / 90.0	N/A	N/A
4574.79	56.6 Pk	4.8 / 33.6 / 41.0	54.1	H / 1.1 / 305.0	N/A	N/A
4639.23	57.4 Pk	4.9 / 34.0 / 41.0	55.1	V / 1.1 / 0.0	N/A	N/A
5412.30	54.6 Pk	5.2 / 36.7 / 40.8	55.7	H / 1.1 / 0.0	N/A	N/A
5489.66	56.1 Pk	5.2 / 36.9 / 40.7	57.5	H / 1.1 / 305.0	N/A	N/A
5566.84	58.0 Pk	5.2 / 37.0 / 40.7	59.5	H / 1.1 / 312.0	N/A	N/A
6314.38	54.6 Pk	5.4 / 36.7 / 40.5	56.3	H / 1.1 / 0.0	N/A	N/A
6404.63	53.2 Pk	5.5 / 36.6 / 40.5	54.8	H / 1.1 / 312.0	N/A	N/A
6495.00	52.4 Pk	5.5 / 36.4 / 40.5	53.8	H / 1.1 / 312.0	N/A	N/A

Tested by: Shawn Singh
 Printed

Shawn Singh

Signature

Reviewed by: Felix J. Chavez
 Printed

Felix J. Chavez

Signature

File No. BC1G023001, Page B9 of B16

Radiated Electromagnetic Emissions



Test Report #: **B0230 Run 6** Test Area: **Pinewood Site 2 (3m)**
 Test Method: **FCC Part 15** Test Date: **18-Jul-2000**
 EUT Model #: **DGR09** EUT Power: **11 VDC**
 EUT Serial #: **902-1164**
 Manufacturer: **FreeWave**
 EUT Description:

Temperature: **22** °C
 Relative Humidity: **40** %
 Air Pressure: **80.5** kPa

Notes: **with 10 dB Yagi, 85cm unshielded 10 wire data/power**
cable, terminated the micro strips on the board and
raised the height of the RF section shield

Page: **1** of **2**

FREQ (MHz)	LEVEL (dBuV)	CABLE / ANT / PREAMP (dB)	FINAL (dBuV/m)	POL / HGT / AZ (m) (DEG)	DELTA1 FCC B (< 1GHz)	DELTA2 N/A
932.48	41.5 Qp	6.1 / 22.5 / 28.8	41.2	V / 1.2 / 10.0	-4.8	N/A
moved cables						
932.48	41.6 Qp	6.1 / 22.5 / 28.8	41.4	V / 1.2 / 10.0	-4.6	N/A
945.38	38.6 Qp	6.2 / 22.5 / 28.8	38.4	V / 2.0 / 105.0	-7.6	N/A
958.29	36.2 Qp	6.3 / 22.5 / 28.8	36.2	V / 2.0 / 105.0	-9.8	N/A
958.29	38.8 Qp	6.3 / 22.5 / 28.8	38.8	H / 1.0 / 155.0	-7.2	N/A
945.38	38.6 Qp	6.2 / 22.5 / 28.8	38.4	H / 1.0 / 340.0	-7.6	N/A
moved cables						
945.38	38.9 Qp	6.2 / 22.5 / 28.8	38.7	H / 1.0 / 340.0	-7.3	N/A
moved cables						
932.48	42.9 Qp	6.1 / 22.5 / 28.8	42.6	H / 1.0 / 340.0	-3.4	N/A
end of test up to 1 GHz						

Tested by: **Jeff Doolittle**
 Printed

Signature

Reviewed by: **Felix J. Chavez**
 Printed

Signature

File No. BC1G023001, Page B10 of B16

Radiated Electromagnetic Emissions



Test Report #: **B0230 Run 6** Test Area: **Pinewood Site 2 (3m)**
 Test Method: **FCC Part 15** Test Date: **18-Jul-2000**
 EUT Model #: **DGR09** EUT Power: **11 VDC**
 EUT Serial #: **902-1164**
 Manufacturer: **FreeWave**
 EUT Description:

Temperature: **22** °C
 Relative Humidity: **40** %
 Air Pressure: **80.5** kPa

Notes: **with 10 dB Yagi, 85cm unshielded 10 wire data/power**
cable, terminated the micro strips on the board and
raised the height of the RF section shield

Page: **2 of 2**

FREQ (MHz)	LEVEL (dBuV)	CABLE / ANT / PREAMP (dB)	FINAL (dBuV/m)	POL / HGT / AZ (m) (DEG)	DELTA1 FCC B (< 1GHz)	DELTA2 N/A
---------------	-----------------	------------------------------	-------------------	-----------------------------	--------------------------	---------------

***** MEASUREMENT SUMMARY *****						
932.48	42.9 Qp	6.1 / 22.5 / 28.8	42.6	H / 1.0 / 340.0	-3.4	N/A
958.29	38.8 Qp	6.3 / 22.5 / 28.8	38.8	H / 1.0 / 155.0	-7.2	N/A
945.38	38.9 Qp	6.2 / 22.5 / 28.8	38.7	H / 1.0 / 340.0	-7.3	N/A

Tested by: **Jeff Doolittle**
 Printed


 Signature

Reviewed by: **Felix J. Chavez**
 Printed


 Signature

File No. BC1G023001, Page B11 of B16

Radiated Electromagnetic Emissions



Test Report #: **B0230 Run 7** Test Area: **Pinewood Site 2 (3m)**
 Test Method: **FCC Part 15** Test Date: **18-Aug-2000**
 EUT Model #: **DGR09** EUT Power: **11 VDC**
 EUT Serial #: **902-1164**
 Manufacturer: **FreeWave**
 EUT Description:

Temperature: **22** °C
 Relative Humidity: **40** %
 Air Pressure: **80.5** kPa

Notes: with 10 dB Yagi, 85cm unshielded 10 wire data/power
 cable, terminated the micro strips on the board and
 raised the height of the RF section shield

Page: 1 of 3

FREQ (MHz)	LEVEL (dBuV)	CABLE / ANT / PREAMP (dB)	FINAL (dBuV/m)	POL / HGT / AZ (m) (DEG)	DELTA1 FCC B (> 1GHz)	DELTA2 N/A
Low						
1864.84	48.1 Av	3.2 / 27.9 / 29.4	49.8	H / 1.0 / 90.0	-4.2	N/A
2797.29	41.6 Av	3.7 / 31.9 / 29.5	47.7	H / 1.2 / 0.0	-6.3	N/A
3729.72	40.9 Av	4.3 / 33.7 / 29.3	49.6	H / 1.4 / 36.0	-4.4	N/A
Med						
3781.32	36.8 Av	4.3 / 33.8 / 29.3	45.6	H / 1.4 / 40.0	-8.4	N/A
2835.99	39.3 Av	3.8 / 32.0 / 29.4	45.6	H / 1.6 / 20.0	-8.4	N/A
High						
2874.70	34.8 Av	3.8 / 32.1 / 29.4	41.3	H / 1.7 / 20.0	-12.7	N/A
3832.93	36.8 Av	4.3 / 33.9 / 29.3	45.7	H / 1.7 / 45.0	-8.3	N/A
2874.70	33.9 Av	3.8 / 32.1 / 29.4	40.4	V / 1.0 / 180.0	-13.6	N/A
Med						
2835.99	35.2 Av	3.8 / 32.0 / 29.4	41.5	V / 1.0 / 110.0	-12.5	N/A
Low						
1864.84	49.2 Av	3.2 / 27.9 / 29.4	50.9	V / 1.0 / 90.0	-3.1	N/A
2797.29	40.0 Av	3.7 / 31.9 / 29.5	46.1	V / 1.0 / 90.0	-7.9	N/A
Low						
4662.14	37.6 Av	4.8 / 34.1 / 40.0	36.5	V / 1.1 / 90.0	-17.5	N/A
Med						
4726.65	38.7 Av	4.8 / 34.4 / 40.0	38.0	V / 1.1 / 70.0	-16.0	N/A
High						

Tested by: **Dan Dillon**
 Printed


 Signature

Reviewed by: **Felix J. Chavez**
 Printed


 Signature

File No. BC1G023001, Page B12 of B16

Radiated Electromagnetic Emissions



Test Report #: **B0230 Run 7** Test Area: **Pinewood Site 2 (3m)**
 Test Method: **FCC Part 15** Test Date: **18-Aug-2000**
 EUT Model #: **DGR09** EUT Power: **11 VDC**
 EUT Serial #: **902-1164**
 Manufacturer: **FreeWave**
 EUT Description:

Temperature: **22** °C
 Relative Humidity: **40** %
 Air Pressure: **80.5** kPa

Notes: **with 10 dB Yagi, 85cm unshielded 10 wire data/power**
cable, terminated the micro strips on the board and
raised the height of the RF section shield

Page: **2 of 3**

FREQ (MHz)	LEVEL (dBuV)	CABLE / ANT / PREAMP (dB)	FINAL (dBuV/m)	POL / HGT / AZ (m) (DEG)	DELTA1 FCC B (> 1GHz)	DELTA2 N/A
4791.17	39.6 Av	4.9 / 34.8 / 40.0	39.3	V / 1.1 / 60.0	-14.7	N/A
4791.17	39.4 Av	4.9 / 34.8 / 40.0	39.1	H / 1.2 / 80.0	-14.9	N/A
Med						
4726.65	35.8 Av	4.8 / 34.4 / 40.0	35.1	H / 1.2 / 70.0	-18.9	N/A
Low						
4662.15	37.2 Av	4.8 / 34.1 / 40.0	36.1	H / 1.2 / 110.0	-17.9	N/A
EUT in normal operating mode.						
The following were maximized						
1890.67	28.2 Av	3.2 / 28.0 / 29.5	29.9	V / 1.0 / 117.0	-24.1	N/A
1916.48	27.9 Av	3.2 / 28.1 / 29.5	29.7	V / 1.0 / 161.0	-24.3	N/A
3729.72	24.9 Av	4.3 / 33.7 / 29.3	33.6	V / 1.0 / 93.0	-20.4	N/A
3832.93	25.3 Av	4.3 / 33.9 / 29.3	34.2	V / 1.0 / 300.0	-19.8	N/A
The following were maximized in horizontal polarization						
1890.67	27.5 Av	3.2 / 28.0 / 29.5	29.3	H / 1.4 / 346.0	-24.7	N/A
1916.48	27.4 Av	3.2 / 28.1 / 29.5	29.3	H / 1.5 / 238.0	-24.7	N/A
The following were maximized in vertical polarization.						
3781.32	24.4 Av	4.3 / 33.8 / 29.3	33.2	V / 1.0 / 350.0	-20.8	N/A
3781.32	24.4 Av	4.3 / 33.8 / 29.3	33.2	V / 1.0 / 350.0	-20.8	N/A
1864.84	27.9 Av	3.2 / 27.9 / 29.4	29.6	V / 1.0 / 354.0	-24.4	N/A

Tested by: **Dan Dillon**
 Printed


 Signature

Reviewed by: **Felix J. Chavez**
 Printed


 Signature

File No. BC1G023001, Page B13 of B16

Radiated Electromagnetic Emissions



Test Report #: **B0230 Run 7** Test Area: **Pinewood Site 2 (3m)**
 Test Method: **FCC Part 15** Test Date: **18-Aug-2000**
 EUT Model #: **DGR09** EUT Power: **11 VDC**
 EUT Serial #: **902-1164**
 Manufacturer: **FreeWave**
 EUT Description:

Temperature: **22** °C
 Relative Humidity: **40** %
 Air Pressure: **80.5** kPa

Notes: **with 10 dB Yagi, 85cm unshielded 10 wire data/power**
cable, terminated the micro strips on the board and
raised the height of the RF section shield

Page: **3** of **3**

FREQ (MHz)	LEVEL (dBuV)	CABLE / ANT / PREAMP (dB)	FINAL (dBuV/m)	POL / HGT / AZ (m) (DEG)	DELTA1 FCC B (> 1GHz)	DELTA2 N/A
---------------	-----------------	------------------------------	-------------------	-----------------------------	--------------------------	---------------

***** MEASUREMENT SUMMARY *****						
2797.29	41.6 Av	3.7 / 31.9 / 29.5	47.7	H / 1.2 / 0.0	-6.3	N/A
2835.99	39.3 Av	3.8 / 32.0 / 29.4	45.6	H / 1.6 / 20.0	-8.4	N/A
2874.70	34.8 Av	3.8 / 32.1 / 29.4	41.3	H / 1.7 / 20.0	-12.7	N/A
4791.17	39.6 Av	4.9 / 34.8 / 40.0	39.3	V / 1.1 / 60.0	-14.7	N/A
4726.65	38.7 Av	4.8 / 34.4 / 40.0	38.0	V / 1.1 / 70.0	-16.0	N/A
4662.14	37.6 Av	4.8 / 34.1 / 40.0	36.5	V / 1.1 / 90.0	-17.5	N/A
3832.93	25.3 Av	4.3 / 33.9 / 29.3	34.2	V / 1.0 / 300.0	-19.8	N/A
3729.72	24.9 Av	4.3 / 33.7 / 29.3	33.6	V / 1.0 / 93.0	-20.4	N/A
3781.32	24.4 Av	4.3 / 33.8 / 29.3	33.2	V / 1.0 / 350.0	-20.8	N/A
1890.67	28.2 Av	3.2 / 28.0 / 29.5	29.9	V / 1.0 / 117.0	-24.1	N/A
1916.48	27.9 Av	3.2 / 28.1 / 29.5	29.7	V / 1.0 / 161.0	-24.3	N/A
1864.84	27.9 Av	3.2 / 27.9 / 29.4	29.6	V / 1.0 / 354.0	-24.4	N/A

Tested by: **Dan Dillon**
 Printed


 Signature

Reviewed by: **Felix J. Chavez**
 Printed


 Signature

Conducted Electromagnetic Emissions



Test Report #: **B0230 Run 1**

Test Area: Screen Room

Temperature: _____ °C

Test Method: FCC Class B

Test Date: 09-Aug-2000

Relative Humidity: _____ %

EUT Model #: DGR09

EUT Power: 120 VAC / 60 HZ

Air Pressure: _____ kPa

EUT Serial #: 902-1164

Page: 1 of 2

Manufacturer: Freewave Technologies

EUT Description: Transceiver Module

Notes: Conducted Emissions test was performed on HP model F3620A DC power supply.

Level Key

PK – Peak Nb – Narrow Band
Qp – QuasiPeak Bb – Broad Band
Av - Average

FREQ (MHz)	LEVEL (dBuV)	CABLE / LISN / ATTEN (dB)	FINAL (dBuV)	TEST POINT	DELTA1 (dB) FCC B	DELTA2 (dB) N/A
QP - Neutral Measurements						
1.60	34.5 Qp	0.0 / 0.0 / 0.0	34.5	Neutral	-13.5	N/A
1.72	41.0 Qp	0.0 / 0.0 / 0.0	41.0	Neutral	-7.0	N/A
1.78	44.5 Qp	0.0 / 0.0 / 0.0	44.5	Neutral	-3.5	N/A
1.93	39.0 Qp	0.0 / 0.0 / 0.0	39.0	Neutral	-9.0	N/A
2.00	39.0 Qp	0.0 / 0.0 / 0.0	39.0	Neutral	-9.0	N/A
15.22	34.0 Qp	0.0 / 0.0 / 0.0	34.0	Neutral	-14.0	N/A
QP - Line Measurements						
1.60	35.0 Qp	0.0 / 0.0 / 0.0	35.0	Line 1	-13.0	N/A
1.72	40.2 Qp	0.0 / 0.0 / 0.0	40.2	Line 1	-7.8	N/A
1.78	44.3 Qp	0.0 / 0.0 / 0.0	44.3	Line 1	-3.7	N/A
1.93	39.1 Qp	0.0 / 0.0 / 0.0	39.1	Line 1	-8.9	N/A
2.00	39.0 Qp	0.0 / 0.0 / 0.0	39.0	Line 1	-9.0	N/A
15.22	34.0 Qp	0.0 / 0.0 / 0.0	34.0	Line 1	-14.0	N/A

Tested by: Shawn Singh
Printed

Shawn Singh

Signature

Reviewed by: Felix J. Chavez
Printed

Felix J. Chavez

Signature

File No. BC1G023001, Page B15 of B16

Conducted Electromagnetic Emissions



Test Report #: **B0230 Run 1**
 Test Method: **FCC Class B**
 EUT Model #: **DGR09**
 EUT Serial #: **902-1164**
 Manufacturer: **Freewave Technologies**
 EUT Description: **Transceiver Module**
 Notes: **Conducted Emissions test was performed on HP model F3620A DC power supply.**

Test Area: **Screen Room**
 Test Date: **09-Aug-2000**
 EUT Power: **120 VAC / 60 HZ**

Temperature: _____ °C
 Relative Humidity: _____ %
 Air Pressure: _____ kPa
 Page: **2** of **2**

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ (MHz)	LEVEL (dBuV)	CABLE / LISN / ATTEN (dB)	FINAL (dBuV)	TEST POINT	DELTA1 (dB) FCC B	DELTA2 (dB) N/A
***** Measurement Summary *****						
1.78	44.5 Qp	0.0 / 0.0 / 0.0	44.5	Neutral	-3.5	N/A
1.78	44.3 Qp	0.0 / 0.0 / 0.0	44.3	Line 1	-3.7	N/A
1.72	41.0 Qp	0.0 / 0.0 / 0.0	41.0	Neutral	-7.0	N/A
1.93	39.1 Qp	0.0 / 0.0 / 0.0	39.1	Line 1	-8.9	N/A
2.00	39.0 Qp	0.0 / 0.0 / 0.0	39.0	Line 1	-9.0	N/A
1.60	35.0 Qp	0.0 / 0.0 / 0.0	35.0	Line 1	-13.0	N/A
15.22	34.0 Qp	0.0 / 0.0 / 0.0	34.0	Line 1	-14.0	N/A

Tested by: Shawn Singh
 Printed

Shawn Singh

Signature

Reviewed by: Felix J. Chavez
 Printed

Felix J. Chavez

Signature


Appendix C

Plot of Occupied Bandwidth of a Single Channel with Modulation

14: 41: 00 NOV 14, 2000

REF 28.3 dBm AT 40 dB

SMPL LOG 10 dB/ OFFST -1.7 dB

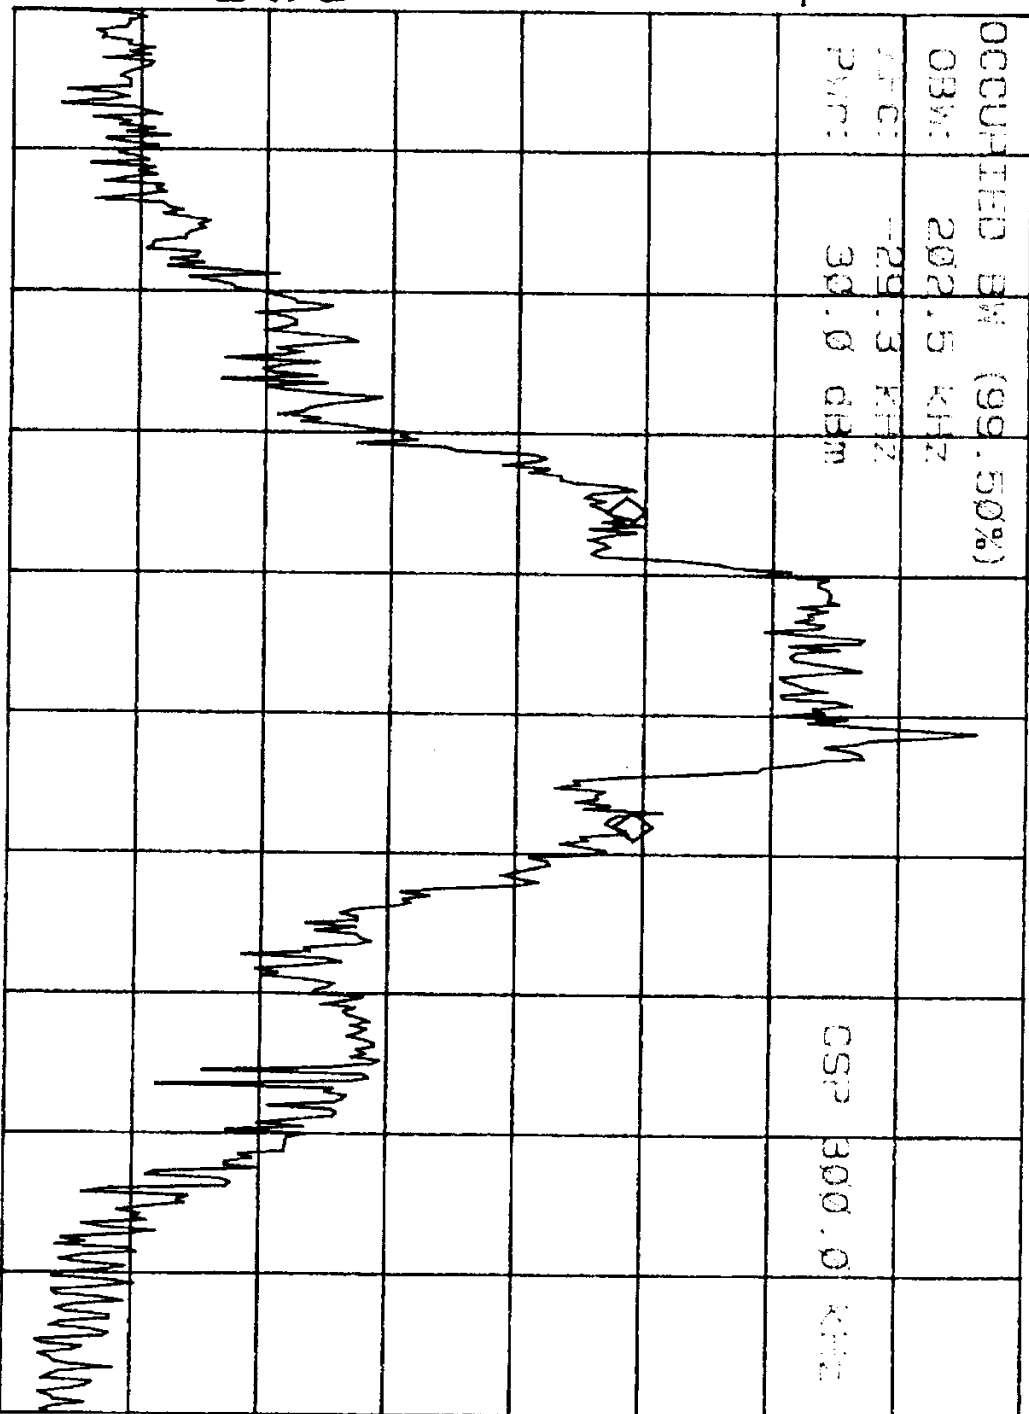

CENTER 902.0450 MHz
#RES BW 3.0 KHz

#VBW 30 KHz


SPAN 900.0 KHz
SWP 300 msec

15:17:24 NOV 14, 2000
/H

REF 28.3 dBm AT 40 dB

SMPL
LOG
10
dB/
OFFST
-1.7
dB

VA SB
SC FC
CORR

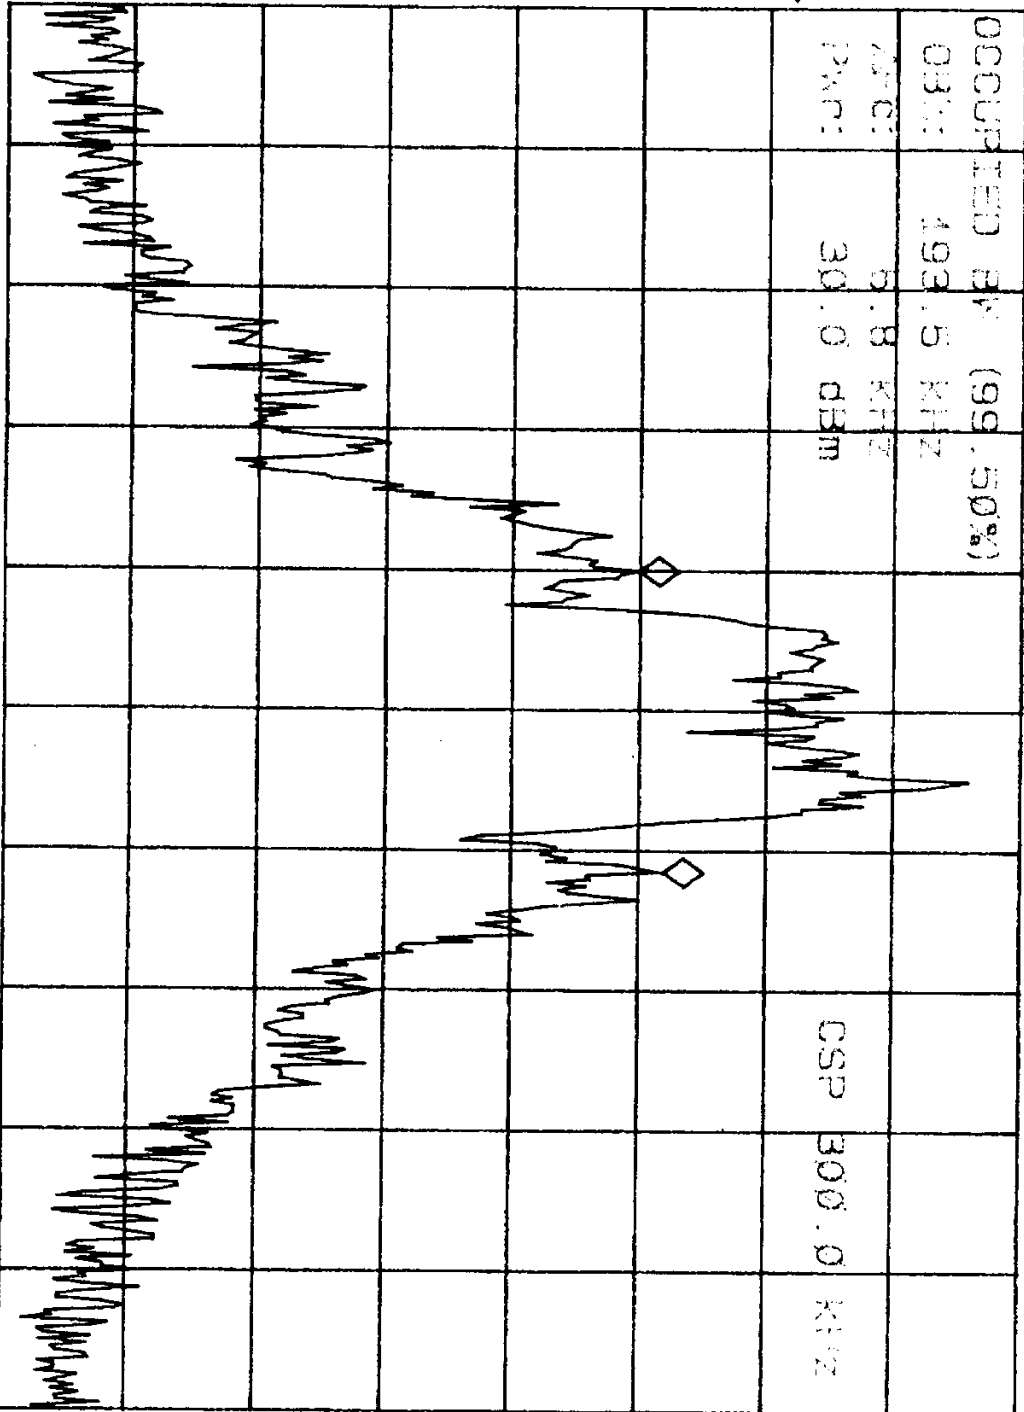

CENTER 914.9135 MHz
#RES BW 3.0 KHz

#VBW 30 KHz


SPAN 900.0 KHz
SWP 300 msec

15: 24: 26 NOV 14, 2000

REF 28.3 dBm AT 40 dB

SMPL LOG 10 DB/ OFFST -1.7 dB

VA SB SC FC CORR

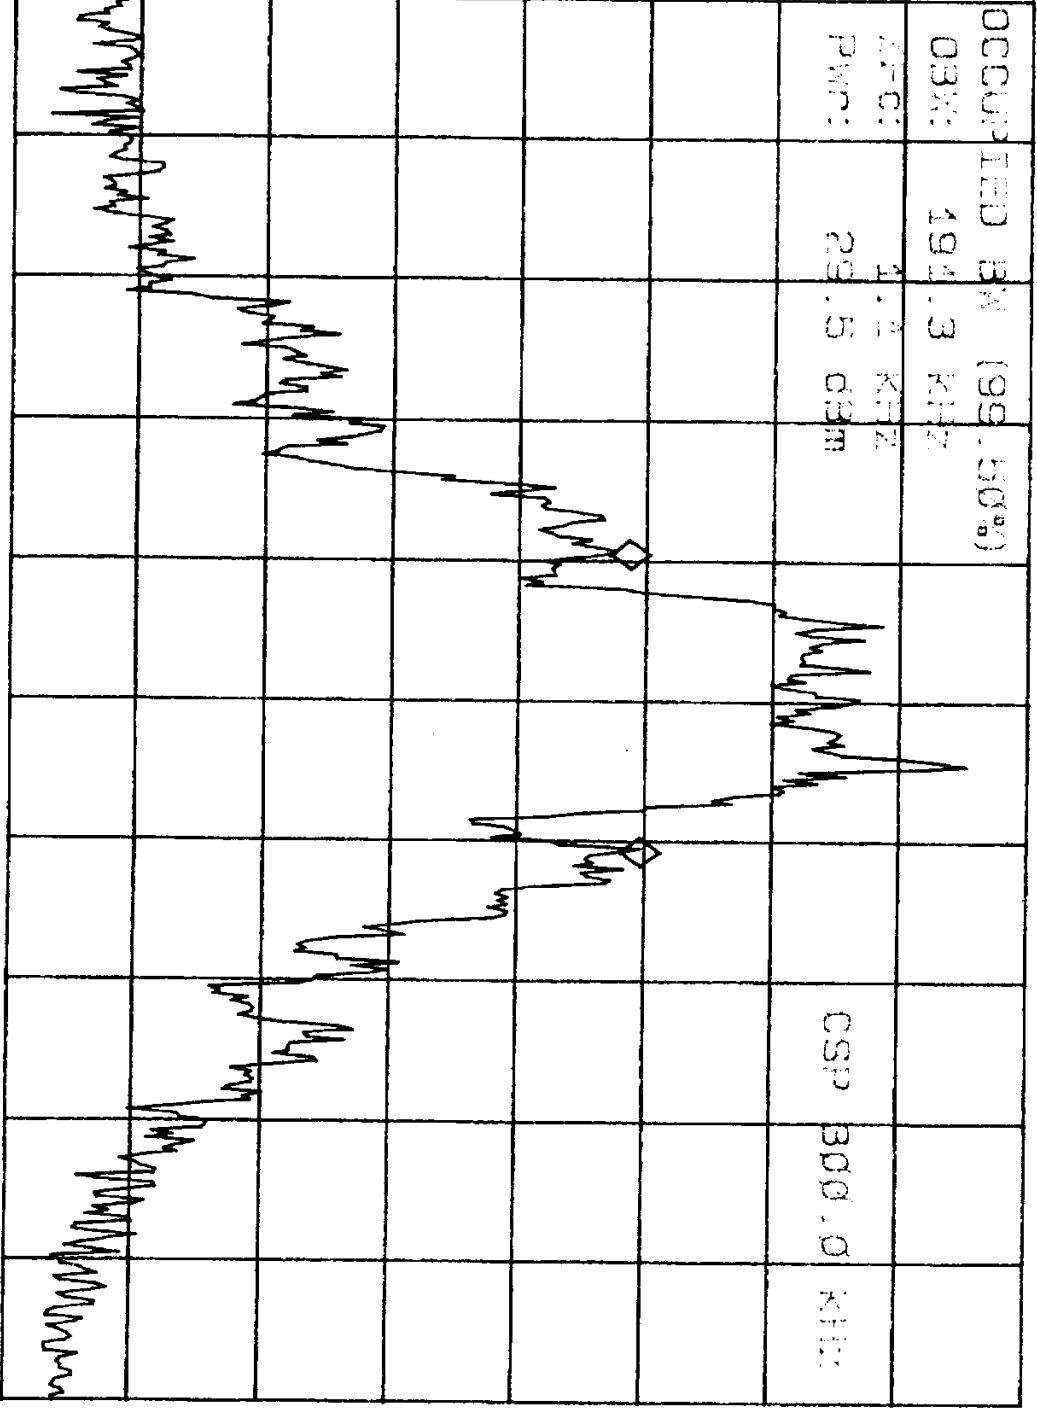

CENTER 927.8208 MHz SPAN 900.0 KHz
#RES BW 3.0 KHz #VBW 30 KHz SWP 300 msec

Appendix D

Plot of Nominal Channel Band Occupancy

November 13, 2000

Federal Communications Commission
Equipment Authorization Division
7435 Oakland Mills Road
Columbia, MD 21046

**Frequency channels occupancy time in 20 seconds period
calculations/measurements.**


To whom it may concern,

FreeWave Technologies is submitting a low power output 902-928 MHz frequency hopping spread spectrum transceiver (FCC ID KNY-1931852313419, model number DGRO9). This transceiver's frequency channel occupancy time is programmable and depends on MinPacketSize and MaxPacketSize settings on the radio (for more information about this settings, please, refer to page 28 of the User Manual).

In general, MinPacketSize and MaxPacketSize settings define the number of bytes to be allocated in a time domain for transceiver's transmission. Bigger MinPacketSize, MaxPacketSize settings leads to more bytes of data DGRO9 transceiver (EUT) will be able to transmit in one packet (on one frequency channel). That is why the EUT will occupy a single frequency channel for the longest time in the case if three conditions will be met:

- MinPacketSize will be set to "9" and the MaxPacketSize will be set to "9",
- EUT is programmed to be a Point-to-Point master,
- EUT is communicating with another DGRO9 series transceiver,
- and when the radio is sending continuous stream of RS232 data at the maximum data rate (115.2 kb/s).

To measure the frequency channel occupancy time following equipment setup was used:

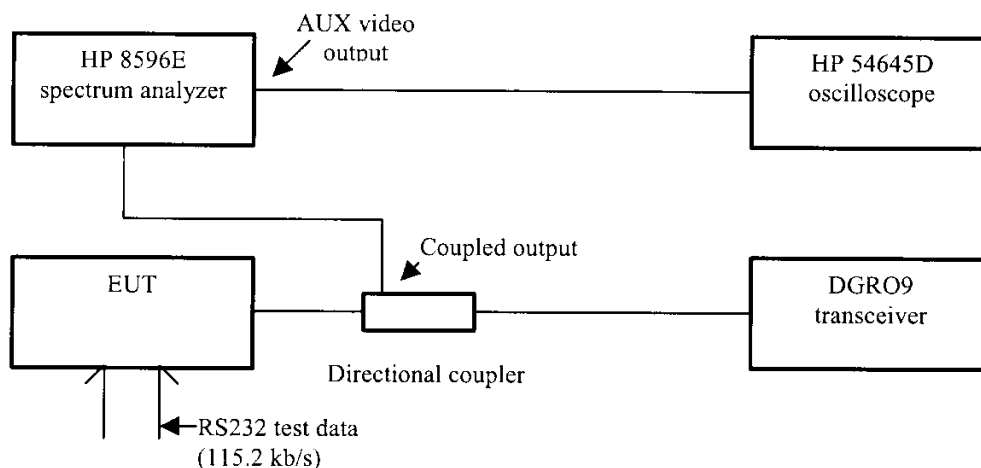

The EUT was setup to communicate with another DGRO9 transceiver at the fixed frequency mode. Random RS232 data was sent to the EUT to simulate the worst case scenario described above.

Spectrum analyzer was setup to demodulate EUT's signal while oscilloscope was used for time measurements.

The test includes two steps:

1. Measure frequency channel occupancy time when the radio is in a fixed frequency mode.

The EUT was setup to stay on a fixed frequency (914.9182 MHz). In other words, every time the EUT would under normal circumstances hop to a different frequency, it was hopping to the same frequency channel. By doing this, single frequency channel occupancy time was measured.

The oscilloscope's screen snapshot for this configuration is given on Figure 1 (for time measurement accuracy oscilloscope was setup to show at least 20 periods – 23 is an actual number). The Figure 2 shows settings on the spectrum analyzer used for these measurements. From the Figure 1 follows that the EUT will stay on each frequency channel for no longer than

$$T1 = 482 \text{ msec} / 23 \text{ periods} = 20.9565 \text{ msec}.$$

2. Calculate frequency channel occupancy time for 20 seconds period when the radio is in a hopping mode.

The EUT uses frequency hop pattern, which consists 112 frequency channels. Each frequency channel within the hopping pattern is used just once. So, the hop pattern duration is

$$\text{Hop Pattern Duration } [T2] = T1 * \text{Number Of Frequency Channels In The Hop Pattern}$$

In our case this time will be

$$T2 = 20.9565 \text{ msec} * 112 = 2347.128 \text{ msec} \sim 2.347 \text{ sec}.$$

The EUT will repeat the hopping pattern within 20 seconds period of time:

Hop Pattern Will Be Repeated $[N] = 20 \text{ seconds} / T2$

or

$N = 20 \text{ seconds} / 2.347 \text{ seconds} = 8.5215 \text{ times.}$

In other words, each frequency channel will be used by the EUT no more than 9 times within 20 seconds period of time in the worst case scenario. Figure 3 shows spectrum analyzer's screen snapshot then the sweep time was set to 20 seconds. As you can see, the 914.918 MHz frequency appeared on output of the EUT 8 times within 20 seconds period of time. So, the total time the EUT will occupy a single frequency channel in the worst case will be

*Single Frequency Occupation Time for 20 seconds period = $T1 * 9 = 188.6085 \text{ msec.}$*

Sincerely,


A handwritten signature in black ink, appearing to read 'Aleksey Pozhidaev', with a long horizontal flourish extending to the right.

Aleksey Pozhidaev
Engineer

Appendix E

Plot of Channel Spacing

CENTER FREQ 300.000 MHz
 REF BW 30 KHz
 VBW 100 KHz
 SSB 50.0 Wsec
 SPAN 1.00 MHz

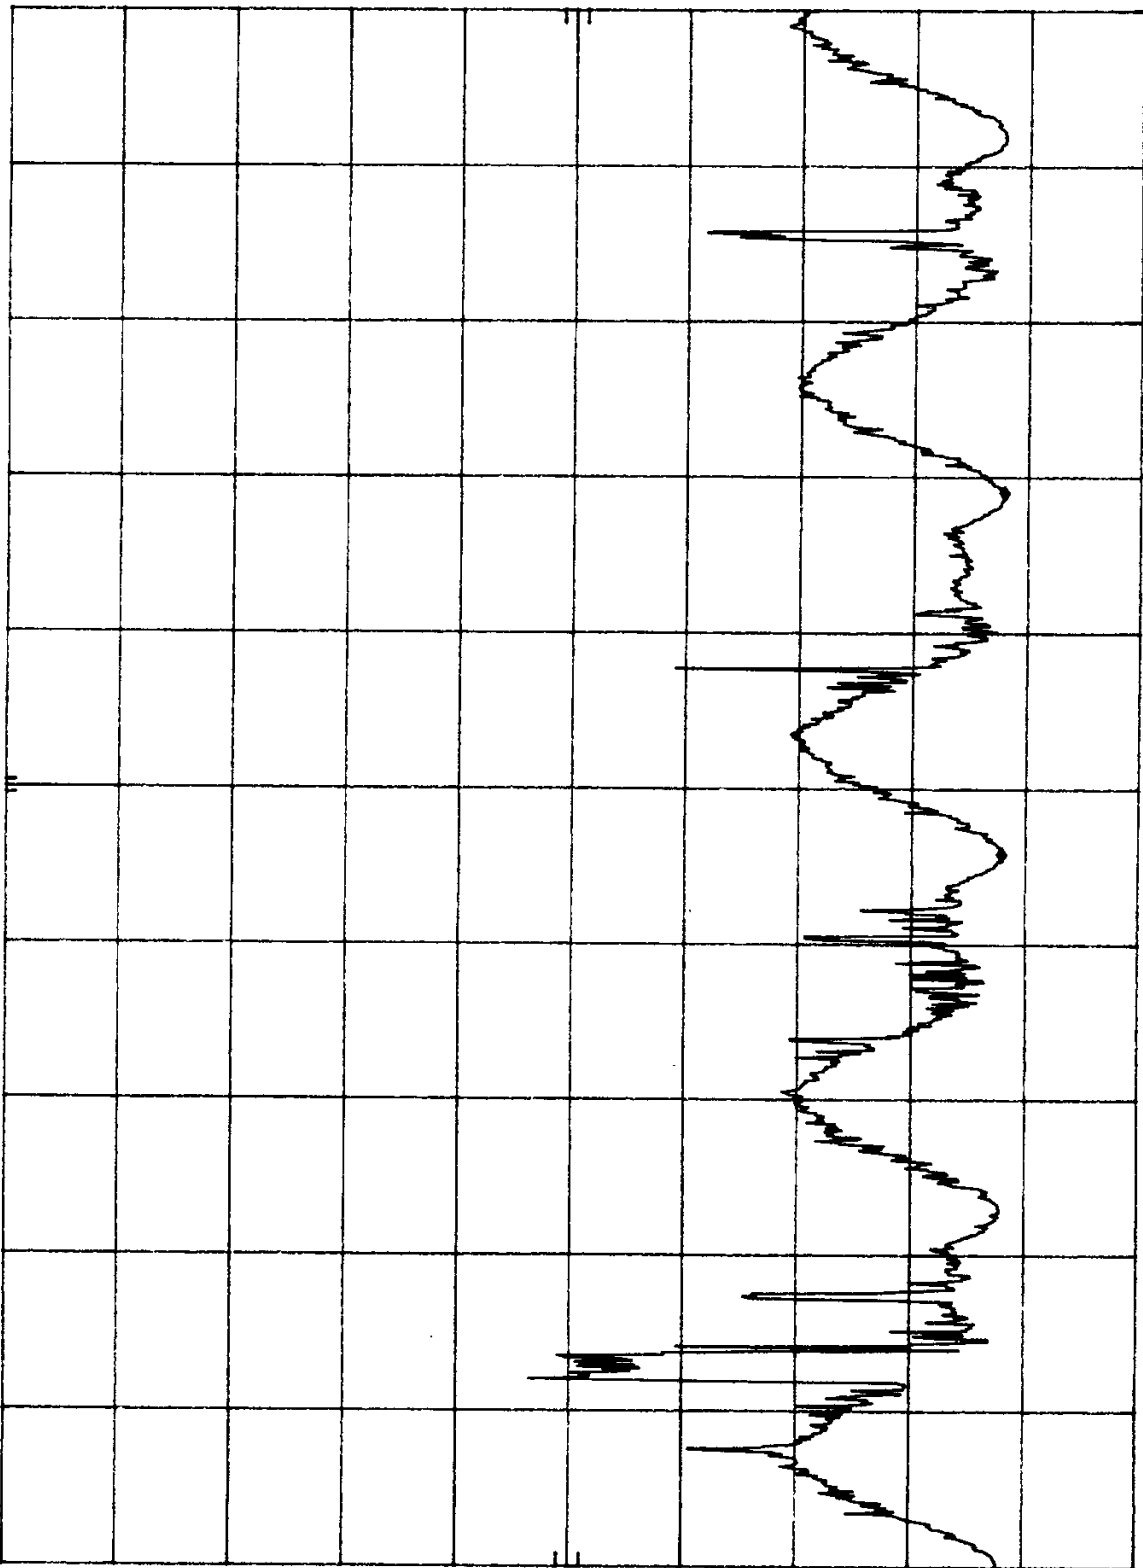

0.0
 dB
 OFFSET

10 dB

dB

REF 100.0 dBm
 ATTEN 20 dB
 RBW 30 KHz
 VBW 100 KHz
 SSB 50.0 Wsec
 SPAN 1.00 MHz

0.00 dB
 WKB 535 KHz

Appendix F


Plot of Power Output

Output Power = 26.8 dBm + 3 dBm (cable loss) = 29.8 dBm = 955 mW

REF 30.0 dBm
CENTER 274.27 MHz

ABM 7 MHz

2MB 50.0 msec
2500 5.00 MHz

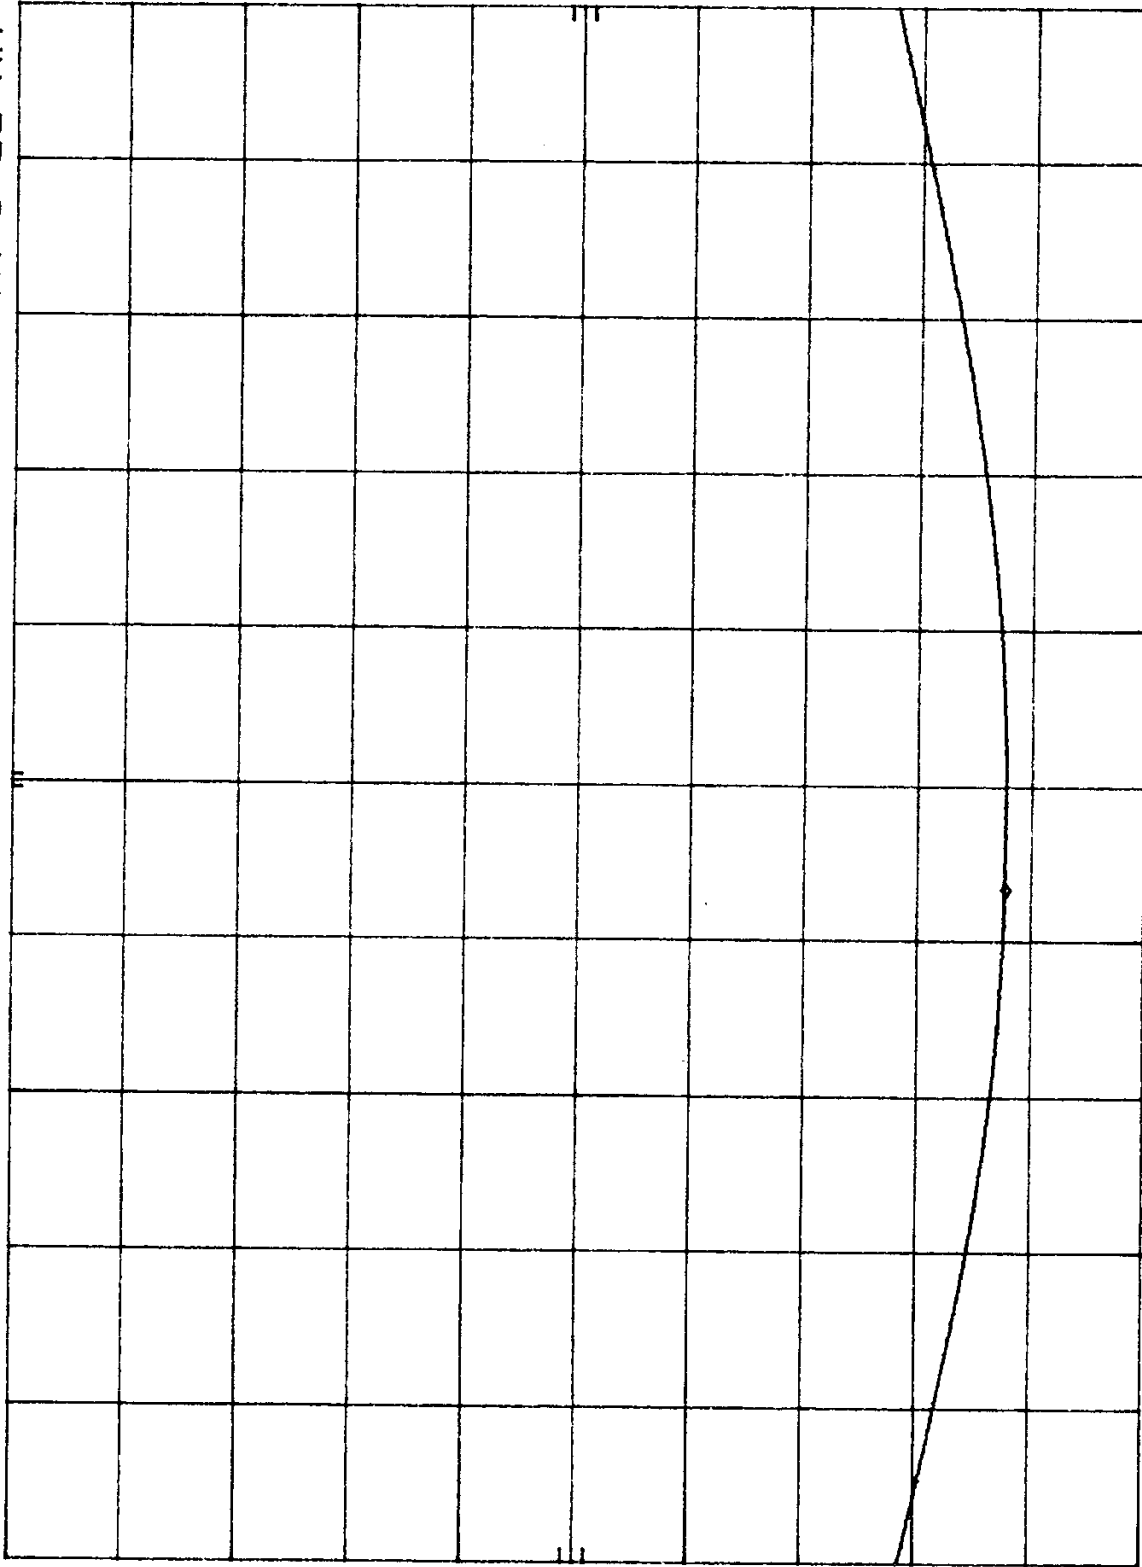

dB
2.0
OFFSET


70 dB
10

REF 30.0 dBm
FREQUENCY DEPEND

ATTEN 40 dB


50.00 dBm
WKB 274.285 MHz

Output Power = 26.7 dBm + 3 dBm (cable loss) = 29.7 dBm
 26.7 dBm + 3 dBm (cable loss) = 29.7 dBm
 26.7 dBm + 3 dBm (cable loss) = 29.7 dBm

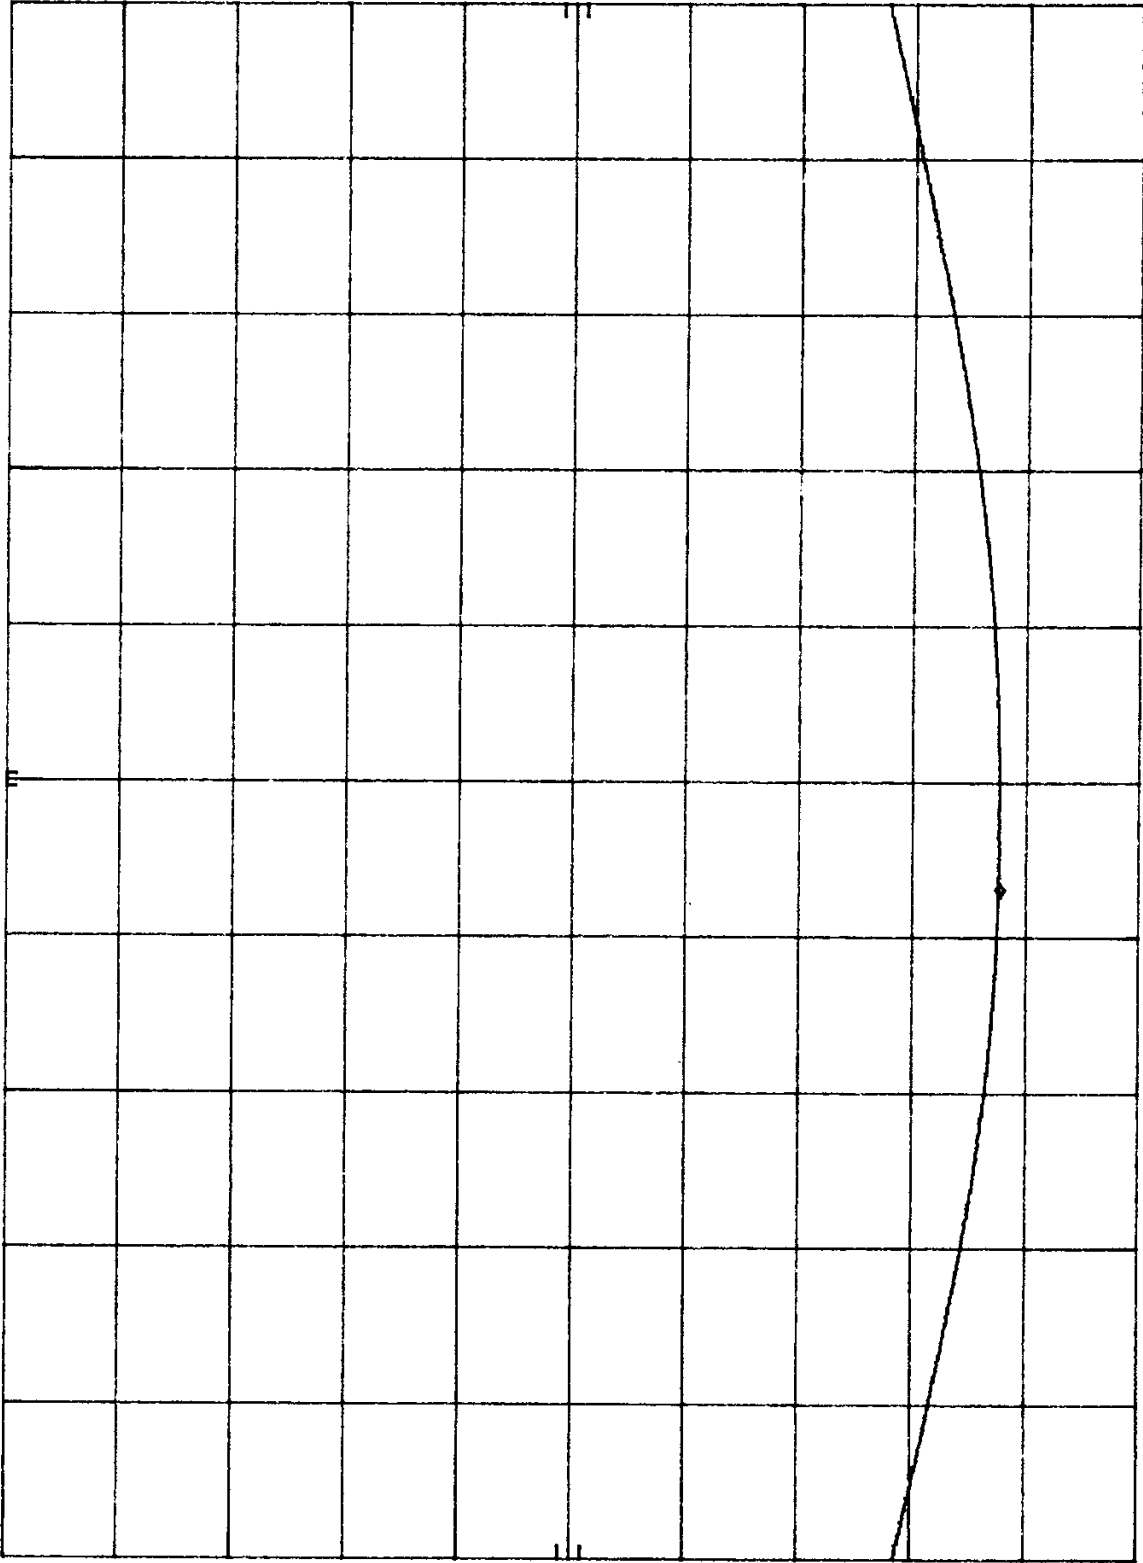

26.7 dBm + 3 dBm (cable loss) = 29.7 dBm
 26.7 dBm + 3 dBm (cable loss) = 29.7 dBm
 26.7 dBm + 3 dBm (cable loss) = 29.7 dBm

HEE BM T Output Power = 25.8 dBm $\pm$ 3 dB (cable loss) = 28.8 dBm 50.0 Wacc
 CENTER 85.1.01 MHz 26.01 5.00 MHz

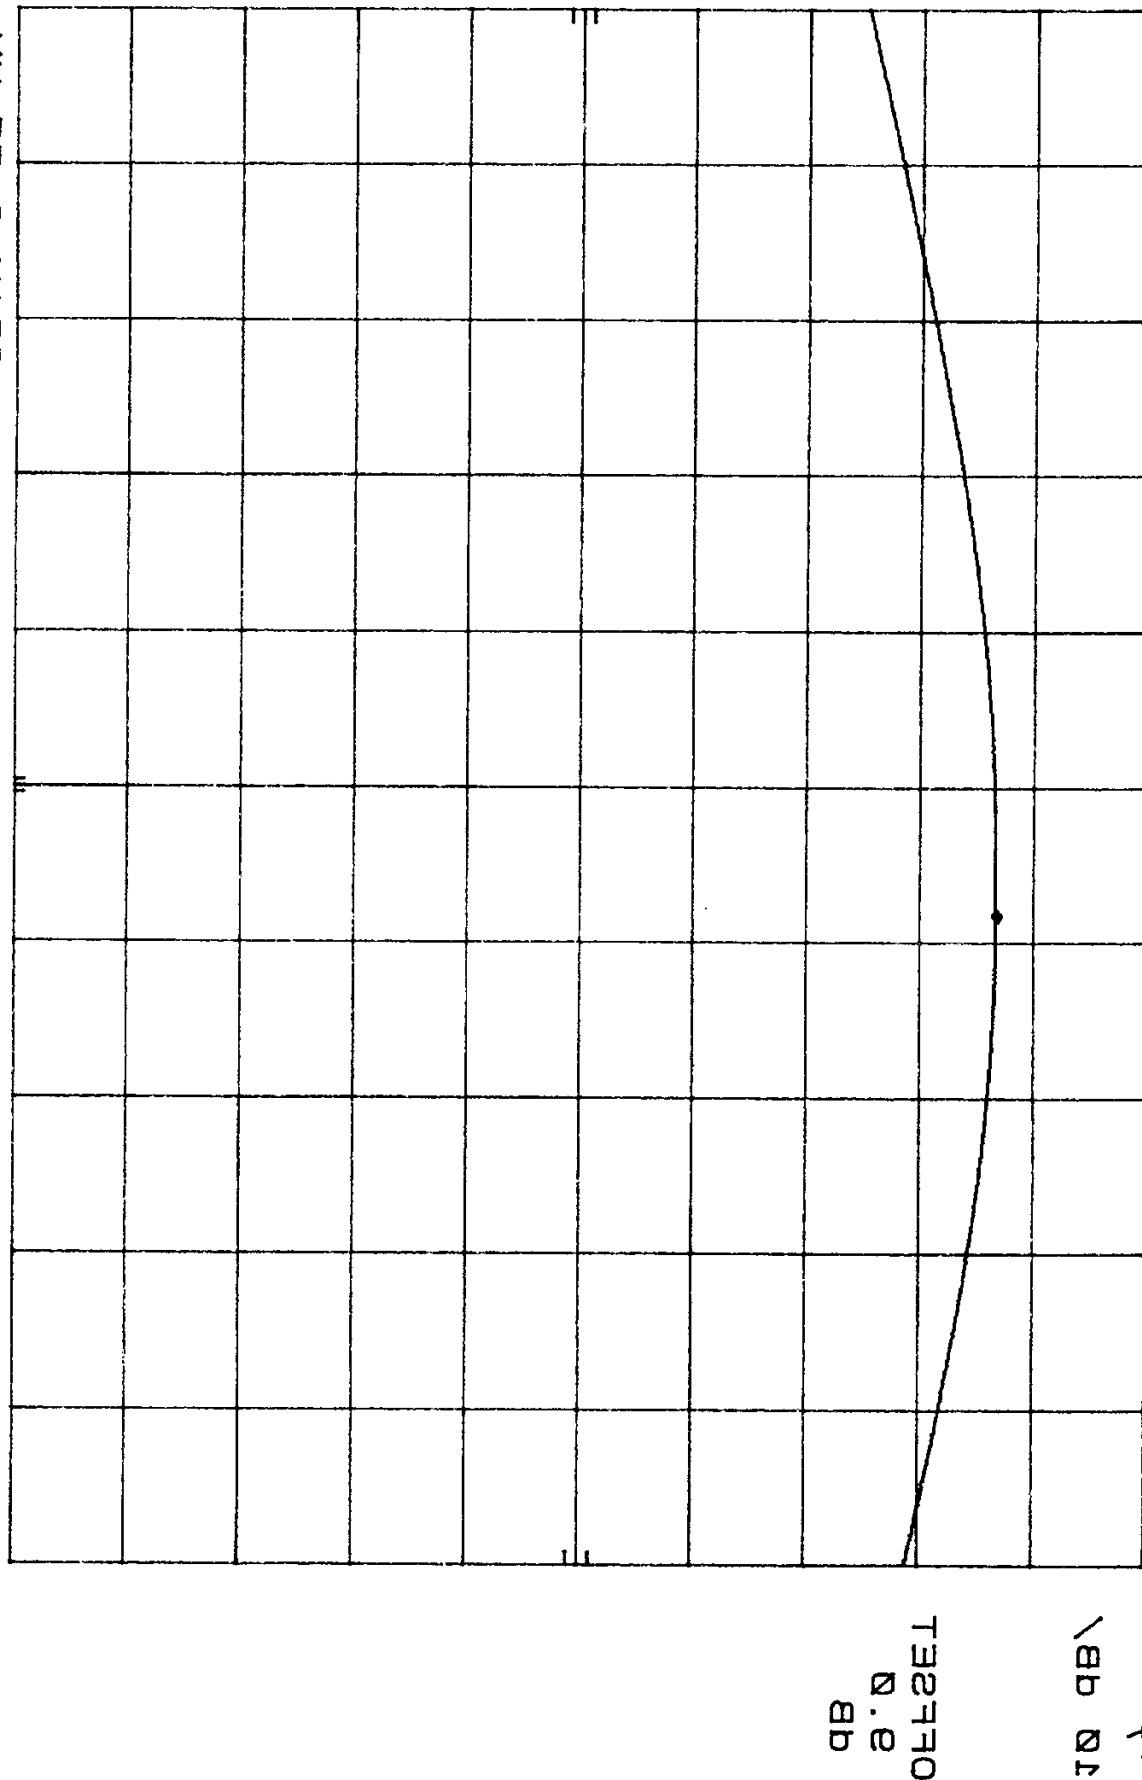

dB
 0.0
 OFFSET

10 dB


10

HEE 30.0 dBm 52.80 dBm
 FREQUENCY DCR00

Appendix G

Plot of Out of Bands

START 30 MHz RES BM 7 MHz ABM 7 MHz 2MB 54.3 msec STOP 7.000 CHZ

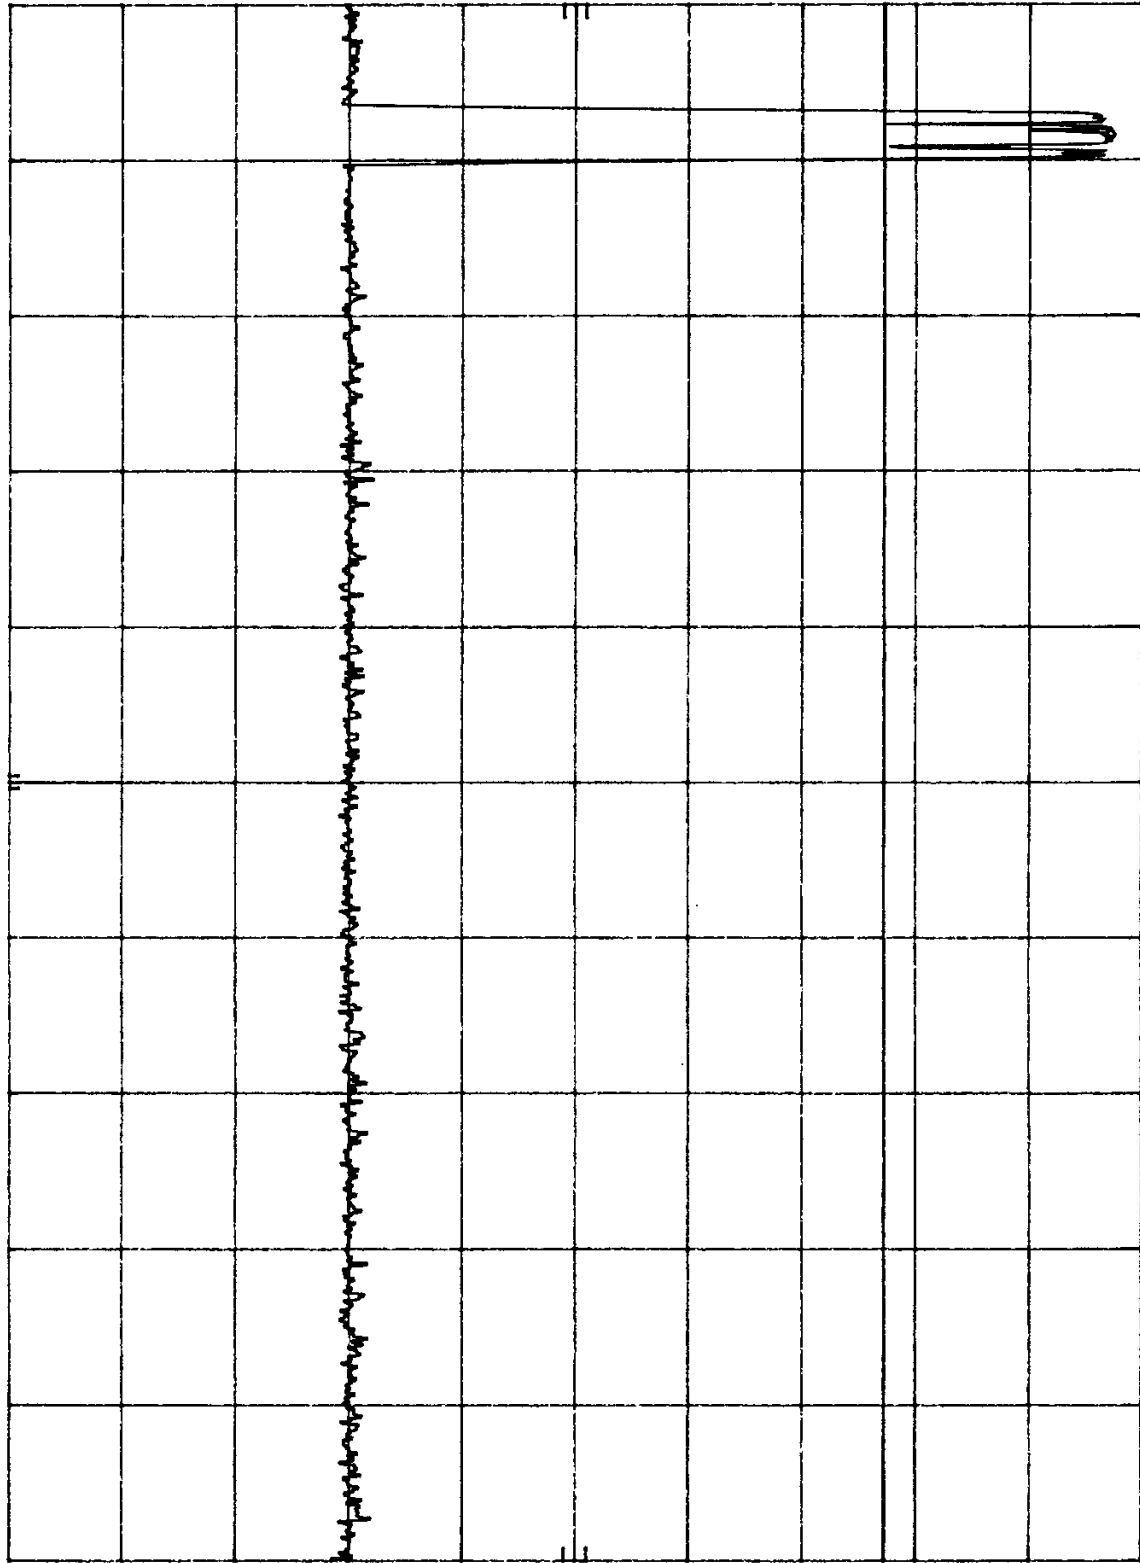


qBW
e.s
DL

qB
0.0
0.025

10 qB
10 qB

RES 50.0 qBW ATEN 30 qB SE.50 qBW
FBEEWAVE DCR00 WKH 017.0 MHz ZHM

START 1.00 MHz REF BM 1 MHz ABM 1 MHz 2MB 52.0 MHz STOP 5.00 GHz

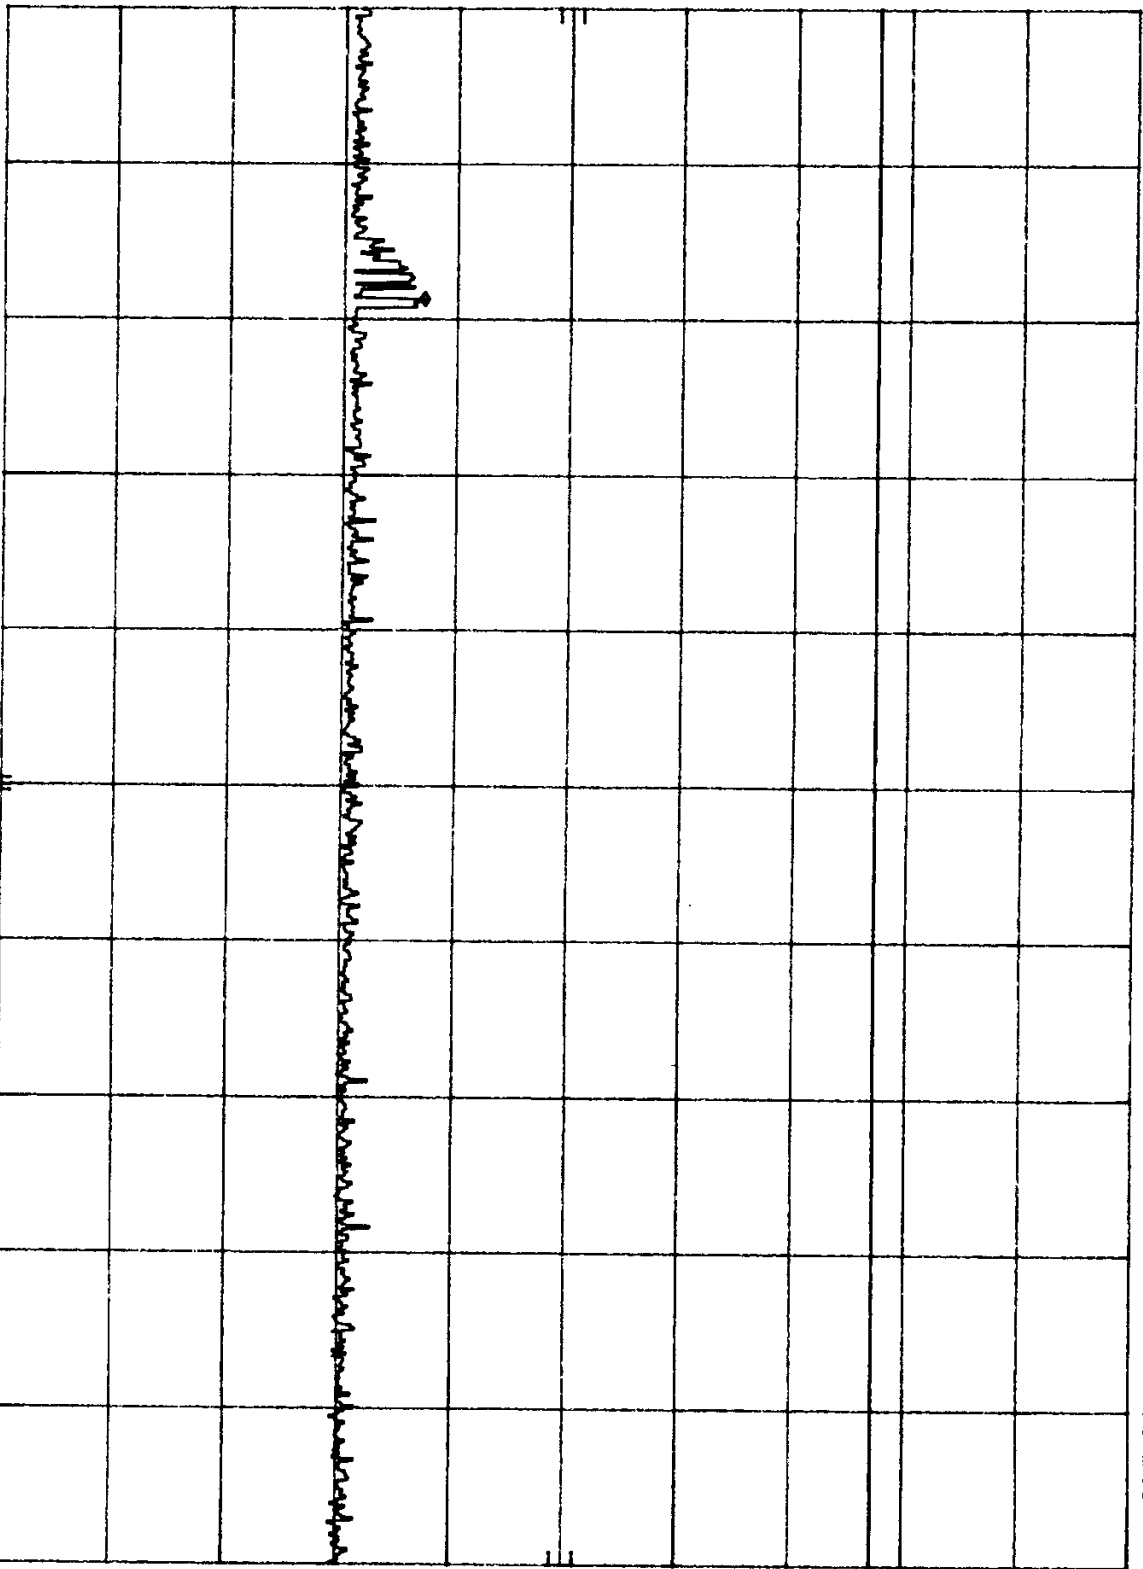


qbm
e.s
df
qb
a.0
OFFSET

to qb\

REF 52.0 qbm ATTEN 30 dB -33.20 qbm
FREQUENCY DEGREE WKB 1.875 GHz

START 5.00 CHZ REF BM 7 MHz ABM 7 MHz 2MB 500 msec STOP 10.00 CHZ

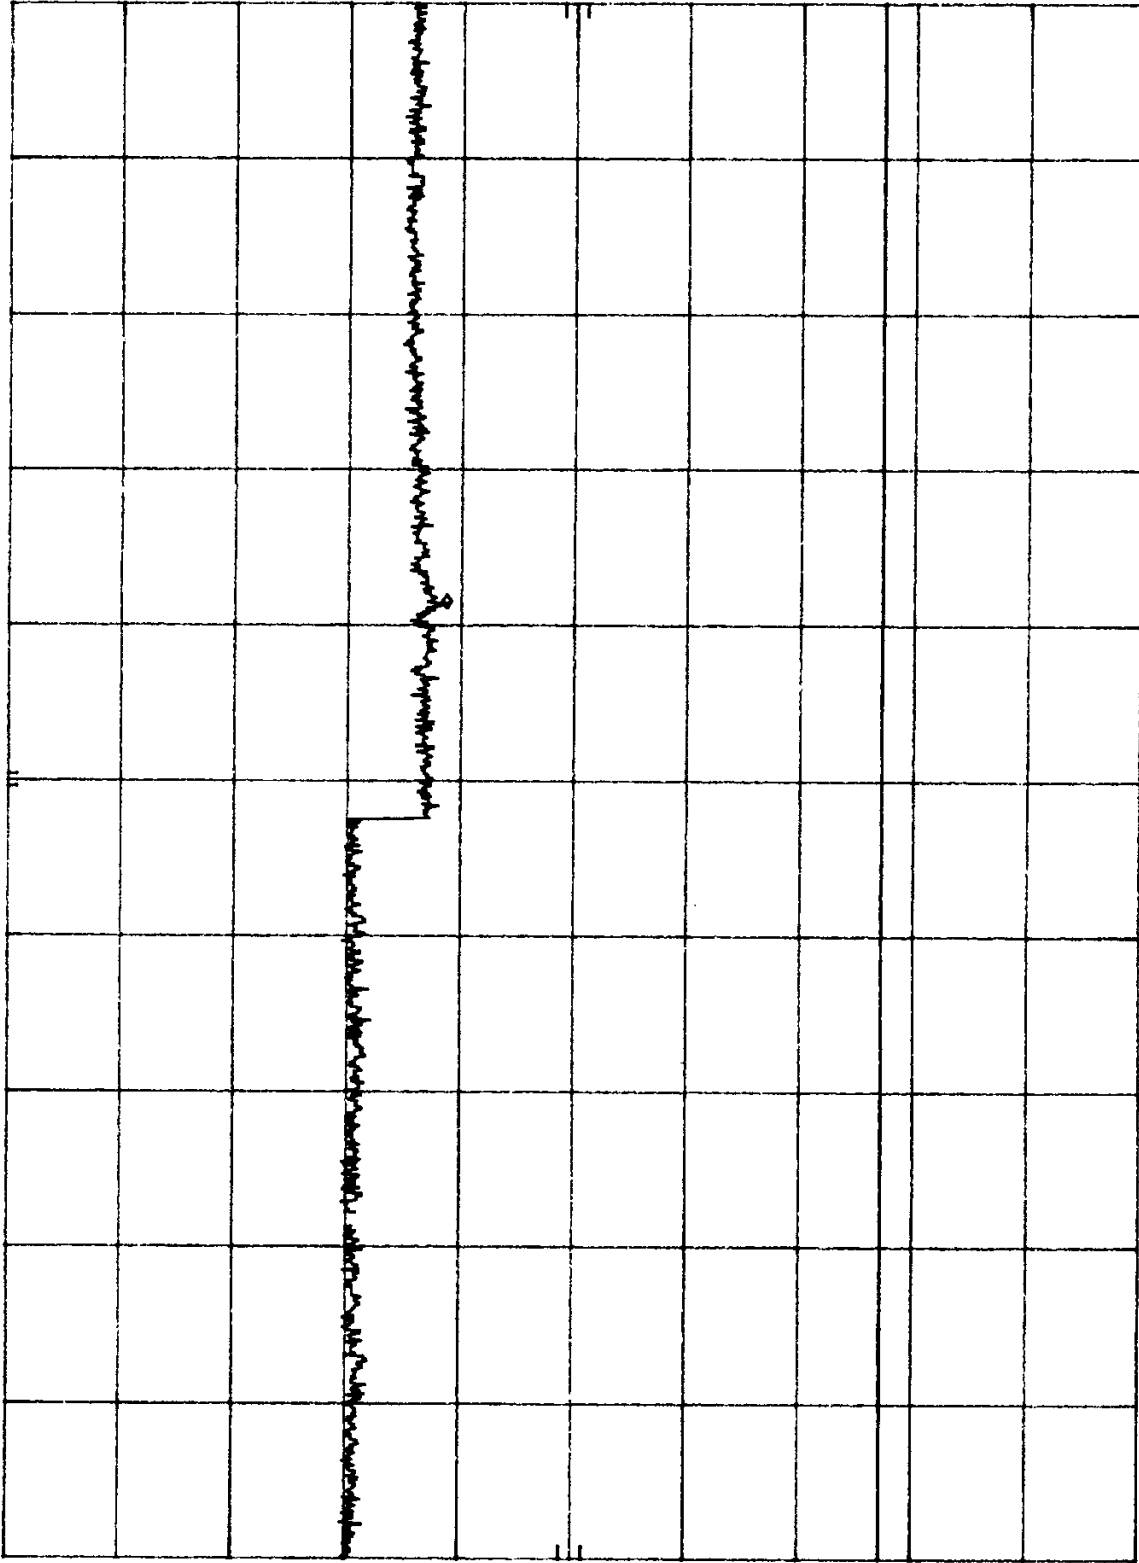

qbw
e.s
DL

qbw
a.o
OFFSET

10 qbw\

qbw

REF 50.0 qbw ALLEN 30 qbw -35.30 qbw
FREQUENCY DEPEND WKB 0.015 CHZ

Appendix H

Test Plan and Constructional Data Form

Form

EMC Test Plan and Constructional Data Form

PLEASE COMPLETE THIS DOCUMENT IN FULL, ENTERING N/A IF THE FIELD IS NOT APPLICABLE.

Applicant -- NOTE: This information will be input into your test report as shown below.
Press the F1 key at any time to get HELP for the current field selected.

Company: FreeWave Technologies, Inc.
Address: 1880 S. Flatiron Court, Suite F
Boulder, CO 80301
Contact: Aleksey Pozhidaev Position: Engineer
Phone: (303) 444-3862 Fax: (303) 786-9948
E-mail Address: alexp@freewave.com

General Equipment Description -- NOTE: This information will be input into your test report as shown below.

EUT Description frequency hopping spread spectrum transceiver module, 902-928 MHz band, 1 W
EUT Name wireless data transceiver
Model No.: DGRO9 Serial No.: 902-1164
Product Options: _____
Configurations to be tested: DGRO9 with 10 dB Yagi antenna, DGRO9 with 5 dB omnidirectional antenna

Test Objective

- | | |
|---|---|
| ☐ EMC Directive 89/336/EEC (EMC)
Std: _____ | ☐ FCC: Class ☐ A ☒ B Part <u>15</u> |
| ☐ Machinery Directive 89/392/EEC (EMC)
Std: _____ | ☐ VCCI: Class ☐ A ☐ B |
| ☐ Medical Device Directive 93/42/EEC (EMC)
Std: _____ | ☐ BCIQ: Class ☐ A ☐ B |
| ☐ Vehicle Directive 72/245/EEC (EMC)
Std: _____ | ☐ Canada: Class ☐ A ☒ B |
| ☐ FDA Reviewers Guidance for Premarket
Notification Submissions (EMC) | ☐ Australia: Class ☐ A ☐ B |
| | ☐ Other: _____ |

TÜV Product Service Certification Requested

- | | |
|--|---|
| ☐ Attestation of Conformity (AoC) | ☐ International EMC Mark (IEM) |
| ☐ Certificate of Conformity (CoC) | ☐ Compliance Document |
| Protection Class (N/A for vehicles) | ☐ Class I ☐ Class II ☐ Class III |
- (Press F1 when field is selected to show additional information on Protection Class.)

Form

EMC Test Plan and Constructional Data Form

Attendance

Test will be: ☒ Attended by the customer ☐ Unattended by the customer

Failure - Complete this section if testing will not be attended by the customer.

If a failure occurs, TUV Product Service should:

- ☐ Call contact listed above, if not available then stop testing. (After hrs phone): _____
- ☐ Continue testing to complete test series.
- ☐ Continue testing to define corrective action.
- ☐ Stop testing.

EUT Specifications and Requirements

Length: 5.040" Width: 2.435" Height: 0.612" Weight: 90 g

Power Requirements

Regulations require testing to be performed at typical power ratings in the countries of intended use. (i.e., European power is typically 230 VAC 50 Hz or 400 VAC 50 Hz, single and three phase, respectively)

Voltage: 12 VDC (If battery powered, make sure battery life is sufficient to complete testing.)

of Phases: _____

Current (Amps/phase(max)): 1 A max Current (Amps/phase(nominal)): 250 mA

Other _____

Other Special Requirements

Typical Installation and/or Operating Environment

(ie. Hospital, Small Business, Industrial/Factory, etc.)

Typical installations are remote monitoring and data gathering, Internet access, and differential GPS.

EUT Power Cable

☐ Permanent OR ☐ Removable Length (in meters): _____
☐ Shielded OR ☐ Unshielded
☒ Not Applicable

Form

EMC Test Plan and Constructional Data Form

EUT Interface Ports and Cables												
Interface			Shielding									
Type	Analog	Digital	Qty	Yes	No	Type	Termination	Connector Type	Port Termination	Length (in meters)	Removable	Permanent
EXAMPLE:												
RS232	☐	☒	2	☒	☐	Foil over braid	Coaxial	Metallized 9-pin D-Sub	Characteristic Impedance	6	☒	☐
power and RS232 data port	☐	☒	1	☐	☒			10 pin Header, Surface mount, Locking Ramp			☐	☒
antenna port	☒	☐	1	☒	☐	Coaxial cable		reverse SMA	Characteristic impedance	6	☐	☒
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
Not Applicable	☐	☐		☐	☐						☐	☐

Form

EMC Test Plan and Constructional Data Form

EUT Software.

Revision Level: version 5.63

Description: supports Point-to-Point, Point-to-Multipoint, TDMA and Peer-to-Peer network protocols

EUT Operating Modes to be Tested -- list the operating modes to be used during test. It is recommended the equipment be tested while operating in a typical operation mode. FCC testing of personal computers and/or peripherals requires that a simple program generate a complete line of upper case H's. Provide a general description of all software, firmware, and PLD algorithms used in the equipment. List all code modules as described above, with the revision level used during testing. Consult with your TÜV Product Service Representative if additional assistance is required.

1. Test mode 1 - single frequency (low, mid and high), 100 % receiver duty cycle - for the unintentional radiated emissions test.
2. Test mode 2 - single frequency (low, mid and high), receiver is off, transmitter is on with the duty cycle 20.4 % - for the intentional radiated emissions test.
- 3.

EUT System Components -- List and describe all components which are part of the EUT. For FCC testing a minimum configuration is required. (ie. Mouse, Printer, Monitor, External Disk Drive, Motherboard, etc.)

Description	Model #	Serial #	FCC ID #
"FreeWave Technologies" radio transceiver module	DGRO9	902-1164	KNY-19318523-13419
data and power cable	built for the test purposes only		
"Larsen" 10 db Yagi antenna	YA0006		
"Antennex" 5 dB omnidirectional antenna	EB8965C		
"Denver Beta" antenna coaxial cable	ASC0202RN		

Form

EMC Test Plan and Constructional Data Form

Support Equipment -- List and describe all support equipment which is not part of the EUT. (i.e. peripherals, simulators, etc)			
<i>Description</i>	<i>Model #</i>	<i>Serial #</i>	<i>FCC ID #</i>
"Hewlett Packard" linear power supply	E3620A	KR75307041	
"Dell" laptop computer	P133ST	7YF1K7	E2KXPE2KXPT

Oscillator Frequencies			
<i>Frequency</i>	<i>Derived Frequency</i>	<i>Component # / Location</i>	<i>Description of Use</i>
14.7456 MHz		U5, Y1, R52, R48, C54, C85	main crystal oscillator
902-928 MHz and 932-958 MHz		Q10, Q11, Y2, U3, U22	local oscillator (Tx and Rx frequencies)

Power Supply			
<i>Manufacturer</i>	<i>Model #</i>	<i>Serial #</i>	<i>Type</i>
Hewlett Packard	E3628	KR75307041	☐ Switched-mode: (Frequency) _____ ☒ Linear ☐ Other: _____
			☐ Switched-mode: (Frequency) _____ ☐ Linear ☐ Other: _____

Power Line Filters		
<i>Manufacturer</i>	<i>Model #</i>	<i>Location in EUT</i>

Form

EMC Test Plan and Constructional Data Form

Critical EMI Components (Capacitors, ferrites, etc.)				
Description	Manufacturer	Part # or Value	Qty	Component # / Location

EMC Critical Detail -- Describe other EMC Design details used to reduce high frequency noise.

(PLEASE INSERT "ELECTRONIC SIGNATURE" BELOW IF POSSIBLE)

Authorization Signatures

Aleksey Pozhidaev

7/03/00

Customer authorization to perform tests
according to this test plan.

Date

Test Plan/CDF Prepared By (please print)

Date




Sept. 05, 2000

Reviewed by TÜV Product Service Associate

Date

EMC Block Diagram Form

System Configuration Block Diagram -- Provide a line drawing identifying the EUT, simulators, support equipment, I/O cables, power cables, and any other pertinent components to be used during testing. Use a dashed line to separate the equipment in the testing field versus equipment outside testing field.

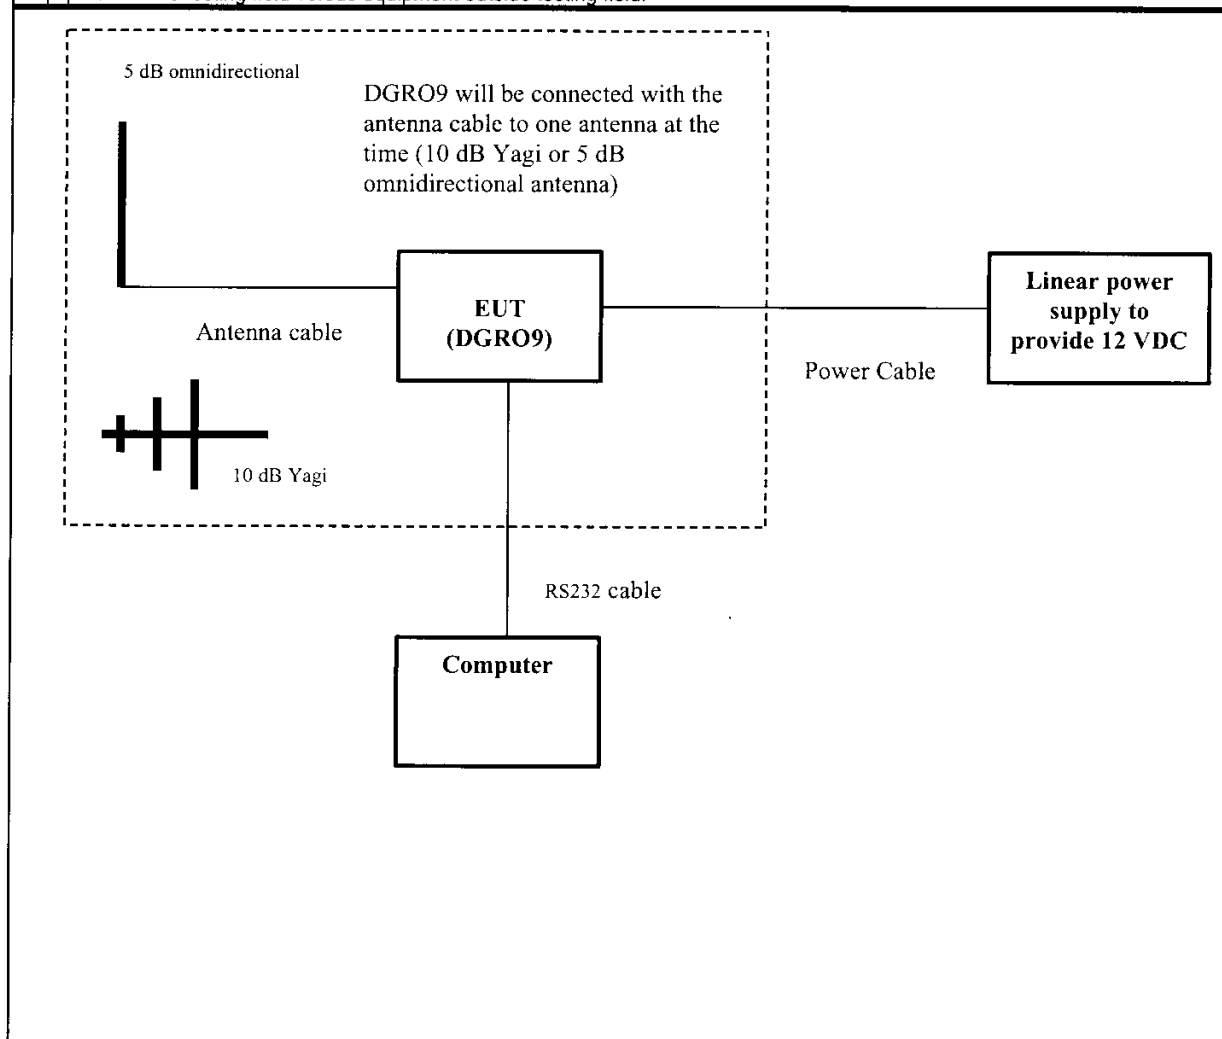
Authorization Signatures

Customer authorization to perform tests according to this test plan.

Aleksey Pozhidaev

Date

7/03/00

Test Plan/OSP Prepared By (please print)

[Signature]

Date

Sept. 05, 2000

Reviewed by TÜV Product Service Associate

Date

FCC Emissions Test Plan Details (ATTACHMENT)



If testing levels other than those desired, then indicate the requested test levels under Engineering Justifications / Test Deviations.


Standards to be Applied		
☐	CISPR 22	
☐	Class A	
☐	Class B	
☒	FCC Part 15	(list) Class B (list)
☐	Other	(list)

Description	Basic Document	Requirement
Radiated & Conducted Emissions	ANSI 63.4	Reference Basic Document or Applicable Standard

Engineering Justifications / Test Deviations
1. The FreeWave Technologies will provide the DGRO9 radio transceiver module for installation in a combination with a set of different antennas (complete list of antenna model numbers and antenna manufactures provided in the User Manual). All of these antennas can be divided into two general types - omnidirectional and directional. After prescanning all of the antennas in the "TUV product service" company's EMC measurements laboratory, was found that two antennas shall be considered as a worst case from the intentional radiation levels stand point - 10 dB Yagi and 5 dB omnidirectional antennas and one antenna shall be considered as a worst case from the unintentional radiation levels stand point - 10 dB Yagi. So, all of the intentional measurements shall be done using 10 dB Yagi and 5 dB omnidirectional antennas and all of the unintentional measurements shall be done using 10 dB Yagi antenna.

UEMC0911.DOC, Revision 2.0
Author: F.Chavez
Revised: 26 September 1999

**FCC Emissions
Test Plan Details**
(ATTACHMENT)



UEMC0911.DOC, Revision 2.0
Author: F.Chavez
Revised: 26 September 1999

Appendix I

Measurement of Protocol

MEASUREMENT PROTOCOL FOR FCC

GENERAL INFORMATION

Measurement Uncertainty

The test system for conducted emissions is defined as the LISN, tuned receiver or spectrum analyzer, and coaxial cable. The test system for radiated emissions is defined as the antenna, the pre-amplifier, the spectrum analyzer and the coaxial cable. These test systems have a measurement uncertainty of ± 4.5 dB. The equipment comprising the test systems are calibrated on an annual basis.

Justification

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral into its characteristic impedance or left unterminated. When appropriate, the cables are manually manipulated with respect to each other to obtain maximum emissions from the unit.

CONDUCTED EMISSIONS

The final level, expressed in dB μ V, is arrived at by taking the reading directly from the EMI receiver. This level is compared directly to the FCC limit.

To convert between dB μ V and μ V, the following conversions apply:

$$\text{dB}\mu\text{V} = 20(\log \mu\text{V})$$

$$\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$$

RADIATED EMISSIONS

The final level, expressed in dB μ V/m, is arrived at by taking the reading from the spectrum analyzer (Level dB μ V) and adding the antenna correction factor and cable loss factor (Factor dB) to it. This result then has the FCC limit subtracted from it to provide the Delta which gives the tabular data as shown in the data sheets in Attachment B. The amplifier gain is automatically accounted for by using an analyzer offset.

Example:

Frequency (MHz)	Level (dB μ V)	+	Factor & Cable (dB)	=	Final (dB μ V/m)	-	FCC B Limit (dB μ V/m)	=	Delta FCC B (dB)
32.21	13.9	+	16.3	=	30.2	-	40.0	=	-9.8

DETAILS OF TEST PROCEDURES

General Standard Information

The test methods used comply with ANSI C63.4-1992 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz."

Conducted Emissions

Conducted emissions on the 60 Hz power interface of the EUT are measured in the frequency range of 450 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection, and a Line Impedance Stabilization Network (LISN), with 50 Ω /50 μ H (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 centimeters above the floor and is positioned 40 centimeters from the vertical ground plane (wall) of the screen room. In some cases, a pre-scan using a spectrum analyzer is initially performed on the units comprising the system under test to locate the highest emissions. If the minimum passing margin appears to be less than 20 dB with a peak mode measurement, the emissions are re-measured using a tuned receiver or spectrum analyzer with quasi-peak and average detection and recorded on the data sheets.

Radiated Emissions

Radiated emissions from the EUT are measured in the frequency range of 30 to 9278.6 MHz using a spectrum analyzer and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection and measurements above 1000 MHz are made with a 1 MHz/6 dB bandwidth and peak detection. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimeters above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. Interface cables that are closer than 40 centimeters to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimeters from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna is positioned 3 meters horizontally from the EUT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarizations and the EUT are rotated 360 degrees. Intentional radiators are rotated through three orthogonal axes to determine the attitude that maximizes the emissions.

15: 56: 34 NOV 14, 2000

HP

REF 28.3 dBm

AT 40 dB

MKR Δ -225 kHz

-20.08 dB

PEAK

LOG

10

dB/

OFFST


-1.7

dB

VA SB

SC FC

CORR

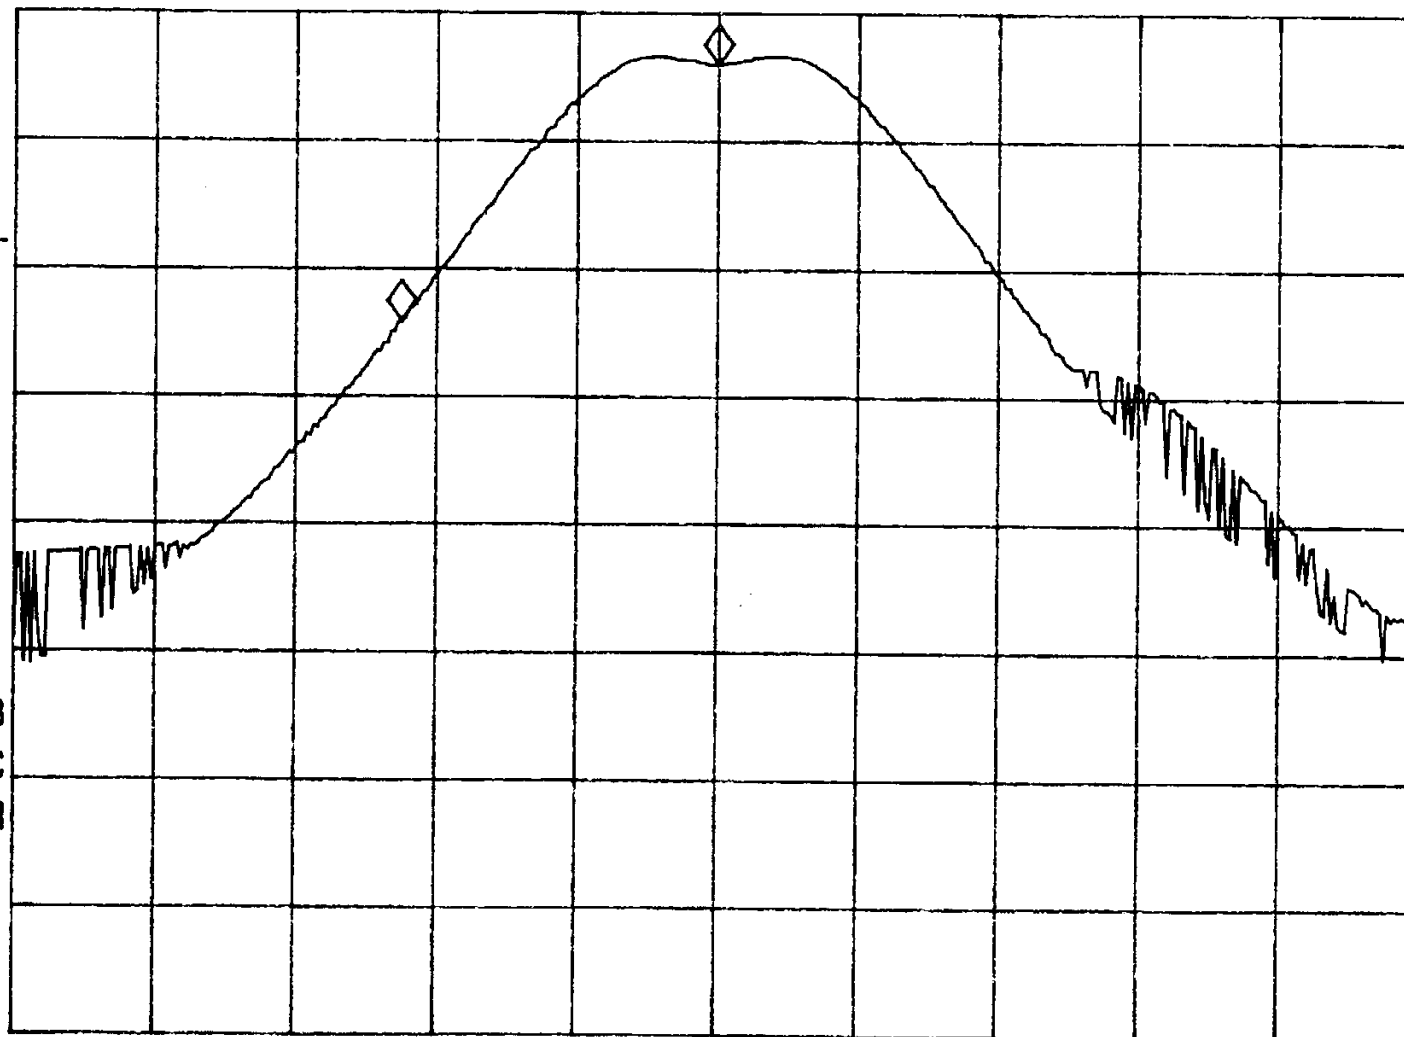

CENTER 902.016 MHz

#RES BW 100 kHz

VBW 100 kHz

SPAN 1.000 MHz

SWP 20.0 msec

16: 25: 38 NOV 14, 2000
hp


REF 28.3 dBm

AT 40 dB

MKR 901.791 MHz
4.20 dBm

PEAK
LOG
10
dB/
OFFST
-1.7
dB

VA SB
SC FC
CORR

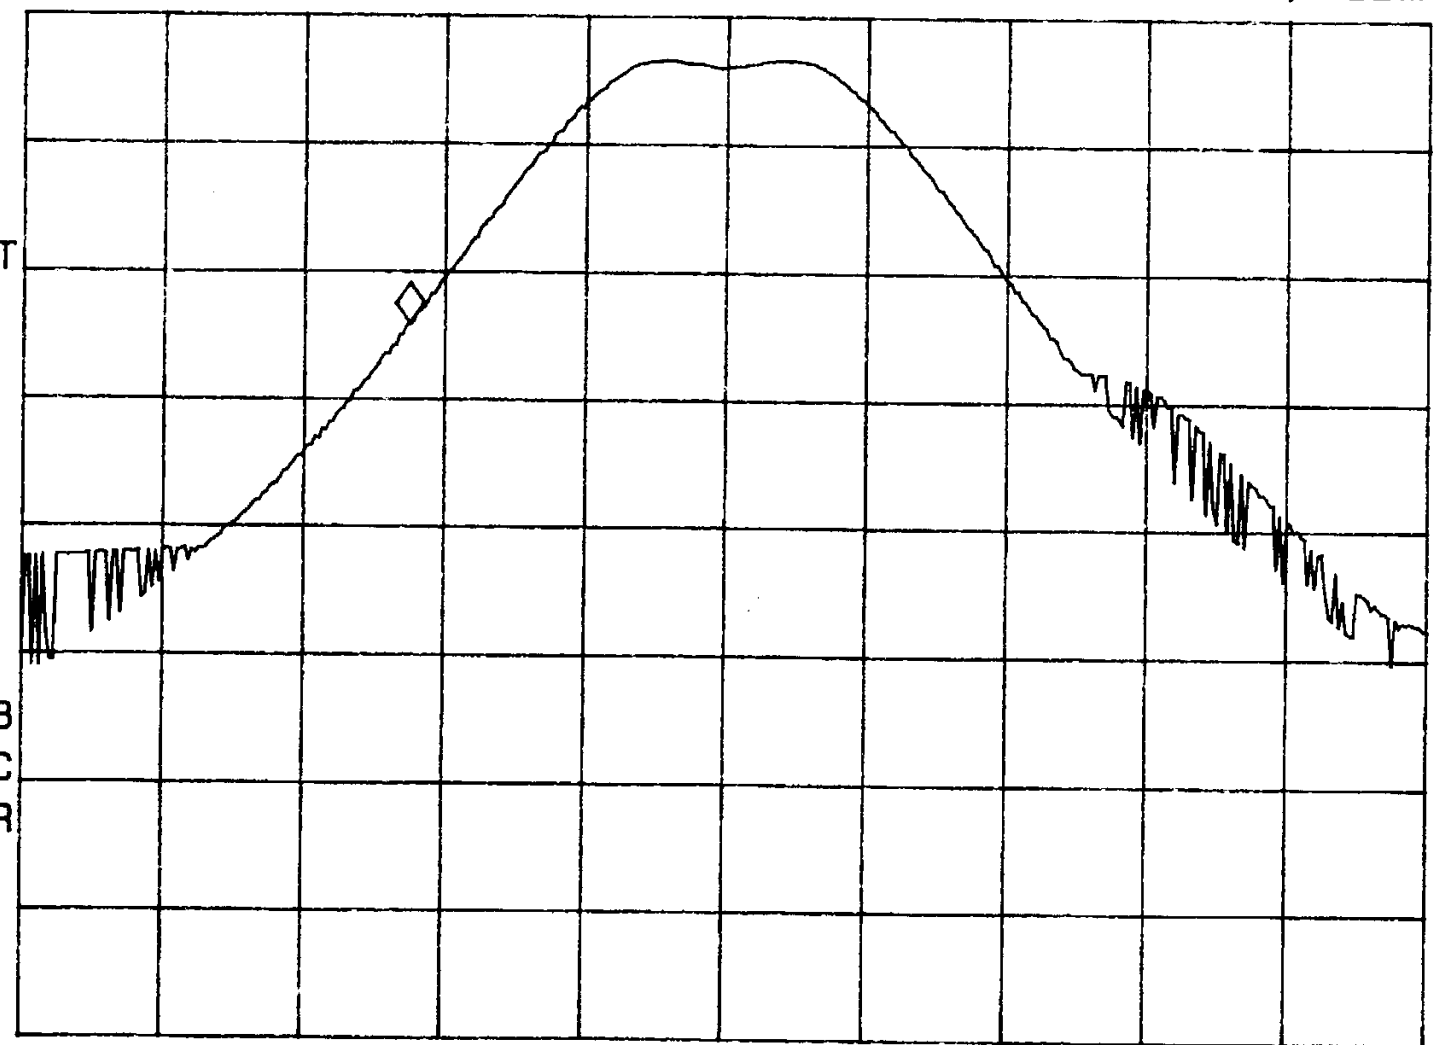

CENTER 902.016 MHz

#RES BW 100 KHz

VBW 100 KHz

SPAN 1.000 MHz

SWP 20.0 msec

15: 42: 08 NOV 14, 2000
hp

REF 28.3 dBm


AT 40 dB

MKR Δ 225 kHz

-20.12 dB

PEAK
LOG
10
dB/
OFFST
-1.7
dB

VA SB
SC FC
CORR

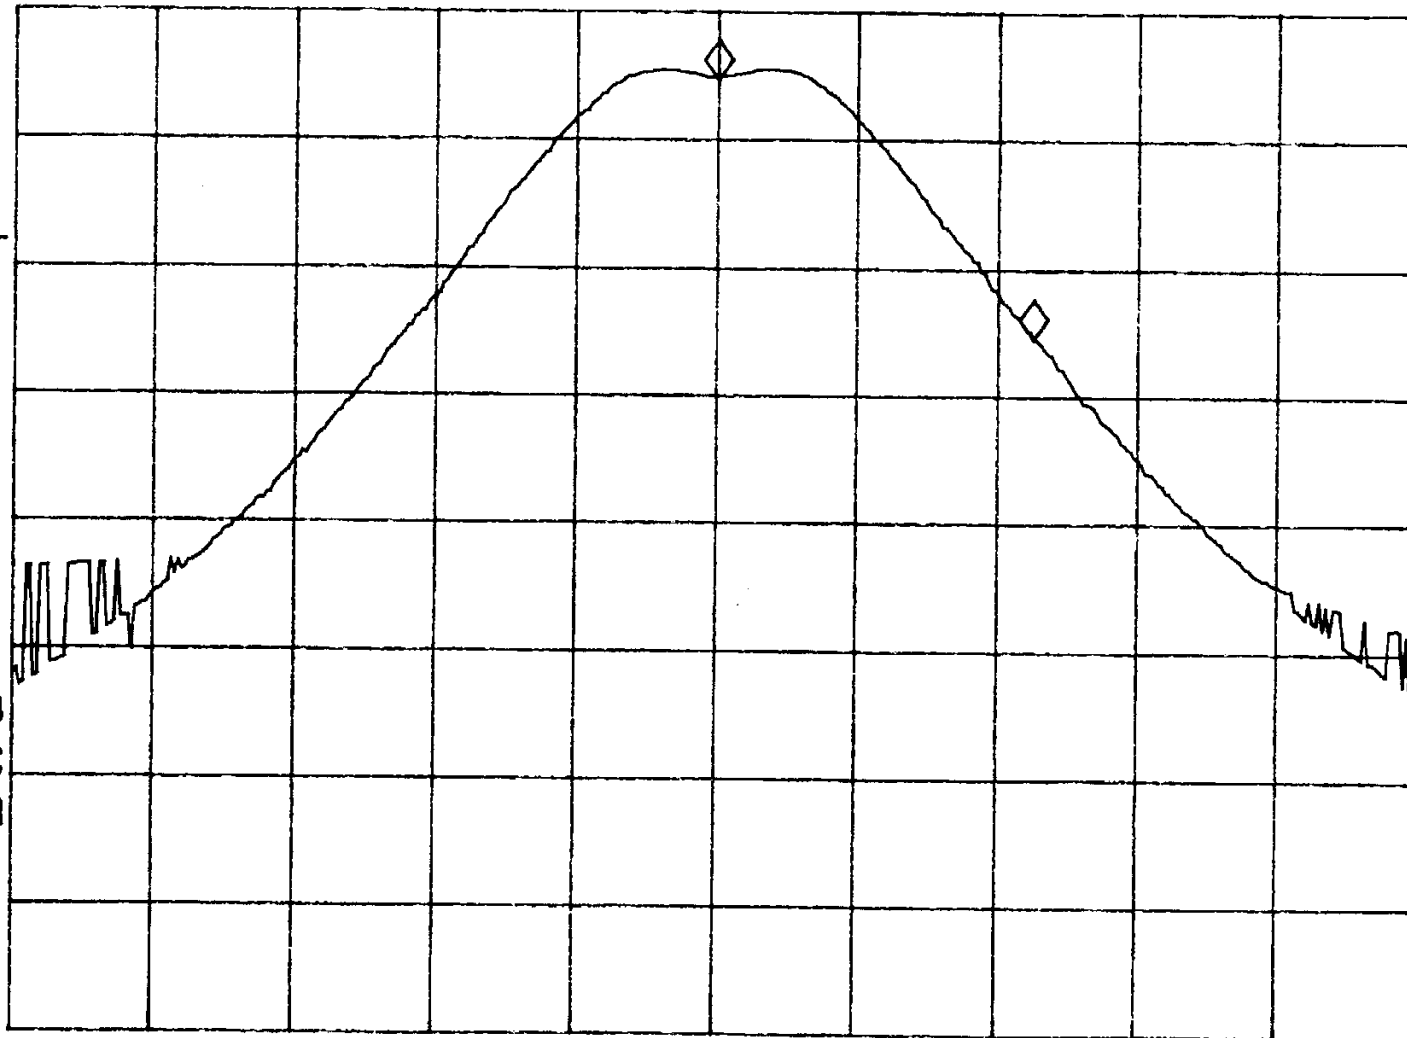

CENTER 927.821 MHz

#RES BW 100 kHz

VBW 100 kHz

SPAN 1.000 MHz

SWP 20.0 msec


15: 46: 51 NOV 14, 2000
hp

MKR 928.046 MHz
2.81 dBm

REF 28.3 dBm AT 40 dB

PEAK
LOG
10
dB/
OFFST
-1.7
dB

VA SB
SC FC
CORR

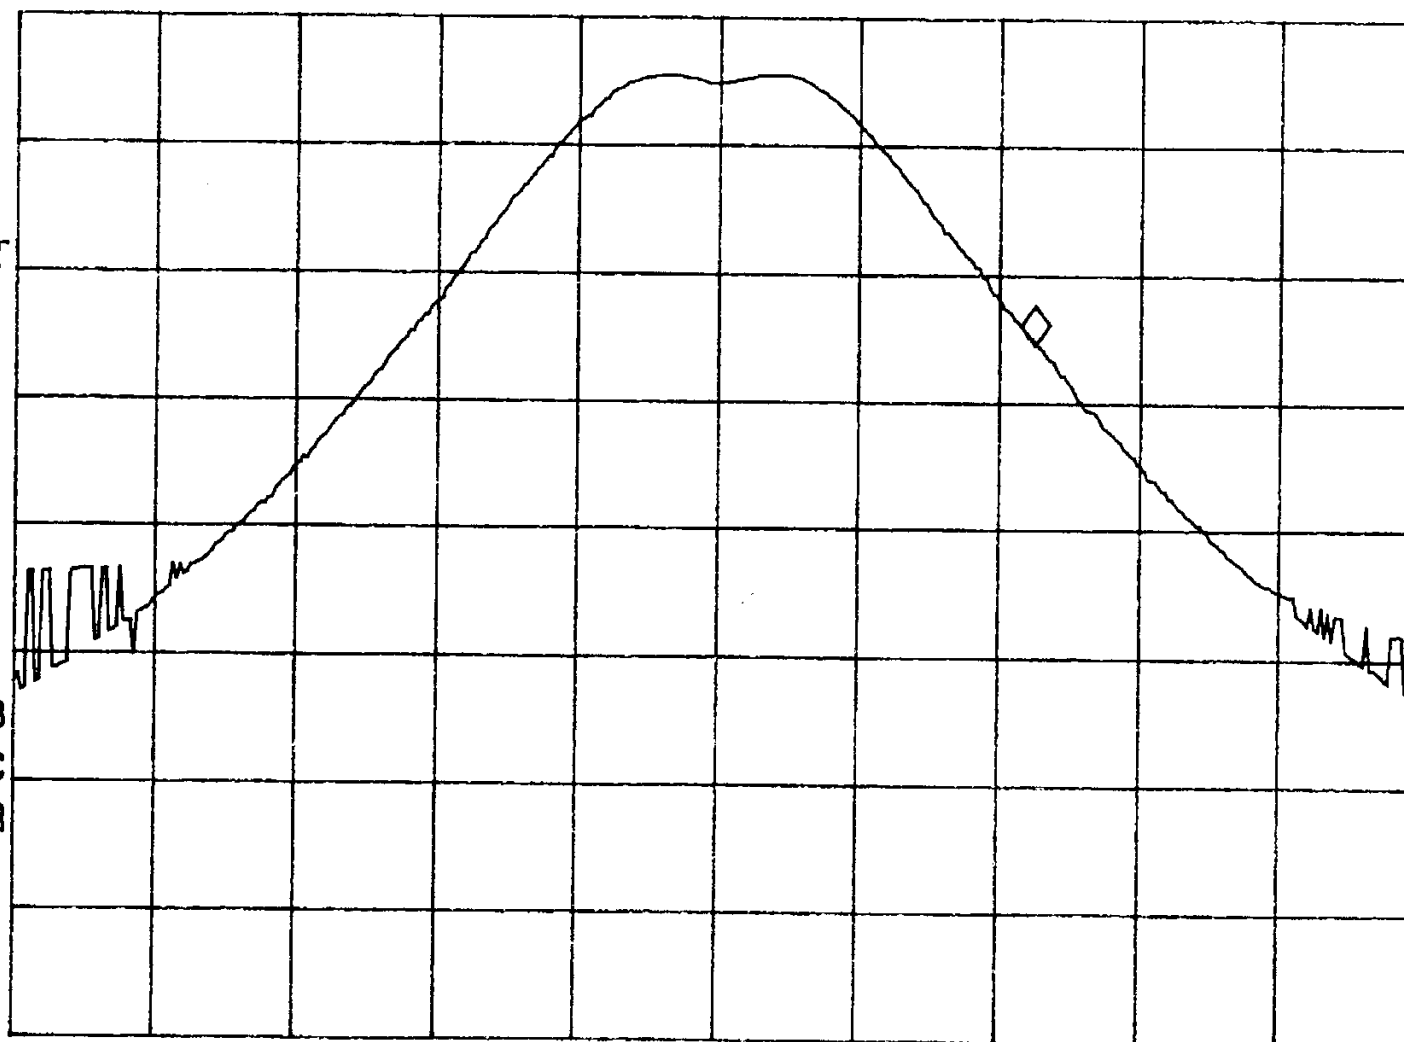

CENTER 927.821 MHz
#RES BW 100 KHz

VBW 100 KHz

SPAN 1.000 MHz
SWP 20.0 msec


LMR 400 100ft
REF 30.0 dBm

ATTEN 20 dB

MKR 902.182 MHz
22.60 dBm

hp
10 dB/

OFFSET
20.0
dB

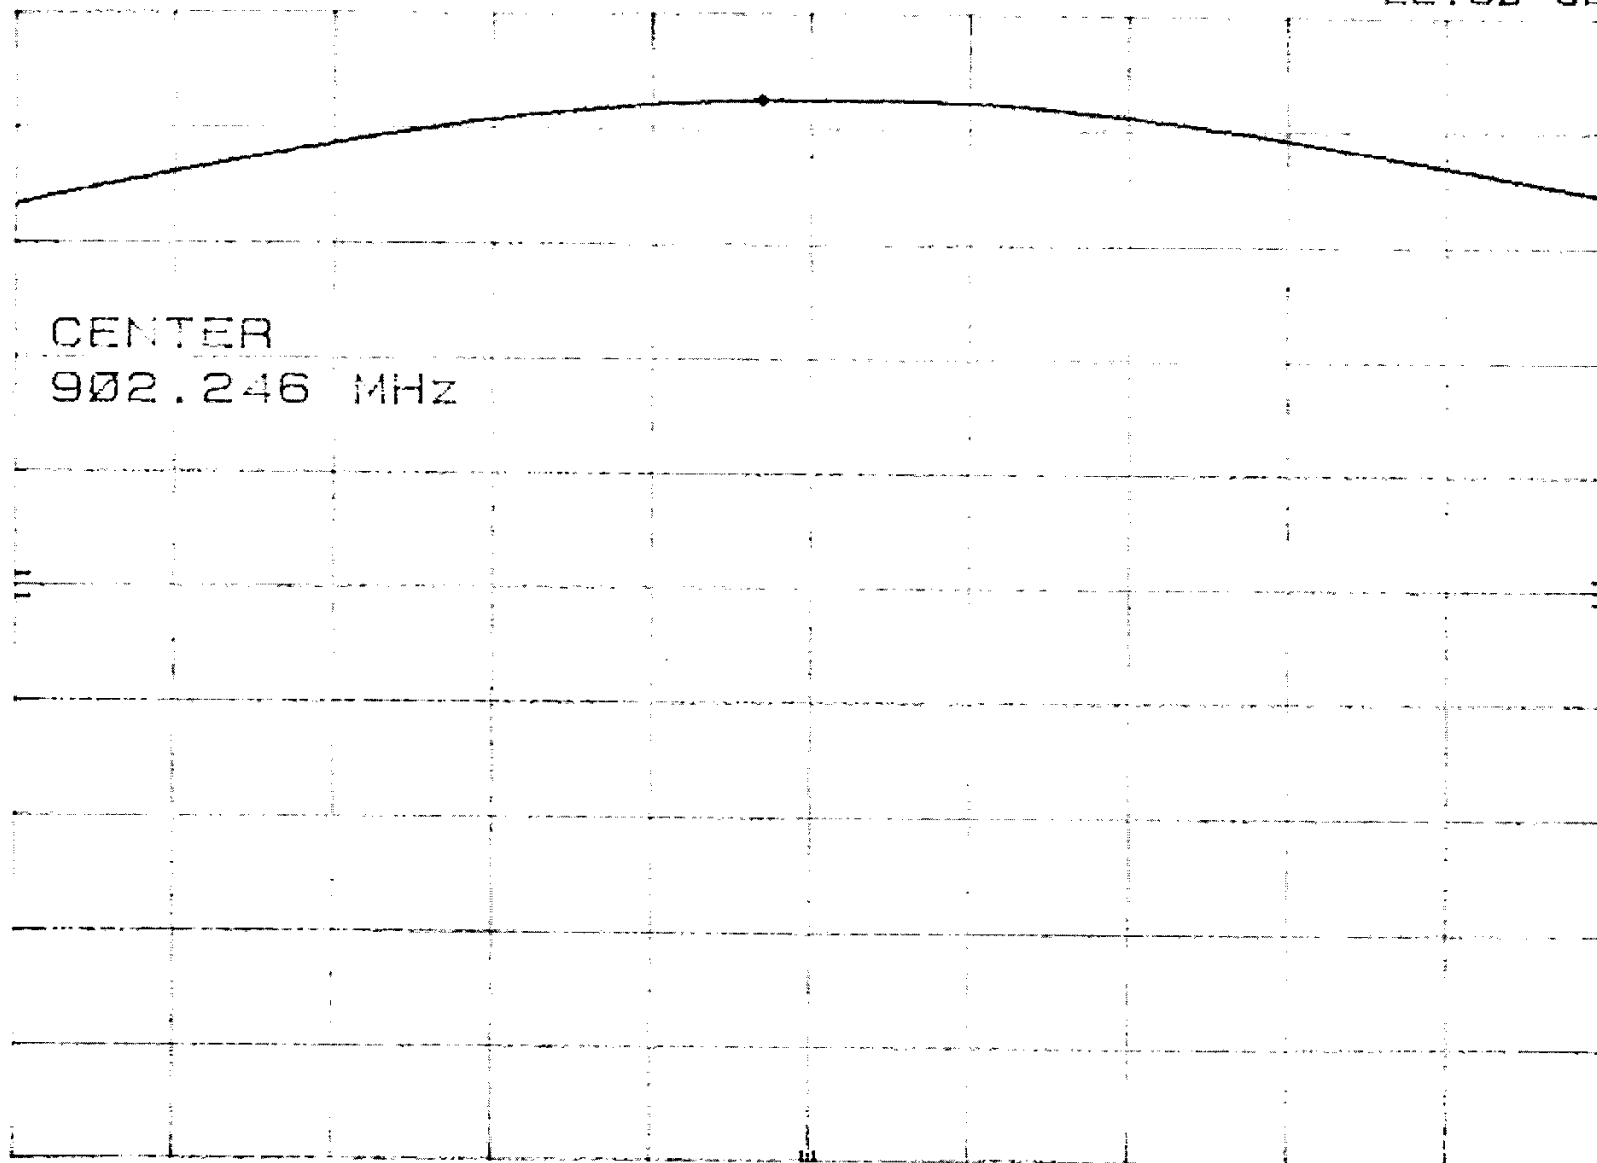

CENTER 902.246 MHz
RES BW 1 MHz

VBW 300 kHz

SPAN 2.000 MHz
SWP 20 msec

LMR 400 100ft

REF 30.0 dBm


ATTEN 20 dB

MKR 914.900 MHz

23.00 dBm

hp
10 dB/

OFFSET
20.0
dB

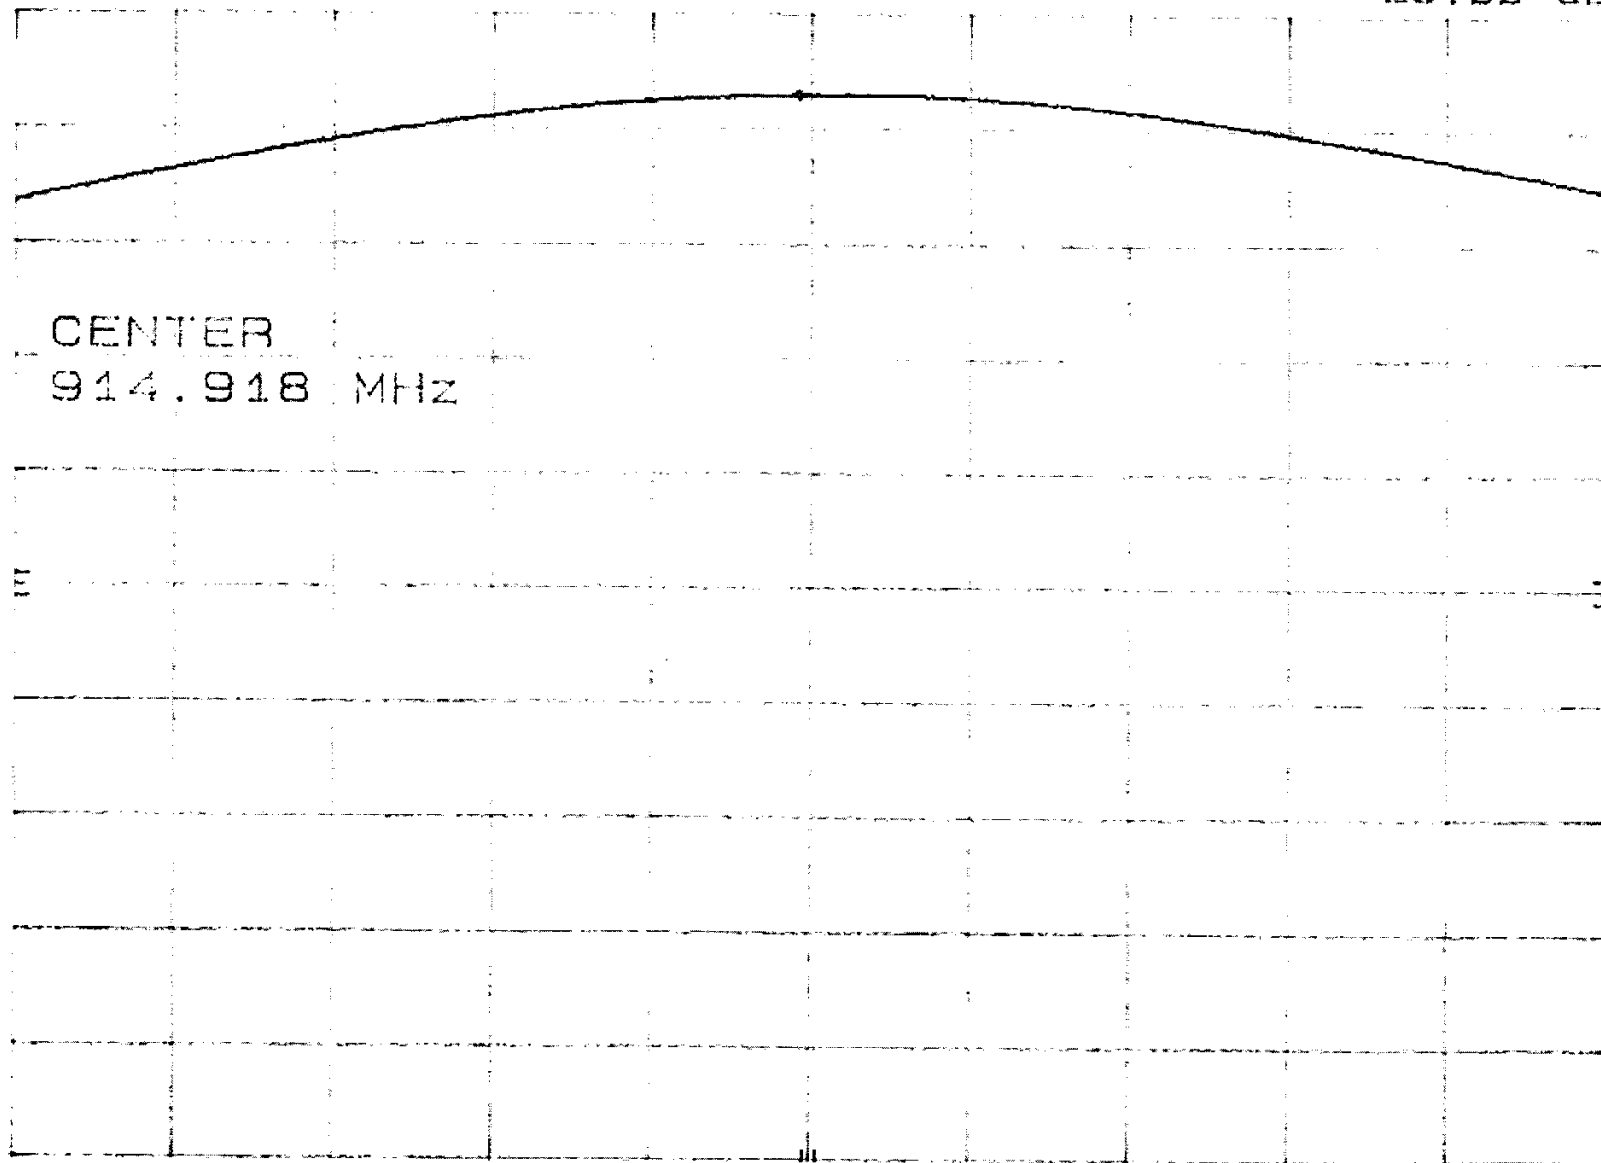

CENTER 914.918 MHz

RES BW 1 MHz

VBW 300 kHz

SPAN 2.000 MHz
SWP 20 msec

LMR 400 100ft

REF 30.0 dBm

ATTEN 20 dB

MKR 927.811 MHz

22.80 dBm


hp

10 dB/

OFFSET

20.0

dB

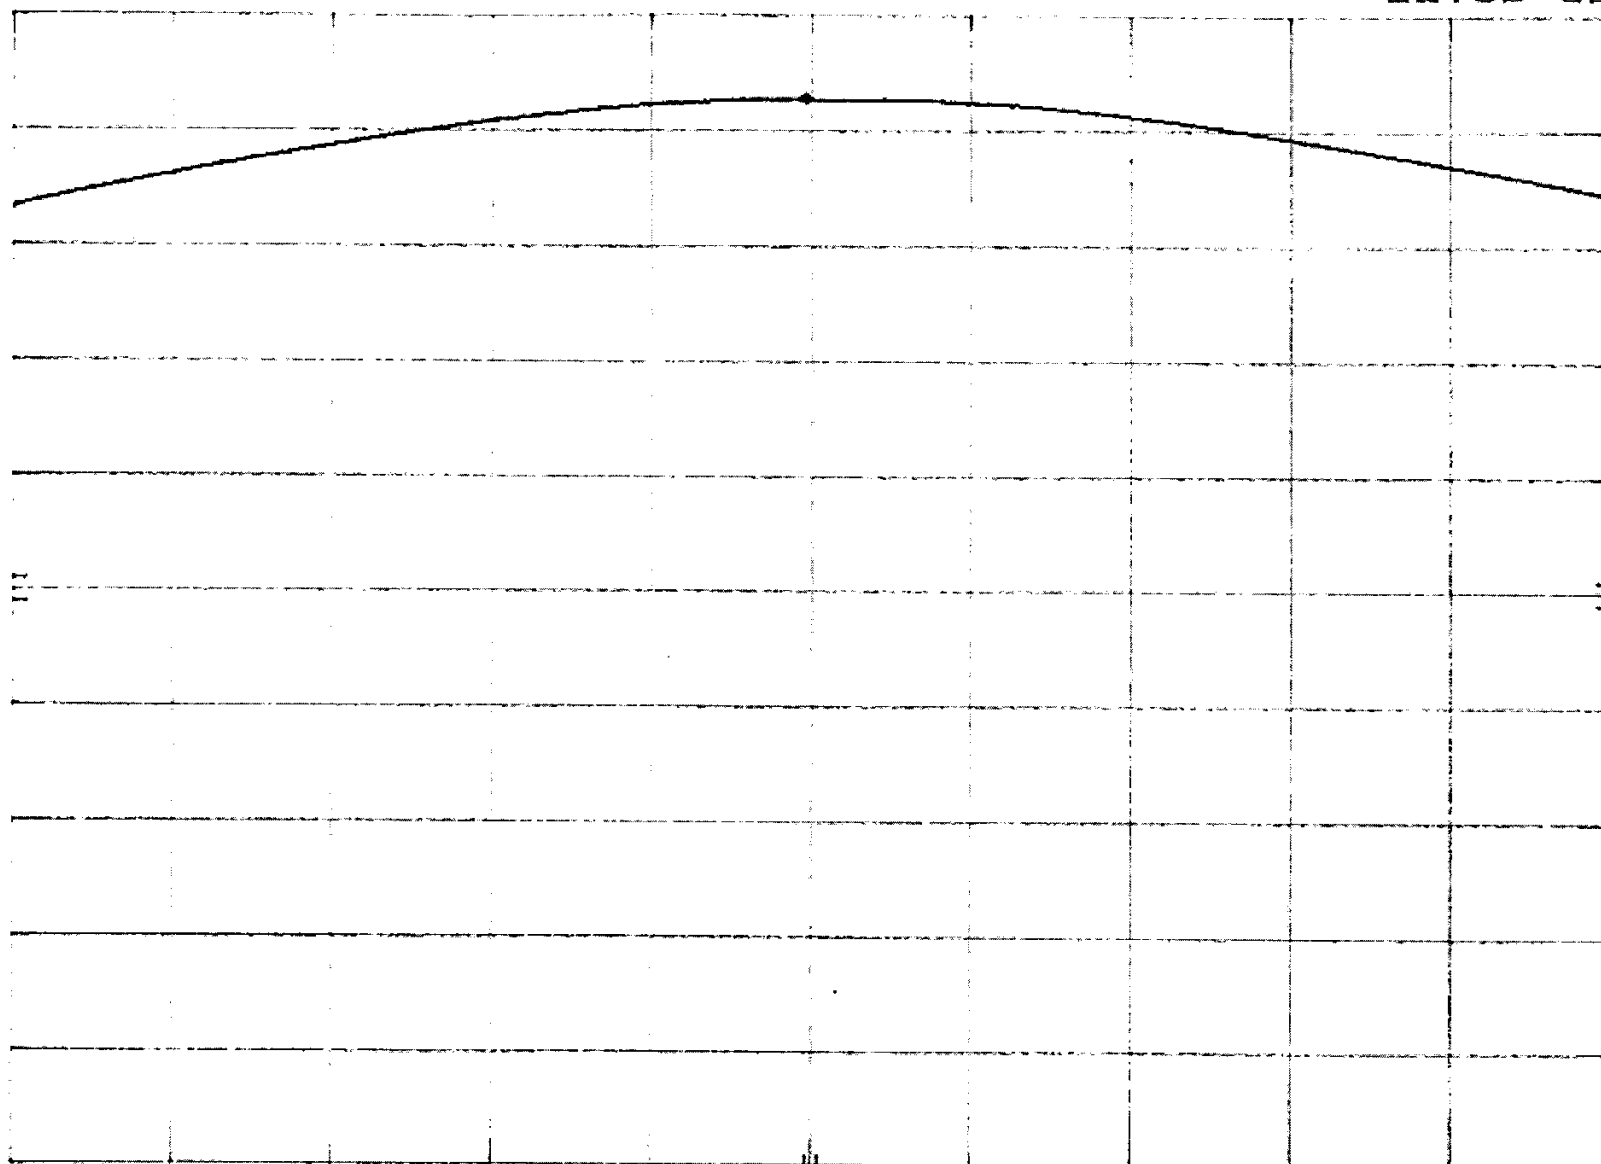

CENTER 927.821 MHz

RES BW 1 MHz

VBW 300 KHz

SPAN 2.000 MHz

SWP 20 msec

LMR 240 50ft

MKR 902.246 MHz
23.20 dBm


hp

REF 30.0 dBm

ATTEN 20 dB

10 dB/

OFFSET
20.0
dB

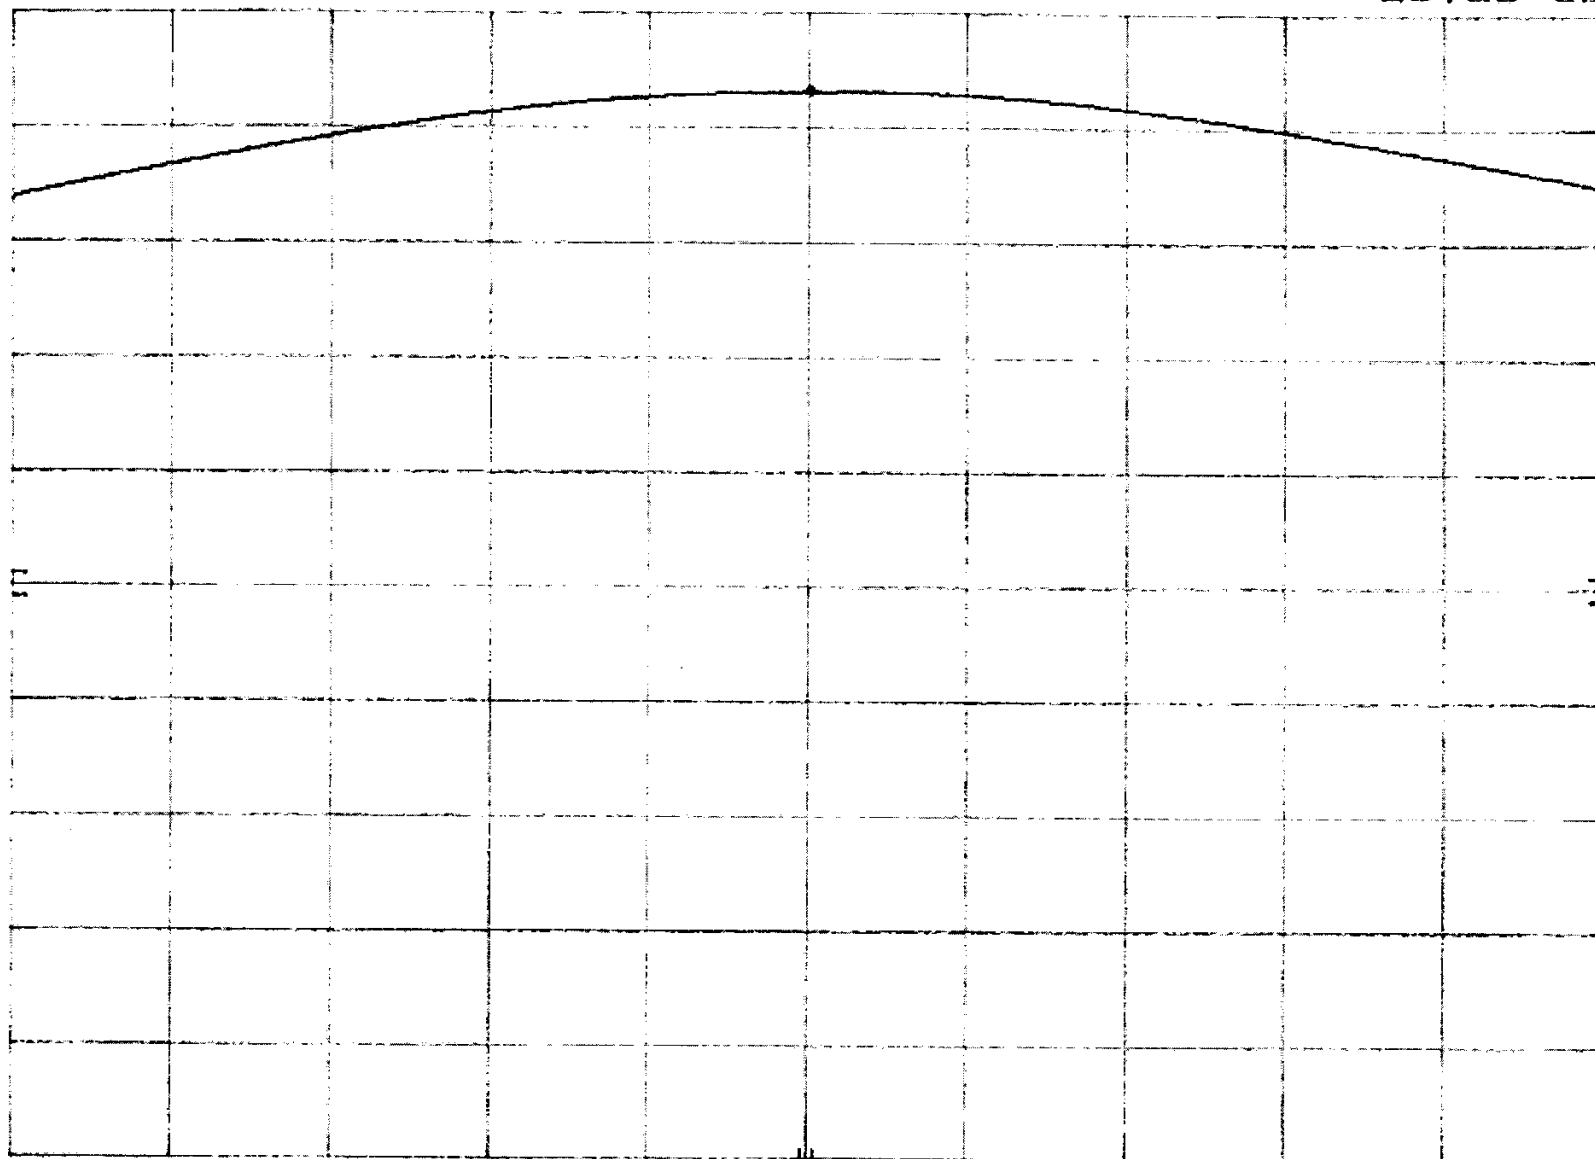

CENTER 902.246 MHz

RES BW 1 MHz

VBW 300 kHz

SPAN 2.000 MHz
SWP 20 msec

LMR 240 50ft

REF 30.0 dBm

ATTEN 20 dB

MKR 914.868 MHz

23.10 dBm

hp

10 dB/

OFFSET

20.0

dB

CENTER

914.918 MHz

11

11


CENTER 914.918 MHz

RES BW 1 MHz

VBW 300 kHz

SPAN 2.000 MHz

SWP 20 msec

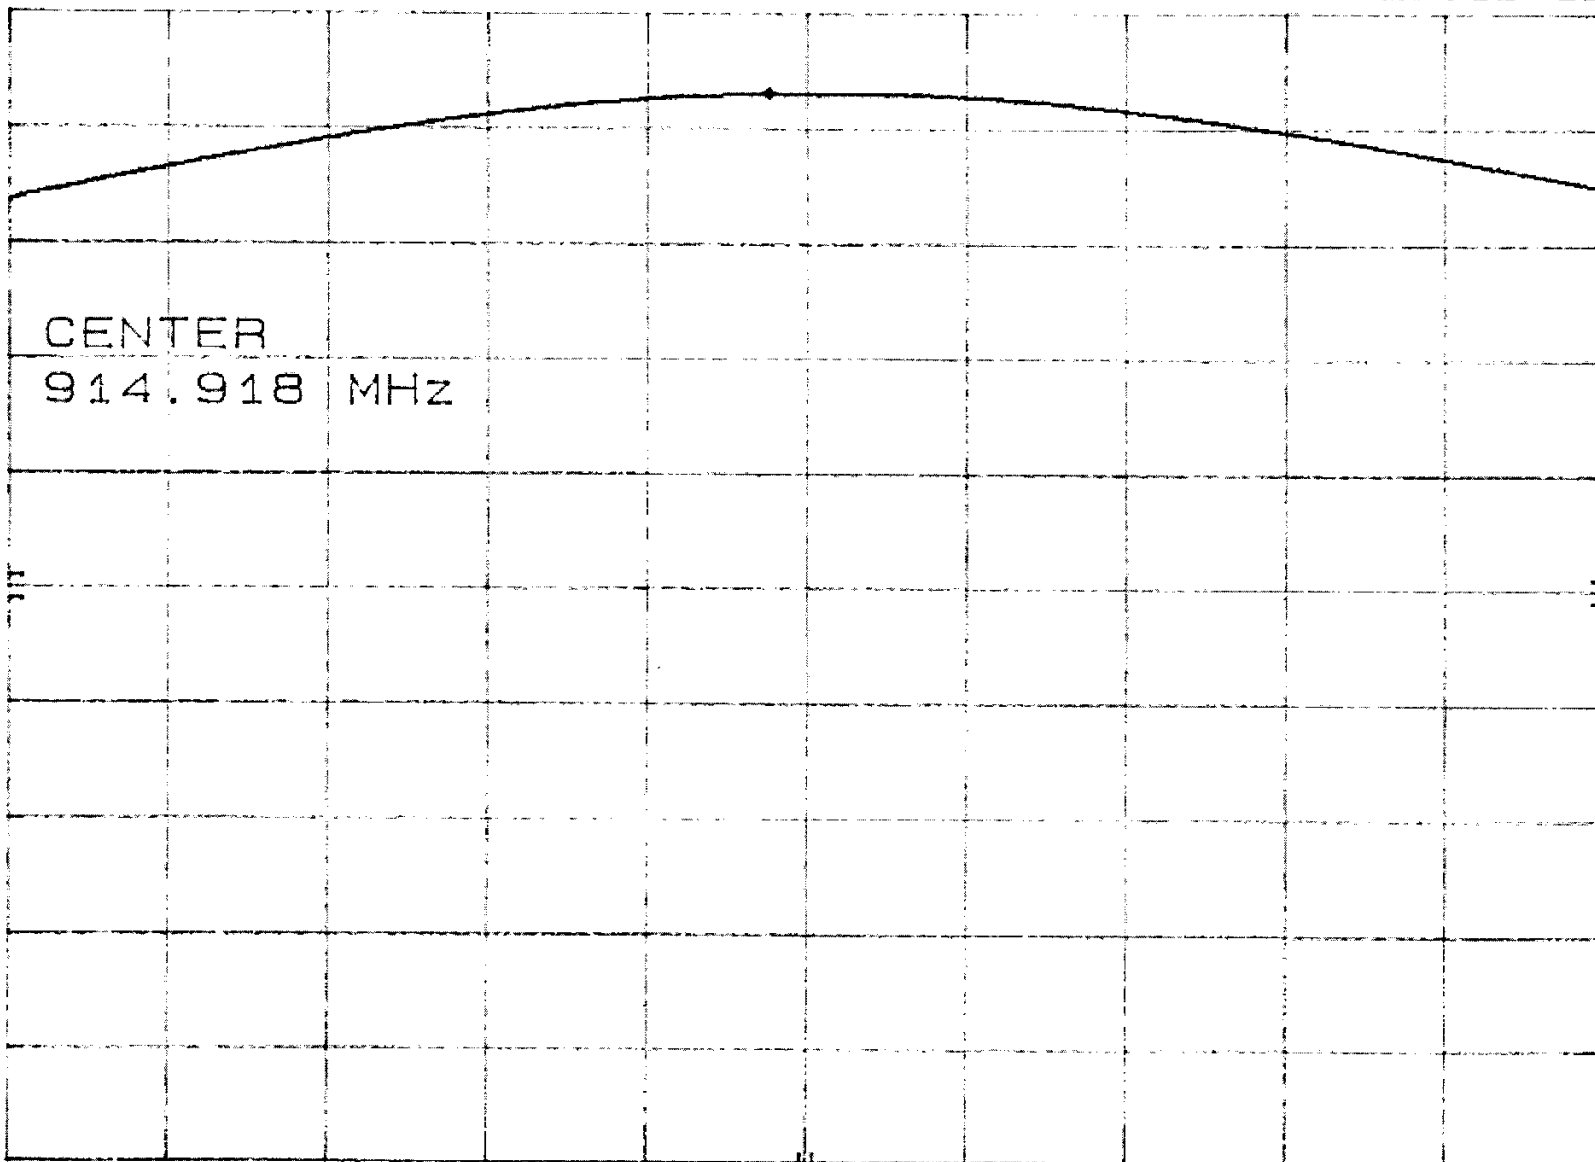

LMA 240 50ft

REF 30.0 dBm

ATTEN 20 dB

MKR 927.811 MHz

22.90 dBm

hp

10 dB/

OFFSET

20.0

dB

CENTER

927.821 MHz


CENTER 927.821 MHz

RES BW 1 MHz

VBW 300 kHz

SPAN 2.000 MHz

SWP 20 msec

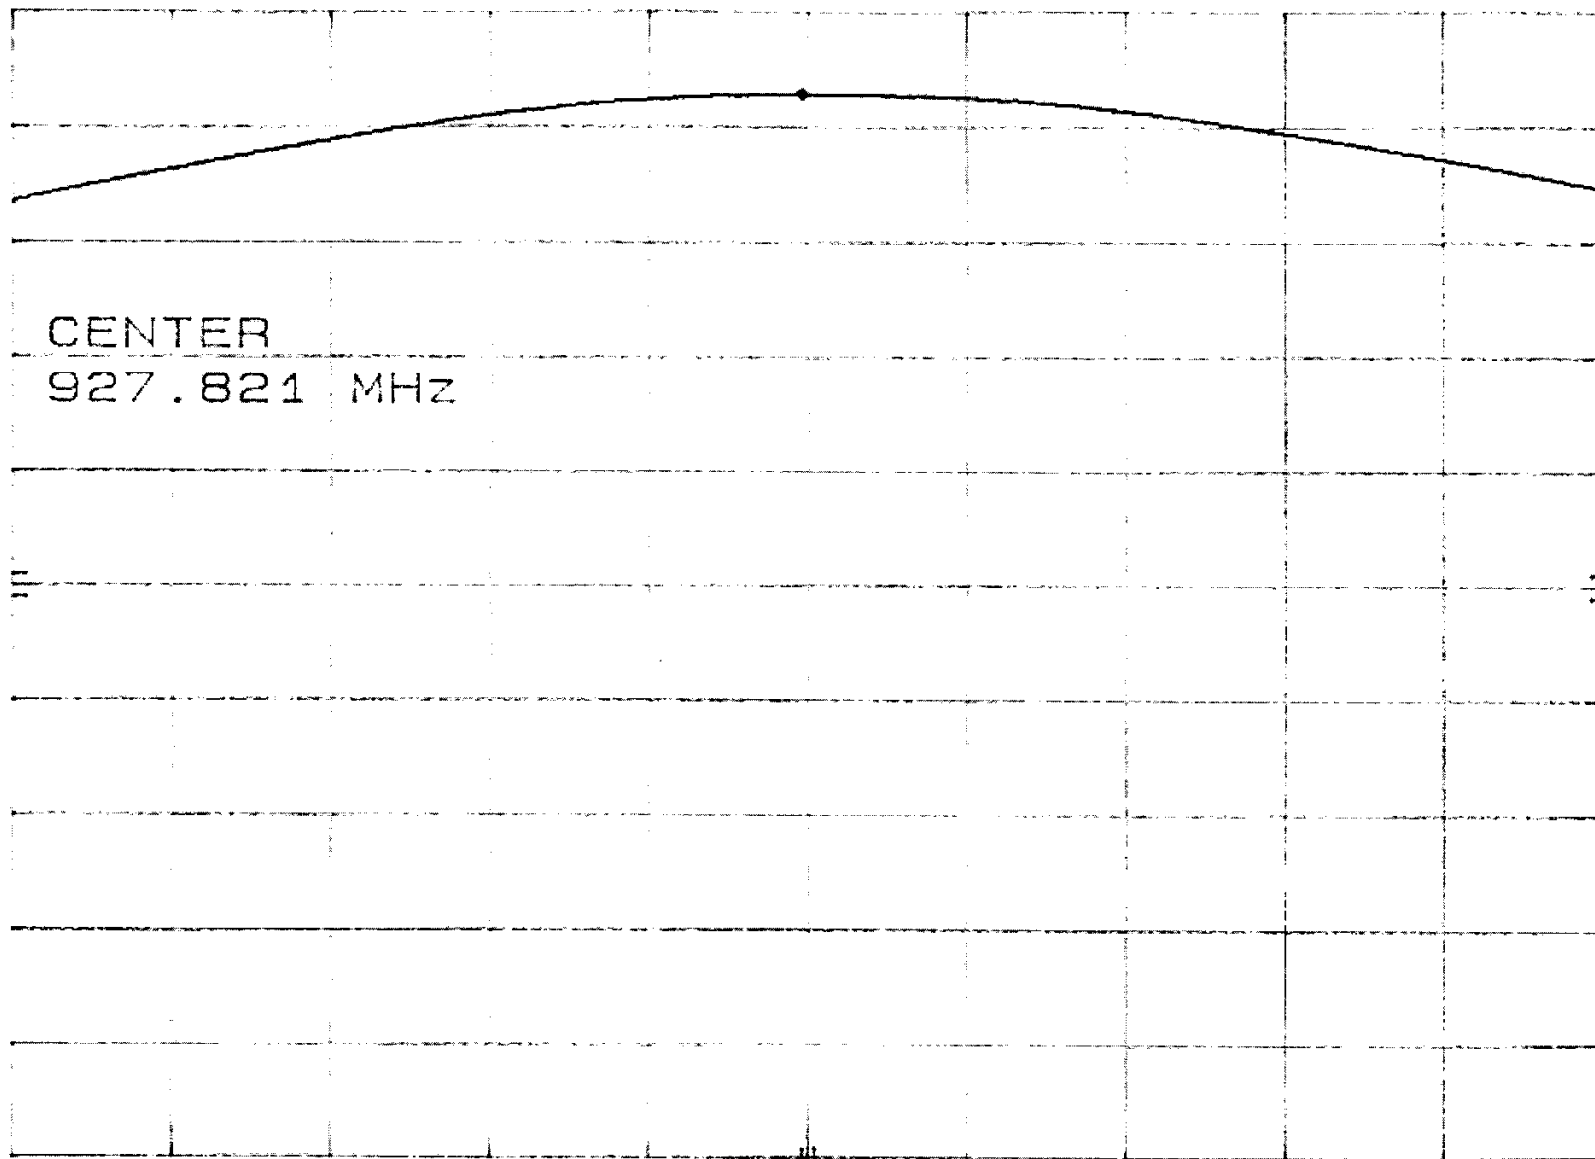

November 29, 2000

Federal Communications Commission
Equipment Authorization Division
7435 Oakland Mills Road
Columbia, MD 21046

To whom it may concern,

For modules, which will have the external 10 dB Yagi antenna, we will use a special reverse polarity SMA type connector supplied by Amphenol (Amphenol part number #615X-1279-200, the drawing is attached).

Additionally, the 10 dB Yagi antennas will be supplied by FreeWave Technologies in a combination with a coaxial 50 Ohms cable permanently and securely connected to the antenna with Conap High Strength Epoxy and Sealant. The length of the cable will be chosen to provide at least 4 dB insertion loss in 902-928 MHz frequency band.

We believe the above additions to our module will fulfill requirements of Sections 15.203 and 15.204(c) as well as requirement of Public Notice DA 00-1407 for a "unique" antenna coupler and therefor do not need to meet requirements for professional installation.

Sincerely,

A handwritten signature in black ink, appearing to read 'Aleksey Pozhidaev', with a horizontal line drawn underneath the signature.

Aleksey Pozhidaev
Engineer