

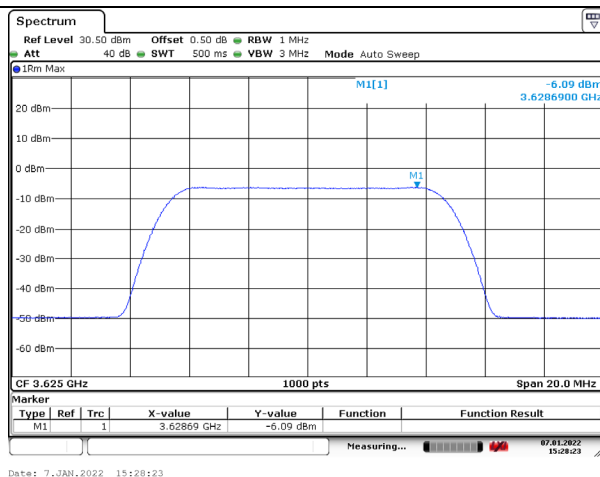
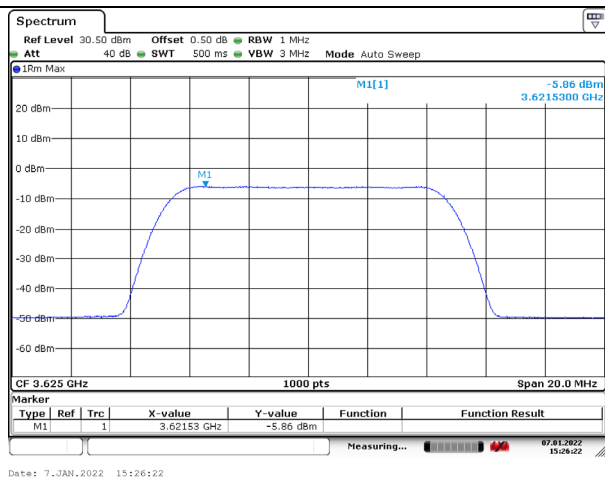
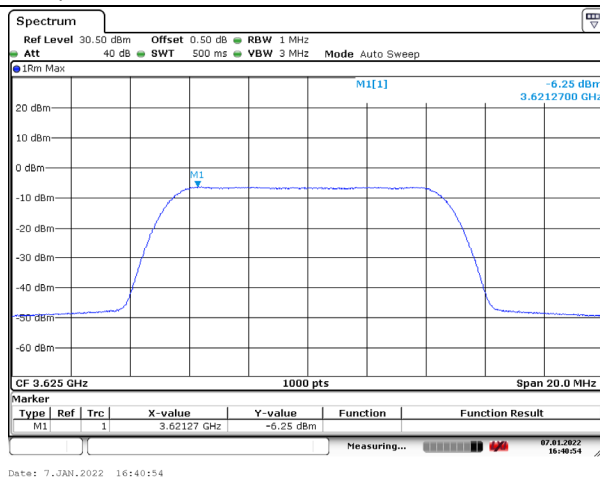
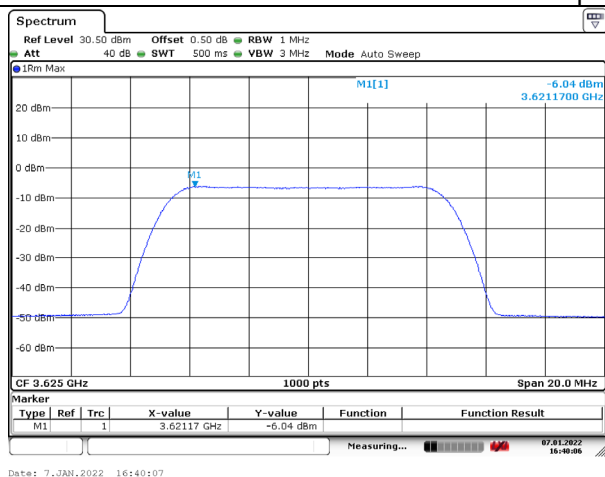
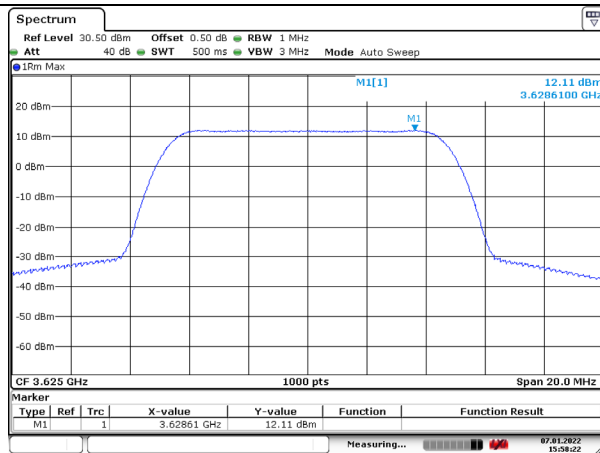
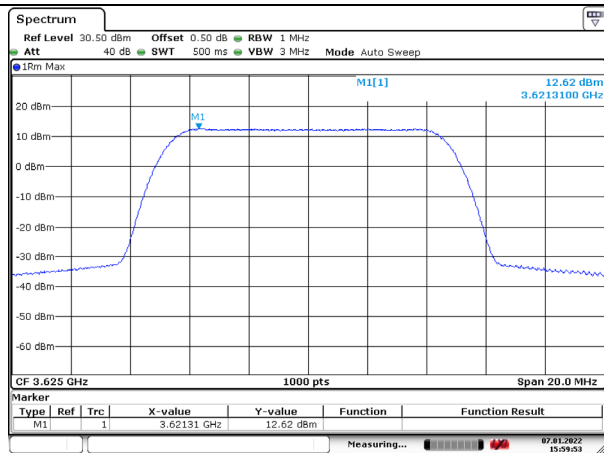


maxEirp = 17 dBm/MHz

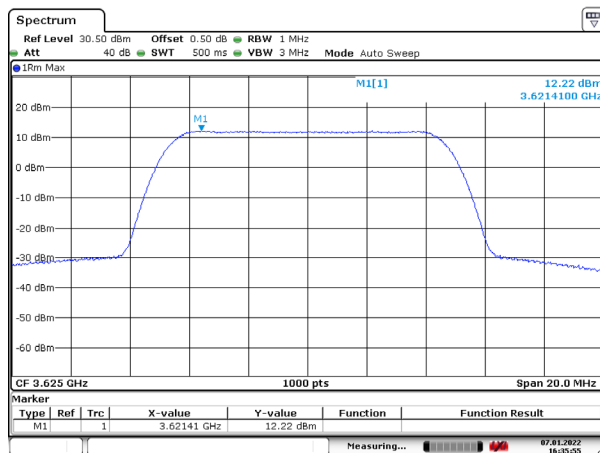





maxEirp = 36 dBm/MHz

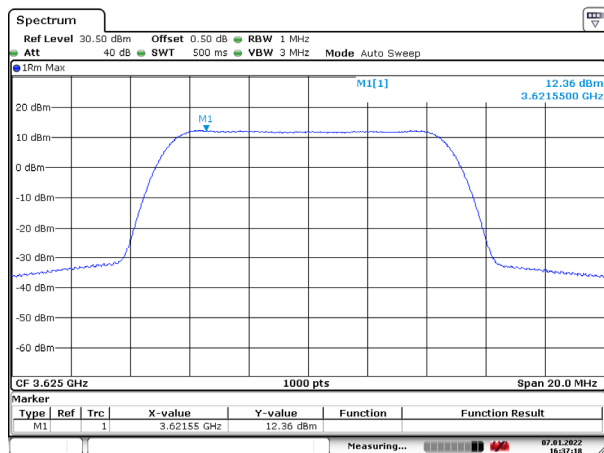





Channel	Freq. (MHz)	20MHz					Limit	Pass / Fail
		Conducted Power Density (dBm/MHz)				Directional Gain(dBi)		
		Chain 0	Chain 1	Chain 2	Chain 3	Power Density	maxEirp(dBm)=Pi	
Middle	3625	-27.08	-27.59	-27.08	-27.68	-20.97	-2	Pass
Middle	3625	-9.07	-9.21	-8.65	-8.95	-2.95	17	Pass
Middle	3625	9.37	9.05	9.76	8.87	15.30	36	Pass

Note: Directional gain = 9.8dBi + 10log(4) = 15.82 dBi





maxEirp = -2 dBm/MHz

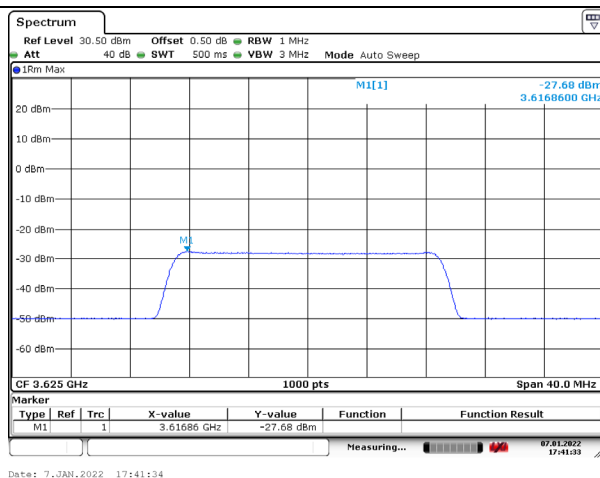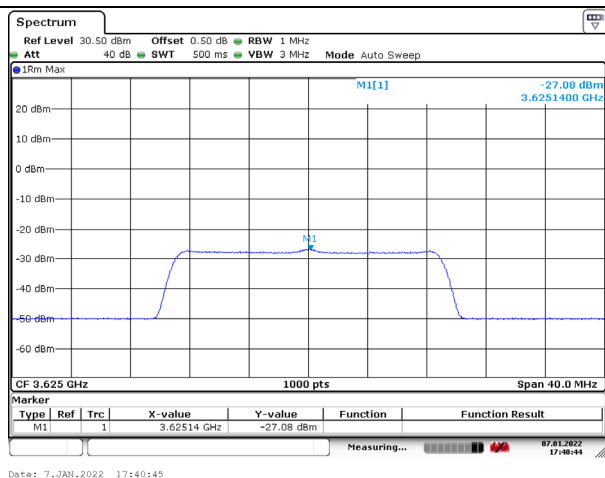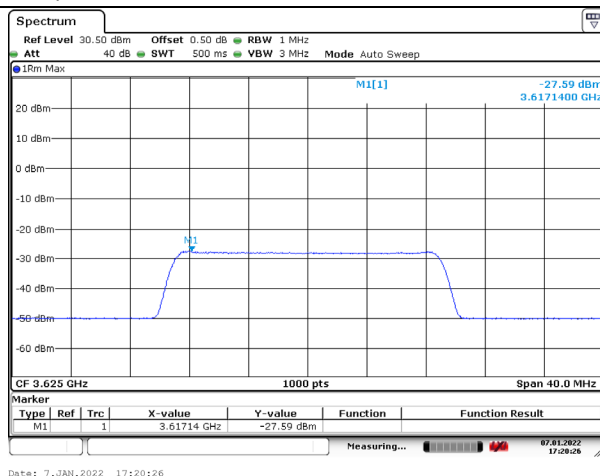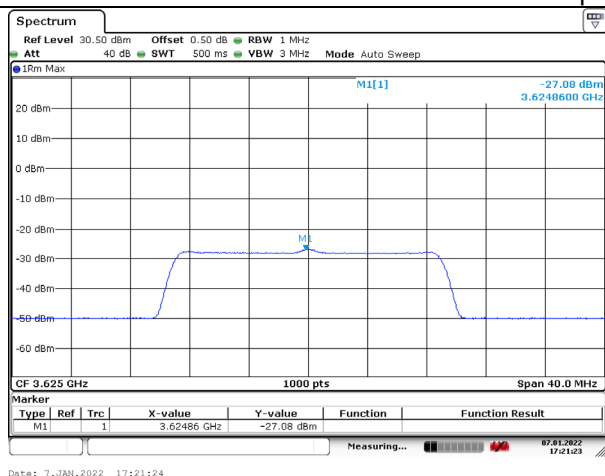

maxEirp = 17 dBm/MHz

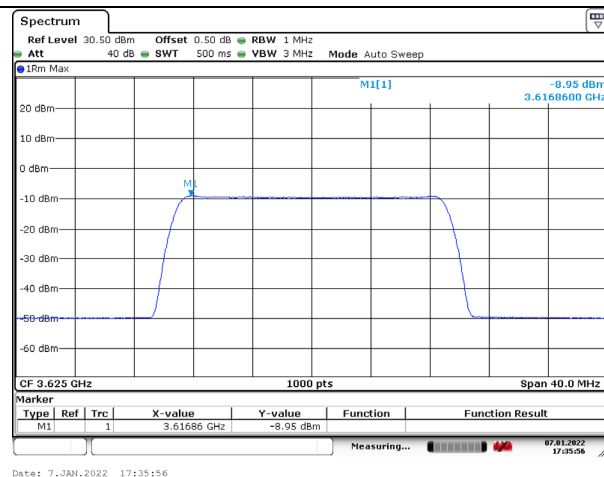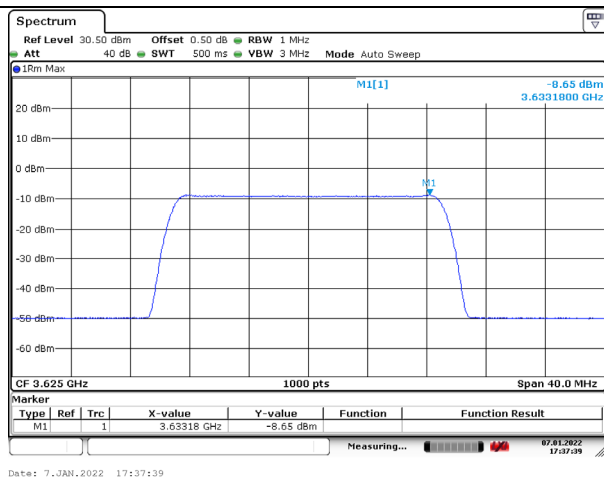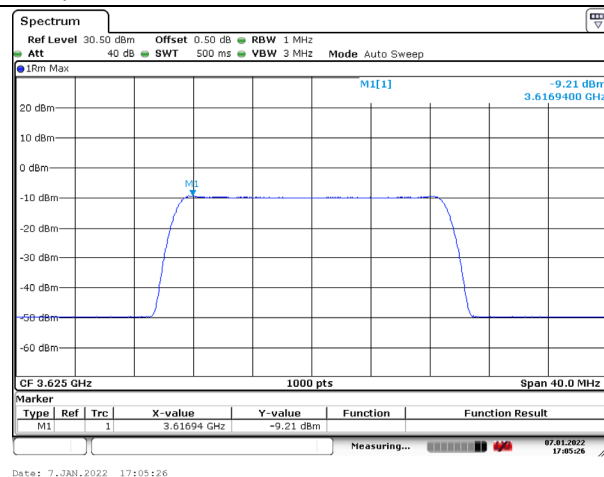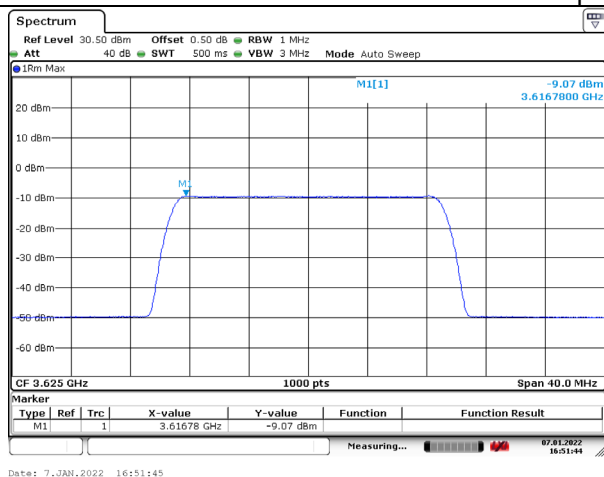

maxEirp = 36 dBm/MHz

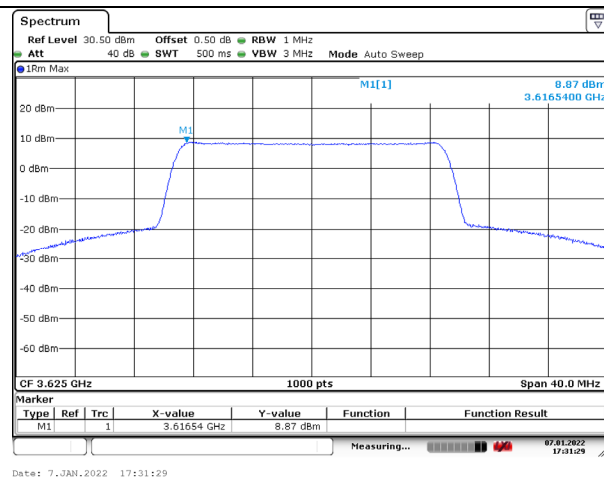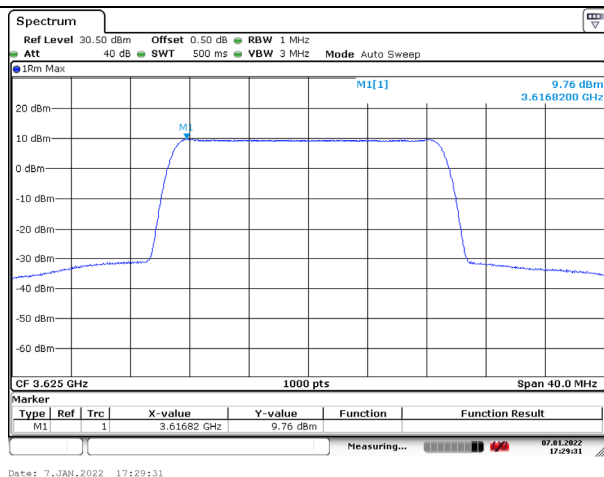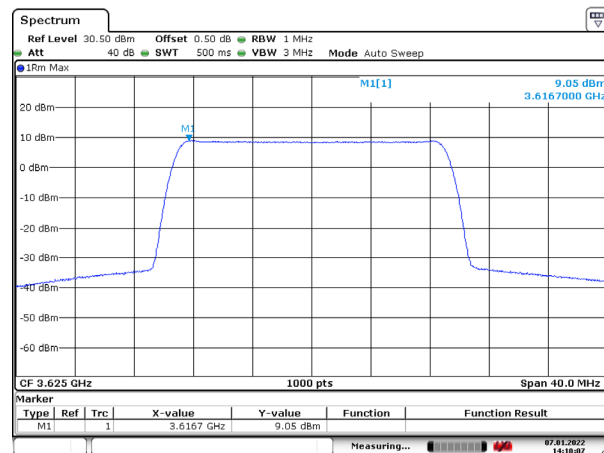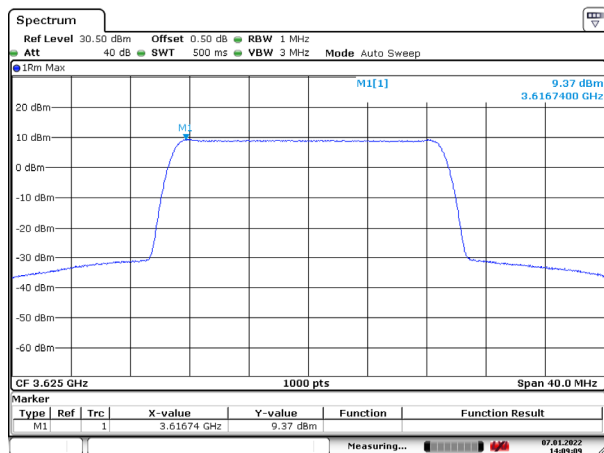

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

6 WinnForum Logs

Please refer to the attached file (Test Logs).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---