


|          |        |
|----------|--------|
| ITEM NO. | CHANGE |
|          |        |

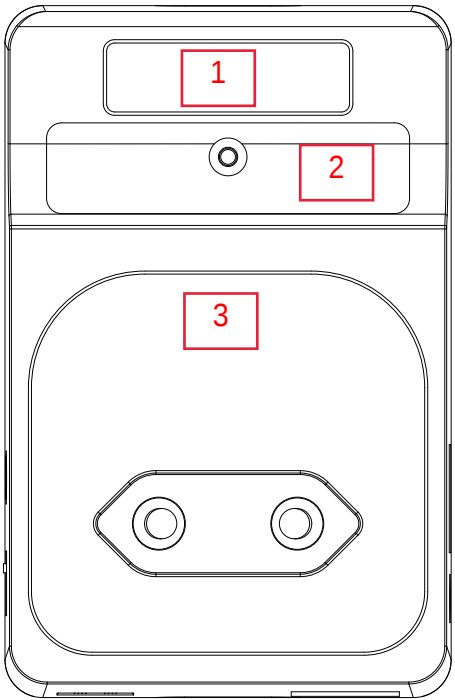

厚度：0.2mm

| DIMENSIONAL TOLERANCES | ●    |      |      |      |      |      |      |  | UNIT     | mm  | REV.                                     | EDIMAX 訊舟科技股份有限公司 |  |           |  |
|------------------------|------|------|------|------|------|------|------|--|----------|-----|------------------------------------------|-------------------|--|-----------|--|
|                        | M1   | M2   | S1   | S2   | P1   | P2   | C    |  | MATERIAL |     |                                          |                   |  |           |  |
| 0-6                    | 0.05 | 0.10 | 0.15 | 0.20 | 0.05 | 0.10 | 0.5  |  | FINISH   |     | <br>THIRD ANGLE PROJECTION<br>SIZE<br>A4 | DRAWN             |  | MODEL NO. |  |
| 6-30                   | 0.10 | 0.20 | 0.15 | 0.25 | 0.10 | 0.15 | 1.0  |  | SCALE    | 1:1 |                                          | DESIGNED          |  |           |  |
| 30-80                  | 0.15 | 0.25 | 0.20 | 0.30 | 0.20 | 0.40 | 2.0  |  | DATE     |     |                                          | CHECKED           |  | PART NAME |  |
| 80-180                 | 0.15 | 0.30 | 0.25 | 0.45 | 0.40 | 0.80 | 3.0  |  | SHEET    |     |                                          | APPROVED          |  | PART NO.  |  |
| 180-315                | 0.20 | 0.50 | 0.40 | 0.60 | 0.60 | 1.20 | 3.0  |  |          |     |                                          |                   |  |           |  |
| ANGULAR                | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 |  |          |     |                                          |                   |  |           |  |

1

MAC (2.4GHz): FF:FF:FF:FF:FF:FF

MAC (5GHz): FF:FF:FF:FF:FF:FF

WPS Pin: 12345678

2

amped|wireless

**AC750 Plug-In  
Wi-Fi Range Extender****Model: B750EX**Designed In the USA by Amped Wireless.  
Assembled In China.

Login Settings

Web Menu: <http://setup.ampedwireless.com>

IP Address: 192.168.1.240

Wi-Fi Settings

2.4GHz SSID: Amped\_B750EX\_2.4

5GHz SSID: Amped\_B750EX\_5.0

Factory Default Settings

Hold down Reset button for 10 seconds.

3

S/N:



KAB5USWUFU2EKECUWRU5

Indoor Use Only

Input: 100-240V~50-60Hz, 0.16A

FCC ID: ZTT-B750EX  
IC: 10233A-B750EX  
CAN ICES-3(B) / NMB-3(B)For product support, installation guides, software updates and FAQs,  
please visit: [www.ampedwireless.com/support](http://www.ampedwireless.com/support)

This device complied with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.