

TEST REPORT FOR SAR TESTING

Report No.: SRTC2019-9004(F)-19031203(H)

Product Name: LTE/WCDMA/GSM(GPRS)Multi-Mode Digital Mobile
Phone

Product Model: ZTE Blade A7 2019

Applicant: ZTE Corporation

Manufacturer: ZTE Corporation

Specification: Part 2.1093

IEEE Std 1528

KDB Procedures

FCC ID: SRQ-ZTEA72019

The State Radio_monitoring_center Testing Center (SRTC)

15th Building, No.30 Shixing Street, Shijingshan District, Beijing, P.R.China

Tel: 86-10-57996183 Fax: 86-10-57996388

Contents

1. GENERAL INFORMATION.....	2
1.1 NOTES OF THE TEST REPORT	2
1.2 INFORMATION ABOUT THE TESTING LABORATORY	2
1.3 APPLICANT’S DETAILS	2
1.4 MANUFACTURER’S DETAILS	2
1.5 TEST ENVIRONMENT.....	3
2. DESCRIPTION OF THE DEVICE UNDER TEST	4
2.1 FINAL EQUIPMENT BUILD STATUS.....	4
2.2 SUPPORT EQUIPMENT	5
3. REFERENCE SPECIFICATION.....	5
4. TEST CONDITIONS	6
4.1 PICTURE TO DEMONSTRATE THE REQUIRED LIQUID DEPTH	6
4.2 TEST SIGNAL, FREQUENCIES AND OUTPUT POWER	6
4.3 SAR MEASUREMENT SET-UP	6
4.4 PHANTOMS	7
4.5 TISSUE SIMULANTS	7
4.6 DESCRIPTION OF THE TEST PROCEDURE	8
5 RESULT SUMMAR	10
6 TEST RESULT	12
6.1 MANUFACTURING TOLERANCE.....	12
6.2 GSM MEASUREMENT RESULT	20
6.3 WCDMA MEASUREMENT RESULT	22
6.4 LTE MEASUREMENT RESULT	25
6.5 BLUETOOTH MEASUREMENT RESULT	45
6.6 WI-FI MEASUREMENT RESULT	45
6.7 STANDALONE SAR TEST EXCLUSION CONSIDERATIONS.....	46
6.8 RF EXPOSURE CONDITIONS	48
6.9 SYSTEM CHECKING	50
6.10 SAR TEST RESULT	52
6.11 SAR MEASUREMENT VARIABILITY.....	67
6.12 SIMULTANEOUS TRANSMISSION SAR ANALYSIS.....	68
7 MEASUREMENT UNCERTAINTY.....	70
8 TEST EQUIPMENTS.....	72
ANNEX A – TEST PLOTS	78
ANNEX B – RELEVANT PAGES FROM CALIBRATION REPORTS	107

1. GENERAL INFORMATION

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC).

The test results relate only to individual items of the samples which have been tested. The certification and accreditation identifiers used in this report shall not be applicable to the tested or calibrated samples thereof. The manufacturer shall not mark the tested samples or items (or a separate part of the item) with the identifiers of certification and accreditation to mislead relevant parties about the tested samples or items.

1.2 Information about the testing laboratory

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Address:	15th Building, No.30 Shixing Street, Shijingshan District, Beijing P.R.China
City:	Beijing
Country or Region:	P.R.China
Contacted person:	Liu Jia
Tel:	+86 10 57996183
Fax:	+86 10 57996388
Email:	liujiat@srtc.org.cn

1.3 Applicant's details

Company:	ZTE Corporation
Address:	ZTE Plaza, #55 Keji Road South, Hi-Tech, Industrial Park, Nanshan District,Guangdong
City:	Shenzhen
Country or Region:	China
Contacted person:	Yang Zhao
Tel:	029-83600770
Fax:	---
Email:	zhao.yangxa@zte.com.cn

1.4 Manufacturer's details

Company:	ZTE Corporation
Address:	ZTE Plaza, #55 Keji Road South, Hi-Tech, Industrial Park, Nanshan District,Guangdong
City:	Shenzhen
Country or Region:	China
Contacted person:	Yang Zhao
Tel:	029-83600770
Fax:	---
Email:	zhao.yangxa@zte.com.cn

1.5 Test Environment

Date of Receipt of test sample at SRTC:	2019.03.18
Testing Start Date:	2019.03.18
Testing End Date:	2019.03.22

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient	21-23	40-45

Normal Supply Voltage (Vdc.):	3.85
-------------------------------	------

2. DESCRIPTION OF THE DEVICE UNDER TEST

2.1 Final Equipment Build Status

Wireless Technology and Frequency Bands	☒ GSM Band: GSM850/PCS1900 ☒ WCDMA Band: FDDII/IV/V ☒ LTE Band: 2/4/5/7 ☒ Bluetooth Band: 2.4GHz ☒ Wi-Fi Band: 2.4GHz
Mode	GSM ☒ Voice (GMSK) ☒ GPRS (GMSK) ☒ EGPRS (GMSK) WCDMA ☒ UMTS Rel. 99 (Voice & Data) ☒ HSDPA (Rel. 5) ☒ HSUPA (Rel. 6) ☒ HSPA+ (Rel.) ☒ DC-HSDPA (Rel.) Wi-Fi ☒ 802.11b ☒ 802.11g ☒ 802.11n (20MHz) Bluetooth ☒ BR(GFSK) ☒ EDR ($\pi/4$ DQPSK, 8-DPSK) ☒ BLE(GFSK) LTE ☒ QPSK ☒ 16QAM ☒ 64QAM
Duty Cycle	GSM Voice: 12.5%; GPRS: 12.5% (1 Slot), 25% (2 Slots), 37.5% (3 Slots), 50% (4 Slots) WCDMA: 100% Wi-Fi 802.11b: 97.2%/11g: 93.5%/11n: 92.7% Bluetooth: 32.25% (DH1), 66.68% (DH3), 77.52% (DH5)
GPRS/EGPRS Multi-Slot Class	☐ Class 8 - One Up ☐ Class 10 - Two Up ☒ Class 12 - Four Up
Mobile Phone Capability	☐ Class A - Mobile phones can be connected to both GPRS and GSM services simultaneously. ☒ Class B - Mobile phones can be attached to both GPRS and GSM services, using one service at a time. ☐ Class C - Mobile phones are attached to either GPRS or GSM voice service. You need to switch manually between services
DTM (Dual Transfer Mode)	Not Supported

2.2 Support Equipment

The following support equipment was used to exercise the DUT during testing:

State of sample	Normal
Headset1	JWEP1036-Z01R
Headset2	DEM-66
Battery1	Li3931T44P8h806139/Li-Lon/ Ningbo Veken Battery Co., Ltd.
Battery2	Li3931T44P8h806139/Li-Lon/Zhongshan Tianmao Battery Co., Ltd.
H/W Version	ukhB
S/W Version	TEL_MX_ZTE_Blade_A7_2019V1.0
IMEI	864432040006132
Notes	As the information described above, we use test sample offered by the customer. The relevant tests have been performed in order to verify in which combination case the EUT would have the worst features. The tests shown in the report when the Battery1 for main supply, Battery2 for second supply.

3. REFERENCE SPECIFICATION

Specification	Version	Title
Part 2.1093	2018	Radiofrequency radiation exposure evaluation: portable devices.
IEEE Std 1528	2013	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
IEEE Std 1528a	2005	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques Amendment 1: CAD File for Human Head Model (SAM Phantom)
KDB 447498 D01	v06	General RF Exposure Guidance
KDB 648474 D04	v01r03	Handset SAR
KDB 941225 D01	v03r01	3G SAR Procedures
KDB 248227 D01	v02r02	SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS
KDB 865664 D01	v01r04	SAR Measurement from 100 MHz to 6 GHz
KDB 865664 D02	v01r02	RF Exposure Reporting
KDB 941225 D05	v02r05	SAR for LTE Devices

4. TEST CONDITIONS

4.1 Picture to demonstrate the required liquid depth

The liquid depth in the used SAM phantoms



Liquid depth for SAR Measurement

4.2 Test Signal, Frequencies and Output Power

The device was put into operation by using a call tester. Communication between the device and the call tester was established by air link.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

In all operating bands the measurements were performed on middle channel, and few of them were also performed on lowest and highest channels.

4.3 SAR Measurement Set-up

The system is based on a high precision robot (working range greater than 0.9m), which positions the probes with a positional repeatability of better than $\pm 0.02\text{mm}$. Special E-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines (length = 300mm) to the data acquisition unit. A cell controller system contains the power supply, robot controller, teaches pendant (Joystick), and remote control, is used to drive the robot motors.

The PC consists of the Micron Pentium IV computer with Win7 system and SAR Measurement Software DASY5 Professional, A/D interface card, monitor, mouse, and

keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot.

A data acquisition electronic (DAE) circuit performs the signal amplification; signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card. The DAE consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines.

The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection

The robot uses its own controller with a built in VME-bus computer.

4.4 Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin headed "SAM Phantom", manufactured by SPEAG. The phantom conforms to the requirements of IEEE 1528 - 2013.

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.

The SPEAG device holder (see Section 5.1) was used to position the device in all tests whilst a tripod was used to position the validation dipoles against the flat section of phantom.

4.5 Tissue Simulants

Recommended values for the dielectric parameters of the tissue simulants are given in IEEE 1528 - 2013 and FCC Supplement C to OET Bulletin 65. All tests were carried out using simulants whose dielectric parameters were within $\pm 5\%$ of the recommended values. All tests were carried out within 24 hours of measuring the dielectric parameters.

The depth of the tissue simulant was 15.0 ± 0.5 cm measured from the ear reference point during system checking and device measurements.

4.5.1 Tissue Stimulant Recipes

The following tissue stimulants were used for Head and Body test:

Name	Broadband tissue-equivalent liquid
Type for Head	HBBL600-6000V6 Head Simulating Liquid
Type for Body	MBBL600-6000V6 Body Simulating Liquid

4.6 DESCRIPTION OF THE TEST PROCEDURE

4.6.1 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the Dasy5 system.



Device holder supplied by SPEAG

4.6.2 Test positions

4.6.2.1 Against Phantom Head

Measurements were made in “cheek” and “tilt” positions on both the left hand and right-hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 - 2013 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

4.6.2.2 Body Worn Configuration

The device was placed in the SPEAG holder below the flat section of the phantom. The distance between the device and the phantom was kept at the separation distance using a separate flat spacer that was removed before the start of the measurements. And the distance is 10mm. The device was oriented with its antenna facing the phantom since this orientation gives higher results.

4.6.3 Scan Procedure

First, area scans were used for determination of the field distribution and the approximate location of the local peak SAR values. The SAR distribution is scanned along the inside surface, at least for an area larger than the projection of the handset and antenna. The angle between the probe axis and the surface normal line is recommended but not required to be less than 30°. The SAR distribution is first measured on a 2-D coarse grid. The scan region should cover all areas that are exposed and encompassed by the projection of the handset. There are 15 mm × 15 mm (equal or less than 2GHz), 12 mm × 12 mm (from 2GHz~3GHz) and 10mm x 10mm (above 5GHz) measurement grid used when two staggered one-dimensional cubic splines are used to estimate the maximum SAR location. Next, a zoom scan, a minimum of 7 x 7x7 points covering a volume of at least 30x30x30mm, was performed around the highest E-field value to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the area scan and again at the end of the zoom scan.

4.6.4 SAR Averaging Methods

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation.

The interpolation, extrapolation and maximum search routines within DASY5 are all based on the modified Quadratic Shepard's method (Robert J. Renka, Multivariate Interpolation of Large Sets of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A triradiate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighboring points by a least-square method. For the zoom scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics.

In the zoom scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.

5 RESULT SUMMAR


The maximum reported SAR values for Head configuration and Body Worn configuration are given as follows. The device conforms to the requirements of the standard(s) when the maximum reported SAR value is less than or equal to the limit.

Note: SRTC check the worst condition among all the frequency bands for second supply and the test result is better than the test data of main supply. So the data from main supply is adopted as the final Variant product result as below.

Exposure Position	Frequency Band	1g-SAR Result(W/kg)	Highest 1g-SAR Result(W/kg)		Limit (W/kg)/1g	Result
Head	GSM 850	0.12	0.28			
	GSM 1900	0.10				
	WCDMA Band II	0.28				
	WCDMA Band IV	0.18				
	WCDMA Band V	0.15				
	LTE Band 2	0.27				
	LTE Band 4	0.15				
	LTE Band 5	0.13				
	LTE Band 7	0.12				
	WLAN 2.4GHz Band	0.04				
Body-Worn (10mm Gap)	GSM 850	0.29	1.10	1.10	1.6	pass
	GSM 1900	0.55				
	WCDMA Band II	1.10				
	WCDMA Band IV	0.95				
	WCDMA Band V	0.28				
	LTE Band 2	0.96				
	LTE Band 4	0.80				
	LTE Band 5	0.29				
	LTE Band 7	1.07				
	WLAN 2.4GHz Band	0.06				
Hotspot (10mm Gap)	GSM 850	0.29	1.10			
	GSM 1900	0.55				
	WCDMA Band II	1.10				
	WCDMA Band IV	0.95				
	WCDMA Band V	0.28				
	LTE Band 2	0.96				
	LTE Band 4	0.80				
	LTE Band 5	0.29				
	LTE Band 7	1.07				
	WLAN 2.4GHz Band	0.06				

Simultaneous Transmission Summary

Exposure Position	Frequency Band	1g-SAR Result(W/kg)	Highest 1g-SAR Result(W/kg)		Limit (W/kg)/1g	Result
Head	GSM & Wi-Fi	0.16	0.41	1.17	1.6	pass
	WCDMA & Wi-Fi	0.30				
	LTE & Wi-Fi	0.29				
	GSM & Bluetooth	0.25				
	WCDMA & Bluetooth	0.41				
	LTE & Bluetooth	0.39				
Body-Worn (10mm Gap)	GSM & Wi-Fi	0.60	1.17			
	WCDMA & Wi-Fi	1.16				
	LTE & Wi-Fi	1.13				
	GSM & Bluetooth	0.61				
	WCDMA & Bluetooth	1.17				
	LTE & Bluetooth	1.13				
hotspot (10mm Gap)	GSM & Wi-Fi(2.4G/5G)	0.60	1.16			
	WCDMA & Wi-Fi(2.4G/5G)	1.16				
	LTE & Wi-Fi(2.4G/5G)	1.13				

This Test Report Is Issued by: Mr. Peng Zhen 	Checked by: Mr. Li Bin 
Tested by: Miss. Wu Han 	Issued date: 20190327

6 TEST RESULT

6.1 Manufacturing Tolerance

GSM

GSM 850			
Channel	Channel 128	Channel 189	Channel 251
Tolerance (dBm)	29.5~33.5	29.5~33.5	29.5~33.5
GSM 1900			
Channel	Channel 512	Channel 661	Channel 810
Tolerance (dBm)	26.0~30.0	26.0~30.0	26.0~30.0

GSM 850 GPRS				
Channel		128	189	251
1 Txslot	Tolerance (dBm)	29.5~33.5	29.5~33.5	29.5~33.5
2 Txslot	Tolerance (dBm)	28.5~31.5	28.5~31.5	28.5~31.5
3 Txslot	Tolerance (dBm)	25.0~29.0	25.0~29.0	25.0~29.0
4 Txslot	Tolerance (dBm)	23.5~27.5	23.5~27.5	23.5~27.5
GSM 850 EGPRS(GMSK)				
Channel		128	189	251
1 Txslot	Tolerance (dBm)	29.5~33.5	29.5~33.5	29.5~33.5
2 Txslot	Tolerance (dBm)	28.5~31.5	28.5~31.5	28.5~31.5
3 Txslot	Tolerance (dBm)	25.0~29.0	25.0~29.0	25.0~29.0
4 Txslot	Tolerance (dBm)	24.0~28.0	24.0~28.0	24.0~28.0
GSM 850 EGPRS(8DPSK)				
Channel		128	189	251
1 Txslot	Tolerance (dBm)	21.5~25.5	21.5~25.5	21.5~25.5
2 Txslot	Tolerance (dBm)	20.5~24.5	20.5~24.5	20.5~24.5
3 Txslot	Tolerance (dBm)	18.5~22.5	18.5~22.5	18.5~22.5
4 Txslot	Tolerance (dBm)	16.0~20.0	16.0~20.0	16.0~20.0

GSM 1900 GPRS				
Channel		512	661	810
1 Txslot	Tolerance (dBm)	26.0~30.0	26.0~30.0	26.0~30.0
2 Txslot	Tolerance (dBm)	23.5~27.5	23.5~27.5	23.5~27.5
3 Txslot	Tolerance (dBm)	22.0~26.0	22.0~26.0	22.0~26.0
4 Txslot	Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5
GSM 1900 EGPRS(GMSK)				
Channel		512	661	810
1 Txslot	Tolerance (dBm)	26.0~30.0	26.0~30.0	26.0~30.0
2 Txslot	Tolerance (dBm)	23.5~27.5	23.5~27.5	23.5~27.5
3 Txslot	Tolerance (dBm)	22.0~26.0	22.0~26.0	22.0~26.0
4 Txslot	Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5

GSM 1900 EGPRS(8DPSK)				
Channel		512	661	810
1 Txslot	Tolerance (dBm)	21.0~25.0	21.0~25.0	21.0~25.0
2 Txslot	Tolerance (dBm)	20.0~24.0	20.0~24.0	20.0~24.0
3 Txslot	Tolerance (dBm)	17.0~21.0	17.0~21.0	17.0~21.0
4 Txslot	Tolerance (dBm)	14.0~18.0	14.0~18.0	14.0~18.0

WCDMA

WCDMA Band II			
Channel	9262	9400	9538
Tolerance (dBm)	20.0~24.0	20.0~24.0	20.0~24.0
WCDMA Band IV			
Channel	1312	1412	1513
Tolerance (dBm)	20.0~24.0	20.0~24.0	20.0~24.0
WCDMA Band V			
Channel	4132	4183	4233
Tolerance (dBm)	20.0~24.0	20.0~24.0	20.0~24.0

HSDPA Band II				
Channel		9262	9400	9538
Sub test 1	Tolerance (dBm)	20.0~24.0	20.0~24.0	20.0~24.0
Sub test 2	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
Sub test 3	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
Sub test 4	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
HSDPA Band IV				
Channel		1312	1412	1513
Sub test 1	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
Sub test 2	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
Sub test 3	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
Sub test 4	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
HSDPA Band V				
Channel		4132	4183	4233
Sub test 1	Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5
Sub test 2	Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5
Sub test 3	Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5
Sub test 4	Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5

HSUPA Band II				
Channel		9262	9400	9538
Sub test 1	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
Sub test 2	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
Sub test 3	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
Sub test 4	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
Sub test 5	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
HSPA+ Band II				
Channel		9262	9400	9538
Sub test 1	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

HSUPA Band IV				
Channel		1312	1412	1513
Sub test 1	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
Sub test 2	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
Sub test 3	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
Sub test 4	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
Sub test 5	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
HSPA+ Band IV				
Channel		1312	1412	1513
Sub test 1	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

HSUPA Band V				
Channel		4132	4183	4233
Sub test 1	Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5
Sub test 2	Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5
Sub test 3	Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5
Sub test 4	Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5
Sub test 5	Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5
HSPA+ Band V				
Channel		4132	4183	4233
Sub test 1	Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5

LTE

Band 2 QPSK

20BW 1RB			
Channel	Channel 18607	Channel 18900	Channel 19193
Tolerance (dBm)	20.0~24.0	20.0~24.0	20.0~24.0
20BW 50%RB			
Channel	Channel 18607	Channel 18900	Channel 19193
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
20BW 100%RB			
Channel	Channel 18607	Channel 18900	Channel 19193
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

16QAM

20BW 1RB			
Channel	Channel 18607	Channel 18900	Channel 19193
Tolerance (dBm)	20.0~24.0	20.0~24.0	20.0~24.0
20BW 50%RB			
Channel	Channel 18607	Channel 18900	Channel 19193
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
20BW 100%RB			
Channel	Channel 18607	Channel 18900	Channel 19193
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

64QAM

20BW 1RB			
Channel	Channel 18607	Channel 18900	Channel 19193
Tolerance (dBm)	20.0~24.0	20.0~24.0	20.0~24.0
20BW 50%RB			
Channel	Channel 18607	Channel 18900	Channel 19193
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
20BW 100%RB			
Channel	Channel 18607	Channel 18900	Channel 19193
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

Band 4
QPSK

20BW 1RB			
Channel	Channel 20050	Channel 20175	Channel 20300
Tolerance (dBm)	20.0~24.0	20.0~24.0	20.0~24.0
20BW 50%RB			
Channel	Channel 20050	Channel 20175	Channel 20300
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
20BW 100%RB			
Channel	Channel 20050	Channel 20175	Channel 20300
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

16QAM

20BW 1RB			
Channel	Channel 20050	Channel 20175	Channel 20300
Tolerance (dBm)	20.0~24.0	20.0~24.0	20.0~24.0
20BW 50%RB			
Channel	Channel 20050	Channel 20175	Channel 20300
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
20BW 100%RB			
Channel	Channel 20050	Channel 20175	Channel 20300
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

64QAM

20BW 1RB			
Channel	Channel 20050	Channel 20175	Channel 20300
Tolerance (dBm)	20.0~24.0	20.0~24.0	20.0~24.0
20BW 50%RB			
Channel	Channel 20050	Channel 20175	Channel 20300
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
20BW 100%RB			
Channel	Channel 20050	Channel 20175	Channel 20300
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

Band 5
QPSK

10BW 1RB			
Channel	Channel 20450	Channel 20525	Channel 20600
Tolerance (dBm)	20.0~24.0	20.0~24.0	20.0~24.0
10BW 50%RB			
Channel	Channel 20450	Channel 20525	Channel 20600
Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5
10BW 100%RB			
Channel	Channel 20450	Channel 20525	Channel 20600
Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5

16QAM

10BW 1RB			
Channel	Channel 20450	Channel 20525	Channel 20600
Tolerance (dBm)	20.0~24.0	20.0~24.0	20.0~24.0
10BW 50%RB			
Channel	Channel 20450	Channel 20525	Channel 20600
Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5
10BW 100%RB			
Channel	Channel 20450	Channel 20525	Channel 20600
Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5

64QAM

10BW 1RB			
Channel	Channel 20450	Channel 20525	Channel 20600
Tolerance (dBm)	20.0~24.0	20.0~24.0	20.0~24.0
10BW 50%RB			
Channel	Channel 20450	Channel 20525	Channel 20600
Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5
10BW 100%RB			
Channel	Channel 20450	Channel 20525	Channel 20600
Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5

Band 7

QPSK

20BW 1RB			
Channel	Channel 20850	Channel 21100	Channel 21350
Tolerance (dBm)	20.0~24.0	20.0~24.0	20.0~24.0
20BW 50%RB			
Channel	Channel 20850	Channel 21100	Channel 21350
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
20BW 100%RB			
Channel	Channel 20850	Channel 21100	Channel 21350
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

16QAM

20BW 1RB			
Channel	Channel 20850	Channel 21100	Channel 21350
Tolerance (dBm)	20.0~24.0	20.0~24.0	20.0~24.0
20BW 50%RB			
Channel	Channel 20850	Channel 21100	Channel 21350
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
20BW 100%RB			
Channel	Channel 20850	Channel 21100	Channel 21350
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

64QAM

20BW 1RB			
Channel	Channel 20850	Channel 21100	Channel 21350
Tolerance (dBm)	20.0~24.0	20.0~24.0	20.0~24.0
20BW 50%RB			
Channel	Channel 20850	Channel 21100	Channel 21350
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
20BW 100%RB			
Channel	Channel 20850	Channel 21100	Channel 21350
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

Bluetooth

GFSK			
Channel	0	39	78
Tolerance (dBm)	1.0~5.0	1.0~5.0	1.0~5.0
$\pi/4$ DQPSK			
Channel	0	39	78
Tolerance (dBm)	-2.0~2.0	-2.0~2.0	-2.0~2.0
8DPSK			
Channel	0	39	78
Tolerance (dBm)	-2.0~2.0	-2.0~2.0	-2.0~2.0

Bluetooth (BLE)

GFSK			
Channel	0	19	39
Tolerance (dBm)	-4.0~0.0	-4.0~0.0	-4.0~0.0

Wi-Fi (2.4GHz)

802.11b			
Channel	1	6	11
Tolerance (dBm)	13.5~17.5	13.5~17.5	13.5~17.5
802.11g			
Channel	1	6	11
Tolerance (dBm)	13.0~17.0	13.0~17.0	13.0~17.0
802.11n HT20			
Channel	1	6	11
Tolerance (dBm)	12.0~16.0	12.0~16.0	12.0~16.0

6.2 GSM Measurement result

GSM Measured Power

Mode	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
Measured Power(dBm)	33.03	33.08	33.11	29.64	29.39	29.41

GSM Frame Average Power

Mode	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
Frame Average Power (dBm)	24.00	24.05	24.08	20.61	20.36	20.38

GPRS Measured Power

Mode	GPRS850			GPRS1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
4Downlink1uplinkPower(dBm)	33.03	33.08	33.11	29.66	29.49	29.43
3Downlink2uplinkPower(dBm)	31.03	31.01	31.02	27.45	27.23	27.03
2Downlink3uplinkPower(dBm)	28.64	28.61	28.59	25.50	25.29	25.06
1Downlink4uplinkPower(dBm)	27.21	27.2	27.18	23.41	23.20	23.02

GPRS Frame Average Power

Mode	GPRS850			GPRS1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
4Downlink1uplinkPower(dBm)	24.00	24.05	24.08	20.63	20.46	20.40
3Downlink2uplinkPower(dBm)	25.01	24.99	25.00	21.43	21.21	21.01
2Downlink3uplinkPower(dBm)	24.38	24.35	24.33	21.24	21.03	20.80
1Downlink4uplinkPower(dBm)	24.20	24.19	24.17	20.40	20.19	20.01

Division Factors (for Measured Power and Frame Average Power):

To average the power, the division factor is as follows:

1TX-slot (4Downlink1uplink) = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots(3Downlink2uplink) = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots (2Downlink3uplink) = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots (1Downlink4uplink) = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with **2Txslots** (3Downlink2uplink) for GPRS.

EGPRS Measured Power

Mode	EGPRS900 (GMSK)			EGPRS1900 (GMSK)		
	EGPRS900 (8PSK)			EGPRS1900 (8PSK)		
Channel	975	37	124	512	661	810
Frequency(MHz)	880.2	897.4	914.8	1850.2	1880.0	1909.8
4Downlink1uplinkPower(dBm)	33.00	33.05	33.08	29.64	29.47	29.42
	25.20	25.36	25.47	24.45	24.99	24.48
3Downlink2uplinkPower(dBm)	31.02	31.01	30.99	27.45	27.23	27.04
	23.84	24.27	24.30	23.11	23.77	22.9
2Downlink3uplinkPower(dBm)	28.64	28.61	28.59	25.51	25.29	25.05
	21.84	21.95	22.03	20.41	20.88	20.24
1Downlink4uplinkPower(dBm)	27.22	27.2	27.17	23.41	23.20	23.00
	19.48	19.71	19.62	17.71	17.98	17.68

EGPRS Frame Average Power

Mode	EGPRS900 (GMSK)			EGPRS1900 (GMSK)		
	EGPRS900 (8PSK)			EGPRS1900 (8PSK)		
Channel	975	37	124	512	661	810
Frequency(MHz)	880.2	897.4	914.8	1850.2	1880.0	1909.8
4Downlink1uplinkPower(dBm)	23.97	24.02	24.05	20.61	20.44	20.39
	16.17	16.33	16.44	15.42	15.96	15.45
3Downlink2uplinkPower(dBm)	25.00	24.99	24.97	21.43	21.21	21.02
	17.82	18.25	18.28	17.09	17.75	16.88
2Downlink3uplinkPower(dBm)	24.38	24.35	24.33	21.25	21.03	20.79
	17.58	17.69	17.77	16.15	16.62	15.98
1Downlink4uplinkPower(dBm)	24.21	24.19	24.16	20.40	20.19	19.99
	16.47	16.70	16.61	14.70	14.97	14.67

Division Factors (for Measured Power and Averaged Power):

To average the power, the division factor is as follows:

1TX-slot (4Downlink1uplink) = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots(3Downlink2uplink) = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots (2Downlink3uplink) = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots (1Downlink4uplink) = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with **2Txslots (3Downlink2uplink)** for EGPRS (GMSK).

6.3 WCDMA Measurement result

The following procedures are according to FCC KDB Publication 941225 D01.

Release 99

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

Measured Results

Mode	Band II			Band V		
Channel	9262	9400	9538	4132	4183	4233
Frequency (MHz)	1852.4	1880	1907.6	826.4	836.4	846.6
RB test mode1+64kRMC(dBm)	23.46	23.43	23.49	23.43	23.41	23.40
RB test mode1+12.2kRMC(dBm)	23.78	23.79	23.80	23.62	23.57	23.55
RB test mode1+144kRMC(dBm)	23.44	23.41	23.48	23.44	23.45	23.41
RB test mode1+384kRMC(dBm)	23.47	23.40	23.46	23.43	23.41	23.40

Mode	Band IV		
Channel	1312	1412	1513
Frequency(MHz)	1712.6	1740.0	1752.4
RB test mode1+64kRMC(dBm)	23.63	23.65	23.62
RB test mode1+12.2kRMC(dBm)	23.79	23.77	23.78
RB test mode1+144kRMC(dBm)	23.60	23.64	23.60
RB test mode1+384kRMC(dBm)	23.58	23.52	23.58

HSDPA

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM(dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/18	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note2: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$.

Note3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC(TF1,TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Measured Results

Mode	HSDPA Band II			HSDPA Band V		
Channel	9262	9400	9538	4132	4183	4233
Frequency (MHz)	1852.4	1880	1907.6	826.4	836.4	846.6
sub-test1(dBm)	23.00	22.92	22.91	23.29	23.24	23.23
sub-test2(dBm)	22.90	22.89	22.91	23.22	23.22	23.19
sub-test3(dBm)	22.92	22.88	22.89	23.19	23.21	23.22
sub-test4(dBm)	22.90	22.88	22.91	23.18	23.20	23.22

Mode	HSDPA Band IV		
Channel	1312	1412	1513
Frequency(MHz)	1712.6	1740.0	1752.4
sub-test1(dBm)	22.90	22.73	22.72
sub-test2(dBm)	22.85	22.70	22.71
sub-test3(dBm)	22.84	22.71	22.70
sub-test4(dBm)	22.83	22.70	22.70

HSUPA

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121.

Sub-test	β_c	β_d	β_d (S F)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (S F)	β_{ed} (code s)	CM ⁽²⁾ (dB)	MP R (dB)	AG ⁽⁴⁾ Index	E-TF CI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/25	1039/25	4	1	1.0	2.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4	2	2.0	2.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	2.0	21	81

Note1: ΔACK , $\Delta NACK$ and $\Delta CQI = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note2: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC(TF1,TF1) to $\beta_c=10/15$ and $\beta_d=15/15$.

Note4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC(TF1,TF1) to $\beta_c=14/15$ and $\beta_d=15/15$.

NOTE5: Testing UE using E-DPDCH Physical layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

NOTE6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Measured Results

Mode	HSUPA Band II			HSUPA Band V		
Channel	9262	9400	9538	4132	4183	4233
Frequency (MHz)	1852.4	1880	1907.6	826.4	836.4	846.6
sub-test1(dBm)	22.89	22.88	22.89	23.21	23.19	23.21
sub-test2(dBm)	22.87	22.90	22.91	23.23	23.19	23.18
sub-test3(dBm)	22.88	22.87	22.89	23.21	23.20	23.19
sub-test4(dBm)	22.90	22.90	22.90	23.23	23.20	23.21
sub-test5(dBm)	22.91	22.89	22.88	23.19	23.18	23.22

Mode	HSUPA Band IV		
Channel	1312	1412	1513
Frequency (MHz)	1712.6	1740.0	1752.4
sub-test1(dBm)	22.83	22.71	22.73
sub-test2(dBm)	22.80	22.72	22.70
sub-test3(dBm)	22.85	22.72	22.70
sub-test4(dBm)	22.81	22.70	22.70
sub-test5(dBm)	22.84	22.72	22.70

Mode	HSPA+ Band II	
Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
1852.4	9262	22.88
1880.0	9400	22.87
1907.6	9538	22.90

Mode	HSPA+ Band V	
Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
826.4	4132	23.18
836.6	4183	23.19
846.6	4233	23.20

Mode	HSPA+ Band IV	
Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
1712.4	1312	22.88
1732.4	1412	22.71
1752.6	1513	22.70

Note: UMTS SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.

6.4 LTE Measurement result

LTE2

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1850.7	18607	1.4	1	0	23.22
				1	5	23.22
				3	2	22.29
				6	0	22.25
	1880	18900		1	0	23.23
				1	5	23.23
				3	2	22.29
				6	0	22.17
	1909.3	19193		1	0	23.09
				1	5	23.09
				3	2	22.17
				6	0	22.13
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1850.7	18607	1.4	1	0	22.42
				1	5	22.42
				3	2	21.27
				6	0	21.24
	1880	18900		1	0	22.42
				1	5	22.42
				3	2	21.39
				6	0	21.33
	1909.3	19193		1	0	22.71
				1	5	22.71
				3	2	21.33
				6	0	21.29
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1850.7	18607	1.4	1	0	22.45
				1	5	22.45
				3	2	21.35
				6	0	21.32
	1880	18900		1	0	22.23
				1	5	22.23
				3	2	21.38
				6	0	21.17
	1909.3	19193		1	0	22.45
				1	5	22.41
				3	2	21.30
				6	0	21.24

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1851.5	18615	3	1	0	23.27
				1	14	23.27
				8	4	22.34
				15	0	22.3
	1880	18900		1	0	23.36
				1	14	23.36
				8	4	22.42
				15	0	22.30
	1908.5	19185		1	0	23.22
				1	14	23.22
				8	4	22.30
				15	0	22.26
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1851.5	18615	3	1	0	22.47
				1	14	22.47
				8	4	21.32
				15	0	21.29
	1880	18900		1	0	22.61
				1	14	22.55
				8	4	21.52
				15	0	21.46
	1908.5	19185		1	0	22.99
				1	14	22.84
				8	4	21.46
				15	0	21.42
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1851.5	18615	3	1	0	22.58
				1	14	22.50
				8	4	21.40
				15	0	21.37
	1880	18900		1	0	22.39
				1	14	22.36
				8	4	21.51
				15	0	21.30
	1908.5	19185		1	0	22.58
				1	14	22.54
				8	4	21.43
				15	0	21.37

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1852.5	18625	5	1	0	23.31
				1	24	23.31
				12	6	22.38
				25	0	22.34
	1880	18900		1	0	23.46
				1	24	23.46
				12	6	22.52
				25	0	22.40
	1907.5	19175		1	0	23.20
				1	24	23.20
				12	6	22.28
				25	0	22.24
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1852.5	18625	5	1	0	22.51
				1	24	22.51
				12	6	21.36
				25	0	21.33
	1880	18900		1	0	22.71
				1	24	22.65
				12	6	21.62
				25	0	21.56
	1907.5	19175		1	0	22.97
				1	24	22.82
				12	6	21.44
				25	0	21.40
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1852.5	18625	5	1	0	22.62
				1	24	22.54
				12	6	21.44
				25	0	21.41
	1880	18900		1	0	22.49
				1	24	22.46
				12	6	21.61
				25	0	21.4
	1907.5	19175		1	0	22.56
				1	24	22.52
				12	6	21.41
				25	0	21.35

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1855	18650	10	1	0	23.43
				1	49	23.43
				24	12	22.5
				50	0	22.46
	1880	18900		1	0	23.51
				1	49	23.51
				24	12	22.57
				50	0	22.45
	1905	19150		1	0	23.24
				1	49	23.24
				24	12	22.32
				50	0	22.28
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1855	18650	10	1	0	22.63
				1	49	22.63
				24	12	21.48
				50	0	21.45
	1880	18900		1	0	22.76
				1	49	22.70
				24	12	21.67
				50	0	21.61
	1905	19150		1	0	23.01
				1	49	22.86
				24	12	21.48
				50	0	21.44
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1855	18650	10	1	0	22.74
				1	49	22.66
				24	12	21.56
				50	0	21.53
	1880	18900		1	0	22.54
				1	49	22.51
				24	12	21.66
				50	0	21.45
	1905	19150		1	0	22.60
				1	49	22.56
				24	12	21.45
				50	0	21.39

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1857.5	18675	15	1	0	23.51
				1	74	23.51
				40	18	22.58
				75	0	22.54
	1880	18900		1	0	23.61
				1	74	23.61
				40	18	22.67
				75	0	22.55
	1902.5	19125		1	0	23.32
				1	74	23.32
				40	18	22.40
				75	0	22.36
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1857.5	18675	15	1	0	22.71
				1	74	22.71
				40	18	21.56
				75	0	21.53
	1880	18900		1	0	22.86
				1	74	22.86
				40	18	21.77
				75	0	21.71
	1902.5	19125		1	0	22.94
				1	74	22.94
				40	18	21.56
				75	0	21.52
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1857.5	18675	15	1	0	22.74
				1	74	22.74
				40	18	21.64
				75	0	21.61
	1880	18900		1	0	22.61
				1	74	22.61
				40	18	21.76
				75	0	21.55
	1902.5	19125		1	0	22.64
				1	74	22.64
				40	18	21.53
				75	0	21.47

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1860	18700	20	1	0	23.82
				1	99	23.82
				50	25	22.81
				100	0	22.77
	1880	18900		1	0	23.87
				1	99	23.87
				50	25	22.84
				100	0	22.72
	1900	19100		1	0	23.64
				1	99	23.64
				50	25	22.65
				100	0	22.61
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1860	18700	20	1	0	22.94
				1	99	22.94
				50	25	21.79
				100	0	21.76
	1880	18900		1	0	22.97
				1	99	22.97
				50	25	21.94
				100	0	21.88
	1900	19100		1	0	23.19
				1	99	23.19
				50	25	21.81
				100	0	21.77
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1860	18700	20	1	0	22.97
				1	99	22.97
				50	25	21.87
				100	0	21.84
	1880	18900		1	0	22.78
				1	99	22.78
				50	25	21.93
				100	0	21.72
	1900	19100		1	0	22.89
				1	99	22.89
				50	25	21.78
				100	0	21.72

LTE4

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1710.7	19957	1.4	1	0	23.21
				1	5	23.21
				3	2	22.30
				6	0	22.21
	1732.5	20175		1	0	23.12
				1	5	23.12
				3	2	22.31
				6	0	22.22
	1754.3	20393		1	0	23.14
				1	5	23.14
				3	2	22.18
				6	0	22.13
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1710.7	19957	1.4	1	0	22.51
				1	5	22.45
				3	2	21.50
				6	0	21.40
	1732.5	20175		1	0	22.50
				1	5	22.46
				3	2	21.51
				6	0	21.40
	1754.3	20393		1	0	22.49
				1	5	22.44
				3	2	21.40
				6	0	21.37
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1710.7	19957	1.4	1	0	22.71
				1	5	22.68
				3	2	21.50
				6	0	21.42
	1732.5	20175		1	0	22.68
				1	5	22.60
				3	2	21.47
				6	0	21.40
	1754.3	20393		1	0	22.58
				1	5	22.54
				3	2	21.39
				6	0	21.35

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1711.5	19965	3	1	0	23.26
				1	14	23.26
				8	4	22.35
				15	0	22.30
	1732.5	20175		1	0	23.24
				1	14	23.24
				8	4	22.43
				15	0	22.34
	1753.5	20385		1	0	23.25
				1	14	23.25
				8	4	22.29
				15	0	22.24
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1711.5	19965	3	1	0	22.56
				1	14	22.50
				8	4	21.55
				15	0	21.49
	1732.5	20175		1	0	22.62
				1	14	22.58
				8	4	21.63
				15	0	21.52
	1753.5	20385		1	0	22.60
				1	14	22.55
				8	4	21.51
				15	0	21.48
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1711.5	19965	3	1	0	22.76
				1	14	22.73
				8	4	21.55
				15	0	21.51
	1732.5	20175		1	0	22.80
				1	14	22.72
				8	4	21.59
				15	0	21.52
	1753.5	20385		1	0	22.69
				1	14	22.65
				8	4	21.50
				15	0	21.46

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1712.5	19975	5	1	0	23.34
				1	24	23.34
				12	6	22.43
				25	0	22.38
	1732.5	20175		1	0	23.26
				1	24	23.26
				12	6	22.45
				25	0	22.36
	1752.5	20375		1	0	23.35
				1	24	23.35
				12	6	22.39
				25	0	22.34
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1712.5	19975	5	1	0	22.64
				1	24	22.58
				12	6	21.63
				25	0	21.57
	1732.5	20175		1	0	22.64
				1	24	22.60
				12	6	21.65
				25	0	21.54
	1752.5	20375		1	0	22.70
				1	24	22.65
				12	6	21.61
				25	0	21.58
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1712.5	19975	5	1	0	22.84
				1	24	22.81
				12	6	21.63
				25	0	21.59
	1732.5	20175		1	0	22.82
				1	24	22.74
				12	6	21.61
				25	0	21.54
	1752.5	20375		1	0	22.79
				1	24	22.75
				12	6	21.60
				25	0	21.56

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1715	20000	10	1	0	23.43
				1	49	23.43
				24	12	22.52
				50	0	22.47
	1732.5	20175		1	0	23.32
				1	49	23.32
				24	12	22.51
				50	0	22.42
	1750	20350		1	0	23.40
				1	49	23.40
				24	12	22.44
				50	0	22.39
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1715	20000	10	1	0	22.73
				1	49	22.67
				24	12	21.72
				50	0	21.66
	1732.5	20175		1	0	22.70
				1	49	22.66
				24	12	21.71
				50	0	21.60
	1750	20350		1	0	22.75
				1	49	22.70
				24	12	21.66
				50	0	21.63
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1715	20000	10	1	0	22.93
				1	49	22.90
				24	12	21.72
				50	0	21.68
	1732.5	20175		1	0	22.80
				1	49	22.80
				24	12	21.67
				50	0	21.60
	1750	20350		1	0	22.80
				1	49	22.80
				24	12	21.65
				50	0	21.61

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1717.5	20025	15	1	0	23.51
				1	74	23.51
				40	18	22.60
				75	0	22.55
	1732.5	20175		1	0	23.39
				1	74	23.39
				40	18	22.58
				75	0	22.49
	1747.5	20325		1	0	23.41
				1	74	23.41
				40	18	22.45
				75	0	22.40
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1717.5	20025	15	1	0	22.75
				1	74	22.75
				40	18	21.80
				75	0	21.74
	1732.5	20175		1	0	22.73
				1	74	22.73
				40	18	21.78
				75	0	21.67
	1747.5	20325		1	0	22.71
				1	74	22.71
				40	18	21.67
				75	0	21.64
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1717.5	20025	15	1	0	22.98
				1	74	22.98
				40	18	21.80
				75	0	21.76
	1732.5	20175		1	0	22.87
				1	74	22.87
				40	18	21.74
				75	0	21.67
	1747.5	20325		1	0	22.81
				1	74	22.81
				40	18	21.66
				75	0	21.62

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1720	20050	20	1	0	23.72
				1	99	23.72
				50	25	22.77
				100	0	22.72
	1732.5	20175		1	0	23.78
				1	99	23.78
				50	25	22.82
				100	0	22.73
	1745	20300		1	0	23.79
				1	99	23.79
				50	25	22.72
				100	0	22.67
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1720	20050	20	1	0	22.92
				1	99	22.92
				50	25	21.97
				100	0	21.91
	1732.5	20175		1	0	22.97
				1	99	22.97
				50	25	22.02
				100	0	21.91
	1745	20300		1	0	22.98
				1	99	22.98
				50	25	21.94
				100	0	21.91
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1720	20050	20	1	0	23.15
				1	99	23.15
				50	25	21.97
				100	0	21.93
	1732.5	20175		1	0	23.11
				1	99	23.11
				50	25	21.98
				100	0	21.91
	1745	20300		1	0	23.08
				1	99	23.08
				50	25	21.93
				100	0	21.89

LTE5

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	824.7	20407	1.4	1	0	23.77
				1	5	23.77
				3	2	22.91
				6	0	22.87
	836.5	20525		1	0	23.79
				1	5	23.79
				3	2	22.87
				6	0	22.83
	848.3	20643		1	0	23.62
				1	5	23.62
				3	2	22.67
				6	0	22.63
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	824.7	20407	1.4	1	0	23.40
				1	5	23.34
				3	2	21.92
				6	0	21.86
	836.5	20525		1	0	23.36
				1	5	23.29
				3	2	21.89
				6	0	21.83
	848.3	20643		1	0	23.16
				1	5	23.12
				3	2	21.76
				6	0	21.73
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	824.7	20407	1.4	1	0	23.33
				1	5	23.26
				3	2	22.00
				6	0	21.91
	836.5	20525		1	0	23.33
				1	5	23.26
				3	2	21.95
				6	0	21.90
	848.3	20643		1	0	22.96
				1	5	22.93
				3	2	21.73
				6	0	21.62

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	825.5	20415	3	1	0	23.65
				1	14	23.65
				8	4	22.79
				15	0	22.75
	836.5	20525		1	0	23.70
				1	14	23.70
				8	4	22.78
				15	0	22.74
	847.5	20635		1	0	23.56
				1	14	23.56
				8	4	22.61
				15	0	22.57
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	825.5	20415	3	1	0	23.28
				1	14	23.22
				8	4	21.80
				15	0	21.74
	836.5	20525		1	0	23.27
				1	14	23.20
				8	4	21.80
				15	0	21.74
	847.5	20635		1	0	23.10
				1	14	23.06
				8	4	21.70
				15	0	21.67
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	825.5	20415	3	1	0	23.21
				1	14	23.14
				8	4	21.88
				15	0	21.79
	836.5	20525		1	0	23.24
				1	14	23.17
				8	4	21.86
				15	0	21.81
	847.5	20635		1	0	22.87
				1	14	22.87
				8	4	21.67
				15	0	21.56

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	826.5	20425	5	1	0	23.72
				1	24	23.72
				12	6	22.86
				25	0	22.82
	836.5	20525		1	0	23.79
				1	24	23.79
				12	6	22.87
				25	0	22.83
	846.5	20625		1	0	23.66
				1	24	23.66
				12	6	22.71
				25	0	22.67
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	826.5	20425	5	1	0	23.35
				1	24	23.29
				12	6	21.87
				25	0	21.81
	836.5	20525		1	0	23.33
				1	24	23.29
				12	6	21.89
				25	0	21.83
	846.5	20625		1	0	23.20
				1	24	23.16
				12	6	21.80
				25	0	21.77
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	826.5	20425	5	1	0	23.21
				1	24	23.21
				12	6	21.95
				25	0	21.86
	836.5	20525		1	0	23.26
				1	24	23.26
				12	6	21.95
				25	0	21.90
	846.5	20625		1	0	22.97
				1	24	22.97
				12	6	21.77
				25	0	21.66

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	829	20450	10	1	0	23.92
				1	49	23.92
				24	12	23.02
				50	0	22.98
	836.5	20525		1	0	23.97
				1	49	23.97
				24	12	23.05
				50	0	23.01
	844	20600		1	0	23.89
				1	49	23.89
				24	12	22.92
				50	0	22.88
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	829	20450	10	1	0	23.45
				1	49	23.45
				24	12	22.03
				50	0	21.97
	836.5	20525		1	0	23.47
				1	49	23.47
				24	12	22.07
				50	0	22.01
	844	20600		1	0	23.37
				1	49	23.37
				24	12	22.01
				50	0	21.98
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	829	20450	10	1	0	23.37
				1	49	23.37
				24	12	22.11
				50	0	22.02
	836.5	20525		1	0	23.44
				1	49	23.44
				24	12	22.13
				50	0	22.08
	844	20600		1	0	23.18
				1	49	23.18
				24	12	21.98
				50	0	21.87

LTE7

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	2502.5	20775	5	1	0	23.33
				1	24	23.33
				12	6	22.42
				25	0	22.40
	2535	21100		1	0	23.34
				1	24	23.34
				12	6	22.51
				25	0	22.44
	2567.5	21425		1	0	23.33
				1	24	23.33
				12	6	22.47
				25	0	22.40
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	2502.5	20775	5	1	0	22.91
				1	24	22.83
				12	6	21.44
				25	0	21.43
	2535	21100		1	0	22.81
				1	24	22.71
				12	6	21.58
				25	0	21.52
	2567.5	21425		1	0	22.95
				1	24	22.88
				12	6	21.57
				25	0	21.51
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	2502.5	20775	5	1	0	22.76
				1	24	22.71
				12	6	21.60
				25	0	21.56
	2535	21100		1	0	22.79
				1	24	22.71
				12	6	21.64
				25	0	21.59
	2567.5	21425		1	0	22.72
				1	24	22.66
				12	6	21.59
				25	0	21.52

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	2505	20800	10	1	0	23.46
				1	49	23.46
				24	12	22.55
				50	0	22.53
	2535	21100		1	0	23.44
				1	49	23.44
				24	12	22.61
				50	0	22.54
	2565	21400		1	0	23.42
				1	49	23.42
				24	12	22.56
				50	0	22.49
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	2505	20800	10	1	0	23.04
				1	49	22.96
				24	12	21.57
				50	0	21.56
	2535	21100		1	0	22.91
				1	49	22.81
				24	12	21.68
				50	0	21.62
	2565	21400		1	0	23.04
				1	49	22.97
				24	12	21.66
				50	0	21.60
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	2505	20800	10	1	0	22.89
				1	49	22.84
				24	12	21.73
				50	0	21.69
	2535	21100		1	0	22.89
				1	49	22.81
				24	12	21.74
				50	0	21.69
	2565	21400		1	0	22.81
				1	49	22.75
				24	12	21.68
				50	0	21.61

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	2507.5	20825	15	1	0	23.54
				1	74	23.54
				40	18	22.63
				75	0	22.61
	2535	21100		1	0	23.49
				1	74	23.49
				40	18	22.66
				75	0	22.59
	2562.5	21375		1	0	23.44
				1	74	23.44
				40	18	22.58
				75	0	22.51
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	2507.5	20825	15	1	0	23.12
				1	74	23.04
				40	18	21.65
				75	0	21.64
	2535	21100		1	0	22.96
				1	74	22.86
				40	18	21.73
				75	0	21.67
	2562.5	21375		1	0	23.06
				1	74	22.99
				40	18	21.68
				75	0	21.62
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	2507.5	20825	15	1	0	22.97
				1	74	22.92
				40	18	21.81
				75	0	21.77
	2535	21100		1	0	22.94
				1	74	22.86
				40	18	21.79
				75	0	21.74
	2562.5	21375		1	0	22.83
				1	74	22.77
				40	18	21.70
				75	0	21.63

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	2510	20850	20	1	0	23.77
				1	99	23.77
				50	25	22.74
				100	0	22.72
	2535	21100		1	0	23.74
				1	99	23.74
				50	25	22.84
				100	0	22.77
	2560	21350		1	0	23.78
				1	99	23.78
				50	25	22.83
				100	0	22.76
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	2510	20850	20	1	0	23.23
				1	99	23.15
				50	25	21.76
				100	0	21.75
	2535	21100		1	0	23.14
				1	99	23.04
				50	25	21.91
				100	0	21.85
	2560	21350		1	0	23.31
				1	99	23.24
				50	25	21.93
				100	0	21.87
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	2510	20850	20	1	0	23.08
				1	99	23.03
				50	25	21.92
				100	0	21.88
	2535	21100		1	0	23.12
				1	99	23.04
				50	25	21.97
				100	0	21.92
	2560	21350		1	0	23.08
				1	99	23.02
				50	25	21.95
				100	0	21.88

6.5 Bluetooth Measurement result

Modulation type	Test Result (dBm)		
	2402MHz (Ch0)	2441MHz (Ch39)	2480MHz (Ch78)
GFSK	4.43	3.53	4.77
$\pi/4$ DQPSK	1.21	1.44	1.75
8DPSK	1.14	1.42	1.74
GFSK(BLE)	2402MHz (Ch0)	2440MHz (Ch19)	2480MHz (Ch39)
	-3.32	-0.94	-1.84

6.6 Wi-Fi Measurement result

WIFI 2.4GHz

Modulation type	Average power output (dBm)		
	2412MHz	2437MHz	2462MHz
11b	16.55	16.72	17.13
11g	14.97	15.31	16.57
11n HT20	14.63	15.34	15.36

6.7 Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied.

SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and ≤ 50 mm

According to the KDB447498 4.3.1 (1)

For 100 MHz to 6 GHz and test separation distances ≤ 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f} \text{ (GHz)}] \leq 3.0$ for 1-g SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm, and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

This is equivalent to $[(\text{max. power of channel, including tune-up tolerance, mW}) / (60 / \sqrt{f}(\text{GHz}) \text{ mW})] \cdot [20 \text{ mm} / (\text{min. test separation distance, mm})] \leq 1.0$ for 1-g SAR; also see Appendix A for approximate exclusion threshold values at selected frequencies and distances.
According to the KDB447498 appendix A

Approximate SAR Test Exclusion Power Thresholds at Selected Frequencies and Test Separation Distances are illustrated in the following Table.

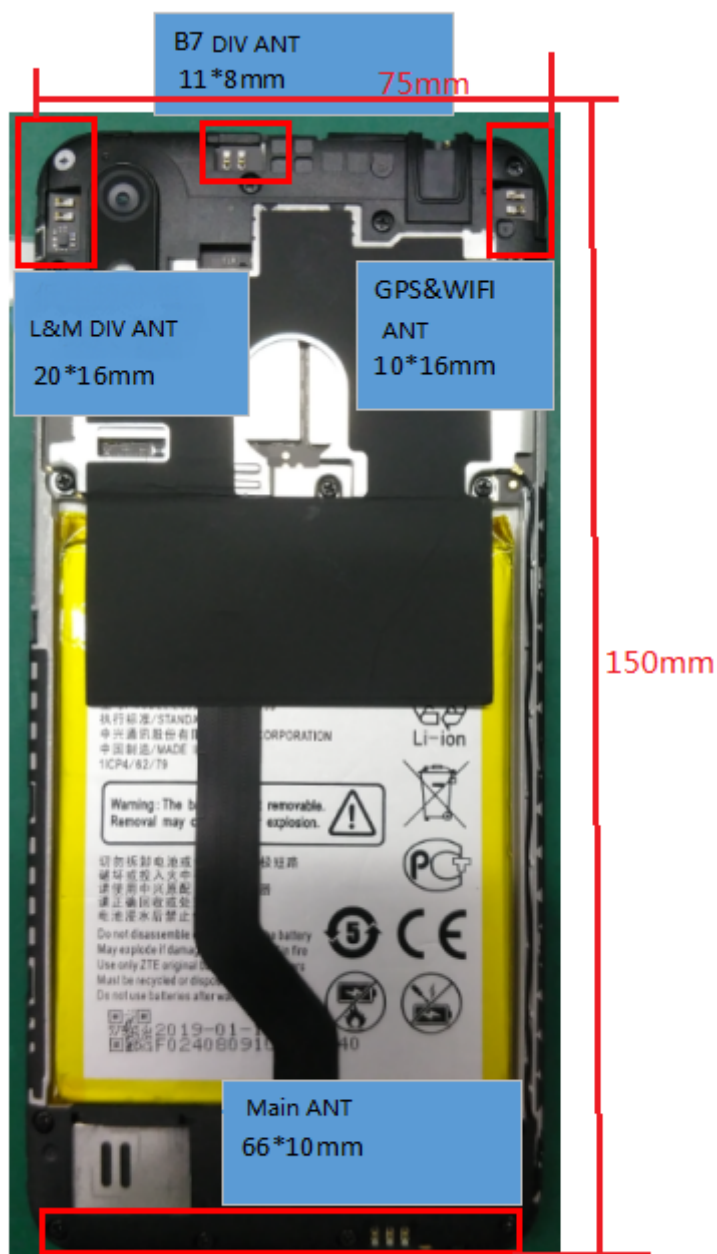
MHz	5	10	15	20	25	mm
150	39	77	116	155	194	SAR Test Exclusion Threshold (mW)
300	27	55	82	110	137	
450	22	45	67	89	112	
835	16	33	49	66	82	
900	16	32	47	63	79	
1500	12	24	37	49	61	
1900	11	22	33	44	54	
2450	10	19	29	38	48	
3600	8	16	24	32	40	
5200	7	13	20	26	33	
5400	6	13	19	26	32	
5800	6	12	19	25	31	

Summary of Transmitters

Band/Mode	Position	Max. RF output power (mW)	SAR test exclusion Threshold (mW)	SAR Required
(2.4~2.4835) GHz Bluetooth	Head	3.00	10	No
	Body	3.00	19	No
(2.4~2.4835) GHz Wi-Fi	Head	51.64	10	Yes
	Body	51.64	19	Yes

6.8 RF exposure conditions

Refer to the follow picture “Antenna Locations & Separation Distances” for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.



6.8.1 Head Exposure Conditions For WWAN

Test Configurations	SAR Required	Note
Left Touch	yes	/
Left Tilt (15°)	yes	/
Right Touch	yes	/
Right Tilt (15°)	yes	/

For WLAN

Test Configurations	SAR Required	Note
Left Touch	yes	/
Left Tilt (15°)	yes	/
Right Touch	yes	/
Right Tilt (15°)	yes	/

6.8.2 Body Exposure conditions For WWAN

Test Configurations	SAR Required	Note
Back	yes	/
Front	yes	/

For WLAN

Test Configurations	SAR Required	Note
Back	yes	/
Front	yes	/

6.8.3 Hotspot Exposure conditions For WWAN

Test Configurations	Antenna-to-edge/surface	SAR Required
Back	<25 mm	Yes
Front	<25 mm	Yes
Top	>25 mm	No
Bottom	<25 mm	Yes
Right	<25 mm	Yes
Left	<25 mm	Yes

For WLAN

Test Configurations	Antenna-to-edge/surface	SAR Required
Back	<25 mm	Yes
Front	<25 mm	Yes
Top	<25 mm	Yes
Bottom	>25 mm	No
Left	<25 mm	Yes
Right	>25 mm	No

6.9 System Checking

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyzer. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system checking results (dielectric parameters and SAR values) are given in the table below.

Date Tested	System dipole	T.S. Liquid	SAR measured (normalized to 1W)		Target (Ref. Value)	Delta (%)	Tolerance (%)
2019/03/18	D835V2	Head	1g	8.68	9.52	-8.8	±10
2019/03/19	D1800V2	Head	1g	38.12	39.30	-3.0	±10
2019/03/20	D2000V2	Head	1g	38.60	40.30	-4.2	±10
2019/03/21	D2450V2	Head	1g	52.80	53.60	-1.4	±10

Date Tested	System dipole	T.S. Liquid	SAR measured (normalized to 1W)		Target (Ref. Value)	Delta (%)	Tolerance (%)
2019/03/18	D835V2	Body	1g	8.76	9.44	-7.2	±10
2019/03/19	D1800V2	Body	1g	38.40	39.50	-2.7	±10
2019/03/20	D2000V2	Body	1g	38.84	40.30	-3.6	±10
2019/03/21	D2450V2	Body	1g	52.96	54.40	-2.6	±10

According to KDB 865664 D01&IEEE 1528-2013, 2450MHz system check could cover the frequency range from 2205MHz to 2695 MHz

Plots of the system checking scans are given in Appendix A.

Tissue Simulants used in the Measurements

For the measurement of the following parameters the SPEAG DAKS-3.5 dielectric parameter probe is used, representing the open-ended coaxial probe measurement procedure.

Date Tested	Freq. (MHz)	Liquid parameters	measured	Target	Delta (%)	Tolerance (%)
2019/03/18	Head 835	ϵ_r	41.53	41.50	0.1	± 5
		$\sigma[\text{S/m}]$	0.91	0.90	1.1	± 5
2019/03/19	Head 1800	ϵ_r	40.00	40.00	0.0	± 5
		$\sigma[\text{S/m}]$	1.40	1.40	0.0	± 5
2019/03/20	Head 2000	ϵ_r	39.82	40.00	-0.5	± 5
		$\sigma[\text{S/m}]$	1.38	1.40	-1.1	± 5
2019/03/21	Head 2450	ϵ_r	39.58	39.20	1.0	± 5
		$\sigma[\text{S/m}]$	1.85	1.80	2.8	± 5
2019/03/22	Head 2600	ϵ_r	40.22	39	3.1	± 5
		$\sigma[\text{S/m}]$	2.01	1.96	2.6	± 5

Date Tested	Freq. (MHz)	Liquid parameters	measured	Target	Delta (%)	Tolerance (%)
2019/03/18	Body 835	ϵ_r	55.24	55.20	0.1	± 5
		$\sigma[\text{S/m}]$	0.97	0.97	0.0	± 5
2019/03/19	Body 1800	ϵ_r	53.29	53.30	0.0	± 5
		$\sigma[\text{S/m}]$	1.50	1.52	-1.3	± 5
2019/03/20	Body 2000	ϵ_r	52.60	53.30	-1.3	± 5
		$\sigma[\text{S/m}]$	1.59	1.52	4.3	± 5
2019/03/21	Body 2450	ϵ_r	51.15	52.70	-2.9	± 5
		$\sigma[\text{S/m}]$	2.02	1.95	3.6	± 5
2019/03/22	Body 2600	ϵ_r	51.4	52.5	-2.1	± 5
		$\sigma[\text{S/m}]$	2.22	2.16	2.8	± 5

6.10 SAR TEST RESULT

In order to determine the largest value of the peak spatial-average SAR of a handset, all device positions, configurations, and operational modes should be tested for each frequency band according to Steps 1 to 3 below.

Step 1: The tests should be performed at the channel that is closest to the center of the transmit frequency band.

a) All device positions (cheek and tilt, for both left and right sides of the SAM phantom),
b) All configurations for each device position in a), e.g., antenna extended and retracted, and
c) All operational modes for each device position in item a) and configuration in item b) in each frequency band, e.g., analog and digital, If more than three frequencies need to be tested (i.e., $N_c > 3$), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing the highest peak spatial-average SAR determined in Step 1 for each frequency, perform all tests at all other test frequency channels, e.g., lowest and highest frequencies. In addition, for all other conditions (device position, configuration, and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies should be tested as well.

Step 3: Examine all data to determine the largest value of the peak.

Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.

Scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.

Reported SAR (W/kg) = Measured SAR (W/kg) * Scaling Factor

2. Per KDB 447498 D01v06, for each exposure position, if the highest output channel reported SAR ≤ 0.8 W/kg, other channels SAR testing are not necessary.

3. The distance between the EUT and the phantom bottom is 10mm.

The measured and reported Head/body SAR values for the test device are tabulated below:

Mode: GSM 850(GPRS)

fL(MHz)=824.2MHz

fM(MHz)=836.5MHz

fH(MHz)= 848.8MHz

SAR Values (850MHz Band)

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1g Average	1g Average
Left cheek	GPRS 2TX (head)	L	31.03	31.50	1.11	---	---
		M	31.01	31.50	1.12	0.072	0.081
		H	31.02	31.50	1.12	---	---
Left Tilted		L	31.03	31.50	1.11	---	---
		M	31.01	31.50	1.12	0.043	0.048
		H	31.02	31.50	1.12	---	---
Right cheek		L	31.03	31.50	1.11	---	---
		M	31.01	31.50	1.12	0.109	0.122
		H	31.02	31.50	1.12	---	---
Right Tilted		L	31.03	31.50	1.11	---	---
		M	31.01	31.50	1.12	0.041	0.046
		H	31.02	31.50	1.12	---	---
Back	GPRS 2TX (body-worn)	L	31.03	31.50	1.11	---	---
		M	31.01	31.50	1.12	0.261	0.292
		H	31.02	31.50	1.12	---	---
Front		L	31.03	31.50	1.11	---	---
		M	31.01	31.50	1.12	0.083	0.093
		H	31.02	31.50	1.12	---	---
Bottom	GPRS 2TX (hotspot)	L	31.03	31.50	1.11	---	---
		M	31.01	31.50	1.12	0.064	0.072
		H	31.02	31.50	1.12	---	---
Left		L	31.03	31.50	1.11	---	---
		M	31.01	31.50	1.12	0.074	0.083
		H	31.02	31.50	1.12	---	---
Right		L	31.03	31.50	1.11	---	---
		M	31.01	31.50	1.12	0.124	0.139
		H	31.02	31.50	1.12	---	---

Mode: GSM1900(GPRS)

fL (MHz)=1850.2MHz fM (MHz)=1880.0MHz fH (MHz)=1909.8MHz

SAR Values (1900MHz Band)

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1g Average	1g Average
Left cheek	GPRS 2TX (head)	L	27.45	27.50	1.01	---	---
		M	27.23	27.50	1.06	0.091	0.096
		H	27.03	27.50	1.11	---	---
Left Tilted		L	27.45	27.50	1.01	---	---
		M	27.23	27.50	1.06	0.026	0.028
		H	27.03	27.50	1.11	---	---
Right cheek		L	27.45	27.50	1.01	---	---
		M	27.23	27.50	1.06	0.030	0.032
		H	27.03	27.50	1.11	---	---
Right Tilted		L	27.45	27.50	1.01	---	---
		M	27.23	27.50	1.06	0.026	0.028
		H	27.03	27.50	1.11	---	---
Back	GPRS 2TX (body-worn)	L	27.45	27.50	1.01	---	---
		M	27.23	27.50	1.06	0.518	0.549
		H	27.03	27.50	1.11	---	---
Front		L	27.45	27.50	1.01	---	---
		M	27.23	27.50	1.06	0.079	0.084
		H	27.03	27.50	1.11	---	---
Bottom	GPRS 2TX (hotspot)	L	27.45	27.50	1.01	---	---
		M	27.23	27.50	1.06	0.353	0.374
		H	27.03	27.50	1.11	---	---
Left		L	27.45	27.50	1.01	---	---
		M	27.23	27.50	1.06	0.105	0.111
		H	27.03	27.50	1.11	---	---
Right		L	27.45	27.50	1.01	---	---
		M	27.23	27.50	1.06	0.017	0.018
		H	27.03	27.50	1.11	---	---

Mode: WCDMA BAND2

fL (MHz)=1852.4MHz fM (MHz)=1880MHz fH (MHz)= 1907.6MHz

SAR Values (WCDMA BAND2)

Limit of SAR (W/kg) :< 1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1g Average	1g Average
Left cheek	12.2KRMC (head)	L	23.78	24.00	1.05	---	---
		M1 (Main supply)	23.79	24.00	1.05	0.267	0.280
		M1 (Second supply)	23.79	24.00	1.05	0.243	0.255
Left Tilted		H	23.80	24.00	1.05	---	---
		L	23.78	24.00	1.05	---	---
Right cheek		M	23.79	24.00	1.05	0.082	0.086
		H	23.80	24.00	1.05	---	---
		L	23.78	24.00	1.05	---	---
		M	23.79	24.00	1.05	0.156	0.164
Right Tilted		H	23.80	24.00	1.05	---	---
		L	23.78	24.00	1.05	---	---
		M	23.79	24.00	1.05	0.082	0.086
Back	12.2KRMC (body-worn)	L1	23.78	24.00	1.05	0.834	0.876
		M1 (Main supply)	23.79	24.00	1.05	1.050	1.103
		M1 (Second supply)	23.79	24.00	1.05	0.926	0.972
		H1	23.80	24.00	1.05	0.835	0.877
		L2	23.78	24.00	1.05	0.835	0.877
		M2	23.79	24.00	1.05	1.030	1.082
		H2	23.80	24.00	1.05	0.841	0.883
	Front	L	23.78	24.00	1.05	---	---
		M	23.79	24.00	1.05	0.196	0.206
		H	23.80	24.00	1.05	---	---
Bottom	12.2KRMC (hotspot)	L	23.78	24.00	1.05	0.758	0.796
		M1	23.79	24.00	1.05	0.918	0.964
		M2	23.79	24.00	1.05	0.883	0.927
		H	23.80	24.00	1.05	0.678	0.712
Left		L	23.78	24.00	1.05	---	---
		M	23.79	24.00	1.05	0.168	0.176
		H	23.80	24.00	1.05	---	---
Right		L	23.78	24.00	1.05	---	---
		M	23.79	24.00	1.05	0.349	0.366
		H	23.80	24.00	1.05	---	---

Mode: WCDMA BAND4

fL (MHz)= 1712.4MHz fM (MHz)= 1732.4MHz fH (MHz)= 1752.6MHz

SAR Values (WCDMA BAND4)

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1g Average	1g Average
Left cheek	12.2KRMC (head)	L	23.79	24.00	1.05	---	---
		M	23.77	24.00	1.05	0.168	0.176
		H	23.78	24.00	1.05	---	---
Left Tilted		L	23.79	24.00	1.05	---	---
		M	23.77	24.00	1.05	0.083	0.087
		H	23.78	24.00	1.05	---	---
Right cheek		L	23.79	24.00	1.05	---	---
		M	23.77	24.00	1.05	0.098	0.102
		H	23.78	24.00	1.05	---	---
Right Tilted		L	23.79	24.00	1.05	---	---
		M	23.77	24.00	1.05	0.091	0.095
		H	23.78	24.00	1.05	---	---
Back	12.2KRMC (body-worn)	L	23.79	24.00	1.05	0.639	0.671
		M1	23.77	24.00	1.05	0.902	0.947
		H1	23.78	24.00	1.05	0.876	0.920
		M2	23.77	24.00	1.05	0.873	0.917
		H2	23.78	24.00	1.05	0.881	0.925
Front		L	23.79	24.00	1.05	---	---
		M	23.77	24.00	1.05	0.187	0.196
		H	23.78	24.00	1.05	---	---
Bottom	12.2KRMC (hotspot)	L	23.79	24.00	1.05	---	---
		M	23.77	24.00	1.05	0.499	0.524
		H	23.78	24.00	1.05	---	---
Left		L	23.79	24.00	1.05	---	---
		M	23.77	24.00	1.05	0.105	0.110
		H	23.78	24.00	1.05	---	---
Right		L	23.79	24.00	1.05	---	---
		M	23.77	24.00	1.05	0.273	0.287
		H	23.78	24.00	1.05	---	---

Mode: WCDMA BAND5

fL (MHz)=826.4MHz

fM (MHz)=836.4MHz

fH (MHz)= 846.6MHz

SAR Values (WCDMA BAND5)

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1g Average	1g Average
Left cheek	12.2KRMC (head)	L	23.62	24.00	1.09	---	---
		M	23.57	24.00	1.10	0.134	0.147
		H	23.55	24.00	1.11	---	---
Left Tilted		L	23.62	24.00	1.09	---	---
		M	23.57	24.00	1.10	0.052	0.058
		H	23.55	24.00	1.11	---	---
Right cheek		L	23.62	24.00	1.09	---	---
		M	23.57	24.00	1.10	0.118	0.130
		H	23.55	24.00	1.11	---	---
Right Tilted		L	23.62	24.00	1.09	---	---
		M	23.57	24.00	1.10	0.054	0.060
		H	23.55	24.00	1.11	---	---
Back	12.2KRMC (body-worn)	L	23.62	24.00	1.09	---	---
		M	23.57	24.00	1.10	0.252	0.277
		H	23.55	24.00	1.11	---	---
Front		L	23.62	24.00	1.09	---	---
		M	23.57	24.00	1.10	0.097	0.107
		H	23.55	24.00	1.11	---	---
Bottom	12.2KRMC (hotspot)	L	23.62	24.00	1.09	---	---
		M	23.57	24.00	1.10	0.085	0.093
		H	23.55	24.00	1.11	---	---
Left		L	23.62	24.00	1.09	---	---
		M	23.57	24.00	1.10	0.086	0.095
		H	23.55	24.00	1.11	---	---
Right		L	23.62	24.00	1.09	---	---
		M	23.57	24.00	1.10	0.106	0.117
		H	23.55	24.00	1.11	---	---

Mode: LTE Band 2

fL (MHz)= 1860MHz

fM (MHz)= 1880MHz

fH (MHz)=1900MHz

SAR Values(LTE BAND2)

Limit of SAR (W/kg) : <1.6W/kg (1g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					1g Average	1g Average
Left cheek	20BW 1RB (head)	L	23.82	24.00	1.04	---	---
		M	23.87	24.00	1.03	0.260	0.268
		H	23.64	24.00	1.09	---	---
Left Tilted		L	23.82	24.00	1.04	---	---
		M	23.87	24.00	1.03	0.107	0.110
		H	23.64	24.00	1.09	---	---
Right cheek		L	23.82	24.00	1.04	---	---
		M	23.87	24.00	1.03	0.095	0.098
		H	23.64	24.00	1.09	---	---
Right Tilted		L	23.82	24.00	1.04	---	---
		M	23.87	24.00	1.03	0.104	0.107
		H	23.64	24.00	1.09	---	---
Back	20BW 1RB (body- worn)	L1	23.82	24.00	1.04	0.713	0.742
		M1	23.87	24.00	1.03	0.931	0.959
		H1	23.64	24.00	1.09	0.808	0.881
		L2	23.82	24.00	1.04	0.701	0.729
		M2	23.87	24.00	1.03	0.895	0.922
		H2	23.64	24.00	1.09	0.812	0.885
Front		L	23.82	24.00	1.04	---	---
		M	23.87	24.00	1.03	0.199	0.205
		H	23.64	24.00	1.09	---	---
Bottom	20BW 1RB (hotspot)	L	23.82	24.00	1.04	---	---
		M	23.87	24.00	1.03	0.704	0.725
		H	23.64	24.00	1.09	---	---
Left		L	23.82	24.00	1.04	---	---
		M	23.87	24.00	1.03	0.141	0.145
		H	23.64	24.00	1.09	---	---
Right		L	23.82	24.00	1.04	---	---
		M	23.87	24.00	1.03	0.085	0.087
		H	23.64	24.00	1.09	---	---

Left cheek	20BW 50%RB (head)	L	22.81	23.00	1.04	---	---
		M	22.84	23.00	1.04	0.198	0.206
		H	22.65	23.00	1.08	---	---
Left Tilted		L	22.81	23.00	1.04	---	---
		M	22.84	23.00	1.04	0.083	0.086
		H	22.65	23.00	1.08	---	---
Right cheek		L	22.81	23.00	1.04	---	---
		M	22.84	23.00	1.04	0.071	0.074
		H	22.65	23.00	1.08	---	---
Right Tilted		L	22.81	23.00	1.04	---	---
		M	22.84	23.00	1.04	0.083	0.087
		H	22.65	23.00	1.08	---	---
Back	20BW 50%RB (body- worn)	L	22.81	23.00	1.04	---	---
		M	22.84	23.00	1.04	0.705	0.733
		H	22.65	23.00	1.08	---	---
Front		L	22.81	23.00	1.04	---	---
		M	22.84	23.00	1.04	0.102	0.106
		H	22.65	23.00	1.08	---	---

Back	20BW 100%RB (body- worn)	L	22.77	23.00	1.05	---	---
		M	22.72	23.00	1.07	0.606	0.648
		H	22.61	23.00	1.09	---	---

Mode: LTE Band 4

fL (MHz)= 1710.7MHz fM (MHz)= 1732.5MHz fH (MHz)= 1754.3MHz

SAR Values (LTE BAND4)

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					1g Average	1g Average
Left cheek	20BW 1RB (head)	L	23.72	24.00	1.07	---	---
		M	23.78	24.00	1.05	0.140	0.147
		H	23.79	24.00	1.05	---	---
Left Tilted		L	23.72	24.00	1.07	---	---
		M	23.78	24.00	1.05	0.078	0.081
		H	23.79	24.00	1.05	---	---
Right cheek		L	23.72	24.00	1.07	---	---
		M	23.78	24.00	1.05	0.066	0.069
		H	23.79	24.00	1.05	---	---
Right Tilted		L	23.72	24.00	1.07	---	---
		M	23.78	24.00	1.05	0.068	0.071
		H	23.79	24.00	1.05	---	---
Back	20BW 1RB (body- worn)	L	23.72	24.00	1.07	---	---
		M	23.78	24.00	1.05	0.761	0.799
		H	23.79	24.00	1.05	---	---
Front		L	23.72	24.00	1.07	---	---
		M	23.78	24.00	1.05	0.171	0.180
		H	23.79	24.00	1.05	---	---
Bottom	20BW 1RB (hotspot)	L	23.72	24.00	1.07	---	---
		M	23.78	24.00	1.05	0.358	0.376
		H	23.79	24.00	1.05	---	---
Left		L	23.72	24.00	1.07	---	---
		M	23.78	24.00	1.05	0.078	0.081
		H	23.79	24.00	1.05	---	---
Right		L	23.72	24.00	1.07	---	---
		M	23.78	24.00	1.05	0.059	0.062
		H	23.79	24.00	1.05	---	---

Left cheek	20BW 50%RB (head)	L	22.77	23.00	1.05	---	---
		M	22.82	23.00	1.04	0.109	0.113
		H	22.72	23.00	1.07	---	---
Left Tilted		L	22.77	23.00	1.05	---	---
		M	22.82	23.00	1.04	0.059	0.061
		H	22.72	23.00	1.07	---	---
Right cheek		L	22.77	23.00	1.05	---	---
		M	22.82	23.00	1.04	0.041	0.043
		H	22.72	23.00	1.07	---	---
Right Tilted		L	22.77	23.00	1.05	---	---
		M	22.82	23.00	1.04	0.045	0.047
		H	22.72	23.00	1.07	---	---
Back	20BW 50%RB (body- worn)	L	22.77	23.00	1.05	---	---
		M	22.82	23.00	1.04	0.528	0.549
		H	22.72	23.00	1.07	---	---
Front		L	22.77	23.00	1.05	---	---
		M	22.82	23.00	1.04	0.129	0.134
		H	22.72	23.00	1.07	---	---

Mode: LTE Band 5

fL (MHz)=829 MHz fM (MHz)=836.5MHz fH (MHz)= 844MHz

SAR Values (LTE BAND5)

Limit of SAR (W/kg) : <1.6W/kg (1g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					1g Average	1g Average
Left cheek	10BW 1RB (head)	L	23.92	24.00	1.02	---	---
		M	23.97	24.00	1.01	0.131	0.132
		H	23.89	24.00	1.03	---	---
Left Tilted		L	23.92	24.00	1.02	---	---
		M	23.97	24.00	1.01	0.069	0.070
		H	23.89	24.00	1.03	---	---
Right cheek		L	23.92	24.00	1.02	---	---
		M	23.97	24.00	1.01	0.124	0.125
		H	23.89	24.00	1.03	---	---
Right Tilted		L	23.92	24.00	1.02	---	---
		M	23.97	24.00	1.01	0.068	0.069
		H	23.89	24.00	1.03	---	---
Back	10BW 1RB (body- worn)	L	23.92	24.00	1.02	---	---
		M	23.97	24.00	1.01	0.287	0.290
		H	23.89	24.00	1.03	---	---
Front		L	23.92	24.00	1.02	---	---
		M	23.97	24.00	1.01	0.097	0.097
		H	23.89	24.00	1.03	---	---
Bottom	10BW 1RB (hotspot)	L	23.92	24.00	1.02	---	---
		M	23.97	24.00	1.01	0.065	0.066
		H	23.89	24.00	1.03	---	---
Left		L	23.92	24.00	1.02	---	---
		M	23.97	24.00	1.01	0.102	0.103
		H	23.89	24.00	1.03	---	---
Right		L	23.92	24.00	1.02	---	---
		M	23.97	24.00	1.01	0.105	0.106
		H	23.89	24.00	1.03	---	---

Left cheek	10BW 50%RB (head)	L	23.02	23.50	1.12	---	---
		M	23.05	23.50	1.11	0.102	0.113
		H	22.92	23.50	1.14	---	---
Left Tilted		L	23.02	23.50	1.12	---	---
		M	23.05	23.50	1.11	0.058	0.064
		H	22.92	23.50	1.14	---	---
Right cheek		L	23.02	23.50	1.12	---	---
		M	23.05	23.50	1.11	0.093	0.103
		H	22.92	23.50	1.14	---	---
Right Tilted		L	23.02	23.50	1.12	---	---
		M	23.05	23.50	1.11	0.042	0.047
		H	22.92	23.50	1.14	---	---
Back	10BW 50%RB (body- worn)	L	23.02	23.50	1.12	---	---
		M	23.05	23.50	1.11	0.184	0.204
		H	22.92	23.50	1.14	---	---
Front		L	23.02	23.50	1.12	---	---
		M	23.05	23.50	1.11	0.073	0.081
		H	22.92	23.50	1.14	---	---

Mode: LTE Band 7

fL (MHz)=2510 MHz

fM (MHz)=2535MHz

fH (MHz)= 2560MHz

SAR Values (LTE BAND7)

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					1g Average	1g Average
Left cheek	20BW 1RB (head)	L	23.77	24.00	1.05	---	---
		M	23.74	24.00	1.06	0.081	0.086
		H	23.78	24.00	1.05	---	---
Left Tilted		L	23.77	24.00	1.05	---	---
		M	23.74	24.00	1.06	0.064	0.068
		H	23.78	24.00	1.05	---	---
Right cheek		L	23.77	24.00	1.05	---	---
		M	23.74	24.00	1.06	0.057	0.061
		H	23.78	24.00	1.05	---	---
Right Tilted		L	23.77	24.00	1.05	---	---
		M	23.74	24.00	1.06	0.109	0.116
		H	23.78	24.00	1.05	---	---
Back	20BW 1RB (body-worn)	L1	23.77	24.00	1.05	0.822	0.863
		M1	23.74	24.00	1.06	1.010	1.071
		H1	23.78	24.00	1.05	0.777	0.816
		L2	23.77	24.00	1.05	0.830	0.872
		M2	23.74	24.00	1.06	1.000	1.060
		H2	23.78	24.00	1.05	0.739	0.776
Front		L	23.77	24.00	1.05	---	---
		M	23.74	24.00	1.06	0.144	0.153
		H	23.78	24.00	1.05	---	---
Bottom	20BW 1RB (hotspot)	L	23.77	24.00	1.05	---	---
		M	23.74	24.00	1.06	0.628	0.666
		H	23.78	24.00	1.05	---	---
Left		L	23.77	24.00	1.05	---	---
		M	23.74	24.00	1.06	0.149	0.158
		H	23.78	24.00	1.05	---	---
Right		L	23.77	24.00	1.05	---	---
		M	23.74	24.00	1.06	0.087	0.092
		H	23.78	24.00	1.05	---	---

Left cheek	20BW 50%RB (head)	L	22.74	23.00	1.06	---	---
		M	22.84	23.00	1.04	0.077	0.080
		H	22.83	23.00	1.04	---	---
Left Tilted		L	22.74	23.00	1.06	---	---
		M	22.84	23.00	1.04	0.052	0.054
		H	22.83	23.00	1.04	---	---
Right cheek		L	22.74	23.00	1.06	---	---
		M	22.84	23.00	1.04	0.041	0.043
		H	22.83	23.00	1.04	---	---
Right Tilted		L	22.74	23.00	1.06	---	---
		M	22.84	23.00	1.04	0.070	0.073
		H	22.83	23.00	1.04	---	---
Back	20BW 50%RB (body- worn)	L	22.74	23.00	1.06	0.748	0.793
		M1	22.84	23.00	1.04	0.936	0.973
		H	22.83	23.00	1.04	0.659	0.685
		M2	22.84	23.00	1.04	0.891	0.927
Front		L	22.74	23.00	1.06	---	---
		M	22.84	23.00	1.04	0.051	0.053
		H	22.83	23.00	1.04	---	---

Test Case		CH	Measure Conducte d Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					1g Average	1g Average
Back	20BW 100%RB (body- worn)	L	22.72	23.00	1.07	---	---
		M	22.77	23.00	1.05	0.621	0.652
		H	22.76	23.00	1.06	---	---

Mode: Wi-Fi 2.4GHz

fL (MHz)=2412MHz fM (MHz)=2437MHz

fH (MHz)= 2462MHz

SAR Values (Wi-Fi 802.11b)

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1g Average	1g Average
Left cheek	802.11b (head)	L	16.55	17.50	1.24	---	---
		M	16.72	17.50	1.20	0.019	0.023
		H	17.13	17.50	1.09	---	---
Left Tilted		L	16.55	17.50	1.24	---	---
		M	16.72	17.50	1.20	0.020	0.024
		H	17.13	17.50	1.09	---	---
Right cheek		L	16.55	17.50	1.24	---	---
		M	16.72	17.50	1.20	0.035	0.042
		H	17.13	17.50	1.09	---	---
Right Tilted		L	16.55	17.50	1.24	---	---
		M	16.72	17.50	1.20	0.036	0.043
		H	17.13	17.50	1.09	---	---
Back	802.11b (body- worn)	L	16.55	17.50	1.24	---	---
		M	16.72	17.50	1.20	0.046	0.055
		H	17.13	17.50	1.09	---	---
Front		L	16.55	17.50	1.24	---	---
		M	16.72	17.50	1.20	0.011	0.013
		H	17.13	17.50	1.09	---	---
Top	802.11b (hotspot)	L	16.55	17.50	1.24	---	---
		M	16.72	17.50	1.20	0.015	0.018
		H	17.13	17.50	1.09	---	---
Left		L	16.55	17.50	1.24	---	---
		M	16.72	17.50	1.20	0.014	0.017
		H	17.13	17.50	1.09	---	---

6.11 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The Highest Reported SAR configuration in Each Frequency Band

Frequency band	Air interface	Head(w/kg)	Body-worn(w/kg)	Hotspot(w/kg)
850 MHz	GSM850 WCDMA BAND5 LTE BAND5	<0.8	<0.8	<0.8
1800/1900 MHz	GSM1900 WCDMA BAND2 WCDMA BAND4 LTE BAND4 LTE BAND2	<0.8	>0.8	>0.8
2.4 GHz	WIFI LTE BAND7	<0.8	>0.8	<0.8

6.12 Simultaneous Transmission SAR Analysis

The sum of SAR values for GSM & Wi-Fi

	MAXIMUM SAR VALUE FOR HEAD	MAXIMUM SAR VALUE FOR BODY WORN	MAXIMUM SAR VALUE FOR HOTSPOT
GSM	0.122	0.549	0.549
Wi-Fi	0.042	0.055	0.055
Sum	0.164	0.604	0.604
Note	Right cheek: GSM850+wifi2.4G	Back: GSM1900+wifi2.4G	Back: GSM1900+wifi2.4G

According to the above tables, the sum of SAR values for GSM and Wi-Fi < 1.6W/kg. So simultaneous transmission SAR are not required for Wi-Fi transmitter.

The sum of SAR values for WCDMA & Wi-Fi

	MAXIMUM SAR VALUE FOR HEAD	MAXIMUM SAR VALUE FOR BODY	MAXIMUM SAR VALUE FOR HOTSPOT
WCDMA	0.280	1.103	1.103
Wi-Fi	0.023	0.055	0.055
Sum	0.303	1.158	1.158
Note	Left cheek: WCDMA2 +WIFI 2.4G	Back: WCDMA2+ WIFI 2.4G	Back: WCDMA2+ WIFI 2.4G

According to the above tables, the sum of SAR values for WCDMA and Wi-Fi < 1.6W/kg. So simultaneous transmission SAR are not required for Wi-Fi transmitter.

The sum of SAR values for LTE& Wi-Fi

	MAXIMUM SAR VALUE FOR HEAD	MAXIMUM SAR VALUE FOR BODY	MAXIMUM SAR VALUE FOR HOTSPOT
LTE	0.268	1.071	1.071
Wi-Fi	0.023	0.055	0.055
Sum	0.291	1.126	1.126
Note	Left cheek: LTE2 +WIFI 2.4G	Back: LTE7 +WIFI 2.4G	Back: LTE7 +WIFI 2.4G

According to the above tables, the sum of SAR values for LTE and Wi-Fi < 1.6W/kg. So simultaneous transmission SAR are not required for Wi-Fi transmitter.

According to the formula (KDB447498 4.3.2) the Bluetooth SAR as follow:

$[(\text{max. power of channel, including tune-up tolerance, mw}) / (\text{min. test separation distance, mm})]$

$[\sqrt{f(\text{GHz})/x}] \text{ W/kg}$ for test separation distances $\leq 50\text{mm}$.

Head:

min. test separation distance = 5mm

Body:

min. test separation distance = 10mm

Where $x=7.5$ for 1-g SAR, and $x=18.75$ for 10-g SAR.

Estimated SAR Bluetooth

Mode	Position	F(GHz)	Distance(mm)	Estimated
Bluetooth	Head	2.480	5	0.126
	Body	2.480	10	0.063

The sum of SAR values for GSM & Bluetooth

	MAXIMUM SAR VALUE FOR HEAD	MAXIMUM SAR VALUE FOR BODY WORN
GSM	0.122	0.549
Bluetooth	0.126	0.063
Sum	0.248	0.612
Note	Right cheek: GSM850+BT	Back: GSM1900+BT

According to the above tables, the sum of SAR values for GSM and Bluetooth $< 1.6\text{W/kg}$. So simultaneous transmission SAR are not required for Bluetooth transmitter.

The sum of SAR values for WCDMA & Bluetooth

	MAXIMUM SAR VALUE FOR HEAD	MAXIMUM SAR VALUE FOR BODY WORN
WCDMA	0.280	1.103
Bluetooth	0.126	0.063
Sum	0.406	1.166
Note	Left cheek: WCDMA2+BT	Back: WCDMA2+BT

According to the above tables, the sum of SAR values for WCDMA and Bluetooth $< 1.6\text{W/kg}$. So simultaneous transmission SAR are not required for Bluetooth transmitter.

The sum of SAR values for LTE& Bluetooth

	MAXIMUM SAR VALUE FOR HEAD	MAXIMUM SAR VALUE FOR BODY
LTE	0.268	1.071
Bluetooth	0.126	0.063
Sum	0.394	1.134
Note	Left cheek: LTE2+BT	Back: LTE7 +BT

According to the above tables, the sum of SAR values for LTE and Bluetooth $< 1.6\text{W/kg}$. So simultaneous transmission SAR are not required for Bluetooth transmitter.

7 MEASUREMENT UNCERTAINTY

(0.3 - 3 GHz range)								
Error Description	Uncert. value	Prob. Dist.	Div.	(c_i) 1g	(c_i) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(v_i) v_{eff}
Measurement System								
Probe Calibration	±6.0 %	N	1	1	1	±6.0 %	±6.0 %	∞
Axial Isotropy	±4.7 %	R	$\sqrt{3}$	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	$\sqrt{3}$	0.7	0.7	±3.9 %	±3.9 %	∞
Boundary Effects	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	∞
Linearity	±4.7 %	R	$\sqrt{3}$	1	1	±2.7 %	±2.7 %	∞
System Detection Limits	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	∞
Modulation Response ^m	±2.4 %	R	$\sqrt{3}$	1	1	±1.4 %	±1.4 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	$\sqrt{3}$	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	$\sqrt{3}$	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.4 %	R	$\sqrt{3}$	1	1	±0.2 %	±0.2 %	∞
Probe Positioning	±2.9 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
Max. SAR Eval.	±2.0 %	R	$\sqrt{3}$	1	1	±1.2 %	±1.2 %	∞
Test Sample Related								
Device Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Power Drift	±5.0 %	R	$\sqrt{3}$	1	1	±2.9 %	±2.9 %	∞
Power Scaling ^P	±0 %	R	$\sqrt{3}$	1	1	±0.0 %	±0.0 %	∞
Phantom and Setup								
Phantom Uncertainty	±6.1 %	R	$\sqrt{3}$	1	1	±3.5 %	±3.5 %	∞
SAR correction	±1.9 %	R	$\sqrt{3}$	1	0.84	±1.1 %	±0.9 %	∞
Liquid Conductivity (mea.) ^{DAK}	±2.5 %	R	$\sqrt{3}$	0.78	0.71	±1.1 %	±1.0 %	∞
Liquid Permittivity (mea.) ^{DAK}	±2.5 %	R	$\sqrt{3}$	0.26	0.26	±0.3 %	±0.4 %	∞
Temp. unc. - Conductivity ^{BB}	±3.4 %	R	$\sqrt{3}$	0.78	0.71	±1.5 %	±1.4 %	∞
Temp. unc. - Permittivity ^{BB}	±0.4 %	R	$\sqrt{3}$	0.23	0.26	±0.1 %	±0.1 %	∞
Combined Std. Uncertainty						±11.2 %	±11.1 %	361
Expanded STD Uncertainty						±22.3 %	±22.2 %	

(3 - 6 GHz range)								
Error Description	Uncert. value	Prob. Dist.	Div.	(c_i) 1g	(c_i) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(v_i) v_{eff}
Measurement System								
Probe Calibration	±6.55 %	N	1	1	1	±6.55 %	±6.55 %	∞
Axial Isotropy	±4.7 %	R	$\sqrt{3}$	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	$\sqrt{3}$	0.7	0.7	±3.9 %	±3.9 %	∞
Boundary Effects	±2.0 %	R	$\sqrt{3}$	1	1	±1.2 %	±1.2 %	∞
Linearity	±4.7 %	R	$\sqrt{3}$	1	1	±2.7 %	±2.7 %	∞
System Detection Limits	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	∞
Modulation Response ^m	±2.4 %	R	$\sqrt{3}$	1	1	±1.4 %	±1.4 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	$\sqrt{3}$	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	$\sqrt{3}$	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.8 %	R	$\sqrt{3}$	1	1	±0.5 %	±0.5 %	∞
Probe Positioning	±6.7 %	R	$\sqrt{3}$	1	1	±3.9 %	±3.9 %	∞
Max. SAR Eval.	±4.0 %	R	$\sqrt{3}$	1	1	±2.3 %	±2.3 %	∞
Test Sample Related								
Device Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Power Drift	±5.0 %	R	$\sqrt{3}$	1	1	±2.9 %	±2.9 %	∞
Power Scaling ^p	±0 %	R	$\sqrt{3}$	1	1	±0.0 %	±0.0 %	∞
Phantom and Setup								
Phantom Uncertainty	±6.6 %	R	$\sqrt{3}$	1	1	±3.8 %	±3.8 %	∞
SAR correction	±1.9 %	R	$\sqrt{3}$	1	0.84	±1.1 %	±0.9 %	∞
Liquid Conductivity (mea.) ^{DAK}	±2.5 %	R	$\sqrt{3}$	0.78	0.71	±1.1 %	±1.0 %	∞
Liquid Permittivity (mea.) ^{DAK}	±2.5 %	R	$\sqrt{3}$	0.26	0.26	±0.3 %	±0.4 %	∞
Temp. unc. - Conductivity ^{BB}	±3.4 %	R	$\sqrt{3}$	0.78	0.71	±1.5 %	±1.4 %	∞
Temp. unc. - Permittivity ^{BB}	±0.4 %	R	$\sqrt{3}$	0.23	0.26	±0.1 %	±0.1 %	∞
Combined Std. Uncertainty						±12.3 %	±12.2 %	748
Expanded STD Uncertainty						±24.6 %	±24.5 %	

8 TEST EQUIPMENTS

The measurements were performed using an automated near-field scanning system, DASY5, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland. The SAR extrapolation algorithm used in all measurements was the 'advanced extrapolation' algorithm.

The following table lists calibration dates of SPEAG components:

Test Equipment	Model	Serial Number	Calibration date	Calibration Due data
DAE	DAE4	720	2018.10.15	2019.10.14
Dosimetric E-field Probe	EX4DV3	3708	2018.10.22	2019.10.21
Dipole Validation Kit	D835V2	4d023	2017.09.13	2020.09.12
Dipole Validation Kit	D1800V2	2d084	2017.09.15	2020.09.14
Dipole Validation Kit	D2000V2	1009	2018.02.01	2021.01.31
Dipole Validation Kit	D2450V2	738	2017.09.18	2020.09.17

According to KDB 865664 D01 section 3.2.2, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the **SAR target, impedance and return loss** of a dipole have remain stable according to the following requirements.

- 1) The test laboratory must ensure that the required supporting information and documentation are included in the SAR report to qualify for the three-year extended calibration interval; otherwise, the IEEE Std 1528-2013 recommended annual calibration applies.
- 2) Immediate re-calibration is required for the following conditions.
 - a) After a dipole is damaged and properly repaired to meet required specifications.
 - b) When the measured SAR deviates from the calibrated SAR value by more than 10% due to changes in physical, mechanical, electrical or other relevant dipole conditions; i.e., the error is not introduced by incorrect measurement procedures or other issues relating to the SAR measurement system.
 - c) When the most recent return-loss result, measured at least annually, deviates by more than 20% from the previous measurement (i.e. value in dB $\times$ 0.2) or not meeting the required 20 dB minimum return-loss requirement.
 - d) When the most recent measurement of the real or imaginary parts of the impedance, measured at least annually, deviates by more than 5 Ω from the previous measurement.

Dipole 835

SAR target

Refers to system check, measured SAR (1g and 10g) deviates from the Target SAR value of calibration report within 10%.

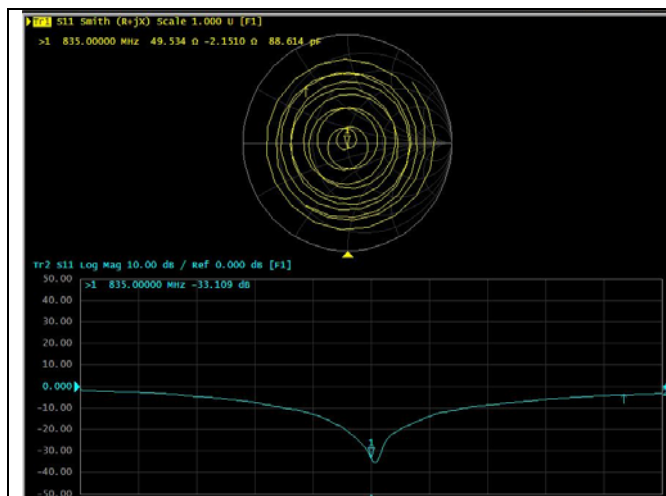
Impedance and Return loss measured by Network analyzer

The most recent measurement of the real or imaginary parts of the impedance (measured on 2018.8.20), deviates within 5 Ω from the previous measurement. (Data from the last calibration report)

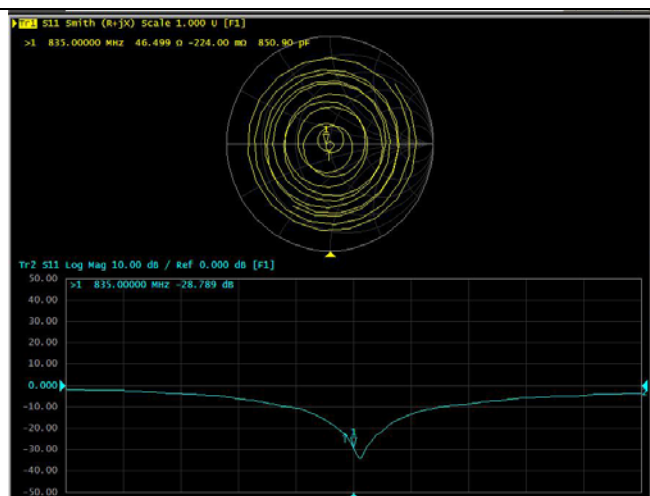
The most recent return-loss result (measured on 2018.8.20) deviates within 20% from the previous measurement. (Data from the last calibration report)

Head TSL Parameters			
Parameters	Target (Ref. Value)	Measured data	Deviation
Impedance	51.0 Ω -2.79j Ω	49.5 Ω -2.15j Ω	<5 Ω
Return loss	-30.7 dB	-33.1 dB	<20%

Body TSL Parameters			
Parameters	Target (Ref. Value)	Measured data	Deviation
Impedance	46.6 Ω -3.61j Ω	49.5 Ω -0.22j Ω	<5 Ω
Return loss	-25.8dB	-28.8dB	<20%



Head TSL Parameters



Body TSL Parameters

Dipole1800

SAR target

Refers to system check, measured SAR (1g and 10g) deviates from the Target SAR value of calibration report within 10%.

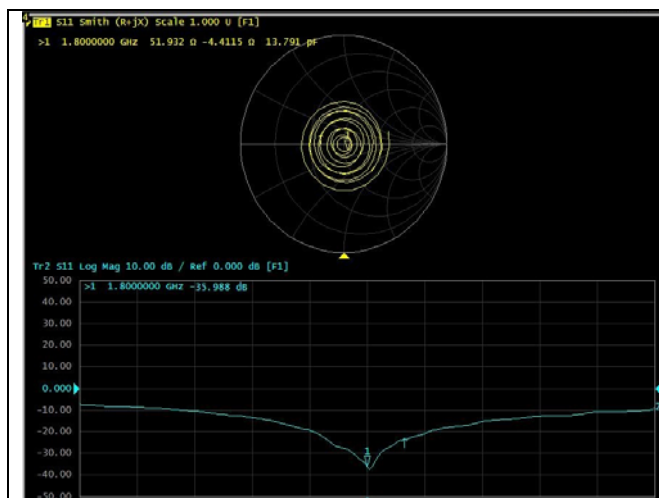
Impedance and Return loss measured by Network analyzer

The most recent measurement of the real or imaginary parts of the impedance (measured on 2018.8.20), deviates within 5 Ω from the previous measurement. (Data from the last calibration report)

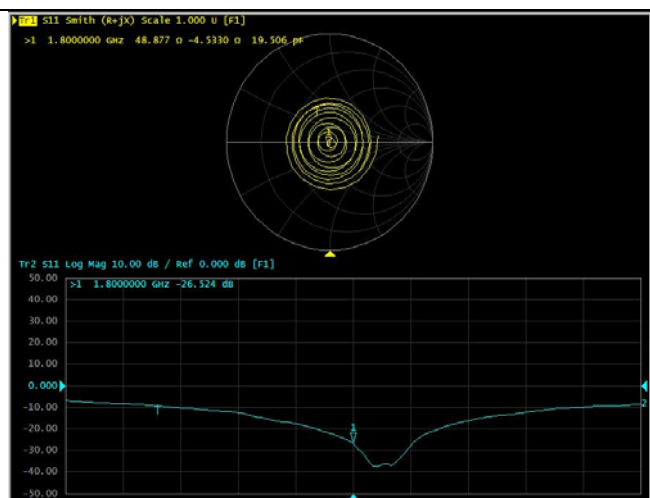
The most recent return-loss result (measured on 2018.8.20) deviates within 20% from the previous measurement. (Data from the last calibration report)

Head TSL Parameters			
Parameters	Target (Ref. Value)	Measured data	Deviation
Impedance	49.3 Ω -1.55j Ω	51.9 Ω -4.41j Ω	<5 Ω
Return loss	-35.4 dB	-36.0dB	<20%

Body TSL Parameters			
Parameters	Target (Ref. Value)	Measured data	Deviation
Impedance	46.0 Ω -1.32j Ω	48.9 Ω -4.53j Ω	<5 Ω
Return loss	-27.1dB	-26.5dB	<20%



Head TSL Parameters



Body TSL Parameters

Dipole2000

SAR target

Refers to system check, measured SAR (1g and 10g) deviates from the Target SAR value of calibration report within 10%.

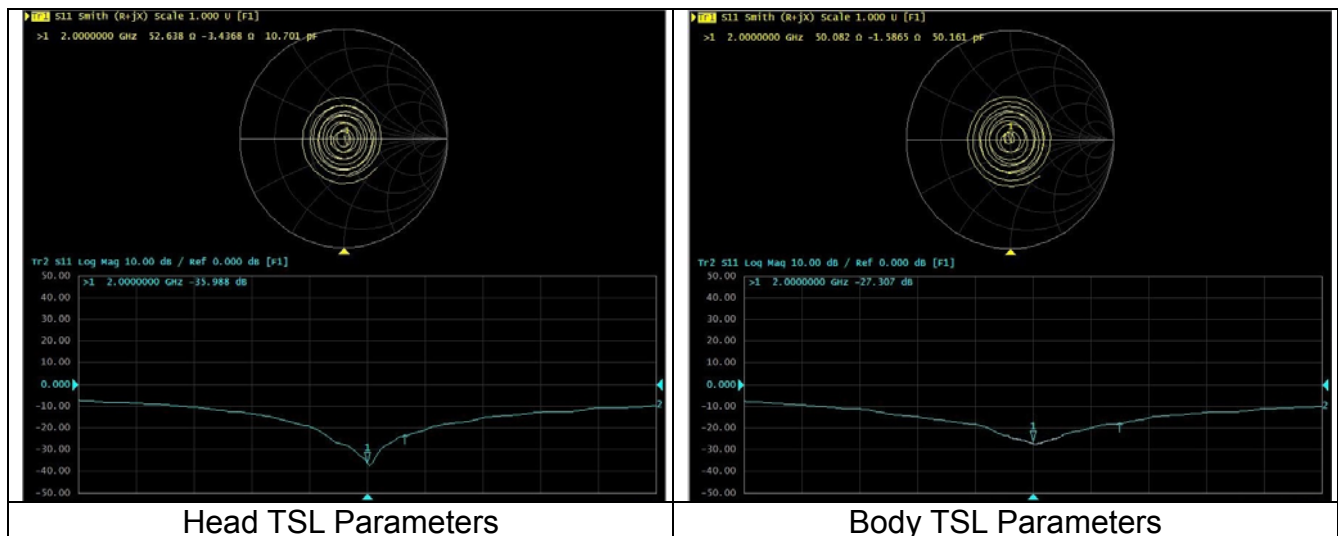
Impedance and Return loss measured by Network analyzer

The most recent measurement of the real or imaginary parts of the impedance (measured on 2018.8.20), deviates within 5 Ω from the previous measurement. (Data from the last calibration report)

The most recent return-loss result (measured on 2018.8.20) deviates within 20% from the previous measurement. (Data from the last calibration report)

Head TSL Parameters			
Parameters	Target (Ref. Value)	Measured data	Deviation
Impedance	49.8 Ω -2.08j Ω	52.6 Ω -3.44j Ω	<5 Ω
Return loss	-33.6dB	-36.0dB	<20%

Body TSL Parameters			
Parameters	Target (Ref. Value)	Measured data	Deviation
Impedance	46.3 Ω -1.63j Ω	50.1 Ω -1.59j Ω	<5 Ω
Return loss	-27.6dB	-27.3dB	<20%



Dipole2450

SAR target

Refers to system check, measured SAR (1g and 10g) deviates from the Target SAR value of calibration report within 10%.

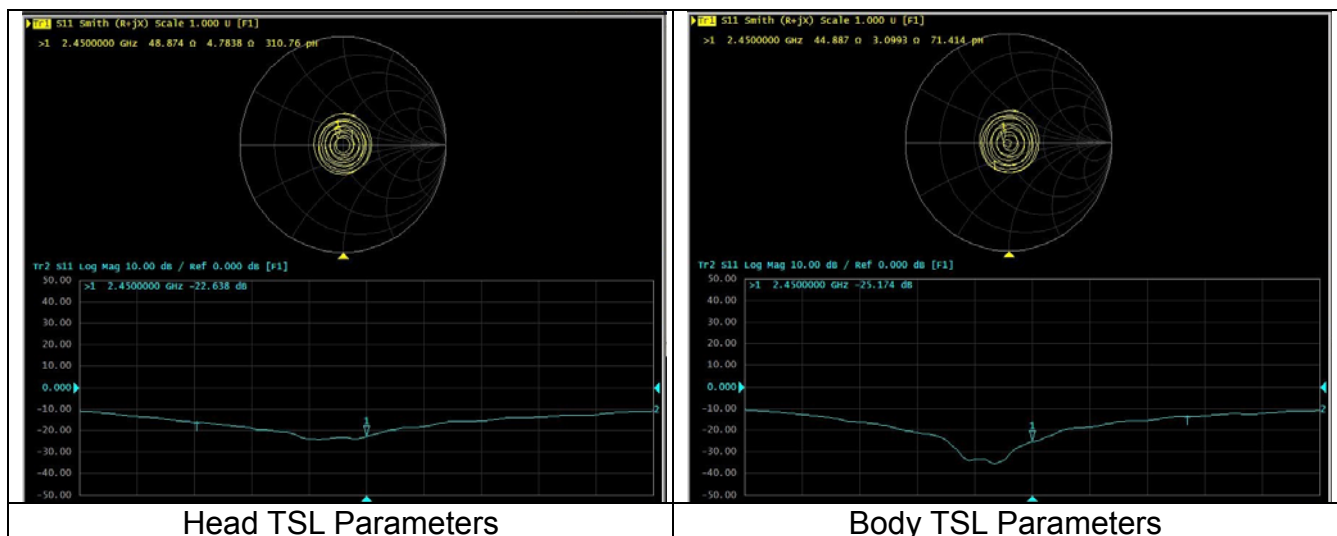
Impedance and Return loss measured by Network analyzer

The most recent measurement of the real or imaginary parts of the impedance (measured on 2018.8.20), deviates within 5 Ω from the previous measurement. (Data from the last calibration report)

The most recent return-loss result (measured on 2018.8.20) deviates within 20% from the previous measurement. (Data from the last calibration report)

Head TSL Parameters			
Parameters	Target (Ref. Value)	Measured data	Deviation
Impedance	51.3 Ω +5.92j Ω	48.9 Ω +4.78j Ω	<5 Ω
Return loss	-24.5 dB	-22.6dB	<20%

Body TSL Parameters			
Parameters	Target (Ref. Value)	Measured data	Deviation
Impedance	47.6 Ω +6.39j Ω	44.9 Ω +3.10j Ω	<5 Ω
Return loss	-23.1dB	-25.2dB	<20%



Additional test equipment used in testing:

Test Equipment	Model	Serial Number	Calibration date	Calibration Due data
Signal Generator	E4428C	MY45280865	2018.08.20	2019.08.19
Signal Generator	SML 03	103514	2018.08.20	2019.08.19
Power meter	E4417A	MY45101182	2018.08.20	2019.08.19
Power Sensor	E4412A	MY41502214	2018.08.20	2019.08.19
Power Sensor	E4412A	MY41502130	2018.08.20	2019.08.19
Power meter	E4417A	MY45101004	2018.08.20	2019.08.19
Power Sensor	E9300B	MY41496001	2018.08.20	2019.08.19
Power Sensor	E9300B	MY41496003	2018.08.20	2019.08.19
Communication Tester	MT8820C	6201300660	2018.08.20	2019.08.19
Vector Network Analyzer	VNA R140	0011213	2018.10.17	2019.10.16
Dielectric Parameter Probe	DAKS-3.5	1042	2018.10.17	2019.10.16
Network Analyzer	E5072A	MY51100334	2018.03.01	2019.02.28

Detailed information of Isotropic E-field Probe Type ES3DV3

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Calibration certificate in Appendix C
Frequency	10 MHz to 4 GHz; Linearity: ± 0.2 dB (30 MHz to 4 GHz)
Optical Surface Detection	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm
Dynamic Range	5 μ W/g to > 100 W/kg; Linearity: ± 0.2 dB
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones

Detailed information of Isotropic E-field Probe Type EX3DV4

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Calibration certificate in Appendix C
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Optical Surface Detection	± 0.3 mm repeatability in air and clear liquids over diffuse reflecting surfaces
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Dynamic Range	10 μ W/g to > 100 W/kg Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.

ANNEX A – TEST PLOTS

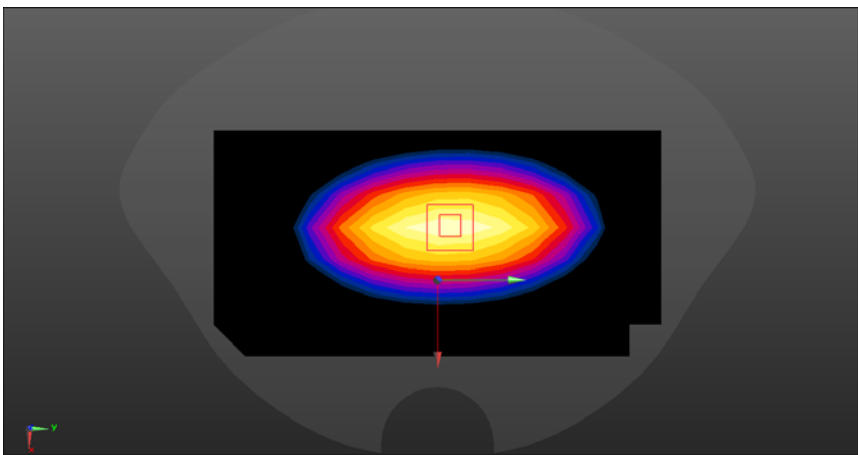
Please refer to the attachment.

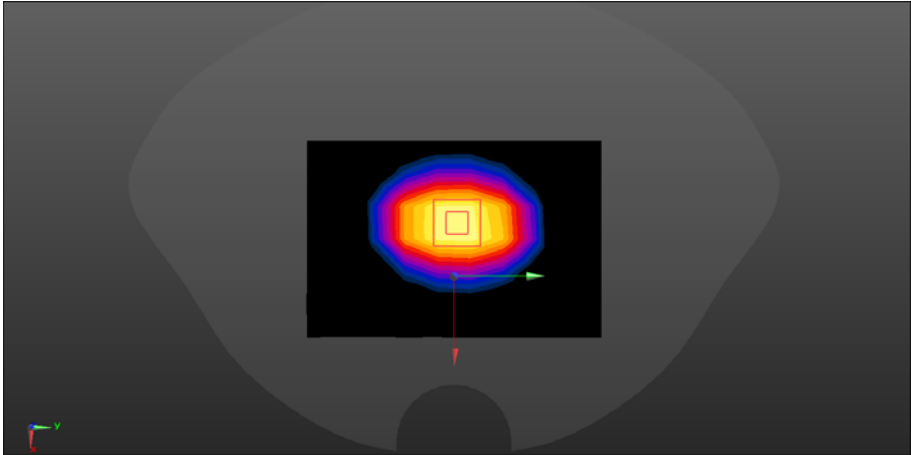
ANNEX B – RELEVANT PAGES FROM CALIBRATION REPORTS

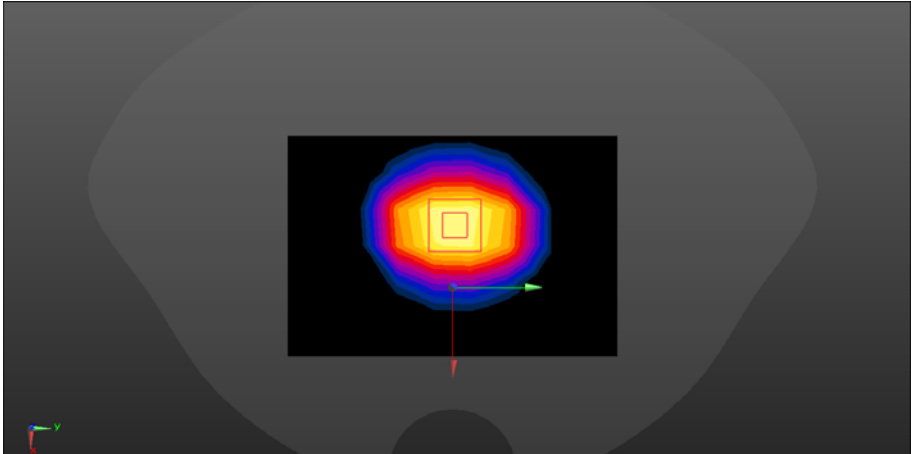
Please refer to the attachment.

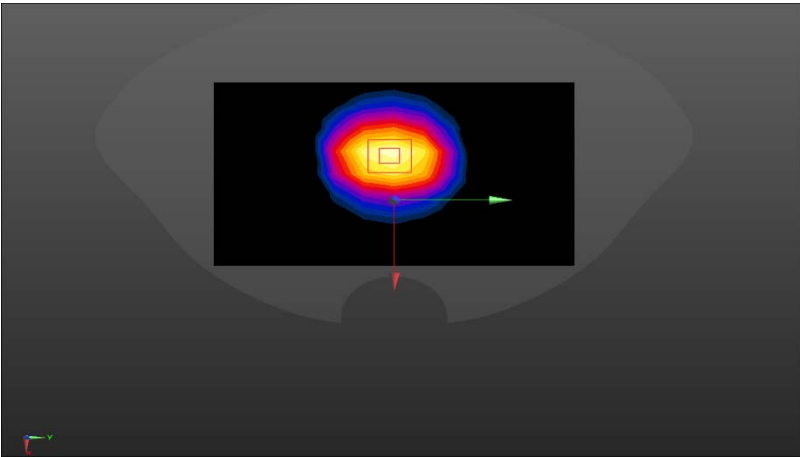
ANNEX A – TEST PLOTS

Head liquid

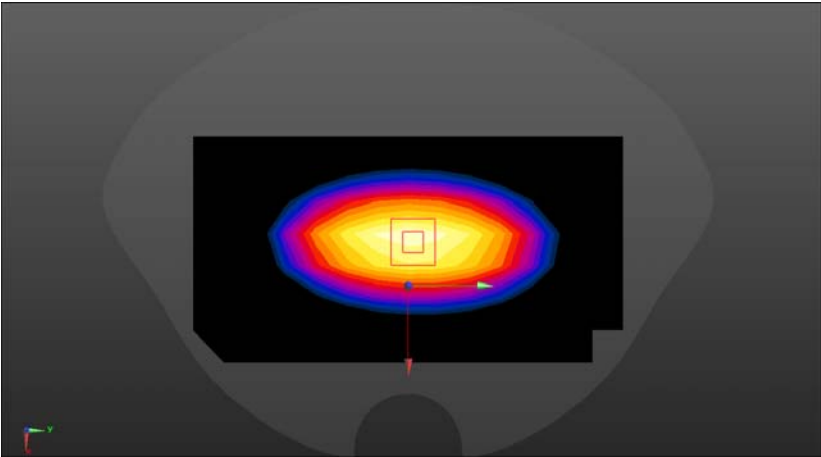
System check	835MHz
Communication System: UID 0, CW (0); Frequency: 835 MHz Medium parameters used (interpolated): $f = 835 \text{ MHz}$; $\sigma = 0.914 \text{ S/m}$; $\epsilon_r = 41.529$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Configuration 835/835/Area Scan (8x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 2.87 W/kg Configuration 835/835/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 52.13 V/m; Power Drift = 0.12 dB Peak SAR (extrapolated) = 3.66 W/kg SAR(1 g) = 2.17 W/kg; SAR(10 g) = 1.45 W/kg Maximum value of SAR (measured) = 2.67 W/kg	
	

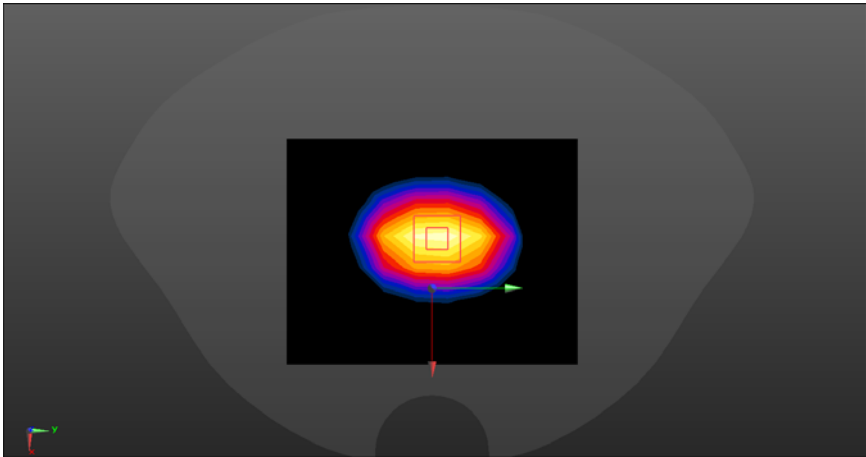
System check	1800MHz
Communication System: UID 0, CW (0); Frequency: 1800 MHz Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.401 \text{ S/m}$; $\epsilon_r = 40.012$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(8.2, 8.2, 8.2); Calibrated: 10/22/2018 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Configuration 1800/1800/Area Scan (7x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 8.31 W/kg Configuration 1800/1800/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 76.60 V/m; Power Drift = 0.17 dB Peak SAR (extrapolated) = 17.5 W/kg SAR(1 g) = 9.53 W/kg; SAR(10 g) = 4.98 W/kg Maximum value of SAR (measured) = 12.1 W/kg 	

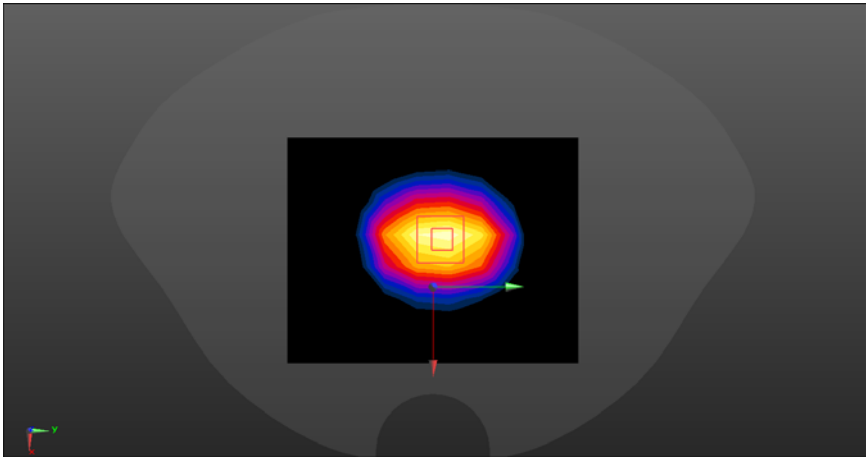
System check	2000MHz
Communication System: UID 0, CW (0); Frequency: 2000 MHz Medium parameters used: $f = 2000 \text{ MHz}$; $\sigma = 1.375 \text{ S/m}$; $\epsilon_r = 39.815$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.86, 7.86, 7.86); Calibrated: 10/22/2018, ConvF(7.86, 7.86, 7.86); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Configuration 2000/2000/Area Scan (7x10x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 8.40 W/kg Configuration 2000/2000/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 76.73 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 18.7 W/kg SAR(1 g) = 9.65 W/kg; SAR(10 g) = 4.86 W/kg Maximum value of SAR (measured) = 12.5 W/kg 	

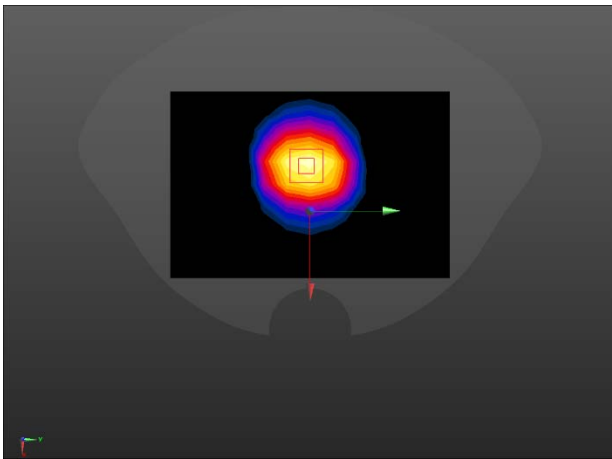
System check	2450MHz
Communication System: UID 0, CW (0); Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz Medium parameters used: $f = 2450$ MHz; $\sigma = 1.846$ S/m; $\epsilon_r = 39.582$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.13, 7.13, 7.13); Calibrated: 10/22/2018, ConvF(7.13, 7.13, 7.13); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) System Performance Check at Frequencies 2450MHz Head/d=10mm, Pin=250 mW, dist=4.0mm (EX-Probe)/Area Scan (9x13x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 21.87 W/kg System Performance Check at Frequencies 2450MHz Head/d=10mm, Pin=250 mW, dist=4.0mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 98.95 V/m; Power Drift = 0.10 dB Peak SAR (extrapolated) = 27.9 W/kg SAR(1 g) = 13.2 W/kg; SAR(10 g) = 5.99 W/kg Maximum value of SAR (measured) = 12.56 W/kg	
	

Body liquid

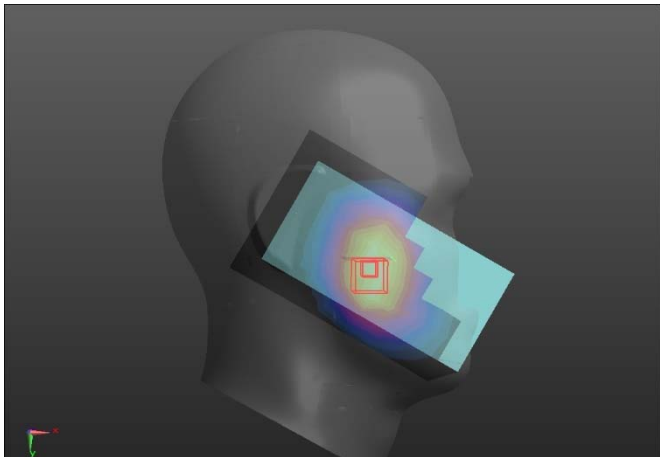
System check	835MHz
Communication System: UID 0, CW (0); Frequency: 835 MHz Medium parameters used (interpolated): $f = 835 \text{ MHz}$; $\sigma = 0.966 \text{ S/m}$; $\epsilon_r = 55.236$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.33, 9.33, 9.33); Calibrated: 10/22/2018 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Configuration 835/835/Area Scan (8x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 2.57 W/kg Configuration 835/835/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 51.34 V/m; Power Drift = 0.19 dB Peak SAR (extrapolated) = 3.26 W/kg SAR(1 g) = 2.19 W/kg; SAR(10 g) = 1.45 W/kg Maximum value of SAR (measured) = 2.58 W/kg 	

System check	1800MHz
Communication System: UID 0, CW (0); Frequency: 1800 MHz Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.502 \text{ S/m}$; $\epsilon_r = 53.287$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.69, 7.69, 7.69); Calibrated: 10/22/2018 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Configuration 1800/1800/Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 11.5 W/kg Configuration 1800/1800/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 80.17 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 17.8 W/kg SAR(1 g) = 9.60 W/kg; SAR(10 g) = 5.03 W/kg Maximum value of SAR (measured) = 12.4 W/kg 	

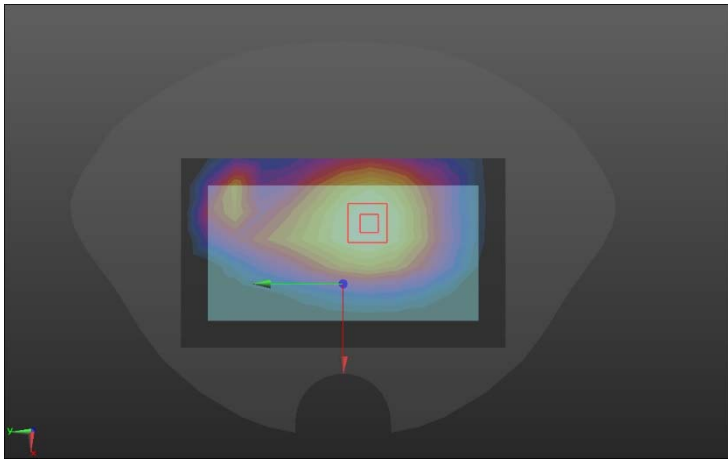
System check	2000MHz
Communication System: UID 0, CW (0); Frequency: 2000 MHz Medium parameters used: $f = 2000 \text{ MHz}$; $\sigma = 1.586 \text{ S/m}$; $\epsilon_r = 52.557$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.53, 7.53, 7.53); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Configuration 2000/2000/Area Scan (8x10x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 11.1 W/kg Configuration 2000/2000/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 78.14 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 17.8 W/kg SAR(1 g) = 9.71 W/kg; SAR(10 g) = 4.78 W/kg Maximum value of SAR (measured) = 12.1 W/kg 	

System check	2450MHz
Communication System: UID 0, CW (0); Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 2.017$ S/m; $\epsilon_r = 51.146$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.19, 7.19, 7.19); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) System Performance Check at Frequencies 2450MHz Head/d=10mm, Pin=250 mW, dist=4.0mm (EX-Probe)/Area Scan (9x13x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 13.4 W/kg System Performance Check at Frequencies 2450MHz Head/d=10mm, Pin=250 mW, dist=4.0mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 62.29 V/m; Power Drift = 0.12 dB Peak SAR (extrapolated) = 29.3 W/kg SAR(1 g) = 13.24 W/kg; SAR(10 g) = 6.11 W/kg Maximum value of SAR (measured) = 18.9 W/kg 	

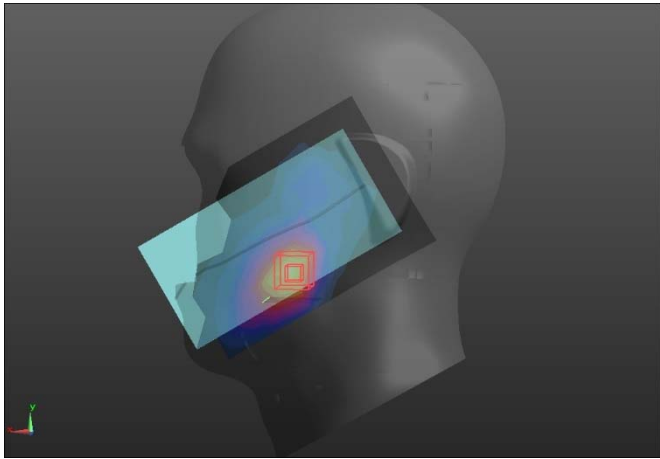
GSM (850MHz/Head)

Right Side	Cheek
Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 2:8.30042 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) RIGHT/G850 RC/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.121 W/kg RIGHT/G850 RC/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 2.987 V/m; Power Drift = -0.12 dB Peak SAR (extrapolated) = 0.140 W/kg SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.081 W/kg Maximum value of SAR (measured) = 0.130 W/kg	
	

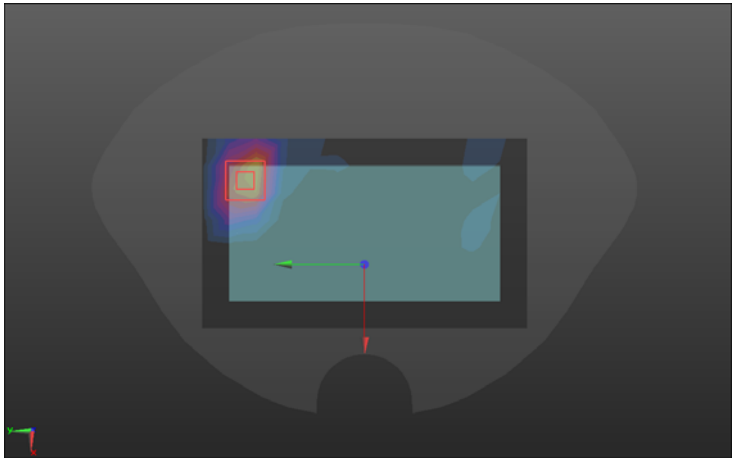
GSM (850MHz with GPRS/Flat)

Body worn&Hotspot	Back
Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz;Duty Cycle: 2:8.30042 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.976$ S/m; $\epsilon_r = 55.195$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.33, 9.33, 9.33); Calibrated: 10/22/2018 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) flat check/back/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.287 W/kg flat check/back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 15.78 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 0.343 W/kg SAR(1 g) = 0.261 W/kg; SAR(10 g) = 0.194 W/kg Maximum value of SAR (measured) = 0.290 W/kg	
	

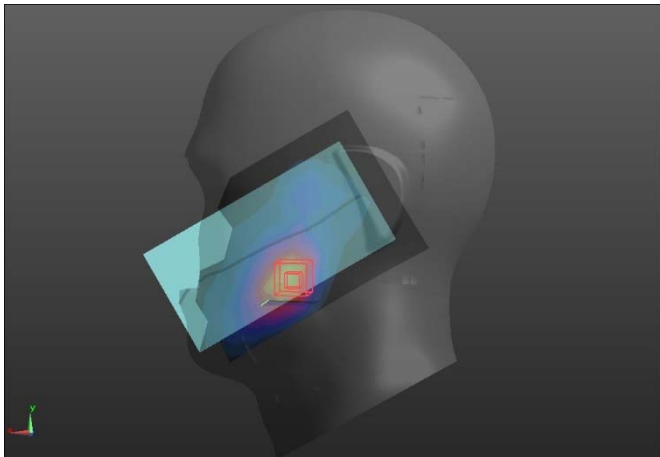
GSM (1900MHz/Head)

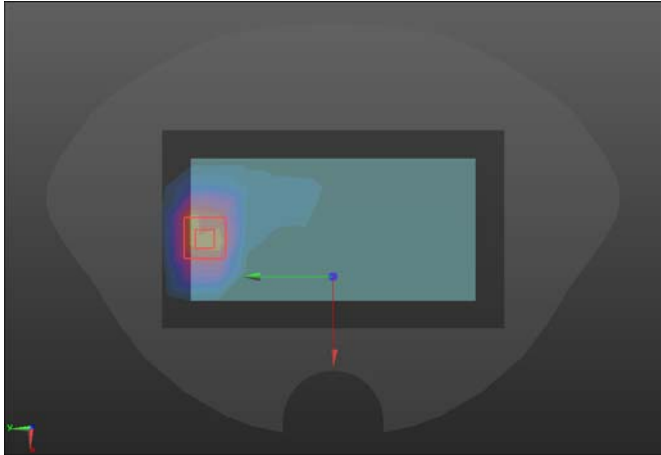
Left Side	Cheek
Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 2:8.30042 Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) left/G1900 LC/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.110 W/kg left/G1900 LC/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 3.450 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 0.148 W/kg SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.054 W/kg Maximum value of SAR (measured) = 0.120 W/kg	
	

GSM (1900MHz with GPRS/Flat)

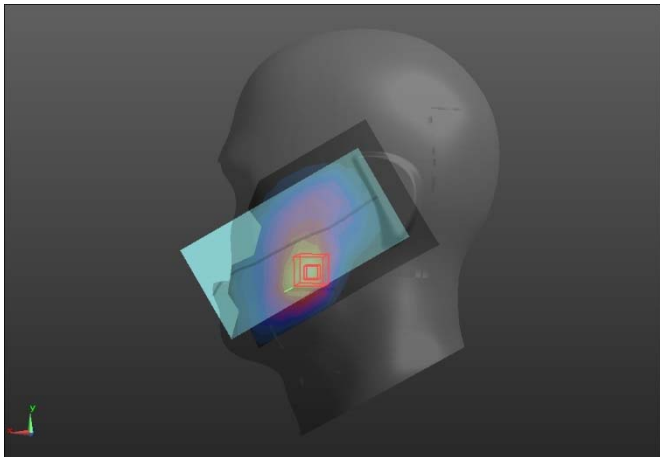
Body worn&Hotspot	Back
Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz;Duty Cycle: 2:8.30042 Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.526$ S/m; $\epsilon_r = 53.291$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) flat check/back 2/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.494 W/kg flat check/back 2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 3.044 V/m; Power Drift = 0.17 dB Peak SAR (extrapolated) = 0.991 W/kg SAR(1 g) = 0.518 W/kg; SAR(10 g) = 0.262 W/kg Maximum value of SAR (measured) = 0.664 W/kg 	

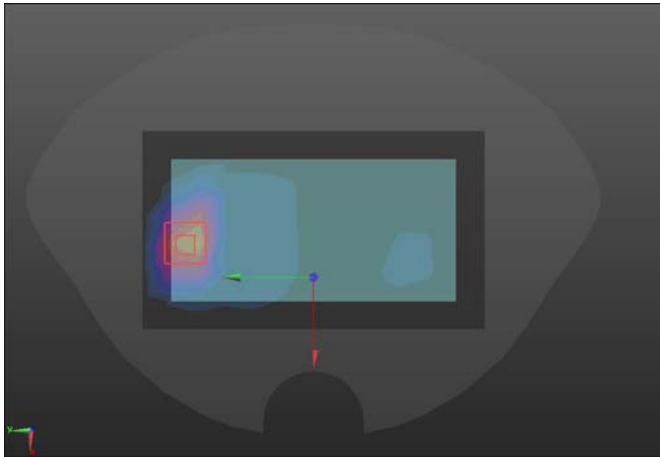
WCDMA Band 2

Left Side	Cheek
Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1880 MHz; Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) left/W2 LC/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.332 W/kg left/W2 LC/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 4.996 V/m; Power Drift = 0.08 dB Peak SAR (extrapolated) = 0.433 W/kg SAR(1 g) = 0.267 W/kg; SAR(10 g) = 0.159 W/kg Maximum value of SAR (measured) = 0.367 W/kg	
	

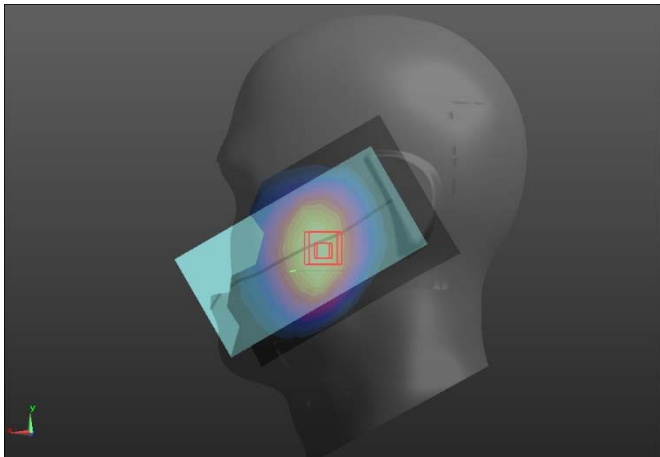
Body worn&Hotspot	Back
Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1880 MHz; Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.526$ S/m; $\epsilon_r = 53.291$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) flat/W2 back/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 1.07 W/kg flat/W2 back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 6.281 V/m; Power Drift = -0.06 dB Peak SAR (extrapolated) = 1.95 W/kg SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.546 W/kg Maximum value of SAR (measured) = 1.60 W/kg 	

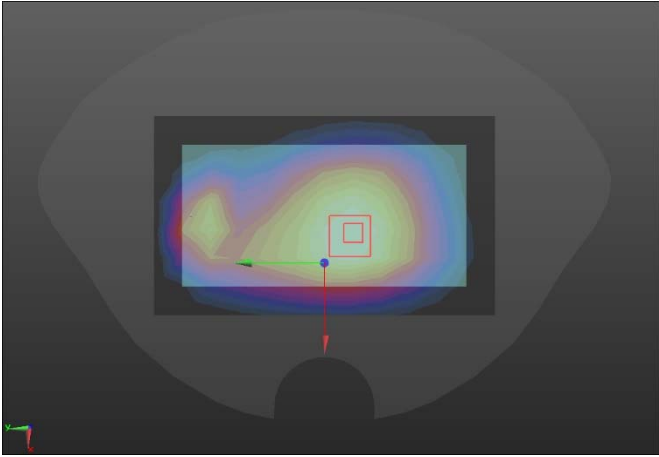
WCDMA Band 4

Left Side	Cheek
Communication System: UID 0, wcdma bandIV (0); Frequency: 1732.4 MHz; Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 40.07$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(8.2, 8.2, 8.2); Calibrated: 10/22/2018 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) left/W4 LC/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.211 W/kg left/W4 LC/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 2.852 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 0.261 W/kg SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.106 W/kg Maximum value of SAR (measured) = 0.220 W/kg	
	

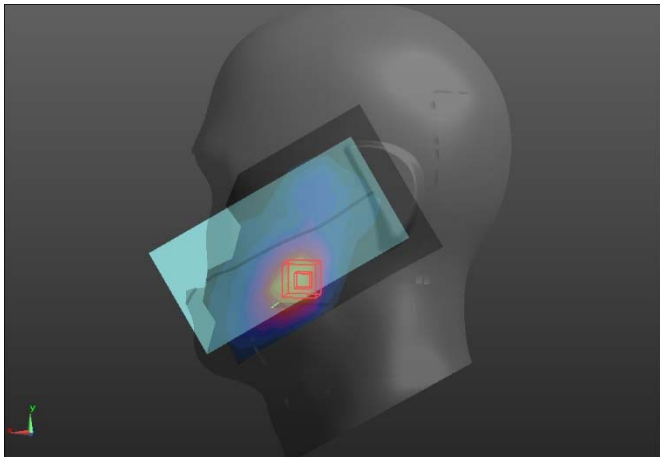
Body worn&Hotspot	Back
Communication System: UID 0, wcdma bandIV (0); Frequency: 1732.4 MHz; Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.477$ S/m; $\epsilon_r = 53.461$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.69, 7.69, 7.69); Calibrated: 10/22/2018 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) flat/W4 back/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.971 W/kg flat/W4 back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 5.863 V/m; Power Drift = -0.17 dB Peak SAR (extrapolated) = 1.68 W/kg SAR(1 g) = 0.902 W/kg; SAR(10 g) = 0.452 W/kg Maximum value of SAR (measured) = 1.39 W/kg	
	

WCDMA Band 5

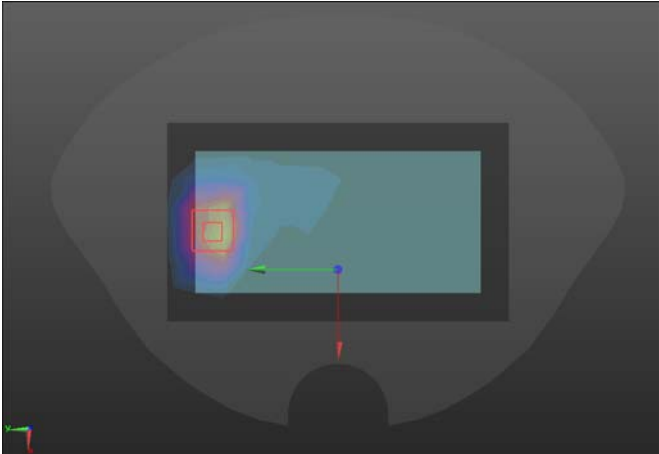
Left Side	Cheek
Communication System: UID 0, WCDMA 5 (0); Frequency: 836.6 MHz; Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) left/W5 LC/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.145 W/kg left/W5 LC/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 4.061 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 0.172 W/kg SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.102 W/kg Maximum value of SAR (measured) = 0.158 W/kg 	

Body worn&Hotspot	Back
Communication System: UID 0, WCDMA 5 (0); Frequency: 836.6 MHz; Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.976 \text{ S/m}$; $\epsilon_r = 55.195$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.33, 9.33, 9.33); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) flat/W5 back/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.316 W/kg flat/W5 back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 15.78 V/m; Power Drift = -0.06 dB Peak SAR (extrapolated) = 0.347 W/kg SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.185 W/kg Maximum value of SAR (measured) = 0.311 W/kg 	

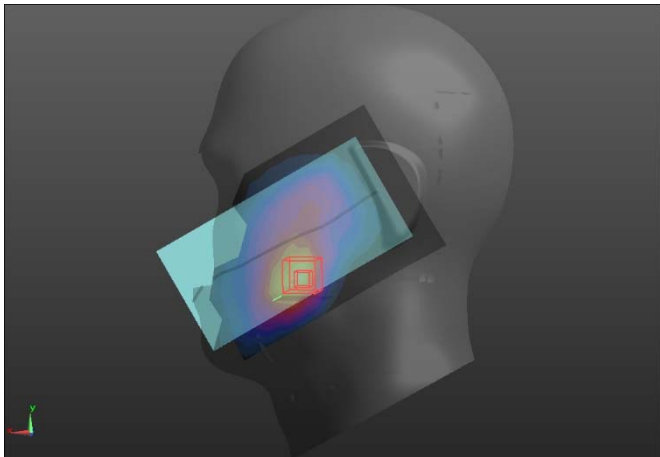
LTE Band 2 (20BW 1RB)

Left Side	Cheek
Communication System: UID 10169 - CAC, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1880 MHz; Medium parameters used (interpolated): $f = 1880 \text{ MHz}$; $\sigma = 1.4 \text{ S/m}$; $\epsilon_r = 40$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) left/LTE2 LC/Area Scan (8x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.317 W/kg left/LTE2 LC/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 4.511 V/m; Power Drift = 0.12 dB Peak SAR (extrapolated) = 0.415 W/kg SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.156 W/kg Maximum value of SAR (measured) = 0.343 W/kg 	

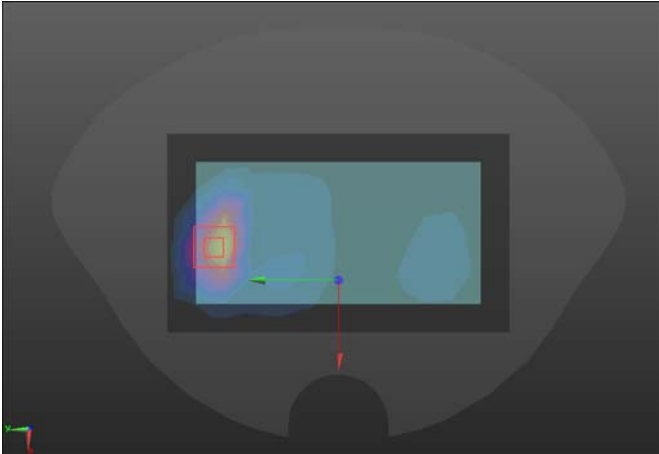
20BW 1RB

Body worn&Hotspot	Back
Communication System: UID 10169 - CAC, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1880 MHz; Medium parameters used (interpolated): $f = 1880 \text{ MHz}$; $\sigma = 1.526 \text{ S/m}$; $\epsilon_r = 53.291$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) flat/LTE2 back/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 1.18 W/kg flat/LTE2 back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 6.699 V/m; Power Drift = -0.05 dB Peak SAR (extrapolated) = 1.70 W/kg SAR(1 g) = 0.931 W/kg; SAR(10 g) = 0.488 W/kg Maximum value of SAR (measured) = 1.41 W/kg 	

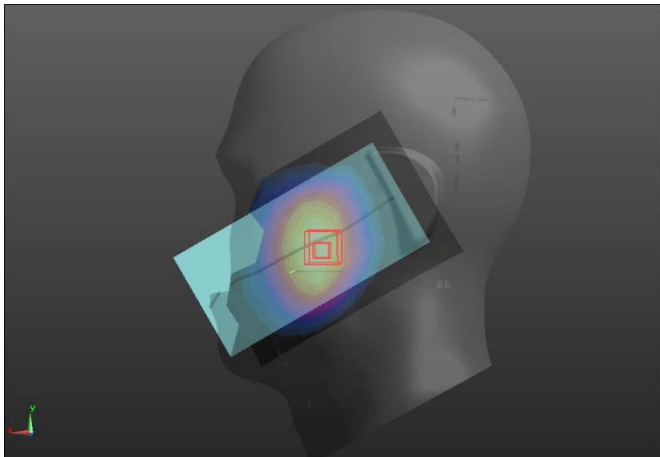
LTE Band 4 (20BW 1RB)

Left Side	Cheek
Communication System: UID 10169 - CAC, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1732.5 MHz; Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 40.07$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(8.2, 8.2, 8.2); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) left/LTE4 LC/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.170 W/kg left/LTE4 LC/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 2.157 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 0.217 W/kg SAR(1 g) = 0.140 W/kg; SAR(10 g) = 0.089 W/kg Maximum value of SAR (measured) = 0.182 W/kg	
	

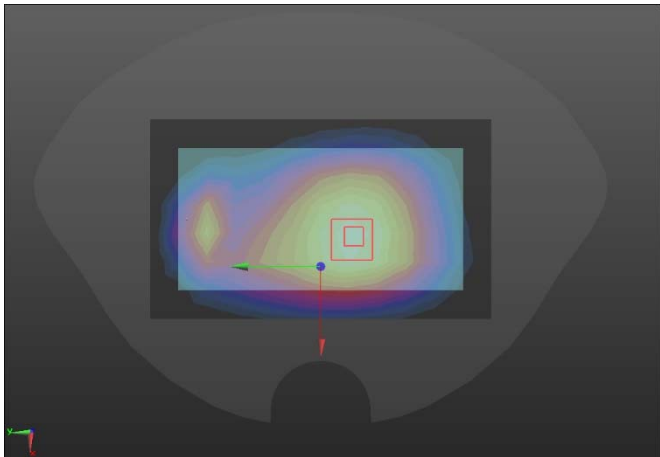
20BW 1RB

Body worn&Hotspot	Back
Communication System: UID 10169 - CAC, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1732.5 MHz; Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.477$ S/m; $\epsilon_r = 53.46$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.69, 7.69, 7.69); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) flat/LTE4 back/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.989 W/kg flat/LTE4 back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 6.711 V/m; Power Drift = 0.06 dB Peak SAR (extrapolated) = 1.41 W/kg SAR(1 g) = 0.761 W/kg; SAR(10 g) = 0.394 W/kg Maximum value of SAR (measured) = 1.20 W/kg 	

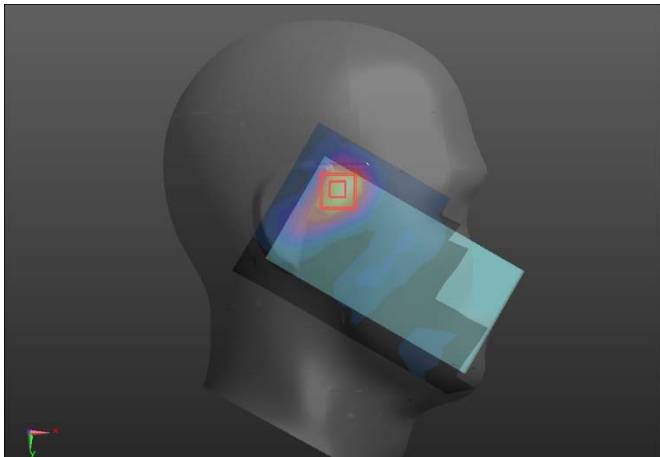
LTE Band 5 (10BW 1RB)

Left Side	Cheek
Communication System: UID 10175 - CAD, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 836.5 MHz; Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) left/LTE5 LC/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.143 W/kg left/LTE5 LC/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 3.703 V/m; Power Drift = 0.11 dB Peak SAR (extrapolated) = 0.165 W/kg SAR(1 g) = 0.131 W/kg; SAR(10 g) = 0.100 W/kg Maximum value of SAR (measured) = 0.152 W/kg	
	

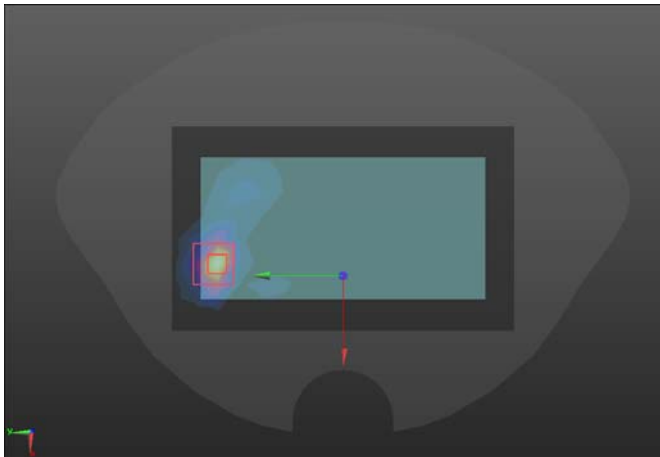
10BW 1RB

Body worn&Hotspot	Back
Communication System: UID 10175 - CAD, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 836.5 MHz; Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.976$ S/m; $\epsilon_r = 55.195$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.33, 9.33, 9.33); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) flat/LTE5 back/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.345 W/kg flat/LTE5 back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 16.29 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 0.391 W/kg SAR(1 g) = 0.287 W/kg; SAR(10 g) = 0.211 W/kg Maximum value of SAR (measured) = 0.352 W/kg	
	

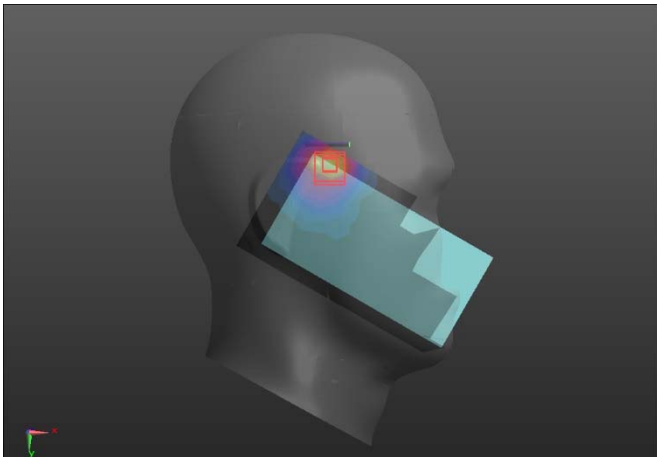
LTE Band 7 (20BW 1RB)

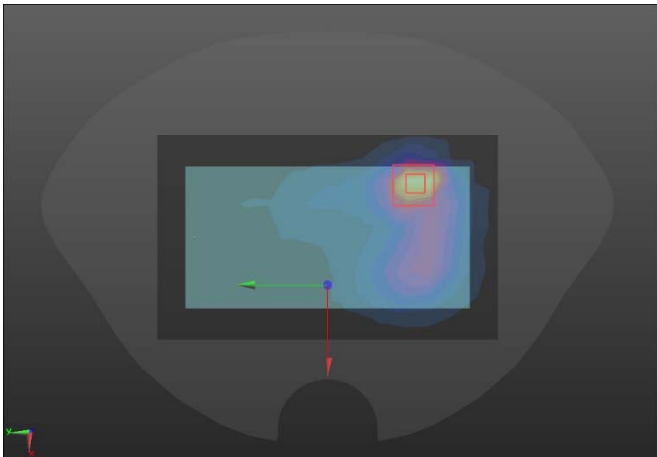
Right Side	Cheek
Communication System: UID 10169 - CAC, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2535 MHz; Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.888$ S/m; $\epsilon_r = 39.084$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.01, 7.01, 7.01); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) RIGHT/LTE7 RT/Area Scan (10x15x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.163 W/kg RIGHT/LTE7 RT/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 5.880 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 0.200 W/kg SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.057 W/kg Maximum value of SAR (measured) = 0.164 W/kg	
	

20BW 1RB

Body worn&Hotspot	Back
Communication System: UID 10169 - CAC, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2535 MHz; Medium parameters used (interpolated): $f = 2535 \text{ MHz}$; $\sigma = 2.067 \text{ S/m}$; $\epsilon_r = 52.592$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.14, 7.14, 7.14); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) flat/LTE7 back/Area Scan (10x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 1.83 W/kg flat/LTE7 back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 4.568 V/m; Power Drift = -0.15 dB Peak SAR (extrapolated) = 2.27 W/kg SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.399 W/kg Maximum value of SAR (measured) = 1.77 W/kg	
	

WLAN 2.4GHz

Right Side	Tilted
Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2437 MHz; Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 39.219$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.13, 7.13, 7.13); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) RIGHT/RT/Area Scan (9x15x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.0449 W/kg RIGHT/RT/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 1.294 V/m; Power Drift = 0.10 dB Peak SAR (extrapolated) = 0.0800 W/kg SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.017 W/kg Maximum value of SAR (measured) = 0.0485 W/kg 	

Body worn&Hotspot	Back
Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2437 MHz; Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.933$ S/m; $\epsilon_r = 52.717$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.19, 7.19, 7.19); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) FLAT/back/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.0551 W/kg FLAT/back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 1.324 V/m; Power Drift = 0.10 dB Peak SAR (extrapolated) = 0.108 W/kg SAR(1 g) = 0.046 W/kg; SAR(10 g) = 0.020 W/kg Maximum value of SAR (measured) = 0.0608 W/kg 	

ANNEX B – RELEVANT PAGES FROM CALIBRATION REPORTS

DAE4 Sn:720

TTL In Collaboration with **S P E C A** CALIBRATION LABORATORY

Add: No.31 Xanyuan Road, Weidian District, Beijing, 100191, China
Tel: +86-10-42306333-2512 Fax: +86-10-42306333-2504
E-mail: csl@speca.com.cn Http://www.speca.com.cn

中国认可
国际互认
校准
CNAS L0570

Client: **SRTC** Certificate No: **Z18-60399**

CALIBRATION CERTIFICATE

Object: **DAE4 - SN: 720**

Calibration Procedure(s): **PF-Z11-002-01**
Calibration Procedure for the Data Acquisition Electronics (DAE4)

Calibration date: **October 10, 2018**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurement(s). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature±0.2°C and humidity±5%.

Calibration Equipment Used (MUTU critical for calibration)

Primary Standards	ID #	Cal Date/Calibrated by, Certificate No.	Scheduled Calibration
Process Calibrator 753	1671018	20-Jun-18 (SRTL, No.718X00634)	June-19

	Name	Function
Calibrated by:	Yu Zongying	SAR Test Engineer
Reviewed by:	Lin Hao	SAR Test Engineer
Approved by:	Qi Dianyu	SAR Project Leader

Issued: October 17, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z18-60399 Page 1 of 2

TTL In Collaboration with **S P E C A** CALIBRATION LABORATORY

Add: No.31 Xanyuan Road, Weidian District, Beijing, 100191, China
Tel: +86-10-42306333-2512 Fax: +86-10-42306333-2504
E-mail: csl@speca.com.cn Http://www.speca.com.cn

Glossary:

DAE: data acquisition electronics
Connector angle: information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters:

- DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- Connector angle:** The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The report provide only calibration results for DAE, it does not contain other performance test results.

Certificate No: Z18-60399 Page 2 of 2

TTL In Collaboration with **S P E C A** CALIBRATION LABORATORY

Add: No.31 Xanyuan Road, Weidian District, Beijing, 100191, China
Tel: +86-10-42306333-2512 Fax: +86-10-42306333-2504
E-mail: csl@speca.com.cn Http://www.speca.com.cn

DC Voltage Measurement

AO: Candidate Measurement method

High Range: 11.58 ± 0.1% Full range = +100...+300 mV
Low Range: 10.58 ± 0.1% Full range = +10...+300 mV

DAE4 measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	403.343 ± 0.15% (k=2)	404.773 ± 0.15% (k=2)	403.205 ± 0.15% (k=2)
Low Range	0.00074 ± 0.7% (k=2)	0.00069 ± 0.7% (k=2)	0.00069 ± 0.7% (k=2)

Connector Angle

Connector Angle to be used in DASY system	SEP ± 1°

Certificate No: Z18-60399 Page 3 of 3

EX3DV4 Sn:3708 (1/7)

Calibration Laboratory of Schmid & Partner Engineering AG Zugschneidstrasse 83, 8594 Zurich, Switzerland				S C S Schweizerischer Kantonaleidmet Service suisse d'etonnements Swiss Calibration Institute																													
Accredited by the Swiss Accreditation Service (SAS) This Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration laboratories				Accreditation No.: SCS 0198																													
Client BRTG (Auden)				Certificate No. EKS-3708_Oct18																													
CALIBRATION CERTIFICATE																																	
Object EX50V4 - SM-2708																																	
Calibration procedure(s) QA CAL-01-09, QA CAL-12-06, QA CAL-14-04, QA CAL-23-05, QA CAL-25-06 Calibration procedures for dosimetric E-field probes																																	
Calibration date October 20, 2018																																	
This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (2). The measurements and the associated traceability are given in the table below, and are part of the certificate.																																	
All calibrations have been conducted in the client laboratory facility, environmental conditions (23 ± 0.5°C and humidity = 70%).																																	
Calibration Equipment used (SAS No. for calibration)																																	
<table border="1"> <thead> <tr> <th>Primary Standards</th> <th>Q1</th> <th>Cap (Date: Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Reference signal</td> <td>Q1-144778</td> <td>04-May-18 (No. 213-10074-00029)</td> <td>Apr-19</td> </tr> <tr> <td>Power sensor MHP-201</td> <td>SA-102444</td> <td>04-May-18 (No. 213-10074-00029)</td> <td>Apr-19</td> </tr> <tr> <td>Power sensor 144-134</td> <td>SA-122245</td> <td>04-May-18 (No. 213-10074-00029)</td> <td>Apr-19</td> </tr> <tr> <td>Power sensor 144-134</td> <td>SA-122245</td> <td>04-May-18 (No. 213-10074-00029)</td> <td>Apr-19</td> </tr> <tr> <td>Reference probe EX50V4</td> <td>Q1-2013</td> <td>20-Oct-17 (No. 213-10131-00073)</td> <td>Oct-18</td> </tr> <tr> <td>Q145A</td> <td>SA-692</td> <td>21-Oct-17 (No. 213-10131-00073)</td> <td>Oct-18</td> </tr> </tbody> </table>						Primary Standards	Q1	Cap (Date: Certificate No.)	Scheduled Calibration	Reference signal	Q1-144778	04-May-18 (No. 213-10074-00029)	Apr-19	Power sensor MHP-201	SA-102444	04-May-18 (No. 213-10074-00029)	Apr-19	Power sensor 144-134	SA-122245	04-May-18 (No. 213-10074-00029)	Apr-19	Power sensor 144-134	SA-122245	04-May-18 (No. 213-10074-00029)	Apr-19	Reference probe EX50V4	Q1-2013	20-Oct-17 (No. 213-10131-00073)	Oct-18	Q145A	SA-692	21-Oct-17 (No. 213-10131-00073)	Oct-18
Primary Standards	Q1	Cap (Date: Certificate No.)	Scheduled Calibration																														
Reference signal	Q1-144778	04-May-18 (No. 213-10074-00029)	Apr-19																														
Power sensor MHP-201	SA-102444	04-May-18 (No. 213-10074-00029)	Apr-19																														
Power sensor 144-134	SA-122245	04-May-18 (No. 213-10074-00029)	Apr-19																														
Power sensor 144-134	SA-122245	04-May-18 (No. 213-10074-00029)	Apr-19																														
Reference probe EX50V4	Q1-2013	20-Oct-17 (No. 213-10131-00073)	Oct-18																														
Q145A	SA-692	21-Oct-17 (No. 213-10131-00073)	Oct-18																														
<table border="1"> <thead> <tr> <th>Secondary Standards</th> <th>Q2</th> <th>Check Date (in-house)</th> <th>Scheduled Check</th> </tr> </thead> <tbody> <tr> <td>Power meter 144-138</td> <td>SA-086100074</td> <td>16-May-18 (In-house Check) Jun-18</td> <td>In-house Check Jun-20</td> </tr> <tr> <td>Power sensor 144-134</td> <td>SA-MP-144500074</td> <td>16-May-18 (In-house Check) Jun-18</td> <td>In-house Check Jun-20</td> </tr> <tr> <td>Power meter 144-134</td> <td>SA-086100074</td> <td>16-May-18 (In-house Check) Jun-18</td> <td>In-house Check Jun-20</td> </tr> <tr> <td>SA generator SA-044C</td> <td>SA-044C-000077</td> <td>03-May-18 (In-house Check) Oct-18</td> <td>In-house Check Oct-18</td> </tr> </tbody> </table>						Secondary Standards	Q2	Check Date (in-house)	Scheduled Check	Power meter 144-138	SA-086100074	16-May-18 (In-house Check) Jun-18	In-house Check Jun-20	Power sensor 144-134	SA-MP-144500074	16-May-18 (In-house Check) Jun-18	In-house Check Jun-20	Power meter 144-134	SA-086100074	16-May-18 (In-house Check) Jun-18	In-house Check Jun-20	SA generator SA-044C	SA-044C-000077	03-May-18 (In-house Check) Oct-18	In-house Check Oct-18								
Secondary Standards	Q2	Check Date (in-house)	Scheduled Check																														
Power meter 144-138	SA-086100074	16-May-18 (In-house Check) Jun-18	In-house Check Jun-20																														
Power sensor 144-134	SA-MP-144500074	16-May-18 (In-house Check) Jun-18	In-house Check Jun-20																														
Power meter 144-134	SA-086100074	16-May-18 (In-house Check) Jun-18	In-house Check Jun-20																														
SA generator SA-044C	SA-044C-000077	03-May-18 (In-house Check) Oct-18	In-house Check Oct-18																														
Calibrated by: Name Function Claudio Leubner Laboratory Technician																																	
Approved by: Name Technical Manager Kuno Pfister																																	
Issued: October 20, 2018																																	

[illegible]

EX3DV4 - SN:3708

October 22, 2019

Probe EX3DV4

SN:3708

Manufactured: July 21, 2009

Calibrated: October 22, 2019

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system)

Page 2 of 28

EAS/EASY - 3708

EAS/EASY - 3708

DAS/EASY - Parameters of Probe: EX3DV4 - SN:3708

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm. $\sqrt{V_x^2/V_y^2}$ ¹	0.25	0.35	0.42	$\pm 10.1 \%$
DOF (mV)	98.4	103.6	109.4	

Modulation Calibration Parameters

USD	Communication System Name	A	B	C	D	VR	Unc ²
		ms, V ^{1/2}	ms, V ^{1/2}	ms	ms	V ^{1/2}	(mV)
X	CCV	0	0.0	0.0	1.0	0.05	$\pm 1.5 \%$
Y		0	0.0	0.0	1.0	0.05	
Z		0	0.0	0.0	1.0	0.05	

Note: For details on USD parameters see Appendix.

Sensor Model Parameters

	C1 mV	C2 mV	σ mV ^{1/2}	T1 ms, V ^{1/2}	T2 ms, V ^{1/2}	T3 ms	T4 V ^{1/2}	T5 V ^{1/2}	T6 ms
X	33.84	270.1	40.97	0.363	1.302	0.000	0.000	0.702	1.008
Y	40.34	291.1	34.08	13.47	0.921	0.012	1.768	0.196	1.000
Z	34.84	282.2	35.97	11.65	0.830	0.031	0.000	0.000	1.000

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

¹ The uncertainties of Norm. X, Y or Z do not affect the $k=2$ level uncertainty index T6, see Page 9 of 10.

² Numerical integration parameter: uncertainty not required.

³ Uncertainty is determined by the rms. deviation from linear response applying rectangular distribution and is expressed for the square of the full value.

EAS/EASY - 3708 - 3708 - 3708

Page 4 of 10