




8.5 Test Result


Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	(5180-5240MHz)		


Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	-1.86	10	Pass
NVNT	a	5200	-1.71	10	Pass
NVNT	a	5240	-1.81	10	Pass
NVNT	n20	5180	-3.10	10	Pass
NVNT	n20	5200	-2.69	10	Pass
NVNT	n20	5240	-2.70	10	Pass
NVNT	n40	5190	-7.08	10	Pass
NVNT	n40	5230	-7.71	10	Pass
NVNT	ac20	5180	-2.56	10	Pass
NVNT	ac20	5200	-2.71	10	Pass
NVNT	ac20	5240	-2.75	10	Pass
NVNT	ac40	5190	-7.23	10	Pass
NVNT	ac40	5230	-7.72	10	Pass
NVNT	ac80	5210	-13.04	10	Pass
NVNT	ax20	5180	-3.06	10	Pass
NVNT	ax20	5200	-3.16	10	Pass
NVNT	ax20	5240	-3.15	10	Pass
NVNT	ax40	5190	-7.71	10	Pass
NVNT	ax40	5230	-7.55	10	Pass
NVNT	ax80	5210	-13.44	10	Pass


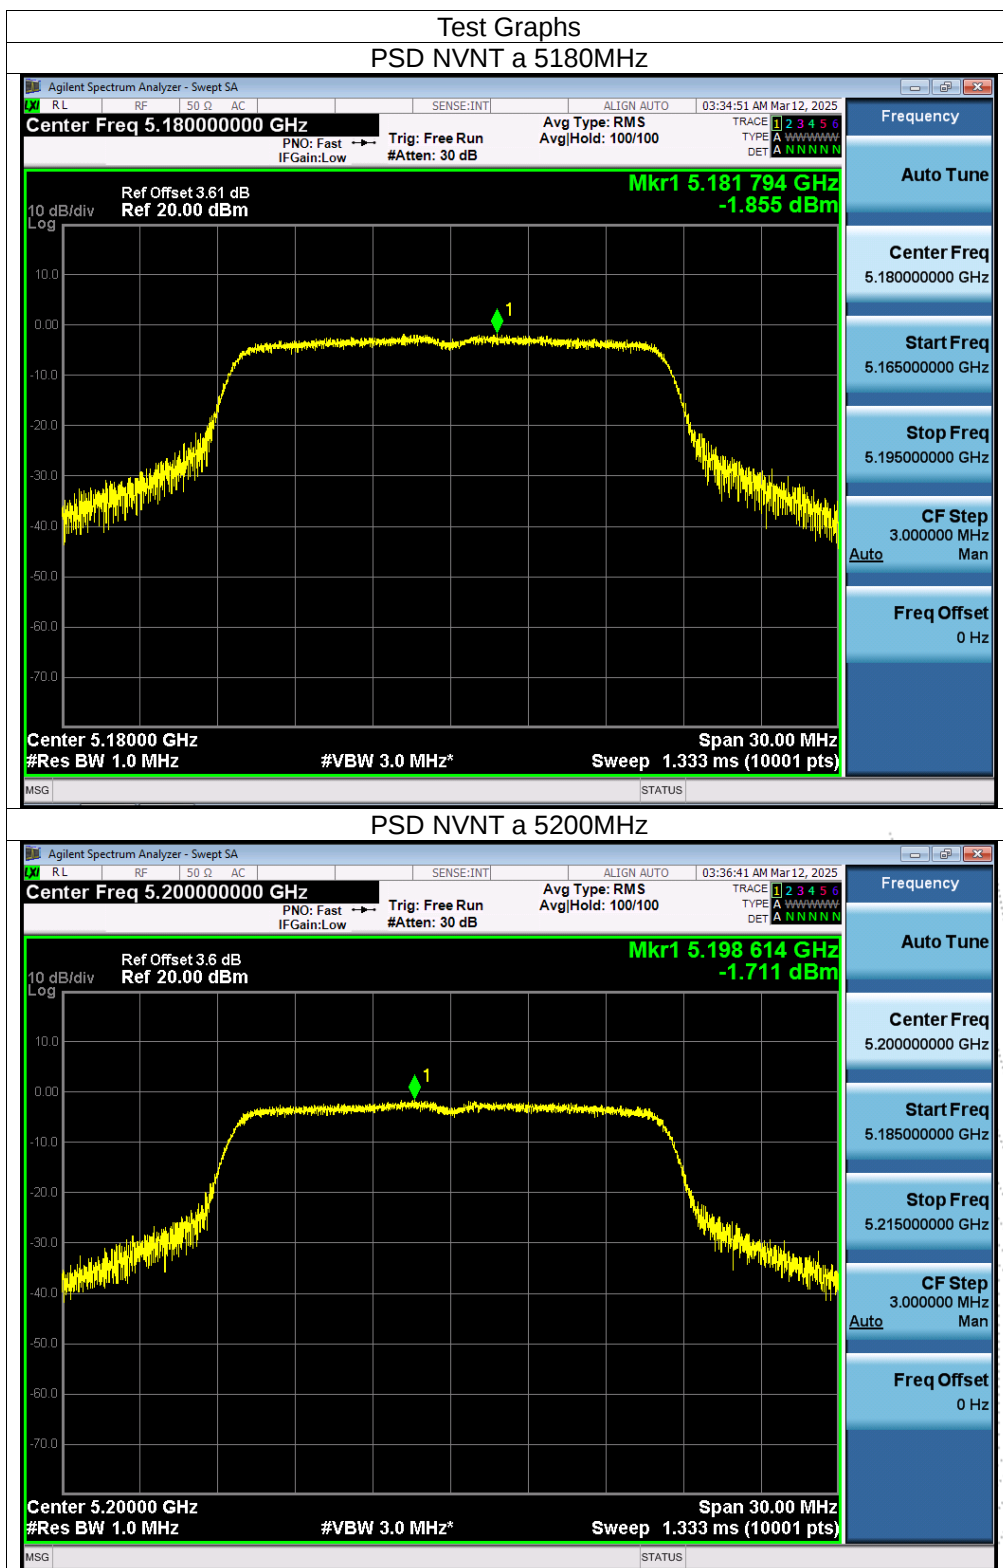


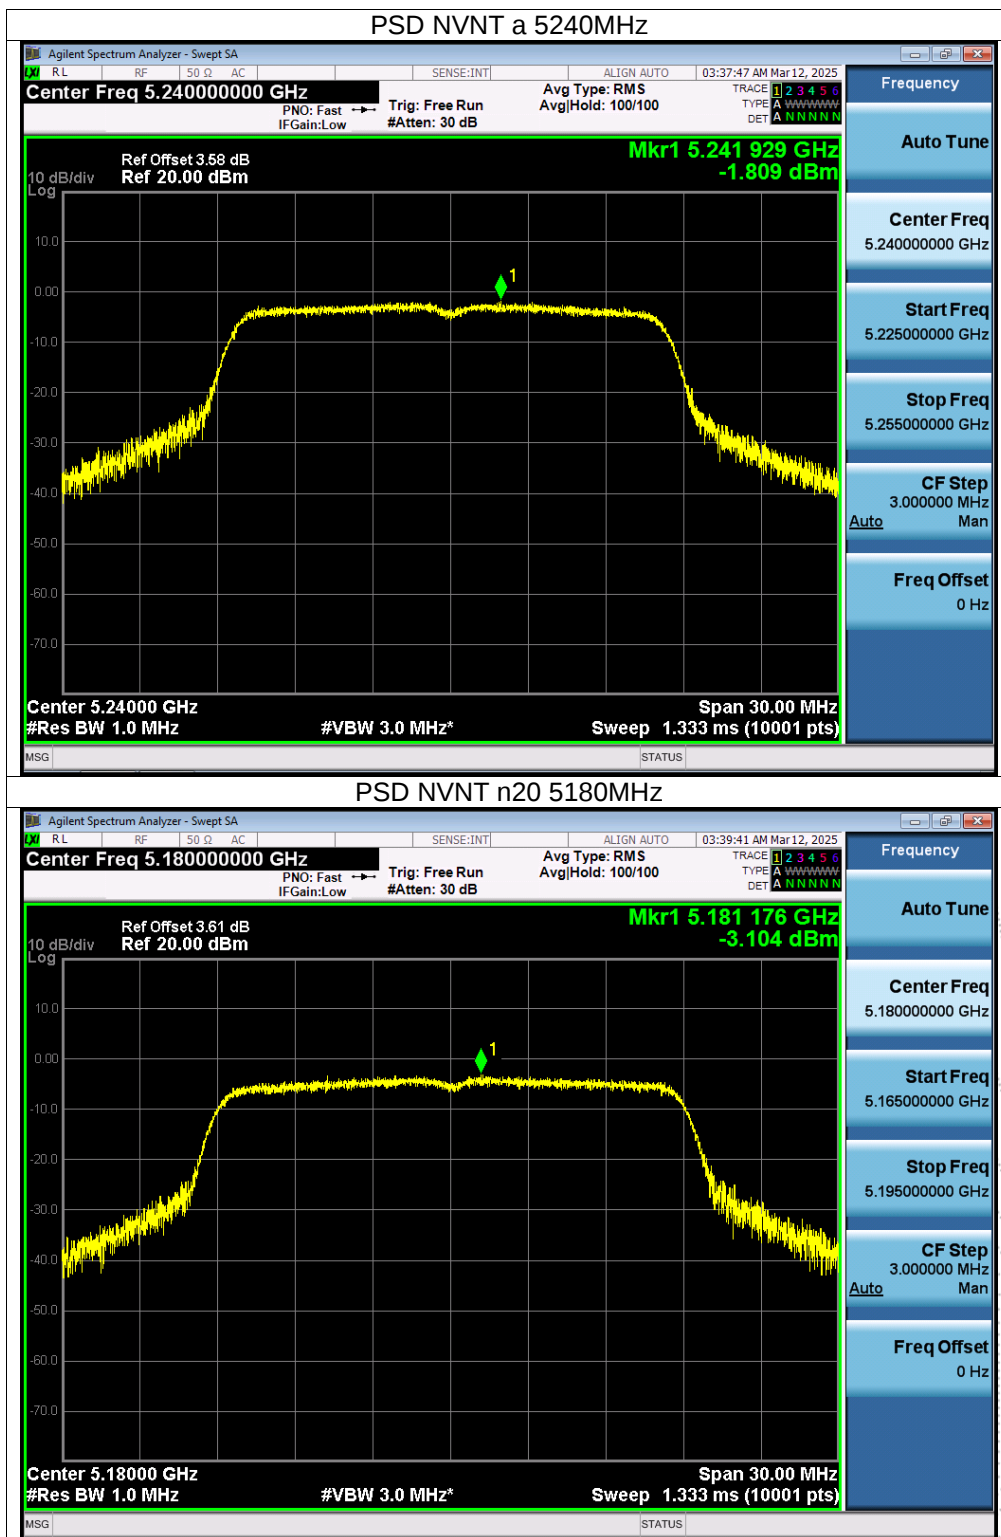


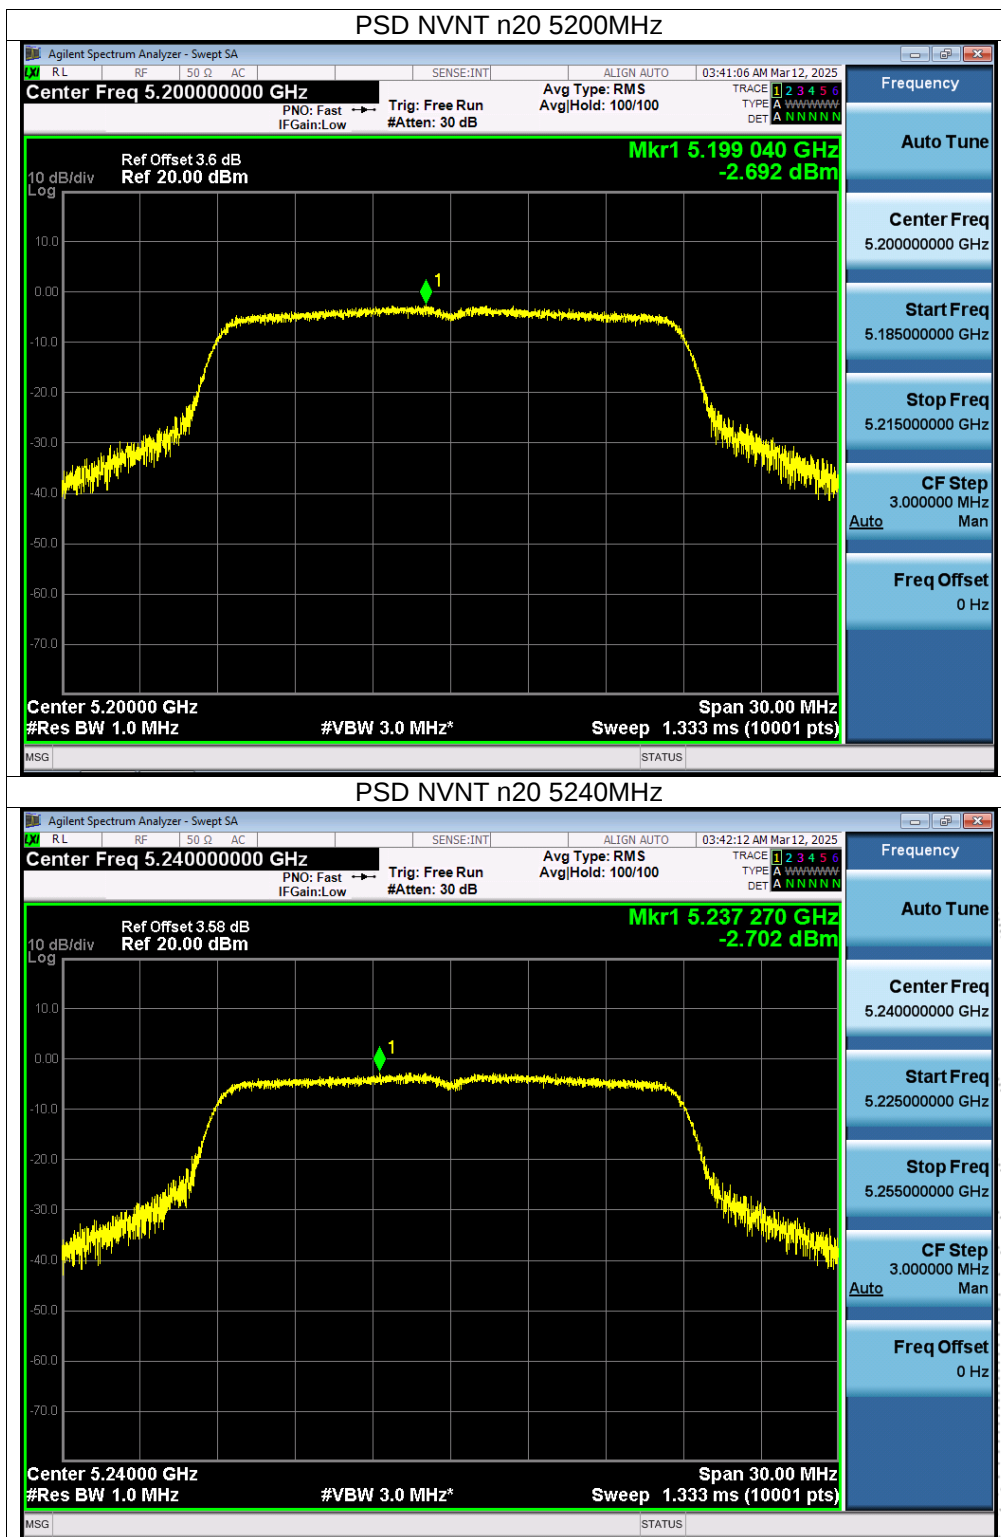


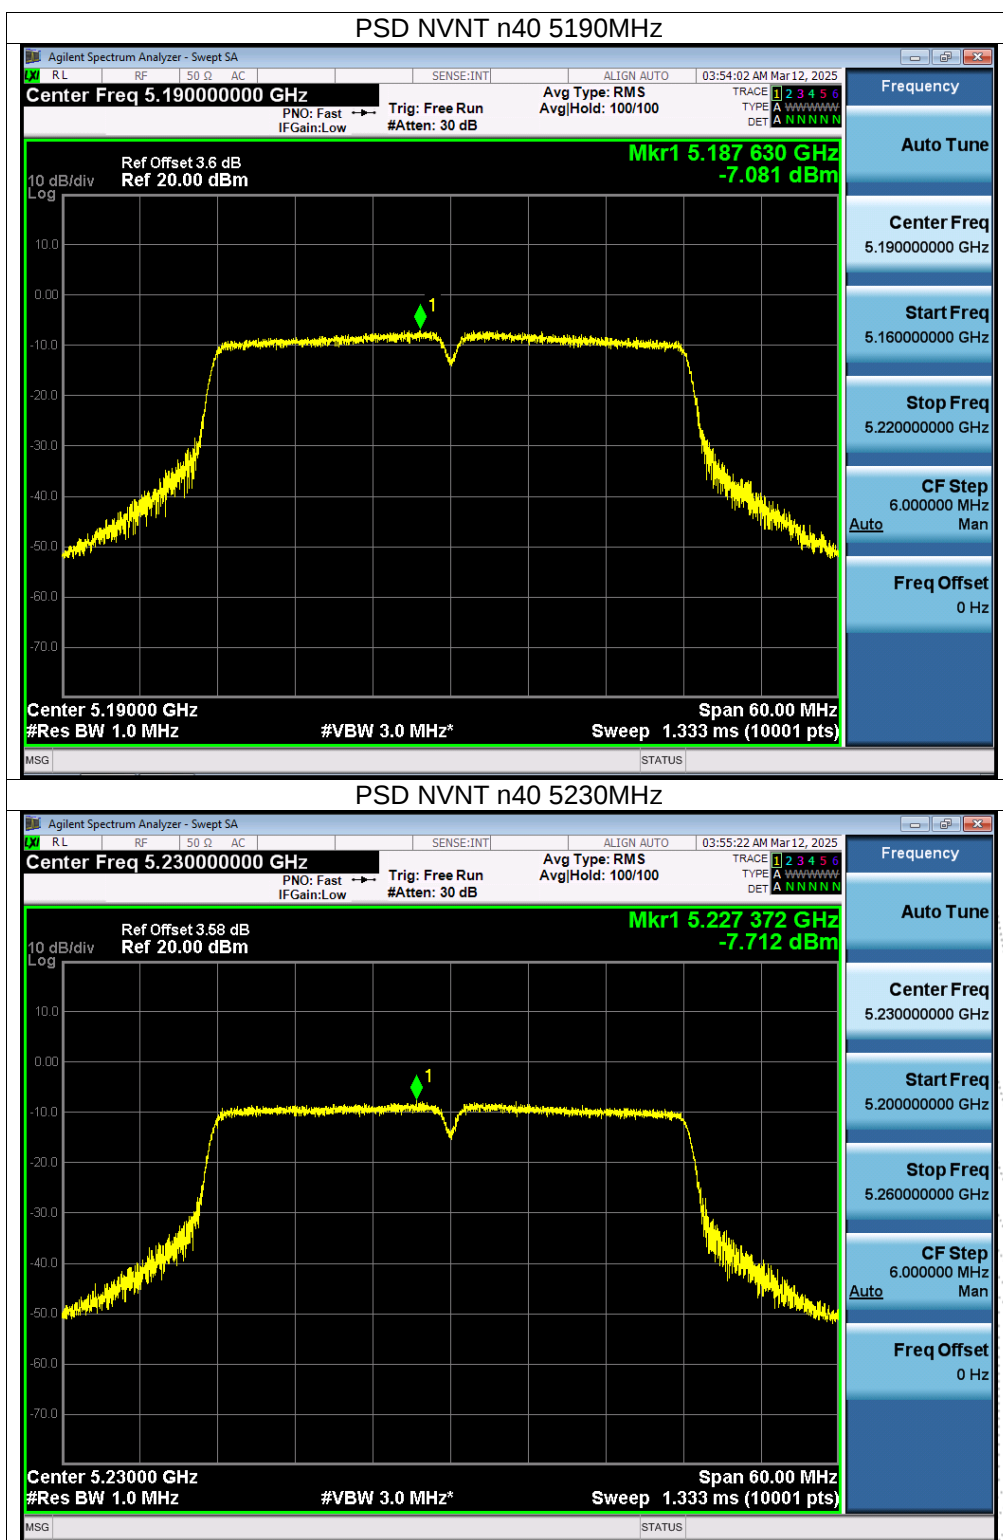


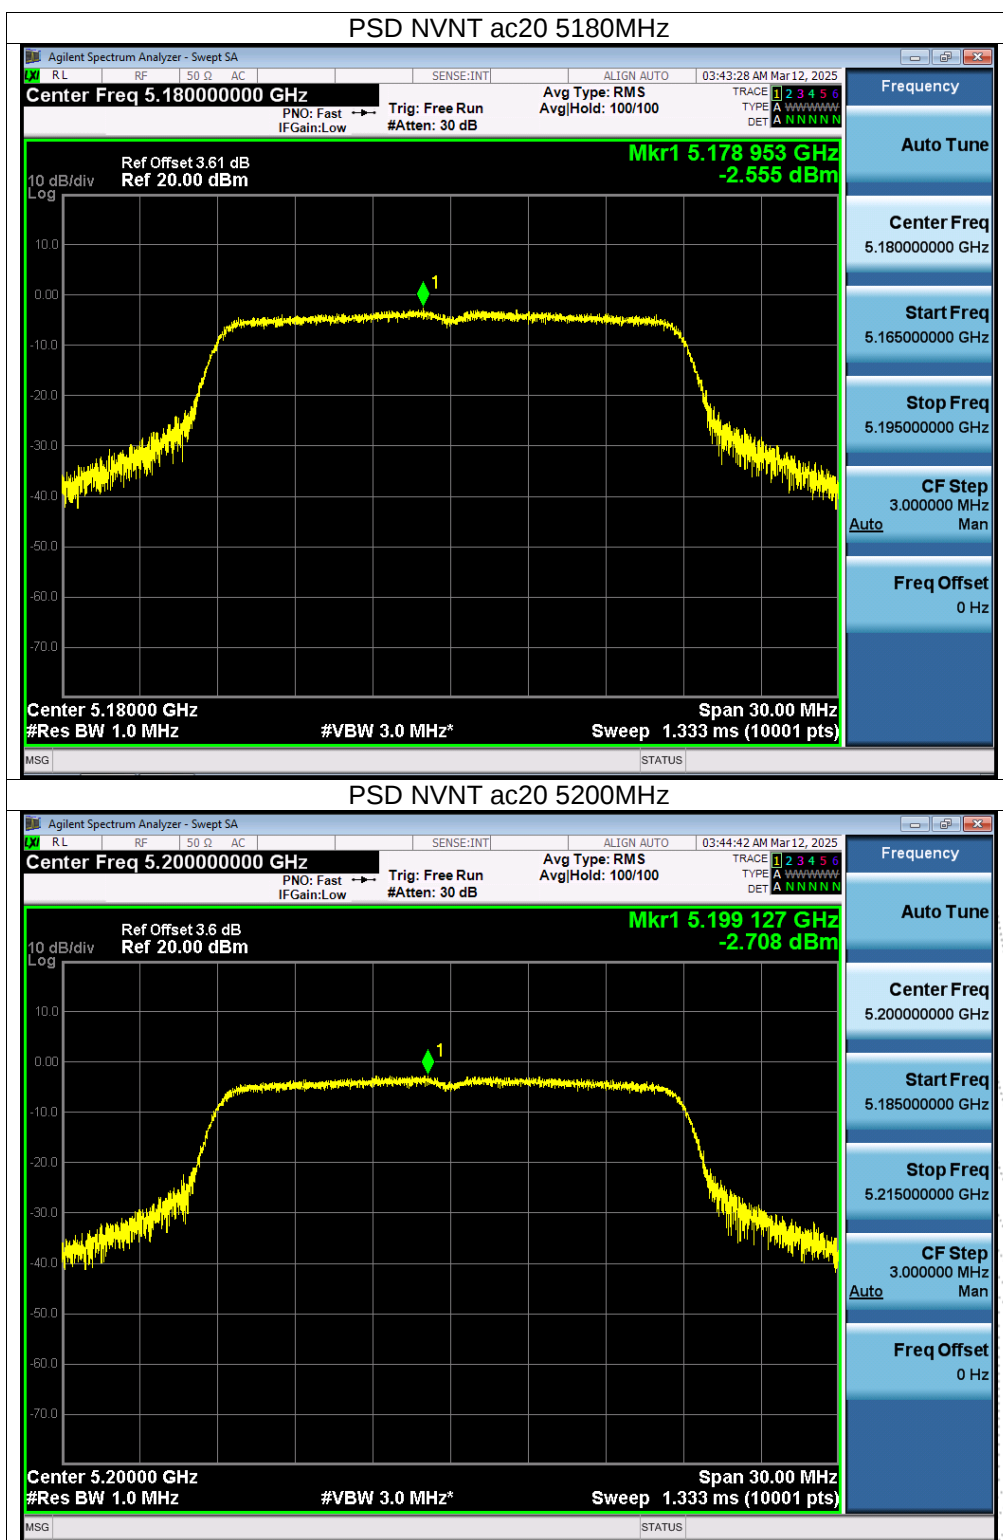


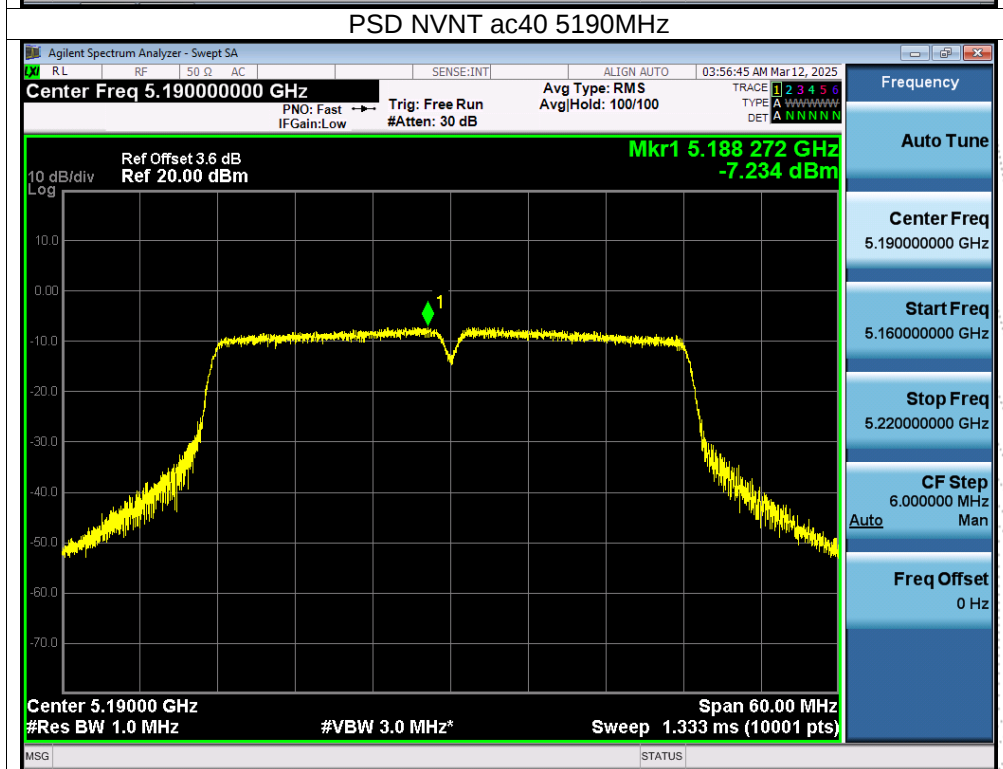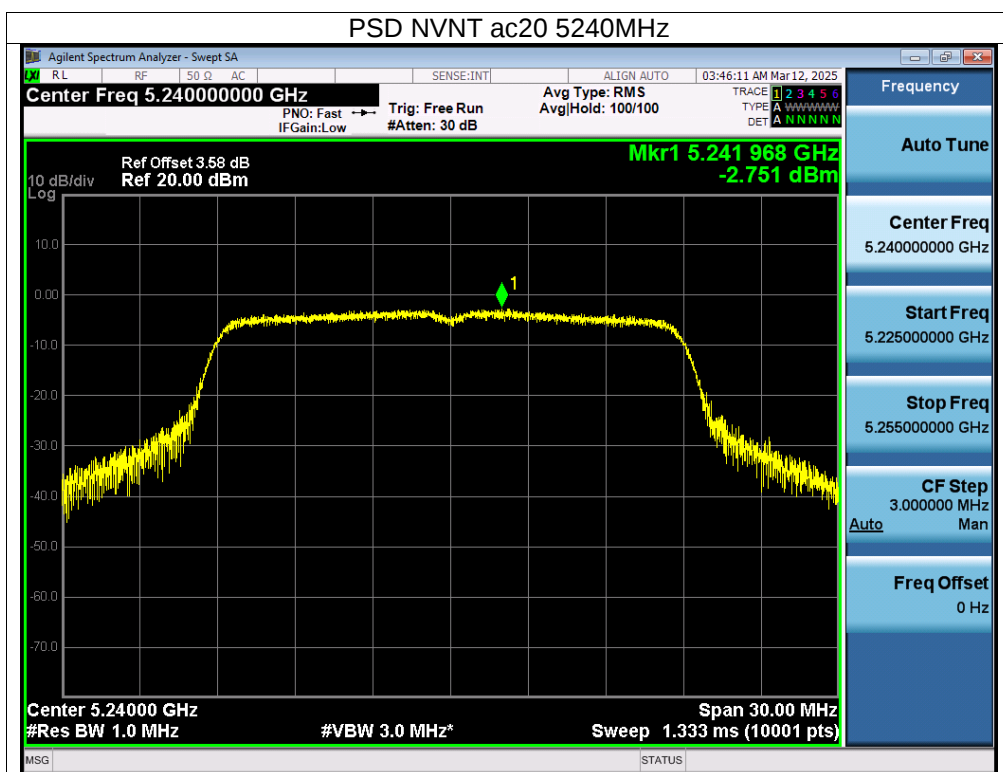

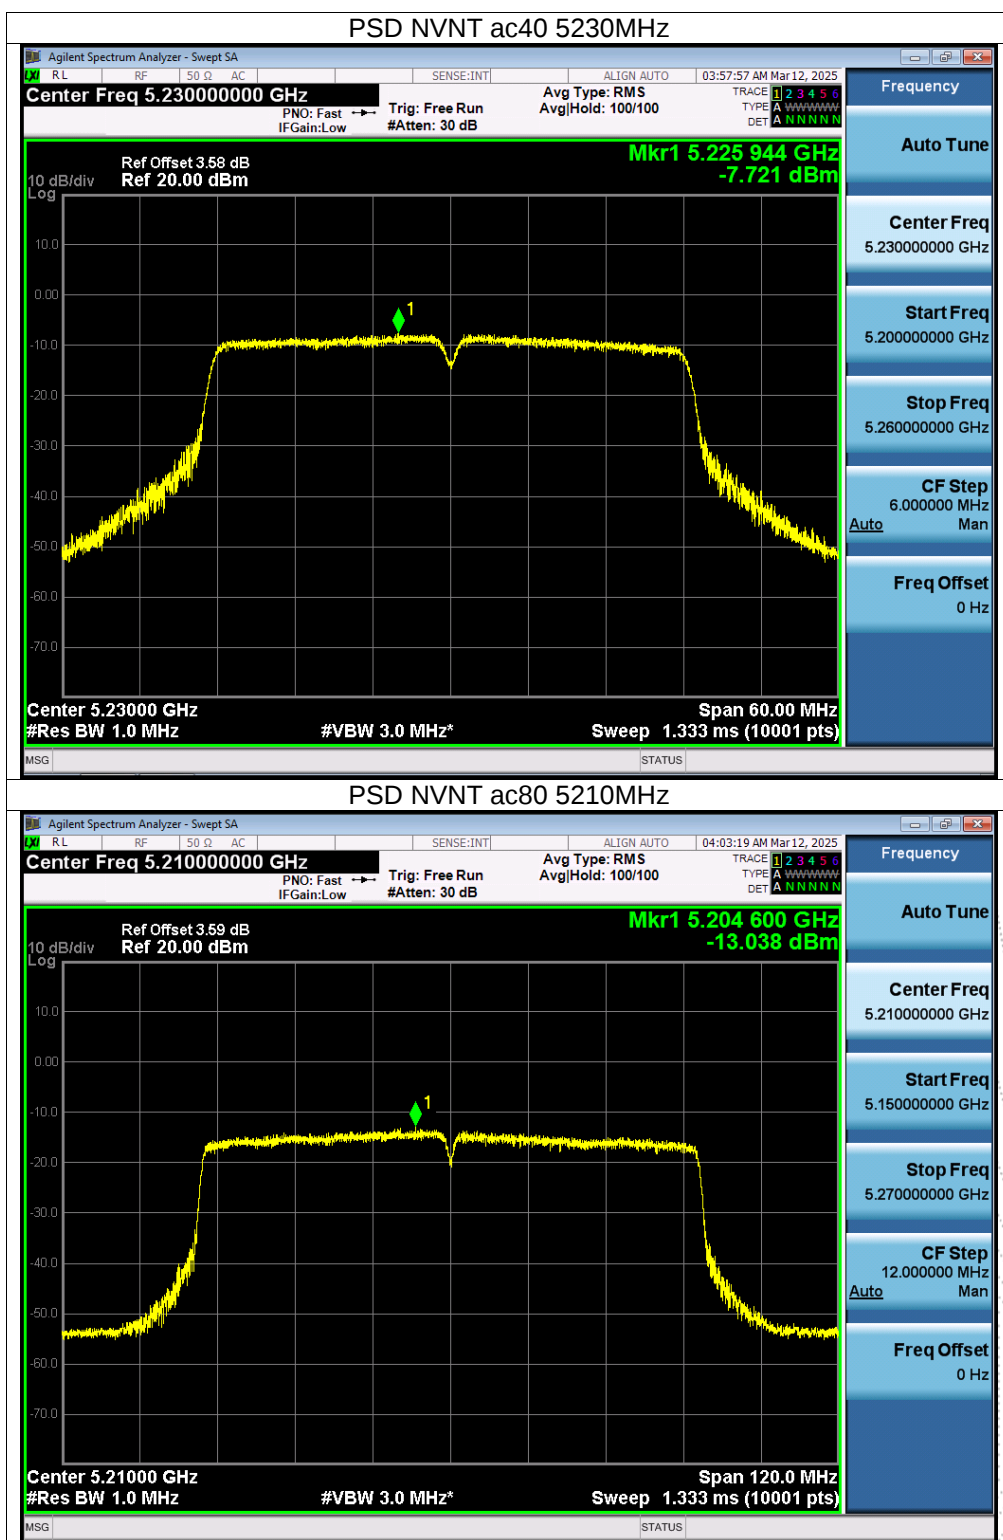

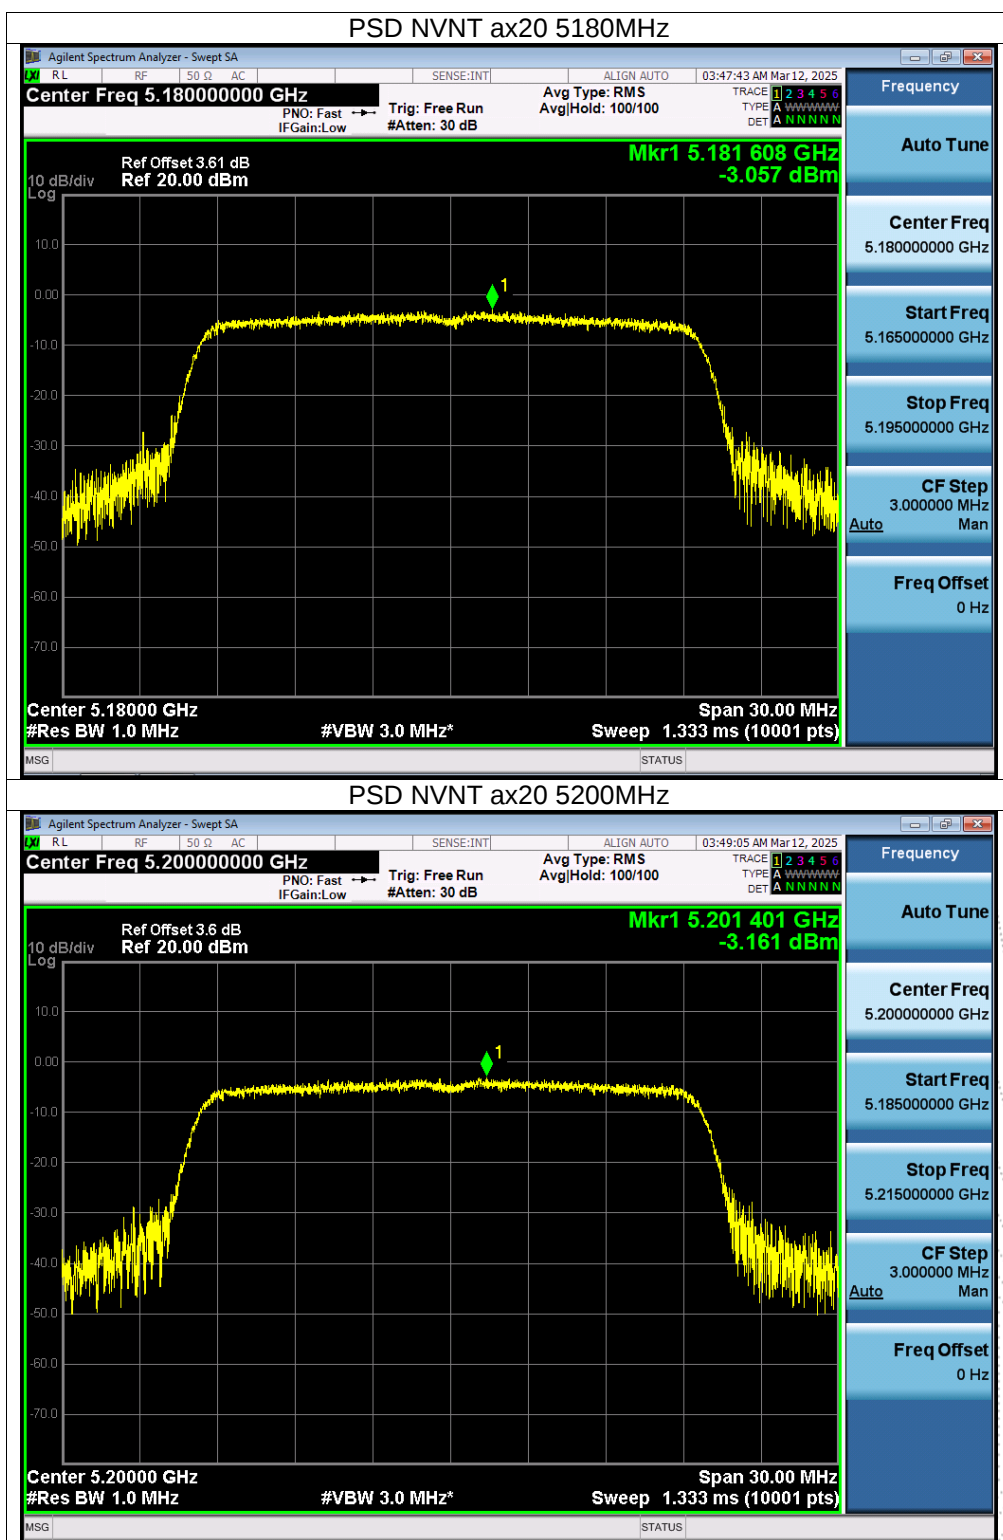

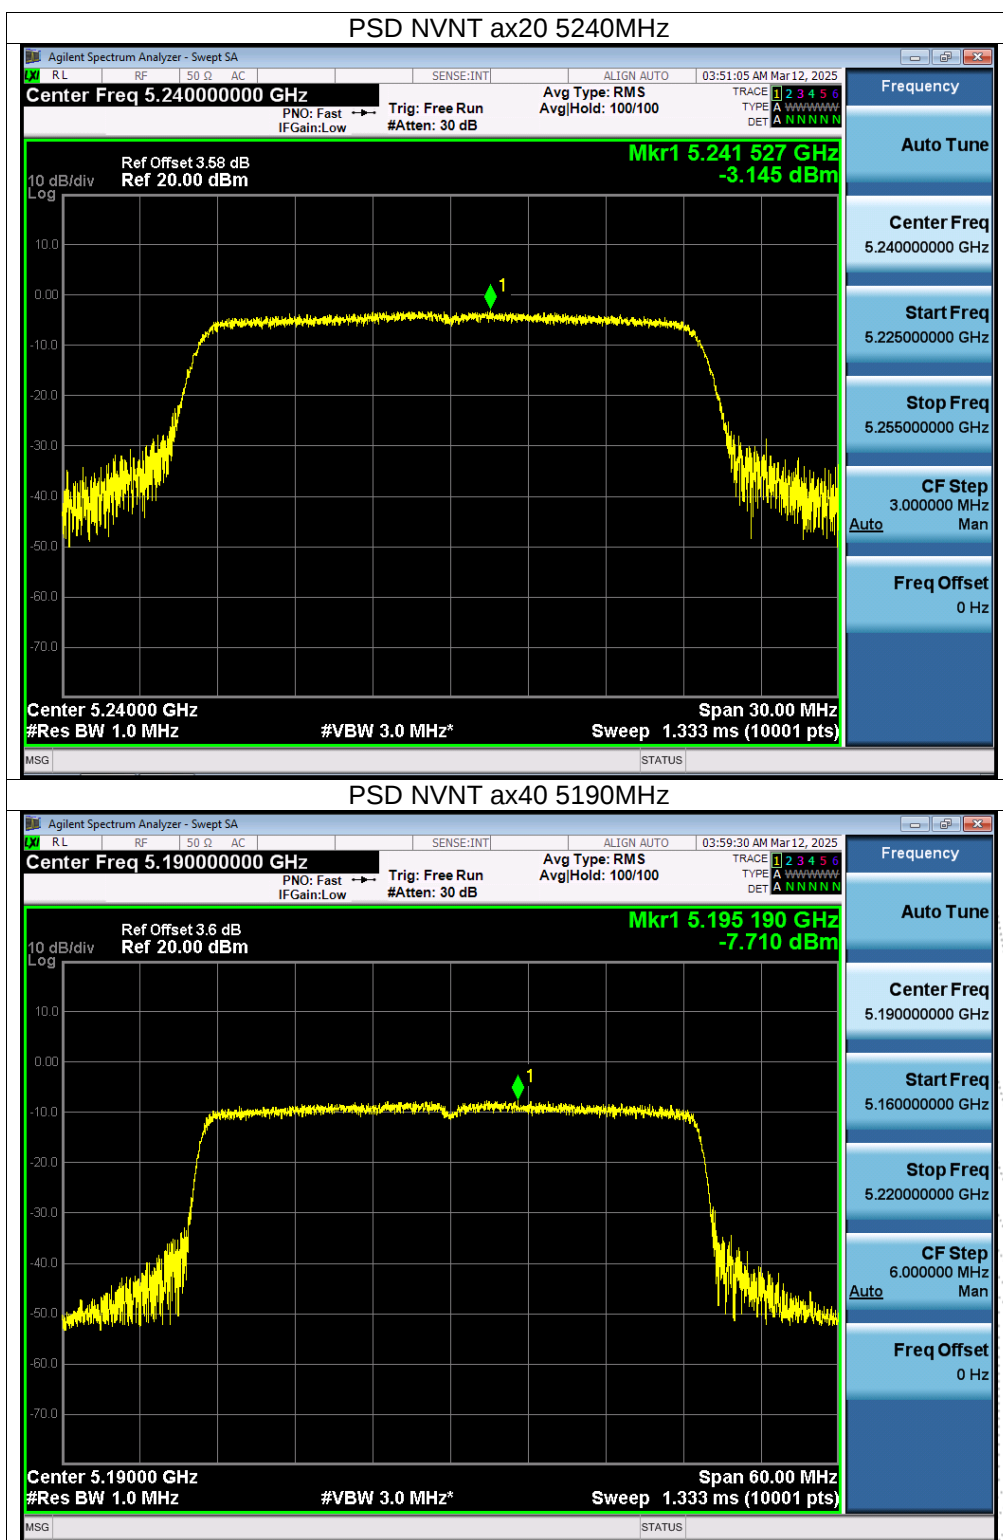



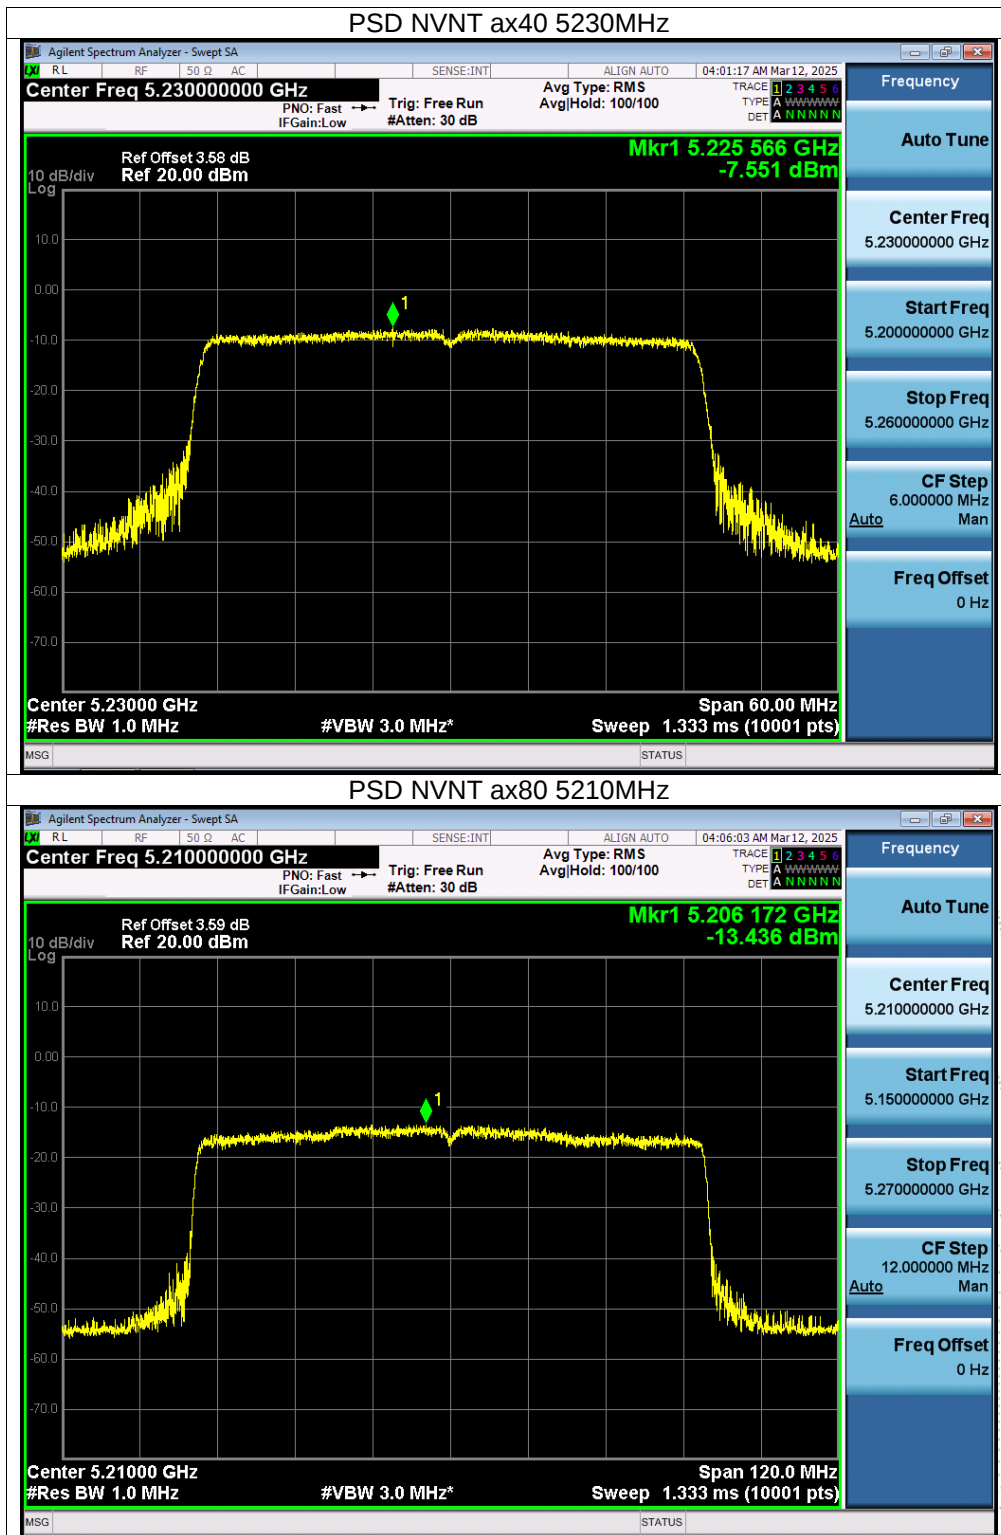



Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	(5260-5320MHz)		


Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5260	-2.88	10	Pass
NVNT	a	5280	-3.74	10	Pass
NVNT	a	5320	-2.73	10	Pass
NVNT	n20	5260	-6.13	10	Pass
NVNT	n20	5280	-5.23	10	Pass
NVNT	n20	5320	-3.87	10	Pass
NVNT	n40	5270	-9.17	10	Pass
NVNT	n40	5310	-9.43	10	Pass
NVNT	ac20	5260	-4.44	10	Pass
NVNT	ac20	5280	-5.01	10	Pass
NVNT	ac20	5320	-3.83	10	Pass
NVNT	ac40	5270	-9.62	10	Pass
NVNT	ac40	5310	-8.40	10	Pass
NVNT	ac80	5290	-13.73	10	Pass
NVNT	ax20	5260	-5.35	10	Pass
NVNT	ax20	5280	-5.41	10	Pass
NVNT	ax20	5320	-4.43	10	Pass
NVNT	ax40	5270	-9.22	10	Pass
NVNT	ax40	5310	-9.62	10	Pass
NVNT	ax80	5290	-13.65	10	Pass


CO. LTD.

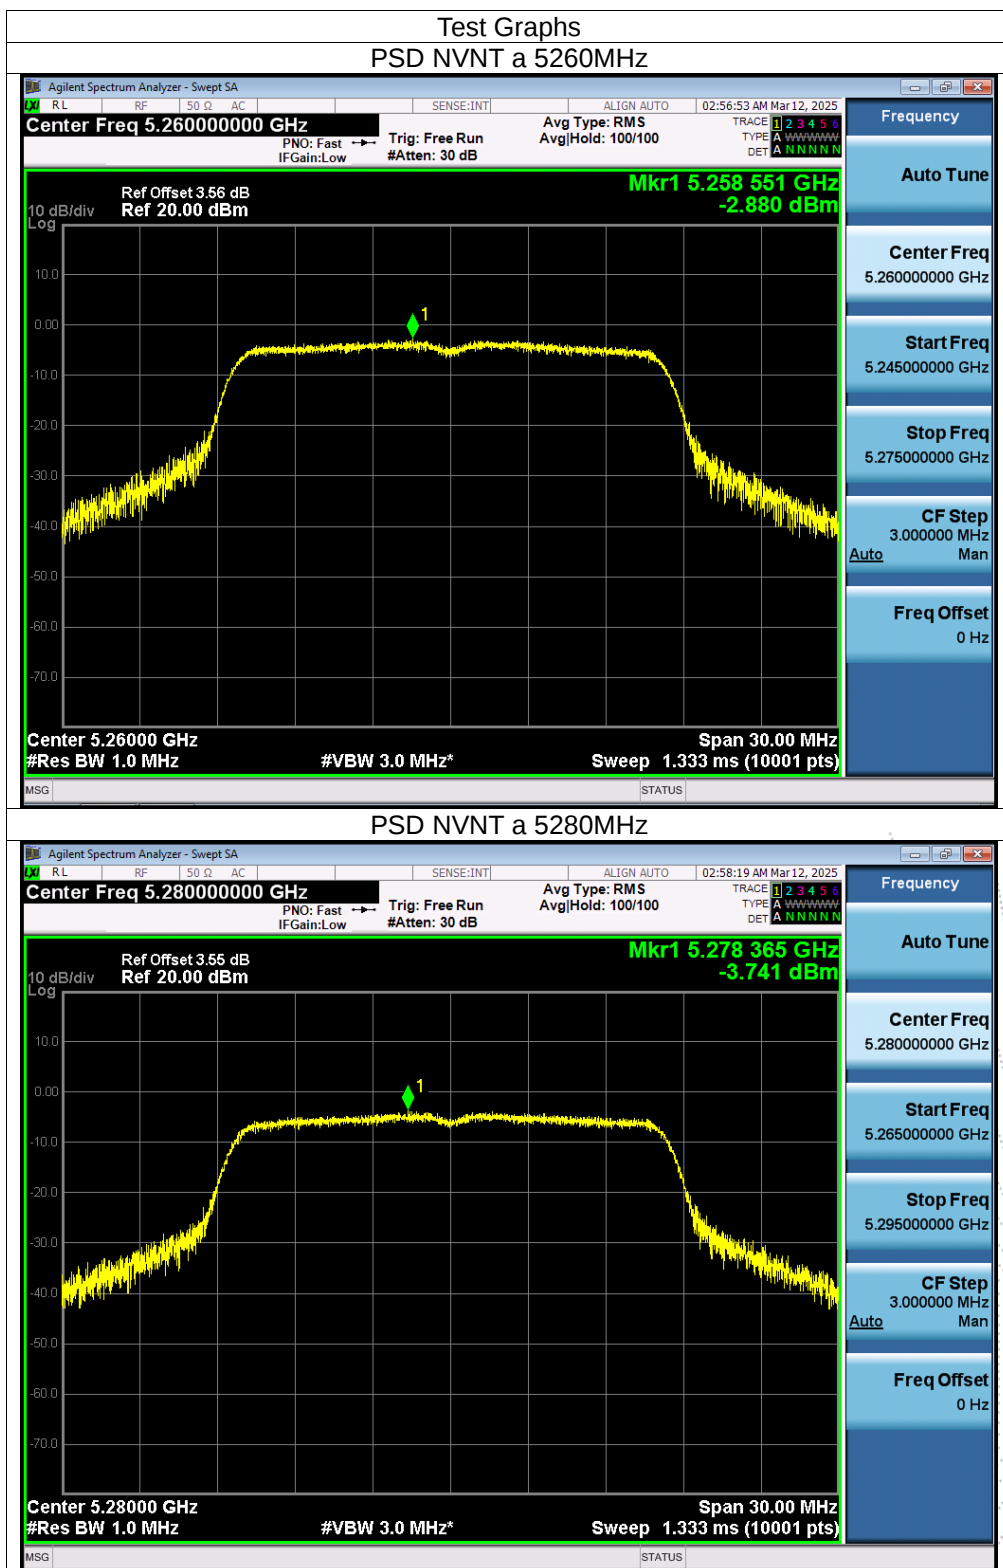


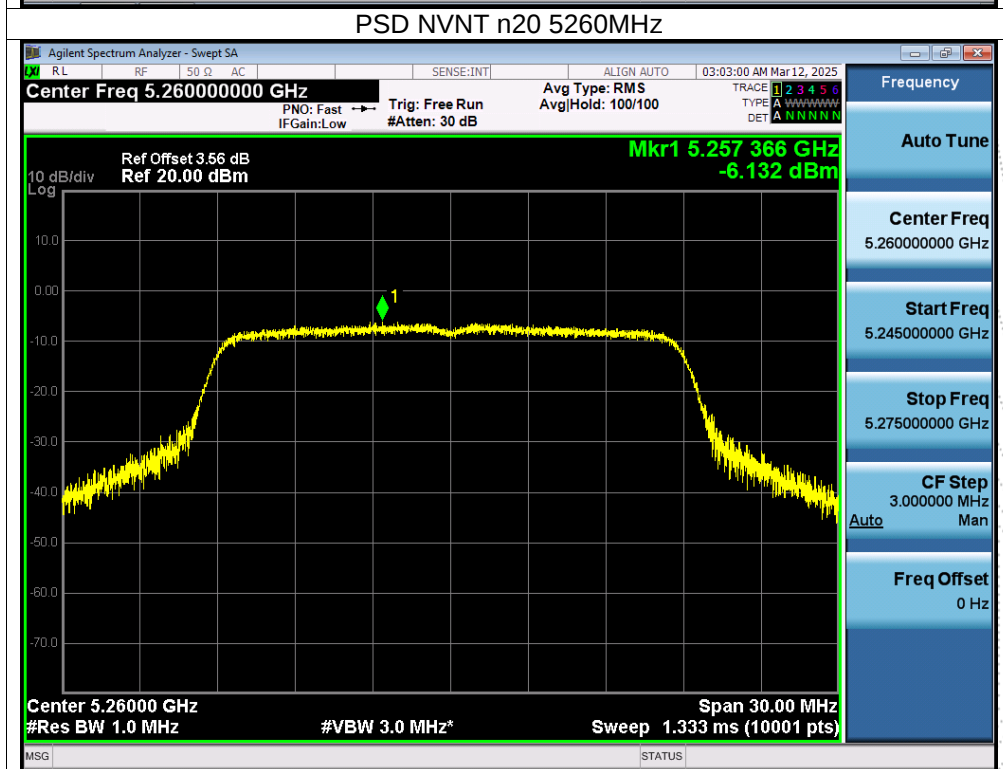
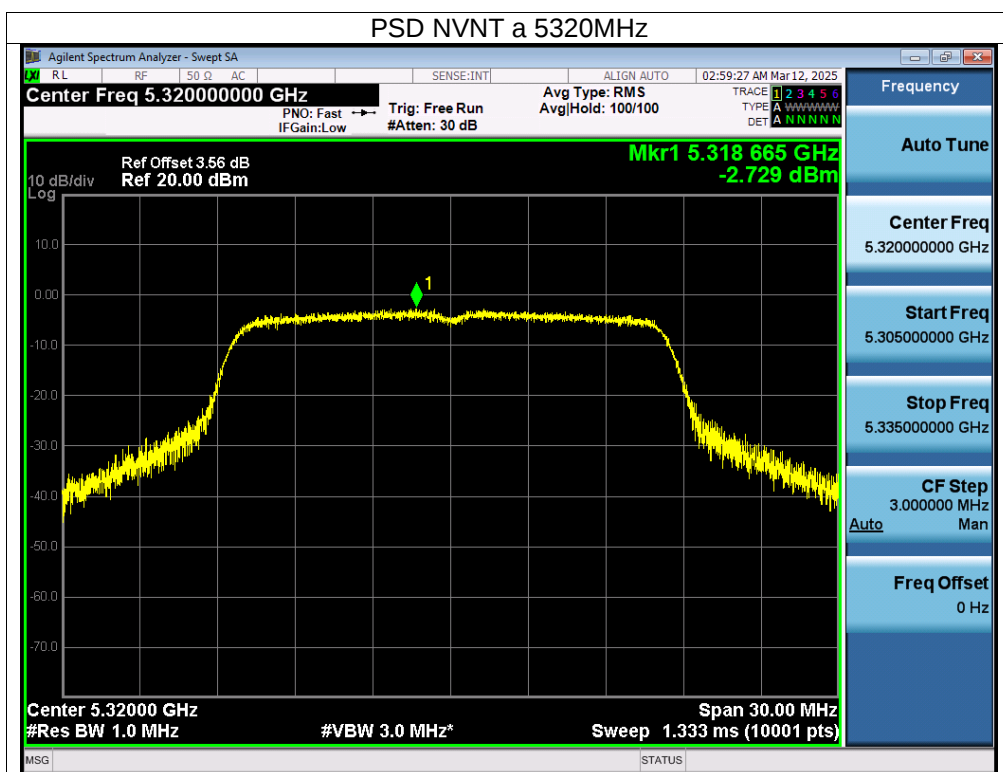


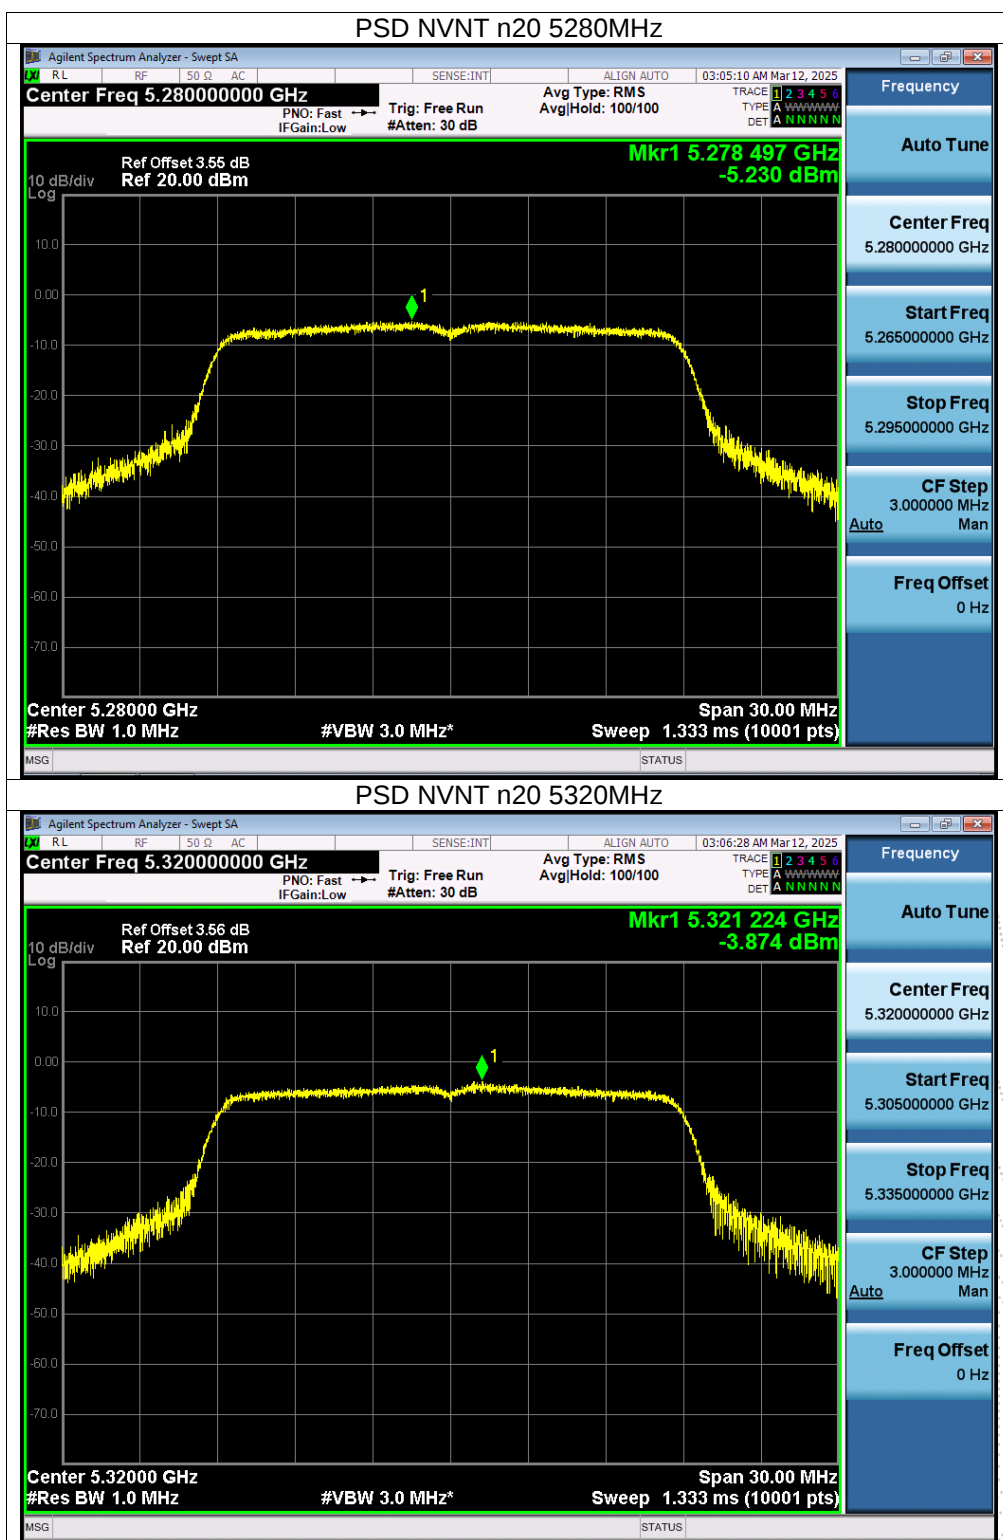


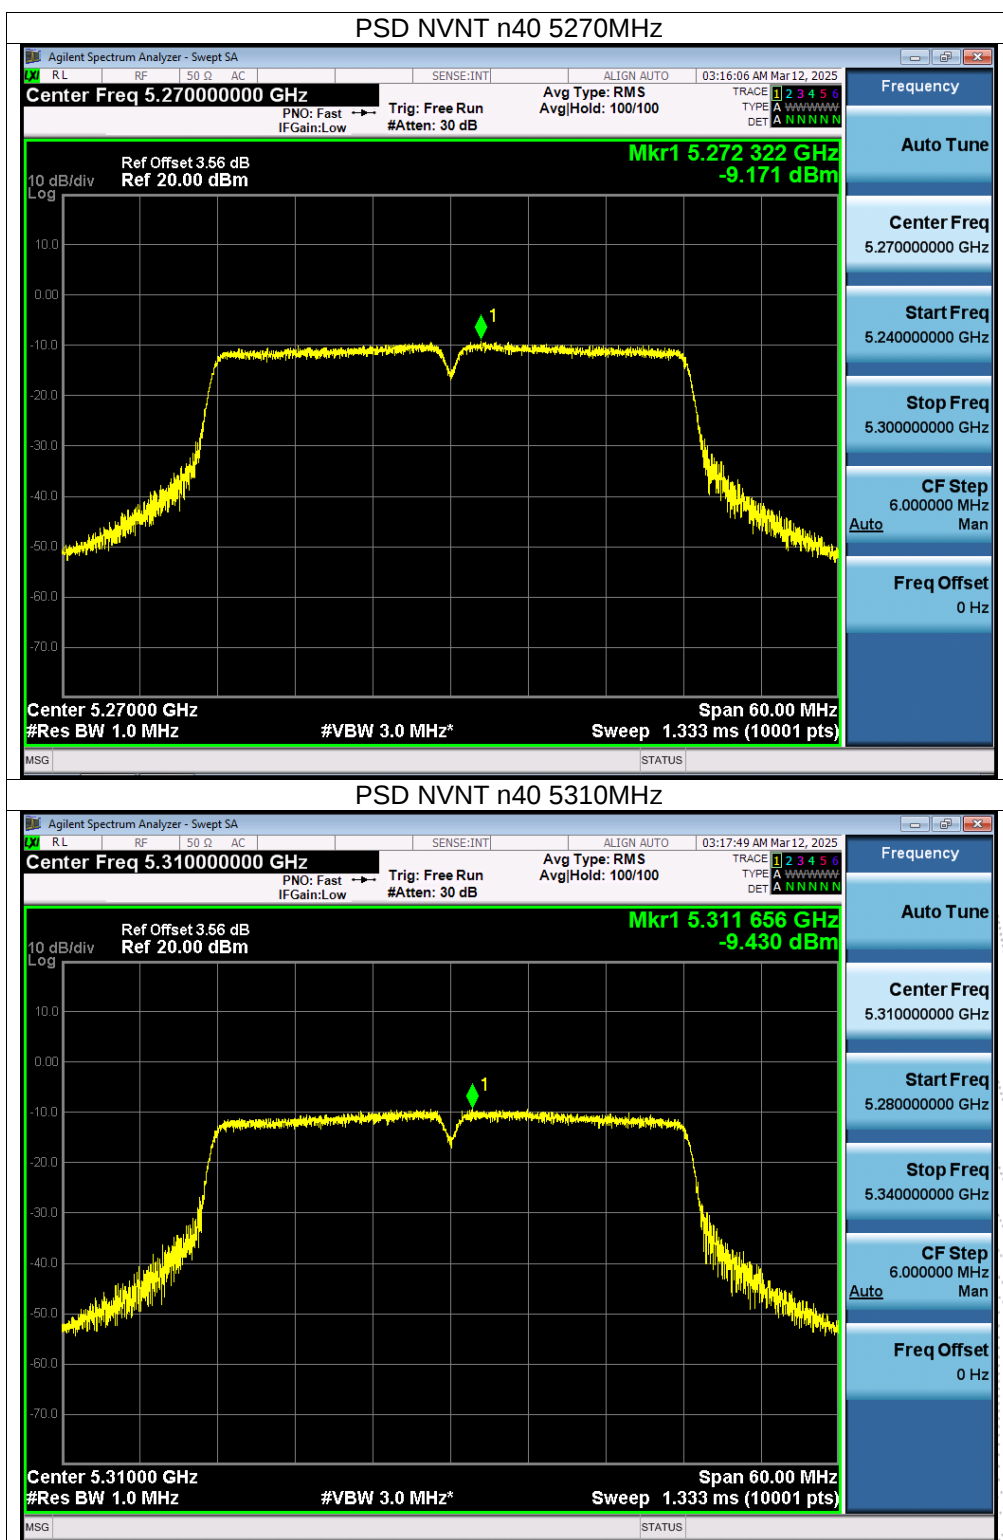



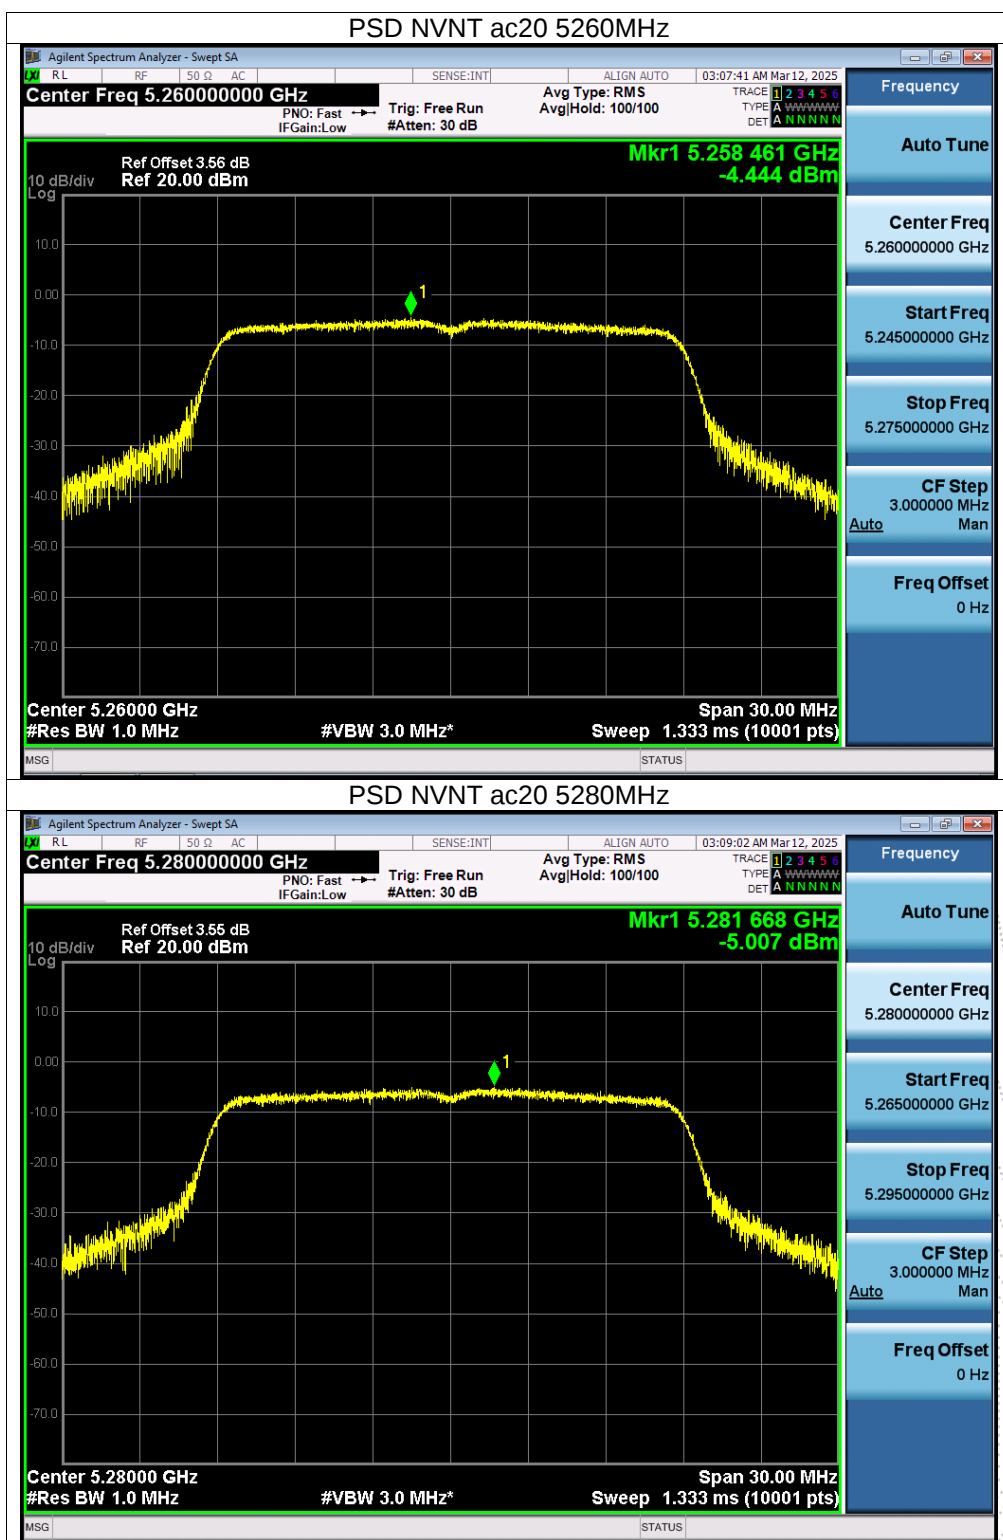


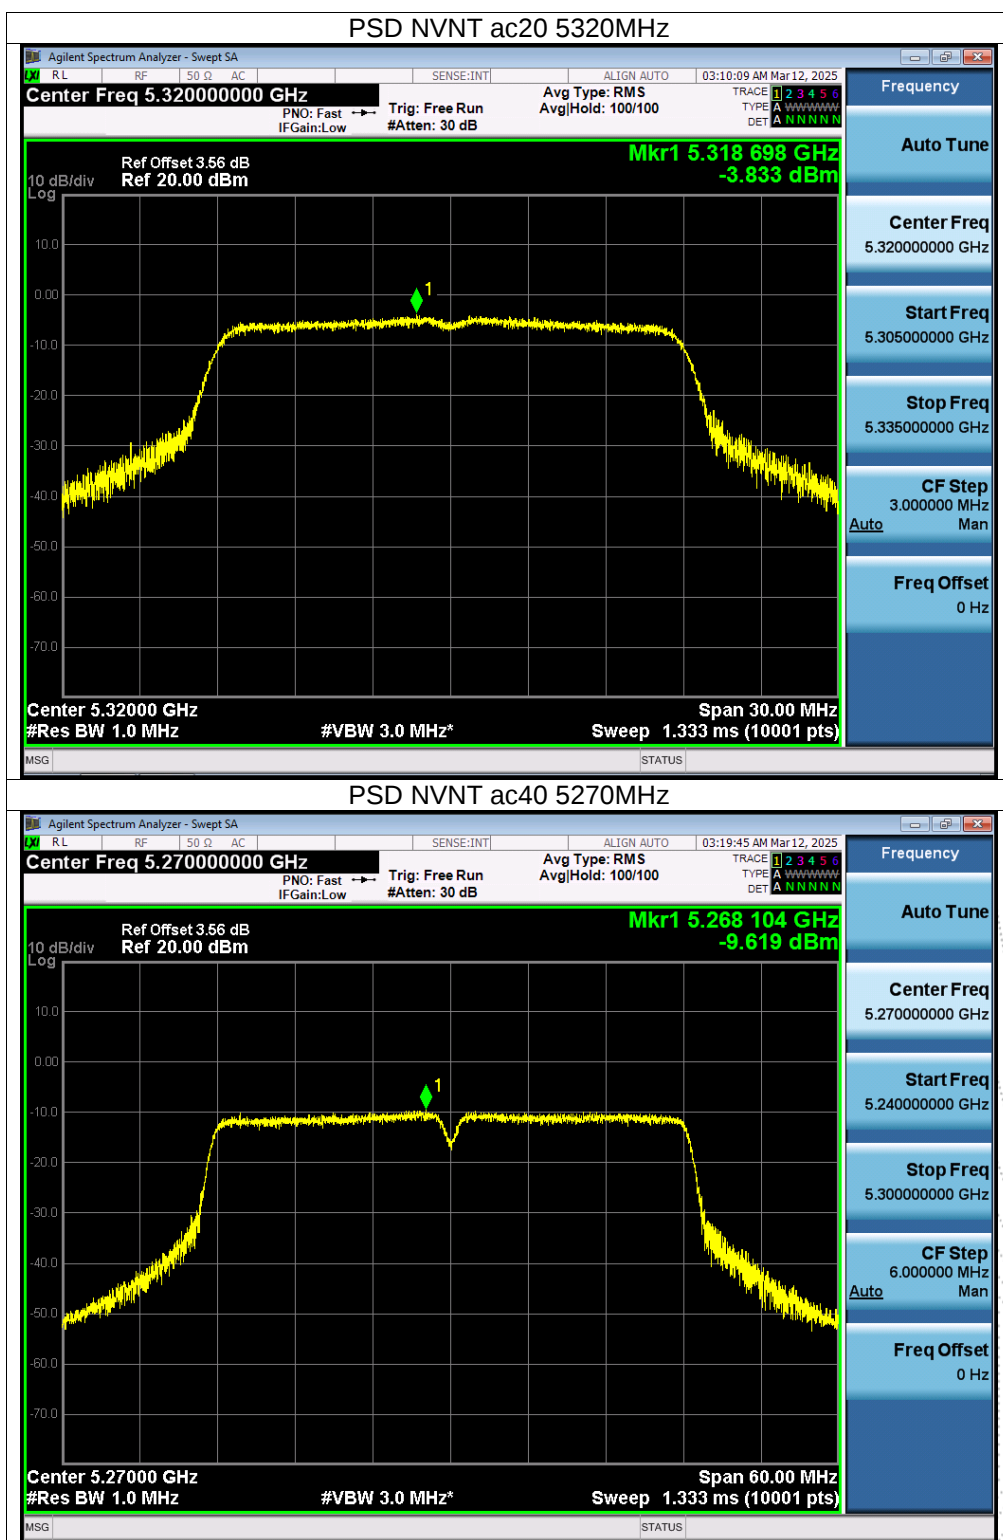

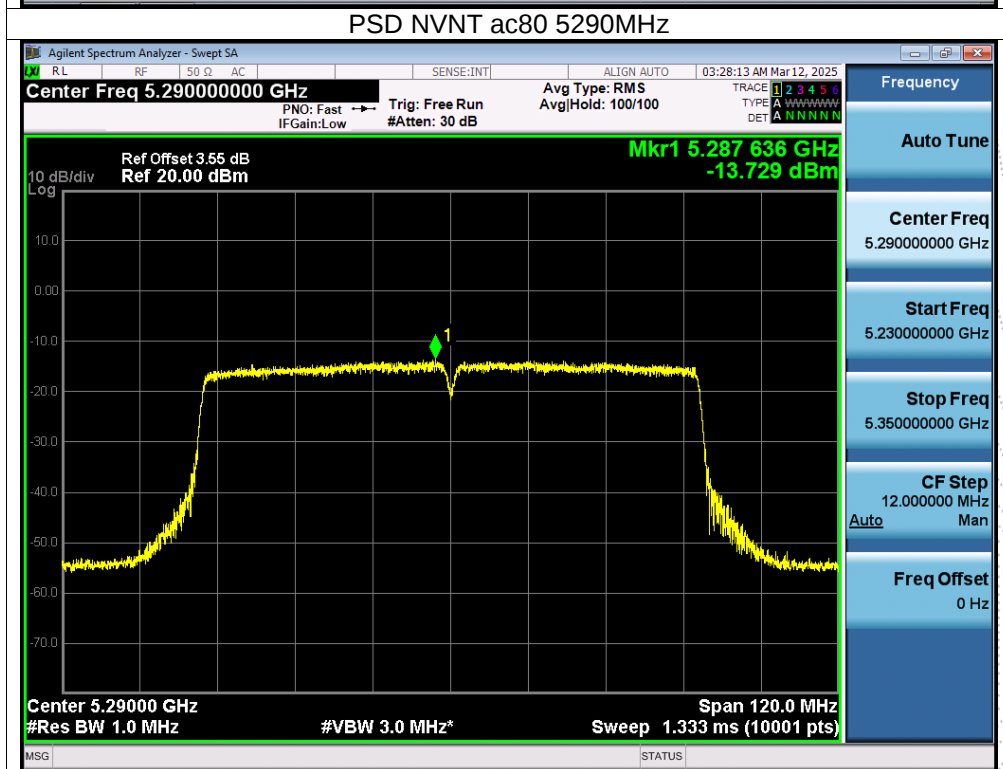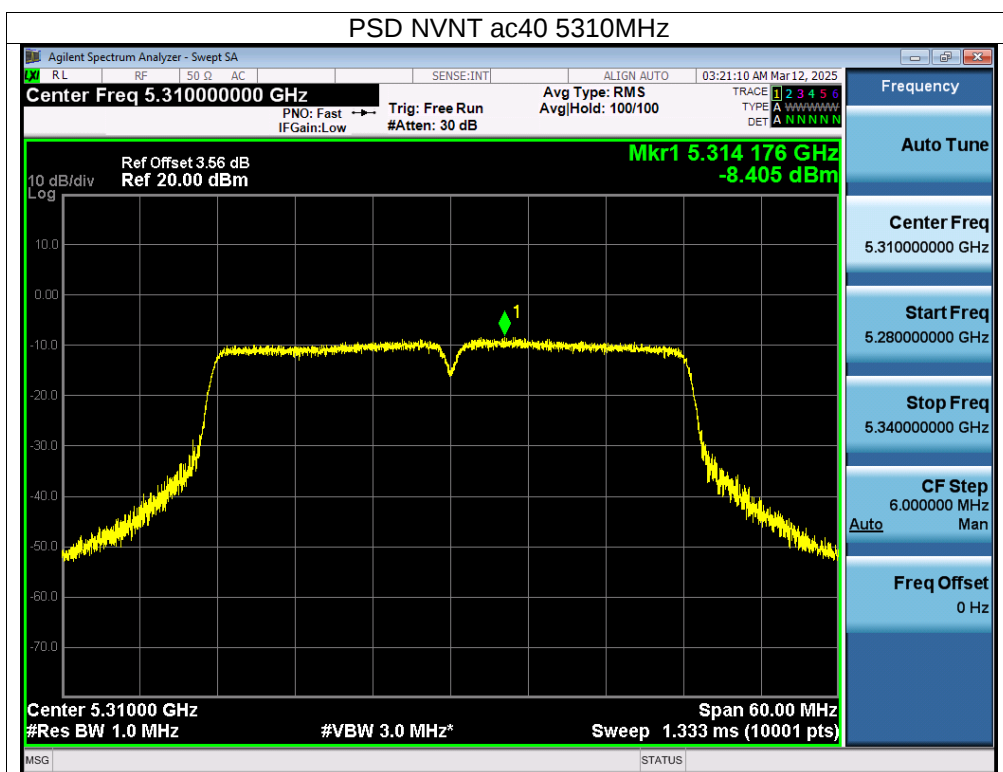

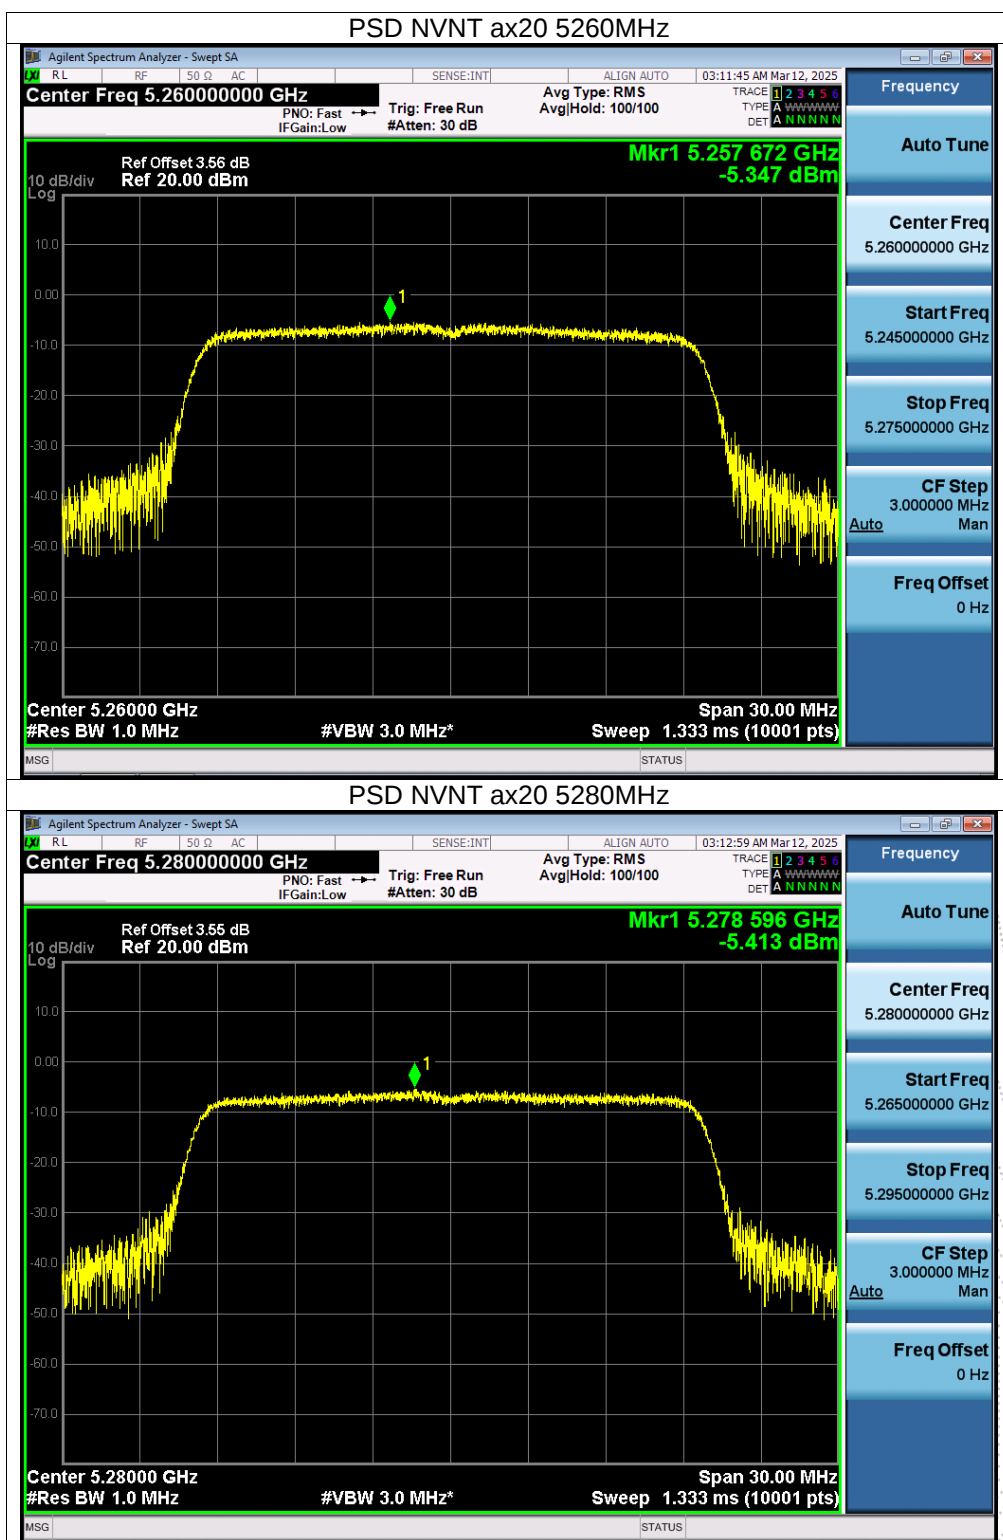

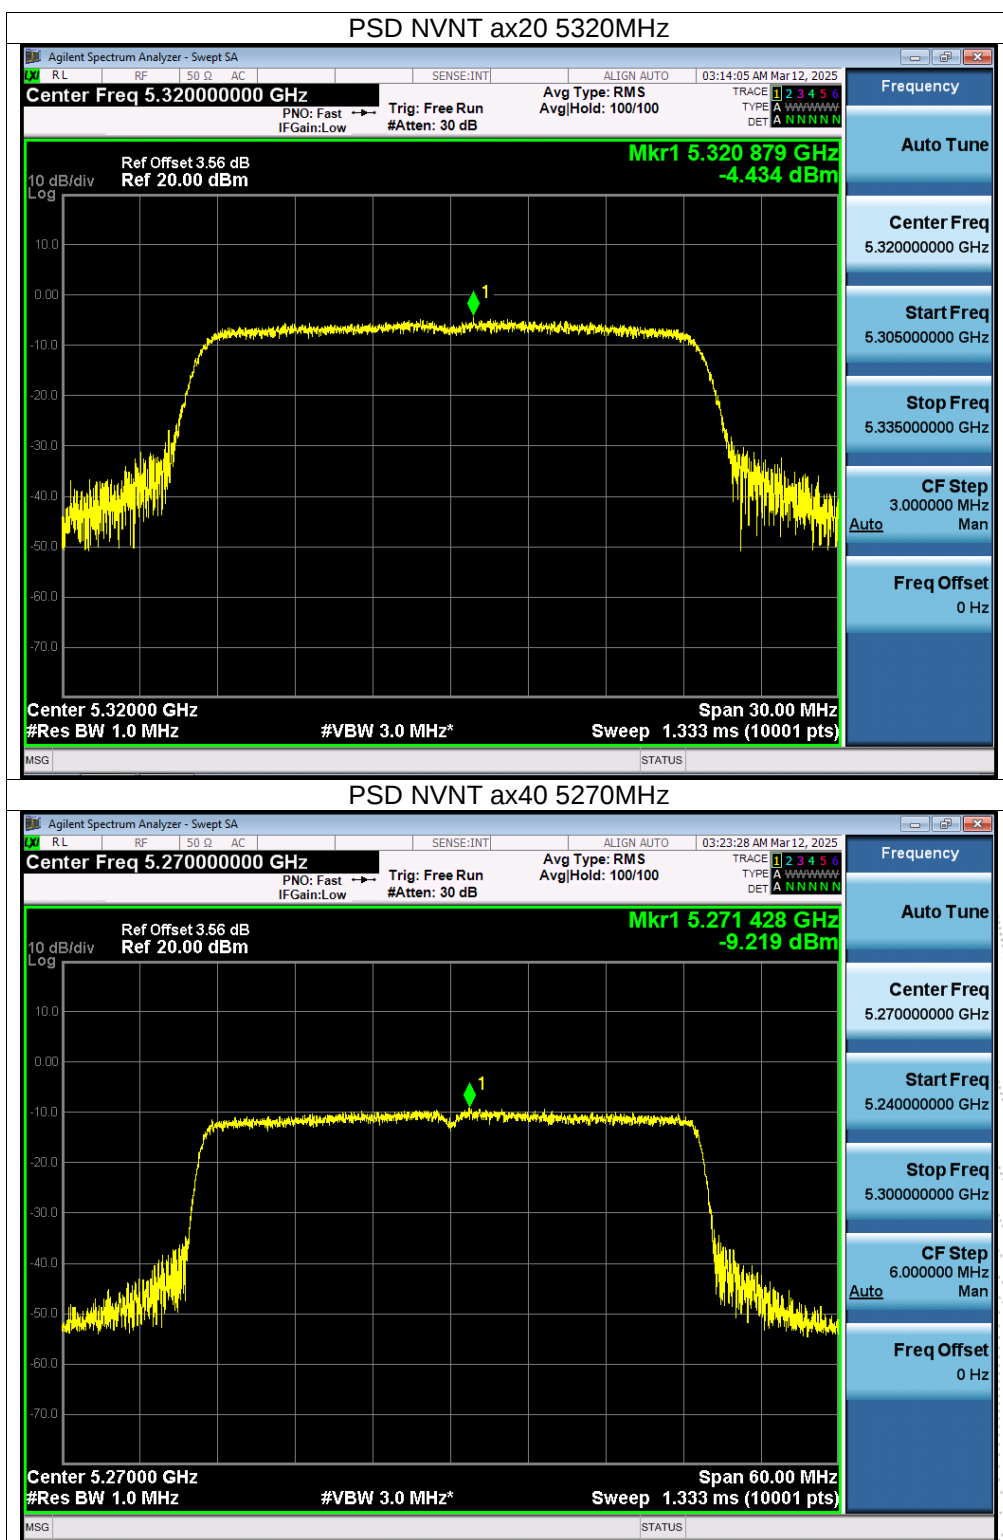


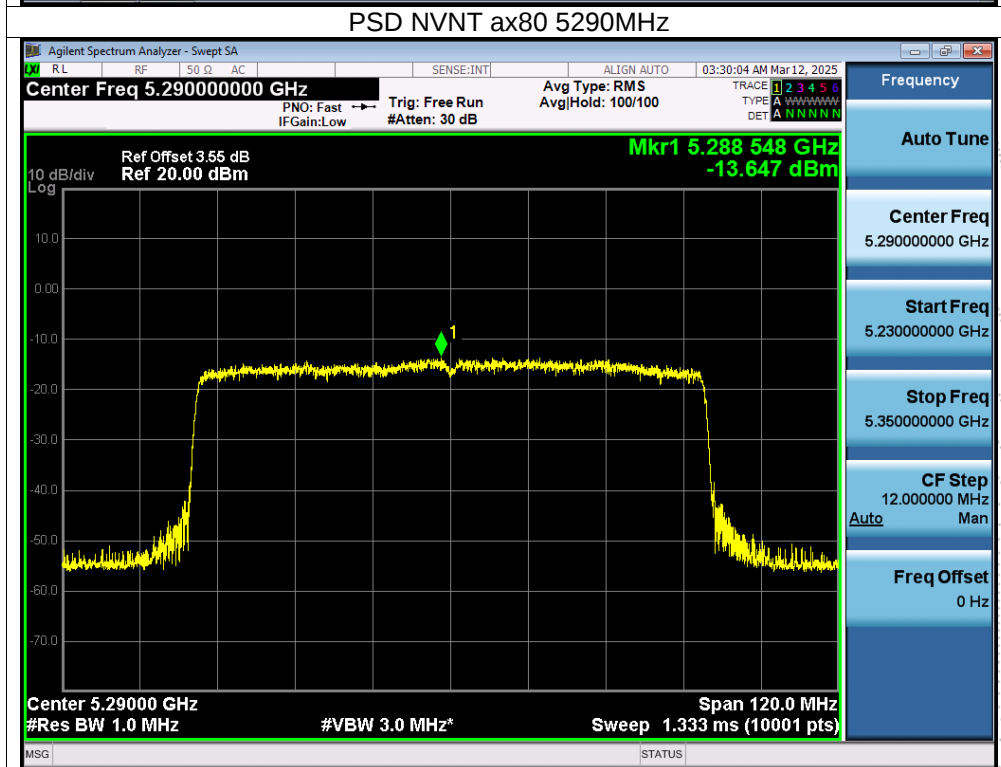
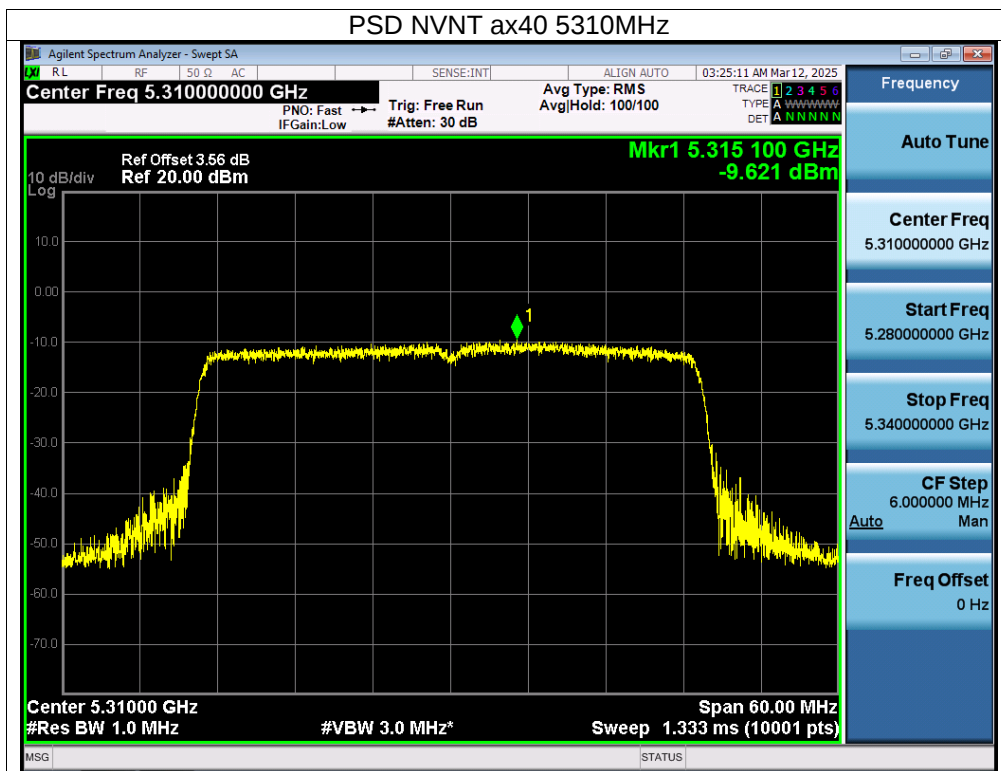



Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC120V/60Hz
Test Mode:	(5500-5700MHz)		


Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5500	-2.24	10	Pass
NVNT	a	5580	-2.51	10	Pass
NVNT	a	5700	-2.23	10	Pass
NVNT	n20	5500	-4.46	10	Pass
NVNT	n20	5580	-4.17	10	Pass
NVNT	n20	5700	-4.84	10	Pass
NVNT	n40	5510	-8.31	10	Pass
NVNT	n40	5550	-8.35	10	Pass
NVNT	n40	5670	-9.08	10	Pass
NVNT	ac20	5500	-4.06	10	Pass
NVNT	ac20	5580	-4.69	10	Pass
NVNT	ac20	5700	-4.88	10	Pass
NVNT	ac40	5510	-9.01	10	Pass
NVNT	ac40	5550	-7.53	10	Pass
NVNT	ac40	5670	-9.17	10	Pass
NVNT	ac80	5530	-13.98	10	Pass
NVNT	ax20	5500	-4.41	10	Pass
NVNT	ax20	5580	-5.41	10	Pass
NVNT	ax20	5700	-4.90	10	Pass
NVNT	ax40	5510	-9.24	10	Pass
NVNT	ax40	5550	-7.64	10	Pass
NVNT	ax40	5670	-8.88	10	Pass
NVNT	ax80	5530	-13.16	10	Pass



STING
ED


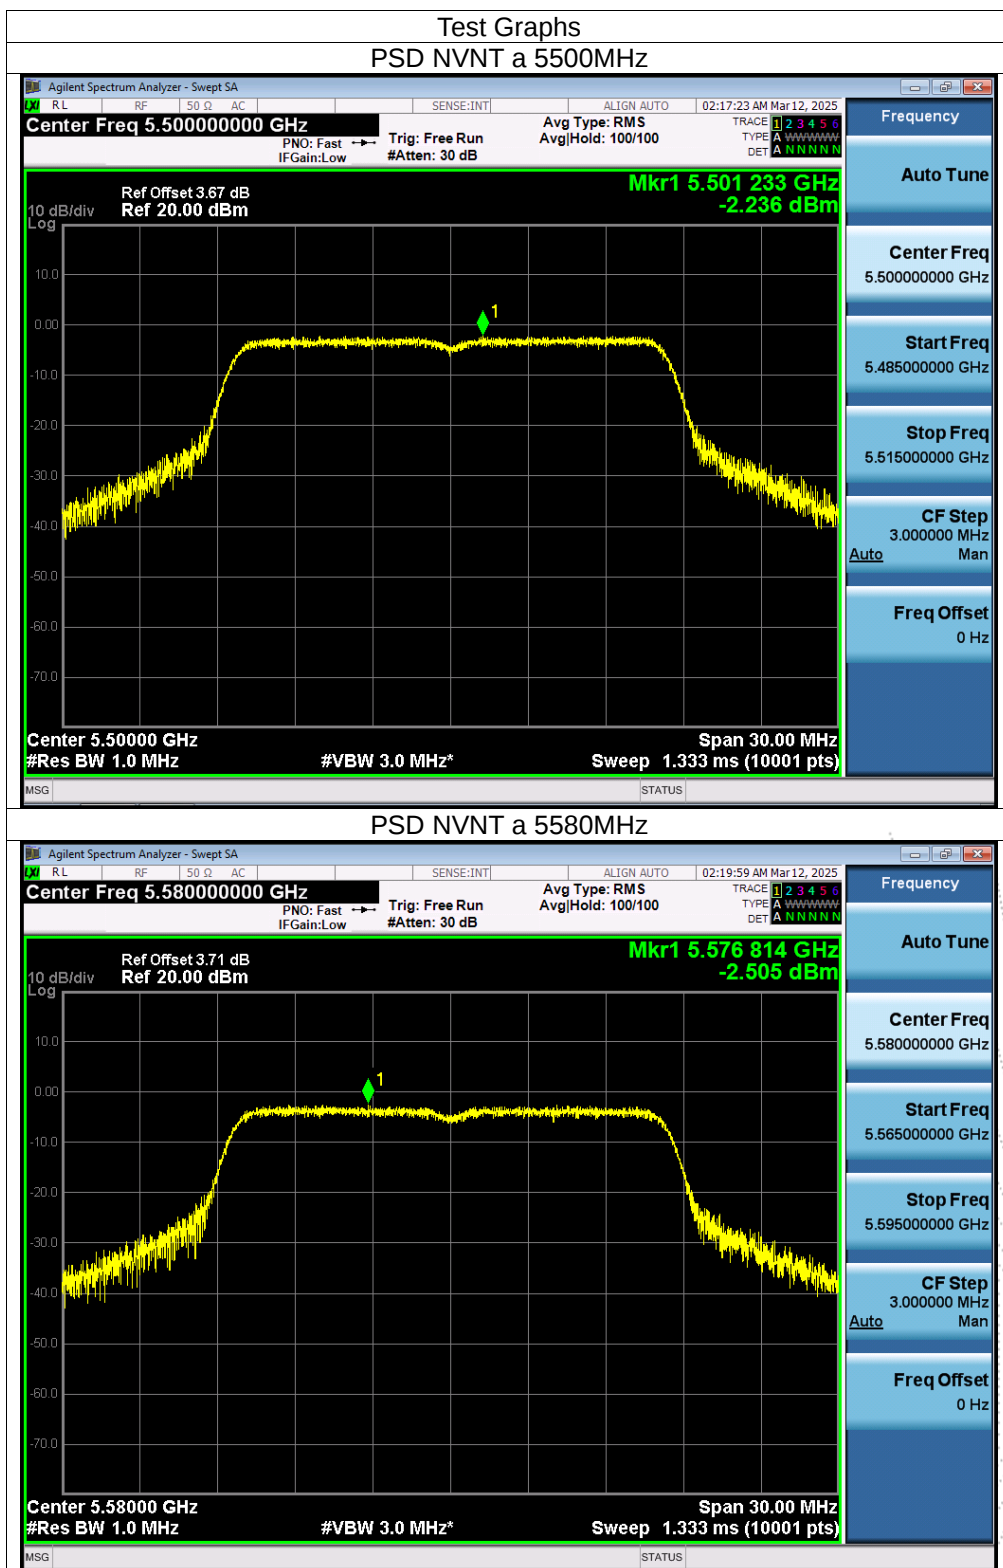


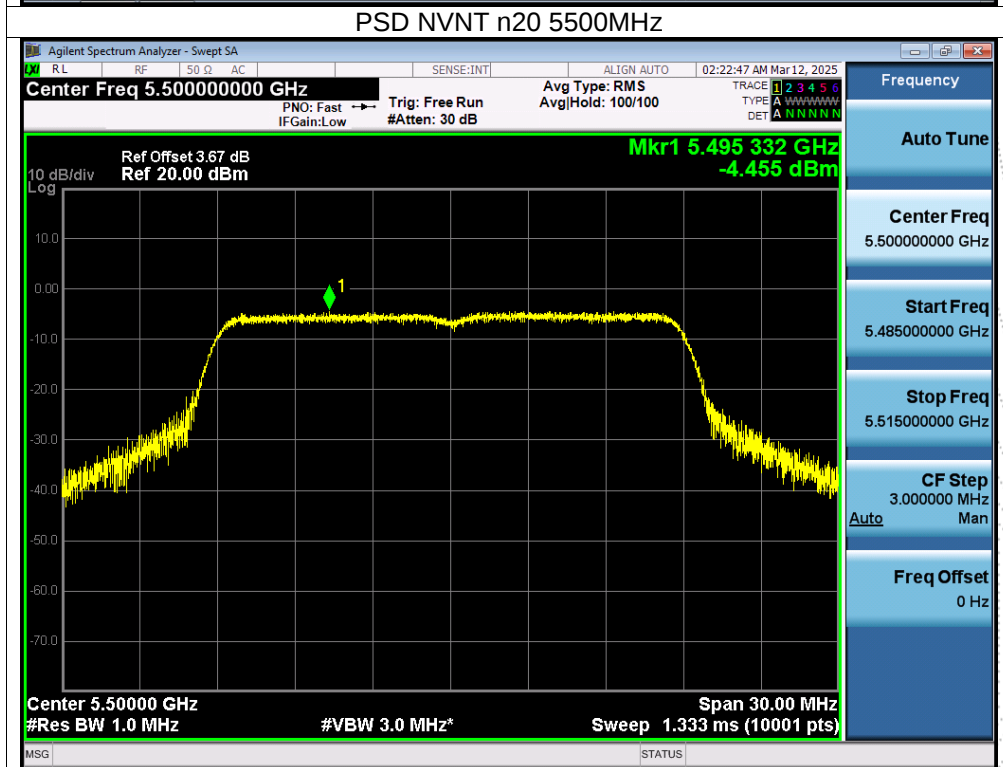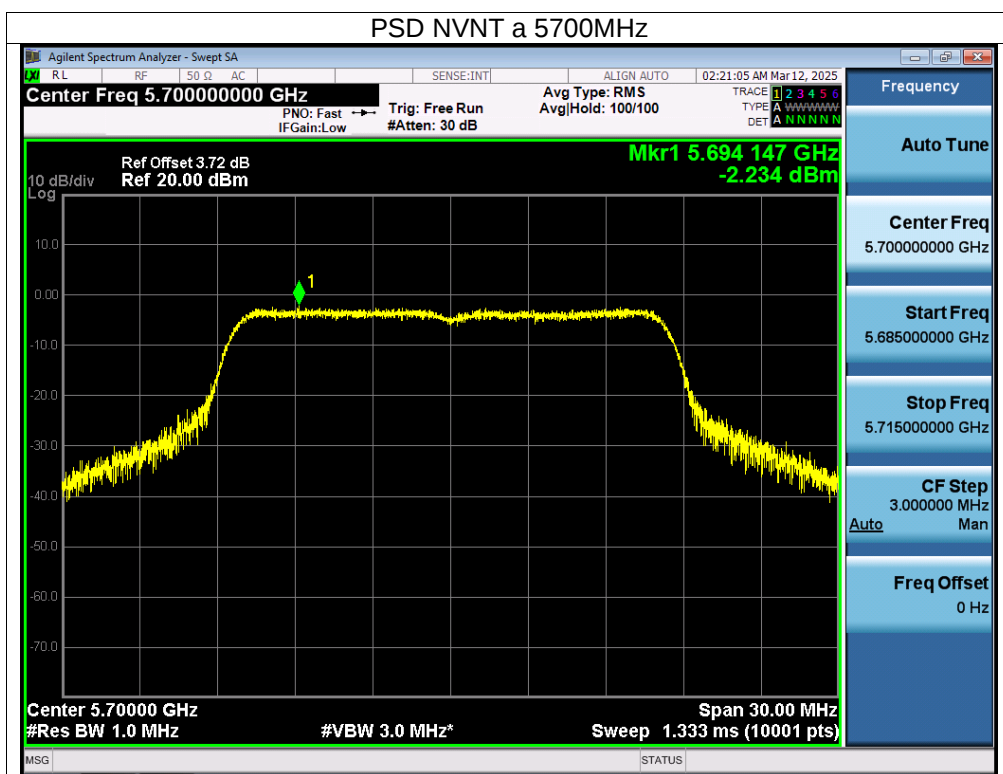


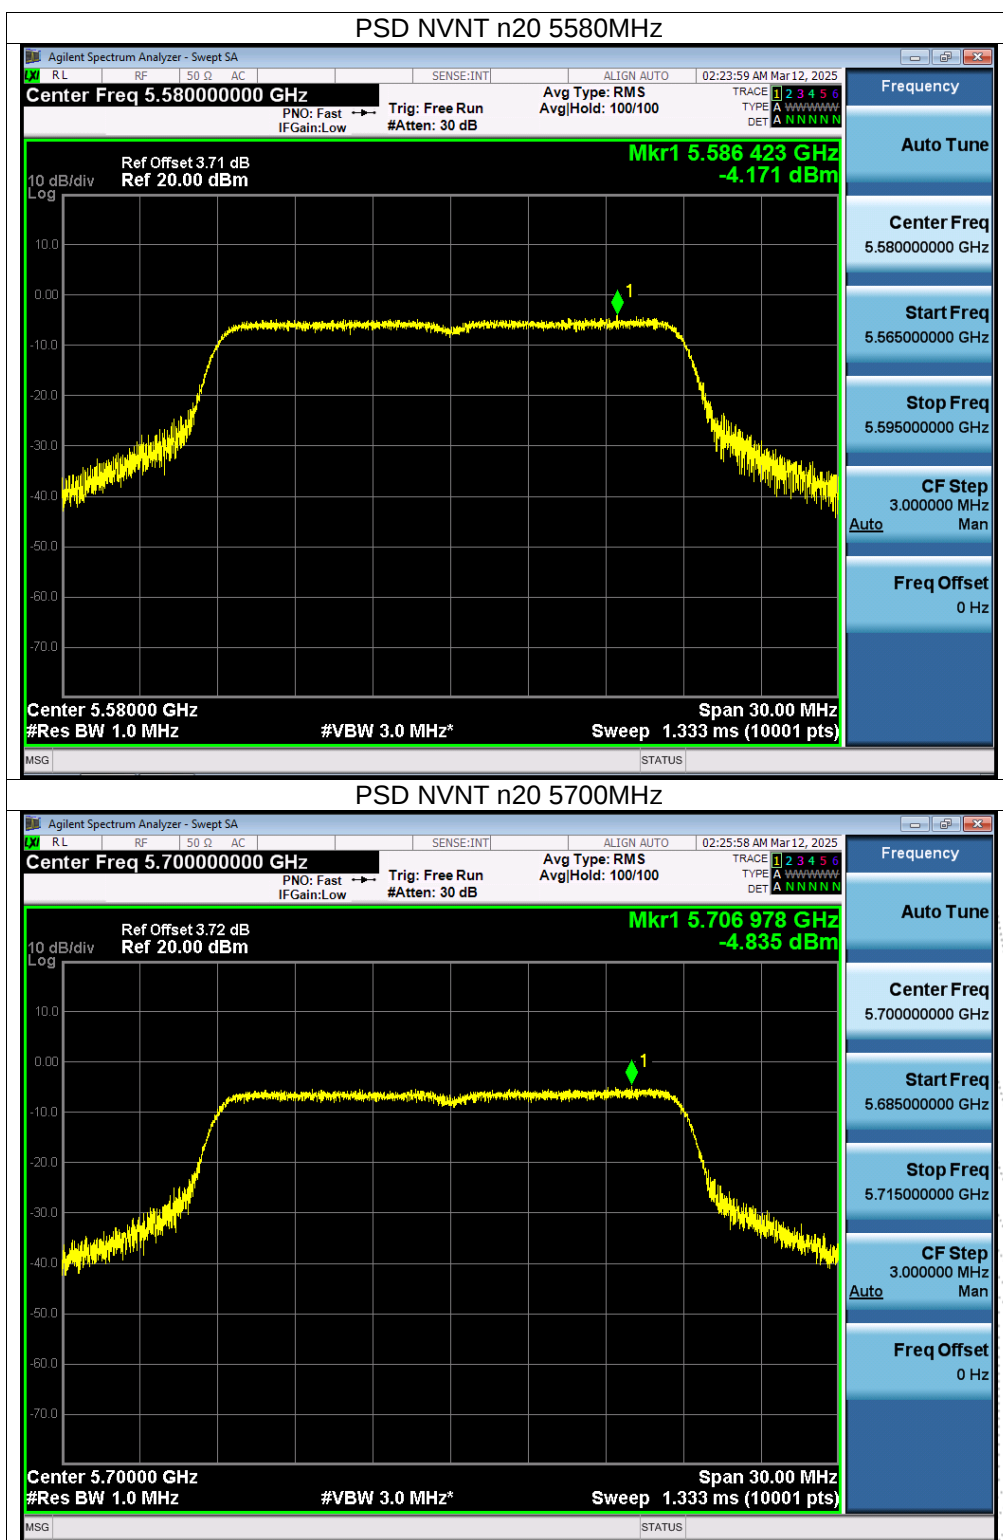


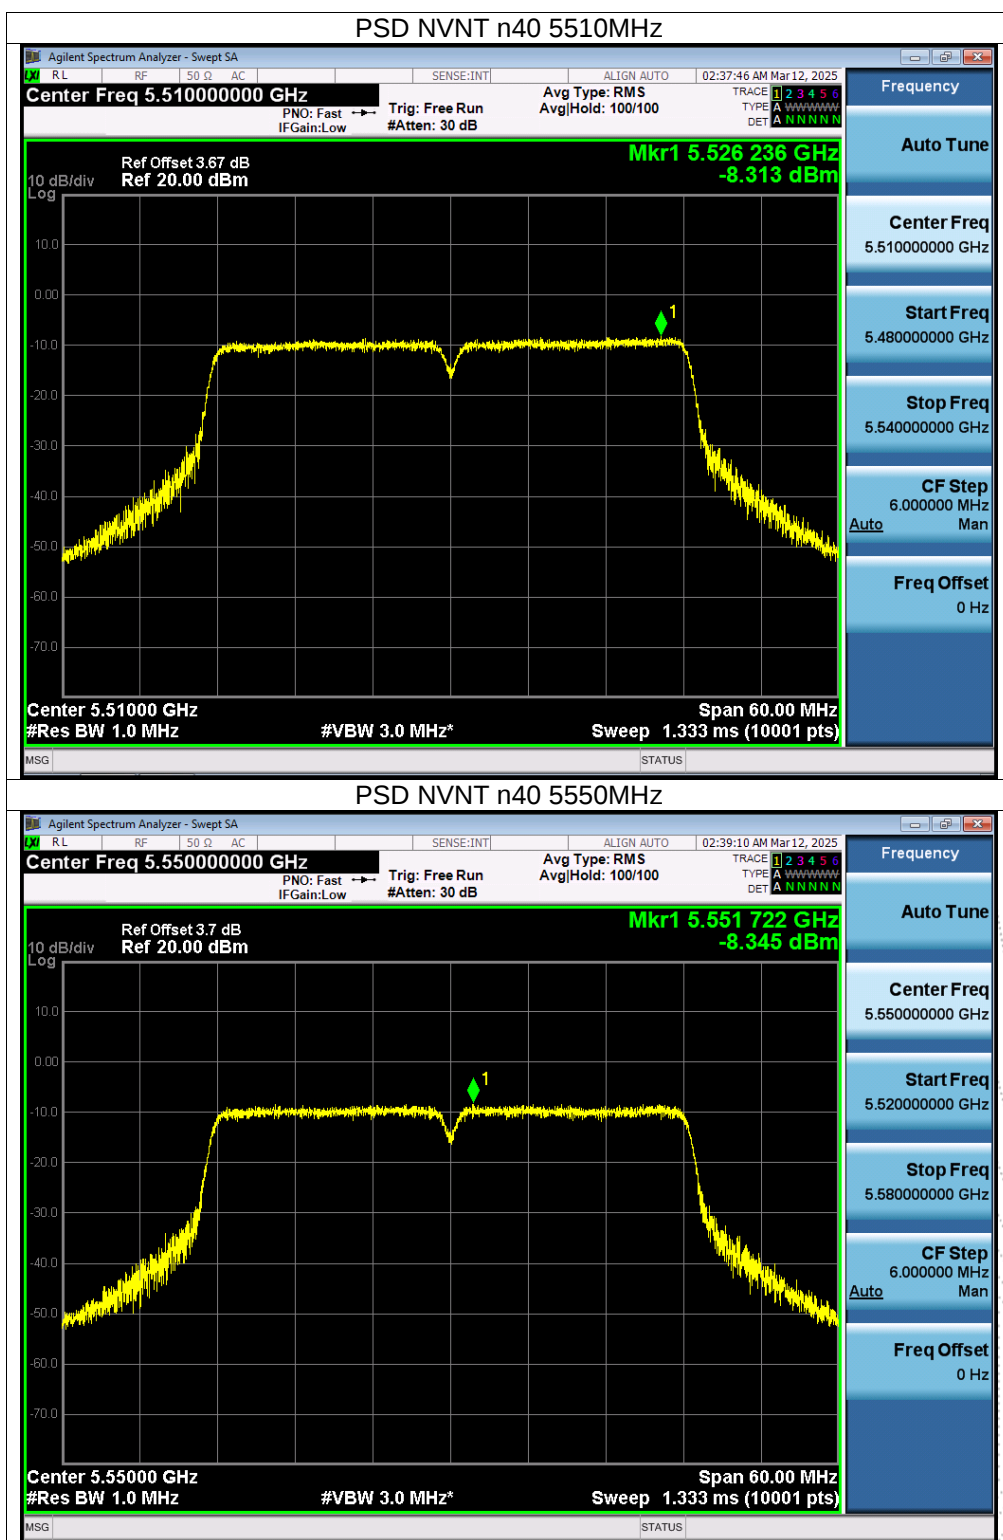


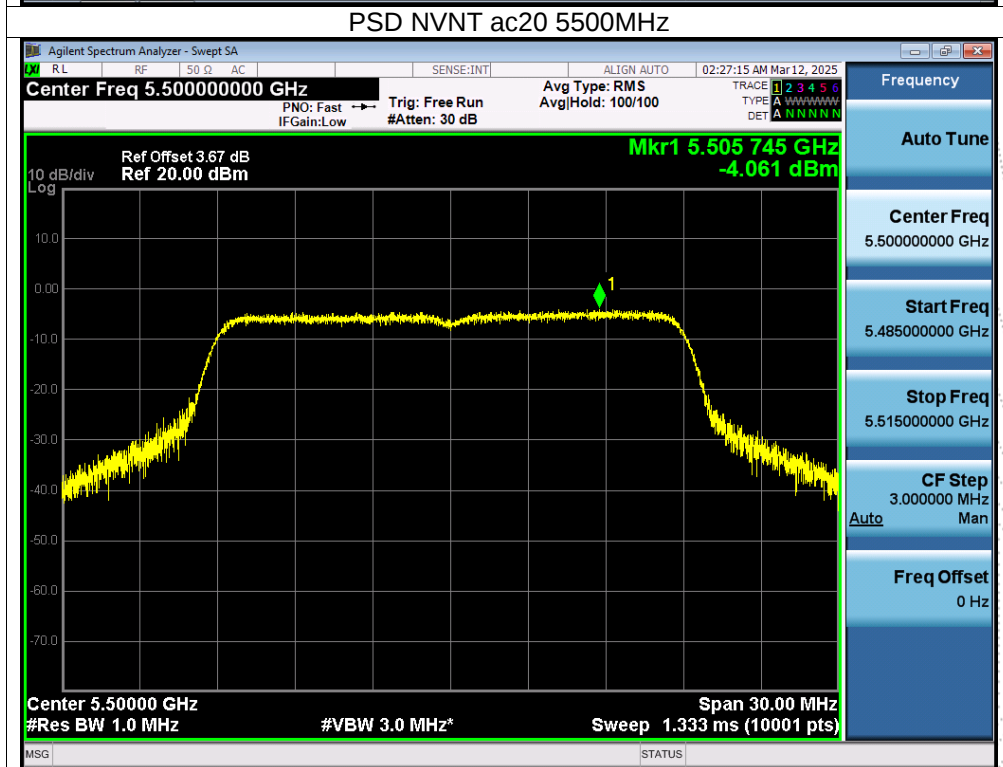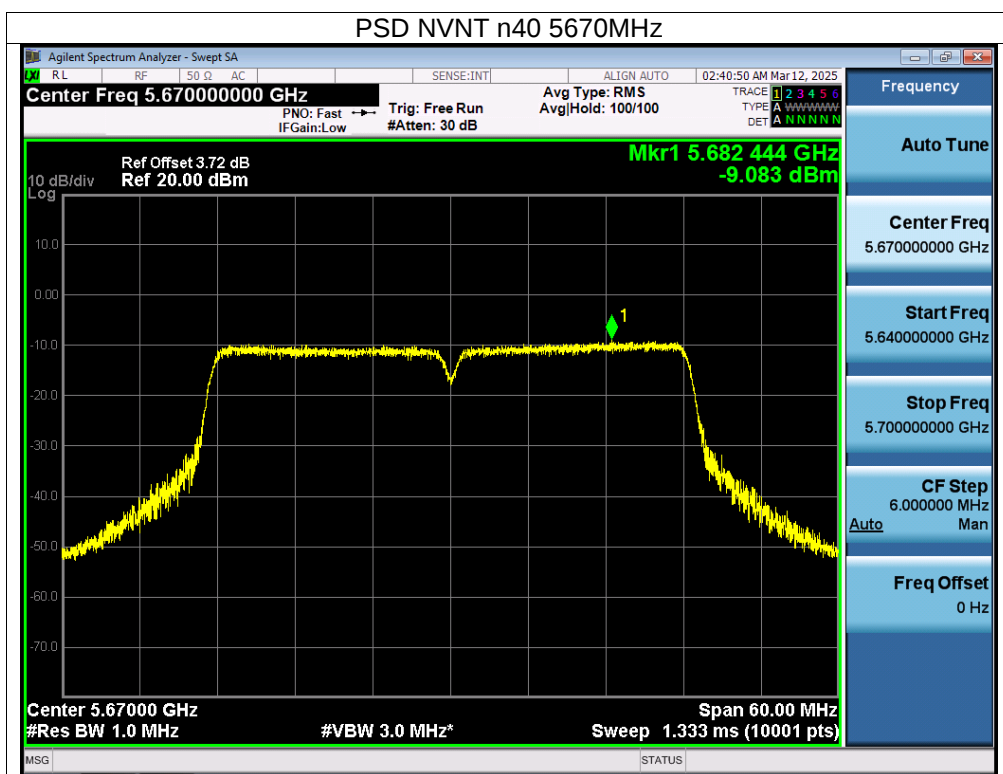


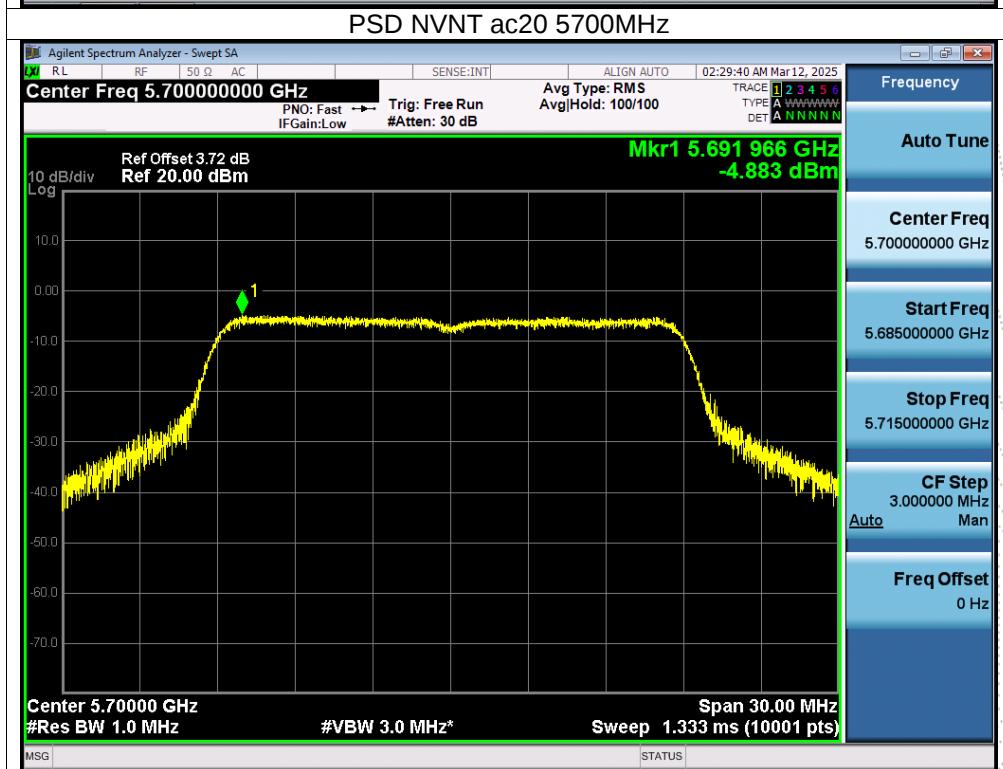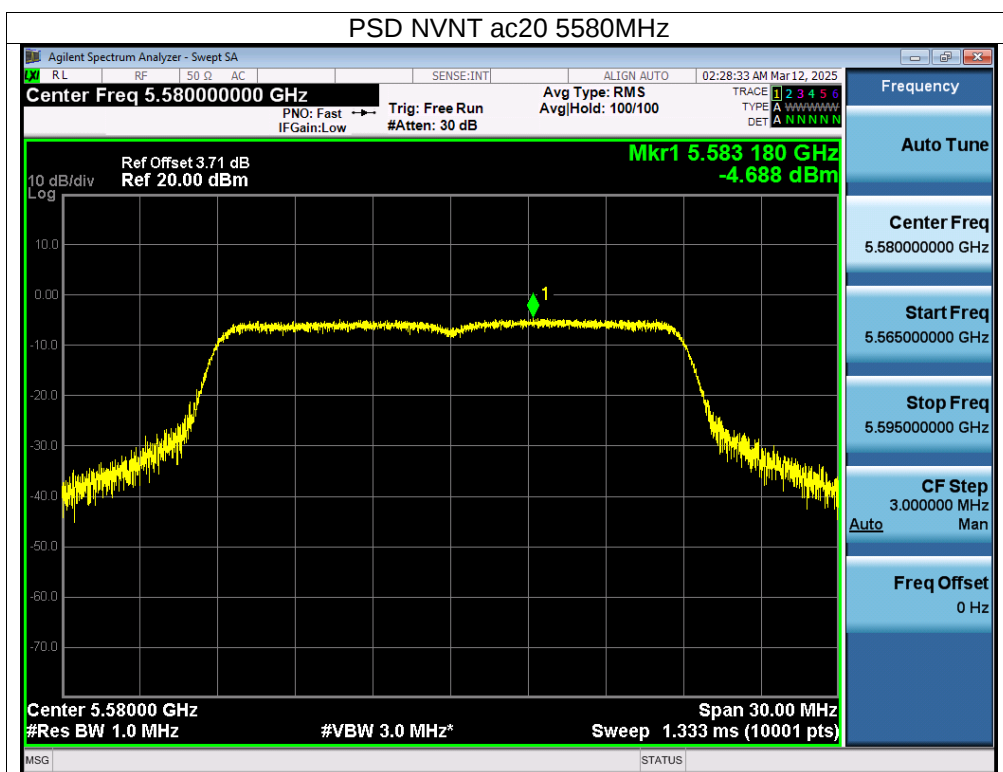


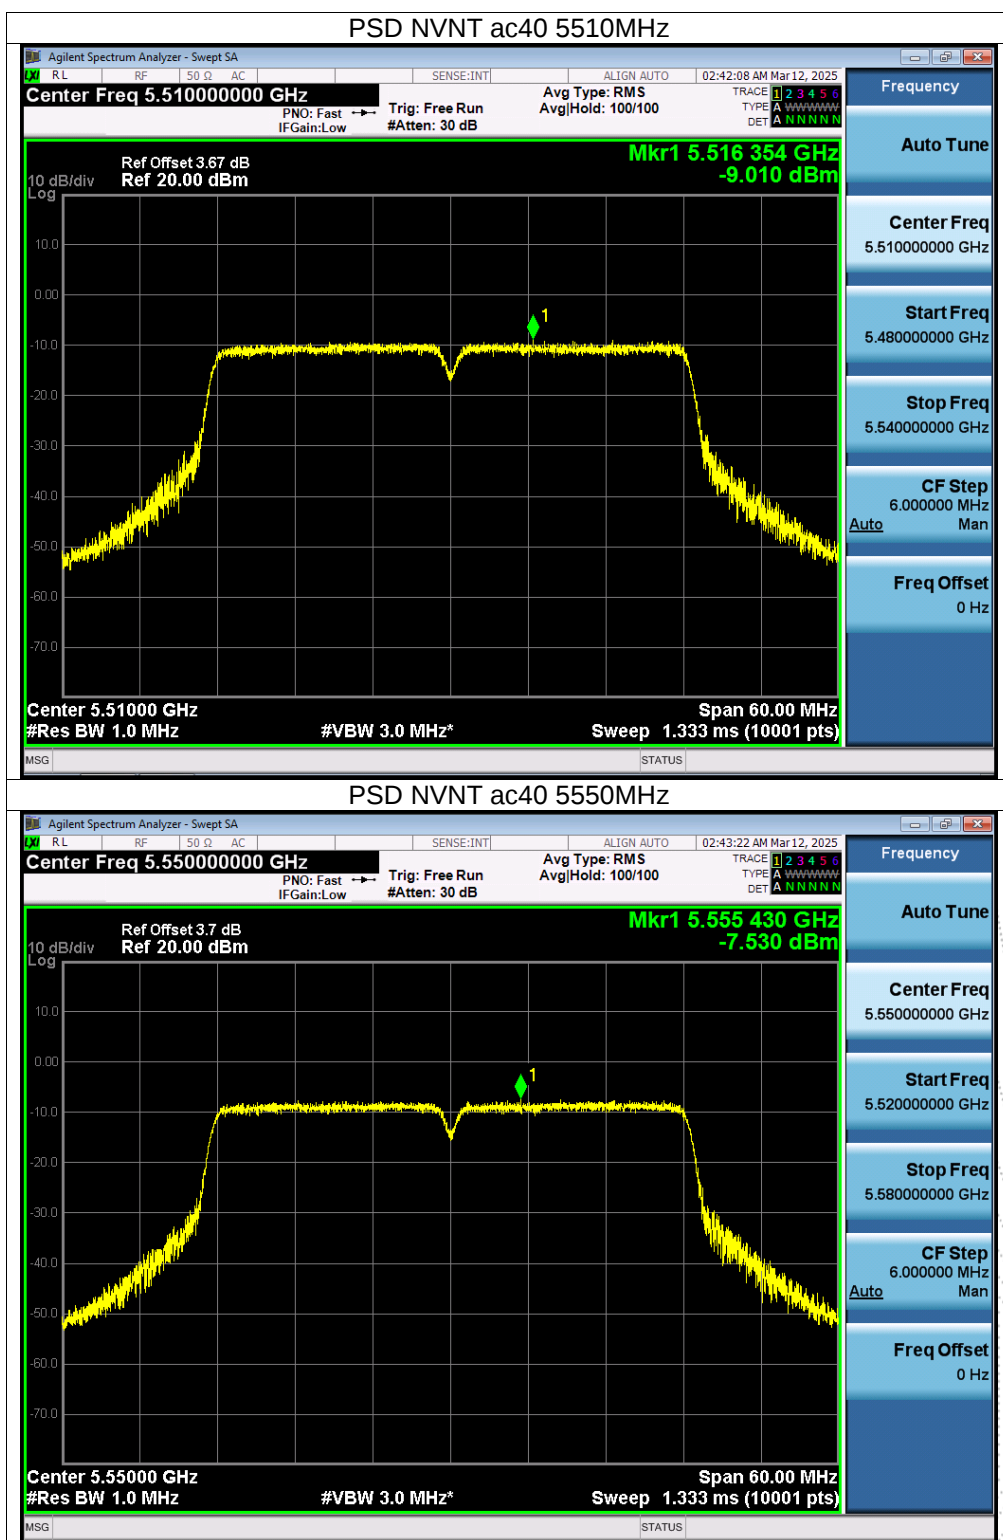



CO.LTD

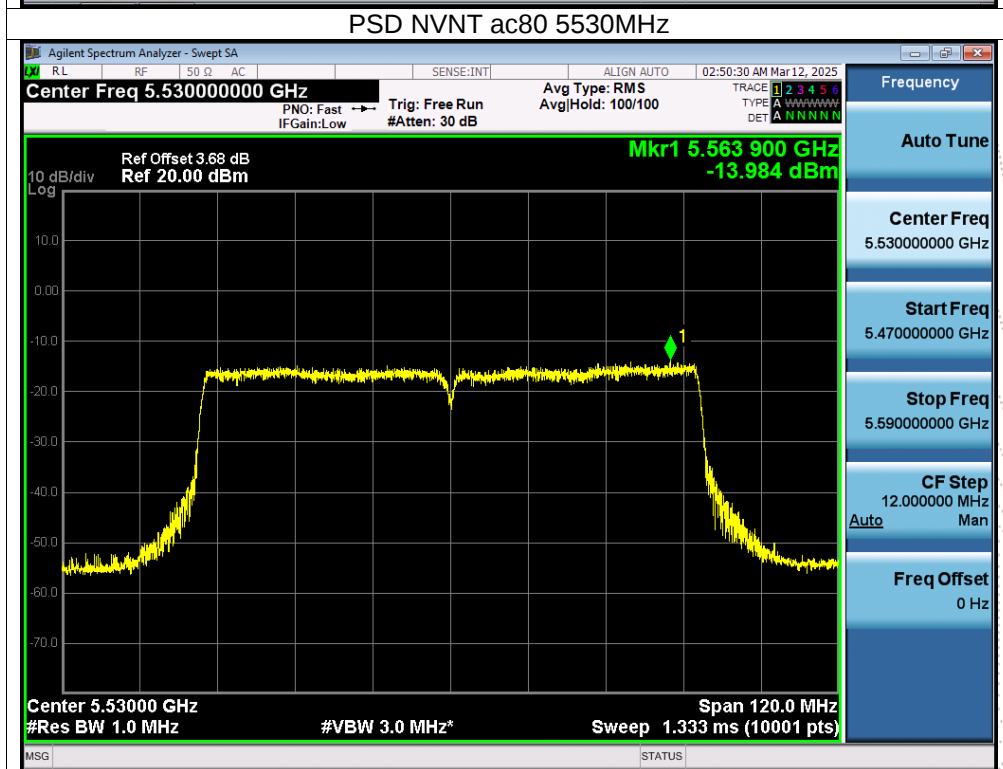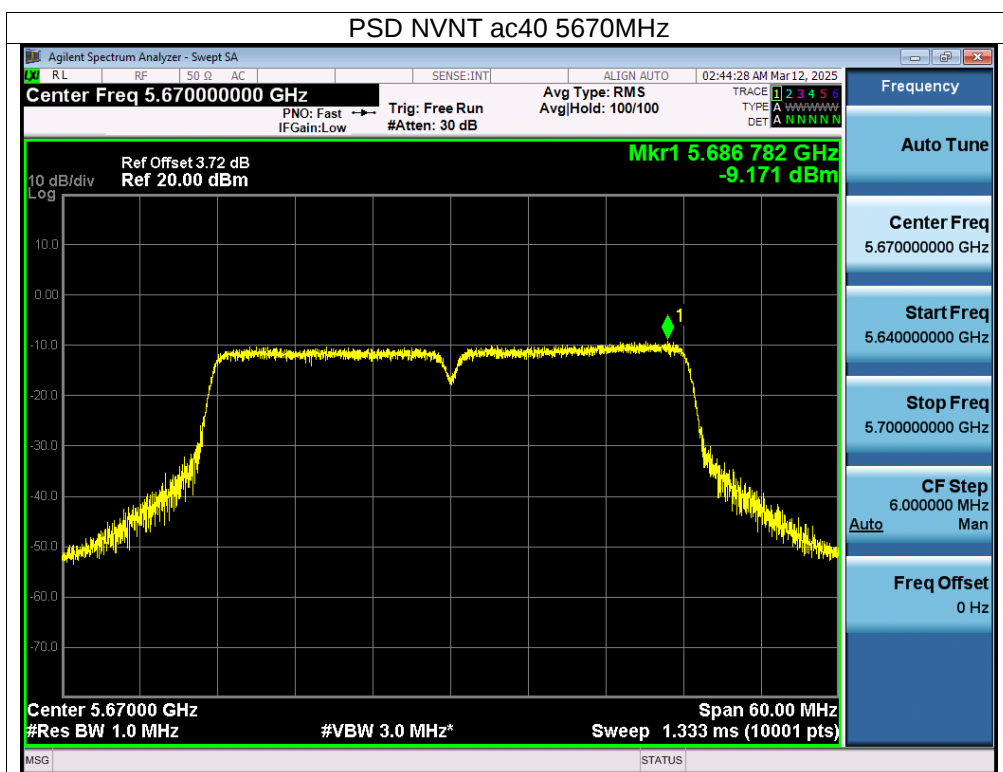

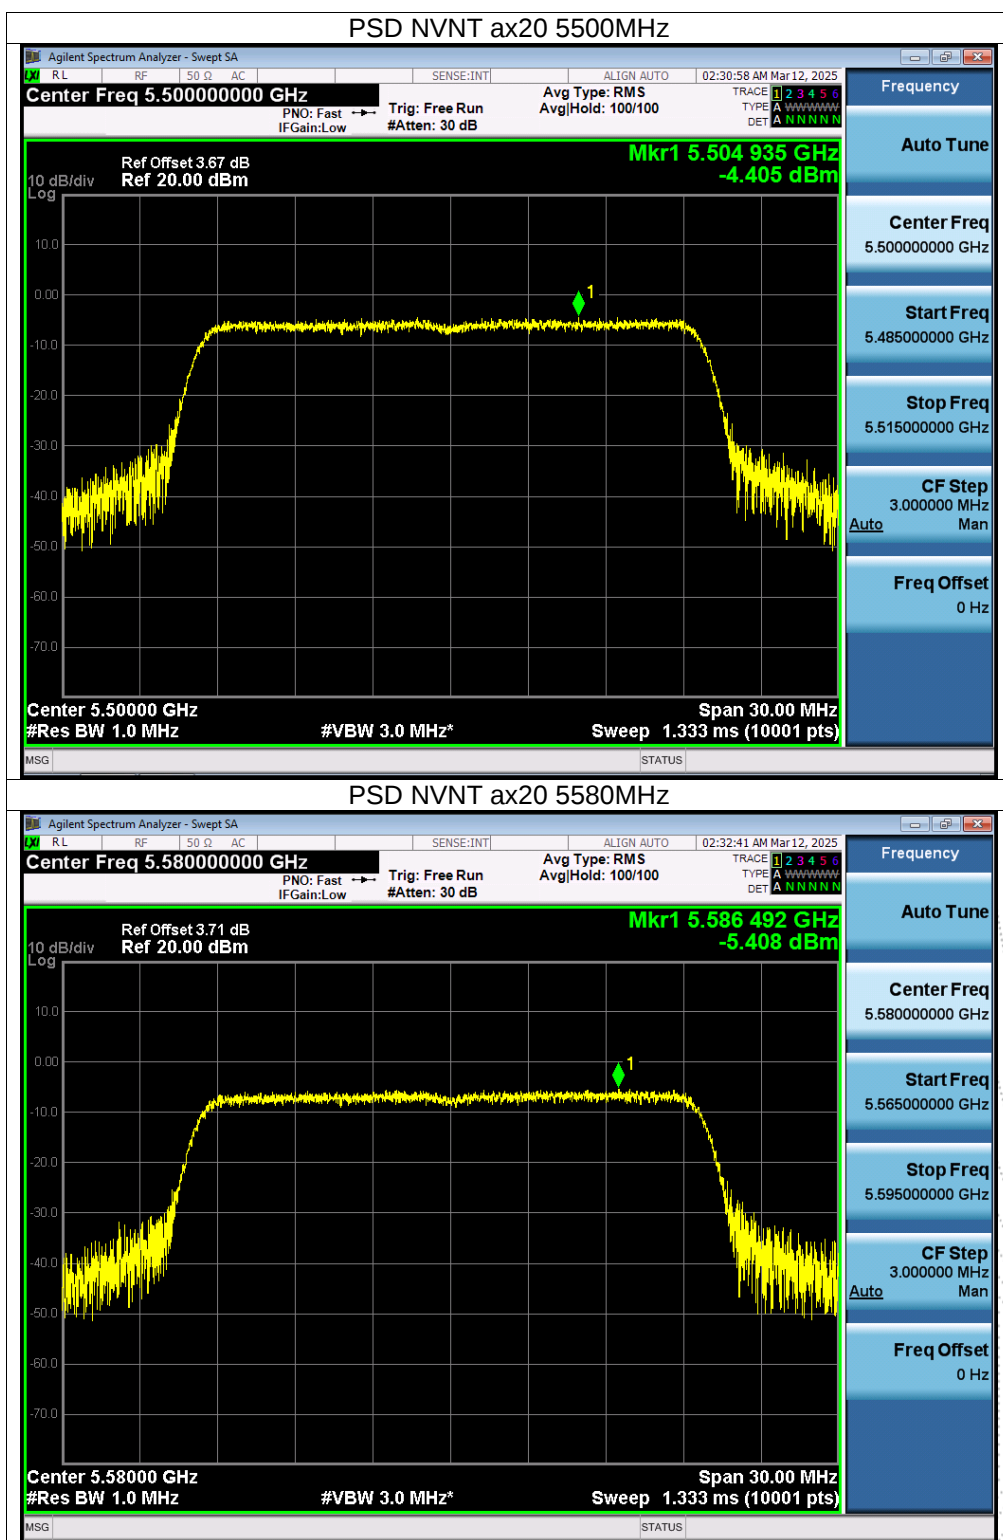

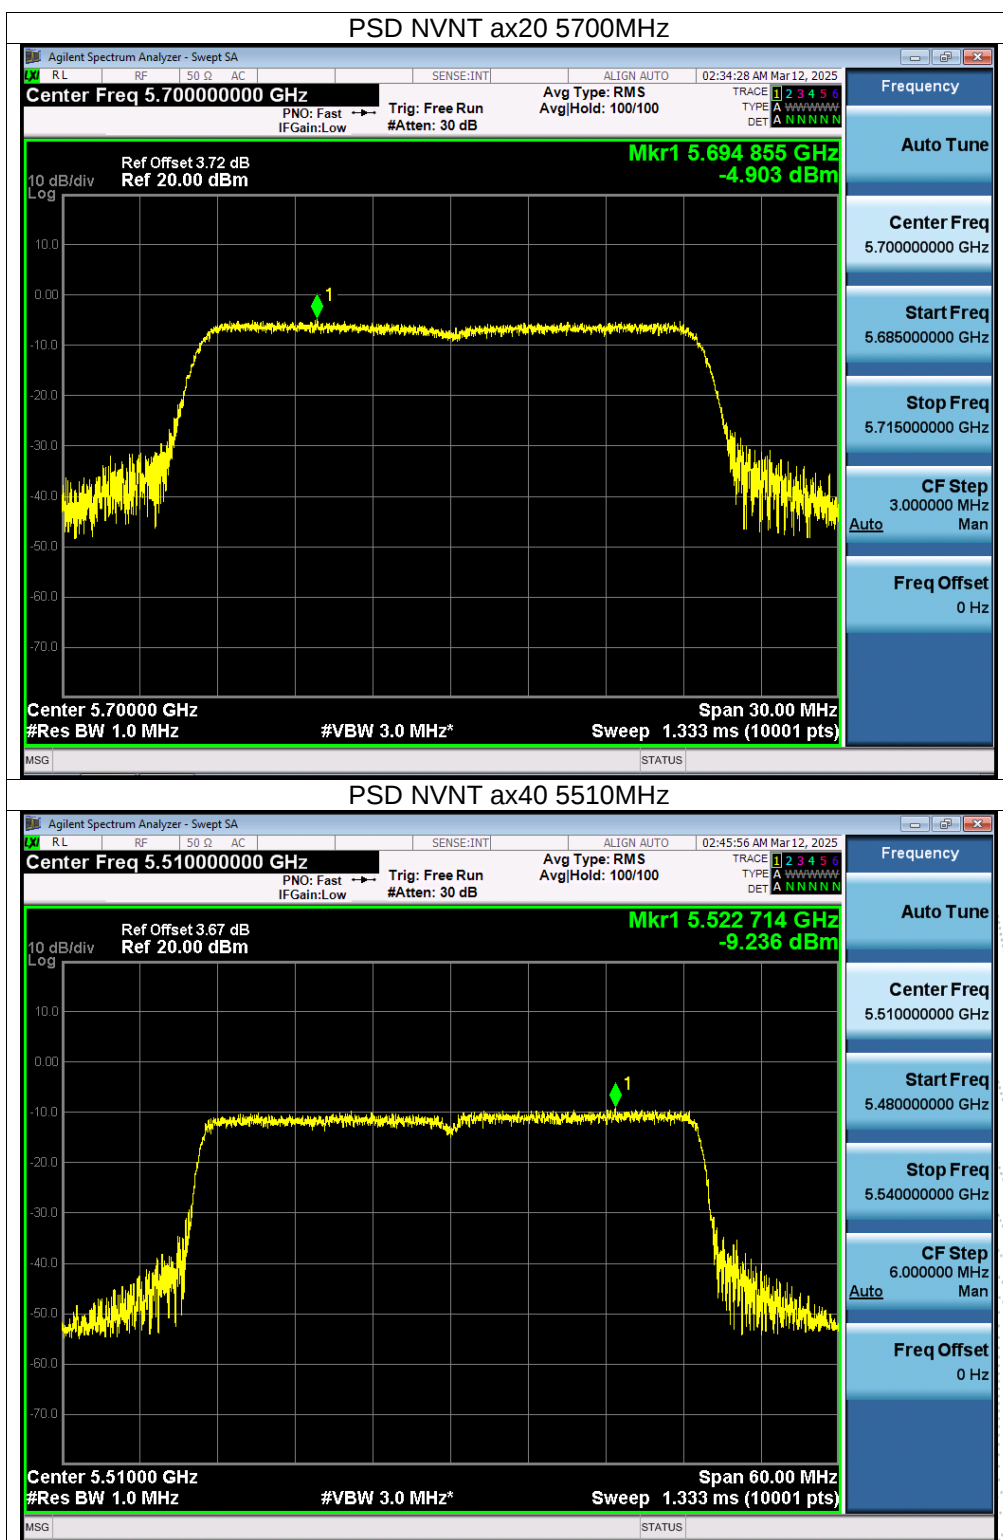

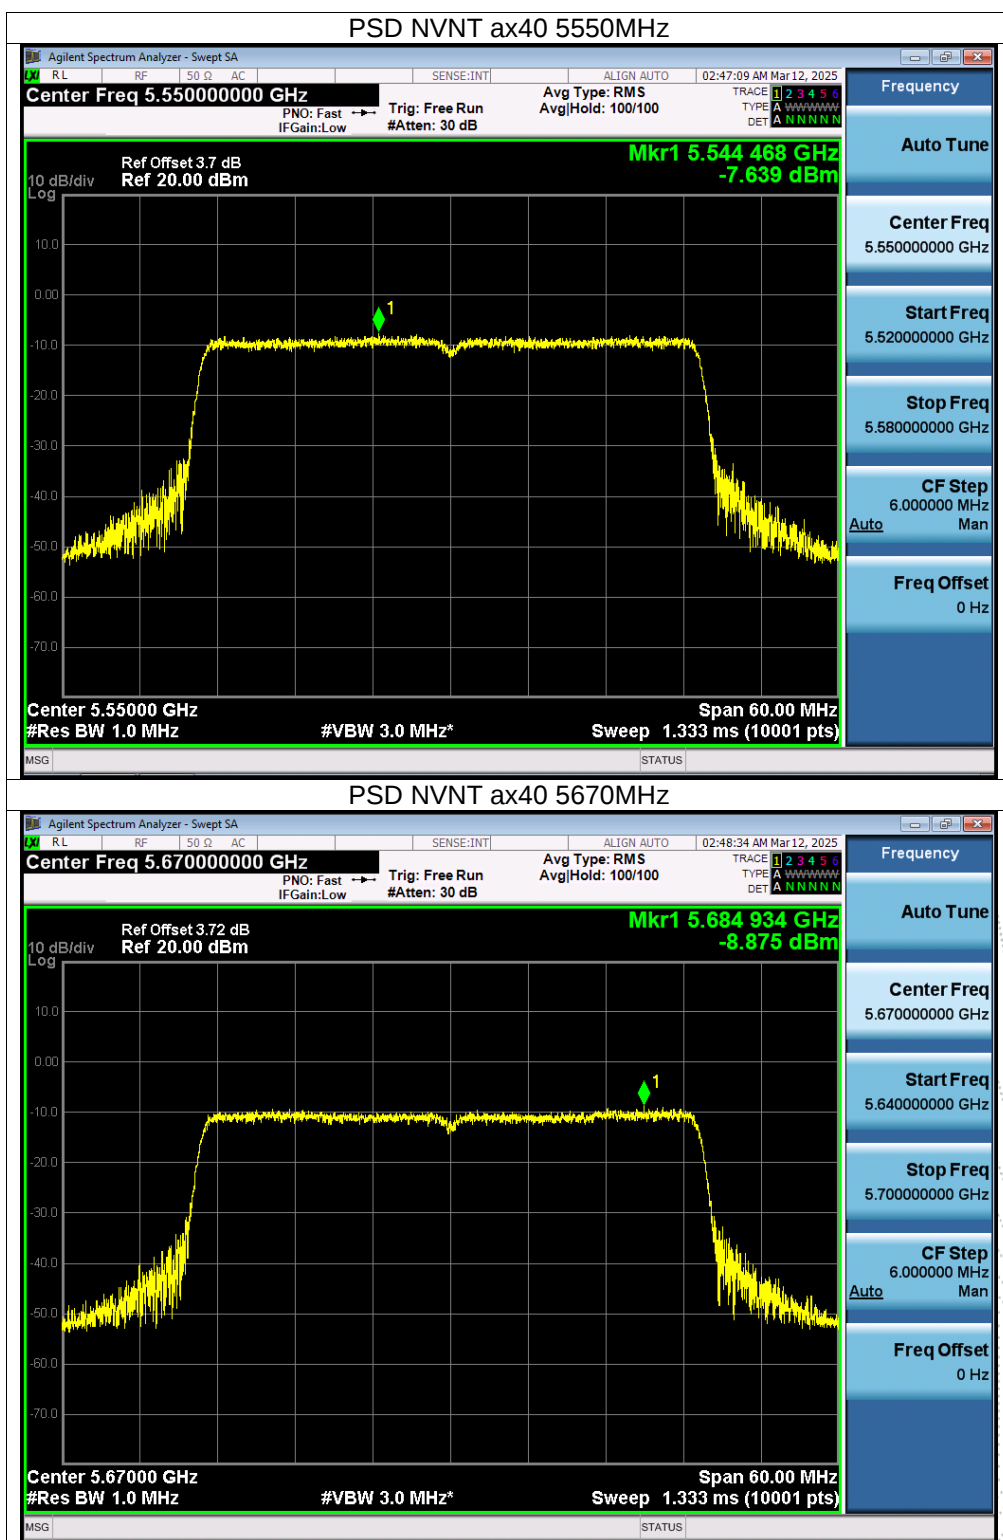


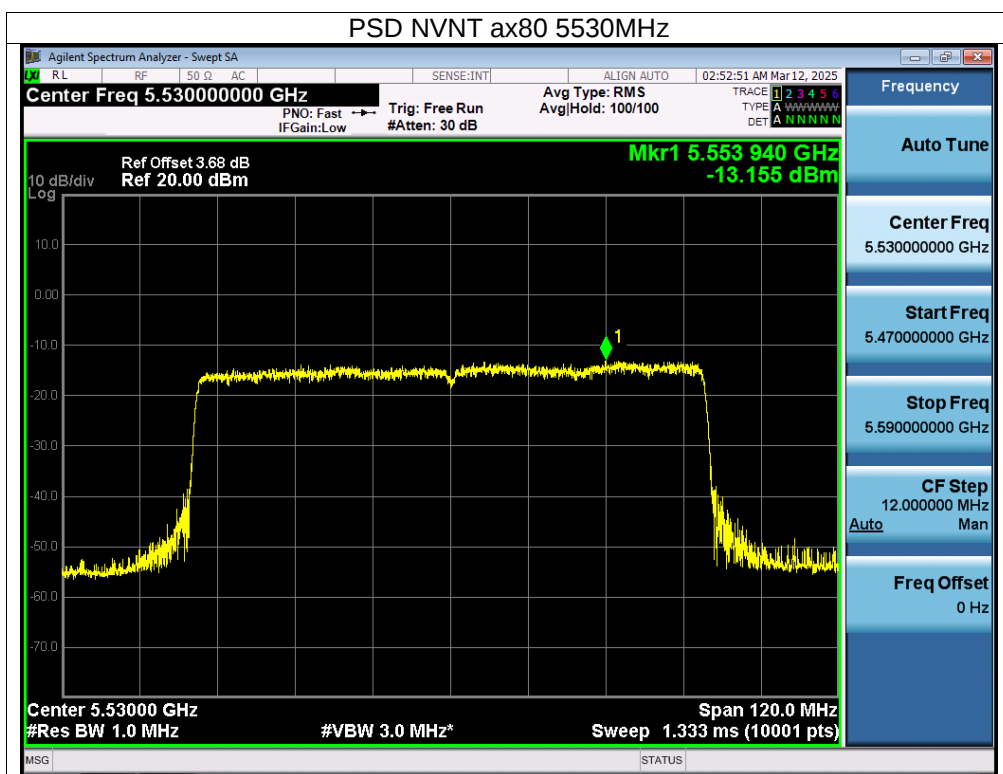



Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	(5745-5825MHz)		

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/510KHz)	Conducted PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
NVNT	a	5745	-6.22	-6.31	30	Pass
NVNT	a	5785	-6.58	-6.67	30	Pass
NVNT	a	5825	-8.27	-8.36	30	Pass
NVNT	n20	5745	-7.31	-7.40	30	Pass
NVNT	n20	5785	-7.85	-7.94	30	Pass
NVNT	n20	5825	-9.68	-9.77	30	Pass
NVNT	n40	5755	-11.82	-11.91	30	Pass
NVNT	n40	5795	-12.35	-12.44	30	Pass
NVNT	ac20	5745	-7.53	-7.62	30	Pass
NVNT	ac20	5785	-7.71	-7.80	30	Pass
NVNT	ac20	5825	-9.16	-9.25	30	Pass
NVNT	ac40	5755	-11.72	-11.81	30	Pass
NVNT	ac40	5795	-12.32	-12.41	30	Pass
NVNT	ac80	5775	-17.15	-17.24	30	Pass
NVNT	ax20	5745	-7.59	-7.68	30	Pass
NVNT	ax20	5785	-8.64	-8.73	30	Pass
NVNT	ax20	5825	-9.39	-9.48	30	Pass
NVNT	ax40	5755	-12.02	-12.11	30	Pass
NVNT	ax40	5795	-12.19	-12.28	30	Pass
NVNT	ax80	5775	-17.15	-17.24	30	Pass

Note: Correction Factor = $10\log(500\text{KHz}/\text{RBW in measurement}) = -0.086$

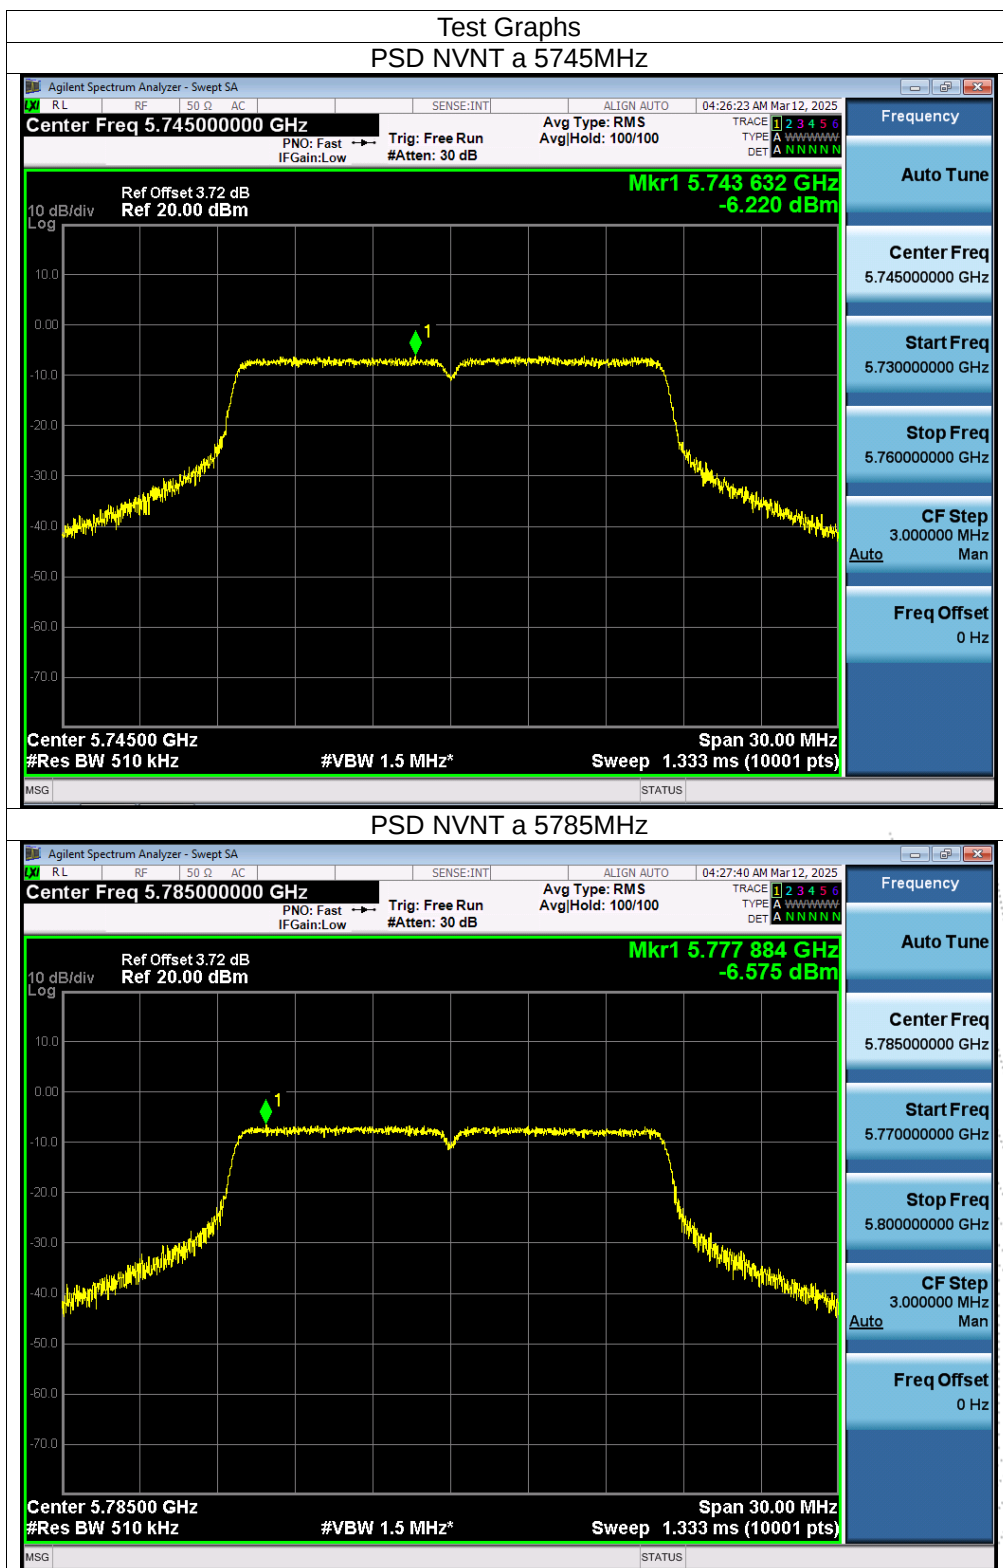

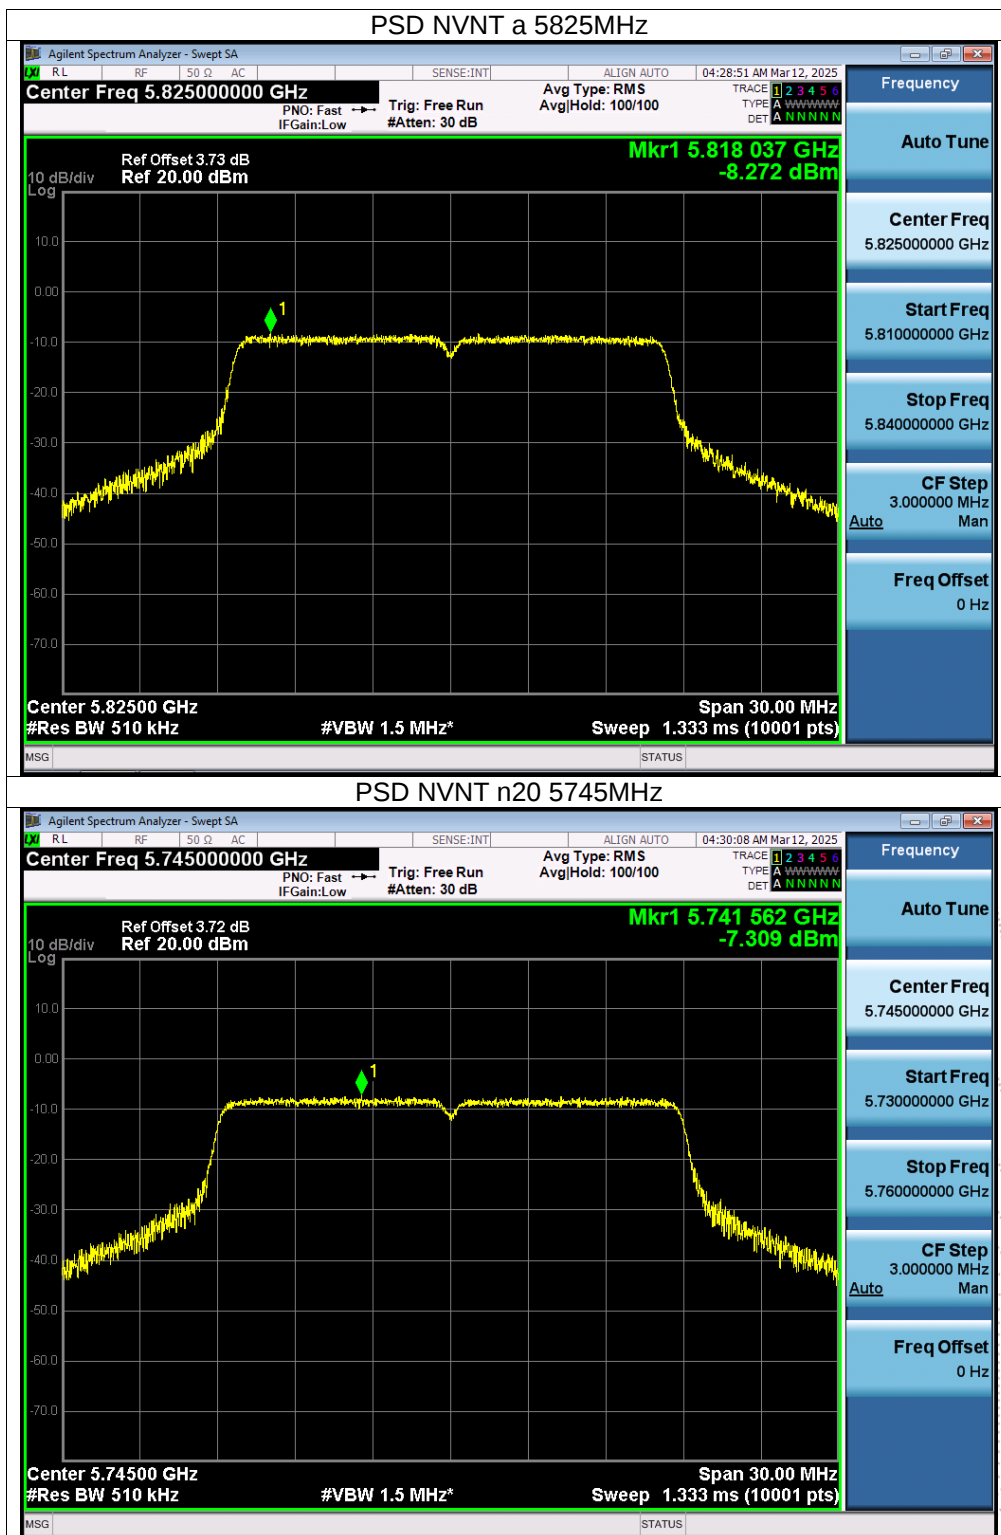

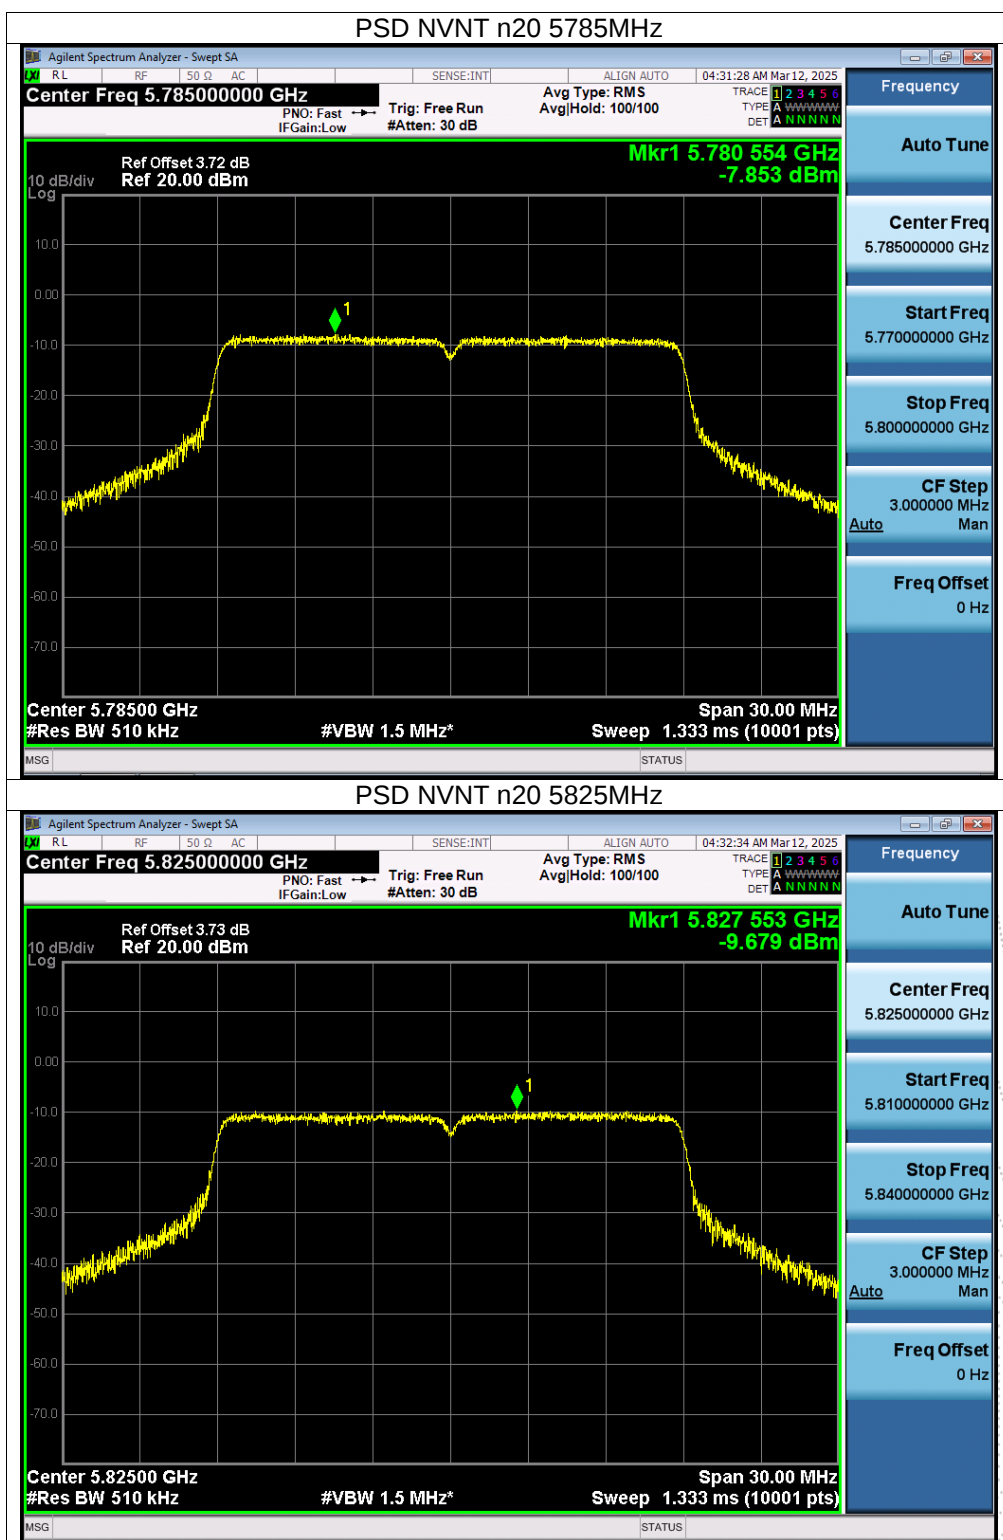

TESTED
TC
OVER
t Seal

