



# RADIO TEST REPORT


Test Report No. : 11210169H-A

**Applicant** : ALPS ELECTRIC CO., LTD.  
**Type of Equipment** : TRANSMITTER, ELECTRICAL KEY  
**Model No.** : TWB1G0125  
**Test regulation** : FCC Part 15 Subpart C: 2015  
**FCC ID** : CWTWB1G0125  
**Test Result** : Complied


1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.
6. This test report covers Radio technical requirements. It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)

**Date of test:** April 18, 2016

**Representative test engineer:**

  
Ken Fujita  
Engineer  
Consumer Technology Division

**Approved by:**

  
Takashi Nakazawa  
Leader  
Consumer Technology Division



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.  
\*As for the range of Accreditation in NVLAP, you may refer to the WEB address,  
[http://japan.ul.com/resources/emc\\_accredited/](http://japan.ul.com/resources/emc_accredited/)

**UL Japan, Inc.**  
**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
Telephone : +81 596 24 8999  
Facsimile : +81 596 24 8124

13-EM-F0429



<b>CONTENTS</b>	<b>PAGE</b>
<b>SECTION 1: Customer information</b> .....	<b>4</b>
<b>SECTION 2: Equipment under test (E.U.T.)</b> .....	<b>4</b>
<b>SECTION 3: Test specification, procedures &amp; results</b> .....	<b>5</b>
<b>SECTION 4: Operation of E.U.T. during testing</b> .....	<b>8</b>
<b>SECTION 5: Radiated emission (Electric Field Strength of Fundamental and Spurious Emission)</b> .....	<b>9</b>
<b>SECTION 6: Automatically deactivate</b> .....	<b>10</b>
<b>SECTION 7: -20 dB and 99 % Occupied Bandwidth</b> .....	<b>10</b>
<b>APPENDIX 1: Test data</b> .....	<b>11</b>
Automatically deactivate .....	11
Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission) .....	12
-20dB and 99% Occupied Bandwidth .....	14
Duty Cycle .....	15
<b>APPENDIX 2: Test Instruments</b> .....	<b>16</b>
<b>APPENDIX 3: Photographs of test setup</b> .....	<b>17</b>
Radiated emission .....	17
Worst case position .....	18

---

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## **SECTION 1: Customer information**

Company Name : ALPS ELECTRIC CO., LTD.  
Address : 6-3-36, Nakazato, Furukawa, Osaki-city, Miyagi-pref., JAPAN  
989-6181  
Telephone Number : +81-229-23-5111  
Facsimile Number : +81-229-23-5129  
Contact Person : Yasuhiro Yabe

## **SECTION 2: Equipment under test (E.U.T.)**

### **2.1 Identification of E.U.T.**

Type of Equipment : TRANSMITTER, ELECTRICAL KEY  
Model No. : TWB1G0125  
Serial No. : Refer to Clause 4.2  
Rating : DC 3.0V  
Receipt Date of Sample : April 11, 2016  
Country of Mass-production : China  
Condition of EUT : Engineering prototype  
(Not for Sale: This sample is equivalent to mass-produced items.)  
Modification of EUT : No Modification by the test lab

### **2.2 Product Description**

Model No: TWB1G0125 (referred to as the EUT in this report) is the TRANSMITTER, ELECTRICAL KEY.

### **General Specification**

Clock frequency(ies) in the system : 13.08148 MHz (Crystal), 2MHz (CPU)

### **Radio Specification**

Radio Type : Transceiver  
Frequency of Operation : 433.92 MHz  
Modulation : FSK  
Antenna type : Internal Antenna  
Method of Frequency Generation : Crystal + PLL IC  
Operating temperature range : -20 to +60 deg. C

Radio Type : Receiver  
Frequency of Operation : 125 kHz

\* Model No.: TWB1G0125 has variation types (2 switches, 3 switches, 4 switches, and 5 switches).

The differences of these types are as follows;

- The number of components
- Top cover (Plastic) and Number of knob switches (Plastic).

They are completely identical in radio characteristics.

Therefore the test was performed with the representative 4 switches type which was the worst one.

---

## **UL Japan, Inc.**

### **Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

### **SECTION 3: Test specification, procedures & results**

#### **3.1 Test Specification**

Test Specification : FCC Part 15 Subpart C: 2015, final revised on November 23, 2015  
\*Some parts are effective on and after December 17, 2015 or December 23, 2015.  
The revision does not affect the test specification applied to the EUT.

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators  
Section 15.231 Periodic operation in the band 40.66 - 40.70MHz  
and above 70MHz

\* The EUT complies with FCC Part 15 Subpart B: 2015, final revised on June 12, 2015 and effective July 13, 2015

#### **3.2 Procedures and results**

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Conducted emission	<b>FCC:</b> ANSI C63.10:2013 6 Standard test methods	<b>FCC:</b> Section 15.207	N/A	N/A *1)	-
	<b>IC:</b> RSS-Gen 8.8	<b>IC:</b> RSS-Gen 8.8			
Automatically Deactivate	<b>FCC:</b> ANSI C63.10:2013 6 Standard test methods	<b>FCC:</b> Section 15.231(a)(1)	N/A	Complied	Radiated
	<b>IC:</b> -	<b>IC:</b> RSS-210 A1.1.1			
Electric Field Strength of Fundamental Emission	<b>FCC:</b> ANSI C63.10:2013 6 Standard test methods	<b>FCC:</b> Section 15.231(b)	4.8 dB 433.920 MHz Horizontal PK with Duty factor	Complied	Radiated
	<b>IC:</b> RSS-Gen 6.12	<b>IC:</b> RSS-210 A1.1.2			
Electric Field Strength of Spurious Emission	<b>FCC:</b> ANSI C63.10:2013 6 Standard test methods	<b>FCC:</b> Section 15.205 Section 15.209 Section 15.231(b)	2.2 dB 3905.280 MHz Horizontal PK with Duty factor	Complied	Radiated
	<b>IC:</b> RSS-Gen 6.13	<b>IC:</b> RSS-210 A1.1.2, 2.5.1 RSS-Gen 8.9			
-20dB Bandwidth	<b>FCC:</b> ANSI C63.10:2013 6 Standard test methods	<b>FCC:</b> Section 15.231(c)	N/A	Complied	Radiated
	<b>IC:</b> -	<b>IC:</b> Reference data			

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

\*1) The test is not applicable since the EUT does not have AC Mains.

#### **FCC Part 15.31 (e)**

This test was performed with the New Battery (DC 3.0 V) during the tests. Therefore, the EUT complies with the requirement.

#### **FCC Part 15.203 Antenna requirement**

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

### 3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99 % Occupied Bandwidth	IC: RSS-Gen 6.6	IC: RSS-210 A1.1.3	N/A	Complied	Radiated

Other than above, no addition, exclusion nor deviation has been made from the standard.

### 3.4 Uncertainty

#### EMI

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Test distance	Radiated emission ( $\pm$ dB)
	9 kHz - 30 MHz
3m	3.8 dB
10m	3.7 dB

\*Measurement distance

Polarity	Radiated emission (Below 1GHz)			
	(3 m*)(+dB)		(10 m*)(+dB)	
	30 – 200 MHz	200 – 1000MHz	30 – 200 MHz	200 – 1000MHz
Horizontal	4.9 dB	5.2 dB	4.9 dB	5.0 dB
Vertical	4.6 dB	5.9 dB	5.0 dB	5.0 dB

Radiated emission				
(3 m*)(+dB)	(1 m*)(+dB)	(0.5 m*)(+dB)	(10 m*)(+dB)	
1 – 6GHz	6 – 18GHz	10 – 26.5 GHz	26.5 – 40GHz	1 -18 GHz
5.0 dB	5.2 dB	5.1 dB	5.0 dB	5.2 dB

\* Measurement distance

#### Radiated emission test(3 m)

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

### 3.5 Test Location

UL Japan, Inc. Ise EMC Lab. \*NVLAP Lab. code: 200572-0  
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
Telephone : +81 596 24 8999 Facsimile : +81 596 24 8124

	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	2973C-1	19.2 x 11.2 x 7.7m	7.0 x 6.0m	No.1 Power source room
No.2 semi-anechoic chamber	2973C-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	2973C-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.3 Preparation room
No.3 shielded room	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	2973C-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.4 Preparation room
No.4 shielded room	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 semi-anechoic chamber	-	6.0 x 6.0 x 3.9m	6.0 x 6.0m	-
No.6 shielded room	-	4.0 x 4.5 x 2.7m	4.0 x 4.5 m	-
No.6 measurement room	-	4.75 x 5.4 x 3.0m	4.75 x 4.15 m	-
No.7 shielded room	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	3.1 x 5.0 x 2.7m	N/A	-
No.9 measurement room	-	8.0 x 4.6 x 2.8m	2.4 x 2.4m	-
No.11 measurement room	-	6.2 x 4.7 x 3.0m	4.8 x 4.6m	-

\* Size of vertical conducting plane (for Conducted Emission test): 2.0 x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

### 3.6 Test data, Test instruments, and Test set up.

Refer to APPENDIX.

### UL Japan, Inc. Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
Telephone : +81 596 24 8999  
Facsimile : +81 596 24 8124

## **SECTION 4: Operation of E.U.T. during testing**

### **4.1 Operating Modes**

Test Item*	Mode
Automatically Deactivate Duty Cycle	Normal use mode
Electric Field Strength of Fundamental Emission Electric Field Strength of Spurious Emission -20dB & 99% Occupied Bandwidth	Continuous Transmitting mode (Tx)
* The system was configured in typical fashion (as a customer would normally use it) for testing.	

### **4.2 Configuration and peripherals**



\* Test data was taken under worse case conditions.

#### **Description of EUT**

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	TRANSMITTER, ELECTRICAL KEY	TWB1G0125	16040803 *1) 16040807 *2)	ALPS ELECTRIC CO., LTD.	EUT

\*1) Used for Continuous Transmitting mode

\*2) Used for Normal use mode

---

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124



## **SECTION 5: Radiated emission (Electric Field Strength of Fundamental and Spurious Emission)**

### **Test Procedure and conditions**

[For below 1GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength. Photographs of the set up are shown in Appendix 3.

### **[Transmitting mode]**

#### **(Below 30 MHz)**

The noise level was checked by moving a search-coil (Loop Antenna) close to the EUT.

#### **(Above 30 MHz)**

The Radiated Electric Field Strength has been measured on Semi anechoic chamber with a ground plane and at a distance of 3 m.

The measuring antenna height was varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization.

The radiated emission measurements were made with the following detector function of the test receiver / spectrum analyzer.

### **Test Antennas are used as below;**

Frequency	Below 30 MHz	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Loop	Biconical	Logperiodic	Horn

	From 9 kHz to 90 kHz and From 110 kHz to 150 kHz	From 90 kHz to 110 kHz	From 150 kHz to 490 kHz	From 490 kHz to 30 MHz	From 30 MHz to 1 GHz	Above 1 GHz
Detector Type	Peak	Peak	Peak	Peak	Peak and Peak with Duty factor	Peak and Peak with Duty factor
IF Bandwidth	200 Hz	200 Hz	9.1 kHz	9.1 kHz	120 kHz	PK: S/A: RBW 1 MHz, VBW: 3 MHz

- The carrier level (or, noise levels) was (or were) measured at each position of all three axes X, Y and Z, and the position that has the maximum noise was determined.

Noise levels of all the frequencies were measured at the position.

This EUT has two modes which mechanical key is inserted or not. The worst case was confirmed with and without mechanical key, as a result, the test without mechanical key was the worst case. Therefore the test without mechanical key was performed only.

\*The result is rounded off to the second decimal place, so some differences might be observed.

## **UL Japan, Inc.**

### **Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Measurement range : 9 kHz - 4.4 GHz  
Test data : APPENDIX  
Test result : Pass

## **SECTION 6: Automatically deactivate**

### **Test Procedure**

The measurement was performed with Electric field strength using a spectrum analyzer.

Test data : APPENDIX  
Test result : Pass

## **SECTION 7: -20 dB and 99 % Occupied Bandwidth**

### **Test Procedure**

The test was measured with a spectrum analyzer using a test fixture.

Test	Span	RBW	VBW	Sweep	Detector	Trace	Instrument used
20 dB Bandwidth	300 kHz	3 kHz	9.1 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99 % Occupied Bandwidth	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak *1)	Max Hold *1)	Spectrum Analyzer

\*1) The measurement was performed with Peak detector, Max Hold since the duty cycle was not 100 %.  
Peak hold was applied as Worst-case measurement.

Test data : APPENDIX  
Test result : Pass

---

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999


Facsimile : +81 596 24 8124

## APPENDIX 1: Test data

### Automatically deactivate

Test place : Ise EMC Lab. No.4 Semi Anechoic Chamber  
Report No. : 11210169H  
Date : April 18, 2016  
Temperature / Humidity : 23 deg. C / 41 % RH  
Engineer : Ken Fujita  
Mode : Normal use mode 433.92 MHz

Time of Transmitting [sec]	Limit [sec]	Result
0.3833	5.00	Pass

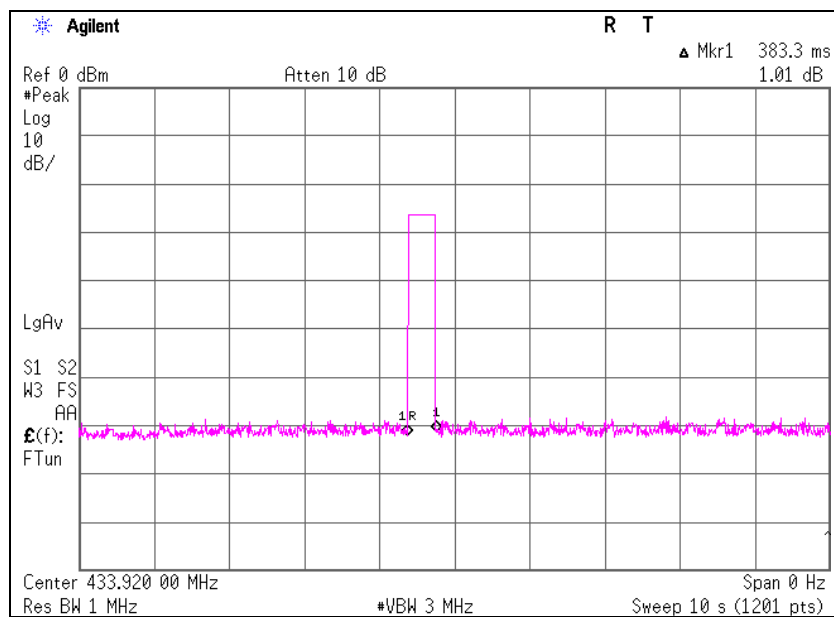

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission)

Test place	Ise EMC Lab. No.4 and No.1 Semi Anechoic Chamber	
Report No.	11210169H	
Date	April 18, 2016	April 18, 2016
Temperature / Humidity	23 deg. C / 41 % RH	23 deg. C / 45 % RH
Engineer	Ken Fujita	Tomohisa Nakagawa
	(Below 1 GHz)	(Above 1 GHz)
Mode	Continuous Transmitting mode 433.92 MHz	

### PK

Frequency [MHz]	Detector	Reading [dBuV]		Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]		Limit dBuV/m	Margin [dB]		Remark Inside or Outside of Restricted Bands
		Hor	Ver					Hor	Ver		Hor	Ver	
433.920	PK	81.0	78.8	16.3	10.8	32.1	-	76.0	73.8	100.8	24.8	27.0	Carrier
867.840	PK	36.7	33.8	21.5	13.2	31.3	-	40.1	37.2	80.8	40.7	43.6	Outside
1301.760	PK	47.3	47.3	24.7	4.5	36.5	-	40.0	40.0	73.9	33.9	33.9	Inside
1735.680	PK	49.7	48.3	25.9	4.8	36.2	-	44.2	42.8	80.8	36.6	38.0	Outside
2169.600	PK	47.9	47.3	26.7	5.1	36.2	-	43.5	42.9	80.8	37.3	37.9	Outside
2603.520	PK	48.3	47.4	27.2	5.3	36.3	-	44.5	43.6	80.8	36.3	37.2	Outside
3037.440	PK	48.8	49.1	28.4	5.5	36.2	-	46.5	46.8	80.8	34.3	34.0	Outside
3471.360	PK	47.2	47.4	29.4	5.8	36.0	-	46.4	46.6	80.8	34.4	34.2	Outside
3905.280	PK	51.3	49.7	30.1	6.0	35.7	-	51.7	50.1	73.9	22.2	23.8	Inside
4339.200	PK	47.4	46.7	31.0	6.2	35.6	-	49.0	48.3	73.9	24.9	25.6	Inside

### PK with Duty factor

Frequency [MHz]	Detector	Reading [dBuV]		Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]		Limit dBuV/m	Margin [dB]		Remark
		Hor	Ver					Hor	Ver		Hor	Ver	
433.920	PK	81.0	78.8	16.3	10.8	32.1	0.0	76.0	73.8	80.8	4.8	7.0	Carrier
867.840	PK	36.7	33.8	21.5	13.2	31.3	0.0	40.1	37.2	60.8	20.7	23.6	Outside
1301.760	PK	47.3	47.3	24.7	4.5	36.5	0.0	40.0	40.0	53.9	13.9	13.9	Inside
1735.680	PK	49.7	48.3	25.9	4.8	36.2	0.0	44.2	42.8	60.8	16.6	18.0	Outside
2169.600	PK	47.9	47.3	26.7	5.1	36.2	0.0	43.5	42.9	60.8	17.3	17.9	Outside
2603.520	PK	48.3	47.4	27.2	5.3	36.3	0.0	44.5	43.6	60.8	16.3	17.2	Outside
3037.440	PK	48.8	49.1	28.4	5.5	36.2	0.0	46.5	46.8	60.8	14.3	14.0	Outside
3471.360	PK	47.2	47.4	29.4	5.8	36.0	0.0	46.4	46.6	60.8	14.4	14.2	Outside
3905.280	PK	51.3	49.7	30.1	6.0	35.7	0.0	51.7	50.1	53.9	2.2	3.8	Inside
4339.200	PK	47.4	46.7	31.0	6.2	35.6	0.0	49.0	48.3	53.9	4.9	5.6	Inside

Sample calculation:

Result of PK = Reading + Ant Factor + Loss (Cable + Attenuator + Distance factor) - Gain (Amplifier)

Result of PK with Duty factor = Reading + Ant Factor + Loss (Cable + Attenuator + Distance factor) - Gain (Amplifier) + Duty factor  
(Refer to Duty factor data sheet)

For above 1GHz : Distance Factor:  $20 \times \log(4.0 \text{ m}/3.0 \text{ m}) = 2.50 \text{ dB}$

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

**UL Japan, Inc.**

**Ise EMC Lab.**



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## **Radiated Spurious Emission** **(Plot data, Worst case)**

Test place	Ise EMC Lab. No.4 and No.1 Semi Anechoic Chamber	
Report No.	11210169H	
Date	April 18, 2016	April 18, 2016
Temperature / Humidity	23 deg. C / 41 % RH	23 deg. C / 45 % RH
Engineer	Ken Fujita (Below 1 GHz)	Tomohisa Nakagawa (Above 1 GHz)
Mode	Continuous Transmitting mode 433.92 MHz	

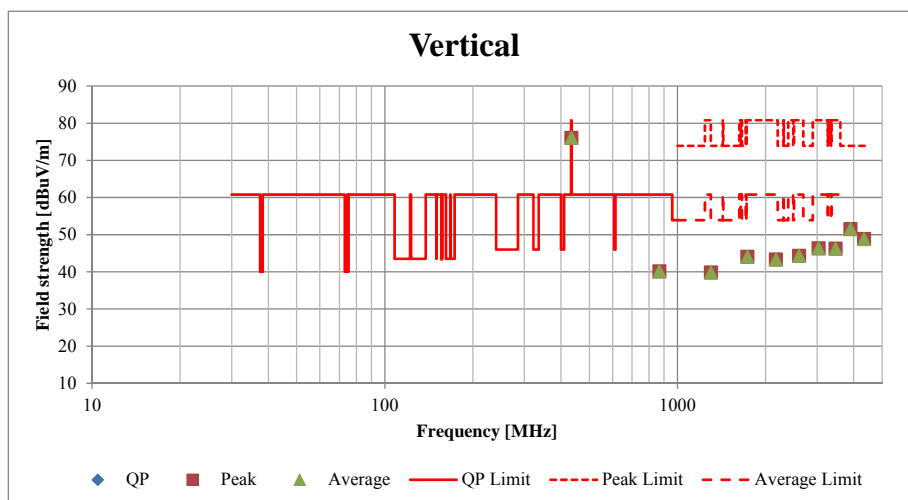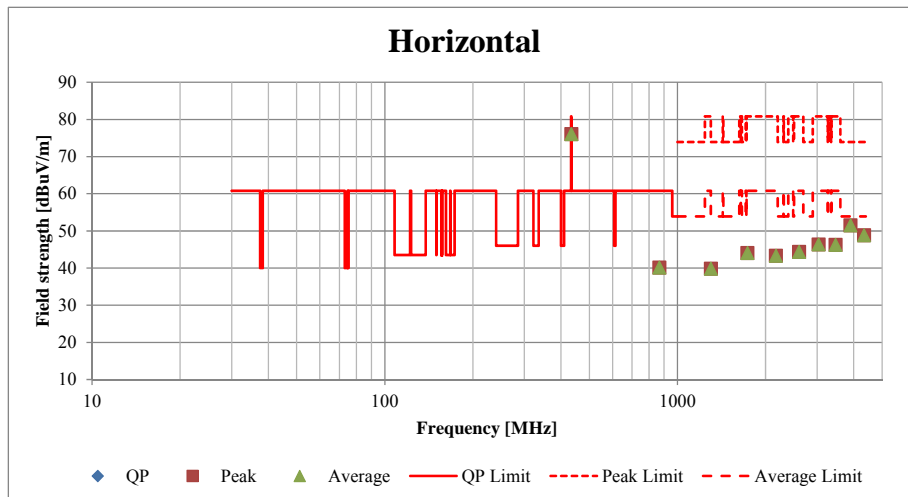

\*These plots data contains sufficient number to show the trend of characteristic features for EUT.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

### -20dB and 99% Occupied Bandwidth


Test place : Ise EMC Lab. No.4 Semi Anechoic Chamber  
Report No. : 11210169H  
Date : 04/17/2016  
Temperature/ Humidity : 23 deg. C / 41 % RH  
Engineer : Ken Fujita  
Mode : Continuous Transmitting mode 433.92 MHz

Bandwidth Limit : Fundamental Frequency **433.92** MHz x 0.25% = 1084.80 kHz

\* The above limit was calculated from more stringent nominal frequency.

-20dB Bandwidth [kHz]	Bandwidth Limit [kHz]	Result
76.747	1084.80	Pass

99% Occupied Bandwidth [kHz]	Bandwidth Limit [kHz]	Result
86.546	1084.80	Pass

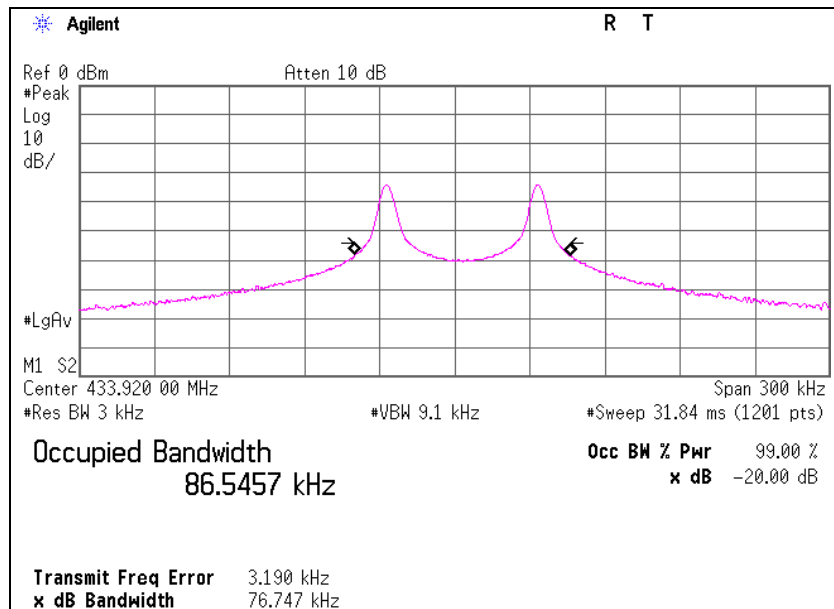

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999


Facsimile : +81 596 24 8124

## Duty Cycle

Test place	Ise EMC Lab. No.4 Semi Anechoic Chamber
Report No.	11210169H
Date	04/17/2016
Temperature/ Humidity	23 deg. C / 41 % RH
Engineer	Ken Fujita
Mode	Normal use mode 433.92 MHz

ON time [ms]	Cycle [ms]	Duty (On time/Cycle)	Duty [dB]
300.000	300.00	1.0000	0.00

\* Duty =  $20\log_{10}(\text{ON time/Cycle})$

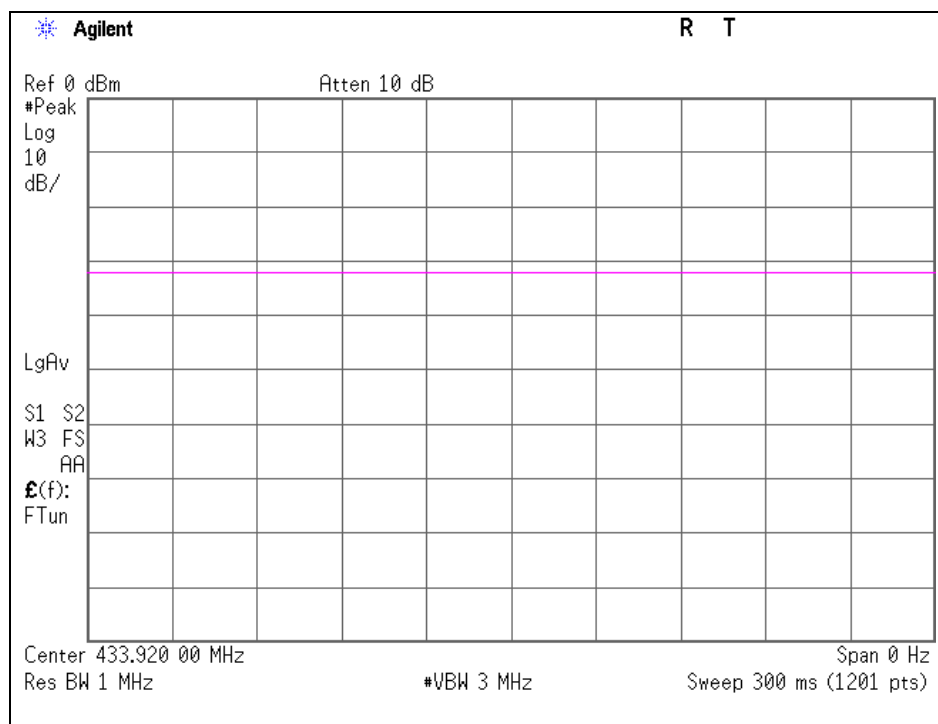

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## **APPENDIX 2: Test Instruments**

### **EMI test equipment**

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MAEC-04	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	RE	2015/10/02 * 12
MOS-15	Thermo-Hygrometer	Custom	CTH-180	1501	RE	2016/01/21 * 12
MJM-26	Measure	KOMELON	KMC-36	-	RE	-
COTS-MEMI	EMI measurement program	TSJ	TEPTO-DV	-	RE	-
MTR-10	EMI Test Receiver	Rohde & Schwarz	ESR26	101408	RE	2016/01/29 * 12
MBA-05	Biconical Antenna	Schwarzbeck	BBA9106	1302	RE	2015/11/02 * 12
MLA-23	Logperiodic Antenna(200-1000MHz)	Schwarzbeck	VUSLP9111B	911B-192	RE	2016/01/30 * 12
MCC-50	Coaxial Cable	UL Japan	-	-	RE	2015/06/19 * 12
MAT-68	Attenuator	Anritsu	MP721B	6200961025	RE	2015/11/12 * 12
MPA-14	Pre Amplifier	SONOMA INSTRUMENT	310	260833	RE	2016/03/18 * 12
MMM-10	DIGITAL HiTESTER	Hioki	3805	051201148	RE	2016/01/18 * 12
MSA-04	Spectrum Analyzer	Agilent	E4448A	US44300523	RE	2015/11/06 * 12
MAEC-01	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 10m	DA-06881	RE	2015/09/19 * 12
MOS-27	Thermo-Hygrometer	CUSTOM	CTH-201	A08Q26	RE	2016/01/21 * 12
MJM-25	Measure	KOMELON	KMC-36	-	RE	-
MHA-05	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	253	RE	2015/05/18 * 12
MPA-01	Pre Amplifier	Agilent	8449B	3008A01671	RE	2016/02/26 * 12
MCC-165	Microwave Cable	Junkosha	MWX221	1203S213(1m) / 1311S166(5m)	RE	2015/11/10 * 12
MMM-03	Digital Tester	Fluke	FLUKE 26-3	78030621	RE	2015/08/19 * 12
MRENT-127	Spectrum Analyzer	KEYSIGHT	N9030A	US51350215	RE	2015/11/02 * 12
MLPA-07	Loop Antenna	UL Japan	-	-	RE	Pre Check

**The expiration date of the calibration is the end of the expired month.**

**All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.**

**As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.**

**Test Item:**

**RE: Radiated emission, 99 % Occupied Bandwidth, -20 dB bandwidth, Automatically deactivate and Duty cycle tests**

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124