

# **FCC Test Report**

Report No.: AGC02320180303FE03

**FCC ID** : 2AO47-VCB60015BT

**APPLICATION PURPOSE**: Original Equipment

**PRODUCT DESIGNATION**: Wireless Speaker

**BRAND NAME** : VIVITAR

MODEL NAME : VCB60015BT

**CLIENT**: Shenzhen Kingstar Industrial Co., Ltd.

**DATE OF ISSUE** : May 08, 2018

STANDARD(S)

TEST PROCEDURE(S)

: FCC Part 15 Subpart C Section 15.249

REPORT VERSION V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

#### **CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



The results spower this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true and the authenticity of the authenticity of

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



Page 2 of 63

## **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	plience 1 8 Marie	May 08, 2018	Valid	Initial release

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.



## TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.2. TABLE OF CARRIER FREQUENCYS	5
3. MEASUREMENT UNCERTAINTY	
4. DESCRIPTION OF TEST MODES	
5. SYSTEM TEST CONFIGURATION	8
5.1. CONFIGURATION OF EUT SYSTEM5.2. EQUIPMENT USED IN EUT SYSTEM5.3. SUMMARY OF TEST RESULTS	8
6. TEST FACILITY	10
7.TEST METHOD	11
8. TEST EQUIPMENT LIST	
9. RADIATED EMISSION	12
9.1TEST LIMIT 9.2. MEASUREMENT PROCEDURE 9.3. TEST SETUP 9.4. TEST RESULT	12 13 15
10. BAND EDGE EMISSION	38
10.1. MEASUREMENT PROCEDURE	38 39
11. 20DB BANDWIDTH	43
11.1. MEASUREMENT PROCEDURE	43
12. FCC LINE CONDUCTED EMISSION TEST	50
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	50 51 51
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	54
ADDENIDIY D. DUOTOGDADUS OF FUT	57



Page 4 of 63

## 1. VERIFICATION OF CONFORMITY

Applicant	Shenzhen Kingstar Industrial Co., Ltd.
Address	Room 211, Min Le technology Building, Meiban Road, LongHua District, Shenzhen China
Manufacturer	Shenzhen Kingstar Industrial Co., Ltd.
Address	Room 211, Min Le technology Building, Meiban Road, LongHua District, Shenzhen China
Product Designation	Wireless Speaker
Brand Name	VIVITAR
Test Model	VCB60015BT
Date of test	Apr. 12, 2018 to Apr. 19, 2018
Deviation	None
Condition of Test Sample	Normal Normal
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.249. The test results of this report relate only to the tested sample identified in this report.

Tested By	Jorden Wang	
	Jonhen Wang(Wang Yonghuan)	Apr. 19, 2018
	and change	
Reviewed By		otill
	Cool Cheng(Cheng Mengguo)	May 08, 2018
	-owest cei	
Approved By	C " D	
	Forrest Lei(Lei Yonggang)  Authorized Officer	May 08, 2018

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 5 of 63

## 2. GENERAL INFORMATION

## 2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

2 N 2 N 2 N 2 N 2 N 2 N 2 N 2 N 2 N 2 N	
Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	1.34dBm(Max EIRP Power=Max radiation field-95.2)
Bluetooth Version	V4.2
Modulation	BR ⊠GFSK, EDR ⊠π /4-DQPSK, ⊠8DPSK BLE □GFSK
Number of channels	79 for BR/EDR
Hardware Version	V1.0
Software Version	V4.2
Antenna Designation	PCB Antenna
Antenna Gain	0dBi
Power Supply	DC 3.7V by battery
Note: The USB port only	used for charging and can't be used to transfer data with PC.

## 2.2. TABLE OF CARRIER FREQUENCYS

BR/EDR channel List

Frequency Band	Channel Number	Frequency
NO.	0 1 1 1	2402MHz
The Manufacture	The state of the s	2403MHz
© Signatura of Clobal Control	Paris Co. T. Co.	
CC CC	38	2440 MHz
2400~2483.5MHz	39	2441 MHz
Complaine @ # John of Copya Co.	40	2442 MHz
GO TO C		
	77	2479 MHz
10 mm	78	2480 MHz



Page 6 of 63

## 3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

- Uncertainty of Conducted Emission, Uc = ±3.2 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB

## 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
8 # 1 not coon 8 #	Low channel GFSK
2 60	Middle channel GFSK
3	High channel GFSK
4 报	Low channel π /4-DQPSK
® 5 nd cloud	Middle channel π /4-DQPSK
6	High channel π /4-DQPSK
7	Low channel 8DPSK
The state of the s	Middle channel 8DPSK
90	High channel 8DPSK
10	BT Link with charging
11th his rolling	BT Link
(f) 200c (at)	

#### Note:

- 1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. The EUT used fully-charged battery when tested.





The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.agc-gett.com.




Page 8 of 63

## 5. SYSTEM TEST CONFIGURATION


## 5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)



Note: Owing to the EUT has own battery, testing may be performed while PC or adapter removed.

Configure 2: (Control continuous TX)



## **5.2. EQUIPMENT USED IN EUT SYSTEM**

Item	Equipment	Mfr/Brand	Model/Type No.	Remark	
1	Wireless Speaker	VIVITAR	VCB60015BT	EUT	
2	Battery	pengchengtiaxia 053040		Accessory	
3	PC	APPLE	A1465	A.E	
4	Control box	BEKEN	N/A	A.E	
5	Adapter	Huawei	N/A	A.E	
6	USB Cable	N/A	1m unshielded	A.E	

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



Page 9 of 63

#### **5.3. SUMMARY OF TEST RESULTS**

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249(a) §15.209	Radiated Emission	Compliant
§15.249(d)	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
§15.215	Bandwidth	Compliant



Page 10 of 63

## 6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd			
Location	1-2F., Bldg.2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District B112-B113, Bldg.12, Baoan Bldg Materials Center, No.1 of Xixiang Inner Ring Road, Baoan District, Shenzhen 518012			
NVLAP Lab Code	600153-0			
Designation Number	CN5028			
Test Firm Registration Number	682566			
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by National Voluntary Laboratory Accreditation program, NVLAP Code 600153-0			



age 11 of 63

## 7. TEST METHOD

All measurements contained in this report were conducted with ANSI C63.10-2013

## 8. TEST EQUIPMENT LIST

#### **TEST EQUIPMENT OF CONDUCTED EMISSION TEST**

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Jun.20, 2017	Jun.19, 2018
LISN	R&S	ESH2-Z5	100086	Aug.21, 2017	Aug.20, 2018

## **TEST EQUIPMENT OF RADIATED EMISSION TEST**

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun.20, 2017	Jun.19, 2018
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec.08, 2017	Dec.07, 2018
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep.20, 2017	Sep.19, 2018
preamplifier	ChengYi	EMC184045SE	980508	Sep.15, 2017	Sep.14, 2018
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May 18, 2017	May 17, 2019
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun.20, 2017	Jun.19, 2018
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep.28, 2017	Sep.27, 2018
Loop Antenna	LAPLACE	RF300	C AME	Mar. 01, 2018	Feb. 28, 2020
Radiation Cable 1	MXT	RS1	R005	June 6, 2017	June 5, 2018
Radiation Cable 2	MXT	RS1	R006	June 6, 2017	June 5, 2018
Filter (2.4-2.483GHz)	Micro-tronics	087		Jun.20, 2017	Jun.19, 2018

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 12 of 63

## 9. RADIATED EMISSION

## 9.1TEST LIMIT

## Standard FCC15.249

Fundamental	Field Strength of Fundamental	Field Strength of Harmonics
Frequency	(millivolts/meter)	(microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

#### Standard FCC 15.209

Frequency	Distance	Field Str	engths Limit
(MHz)	Meters	μ V/m	dB(μV)/m
0.009 ~ 0.490	300	2400/F(kHz)	9
0.490 ~ 1.705	30	24000/F(kHz)	技訓
1.705 ~ 30	30	30 (1)	E Cobaco (Color of Color of Co
30 ~ 88	3 F 1000	100	40.0
88 ~ 216	3 - 6	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3. I	Other:74.0 dB(μV)/m (Average)	(Peak) 54.0 dB(μV)/m

Remark:

- (1) Emission level dB $\mu$  V = 20 log Emission level  $\mu$  V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.



Page 13 of 63

#### 9.2. MEASUREMENT PROCEDURE

- 1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
- 2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
- The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
- 4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- 5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
- 6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 14 of 63


The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	Fundamental: 2.4~2.483GHz RBW 2MHz/ VBW 6MHz for Peak, RBW 2MHz/ VBW 10Hz for Average Harmonics: 1GHz~25GHz RBW 1MHz/ VBW 3MHz for Peak, RBW 1MHz/ VBW 10Hz for Average
Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP




## 9.3. TEST SETUP

## Radiated Emission Test-Setup Frequency Below 30MHz

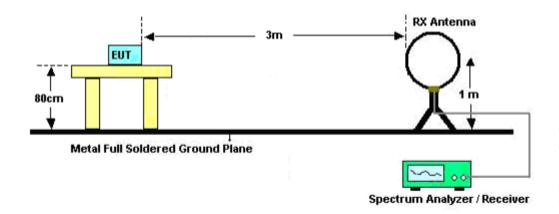


## RADIATED EMISSION TEST SETUP 30MHz-1000MHz

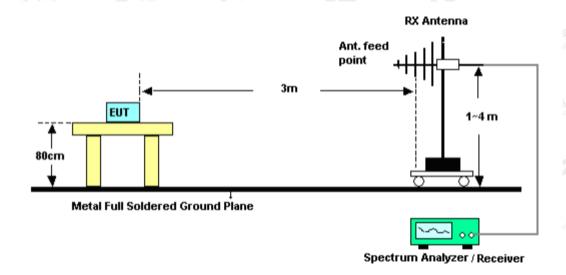



Page 16 of 63

## RADIATED EMISSION TEST SETUP ABOVE 1000MHz

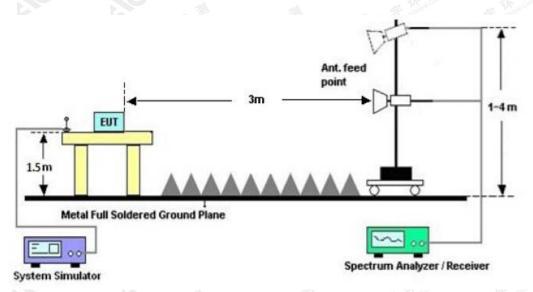



Page 17 of 63

#### 9.4. TEST RESULT

## FOR BR/EDR


(Worst modulation: GFSK)

## **RADIATED EMISSION BELOW 30MHz**

No emission found between lowest internal used/generated frequencies to 30MHz.

#### **RADIATED EMISSION BELOW 1GHz**

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL

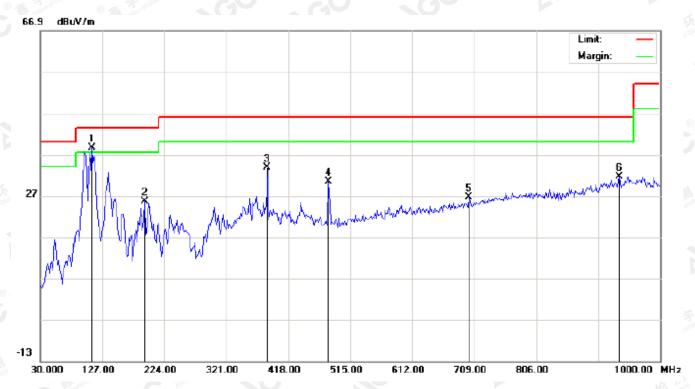


No	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	110.8332	30.72	7.98	38.70	43.50	-4.80	peak			
2		193.2829	14.01	11.69	25.70	43.50	-17.80	peak			
3		385.6666	14.81	18.98	33.79	46.00	-12.21	peak			
4		481.0500	9.58	20.92	30.50	46.00	-15.50	peak			
5		700.9166	1.31	25.25	26.56	46.00	-19.44	peak		·	
6		935.3333	2.11	29.59	31.70	46.00	-14.30	peak			

**RESULT: PASS** 



Page 18 of 63

## RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

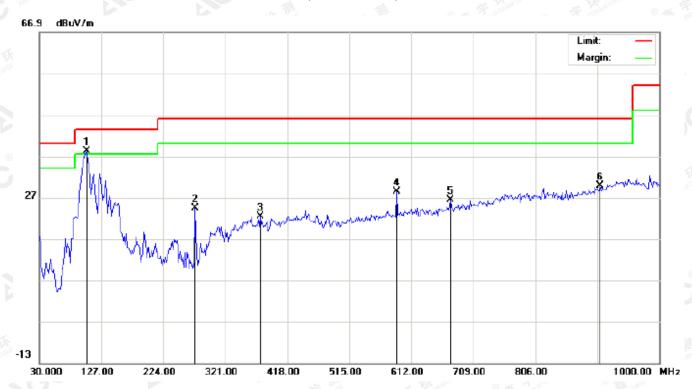

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1	*	104.3666	28.71	9.47	38.18	43.50	-5.32	peak			
2		274.1167	13.45	11.00	24.45	46.00	-21.55	peak			
3		375.9667	3.51	18.91	22.42	46.00	-23.58	peak			
4		589.3667	4.98	23.46	28.44	46.00	-17.56	peak			
5		673.4333	1.85	24.49	26.34	46.00	-19.66	peak			
6		907.8500	0.97	28.83	29.80	46.00	-16.20	peak			

## **RESULT: PASS**


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



Page 19 of 63

## RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

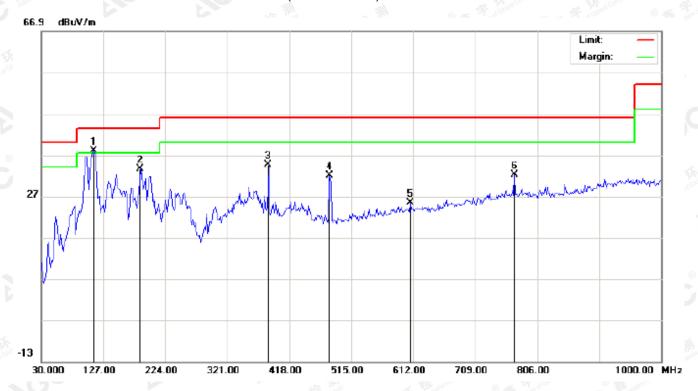


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
1	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1	*	112.4500	30.43	7.60	38.03	43.50	-5.47	peak			
2		185.1999	22.21	11.31	33.52	43.50	-9.98	peak			
3		385.6666	15.59	18.98	34.57	46.00	-11.43	peak			
4		481.0500	11.17	20.93	32.10	46.00	-13.90	peak			
5		607.1499	1.57	23.75	25.32	46.00	-20.68	peak			
6		770.4333	5.38	26.91	32.29	46.00	-13.71	peak			

DECIII T. DACC



Page 20 of 63

## RADIATED EMISSION TEST- (30MHz-1GHz)- MIDDLE CHANNEL -VERTICAL

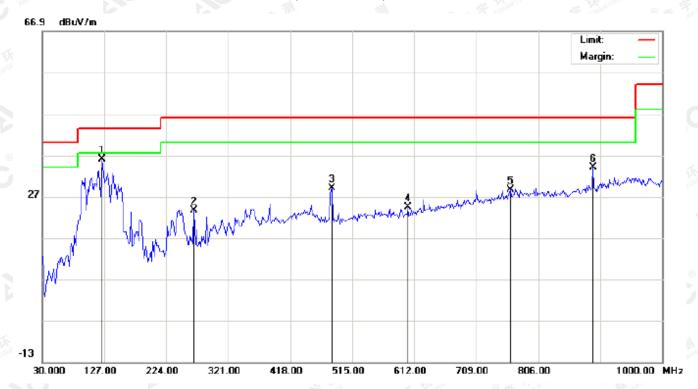

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu√/m	dBu√/m	dB		cm	degree	
1	*	123.7667	27.62	8.43	36.05	43.50	-7.45	peak			
2		267.6500	9.13	14.43	23.56	46.00	-22.44	peak			
3		482.6667	8.09	20.94	29.03	46.00	-16.97	peak			
4		602.3000	1.59	22.78	24.37	46.00	-21.63	peak			
5		762.3500	1.78	26.80	28.58	46.00	-17.42	peak			
6		891.6833	5.67	28.39	34.06	46.00	-11.94	peak			

## **RESULT: PASS**


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



Page 21 of 63

## RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL-HORIZONTAL

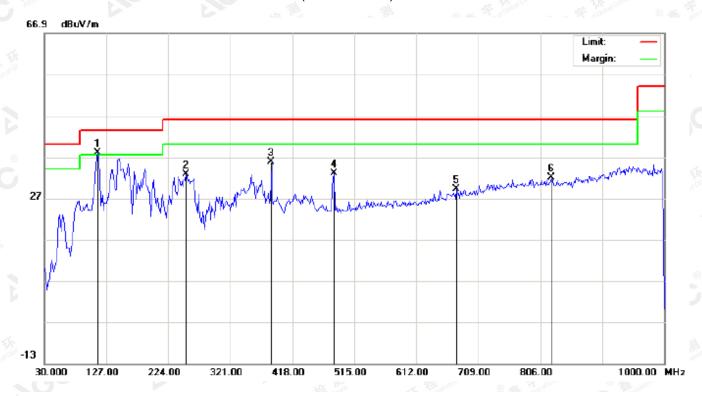


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	114.0665	31.30	6.67	37.97	43.50	-5.53	peak			
2		251.4833	15.92	16.94	32.86	46.00	-13.14	peak			
3		385.6666	13.79	21.98	35.77	46.00	-10.23	peak			
4		482.6667	8.98	23.94	32.92	46.00	-13.08	peak			
5		675.0500	1.67	27.52	29.19	46.00	-16.81	peak			
6		823.7833	1.78	30.32	32.10	46.00	-13.90	peak			

**RESULT: PASS** 



Page 22 of 63

## RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

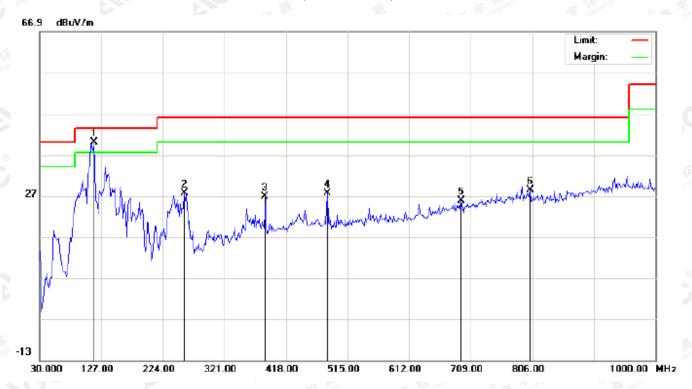

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1	*	115.6833	35.28	4.71	39.99	43.50	-3.51	peak			
2		257.9500	13.38	14.14	27.52	46.00	-18.48	peak			
3		385.6666	7.77	18.98	26.75	46.00	-19.25	peak			
4		482.6667	6.67	20.94	27.61	46.00	-18.39	peak			
5		694.4500	0.86	25.04	25.90	46.00	-20.10	peak			
6		802.7667	1.10	27.32	28.42	46.00	-17.58	peak			

## **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.




Page 23 of 63

## RADIATED EMISSION ABOVE 1GHz FOR BR/EDR

(Worst modulation: GFSK)

#### For Fundamental

## RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL

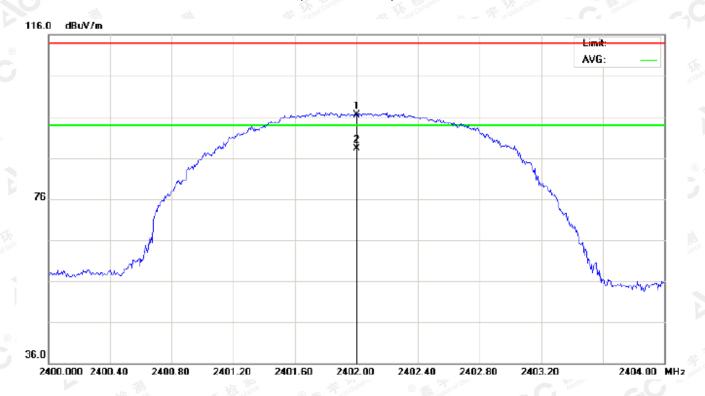


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2402.000	86.22	10.32	96.54	114.00	-17.46	peak			
2	*	2402.000	78.02	10.32	88.34	94.00	-5.66	AVG	100	310	

RESULT: PASS



Page 24 of 63

## RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

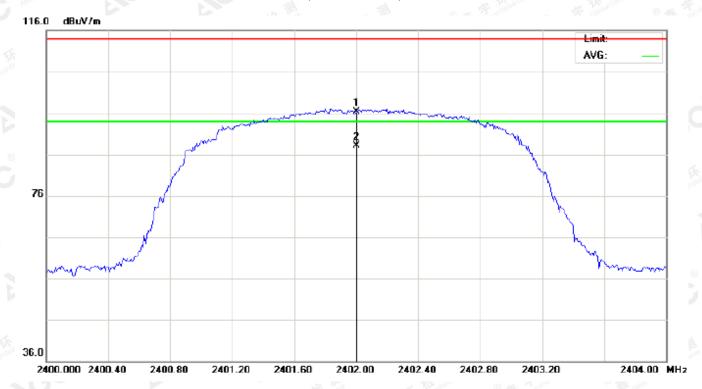


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2402.000	85.89	10.32	96.21	114.00	-17.79	peak			
2	*	2402.000	77.70	10.32	88.02	94.00	-5.98	AVG	100	121	

**RESULT: PASS** 



Page 25 of 63

## RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

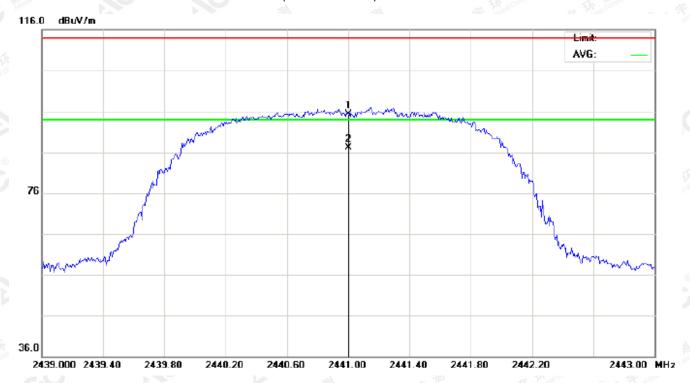


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2441.000	84.97	10.36	95.33	114.00	-18.67	peak			
2	*	2441.000	76.67	10.36	87.03	94.00	-6.97	AVG	100	310	

**RESULT: PASS** 



Page 26 of 63

## RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

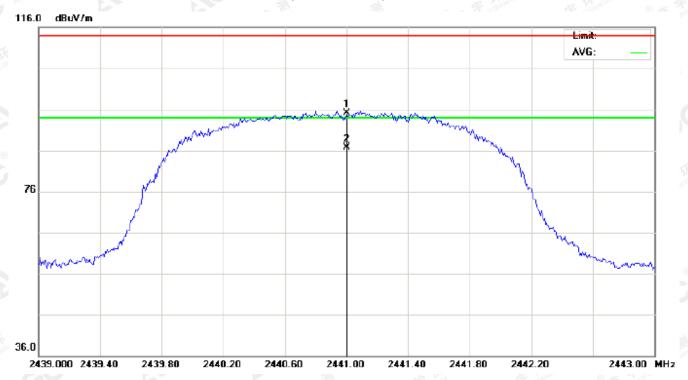


No	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2441.000	84.66	10.36	95.02	114.00	-18.98	peak			
2	*	2441.000	76.35	10.36	86.71	94.00	-7.29	AVG	100	128	

**RESULT: PASS** 



Page 27 of 63

## RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

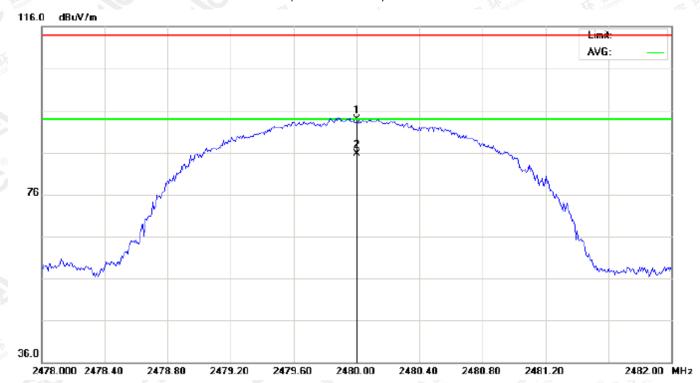


No	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2480.000	83.48	10.41	93.89	114.00	-20.11	peak			
2	*	2480.000	75.28	10.41	85.69	94.00	-8.31	AVG	100	345	

**RESULT: PASS** 



Page 28 of 63

## RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

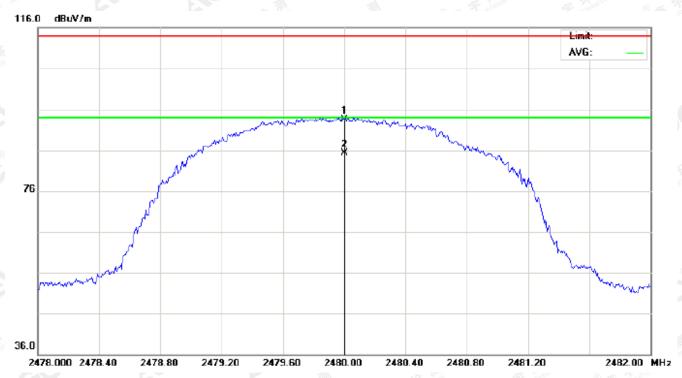

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2480.000	83.10	10.41	93.51	114.00	-20.49	peak			
2	*	2480.000	74.94	10.41	85.35	94.00	-8.65	AVG	100		

## **RESULT: PASS**

Note: Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.



Page 29 of 63

## Field strength of the fundamental signal

## 1Mbps Result:

## Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna	
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization	
2402	86.22	10.32	96.54	114	-17.46	Horizontal	
2402	85.89	10.32	96.21	114	-17.79	Vertical	
2441	84.97	10.36	95.33	114	-18.67	Horizontal	
2441	84.66	10.36	95.02	114	-18.98	Vertical	
2480	83.48	10.41	93.89	114	-20.11	Horizontal	
2480	83.10	10.41	93.51	114	-20.49	Vertical	

## Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna	
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization	
2402	78.02	10.32	88.34	94	-5.66	Horizontal	
2402	77.70	10.32	88.02	94	-5.98	Vertical	
2441	76.67	10.36	87.03	94	-6.97	Horizontal	
2441	76.35	10.36	86.71	94	-7.29	Vertical	
2480	75.28	10.41	85.69	94	-8.31	Horizontal	
2480	74.94	10.41	85.35	94	-8.65	Vertical	



Page 30 of 63

## 2Mbps Result:

#### Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna	
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization	
2402	85.81	10.32	96.13	114	-17.87	Horizontal	
2402	85.50	10.32	95.82	114	-18.18	Vertical	
2441	84.50	10.36	94.86	114	-19.14	Horizontal	
2441	84.25	10.36	94.61	114	-19.39	Vertical	
2480	83.07	10.41	93.48	114	-20.52	Horizontal	
2480	82.66	10.41	93.07	114	-20.93	Vertical	

## Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	77.70	10.32	88.02	94	-5.98	Horizontal
2402	77.21	10.32	87.53	94	-6.47	Vertical
2441	76.24	10.36	86.60	94	-7.40	Horizontal
2441	75.91	10.36	86.27	94	-7.73	Vertical
2480	74.86	10.41	85.27	94	-8.73	Horizontal
2480	74.47	10.41	84.88	94	-9.12	Vertical



Page 31 of 63

## 3Mbps Result:

#### Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna	
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization	
2402	85.35	10.32	95.67	114	-18.33	Horizontal	
2402	85.08	10.32	95.40	114	-18.60	Vertical	
2441	84.06	10.36	94.42	114	-19.58	Horizontal	
2441	83.83	10.36	94.19	114	-19.81	Vertical	
2480	82.58	10.41	92.99	114	-21.01	Horizontal	
2480	82.21	10.41	92.62	114	-21.38	Vertical	

## Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna	
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization	
2402	77.40	10.32	87.72	94	-6.28	Horizontal	
2402	76.76	10.32	87.08	94	-6.92	Vertical	
2441	75.87	10.36	86.23	94	-7.77	Horizontal	
2441	75.42	10.36	85.78	94	-8.22	Vertical	
2480	74.42	10.41	84.83	94	-9.17	Horizontal	
2480	74.07	10.41	84.48	94	-9.52	Vertical	




age 32 of 63

## FOR BR/EDR

(Worst modulation: GFSK)

#### **For Harmonics**

## RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL

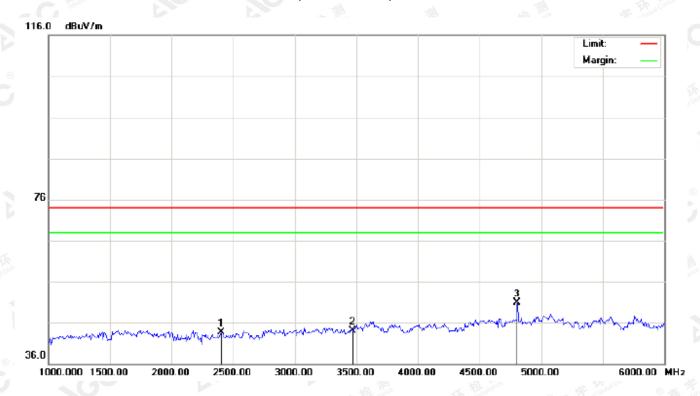


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2402.000	33.33	10.32	43.65	74.00	-30.35	peak			
2		3466.667	31.95	12.08	44.03	74.00	-29.97	peak			
3	*	4804.000	43.21	7.69	50.90	74.00	-23.10	peak			

RESULT: PASS



Page 33 of 63

## RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

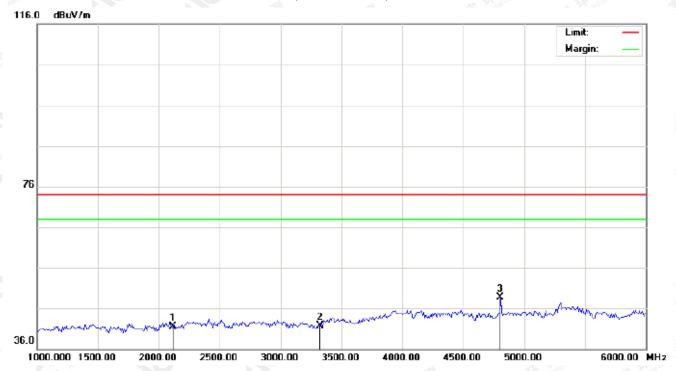

	No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
. [	1		2116.667	31.42	10.01	41.43	74.00	-32.57	peak			
	2		3325.000	29.72	11.95	41.67	74.00	-32.33	peak			
	3	*	4804.000	41.05	7.69	48.74	74.00	-25.26	peak			

**RESULT: PASS** 

The results spowth this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gott.com.



Page 34 of 63

## RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL



No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2258.333	31.74	10.16	41.90	74.00	-32.10	peak			
2		3616.667	29.92	12.83	42.75	74.00	-31.25	peak			
3	*	4882.000	42.66	7.89	50.55	74.00	-23.45	peak			


**RESULT: PASS** 

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 100°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at although the confirmed at although the confirmed at all the confirmed at



Page 35 of 63

## RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

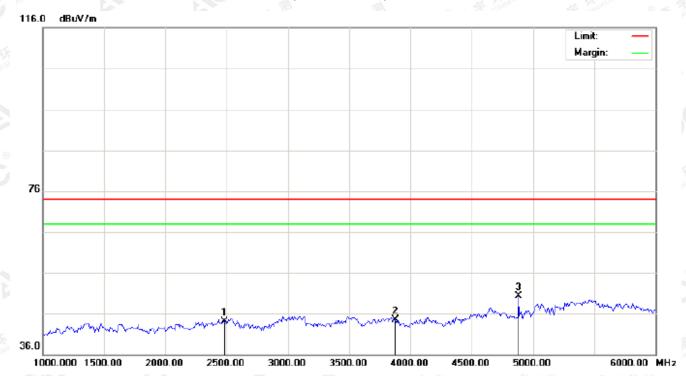

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2483.333	33.76	10.41	44.17	74.00	-29.83	peak			
2		3875.000	30.03	14.42	44.45	74.00	-29.55	peak			
3	*	4882.000	42.39	7.89	50.28	74.00	-23.72	peak			


**RESULT: PASS** 

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago-gett.com.



Page 36 of 63

## RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

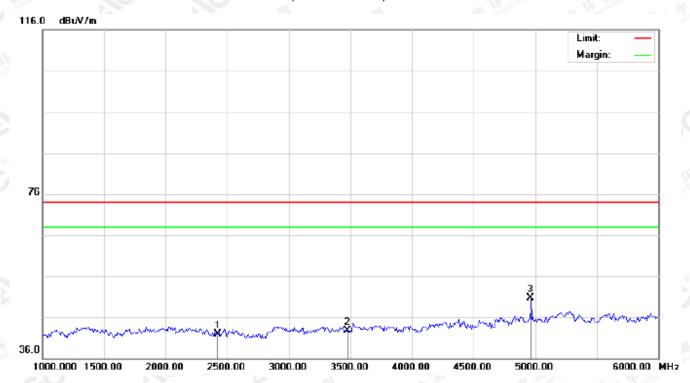

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2425.000	31.59	10.35	41.94	74.00	-32.06	peak			
2		3475.000	30.69	12.09	42.78	74.00	-31.22	peak			
3	*	4960.000	42.60	8.09	50.69	74.00	-23.31	peak			


RESULT: PASS

The results shown in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 40°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



Page 37 of 63

# RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

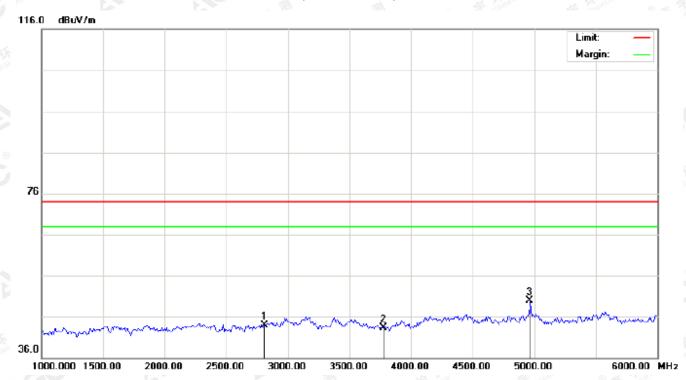

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
d	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2808.333	32.76	11.18	43.94	74.00	-30.06	peak			
2		3775.000	29.53	13.80	43.33	74.00	-30.67	peak			
3	*	4960.000	41.91	8.09	50.00	74.00	-24.00	peak			

### **RESULT: PASS**

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 38 of 63

### 10. BAND EDGE EMISSION


### 10.1. MEASUREMENT PROCEDURE

- The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
- 2. Max hold the trace of the setup 1, and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.
- 3. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission.

Start frequency(MHz)	Stop frequency(MHz)
2200	2405
2478	2500

### **10.2 TEST SETUP**

## RADIATED EMISSION TEST SETUP

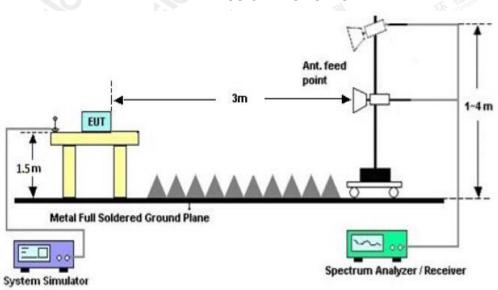

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 39 of 63

# **10.3 RADIATED TEST RESULT**

## FOR BR/EDR

(Worst modulation: GFSK)

### TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal




No	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		2379.375	31.42	10.30	41.72	74.00	-32.28	peak			
2		2390.000	33.00	10.31	43.31	74.00	-30.69	peak			
3		2400.000	42.47	10.32	52.79	74.00	-21.21	peak			
4	*	2402.000	86.21	10.32	96.53	74.00	22.53	peak			
5	Х	2402.000	78.00	10.32	88.32	74.00	14.32	AVG	100	314	

The results spowth this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gott.com.



Page 40 of 63

# TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

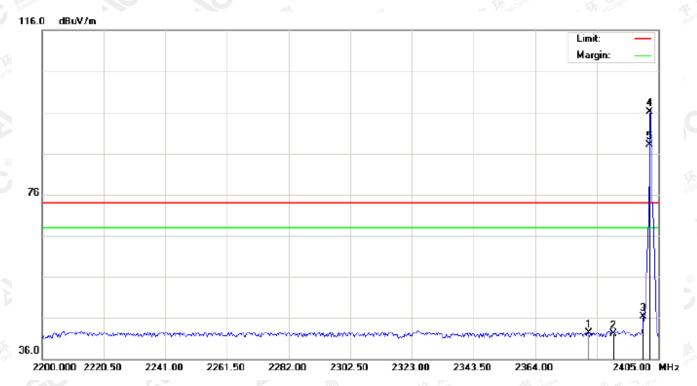


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2381.767	32.07	10.30	42.37	74.00	-31.63	peak			
2		2390.000	31.71	10.31	42.02	74.00	-31.98	peak			
3		2400.000	36.06	10.32	46.38	74.00	-27.62	peak			
4	*	2402.000	85.88	10.32	96.20	74.00	22.20	peak			-
5	Х	2402.000	77.69	10.32	88.01	74.00	14.01	AVG	100	104	

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc.cett.com.



Page 41 of 63

# TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

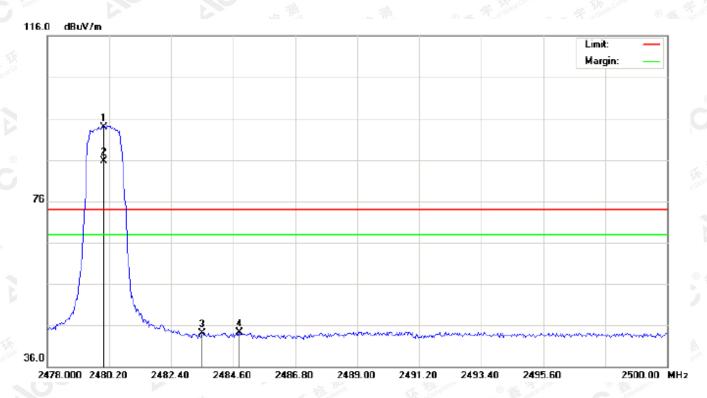


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	83.47	10.41	93.88	74.00	19.88	peak			
2	Х	2480.000	75.27	10.41	85.68	74.00	11.68	AVG	100	312	
3		2483.500	33.69	10.41	44.10	74.00	-29.90	peak			
4		2484.820	33.86	10.41	44.27	74.00	-29.73	peak			

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 42 of 63

# TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

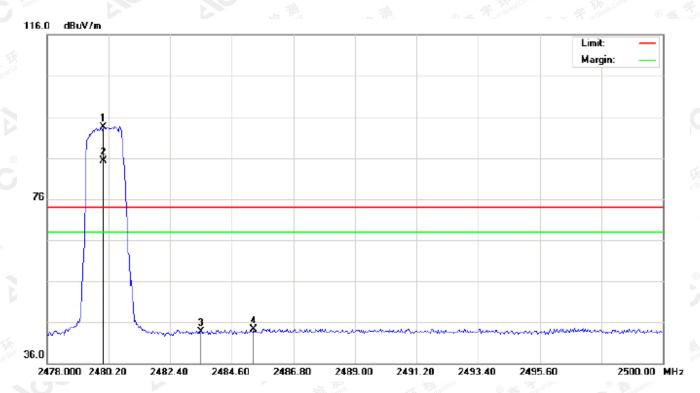

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	83.11	10.41	93.52	74.00	19.52	peak			
2	Х	2480.000	74.93	10.41	85.34	74.00	11.34	AVG	100	124	
3		2483.500	33.26	10.41	43.67	74.00	-30.33	peak			
4		2485.370	33.89	10.41	44.30	74.00	-29.70	peak			

### **RESULT: PASS**

Note: Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Hopping on mode and Hopping off mode have been tested, but only worst case reported.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.




Page 43 of 63

## 11. 20DB BANDWIDTH

### 11.1. MEASUREMENT PROCEDURE

- 1. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 2. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ 3RBW; Sweep = auto; Detector function = peak
- 3. Set SPA Trace 1 Max hold, then View.

### 11.2. TEST SET-UP

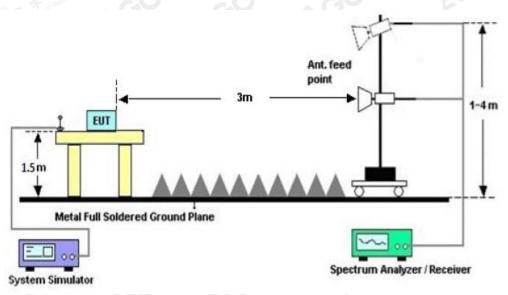

# 11.3. LIMITS AND MEASUREMENT RESULTS

### FOR BR/EDR

BLUET	OOTH 1MBPS LIN	MITS AND MEASU	REMENT RESULT	
		Measure	ement Result	
Applicable Limits		Donali (		
		99%OBW (MHz)	-20dB BW(MHz)	Result
Solva Company	Low Channel	0.997	1.127	PASS
N/A	Middle Channel	0.966	1.117	PASS
	High Channel	0.962	1.111	PASS


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

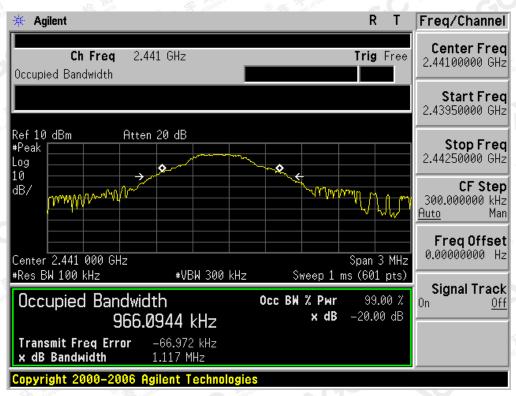


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.





#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

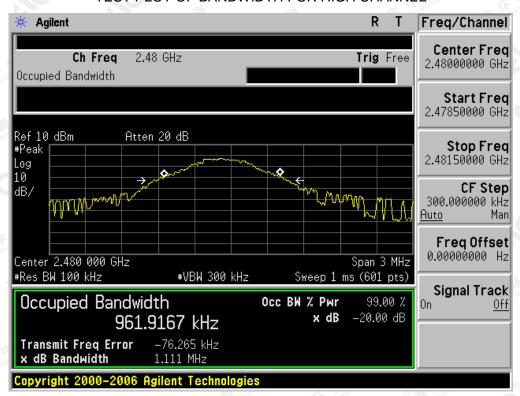


The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 46 of 63

BLUET	OOTH 2MBPS LIN	MITS AND MEASU	REMENT RESULT						
	Measurement Result								
Applicable Limits		<b>D</b>							
		99%OBW (MHz)	-20dB BW(MHz)	Result					
The transfer of the transfer o	Low Channel	1.228	1.407	PASS					
N/A	Middle Channel	1.228	1.407	PASS					
CO "	High Channel	1.209	1.372	PASS					


### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

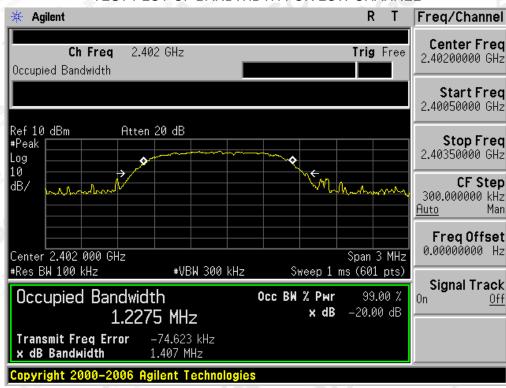


The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.




#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

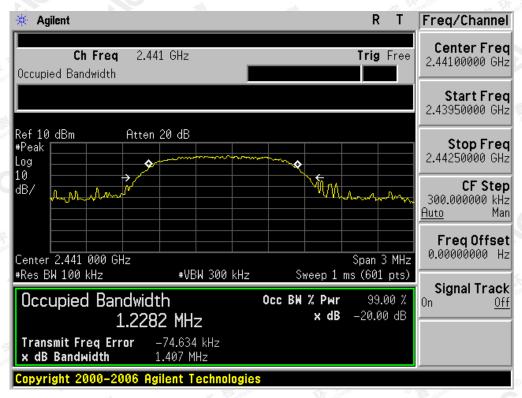

#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

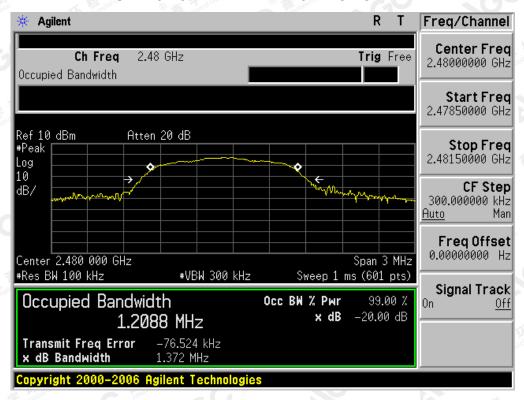


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.





**BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT Measurement Result Applicable Limits** Test Data (MHz) Result 99%OBW (MHz) -20dB BW(MHz) Low Channel 1.238 **PASS** 1.401 1.232 **PASS** N/A Middle Channel 1.409 1.231 **PASS High Channel** 1.408


#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

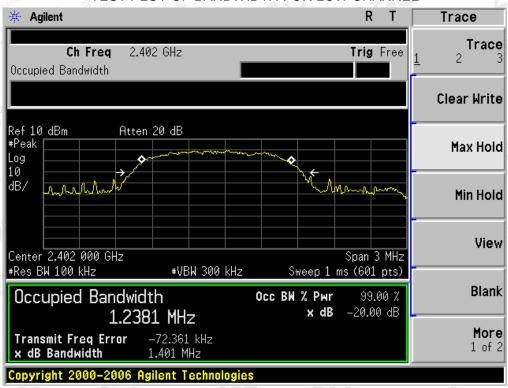


The results spowfil this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 40°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

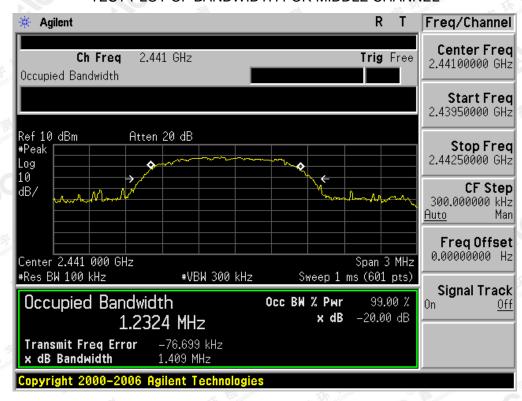

#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

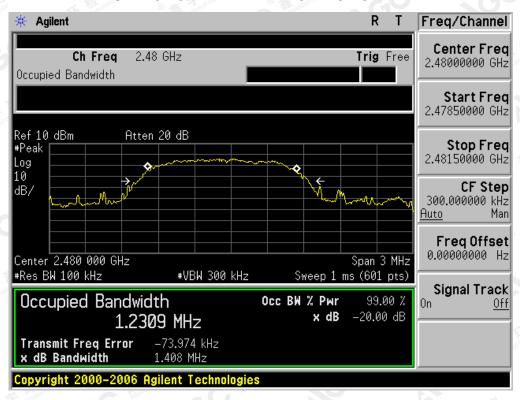

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



Page 50 of 63

## 12. FCC LINE CONDUCTED EMISSION TEST


## 12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

F	Maximum RF	Line Voltage
Frequency	Q.P.( dBuV)	Average( dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	8 gg 200 56 gg 100 00 00 00 00 00 00 00 00 00 00 00 00	46
5MHz~30MHz	60	50

### Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

## 12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

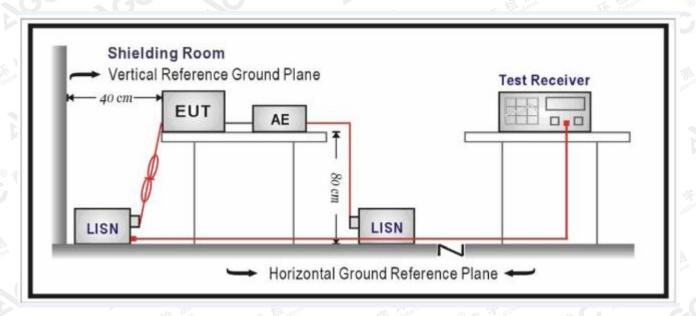

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 51 of 63

## 12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC charging voltage by adapter or PC which received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

### 12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago-gent.com.


Page 52 of 63

# 12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

# By adapter(worst case)

### FOR BR/EDR

## Line Conducted Emission Test Line 1-L

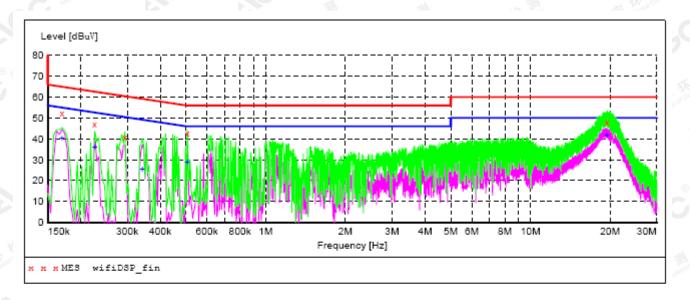

### MEASUREMENT RESULT:

2018-4-12 8:55

Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dBuV	dB d	BuV	dB				
0.170000 0.226000 0.294000 0.506000 19.486000	52.50 47.20 40.90 42.60 48.20	0.2 0.2 0.2 0.2 0.8	65 63 60 56	12.5 15.4 19.5 13.4 11.8	QP	L1 L1 L1 L1 L1	GND GND GND GND GND	ON ON ON ON

#### MEASUREMENT RESULT:


2018-4-12 8:55

Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dBuV	dB d	BuV	dB				
0.170000 0.226000 0.342000 0.506000 19.470000	40.20 36.20 25.50 28.90 41.70	0.2 0.2 0.2 0.2 0.8	55 53 49 46 50		AV AV AV AV	L1 L1 L1 L1 L1	GND GND GND GND GND	ON ON ON

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



### Line Conducted Emission Test Line 2-N

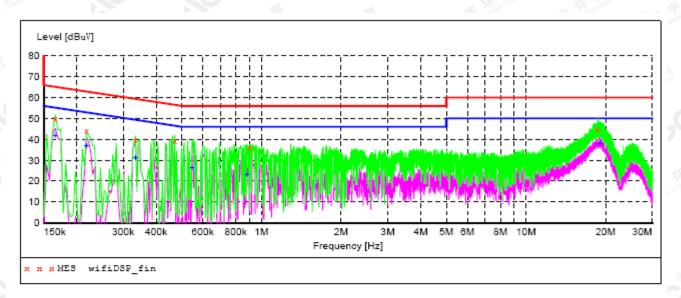


#### MEASUREMENT RESULT:

2018-4-12 9:07 Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dBuV	dB	$\mathtt{dBuV}$	dB				211112
0.166000 0.218000 0.334000 0.470000 0.906000 18.654000	50.10 44.00 39.80 39.50 36.10 44.70	0.2 0.2 0.2 0.2 0.2 0.7	65 63 59 57 56	15.1 18.9 19.6 17.0 19.9	QP QP QP QP QP QP	N N N N N	GND GND GND GND GND GND	ON ON ON ON

#### MEASUREMENT RESULT:

2018-4-12 9	:07							
Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX
MHz	dBuV	dB d	lBuV	dB				STATE
0.166000	41.70	0.2	55	13.5	AV	N	GND	ON
0.218000	37.20	0.2	53	15.7	AV	N	GND	ON
0.334000	31.10	0.2	49	18.3	AV	N	GND	ON
0.546000	26.40	0.2	46	19.6	AV	N	GND	ON
0.882000	23.20	0.2	46	22.8	AV	N	GND	ON
19.046000	38.20	0.8	5.0	11.8	ΔV	N	GND	ON

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc-gett.com.





# APPENDIX A: PHOTOGRAPHS OF TEST SETUP


FCC LINE CONDUCTED EMISSION TEST SETUP




FCC RADIATED EMISSION TEST SETUP




The results spowed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc-gent.com.






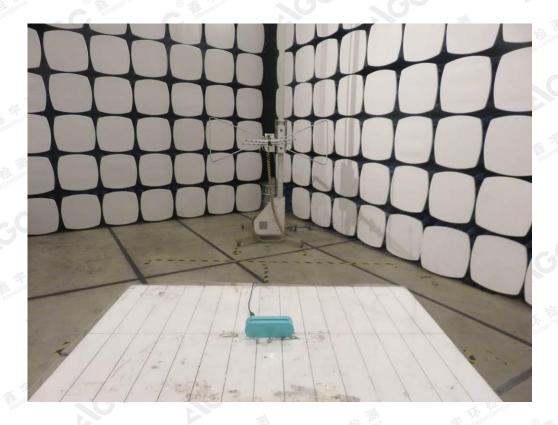

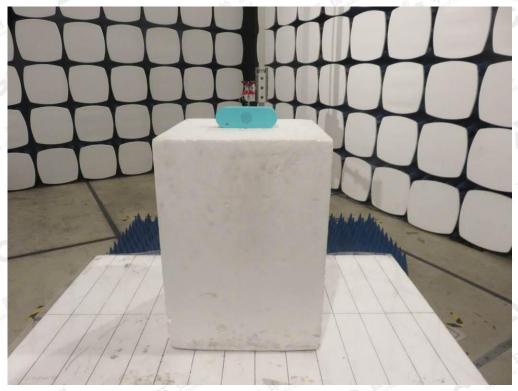

The results shown in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true; //www.agc.gett.com.







The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (60°, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.




## **APPENDIX B: PHOTOGRAPHS OF EUT**


TOP VIEW OF EUT



**BOTTOM VIEW OF EUT** 

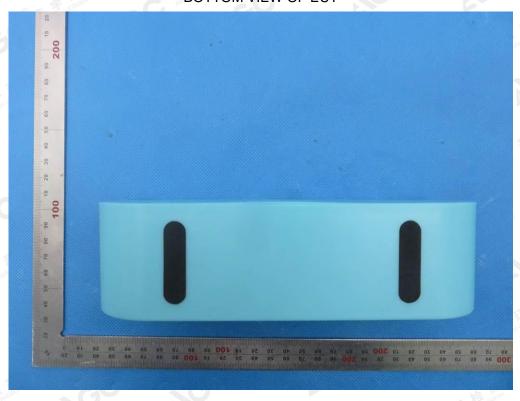


The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.





## FRONT VIEW OF EUT

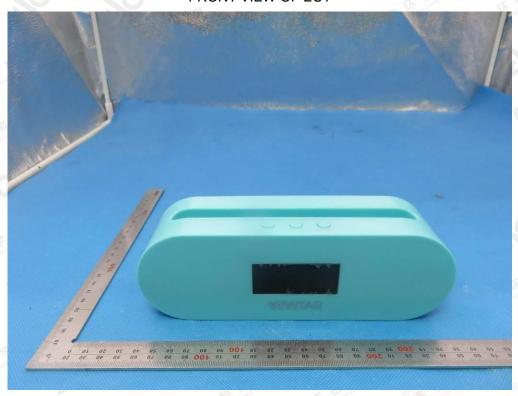

**BACK VIEW OF EUT** 



The results specified this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc-gett.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



# LEFT VIEW OF EUT



RIGHT VIEW OF EUT



The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attraction.

Attestation of Global Compliance

AGC 8


Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



# VIEW OF EUT (PORT)



**OPEN VIEW OF EUT** 

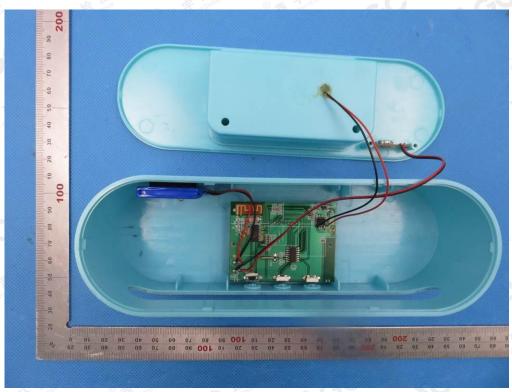


The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Attestation of Global Compliance


Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



## VIEW OF BATTERY

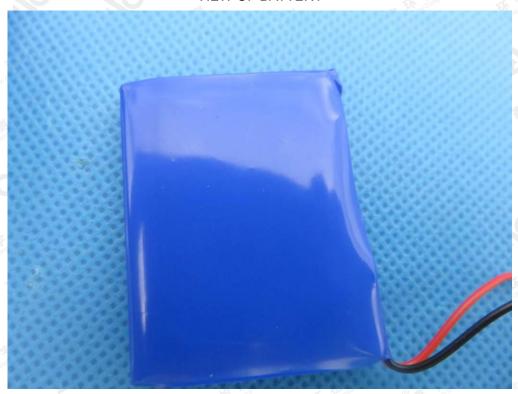

**INTERNAL VIEW OF EUT-1** 

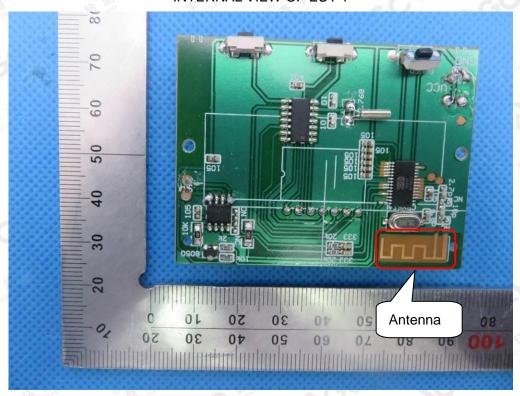


The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a the confirmed at a t

Attestation of Global Compliance


Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



## **INTERNAL VIEW OF EUT-2**

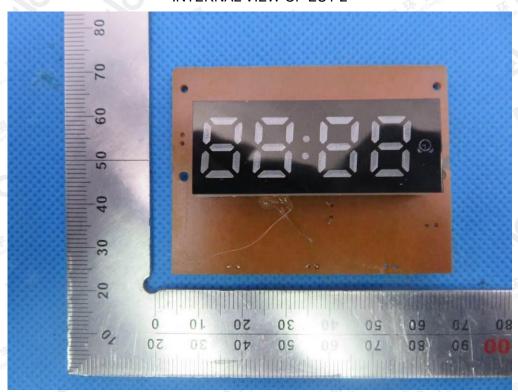

**INTERNAL VIEW OF EUT-3** 

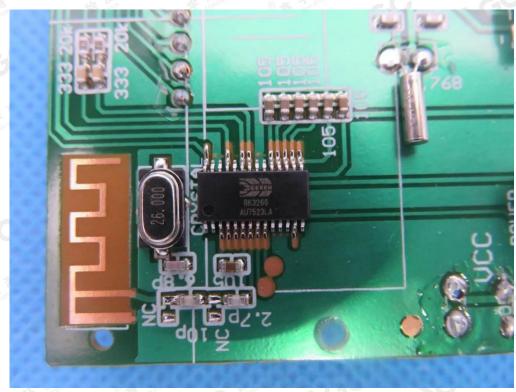

The results spowth this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc.gett.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



Page 63 of 63

# VIEW OF ADAPTER(AE)



The adapter was supplied by AGC

----END OF REPORT----

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (SC), this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true; // www.agc gett.com.

AGC 8