



# H.B. Compliance Solutions

## Intentional Radiator Test Report

For the

**Globalstar, Inc.**

**RM200M**

Tested under

The FCC Rules contained in Title 47 of the CFR, Part 25 and ISSED RSS-170 Issue 4 for

Satellite Communications

June 17, 2024

**Prepared for:**

Globalstar, Inc.

1351 Holiday Square Blvd.

Covington, LA 70433

**Prepared By:**

H.B. Compliance Solutions

5005 S. Ash Avenue, Suite # A-10

Tempe, Arizona 85282

**Reviewed By:**

A handwritten signature in black ink, appearing to read 'Hoosamuddin'.

Hoosamuddin Bandukwala



Cert # ATL-0062-E

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedure indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurement made, the equipment tested is capable of operation in accordance with the requirements of Part 25 of the FCC Rules under normal use and maintenance. All results contained herein relate only to the sample tested.

## Report Status Sheet

Revision #	Report Date	Reason for Revision
Ø	June 17, 2024	Initial Issue
1	August 2, 2024	Occupied BW Plot updated.

## Table of Contents

EXECUTIVE SUMMARY .....	4
1. Testing Summary .....	4
EQUIPMENT CONFIGURATION .....	5
1. Overview .....	5
2. Test Facility .....	6
3. Description of Test Sample .....	7
4. Equipment Configuration .....	7
5. Support Equipment .....	7
6. Ports and Cabling Information .....	8
7. Method of Monitoring EUT Operation .....	8
8. Mode of Operation .....	8
9. Modifications .....	8
10. Disposition of EUT .....	8
Criteria for Intentional Radiators .....	9
1. RF Power Output .....	9
2. Occupied Bandwidth .....	10
3. Unwanted Emissions at Antenna Terminals .....	12
4. Radiated Spurious Emissions .....	20
5. Protection of Aeronautical Radio Navigation Satellite Service .....	23
6. Frequency Stability vs Temperature .....	29
7. Frequency Stability vs Voltage .....	31
Test Equipment .....	33
8. Measurement Uncertainty .....	34

## EXECUTIVE SUMMARY

### 1. Testing Summary

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 25. All tests were conducted using measurement procedure from ANSI C63.26-2015, RSS-GEN Issue 5 and RSS-170 Issue 4 as appropriate.

Test Name	Test Method / FCC Standard	ISED Standard	Result	Comments
RF Output Power	§2.1046; §25.204	RSS-170 (5.5)	Pass	
Occupied Bandwidth	§2.1049	RSS-Gen (6.7)	Pass	
Unwanted Emissions at Antenna Terminals	§2.1051; §25.202(f)	RSS-170 (5.8) & RSS-Gen (7.4)	Pass	
Radiated Spurious Emissions	§2.1053; §25.202(f)	RSS-170 (5.8)	Pass	
Protection of Aeronautical Radio Navigation Satellite Service	§25.216(c)(f)(g)(i)(j)	RSS-170 (5.9.1 & 5.10)	Pass	
Frequency Stability over Temperature Variations	§2.1055(a)(1); §25.202(d)	RSS-170 (5.3)	Pass	
Frequency Stability over Voltage Variations	§2.1055(d); §25.202(d)	RSS-170 (5.3)	Pass	

## EQUIPMENT CONFIGURATION

### 1. Overview

H.B Compliance Solutions was contracted by Globalstar to perform testing on the RM200M under the purchase number 106746.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Globalstar, RM200M.

The tests were based on FCC Part 25 Rules. The tests described in this document were formal tests as described with the objective of the testing was to evaluate compliance of the Equipment Under Test (EUT) to the requirements of the aforementioned specifications. Globalstar should retain a copy of this document and it should be kept on file for at least five years after the manufacturing of the EUT has been permanently discontinued. The results obtained relate only to the item(s) tested.

<b>Product Name:</b>	RM200M
<b>Model(s) Tested:</b>	RM200M
<b>FCC ID:</b>	L2V-RX200M
<b>IC ID:</b>	3989A-RX200M
<b>Supply Voltage Input:</b>	Primary Power: 5.0 VDC
<b>Frequency Range:</b>	1611.25MHz to 1618.75MHz
<b>No. of Channels:</b>	Four Channel
<b>Necessary Bandwidth</b>	N/A
<b>Type(s) of Modulation:</b>	BPSK
<b>Range of Operation Power:</b>	0.6095W (EIRP)
<b>Voltage into final Transistor</b>	3.3V
<b>Current into final Transistor</b>	500mA
<b>Emission Designator:</b>	2M00G1D
<b>Channel Spacing(s)</b>	2.5MHz
<b>Test Item:</b>	Pre-Production
<b>Type of Equipment:</b>	Satellite/Earth Stations
<b>Antenna:</b>	3.77dBi Ceramic Patch Antenna
<b>Environmental Test Conditions:</b>	Temperature: 15-35°C Humidity: 30-60% Barometric Pressure: 860-1060 mbar
<b>Modification to the EUT:</b>	None
<b>Evaluated By:</b>	Staff at H.B. Compliance Solutions
<b>Test Date(s):</b>	06/03/2024 to 06/12/2024
<b>Firmware Version Number (FVIN):</b>	0.2.6

## 2. Test Facility

All testing was performed at H.B. Compliance Solutions. This facility is located at 5005 S. Ash Avenue, Suite # A-10, Tempe AZ-85282. All equipment used in making physical determination is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements from 30MHz to 1GHz were performed in a GTEM chamber (equivalent to an Open Area Test Site). Radiated Emissions Above 1GHz were performed on an Open Area Test Site (OATS). In accordance with §2.948(a)(3), a complete site description is contained at H.B. Compliance Solutions.

Test facility H.B. Compliance Solutions is an ANAB accredited test site. The ANAB certificate number is L2458. The scope of accreditation can be found on ANAB website [www.anab.org](http://www.anab.org)

FCC Registered Number: 738876

ISED Test Site Registration number: 9481A



### 3. Description of Test Sample

The Globalstar RM200M is a Satellite IoT transceiver module designed to send and receive small packets of user defined data to a network of low earth orbiting (LEO) satellites using the Globalstar commercial IoT network. The data is either received from or forwarded to a user defined network interface that may be in the form of an FTP host, HTTPS host or HTTP host where the user has supplied or will interpret the data for further processing.

The RM200M is designed to be integrated into an integrator's custom carrier board design.

The RM200M consists of the Nordic NRF52840, QSPI Memory, GPS, accelerometer, GCT DSP GDM7243i, GMT PMIC, Quad Flash, OCTA RAM, power controls, and RF Components. There are no onboard antennas. The Nordic and GCT DSP GDM7243i are shielded for modular certification. The RM200M has gold "fingers" around the perimeter of the PCB so that it can be SMT-installed onto a carrier board or another custom PCB.

### 4. Equipment Configuration

Ref. ID	Name / Description	Model Number	Serial Number
# 1	Globalstar RM200M (Sample #1 For Conducted Testing)	RM200M	-
# 2	Globalstar RM200M (Sample #2 For Radiated Testing)	RM200M	-

Table 1. Equipment Configuration

### 5. Support Equipment

All support equipment supplied is listed in the following Support Equipment List.

Ref ID	Name / Description	Manufacturer	Model #	Serial #
# 3	Laptop Computer	Acer	Swift SF314	-
# 4	USB to TTL Dongle	DSD Tech	SH-U07A	-

Table 2. Support Equipment

## 6. Ports and Cabling Information

Ref ID	Port name on the EUT	Cable Description	Qty.	Length (m)	Shielded? (Y/N)	Termination Box ID & Port ID
# 5	Power	2 wire	1	0.15	N	DC Power Supply
# 6	Modem UART	3 wire	1	0.2	N	# 4

Table 3. Ports and Cabling Information

## 7. Method of Monitoring EUT Operation

A test receiver will be used to monitor the data transmission from the EUT.

## 8. Mode of Operation

The EUT will be configured to transmit at maximum power level. Test mode was provided using a UART interface through a TTL to serial port connection to a laptop computer to set the frequency, power level and change the device from CW to Modulation mode. These settings were created for testing purposes only.

## 9. Modifications

### 9.1 Modifications to EUT

No modifications were made to the EUT

### 9.2 Modifications to Test Standard

No Modifications were made to the test standard.

## 10. Disposition of EUT

The test sample including all support equipment submitted to H.B Compliance Solutions for testing will be returned to Globalstar upon completion of testing & certification.



## Criteria for Intentional Radiators

### 1. RF Power Output

<b>Test Requirement(s):</b>	§2.1046, §25.204 and RSS-170 §5.5	<b>Test Engineer(s):</b>	Sean E.
<b>Test Results:</b>	Pass	<b>Test Date(s):</b>	June 05, 2024

**Test Procedures:** As required by 47 CFR §2.1046 and RSS-170 §5.5, RF Power output measurements were made at the RF output terminals of the EUT.

Customer provided a test mode internal to the EUT to control the RF modulation, and frequency channel. The EUT was connected through an attenuator to a Power Sensor capable of making power measurements. Measurements were made at the low and high channels of the entire frequency band.

**Test Setup:**



Figure 1. Output RF power Test Setup

**Test Results:**

Frequency (MHz)	Channel	Conducted Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	FCC Specification Limit (dBW)
1611.25	Lowest	24.08	3.77	27.85	40
1618.75	Highest	23.46	3.77	27.23	40

Table 4. RF Power Output, Test Results

## 2. Occupied Bandwidth

<b>Test Requirement(s):</b>	§2.1049, RSS-Gen §6.7	<b>Test Engineer(s):</b>	Sean E.
<b>Test Results:</b>	Pass	<b>Test Date(s):</b>	June 03, 2024

**Test Procedure:** As required by 47 CFR §2.1049 and RSS-Gen §6.7, occupied bandwidth measurements were made at the output terminals of the EUT.


Customer provided a test mode internal to the EUT to control the RF modulation, and frequency channel. The EUT was connected through an attenuator to a Spectrum Analyzer. The measured highest peak power was set relative to zero dB reference. The RBW of the Spectrum Analyzer was set to at least 1% of the channel bandwidth and video bandwidth was set to 3 times the resolution bandwidth. Measurements were carried out at the low and high channels of the TX band.

The following pages show measurements of Occupied Bandwidth plots:


### Test Setup:



**Figure 2: Occupied Bandwidth Test Setup**

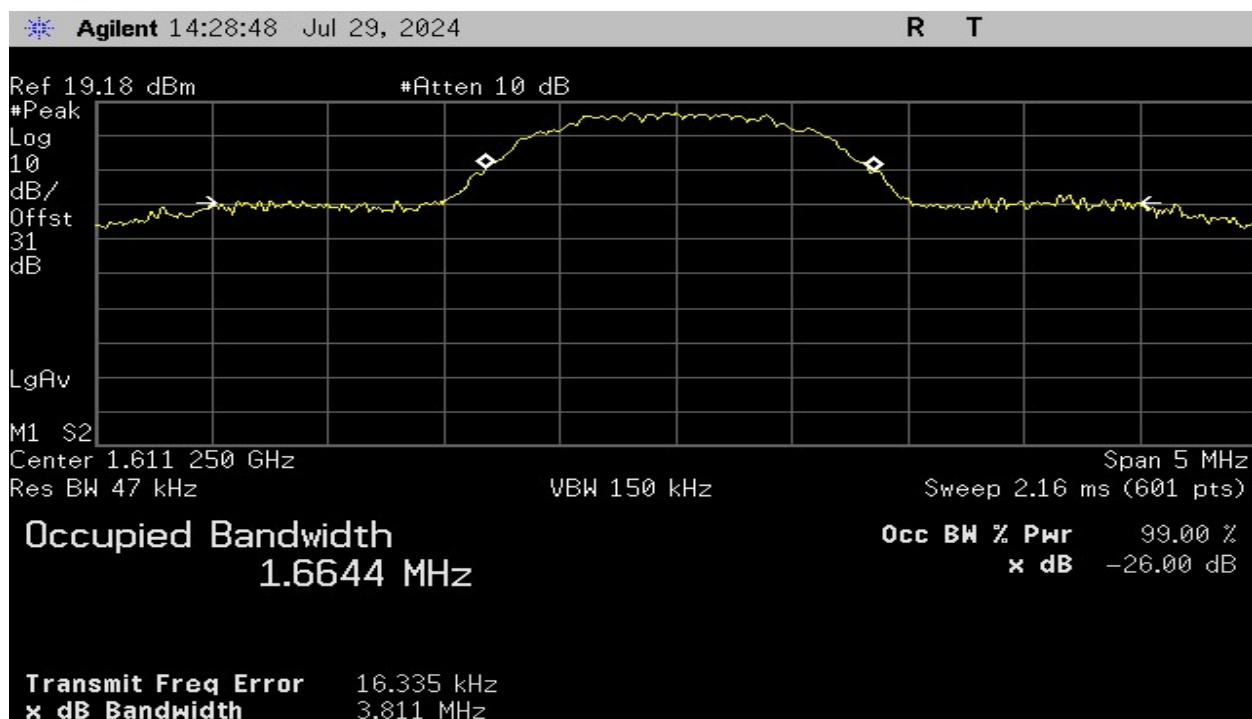

Plot 1 – Low Channel – 26dB Bandwidth

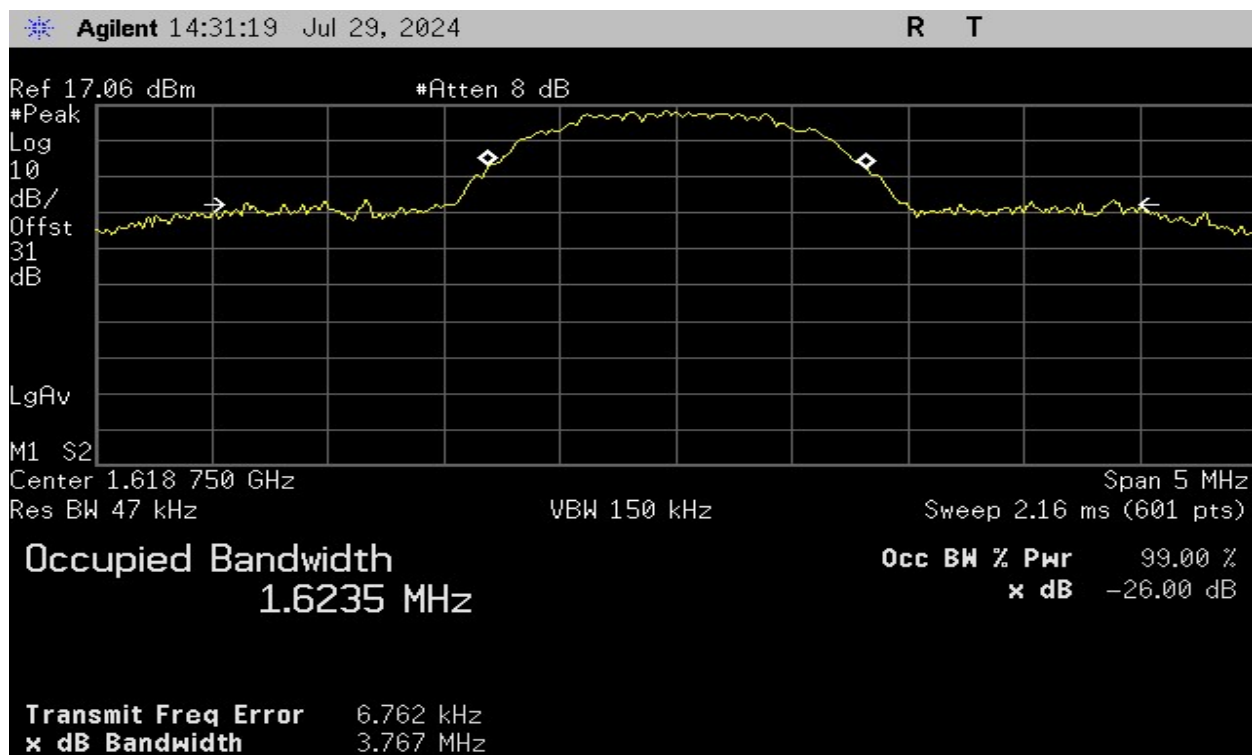

Plot 2 – High Channel – 26dB Bandwidth

### 3. Unwanted Emissions at Antenna Terminals

<b>Test Requirement(s):</b>	§2.1051, §25.202(f), RSS-170 §5.8, and RSS-Gen §7.4	<b>Test Engineer(s):</b>	Sean E.
<b>Test Results:</b>	Pass	<b>Test Date(s):</b>	June 04 – June 12, 2024

**Test Procedures:** As required by 47 CFR §25.202(f), RSS-170 §5.8, and RSS-Gen §7.4, unwanted emissions at antenna terminal measurements were made at the RF output antenna terminal of the EUT.

Customer provided a test mode internal to the EUT to control the RF modulation, and frequency channel. The EUT was connected through an attenuator to a Spectrum Analyzer to verify the DUT met the requirements as specified in §25.202(f). Measurements were made at the lowest and highest frequency of the transmit band.


Frequency removed from channel center by	Minimum signal reduction
0 to 50%	In Channel
50 to 100%	-25dBc
100 to 250%	-35dBc
More than 250%	-13dBm

Table 5 – Test Limit per section 25.202(f)

**Test Setup:**




Figure 3: Spurious Emission at Antenna Terminal Test setup

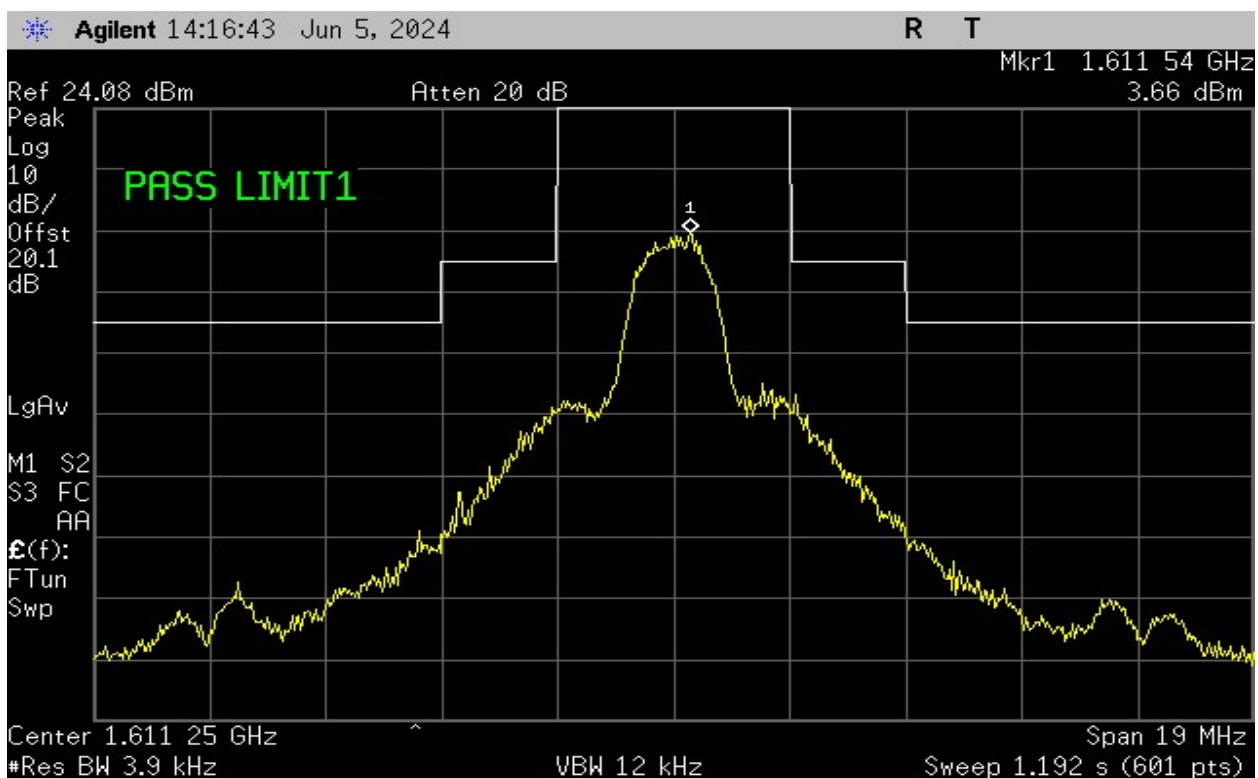


**Plot 3 – Emission Mask – Low Channel**




**Plot 4 – Emission Mask - High Channel**

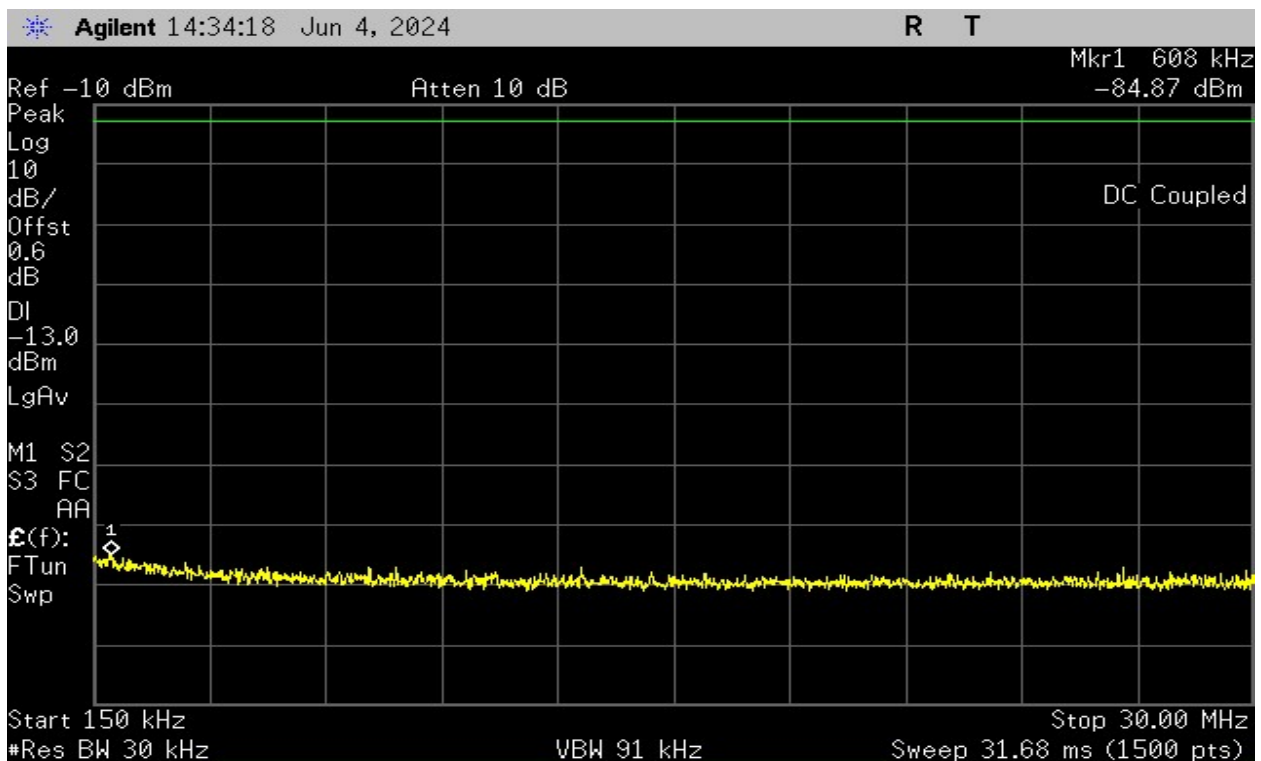


**Plot 5 – Lowest Channel - 150kHz to 30MHz**

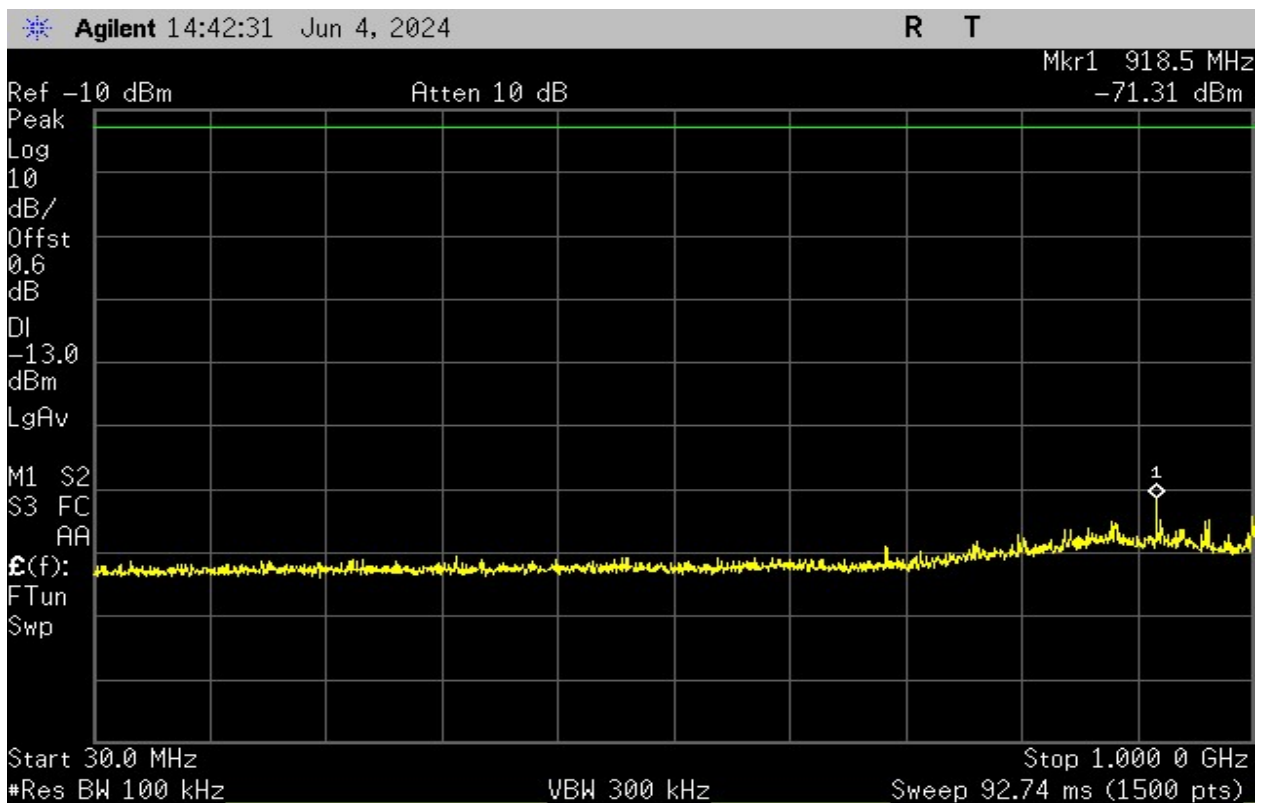


**Plot 6 – Lowest Channel - 30MHz to 1GHz**

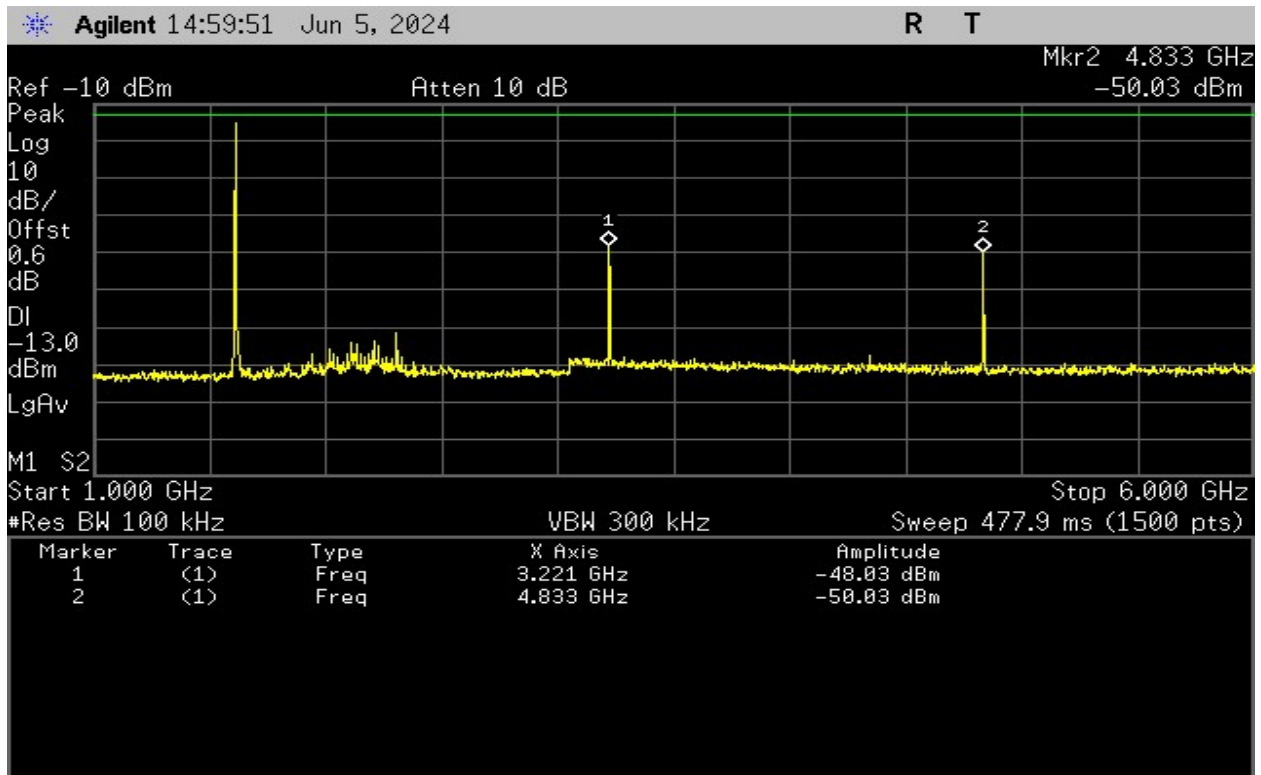


Plot 7 – Lowest Channel - 1GHz to 6GHz

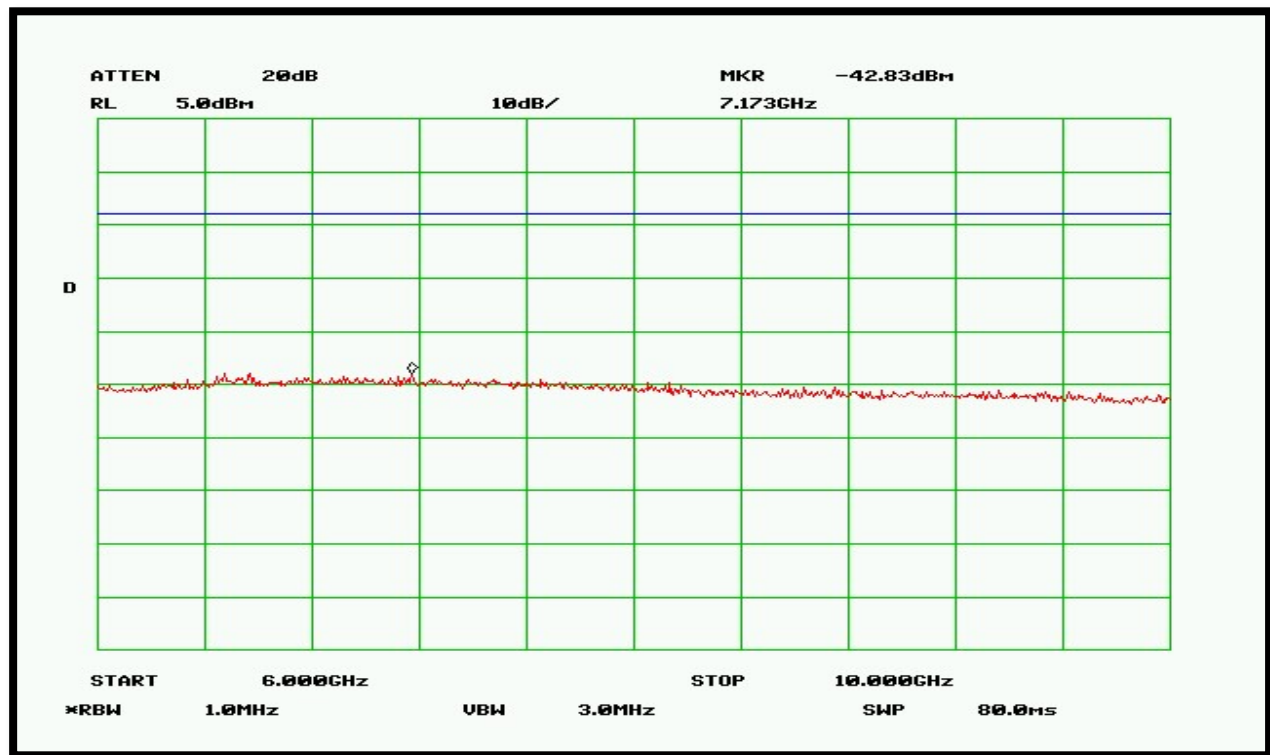

Plot 8 – Lowest Channel - 6GHz to 10 GHz

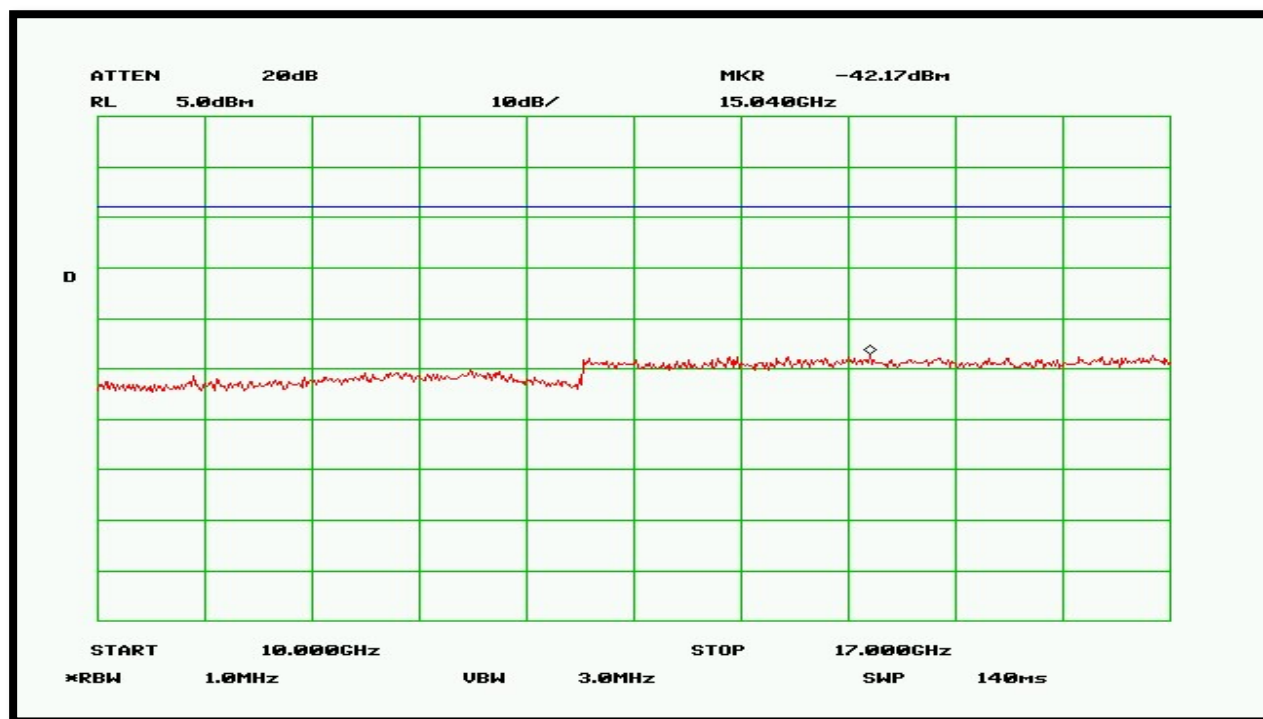


Plot 9 – Lowest Channel - 10GHz to 17GHz

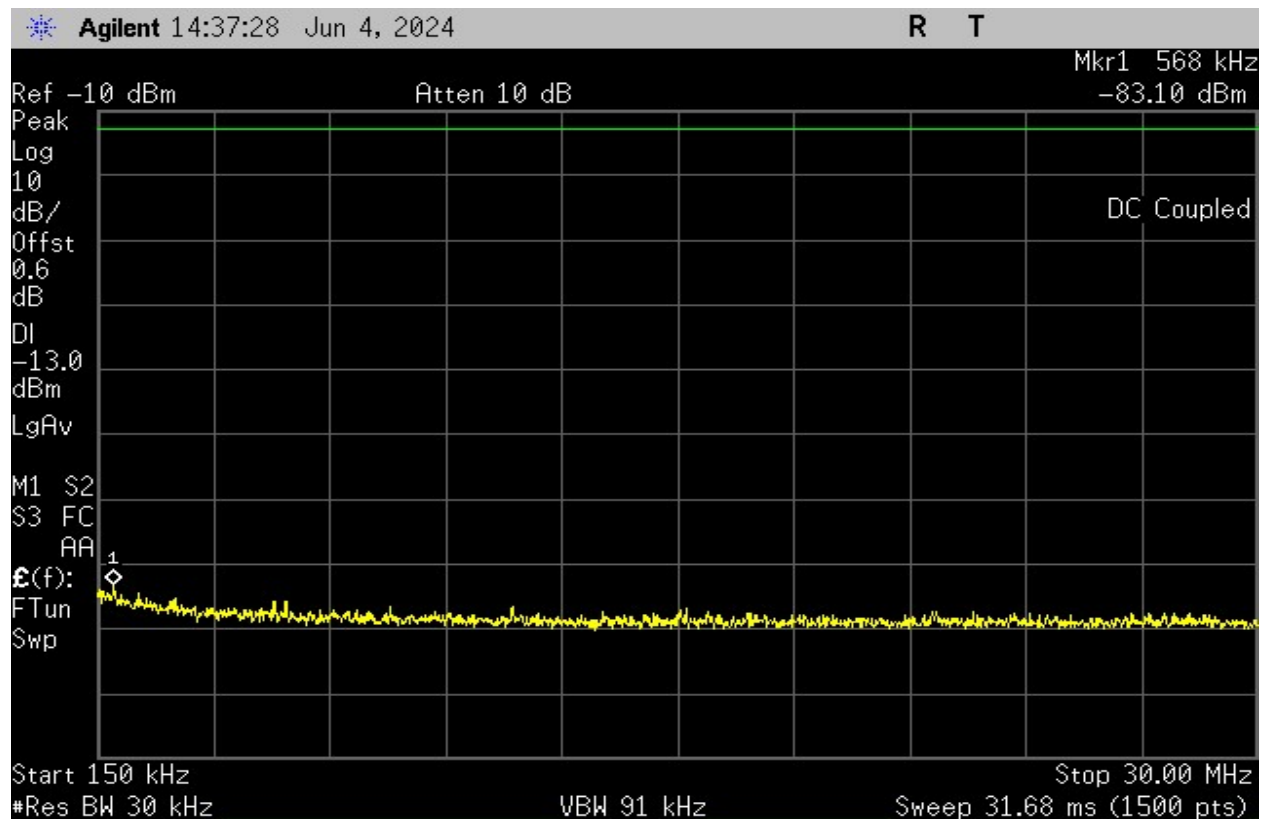


Plot 10 – Highest Channel – 150kHz to 30MHz




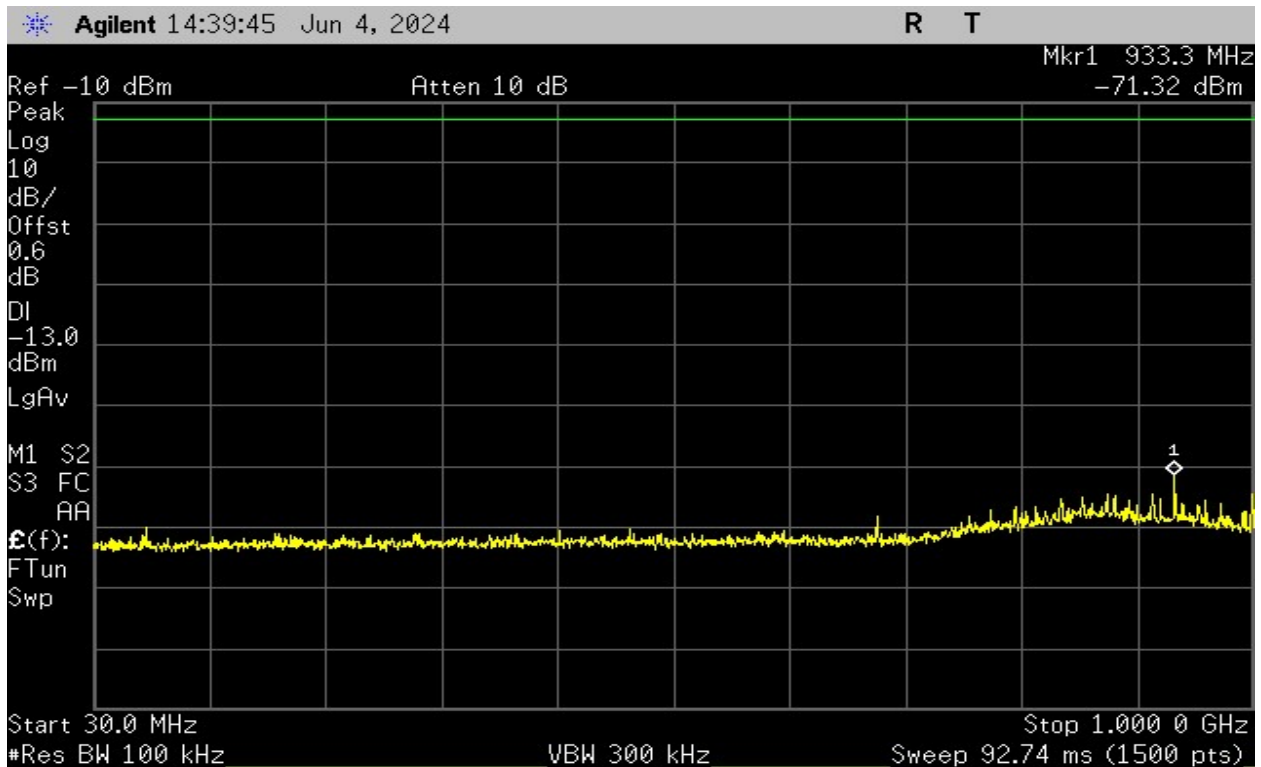


Plot 11 - Highest Channel – 30MHz to 1GHz

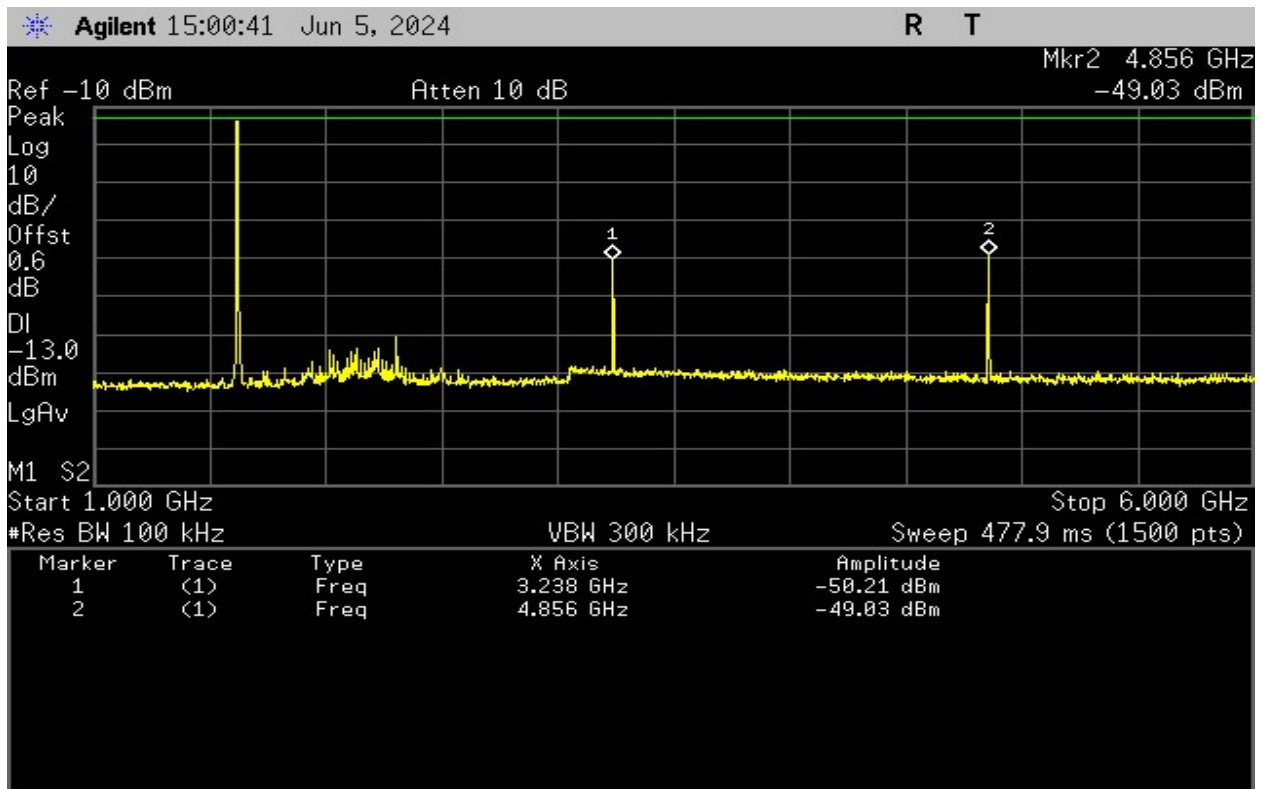


Plot 12 - Highest Channel - 1GHz to 6GHz

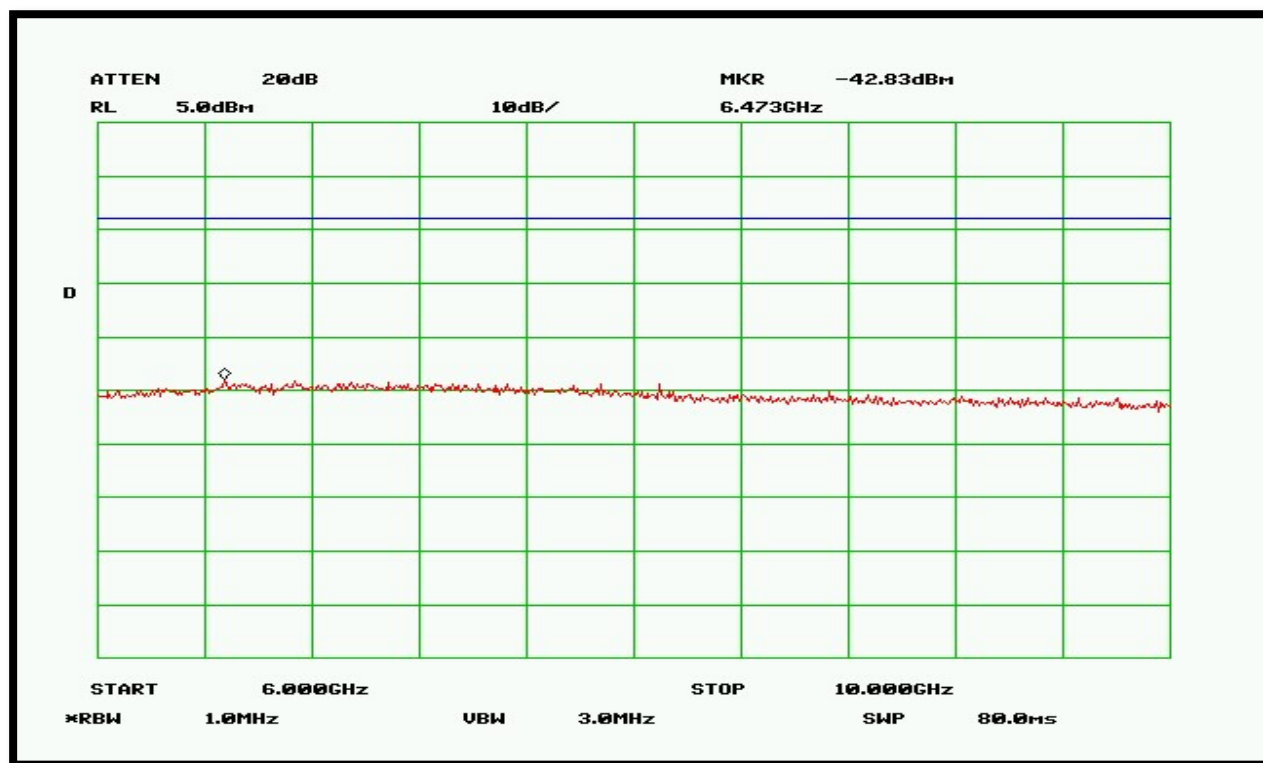


Plot 13 - Highest Channel - 6GHz to 10GHz

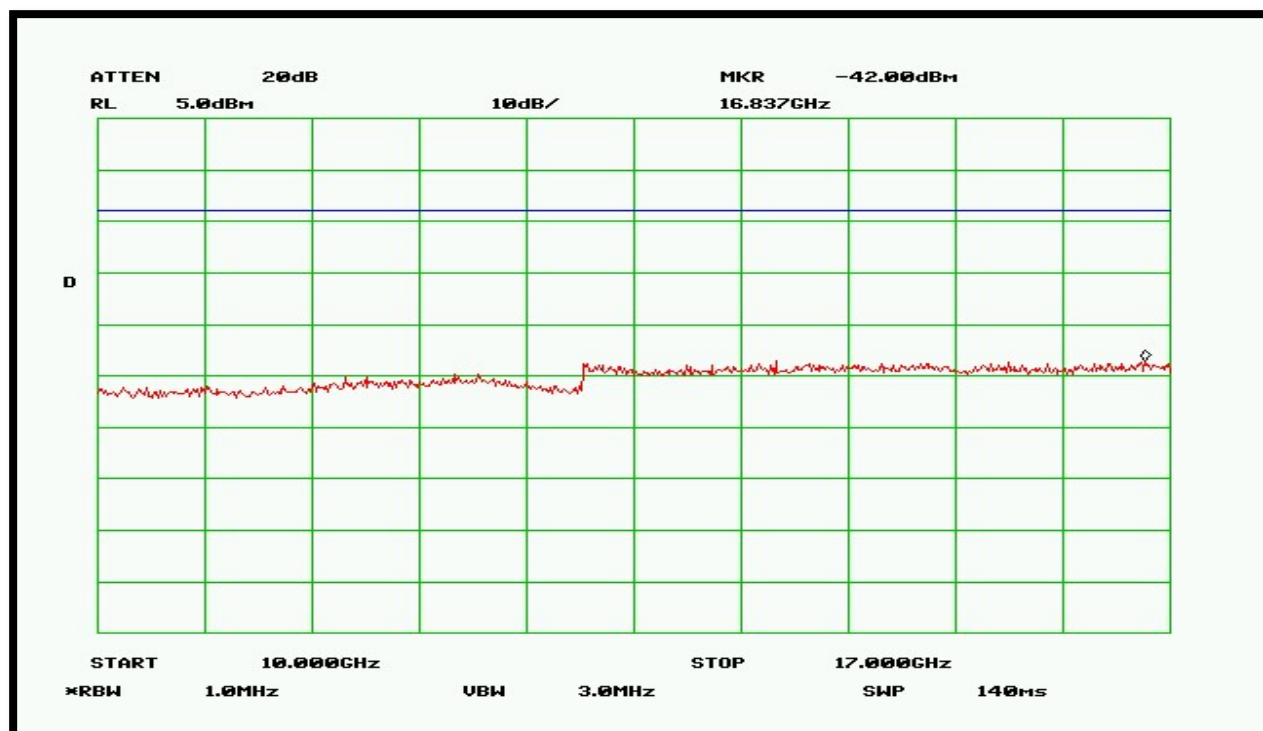

Plot 14 - Highest Channel - 10GHz to 17GHz

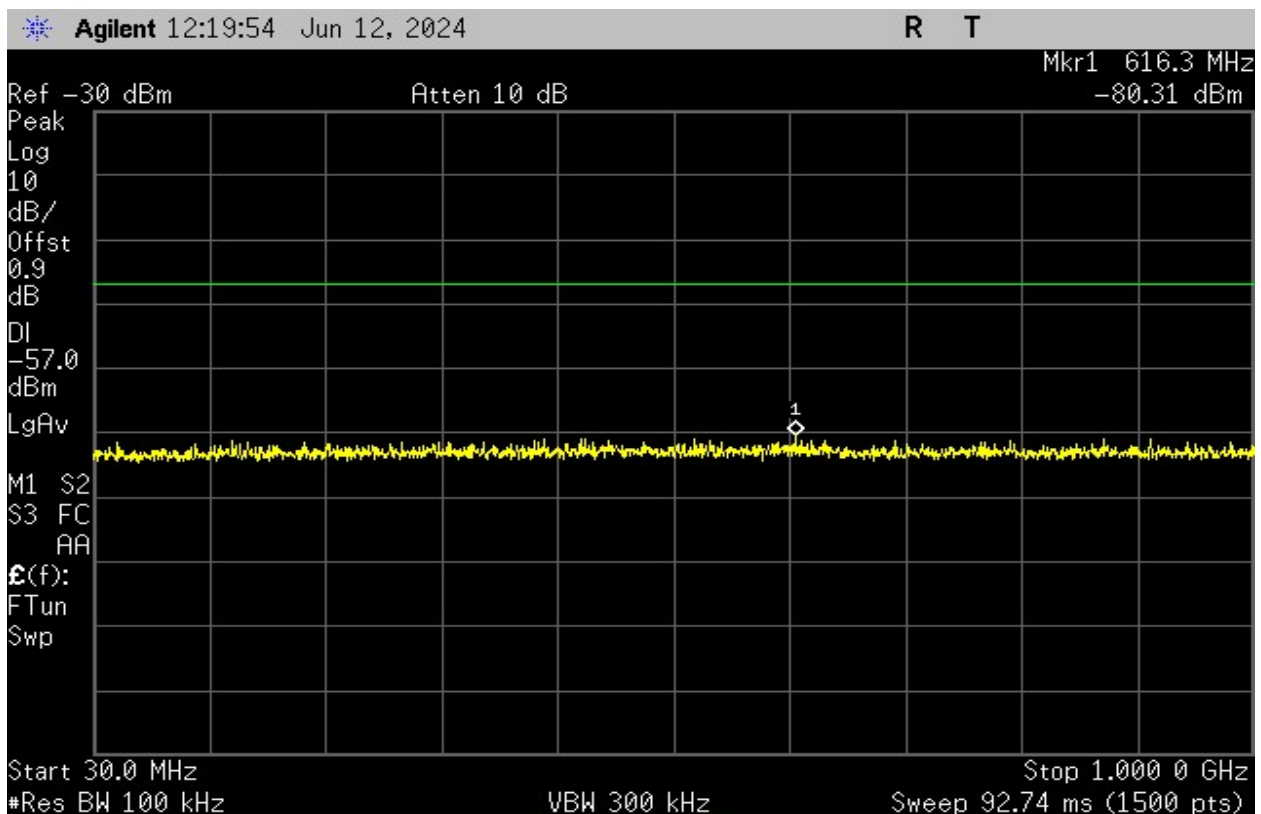

**Plot 15 – Receiver Spurious Emissions – 30MHz to 1GHz (For Industry Canada)**

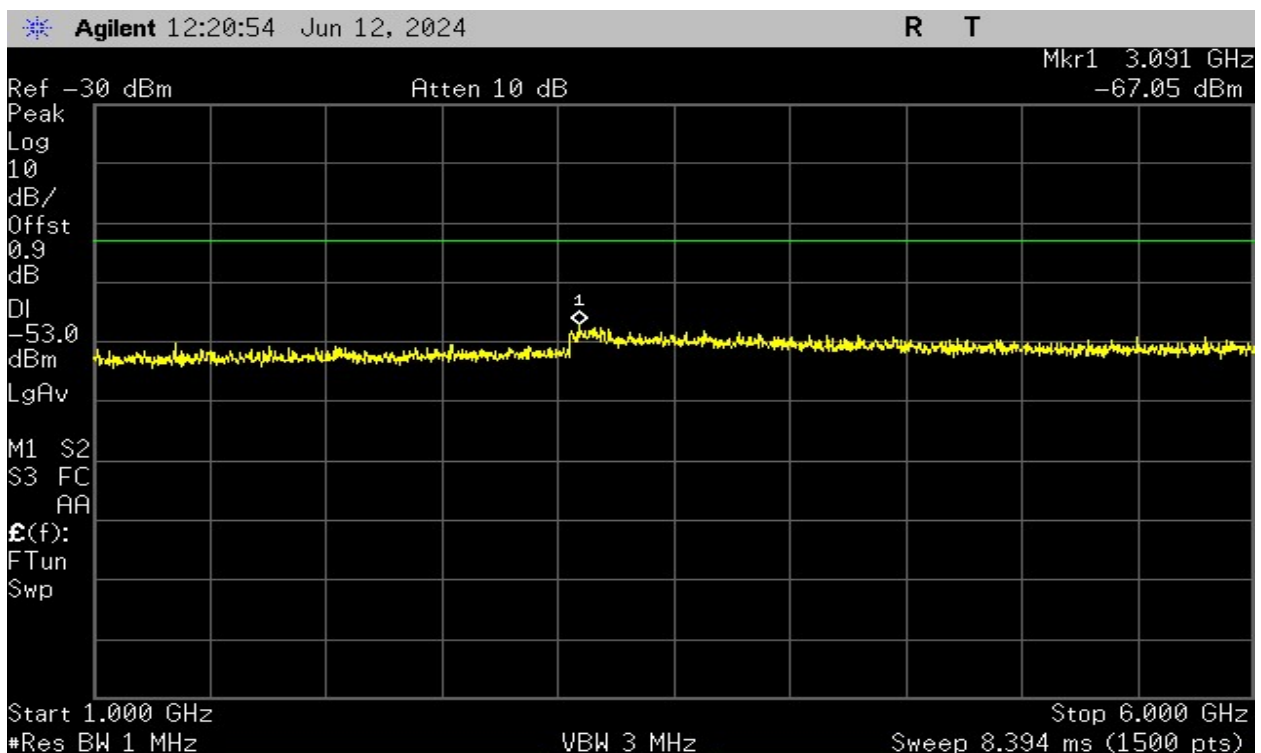

**Plot 16 – Receiver Spurious Emissions – 1GHz to 6GHz (For Industry Canada)**

#### 4. Radiated Spurious Emissions

<b>Test Requirement(s):</b>	§2.1053, §25.202(f) and RSS-170 §5.8	<b>Test Engineer(s):</b>	Sean E.
<b>Test Results:</b>	Pass	<b>Test Date(s):</b>	June 06, 2024


**Test Procedures:** As required by 47 CFR 2.1053 and RSS-170 §5.8, field strength of radiated spurious measurements were made in accordance with the procedures of the ANSI C63.26-2015.

The EUT was placed on a non-reflective table inside a 3-meter open area test site. The EUT was set on continuous transmit.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3 orthogonal axes. The frequency range up to the 10<sup>th</sup> harmonic was investigated.

To get a maximum emission level from the EUT, the EUT was rotated throughout the X-axis, Y-axis and Z-axis. Worst case is X-axis

**Test Setup:**

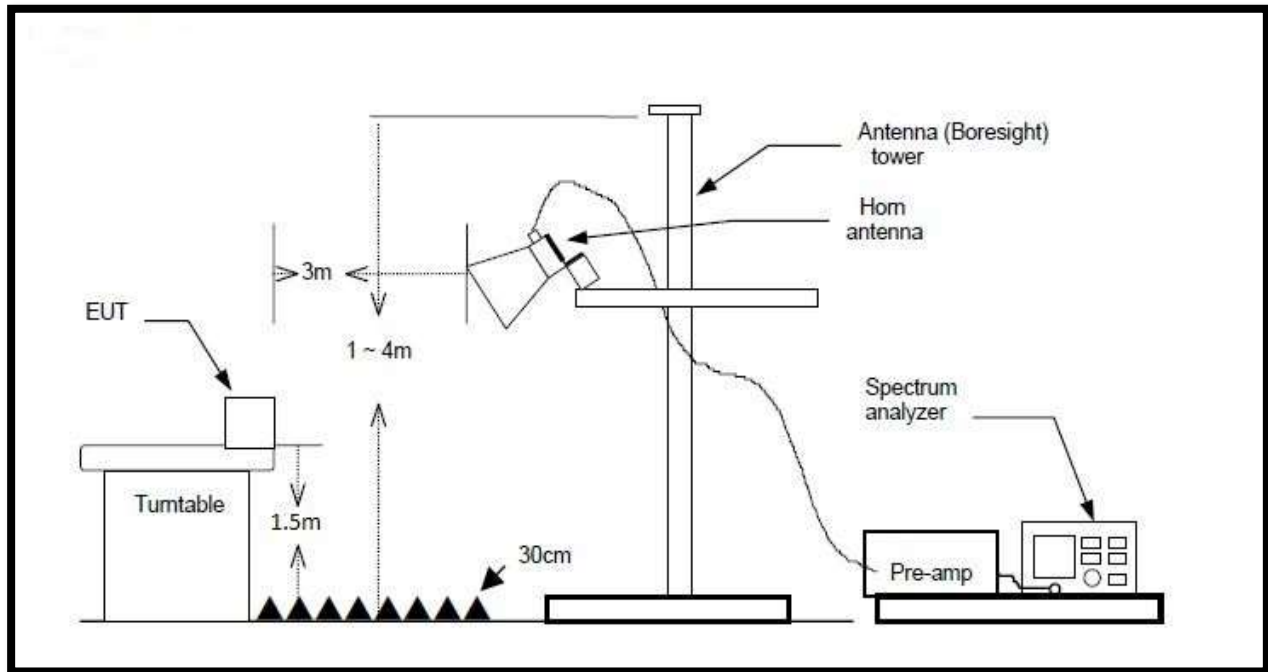

**Figure 4 – Radiated Spurious Emissions**

## Test Results:

Frequency (MHz)	Measured Amplitude (dBuV/m)	Equivalent Radiated Power (dBm)	Antenna Polarity (V/H)	Spurious Limit (dBm)	Margin	Comment
1611.25	121.27	26.07	Horizontal	-	-	Fundamental
3222.5	47.90	-47.30	Horizontal	-13	-34.3	
4833.75	54.49	-40.71	Horizontal	-13	-27.71	

Table 6 - Spurious Radiated Emission Data – Low Band

Frequency (MHz)	Measured Amplitude (dBuV/m)	Equivalent Radiated Power (dBm)	Antenna Polarity (V/H)	Spurious Limit (dBm)	Margin (dB)	Comment
1616.25	121.75	26.55	Horizontal	-	-	Fundamental
3232.5	48.36	-46.84	Horizontal	-13	-33.84	
4848.75	54.36	-40.84	Horizontal	-13	-27.84	

Table 7 - Spurious Radiated Emission Data – Mid Band

Frequency (MHz)	Measured Amplitude (dBuV/m)	Equivalent Radiated Power (dBm)	Antenna Polarity (V/H)	Spurious Limit (dBm)	Margin (dB)	Comment
1618.75	120.86	25.66	Horizontal	-	-	Fundamental
3237.5	47.92	-47.29	Horizontal	-13	-34.29	
4856.25	53.65	-41.55	Horizontal	-13	-28.55	

Table 8 – Spurious Radiated Emission Data – High Band

**NOTE:** There were no detectable emissions above the 3<sup>rd</sup> harmonic. Measurement was made at the 10<sup>th</sup> harmonic.


## 5. Protection of Aeronautical Radio Navigation Satellite Service

<b>Test Requirement(s):</b>	§25.216 and RSS-170 §5.9.1 & §5.10	<b>Test Engineer(s):</b>	Sean E.
<b>Test Results:</b>	Pass	<b>Test Date(s):</b>	June 04 – June 05, 2024


**Test Procedures:** As required by 47 CFR §25.216(h) and RSS-170 §5.9.1 & §5.10, measurement were made at the RF output antenna terminal of the EUT.

Customer provided a test mode internal to the EUT to control the RF modulation, and frequency channel. The EUT was connected through an attenuator to a Spectrum analyzer to verify the EUT met the requirements as specified in in §25.202(f). Measurements were made at the lowest and highest frequency of the transmit band

§25.216 Section	RSS-170 Section	Description	Result	Comments
§25.216 (c)	§5.9.1	Limits for MES Protect Radionavigation-Satellite Service	Pass	See Plot # 17 - 20
§25.216 (f) (g)	§5.9.1	Limits for MES Protect Radionavigation-Satellite Service	Pass	See Plot # 21 - 24
§25.216 (i)	§5.10	Limits for MES e.i.r.p density of carrier-off	Pass	See Plot # 25

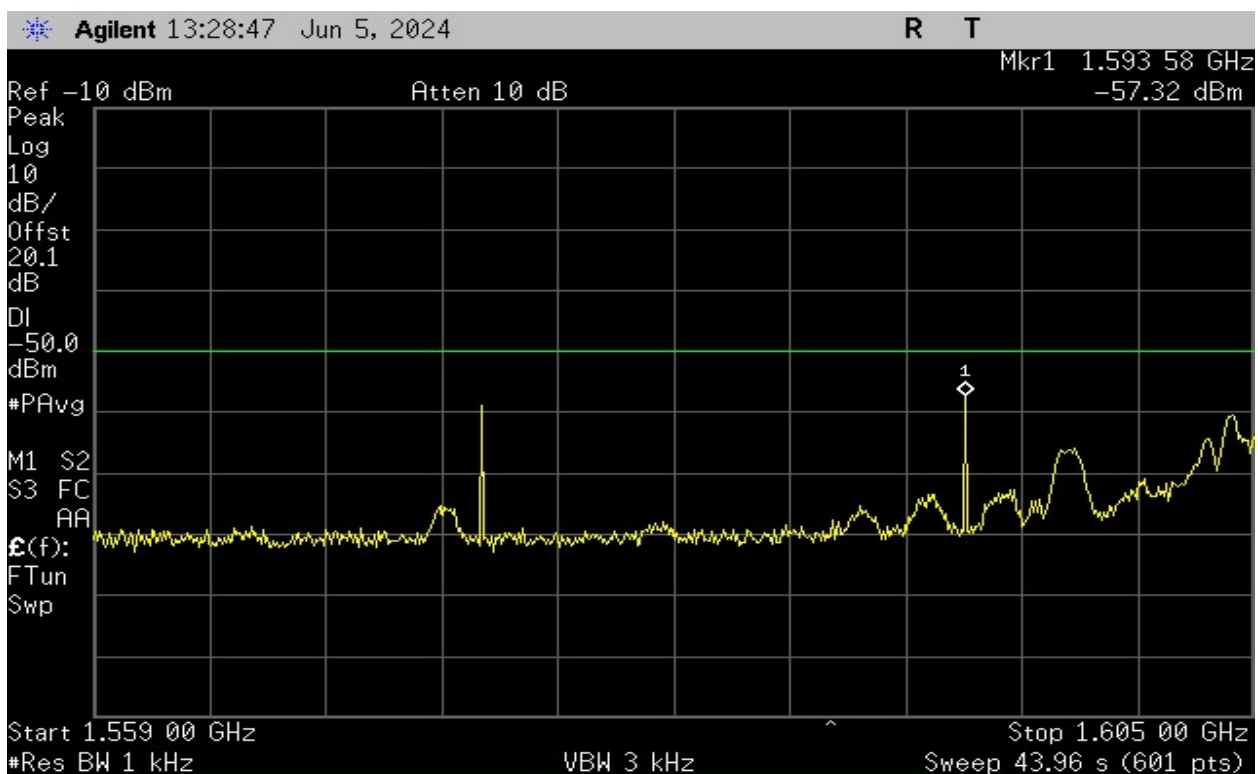


**Plot 17 – Low Channel – Test Limit 25.216 (c) – Discrete Emissions**

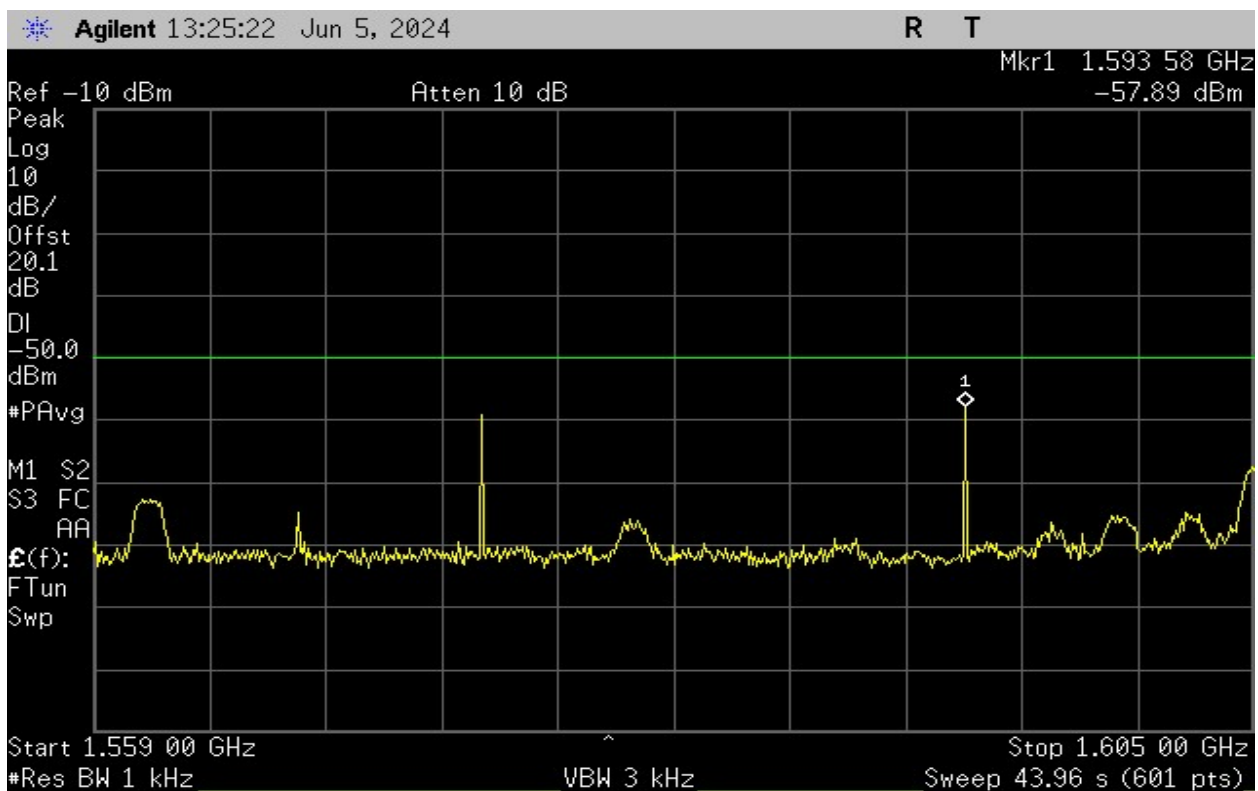


**Plot 18 – High Channel – Test Limit 25.216 (c) – Discrete Emissions**




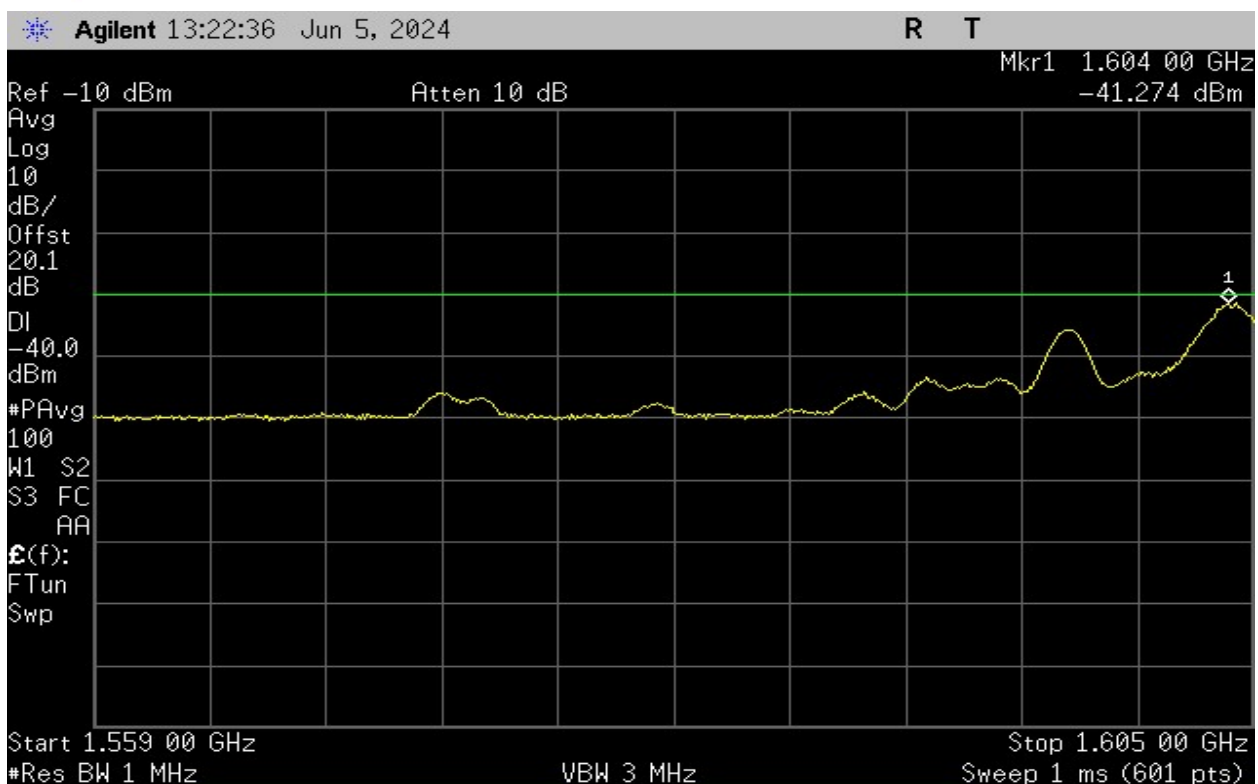


Plot 19 – Low Channel – Test Limit 25.216 (c)

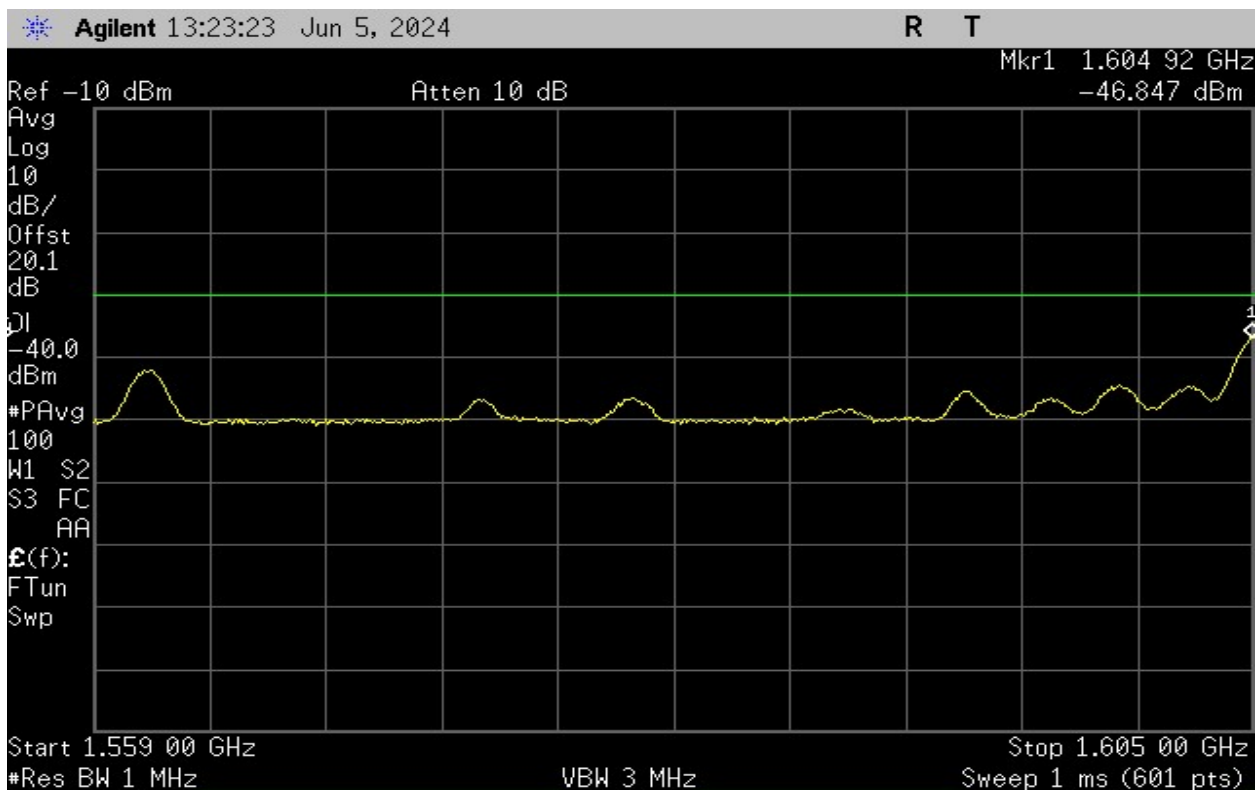


Plot 20 – High Channel – Test Limit 25.216 (c)

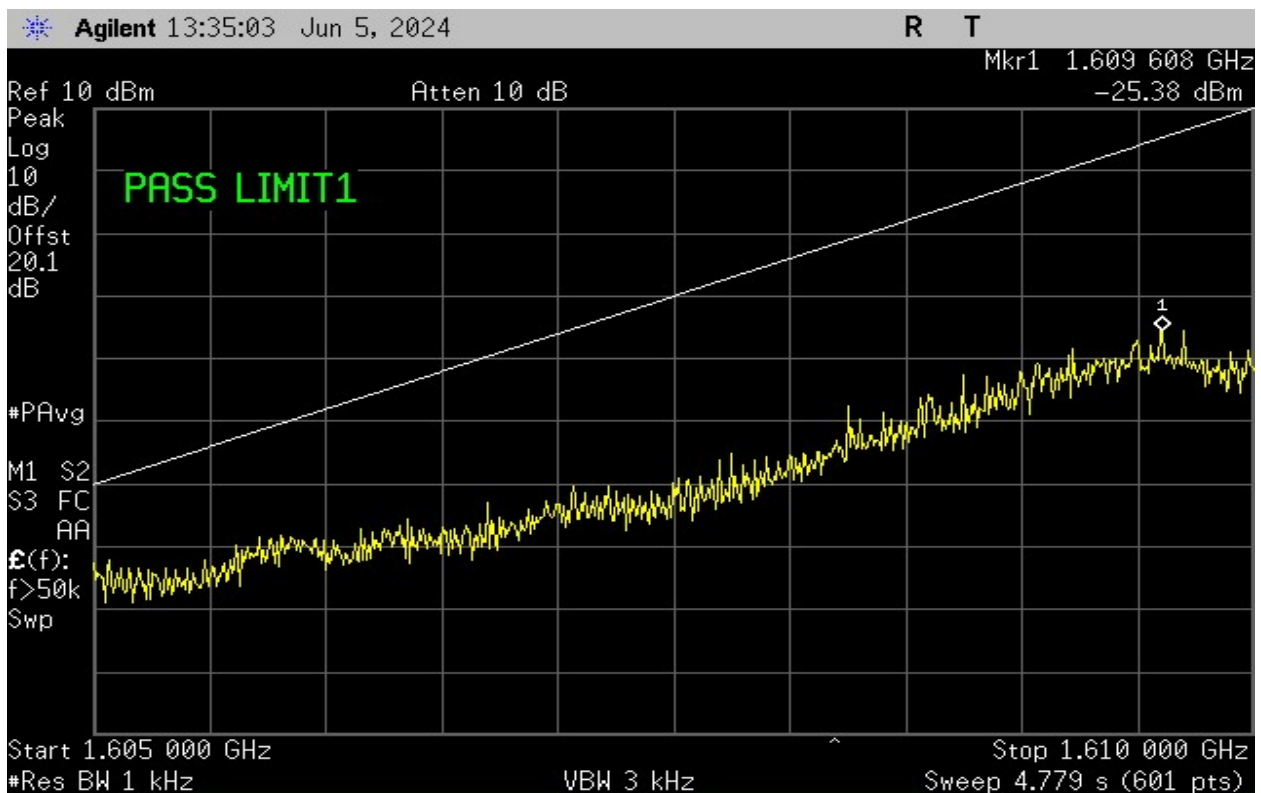


Plot 21 - Low Channel – Test Limit 25.216 (f)(g) – Discrete Emissions

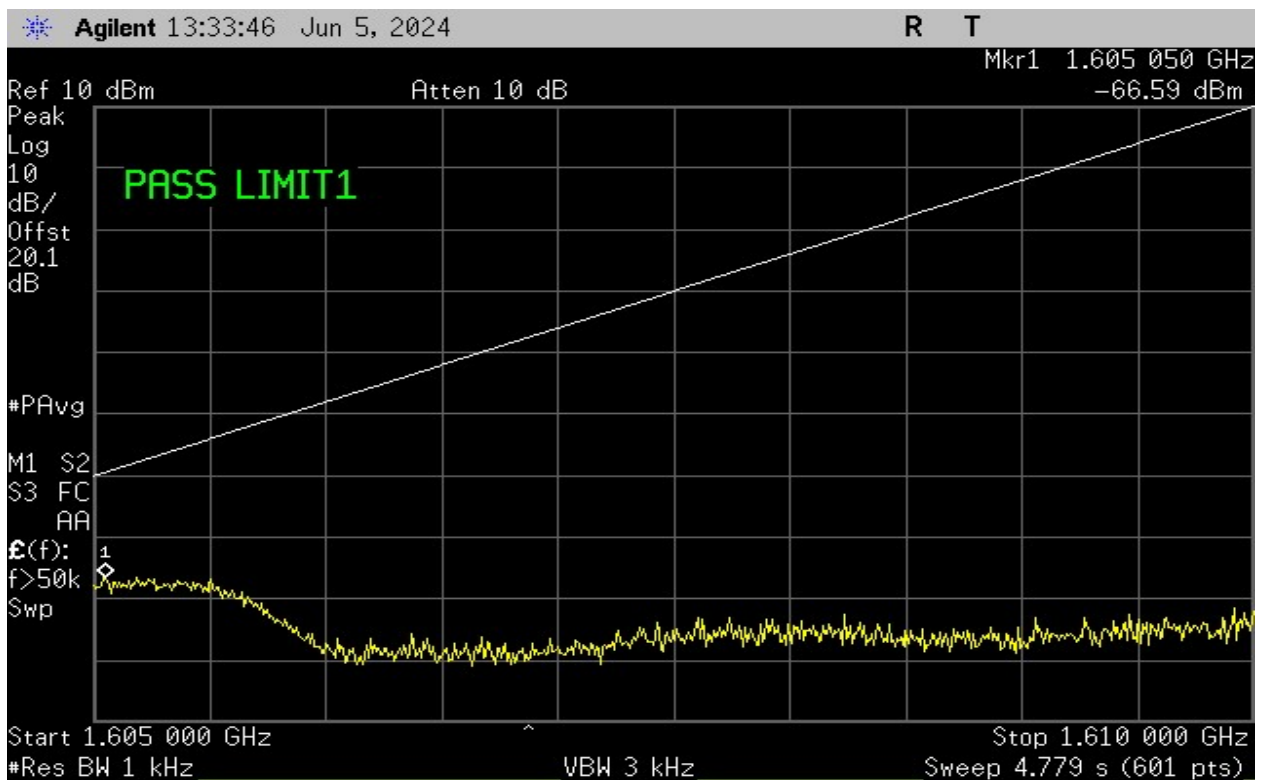


Plot 22 - High Channel – Test Limit 25.216 (f)(g) – Discrete Emissions

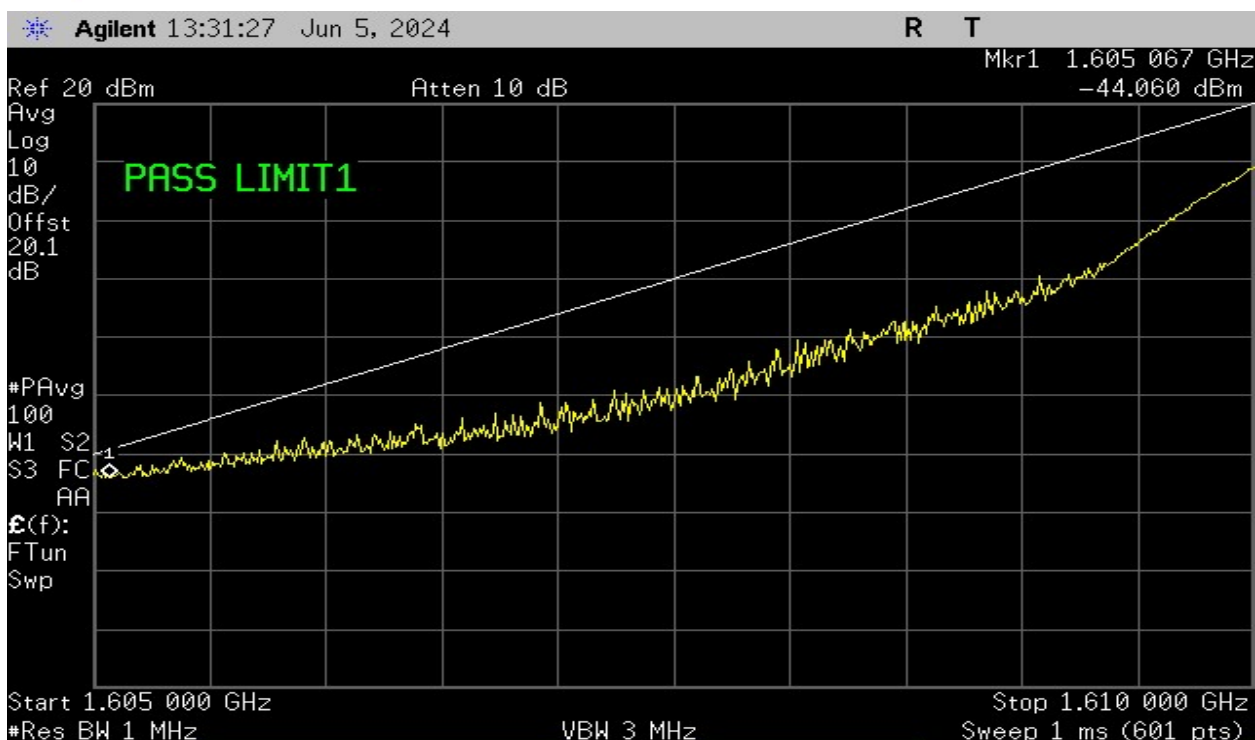

**Plot 23 - Low Channel – Test Limit 25.216 (f)(g)**

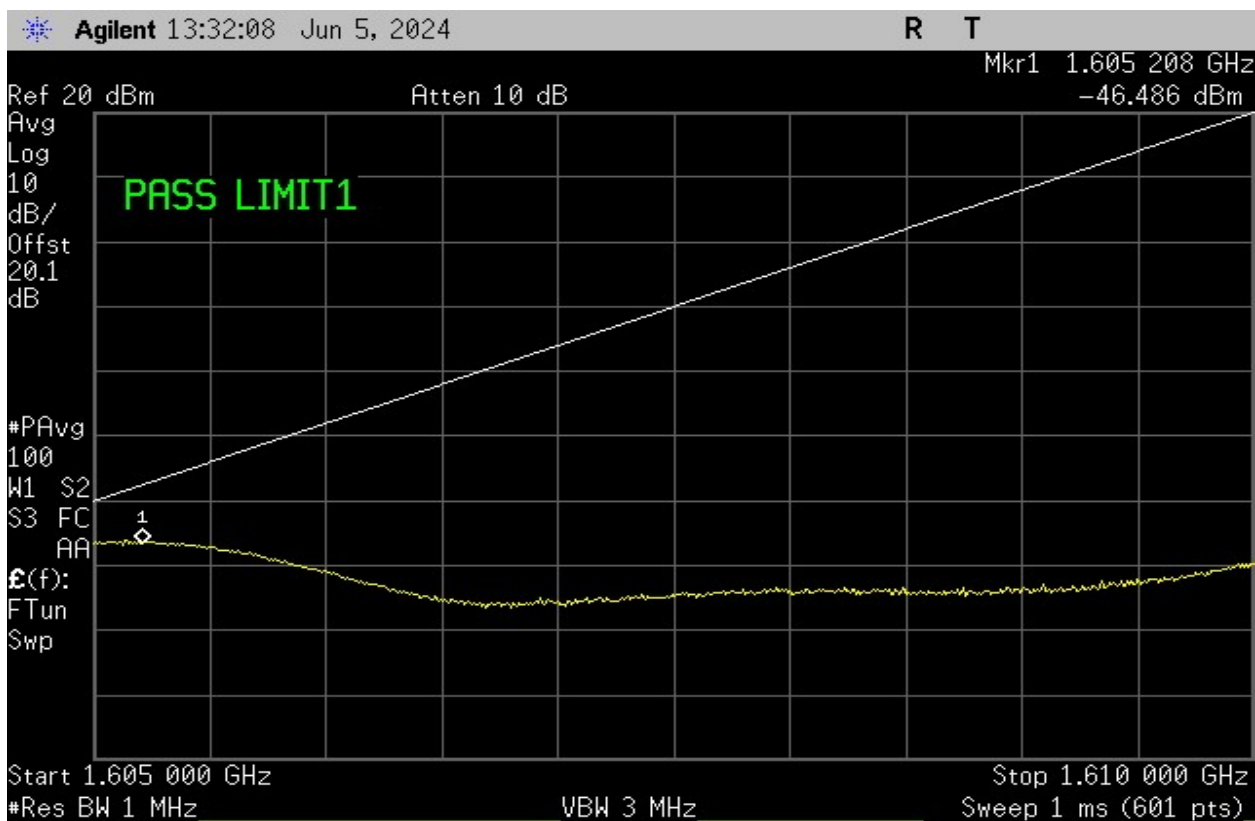

**Plot 24 - High Channel – Test Limit 25.216 (f)(g)**

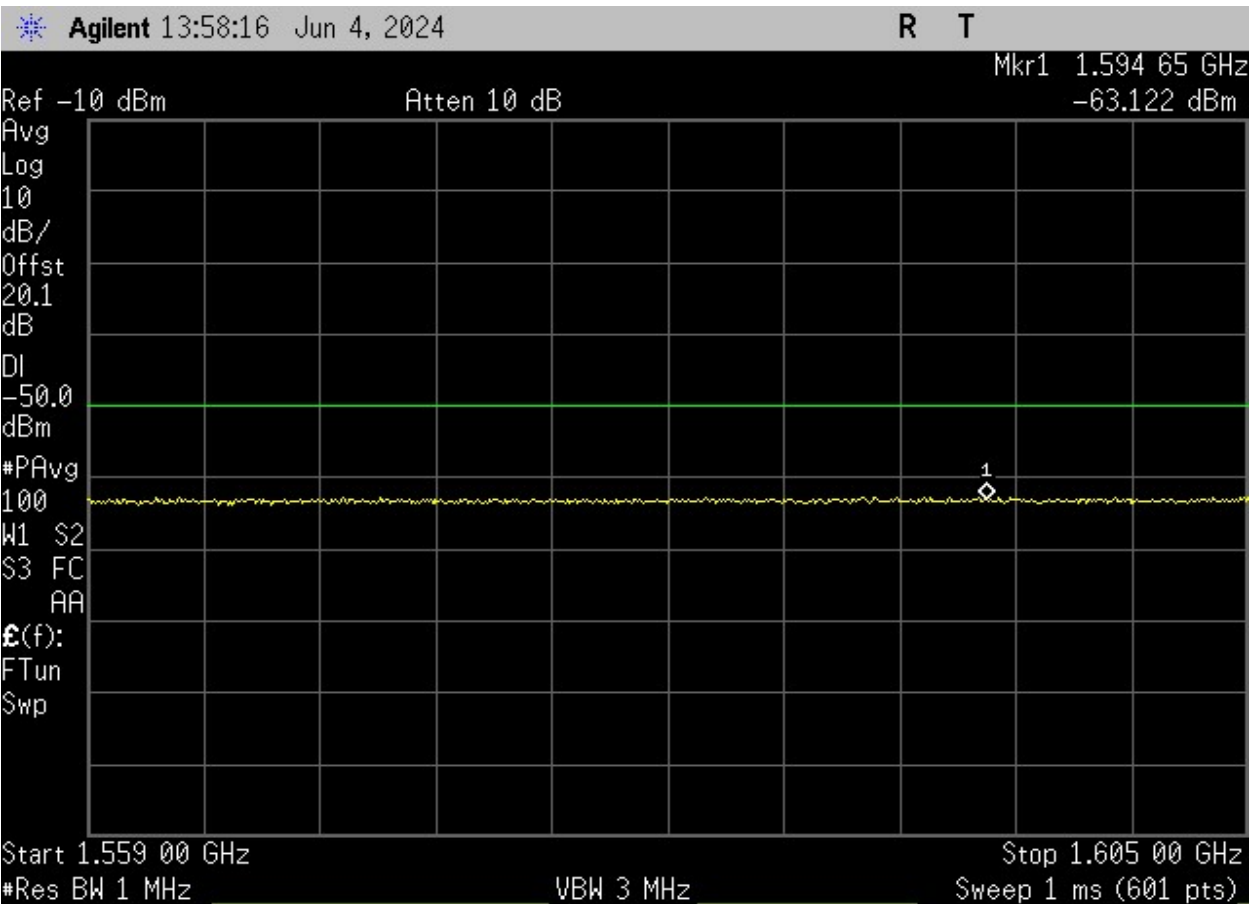

**Plot 25 - Carrier-off state emissions**

## 6. Frequency Stability vs Temperature

<b>Test Requirement(s):</b>	§2.1055 and RSS-170 §5.3	<b>Test Engineer(s):</b>	Sean E.
<b>Test Results:</b>	Pass	<b>Test Date(s):</b>	June 10, 2024

**Test Procedures:** As required by 47 CFR §2.0155 and RSS-170 §5.3, Frequency Stability measurements were made at the RF antenna output terminals of the EUT.

The EUT was placed in an Environmental Chamber with all the support equipment outside the chamber. The EUT was set to transmit a modulated carrier. The reference frequency at 20°C was observed and noted down. The frequency drift was investigated for every 10°C increment until the unit was stabilized then recorded the reading in tabular format with the temperature range of -30°C to 50°C.

### Test Setup:


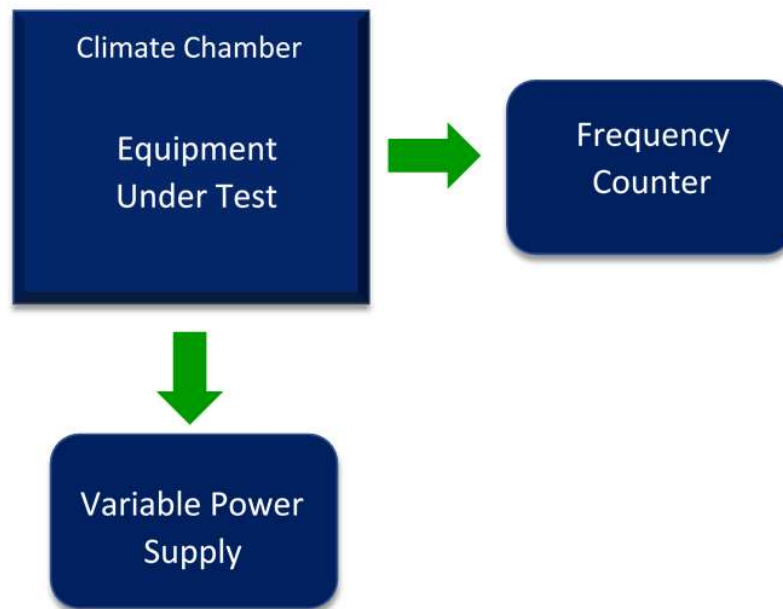


Figure 5 – Frequency Stability Test Setup

## Test Results:

Temperature centigrade	Measured Frequency (MHz)	Upper Margin (MHz)	Lower Margin (MHz)
-30	1616.24776	-0.01840	0.01393
-20	1616.24820	-0.01796	0.01437
-10	1616.24810	-0.01806	0.01427
0	1616.24809	-0.01807	0.01426
10	1616.24834	-0.01782	0.01451
20	1616.24836	-0.01780	0.01452
30	1616.24814	-0.01802	0.01431
40	1616.24806	-0.01810	0.01422
50	1616.24812	-0.01804	0.01428

Table 9 – Temperature vs Frequency Test Result

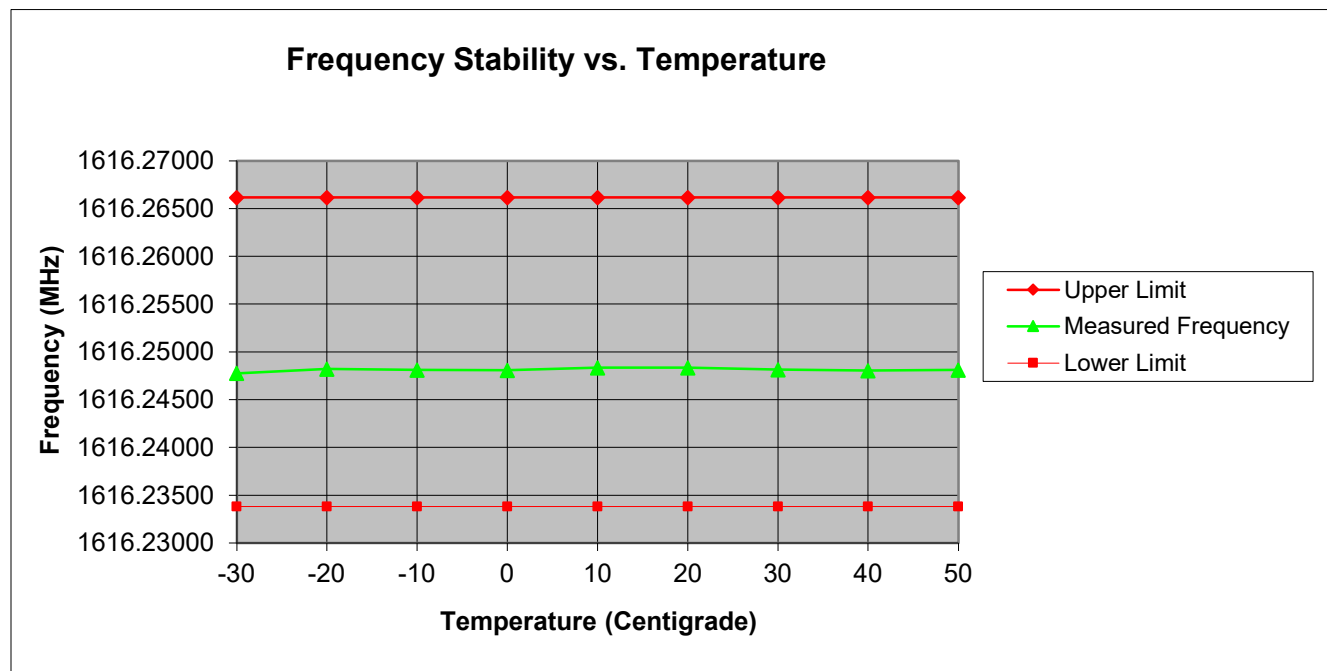

Plot 26 – Temperature vs Frequency

## 7. Frequency Stability vs Voltage

<b>Test Requirement(s):</b>	§2.1055 and RSS-170 §5.3	<b>Test Engineer(s):</b>	Sean E.
<b>Test Results:</b>	Pass	<b>Test Date(s):</b>	June 10, 2024


**Test Procedures:** As required by 47 CFR §2.0155 and RSS-170 §5.3, Frequency Stability measurements were made at the RF antenna output terminals of the EUT.

The EUT was connected to a variable DC source. The frequency was measured at both the nominal 5.0 Vdc of the EUT and at the extreme  $\pm 15\%$  of nominal which is 85% level or 4.25Vdc and at the 115% level or 5.75Vdc

With the voltage set to a measurement point, the transmitted signal was captured by the spectrum analyzer and the frequency value determined. The frequencies are compared to the tuned frequency. All data for these measurements are found in table 10.

**Reference Frequency: 1616.25 at 5.0VdC at 20°C**

**Test Setup:**

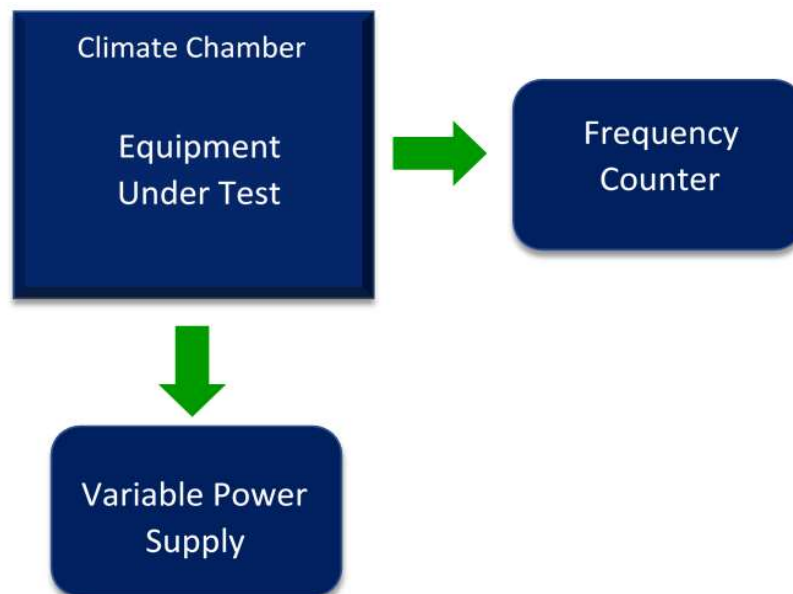


**Figure 6 – Frequency Stability Test Setup**

## Test Results:

Input Voltage (Vdc)	Measured Frequency (MHz)	Upper Margin (MHz)	Lower Margin (MHz)
5.0	1616.24836	-0.01780	0.01452
4.25	1616.24835	-0.01782	0.01451
5.75	1616.24835	-0.01781	0.01451

Table 10. Temperature vs. Voltage Test Result

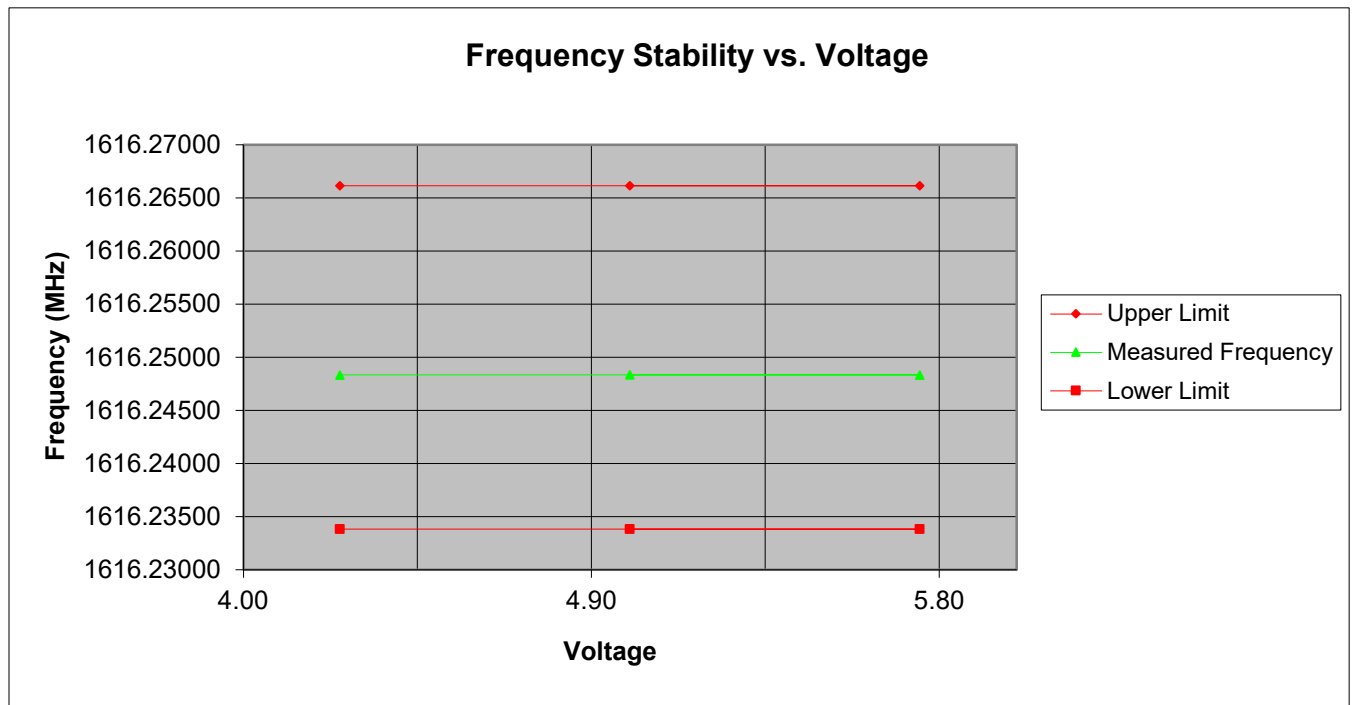

Plot 27 – Temperature vs Voltage



## Test Equipment

Equipment	Manufacturer	Model	Serial #	Last Cal Date	Cal Due Date
Spectrum Analyzer	Agilent	E4443A	US41420164	Jun-01-23	Jul-01-24
Spectrum Analyzer	Hewlett Packard	8563E	3821A09316	May-08-24	May-08-25
Attenuator 20dB	Weinschel	41-20-12	86332	Verified	
Horn Antenna	Com-Power	AHA-118	071150	Jan-09-23	Jan-09-25
Digital Multimeter	Fluke	77 III	72550270	May-08-24	May-08-25
Power Supply	Hewlett Packard	Lambda	LA2-AA20-143 3535	NCR	None
Temperature Chamber	TestEquity	1027C	17953	Aug-16-23	Aug-16-24
Frequency Counter	Agilent	53181A	MY40004981	May-01-23	May-01-25
EMI Test Receiver	Rohde & Schwarz	ESMI26	840607/005	Nov-15-23	Nov-15-24

**Table 11 – Test Equipment List**

**\*Statement of Traceability:** Test equipment is maintained and calibrated on a regular basis. All calibrations have been performed by a 17025 accredited test facility, traceable to National Institute of Standards and Technology (NIST)

## 8. Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. These measurements figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2. Instrumentation measurement uncertainty has **not** been taken into account to determine compliance.

The following measurement uncertainty values have been calculated as show in the table below:

Measured Parameter	Measurement Unit	Frequency Range	Expanded Uncertainty
Conducted Emissions (AC Power)	dBuV or dBuA	150kHz – 30MHz	± 4.3dB
Radiated Emissions below 1GHz	dBuV/m	30 – 1000MHz	± 5.6dB
Radiated Emissions above 1GHz	dBuV/m	1 – 26.5GHz	± 4.1dB

The reported expanded uncertainty has been estimated at a 95% confidence level (k=2)

## **END OF TEST REPORT**