

TEST REPORT

Reference No..... : WTX21X01000159W-1
FCC ID : 2AYPD-H11
Applicant : VIDERI Inc.
Address..... : 151 Lafayette St, (3rd floor), New York, NY, USA 10013
Product Name : Digital Canvas
Test Model. : H11
Standards : FCC Part 15.407
Date of Receipt sample : Jan.04, 2021
Date of Test..... : Jan.04, 2021 to Jan.19, 2021
Date of Issue : Jan.19, 2021
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China


Tel.: +86-755-33663308

Fax.: +86-755-33663309

Tested by:

Reviewed By:

Approved & Authorized By:



Jason Su / Project Engineer

Lion Cai / RF Manager

Silin Chen / Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
1.2 TEST STANDARDS.....	6
1.3 TEST METHODOLOGY	6
1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING	6
1.5 EUT OPERATING DURING TEST	7
1.6 TEST FACILITY	7
1.7 EUT SETUP AND TEST MODE.....	8
1.8 MEASUREMENT UNCERTAINTY	9
1.9 TEST EQUIPMENT LIST AND DETAILS	10
2. SUMMARY OF TEST RESULTS	12
3. ANTENNA REQUIREMENT	13
3.1 STANDARD APPLICABLE.....	13
3.2 EVALUATION INFORMATION.....	13
4. AUTOMATICALLY DISCONTINUE TRANSMISSION	14
4.1 STANDARD APPLICABLE.....	14
4.2 SUMMARY OF TEST RESULTS	14
5. POWER SPECTRAL DENSITY	15
5.1 STANDARD APPLICABLE.....	15
5.2 TEST PROCEDURE.....	15
5.3 SUMMARY OF TEST RESULTS/PLOTS	16
6. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH.....	17
6.1 STANDARD APPLICABLE.....	17
6.2 TEST PROCEDURE.....	17
6.3 SUMMARY OF TEST RESULTS/PLOTS	19
7. MAXIMUM CONDUCTED OUTPUT POWER.....	20
7.1 STANDARD APPLICABLE.....	20
7.2 TEST PROCEDURE.....	20
7.3 SUMMARY OF TEST RESULTS/PLOTS	21
8. RADIATED SPURIOUS EMISSIONS.....	22
8.1 STANDARD APPLICABLE.....	22
8.2 TEST PROCEDURE.....	22
8.3 TEST RECEIVER SETUP	24
8.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	24
8.5 SUMMARY OF TEST RESULTS/PLOTS	24
9. FREQUENCY STABILITY	53
9.1 STANDARD APPLICABLE.....	53
9.2 TEST PROCEDURE.....	53
9.3 SUMMARY OF TEST RESULTS/PLOTS	53
10. CONDUCTED EMISSIONS	54
10.1 TEST PROCEDURE.....	54
10.2 BASIC TEST SETUP BLOCK DIAGRAM.....	54
10.3 TEST RECEIVER SETUP	54
10.4 SUMMARY OF TEST RESULTS/PLOTS	54
APPENDIX SUMMARY	57
APPENDIX A.....	58
APPENDIX B.....	65
APPENDIX C.....	75
APPENDIX D.....	82

APPENDIX PHOTOGRAPHS.....83

Report version

Version No.	Date of issue	Description
Rev.00	Jan.19, 2021	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: VIDERI Inc.
Address of applicant: 151 Lafayette St, (3rd floor), New York, NY, USA 10013

Manufacturer: VIDERI Inc.
Address of manufacturer: 151 Lafayette St, (3rd floor), New York, NY, USA 10013

General Description of EUT	
Product Name:	Digital Canvas
Trade Name:	VIDERI
Model No.:	H11
Adding Model(s):	/
Rated Voltage:	Adapter DC5V, Battery DC3.8V
Battery Capacity:	8000mAh
Power Adapter:	/
Note: The test data is gathered from a production sample, provided by the manufacturer.	

Technical Characteristics of EUT	
Support Standards:	802.11a, 802.11n(HT20), 802.11n-HT40, 802.11ac-VHT80
Frequency Range:	5150-5250MHz, 5725-5850MHz
RF Output Power:	14.74dBm (Conducted)
Type of Modulation:	QPSK,16QAM,64QAM, 256QAM
Quantity of Channels:	15
Type of Antenna:	Integral Antenna
Antenna Gain:	1.2dBi

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.407: General technical requirements.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

KDB789033 D02 v02r01: GUIDELINES FOR COMPLIANCE TESTING OF UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII) DEVICES PART 15, SUBPARTE.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB789033 D02 v02r01. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Table for parameters of Test Software setting

Click Settings on the phone desktop, then click the About Tablet option, click Hardware Information, and quickly double-click the screen driver to enter the engineer mode and start the test. During the test, the channel and power control software provided by the customer was used to control the working channel and output power level. The RF output power selection is used to set the RF output power desired by the customer and will be fixed on the firmware of the final product.

Mode	Test Frequency (MHz)												
	NCB: 20MHz												
	5180	5200	5240	5260	5300	5320	5500	5580	5700	5720	5745	5785	5825
802.11a 6Mbps	20	20	20	/	/	/	/	/	/	/	19	19	19
802.11n-HT20 MCS0	20	20	20	/	/	/	/	/	/	/	19	19	19
Mode	NCB: 40MHz												
	5190	5230	5270	5310	5510	5550	5670	5710	5755	5795			
802.11n-HT40 MCS0	20	20	/	/	/	/	/	/	19	19			
Mode	NCB: 80MHz												
	5210		5290		5530		5610		5690		5775		
802.11ac-VH80 MCS0/Nss2	20		/		/		/		/		19		

1.5 EUT Operating during test

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under Android were executed.

1.6 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11a	5180MHz,5200MHz,5240MHz, ,5745MHz, 5785MHz,5825MHz
TM2	802.11n-HT20	5180MHz,5200MHz,5240MHz, 5745MHz, 5785MHz,5825MHz
TM3	802.11n-HT40	5190MHz,5230MHz, 5755MHz,5795MHz
TM4	802.11ac-VH80	5210MHz, 5775MHz
Note: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report		

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.0	Shielded	Without Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.8 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.9 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2020-04-28	2021-04-27
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2020-04-28	2021-04-27
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2020-04-28	2021-04-27
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2020-04-28	2021-04-27
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2020-04-28	2021-04-27
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
SEMT-1042	Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2019-05-05	2021-05-04
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2020-04-28	2021-04-27
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2020-04-28	2021-04-27
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2020-04-28	2021-04-27
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2020-04-28	2021-04-27
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2020-04-28	2021-04-27
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2020-04-28	2021-04-27
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2019-05-05	2021-05-04
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2020-04-28	2021-04-27
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2020-04-28	2021-04-27
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2020-04-28	2021-04-27
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2020-03-17	2021-03-16
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2020-03-17	2021-03-16
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2020-03-17	2021-03-16
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2020-03-17	2021-03-16
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2020-03-17	2021-03-16
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2020-03-17	2021-03-16

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.405	Antenna Requirement	Compliant
15.407 (c)	Automatically Discontinue Transmission	Compliant
§15.207; §15.407(b)(6)	Conducted Emission	Compliant
§15.407(a)(1),(2)	Power Spectral Density	Compliant
§15.407(e)	Emission Bandwidth and Occupied Bandwidth	Compliant
§15.407(a)(1),(2)	Maximum Conducted Output Power	Compliant
§15.407(b)(1),(2),(3),(4)	Undesirable emission	Compliant
§15.205; §15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§15.407(g)	Frequency Stability	Compliant
§15.407(h)	Dynamic Frequency Selection (DFS)	Compliant

N/A: Not applicable

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information

This product has an integral antenna, fulfill the requirement of this section.

4. Automatically Discontinue Transmission

4.1 Standard Applicable

According to FCC Part 15.407(c), the device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

4.2 Summary of Test Results

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

5. Power Spectral Density

5.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

5.2 Test Procedure

According to 789033 D02 v02r01 General UNII Test Procedures New Rules v02, the following is the measurement procedure.

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500

kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.1.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ kHz}$ is available on nearly all spectrum analyzers.

5.3 Summary of Test Results/Plots

Please refer to Appendix A

6. Emission Bandwidth and Occupied Bandwidth

6.1 Standard Applicable

According to 15.407(a) and (e):

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

6.2 Test Procedure

According to 789033 D02 v02r0r section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.

- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v02r01 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:

- 1. Set center frequency to the nominal EUT channel center frequency.
- 2. Set span = 1.5 times to 5.0 times the OBW.
- 3. Set RBW = 1 % to 5 % of the OBW
- 4. Set VBW $\geq 3 * \text{RBW}$
- 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- 6. Use the 99 % power bandwidth function of the instrument (if available).
- 7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6.3 Summary of Test Results/Plots

Please refer to Appendix B

7. Maximum Conducted Output Power

7.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

7.2 Test Procedure

According to KDB789033 D02 v02r01 section E, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1 MHz.
- (iii) Set VBW $\geq$ 3 MHz.
- (iv) Number of points in sweep $\geq$ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)

- (v) Sweep time = auto.
- (vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq$ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- (viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

7.3 Summary of Test Results/Plots

Please refer to Appendix C

8. Radiated Spurious Emissions

8.1 Standard Applicable

According to §15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

According to §15.407(b)(6), Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

According to §15.407(b)(7), The provisions of §15.205 apply to intentional radiators operating under this section.
789033 D02 v02r01 General UNII Test Procedures New Rules v01

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$\text{EIRP} = ((E \cdot d)^2) / 30$$

where:

- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.


8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..


The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.


The test setup for emission measurement below 30MHz..

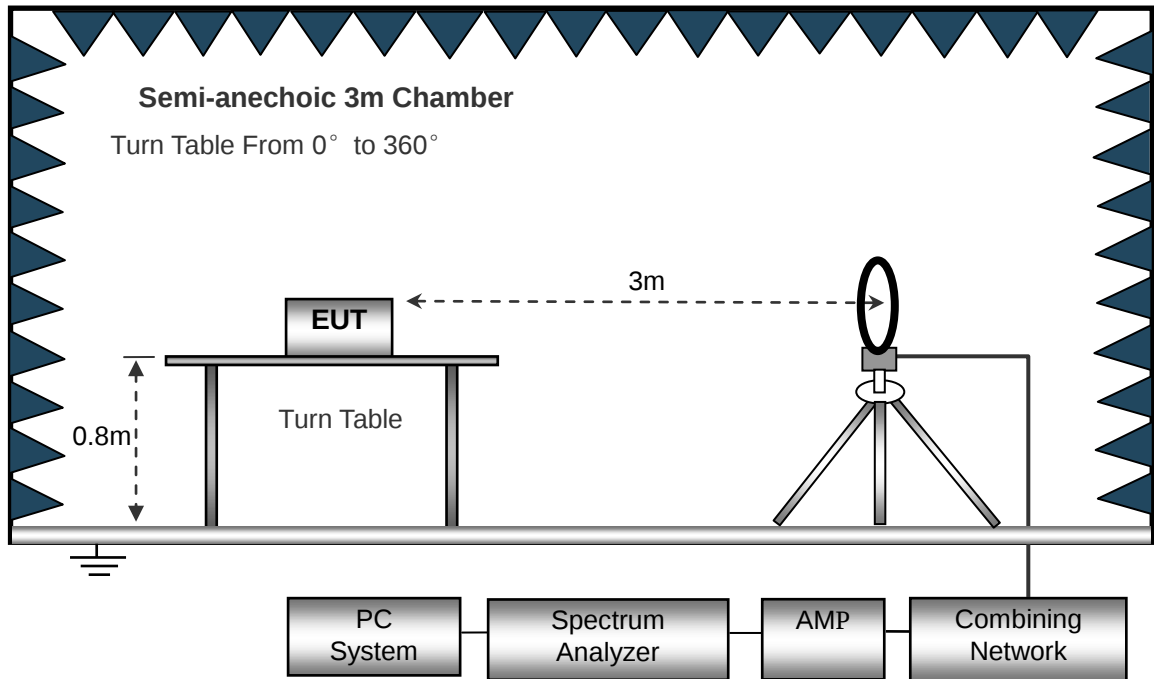

The test setup for emission measurement from 30 MHz to 1 GHz..

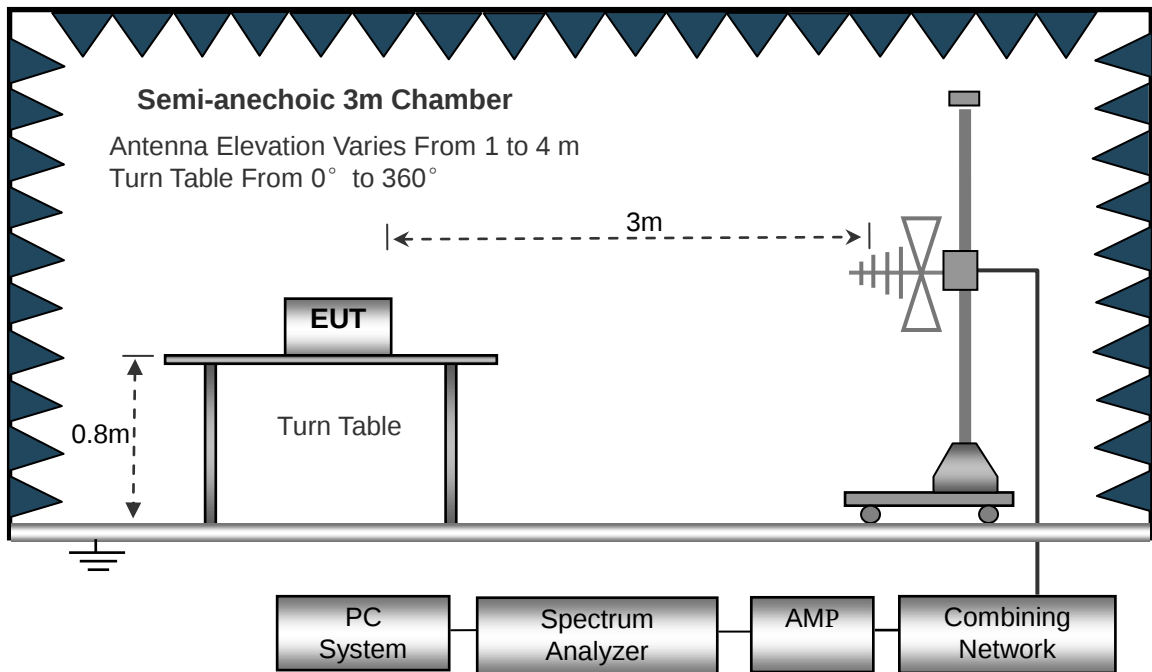

The test setup for emission measurement above 1 GHz..

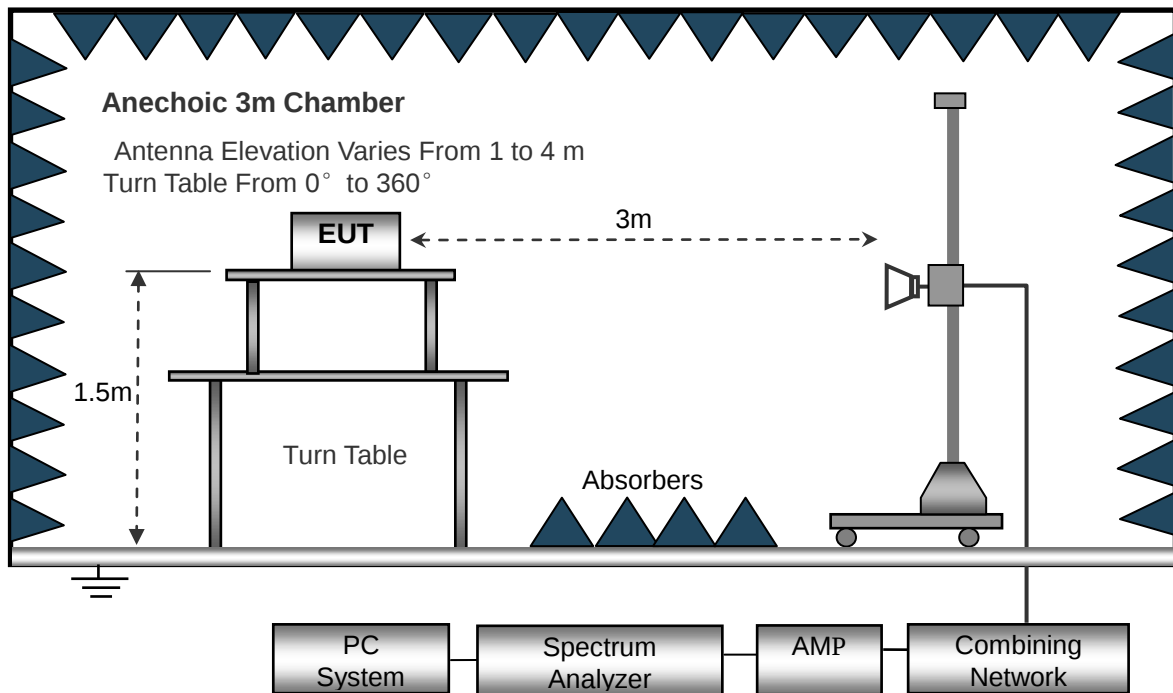

8.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.5 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


- Spurious Emission From 30 MHz to 1 GHz
- 5150-5250MHz

802.11a			
Test Channel	5180MHz(Worst case)	Polarity:	Horizontal

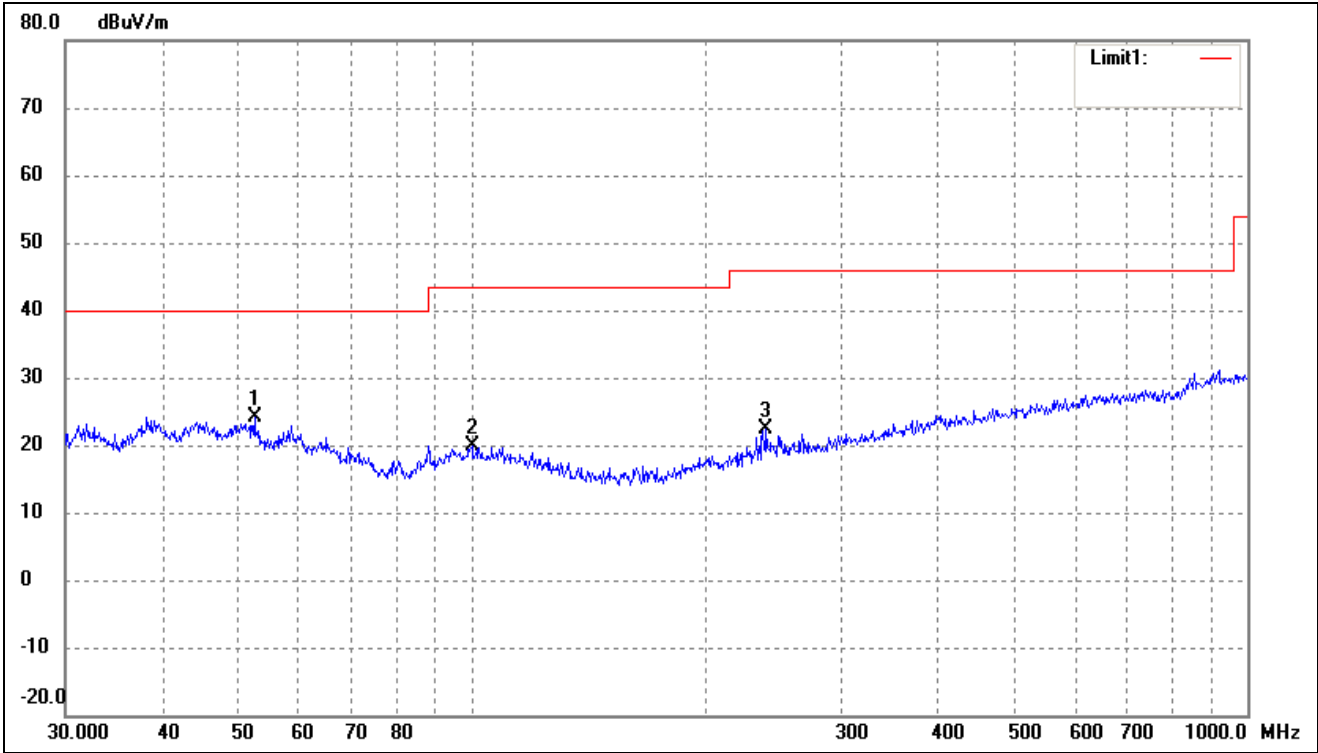


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	52.5753	36.36	-12.25	24.11	40.00	-15.89	-	-	peak
2	100.2286	33.30	-13.32	19.98	43.50	-23.52	-	-	peak
3	239.9874	33.82	-11.42	22.40	46.00	-23.60	-	-	peak

802.11a			
Test Channel	5180MHz(Worst case)	Polarity:	Vertical

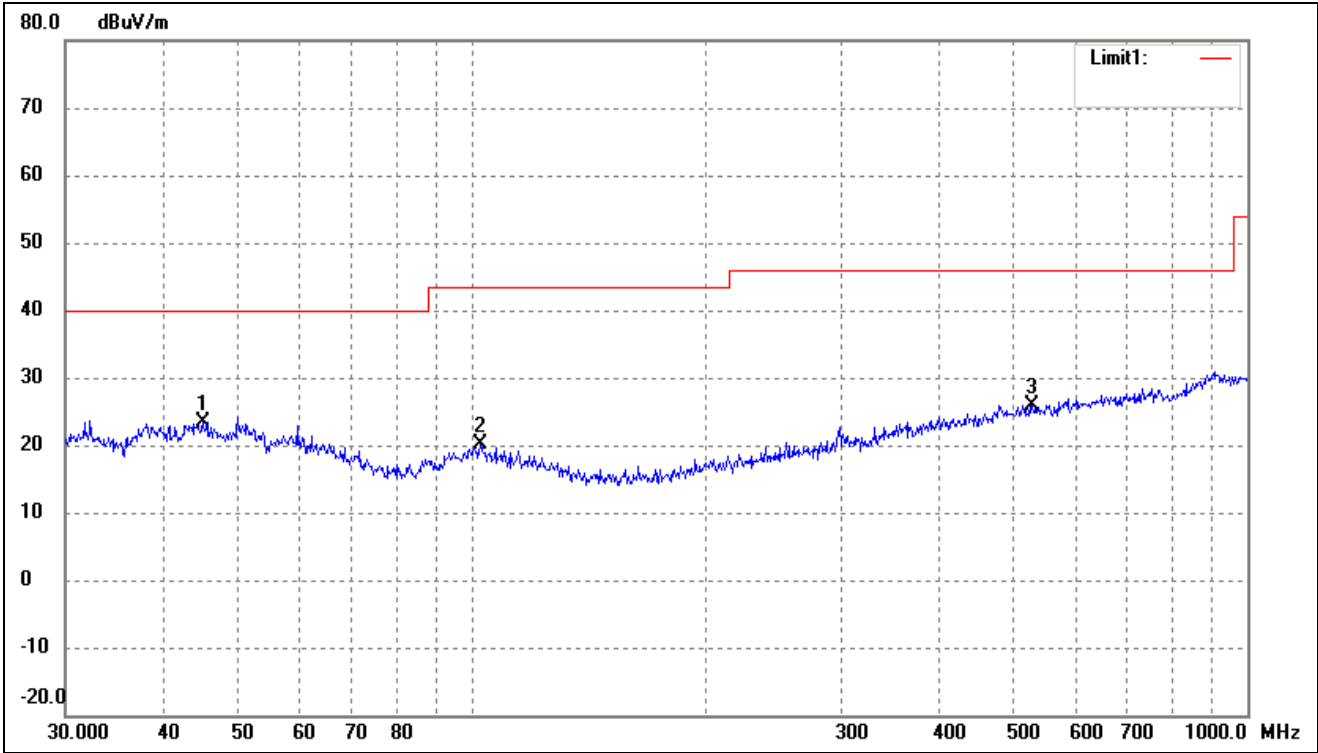


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	45.0583	35.30	-11.80	23.50	40.00	-16.50	-	-	peak
2	102.7192	33.34	-13.32	20.02	43.50	-23.48	-	-	peak
3	528.2458	30.01	-4.13	25.88	46.00	-20.12	-	-	peak

802.11n-HT20			
Test Channel	5180MHz(worst case)	Polarity:	Horizontal

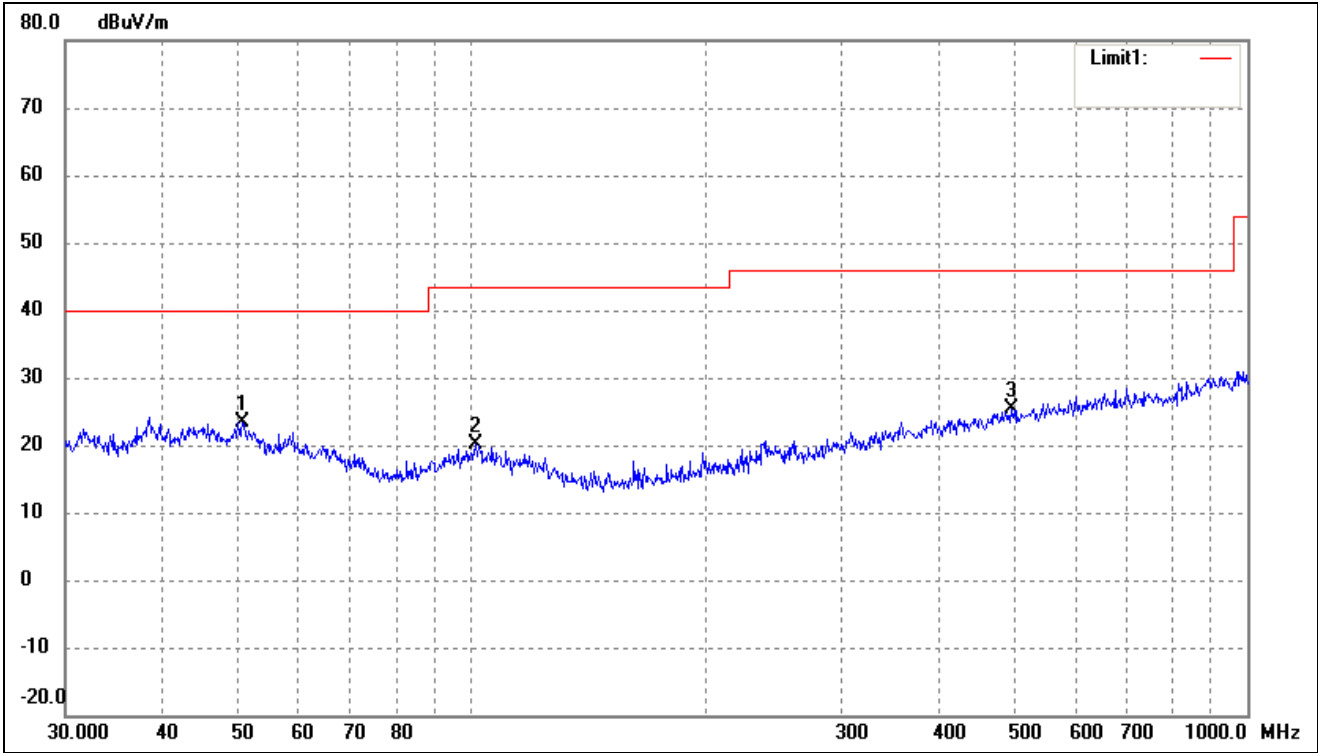


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	50.7637	35.21	-11.75	23.46	40.00	-16.54	-	-	peak
2	101.2885	33.38	-13.31	20.07	43.50	-23.43	-	-	peak
3	495.9344	29.64	-4.17	25.47	46.00	-20.53	-	-	peak

802.11n-HT20			
Test Channel	5180MHz(worst case)	Polarity:	Vertical

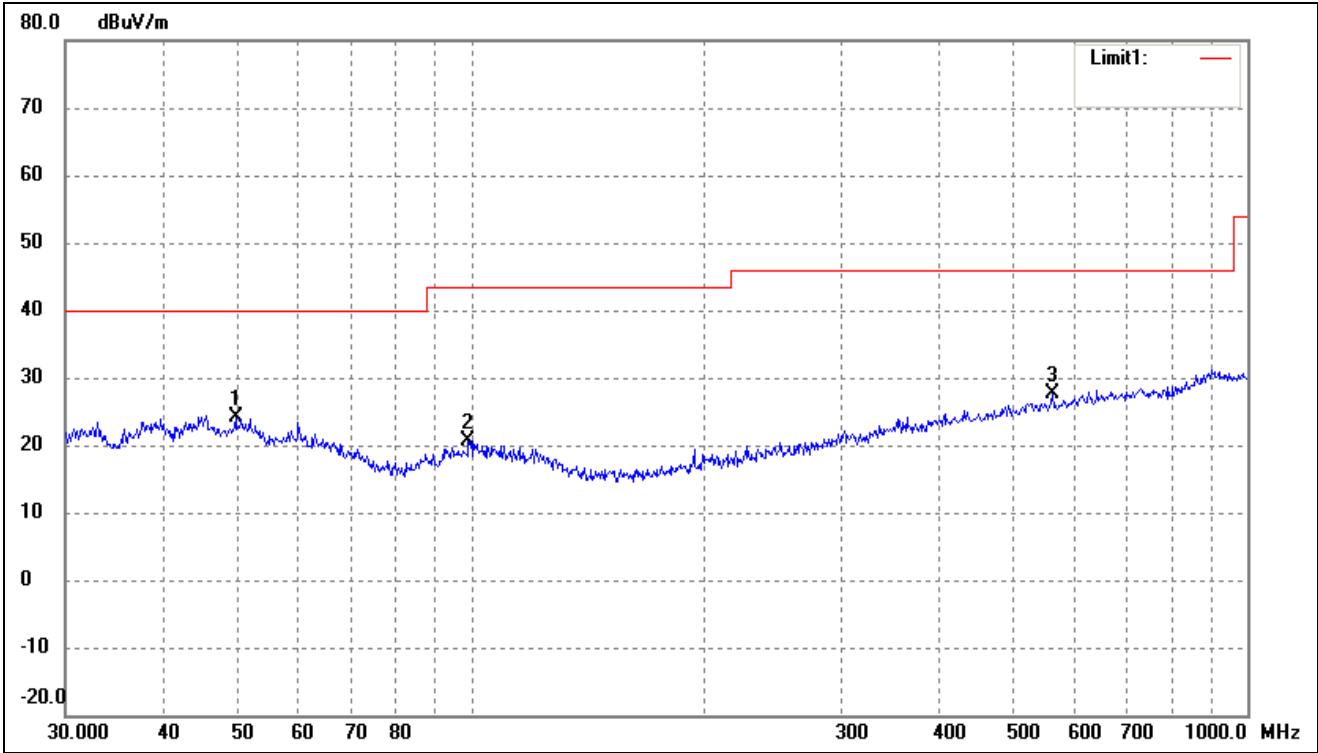


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	49.7068	35.65	-11.55	24.10	40.00	-15.90	-	-	peak
2	99.1797	34.04	-13.45	20.59	43.50	-22.91	-	-	peak
3	560.6928	30.96	-3.27	27.69	46.00	-18.31	-	-	peak

802.11n-HT40			
Test Channel	5190MHz(worst case)	Polarity:	Horizontal

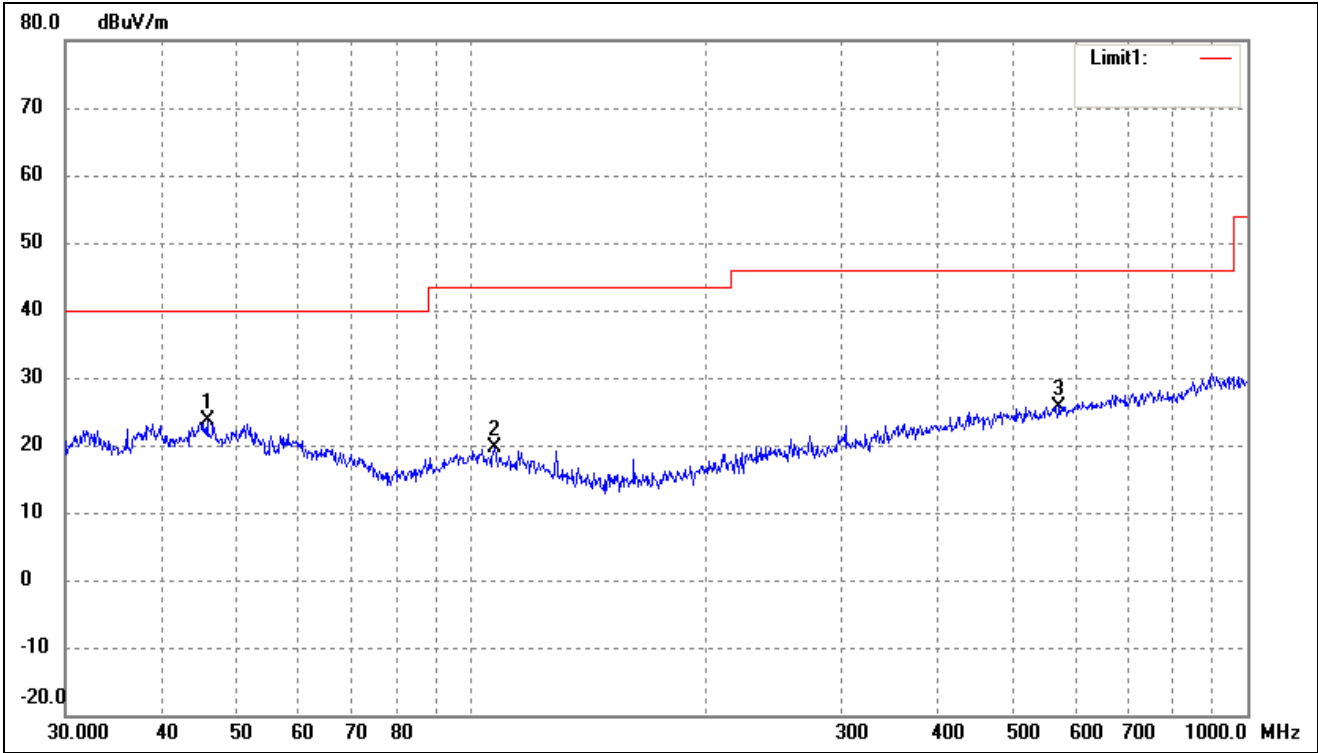


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	45.6948	35.33	-11.76	23.57	40.00	-16.43	-	-	peak
2	107.1337	32.92	-13.31	19.61	43.50	-23.89	-	-	peak
3	572.6144	28.42	-2.67	25.75	46.00	-20.25	-	-	peak

802.11n-HT40			
Test Channel	5190MHz(worst case)	Polarity:	Vertical

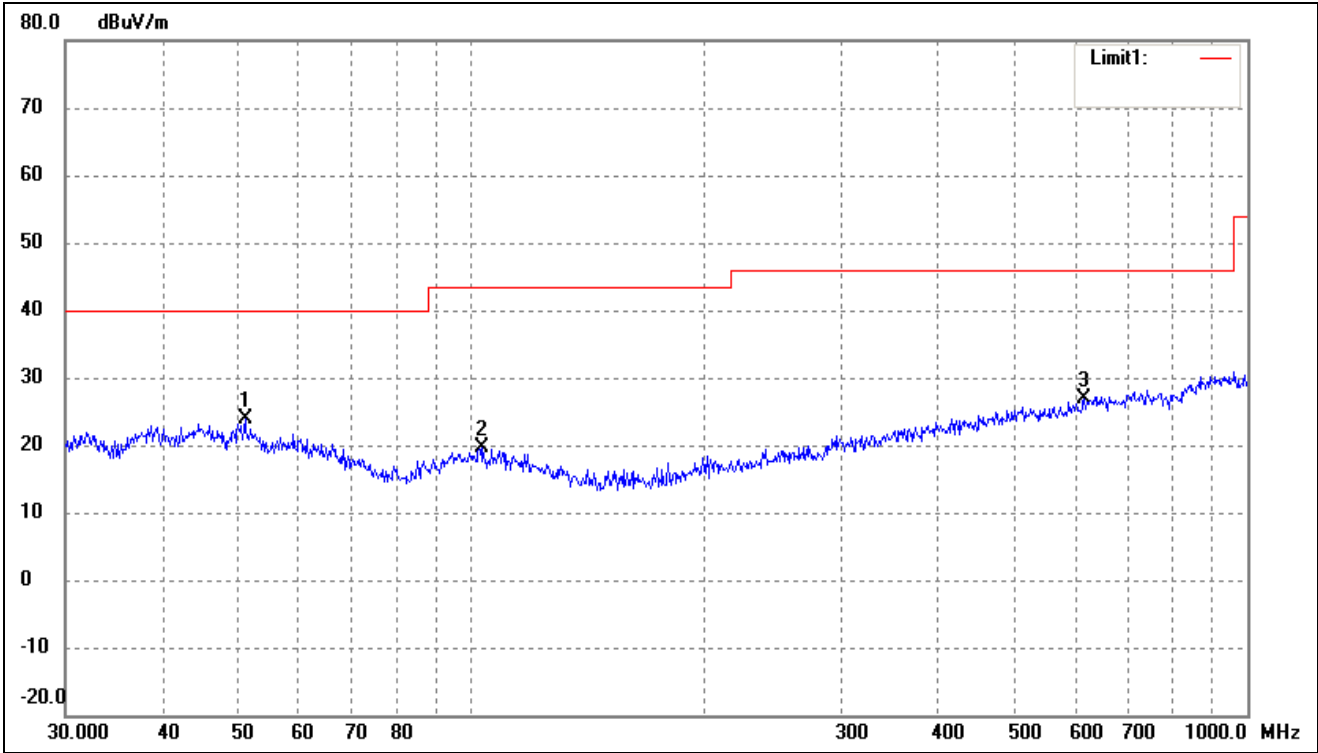


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	51.1209	35.66	-11.85	23.81	40.00	-16.19	-	-	peak
2	103.4421	32.89	-13.31	19.58	43.50	-23.92	-	-	peak
3	616.3718	28.83	-2.07	26.76	46.00	-19.24	-	-	peak

802.11ac-HT80			
Test Channel	5210MHz(worst case)	Polarity:	Horizontal

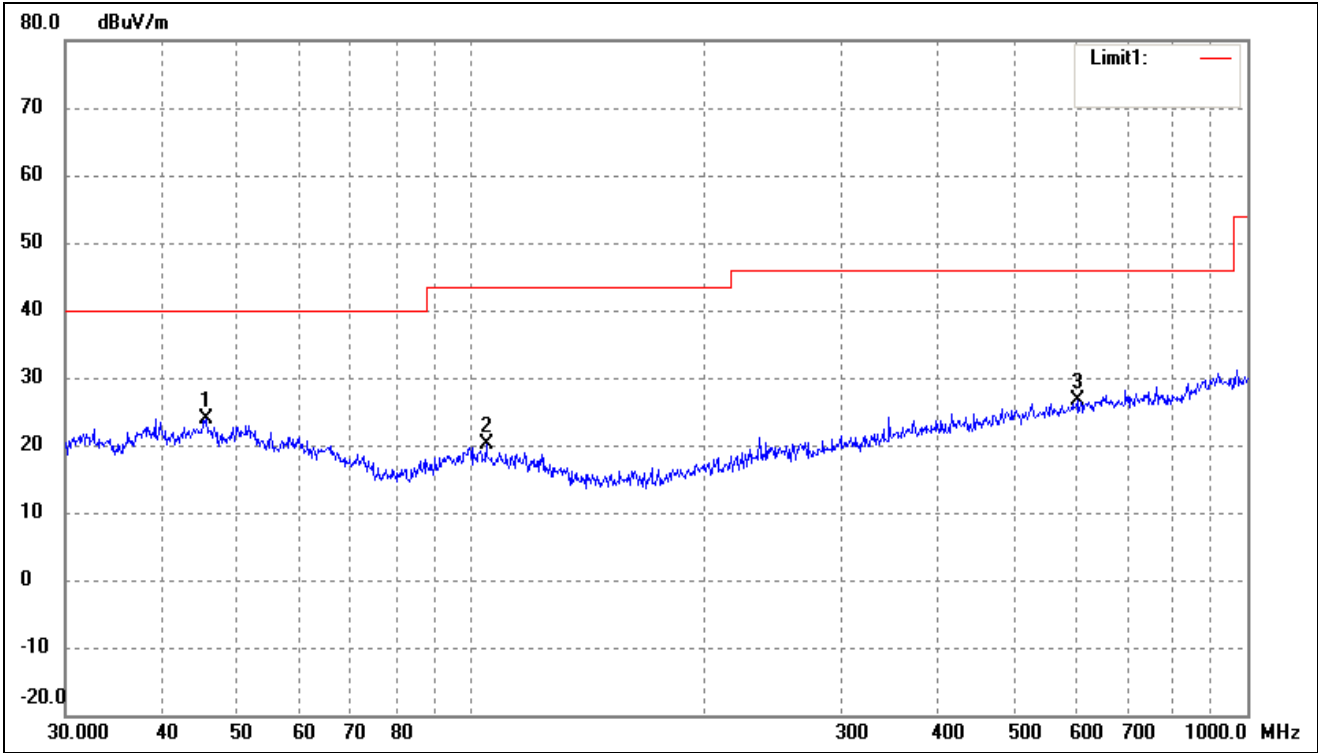

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	45.5348	35.73	-11.77	23.96	40.00	-16.04	-	-	peak
2	104.5361	33.39	-13.32	20.07	43.50	-23.43	-	-	peak
3	603.5392	28.61	-1.97	26.64	46.00	-19.36	-	-	peak


802.11ac-HT80			
Test Channel	5210MHz(worst case)	Polarity:	Vertical

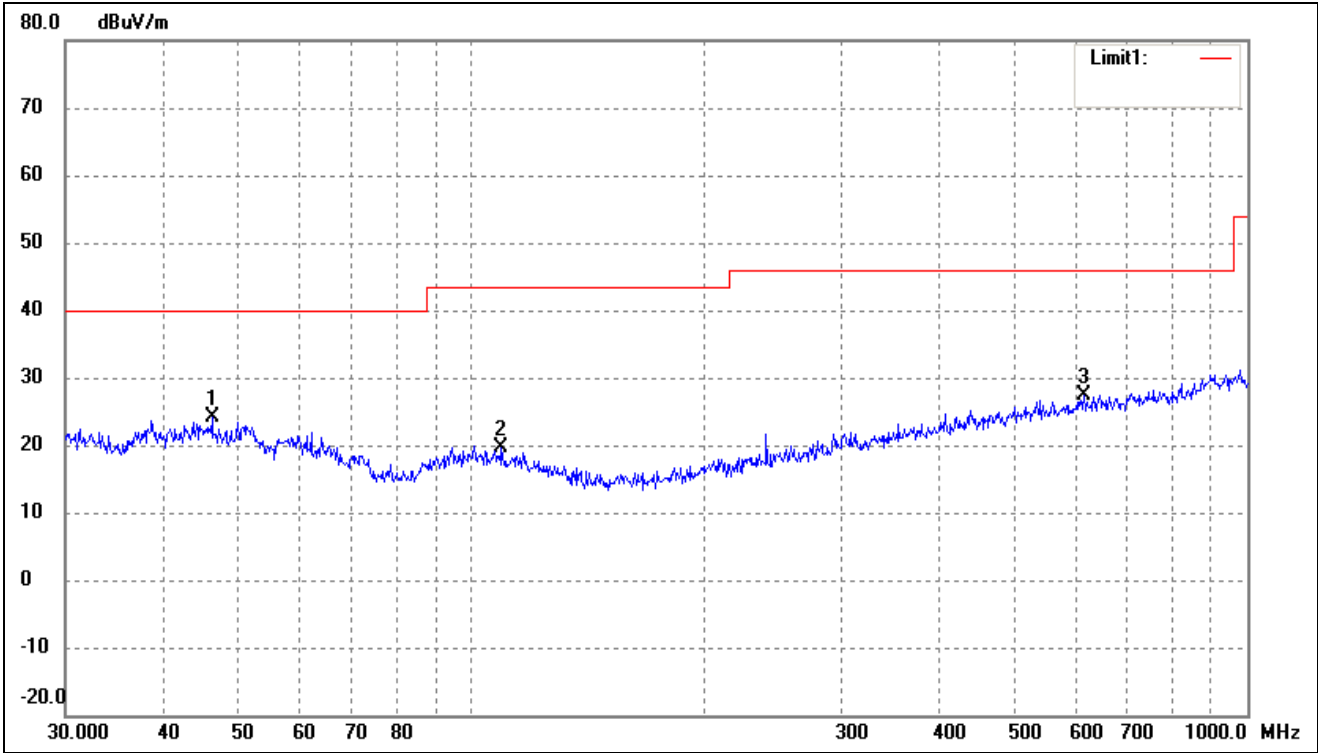

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	46.3402	35.75	-11.73	24.02	40.00	-15.98	-	-	peak
2	109.4116	32.90	-13.31	19.59	43.50	-23.91	-	-	peak
3	616.3718	29.56	-2.07	27.49	46.00	-18.51	-	-	peak


➤ 5725-5850MHz

802.11a			
Test Channel	5745MHz(worst case)	Polarity:	Vertical

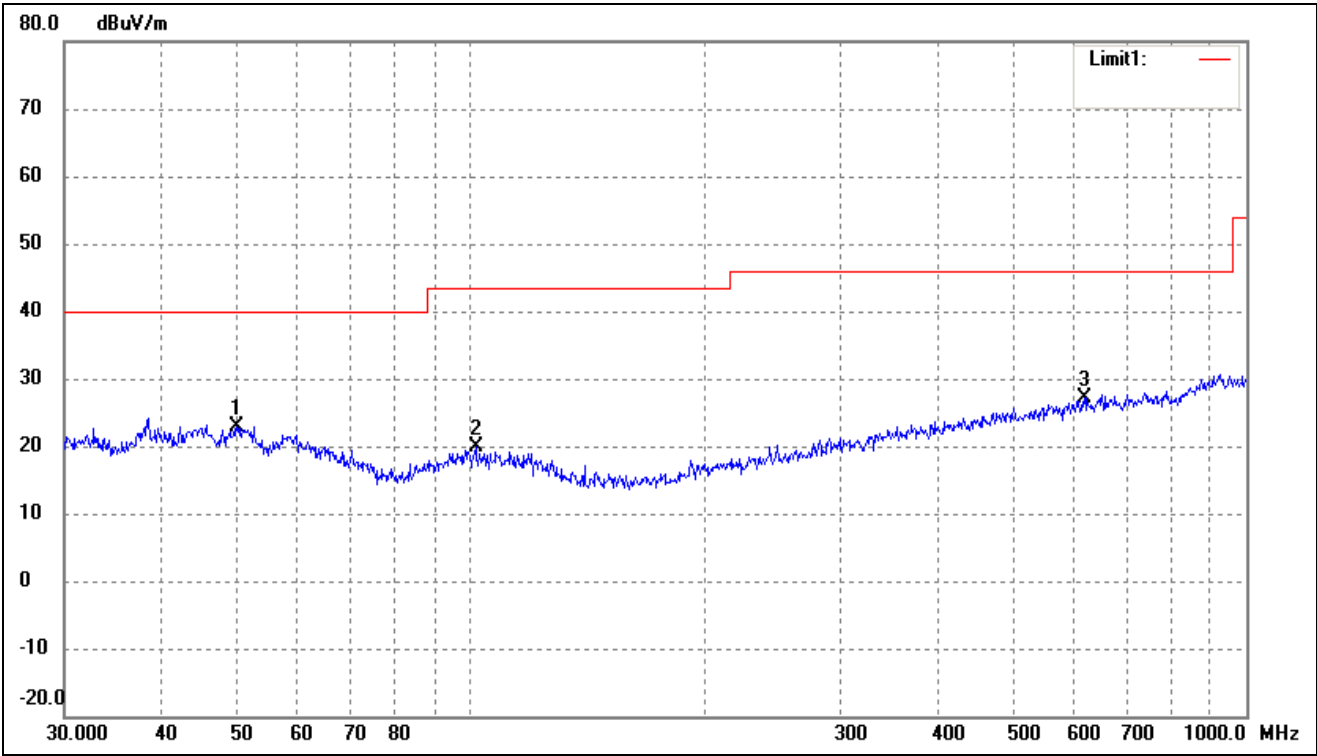


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	50.0566	34.35	-11.55	22.80	40.00	-17.20	-	-	peak
2	101.6443	33.13	-13.32	19.81	43.50	-23.69	-	-	peak
3	618.5369	29.20	-2.10	27.10	46.00	-18.90	-	-	peak

802.11a			
Test Channel	5745MHz(worst case)	Polarity:	Horizontal

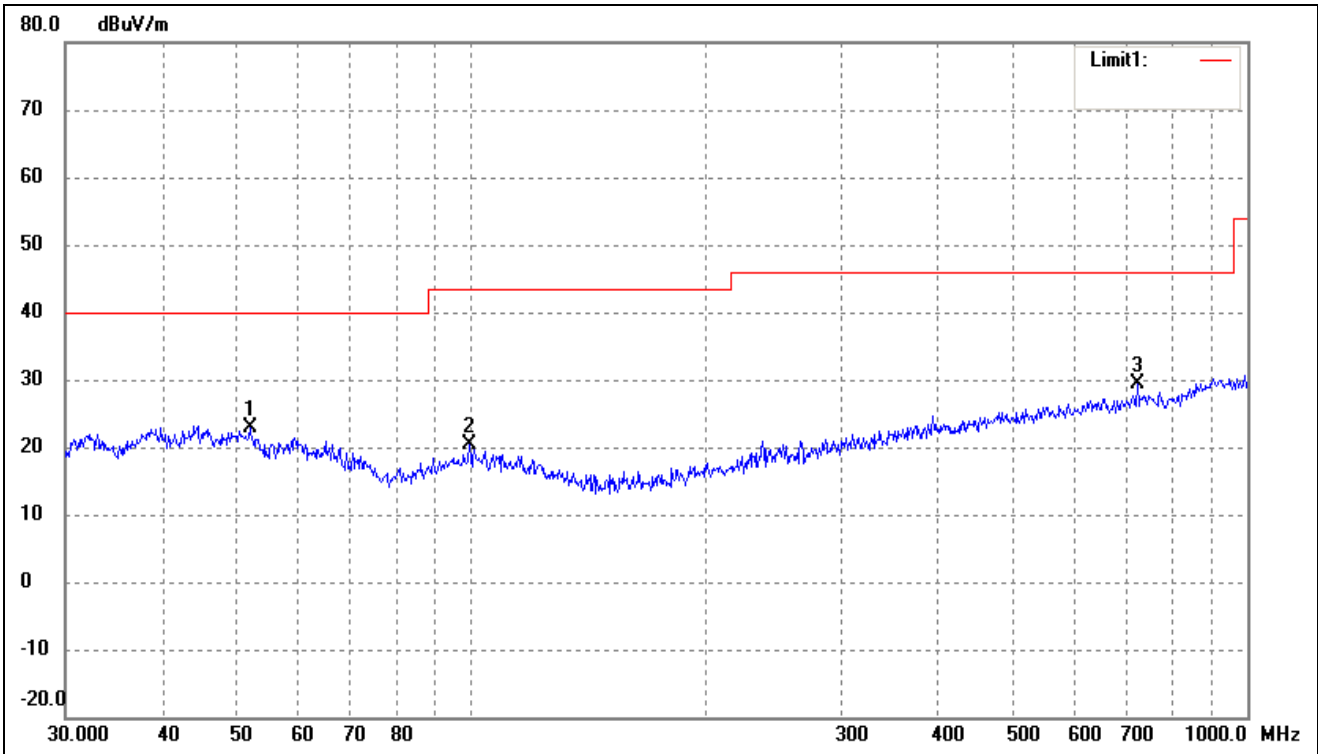


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	51.8430	34.99	-12.04	22.95	40.00	-17.05	-	-	peak
2	99.5281	33.84	-13.39	20.45	43.50	-23.05	-	-	peak
3	721.7259	30.46	-1.10	29.36	46.00	-16.64	-	-	peak

802.11n-HT20			
Test Channel	5745MHz(worst case)	Polarity:	Horizontal

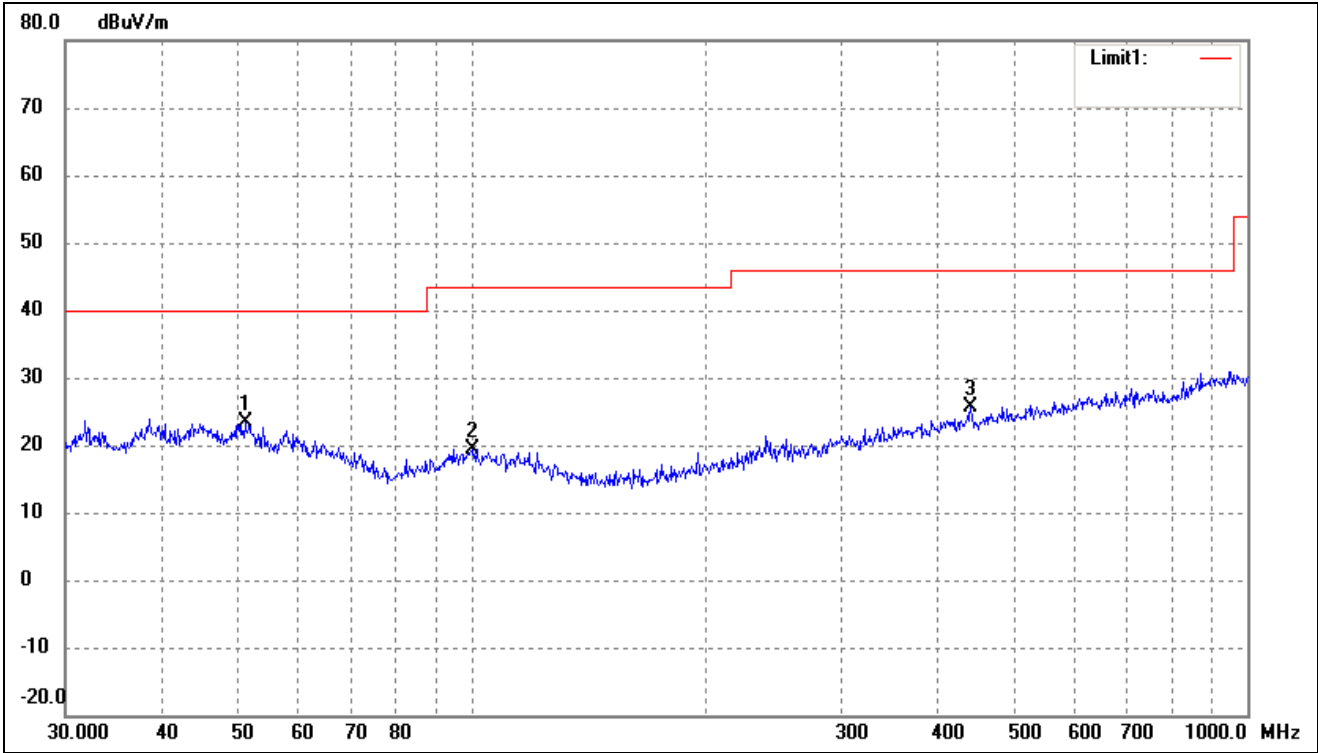


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	51.1209	35.30	-11.85	23.45	40.00	-16.55	-	-	peak
2	100.2286	32.78	-13.32	19.46	43.50	-24.04	-	-	peak
3	440.1963	31.39	-5.71	25.68	46.00	-20.32	-	-	peak

802.11n-HT20			
Test Channel	5745MHz(worst case)	Polarity:	Vertical

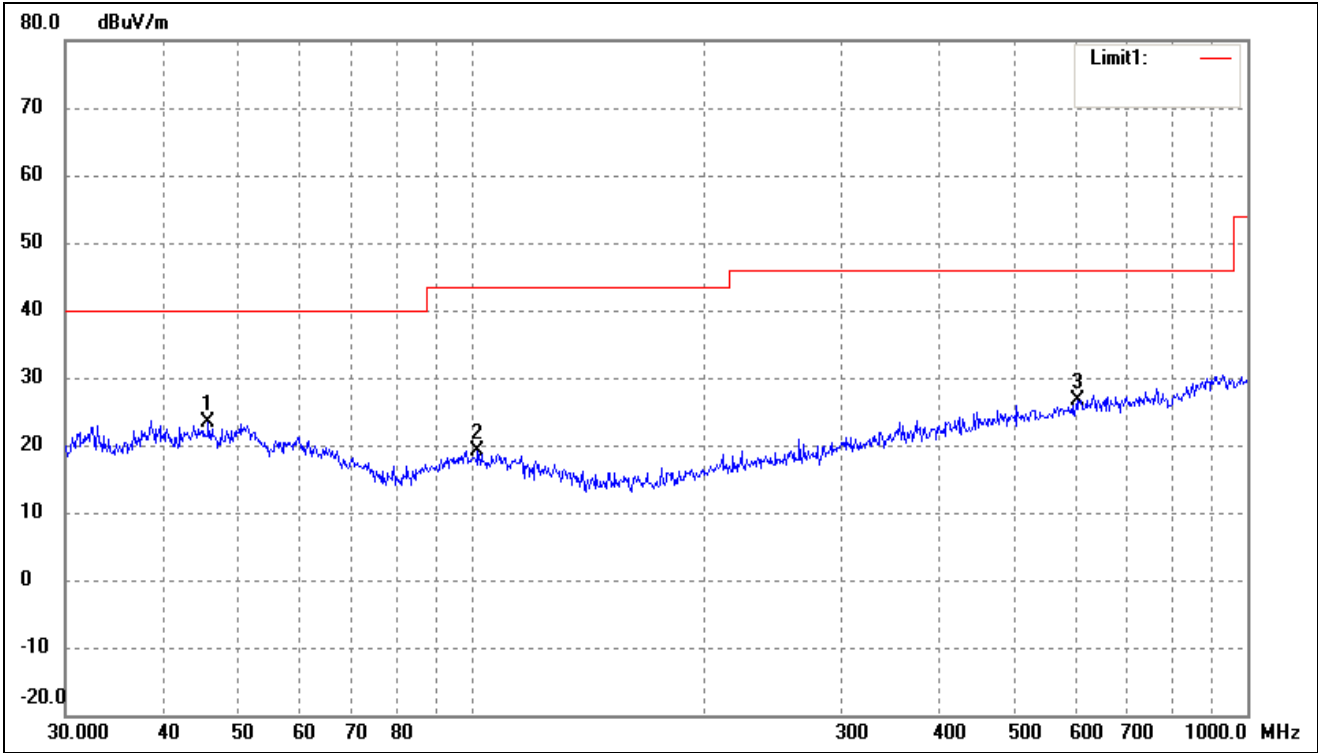


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	45.8553	35.13	-11.75	23.38	40.00	-16.62	-	-	peak
2	102.0014	32.45	-13.32	19.13	43.50	-24.37	-	-	peak
3	605.6592	28.55	-1.98	26.57	46.00	-19.43	-	-	peak

802.11n-HT40			
Test Channel	5755MHz(worst case)	Polarity:	Horizontal

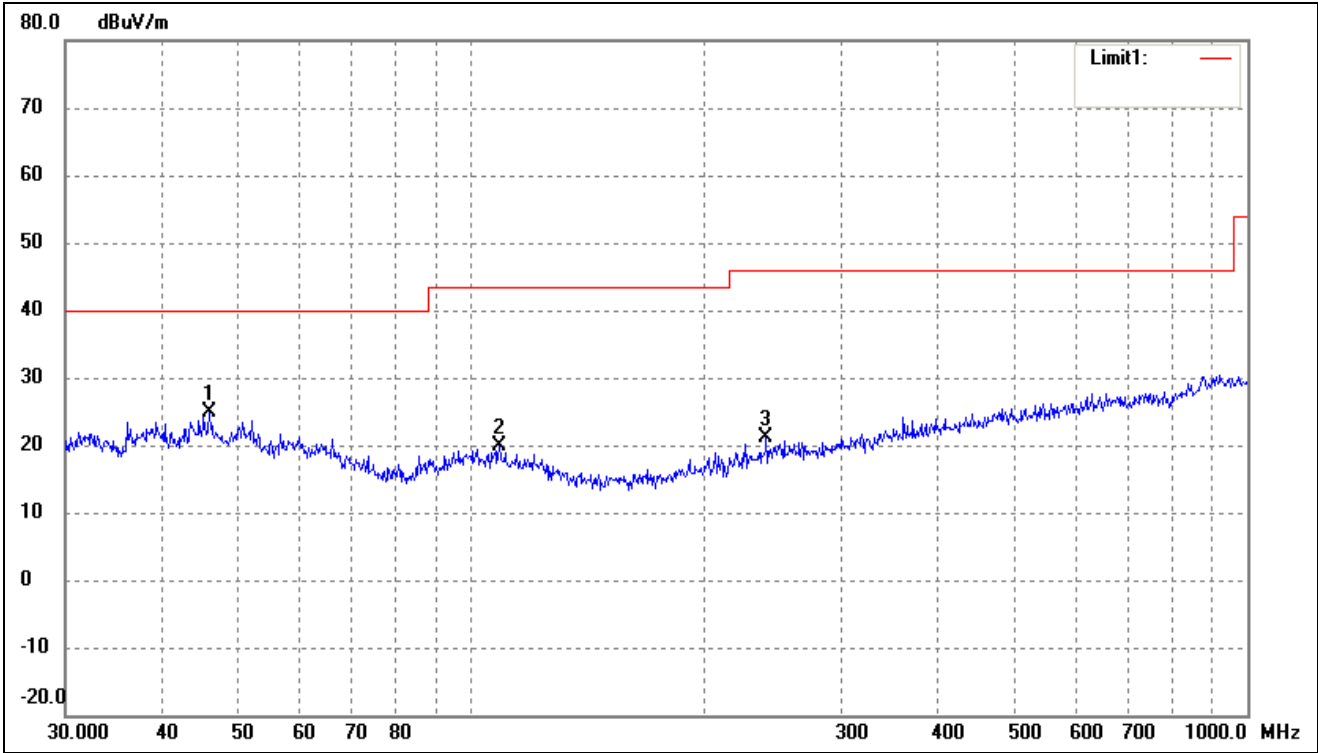


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	46.0164	36.63	-11.74	24.89	40.00	-15.11	-	-	peak
2	108.6470	33.15	-13.31	19.84	43.50	-23.66	-	-	peak
3	239.9874	32.59	-11.42	21.17	46.00	-24.83	-	-	peak

802.11n-HT40			
Test Channel	5755MHz(worst case)	Polarity:	Vertical

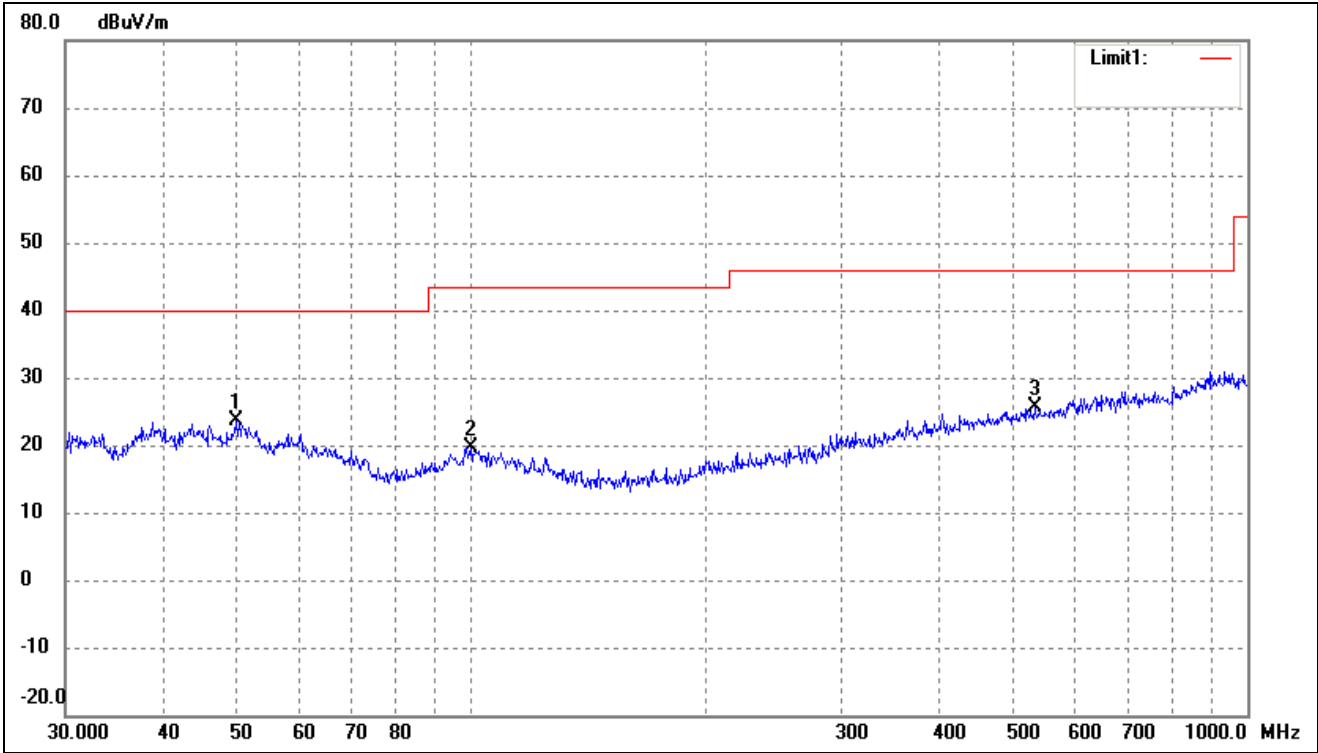


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	49.7068	35.25	-11.55	23.70	40.00	-16.30	-	-	peak
2	99.8777	33.03	-13.34	19.69	43.50	-23.81	-	-	peak
3	531.9635	29.78	-4.07	25.71	46.00	-20.29	-	-	peak

802.11ac-HT80			
Test Channel	5775MHz(worst case)	Polarity:	Horizontal

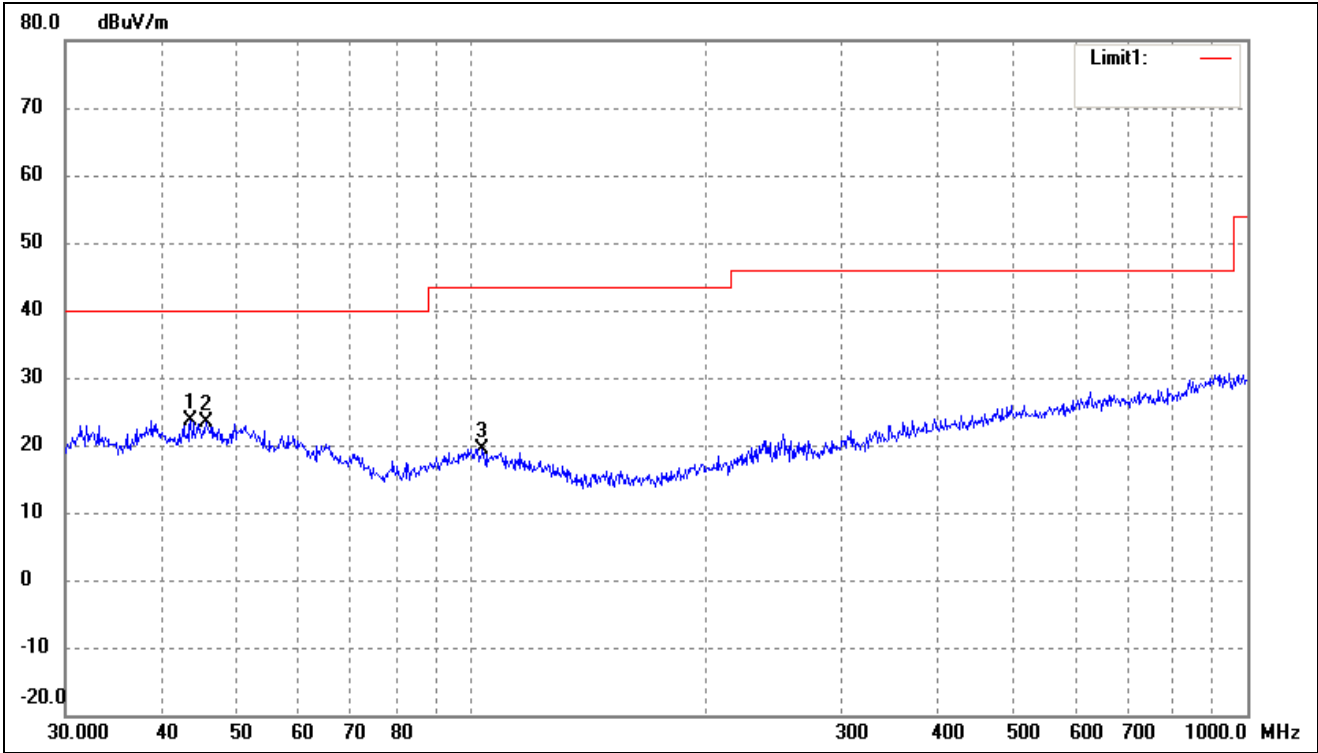

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	43.5057	35.56	-11.85	23.71	40.00	-16.29	-	-	peak
2	45.5348	35.06	-11.77	23.29	40.00	-16.71	-	-	peak
3	103.4421	32.65	-13.31	19.34	43.50	-24.16	-	-	peak

802.11ac-HT80			
Test Channel	5775MHz(worst case)	Polarity:	Vertical

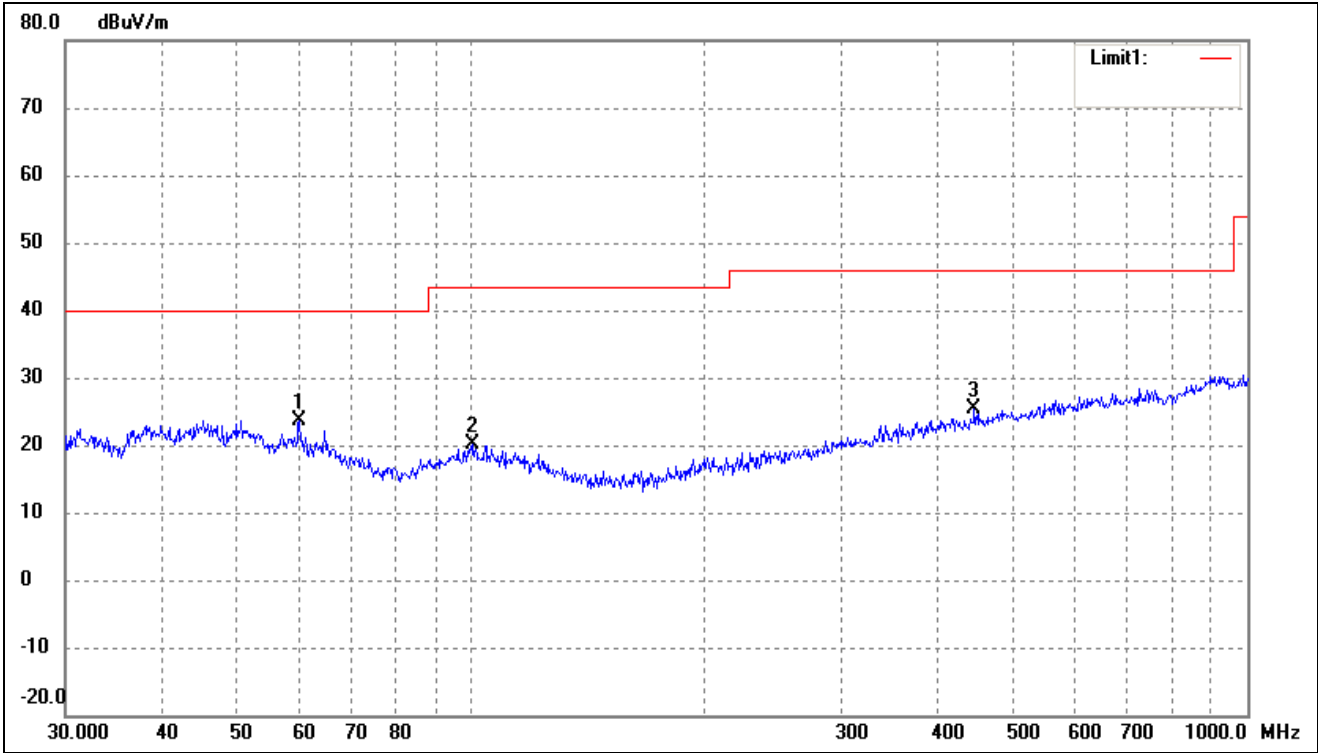


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	60.0691	36.67	-13.00	23.67	40.00	-16.33	-	-	peak
2	100.5806	33.40	-13.33	20.07	43.50	-23.43	-	-	peak
3	444.8514	30.94	-5.65	25.29	46.00	-20.71	-	-	peak

Remark: ‘-’Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.


➤ Spurious Emission above 1GHz

802.11a- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

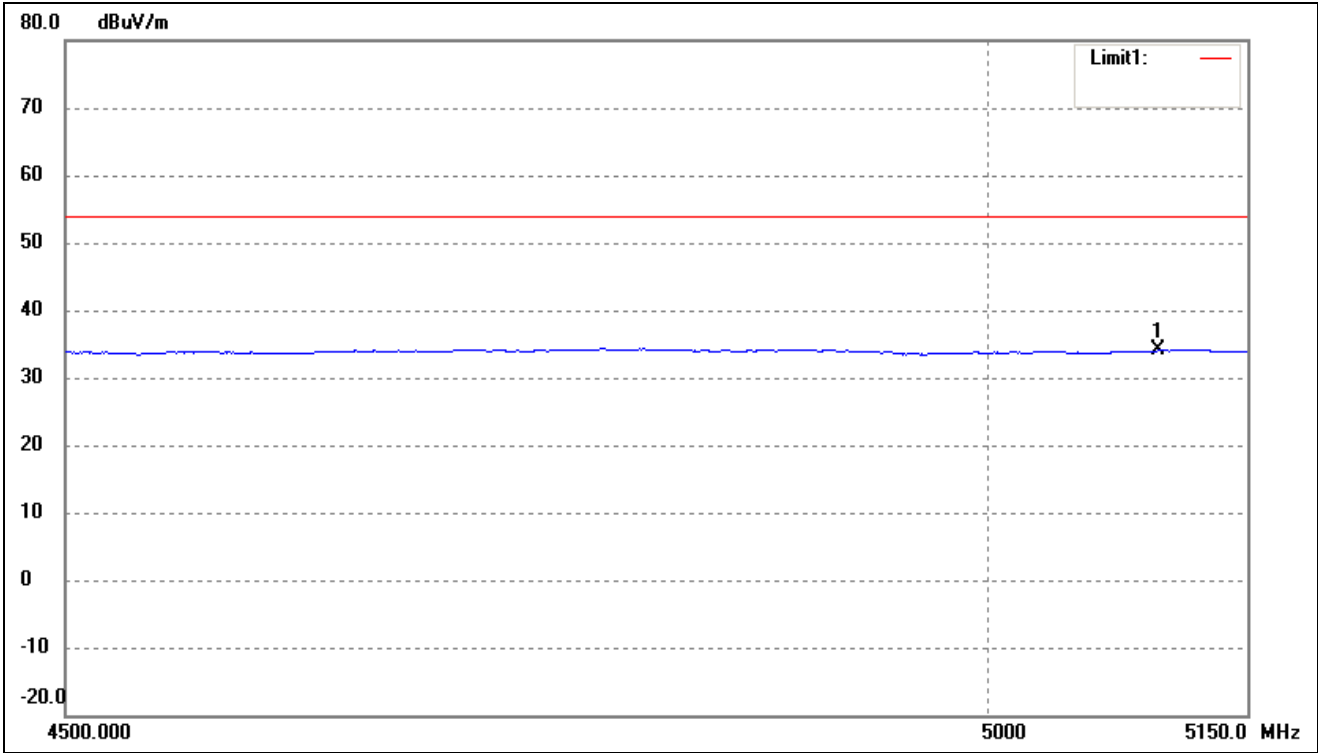


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	5098.150	38.41	-4.34	34.07	54.00	-19.93	-	-	AVG

802.11a- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

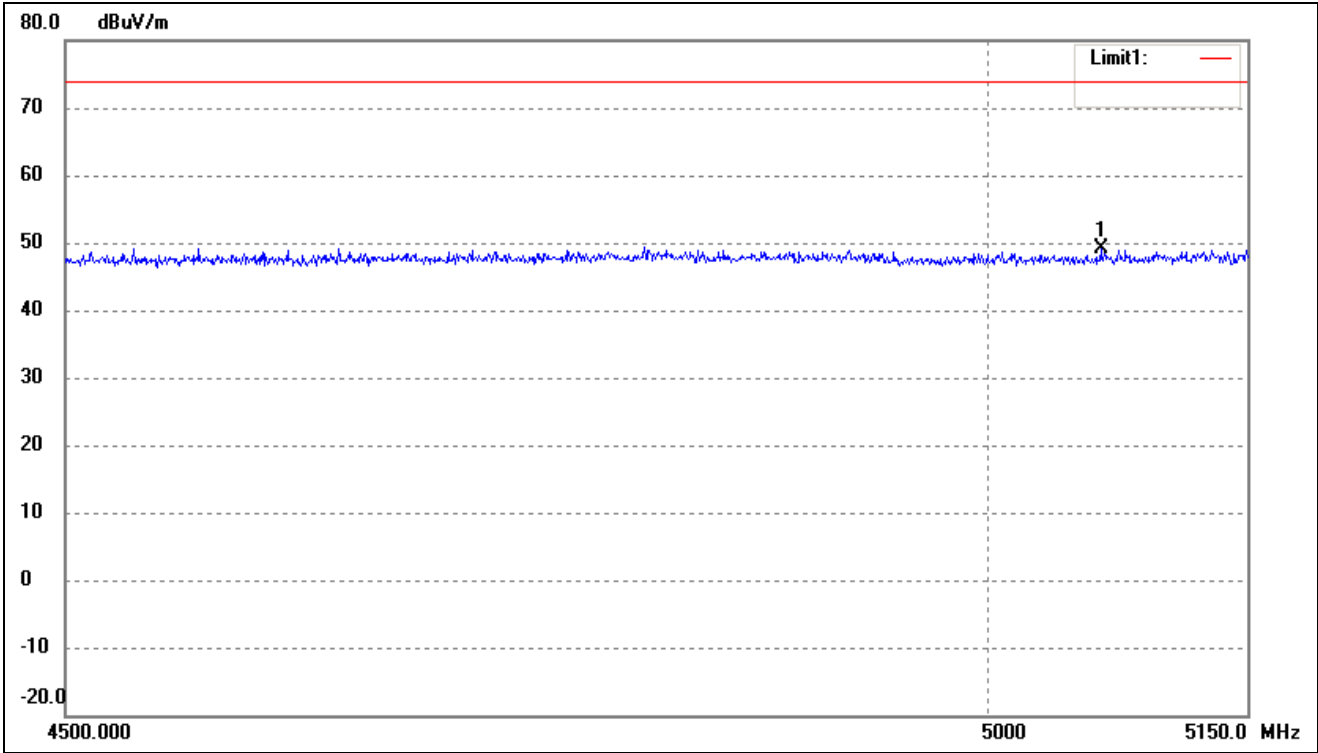


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5064.557	53.57	-4.36	49.21	74.00	-24.79	-	-	peak

802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

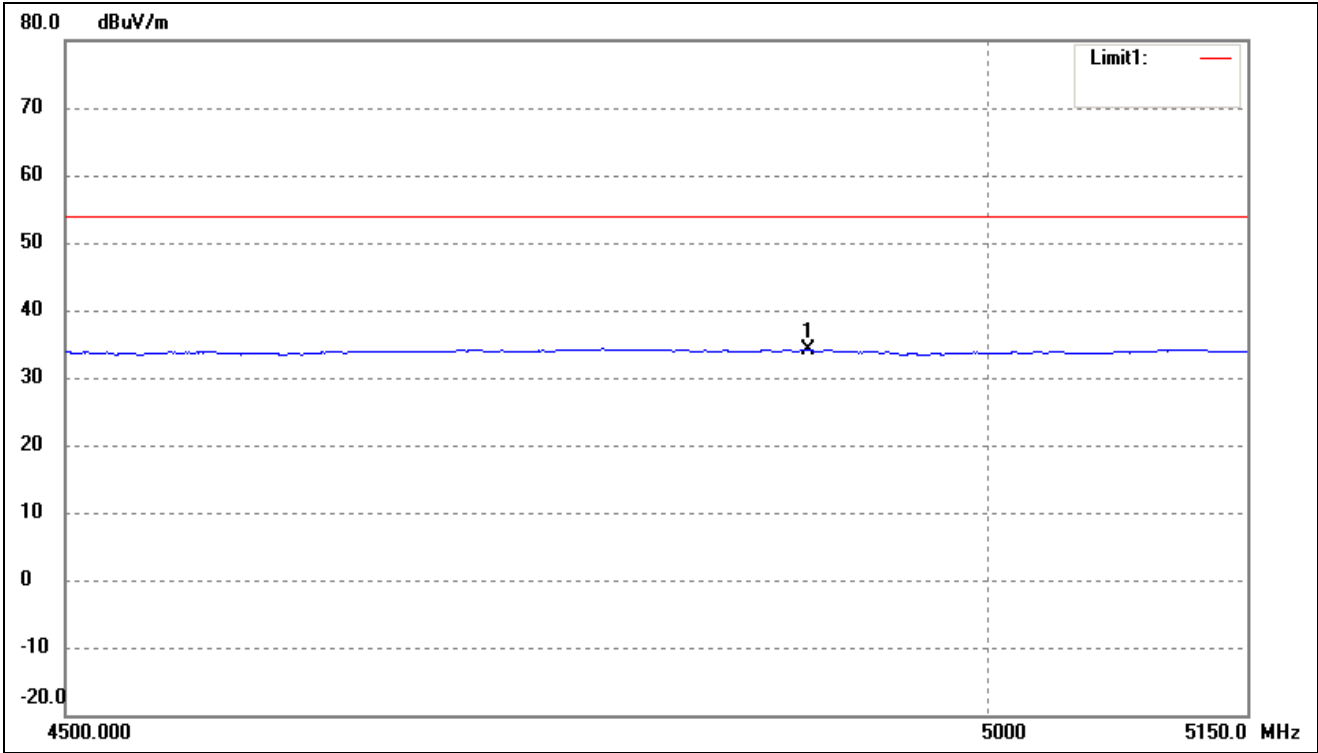


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4897.901	38.59	-4.45	34.14	54.00	-19.86	-	-	AVG

802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

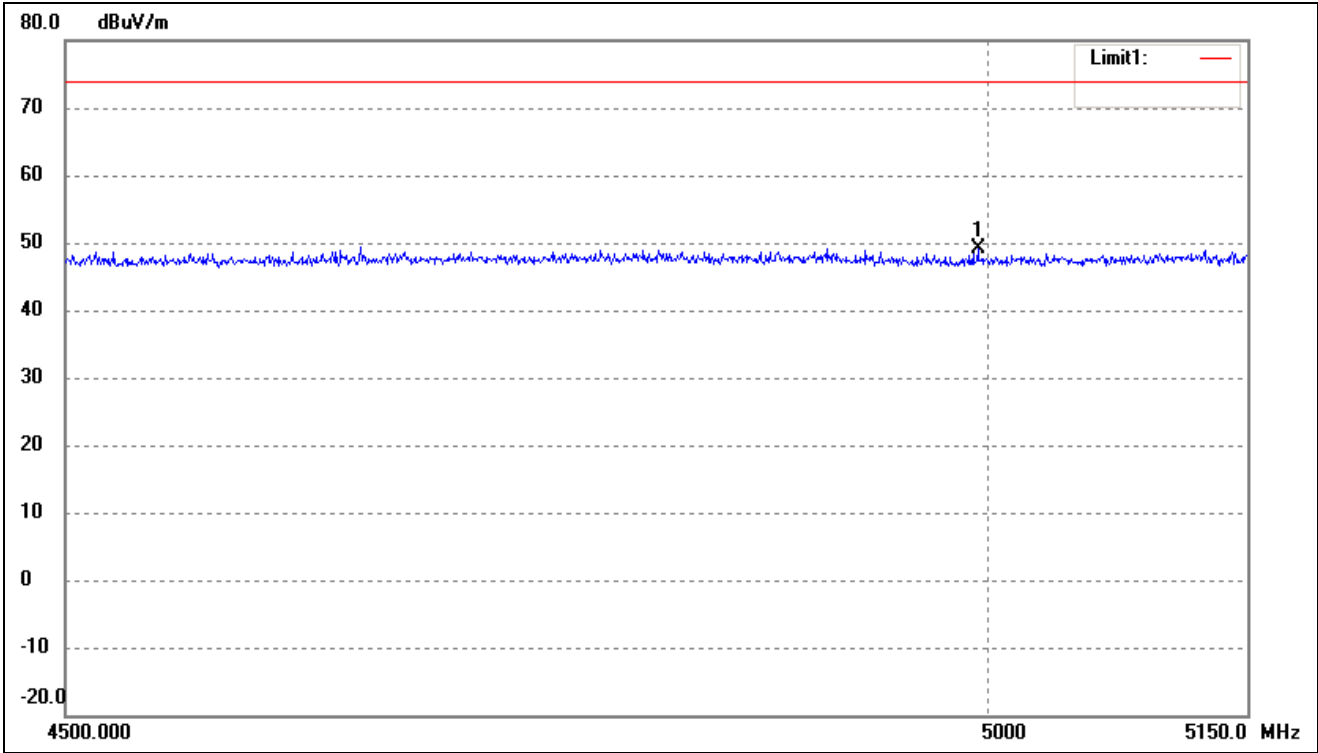


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4993.990	53.42	-4.39	49.03	74.00	-24.97	-	-	peak

802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

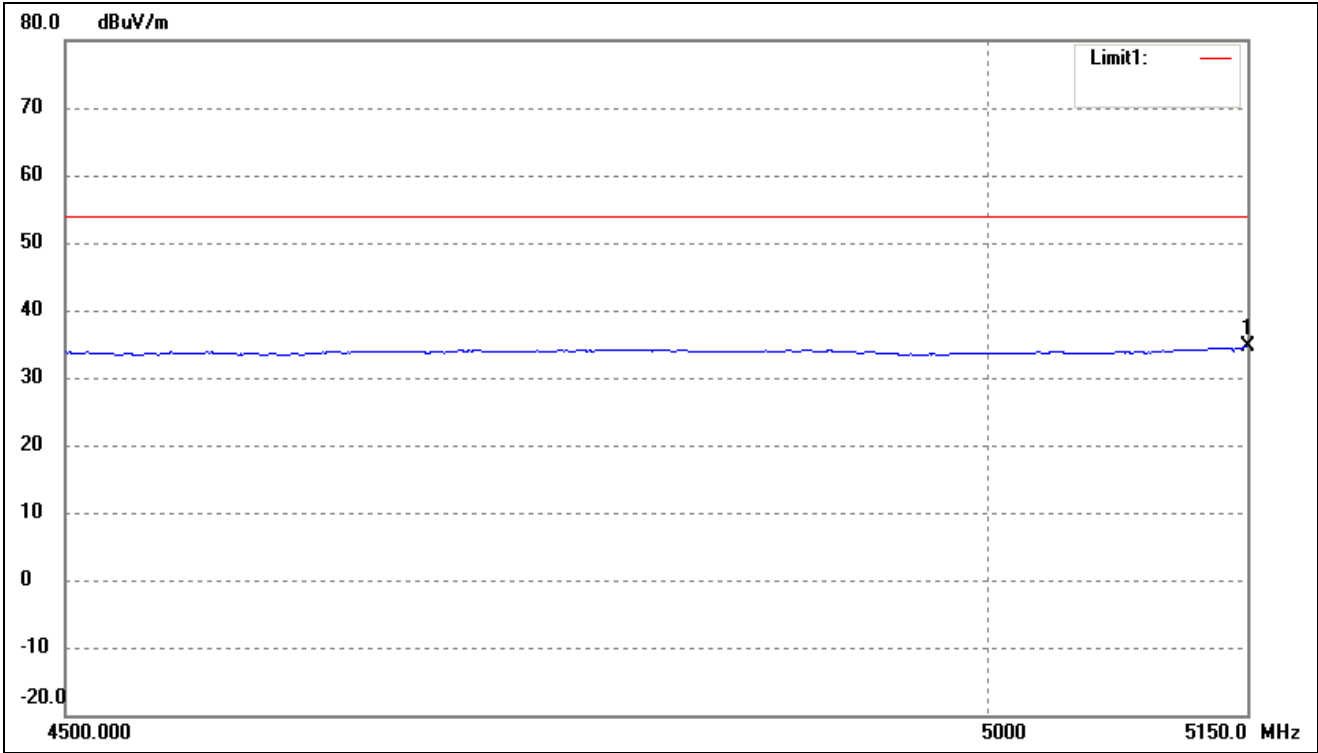


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	38.95	-4.32	34.63	54.00	-19.37	-	-	AVG

802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

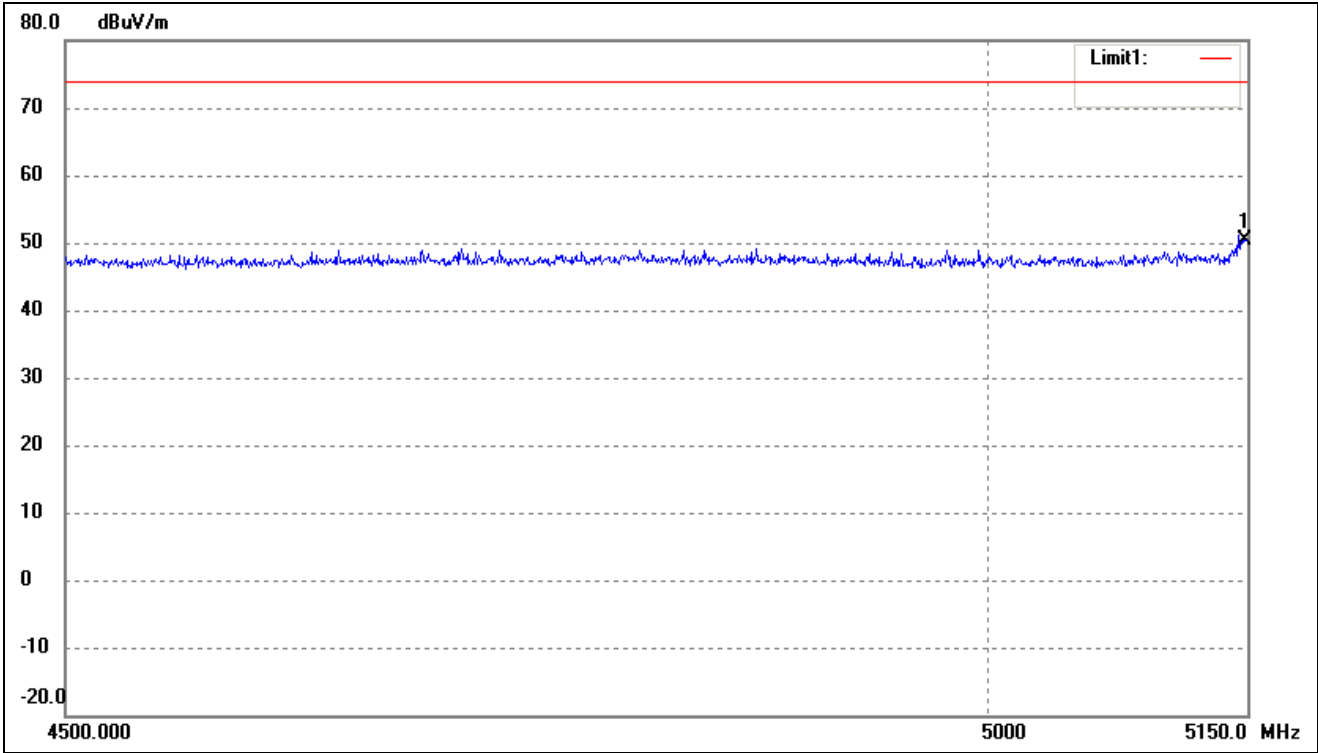


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5148.610	54.74	-4.32	50.42	74.00	-23.58	-	-	peak

802.11ac-HT80- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

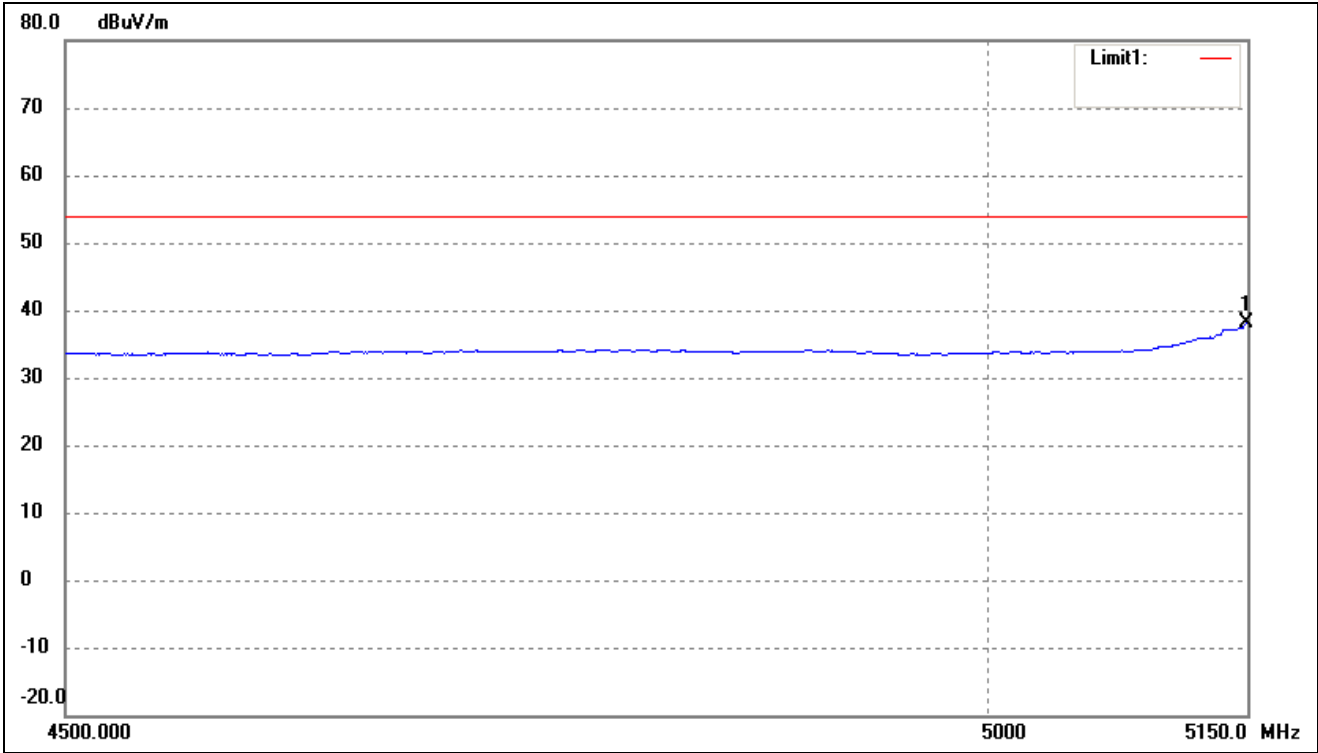

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5149.305	42.39	-4.32	38.07	54.00	-15.93	-	-	AVG

802.11ac-HT80- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

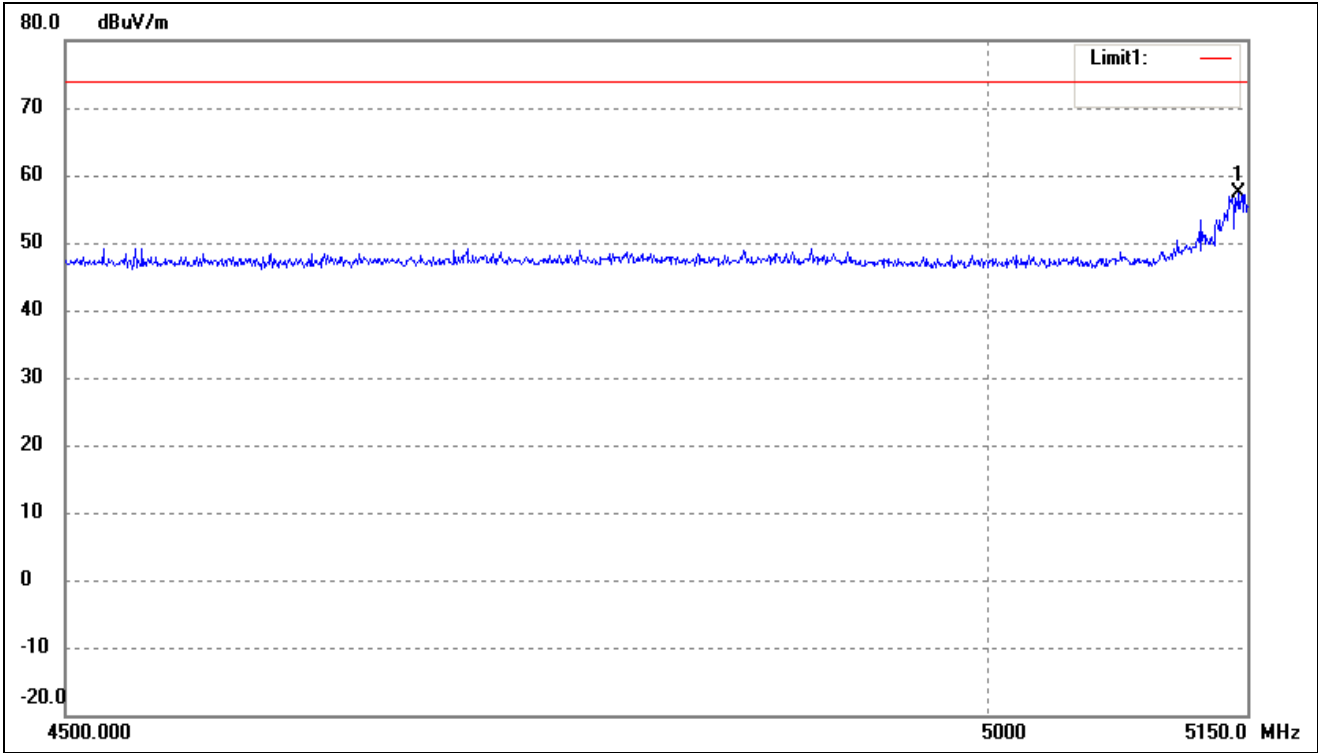

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5145.139	61.76	-4.32	57.44	74.00	-16.56	-	-	peak

Note: The Restricted Bandedge was tested in Horizontal /Vertical and the worst case position data was reported.

Remark: ‘ - ’Means’ the test Degree and Height is not recorded by the test software and only show the worst case in the test report.

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11a)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	54.26	7.11	61.37	74	-12.63	H	PK
10360	32.19	7.11	39.30	54	-14.70	H	AV
10360	51.28	7.11	58.39	74	-15.61	V	PK
10360	36.48	7.11	43.59	54	-10.41	V	AV
High Channel (5240MHz)							
10480	52.39	7.10	59.49	74	-14.51	H	PK
10480	35.42	7.10	42.52	54	-11.48	H	AV
10480	53.02	7.10	60.12	74	-13.88	V	PK
10480	34.46	7.10	41.56	54	-12.44	V	AV
Low Channel (5745MHz)							
11490	51.07	9.02	60.09	74	-13.91	H	PK
11490	35.75	9.02	44.77	54	-9.23	H	AV
11490	52.36	9.02	61.38	74	-12.62	V	PK
11490	34.49	9.02	43.51	54	-10.49	V	AV
High Channel (5825MHz)							
11610	52.28	8.94	61.22	74	-12.78	H	PK
11610	34.46	8.94	43.40	54	-10.60	H	AV
11610	50.36	8.94	59.30	74	-14.70	V	PK
11610	35.49	8.94	44.43	54	-9.57	V	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-39.45	-27
Highest	Above 5350	-35.32	-27
Note: the data just list the worst cases			

- Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-41.78	-27
	5715 to 5725	-29.23	-17
Highest	5850 to 5860	-27.45	-17
	Above 5860	-36.31	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11n HT20)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	52.16	7.11	59.27	74	-14.73	H	PK
10360	34.55	7.11	41.66	54	-12.34	H	AV
10360	53.97	7.11	61.08	74	-12.92	V	PK
10360	34.01	7.11	41.12	54	-12.88	V	AV
High Channel (5240MHz)							
10480	52.36	7.10	59.46	74	-14.54	H	PK
10480	32.48	7.10	39.58	54	-14.42	H	AV
10480	51.43	7.10	58.53	74	-15.47	V	PK
10480	33.46	7.10	40.56	54	-13.44	V	AV
Low Channel (5745MHz)							
11490	52.01	9.02	61.03	74	-12.97	H	PK
11490	34.36	9.02	43.38	54	-10.62	H	AV
11490	53.79	9.02	62.81	74	-11.19	V	PK
11490	36.14	9.02	45.16	54	-8.84	V	AV
High Channel (5825MHz)							
11610	53.84	8.94	62.78	74	-11.22	H	PK
11610	28.68	8.94	37.62	54	-16.38	H	AV
11610	52.13	8.94	61.07	74	-12.93	V	PK
11610	26.48	8.94	35.42	54	-18.58	V	AV

- Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-39.45	-27
Highest	Above 5350	-34.02	-27

Note: the data just list the worst cases

- Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-36.35	-27
	5715 to 5725	-29.45	-17
Highest	5850 to 5860	-34.12	-17
	Above 5860	-37.25	-27

Note: the data just list the worst cases

Note: this EUT was tested in the low, high channel and the worst case position data was reported.

Waltek Testing Group (Shenzhen) Co., Ltd.

<http://www.semtest.com.cn>

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11n HT40)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5190MHz)							
10380	51.48	7.11	58.59	74	-15.41	H	PK
10380	34.21	7.11	41.32	54	-12.68	H	AV
10380	52.07	7.11	59.18	74	-14.82	V	PK
10380	35.69	7.11	42.8	54	-11.2	V	AV
High Channel (5230MHz)							
10460	52.87	7.1	59.97	74	-14.03	H	PK
10460	36.42	7.1	43.52	54	-10.48	H	AV
10460	53.79	7.1	60.89	74	-13.11	V	PK
10460	34.15	7.1	41.25	54	-12.75	V	AV
Low Channel (5755MHz)							
11510	52.98	9.04	62.02	74	-11.98	H	PK
11510	30.42	9.04	39.46	54	-14.54	H	AV
11510	51.12	9.04	60.16	74	-13.84	V	PK
11510	31.54	9.04	40.58	54	-13.42	V	AV
High Channel (5795MHz)							
11590	53.31	8.96	62.27	74	-11.73	H	PK
11590	26.79	8.96	35.75	54	-18.25	H	AV
11590	52.13	8.96	61.09	74	-12.91	V	PK
11590	27.06	8.96	36.02	54	-17.98	V	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-36.68	-27
Highest	Above 5350	-40.32	-27
Note: the data just list the worst cases			

- Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-36.25	-27
	5715 to 5725	-29.47	-17
Highest	5850 to 5860	-34.32	-17
	Above 5860	-37.64	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ac VH80)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5210MHz							
10420	49.45	7.11	56.56	74	-17.44	H	PK
10420	32.28	7.11	39.39	54	-14.61	H	AV
10420	47.16	7.11	54.27	74	-19.73	V	PK
10420	31.78	7.11	38.89	54	-15.11	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5775MHz							
11550	50.98	9.00	59.98	74	-14.02	H	PK
11550	32.45	9.00	41.45	54	-12.55	H	AV
11550	51.17	9.00	60.17	74	-13.83	V	PK
11550	33.69	9.00	42.69	54	-11.31	V	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-38.74	-27
Highest	Above 5350	-37.31	-27
Note: the data just list the worst cases			

- Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-41.02	-27
	5715 to 5725	-32.45	-17
Highest	5850 to 5860	-30.14	-17
	Above 5860	-40.46	-27
Note: the data just list the worst cases			

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Frequency Stability

9.1 Standard Applicable

According to §15.407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

9.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

9.3 Summary of Test Results/Plots

Please refer to Appendix D

10. Conducted Emissions


10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

10.2 Basic Test Setup Block Diagram

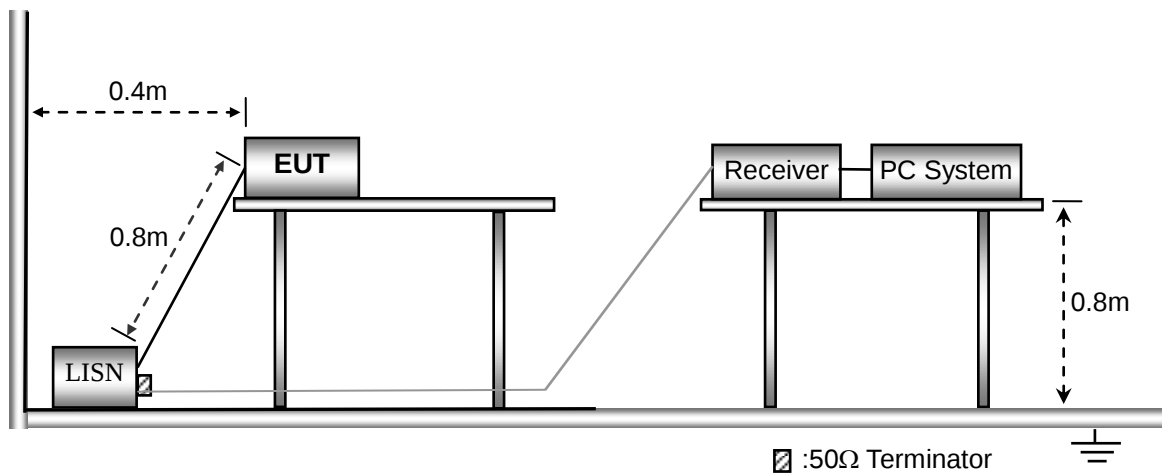


10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150 kHz
Stop Frequency	30 MHz
Sweep Speed	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth	9 kHz
Quasi-Peak Adapter Mode	Normal


10.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

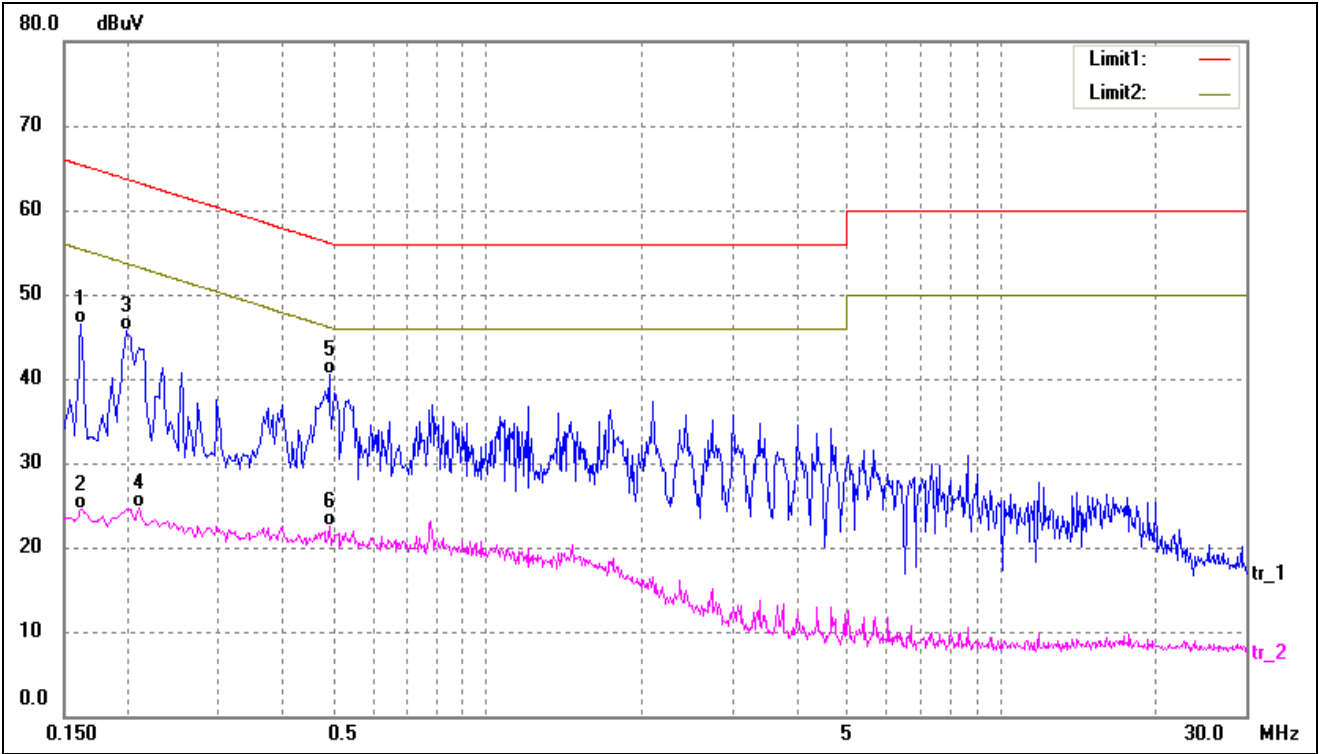

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1620	36.23	10.26	46.49	65.36	-18.87	QP
2	0.1620	14.31	10.26	24.57	55.36	-30.79	AVG
3	0.1980	35.43	10.27	45.70	63.69	-17.99	QP
4	0.2099	14.36	10.27	24.63	53.21	-28.58	AVG
5	0.4939	30.27	10.22	40.49	56.10	-15.61	QP
6	0.4939	12.23	10.22	22.45	46.10	-23.65	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

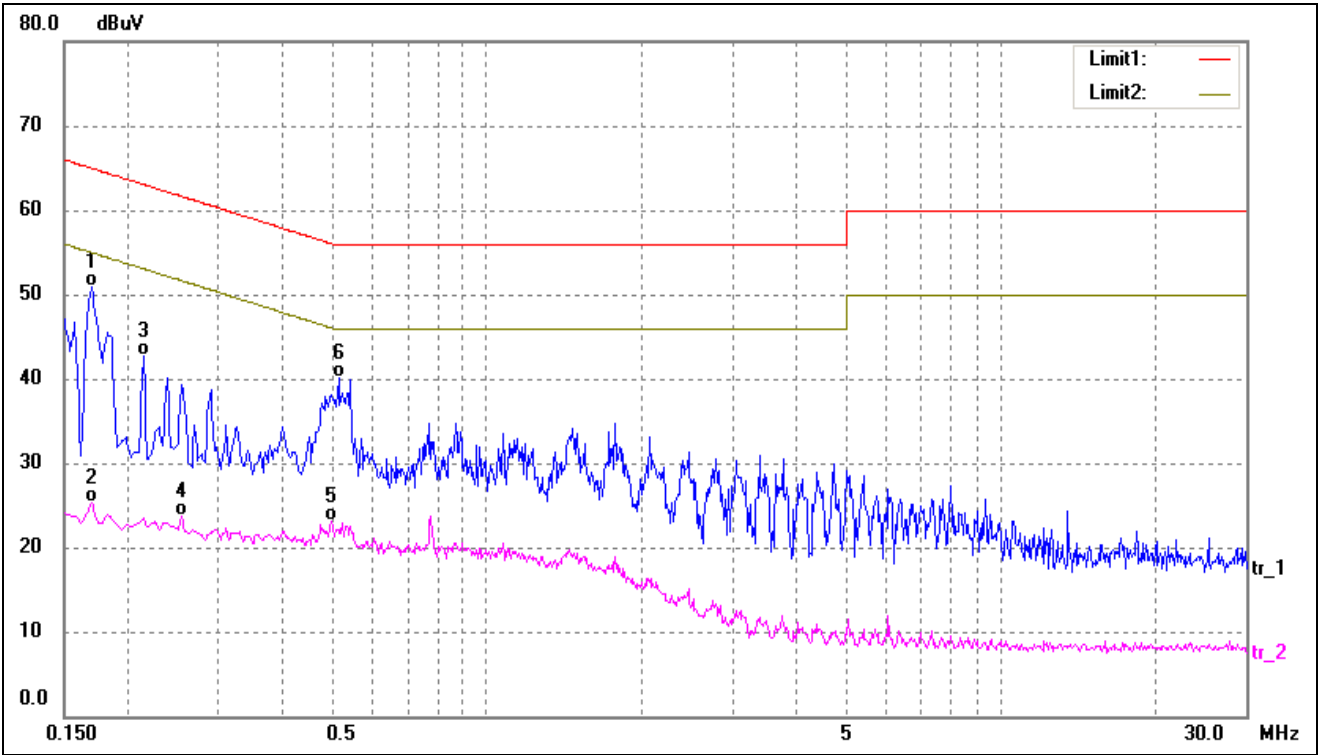

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB/m)	(dBuV)	(dBuV)	(dB)	
1	0.1700	40.61	10.25	50.86	64.96	-14.10	QP
2	0.1700	15.01	10.25	25.26	54.96	-29.70	AVG
3	0.2140	32.52	10.26	42.78	63.04	-20.26	QP
4	0.2540	13.44	10.26	23.70	51.62	-27.92	AVG
5	0.4980	12.84	10.22	23.06	46.03	-22.97	AVG
6	0.5140	29.87	10.22	40.09	56.00	-15.91	QP

APPENDIX SUMMARY

Project No.	WTX21X01000159W	Test Engineer	Shaw
Start date	2021/1/15	Finish date	2021/1/15
Temperature	24℃	Humidity	54%
RF specifications	U-NII		




APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	Emission Bandwidth and Occupied Bandwidth	Compliant
C	Maximum Conducted Output Power	Compliant
D	Frequency Stability	Compliant

APPENDIX A

Power Spectral Density			
U-NII-1:5150-5250MHz			
Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5180	5.112	11
	5200	5.306	11
	5240	5.465	11
802.11n-HT20	5180	5.011	11
	5200	4.901	11
	5240	4.671	11
802.11n-HT40	5190	1.639	11
	5230	2.228	11
802.11ac-HT80	5210	-1.348	11

U-NII-3: 5725-5850MHz					
Operating mode	Test Channel	Power Spectral Density dBm/300kHz	Factor	Power Spectral Density* dBm/500kHz	Limit dBm/500kHz
802.11a	5745	0.906	2.22	3.126	30
	5785	0.951	2.22	3.171	30
	5825	1.056	2.22	3.276	30
802.11n-HT20	5745	1.099	2.22	3.319	30
	5785	0.710	2.22	2.930	30
	5825	0.253	2.22	2.473	30
802.11n HT40	5755	-3.280	2.22	-1.060	30
	5795	-2.726	2.22	-0.506	30
802.11ac VH80	5775	-5.828	2.22	-3.608	30
*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22					

5150-5250MHz

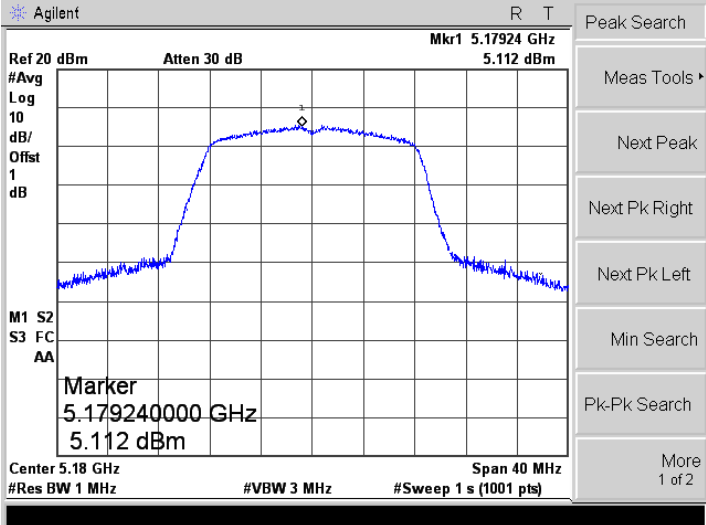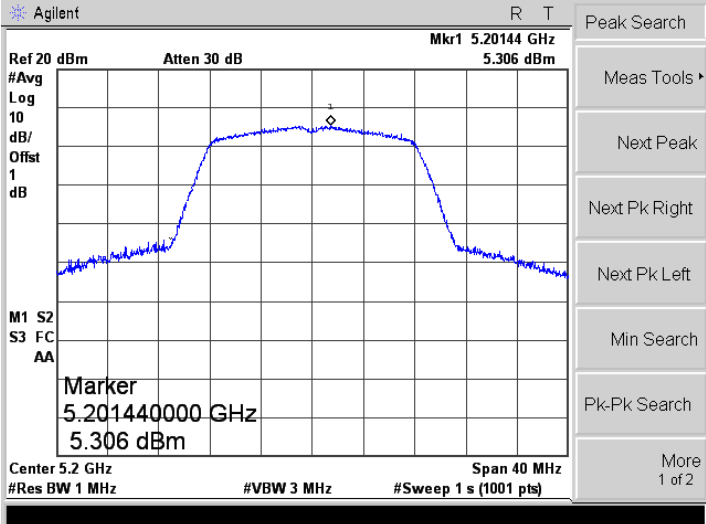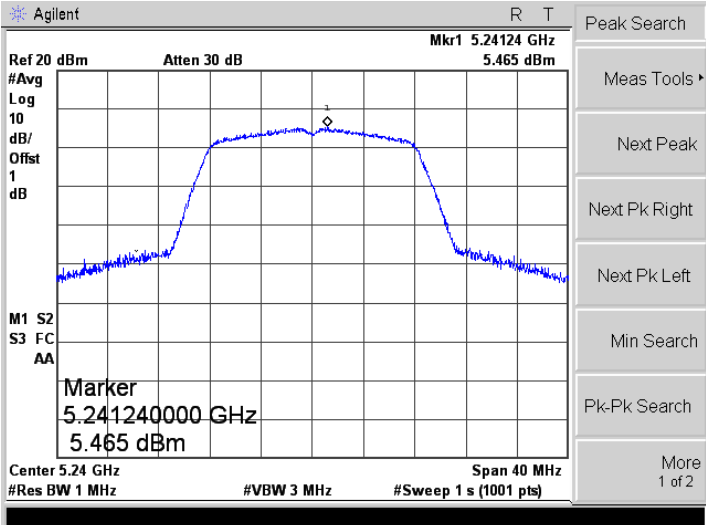802.11a-Low	
802.11a-Middle	
802.11a-High	

802.11n-HT20-Low	Agilent Ref 20 dBm Atten 30 dB Mkr1 5.18108 GHz 5.011 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Center 5.18 GHz #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts) Span 40 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11n-HT20-Middle	Agilent Ref 20 dBm Atten 30 dB Mkr1 5.20112 GHz 4.901 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 5.201120000 GHz 4.901 dBm Center 5.2 GHz #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts) Span 40 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11n-HT20-High	Agilent Ref 20 dBm Atten 30 dB Mkr1 5.23920 GHz 4.671 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 5.239200000 GHz 4.671 dBm Center 5.24 GHz #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts) Span 40 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

802.11n-HT40-Low	Agilent Ref 20 dBm Atten 30 dB Mkr1 5.19264 GHz 1.639 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 5.192640000 GHz 1.639 dBm Center 5.19 GHz #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts) Span 80 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11n-HT40-High	Agilent Ref 20 dBm Atten 30 dB Mkr1 5.22640 GHz 2.228 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 5.226400000 GHz 2.228 dBm Center 5.23 GHz #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts) Span 80 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11ac-HT80-Low	Agilent Ref 20 dBm Atten 30 dB Mkr1 5.20712 GHz -1.348 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 5.207120000 GHz -1.348 dBm Center 5.21 GHz #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts) Span 160 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

5725-5850MHz

802.11a-Low	Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.74628 GHz 0.906 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 5.746280000 GHz 0.906 dBm Center 5.745 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts) Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11a-Middle	Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.78560 GHz 0.951 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 5.785600000 GHz 0.951 dBm Center 5.785 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts) Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11a-High	Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.82396 GHz 1.056 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 5.823960000 GHz 1.056 dBm Center 5.825 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts) Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

802.11n-HT20-Low	Agilent Ref 20 dBm Atten 30 dB Mkr1 5.74596 GHz 1.099 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 5.745960000 GHz 1.099 dBm Center 5.745 GHz #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts) Span 40 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11n-HT20-Middle	Agilent Ref 20 dBm Atten 30 dB Mkr1 5.78420 GHz 0.71 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 5.784200000 GHz 0.71 dBm Center 5.785 GHz #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts) Span 40 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11n-HT20-High	Agilent Ref 20 dBm Atten 30 dB Mkr1 5.82580 GHz 0.253 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 5.825800000 GHz 0.253 dBm Center 5.825 GHz #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts) Span 40 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

802.11n-HT40-Low	Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.75316 GHz -3.28 dBm #Avg Log 10 dB/ Offset 1 dB W1 S2 S3 FC AA Marker 5.753160000 GHz -3.28 dBm Center 5.755 GHz Span 80 MHz #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts) Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11n-HT40-High	Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.79404 GHz -2.726 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 5.794040000 GHz -2.726 dBm Center 5.795 GHz Span 80 MHz #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts) Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11ac-HT80-Low	Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.77660 GHz -5.828 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 5.776600000 GHz -5.828 dBm Center 5.775 GHz Span 160 MHz #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts) Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2




APPENDIX B

Emission Bandwidth and Occupied Bandwidth

U-NII-1:5150-5250MHz				
Test Mode	Test Channel MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5180	23.337	16.7822	Pass
	5200	28.006	16.8537	Pass
	5240	25.058	16.8043	Pass
802.11n-HT20	5180	26.088	17.7963	Pass
	5200	26.031	17.8102	Pass
	5240	23.491	17.8047	Pass
802.11n-HT40	5190	48.406	36.0073	Pass
	5230	40.261	35.9728	Pass
802.11ac-HT80	5210	106.805	75.4905	Pass

U-NII-3: 5725-5850MHz				
Test Mode	Test Channel MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5745	16.324	16.7159	≥500
	5785	16.358	16.7459	≥500
	5825	16.339	16.6879	≥500
802.11n-HT20	5745	17.318	17.7260	≥500
	5785	17.568	17.7306	≥500
	5825	17.577	17.7740	≥500
802.11n-HT40	5755	35.968	35.9336	≥500
	5795	36.331	35.9578	≥500
802.11ac VH80	5775	76.048	75.2881	≥500

5150-5250MHz

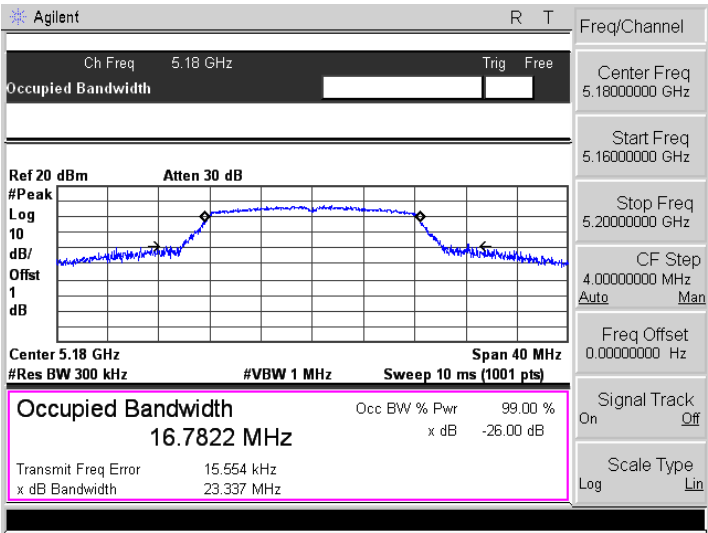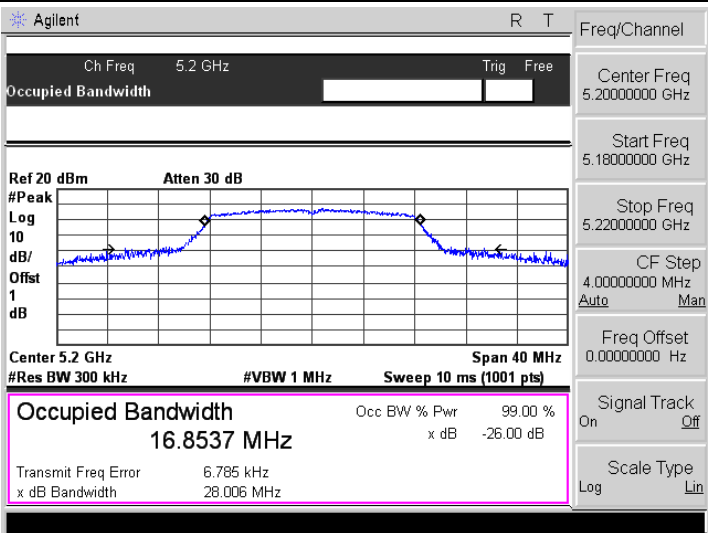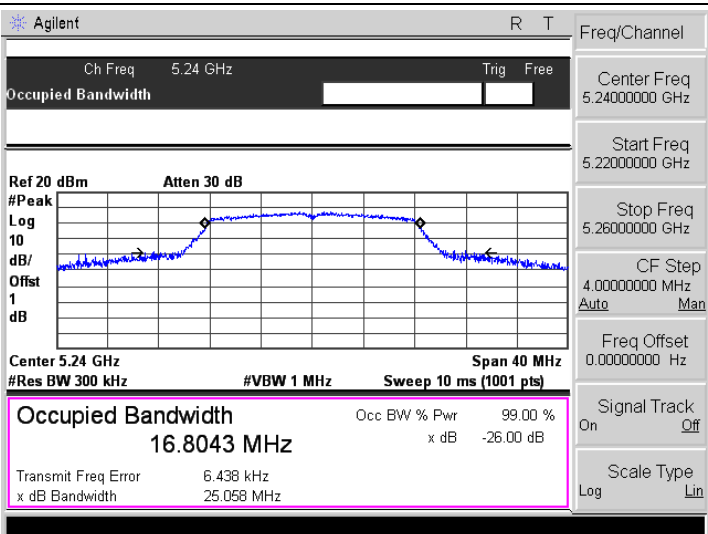802.11a-Low	
802.11a-Middle	
802.11a-High	

802.11n-HT20-Low	Agilent Ch Freq 5.18 GHz Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 5.18 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 40 MHz Occupied Bandwidth 17.7963 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -1.515 kHz x dB Bandwidth 26.088 MHz Freq/Channel Center Freq 5.18000000 GHz Start Freq 5.16000000 GHz Stop Freq 5.20000000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
802.11n-HT20-Middle	Agilent Ch Freq 5.2 GHz Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 5.2 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 40 MHz Occupied Bandwidth 17.8102 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 1.235 kHz x dB Bandwidth 26.031 MHz Freq/Channel Center Freq 5.20000000 GHz Start Freq 5.18000000 GHz Stop Freq 5.22000000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
802.11n-HT20-High	Agilent Ch Freq 5.24 GHz Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 5.24 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 40 MHz Occupied Bandwidth 17.8047 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 10.048 kHz x dB Bandwidth 23.491 MHz Freq/Channel Center Freq 5.24000000 GHz Start Freq 5.22000000 GHz Stop Freq 5.26000000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin

802.11n-HT40-Low	Agilent R T Ch Freq 5.19 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 5.19 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 80 MHz Occupied Bandwidth 36.0073 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -10.960 kHz x dB Bandwidth 48.406 MHz Freq/Channel Center Freq 5.19000000 GHz Start Freq 5.15000000 GHz Stop Freq 5.23000000 GHz CF Step 8.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
802.11n-HT40-High	Agilent R T Ch Freq 5.23 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 5.23 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 80 MHz Occupied Bandwidth 35.9728 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -12.955 kHz x dB Bandwidth 40.261 MHz Freq/Channel Center Freq 5.23000000 GHz Start Freq 5.19000000 GHz Stop Freq 5.27000000 GHz CF Step 8.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
802.11ac-HT80-Low	Agilent R T Ch Freq 5.21 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 5.21 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts) Span 160 MHz Occupied Bandwidth 75.4905 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -52.775 kHz x dB Bandwidth 106.805 MHz Freq/Channel Center Freq 5.21000000 GHz Start Freq 5.13000000 GHz Stop Freq 5.29000000 GHz CF Step 16.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin

5725-5850MHz
6 dB Bandwidth

802.11a-Low	Agilent Ch Freq 5.745 GHz Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 5.745 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 16.3548 MHz Transmit Freq Error 6.657 kHz x dB Bandwidth 16.324 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Freq/Channel Center Freq 5.74500000 GHz Start Freq 5.72500000 GHz Stop Freq 5.76500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
802.11a-Middle	Agilent Ch Freq 5.785 GHz Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 5.785 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 16.3637 MHz Transmit Freq Error 4.636 kHz x dB Bandwidth 16.358 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Freq/Channel Center Freq 5.78500000 GHz Start Freq 5.76500000 GHz Stop Freq 5.80500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
802.11a-High	Agilent Ch Freq 5.825 GHz Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 5.825 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 16.3585 MHz Transmit Freq Error 8.212 kHz x dB Bandwidth 16.339 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Freq/Channel Center Freq 5.82500000 GHz Start Freq 5.80500000 GHz Stop Freq 5.84500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin




802.11n-HT20-Low	Agilent R T Ch Freq 5.745 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 5.745 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 40 MHz Occupied Bandwidth 17.5424 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 5.962 kHz x dB Bandwidth 17.318 MHz Freq/Channel Center Freq 5.7450000 GHz Start Freq 5.7250000 GHz Stop Freq 5.7650000 GHz CF Step 4.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Scale Type Log Lin
802.11n-HT20-Middle	Agilent R T Ch Freq 5.785 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 5.785 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 40 MHz Occupied Bandwidth 17.5248 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 1.259 kHz x dB Bandwidth 17.568 MHz Freq/Channel Center Freq 5.7850000 GHz Start Freq 5.7650000 GHz Stop Freq 5.8050000 GHz CF Step 4.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Scale Type Log Lin
802.11n-HT20-High	Agilent R T Ch Freq 5.825 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 5.825 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 40 MHz Occupied Bandwidth 17.5430 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 9.751 kHz x dB Bandwidth 17.577 MHz Freq/Channel Center Freq 5.8250000 GHz Start Freq 5.8050000 GHz Stop Freq 5.8450000 GHz CF Step 4.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Scale Type Log Lin

802.11n-HT40-Low	Agilent R T Ch Freq 5.755 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 5.755 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 80 MHz Occupied Bandwidth 35.8640 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -17.175 kHz x dB Bandwidth 35.968 MHz Freq/Channel Center Freq 5.7550000 GHz Start Freq 5.7150000 GHz Stop Freq 5.7950000 GHz CF Step 8.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Scale Type Log Lin
802.11n-HT40-High	Agilent R T Ch Freq 5.795 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 5.795 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 80 MHz Occupied Bandwidth 35.9145 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -14.556 kHz x dB Bandwidth 36.331 MHz Freq/Channel Center Freq 5.7950000 GHz Start Freq 5.7550000 GHz Stop Freq 5.8350000 GHz CF Step 8.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Scale Type Log Lin
802.11ac-HT80-Low	Agilent R T Ch Freq 5.775 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 5.775 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 16.58 ms (1001 pts) Span 160 MHz Occupied Bandwidth 75.3586 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -57.336 kHz x dB Bandwidth 76.048 MHz Freq/Channel Center Freq 5.7750000 GHz Start Freq 5.6950000 GHz Stop Freq 5.8550000 GHz CF Step 16.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Scale Type Log Lin

99% Bandwidth

802.11a-Low	Agilent Ch Freq 5.745 GHz Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.745 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 16.7159 MHz Transmit Freq Error -14.157 kHz x dB Bandwidth 20.742 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Freq/Channel Center Freq 5.7450000 GHz Start Freq 5.7250000 GHz Stop Freq 5.7650000 GHz CF Step 4.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Scale Type Log Lin
802.11a-Middle	Agilent Ch Freq 5.785 GHz Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.785 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 16.7459 MHz Transmit Freq Error 10.207 kHz x dB Bandwidth 21.432 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Freq/Channel Center Freq 5.7850000 GHz Start Freq 5.7650000 GHz Stop Freq 5.8050000 GHz CF Step 4.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Scale Type Log Lin
802.11a-High	Agilent Ch Freq 5.825 GHz Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.825 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 16.6879 MHz Transmit Freq Error 23.637 kHz x dB Bandwidth 20.924 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Freq/Channel Center Freq 5.8250000 GHz Start Freq 5.8050000 GHz Stop Freq 5.8450000 GHz CF Step 4.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Scale Type Log Lin

802.11n-HT20-Low	Agilent Ch Freq5.745 GHz TrigFree Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 5.745 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 40 MHz Occupied Bandwidth 17.7260 MHz Occ BW % Pwr99.00 % x dB-26.00 dB Transmit Freq Error10.269 kHz x dB Bandwidth20.577 MHz Freq/Channel Center Freq5.7450000 GHz Start Freq5.7250000 GHz Stop Freq5.7650000 GHz CF Step4.0000000 MHz AutoMan Freq Offset0.0000000 Hz Signal TrackOnOff Scale TypeLogLin
802.11n-HT20-Middle	Agilent Ch Freq5.785 GHz TrigFree Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 5.785 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 40 MHz Occupied Bandwidth 17.7306 MHz Occ BW % Pwr99.00 % x dB-26.00 dB Transmit Freq Error9.700 kHz x dB Bandwidth21.110 MHz Freq/Channel Center Freq5.7850000 GHz Start Freq5.7650000 GHz Stop Freq5.8050000 GHz CF Step4.0000000 MHz AutoMan Freq Offset0.0000000 Hz Signal TrackOnOff Scale TypeLogLin
802.11n-HT20-High	Agilent Ch Freq5.825 GHz TrigFree Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 5.825 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 40 MHz Occupied Bandwidth 17.7740 MHz Occ BW % Pwr99.00 % x dB-26.00 dB Transmit Freq Error-2.779 kHz x dB Bandwidth21.778 MHz Freq/Channel Center Freq5.8250000 GHz Start Freq5.8050000 GHz Stop Freq5.8450000 GHz CF Step4.0000000 MHz AutoMan Freq Offset0.0000000 Hz Signal TrackOnOff Scale TypeLogLin

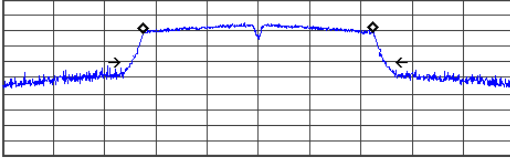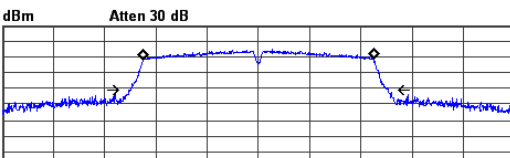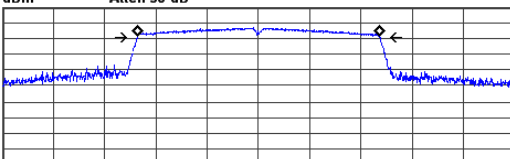802.11n-HT40-Low	Agilent Ch Freq 5.755 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB  Center 5.755 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 80 MHz Occupied Bandwidth 35.9336 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -10.844 kHz x dB Bandwidth 39.594 MHz Freq/Channel Center Freq 5.7550000 GHz Start Freq 5.7150000 GHz Stop Freq 5.7950000 GHz CF Step 8.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Scale Type Log Lin
802.11n-HT40-High	Agilent Ch Freq 5.795 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB  Center 5.795 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 80 MHz Occupied Bandwidth 35.9578 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 5.790 kHz x dB Bandwidth 40.296 MHz Freq/Channel Center Freq 5.7950000 GHz Start Freq 5.7550000 GHz Stop Freq 5.8350000 GHz CF Step 8.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Scale Type Log Lin
802.11ac-HT80-Low	Agilent Ch Freq 5.775 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB  Center 5.775 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts) Span 160 MHz Occupied Bandwidth 75.2881 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -25.685 kHz x dB Bandwidth 75.595 MHz Freq/Channel Center Freq 5.7750000 GHz Start Freq 5.6950000 GHz Stop Freq 5.8650000 GHz CF Step 16.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Scale Type Log Lin

APPENDIX C

Maximum Conducted Output Power

U-NII-1:5150-5250MHz			
Test mode	Frequency MHz	Output Power dBm	Limit dBm
802.11a	5180	14.11	23.98
	5200	14.11	23.98
	5240	14.39	23.98
802.11n-HT20	5180	14.31	23.98
	5200	14.09	23.98
	5240	13.90	23.98
802.11n-HT40	5190	13.82	23.98
	5230	13.59	23.98
802.11ac VH80	5210	13.71	23.98

U-NII-3: 5725-5850MHz			
Test mode	Frequency MHz	Output Power dBm	Limit dBm
802.11a	5745	14.74	30.00
	5785	14.51	30.00
	5825	14.30	30.00
802.11n-HT20	5745	14.17	30.00
	5785	14.14	30.00
	5825	13.91	30.00
802.11n-HT40	5755	14.30	30.00
	5795	14.18	30.00
802.11ac VH80	5775	14.10	30.00

5150-5250MHz

802.11a-Low	Agilent Ch Freq 5.18 GHz Channel Power Trig Free Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 5.18 GHz #Res BW 1 MHz #VBW 3 MHz Span 40 MHz Sweep 20 ms (1001 pts) Channel Power Power Spectral Density 14.11 dBm / 20.0000 MHz -58.90 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11a-Middle	Agilent Ch Freq 5.2 GHz Channel Power Trig Free Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 5.2 GHz #Res BW 1 MHz #VBW 3 MHz Span 40 MHz Sweep 20 ms (1001 pts) Channel Power Power Spectral Density 14.11 dBm / 20.0000 MHz -58.90 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11a-High	Agilent Ch Freq 5.24 GHz Channel Power Trig Free Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 5.24 GHz #Res BW 1 MHz #VBW 3 MHz Span 40 MHz Sweep 20 ms (1001 pts) Channel Power Power Spectral Density 14.39 dBm / 20.0000 MHz -58.63 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

The figure displays three screenshots of an Agilent spectrum analyzer interface, showing the Channel Power and Power Spectral Density (PSD) for three different 802.11n-HT20 channels: Low, Middle, and High. Each screenshot includes a frequency plot with a blue trace, a table of measurement data, and a list of controls on the right.

Channel	Center Freq	Channel Power (dBm / 20.0000 MHz)	Power Spectral Density (dBm/Hz)
802.11n-HT20-Low	5.18 GHz	14.31 dBm / 20.0000 MHz	-58.70 dBm/Hz
802.11n-HT20-Middle	5.2 GHz	14.09 dBm / 20.0000 MHz	-58.93 dBm/Hz
802.11n-HT20-High	5.24 GHz	13.90 dBm / 20.0000 MHz	-58.94 dBm/Hz

Common settings across all screenshots:

- Ref 20 dBm
- Atten 30 dB
- #Avg 10
- Log
- dB/
- Offset 1
- dB
- Center 5.18 GHz (Low), 5.2 GHz (Middle), 5.24 GHz (High)
- #Res BW 1 MHz
- #VBW 3 MHz
- Sweep 20 ms (1001 pts)
- Span 40 MHz

Controls on the right side of each screenshot include: Trace/View, Trace 1 2 3, Clear Write, Max Hold, Min Hold, View, Blank, and More 1 of 2.

802.11n-HT40-Low	Agilent R T Ch Freq 5.19 GHz Trig Free Channel Power Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 5.19 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts) Span 80 MHz Channel Power Power Spectral Density 13.82 dBm / 40.0000 MHz -62.20 dBm/Hz Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT40-High	Agilent R T Ch Freq 5.23 GHz Trig Free Channel Power Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 5.23 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts) Span 80 MHz Channel Power Power Spectral Density 13.59 dBm / 40.0000 MHz -62.43 dBm/Hz Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11ac-HT80-Low	Agilent R T Ch Freq 5.21 GHz Trig Free Channel Power Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 5.21 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts) Span 160 MHz Channel Power Power Spectral Density 13.71 dBm / 80.0000 MHz -65.32 dBm/Hz Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

5725-5850MHz

802.11a-Low	Agilent Ch Freq 5.745 GHz Channel Power Trig Free Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 5.745 GHz #Res BW 1 MHz #VBW 3 MHz Span 40 MHz Sweep 20 ms (1001 pts) Channel Power 14.74 dBm / 20.0000 MHz Power Spectral Density -58.27 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11a-Middle	Agilent Ch Freq 5.785 GHz Channel Power Trig Free Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 5.785 GHz #Res BW 1 MHz #VBW 3 MHz Span 40 MHz Sweep 20 ms (1001 pts) Channel Power 14.51 dBm / 20.0000 MHz Power Spectral Density -58.50 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11a-High	Agilent Ch Freq 5.825 GHz Channel Power Trig Free Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 5.825 GHz #Res BW 1 MHz #VBW 3 MHz Span 40 MHz Sweep 20 ms (1001 pts) Channel Power 14.30 dBm / 20.0000 MHz Power Spectral Density -58.71 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

802.11n-HT20-Low	Agilent Ch Freq 5.745 GHz Channel Power Trig Free Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 5.745 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts) Span 40 MHz Channel Power Power Spectral Density 14.17 dBm / 20.0000 MHz -58.84 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT20-Middle	Agilent Ch Freq 5.785 GHz Channel Power Trig Free Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 5.785 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts) Span 40 MHz Channel Power Power Spectral Density 14.14 dBm / 20.0000 MHz -58.87 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT20-High	Agilent Ch Freq 5.825 GHz Channel Power Trig Free Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 5.825 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts) Span 40 MHz Channel Power Power Spectral Density 13.91 dBm / 20.0000 MHz -59.10 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

802.11n-HT40-Low	Agilent R T Ch Freq 5.755 GHz Trig Free Channel Power Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 5.755 GHz Span 80 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts) Channel Power Power Spectral Density 14.30 dBm / 40.0000 MHz -61.72 dBm/Hz Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT40-High	Agilent R T Ch Freq 5.795 GHz Trig Free Channel Power Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 5.795 GHz Span 80 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts) Channel Power Power Spectral Density 14.18 dBm / 40.0000 MHz -61.85 dBm/Hz Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11ac-HT80-Low	Agilent R T Ch Freq 5.775 GHz Trig Free Channel Power Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 5.775 GHz Span 160 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts) Channel Power Power Spectral Density 14.10 dBm / 80.0000 MHz -64.93 dBm/Hz Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

APPENDIX D

Frequency Stability

U-NII-1:5150-5250MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	3.8	-30	138	0.0265
100%		-20	136	0.0262
100%		-10	157	0.0302
100%		0	118	0.0227
100%		+10	131	0.0252
100%		+20	116	0.0223
100%		+30	138	0.0265
100%		+40	120	0.0231
100%		+50	101	0.0194
Low Battery power	3.5	+20	111	0.0213
High Battery power	4.35	+20	172	0.0331

U-NII-1:5725-5850MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	3.8	-30	131	0.0226
100%		-20	162	0.0280
100%		-10	180	0.0311
100%		0	128	0.0221
100%		+10	130	0.0225
100%		+20	159	0.0275
100%		+30	109	0.0188
100%		+40	156	0.0270
100%		+50	162	0.0280
Low Battery power	3.5	+20	160	0.0277
High Battery power	4.35	+20	135	0.0233

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

******* END OF REPORT *******