

Test of Axxcelera Broadband Wireless AxxceLTE

To: FCC 47 CFR Part 27

Test Report Serial No.: AXXC20-U4 2x2 Rev A





Test of Axxcelera Broadband Wireless AxxcelLTE

to

To FCC 47 CFR Part 27

Test Report Serial No.: AXXC20-U4 2x2 Rev A

This report supersedes NONE

Applicant: Axxcelera Broadband Wireless  
82 Coromar Drive  
Santa Barbara, California 93117  
USA

Product Function: LTE eNodeB

Copy No: pdf Issue Date: 6th November 2015

**This Test Report is Issued Under the Authority of:**

**MiCOM Labs, Inc.**

575 Boulder Court,  
Pleasanton, CA 94566 USA  
Phone: +1 (925) 462-0304  
Fax: +1 (925) 462-0306  
[www.micomlabs.com](http://www.micomlabs.com)



TESTING CERT # 2381.01

**MiCOM Labs is an ISO 17025 Accredited Testing Laboratory**



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 3 of 126

---

This page has been left intentionally blank

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

MiCOM Labs, 575 Boulder Court, Pleasanton, CA 94566 USA, Phone: 925.462.0304, Fax: 925.462.0306, [www.micomlabs.com](http://www.micomlabs.com)



## TABLE OF CONTENTS

|   |            |
|---|------------|
| <b>ACCREDITATION, LISTINGS &amp; RECOGNITION.....</b>   | <b>5</b>   |
| <b>ACCREDITATION - TESTING .....</b>                    | <b>5</b>   |
| <b>RECOGNITION .....</b>                                | <b>6</b>   |
| <b>PRODUCT CERTIFICATION .....</b>                      | <b>7</b>   |
| <b>1. TEST RESULT SUMMARY .....</b>                     | <b>9</b>   |
| <b>2. REFERENCES AND MEASUREMENT UNCERTAINTY .....</b>  | <b>10</b>  |
| 2.1. Normative References .....                         | 10         |
| 2.2. Test and Uncertainty Procedures .....              | 11         |
| <b>3. PRODUCT DETAILS AND TEST CONFIGURATIONS .....</b> | <b>12</b>  |
| 3.1. Technical Details .....                            | 12         |
| 3.2. Scope of Test Program .....                        | 13         |
| 3.3. Equipment Model(s) and Serial Number(s) .....      | 17         |
| 3.4. Antenna Details .....                              | 17         |
| 3.5. Cabling and I/O Ports .....                        | 17         |
| 3.6. Test Configurations .....                          | 18         |
| 3.7. Equipment Modifications .....                      | 18         |
| 3.8. Deviations from the Test Standard .....            | 18         |
| <b>4. TESTING EQUIPMENT CONFIGURATION(S) .....</b>      | <b>19</b>  |
| 4.1. Conducted RF Emission Test Set-up .....            | 19         |
| 4.2. Radiated Spurious Emission Test Set-up .....       | 21         |
| <b>5. TEST SUMMARY .....</b>                            | <b>23</b>  |
| <b>6. TEST RESULTS .....</b>                            | <b>25</b>  |
| 6.1. Device Characteristics .....                       | 25         |
| 6.1.1. Conducted Testing .....                          | 25         |
| 6.1.2. Radiated Testing .....                           | 94         |
| <b>A. GRAPHICAL IMAGES .....</b>                        | <b>101</b> |
| A.1 Transmitter Unwanted Spurious (Conducted) .....     | 102        |

## **ACCREDITATION, LISTINGS & RECOGNITION**

### **ACCREDITATION - TESTING**

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## RECOGNITION

MiCOM Labs, Inc has widely recognized Electrical testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA\*\* countries. Our test reports are widely accepted for global type approvals.

| Country   | Recognition Body   | Status | Phase         | Identification No.                      |
|-----------|--|--------|---------------|---|
| USA       | Federal Communications Commission (FCC)  | TCB    | -             | US0159<br>Listing #: 102167             |
| Canada    | Industry Canada (IC)   | FCB    | APEC<br>MRA 2 | US0159<br>Listing #: 4143A-2<br>4143A-3 |
| Japan     | MIC (Ministry of Internal Affairs and Communication)   | CAB    | APEC<br>MRA 2 | RCB 210                                 |
|           | VCCI   | --     | --            | A-0012                                  |
| Europe    | European Commission  | NB     | EU<br>MRA     | NB 2280                                 |
| Australia | Australian Communications and Media Authority (ACMA)   | CAB    | APEC<br>MRA 1 | US0159                                  |
| Hong Kong | Office of the Telecommunication Authority (OFTA)   | CAB    | APEC<br>MRA 1 |   |
| Korea     | Ministry of Information and Communication Radio Research Laboratory (RRL)                        | CAB    | APEC<br>MRA 1 |   |
| Singapore | Infocomm Development Authority (IDA)   | CAB    | APEC<br>MRA 1 |   |
| Taiwan    | National Communications Commission (NCC)<br>Bureau of Standards, Metrology and Inspection (BSMI) | CAB    | APEC<br>MRA 1 |   |
| Vietnam   | Ministry of Communication (MIC)  | CAB    | APEC<br>MRA 1 |   |

\*\*APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

N/A – Not Applicable

\*\*EU MRA – European Union Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the EU member countries.

\*\*NB – Notified Body

## PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



American Association for Laboratory Accreditation

### *Accredited Product Certification Body*

A2LA has accredited

**MICOM LABS**


*Pleasanton, CA*

for technical competence as a

**Product Certification Body**

This product certification body is accredited in accordance with the recognized International Standard ISO/IEC 17065:2012 - *Requirements for bodies certifying products, processes and services*. This accreditation demonstrates technical competence for a defined scope and the operation of a quality management system.

Presented this 28<sup>th</sup> day of February 2014.



President & CEO  
For the Accreditation Council  
Certificate Number 2381.02  
Valid to November 30, 2015

*For the product certification schemes to which this accreditation applies, please refer to the organization's Product Certification Scope of Accreditation*

### **United States of America – Telecommunication Certification Body (TCB)**

TCB Identifier – US0159

### **Industry Canada – Certification Body**

CAB Identifier – US0159

### **Europe – Notified Body**

Notified Body Identifier - 2280

### **Japan – Recognized Certification Body (RCB)**

RCB Identifier - 210

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 8 of 126

---

## DOCUMENT HISTORY

| Document History |                               |                 |
|------------------|-------------------------------|-----------------|
| Revision         | Date                          | Comments        |
| Draft            | 4 <sup>th</sup> November 2015 |                 |
| Rev A            | 6 <sup>th</sup> November 2015 | Initial Release |
|                  |                               |                 |
|                  |                               |                 |
|                  |                               |                 |

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 9 of 126

## 1. TEST RESULT SUMMARY

|   |  |
|---|--|
| Applicant: Axxcelera Broadband Wireless<br>82 Coromar Drive<br>Santa Barbara, California 93117<br>USA | Tested by: MiCOM Labs, Inc.<br>575 Boulder Court<br>Pleasanton<br>California, 94566, USA |
| EUT: LTE eNodeB   | Tel: +1 925 462 0304   |
| Model: AEN-114100-01  | Fax: +1 925 462 0306   |
| S/N: SCE1539001   |  |
| Test Date(s): 7th to 9th October 2015   | Website: <a href="http://www.micomlabs.com">www.micomlabs.com</a>                        |

| STANDARD(S)                     | TEST RESULTS       |
|---------------------------------|--------------------|
| FCC 47 CFR Part 27 & IC RSS-199 | EQUIPMENT COMPLIES |

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.


### Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

**Approved & Released for MiCOM Labs, Inc. by:**



TESTING CERT # 2381.01

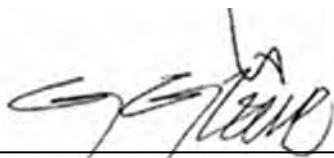  
\_\_\_\_\_  
Graeme Grieve  
Quality Manager MiCOM Labs,

  
\_\_\_\_\_  
Gordon Hurst  
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## **2. REFERENCES AND MEASUREMENT UNCERTAINTY**

### **2.1. Normative References**

| <b>Ref.</b>  | <b>Publication</b>    | <b>Year</b>            | <b>Title</b>   |
|--------------|-----------------------|------------------------|--|
| <b>(i)</b>   | FCC 47 CFR Part 27    | 2012                   | Code of Federal Regulations  |
| <b>(ii)</b>  | ANSI C63.4            | 2009                   | American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |
| <b>(iii)</b> | CISPR 22/<br>EN 55022 | 2008<br>2006+A1:2007   | Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment  |
| <b>(iv)</b>  | M 3003                | Edition 2<br>Jan. 2007 | Expression of Uncertainty and Confidence in Measurements   |
| <b>(v)</b>   | LAB34                 | Edition 1<br>Aug 2002  | The expression of uncertainty in EMC Testing   |
| <b>(vi)</b>  | ETSI TR 100 028       | 2001                   | Parts 1 and 2<br>Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics          |
| <b>(vii)</b> | A2LA                  | July 2012              | Reference to A2LA Accreditation Status – A2LA Advertising Policy   |



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 11 of 126

---

## **2.2. Test and Uncertainty Procedures**

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 12 of 126

### 3. PRODUCT DETAILS AND TEST CONFIGURATIONS

#### 3.1. Technical Details

| Details                          | Description  |
|----------------------------------|--|
| Purpose:                         | Test of the Axxcelera Broadband Wireless AxxceLTE in the frequency range 2500-2690 to FCC Part 27 regulations. |
| Applicant:                       | Axxcelera Broadband Wireless<br>82 Coromar Drive<br>Santa Barbara, California 93117 USA                        |
| Manufacturer:                    | As Applicant   |
| Laboratory performing the tests: | MiCOM Labs, Inc.<br>575 Boulder Court,<br>Pleasanton, 94566 California USA                                     |
| Test report reference number:    | AXXC20-U4 2x2 Rev A  |
| Date EUT received:               | 7 <sup>th</sup> October 2015   |
| Standard(s) applied:             | FCC 47 CFR Part 27   |
| Dates of test (from - to):       | 7th to 9th October 2015  |
| No of Units Tested:              | One  |
| Type of Equipment:               | LTE eNodeB   |
| Model(s):                        | 4x4: AEN-114141-01<br>2x2: AEN-114100-01   |
| Location for use:                | Outdoor only   |
| Declared Frequency Range(s):     | 2496 - 2690 MHz  |
| Hardware Rev                     | 4x4: 020-55026-1741-1<br>2x2: 020-55012-1741-1   |
| Software Rev                     | EN11-A00   |
| EUT Modes of Operation:          | 5, 10, 15, 20 MHz Channel Spacing  |
| Type of Modulation:              | QPSK, 16 QAM, 64 QAM   |
| Transmit/Receive Operation:      | Time Division Duplex   |
| System Beam Forming:             | Antenna beam forming is not implemented in this device   |
| Rated Input Voltage and Current: | Nominal (4x4): -48 Vdc, 6.0 A<br>Nominal (2x2): -48 Vdc, 5.0 A<br>Maximum -60 Vdc Minimum -40 Vdc              |
| Operating Temperature Range:     | Declared range -40 to +55°C  |
| ITU Emission Designator:         | 5 MHz: 4M5D1D<br>10 MHz: 9M0D1D<br>15 MHz: 13M5D1D<br>20 MHz: 18M0D1D  |
| Equipment Dimensions:            | 19 x 14 x 8.5 inches   |
| Weight:                          | 4x4: 50 lbs (22.75 kgs)<br>2x2: 47 lbs (21.50 kgs)   |
| Primary function of equipment:   | LTE eNodeB   |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 13 of 126

---

### **3.2. Scope of Test Program**

#### **Axxcelera Broadband Wireless AxxceLTE RF Testing**

The scope of the test program was to test the Axxcelera Broadband Wireless AxxceLTE, in the frequency range 2500 - 2690 MHz for compliance against FCC 47 CFR Part 27 specification.

FCC CFR 47 Part 27, 2496– 2690 MHz (LTE Band 41)  
Subpart M - Broadband Radio Service and Educational Broadband Service

#### **Axxcelera AxxceLTE**

The Axxcelera AxxceLTE is an LTE base station radio transmission and reception device.

AEN-114100-01 (2x2)

The AxxceLTE product is a complete LTE eNodeB, including both the digital network and RF radio interfaces. It operates in LTE Band 41, which is defined as a TDD band from 2496 - 2690MHz. The model AEN-114100-01 contains (2) transceiver ICs supporting a total of (2) transmit and (2) receive channels.

Each transmit path contains a PA capable of supporting a 5-watt output signal level at the antenna port.

- Single 2x2 sector at a single frequency channel in the band

#### **Manufacturer Declaration**

Results for the 2x2 are presented in this document however measurement results are from the 4x4 device. Except from the number of antenna ports the manufacturer declared that there are no further electrical differences between the models.

**Axxcelera Broadband Wireless AxxceLTE eNodeB**





### Axxcelera Broadband Wireless AxxceLTE eNodeB – Connectors



**Axxcelera Broadband Wireless AxxceLTE eNodeB – Label**







**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 17 of 126

---

### 3.3. Equipment Model(s) and Serial Number(s)

| Type (EUT/Support) | Equipment Description (Including Brand Name) | Mfr       | Model No.     | Serial No. |
|--------------------|--|-----------|---------------|------------|
| EUT                | LTE eNodeB                                   | Axxcelera | AEN-114100-01 | SCE1539001 |
| Support            | Laptop PC                                    | IBM       | Unknown       | None       |

### 3.4. Antenna Details

| Type     | Manufacturer   | Model Number    | Azimuth/Elevation | Antenna Gain (dBi) |
|----------|----------------|-----------------|-------------------|--------------------|
|          |                |                 |                   | 2496 - 2690 MHz    |
| External | Alpha Wireless | AW3286 (2 port) | 65° / 5.5°        | 17.7 (10 @ 0-tilt) |
| External | Alpha Wireless | AW3193 (4 port) | 65° / 5.5°        | 17.7 (18 @ 0-tilt) |

### 3.5. Cabling and I/O Ports

Number and type of I/O ports

| Port Type    | Max Cable Length | # Of Ports | Screened | Conn Type | Data Type |
|--------------|------------------|------------|----------|-----------|-----------|
| Sync I/O     | 10m              | 2          | Y        | TNC       | Digital   |
| GPS Antenna  | 3m               | 1          | Y        | SMA       | RF Port   |
| Ethernet SPF | --               | 2          | N/A      | SFP       | Optical   |
| Ethernet     | 100m             | 1          | Y        | RJ-45     | Packet    |
| CPRI SFP     | --               | 4          | N/A      | SFP       | Optical   |
| RF Antenna   | Unknown          | 4 (4x4)    | Y        | N-Type    | RF Port   |
| RF Antenna   | Unknown          | 2 (2x2)    | Y        | N-Type    | RF Port   |

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 3.6. Test Configurations

Testing was performed to determine the highest power level versus bit rate. The variant with the highest power was used to exercise the product.

Matrix of test configurations

| Operational Mode(s) | Variant       | Data Rates with Highest Power | Test Frequencies (MHz)     |
|---------------------|---------------|-------------------------------|----------------------------|
| 5 MHz Bandwidth     | QPSK + 64 QAM | Setting 5                     | 2498.5<br>2593.0<br>2685.7 |
| 10 MHz Bandwidth    |               | Setting 5                     |                            |
| 15 MHz Bandwidth    |               | Setting 5                     |                            |
| 20 MHz Bandwidth    |               | Setting 5                     |                            |

### 3.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

### 3.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:


1. NONE

## **4. TESTING EQUIPMENT CONFIGURATION(S)**

### **4.1. Conducted RF Emission Test Set-up**

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Section 6.1.1.2 Occupied Bandwidth
2. Section 6.1.1.4. Maximum Conducted Output Power
3. Section 6.1.1.5 Conducted Spurious Emissions
4. Section 6.1.1.5 Band-Edge Spurious Emissions

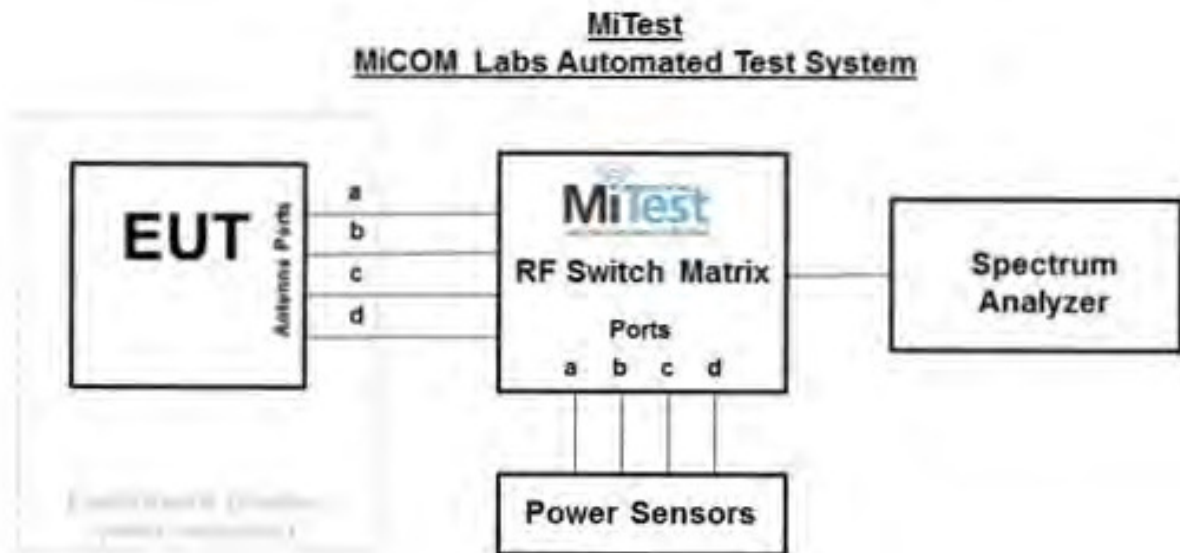

**Conducted Test Measurement Setup**

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 20 of 126

| Asset#        | Description                                    | Manufacturer         | Model#                         | Serial#          | Calibration Due Date |
|---------------|--|----------------------|--------------------------------|------------------|----------------------|
| 158           | Barometer/Thermometer                          | Control Company      | 4196                           | E2846            | 04 Dec 2015          |
| 249           | Resistance Thermometer                         | Thermotronics        | GR2105-02                      | 9340 #2          | 30 Oct 2015          |
| 287           | Rohde & Schwarz 40 GHz Receiver                | Rhode & Schwarz      | ESIB40                         | 100201           | 27 Aug 2016          |
| 361           | Desktop for RF#1, Labview Software installed   | Dell                 | Vostro 220                     | WS RF#1          | Not Required         |
| 378           | Rohde & Schwarz 40 GHz Receiver with Generator | Rhode & Schwarz      | ESIB40                         | 100107/040       | 04 Aug 2016          |
| 380           | 4x4 RF Switch Box                              | MiCOM Labs           | MiTest RF Switch Box           | MIC001           | 20 Dec 2015          |
| 390           | USB Power Head 50MHz - 24GHz -60 to +20dBm     | Agilent              | U2002A                         | MY50000103       | 17 Oct 2016          |
| 398           | Test Software                                  | MiCOM                | MiTest ATS                     | Version 3.0.0.16 | Not Required         |
| 405           | DC Power Supply 0-60V                          | Agilent              | 6654A                          | MY4001826        | Cal when used        |
| 408           | USB to GPIB interface                          | National Instruments | GPIB-USB HS                    | 14C0DE9          | Not Required         |
| 436           | USB Wideband Power Sensor                      | Boonton              | 55006                          | 8731             | 31 Jul 2016          |
| 437           | USB Wideband Power Sensor                      | Boonton              | 55006                          | 8759             | 31 Jul 2016          |
| 75            | Environmental Chamber                          | Thermatron           | SE-300-2-2                     | 27946            | 28 Nov 2015          |
| RF#1 GPIB#1   | GPIB cable to Power Supply                     | HP                   | GPIB                           | None             | Not Required         |
| RF#1 SMA #452 | Precision SMA Male RG-402 Spectrun Analyzer    | Fairview Microwave   | Precision SMA Male RG 402 coax | None             | 20 Dec 2015          |
| RF#1 SMA#1    | EUT to Mitest box port 1                       | Flexco               | SMA Cable port1                | None             | 20 Dec 2015          |
| RF#1 SMA#2    | EUT to Mitest box port 2                       | Flexco               | SMA Cable port2                | None             | 20 Dec 2015          |
| RF#1 SMA#3    | EUT to Mitest box port 3                       | Flexco               | SMA Cable port3                | None             | 20 Dec 2015          |
| RF#1 SMA#4    | EUT to Mitest box port 4                       | Flexco               | SMA Cable port4                | None             | 20 Dec 2015          |
| RF#1 USB#1    | USB Cable to Mitest Box                        | Dynex                | USB Cable                      | None             | Not Required         |


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## 4.2. Radiated Spurious Emission Test Set-up

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Spurious Emissions

### Radiated Emission Measurement Setup – Above 1 GHz

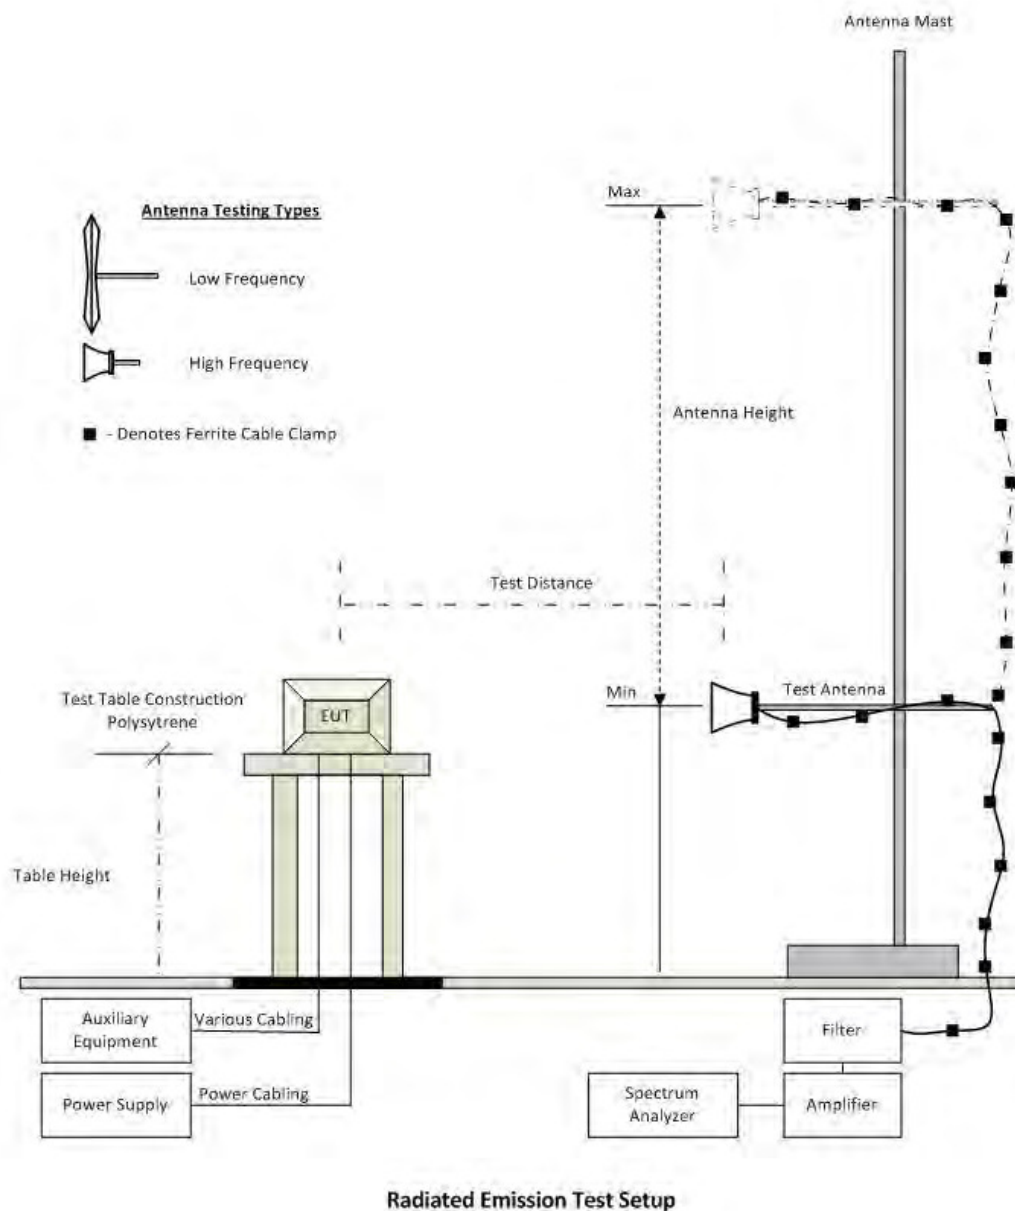

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 22 of 126

| Asset# | Description                                       | Manufacturer         | Model#                | Serial#    | Calibration Due Date |
|--------|---|----------------------|-----------------------|------------|----------------------|
| 158    | Barometer/Thermometer                             | Control Company      | 4196                  | E2846      | 04 Dec 2015          |
| 170    | Video System Controller for Semi Anechoic Chamber | Panasonic            | WV-CY101              | 04R08507   | Not Required         |
| 287    | Rohde & Schwarz 40 GHz Receiver                   | Rhode & Schwarz      | ESIB40                | 100201     | 27 Aug 2016          |
| 310    | SMA Cable   | Micro-Coax           | UFA210A-0-0787-3G03G0 | 209089-001 | 30 Oct 2015          |
| 338    | Sunol 30 to 3000 MHz Antenna                      | Sunol                | JB3                   | A052907    | 15 Aug 2016          |
| 393    | DC - 1050 MHz Low Pass Filter                     | Microcircuits        | VLFX-1050             | N/A        | 08 Oct 2016          |
| 397    | Amp 10 - 2500MHz                                  | MiCOM Labs           | Amp 10 - 2500 MHz     | NA         | 24 Feb 2016          |
| 399    | ETS 1-18 GHz Horn Antenna                         | ETS                  | 3117                  | 00154575   | 10 Nov 2015          |
| 406    | Amplifier for Radiated Emissions                  | MiCOM Labs           | 40dB 1 to 18GHz Amp   | 0406       | 28 May 2016          |
| 410    | Desktop Computer                                  | Dell                 | Inspiron 620          | WS38       | Not Required         |
| 412    | USB to GPIB Interface                             | National Instruments | GPIB-USB HS           | 11B8DC2    | Not Required         |
| 413    | Mast Controller                                   | Sunol Science        | TWR95-4               | 030801-3   | Not Required         |
| 415    | Turntable Controller                              | Sunol Sciences       | Turntable Controller  | None       | Not Required         |
| 416    | Gigabit ethernet filter                           | ETS-Lingren          | Gigafoil 260366       | None       | Not Required         |
| 447    | Rad Emissions Test Software                       | MiCOM                | Software Ver. 1.0.73  | 447        | Not Required         |
| 462    | Schwarzbeck cable from Antenna to Amplifier.      | Schwarzbeck          | AK 9513               | 462        | 25 Feb 2016          |
| 463    | Schwarzbeck cable from Amplifier to Bulkhead.     | Schwarzbeck          | AK 9513               | 463        | 25 Feb 2016          |
| 464    | Schwarzbeck cable from Bulkhead to Receiver       | Schwarzbeck          | AK 9513               | 464        | 25 Feb 2016          |
| 480    | Cable - Bulkhead to Amp                           | SRC Haverhill        | 157-157-3050360       | 480        | 11 Aug 2016          |
| 481    | Cable - Bulkhead to Receiver                      | SRC Haverhill        | 151-151-3050787       | 481        | 11 Aug 2016          |
| 482    | Cable - Amp to Antenna                            | SRC Haverhill        | 157-157-3051574       | 482        | 11 Aug 2016          |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## 5. TEST SUMMARY

### List of Measurements

The following table represents the list of measurements required under the **FCC CFR47 Part 27** and **Industry Canada RSS-199, Industry Canada RSS-Gen and GL-07**.

| Section(s)                                  | Test Items                      | Description                                 | Condition | Result                 | Test Report Section |
|---|---------------------------------|---|-----------|------------------------|---------------------|
| <b>2.1033(c)</b><br><b>4.1</b>              | Type of Modulation              | Modulation type                             | Conducted | Complies               | 6.1.1.1             |
| <b>2.1033(c)</b><br><b>4.2</b>              | Channel Bandwidth               | 99% Emission bandwidth                      | Conducted | Complies               | 6.1.1.2             |
| <b>2.1055, 27.54</b><br><b>4.3</b>          | Transmitter Frequency Stability | Frequency contained within band of interest | Conducted | Complies<br>GPS Locked | 6.1.1.3             |
| <b>2.1046</b><br><b>5.2.1</b><br><b>4.4</b> | Transmitter Output Power & EIRP | Power Measurement                           | Conducted | Complies               | 6.1.1.4             |
| <b>2.1051, 27.53(m)</b><br><b>4.5</b>       | Transmitter Unwanted Emissions  | Transmitter Spurious Emissions              | Conducted | Complies               | 6.1.1.5             |

Note 1: Test results reported in this document relate only to the items tested

Note 2: The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 24 of 126

### List of Measurements (continued)

The following table represents the list of measurements required under the **FCC CFR47 Part 27** and **Industry Canada RSS-199** and **Industry Canada RSS-Gen**.

| Section(s)   | Test Items                                     | Description                  | Condition | Result      | Test Report Section |
|--|--|------------------------------|-----------|-------------|---------------------|
| <b>2.1051,</b><br><b>27.53(m)</b><br><b>4.5</b>      | Radiated Emissions                             |                              | Radiated  | Complies    | 6.1.2.1             |
|  | Transmitter Radiated Spurious Emissions        | Emissions above 1 GHz        |           |             |                     |
|  | Radiated Band Edge                             | Band edge results            |           |             |                     |
|  | Receiver Spurious Emissions                    | Emissions above 1 GHz        |           |             |                     |
| <b>2.1051,</b><br><b>27.53(m)</b><br><b>4.5</b>      | Digital Emissions                              | Emissions <1 GHz (30M-1 GHz) |           | Complies    | 6.1.2.2             |
| <b>15.407(b)(6)</b><br><b>15.207</b><br><b>7.2.2</b> | AC Wireline Conducted Emissions 150 kHz–30 MHz | Conducted Emissions          | Conducted | Not Tested* | 6.1.3               |

\*Device is powered by -48 Vdc

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 25 of 126

---

## 6. TEST RESULTS

### 6.1. Device Characteristics

#### 6.1.1. Conducted Testing

##### 6.1.1.1. Type of Modulation

| Conducted Test Conditions for Type of Modulation  |                    |                     |             |
|---|--------------------|---------------------|-------------|
| Standard:   | FCC CFR 47:Part 27 | Ambient Temp. (°C): | 24.0 - 27.5 |
| Test Heading:   | Type of Modulation | Rel. Humidity (%):  | 32 - 45     |
| Standard Section(s):  | 2.1033(c)          | Pressure (mBars):   | 999 - 1001  |
| Reference Document(s):  |                    |                     |             |
| <b>Test Procedure for Type of Modulation</b><br><br>The type of a digital modulation employed for the Axxcelera AxxceLTE is QPSK, 16 QAM, 64 QAM.<br><br><b>Requirement</b><br><br>Equipment certified under the standard shall employ digital modulation |                    |                     |             |

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 26 of 126

---

#### 6.1.1.2. Channel Bandwidth

| Conducted Test Conditions for Occupied Bandwidth   |                    |                     |             |
|--|--------------------|---------------------|-------------|
| Standard:  | FCC CFR 47:Part 27 | Ambient Temp. (°C): | 24.0 - 27.5 |
| Test Heading:  | Occupied Bandwidth | Rel. Humidity (%):  | 32 - 45     |
| Standard Section(s):   | 2.1033(c)          | Pressure (mBars):   | 999 - 1001  |
| Reference Document(s):   |                    |                     |             |
| <b>Test Procedure for Channel Bandwidth Measurement</b>  |                    |                     |             |
| The 99 % channel bandwidth is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency. The Resolution Bandwidth was set to approximately 1% of the emission bandwidth.  |                    |                     |             |
| <b>Limits</b>  |                    |                     |             |
| The channel bandwidth shall be equal to or greater than 1 MHz and shall be reported by the certification applicant. Based on the channel bandwidth, the channel edge shall be used as reference point in the measurement of the transmitter unwanted emission power. |                    |                     |             |

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 27 of 126

### Measurement Results for 99 % Operational Bandwidth

| Equipment Configuration for 99% Occupied Bandwidth |                |                                   |      |
|--|----------------|-----------------------------------|------|
| <b>Variant:</b>                                    | 5 MHz          | <b>Duty Cycle (%):</b>            | 88   |
| <b>Data Rate:</b>                                  | 5              | <b>Antenna Gain (dBi):</b>        | 10   |
| <b>Modulation:</b>                                 | 64 QAM         | <b>Beam Forming Gain (Y)(dB):</b> | None |
| <b>TPC:</b>  | Not Applicable | <b>Tested By:</b>                 | SB   |
| <b>Engineering Test Notes:</b>                     |                |                                   |      |

| Test Measurement Results |                              |      |    |    |  |  |  |  |
|--------------------------|------------------------------|------|----|----|--|--|--|--|
| Test Frequency           | Measured 99% Bandwidth (MHz) |      |    |    |  |  |  |  |
|                          | Port(s)                      |      |    |    |  |  |  |  |
| MHz                      | a                            | b    | c  | d  |  |  |  |  |
| 2593                     | 4.50                         | 4.50 | -- | -- |  |  |  |  |

| Traceability to Industry Recognized Test Methodologies |                                  |
|--|----------------------------------|
| Work Instruction:                                      | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty:                               | ±2.81 dB                         |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 28 of 126

#### Equipment Configuration for 99% Occupied Bandwidth

|                                |                |                                   |      |
|--------------------------------|----------------|-----------------------------------|------|
| <b>Variant:</b>                | 5 MHz          | <b>Duty Cycle (%):</b>            | 88   |
| <b>Data Rate:</b>              | 5              | <b>Antenna Gain (dBi):</b>        | 10   |
| <b>Modulation:</b>             | QPSK           | <b>Beam Forming Gain (Y)(dB):</b> | None |
| <b>TPC:</b>                    | Not Applicable | <b>Tested By:</b>                 | SB   |
| <b>Engineering Test Notes:</b> |                |                                   |      |

#### Test Measurement Results

| Test Frequency | Measured 99% Bandwidth (MHz) |      |    |    |  |  |  |  |
|----------------|------------------------------|------|----|----|--|--|--|--|
|                | Port(s)                      |      |    |    |  |  |  |  |
| MHz            | a                            | b    | c  | d  |  |  |  |  |
| 2593           | 4.50                         | 4.50 | -- | -- |  |  |  |  |

#### Traceability to Industry Recognized Test Methodologies

|                          |                                  |
|--------------------------|----------------------------------|
| Work Instruction:        | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB                         |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 29 of 126

#### Equipment Configuration for 99% Occupied Bandwidth

|                                |                |                                   |      |
|--------------------------------|----------------|-----------------------------------|------|
| <b>Variant:</b>                | 20 MHz         | <b>Duty Cycle (%):</b>            | 88   |
| <b>Data Rate:</b>              | 5              | <b>Antenna Gain (dBi):</b>        | 10   |
| <b>Modulation:</b>             | 64 QAM         | <b>Beam Forming Gain (Y)(dB):</b> | None |
| <b>TPC:</b>                    | Not Applicable | <b>Tested By:</b>                 | SB   |
| <b>Engineering Test Notes:</b> |                |                                   |      |

#### Test Measurement Results

| Test Frequency | Measured 99% Bandwidth (MHz) |       |    |    |  |  |  |  |
|----------------|------------------------------|-------|----|----|--|--|--|--|
|                | Port(s)                      |       |    |    |  |  |  |  |
| MHz            | a                            | b     | c  | d  |  |  |  |  |
| 2593           | 17.95                        | 18.03 | -- | -- |  |  |  |  |

#### Traceability to Industry Recognized Test Methodologies

|                          |                                  |
|--------------------------|----------------------------------|
| Work Instruction:        | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB                         |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 30 of 126

#### Equipment Configuration for 99% Occupied Bandwidth

|                                |                |                                   |      |
|--------------------------------|----------------|-----------------------------------|------|
| <b>Variant:</b>                | 20 MHz         | <b>Duty Cycle (%):</b>            | 88   |
| <b>Data Rate:</b>              | 5              | <b>Antenna Gain (dBi):</b>        | 10   |
| <b>Modulation:</b>             | QPSK           | <b>Beam Forming Gain (Y)(dB):</b> | None |
| <b>TPC:</b>                    | Not Applicable | <b>Tested By:</b>                 | SB   |
| <b>Engineering Test Notes:</b> |                |                                   |      |

#### Test Measurement Results

| Test Frequency | Measured 99% Bandwidth (MHz) |       |    |    |  |  |  |  |
|----------------|------------------------------|-------|----|----|--|--|--|--|
|                | Port(s)                      |       |    |    |  |  |  |  |
| MHz            | a                            | b     | c  | d  |  |  |  |  |
| 2593           | 17.87                        | 17.87 | -- | -- |  |  |  |  |

#### Traceability to Industry Recognized Test Methodologies

|                          |                                  |
|--------------------------|----------------------------------|
| Work Instruction:        | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB                         |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 31 of 126

#### Equipment Configuration for 99% Occupied Bandwidth

|                                |                |                                   |      |
|--------------------------------|----------------|-----------------------------------|------|
| <b>Variant:</b>                | 10 MHz         | <b>Duty Cycle (%):</b>            | 88   |
| <b>Data Rate:</b>              | 5              | <b>Antenna Gain (dBi):</b>        | 10   |
| <b>Modulation:</b>             | 64 QAM         | <b>Beam Forming Gain (Y)(dB):</b> | None |
| <b>TPC:</b>                    | Not Applicable | <b>Tested By:</b>                 | SB   |
| <b>Engineering Test Notes:</b> |                |                                   |      |

#### Test Measurement Results

| Test Frequency | Measured 99% Bandwidth (MHz) |      |    |    |  |  |  |  |
|----------------|------------------------------|------|----|----|--|--|--|--|
|                | Port(s)                      |      |    |    |  |  |  |  |
| MHz            | a                            | b    | c  | d  |  |  |  |  |
| 2593           | 9.01                         | 8.97 | -- | -- |  |  |  |  |

#### Traceability to Industry Recognized Test Methodologies

|                          |                                  |
|--------------------------|----------------------------------|
| Work Instruction:        | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB                         |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 32 of 126

#### Equipment Configuration for 99% Occupied Bandwidth

|                                |                |                                   |      |
|--------------------------------|----------------|-----------------------------------|------|
| <b>Variant:</b>                | 15 MHz         | <b>Duty Cycle (%):</b>            | 88   |
| <b>Data Rate:</b>              | 5              | <b>Antenna Gain (dBi):</b>        | 10   |
| <b>Modulation:</b>             | 64 QAM         | <b>Beam Forming Gain (Y)(dB):</b> | None |
| <b>TPC:</b>                    | Not Applicable | <b>Tested By:</b>                 | SB   |
| <b>Engineering Test Notes:</b> |                |                                   |      |

#### Test Measurement Results

| Test Frequency | Measured 99% Bandwidth (MHz) |       |    |    |  |  |  |  |
|----------------|------------------------------|-------|----|----|--|--|--|--|
|                | Port(s)                      |       |    |    |  |  |  |  |
| MHz            | a                            | b     | c  | d  |  |  |  |  |
| 2593           | 13.46                        | 13.46 | -- | -- |  |  |  |  |

#### Traceability to Industry Recognized Test Methodologies

|                          |                                  |
|--------------------------|----------------------------------|
| Work Instruction:        | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB                         |


Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.






### 5 MHz Chain A 64 QAM

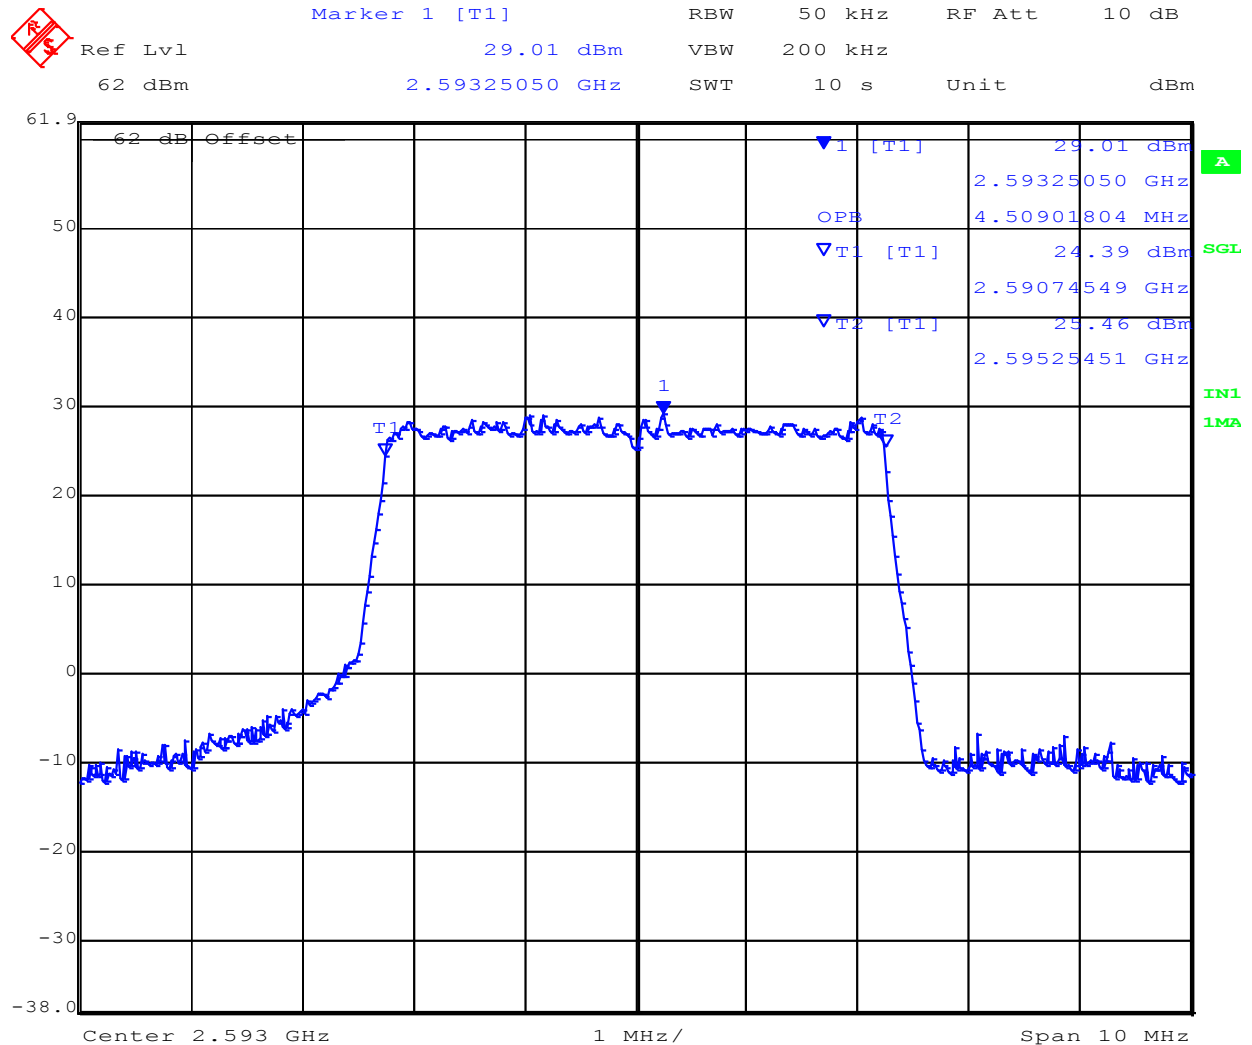

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




### 5 MHz Chain B 64 QAM

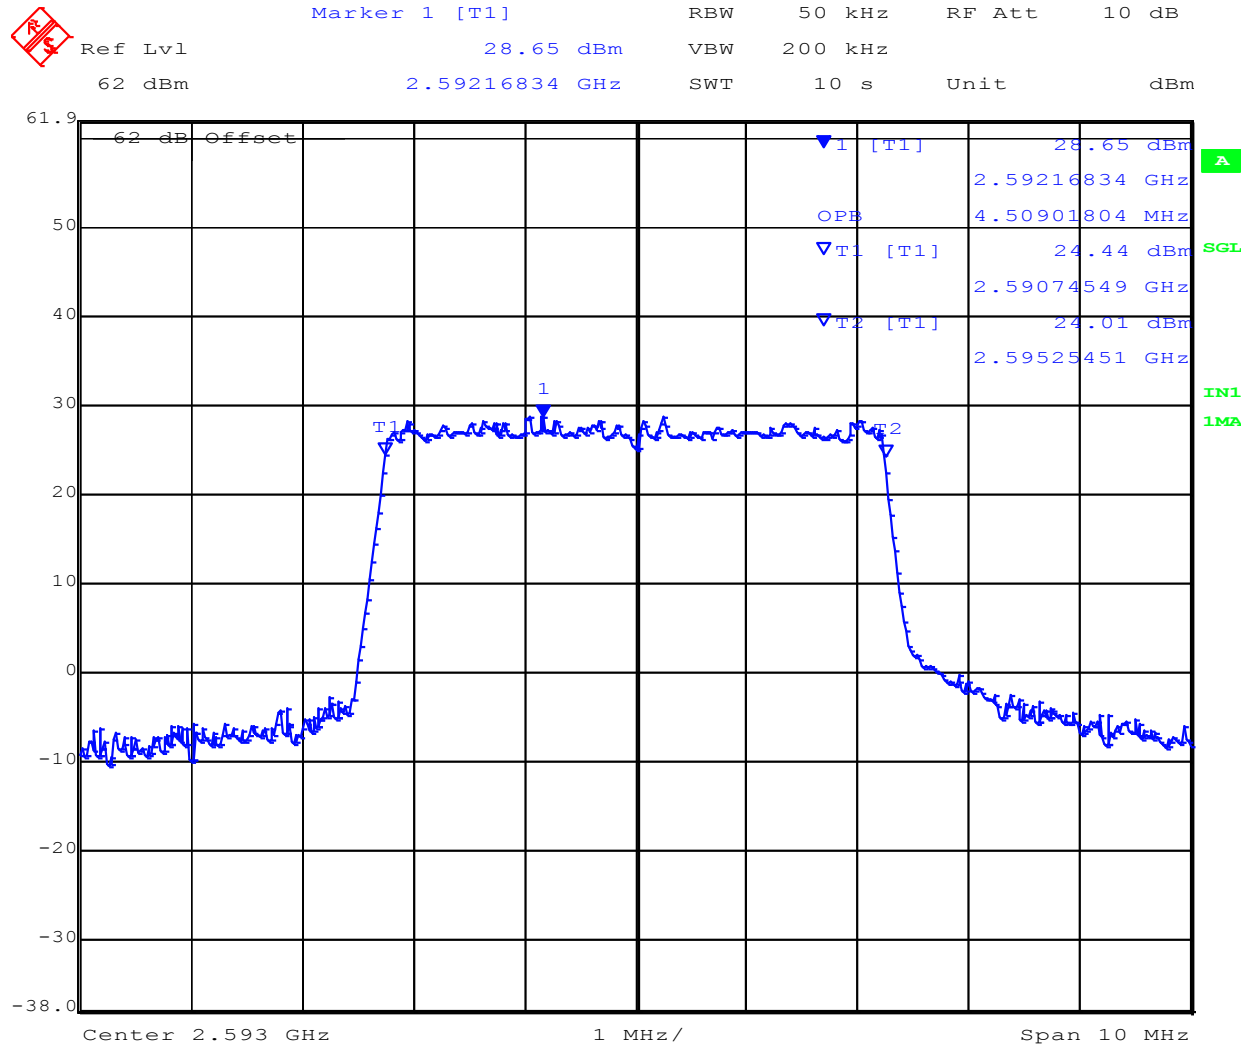

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




### 5 MHz Chain A QPSK

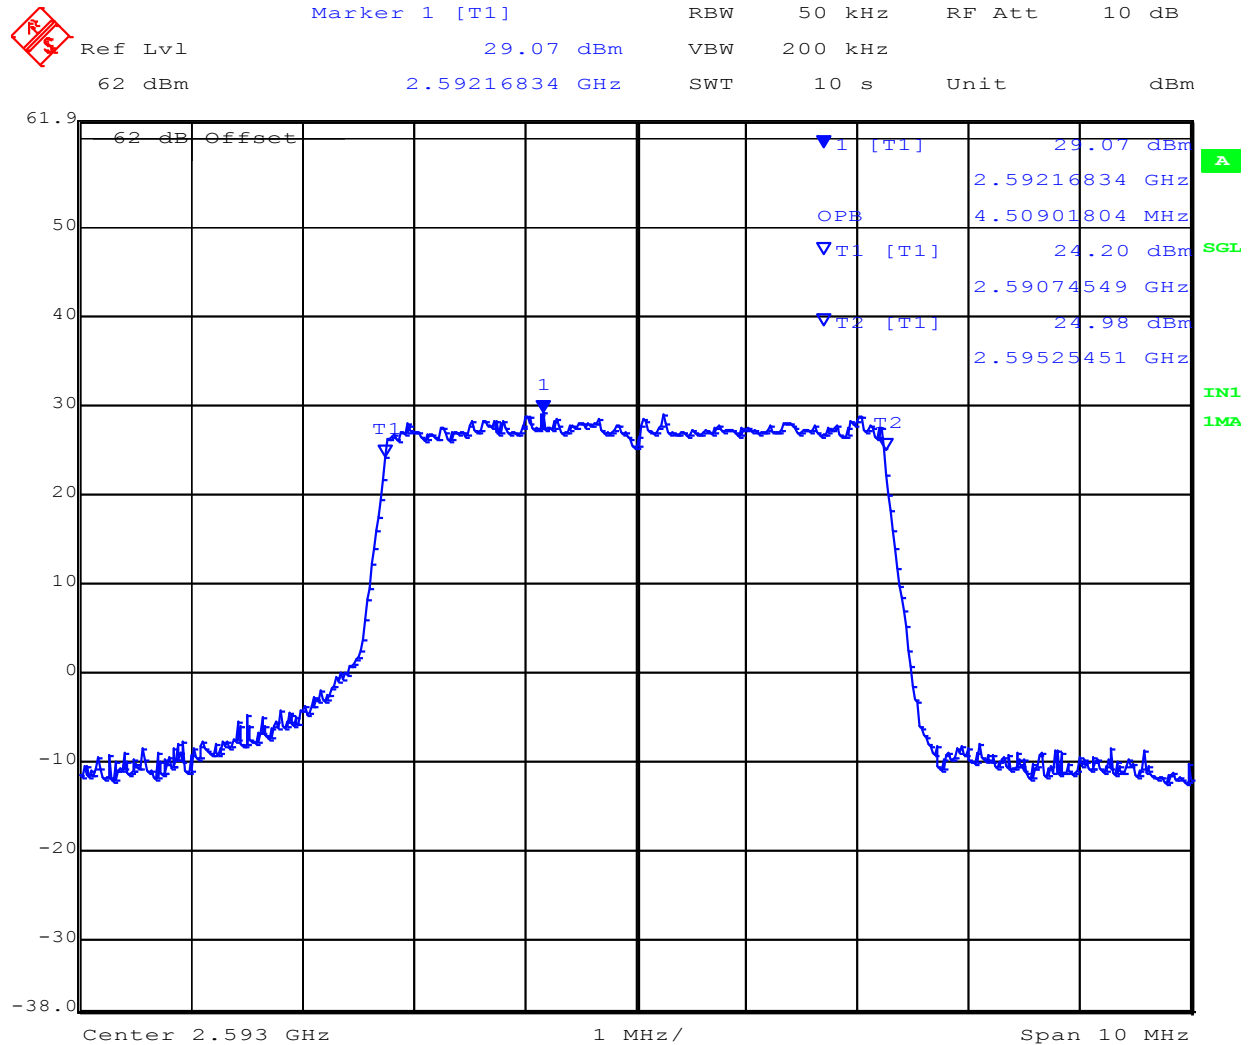

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 5 MHz Chain B QPSK

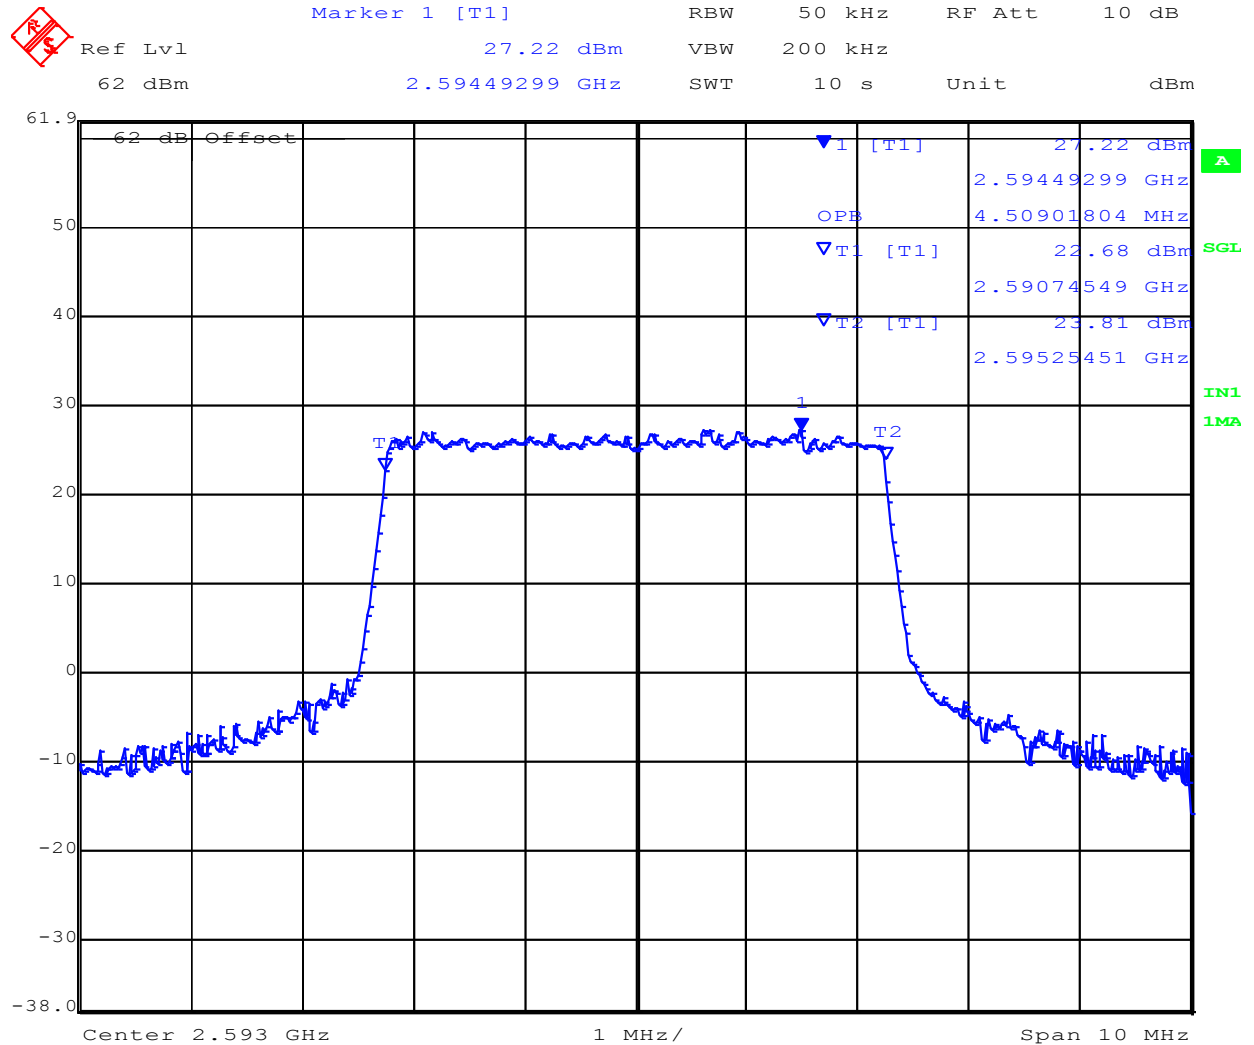


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 37 of 126

## 20 MHz Chain A 64 QAM

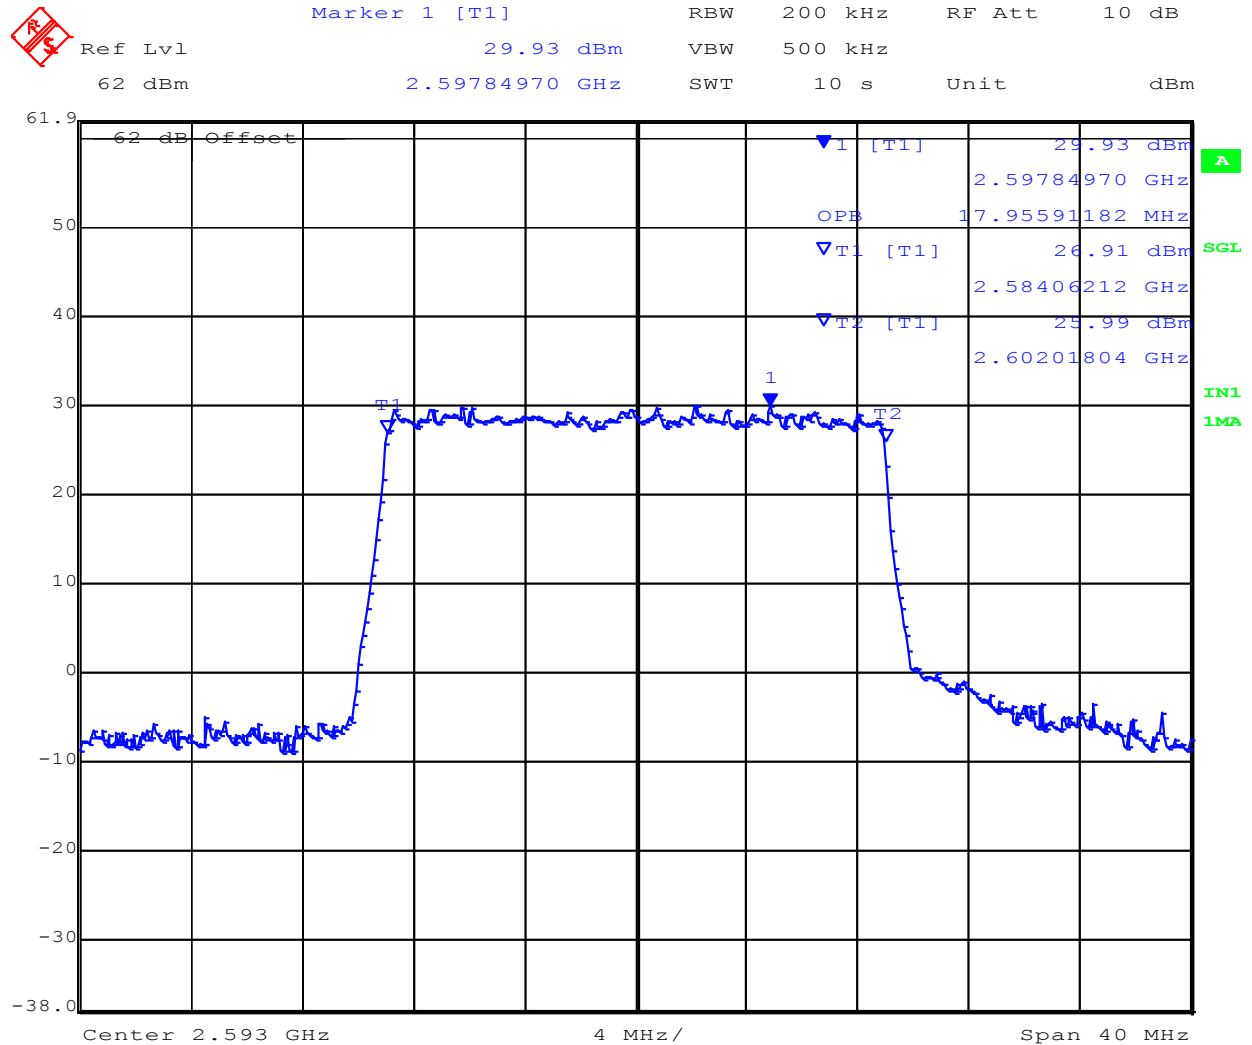


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 38 of 126

## 20 MHz Chain B 64 QAM

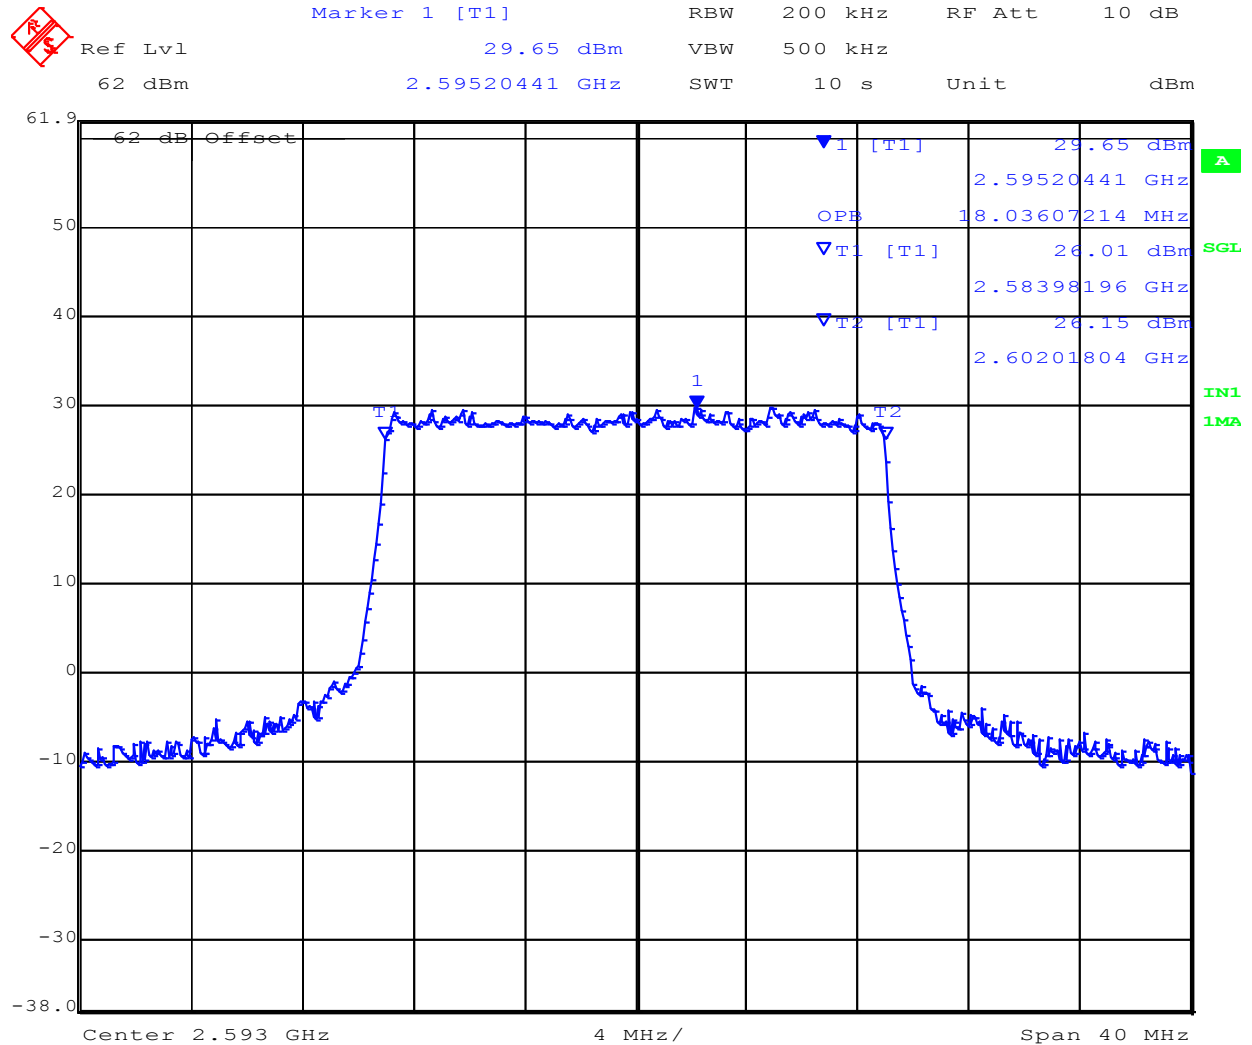


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxcelLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 39 of 126

## 20 MHz Chain A QPSK

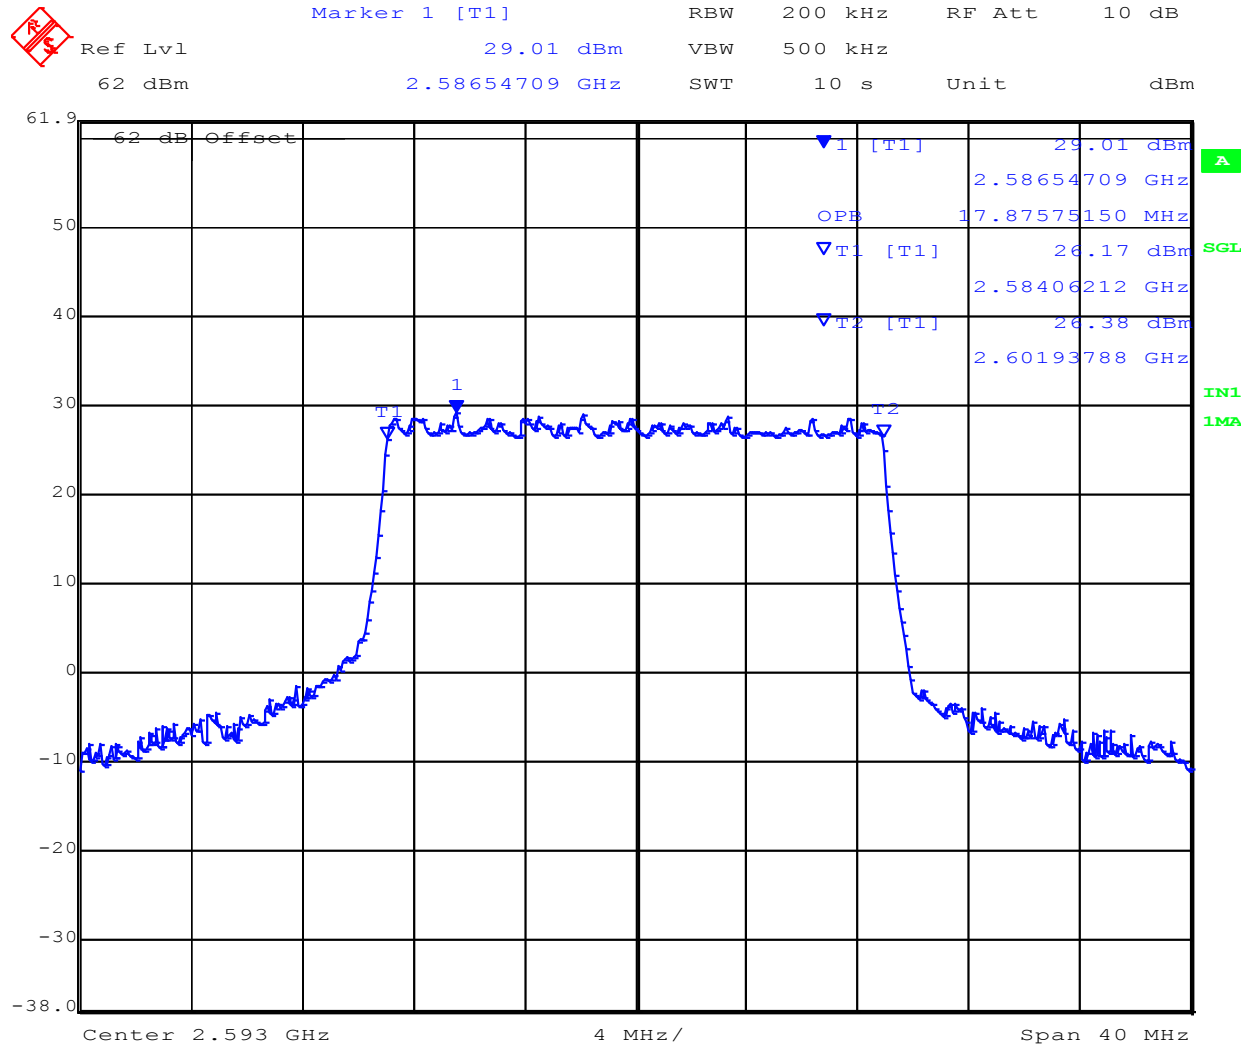


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 40 of 126

## 20 MHz Chain B QPSK

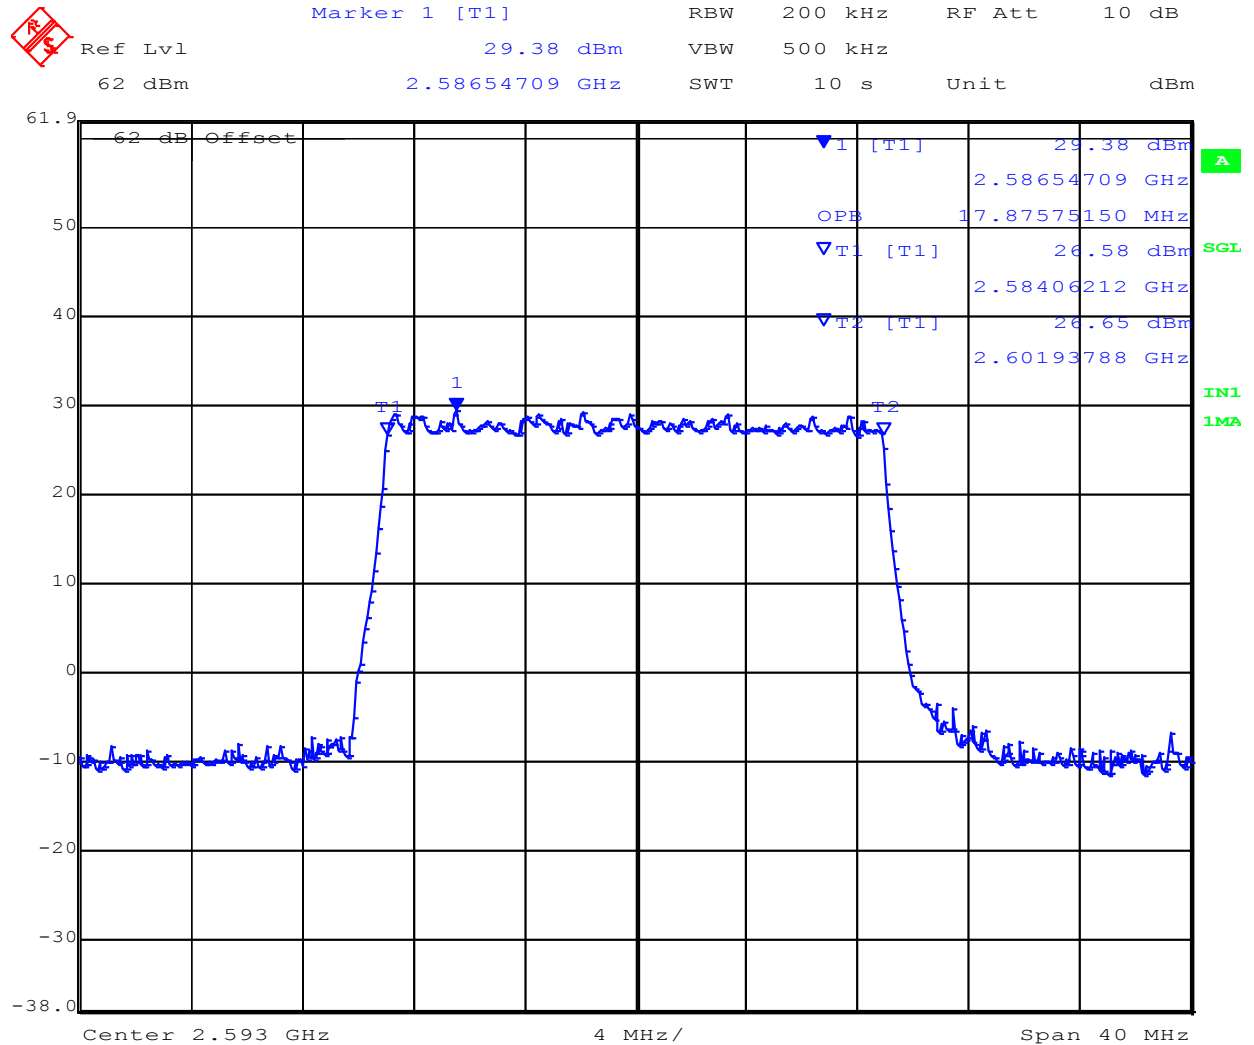


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





### 10 MHz Chain A 64 QAM

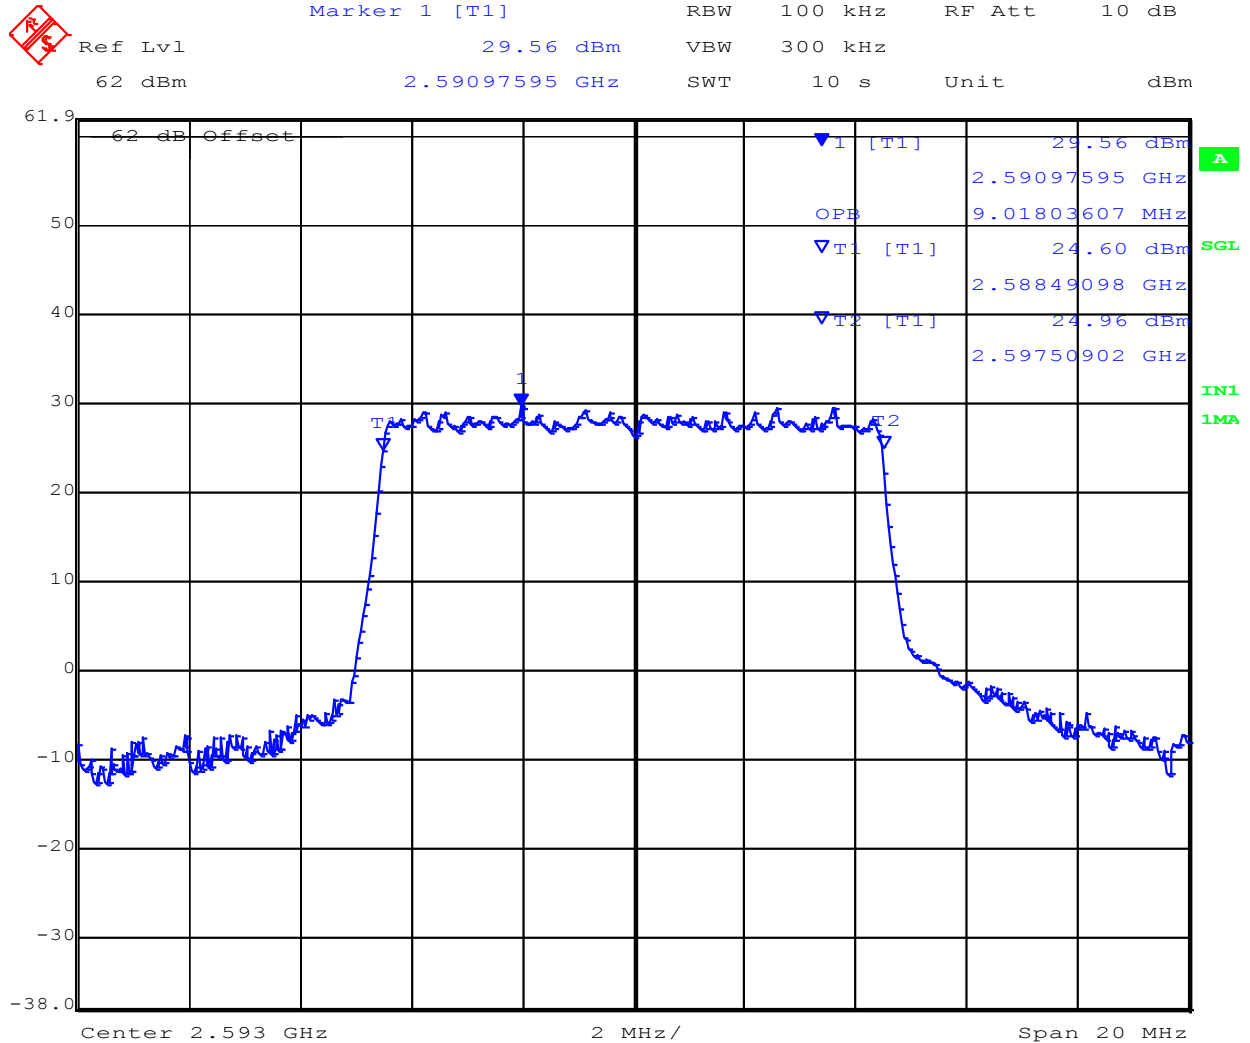


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxcelLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 42 of 126


### 10 MHz Chain B 64 QAM

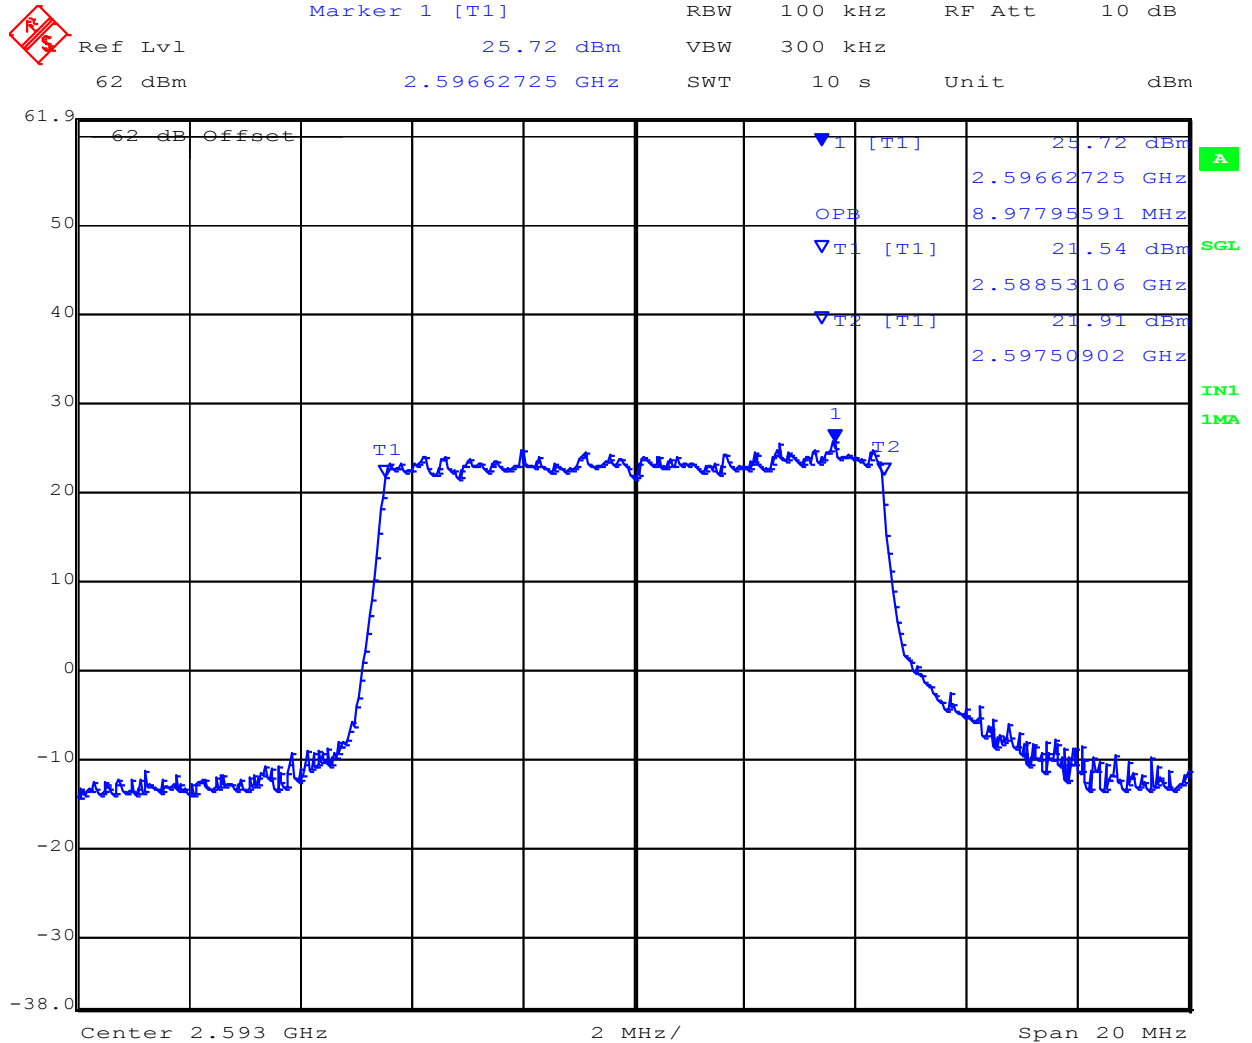

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




### 15 MHz Chain A 64 QAM

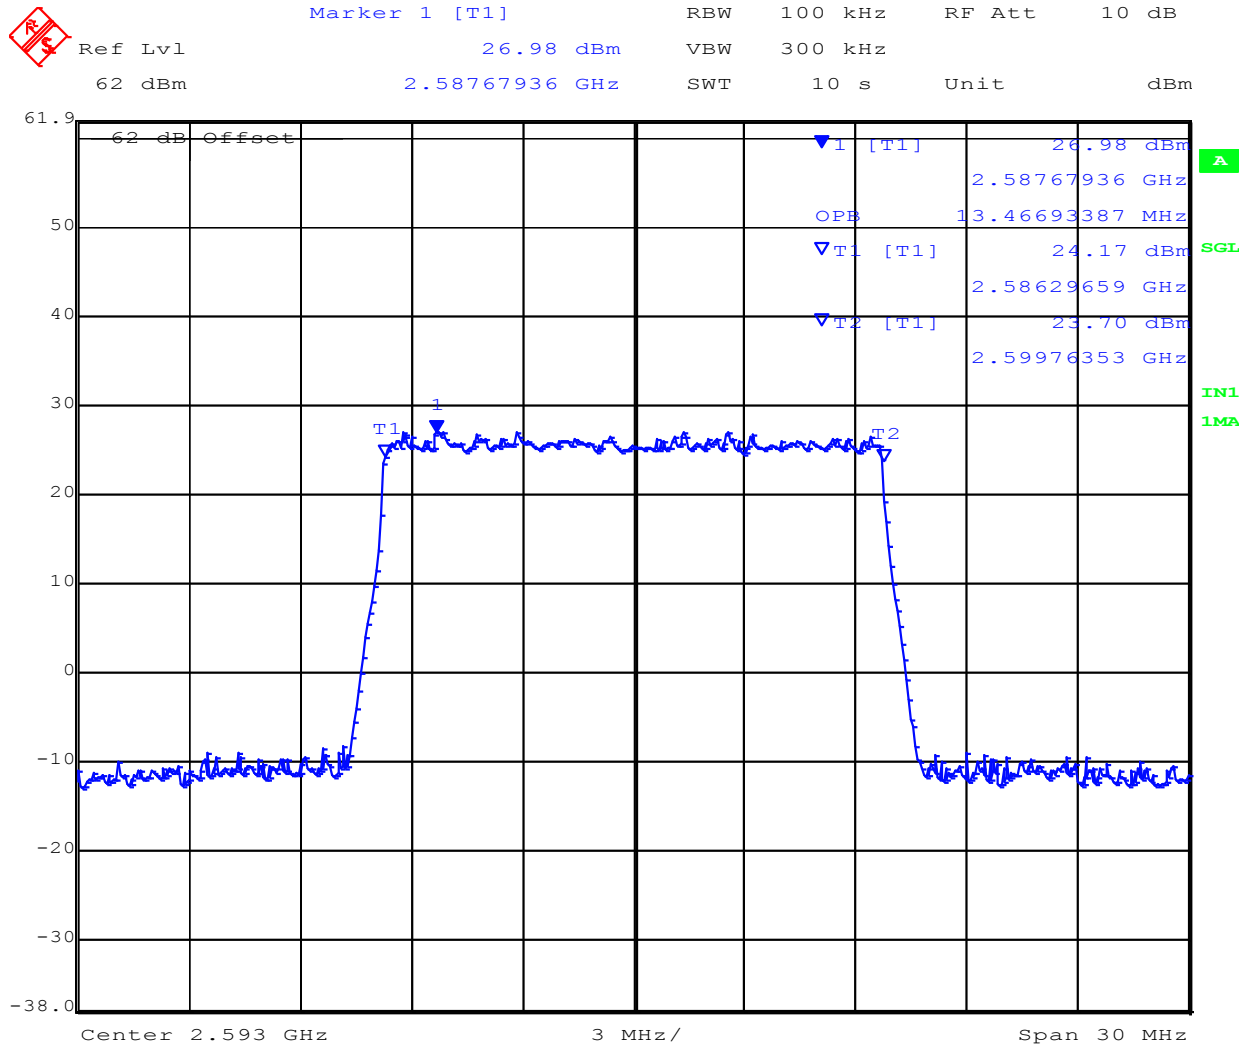

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 15 MHz Chain B 64 QAM

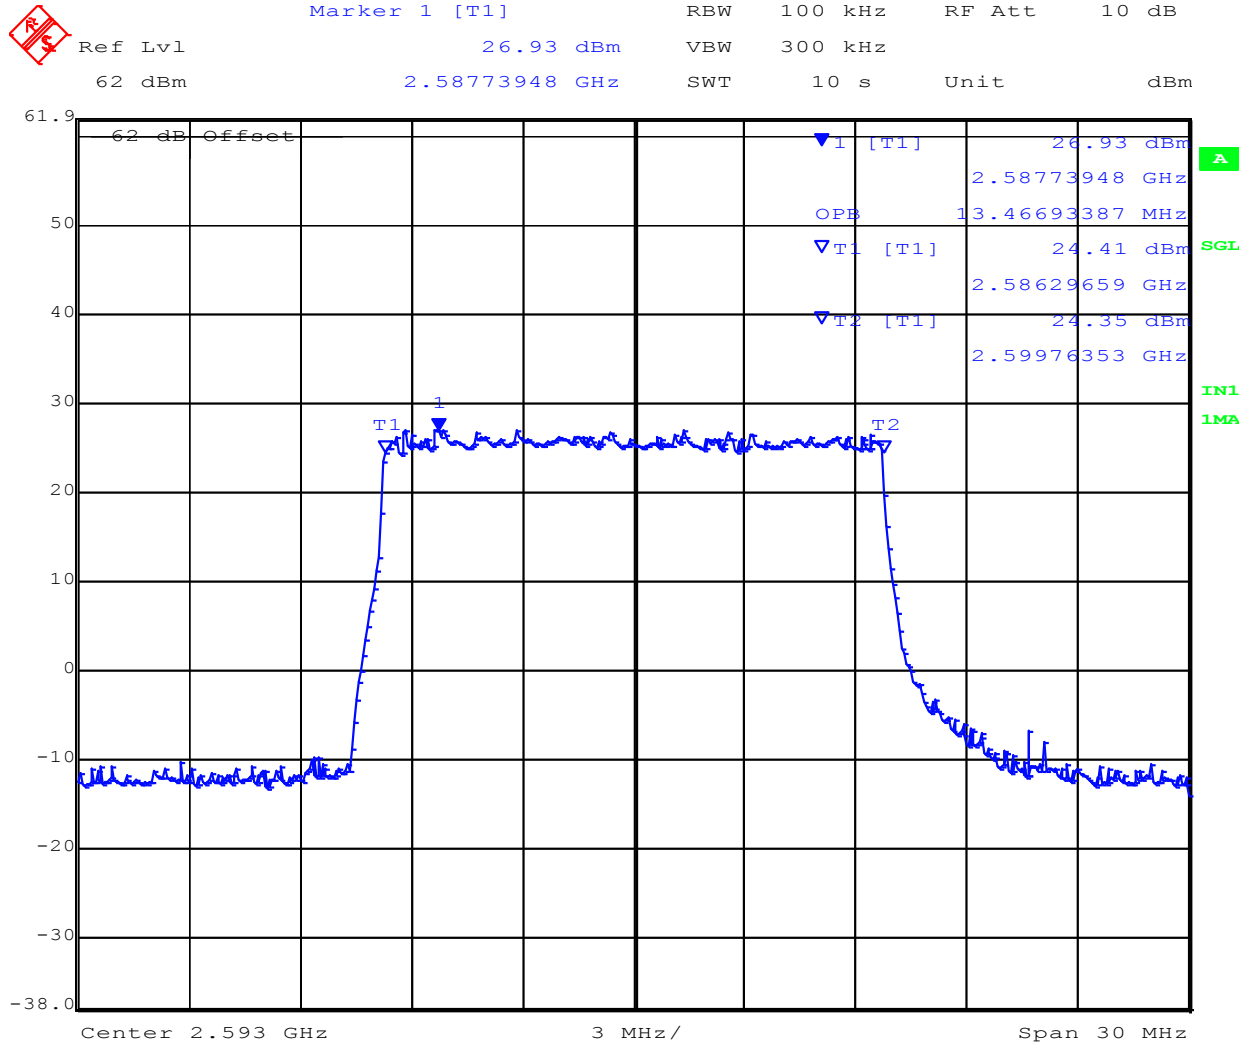

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 45 of 126

---

### 6.1.1.3. Transmitter Frequency Stability

| Conducted Test Conditions for Maximum Conducted Output Power EIRP   |                                   |                     |             |
|---|-----------------------------------|---------------------|-------------|
| Standard:   | FCC CFR 47 Part 27, RSS-199       | Ambient Temp. (°C): | 24.0 - 27.5 |
| Test Heading:   | Transmitter Frequency Stability   | Rel. Humidity (%):  | 32 - 45     |
| Standard Section(s):  | FCC 2.1055, 27.54; IC RSS-Gen 4.3 | Pressure (mBars):   | 999 - 1001  |
| Reference Document(s):  |                                   |                     |             |
| <p><b>Test Procedure for Transmitter Frequency Stability</b></p> <p>Transmitter Frequency Stability testing was performed over nominal voltage and ambient temperature and results reported are for a single antenna port (should the device have multiple ports i.e. MIMO device).</p> <p><b>Definition</b></p> <p>The center frequency is the center of the channel declared by the manufacturer as part of the declared channel plan(s).</p> <p><b>Limits</b></p> <p>The applicant shall ensure frequency stability by showing that fundamental emissions are maintained within the frequency band of operation when tested at the temperature and supply voltage variations specified in the relevant standard FCC Part 2.1055, 27.54 and RSS-199 4.3</p> |                                   |                     |             |

Test Type: Modulated, carrier breakthrough was used for measurement purposes

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 46 of 126

---

### Measurement Results for Transmitter Frequency Stability

| Test frequency | 2593 MHz | Measured Frequency | Frequency Error |       |
|----------------|----------|--------------------|-----------------|-------|
| Temperature    | Voltage  | Hz                 | KHz             | PPM   |
| 20 °C          | 48 VDC   | 2593000270.0       | 0.27            | 0.104 |
| 20 °C          | 40 VDC   | 2593000310.0       | 0.31            | 0.120 |
| 20 °C          | 60 VDC   | 2593000410.0       | 0.41            | 0.158 |
| -40 °C         | 48 VDC   | 2593000250.0       | 0.25            | 0.096 |
| -30 °C         | 48 VDC   | 2593000130.0       | 0.13            | 0.050 |
| -20 °C         | 48 VDC   | 2593000270.0       | 0.27            | 0.104 |
| -10 °C         | 48 VDC   | 2593000350.0       | 0.35            | 0.135 |
| 0 °C           | 48 VDC   | 2593000250.0       | 0.25            | 0.096 |
| +10 °C         | 48 VDC   | 2593000250.0       | 0.25            | 0.096 |
| +25 °C         | 48 VDC   | 2593000370.0       | 0.37            | 0.143 |
| +35 °C         | 48 VDC   | 2593000290.0       | 0.29            | 0.112 |
| +45 °C         | 48 VDC   | 2593000330.0       | 0.33            | 0.127 |
| +55 °C         | 48 VDC   | 2593000310.0       | 0.31            | 0.120 |

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Axxcelera Broadband Wireless AxxcelLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 47 of 126

### Frequency Stability -48 Vdc, +20°C



Marker 1 [T1] RBW 100 Hz RF Att 20 dB  
Ref Lvl -19.52 dBm VBW 100 Hz  
17.8 dBm 2.59300027 GHz SWT 5 s Unit dBm

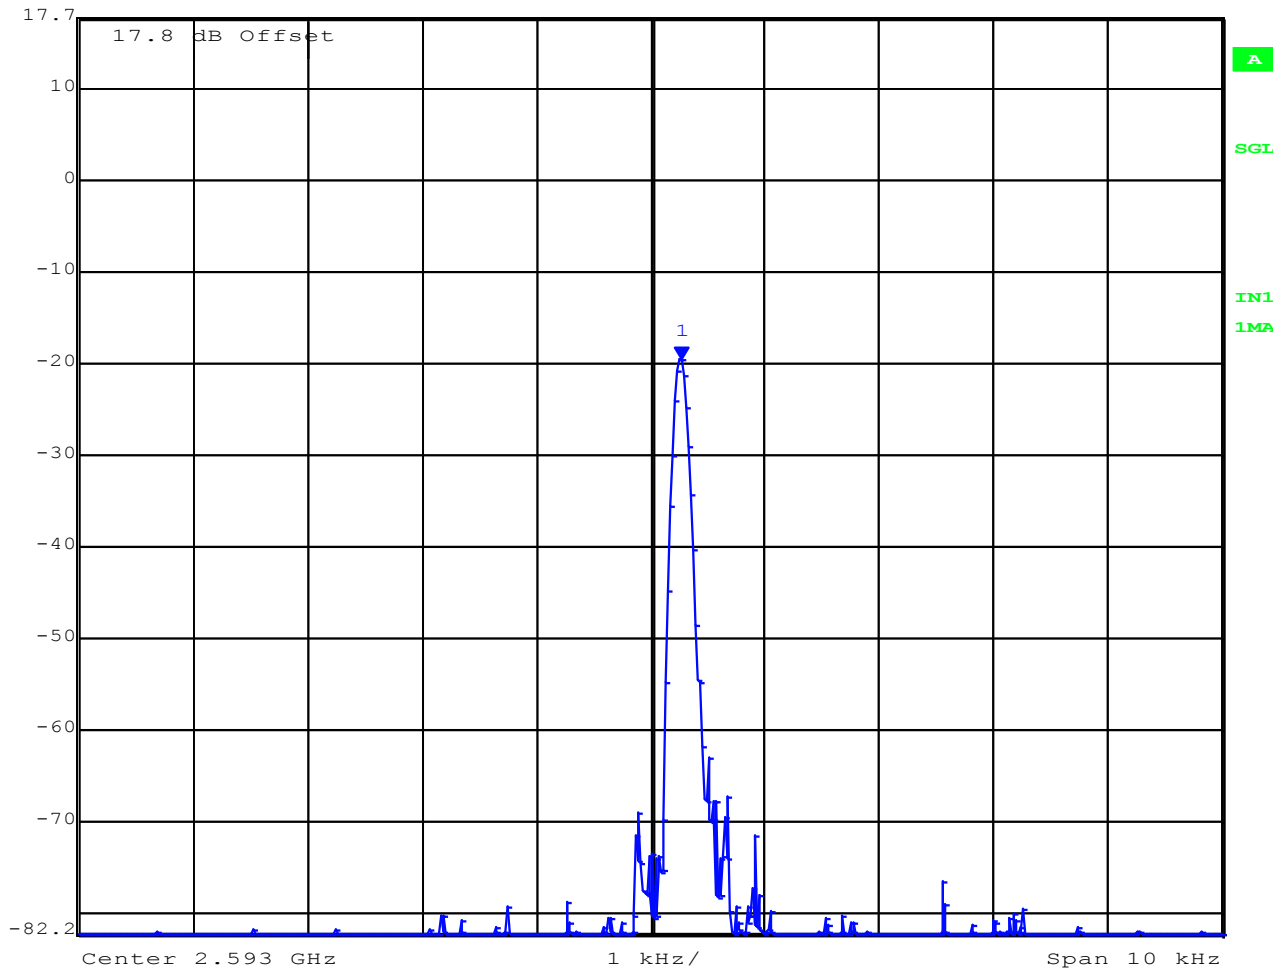

Date: 7.OCT.2015 02:37:23

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 48 of 126

### Frequency Stability -40 Vdc, +20°C



Marker 1 [T1] RBW 100 Hz RF Att 20 dB  
Ref Lvl -19.56 dBm VBW 100 Hz  
17.8 dBm 2.59300031 GHz SWT 5 s Unit dBm

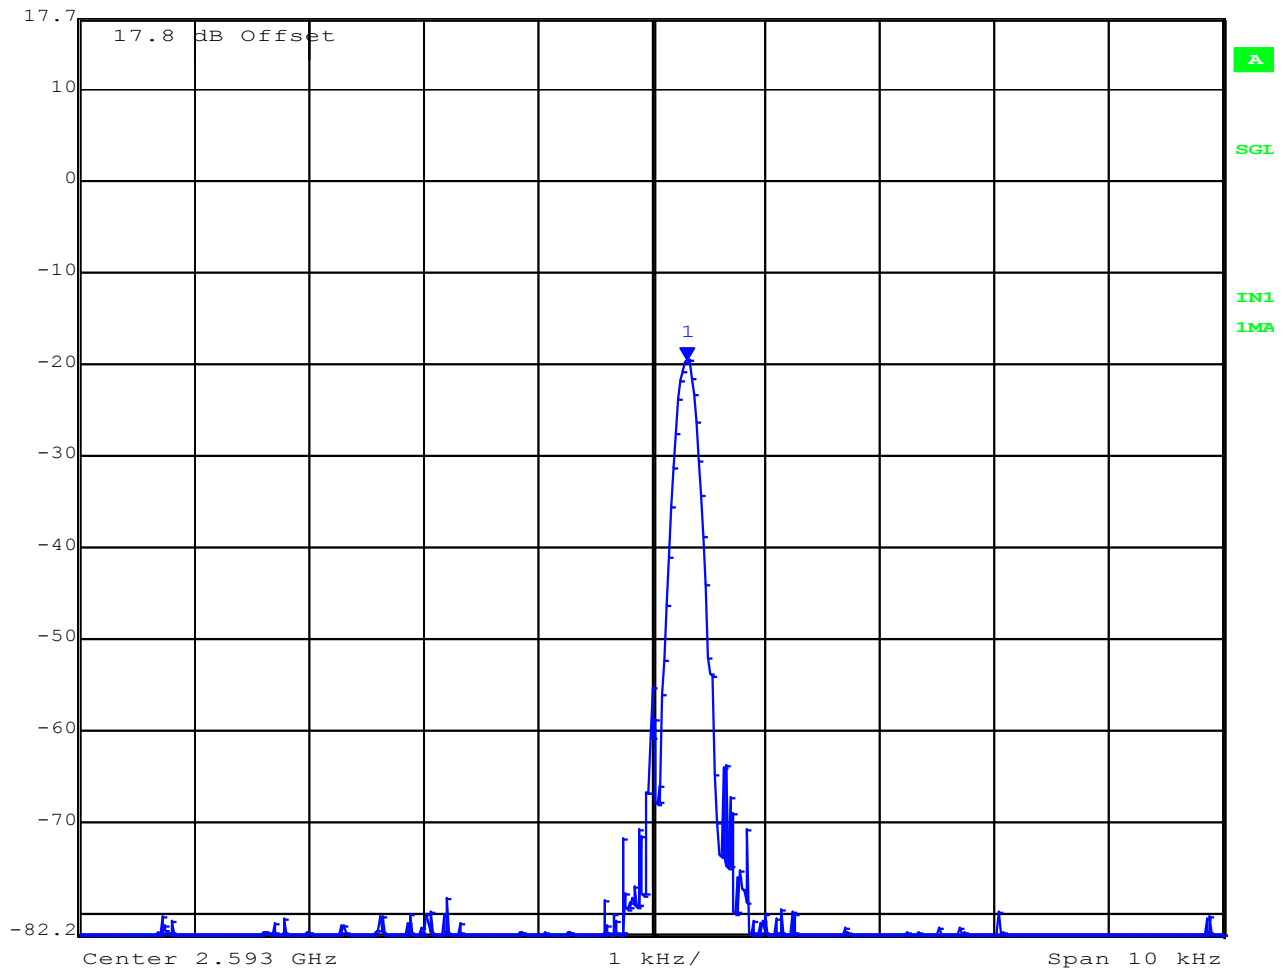

Date: 7.OCT.2015 02:41:11

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.






**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 49 of 126

### Frequency Stability -60 Vdc, +20°C



|               |                |        |        |          |
|---------------|----------------|--------|--------|----------|
| Marker 1 [T1] | RBW            | 100 Hz | RF Att | 20 dB    |
| Ref Lvl       | -19.62 dBm     | VBW    | 100 Hz |          |
| 17.8 dBm      | 2.59300041 GHz | SWT    | 5 s    | Unit dBm |

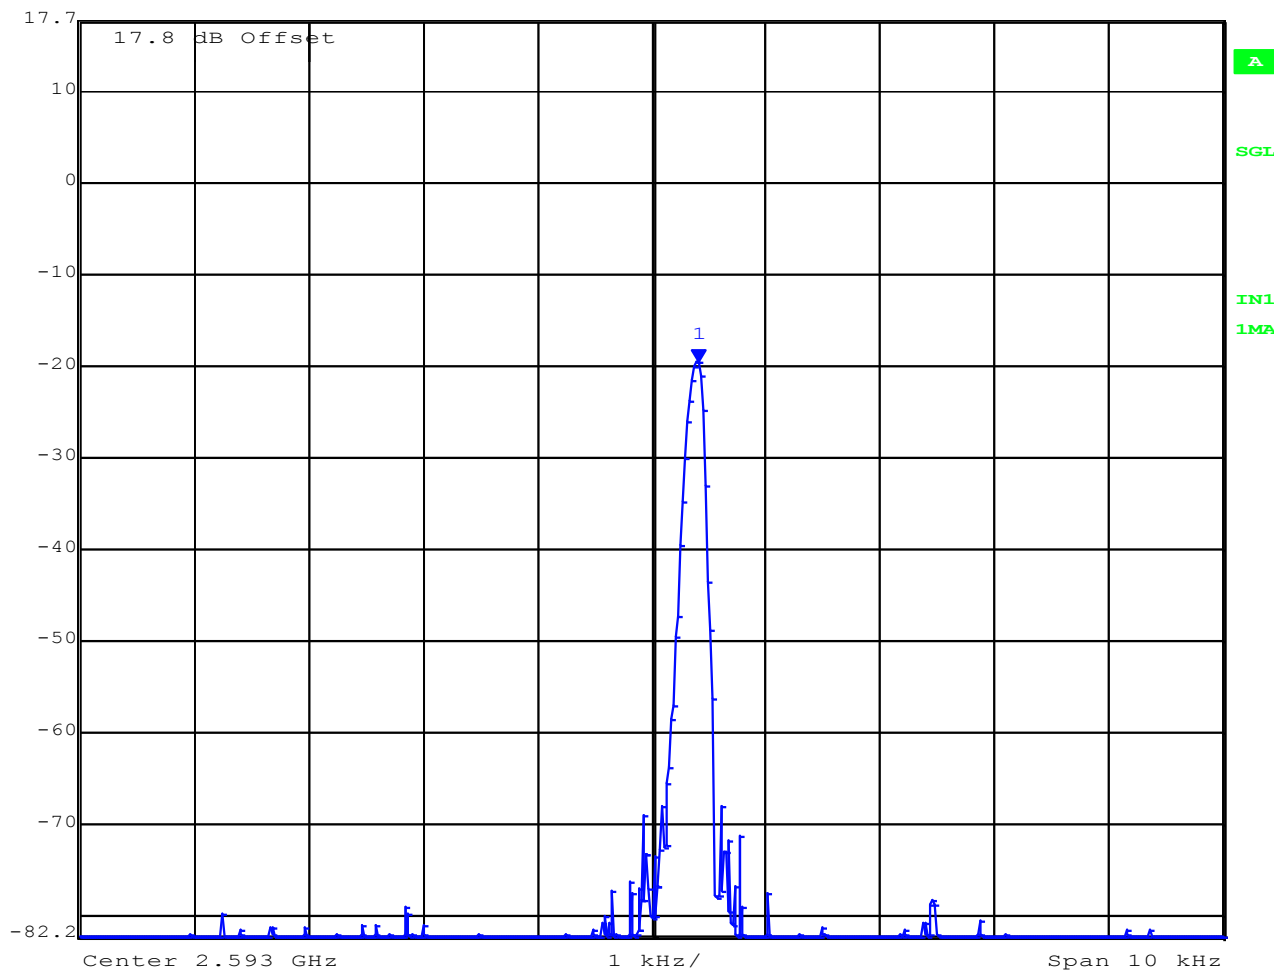

Date: 7.OCT.2015 02:38:53

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 50 of 126

### Frequency Stability -48 Vdc, -40°C



Marker 1 [T1] RBW 100 Hz RF Att 20 dB  
Ref Lvl -20.27 dBm VBW 100 Hz  
17.8 dBm 2.59300025 GHz SWT 5 s Unit dBm

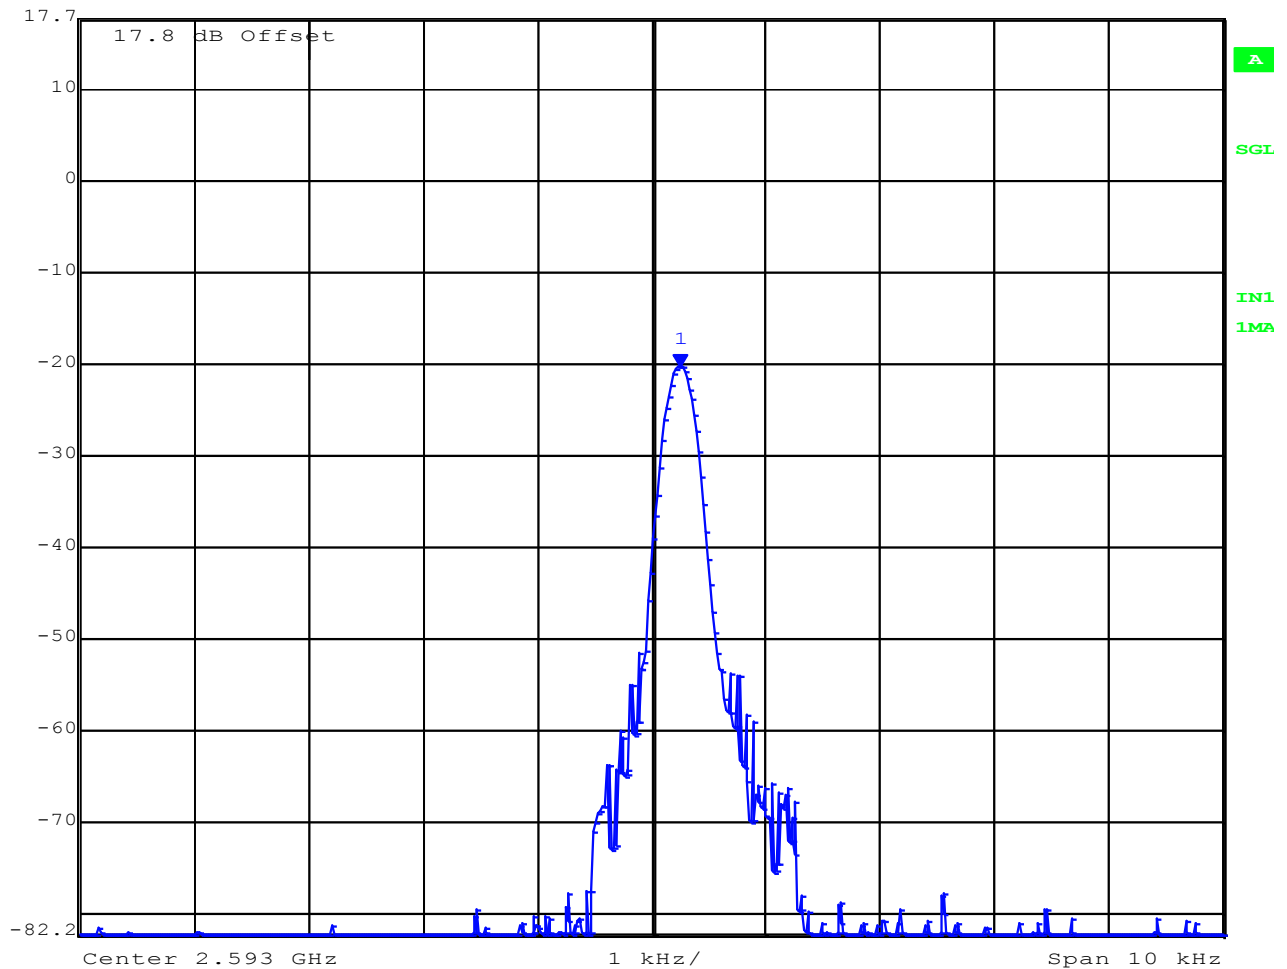

Date: 7.OCT.2015 03:55:29

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 51 of 126

### Frequency Stability -48 Vdc, -30°C



Marker 1 [T1] RBW 100 Hz RF Att 20 dB  
Ref Lvl -19.82 dBm VBW 100 Hz  
17.8 dBm 2.59300013 GHz SWT 5 s Unit dBm

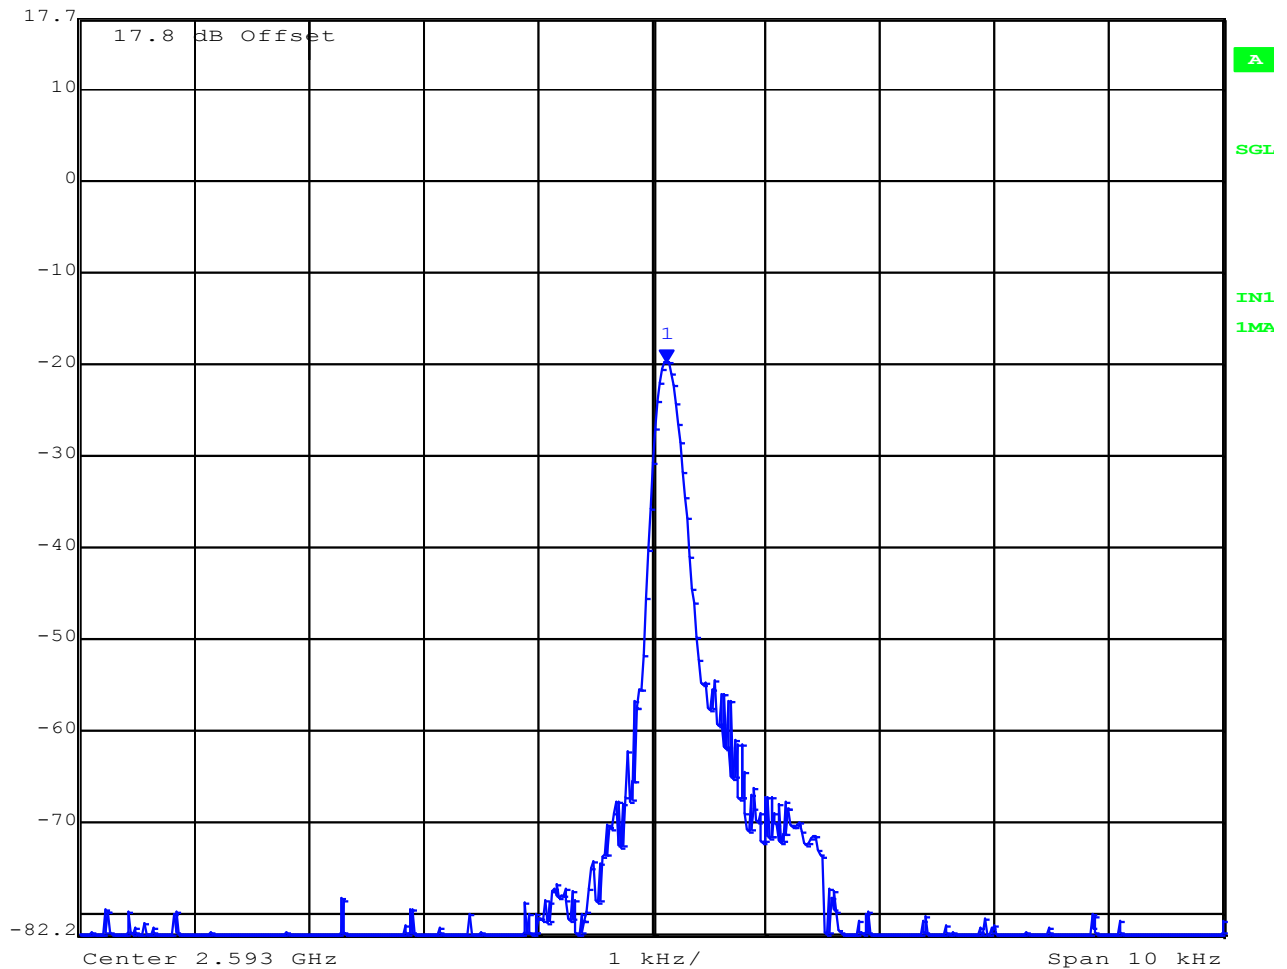

Date: 7.OCT.2015 03:44:09

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 52 of 126

### Frequency Stability -48 Vdc, -20°C



Marker 1 [T1] RBW 100 Hz RF Att 20 dB  
Ref Lvl -19.39 dBm VBW 100 Hz  
17.8 dBm 2.59300027 GHz SWT 5 s Unit dBm

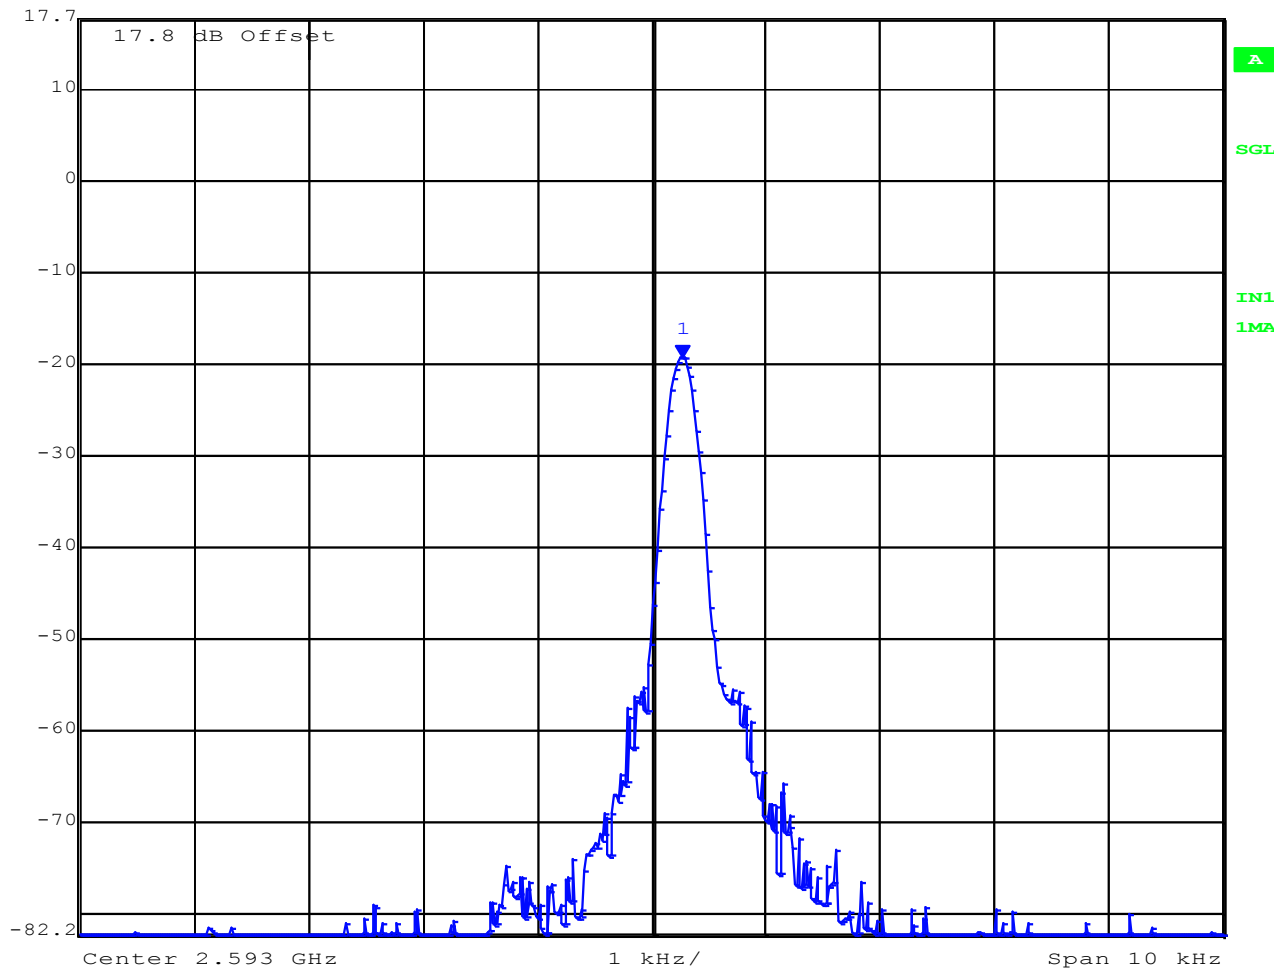

Date: 7.OCT.2015 03:31:39

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 53 of 126

### Frequency Stability -48 Vdc, -10°C



|               |                |        |        |          |
|---------------|----------------|--------|--------|----------|
| Marker 1 [T1] | RBW            | 100 Hz | RF Att | 20 dB    |
| Ref Lvl       | -19.36 dBm     | VBW    | 100 Hz |          |
| 17.8 dBm      | 2.59300035 GHz | SWT    | 5 s    | Unit dBm |

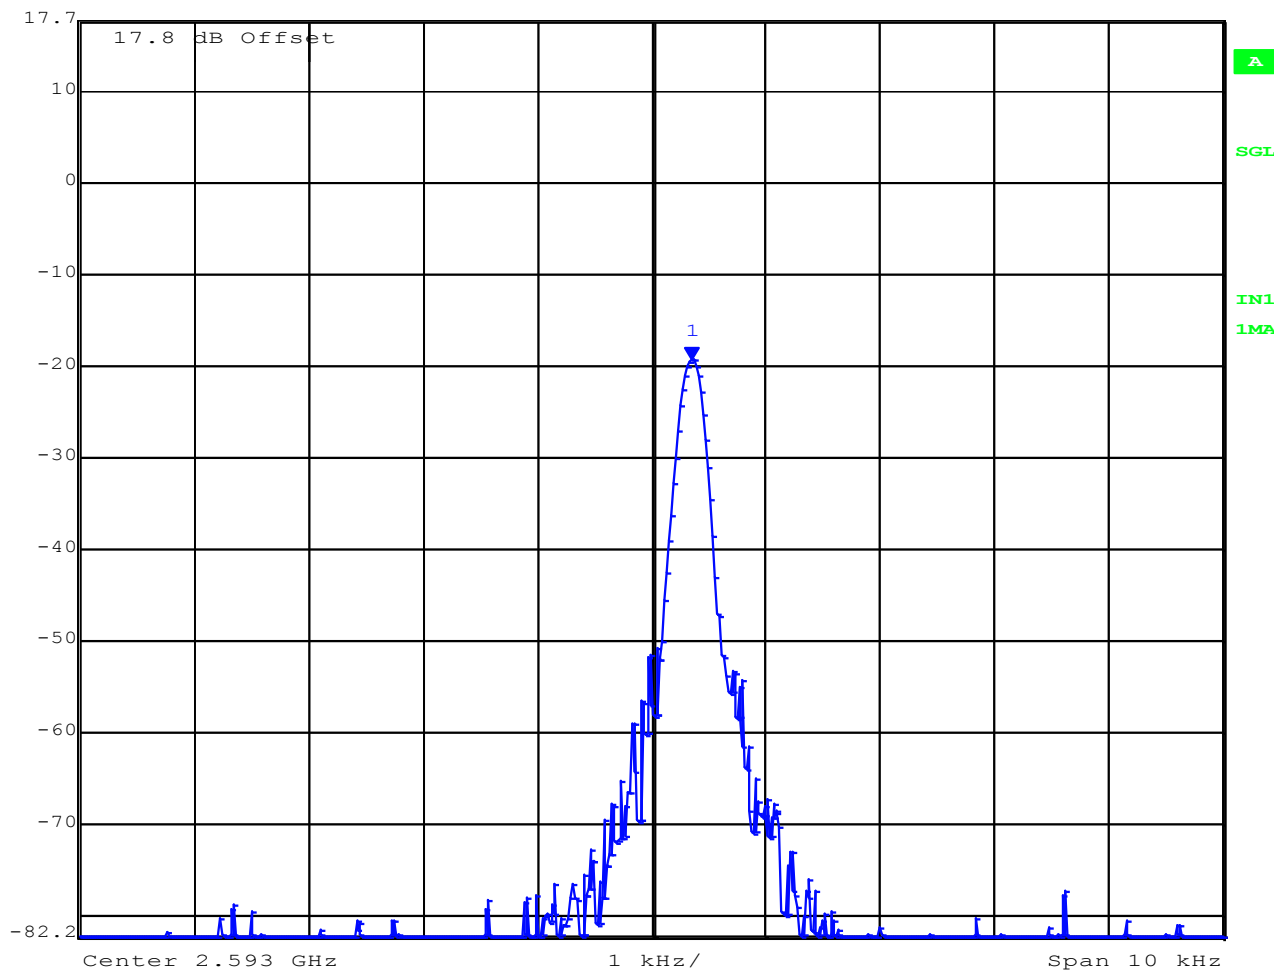

Date: 7.OCT.2015 03:19:35

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 54 of 126

### Frequency Stability -48 Vdc, +0°C



Marker 1 [T1] RBW 100 Hz RF Att 20 dB  
Ref Lvl -19.64 dBm VBW 100 Hz  
17.8 dBm 2.59300025 GHz SWT 5 s Unit dBm

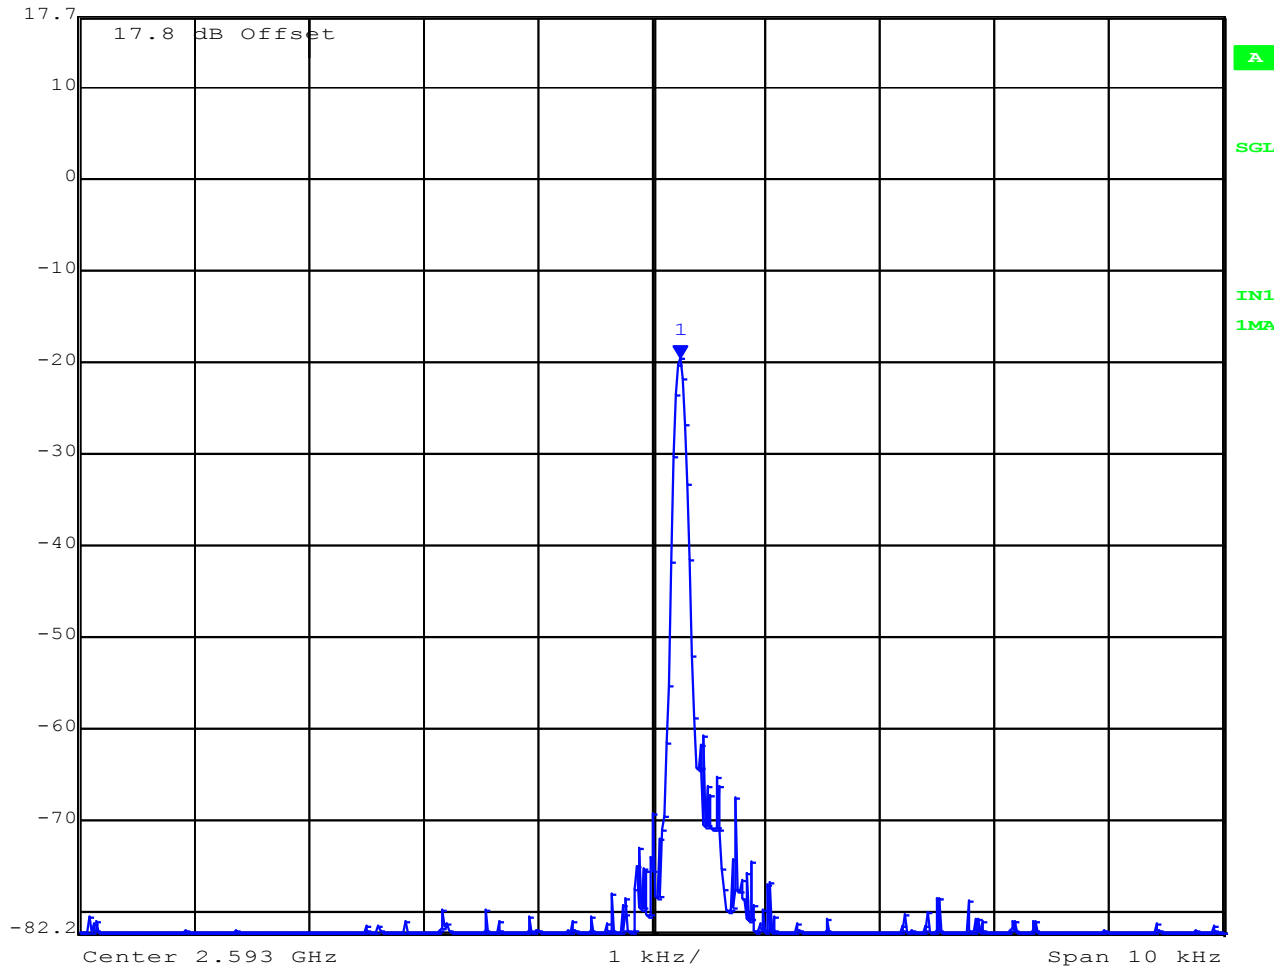


Date: 7.OCT.2015 03:05:48


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 55 of 126

### Frequency Stability -48 Vdc, +10°C

 **Marker 1 [T1]** RBW 100 Hz RF Att 20 dB  
Ref Lvl -19.51 dBm VBW 100 Hz  
17.8 dBm 2.59300025 GHz SWT 5 s Unit dBm

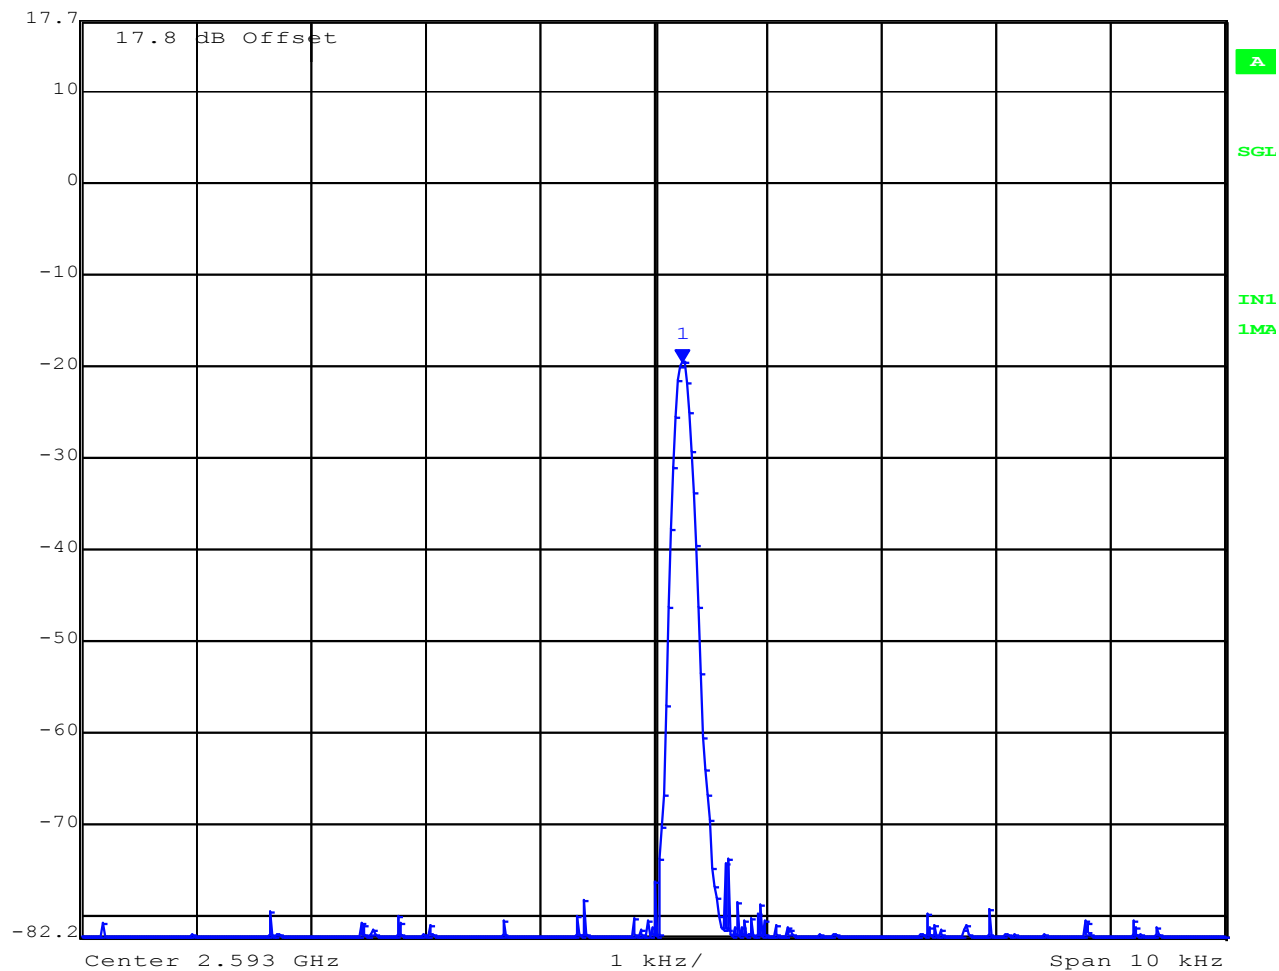

Date: 7.OCT.2015 02:51:56

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 56 of 126

### Frequency Stability -48 Vdc, +25°C



Marker 1 [T1] RBW 100 Hz RF Att 20 dB  
Ref Lvl -19.37 dBm VBW 100 Hz  
17.8 dBm 2.59300037 GHz SWT 5 s Unit dBm

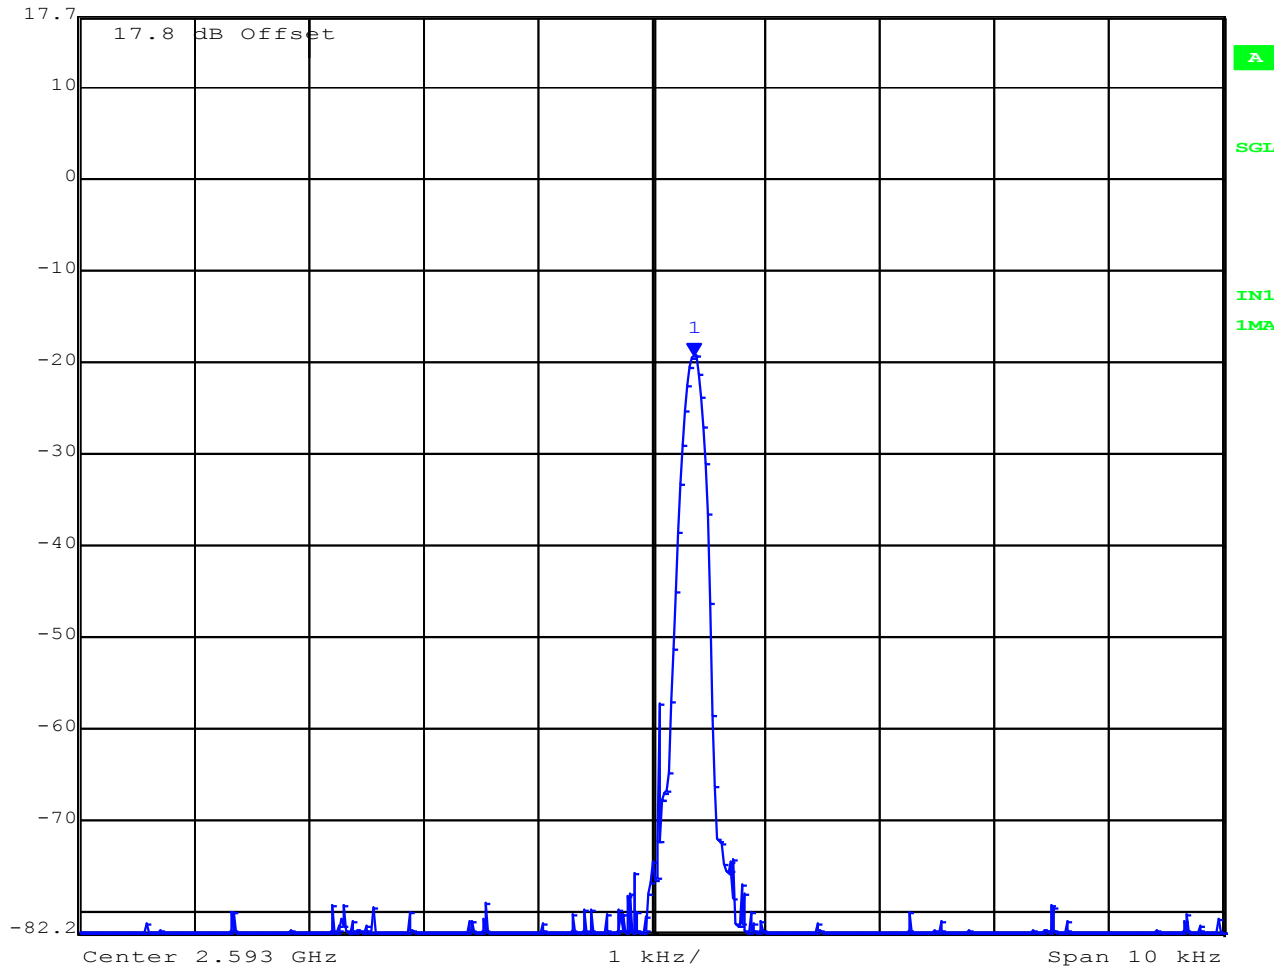

Date: 7.OCT.2015 02:27:08


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 57 of 126

### Frequency Stability -48 Vdc, +35°C

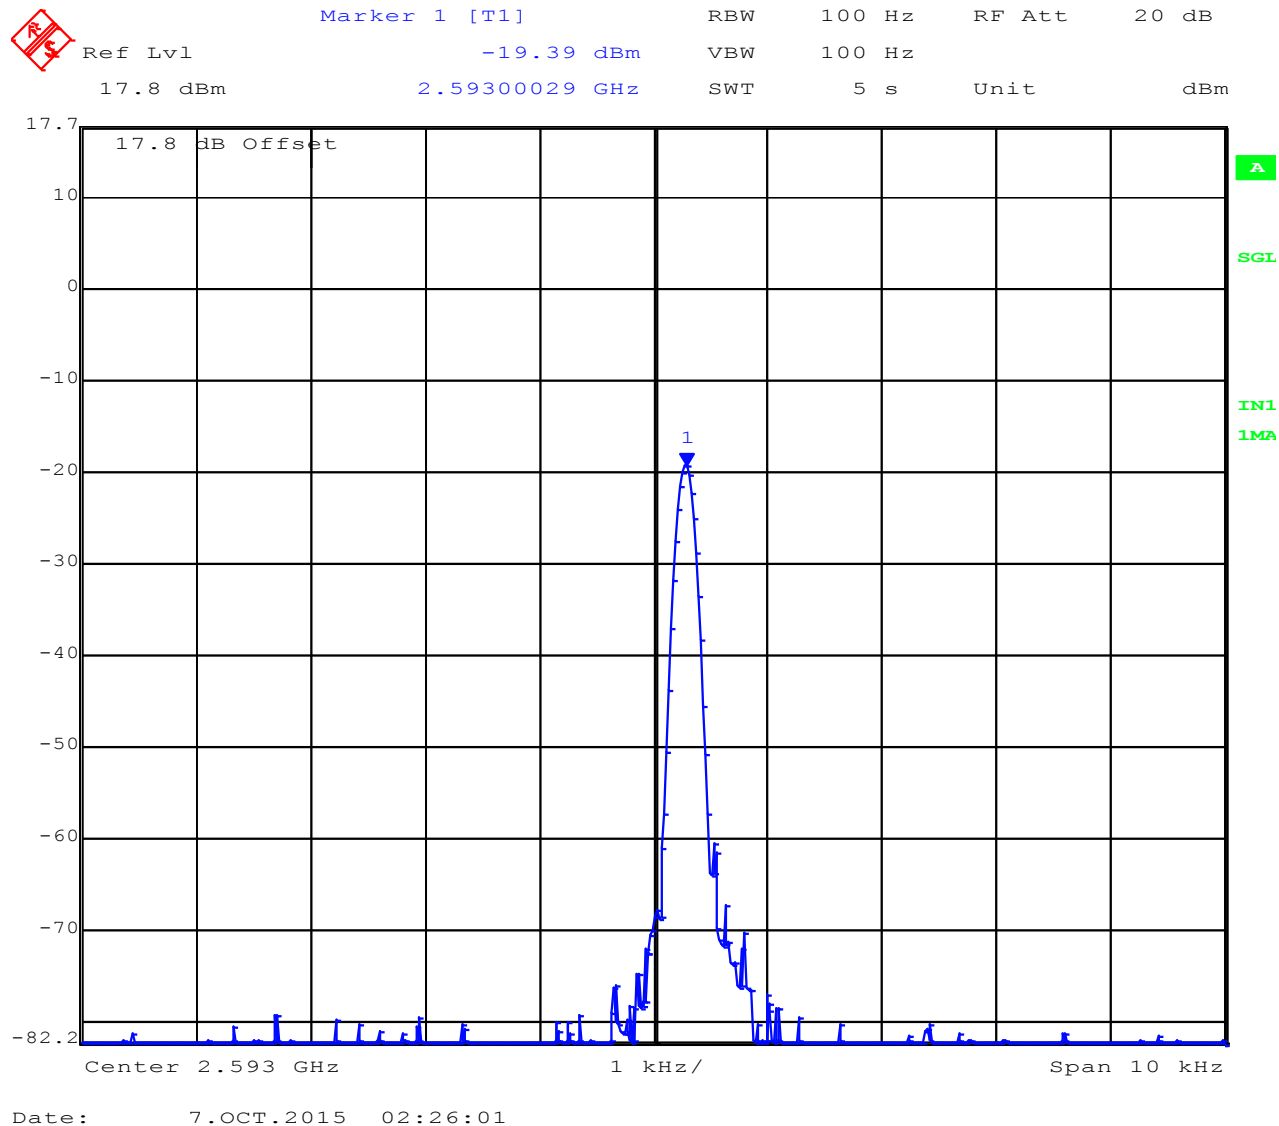

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 58 of 126

### Frequency Stability -48 Vdc, +45°C



Marker 1 [T1] RBW 100 Hz RF Att 20 dB  
Ref Lvl -19.42 dBm VBW 100 Hz  
17.8 dBm 2.59300033 GHz SWT 5 s Unit dBm

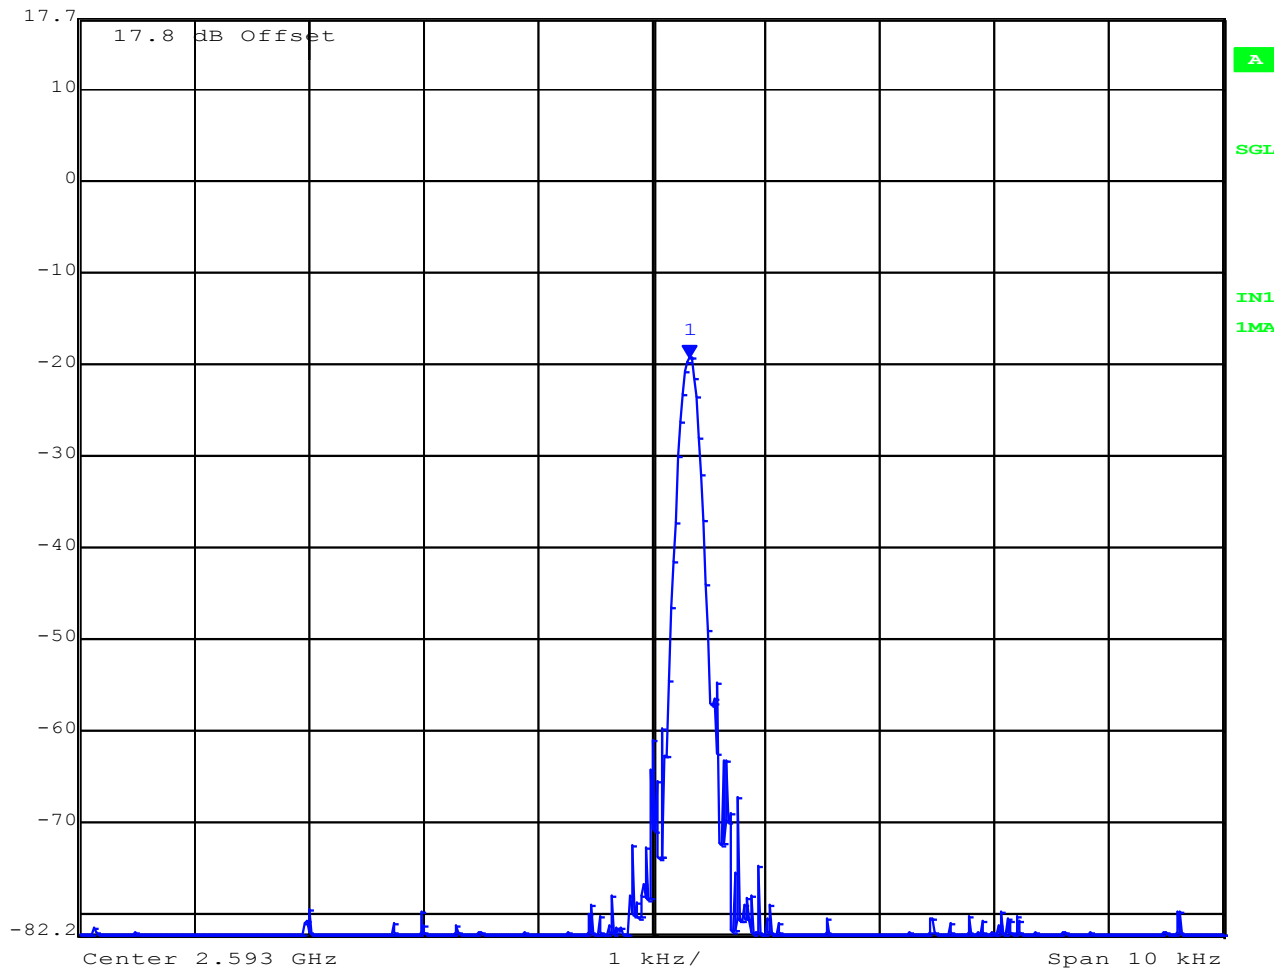

Date: 7.OCT.2015 02:08:37

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 59 of 126

### Frequency Stability -48 Vdc, +55°C



Marker 1 [T1] RBW 100 Hz RF Att 20 dB  
Ref Lvl -19.40 dBm VBW 100 Hz  
17.8 dBm 2.59300031 GHz SWT 5 s Unit dBm

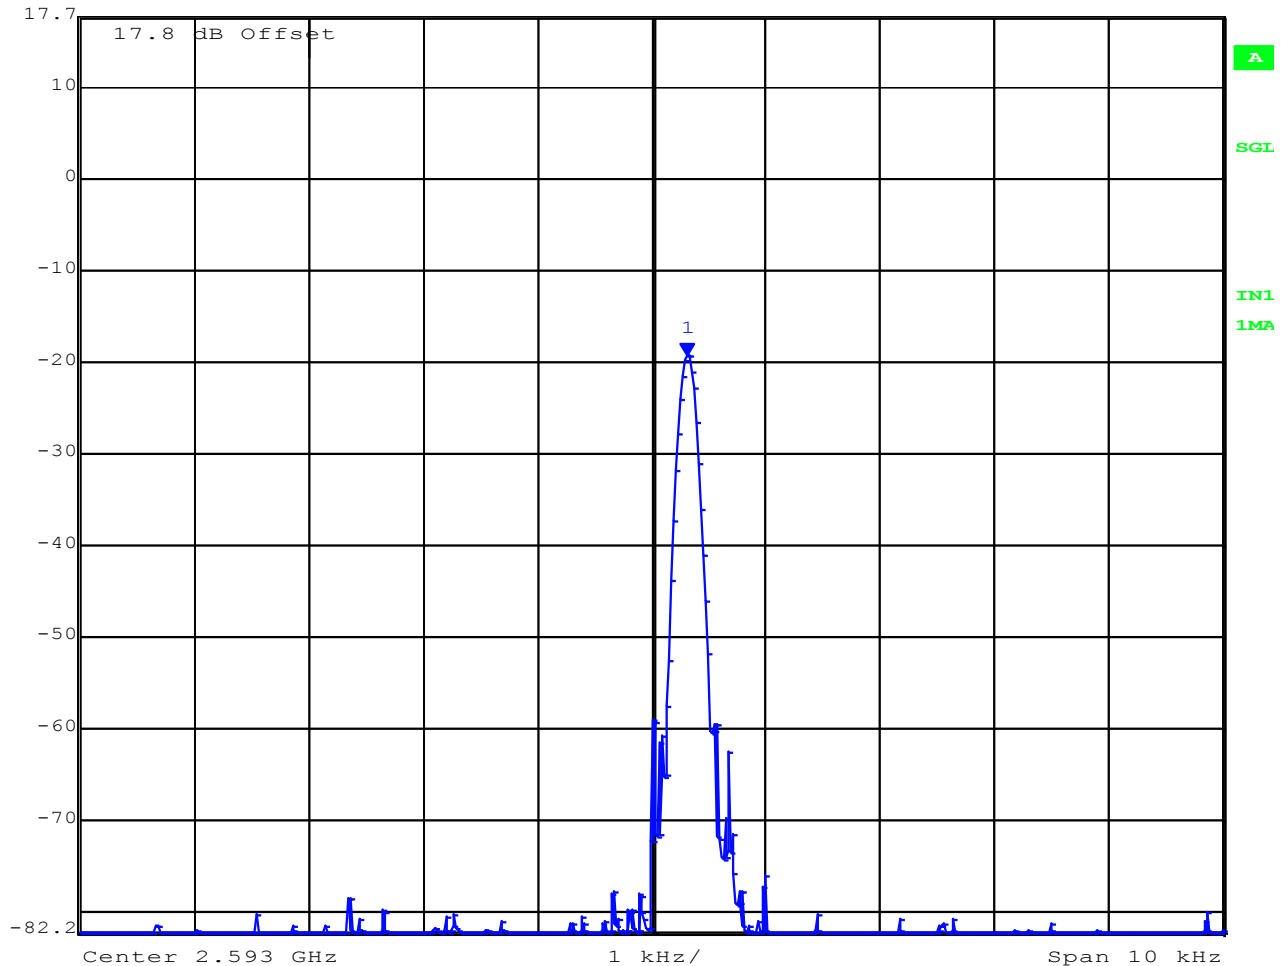

Date: 7.OCT.2015 01:55:23

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 60 of 126

#### 6.1.1.4. Maximum Conducted Output Power

| Conducted Test Conditions for Maximum Conducted Output Power EIRP |                                |                     |             |
|---|--------------------------------|---------------------|-------------|
| Standard:   | FCC CFR 47 Part 27, RSS-199    | Ambient Temp. (°C): | 24.0 - 27.5 |
| Test Heading:   | Maximum Conducted Output Power | Rel. Humidity (%):  | 32 - 45     |
| Standard Section(s):  | FCC 2.1046, IC GL-07 5.2.1     | Pressure (mBars):   | 999 - 1001  |
| Reference Document(s):  |                                |                     |             |

**Test Procedure for Maximum Conducted Output Power Measurement (EIRP)**

Test methodology used a wideband average power meter. Measurements were made while the EUT was operating in a continuous transmission mode (100% duty cycle) at the appropriate centre frequency. All cable losses and offsets were taken into consideration in the measured result. All operational modes and frequency bands were measured independently and the resultant power calculated. For multiple outputs, the measurements were made simultaneously on each output port and summed in a linear fashion. This technique was used in order to prove compliance.

**Power Settings**

Power settings for each of the eight antenna ports could be individually set through software control. Power measurements were made from each antenna port and the power setting logged for each measurement.

**Limits**

Base stations are limited to less than 33.3 W maximum equivalent isotropically radiated power (e.i.r.p.) in any 100 kHz segment.

Operational Bandwidths and maximum permitted EIRP values

Maximum EIRP = 33.3 W + increased power due to all 100 kHz segments in maximum bandwidth for each operational bandwidth  
33.3W = 45.22 dBm

**5 MHz:** Maximum measured 99% Occupied Bandwidth = 4.50 MHz  
Maximum EIRP = 33.3 W + increased power due to all 100 kHz segments in 4.50 MHz  
Maximum EIRP = 45.22 + 10 \* Log (4.5 MHz/0.1 MHz) = 45.22 + 16.5 = 61.72 dBm

**10 MHz:** Maximum measured 99% Occupied Bandwidth = 9.01 MHz  
Maximum EIRP = 33.3 W + increased power due to all 100 kHz segments in 9.01 MHz  
Maximum EIRP = 45.22 + 10 \* Log (9.01 MHz/0.1 MHz) = 45.22 + 19.5 = 64.72 dBm

**15 MHz:** Maximum measured 99% Occupied Bandwidth = 13.46 MHz  
Maximum EIRP = 33.3 W + increased power due to all 100 kHz segments in 13.46 MHz  
Maximum EIRP = 45.22 + 10 \* Log (13.46 MHz/0.1 MHz) = 45.22 + 21.3 = 66.52 dBm

**20 MHz:** Maximum measured 99% Occupied Bandwidth = 18.03 MHz  
Maximum EIRP = 33.3 W + increased power due to all 100 kHz segments in 18.03 MHz  
Maximum EIRP = 45.22 + 10 \* Log (18.03 MHz/0.1 MHz) = 45.22 + 22.6 = 67.82 dBm

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 61 of 126

### Measurement Results for Maximum Conducted Output Power

| Equipment Configuration for Peak Transmit Power |                |                                   |      |
|---|----------------|-----------------------------------|------|
| <b>Variant:</b>                                 | 5 MHz          | <b>Duty Cycle (%):</b>            | 88   |
| <b>Data Rate:</b>                               | 5              | <b>Antenna Gain (dBi):</b>        | 10   |
| <b>Modulation:</b>                              | 64 QAM         | <b>Beam Forming Gain (Y)(dB):</b> | None |
| <b>TPC:</b>                                     | Not Applicable | <b>Tested By:</b>                 | SB   |
| <b>Engineering Test Notes:</b>                  |                |                                   |      |

| Test Measurement Results |                                       |       |    |    |                   |       |            |        |                   |
|--------------------------|---------------------------------------|-------|----|----|-------------------|-------|------------|--------|-------------------|
| Test Frequency           | Measured Conducted Output Power (dBm) |       |    |    | Σ Conducted power | EIRP  | EIRP Limit | Margin | EUT Power Setting |
|                          | Port(s)                               |       |    |    |                   |       |            |        |                   |
| MHz                      | a                                     | b     | c  | d  | dBm               | dBm   | dBm        | dB     |                   |
| 2498.5                   | 36.71                                 | 36.71 | -- | -- | 39.72             | 49.72 | 61.72      | -12.00 |                   |
| 2593.0                   | 36.70                                 | 36.60 | -- | -- | 39.66             | 49.66 | 61.72      | -12.06 |                   |
| 2685.7                   | 36.80                                 | 36.80 | -- | -- | 39.81             | 49.81 | 61.72      | -11.91 |                   |

| Traceability to Industry Recognized Test Methodologies |                                  |
|--|----------------------------------|
| Work Instruction:                                      | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty:                               | $\pm 2.81$ dB                    |

Offset for duty cycle is included in the measurement of chain power

Margin indicates that an antenna with a maximum gain of 21.0 dBi can be installed as part of the system. Antenna's with a gain higher than 21.0 dBi must reduce the output power 1 dB for every dB greater than 21.0 dBi.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 62 of 126

#### Equipment Configuration for Peak Transmit Power

|                                |                |                                   |      |
|--------------------------------|----------------|-----------------------------------|------|
| <b>Variant:</b>                | 10 MHz         | <b>Duty Cycle (%):</b>            | 88   |
| <b>Data Rate:</b>              | 5              | <b>Antenna Gain (dBi):</b>        | 10   |
| <b>Modulation:</b>             | 64 QAM         | <b>Beam Forming Gain (Y)(dB):</b> | None |
| <b>TPC:</b>                    | Not Applicable | <b>Tested By:</b>                 | SB   |
| <b>Engineering Test Notes:</b> |                |                                   |      |

#### Test Measurement Results

| Test Frequency | Measured Conducted Output Power (dBm) |       |    |    | $\Sigma$<br>Conducted power<br>dBm | EIRP<br>dBm | EIRP Limit<br>dBm | Margin<br>dB | EUT Power Setting |
|----------------|---------------------------------------|-------|----|----|------------------------------------|-------------|-------------------|--------------|-------------------|
|                | Port(s)                               |       |    |    |                                    |             |                   |              |                   |
| MHz            | a                                     | b     | c  | d  |                                    |             |                   |              |                   |
| 2501.0         | 36.75                                 | 36.75 | -- | -- | 39.76                              | 49.76       | 64.72             | -14.96       | 37                |
| 2593.0         | 36.75                                 | 36.75 | -- | -- | 39.76                              | 49.76       | 64.72             | -14.96       | 37                |
| 2680.0         | 36.77                                 | 36.77 | -- | -- | 39.78                              | 49.78       | 64.72             | -14.94       | 37                |

#### Traceability to Industry Recognized Test Methodologies

|                          |                                  |
|--------------------------|----------------------------------|
| Work Instruction:        | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB                         |

Offset for duty cycle is included in the measurement of chain power

Margin indicates that an antenna with a maximum gain of 21.0 dBi can be installed as part of the system. Antenna's with a gain higher than 21.0 dBi must reduce the output power 1 dB for every dB greater than 21.0 dBi.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 63 of 126

#### Equipment Configuration for Peak Transmit Power

|                                |                |                                   |      |
|--------------------------------|----------------|-----------------------------------|------|
| <b>Variant:</b>                | 15 MHz         | <b>Duty Cycle (%):</b>            | 88   |
| <b>Data Rate:</b>              | 5              | <b>Antenna Gain (dBi):</b>        | 10   |
| <b>Modulation:</b>             | 64 QAM         | <b>Beam Forming Gain (Y)(dB):</b> | None |
| <b>TPC:</b>                    | Not Applicable | <b>Tested By:</b>                 | SB   |
| <b>Engineering Test Notes:</b> |                |                                   |      |

#### Test Measurement Results

| Test Frequency | Measured Conducted Output Power (dBm) |       |    |    | $\Sigma$<br>Conducted power<br>dBm | EIRP<br>dBm | Limit<br>dBm | Margin<br>dB | EUT Power Setting |
|----------------|---------------------------------------|-------|----|----|------------------------------------|-------------|--------------|--------------|-------------------|
|                | Port(s)                               |       |    |    |                                    |             |              |              |                   |
| MHz            | a                                     | b     | c  | d  |                                    |             |              |              |                   |
| 2503.0         | 36.72                                 | 36.72 | -- | -- | 39.73                              | 49.73       | 66.52        | -16.79       | 37                |
| 2593.0         | 36.89                                 | 36.89 | -- | -- | 39.90                              | 49.90       | 66.52        | -16.62       | 37                |
| 2683.5         | 36.59                                 | 36.59 | -- | -- | 39.60                              | 49.60       | 66.52        | -16.92       | 37                |

#### Traceability to Industry Recognized Test Methodologies

|                          |                                  |
|--------------------------|----------------------------------|
| Work Instruction:        | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB                         |

Offset for duty cycle is included in the measurement of chain power

Margin indicates that an antenna with a maximum gain of 21.0 dBi can be installed as part of the system. Antenna's with a gain higher than 21.0 dBi must reduce the output power 1 dB for every dB greater than 21.0 dBi.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 64 of 126

#### Equipment Configuration for Peak Transmit Power

|                                |                |                                   |      |
|--------------------------------|----------------|-----------------------------------|------|
| <b>Variant:</b>                | 20 MHz         | <b>Duty Cycle (%):</b>            | 88   |
| <b>Data Rate:</b>              | 5              | <b>Antenna Gain (dBi):</b>        | 10   |
| <b>Modulation:</b>             | 64 QAM         | <b>Beam Forming Gain (Y)(dB):</b> | None |
| <b>TPC:</b>                    | Not Applicable | <b>Tested By:</b>                 | SB   |
| <b>Engineering Test Notes:</b> |                |                                   |      |

#### Test Measurement Results

| Test Frequency | Measured Conducted Output Power (dBm) |       |    |    | $\Sigma$<br>Conducted power<br>dBm | EIRP<br>dBm | Limit<br>dBm | Margin<br>dB | EUT Power Setting |
|----------------|---------------------------------------|-------|----|----|------------------------------------|-------------|--------------|--------------|-------------------|
|                | Port(s)                               |       |    |    |                                    |             |              |              |                   |
| MHz            | a                                     | b     | c  | d  |                                    |             |              |              |                   |
| 2503.0         | 36.76                                 | 36.76 | -- | -- | 39.77                              | 49.77       | 67.82        | -18.05       | 37                |
| 2593.0         | 36.58                                 | 36.71 | -- | -- | 39.66                              | 49.66       | 67.82        | -18.16       | 37                |
| 2683.5         | 36.59                                 | 36.59 | -- | -- | 39.60                              | 49.60       | 67.82        | -18.22       | 37                |

#### Traceability to Industry Recognized Test Methodologies

|                          |                                  |
|--------------------------|----------------------------------|
| Work Instruction:        | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB                         |

Offset for duty cycle is included in the measurement of chain power

Margin indicates that an antenna with a maximum gain of 21.0 dBi can be installed as part of the system. Antenna's with a gain higher than 21.0 dBi must reduce the output power 1 dB for every dB greater than 21.0 dBi.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** Axxcelera Broadband Wireless AxxcelLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 65 of 126

#### 6.1.1.5. Transmitter Unwanted Emissions

| Conducted Test Conditions for Transmitter Unwanted Emissions   |                                |                     |             |
|--|--------------------------------|---------------------|-------------|
| Standard:  | FCC CFR 47: Part 27, RSS-199   | Ambient Temp. (°C): | 24.0 - 27.5 |
| Test Heading:  | Transmitter Unwanted Emissions | Rel. Humidity (%):  | 32 - 45     |
| Standard Section(s):   | FCC 2.1051, 27.53(m), IC 4.5   | Pressure (mBars):   | 999 - 1001  |
| Reference Document(s):   |                                |                     |             |
| <b>Test Procedure for Transmitter Unwanted Emissions</b>   |                                |                     |             |
| The Transmitter Unwanted Emissions were measurement conductively. Testing was performed on individual antenna ports and limits applied to each plot respectively.  |                                |                     |             |
| <b>Limits</b>  |                                |                     |             |
| The power of any unwanted emissions measured from the channel edge of the equipment shall be attenuated below the transmitter power, P (dBW), as follows:          |                                |                     |             |
| (a) for base station and subscriber equipment, other than mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \text{ Log}_{10} (p)$ , dB; |                                |                     |             |
| Maximum chain output power found = +36.89 dBm (4.89 W) (15 MHz bandwidth, channel 2593.0 MHz)  |                                |                     |             |
| Limit = $43 + 10 \text{ Log} (P) = 43 + 10 * \text{Log} (P) = 43 + 6.89 = 49.89 \text{ dB}$  |                                |                     |             |
| Limit = $36.89 - 49.89 = -13.0 \text{ dBm}$  |                                |                     |             |

#### Change to Transmitter Unwanted Emission Limits

Although the Axxcelera Broadband Wireless Axxcel LTE has four antenna ports they do not transmit on the same channel frequency. Two ports are dedicated to each channel frequency within the frequency band. As a result the limits for transmitter spurious emissions are modified where testing occurs on a single chain at any given time;

Limit single chain = -13 dBm

Limit single chain (2 port) =  $-13 - 10 * \log(n)$  [where  $n=2$ ] =  $-13 - 3 = -16$  dBm

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 66 of 126

#### 6.1.1.5.1 Conducted Emissions

| Equipment Configuration for 99% Occupied Bandwidth |                |                                   |      |
|--|----------------|-----------------------------------|------|
| <b>Variant:</b>                                    | 5 MHz          | <b>Duty Cycle (%):</b>            | 88   |
| <b>Data Rate:</b>                                  | 5              | <b>Antenna Gain (dBi):</b>        | 10   |
| <b>Modulation:</b>                                 | 64 QAM         | <b>Beam Forming Gain (Y)(dB):</b> | None |
| <b>TPC:</b>  | Not Applicable | <b>Tested By:</b>                 | SB   |
| <b>Engineering Test Notes:</b>                     |                |                                   |      |

| CHAIN A               |                        |   |                           |              |                        |
|-----------------------|------------------------|---|---------------------------|--------------|------------------------|
| <b>Temperature</b>    | 20.0 °C                | <b>Maximum Observed Spurious Emission</b> |                           | <b>Limit</b> | <b>Margin</b>          |
| <b>Voltage</b>        | 24.00 Vdc              | <b>Amplitude</b>                          | <b>Emission Frequency</b> |              |                        |
| <b>Test Frequency</b> | <b>Frequency Range</b> | <b>dBm</b>                                | <b>MHz</b>                | <b>dBm</b>   | <b>dB</b>              |
| 2498.1 MHz            | 9 - 150 KHz            | -20.06                                    | 37.53                     | -16.0        | <a href="#">-4.06</a>  |
|                       | 0.15 - 30 MHz          | -35.71                                    | 150.00                    | -16.0        | <a href="#">-19.71</a> |
|                       | 30 - 1000 MHz          | -33.49                                    | 860.04                    | -16.0        | <a href="#">-17.49</a> |
|                       | 1000 - 26000 MHz       | -20.01                                    | 229939.87                 | -16.0        | <a href="#">-4.01</a>  |

| CHAIN B               |                        |   |                           |              |                        |
|-----------------------|------------------------|---|---------------------------|--------------|------------------------|
| <b>Temperature</b>    | 20.0 °C                | <b>Maximum Observed Spurious Emission</b> |                           | <b>Limit</b> | <b>Margin</b>          |
| <b>Voltage</b>        | 24.00 Vdc              | <b>Amplitude</b>                          | <b>Emission Frequency</b> |              |                        |
| <b>Test Frequency</b> | <b>Frequency Range</b> | <b>dBm</b>                                | <b>MHz</b>                | <b>dBm</b>   | <b>dB</b>              |
| 2498.1 MHz            | 9 - 150 KHz            | -21.48                                    | 73.707                    | -16.0        | <a href="#">-5.48</a>  |
|                       | 0.15 - 30 MHz          | -34.17                                    | 150.00                    | -16.0        | <a href="#">-18.17</a> |
|                       | 30 - 1000 MHz          | -33.87                                    | 955.29                    | -16.0        | <a href="#">-17.87</a> |
|                       | 1000 - 26000 MHz       | -20.80                                    | 229877.13                 | -16.0        | <a href="#">-4.80</a>  |

Click on the link to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 67 of 126

| CHAIN A        |                  |                                    |                    |       |                        |
|----------------|------------------|------------------------------------|--------------------|-------|------------------------|
| Temperature    | 20.0 °C          | Maximum Observed Spurious Emission |                    | Limit | Margin                 |
| Voltage        | 24.00 Vdc        | Amplitude                          | Emission Frequency |       |                        |
| Test Frequency | Frequency Range  | dBm                                | MHz                | dBm   | dB                     |
| 2593 MHz       | 9 - 150 KHz      | -21.43                             | 30.75              | -16.0 | <a href="#">-5.43</a>  |
|                | 0.15 - 30 MHz    | -33.97                             | 150.00             | -16.0 | <a href="#">-17.97</a> |
|                | 30 - 1000 MHz    | -32.97                             | 788.11             | -16.0 | <a href="#">-16.97</a> |
|                | 1000 - 26000 MHz | -21.81                             | 226381.23          | -16.0 | <a href="#">-5.81</a>  |

| CHAIN B        |                  |                                    |                    |       |                        |
|----------------|------------------|------------------------------------|--------------------|-------|------------------------|
| Temperature    | 20.0 °C          | Maximum Observed Spurious Emission |                    | Limit | Margin                 |
| Voltage        | 24.00 Vdc        | Amplitude                          | Emission Frequency |       |                        |
| Test Frequency | Frequency Range  | dBm                                | MHz                | dBm   | dB                     |
| 2593 MHz       | 9 - 150 KHz      | -21.66                             | 73.70              | -16.0 | <a href="#">-5.66</a>  |
|                | 0.15 - 30 MHz    | -34.23                             | 150.00             | -16.0 | <a href="#">-18.23</a> |
|                | 30 - 1000 MHz    | -33.23                             | 939.73             | -16.0 | <a href="#">-17.23</a> |
|                | 1000 - 26000 MHz | -20.81                             | 219799.44          | -16.0 | <a href="#">-4.81</a>  |

Click on the link to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 68 of 126

| CHAIN A        |                  |                                    |                    |       |                        |
|----------------|------------------|------------------------------------|--------------------|-------|------------------------|
| Temperature    | 20.0 °C          | Maximum Observed Spurious Emission |                    | Limit | Margin                 |
| Voltage        | 24.00 Vdc        | Amplitude                          | Emission Frequency |       |                        |
| Test Frequency | Frequency Range  | dBm                                | MHz                | dBm   | dB                     |
| 2687.5 MHz     | 9 - 150 KHz      | -18.27                             | 32.73              | -16.0 | <a href="#">-2.27</a>  |
|                | 0.15 - 30 MHz    | -35.06                             | 150.00             | -16.0 | <a href="#">-19.06</a> |
|                | 30 - 1000 MHz    | -32.96                             | 937.79             | -16.0 | <a href="#">-16.96</a> |
|                | 1000 - 26000 MHz | -20.09                             | 225191.10          | -16.0 | <a href="#">-4.09</a>  |

| CHAIN B        |                  |                                    |                    |       |                        |
|----------------|------------------|------------------------------------|--------------------|-------|------------------------|
| Temperature    | 20.0 °C          | Maximum Observed Spurious Emission |                    | Limit | Margin                 |
| Voltage        | 24.00 Vdc        | Amplitude                          | Emission Frequency |       |                        |
| Test Frequency | Frequency Range  | dBm                                | MHz                | dBm   | dB                     |
| 2687.5 MHz     | 9 - 150 KHz      | -21.42                             | 37.53              | -16.0 | <a href="#">-5.42</a>  |
|                | 0.15 - 30 MHz    | -33.81                             | 150.00             | -16.0 | <a href="#">-17.81</a> |
|                | 30 - 1000 MHz    | -33.09                             | 918.35             | -16.0 | <a href="#">-17.09</a> |
|                | 1000 - 26000 MHz | -20.78                             | 229174.32          | -16.0 | <a href="#">-4.78</a>  |

| Traceability to Industry Recognized Test Methodologies |                                  |
|--|----------------------------------|
| Work Instruction:                                      | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty:                               | ±2.81 dB                         |

Click on the link to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 69 of 126

---

#### 6.1.1.5.2 Conducted Band-Edge Emissions

#### RESULTS SUMMARY FOR CONDUCTED BAND-EDGE EMISSIONS

|                  |        | Bandwidth | Band-Edge Freq | Peak<br>(Limit -16 dBm) | Power Setting |
|------------------|--------|-----------|----------------|-------------------------|---------------|
| Operational Mode | MHz    | MHz       | MHz            | dBm                     |               |
| 64 QAM           | 2498.5 | 5         | 2496           | -18.92                  | 37            |
| 64 QAM           | 2501.0 | 10        | 2496           | -21.97                  | 37            |
| 64 QAM           | 2503.0 | 15        | 2496           | -20.70                  | 37            |
| 64 QAM           | 2503.0 | 20        | 2496           | -23.74                  | 37            |
|                  |        |           |                |                         |               |
| 64 QAM           | 2687.5 | 5         | 2690           | -19.94                  | 37            |
| 64 QAM           | 2680.1 | 10        | 2690           | -21.97                  | 37            |
| 64 QAM           | 2683.5 | 15        | 2690           | -20.90                  | 37            |
| 64 QAM           | 2683.5 | 20        | 2690           | -24.02                  | 37            |

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 70 of 126

**2498.1 MHz 5 MHz Bandwidth**  
**Frequency Range 2495-2497 MHz**



Marker 1 [T1] RBW 50 kHz RF Att 0 dB  
Ref Lvl -18.92 dBm VBW 200 kHz  
42 dBm 2.49600000 GHz SWT 10 s Unit dBm

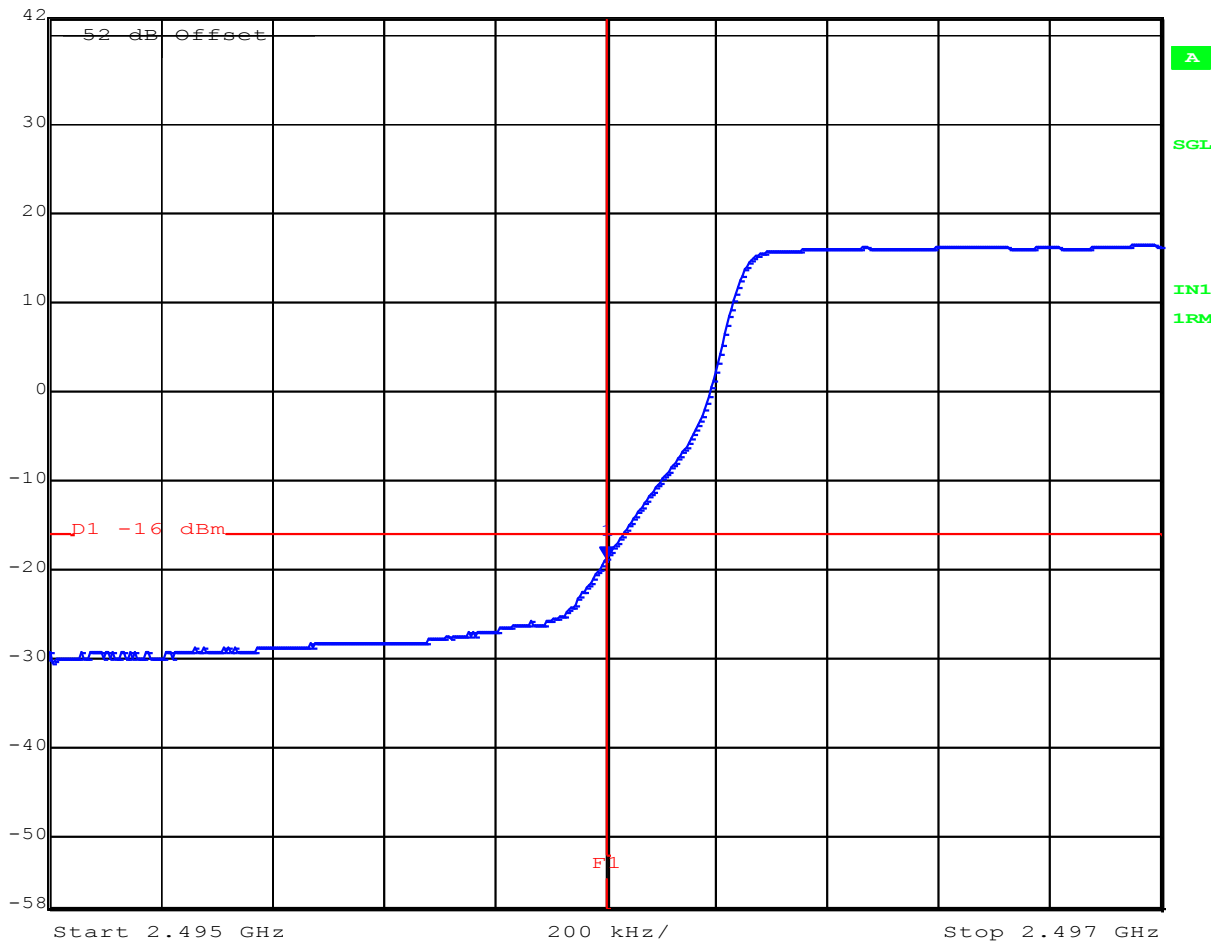

Date: 10.OCT.2015 01:59:14

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 71 of 126

**2498.1 MHz 5 MHz Bandwidth**  
**Frequency Range 2490-2495 MHz**



Marker 1 [T1] RBW 100 kHz RF Att 0 dB  
Ref Lvl -27.12 dBm VBW 300 kHz  
42 dBm 2.49497996 GHz SWT 10 s Unit dBm

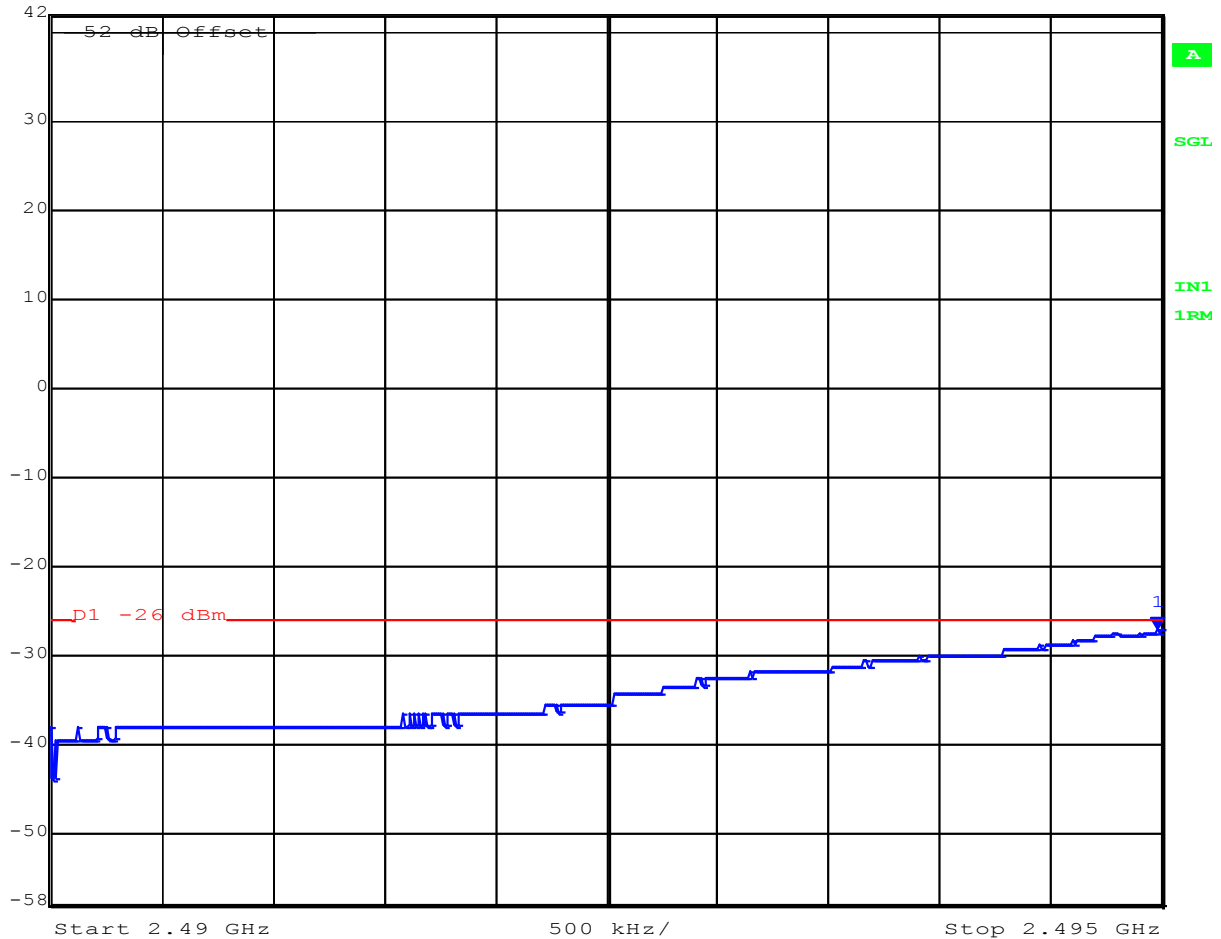

Date: 10.OCT.2015 01:56:55

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 72 of 126

**2498.1 MHz 5 MHz Bandwidth**  
**Frequency Range 2480-2490 MHz**



Marker 1 [T1] RBW 1 MHz RF Att 0 dB  
Ref Lvl -28.96 dBm VBW 3 MHz  
42 dBm 2.49000000 GHz SWT 10 s Unit dBm

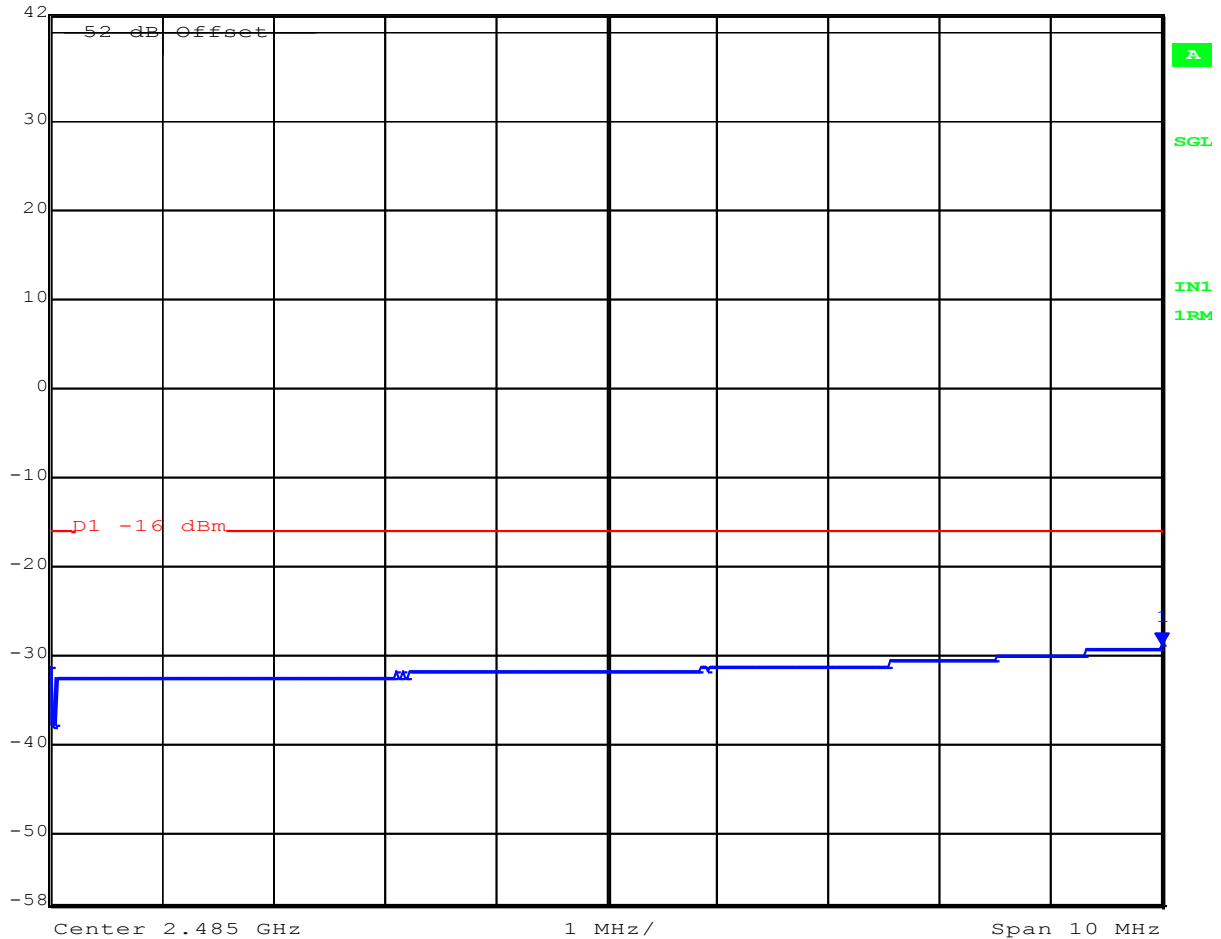

Date: 10.OCT.2015 01:54:00

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.






**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 73 of 126

**2501 MHz 10 MHz Bandwidth**  
**Frequency Range 2495-2497 MHz**



Marker 1 [T1] RBW 100 kHz RF Att 0 dB  
Ref Lvl -21.97 dBm VBW 300 kHz  
42 dBm 2.49600000 GHz SWT 10 s Unit dBm

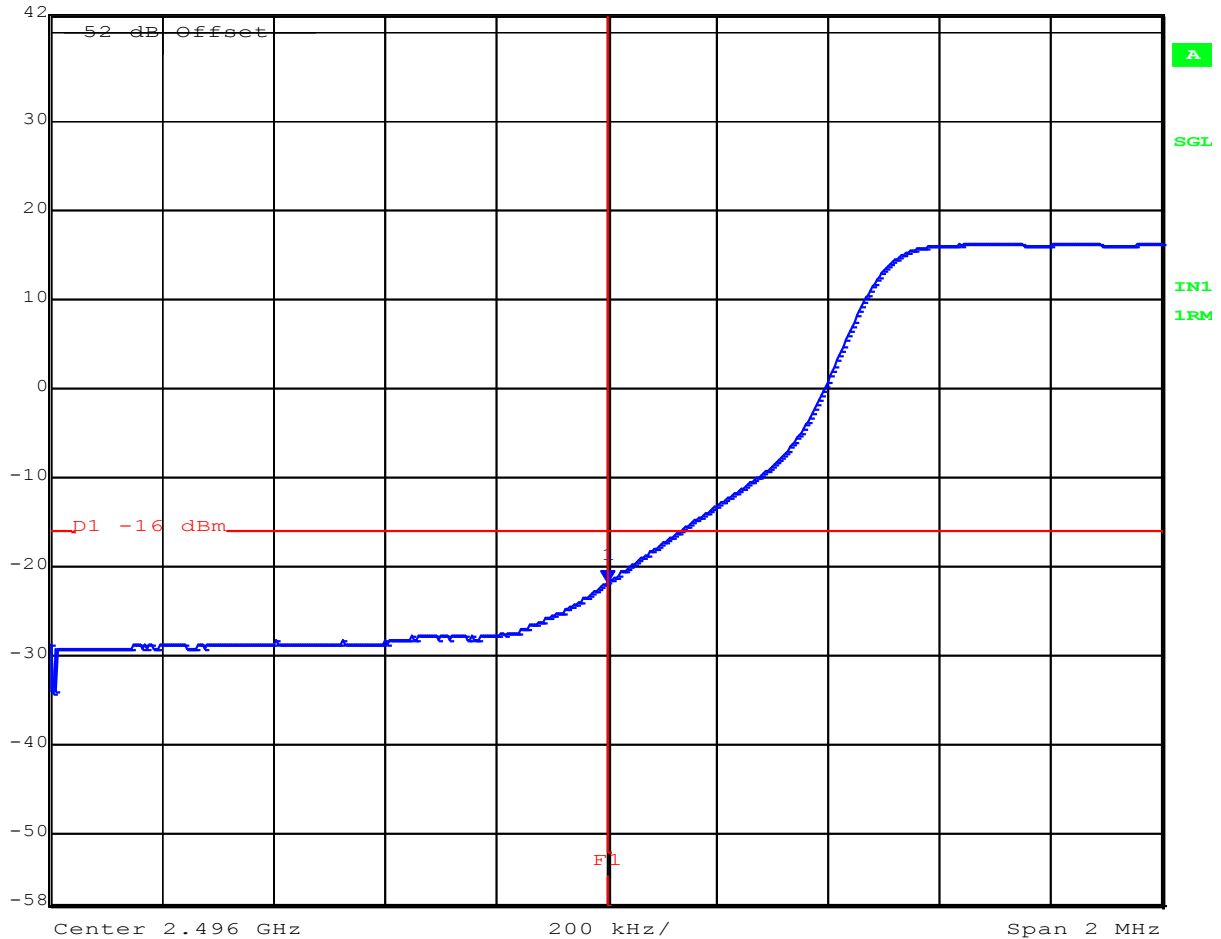


Date: 10.OCT.2015 01:42:56

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 74 of 126

**2501 MHz 10 MHz Bandwidth**  
**Frequency Range 2490-2495 MHz**

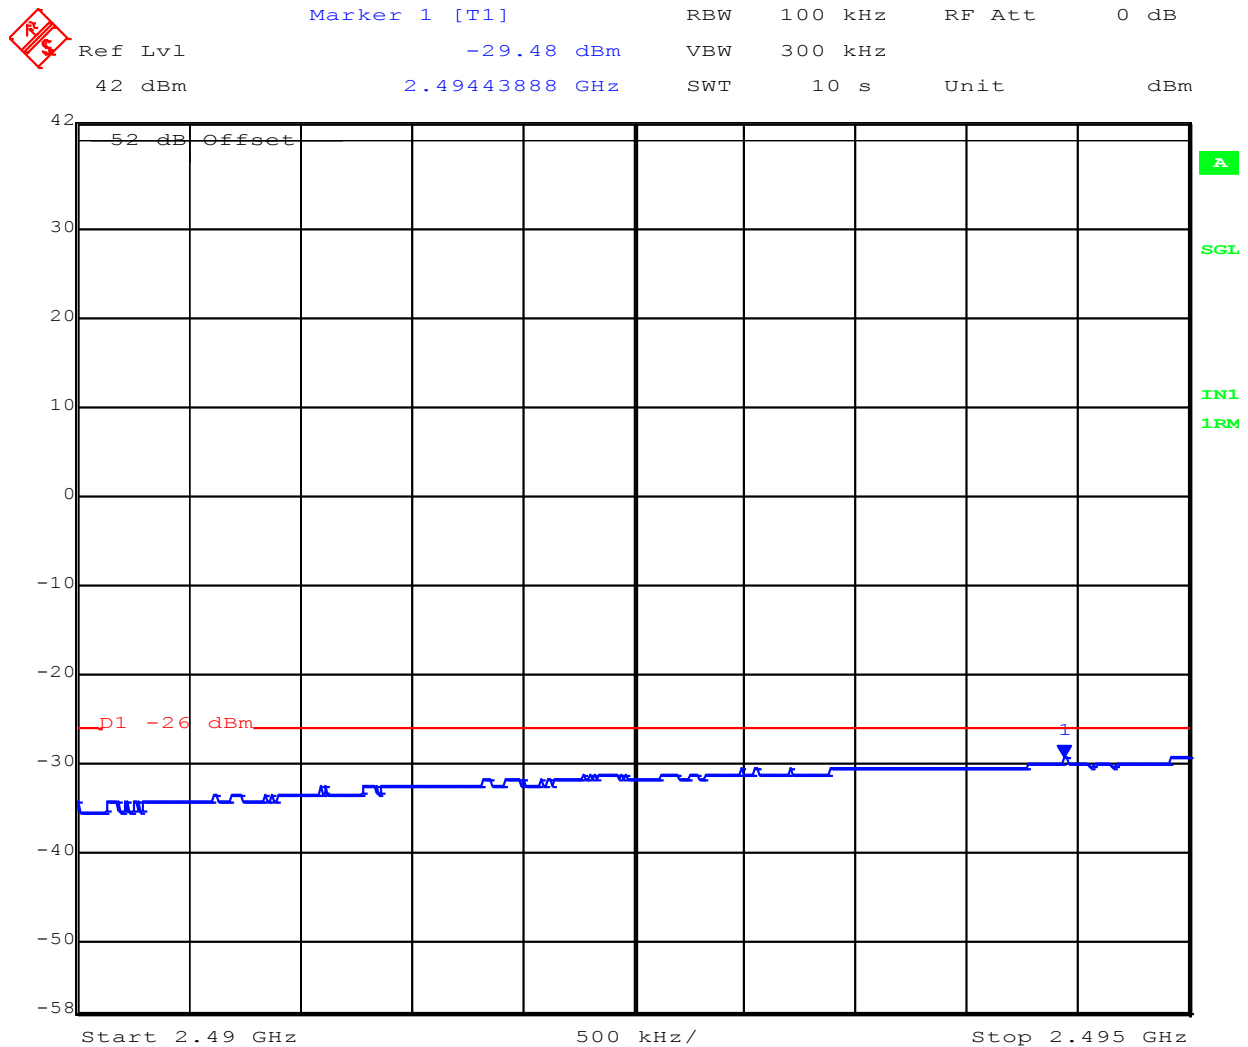

Date: 10.OCT.2015 01:44:41

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 75 of 126

**2501 MHz 10 MHz Bandwidth**  
**Frequency Range 2480-2490 MHz**



Marker 1 [T1] RBW 1 MHz RF Att 0 dB  
Ref Lvl -25.27 dBm VBW 3 MHz  
42 dBm 2.48989980 GHz SWT 10 s Unit dBm

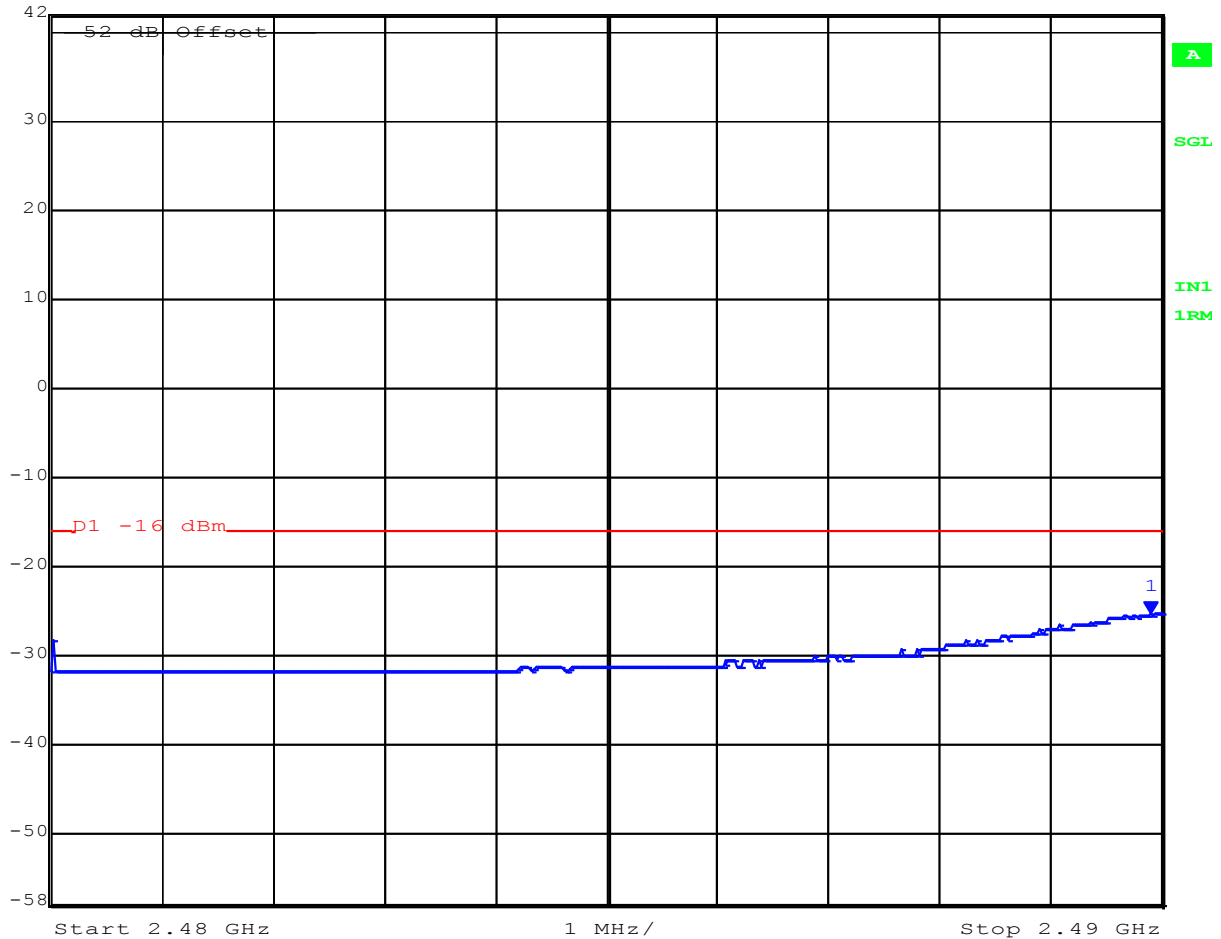

Date: 10.OCT.2015 01:45:59

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 76 of 126

**2503.5 MHz 15 MHz Bandwidth**  
**Frequency Range 2495-2497 MHz**



Marker 1 [T1] RBW 200 kHz RF Att 0 dB  
Ref Lvl -20.70 dBm VBW 1 MHz  
42 dBm 2.49600000 GHz SWT 10 s Unit dBm

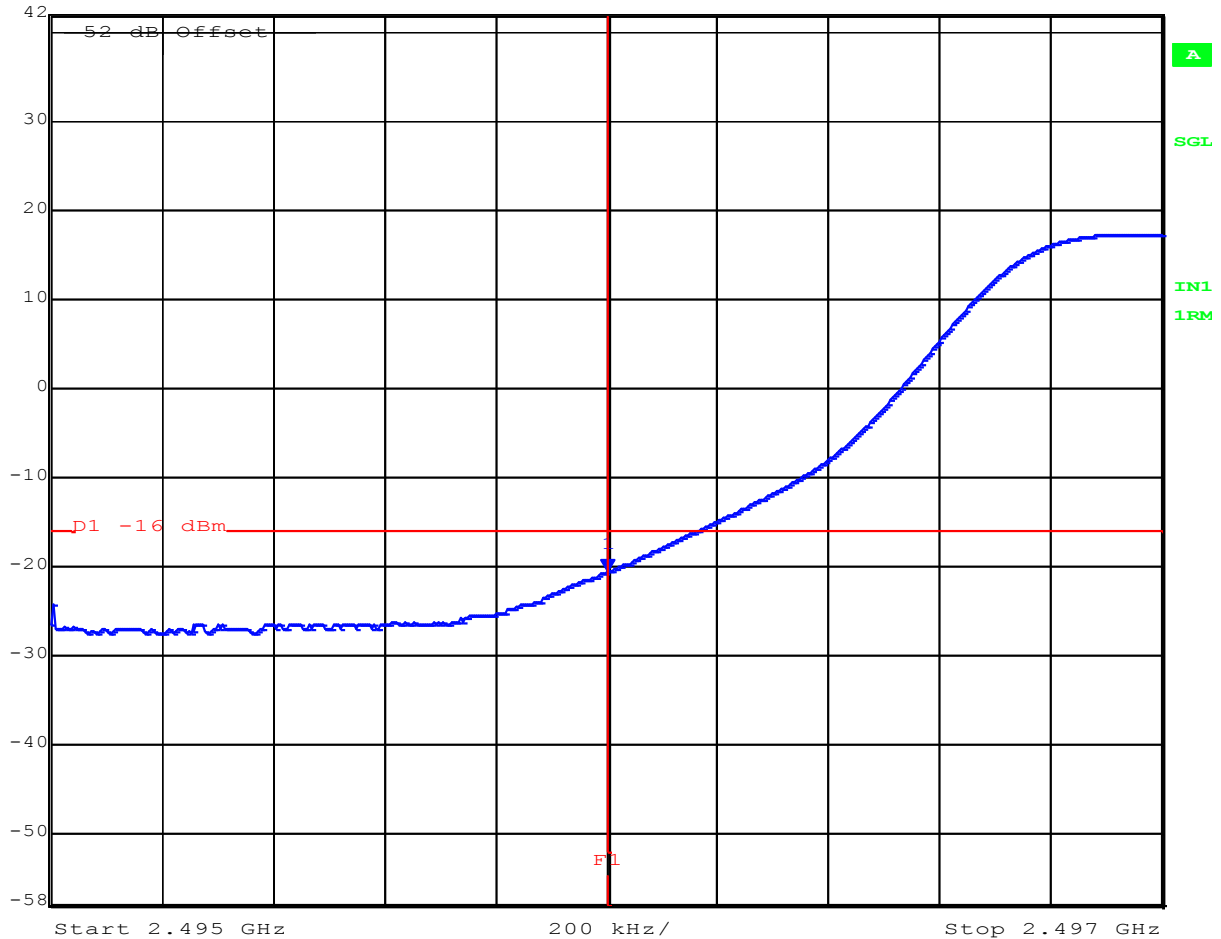

Date: 10.OCT.2015 01:25:58

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 77 of 126

**2503.5 MHz 15 MHz Bandwidth**  
**Frequency Range 2490-2495 MHz**



Marker 1 [T1] RBW 100 kHz RF Att 0 dB  
Ref Lvl -30.04 dBm VBW 300 kHz  
42 dBm 2.49295591 GHz SWT 10 s Unit dBm

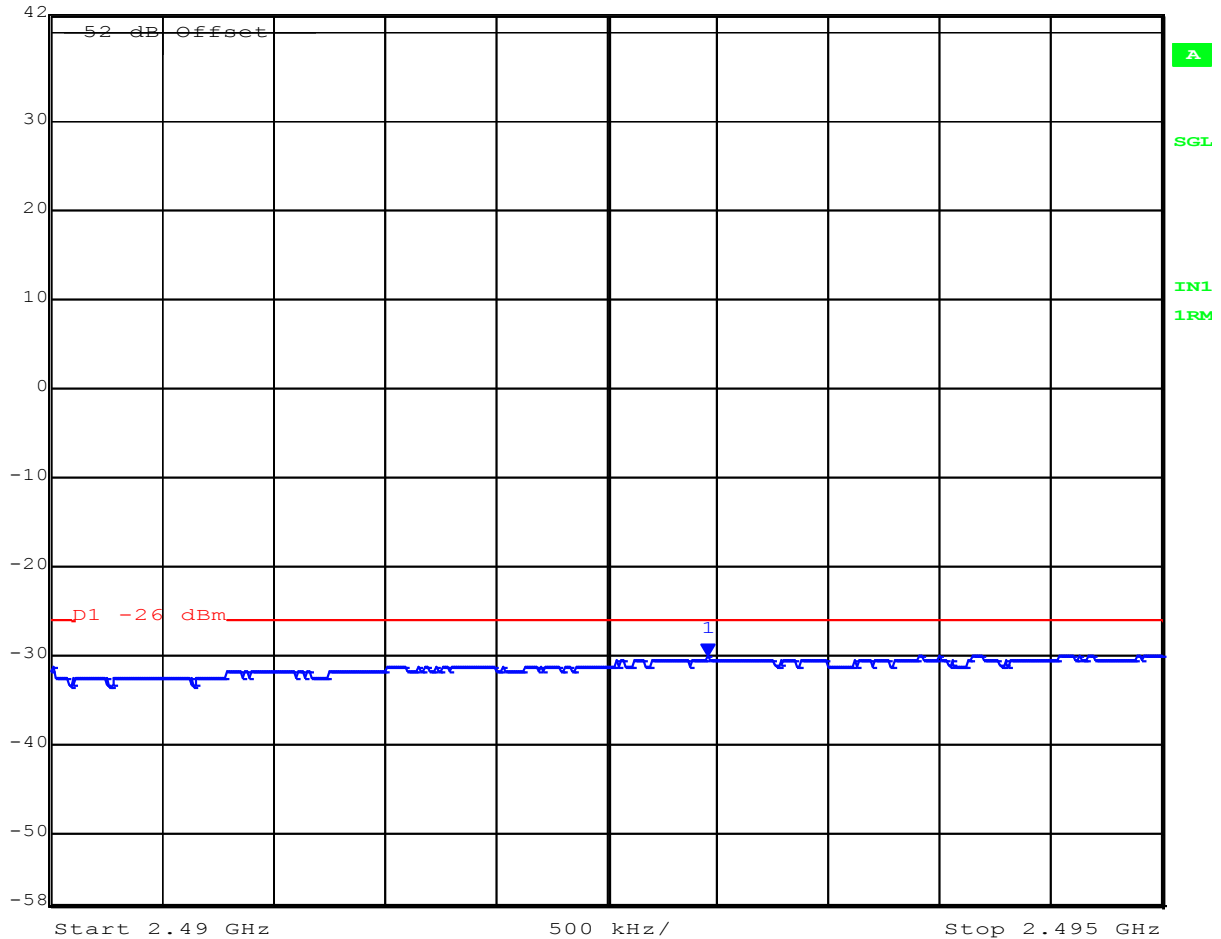

Date: 10.OCT.2015 01:21:03

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 78 of 126

**2503.5 MHz 15 MHz Bandwidth**  
**Frequency Range 2480-2490 MHz**



Marker 1 [T1] RBW 1 MHz RF Att 10 dB  
Ref Lvl -22.74 dBm VBW 3 MHz  
52 dBm 2.48899800 GHz SWT 10 s Unit dBm

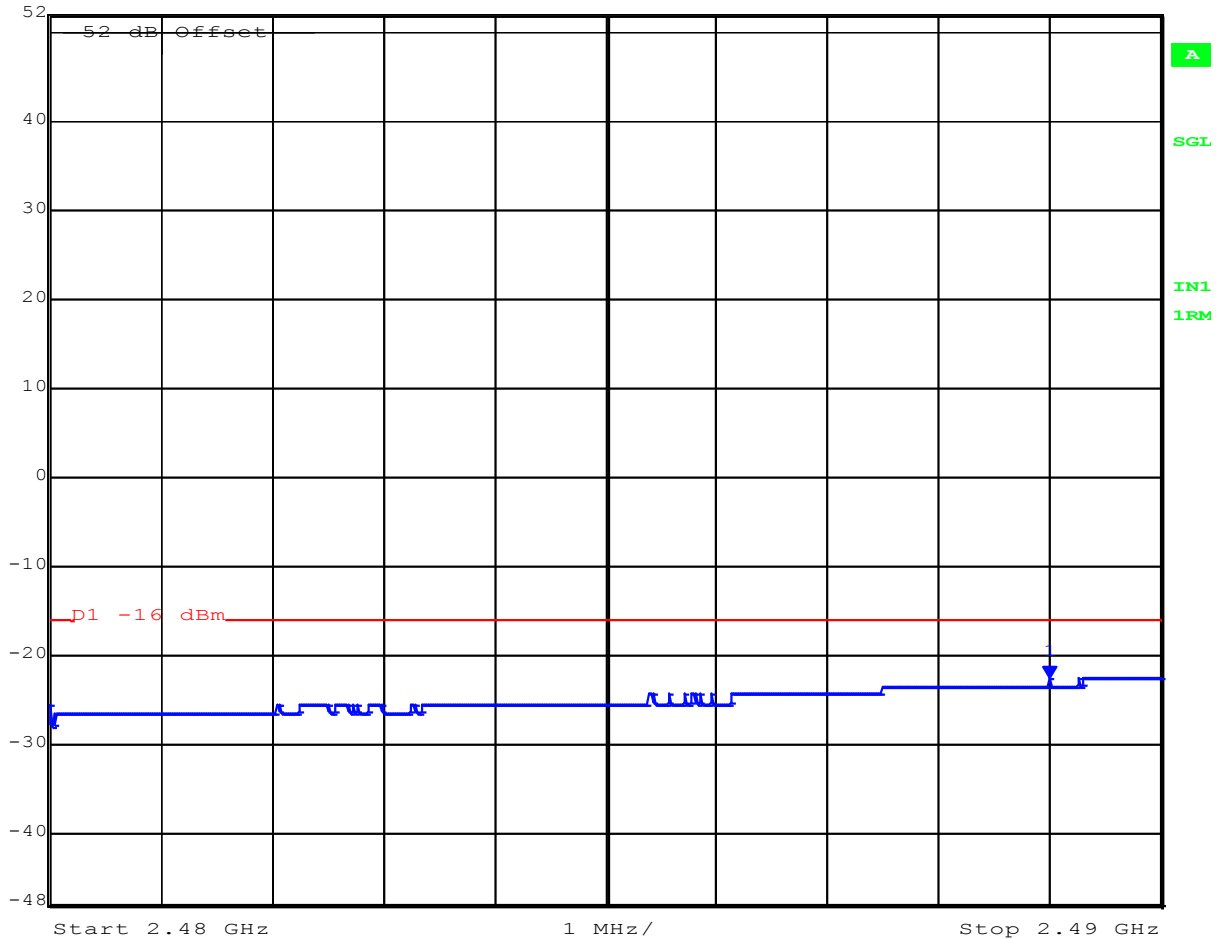

Date: 10.OCT.2015 01:17:35

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Axxcelera Broadband Wireless AxxcelLTE  
To: FCC 47 CFR Part 27  
Serial #: AXXC20-U4 2x2 Rev A  
Issue Date: 6th November 2015  
Page: 79 of 126

**2506 MHz 20 MHz Bandwidth**  
**Frequency Range 2495-2497 MHz**



Marker 1 [T1] RBW 200 kHz RF Att 0 dB  
Ref Lvl -23.74 dBm VBW 1 MHz  
42 dBm 2.49600000 GHz SWT 10 s Unit dBm

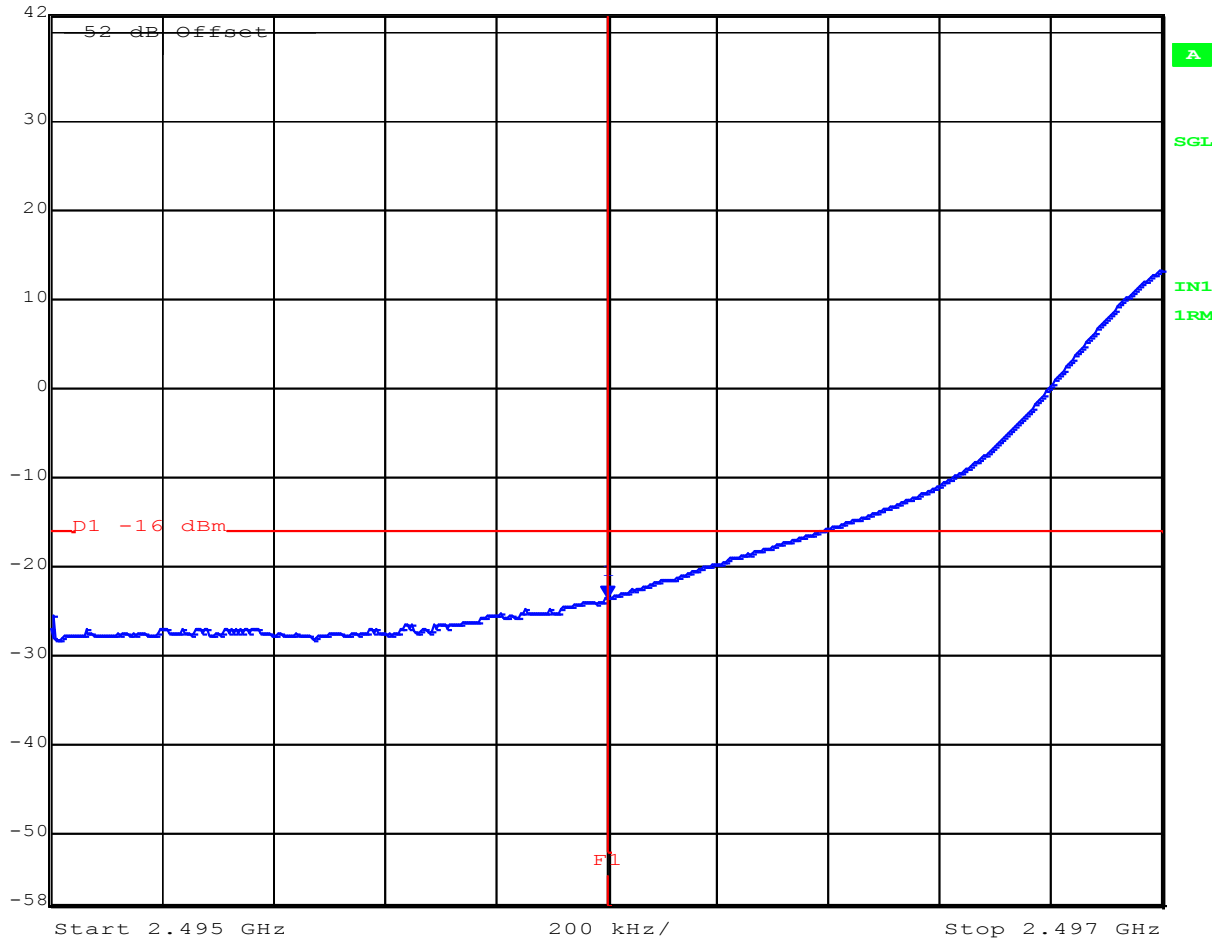

Date: 10.OCT.2015 02:38:39

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 80 of 126

**2506 MHz 20 MHz Bandwidth**  
**Frequency Range 2490-2495 MHz**



Marker 1 [T1] RBW 100 kHz RF Att 0 dB  
Ref Lvl -30.64 dBm VBW 300 kHz  
42 dBm 2.49362725 GHz SWT 10 s Unit dBm

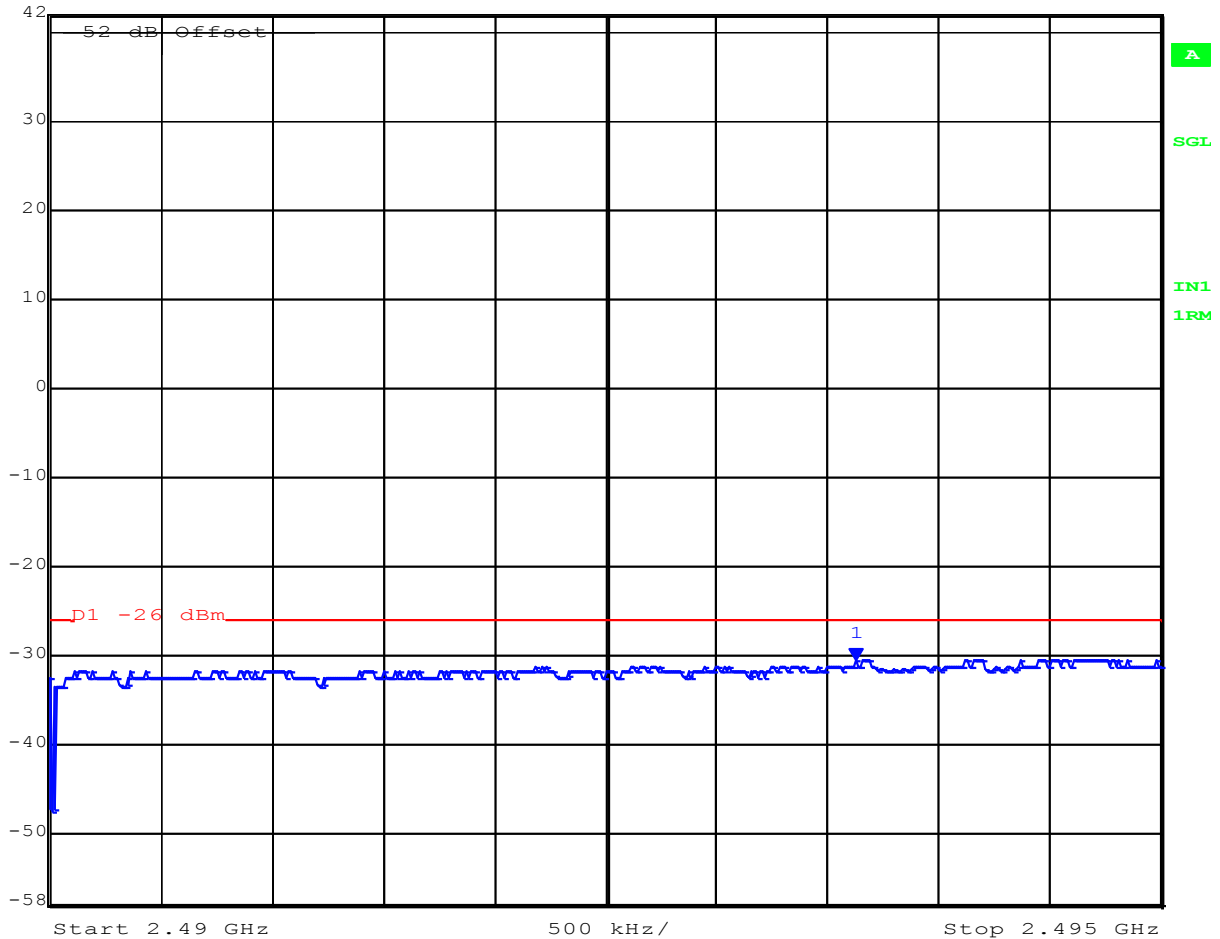

Date: 10.OCT.2015 02:40:33

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.






**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 81 of 126

**2506 MHz 20 MHz Bandwidth**  
**Frequency Range 2480-2490 MHz**



Marker 1 [T1] RBW 1 MHz RF Att 0 dB  
Ref Lvl -21.74 dBm VBW 3 MHz  
42 dBm 2.48939880 GHz SWT 10 s Unit dBm

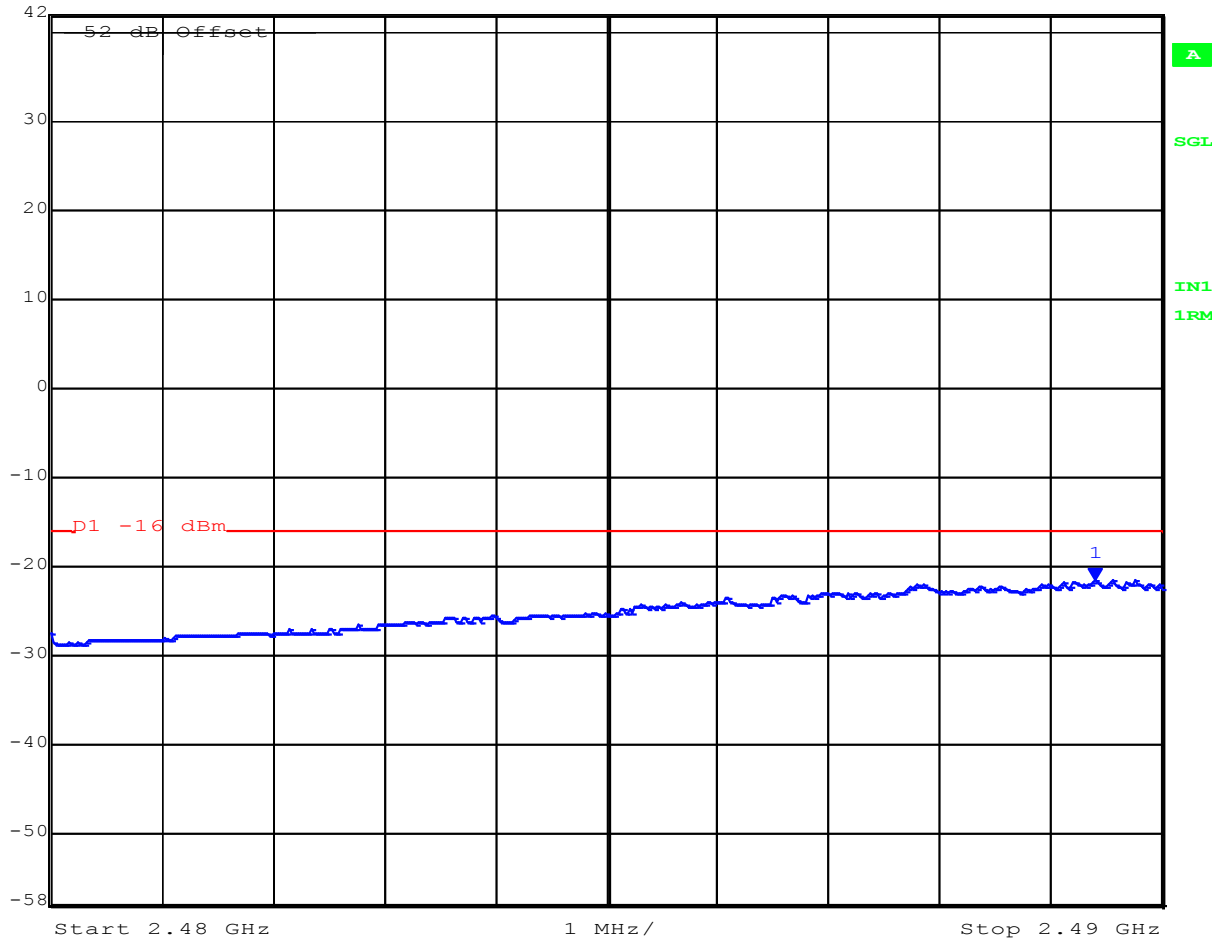

Date: 10.OCT.2015 02:42:07

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 82 of 126

**2687.5 MHz 5 MHz Bandwidth**  
**Frequency Range 2689-2691 MHz**



Marker 1 [T1] RBW 50 kHz RF Att 0 dB  
Ref Lvl -19.94 dBm VBW 200 kHz  
42 dBm 2.69000000 GHz SWT 10 s Unit dBm

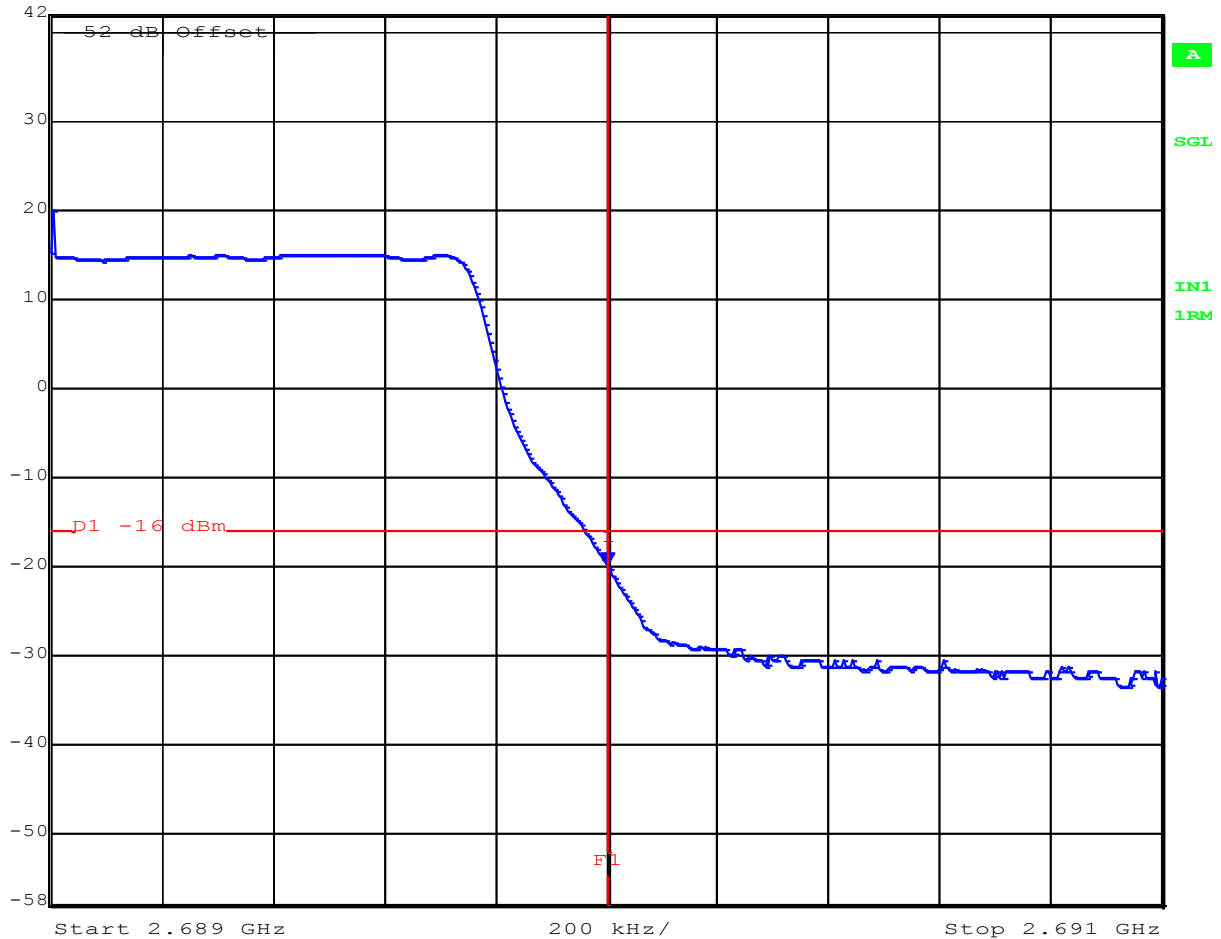

Date: 10.OCT.2015 02:03:59

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 83 of 126

**2687.5 MHz 5 MHz Bandwidth**  
**Frequency Range 2691-2696 MHz**



Marker 1 [T1] RBW 100 kHz RF Att 0 dB  
Ref Lvl -28.46 dBm VBW 300 kHz  
42 dBm 2.69100000 GHz SWT 10 s Unit dBm

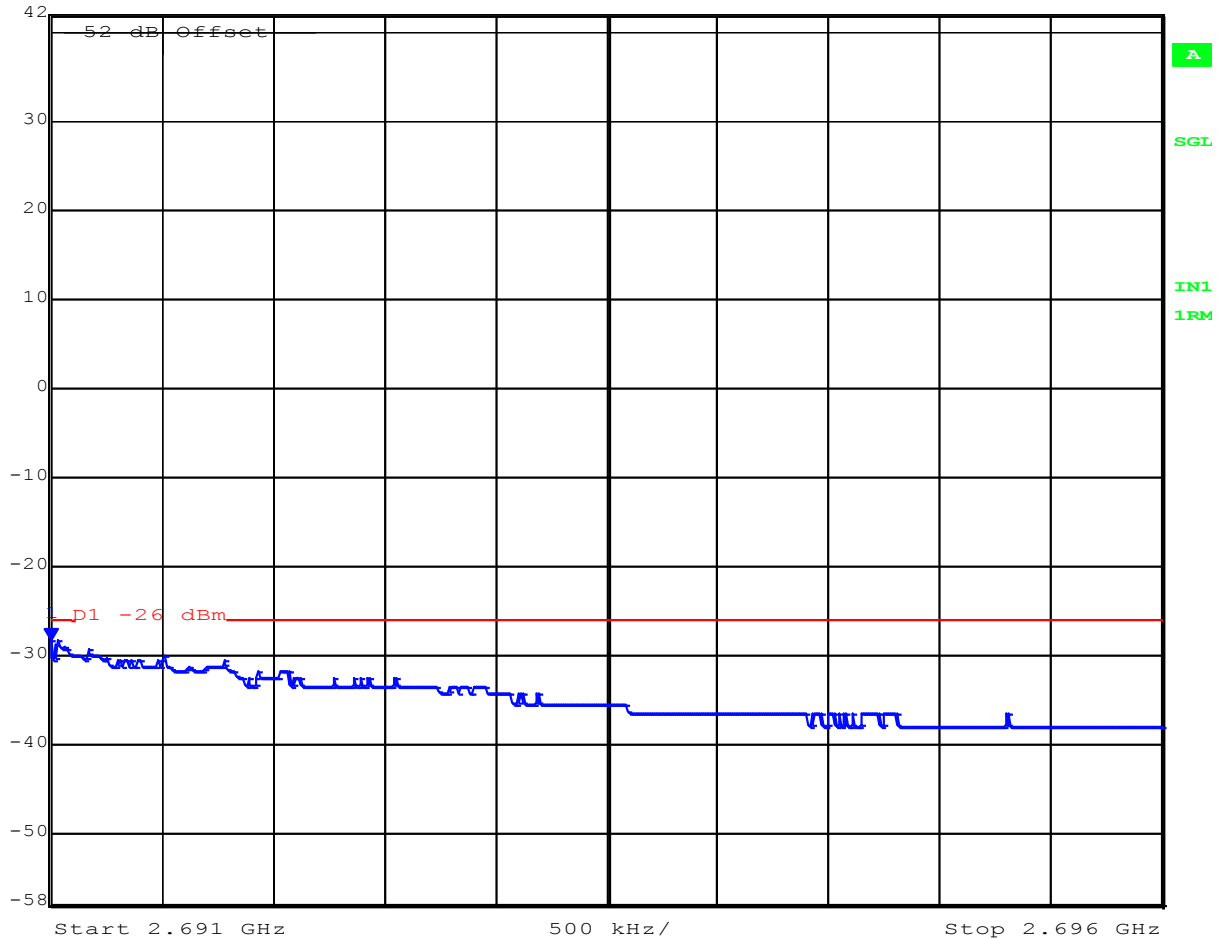

Date: 10.OCT.2015 02:06:15

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 84 of 126

**2687.5 MHz 5 MHz Bandwidth**  
**Frequency Range 2696-2706 MHz**



Marker 1 [T1] RBW 1 MHz RF Att 0 dB  
Ref Lvl -25.27 dBm VBW 3 MHz  
42 dBm 2.69600000 GHz SWT 10 s Unit dBm

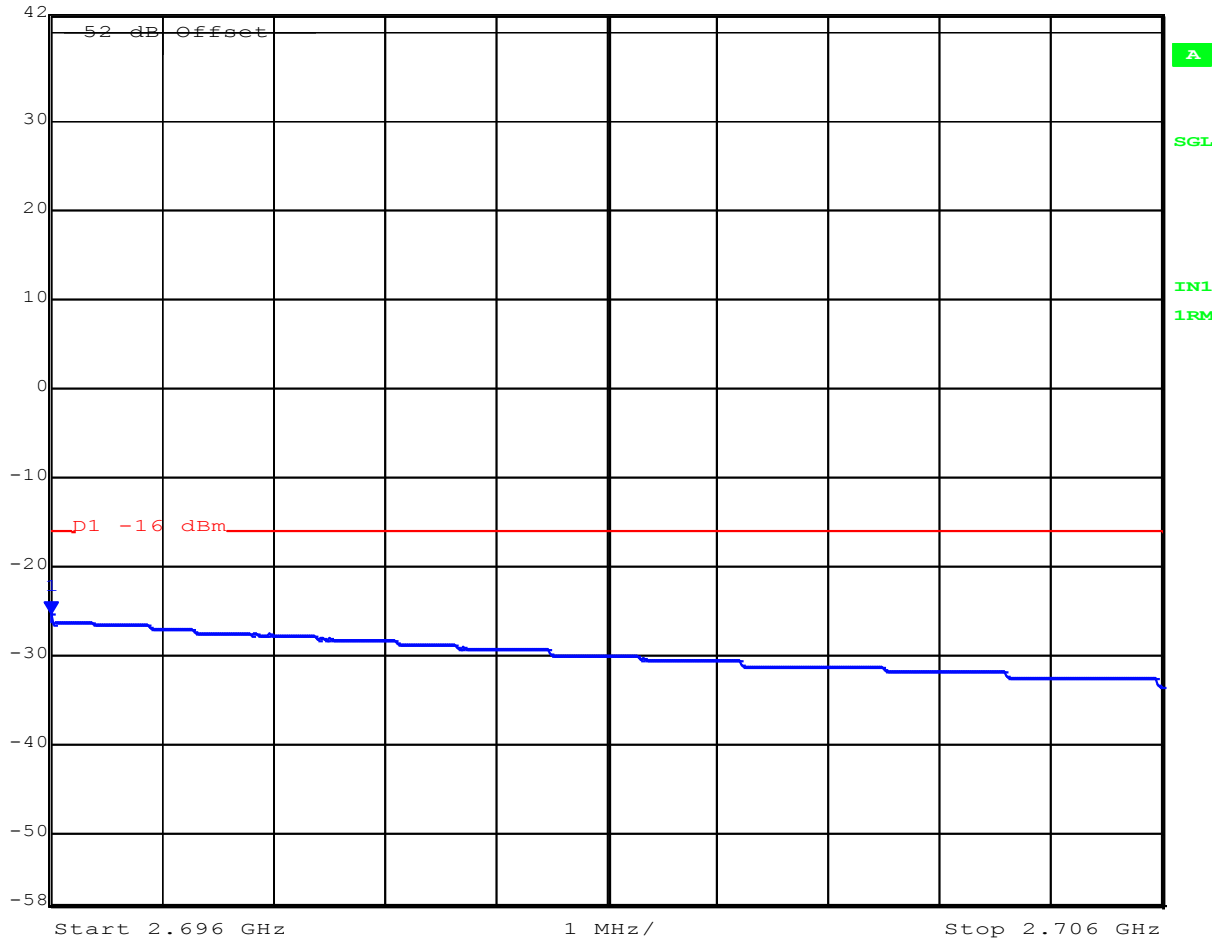

Date: 10.OCT.2015 02:23:25

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 85 of 126

**2685 MHz 10 MHz Bandwidth**  
**Frequency Range 2689-2691 MHz**



Marker 1 [T1] RBW 100 kHz RF Att 0 dB  
Ref Lvl -21.97 dBm VBW 300 kHz  
42 dBm 2.69000000 GHz SWT 10 s Unit dBm

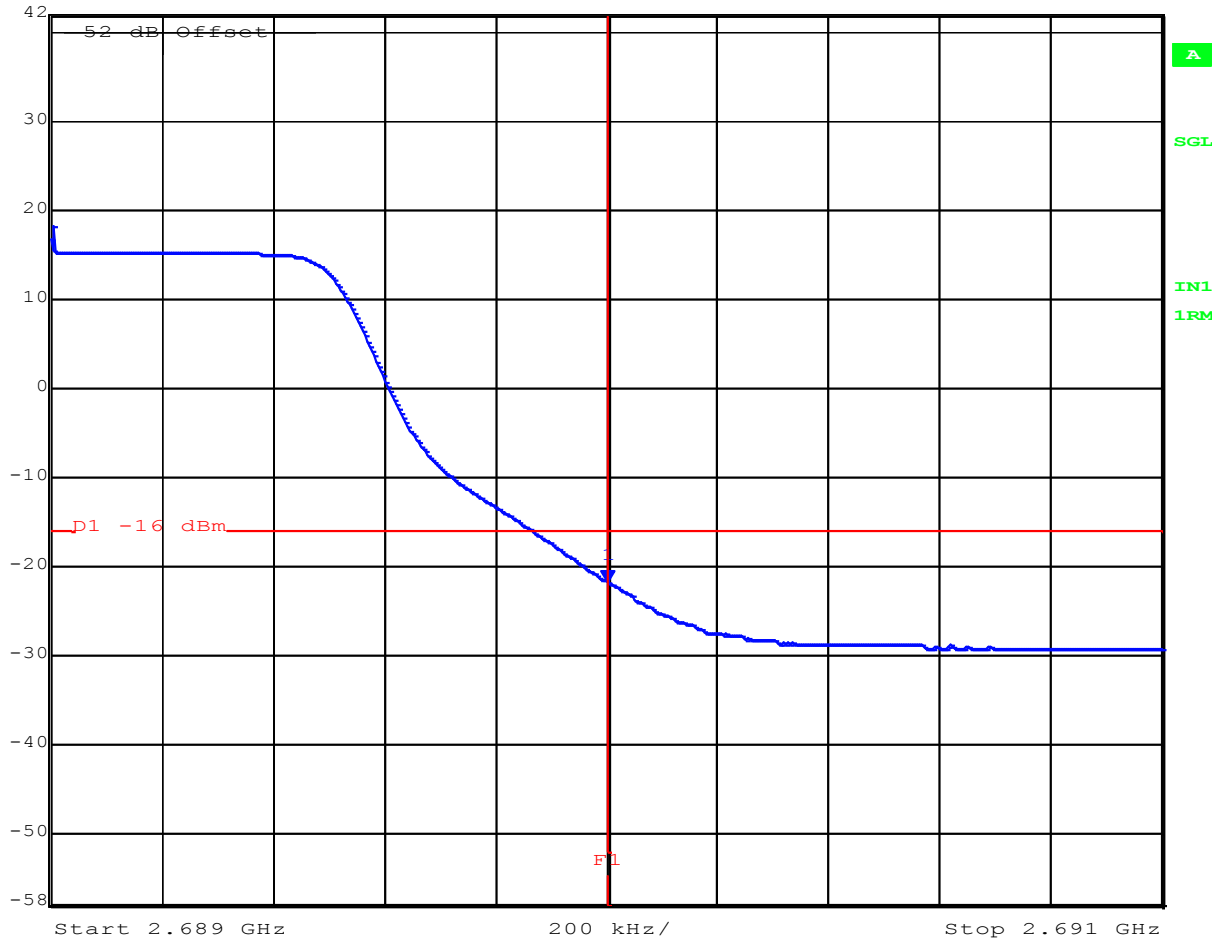

Date: 10.OCT.2015 02:17:28

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 86 of 126

**2685 MHz 10 MHz Bandwidth**  
**Frequency Range 2691-2696 MHz**



Marker 1 [T1] RBW 100 kHz RF Att 0 dB  
Ref Lvl -28.96 dBm VBW 300 kHz  
42 dBm 2.69100000 GHz SWT 10 s Unit dBm

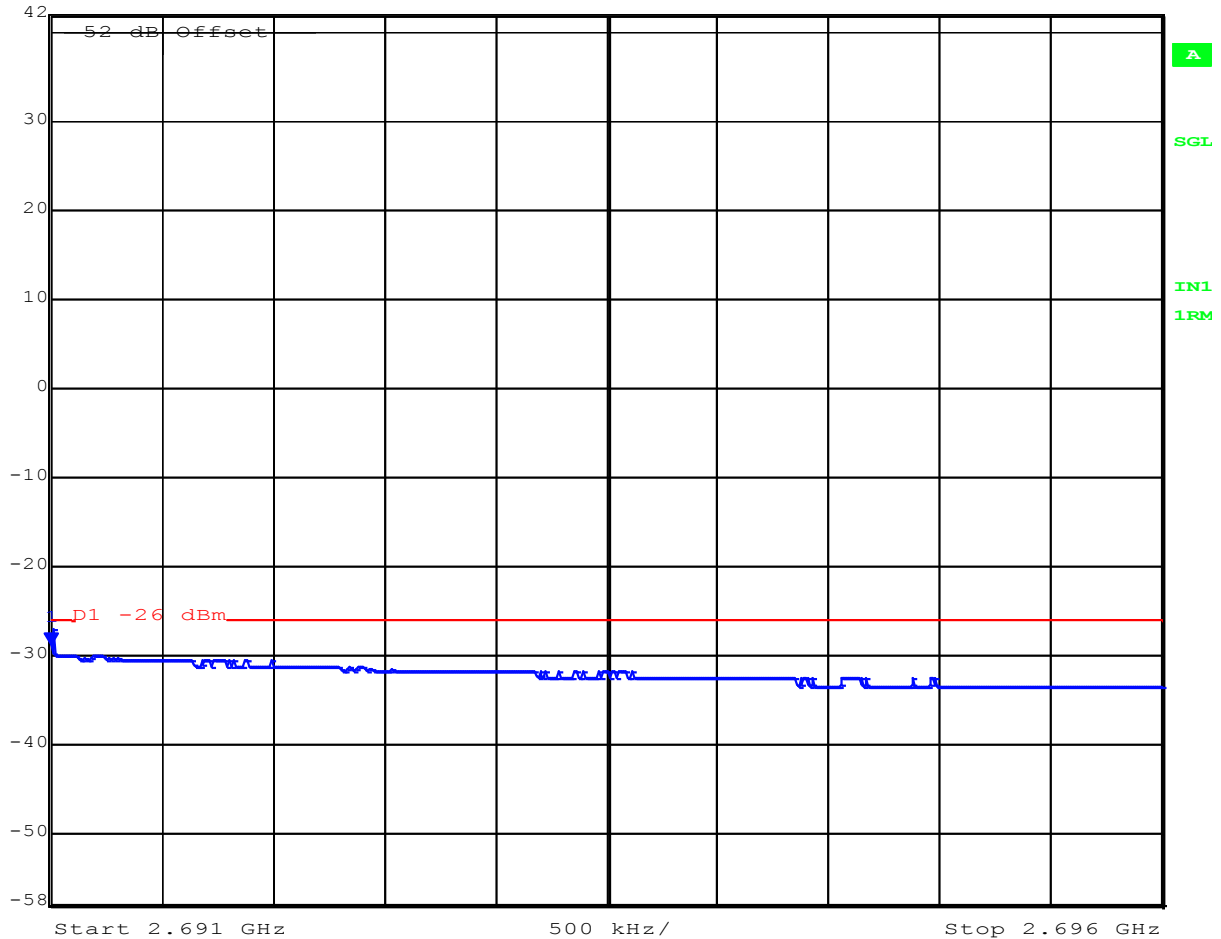

Date: 10.OCT.2015 02:16:17

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 87 of 126

**2685 MHz 10 MHz Bandwidth**  
**Frequency Range 2696-2706 MHz**



Marker 1 [T1] RBW 1 MHz RF Att 0 dB  
Ref Lvl -22.20 dBm VBW 3 MHz  
42 dBm 2.69602004 GHz SWT 10 s Unit dBm

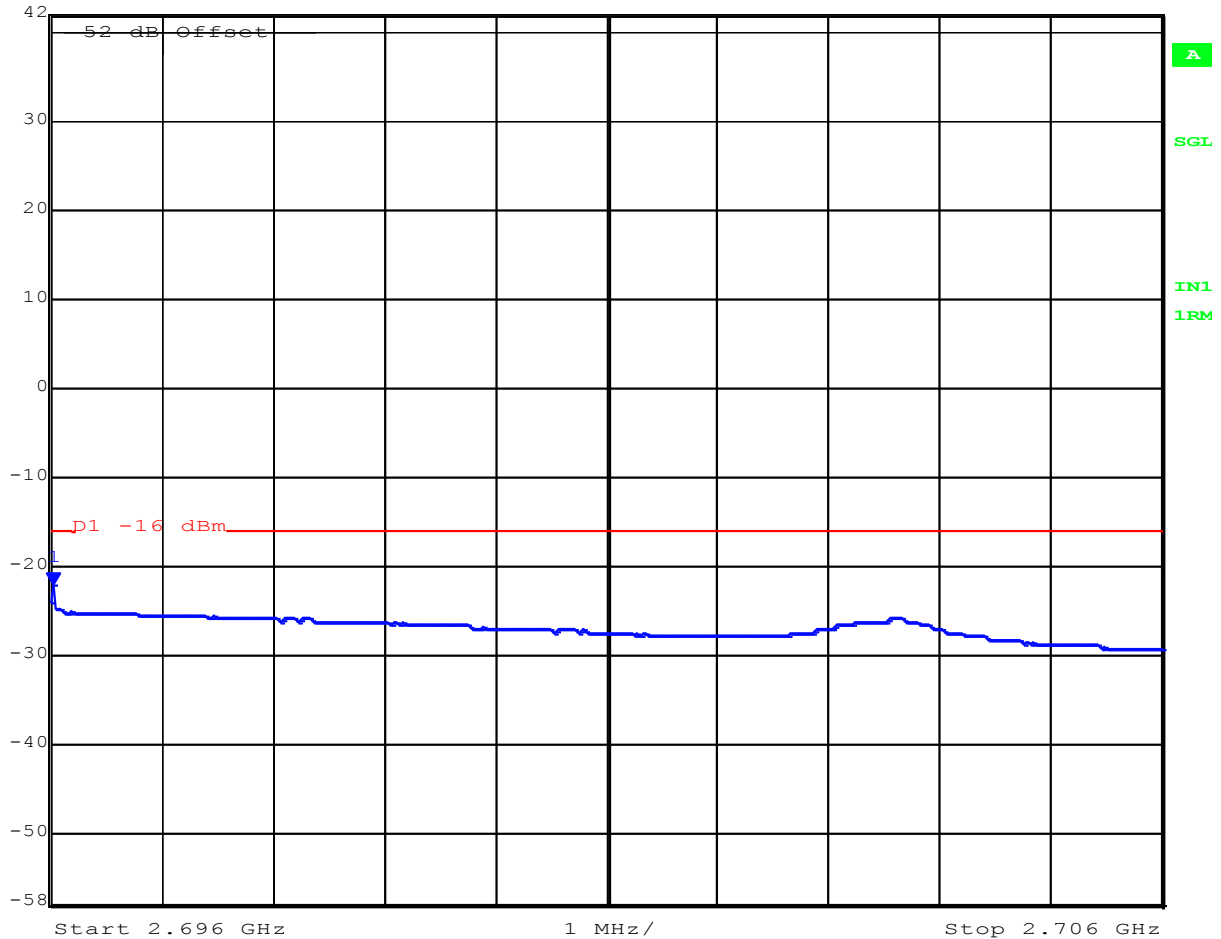

Date: 10.OCT.2015 02:14:26

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 88 of 126

**2682.5 MHz 15 MHz Bandwidth**  
**Frequency Range 2689-2691 MHz**



Marker 1 [T1] RBW 200 kHz RF Att 0 dB  
Ref Lvl -20.90 dBm VBW 1 MHz  
42 dBm 2.69000000 GHz SWT 10 s Unit dBm

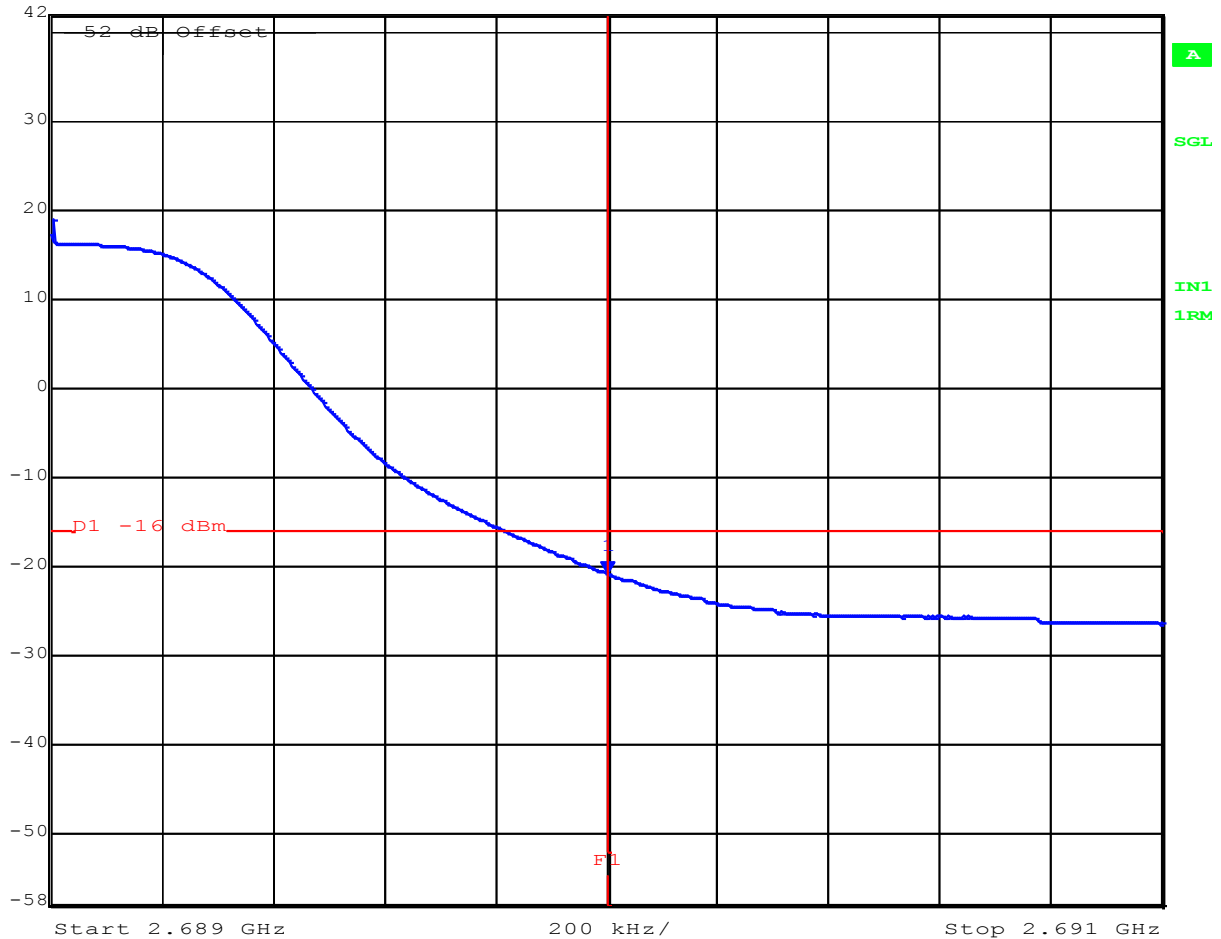

Date: 10.OCT.2015 02:31:32

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.






**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 89 of 126

**2682.5 MHz 15 MHz Bandwidth**  
**Frequency Range 2691-2696 MHz**



Marker 1 [T1] RBW 100 kHz RF Att 0 dB  
Ref Lvl -27.54 dBm VBW 300 kHz  
42 dBm 2.69101002 GHz SWT 10 s Unit dBm

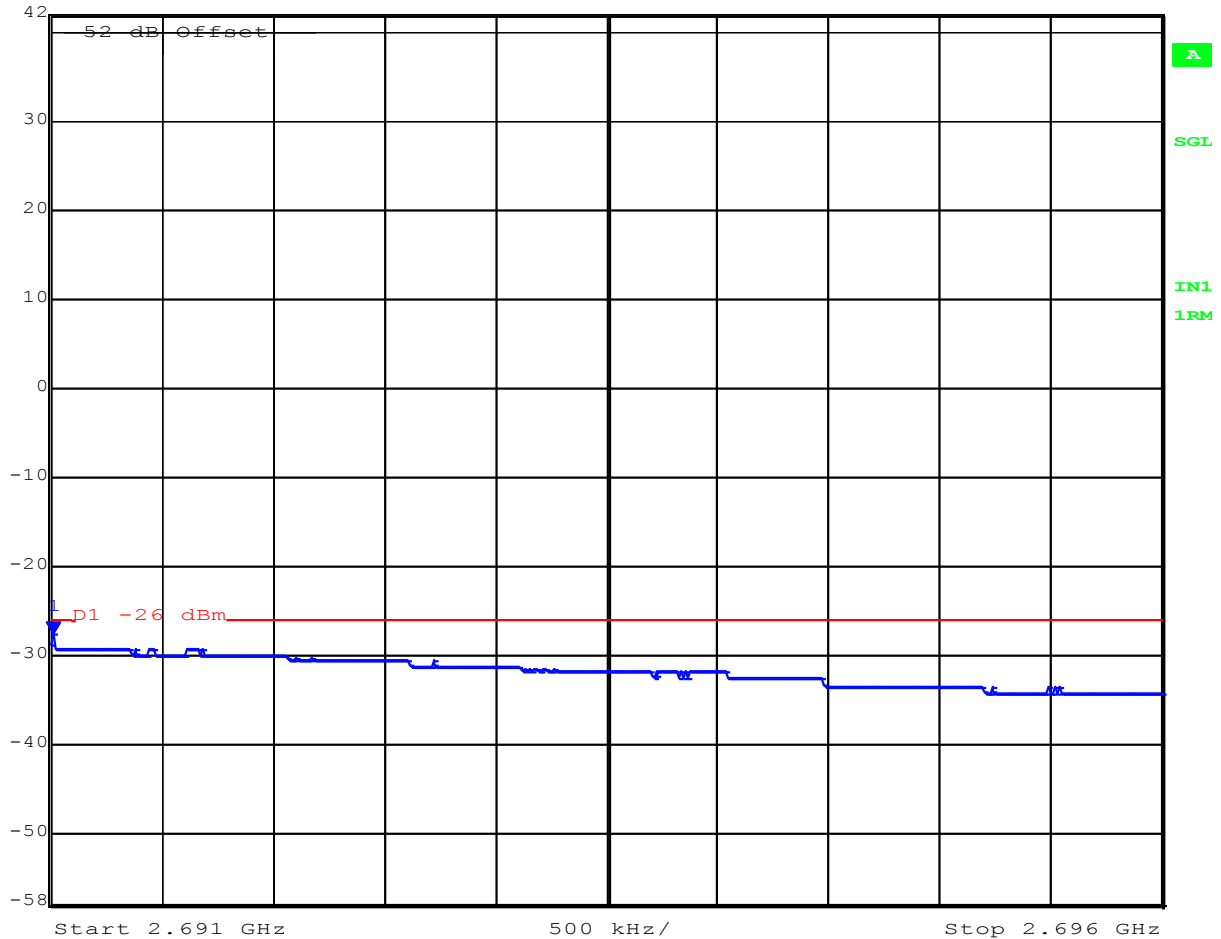

Date: 10.OCT.2015 02:29:12

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 90 of 126

**2682.5 MHz 15 MHz Bandwidth**  
**Frequency Range 2696-2706 MHz**



Marker 1 [T1] RBW 1 MHz RF Att 0 dB  
Ref Lvl -22.94 dBm VBW 3 MHz  
42 dBm 2.69602004 GHz SWT 10 s Unit dBm

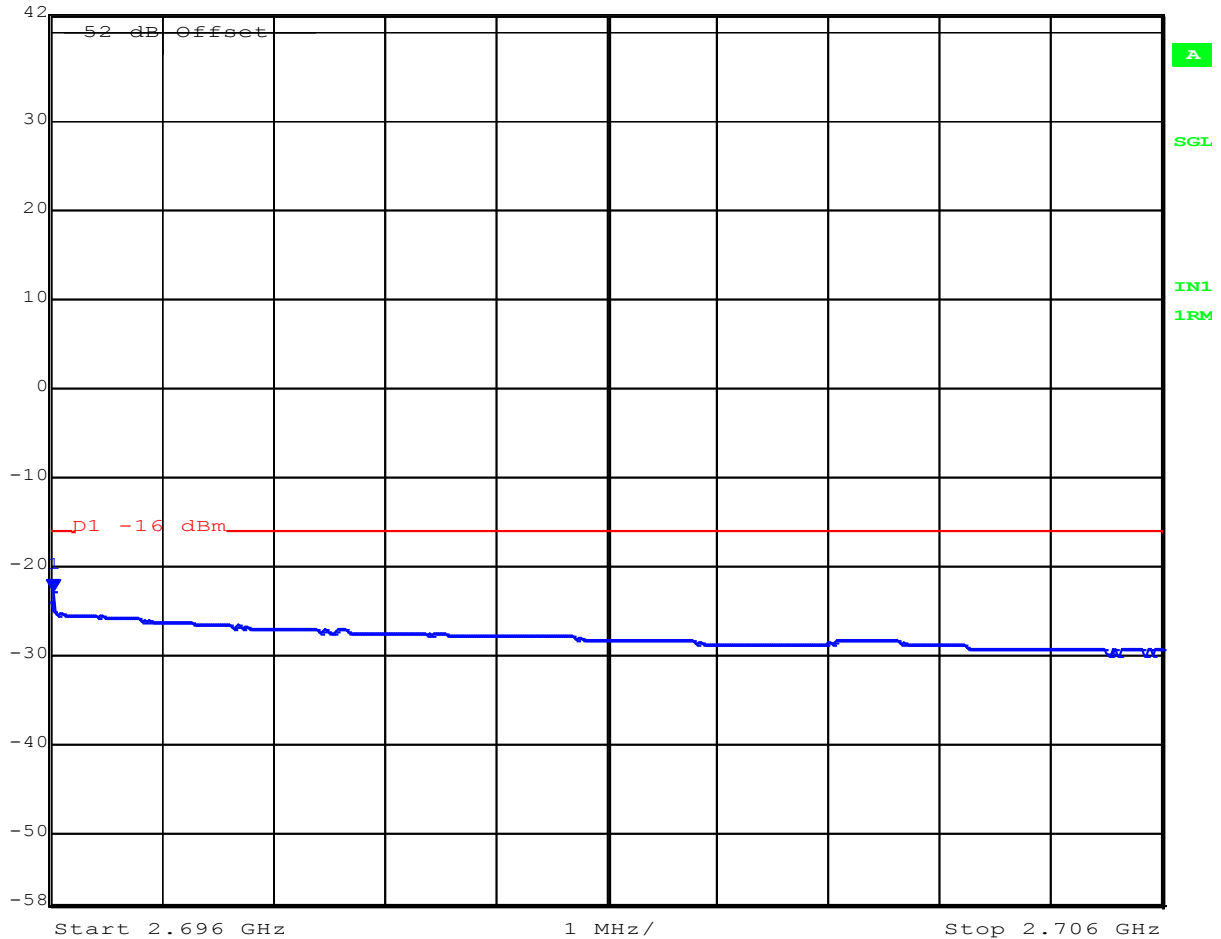

Date: 10.OCT.2015 02:27:37

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 91 of 126

**2680 MHz 20 MHz Bandwidth**  
**Frequency Range 2689-2691 MHz**



Marker 1 [T1] RBW 200 kHz RF Att 0 dB  
Ref Lvl -24.02 dBm VBW 1 MHz  
42 dBm 2.69000000 GHz SWT 10 s Unit dBm

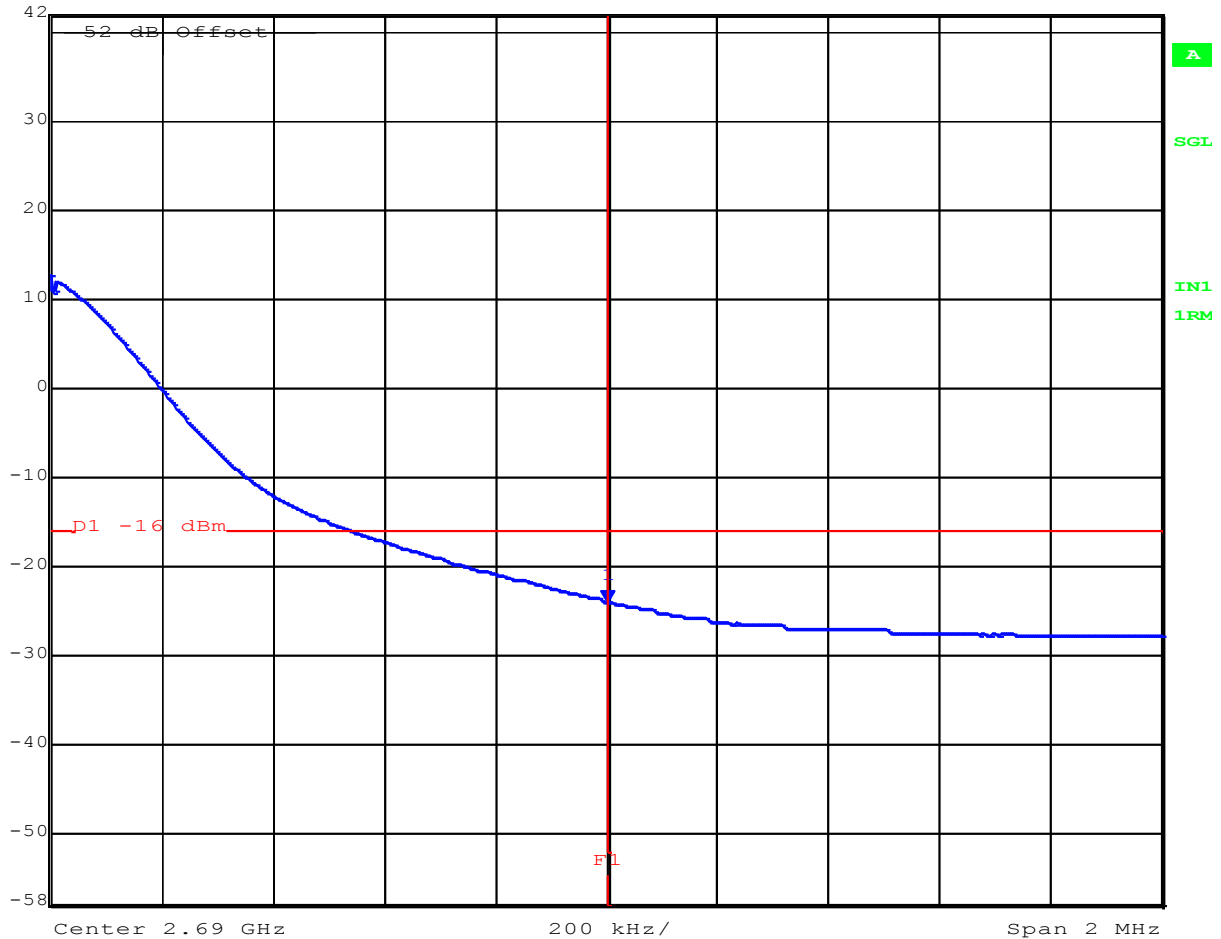

Date: 10.OCT.2015 02:49:03

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 92 of 126

**2680 MHz 20 MHz Bandwidth**  
**Frequency Range 2691-2696 MHz**



Marker 1 [T1] RBW 100 kHz RF Att 0 dB  
Ref Lvl -29.48 dBm VBW 300 kHz  
42 dBm 2.69101002 GHz SWT 10 s Unit dBm

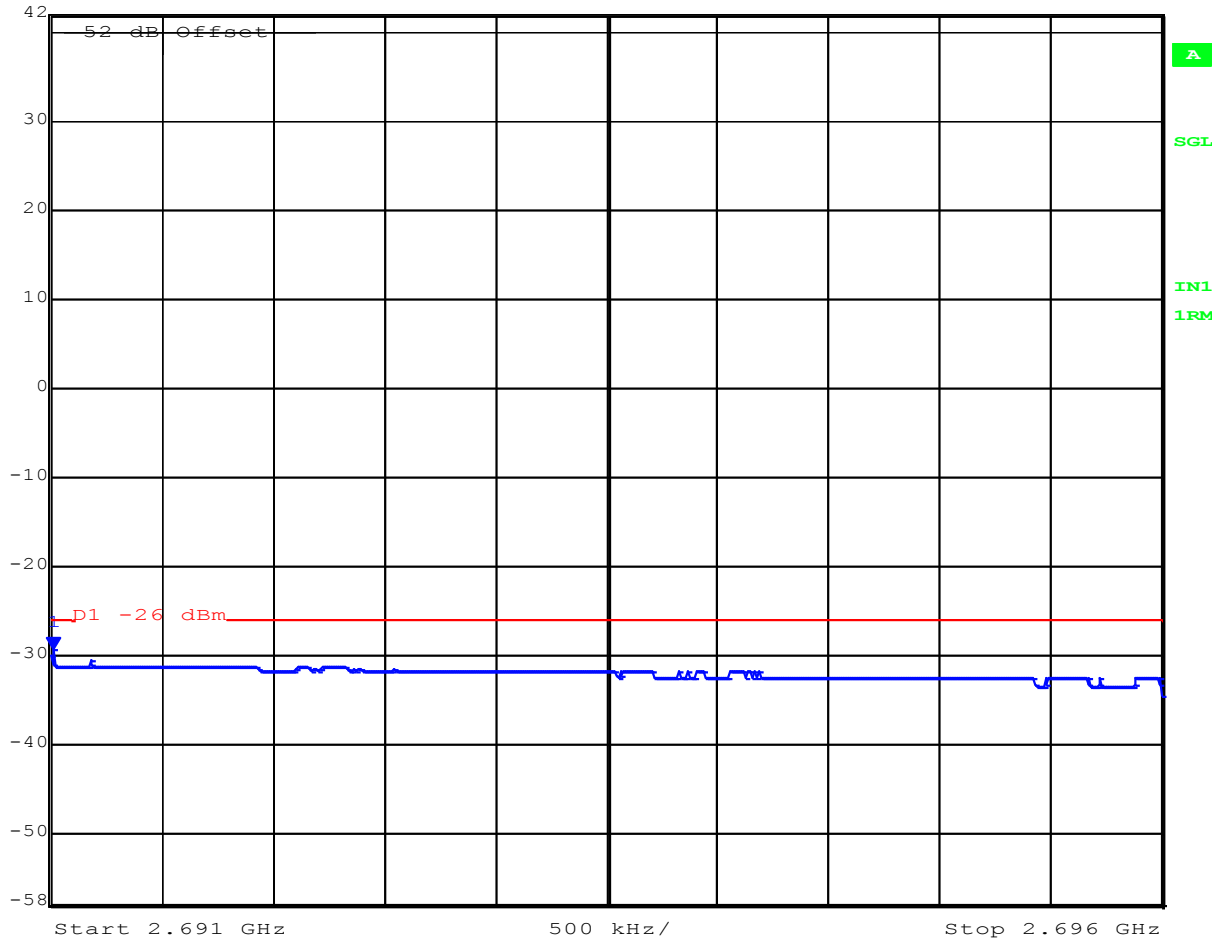

Date: 10.OCT.2015 02:47:31

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 93 of 126

**2680 MHz 20 MHz Bandwidth**  
**Frequency Range 2696-2706 MHz**



Marker 1 [T1] RBW 1 MHz RF Att 0 dB  
Ref Lvl -20.31 dBm VBW 3 MHz  
42 dBm 2.69600000 GHz SWT 10 s Unit dBm

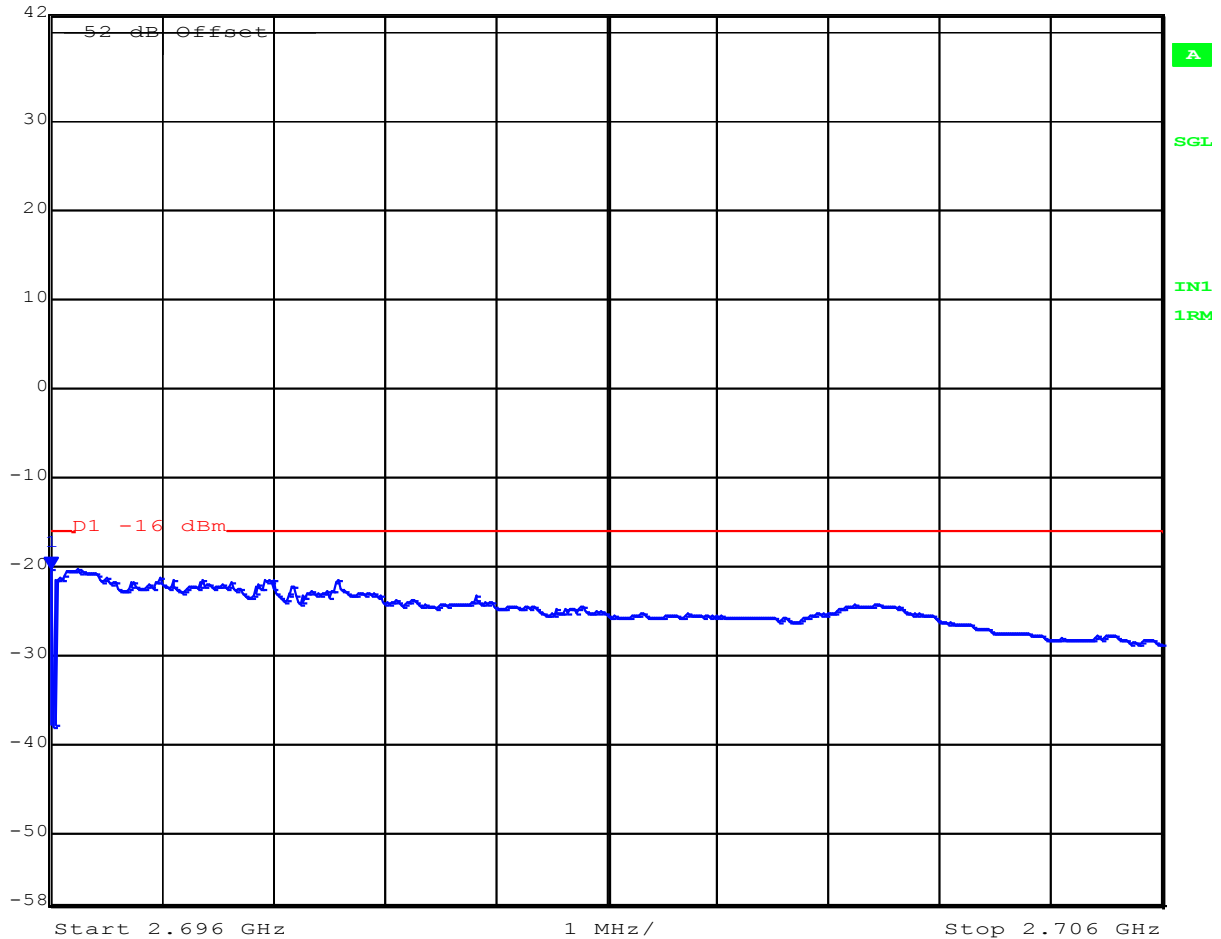

Date: 10.OCT.2015 02:45:55

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 94 of 126

---

### 6.1.2. Radiated Testing

#### ANSI/TIA-603

##### Test Procedure

Measurements were made while EUT was operating in modulated mode of operation at the appropriate center frequency. Substitution was performed on any emissions observed. The antenna port was attenuated with a 50  $\Omega$  termination.

The measurement equipment was set to measure in peak hold mode. The emissions were measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode.

The highest emissions relative to the limit are listed for each frequency band measured.

##### Limits

The power of any unwanted emissions measured from the channel edge of the equipment shall be attenuated below the transmitter power, P (dBW), as follows:

For base station and subscriber equipment, other than mobile subscriber equipment, the attenuation shall not be less than  $43 + 10 \log_{10}(P)$ , dB;

Maximum chain output power found = +36.89 dBm (4.89 W) (15 MHz bandwidth, channel 2593.0 MHz)

Limit =  $43 + 10 \log(P) = 43 + 10 * \log(P) = 43 + 6.89 = 49.89$  dB

Limit =  $36.89 - 49.89 = -13.0$  dBm

##### TIA/EIA 603 Compliance

For measurement purposes the antenna ports were terminated in 50 ohm's in accordance with TIA/EIA 603 measurement procedure.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 95 of 126

### 6.1.2.1. Radiated Spurious Emissions


#### Equipment Configuration for Radiated Spurious - Restricted Band Emissions

|                                 |                       |                        |        |
|---------------------------------|-----------------------|------------------------|--------|
| <b>Antenna:</b>                 | Terminated in 50 Ohms | <b>Variant:</b>        | 5 MHz  |
| <b>Antenna Gain (dBi):</b>      | Not Applicable        | <b>Modulation:</b>     | QAM 64 |
| <b>Beam Forming Gain (Y):</b>   | Not Applicable        | <b>Duty Cycle (%):</b> | 88     |
| <b>Channel Frequency (MHz):</b> | 2506.00               | <b>Data Rate:</b>      | 5      |
| <b>Power Setting:</b>           | 37                    | <b>Tested By:</b>      | SB     |

#### Test Measurement Results



Variant: , Test Freq: 2506.00 MHz, Antenna: terminated, Power Setting: 37

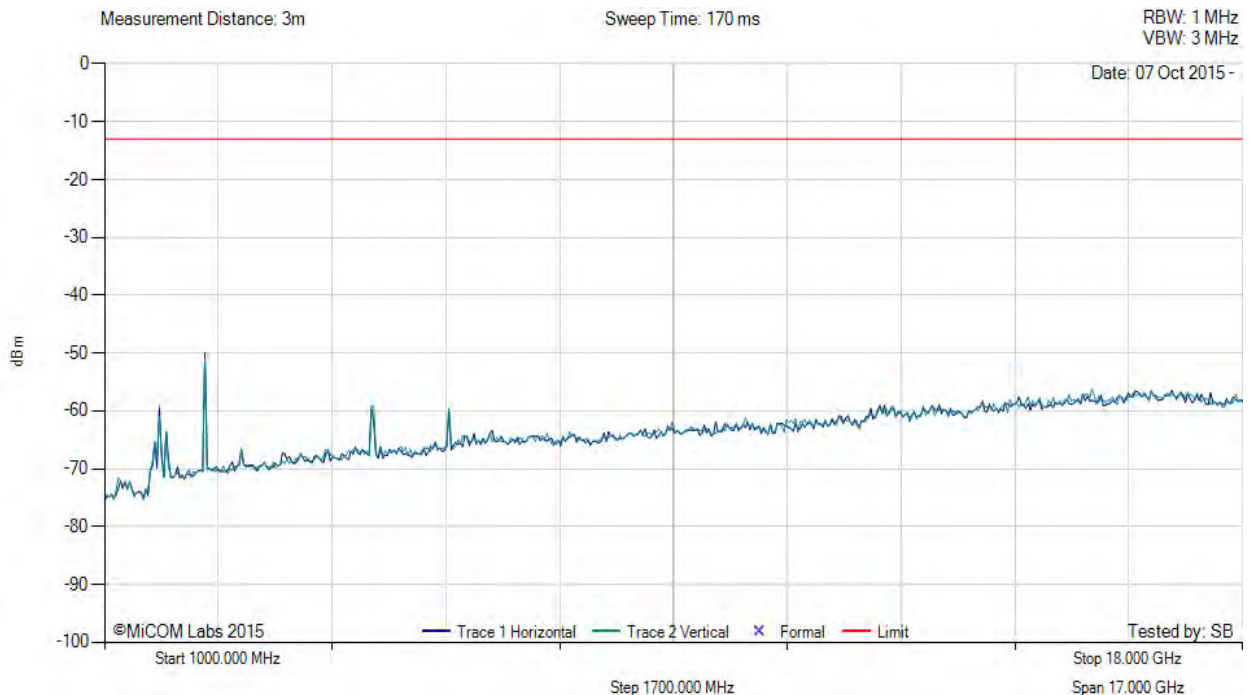

| Num | Frequency MHz | Raw dBm | Cable Loss | AF dB  | Level dBm | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBm | Margin dB | Pass /Fail |
|-----|---------------|---------|------------|--------|-----------|------------------|------------|--------|---------|-----------|-----------|------------|
| 1   | 1839.51       | -49.49  | 2.45       | -13.49 | -60.53    | Peak (Scan)      | Horizontal | 100    | 236     | -13       | -47.5     | Pass       |
| 2   | 5008.29       | -45.67  | 3.63       | -11.55 | -53.59    | Max Peak         | Horizontal | 162    | 211     | -13       | -20.6     | Pass       |
| 3   | 6143.96       | -48.53  | 3.86       | -9.24  | -53.91    | Max Peak         | Horizontal | 114    | 163     | -13       | -20.9     | Pass       |

**Test Notes:** 50 ohm termination heads on antenna ports

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 96 of 126

#### Equipment Configuration for Radiated Spurious - Restricted Band Emissions

|                                 |                       |                        |        |
|---------------------------------|-----------------------|------------------------|--------|
| <b>Antenna:</b>                 | Terminated in 50 Ohms | <b>Variant:</b>        | 5 MHz  |
| <b>Antenna Gain (dBi):</b>      | Not Applicable        | <b>Modulation:</b>     | QAM 64 |
| <b>Beam Forming Gain (Y):</b>   | Not Applicable        | <b>Duty Cycle (%):</b> | 88     |
| <b>Channel Frequency (MHz):</b> | 2593.00               | <b>Data Rate:</b>      | 5      |
| <b>Power Setting:</b>           | 37                    | <b>Tested By:</b>      | SB     |



Variant: , Test Freq: 2593.00 MHz, Antenna: terminated, Power Setting: 37

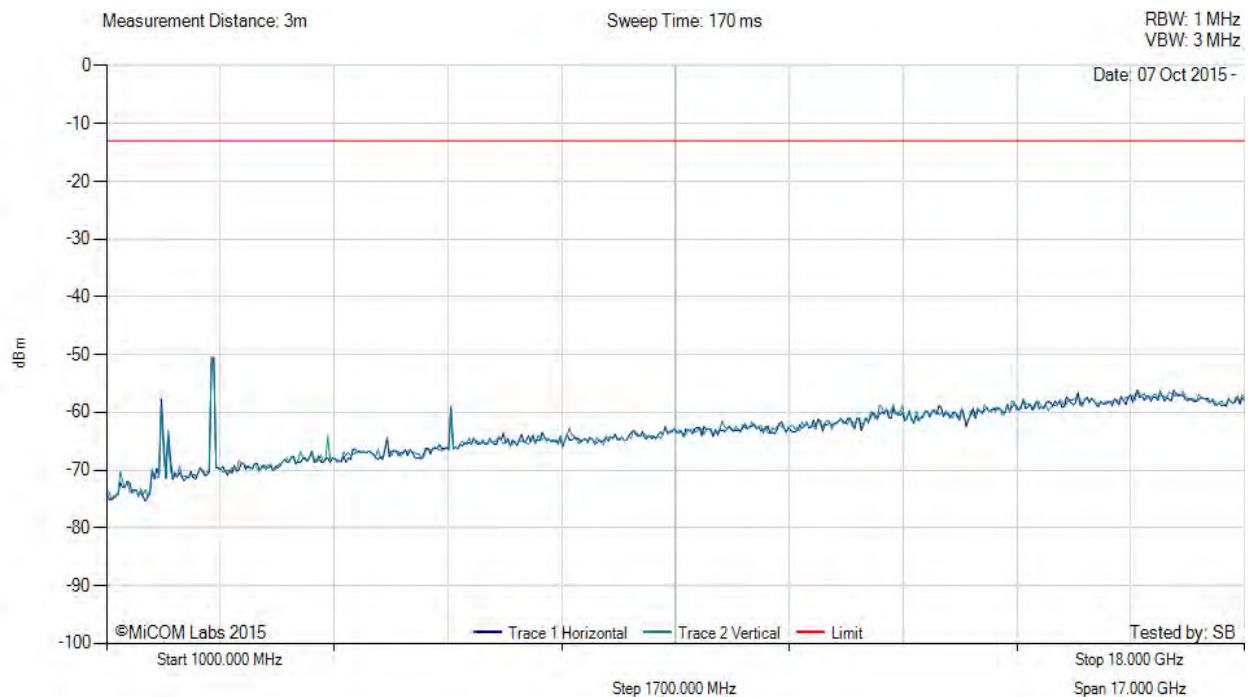

There are no emissions found within 6dB of the limit line.

**Test Notes:** 50 ohm termination heads on antenna ports

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 97 of 126


#### Equipment Configuration for Radiated Spurious - Restricted Band Emissions

|                                 |                       |                        |        |
|---------------------------------|-----------------------|------------------------|--------|
| <b>Antenna:</b>                 | Terminated in 50 Ohms | <b>Variant:</b>        | 5 MHz  |
| <b>Antenna Gain (dBi):</b>      | Not Applicable        | <b>Modulation:</b>     | QAM 64 |
| <b>Beam Forming Gain (Y):</b>   | Not Applicable        | <b>Duty Cycle (%):</b> | 88     |
| <b>Channel Frequency (MHz):</b> | 2680.00               | <b>Data Rate:</b>      | 5      |
| <b>Power Setting:</b>           | 37                    | <b>Tested By:</b>      | SB     |

#### Test Measurement Results



Variant: , Test Freq: 2680.00 MHz, Antenna: terminated, Power Setting: 37

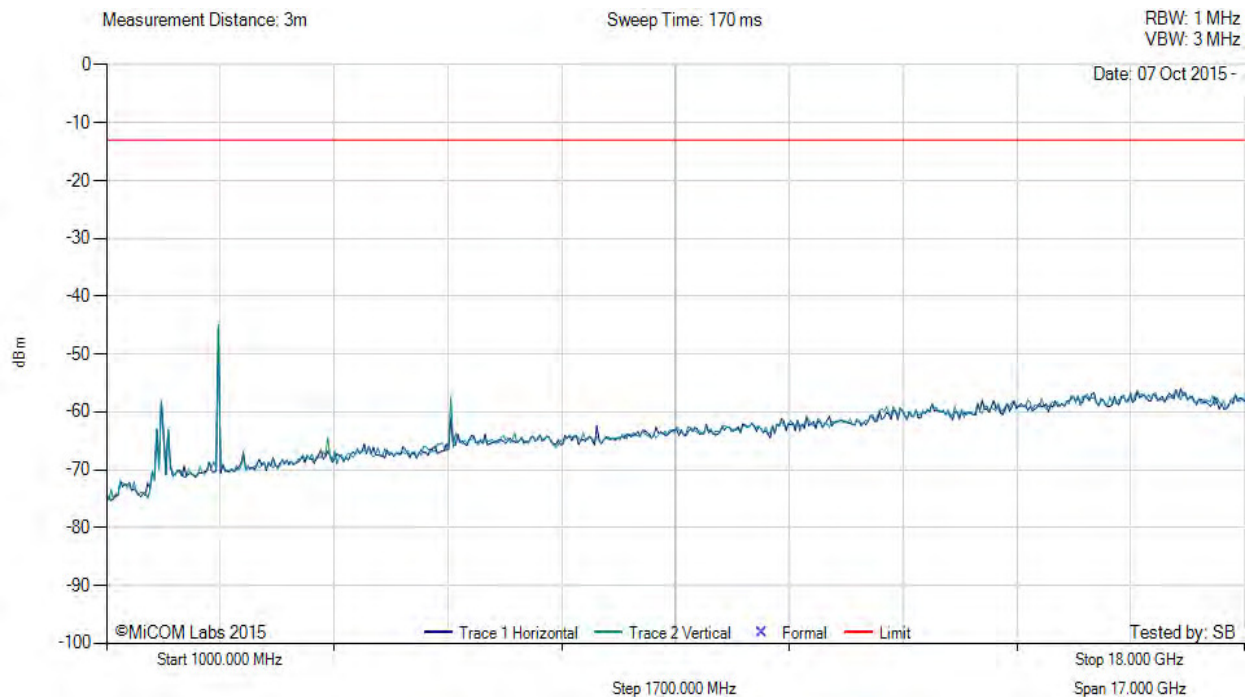

| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB | Level dBμV/m | Measurement Type | Pol      | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|-------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| 1   | 6144.09       | -48.79   | 3.86       | -9.24 | -54.17       | Max Peak         | Vertical | 102    | 179     | -13          | -21.2     | Pass       |

**Test Notes:** 50 ohm termination heads on antenna ports

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### 6.1.2.2. Digital Emissions

#### Test Procedure

Testing 30M-1 GHz was performed in a 3-meter anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed. The anechoic chamber test set-up is identified in Section 6 Test Set-Up Photographs.

#### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength

R = Measured Receiver Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

For example:

Given a Receiver input reading of 51.5dB $\mu$ V; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dB}\mu\text{V/m}$$

Conversion between dB $\mu$ V/m (or dB $\mu$ V) and  $\mu$ V/m (or  $\mu$ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (}\mu\text{V/m))}$$

$$40 \text{ dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250\mu\text{V/m}$$




**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 99 of 126

#### Equipment Configuration for Digital Emissions

|                                 |                       |                        |        |
|---------------------------------|-----------------------|------------------------|--------|
| <b>Antenna:</b>                 | Terminated in 50 Ohms | <b>Variant:</b>        | 5 MHz  |
| <b>Antenna Gain (dBi):</b>      | Not Applicable        | <b>Modulation:</b>     | QAM 64 |
| <b>Beam Forming Gain (Y):</b>   | Not Applicable        | <b>Duty Cycle (%):</b> | 88     |
| <b>Channel Frequency (MHz):</b> | 2680.00               | <b>Data Rate:</b>      | 5      |
| <b>Power Setting:</b>           | 37                    | <b>Tested By:</b>      | SB     |



Variant: , Test Freq: 2680.00 MHz, Antenna: terminated, Power Setting: 37

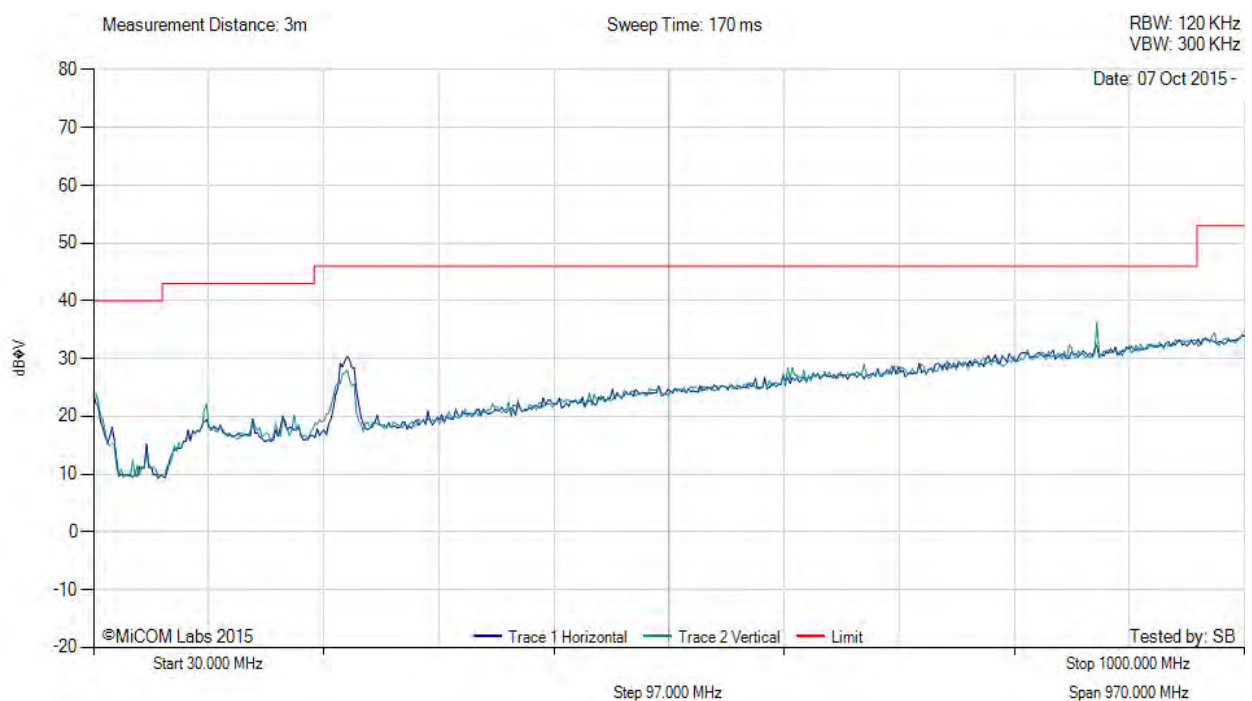

There are no emissions found within 6dB of the limit line.

**Test Notes:** 50 ohm termination heads on antenna ports. Unit was positioned in a worst case orientation for the above digital emission plot. Data for the other orientation is kept on file.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxcelLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 100 of 126


#### Equipment Configuration for Radiated Spurious - Restricted Band Emissions

|                                 |                       |                        |        |
|---------------------------------|-----------------------|------------------------|--------|
| <b>Antenna:</b>                 | Terminated in 50 Ohms | <b>Variant:</b>        | 5 MHz  |
| <b>Antenna Gain (dBi):</b>      | Not Applicable        | <b>Modulation:</b>     | QAM 64 |
| <b>Beam Forming Gain (Y):</b>   | Not Applicable        | <b>Duty Cycle (%):</b> | 88     |
| <b>Channel Frequency (MHz):</b> | 2680.00               | <b>Data Rate:</b>      | 5      |
| <b>Power Setting:</b>           | 37                    | <b>Tested By:</b>      | SB     |

#### Test Measurement Results



Variant: , Test Freq: 2680.00 MHz, Antenna: terminated, Power Setting: 37

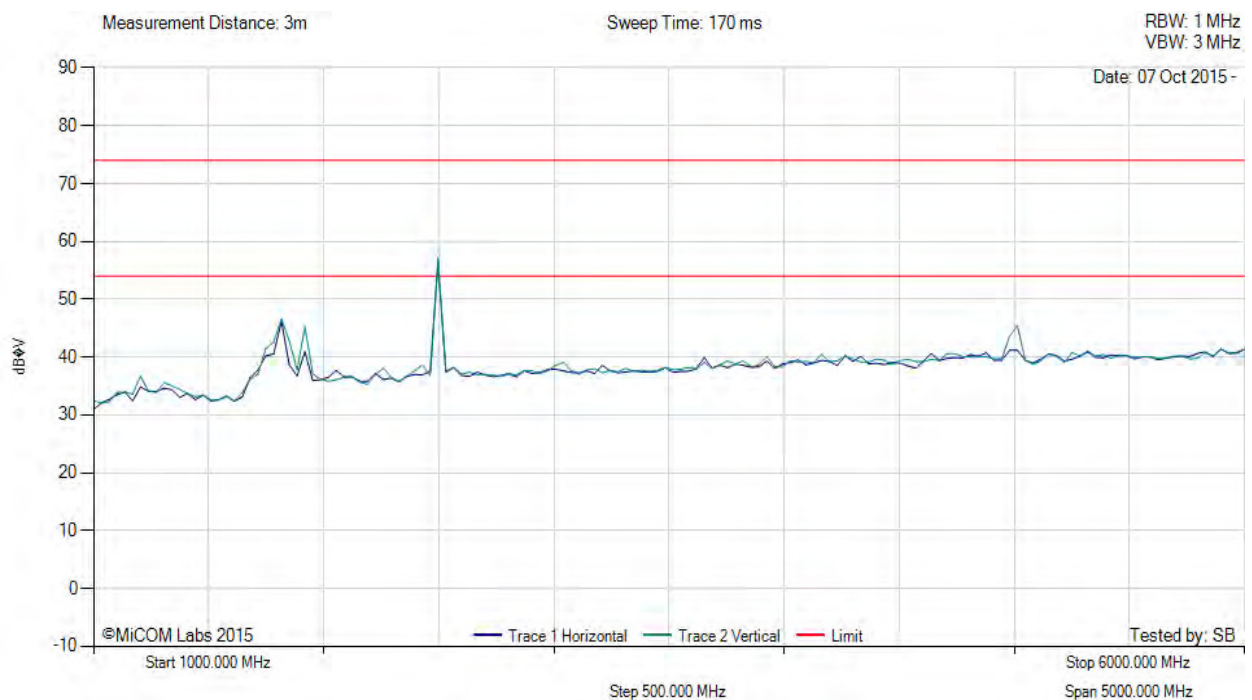

| Num | Frequency MHz | Raw dBuV/m | Cable Loss | AF dB  | Level dBuV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB |       |
|-----|---------------|------------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|-------|
| #1  | 2668.99       | 56.20      | 2.45       | -13.49 | 46.47        | Peak (Scan)      | Horizontal | 100    | -       | -            | --        | FUND- |

Test Notes: 50 ohm termination heads on antenna ports

**Test Notes:** 50 ohm termination heads on antenna ports. Emission at 2668.99 MHz is the fundamental frequency

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 101 of 126

---

## **A. GRAPHICAL IMAGES**

---


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 102 of 126

## A.1 Transmitter Unwanted Spurious (Conducted)

2498.1MHz 9KHz – 150KHz Chain A

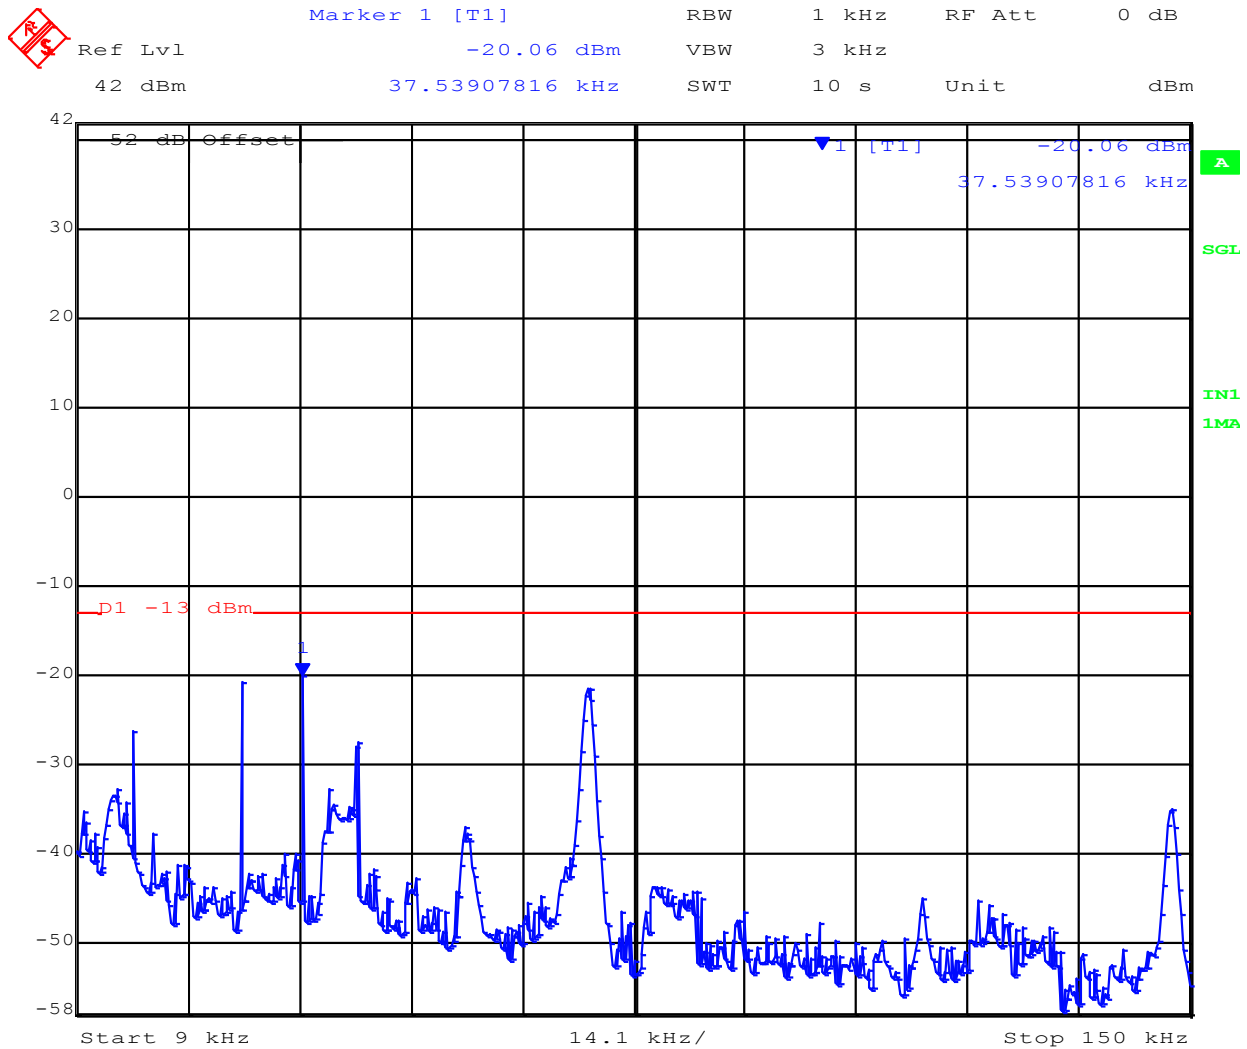


[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



2498.1MHz 150KHz – 30MHz Chain A

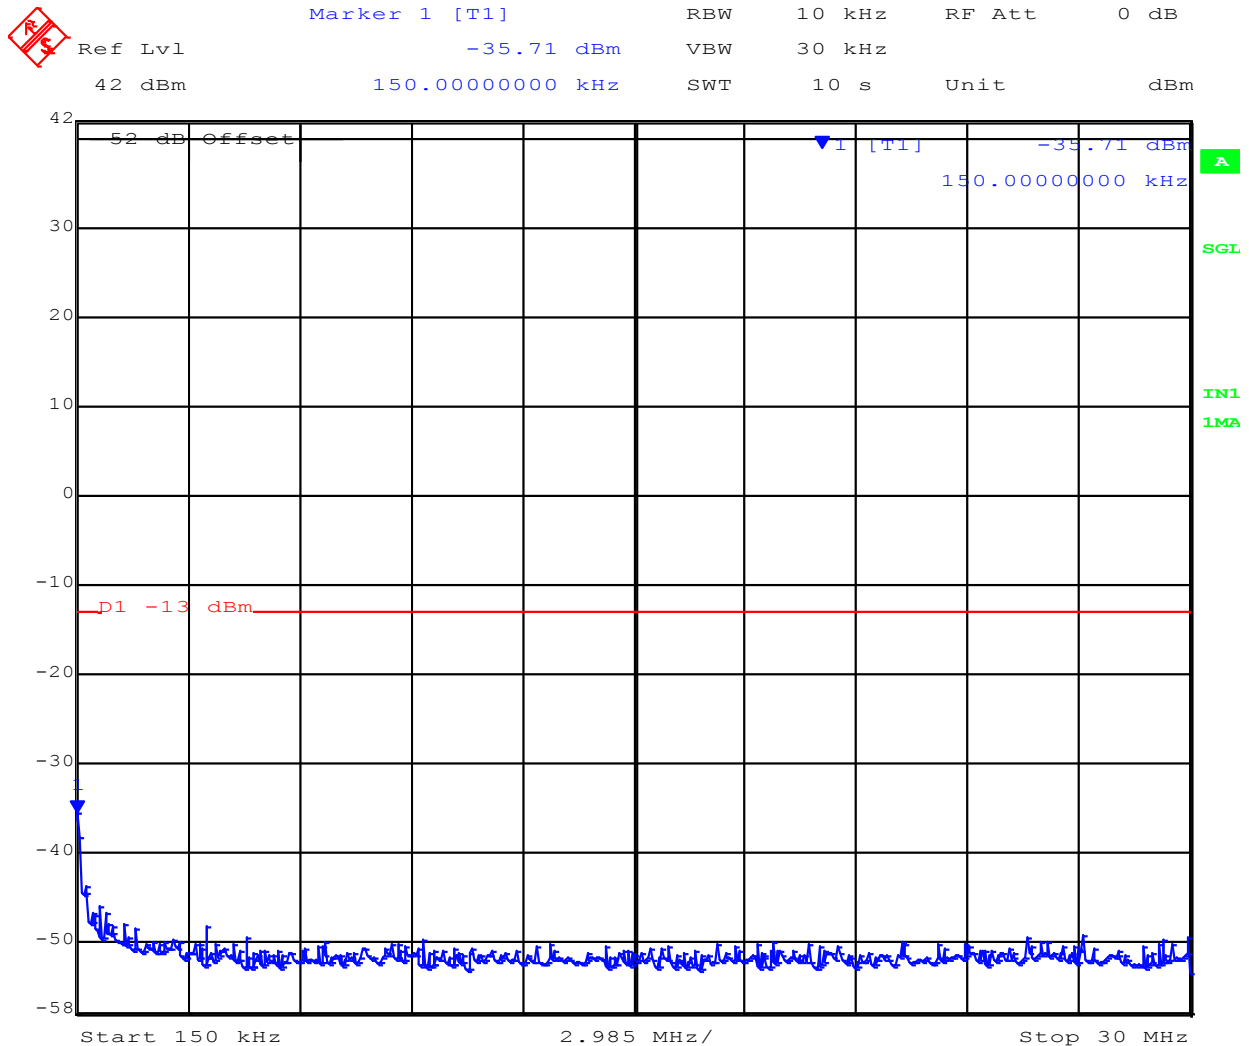


[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



2498.1MHz 30MHz – 1GHz Chain A

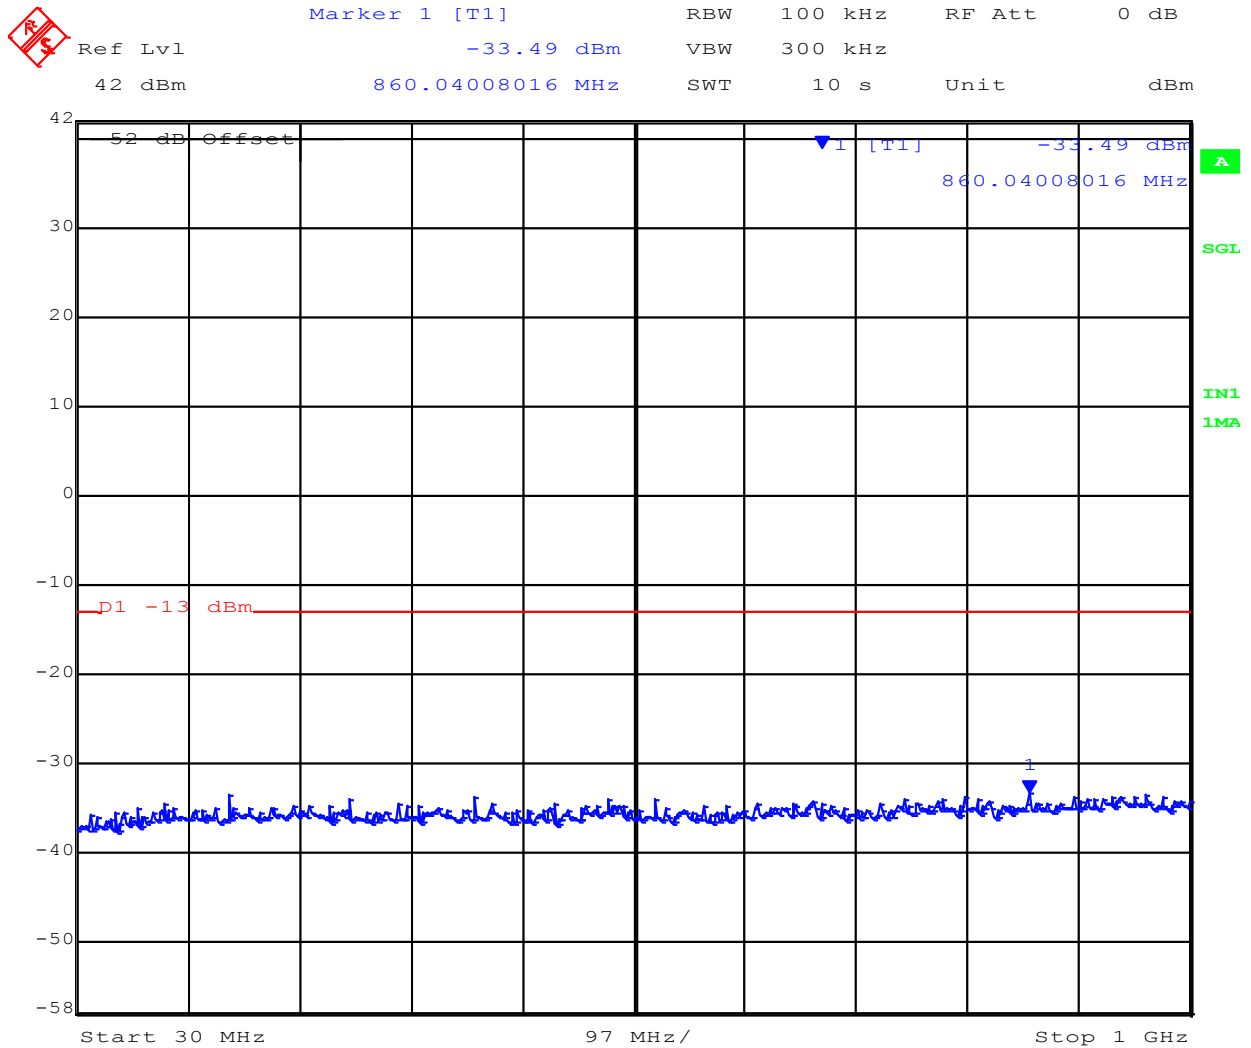


[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





2498.1MHz 1GHz – 26GHz Chain A

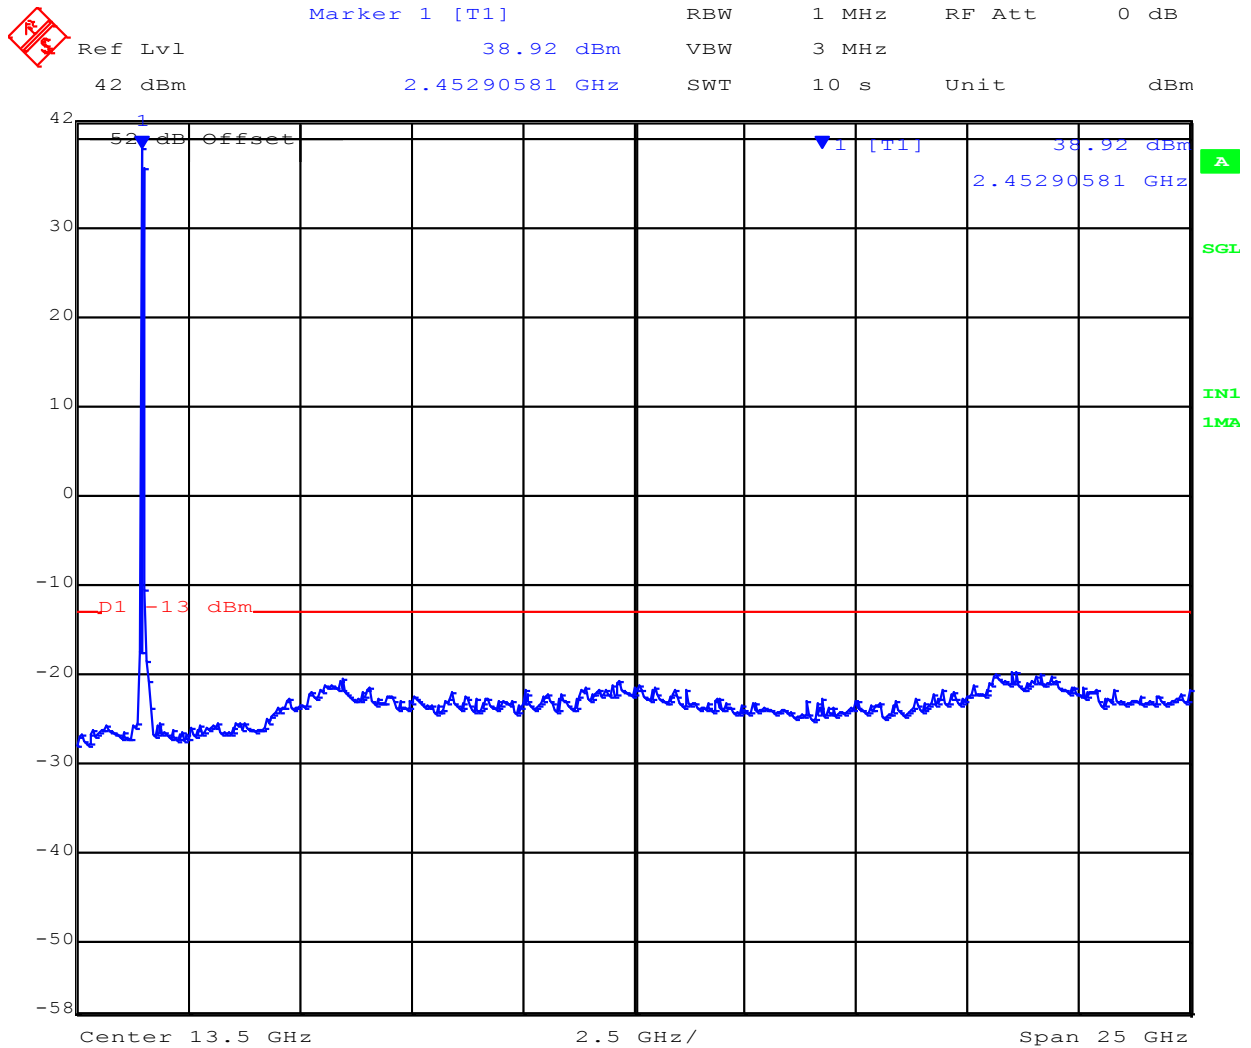


[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 106 of 126

## 2498.1MHz 9KHz – 150KHz Chain B

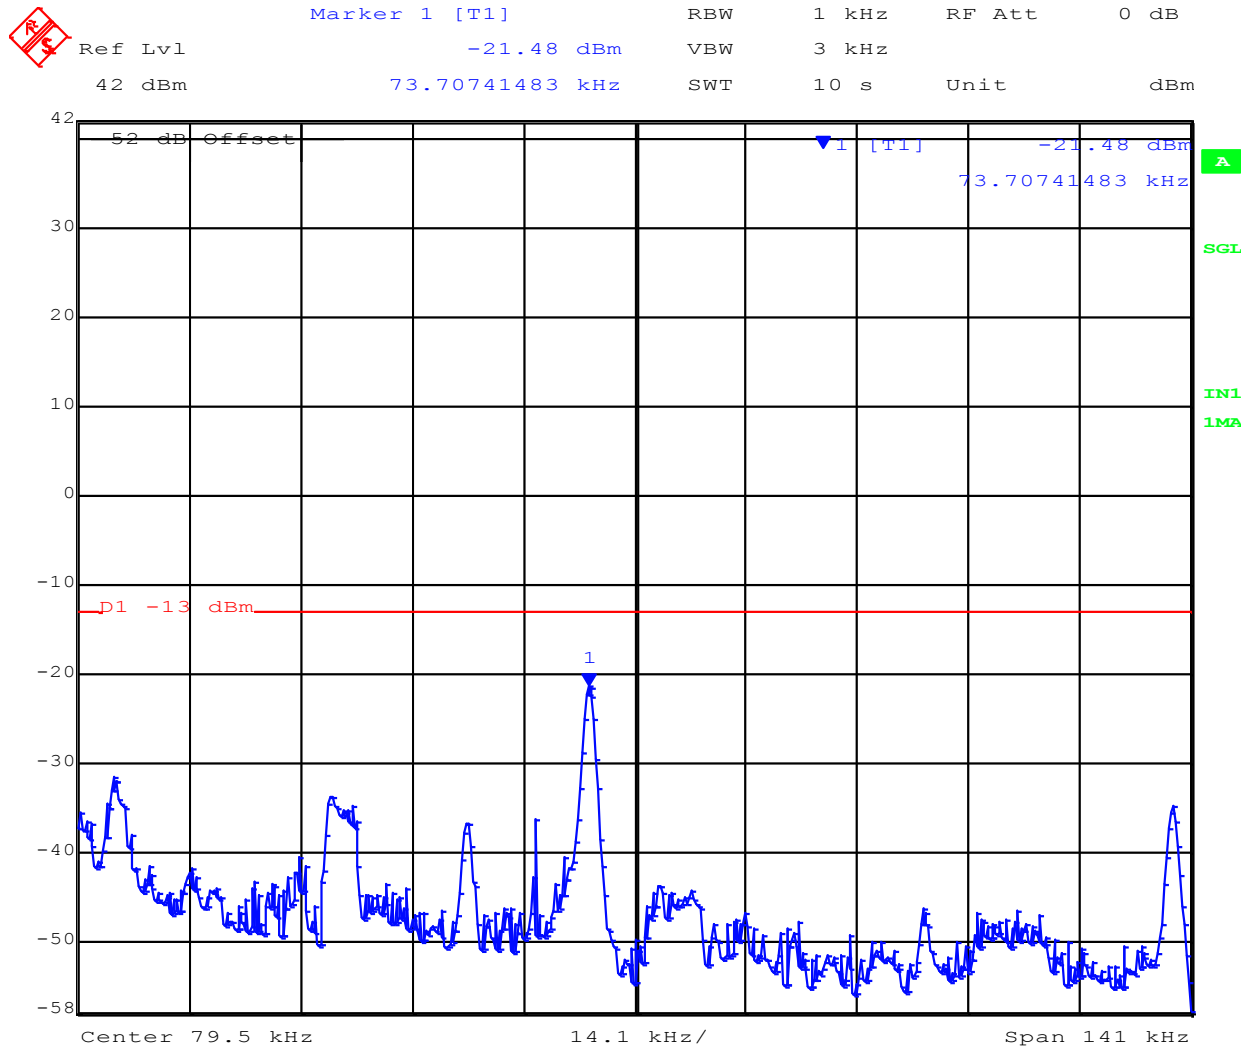


[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



2498.1MHz 150KHz – 30MHz Chain B

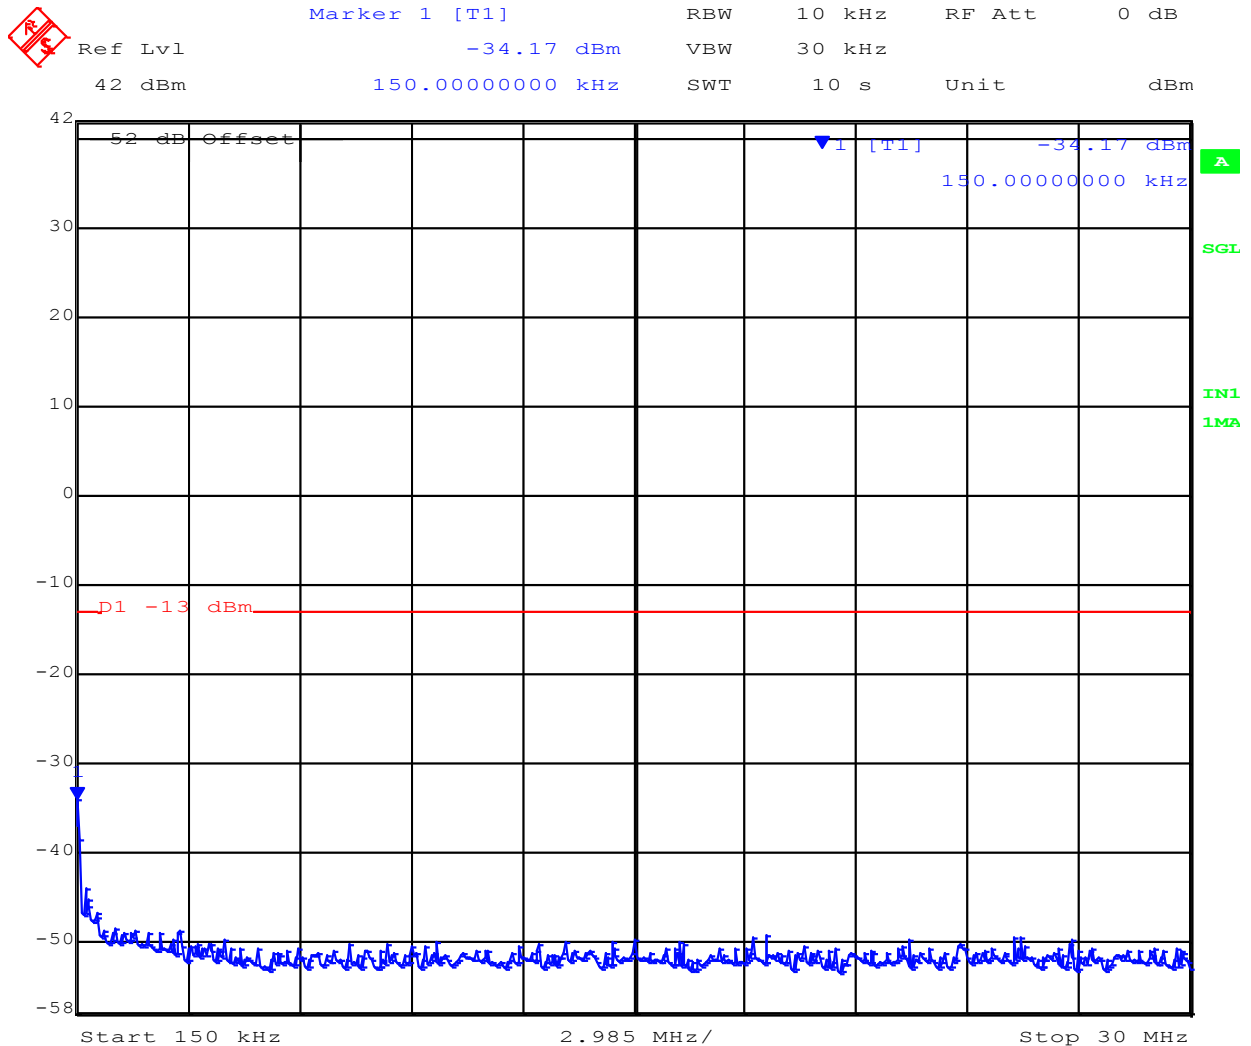


[Back to Matrix](#)



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 108 of 126

## 2498.1MHz 30MHz – 1GHz Chain B

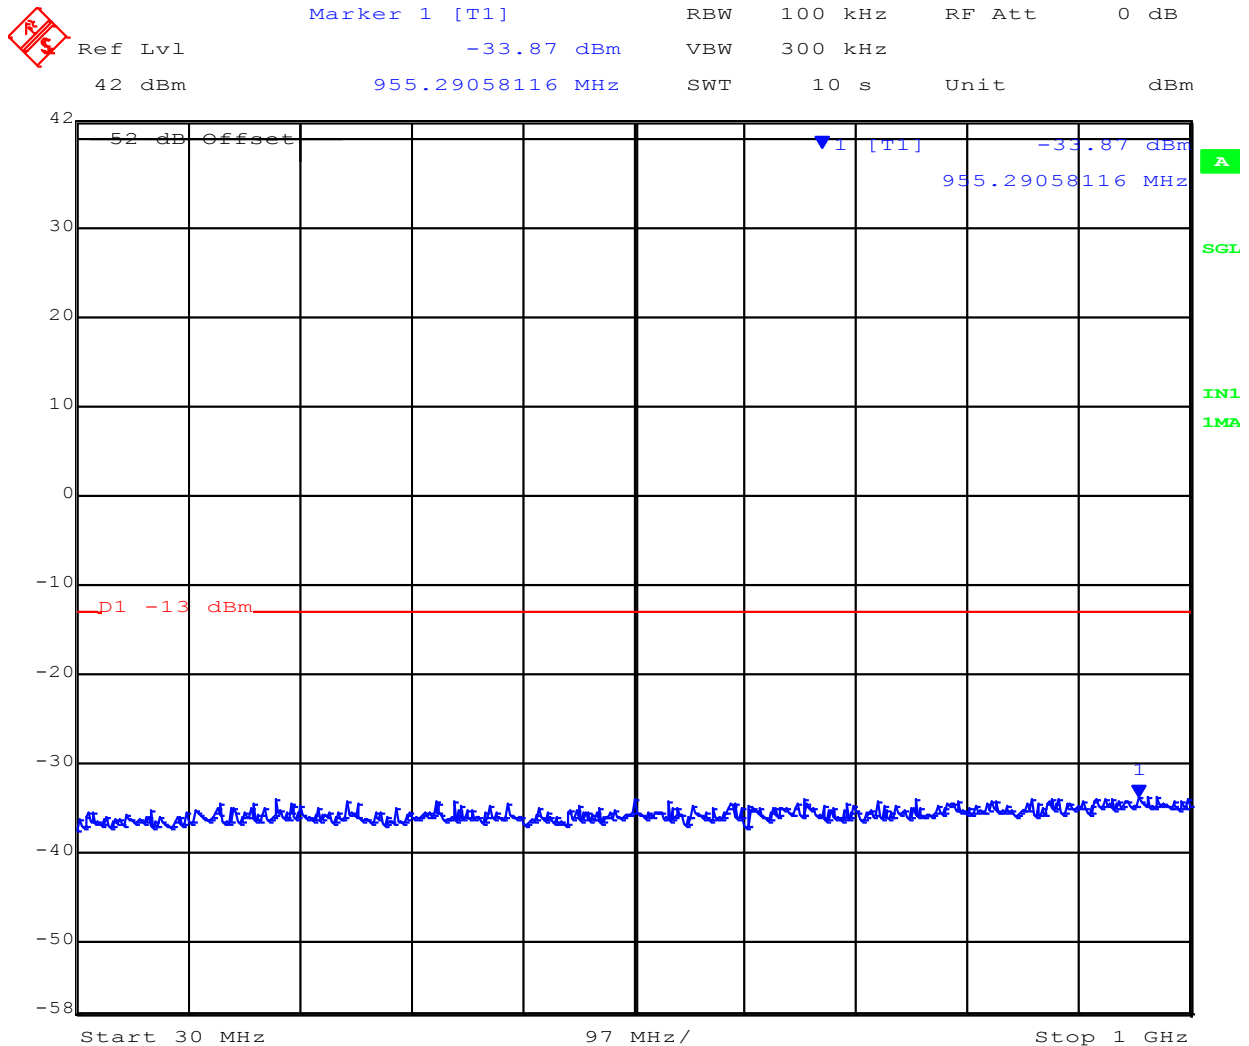


[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxcelLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 109 of 126

## 2498.1MHz 1GHz – 26GHz Chain B

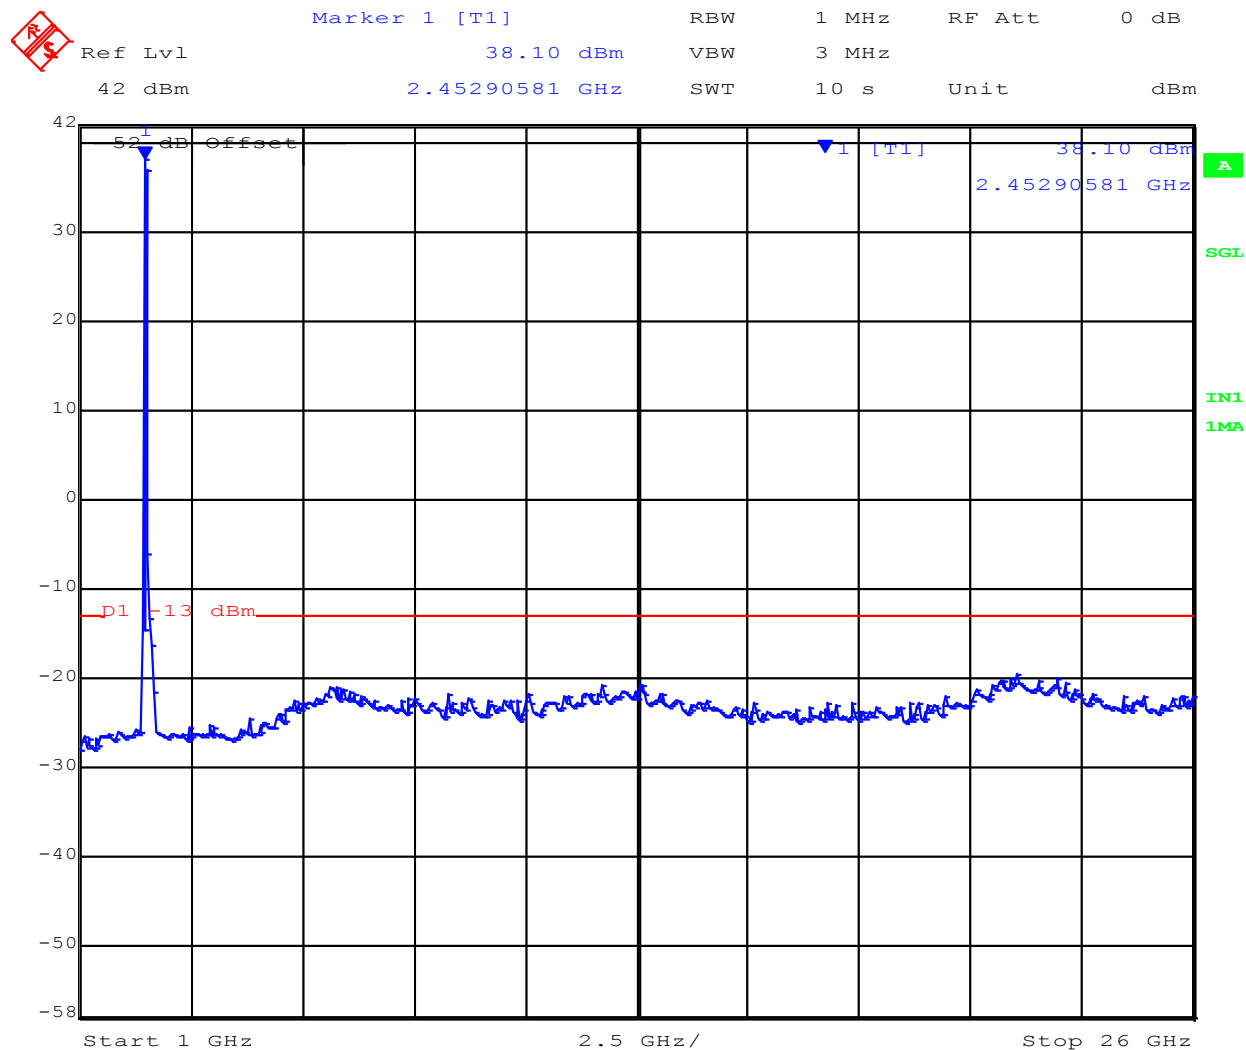


[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 110 of 126

## 2593MHz 9KHz – 150KHz Chain A

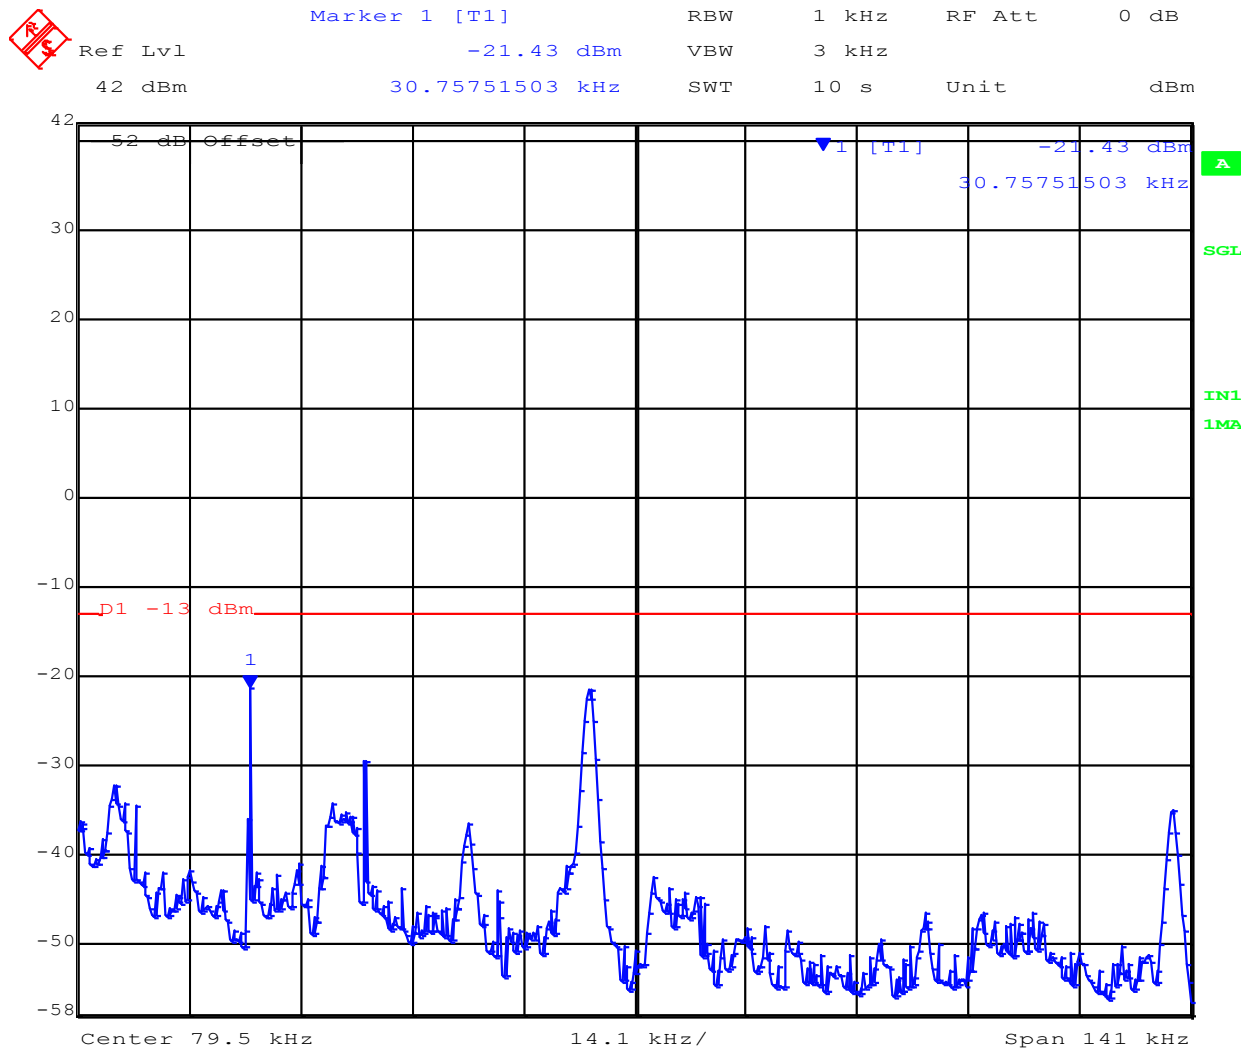


[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxcelLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 111 of 126

## 2593MHz 150KHz – 30MHz Chain A

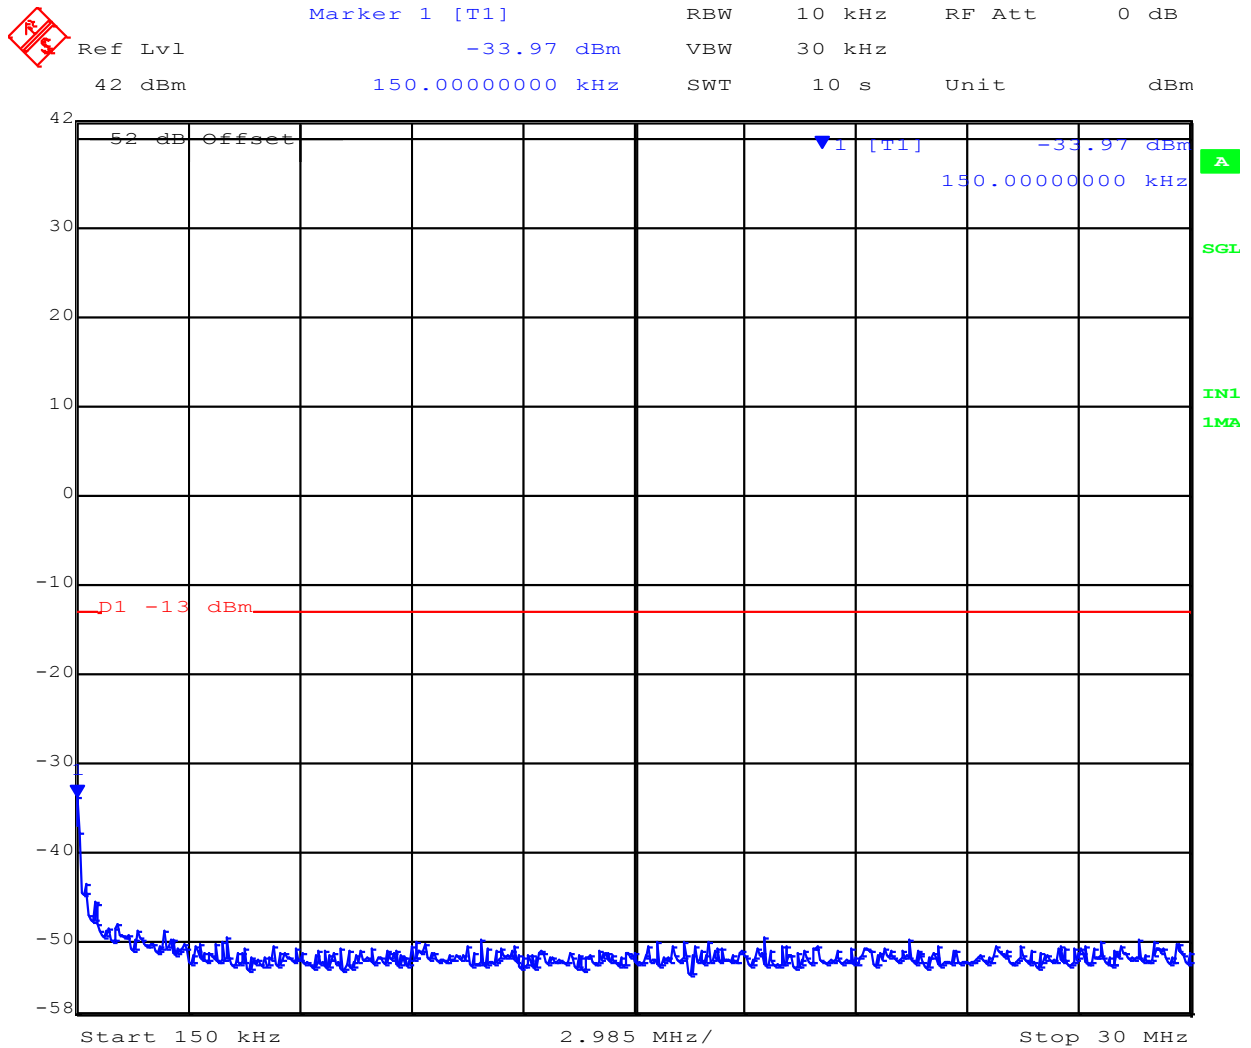


[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 112 of 126

## 2593MHz 30MHz – 1GHz Chain A

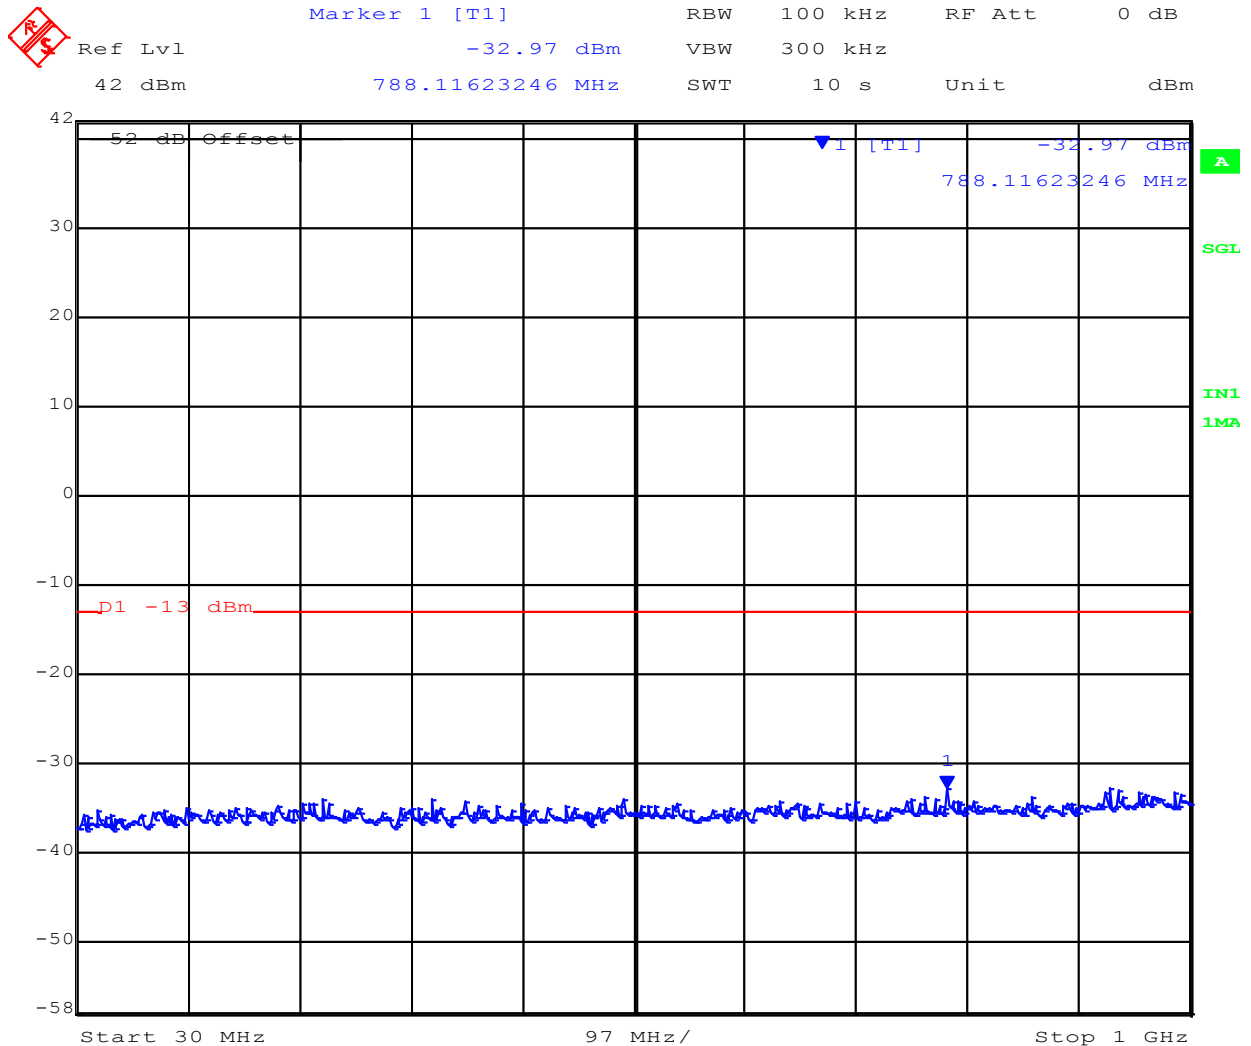

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** Axxcelera Broadband Wireless AxxcelLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 113 of 126

## 2593MHz 1GHz – 26GHz Chain A

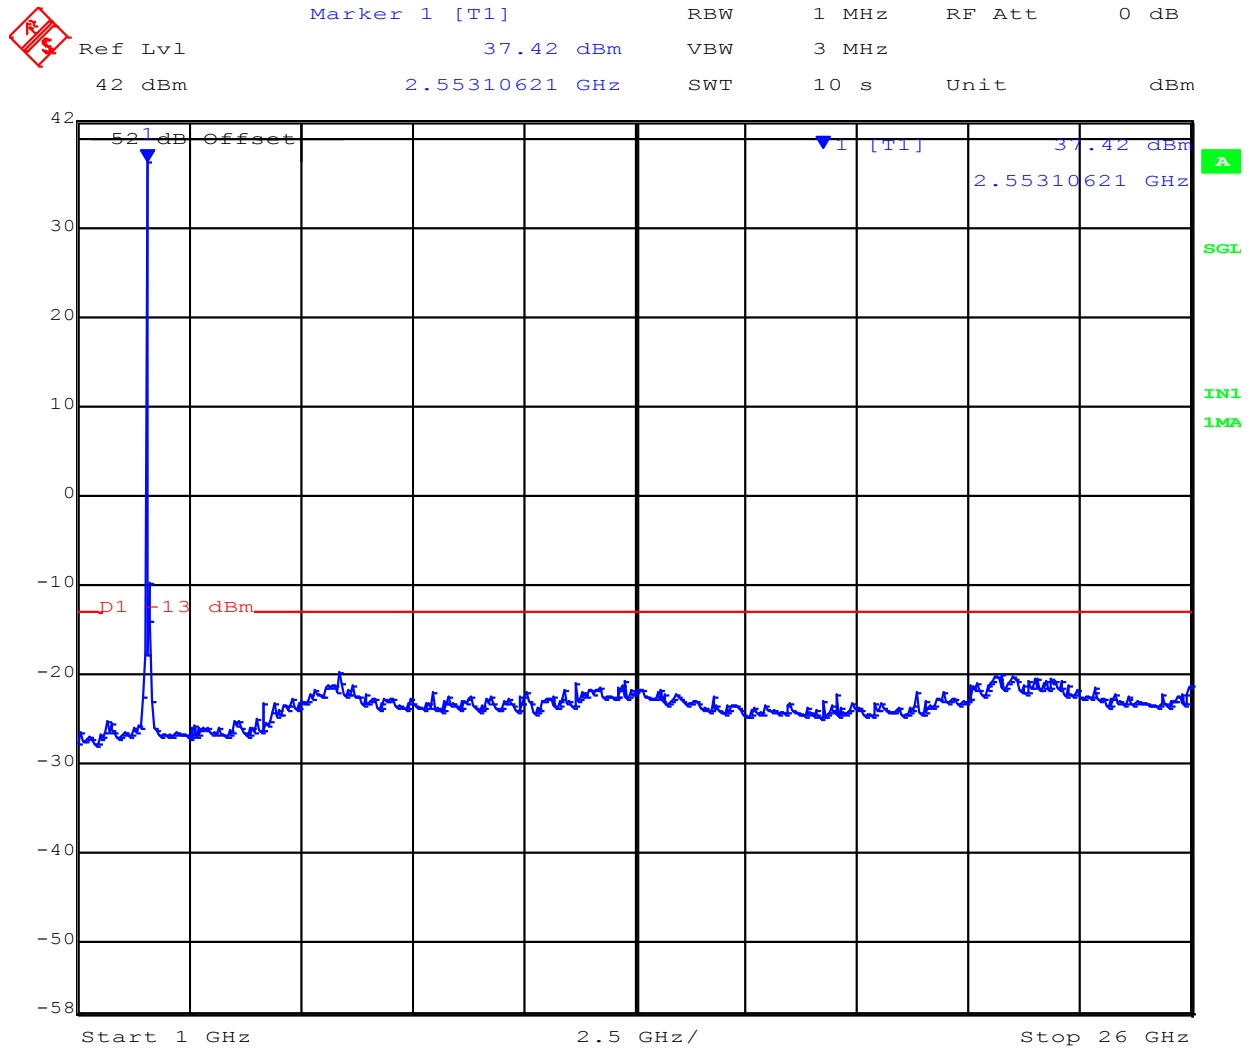


[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxcelLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 114 of 126

## 2593MHz 9KHz – 150KHz Chain B

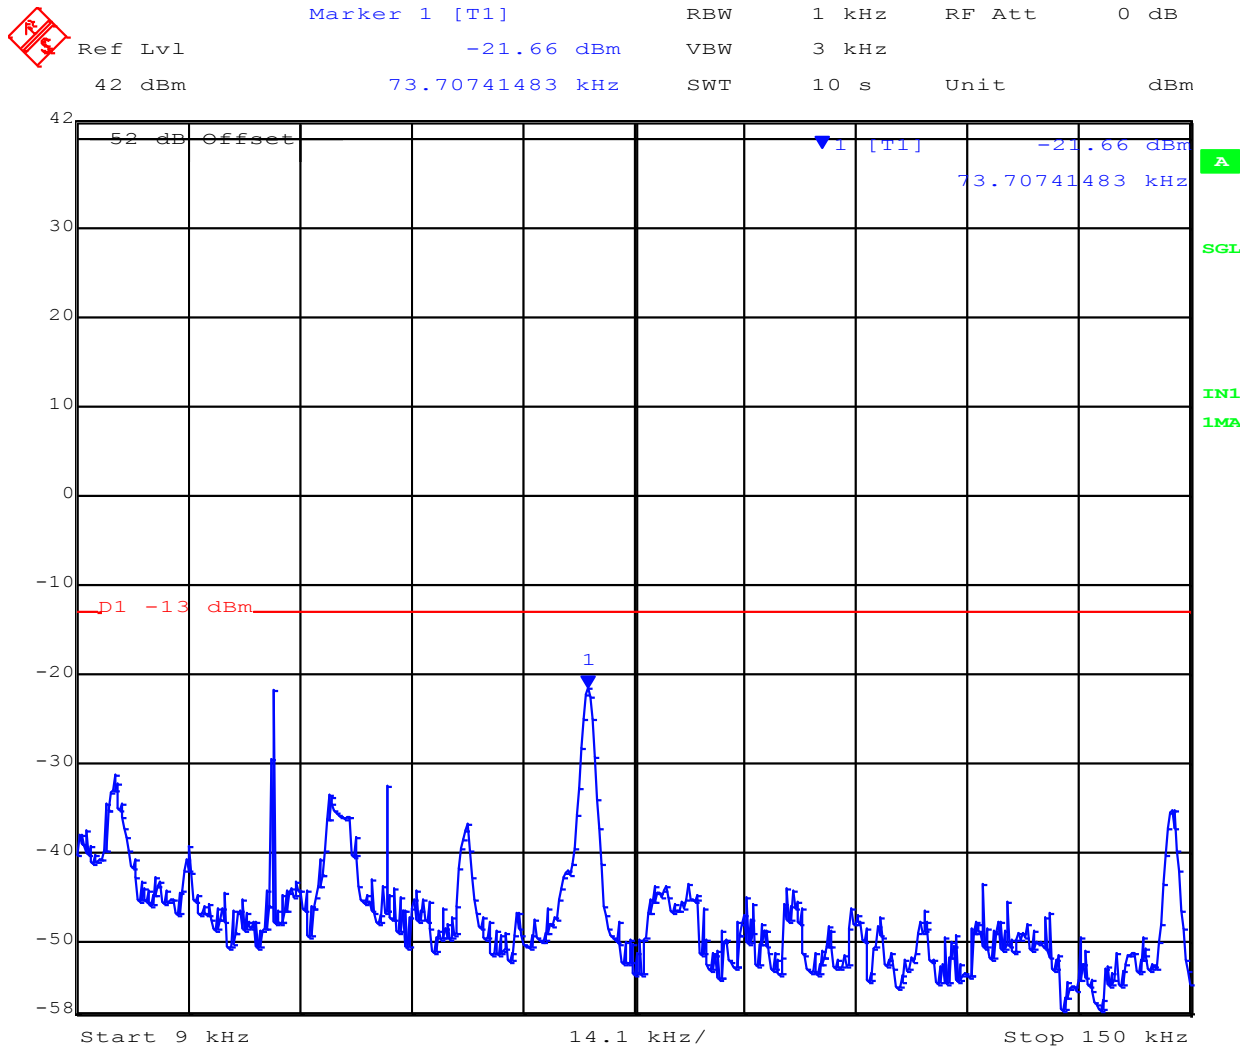


[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxcelLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 115 of 126

## 2593MHz 150KHz – 30MHz Chain B

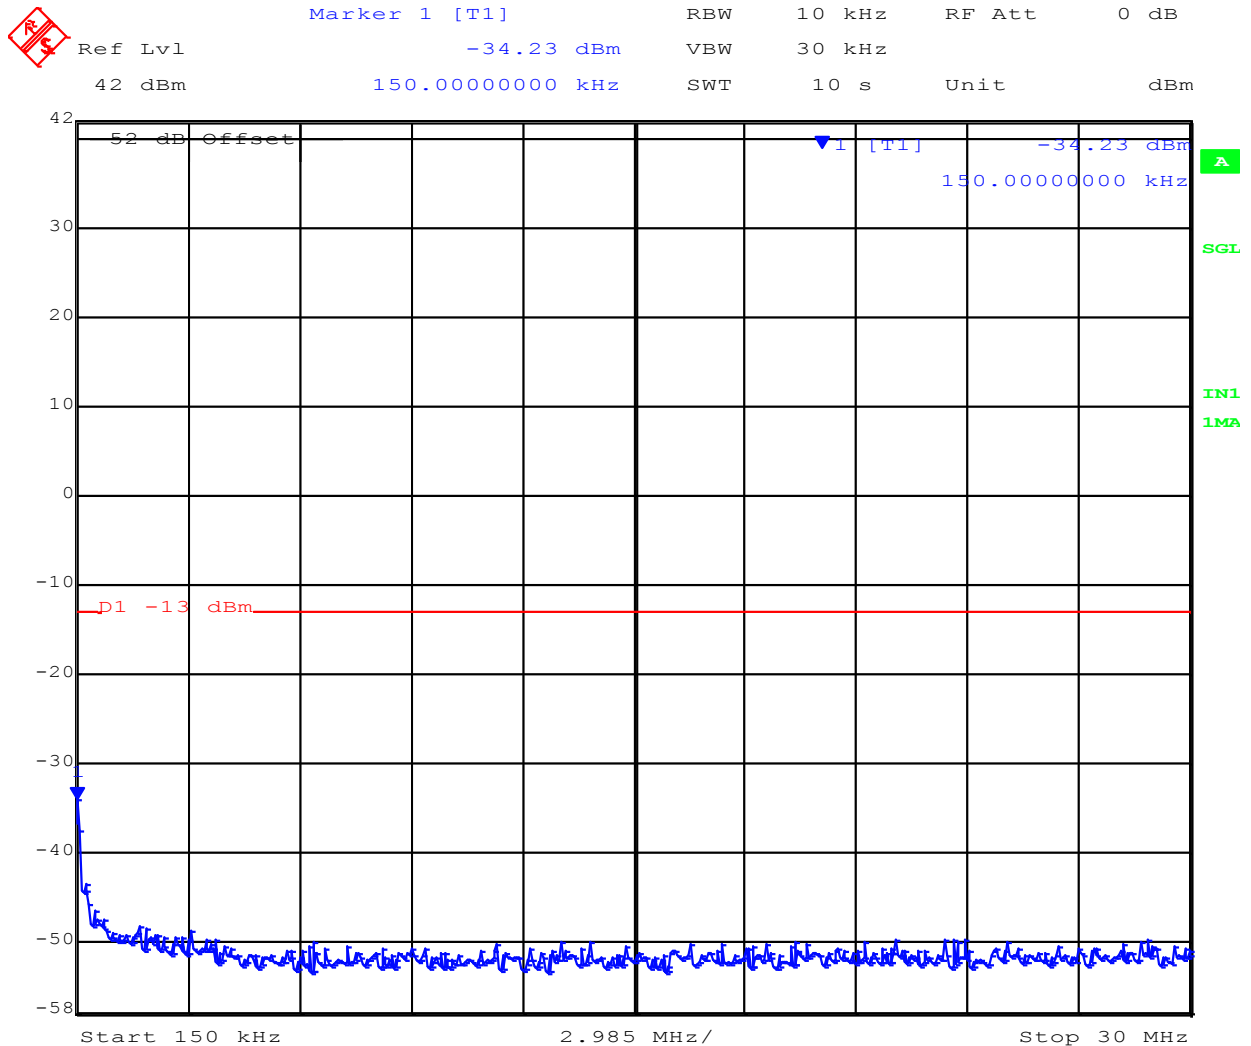


[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 116 of 126

## 2593MHz 30MHz – 1GHz Chain B

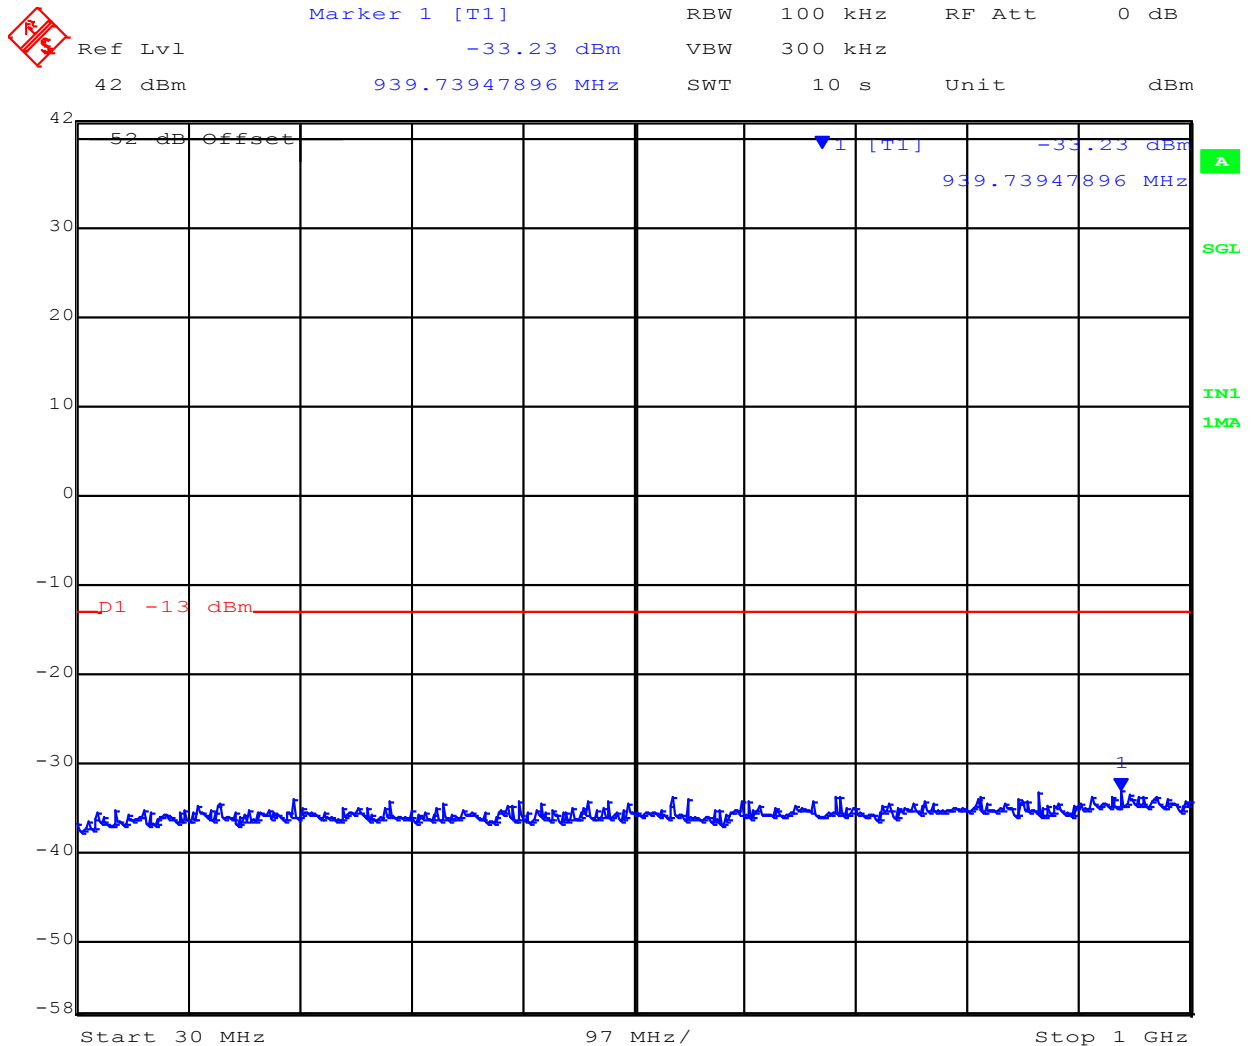


[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



2593MHz 1GHz – 26GHz Chain B

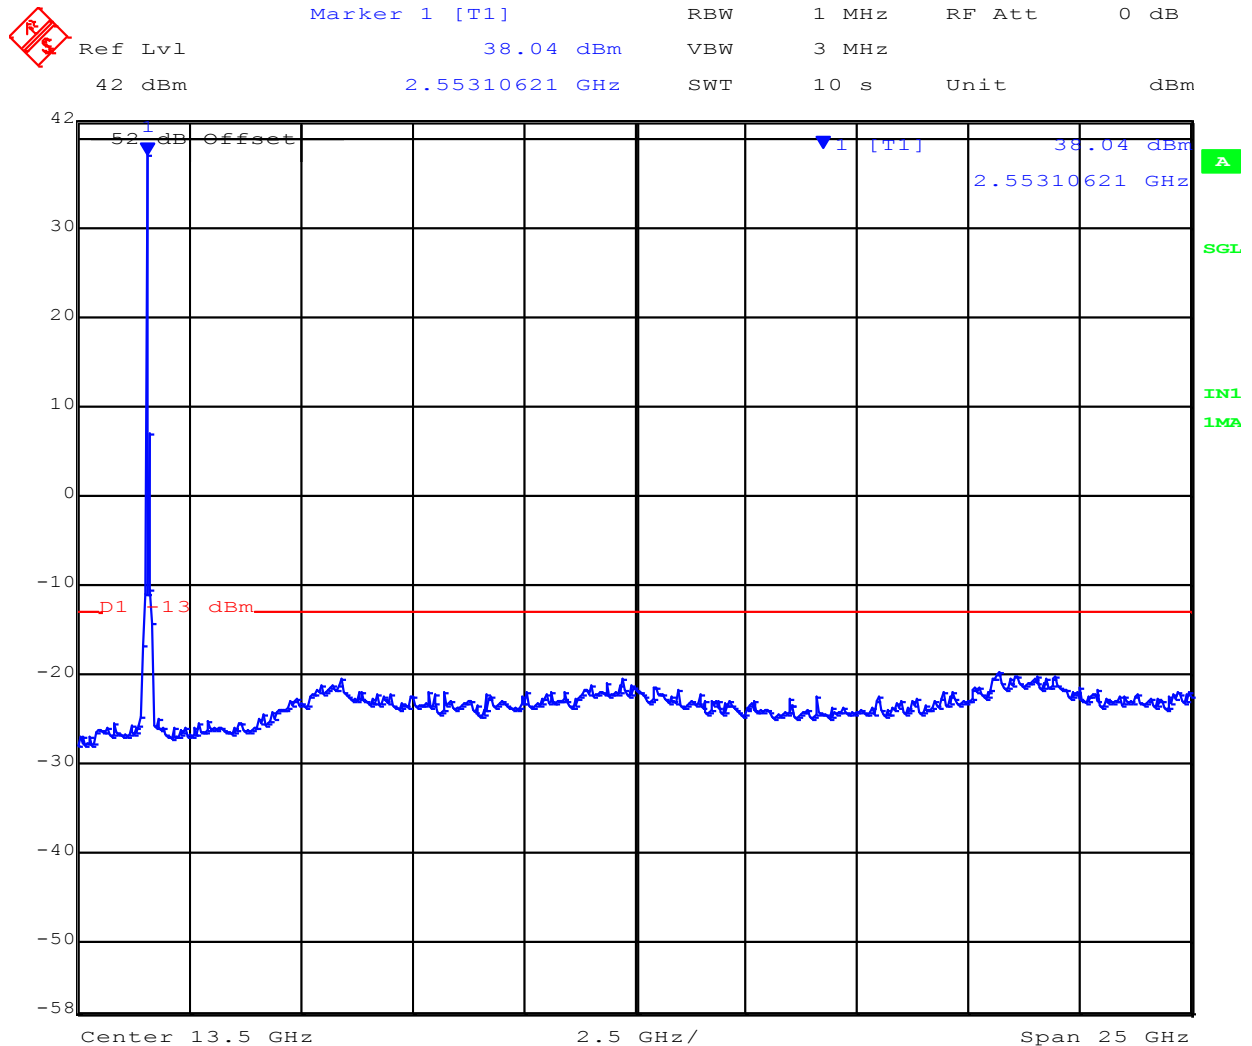


[Back to Matrix](#)



**Title:** Axxcelera Broadband Wireless AxxcelLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 118 of 126

## 2687.5MHz 9KHz – 150KHz Chain A

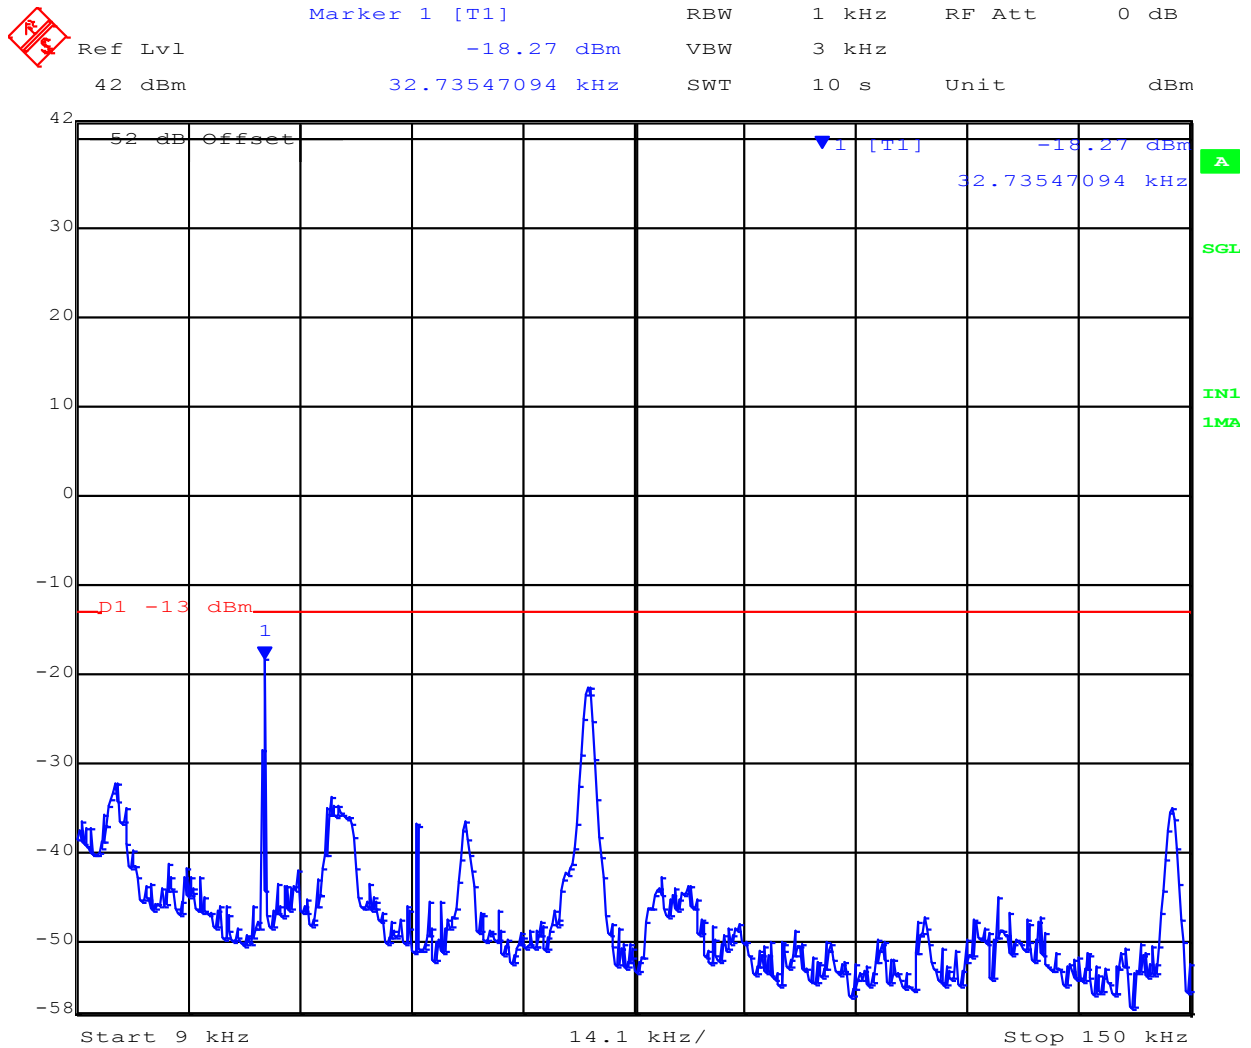


[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



2687.5MHz 150KHz – 30MHz Chain A

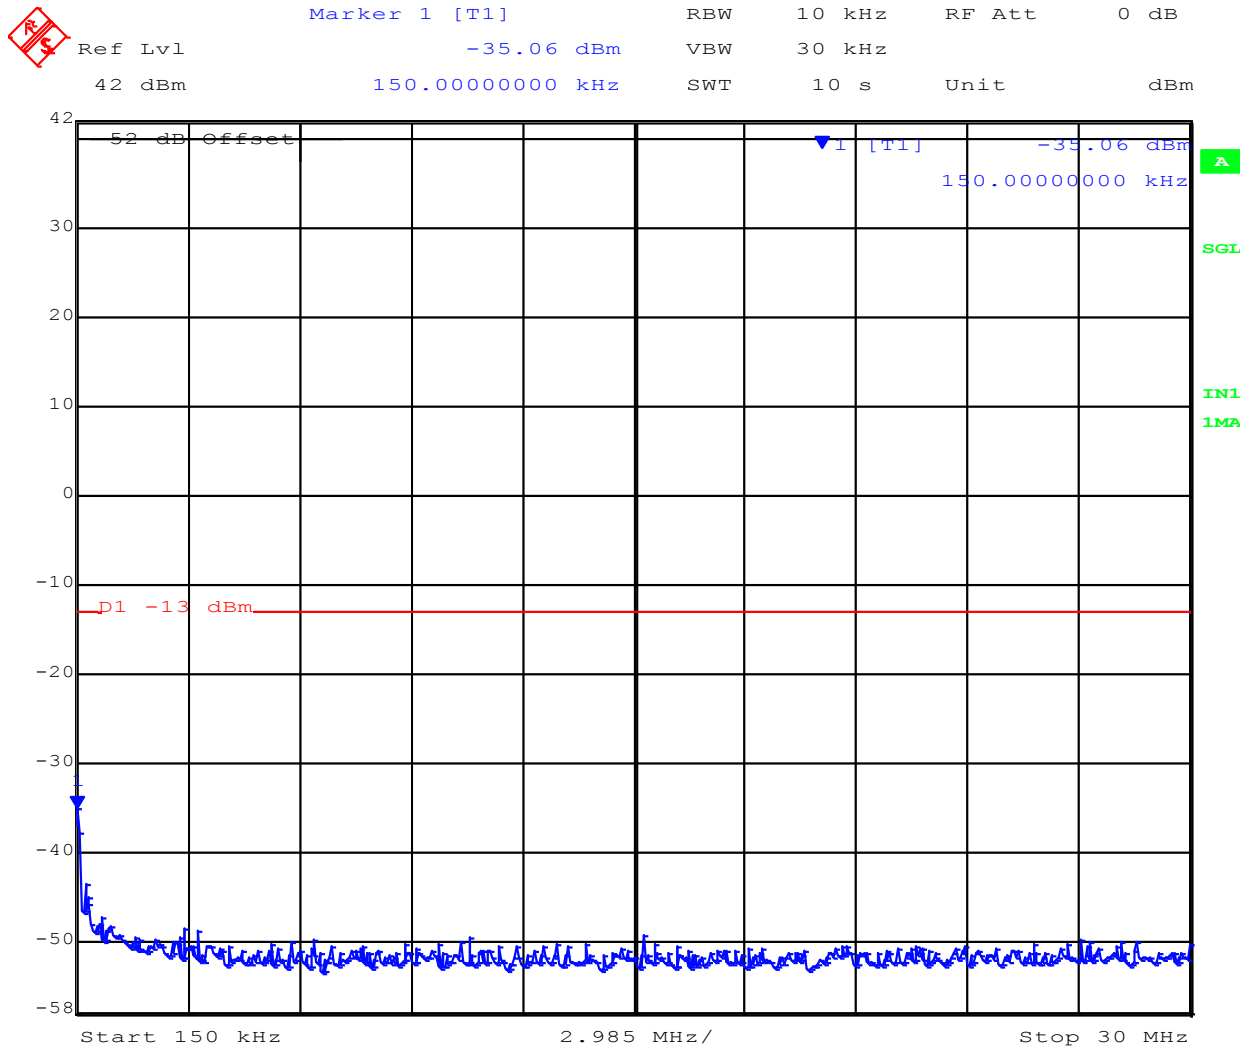


[Back to Matrix](#)



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 120 of 126

## 2687.5MHz 30MHz – 1GHz Chain A

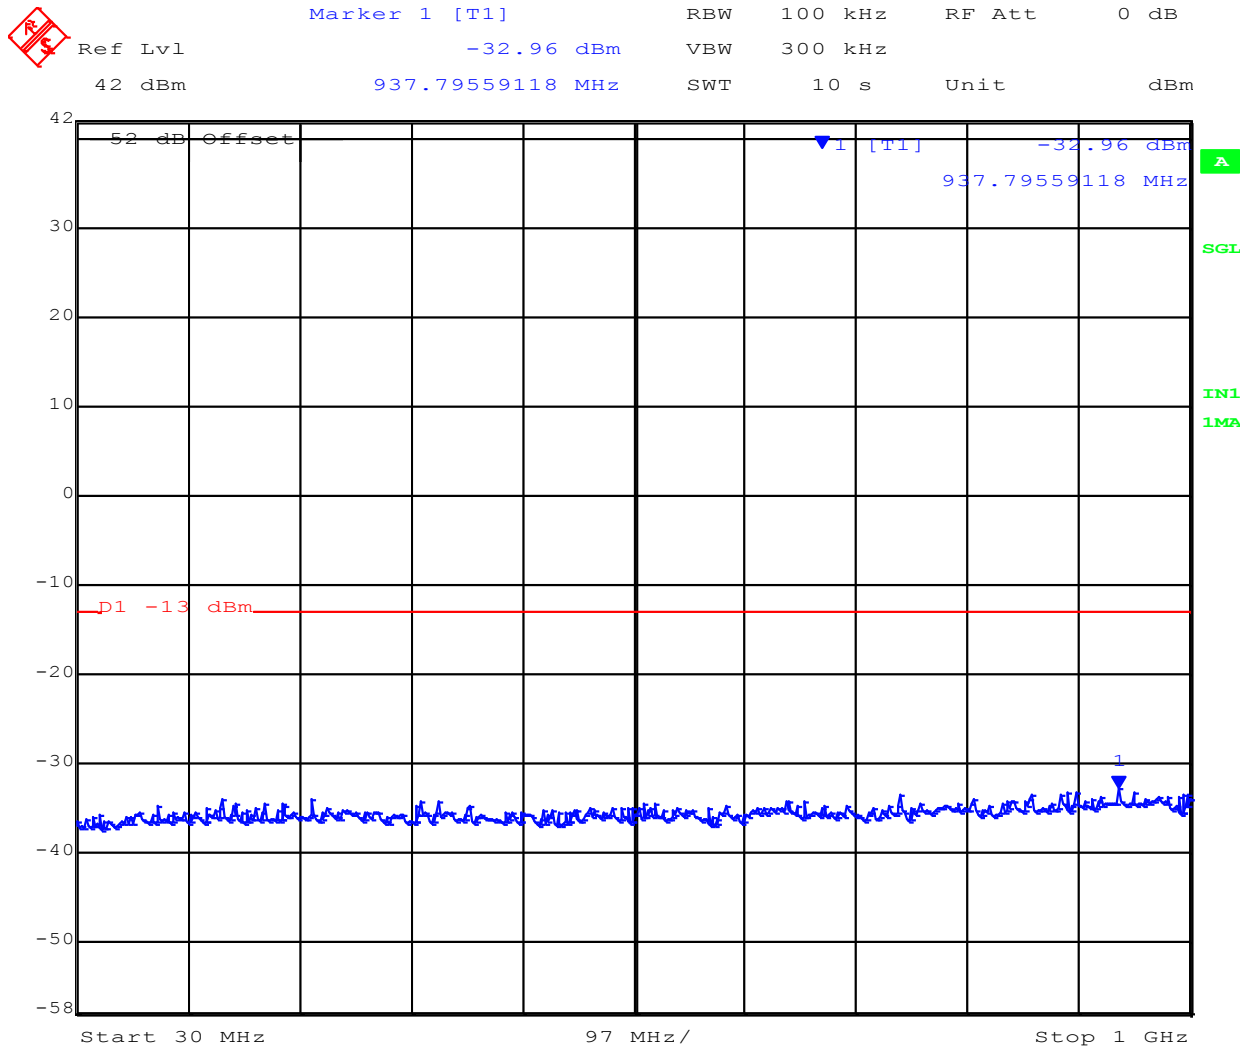


[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





2687.5MHz 1GHz – 26GHz Chain A

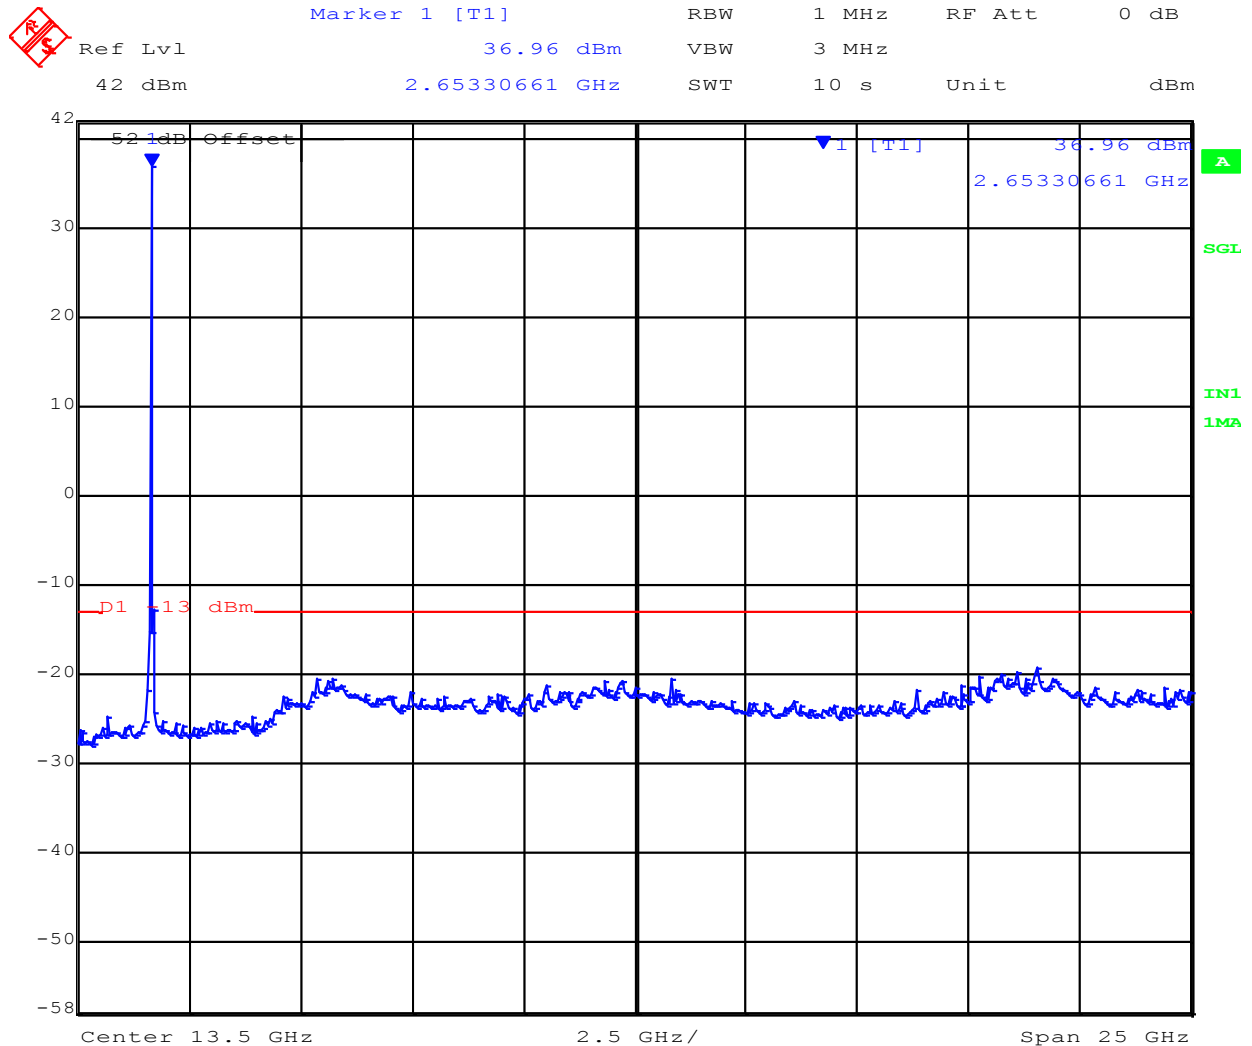


[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera Broadband Wireless AxxcelLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 122 of 126

## 2687.5MHz 9KHz – 150KHz Chain B

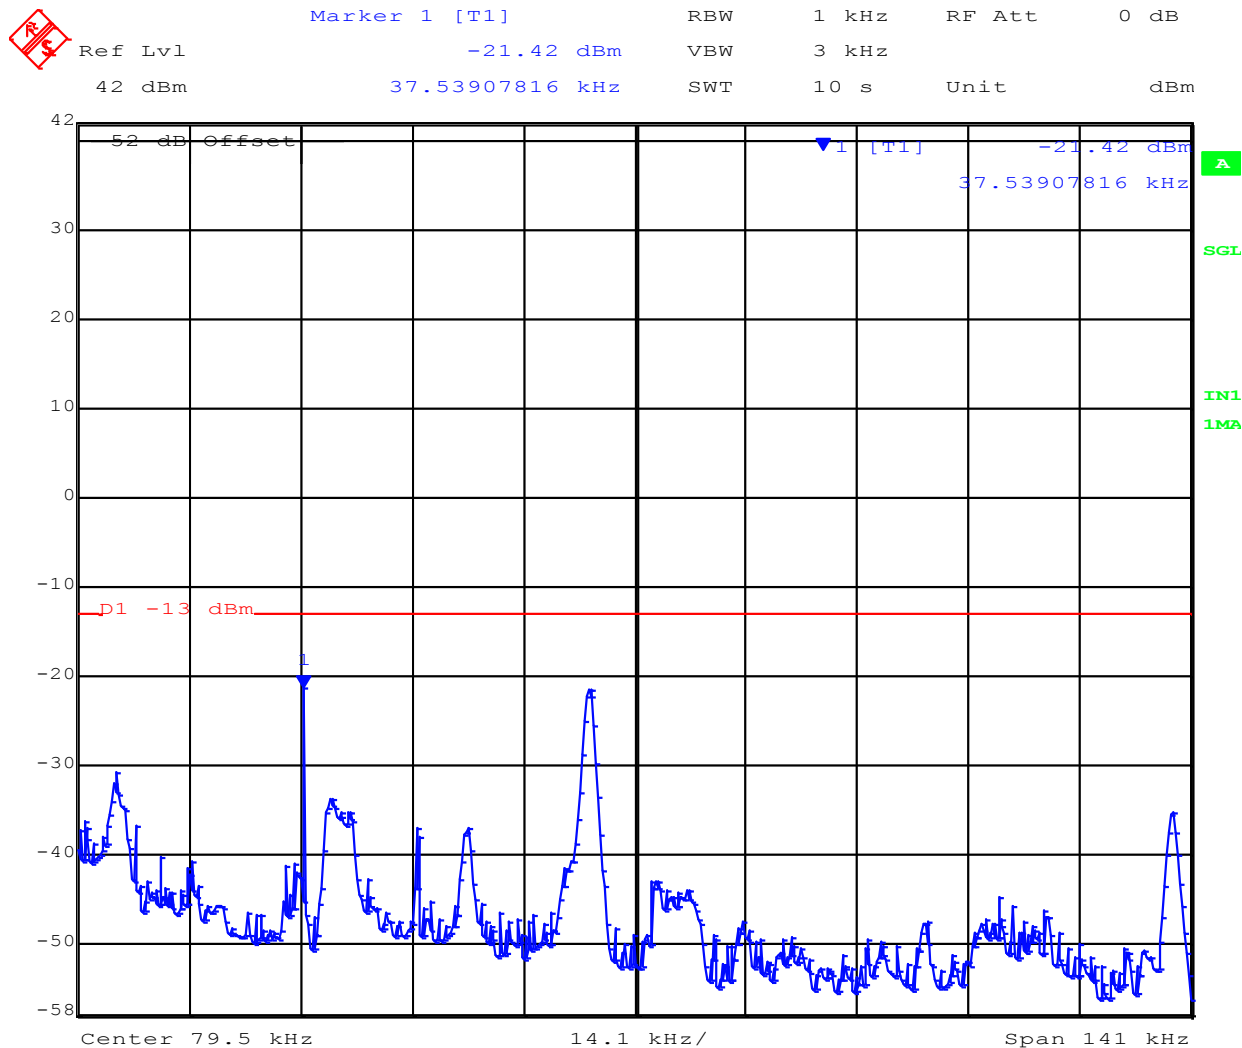


[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



2687.5MHz 150KHz – 30MHz Chain B

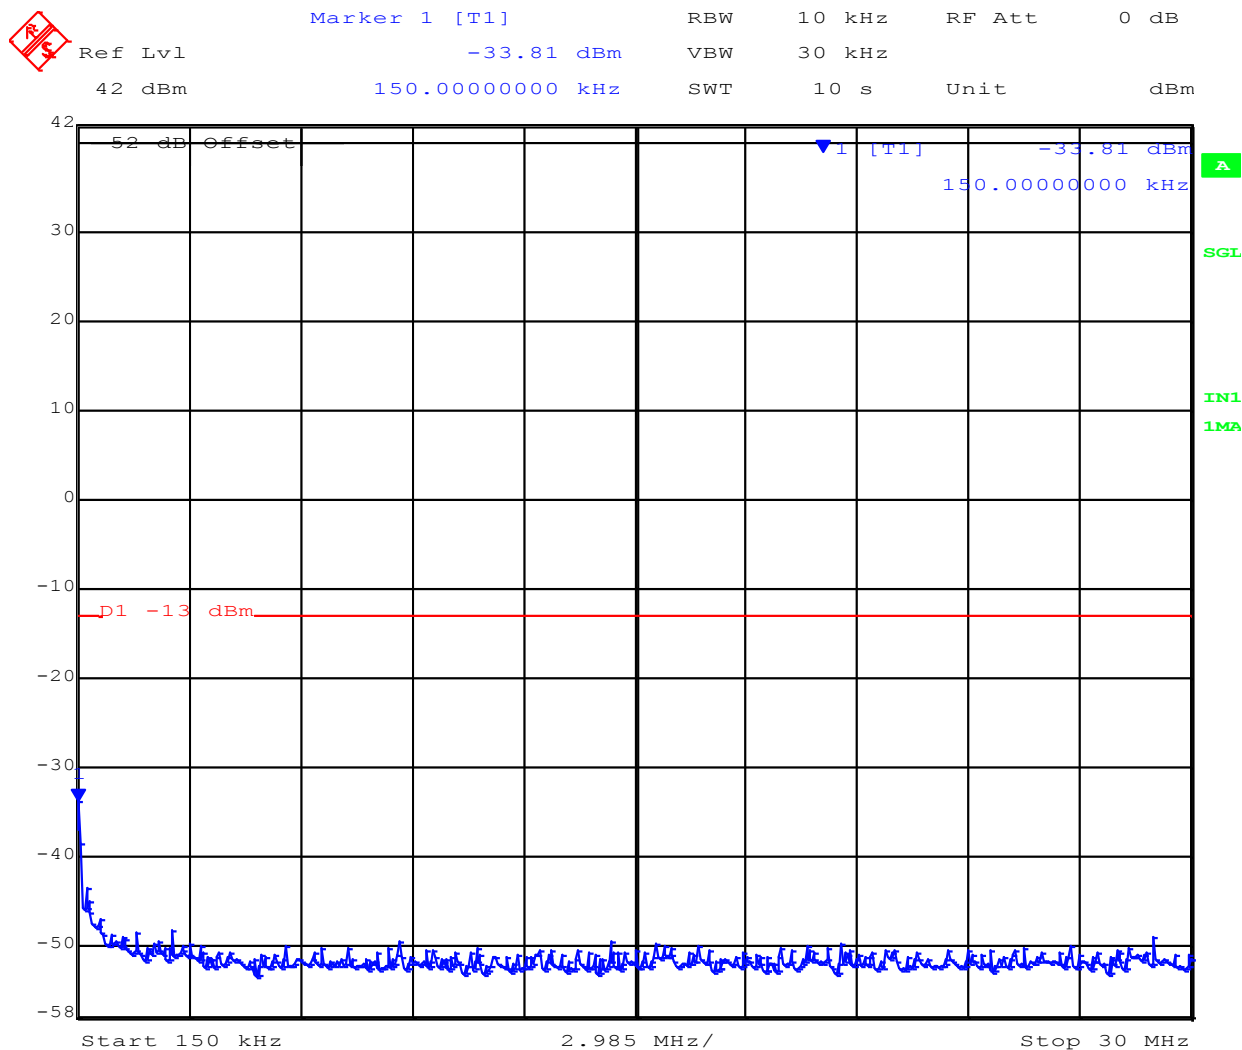


[Back to Matrix](#)



**Title:** Axxcelera Broadband Wireless AxxceLTE  
**To:** FCC 47 CFR Part 27  
**Serial #:** AXXC20-U4 2x2 Rev A  
**Issue Date:** 6th November 2015  
**Page:** 124 of 126

## 2687.5MHz 30MHz – 1GHz Chain B

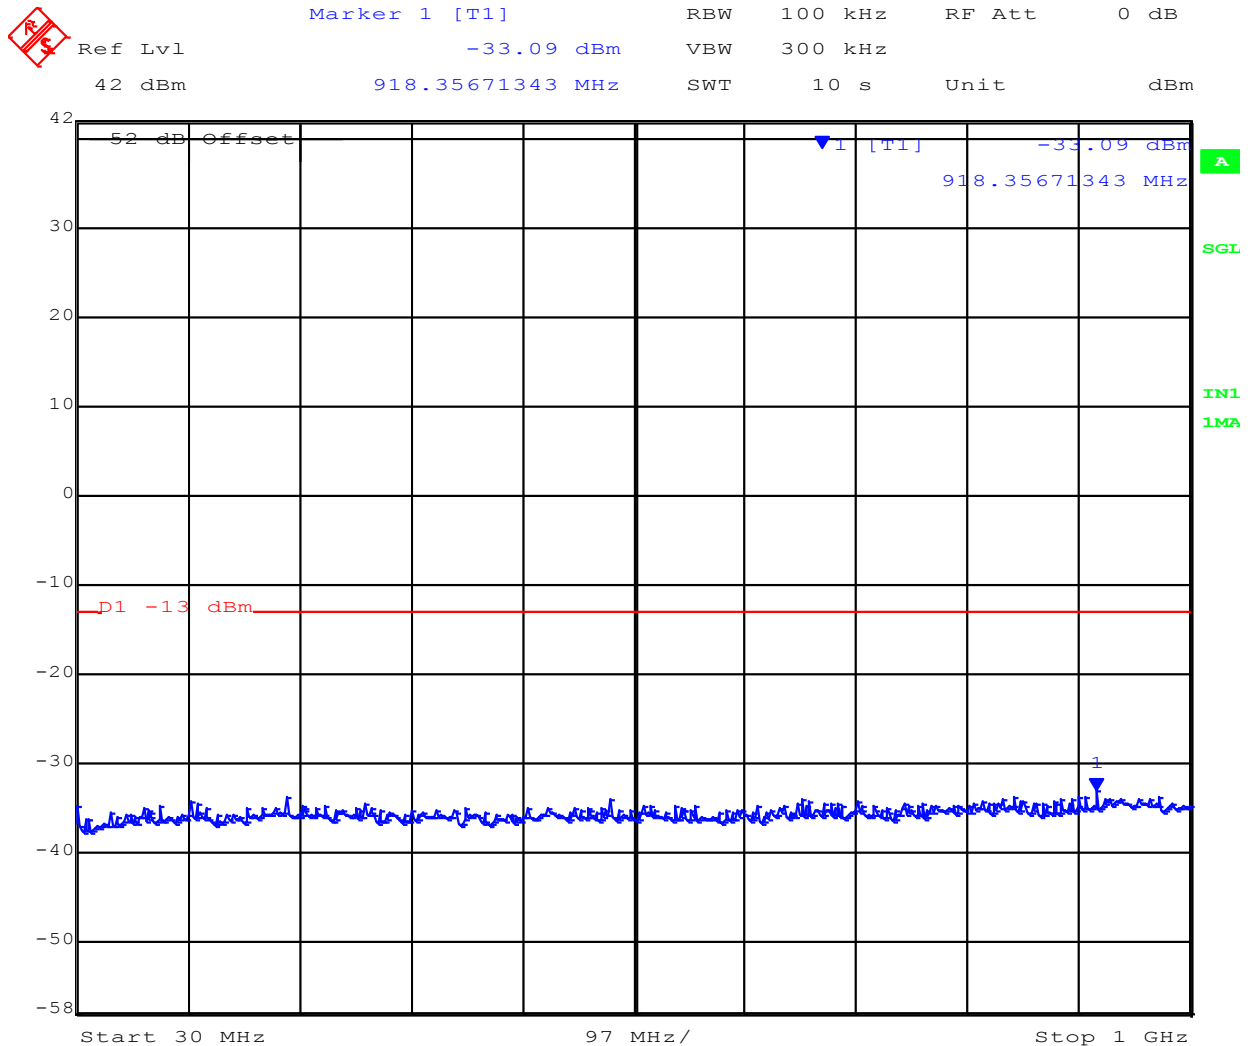


[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



2687.5MHz 1GHz – 26GHz Chain B

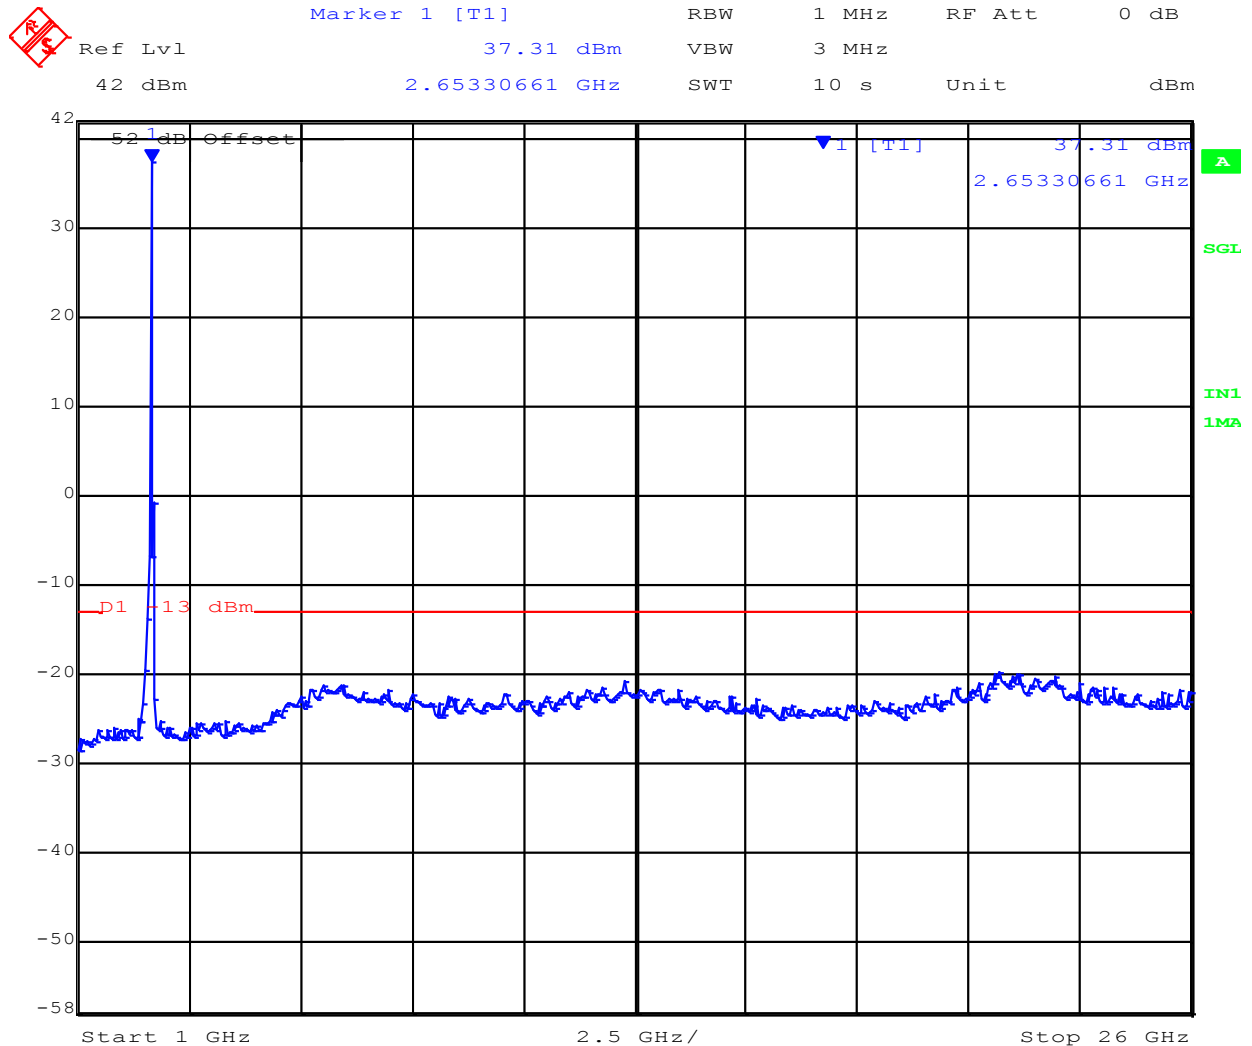

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



575 Boulder Court,  
Pleasanton, California 94566, USA  
Tel: 1.925.462.0304  
Fax: 1.925.462.0306  
[www.micomlabs.com](http://www.micomlabs.com)