



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	PEGATRON CORPORATION
Applicant Address	5F., NO. 76, LIGONG ST., BEITOU DISTRICT, TAIPEI CITY 112 Taiwan
FCC ID	VUICLG8202-NA
Manufacturer's company	MAINTEK COMPUTER
Manufacturer Address	233 Jinfeng Rd., Suzhou, Jiangsu, PRC

Product Name	Wireless Home Automation and Security
Brand Name	CISCO
Model Name	CLG-8202 NA; CLG-8202-WW NA
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2402 ~ 2480MHz
Received Date	Jul. 21, 2014
Final Test Date	Aug. 07, 2014
Submission Type	Original Equipment

Statement

Test result included is only for the Bluetooth BR/EDR of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Filed Antenna.....	4
3.4. Table for Carrier Frequencies	4
3.5. Table for Test Modes	5
3.6. Table for Testing Locations.....	6
3.7. Table for Multiple Listing.....	6
3.8. Table for Supporting Units	6
3.9. Table for Parameters of Test Software Setting	7
3.10. EUT Operation during Test	7
3.11. Duty Cycle	7
3.12. Test Configurations	8
4. TEST RESULT	10
4.1. AC Power Line Conducted Emissions Measurement.....	10
4.2. Maximum Conducted Output Power Measurement.....	14
4.3. Hopping Channel Separation Measurement	16
4.4. Number of Hopping Frequency Measurement.....	27
4.5. Dwell Time Measurement.....	29
4.6. Radiated Emissions Measurement	36
4.7. Emissions Measurement	49
4.8. Antenna Requirements	63
5. LIST OF MEASURING EQUIPMENTS	64
6. MEASUREMENT UNCERTAINTY.....	66
APPENDIX A. TEST PHOTOS	A1 ~ A5


History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR472942AB	Rev. 01	Initial issue of report	Sep. 18, 2014

1. CERTIFICATE OF COMPLIANCE

Product Name : Wireless Home Automation and Security
Brand Name : CISCO
Model No. : CLG-8202 NA; CLG-8202-WW NA
Applicant : PEGATRON CORPORATION
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jul. 21, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

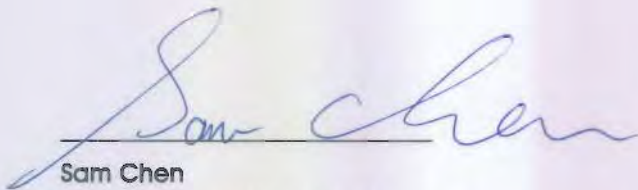

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	6.08 dB
4.2	15.247(b)(1)	Maximum Conducted Output Power	Complies	10.42 dB
4.3	15.247(a)(1)	Hopping Channel Separation	Complies	-
4.4	15.247(b)(1)	Number of Hopping Frequency	Complies	-
4.5	15.247(a)(1)	Dwell Time	Complies	-
4.6	15.247(d)	Radiated Emissions	Complies	1.82 dB
4.7	15.247(d)	Band Edge Emissions	Complies	1.63 dB
4.8	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Power Type	From Power Adapter and button cell
Modulation	FHSS (GFSK / $\pi/4$ -DQPSK / 8DPSK)
Data Rate (Mbps)	GFSK: 1 ; $\pi/4$ -DQPSK: 2 ; 8DPSK: 3
Frequency Range	2402 ~ 2480MHz
Channel Number	79
Channel Band Width (99%)	BR (GFSK) 1 Mbps: 0.856 MHz EDR ($\pi/4$ -DQPSK) 2 Mbps: 1.196 MHz EDR (8DPSK) 3 Mbps: 1.208 MHz
Maximum Conducted Peak Output Power	BR (GFSK) 1 Mbps: 10.58 dBm EDR ($\pi/4$ -DQPSK) 2 Mbps: 7.64 dBm EDR (8DPSK) 3 Mbps: 8.05 dBm
Maximum Conducted Average Output Power	BR (GFSK) 1 Mbps: 9.22 dBm EDR ($\pi/4$ -DQPSK) 2 Mbps: 3.85 dBm EDR (8DPSK) 3 Mbps: 3.72 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3
Note 1: Bluetooth BR uses a combination of GFSK (1Mbps).	
Note 2: Bluetooth EDR uses a combination of $\pi/4$ -DQPSK (2Mbps) and 8DPSK (3Mbps).	

3.2. Accessories


Power	Brand	Model	Rating
Adapter	APD	WA-23A15FU	INPUT: 100-240V ~, 50-60Hz, 0.8A Max. OUTPUT: 15V, 1.5A
Others			
Cradle*1			

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	HL	-	Printed Antenna	Murata	3.62

For Bluetooth (1TX, 1RX)

Only Ant. 1 can be used as transmitting/receiving antenna.

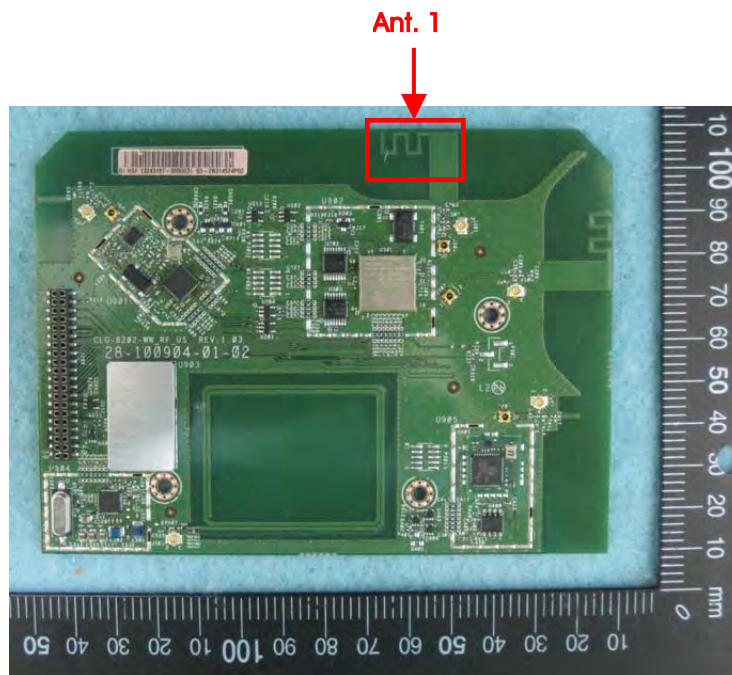

3.4. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	0	2402 MHz	40	2442 MHz
	1	2403 MHz	:	:
	:	:	77	2479 MHz
	38	2440 MHz	78	2480 MHz
	39	2441 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Chain
AC Power Conducted Emissions	CTX	-	-	-
Maximum Conducted Output Power	BR (GFSK)	1 Mbps	0/39/78	1
	EDR ($\pi/4$ -DQPSK)	2 Mbps	0/39/78	1
	EDR (8DPSK)	3 Mbps	0/39/78	1
Hopping Channel Separation	BR (GFSK)	1 Mbps	0~1 39~40 77~78	1
	EDR ($\pi/4$ -DQPSK)	2 Mbps	0~1 39~40 77~78	1
	EDR (8DPSK)	3 Mbps	0~1 39~40 77~78	1
Number of Hopping Frequency	BR (GFSK)	1 Mbps	0~78	1
Dwell Time	BR (GFSK) (DH1, DH3, DH5)	1 Mbps	0/39/78	1
Radiated Emissions Below 1GHz	CTX	-	-	-
Radiated Emissions Above 1GHz	BR (GFSK)	1 Mbps	0/39/78	1
	EDR (8DPSK)	3 Mbps	0/39/78	1
Band Edge Emissions	BR (GFSK)	1 Mbps	0/39/78	1
	EDR (8DPSK)	3 Mbps	0/39/78	1

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. EUT Standing-CTX

For Radiated Emission test:

Mode 1. EUT Standing-CTX

For Co-location MPE:

There are two Simultaneous Transmission Configurations as following:

Mode 1: WiFi+Z-wave+Zigbee+NFC

Mode 2: Bluetooth+Z-wave+Zigbee+NFC

The Co-location Maximum Permissible Exposure, please refer to sporton test report: FA472942.

3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO02-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Multiple Listing

The model names in the following table are all refer to the identical product.

Brand Name	Model Name	Description
CISCO	CLG-8202 NA	All the models are identical, the difference model for difference brand served as marketing strategy.
	CLG-8202-WW NA	

Note: Assessed as above, there is only model: CLG-8202 NA selected to test and recorded in the report as a result.

3.8. Table for Supporting Units

For Test Site No: 03CH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1340	E2K4965AGNM
Buletooth Test set	Anritsu	MT8852B	N/A

For Test Site No: CO02-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC
Buletooth Test set	Anritsu	MT8852B	N/A

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1340	E2K4965AGNM
Buletooth Test set	Anritsu	MT8852B	N/A

3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of Bluetooth

For BR (GFSK) 1 Mbps:

Test Software Version	DOS		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters	Default	Default	Default

For EDR ($\pi/4$ -DQPSK) 2 Mbps:

Test Software Version	DOS		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters	Default	Default	Default

For EDR (8DPSK) 3 Mbps:

Test Software Version	DOS		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters	Default	Default	Default

3.10. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

3.11. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
BR (GFSK)	2.90	6.24	46.47%	3.33	0.34
EDR (8DPSK)	2.92	6.2	47.10%	3.27	0.34


3.12. Test Configurations

3.12.1. AC Power Line Conduction Emissions Test Configuration

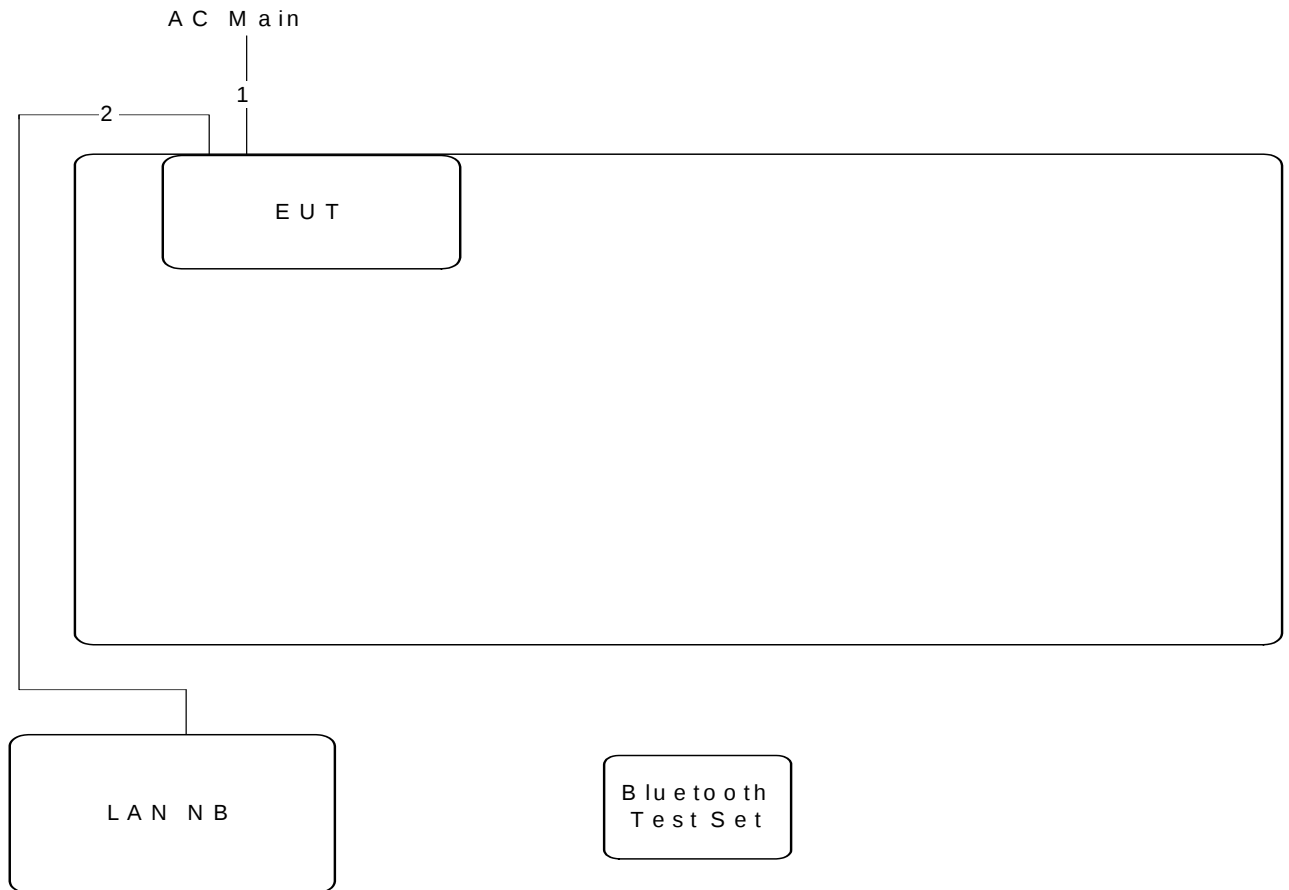

Item	Connection	Shielded	Length(m)
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m

3.12.2. Radiation Emissions Test Configuration

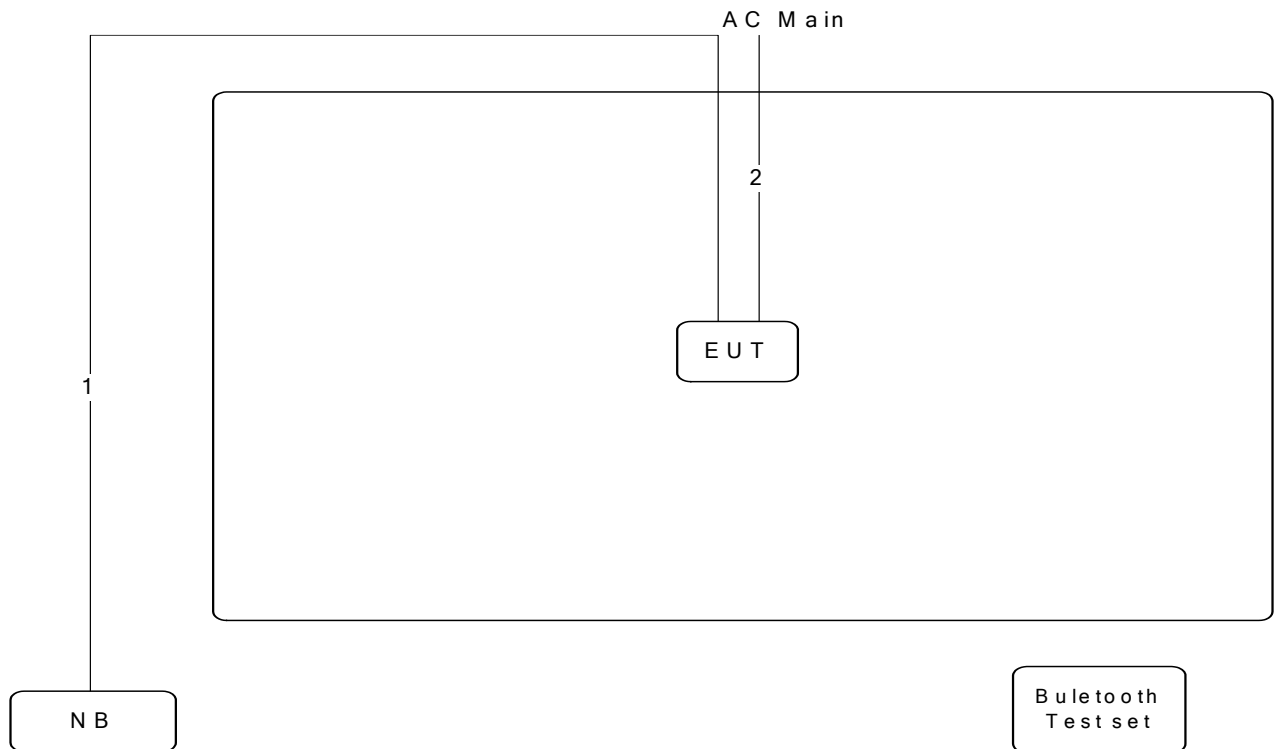

Item	Connection	Shielded	Length(m)
1	RJ-45 cable	No	10m
2	Power cable	No	1.5m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For a Low-power Radio-frequency Device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.




- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

There is no deviation with the original standard.

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	23°C	Humidity	47%
Test Engineer	Ryo Fan	Phase	Line
Configuration	CTX		

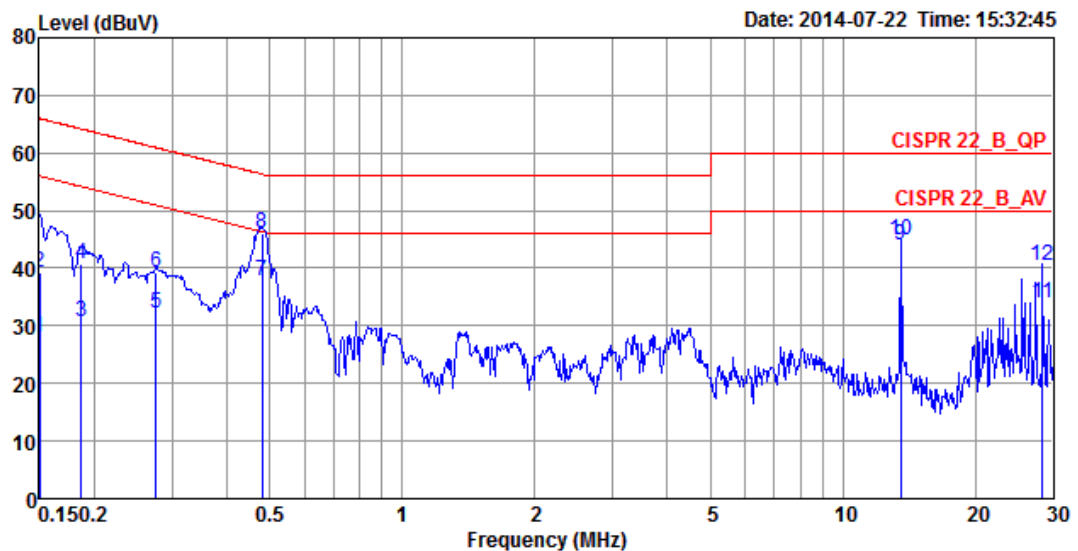

	Freq	Level	Over	Limit	LISN	Read	Cable	Pol/Phase	Remark
	MHz	dBuV	Limit	Line	Factor	Level	Loss		
			dB	dBuV	dB	dBuV	dB		
1	0.1500	27.99	-28.01	56.00	0.22	27.59	0.18	LINE	Average
2	0.1500	39.12	-26.88	66.00	0.22	38.72	0.18	LINE	QP
3	0.1864	30.70	-23.50	54.20	0.21	30.29	0.20	LINE	Average
4	0.1864	40.74	-23.46	64.20	0.21	40.33	0.20	LINE	QP
5	0.2759	32.06	-18.88	50.94	0.21	31.65	0.20	LINE	Average
6	0.2759	39.18	-21.76	60.94	0.21	38.77	0.20	LINE	QP
7	0.4812	37.75	-8.57	46.32	0.22	37.33	0.20	LINE	Average
8 q	0.4812	45.95	-10.37	56.32	0.22	45.53	0.20	LINE	QP
9 a	13.5599	43.92	-6.08	50.00	0.56	42.97	0.39	LINE	Average
10	13.5599	44.77	-15.23	60.00	0.56	43.82	0.39	LINE	QP
11	28.3744	33.81	-16.19	50.00	0.96	32.25	0.60	LINE	Average
12	28.3744	40.44	-19.56	60.00	0.96	38.88	0.60	LINE	QP

Temperature	21°C	Humidity	61%
Test Engineer	Peter Wu	Phase	Neutral
Configuration	CTX		

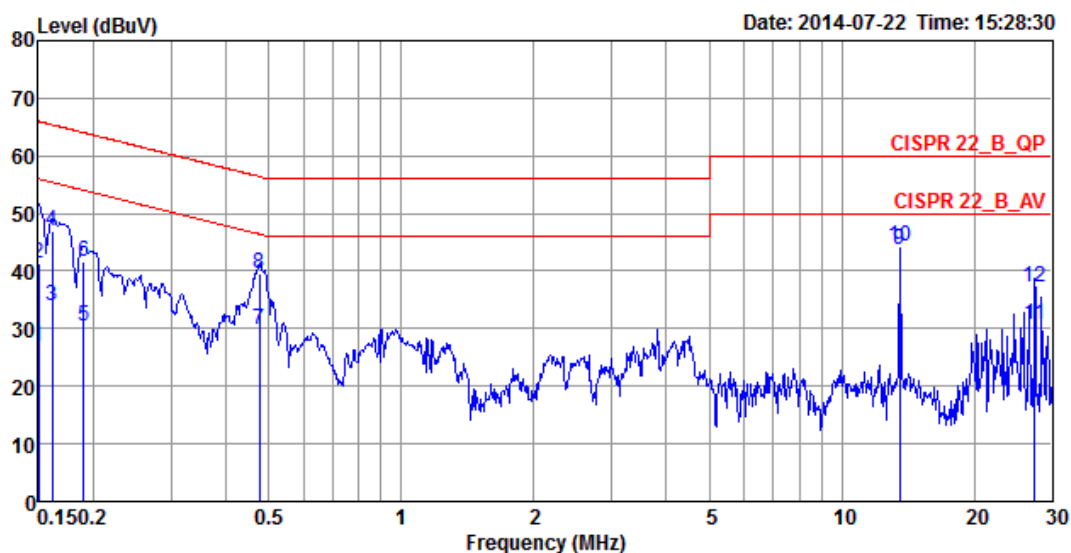

	Freq	Level	Over	Limit	LISN	Read	Cable	Pol/Phase	Remark
	MHz	dBuV	Limit	Line	Factor	Level	Loss		
			dB	dBuV	dB	dBuV	dB		
1	0.1500	26.99	-29.01	56.00	0.09	26.72	0.18	NEUTRAL	Average
2	0.1500	41.34	-24.66	66.00	0.09	41.07	0.18	NEUTRAL	QP
3	0.1616	34.04	-21.34	55.38	0.08	33.77	0.19	NEUTRAL	Average
4	0.1616	46.88	-18.50	65.38	0.08	46.61	0.19	NEUTRAL	QP
5	0.1904	30.33	-23.69	54.02	0.07	30.06	0.20	NEUTRAL	Average
6	0.1904	41.67	-22.35	64.02	0.07	41.40	0.20	NEUTRAL	QP
7	0.4761	29.95	-16.46	46.41	0.08	29.67	0.20	NEUTRAL	Average
8	0.4761	39.51	-16.90	56.41	0.08	39.23	0.20	NEUTRAL	QP
9 a	13.5599	43.58	-6.42	50.00	0.38	42.81	0.39	NEUTRAL	Average
10 q	13.5599	44.41	-15.59	60.00	0.38	43.64	0.39	NEUTRAL	QP
11	27.4320	30.60	-19.40	50.00	0.71	29.30	0.59	NEUTRAL	Average
12	27.4320	37.32	-22.68	60.00	0.71	36.02	0.59	NEUTRAL	QP

Note: Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, the limit for peak output power is 1Watt (30dBm). For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts (21dBm). The limit has to be reduced by the amount in dB that the gain of the antenna exceeds 6dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Peak and Average

4.2.3. Test Procedures

This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout

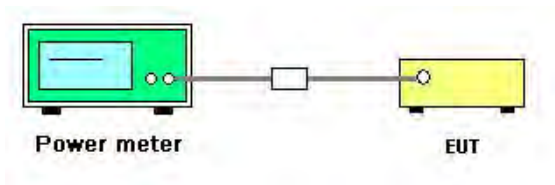

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	20°C	Humidity	62%
Test Engineer	Magic Lai	Configurations	GFSK, $\pi/4$ -DQPSK, 8DPSK
Test Date	Jul. 21, 2014		

For BR (GFSK) 1 Mbps:

Channel	Frequency	Conducted Peak Power (dBm)	Conducted Average Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	10.58	9.22	21.00	Complies
39	2441 MHz	10.47	9.05	21.00	Complies
78	2480 MHz	10.32	9.01	21.00	Complies

For EDR ($\pi/4$ -DQPSK) 2 Mbps:

Channel	Frequency	Conducted Peak Power (dBm)	Conducted Average Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	7.64	3.85	21.00	Complies
39	2441 MHz	7.12	3.01	21.00	Complies
78	2480 MHz	7.06	2.92	21.00	Complies

For EDR (8DPSK) 3 Mbps:

Channel	Frequency	Conducted Peak Power (dBm)	Conducted Average Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	8.05	3.72	21.00	Complies
39	2441 MHz	7.62	3.08	21.00	Complies
78	2480 MHz	7.54	3.02	21.00	Complies

4.3. Hopping Channel Separation Measurement

4.3.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
VBW	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilized for 20 dB bandwidth measurement.
3. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were utilized for channel separation measurement.

4.3.4. Test Setup Layout

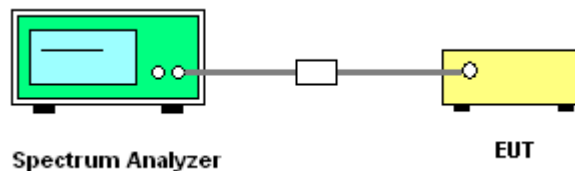

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Hopping Channel Separation

Temperature	20°C	Humidity	62%
Test Engineer	Magic Lai	Configurations	GFSK, $\pi/4$ -DQPSK, 8DPSK

For BR (GFSK) 1 Mbps:

Frequency	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Ch. Separation (MHz)	Two-Thirds of 20dB Bandwidth (MHz)	Result
2402 MHz	0.9280	0.8560	1.00	0.619	Complies
2441 MHz	0.9120	0.8480	1.00	0.608	Complies
2480 MHz	0.9360	0.8560	1.00	0.624	Complies

Ch. Separation Limits: >20dB bandwidth or > Two-Thirds of 20dB bandwidth

For EDR ($\pi/4$ -DQPSK) 2 Mbps:

Frequency	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Ch. Separation (MHz)	Two-Thirds of 20dB Bandwidth (MHz)	Result
2402 MHz	1.2680	1.1880	1.00	0.845	Complies
2441 MHz	1.3240	1.1960	1.00	0.883	Complies
2480 MHz	1.3120	1.1920	1.00	0.875	Complies


Ch. Separation Limits: >20dB bandwidth or > Two-Thirds of 20dB bandwidth

For EDR (8DPSK) 3 Mbps:

Frequency	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Ch. Separation (MHz)	Two-Thirds of 20dB Bandwidth (MHz)	Result
2402 MHz	1.3160	1.2080	1.00	0.877	Complies
2441 MHz	1.3200	1.2000	1.00	0.880	Complies
2480 MHz	1.2800	1.1920	1.00	0.853	Complies


Ch. Separation Limits: >20dB bandwidth or > Two-Thirds of 20dB bandwidth

20 dB Bandwidth Plot on BR (GFSK) 1 Mbps / Channel 0 / 2402 MHz

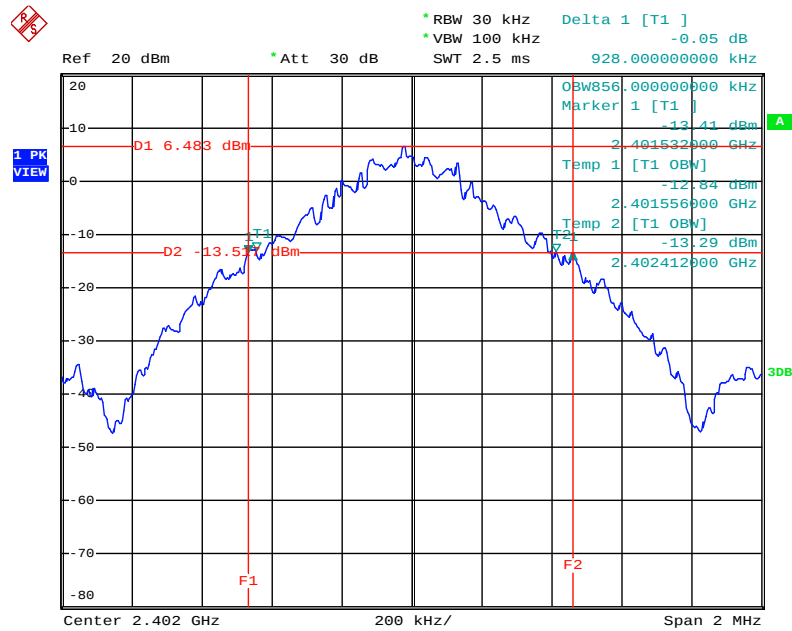


Date: 21.JUL.2014 09:01:41

20 dB Bandwidth Plot on BR (GFSK) 1 Mbps / Channel 39 / 2441 MHz

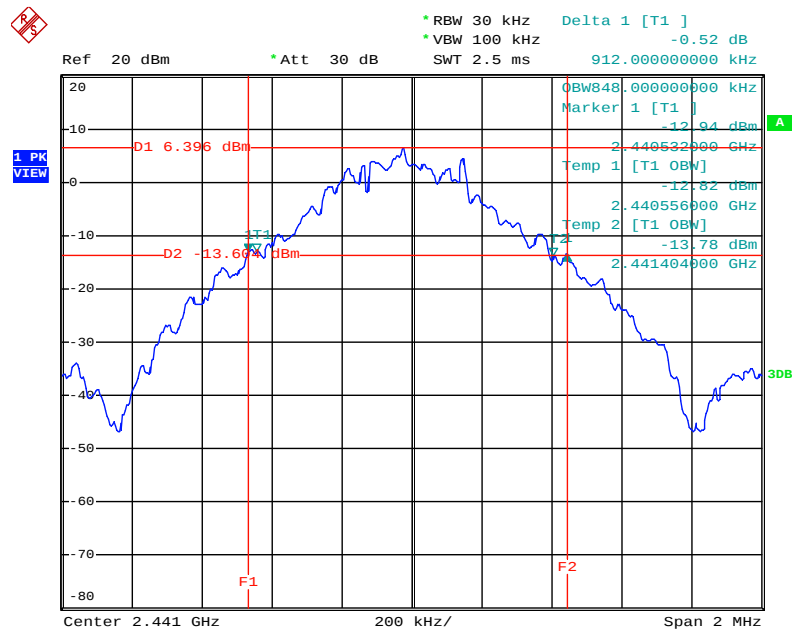


Date: 21.JUL.2014 09:02:07

20 dB Bandwidth Plot on BR (GFSK) 1 Mbps / Channel 78 / 2480 MHz

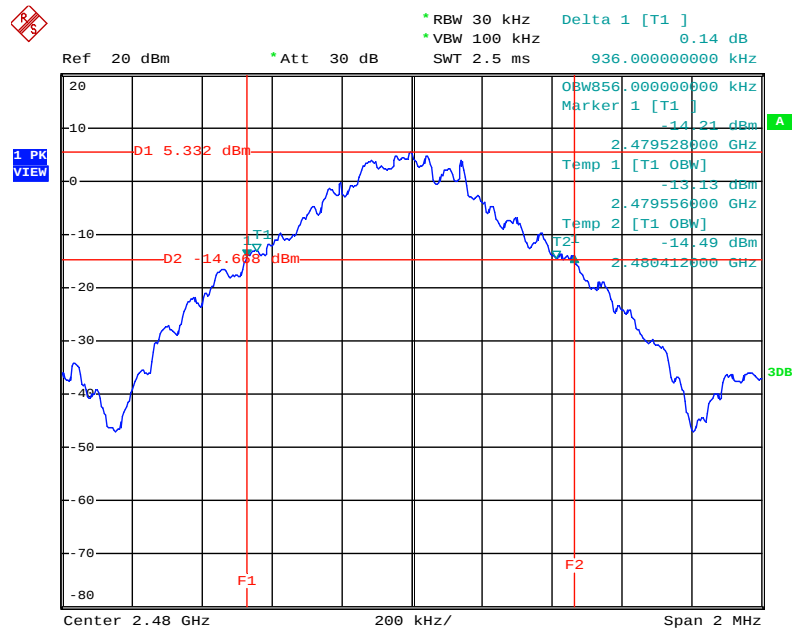


Date: 21.JUL.2014 09:03:09

Channel Separation Plot on BR (GFSK) 1 Mbps / Channel 0~1 / 2402 MHz ~ 2403 MHz

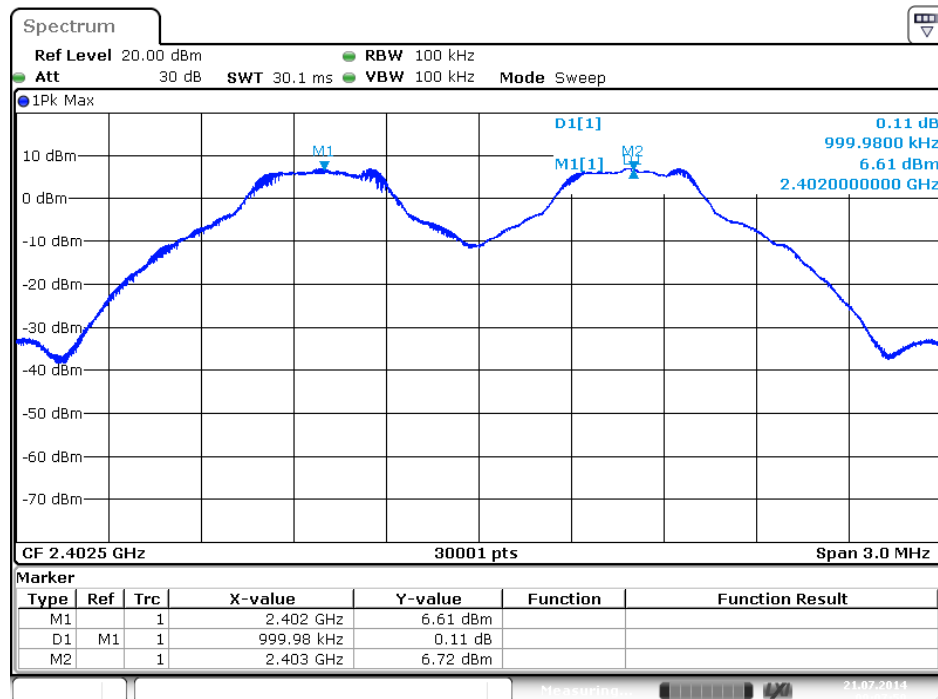


Date: 21.JUL.2014 09:07:59

Channel Separation Plot on BR (GFSK) 1 Mbps / Channel 39~40 / 2441 MHz ~ 2442 MHz

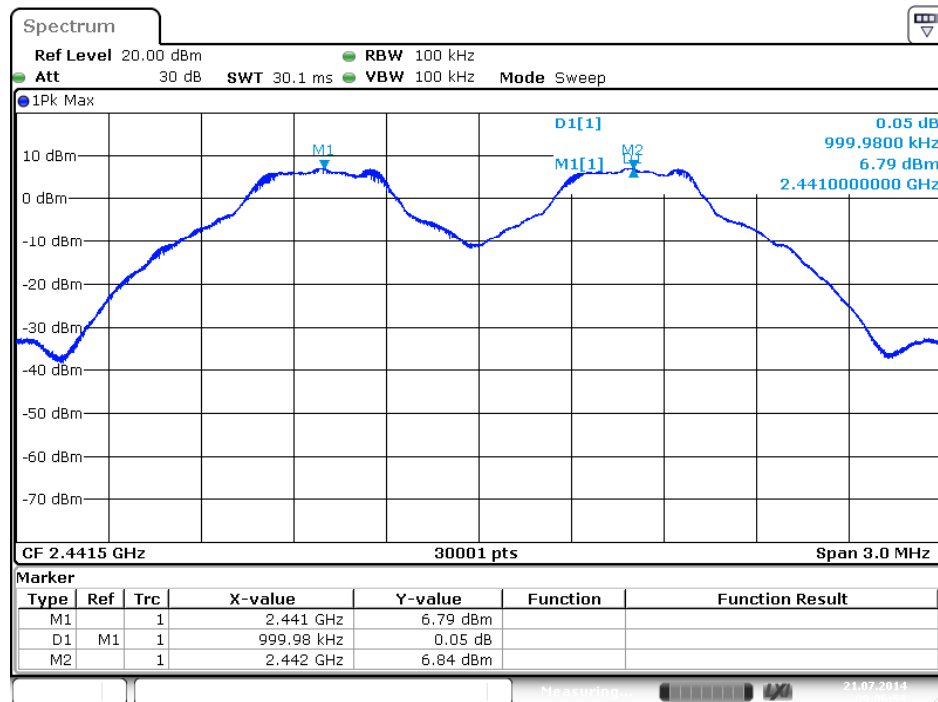

Date: 21.JUL.2014 09:06:53

Channel Separation Plot on BR (GFSK) 1 Mbps / Channel 77~78 / 2479 MHz ~ 2480 MHz

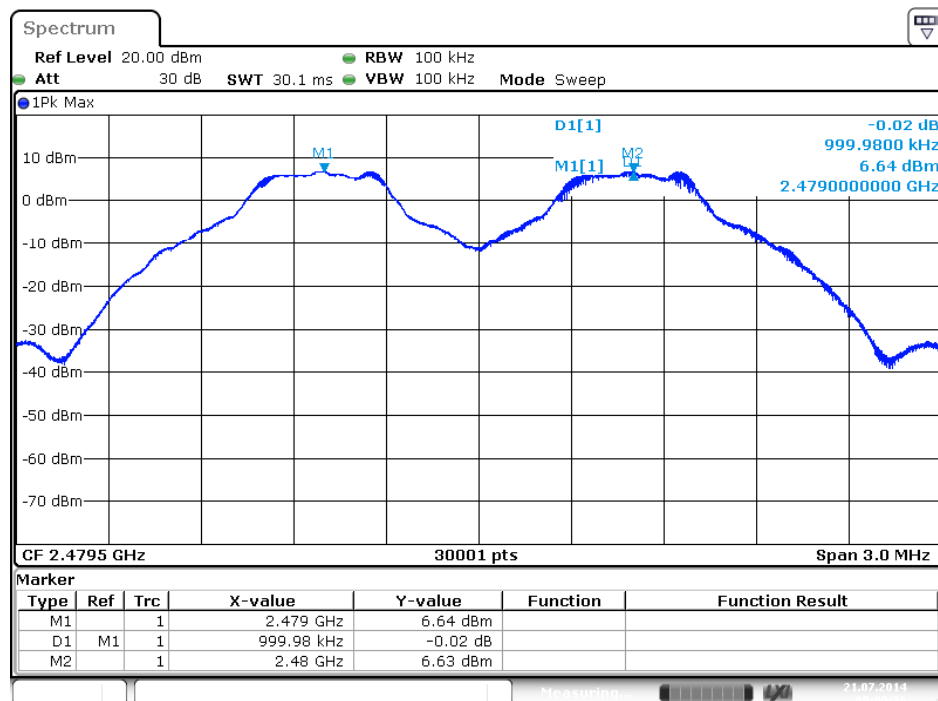

Date: 21.JUL.2014 09:09:36



1 PK VIEW

Ref 20 dBm Att 30 dB RBW 30 kHz VBW 100 kHz SWT 2.5 ms Delta 1 [T1] -0.73 dB 1.26800000 MHz

OBW 1 1.88000000 MHz Marker 1 [T1] -17.58 dBm
 2.401360000 GHz Temp 1 [T1 OBW] -14.65 dBm
 2.401392000 GHz Temp 2 [T1 OBW] -17.42 dBm
 2.402580000 GHz

D1 1.629 dBm D2 18.371 dBm F1 F2

Center 2.402 GHz 200 kHz/ Span 2 MHz

1 PK VIEW


Ref 20 dBm *Att 30 dB *RBW 30 kHz Delta 1 [T1] 0.32 dB
 VBW 100 kHz SWT 2.5 ms 1.324000000 MHz

Marker	Freq [MHz]	Power [dBm]
OBW	1.196000000	-14.67
Marker 1	[T1]	-20.44
Temp 1	[T1 OBW]	-14.67
Temp 2	[T1 OBW]	-16.70
T2	2.415840000	-16.70

Center 2.441 GHz 200 kHz/ Span 2 MHz


Issued Date : Sep. 18, 2014

20 dB Bandwidth Plot on EDR ($\pi/4$ -DQPSK) 2 Mbps / Channel 78 / 2480 MHz

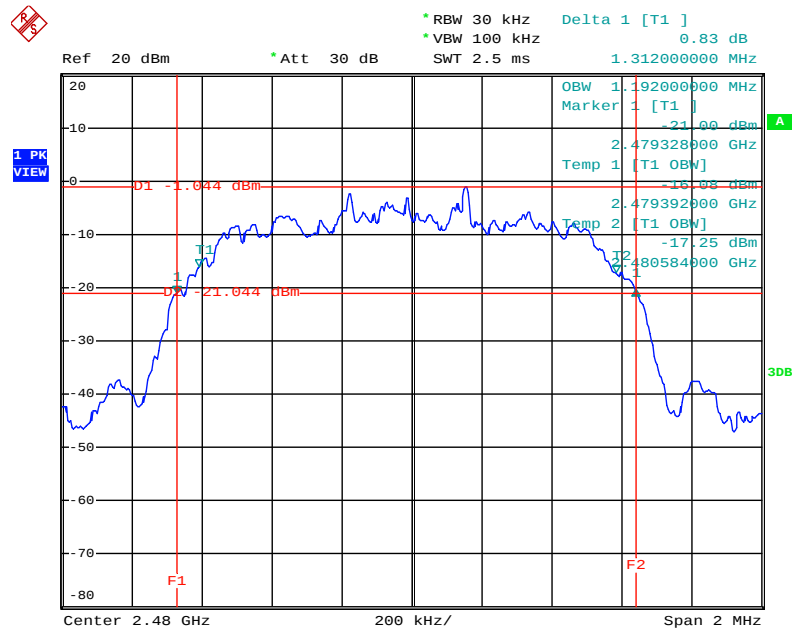


Date: 21.JUL.2014 08:58:58

Channel Separation Plot on EDR ($\pi/4$ -DQPSK) 2 Mbps / Channel 0~1 / 2402 MHz ~ 2403 MHz

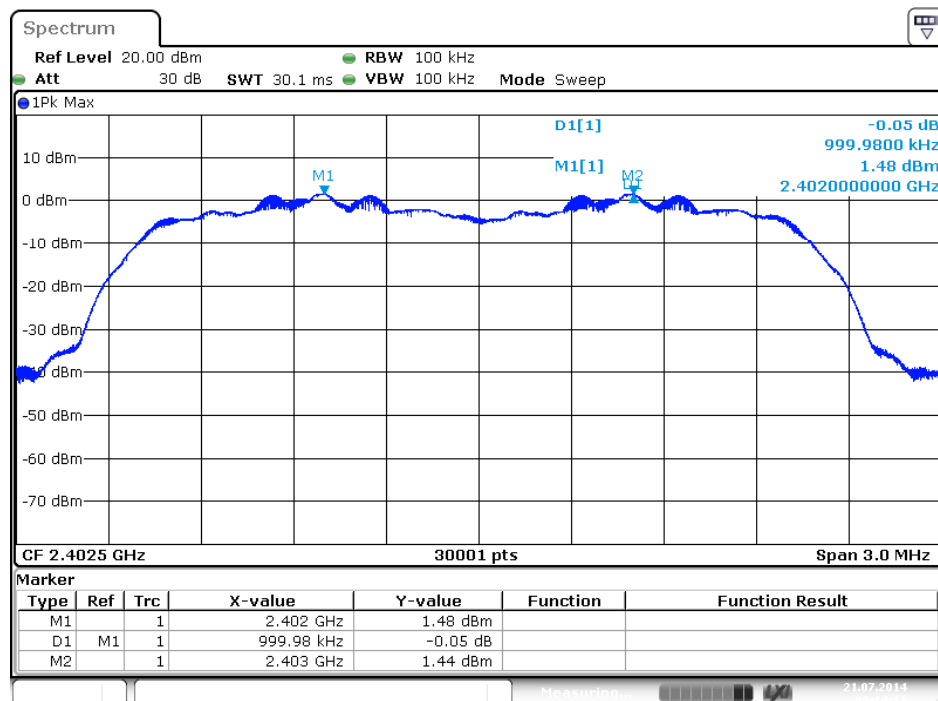


Date: 21.JUL.2014 09:14:12

Channel Separation Plot on EDR ($\pi/4$ -DQPSK) 2 Mbps / Channel 39~40 / 2441 MHz ~ 2442 MHz

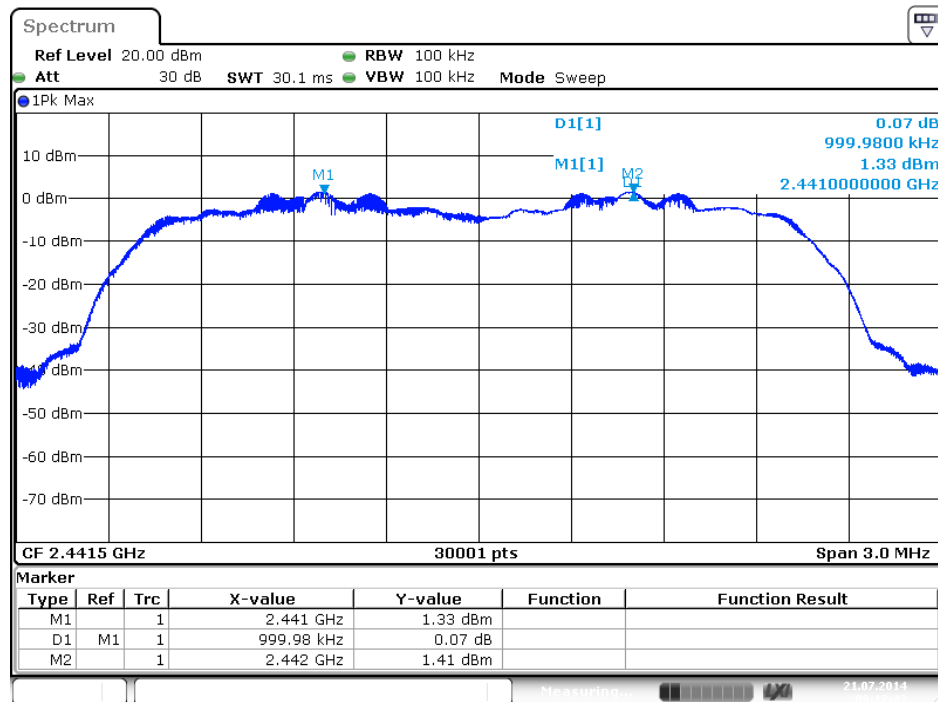


Date: 21.JUL 2014 09:12:44

Channel Separation Plot on EDR ($\pi/4$ -DQPSK) 2 Mbps / Channel 77~78 / 2479 MHz ~ 2480 MHz

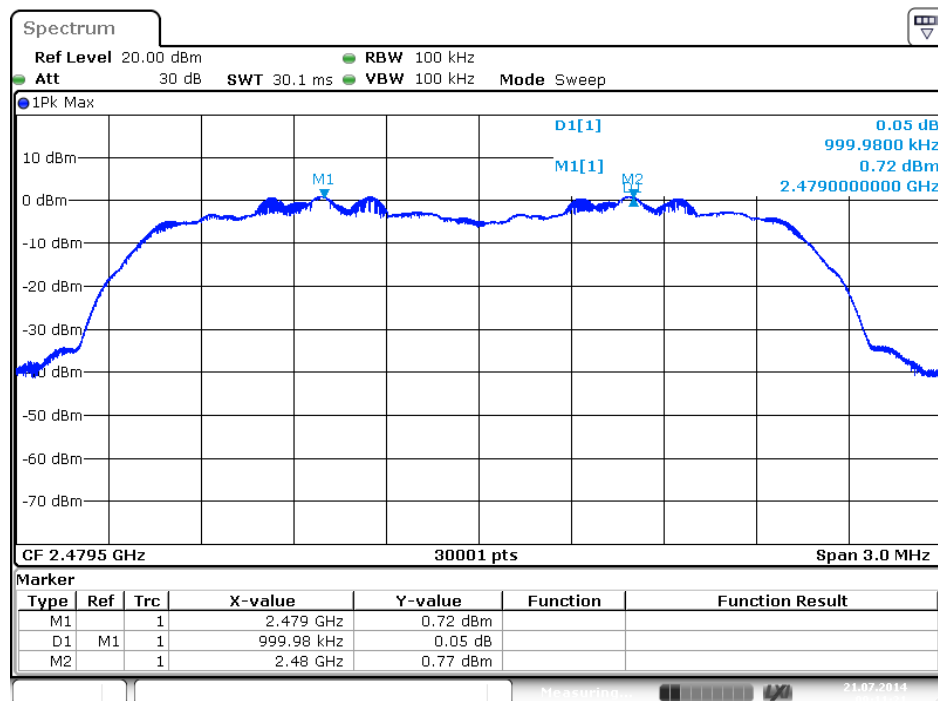


Date: 21.JUL 2014 09:11:21

20 dB Bandwidth Plot on EDR (8DPSK) 3 Mbps / Channel 0 / 2402 MHz

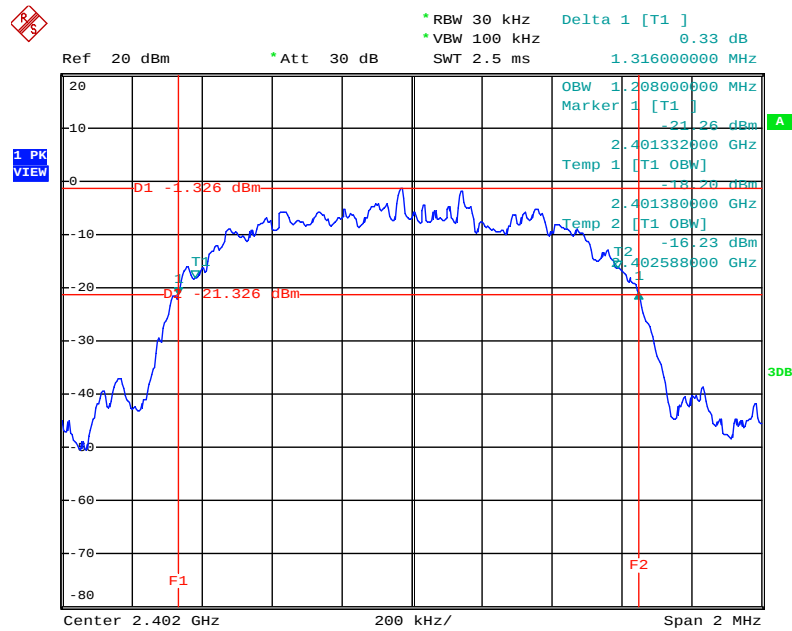


Date: 21.JUL.2014 08:55:48

20 dB Bandwidth Plot on EDR (8DPSK) 3 Mbps / Channel 39 / 2441 MHz

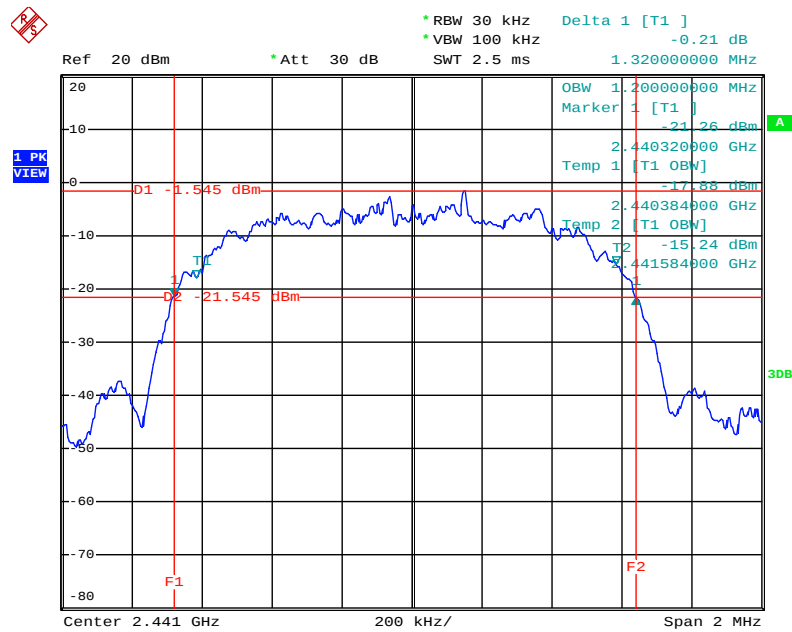


Date: 21.JUL.2014 08:56:57

20 dB Bandwidth Plot on EDR (8DPSK) 3 Mbps / Channel 78 / 2480 MHz

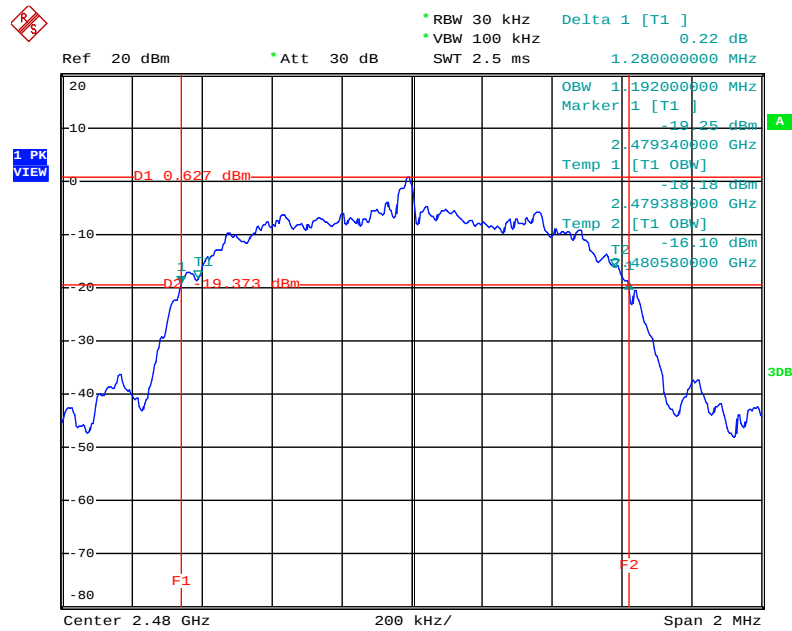


Date: 21.JUL.2014 08:57:52

Channel Separation Plot on EDR (8DPSK) 3 Mbps / Channel 0~1 / 2402 MHz ~ 2403 MHz

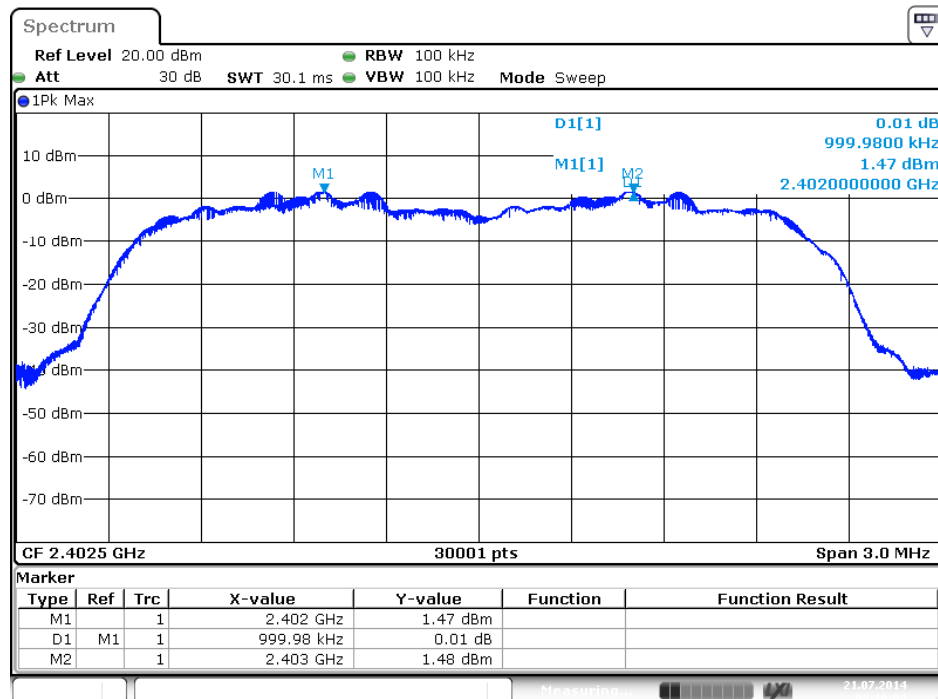


Date: 21.JUL.2014 09:16:04

Channel Separation Plot on EDR (8DPSK) 3 Mbps / Channel 39~40 / 2441 MHz ~ 2442 MHz

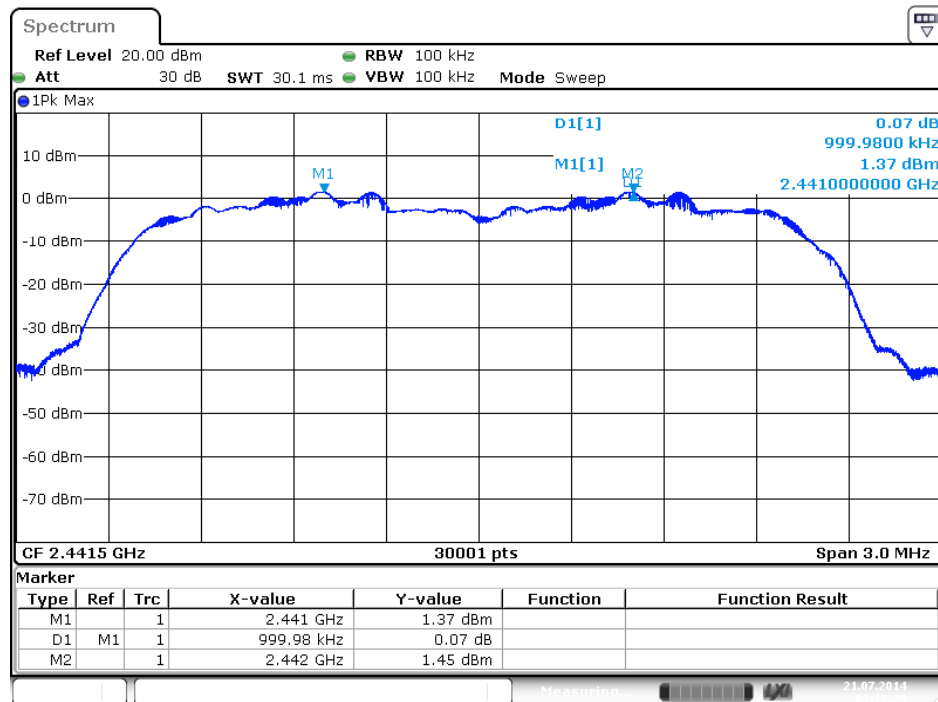

Date: 21.JUL.2014 09:17:30

Channel Separation Plot on EDR (8DPSK) 3 Mbps / Channel 77~78 / 2479 MHz ~ 2480 MHz

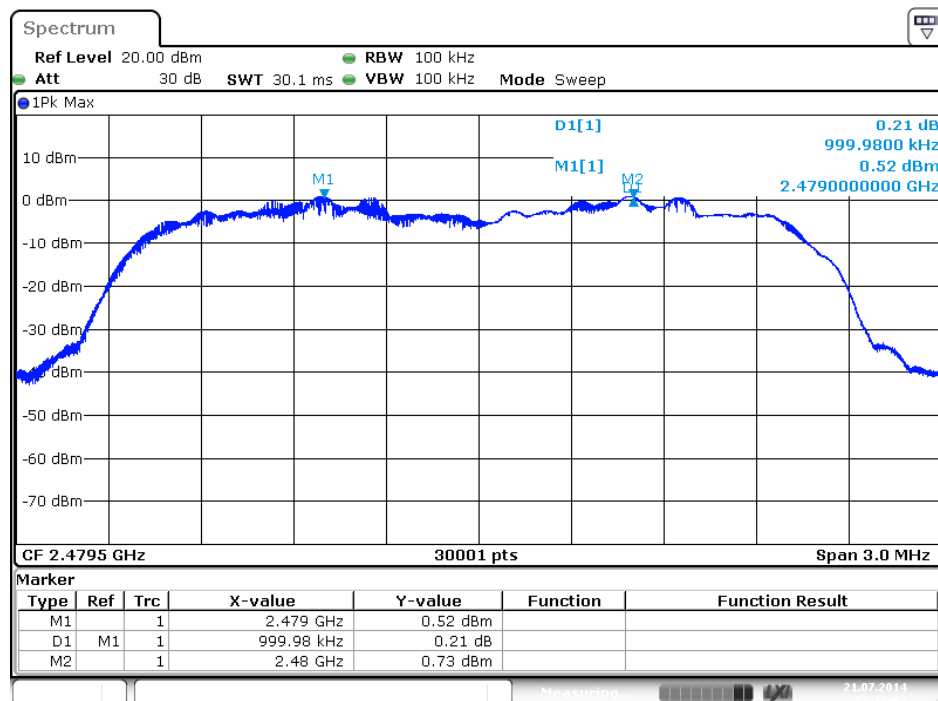

Date: 21.JUL.2014 09:19:05

4.4. Number of Hopping Frequency Measurement

4.4.1. Limit

At least 15 hopping frequencies, and should be equally spaced.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RBW	1000 kHz
VBW	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 1000 kHz and the video bandwidth of 1000 kHz were utilized.
3. Observe frequency hopping in 2400MHz~2483.5MHz, there are at least 75 non-overlapping channels.

4.4.4. Test Setup Layout

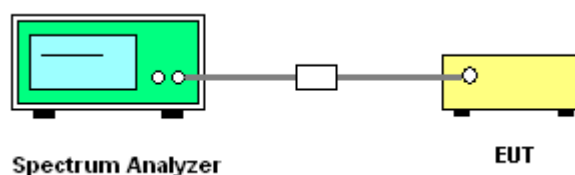

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Number of Hopping Frequency

Temperature	20°C	Humidity	62%
Test Engineer	Magic Lai	Configurations	BR (GFSK)

Modulation Type	Channel No.	Frequency (MHz)	Hopping Ch. (Channels)	Min. Limit (Channels)	Test Result
BR (GFSK)	0 ~ 78	2402 ~ 2480MHz	79	15	Complies

Number of Hopping Channel Plot on BR (GFSK) / Channel 0~78 / 2402 MHz ~ 2480 MHz

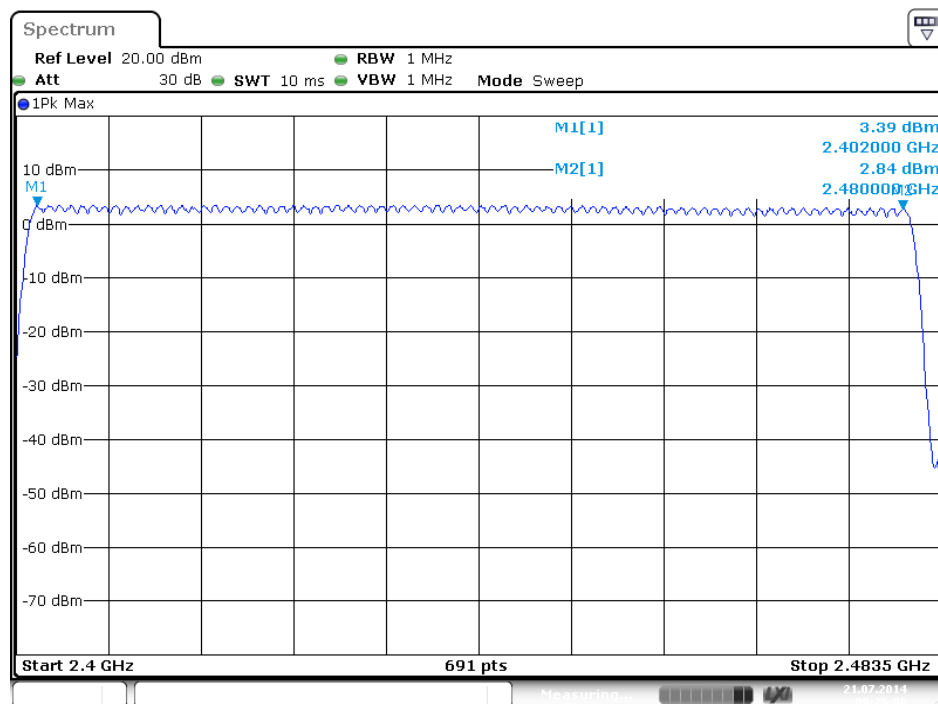

Date: 21.JUL.2014 09:25:07

4.5. Dwell Time Measurement

4.5.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	0 MHz
RBW	1000 kHz
VBW	1000 kHz
Detector	Peak
Trace	Single Trigger

4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 1000kHz.
3. Use a video trigger with the trigger level set to enable triggering only on full pulses.
4. Sweep Time is more than once pulse time.
5. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
6. Measure the maximum time duration of one single pulse.
7. Set the EUT for DH1, DH3, DH5 packet transmitting.
8. Measure the maximum time duration of one single pulse.

4.5.4. Test Setup Layout

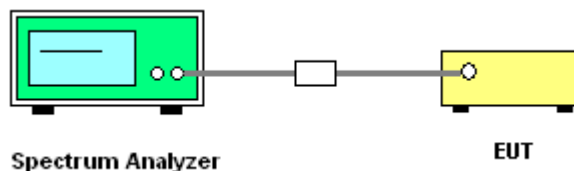

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Dwell Time

Temperature	20°C	Humidity	65%
Test Engineer	Magic Lai	Configurations	BR (GFSK) / DH1, DH3, DH5

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
DH5	2402 MHz	2.8800	0.3072	0.4000	Complies
DH3	2402 MHz	1.6400	0.2624	0.4000	Complies
DH1	2402 MHz	0.4000	0.1280	0.4000	Complies
DH5	2441 MHz	2.9200	0.3115	0.4000	Complies
DH3	2441 MHz	1.6800	0.2688	0.4000	Complies
DH1	2441 MHz	0.4000	0.1280	0.4000	Complies
DH5	2480 MHz	2.9200	0.3115	0.4000	Complies
DH3	2480 MHz	1.6800	0.2688	0.4000	Complies
DH1	2480 MHz	0.4000	0.1280	0.4000	Complies

Note: Pulse Duration * Number of Pulses*(Dwell time / measure time)


Remark:

Dwell Time= 79(channels) x 0.4(s) x average hopping channel x package transfer time (us)

79 channels come from the Hopping Channel number.


Average Hopping Channel = hops / sweep time

Dwell Time Plot on BR (GFSK) / Channel 0 / DH1 / 2402 MHz

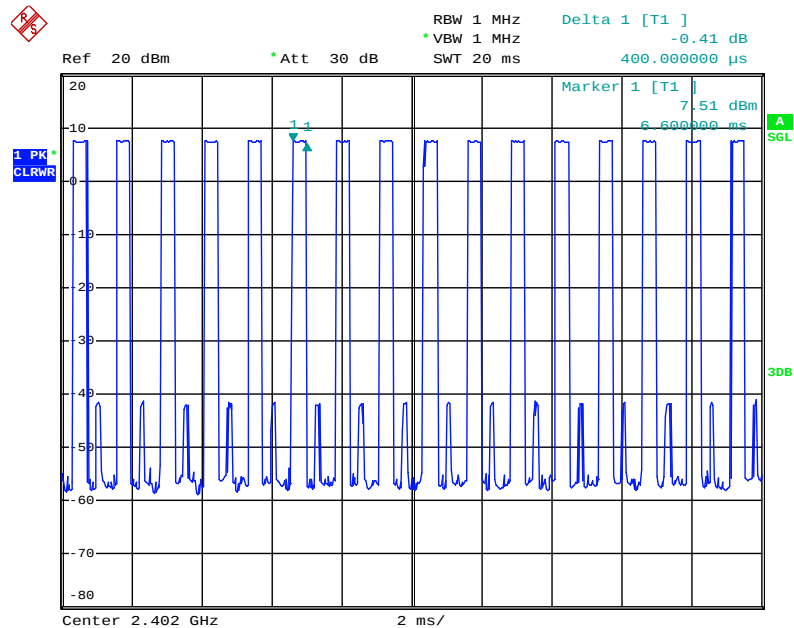


Date: 21.JUL.2014 10:47:24

Dwell Time Plot on BR (GFSK) / Channel 39 / DH1 / 2441 MHz

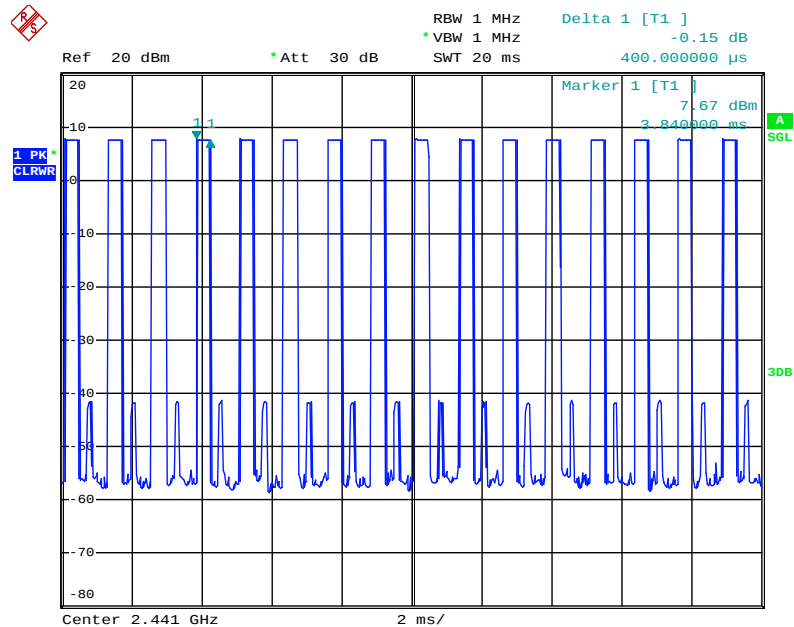


Date: 21.JUL.2014 10:49:19

Dwell Time Plot on BR (GFSK) / Channel 78 / DH1 / 2480 MHz

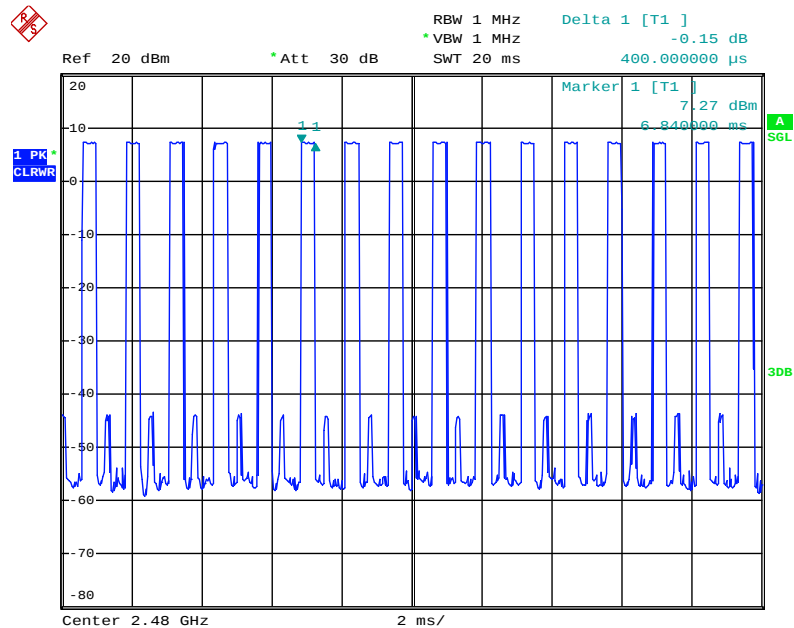


Date: 21.JUL.2014 10:54:13

Dwell Time Plot on BR (GFSK) / Channel 0 / DH3 / 2402 MHz

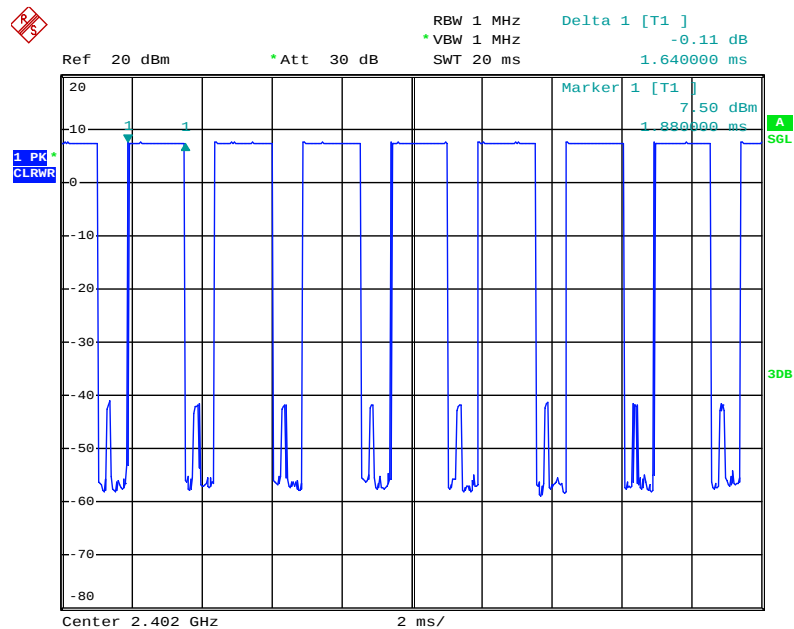


Date: 21.JUL.2014 10:46:48

Dwell Time Plot on BR (GFSK) / Channel 39 / DH3 / 2441 MHz

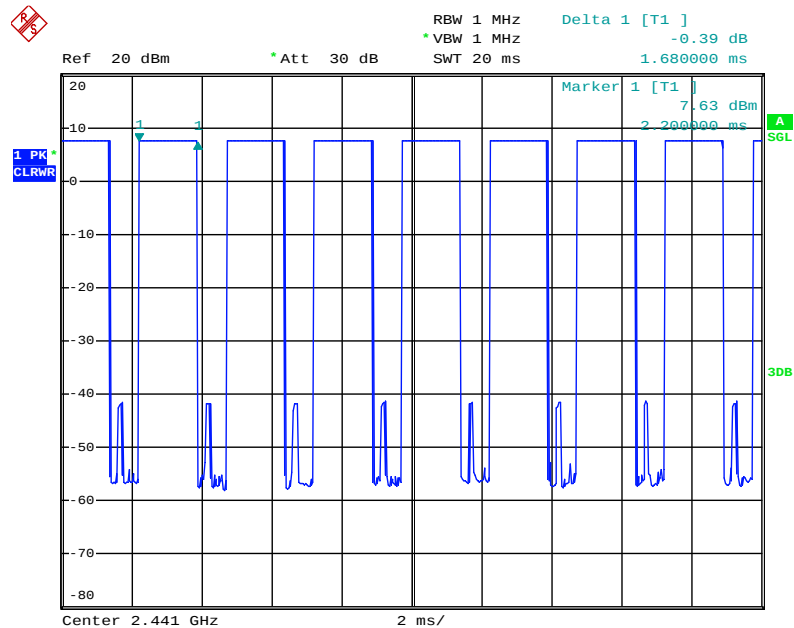


Date: 21.JUL.2014 10:50:02

Dwell Time Plot on BR (GFSK) / Channel 78 / DH3 / 2480 MHz

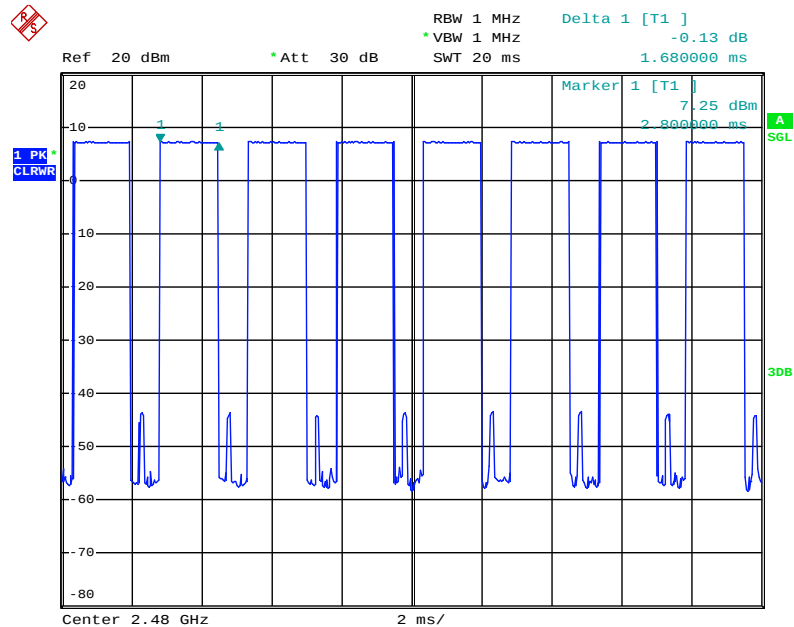


Date: 21.JUL.2014 10:53:40

Dwell Time Plot on BR (GFSK) / Channel 0 / DH5 / 2402 MHz

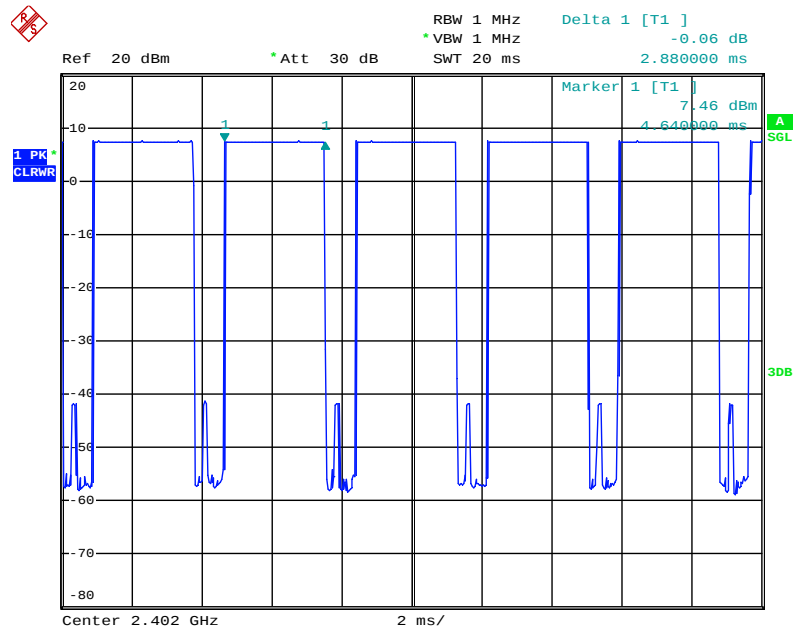


Date: 21.JUL.2014 10:46:11

Dwell Time Plot on BR (GFSK) / Channel 39 / DH5 / 2441 MHz

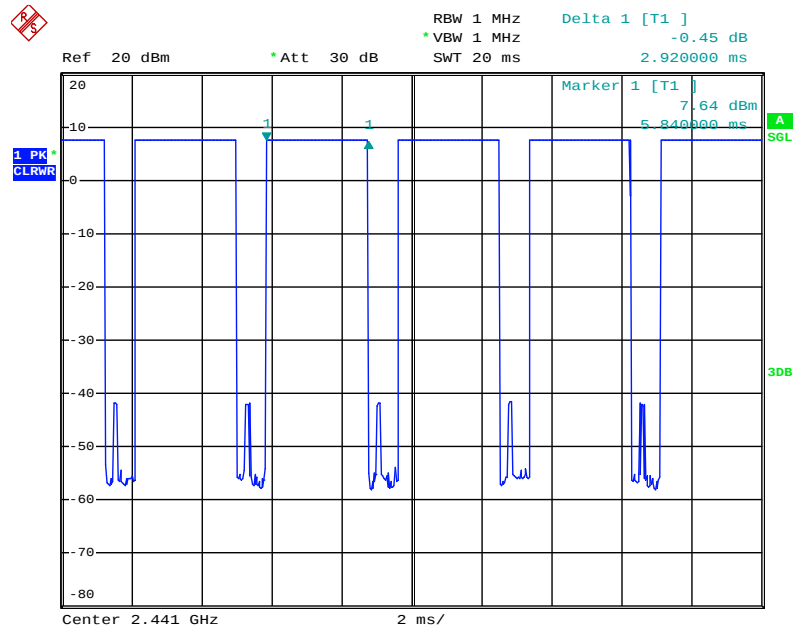

Date: 21.JUL.2014 10:52:24

Dwell Time Plot on BR (GFSK) / Channel 78 / DH5 / 2480 MHz

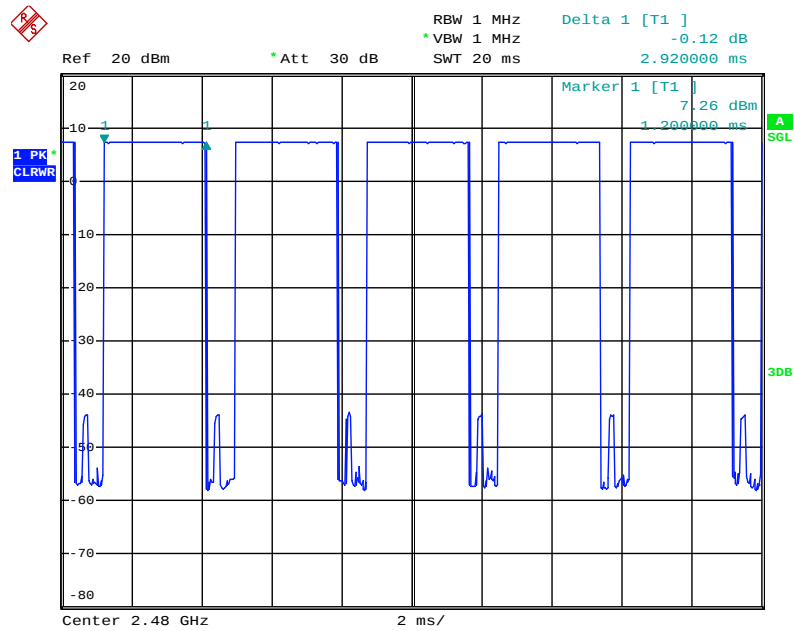

Date: 21.JUL.2014 10:53:08

4.6. Radiated Emissions Measurement

4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz, 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz, RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz, RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz, RBW 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

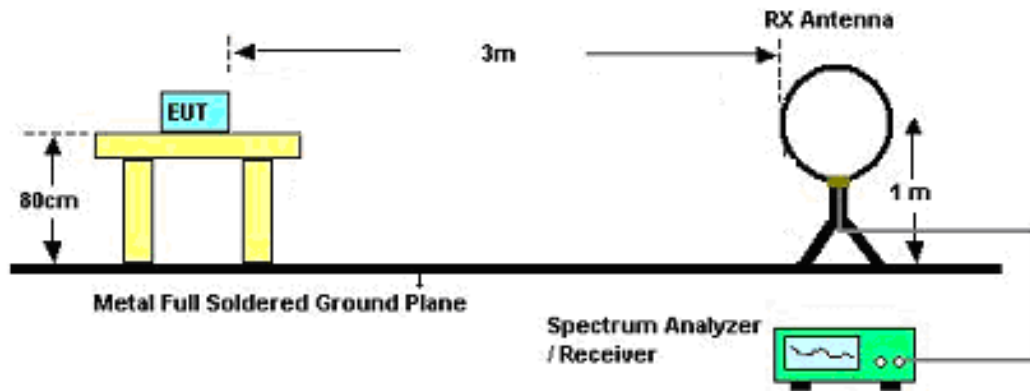

For Radiated Emissions: 30MHz~1GHz

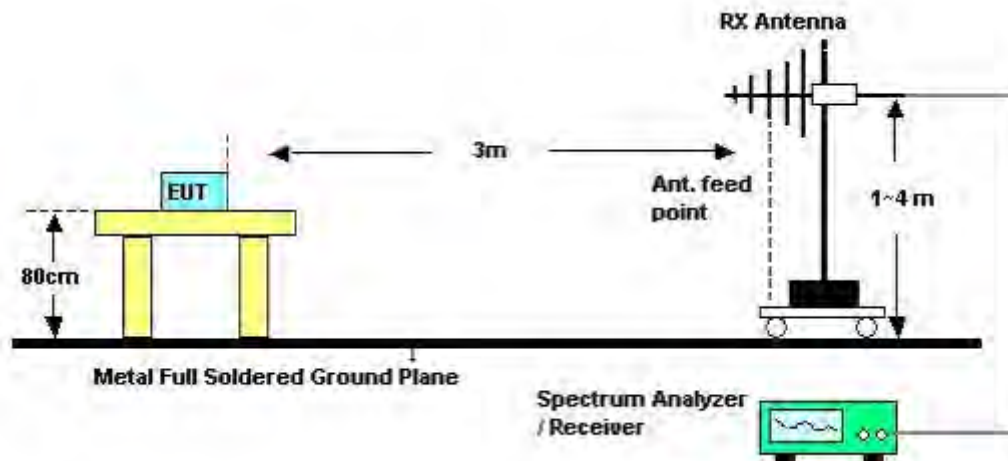

For Radiated Emissions: Above 1GHz

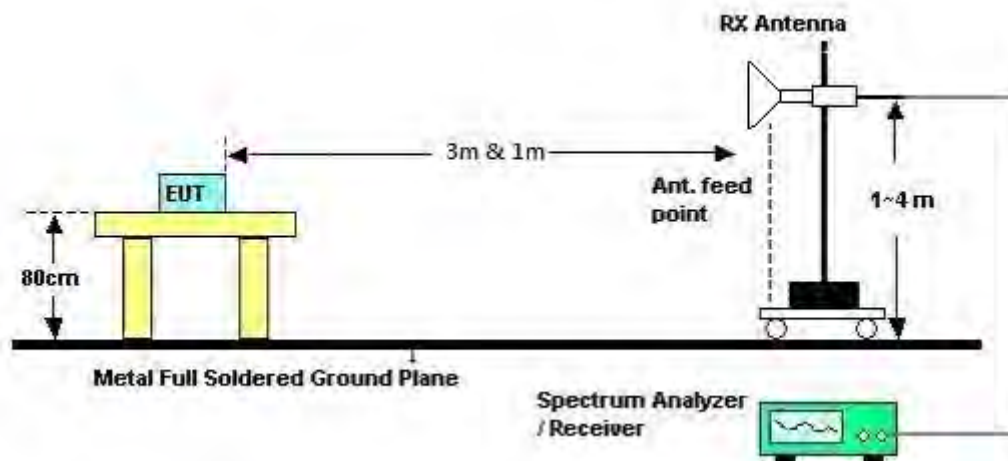

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	26°C	Humidity	68%
Test Engineer	Mars Lin / Satoshi Yang	Test Date	Apr. 26, 2014
Configurations	CTX		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	26°C	Humidity	68%
Test Engineer	Mars Lin / Satoshi Yang	Configurations	CTX

Horizontal

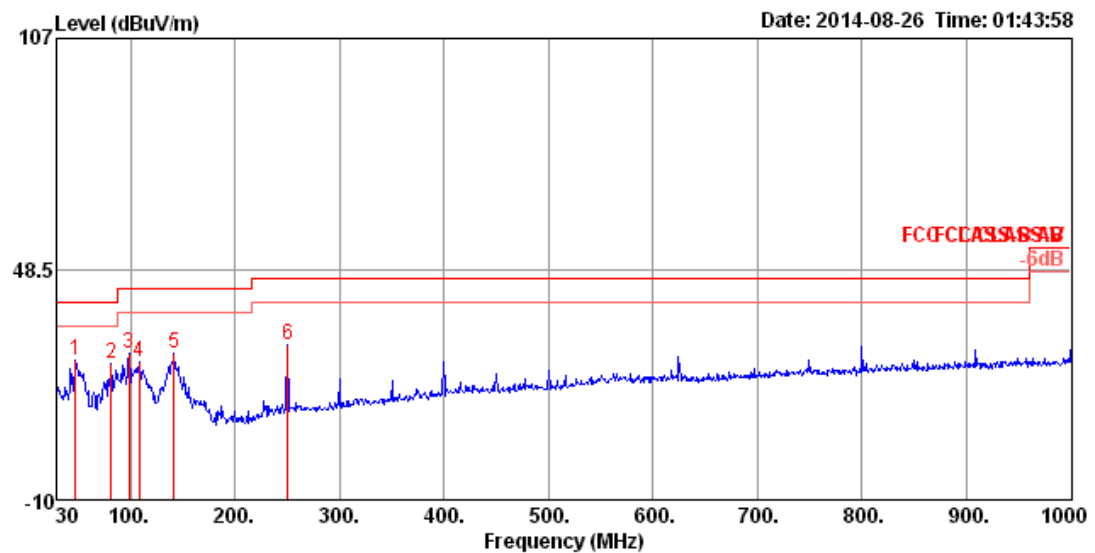

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	47.46	25.43	40.00	-14.57	47.80	0.82	8.62	31.81	400	254	HORIZONTAL	Peak
2	81.41	24.55	40.00	-15.45	48.23	1.05	6.98	31.71	200	266	HORIZONTAL	Peak
3	98.87	27.03	43.50	-16.47	47.29	1.17	10.17	31.60	300	82	HORIZONTAL	Peak
4	108.57	24.82	43.50	-18.68	43.85	1.24	11.28	31.55	400	242	HORIZONTAL	Peak
5	141.55	27.00	43.50	-16.50	46.38	1.41	10.74	31.53	200	249	HORIZONTAL	Peak
6	250.19	29.36	46.00	-16.64	47.04	1.90	11.91	31.49	100	103	HORIZONTAL	Peak

Vertical

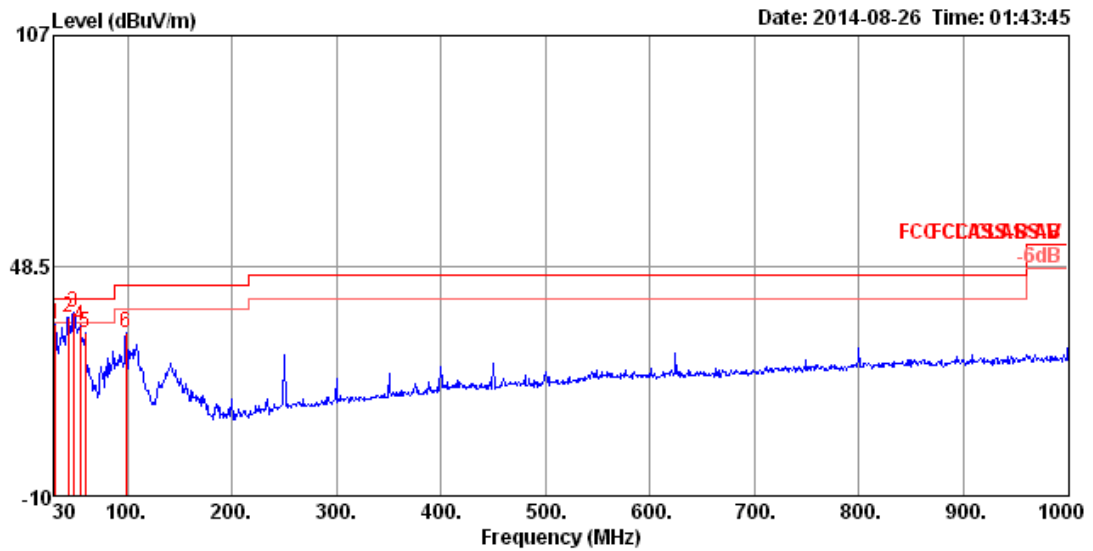

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	30.97	33.39	40.00	-6.61	47.12	0.65	17.44	31.82	100	233	VERTICAL	Peak
2	43.58	35.51	40.00	-4.49	56.32	0.78	10.25	31.84	100	170	VERTICAL	Peak
3	48.43	36.71	40.00	-3.29	59.36	0.83	8.32	31.80	100	354	VERTICAL	Peak
4	54.25	33.37	40.00	-6.63	58.11	0.86	6.18	31.78	100	259	VERTICAL	Peak
5	59.10	31.30	40.00	-8.70	57.08	0.89	5.11	31.78	125	118	VERTICAL	Peak
6	98.87	31.55	43.50	-11.95	51.81	1.17	10.17	31.60	100	13	VERTICAL	Peak

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	26°C	Humidity	68%
Test Engineer	Mars Lin / Satoshi Yang	Configurations	BR (GFSK) / Channel 0
Test Date	Aug. 06, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4804.00	45.37	54.00	-8.63	43.48	3.29	33.52	34.92	Average	115	337	HORIZONTAL
2	4804.30	51.89	74.00	-22.11	50.00	3.29	33.52	34.92	Peak	115	337	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4803.96	51.51	54.00	-2.49	49.62	3.29	33.52	34.92	Average	116	15	VERTICAL
2	4804.25	55.61	74.00	-18.39	53.72	3.29	33.52	34.92	Peak	116	15	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Mars Lin / Satoshi Yang	Configurations	BR (GFSK) / Channel 39
Test Date	Aug. 06, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4881.96	47.89	54.00	-6.11	45.82	3.33	33.66	34.92	Average	124	56	HORIZONTAL
2	4882.30	53.56	74.00	-20.44	51.49	3.33	33.66	34.92	Peak	124	56	HORIZONTAL
3	7322.68	51.90	74.00	-22.10	46.34	4.06	36.69	35.19	Peak	100	41	HORIZONTAL
4	7322.97	45.37	54.00	-8.63	39.81	4.06	36.69	35.19	Average	100	41	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4881.97	51.26	54.00	-2.74	49.19	3.33	33.66	34.92	Average	115	15	VERTICAL
2	4882.28	55.90	74.00	-18.10	53.83	3.33	33.66	34.92	Peak	115	15	VERTICAL
3	7322.51	55.19	74.00	-18.81	49.63	4.06	36.69	35.19	Peak	100	275	VERTICAL
4	7322.93	47.60	54.00	-6.40	42.04	4.06	36.69	35.19	Average	100	275	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Mars Lin / Satoshi Yang	Configurations	BR (GFSK) / Channel 78
Test Date	Aug. 06, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4959.56	52.09	74.00	-21.91	49.80	3.37	33.83	34.91	Peak	100	64	HORIZONTAL
2	4959.94	46.03	54.00	-7.97	43.74	3.37	33.83	34.91	Average	100	64	HORIZONTAL
3	7439.69	53.64	74.00	-20.36	47.81	4.07	36.98	35.22	Peak	100	72	HORIZONTAL
4	7439.87	43.78	54.00	-10.22	37.95	4.07	36.98	35.22	Average	100	72	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4959.70	56.45	74.00	-17.55	54.16	3.37	33.83	34.91	Peak	100	360	VERTICAL
2	4959.97	52.18	54.00	-1.82	49.89	3.37	33.83	34.91	Average	100	360	VERTICAL
3	7439.30	56.72	74.00	-17.28	50.89	4.07	36.98	35.22	Peak	100	271	VERTICAL
4	7439.96	48.96	54.00	-5.04	43.13	4.07	36.98	35.22	Average	100	271	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	26°C	Humidity	68%
Test Engineer	Mars Lin / Satoshi Yang	Configurations	EDR (8DPSK) / Channel 0
Test Date	Aug. 06, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4804.00	44.37	54.00	-9.63	42.48	3.29	33.52	34.92	115	337	HORIZONTAL
2	4804.30	52.89	74.00	-21.11	51.00	3.29	33.52	34.92	115	337	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4804.25	54.61	74.00	-19.39	52.72	3.29	33.52	34.92	100	15	VERTICAL
2	4804.96	47.41	54.00	-6.59	45.52	3.29	33.52	34.92	100	15	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Mars Lin / Satoshi Yang	Configurations	EDR (8DPSK) / Channel 39
Test Date	Aug. 06, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4881.96	44.89	54.00	-9.11	42.82	3.33	33.66	34.92	Average	115	56	HORIZONTAL
2	4882.30	52.56	74.00	-21.44	50.49	3.33	33.66	34.92	Peak	115	56	HORIZONTAL
3	7322.68	53.90	74.00	-20.10	48.34	4.06	36.69	35.19	Peak	102	41	HORIZONTAL
4	7322.97	45.27	54.00	-8.73	39.71	4.06	36.69	35.19	Average	102	41	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4881.97	45.26	54.00	-8.74	43.19	3.33	33.66	34.92	Average	111	15	VERTICAL
2	4882.28	50.90	74.00	-23.10	48.83	3.33	33.66	34.92	Peak	111	15	VERTICAL
3	7322.51	55.19	74.00	-18.81	49.63	4.06	36.69	35.19	Peak	100	275	VERTICAL
4	7322.93	46.60	54.00	-7.40	41.04	4.06	36.69	35.19	Average	100	275	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Mars Lin / Satoshi Yang	Configurations	EDR (8DPSK) / Channel 78
Test Date	Aug. 06, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4959.56	51.09	74.00	-22.91	48.80	3.37	33.83	34.91	Peak	100	64	HORIZONTAL
2	4959.94	47.03	54.00	-6.97	44.74	3.37	33.83	34.91	Average	100	64	HORIZONTAL
3	7439.69	51.64	74.00	-22.36	45.81	4.07	36.98	35.22	Peak	100	72	HORIZONTAL
4	7439.87	45.78	54.00	-8.22	39.95	4.07	36.98	35.22	Average	100	72	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4959.70	51.45	74.00	-22.55	49.16	3.37	33.83	34.91	Peak	100	8	VERTICAL
2	4959.97	46.18	54.00	-7.82	43.89	3.37	33.83	34.91	Average	100	8	VERTICAL
3	7439.30	52.72	74.00	-21.28	46.89	4.07	36.98	35.22	Peak	100	271	VERTICAL
4	7439.96	44.96	54.00	-9.04	39.13	4.07	36.98	35.22	Average	100	271	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.7. Emissions Measurement

4.7.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (30dBc in any 100 kHz bandwidth emission)	100 kHz /100 kHz for Peak

4.7.3. Test Procedures

For Radiated band edges Measurement:

- The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around band edges.

For Radiated Out of Band Emission Measurement:

- The radiated emission test is performed on each TX port of operating mode without summing or adding 10log (N) since the limit is relative emission limit.
Only worst data of each operating mode is presented.

4.7.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.6.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	26°C	Humidity	68%
Test Engineer	Mars Lin / Satoshi Yang	Configurations	BR (GFSK) / Channel 0, 39, 78
Test Date	Jul. 21, 2014		

Channel 0

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2376.80	67.35	74.00	-6.65	36.68	2.21	28.46	0.00	Peak	148	339	HORIZONTAL
2	2390.00	45.44	54.00	-8.56	14.73	2.22	28.49	0.00	Average	148	339	HORIZONTAL
3	2402.00	114.29			83.58	2.22	28.49	0.00	Average	148	339	HORIZONTAL
4	2402.20	115.41			84.70	2.22	28.49	0.00	Peak	148	339	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2402 MHz.

Channel 39

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	44.78	54.00	-9.22	14.07	2.22	28.49	0.00	Average	144	345	HORIZONTAL
2	2390.00	61.53	74.00	-12.47	30.82	2.22	28.49	0.00	Peak	144	345	HORIZONTAL
3	2441.00	114.47			83.63	2.24	28.60	0.00	Average	144	345	HORIZONTAL
4	2441.00	115.59			84.75	2.24	28.60	0.00	Peak	144	345	HORIZONTAL
5	2483.50	45.19	54.00	-8.81	14.26	2.26	28.67	0.00	Average	144	345	HORIZONTAL
6	2491.90	61.81	74.00	-12.19	30.84	2.27	28.70	0.00	Peak	144	345	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2441 MHz.

Channel 78

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2480.00	106.95			76.02	2.26	28.67	0.00	Average	142	352	VERTICAL
2	2480.00	107.81			76.88	2.26	28.67	0.00	Peak	142	352	VERTICAL
3	2483.50	52.37	54.00	-1.63	21.44	2.26	28.67	0.00	Average	142	352	VERTICAL
4	2483.50	60.11	74.00	-13.89	29.18	2.26	28.67	0.00	Peak	142	352	VERTICAL

Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	26°C	Humidity	68%
Test Engineer	Mars Lin / Satoshi Yang	Configurations	EDR (8DPSK) / Channel 0, 39, 78
Test Date	Aug. 07, 2014		

Channel 0

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	2390.00	45.43	54.00	-8.57	14.72	2.22	28.49	0.00	Average	145	345	HORIZONTAL
2	2390.00	59.16	74.00	-14.84	28.45	2.22	28.49	0.00	Peak	145	345	HORIZONTAL
3	2402.00	106.28			75.57	2.22	28.49	0.00	Average	145	345	HORIZONTAL
4	2402.00	110.69			79.98	2.22	28.49	0.00	Peak	145	345	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2402 MHz.

Channel 39

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	2390.00	44.38	54.00	-9.62	13.67	2.22	28.49	0.00	Average	145	347	HORIZONTAL
2	2390.00	58.60	74.00	-15.40	27.89	2.22	28.49	0.00	Peak	145	347	HORIZONTAL
3	2441.00	106.50			75.66	2.24	28.60	0.00	Average	145	347	HORIZONTAL
4	2441.00	111.02			80.18	2.24	28.60	0.00	Peak	145	347	HORIZONTAL
5	2483.50	44.76	54.00	-9.24	13.83	2.26	28.67	0.00	Average	145	347	HORIZONTAL
6	2483.90	56.20	74.00	-17.80	25.27	2.26	28.67	0.00	Peak	145	347	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2441 MHz.

Channel 78

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	2479.80	103.68			72.75	2.26	28.67	0.00	Peak	117	322	HORIZONTAL
2	2480.00	102.79			71.86	2.26	28.67	0.00	Average	117	322	HORIZONTAL
3	2483.50	49.47	54.00	-4.53	18.54	2.26	28.67	0.00	Average	117	322	HORIZONTAL
4	2483.50	58.42	74.00	-15.58	27.49	2.26	28.67	0.00	Peak	117	322	HORIZONTAL


Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Plot on Configuration For BR (GFSK) / Channel 0 / Reference Level

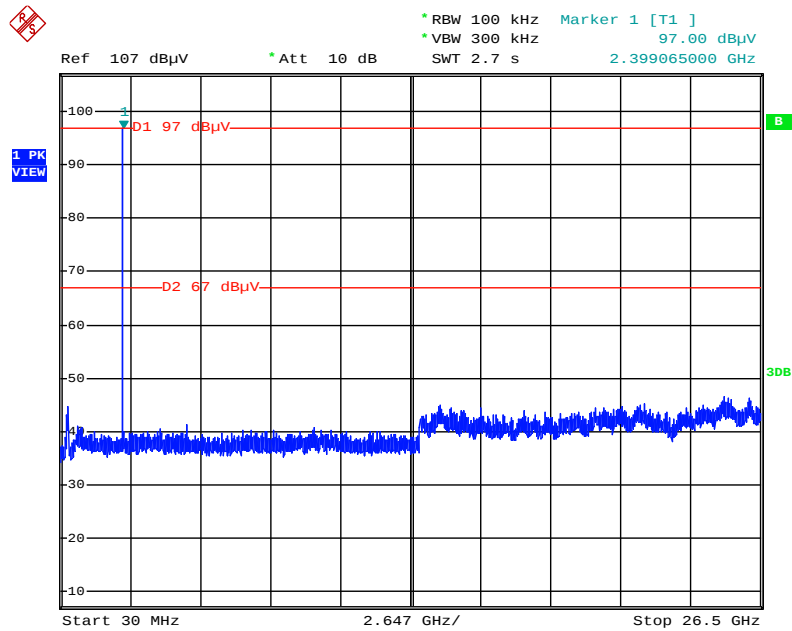


Date: 21.JUL.2014 22:08:59

Plot on Configuration For BR (GFSK) / Channel 0 / 30MHz~2400MHz (down 30dBc)

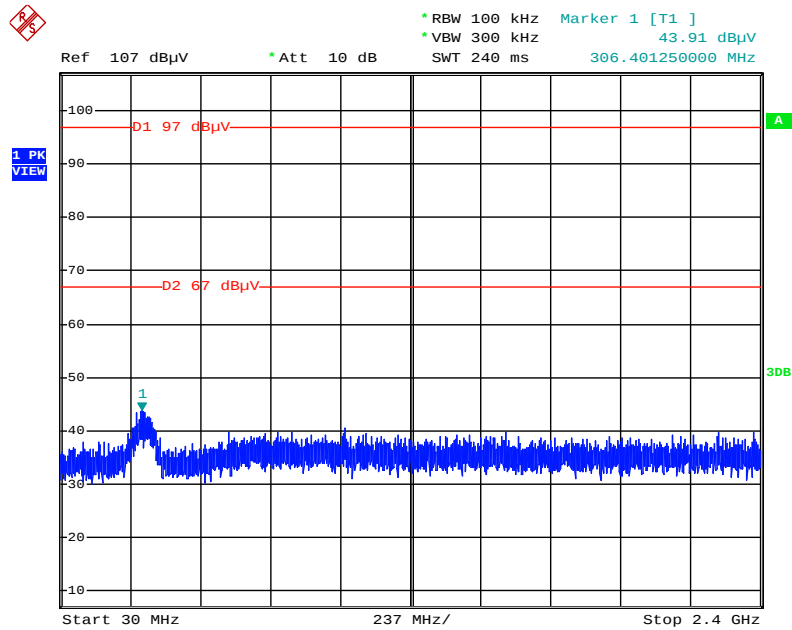


Date: 21.JUL.2014 22:31:29

Plot on Configuration For BR (GFSK) / Channel 0 / 2500MHz~26500MHz (down 30dBc)

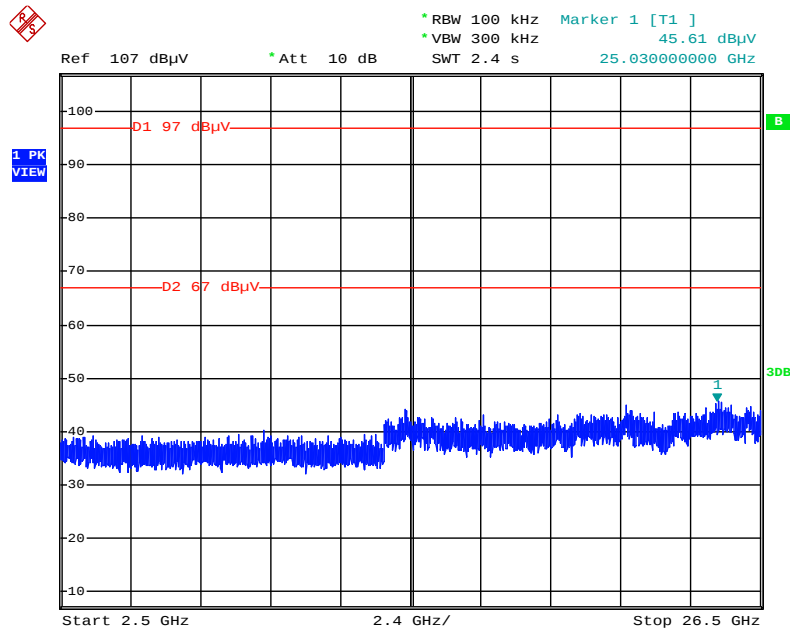


Date: 21.JUL.2014 22:11:08

Plot on Configuration For BR (GFSK) / Channel 78 / Reference Level

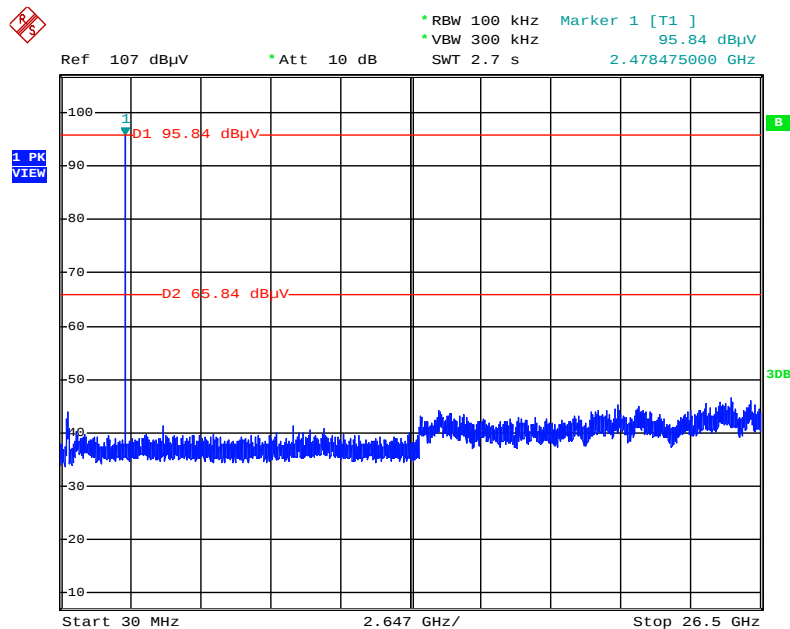


Date: 21.JUL.2014 22:13:15

Plot on Configuration For BR (GFSK) / Channel 78 / 30MHz~2400MHz (down 30dBc)

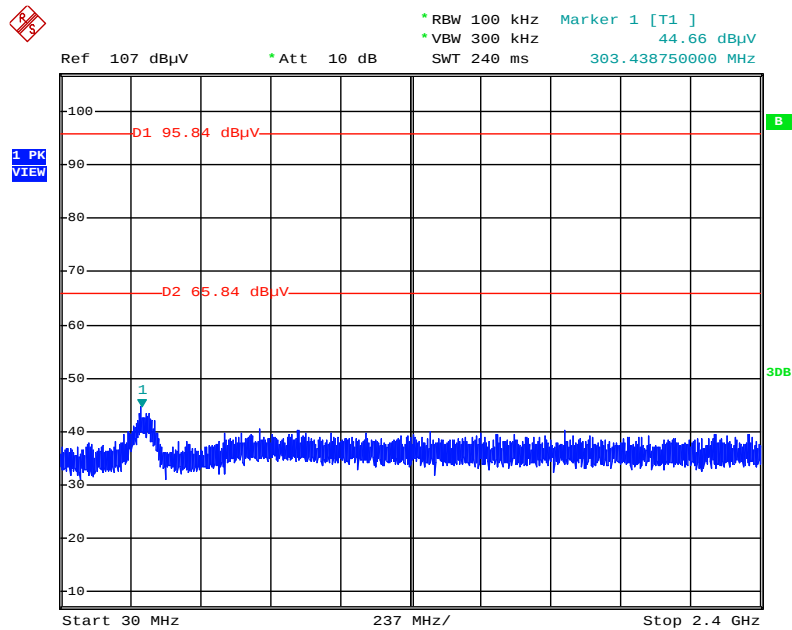


Date: 21.JUL.2014 22:13:44

Plot on Configuration For BR (GFSK) / Channel 78 / 2500MHz~26500MHz (down 30dBc)

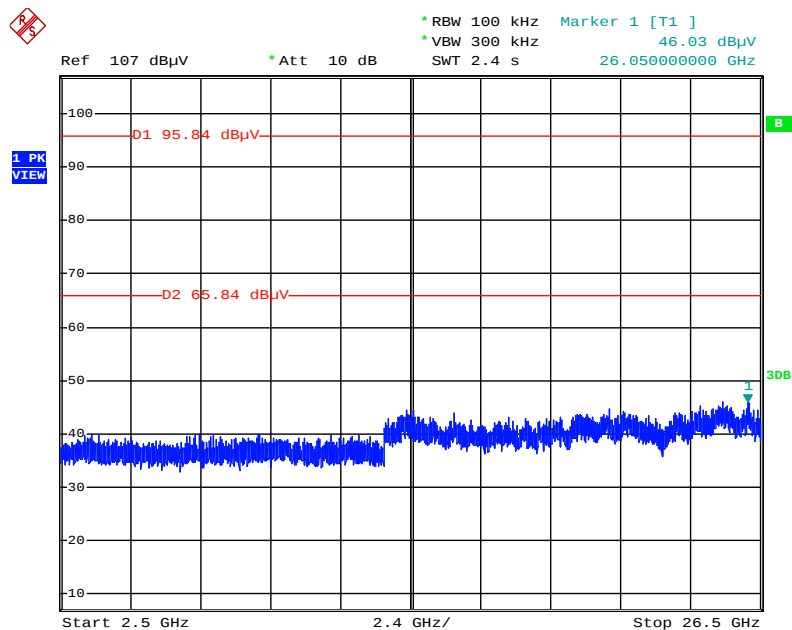


Date: 21.JUL.2014 22:14:05

Plot on Configuration For BR (GFSK) / Hopping / Reference Level

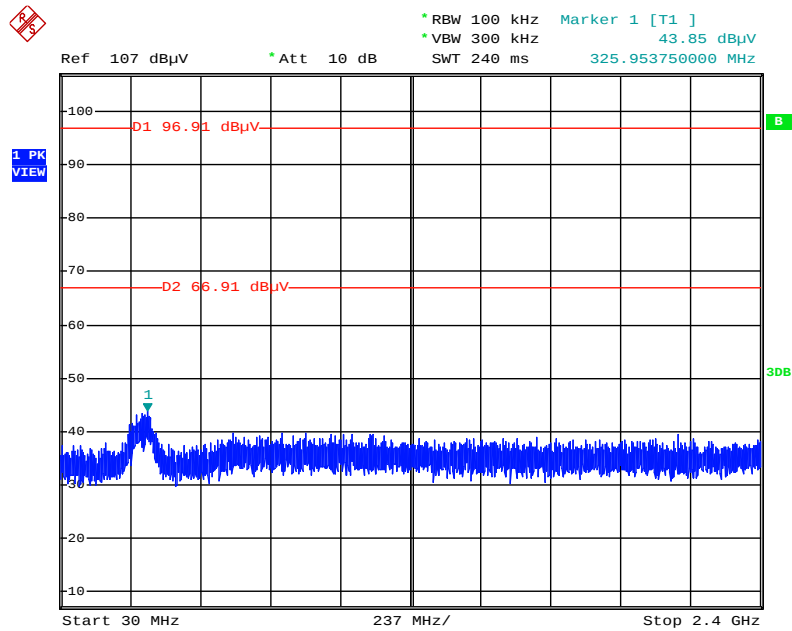


Date: 21.JUL.2014 22:26:49

Plot on Configuration For BR (GFSK) / Hopping / 30MHz~2400MHz (down 30dBc)

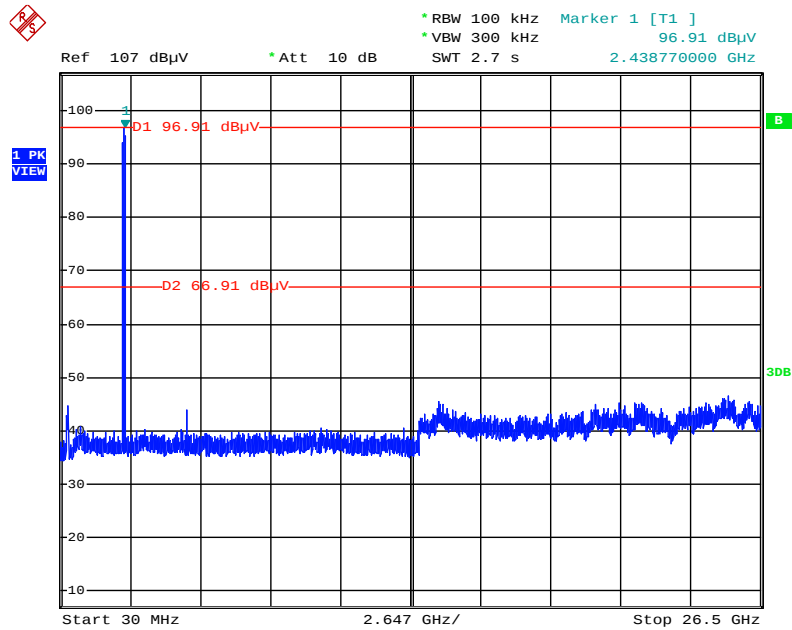


Date: 21.JUL.2014 22:25:39

Plot on Configuration For BR (GFSK) / Hopping / 2500MHz~26500MHz (down 30dBc)

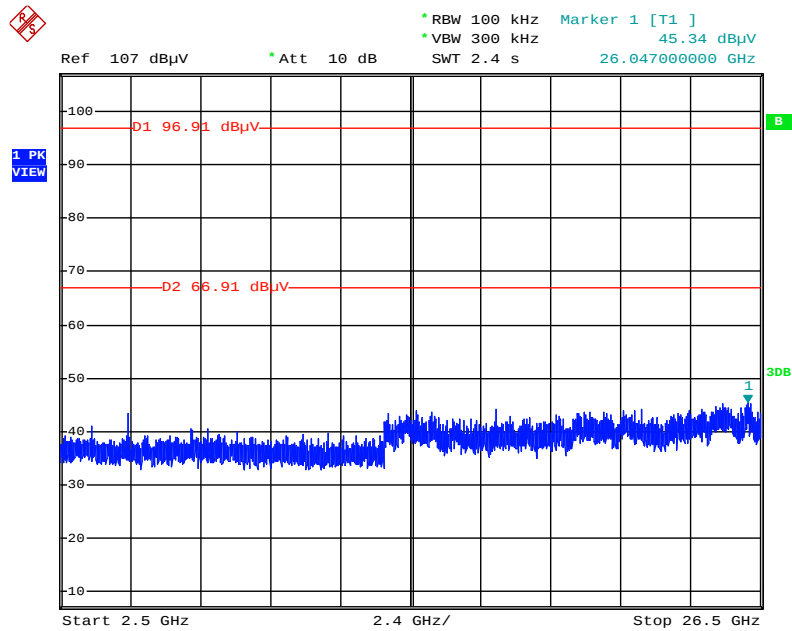


Date: 21.JUL.2014 22:26:25

Plot on Configuration For EDR (8DPSK) / Channel 0 / Reference Level

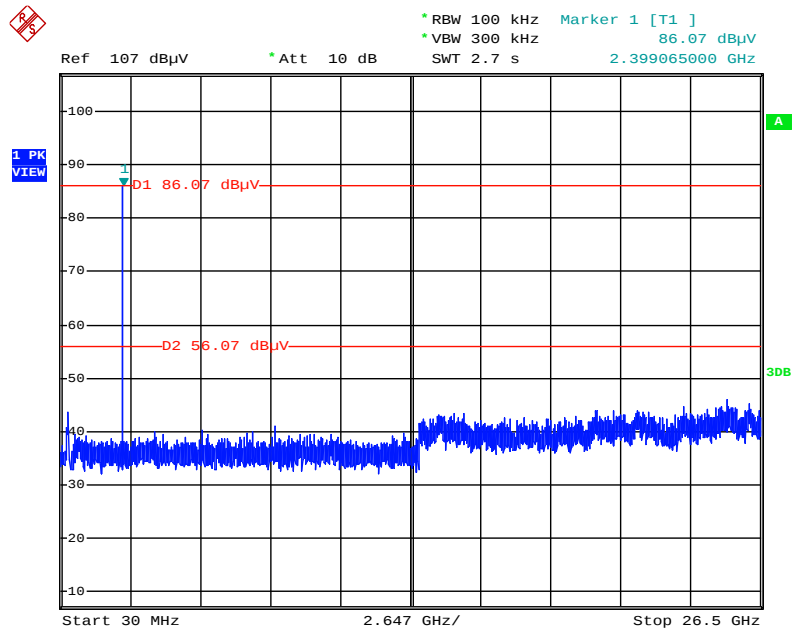


Date: 21.JUL.2014 22:33:45

Plot on Configuration For EDR (8DPSK) / Channel 0 / 30MHz~2400MHz (down 30dBc)

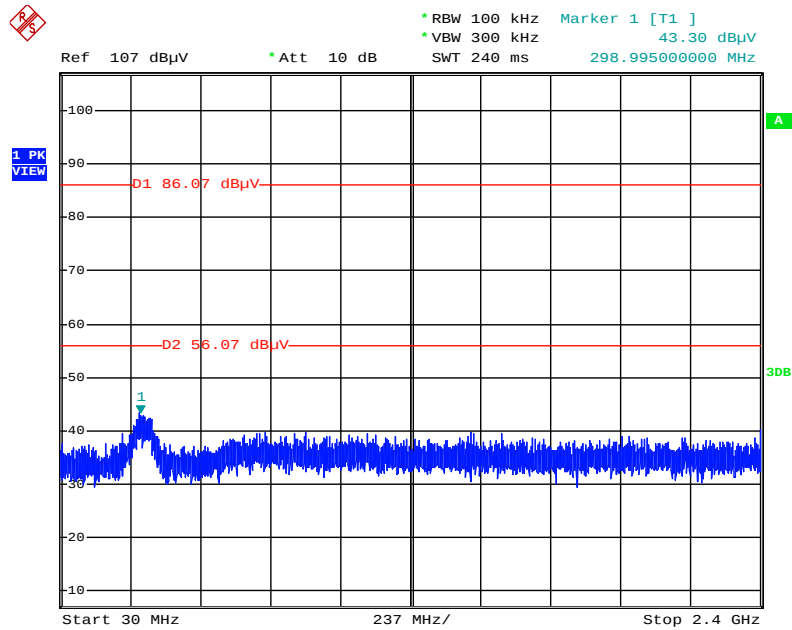


Date: 21.JUL.2014 22:34:29

Plot on Configuration For EDR (8DPSK) / Channel 0 / 2500MHz~26500MHz (down 30dBc)

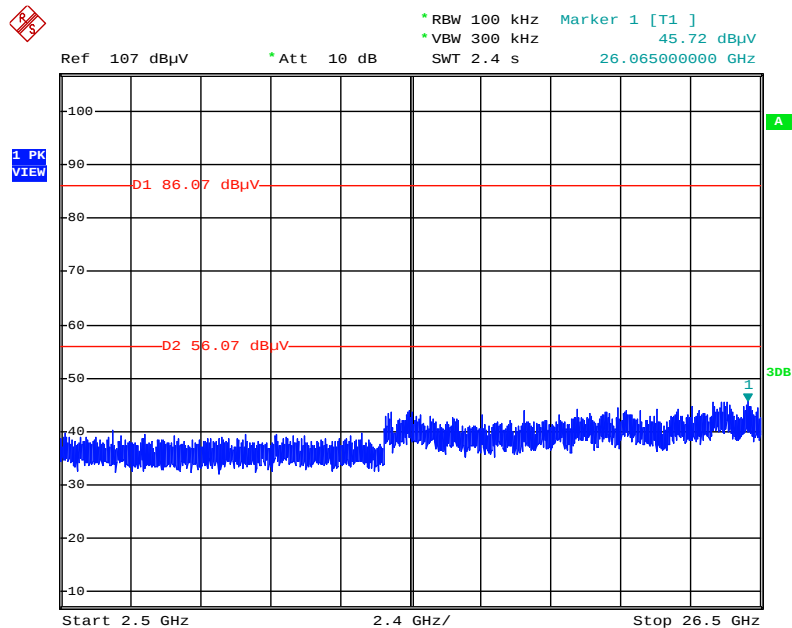


Date: 21.JUL.2014 22:34:55

Plot on Configuration For EDR (8DPSK) / Channel 78 / Reference Level

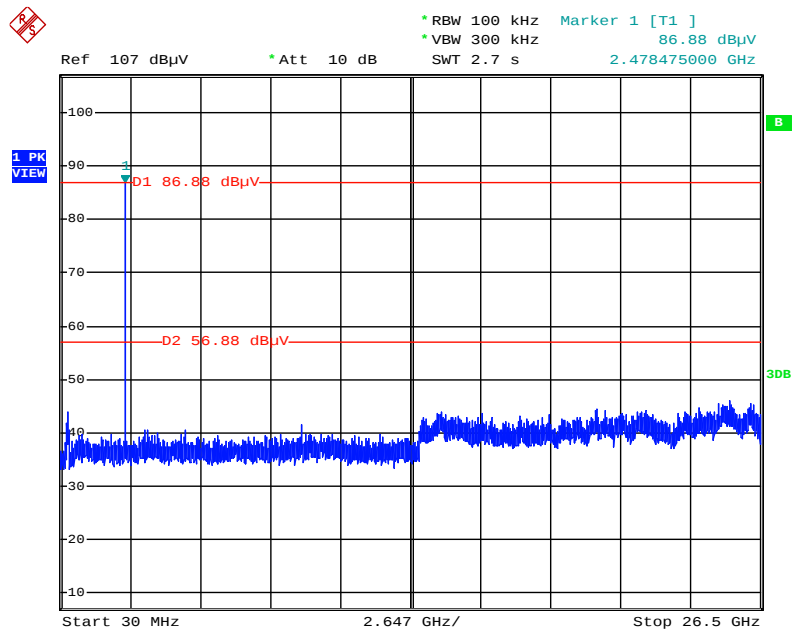


Date: 21.JUL.2014 22:19:26

Plot on Configuration For EDR (8DPSK) / Channel 78 / 30MHz~2400MHz (down 30dBc)

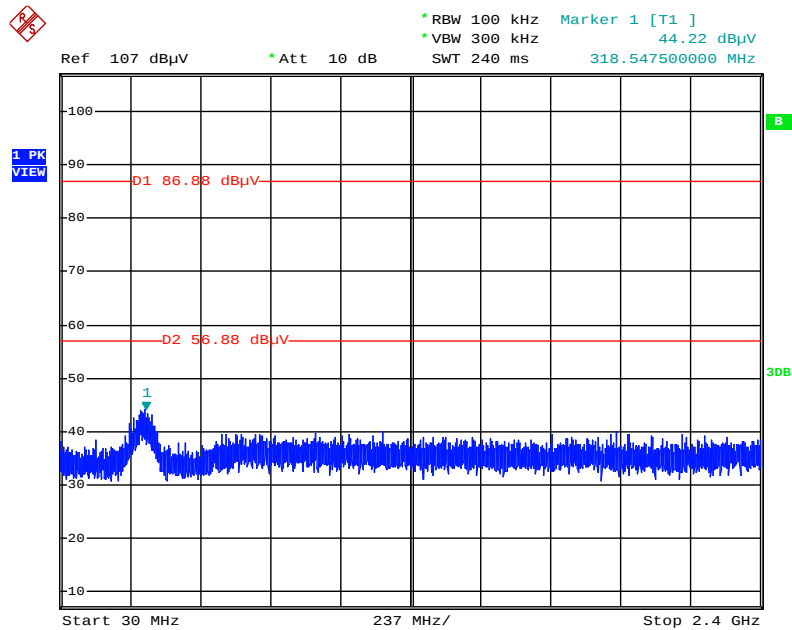


Date: 21.JUL.2014 22:19:46

Plot on Configuration For EDR (8DPSK) / Channel 78 / 2500MHz~26500MHz (down 30dBc)

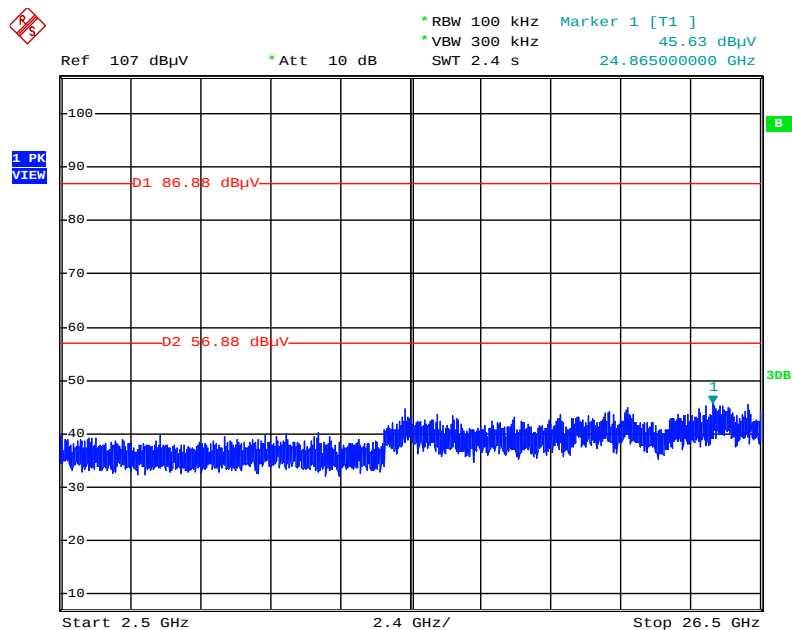


Date: 21.JUL.2014 22:20:19

Plot on Configuration For EDR (8DPSK) / Hopping / Reference Level

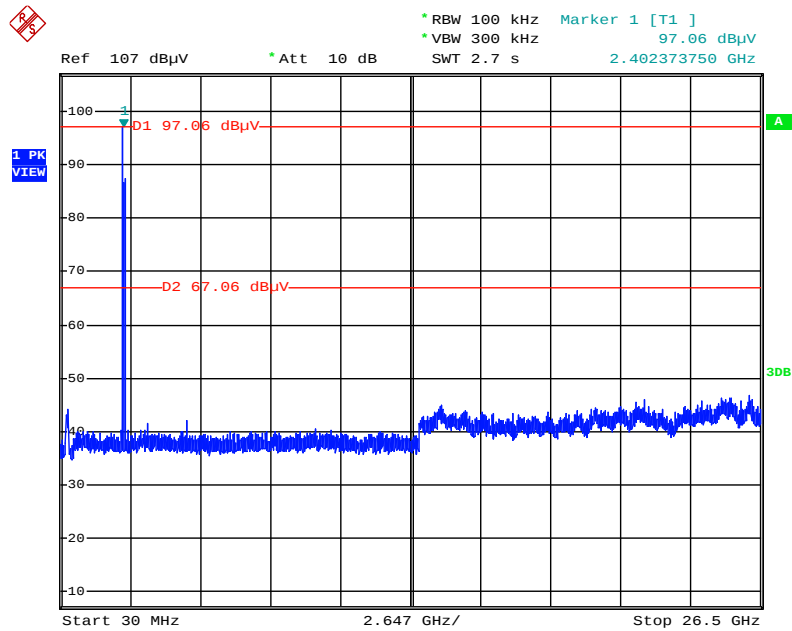


Date: 21.JUL.2014 22:29:13

Plot on Configuration For EDR (8DPSK) / Hopping / 30MHz~2400MHz (down 30dBc)

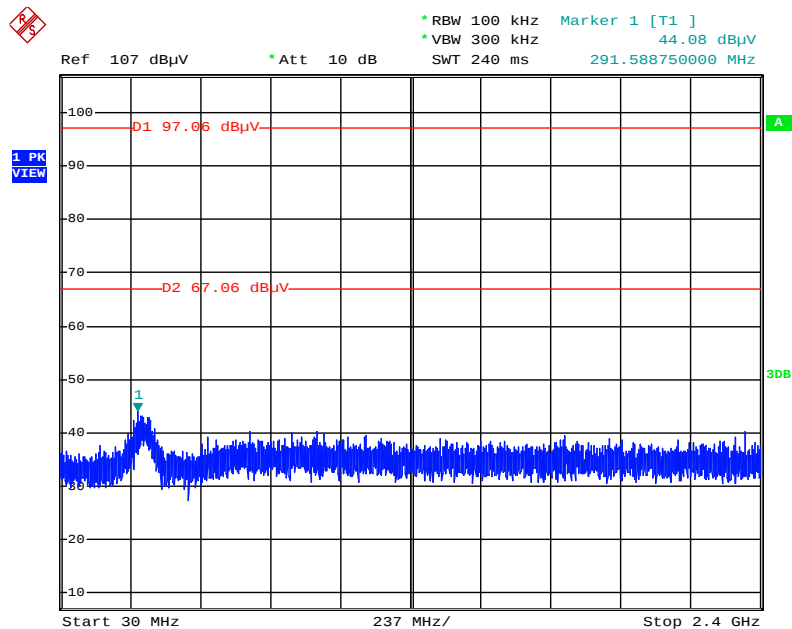

Date: 21.JUL.2014 22:29:37

Plot on Configuration For EDR (8DPSK) / Hopping / 2500MHz~26500MHz (down 30dBc)

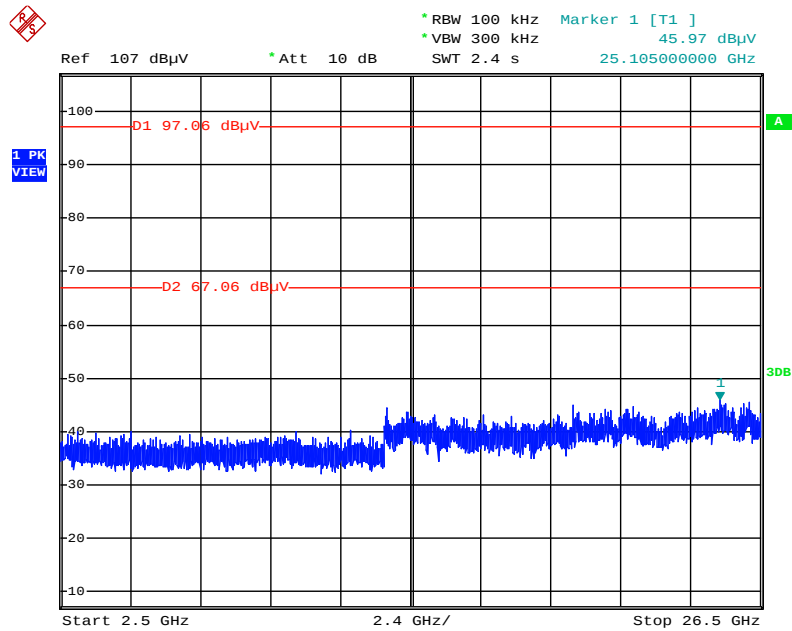

Date: 21.JUL.2014 22:35:40

4.8. Antenna Requirements

4.8.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

4.8.2. Antenna Connector Construction

Please refer to section 3.3 in this test report, antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Nov. 23, 2013	Conduction (CO02-CB)
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Nov. 11, 2013	Conduction (CO02-CB)
MXE EMI Receiver	Agilent	N9038A	MY52260140	9kHz ~ 30MHz	Jan. 22, 2014	Conduction (CO02-CB)
COND Cable	Woken	Cable	01	0.15MHz~30MHz	Dec. 04, 2013	Conduction (CO02-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO02-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	May 26, 2014	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Dec. 17, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 12, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Dec. 16, 2013	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Oct. 23, 2013	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100019	9kHz~40GHz	Dec. 02, 2013	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Dec. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO 2000	N/A	1 m - 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Nov. 29, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	2 Way	0120A02056002D	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	3 Way	MDC2366	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	4 Way	0120A04056002D	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
Horn Antenna	EMCO	3115	9610-4976	1GHz ~ 18GHz	Jan. 28, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz ~ 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz ~ 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz ~ 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

* Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%