

# **FCC TEST REPORT**

**for**

## **47 CFR Part 15 Subpart C**

Equipment : SpeedTouch 585 v6

Model No. : DSLBB683 TK

FCC ID : RSE-ST585V6

Applicant : **Thomson Telecom Belgium**  
Prins Boudewijnlaan 47  
B-2650 Edegem  
Belgium

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

***SPORTON International Inc.***

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

## Table of Contents

History of this test report.....	ii
CERTIFICATE OF COMPLIANCE.....	1
1. General Description of Equipment under Test.....	2
1.1. Applicant.....	2
1.2. Manufacturer .....	2
1.3. Basic Description of Equipment under Test .....	2
1.4. Radio Interface of the EUT.....	3
1.5. Features of Equipment under Test.....	3
1.6. Information Provided by the Manufacturer .....	3
2. Test Configuration of Equipment under Test.....	4
2.1. Test Manner .....	4
2.2. Description of Test System .....	4
2.3. Connection Diagram of Test System .....	5
3. General Information of Test.....	6
3.1. Test Voltage .....	6
3.2. Standard for Methods of Measurement.....	6
3.3. Test in Compliance with .....	6
3.4. Frequency Range Investigated .....	6
4. Report of Measurements and Examinations .....	7
4.1. List of Measurements and Examinations .....	7
4.2. 6dB Bandwidth .....	8
4.3. Maximum Peak Conducted Output Power.....	13
4.4. Peak Power Spectral Density.....	14
4.5. Band Edges Emission .....	19
4.6. Conducted Emission .....	27
4.7. Radiated Emission .....	31
4.8. Antenna Requirements .....	50
4.9. RF Exposure .....	51
5. List of Measuring Equipments Used .....	54
6. Uncertainty of Test Site .....	56
Appendix A. Photographs of EUT.....	A1 ~ A11

### History of this test report

Original Report Issue Date: June 24, 2005

☒ No additional attachment.

☐ Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

# **CERTIFICATE OF COMPLIANCE**

**for**

## **47 CFR Part 15 Subpart C**

Equipment : SpeedTouch 585 v6

Model No. : DSLBB683 TK

Applicant : **Thomson Telecom Belgium**  
Prins Boudewijnlaan 47  
B-2650 Edegem  
Belgium

### **I HEREBY CERTIFY THAT:**

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 2003** and the equipment under test was **passed** all test items required in 47 CFR Part 15 subpart C, relative to the equipment under test. Testing was carried out on June 17, 2005 at **SPORTON International Inc. LAB.**



**Dr. Alan Lane**  
Vice General Manager

***SPORTON International Inc.***

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

## 1. General Description of Equipment under Test

### 1.1. Applicant

Thomson Telecom Belgium  
Prins Boudewijnlaan 47  
B-2650 Edegem  
Belgium

### 1.2. Manufacturer

Same 1.1

### 1.3. Basic Description of Equipment under Test

Equipment : SpeedTouch 585 v6  
Model No. : DSLBB683 TK  
Trade Name : Thomson  
Power Supply Type : Linear  
AC Power Cord : Wall-mount, 2 pin, 18Vac 1A  
Hardware Version : PEM 1  
Cable :

Port	Cable type	Cable length to be used for testing	Internal/External connection
ADSL	UTP Cat 3	13 meter flat cable	External
Ethernet	UTP Cat 5	13-meter	Internal
AC power	UTP	1.8 meter	Internal

The table below shows the interfaces that are equipped on the models as specified:

	AC 18Vac 1A	ADSL ADSL/2/2+	Ethernet 10/100Mbps	Wireless 802.11b/g
SpeedTouch 585 v6	●	●	●	●

- : Equipped.
- : Not equipped.

#### 1.4. Radio Interface of the EUT

The table below shows the radio information of the EUT:

Modulation Type	CCK, DQPSK, DBPSK for DSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Radio Technology	DSSS, OFDM
Transfer Rate	IEEE 802.11b: 11/5.5/2/1 Mbps IEEE 802.11g: 54/48/36/24/18/12/9/6 Mbps
Frequency Range	2400 MHz ~ 2483.5 MHz
Number of Channel	11

List of the carrier frequency is shown as below:

Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412 MHz	5	2432 MHz	9	2452 MHz
2	2417 MHz	6	2437 MHz	10	2457 MHz
3	2422 MHz	7	2442 MHz	11	2462 MHz
4	2427 MHz	8	2447 MHz		

#### 1.5. Features of Equipment under Test

Please refer to user manual.

#### 1.6. Information Provided by the Manufacturer

The following product that existed at the same time of qualification is identical to SpeedTouch 585 v6 DSLBB683 TK can also be covered by this report.

SpeedTouch 585 v6

DSLBB883 TK

## **2. Test Configuration of Equipment under Test**

### **2.1. Test Manner**

- a. The EUT has been associated with personal computer and peripherals pursuant to ANSI C63.4-2003 and the configuration operated in a manner which tended to maximize its emission characteristics in a typical application.
- b. The EUT can operate on 11 channels listed in section 1.4. Three channels (CH01, CH06 and CH11) in both DSSS and OFDM radio technologies were set for the measurements.
- c. The datarate of DSSS was set to 11 Mbps.
- d. The datarate of OFDM was set to 54 Mbps.
- e. Frequency range investigated: Conducted emission: 150 KHz to 30 MHz, Radiated emission: 30 MHz to 25000MHz.

### **2.2. Description of Test System**


Support Unit 1. -- Notebook -- for remote workstation

FCC ID	: N/A
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 2. --ADSL DSLAM (ALCATEL) -- for remote workstation

FCC ID	: N/A
Model No.	: 7300UD

### 2.3. Connection Diagram of Test System

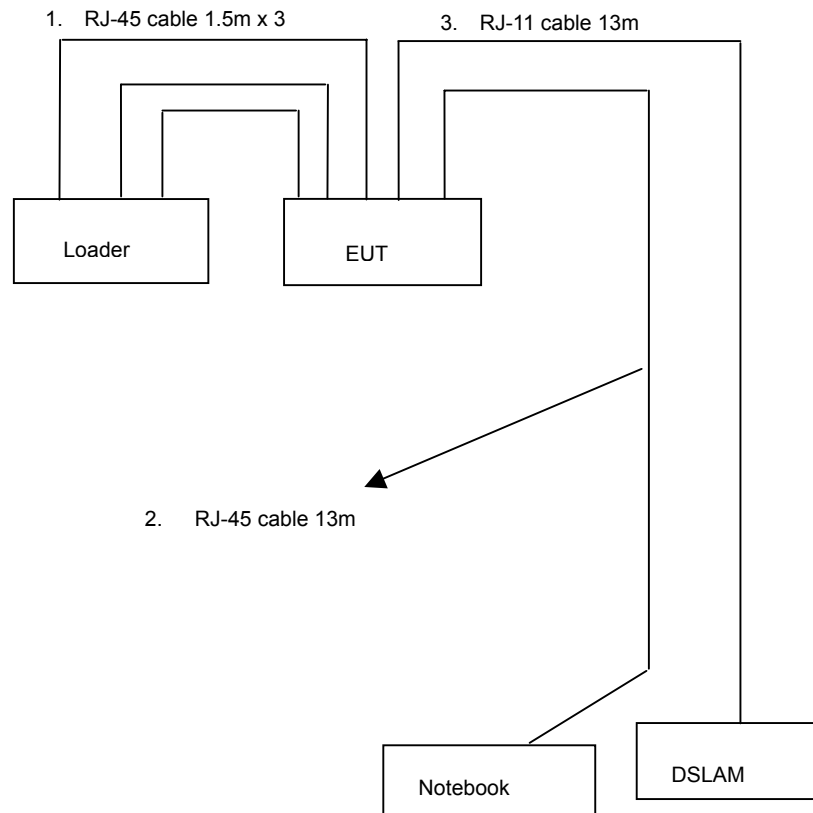

1. Three RJ-45 cables were connected between the EUT and the dummy load.
2. One RJ-45 cable was connected between the EUT and the Notebook.
3. The RJ-11 cable was connected between the EUT and the ADSL DSLAM.

The Notebook is used to control the EUT to stay on the specific operational modes of the radio interface:

- (1) Continuous transmitting mode,
- (2) Continuous receiving mode,
- (3) Normal operation mode.

The operational modes are achieved by the software pre-installed in the EUT.



### **3. General Information of Test**

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park,  
Kwei-Shan Hsiag, Tao Yuan Hsien, Taiwan, R.O.C.  
TEL : 886-3-327-3456  
FAX : 886-3-318-0055  
Test Site No : CO04-HY, 03CH03-HY, TH01-HY

#### **3.1. Test Voltage**

110V/60Hz

#### **3.2. Standard for Methods of Measurement**

ANSI C63.4-2003 for conducted power line test and radiated emission test.

#### **3.3. Test in Compliance with**

47 CFR Part 15 Subpart C

#### **3.4. Frequency Range Investigated**

- a. Conduction: from 150 kHz to 30 MHz
- b. Radiation: from 30 MHz to 25000 MHz

## 4. Report of Measurements and Examinations

### 4.1. List of Measurements and Examinations

Applied Standard: 47CFR FCC Part 15 Subpart C			
5.2	15.247(a)(2)	6dB Spectrum Bandwidth	Pass
4.3	15.247(b)(3)	Maximum Peak Conducted Output Power	Pass
4.4	15.247(e)	Peak Power Spectral Density	Pass
4.5	15.247(d)	Band Edges Emission	Pass
5.6	15.207	AC Power Line Conducted Emission	Pass
5.7	15.247(d)	Spurious Radiated Emission	Pass
5.8	15.203/15.247(b)/(c)	Antenna Requirement	Pass
5.9	2.1091	Maximum Permissible Exposure	Pass

## 4.2. 6dB Bandwidth

### 4.2.1. Applicable Standard

Section 15.247(a)(2): For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

### 4.2.2. Instrument for the measurement

Item 18 of the table shown in section 5.

### 4.2.3. Detailed settings of the instrument

- Spectrum Analyzer : R&S FSP30
  - Attenuation : Auto
  - Center Frequency : 2412 MHz / 2437 MHz / 2462 MHz
  - Span Frequency : > 6 dB Bandwidth
  - RB : 100 kHz
  - VB : 100 kHz
  - Detector : Peak
  - Trace : Max Hold
  - Sweep Time : Auto


### 4.2.4. Test Procedure

The radio output port of the EUT was connected to the spectrum analyzer through an attenuator.

The radio interface of the EUT was set to continuous transmitting mode.

The 6 dB bandwidth is the spectrum with level higher than 6 dB below the peak level.

### 4.2.5. Test Setup

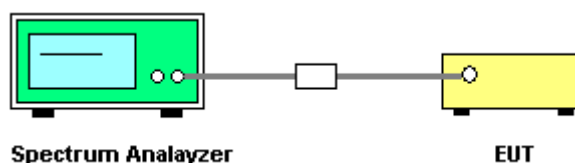

### 4.2.6. Test Criteria


All test results complied with the requirements of 15.247(a)(2). Measurement Uncertainty is  $1 \times 10^{-5}$ .

**4.2.7. Test Result**

- Temperature: 26°C
- Relative Humidity: 64%
- Duty Cycle of the Equipment During the Test:
  - DSSS: 100%
  - OFDM: 88.80%
- Test Engineer: Eason Lu


<b>Modulation Type</b>	<b>Channel No.</b>	<b>Frequency (MHz)</b>	<b>6dB Bandwidth (MHz)</b>	<b>Min. Limit (MHz)</b>
DSSS	01	2412 MHz	10.60	0.5
DSSS	06	2437 MHz	10.88	0.5
DSSS	11	2462 MHz	10.60	0.5
OFDM	01	2412 MHz	16.32	0.5
OFDM	06	2437 MHz	16.32	0.5
OFDM	11	2462 MHz	16.28	0.5

Modulation Type: DSSS (Channel 01) :

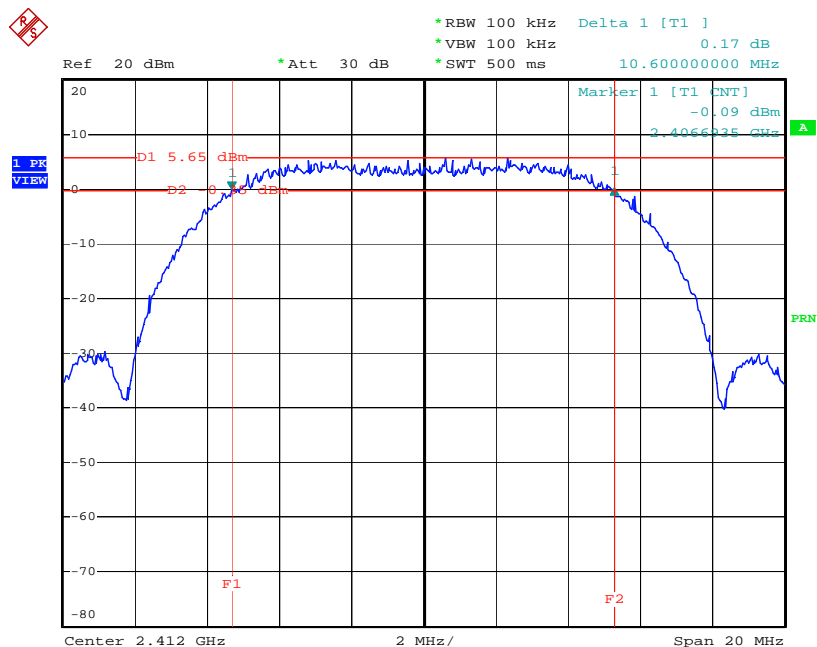


Date: 1.JUN.2005 12:04:35

Modulation Type: DSSS (Channel 06) :

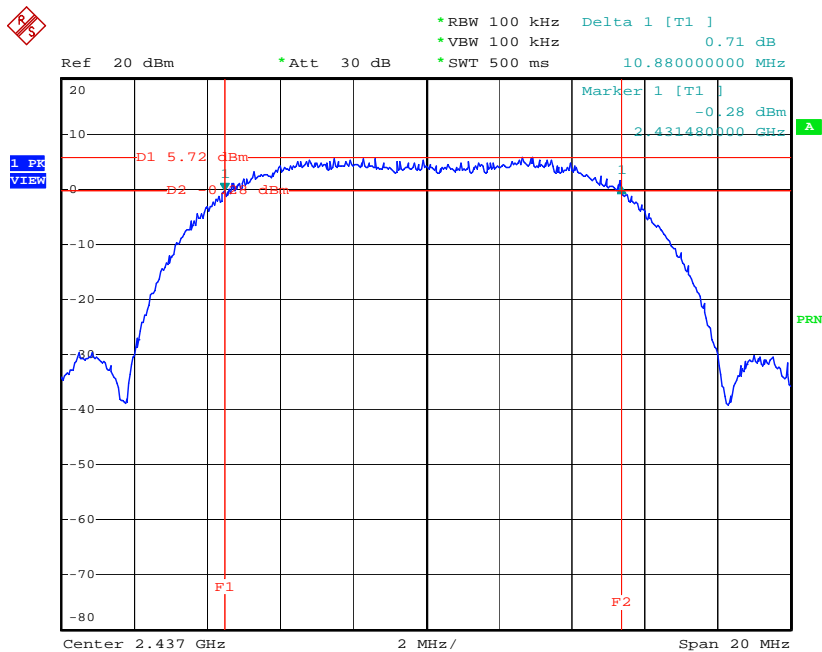


Date: 1.JUN.2005 12:13:24

Modulation Type: DSSS (Channel 11) :

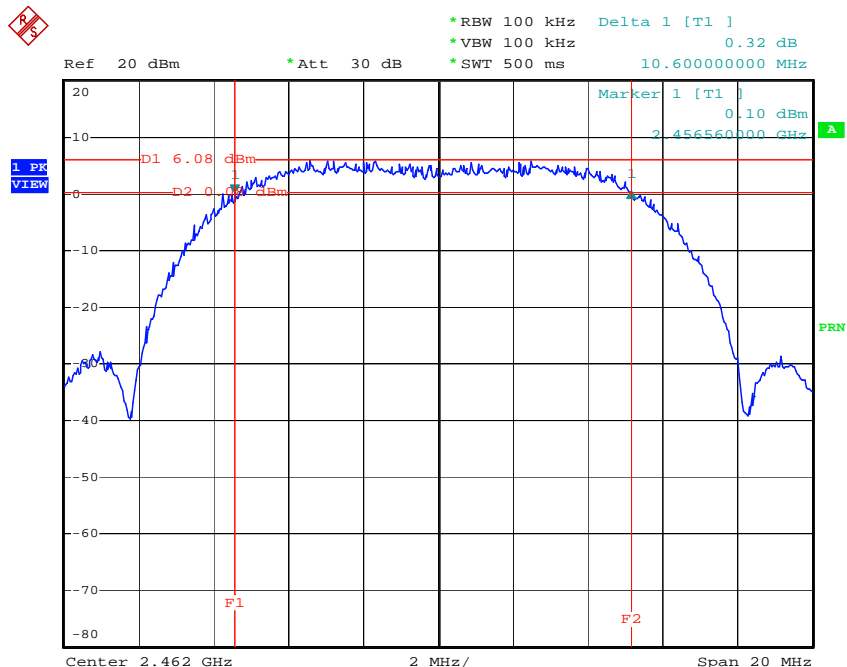


Date: 1.JUN.2005 12:15:24

Modulation Type: OFDM (Channel 01) :

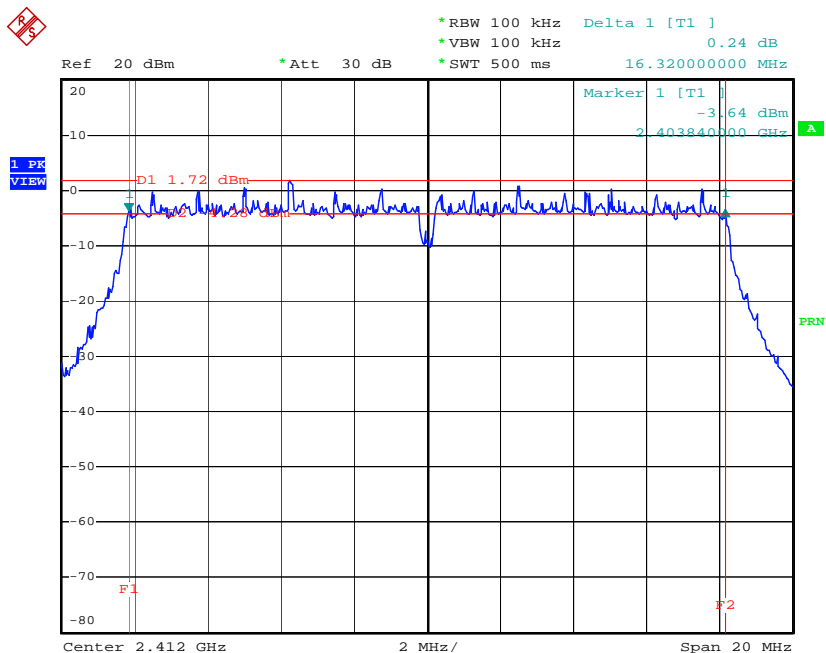


Date: 1.JUN.2005 12:24:37

Modulation Type: OFDM (Channel 06) :

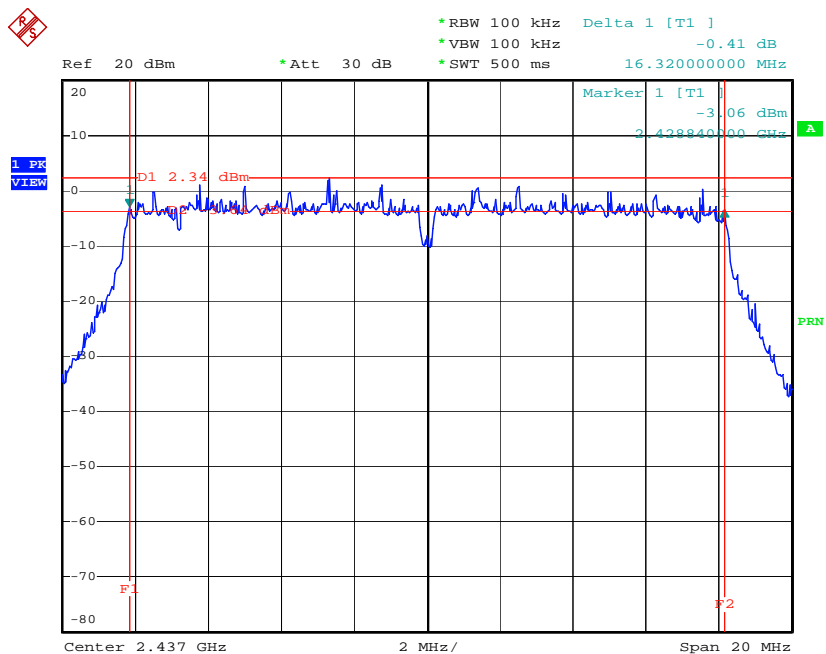

Date: 1.JUN.2005 12:34:01

Modulation Type: OFDM (Channel 11) :

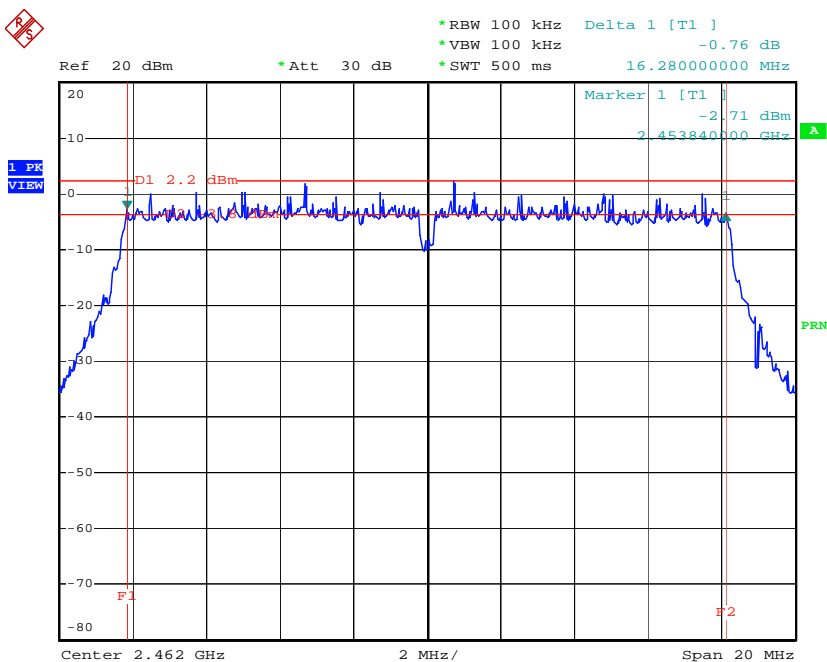

Date: 1.JUN.2005 12:36:10

### 4.3. Maximum Peak Conducted Output Power

#### 4.3.1. Applicable Standard

Section 15.247(b)(3): The maximum peak output power shall not exceed 1 watt (30dBm). Except as shown below, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the above stated values by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


#### 4.3.2. Instruments for the measurement

Item 19 and 21 of the table shown in section 5.

#### 4.3.3. Test Procedure

The radio output port of the EUT was connected to the peak power meter through an attenuator.

#### 4.3.4. Test Setup

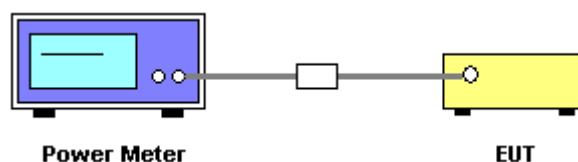

#### 4.3.5. Test Criteria

All test results complied with the requirements of 15.247(b)(3). Measurement Uncertainty is 1.5 dB.

#### 4.3.6. Test Result of Conducted Power

- Temperature: 26°C
- Relative Humidity: 64%
- Duty Cycle of the Equipment During the Test:
  - DSSS: 100%
  - OFDM: 88.80%
- Test Engineer: Eason Lu

Modulation Type	Channel No.	Frequency (MHz)	Output Power (dBm)	Limits (dBm)
DSSS	01	2412 MHz	17.97	30
DSSS	06	2437 MHz	17.72	30
DSSS	11	2462 MHz	18.16	30
OFDM	01	2412 MHz	19.81	30
OFDM	06	2437 MHz	19.54	30
OFDM	11	2462 MHz	20.04	30



## **4.4. Peak Power Spectral Density**

### **4.4.1. Applicable Standard**

Section 15.247(e): For digital modulation systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### **4.4.2. Instrument of the measurement**

Item 18 of the table shown in section 5.

### **4.4.3. Detailed settings of the instrument**


- Spectrum Analyzer : R&S FSP30
- Attenuation : Auto
- Center Frequency : 2412 MHz / 2437 MHz / 2462 MHz
- Span Frequency : 1.5 MHz
- RB : 3 kHz
- VB : 30 kHz
- Detector : Peak
- Trace : Max Hold
- Sweep Time : 500s

### **4.4.4. Test Procedure**

The radio output port of the EUT was connected to the spectrum analyzer through an attenuator.

The radio interface of the EUT was set to continuous transmitting mode.

### **4.4.5. Test Setup**

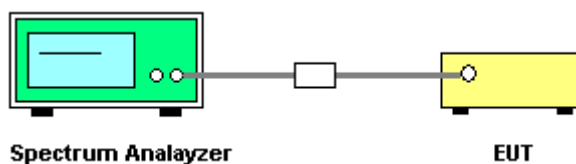

### **4.4.6. Test Criteria**


All test results complied with the requirements of 15.247(e). Measurement Uncertainty is 1.5 dB.

**4.4.7. Test Result**

- Temperature: 26°C
- Relative Humidity: 64%
- Duty Cycle of the Equipment During the Test:
  - DSSS: 100%
  - OFDM: 88.80%
- Test Engineer: Eason Lu


<b>Modulation Type</b>	<b>Channel No.</b>	<b>Frequency (MHz)</b>	<b>Power Density (dBm)</b>	<b>Limits (dBm)</b>
DSSS	01	2412 MHz	-8.39	8
DSSS	06	2437 MHz	-8.34	8
DSSS	11	2462 MHz	-7.76	8
OFDM	01	2412 MHz	-11.07	8
OFDM	06	2437 MHz	-11.71	8
OFDM	11	2462 MHz	-9.91	8

Modulation Type: DSSS (Channel 01) :

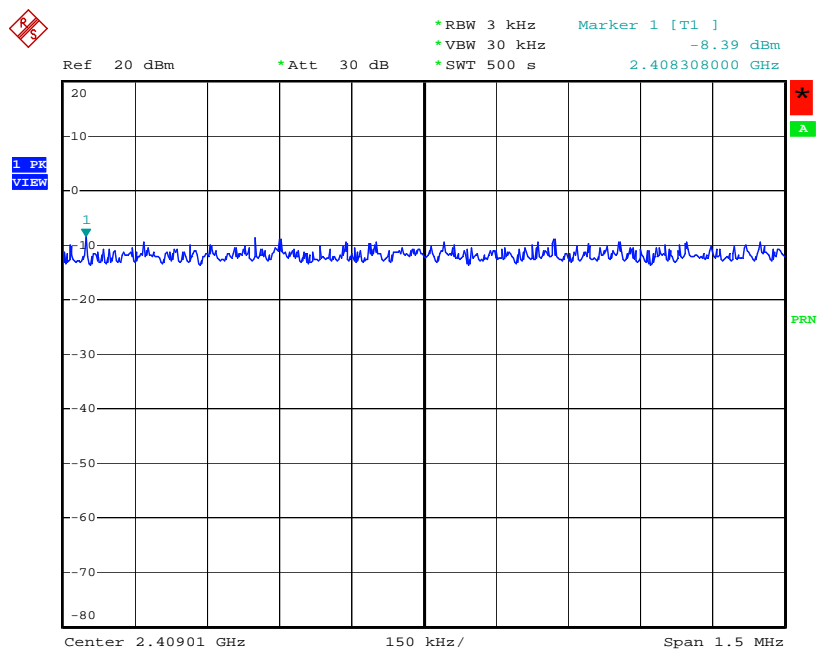


Date: 1.JUN.2005 12:09:10

Modulation Type: DSSS (Channel 06) :

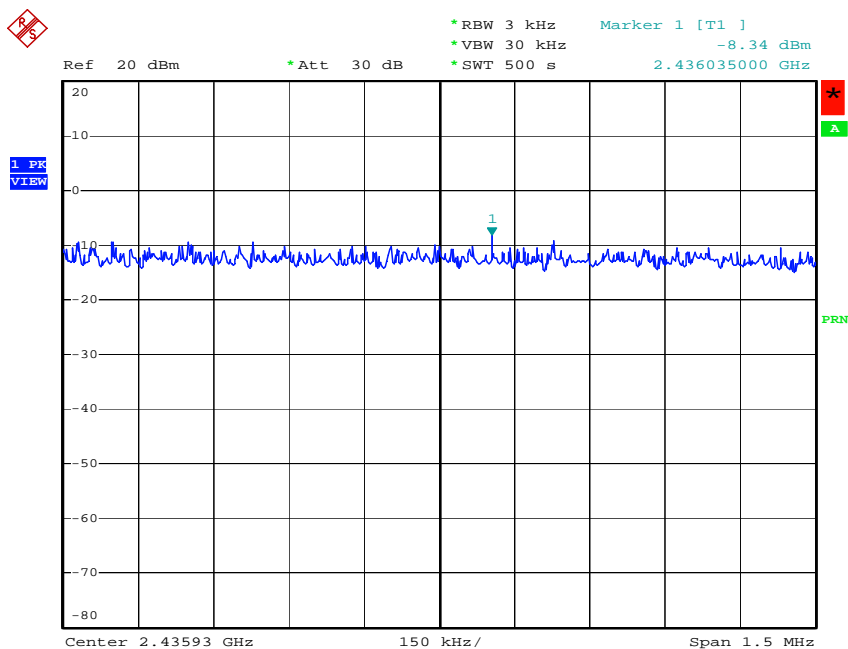


Date: 1.JUN.2005 12:11:30

Modulation Type: DSSS (Channel 11) :

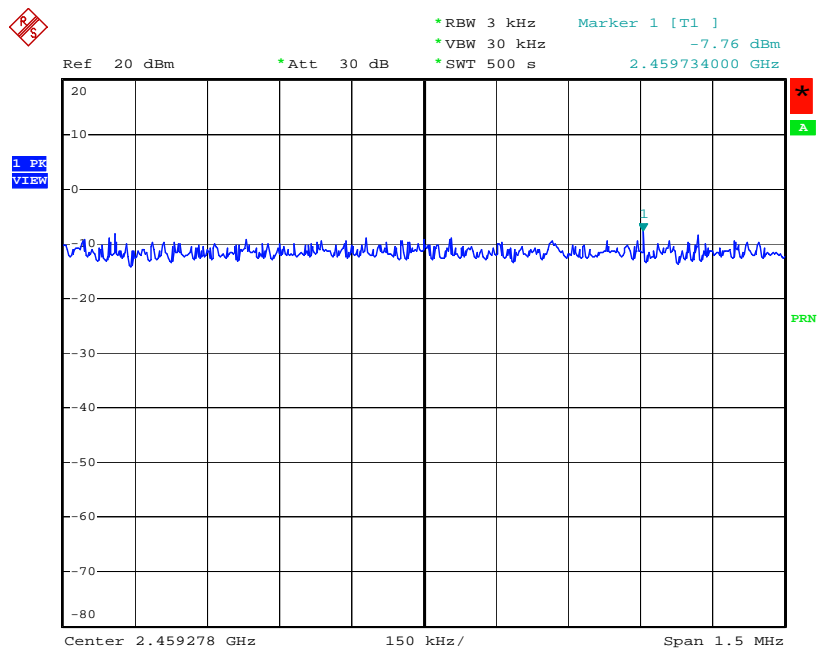


Date: 1.JUN.2005 12:18:53

Modulation Type: OFDM (Channel 01) :

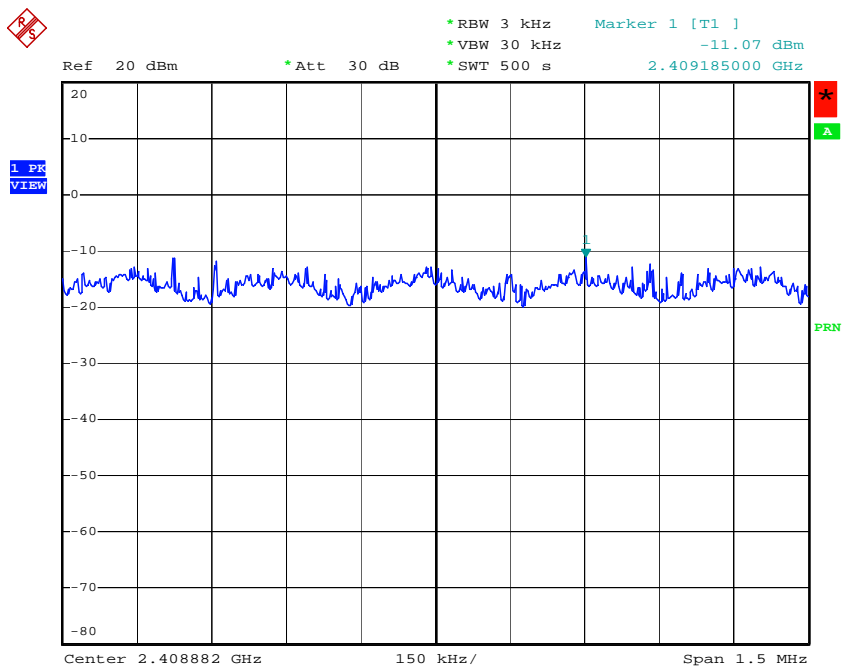


Date: 1.JUN.2005 12:28:17

Modulation Type: OFDM (Channel 06) :

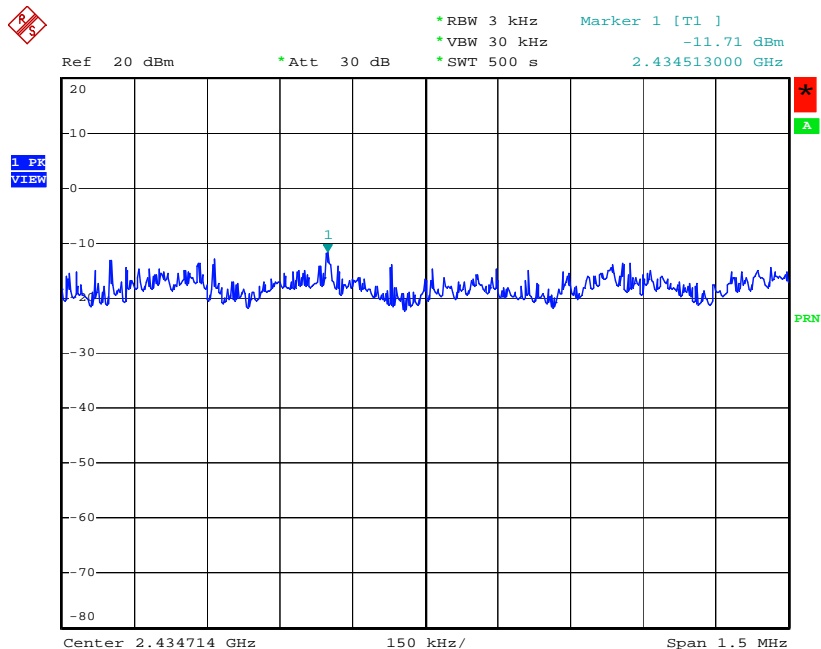

Date: 1.JUN.2005 12:32:18

Modulation Type: OFDM (Channel 11) :

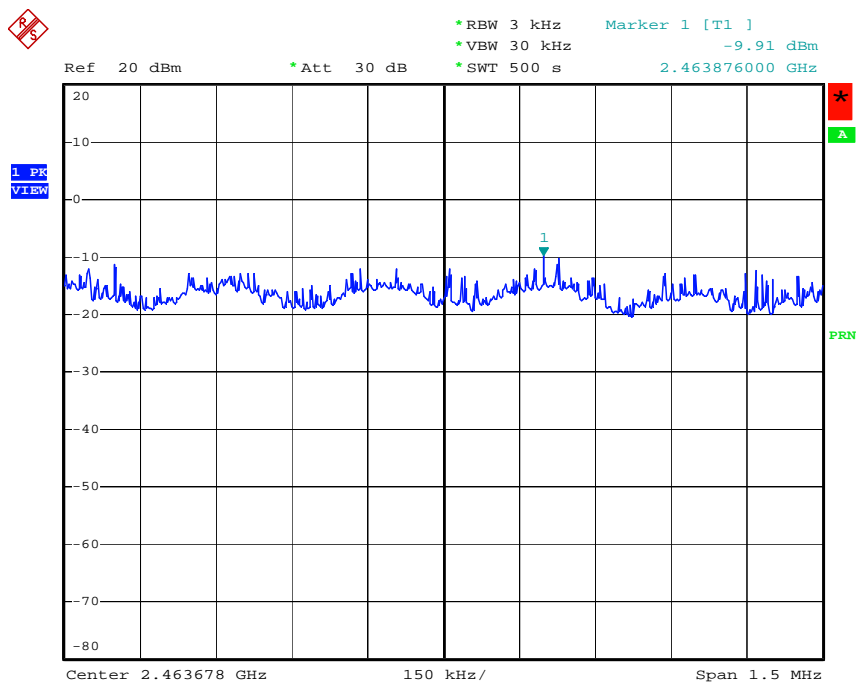

Date: 1.JUN.2005 12:40:11

## **4.5. Band Edges Emission**

### **4.5.1. Applicable Standard**

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

### **4.5.2. Instruments for the measurement**

Radiated measurement: Item 6 ~ 17 of the table shown in section 5.

Conducted measurement: Item 18 of the table shown in section 5.

### **4.5.3. Detailed settings of the instruments**

- Spectrum Analyzer : R&S FSP30 (Conducted Measurement)
  - Attenuation : Auto
  - Center Frequency : 2412 MHz / 2462 MHz
  - Span Frequency : 100 MHz
  - RB : 100 kHz
  - VB : 100 kHz
  - Detector : Peak
  - Trace : Max Hold
  - Sweep Time : Auto
  
- Spectrum Analyzer : R&S FSP40 (Radiated Measurement)
  - Attenuation : Auto
  - Center Frequency : 2412 MHz / 2462 MHz
  - Span Frequency : 100 MHz
  - RB : 1 MHz for PK value / 1 MHz for AV value
  - VB : 1 MHz for PK value / 10 Hz for AV value
  - Detector : Peak
  - Trace : Max Hold
  - Sweep Time : Auto

#### 4.5.4. Test Procedure

Only channel 01 and channel 11 were investigated.

##### **Radiated Measurement**


- The EUT was placed on a table 0.8 meter above the ground reference plane which is constituted by a turn table.
- The EUT was set 3 meters from the interference-receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the horn antenna is varied between one meter and four meters above ground to find the maximum value of the field strength.
- For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.

##### **Conducted Measurement**


The radio output port of the EUT was connected to the spectrum analyzer through an attenuator. The radio interface of the EUT was set to continuous transmitting mode.

#### 4.5.5. Test Setup

##### **Radiated Method**

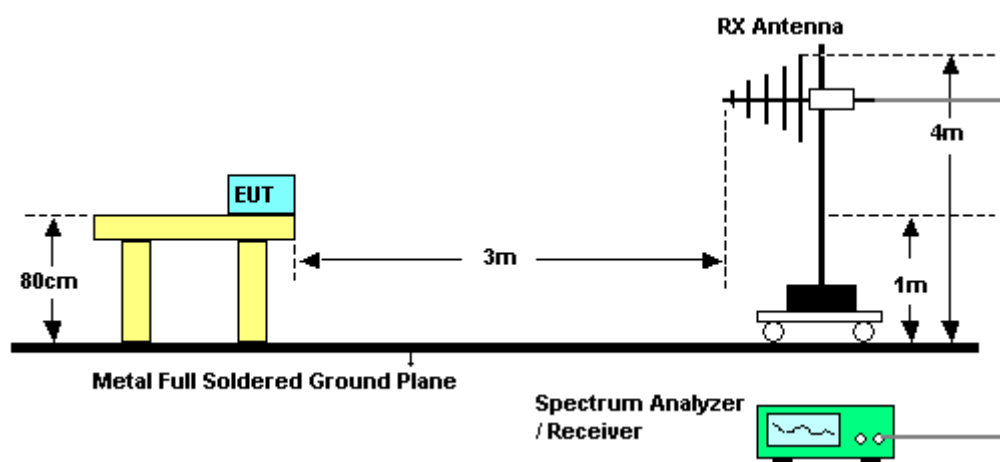

##### **Conducted Method**

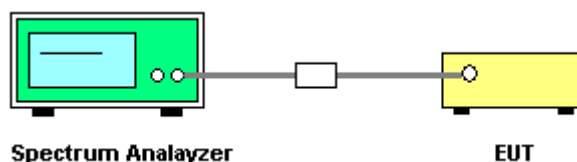


#### 4.5.6. Test Criteria

All test results complied with the requirements of 15.247(d). Measurement Uncertainty is  $1 \times 10^{-5}$ .

## Results of Radiated Emission Test

- Temperature: 26°C
- Relative Humidity: 64%
- Modulation Type: DSSS
- Tested Channel: CH01
- Test Engineer: Ted Chiu

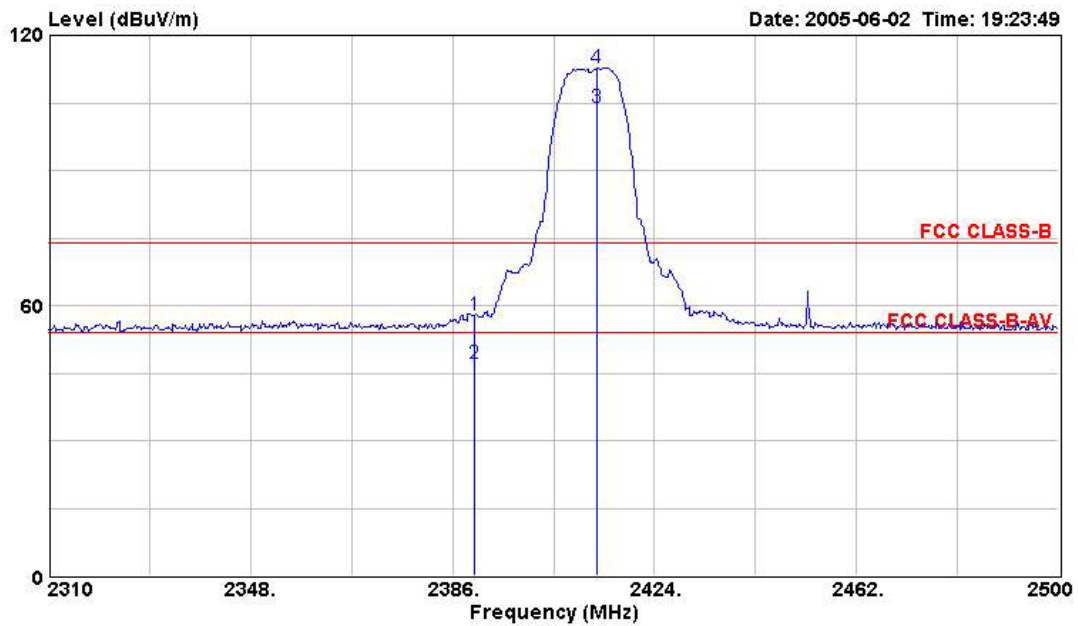

Site : 03CH03-HY  
Condition: FCC CLASS-B 3m HORN-ANT-6741-200505 VERTICAL  
EUT : SpeedTouch 585(i)v6  
Power : 120V/60Hz  
Model : ST585(i)v6  
Memo : TX CH01 2412MHz 11b


	Freq	Level	Over	Read	Limit	Cable	Preamp	
	MHz	dBuV/m	Limit	Level	Line	Factor	Loss	Factor
			dB	dBuV	dBuV/m	dB	dB	dB
1	2389.990	57.88	-16.12	27.76	74.00	30.12	1.90	0.00
2 0	2389.990	47.09	-6.91	16.97	54.00	30.12	1.90	0.00



## FCC TEST REPORT

Report No. : FR552534

- Temperature: 26°C
- Relative Humidity: 64%
- Modulation Type: DSSS
- Tested Channel: CH11
- Test Engineer: Ted Chiu

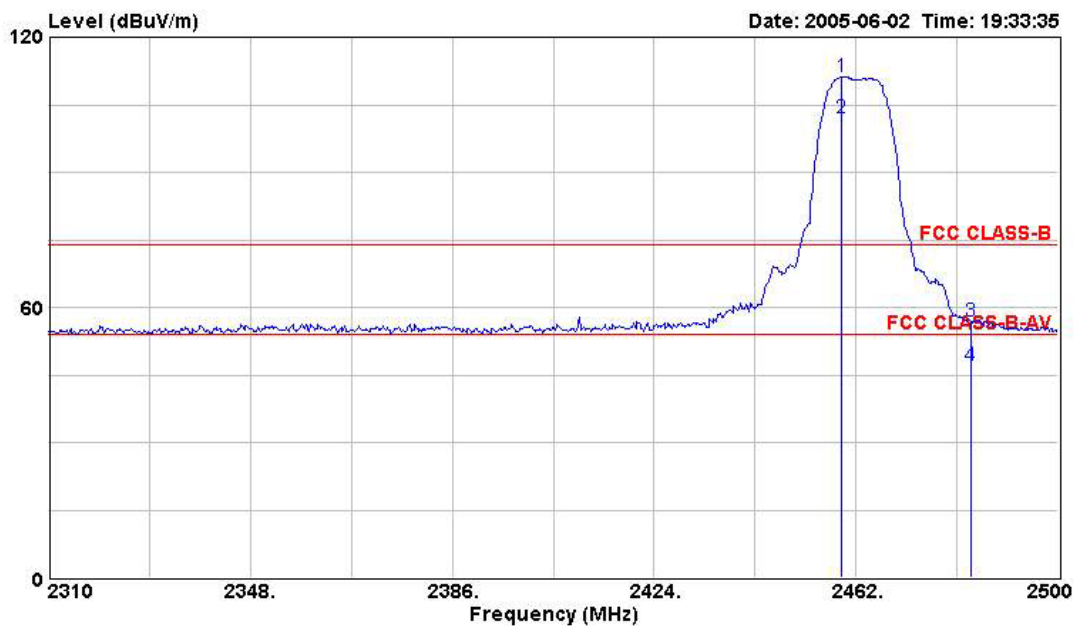


Site : 03CHO3-HY  
Condition: FCC CLASS-B 3m HORN-ANT-6741-200505 VERTICAL  
EUT : SpeedTouch 585(i)v6  
Power : 120V/60Hz  
Model : ST585(i)v6  
Memo : TX CH11 2462MHz 11b

	Freq	Level	Over	Read	Limit		Cable	Preamp	
	MHz	dBuV/m	Limit	Level	Line	Factor	Loss	Factor	Remark
			dB	dBuV	dBuV/m	dB	dB	dB	
3	2483.660	56.93	-17.07	26.60	74.00	30.33	1.96	0.00	Peak
4	2483.660	47.19	-6.81	16.86	54.00	30.33	1.96	0.00	Average

## FCC TEST REPORT

Report No. : FR552534


- Temperature: 26°C
- Relative Humidity: 64%
- Modulation Type: OFDM
- Tested Channel: CH01
- Test Engineer: Ted Chiu

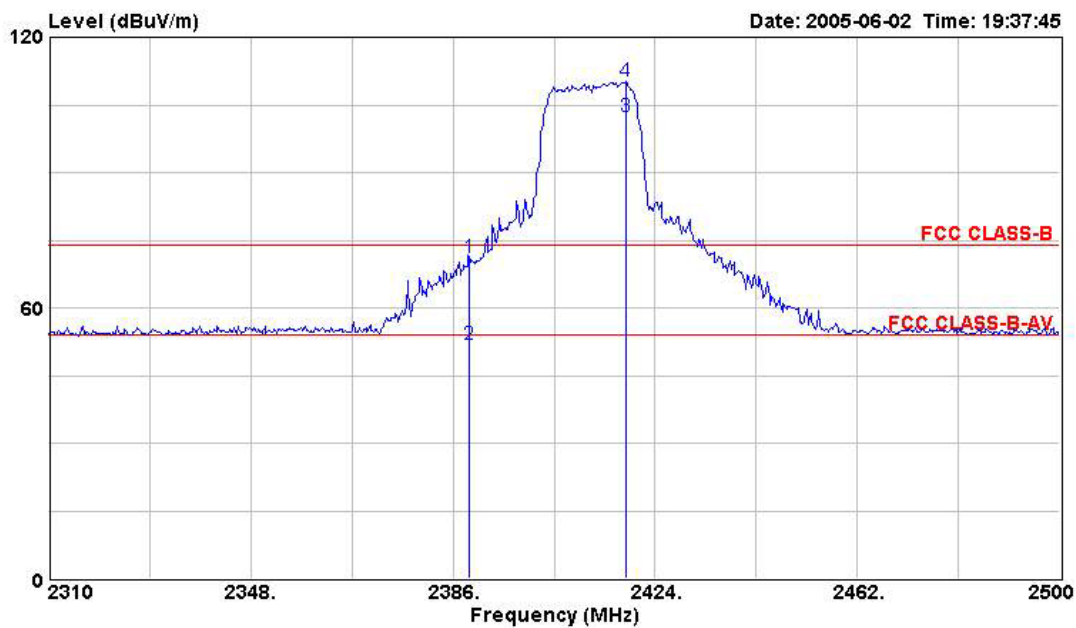

Site : 03CHO3-HY  
Condition: FCC CLASS-B 3m HORN-ANT-6741-200505 VERTICAL  
EUT : SpeedTouch 585(i)v6  
Power : 120V/60Hz  
Model : ST585(i)v6  
Memo : TX CH01 2412MHz 11g

	Freq	Level	Over	Read	Limit		Cable	Preamp	
	MHz	dBuV/m	Limit	Level	Line	Factor	Loss	Factor	Remark
			dB	dBuV	dBuV/m	dB	dB	dB	
1	0	2389.040	71.22	-2.78	41.10	74.00	30.12	1.90	0.00 Peak
2	0	2389.040	51.90	-2.10	21.78	54.00	30.12	1.90	0.00 Average

- Temperature: 26°C
- Relative Humidity: 64%
- Modulation Type: OFDM
- Tested Channel: CH11
- Test Engineer: Ted Chiu

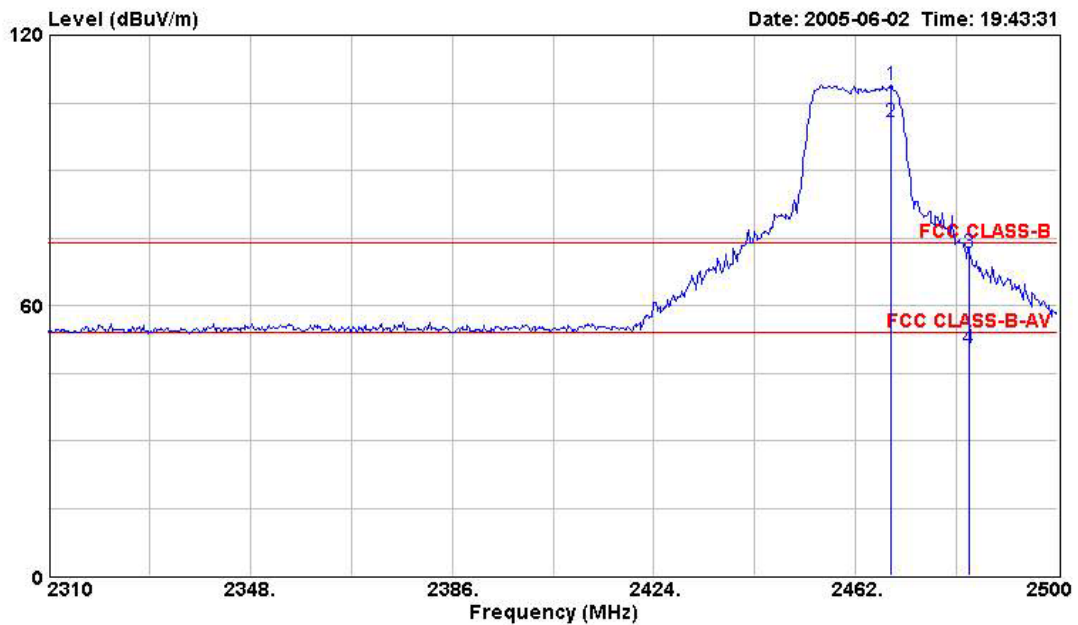


Site : 03CHO3-HY  
Condition: FCC CLASS-B 3m HORN-ANT-6741-200505 VERTICAL  
EUT : SpeedTouch 585(i)v6  
Power : 120V/60Hz  
Model : ST585(i)v6  
Memo : TX CH11 2462MHz 11g

	Freq	Level	Over	Read	Limit		Cable	Preamp	
	MHz	dBuV/m	Limit	Level	Line	Factor	Loss	Factor	Remark
			dB	dBuV	dBuV/m	dB	dB	dB	
3 0	2483.500	71.55	-2.45	41.22	74.00	30.33	1.96	0.00	Peak
4 0	2483.500	50.43	-3.57	20.10	54.00	30.33	1.96	0.00	Average


## Results of Conducted Emission Test

Modulation Type: DSSS (Channel 01) :

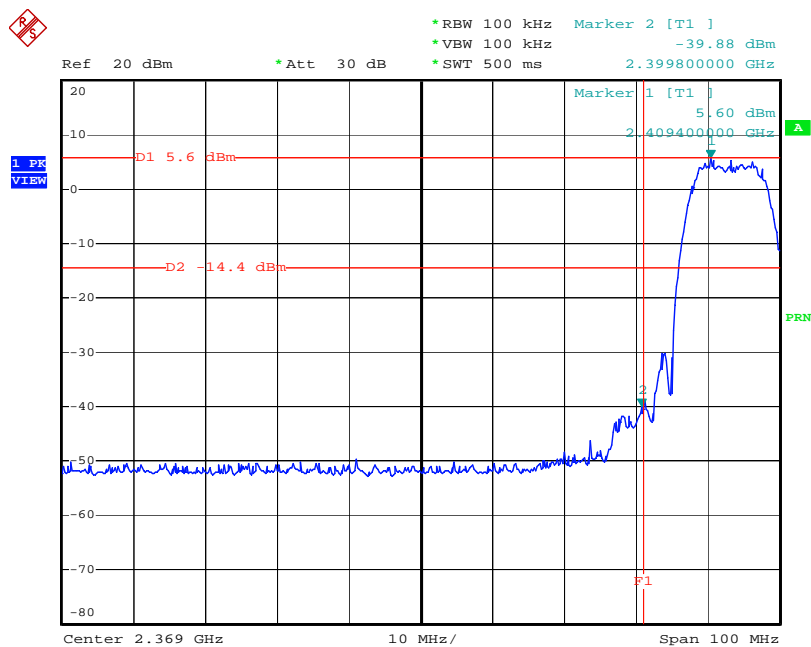


Date: 1.JUN.2005 12:06:17

Modulation Type: DSSS (Channel 11) :

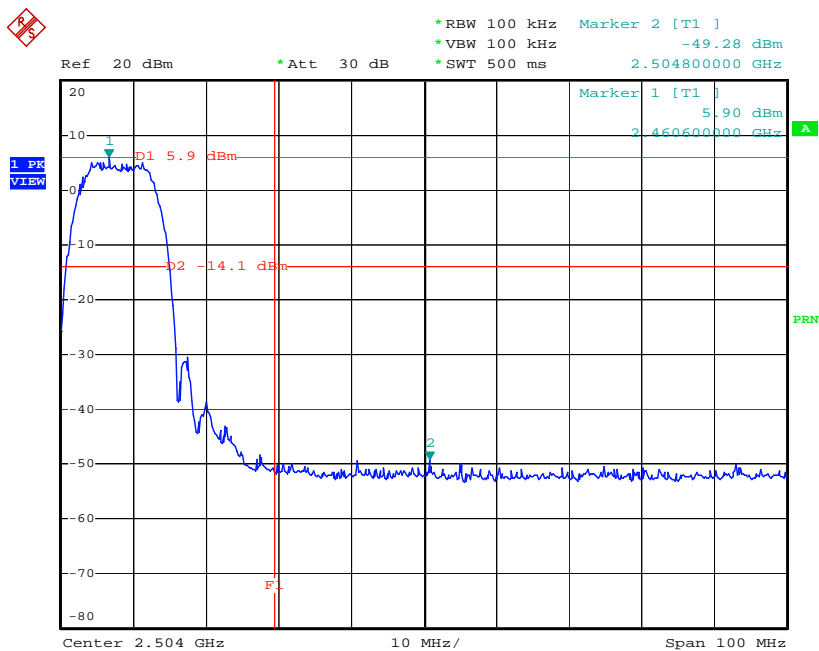


Date: 1.JUN.2005 12:16:51

Modulation Type: OFDM (Channel 01) :

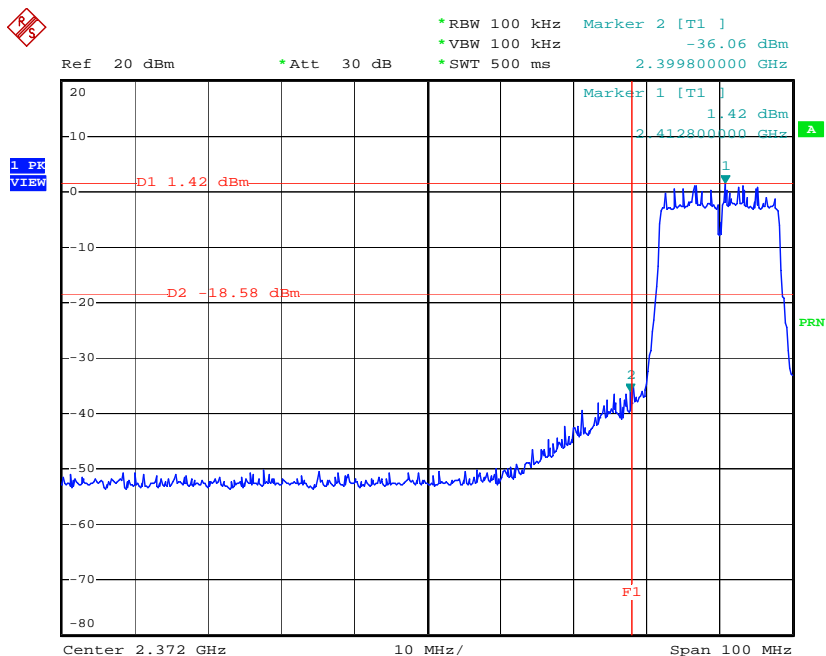

Date: 1.JUN.2005 12:26:13

Modulation Type: OFDM (Channel 11) :

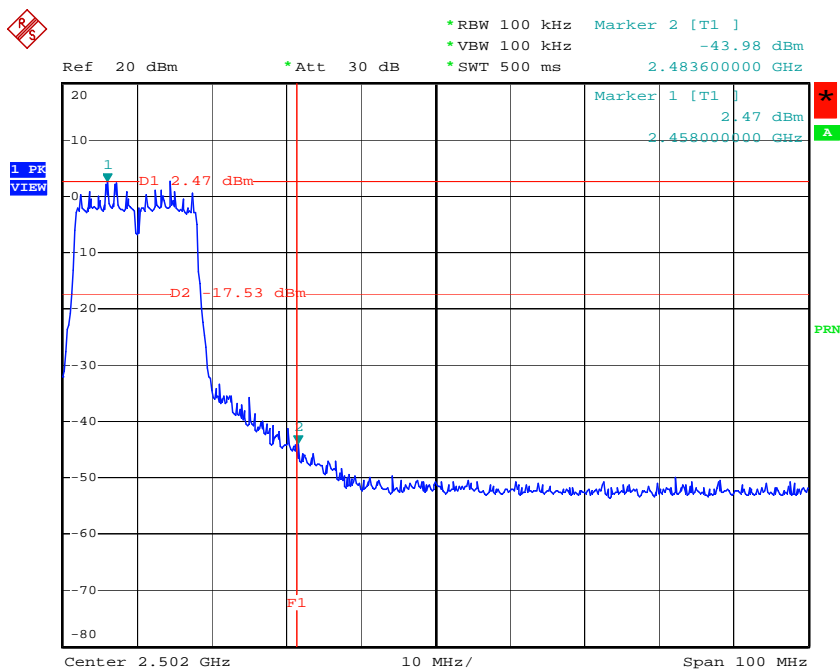

Date: 1.JUN.2005 12:38:08

#### **4.6. Conducted Emission**

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz and return leads of the EUT according to the methods defined in ANSI C63.4-2003 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

##### **4.6.1. Instrument for the measurement**

● Test Receiver	(R&S ESCS 30)
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


##### **4.6.2. Test Procedure**

- a. The EUT was set to the normal operation.
- b. The EUT was placed on a desk 0.8 meters height from the metal ground plane and 0.4 meter from the conducting wall of the shielding room and it was kept at least 0.8 meters from any other grounded conducting surface.
- c. Connection of the EUT to the AC mains power was done through a Line Impedance Stabilization Network (LISN).
- d. All the support units were connected to the other LISN's.
- e. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- f. The CISPR states that a 50 ohm, 50 microhenry LISN should be used.
- g. Both sides of AC line were checked for maximum conducted interference.
- h. The frequency range from 150 kHz to 30 MHz was investigated.
- i. The test-receiver system was set in its Peak Detect Function and specified bandwidth with Maximum Hold Mode.

## 4.6.3. Results of Conducted Emission Test


- ADSL operational Mode: ADSL2+ Annex A
- Frequency Range investigated: from 150 kHz to 30 MHz.
- Temperature: 24.4°C
- Relative Humidity: 53 %

■ The test was passed at the minimum margin that marked by the frame in the following table

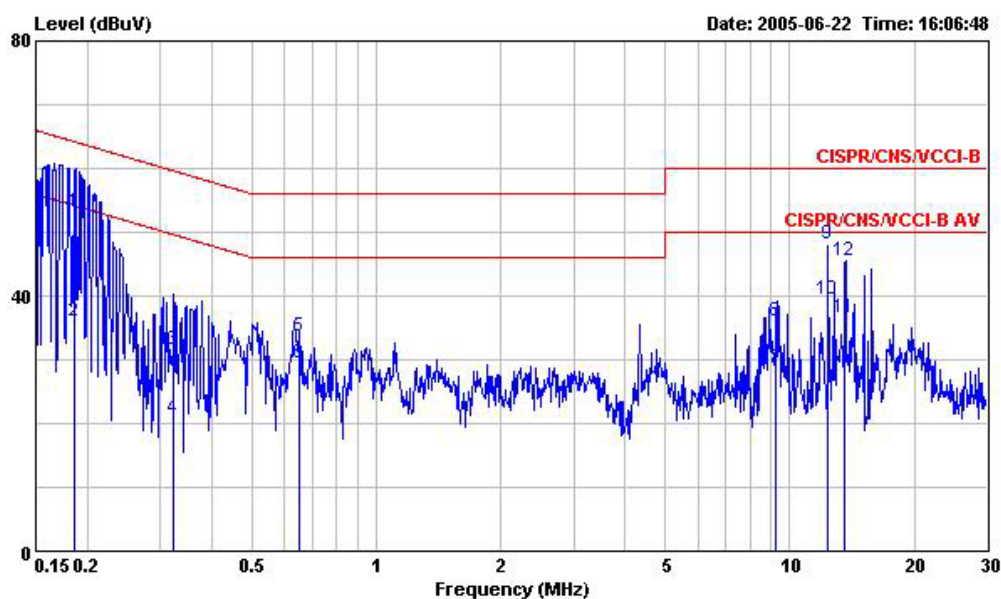

Site : CO04-HY  
 Condition : CISPR/CNS/VCCI-B LISN 2003 /008 LINE  
 EUT : ST585v6  
 Power : 110V 60Hz  
 Model : LAN 10/100Mbps  
 TEST PORT : AC PORT  
 ADSL mode : ADSL 2+ ANNEX A 100Mbps  
 Loop Length : 3000 ft

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
		dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1866660	53.20	-10.98	64.18	52.82	0.10	0.28	QP
2	0.1866660	35.98	-18.20	54.18	35.60	0.10	0.28	Average
3	0.3234010	31.59	-28.03	59.62	31.18	0.10	0.31	QP
4	0.3234010	20.77	-28.85	49.62	20.36	0.10	0.31	Average
5	0.6509790	33.60	-22.40	56.00	32.89	0.10	0.61	QP
6	0.6509790	29.44	-16.56	46.00	28.73	0.10	0.61	Average
7	9.255	28.55	-21.45	50.00	27.91	0.19	0.45	Average
8	9.255	36.12	-23.88	60.00	35.48	0.19	0.45	QP
9	12.355	48.14	-11.86	60.00	46.96	0.20	0.98	QP
10	12.355	39.40	-10.60	50.00	38.22	0.20	0.98	Average
11	13.588	36.48	-13.52	50.00	35.13	0.20	1.15	Average
12	13.588	45.58	-14.42	60.00	44.23	0.20	1.15	QP

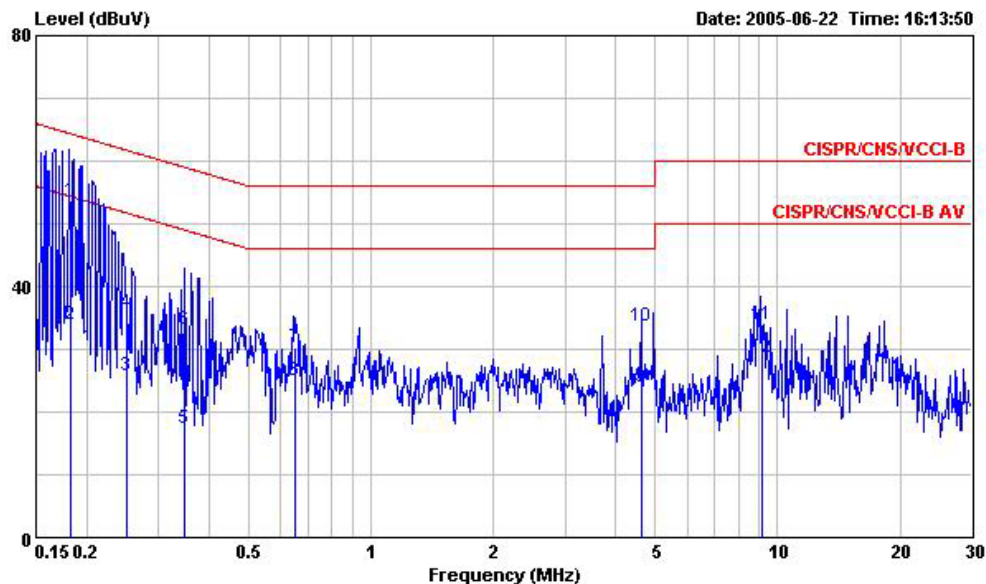

Site : CO04-HY  
 Condition : CISPR/CNS/VCCI-B LISN 2003 /008 NEUTRAL  
 EUT : ST585v6  
 Power : 110V 60Hz  
 Model : LAN 10/100Mbps  
 TEST PORT : AC PORT  
 ADSL mode : ADSL 2+ ANNEX A 100Mbps  
 Loop Length : 3000 ft


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1830480	53.76	-10.59	64.35	53.36	0.10	0.30	QP
2	0.1830480	34.06	-20.29	54.35	33.66	0.10	0.30	Average
3	0.2510210	25.84	-25.88	51.72	25.47	0.10	0.27	Average
4	0.2510210	35.87	-25.85	61.72	35.50	0.10	0.27	QP
5	0.3483010	17.45	-31.55	49.00	17.05	0.10	0.30	Average
6	0.3483010	33.16	-25.84	59.00	32.76	0.10	0.30	QP
7	0.6480130	30.34	-25.66	56.00	29.63	0.10	0.61	QP
8	0.6480130	25.00	-21.00	46.00	24.29	0.10	0.61	Average
9	4.623	24.05	-21.95	46.00	23.65	0.12	0.28	Average
10	4.623	33.79	-22.21	56.00	33.39	0.12	0.28	QP
11	9.148	33.82	-26.18	60.00	33.19	0.19	0.44	QP
12	9.148	28.79	-21.21	50.00	28.16	0.19	0.44	Average




#### 4.6.4. Photographs of Conducted Powerline Test Configuration

- The photographs show the configuration that generates the maximum emission.

FRONT VIEW

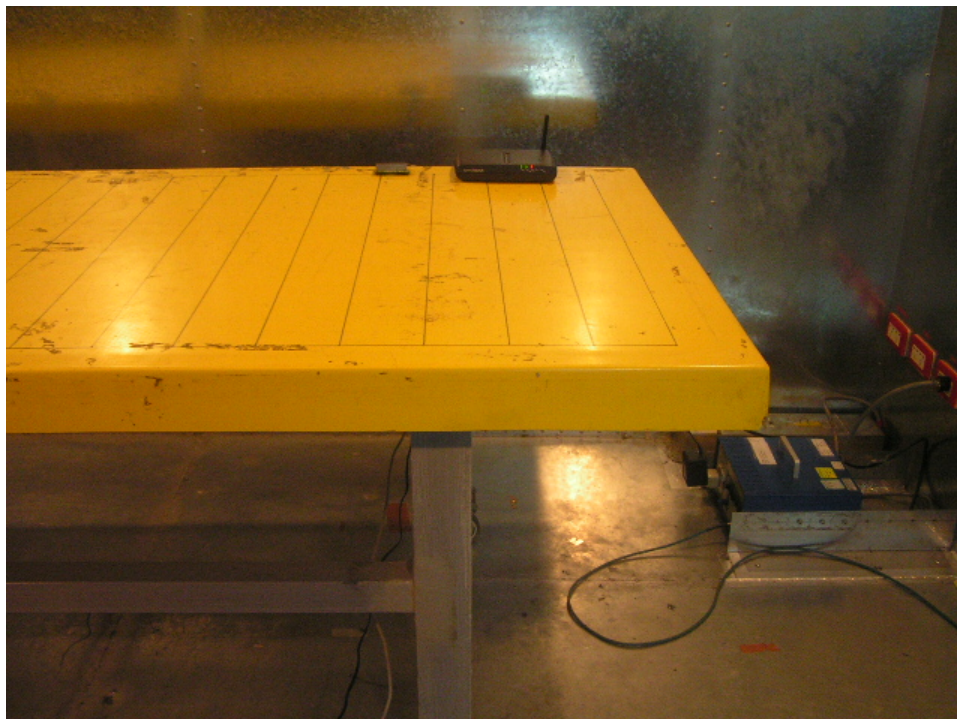

REAR VIEW

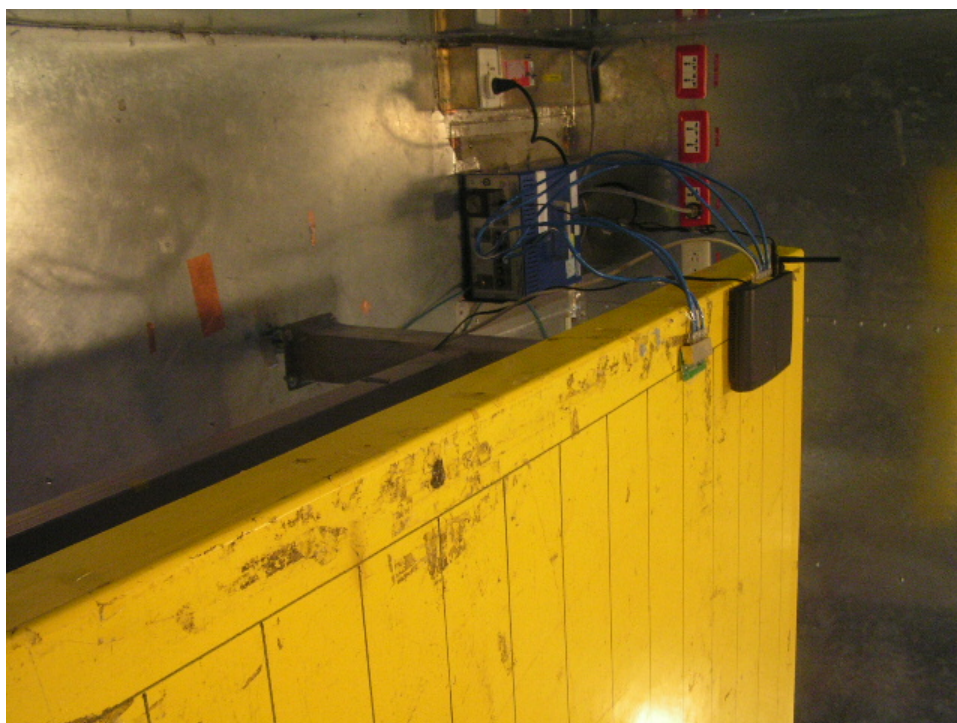

#### **4.7. Radiated Emission**


Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defines in ANSI C63.4-2003. The EUT was placed, 0.8 meter above the ground plane, as shown in section 5.4.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions

##### **4.7.1. Instruments of the measurement**

- Amplifier (SCHAFFNER CPA9231A)
  - RF Gain 30 dB
  - Signal Input 9 kHz -2 GHz
  
- Spectrum Analyzer (R&S FSP40 )
  - Attenuation 10 dB
  - Start Frequency 1 GHz
  - Stop Frequency 18 GHz
  - Resolution Bandwidth 1 MHz
  - Video Bandwidth 1 MHz
  - Signal Input 9 kHz to 40 GHz
  
- Amplifier (MITEQ AFS44)
  - RF Gain 40 dB
  - Signal Input 100 MHz to 26.5 GHz

**4.7.2. Test Procedure**

1. The EUT was placed on a rotatable table top 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
5. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
8. For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

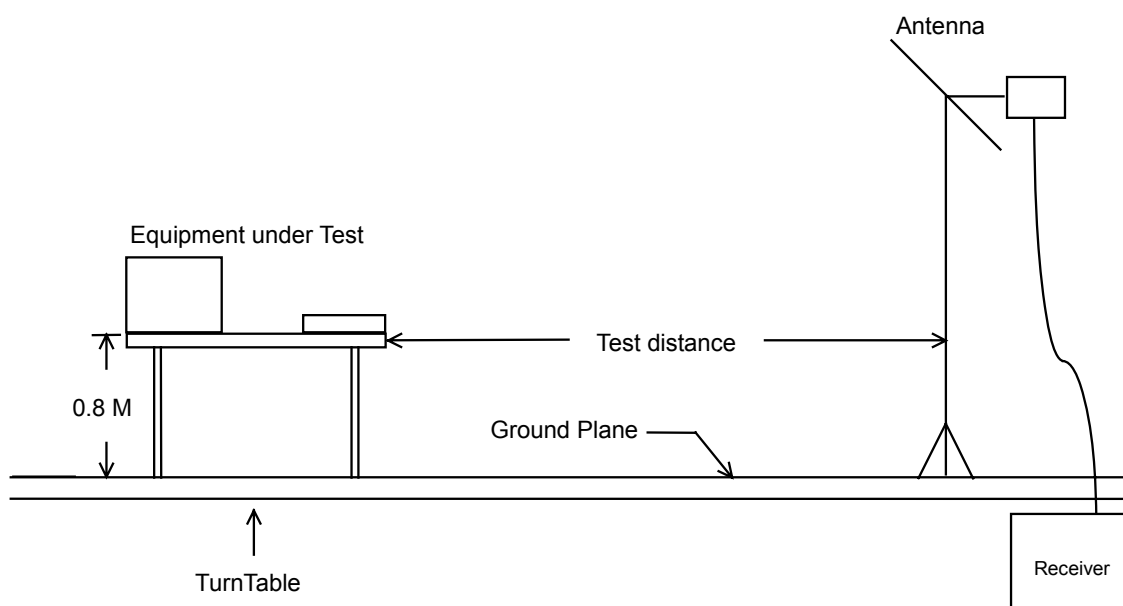**4.7.3. Typical Test Setup Layout of Radiated Emission**

## 4.7.4. Results of Radiated Emission Test

- ADSL operation mode: ADSL2+ Annex A
- Radio operation mode: Continuous transmission
- Test Mode: OFDM CH06


Note:

This mode is determined as the worst-case mode from all possible combinations between the available modulations and channels.

- Test Distance: 3 M
- Temperature: 27°C
- Relative Humidity: 60%
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level


■ The test was passed at the minimum margin that marked by the frame in the following table

- Spurious Emission

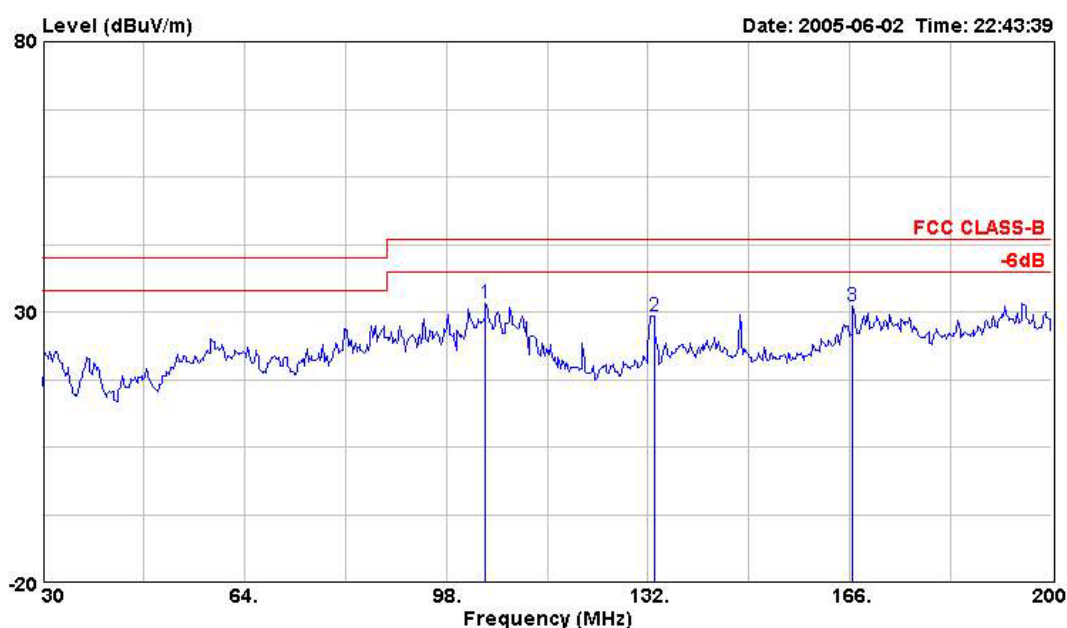


Site : 03CH03-HY  
 Condition: FCC CLASS-B 3m BIC-9124--301 HORIZONTAL  
 EUT : SpeedTouch 585(i)v6  
 Power : 120V/60Hz  
 Model : ST585(i)v6  
 Memo : TX CH06 2437MHz 11g

	Freq	Level	Over	Read	Limit		Cable	Preamp	
	MHz	dBuV/m	Limit	Level	Line	Factor	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB	dB	
1	104.630	31.70	-11.80	51.52	43.50	-19.82	0.99	30.47	Peak
2	133.020	29.32	-14.18	46.47	43.50	-17.15	1.15	30.72	Peak
3	166.510	31.19	-12.31	46.71	43.50	-15.52	1.28	30.11	Peak

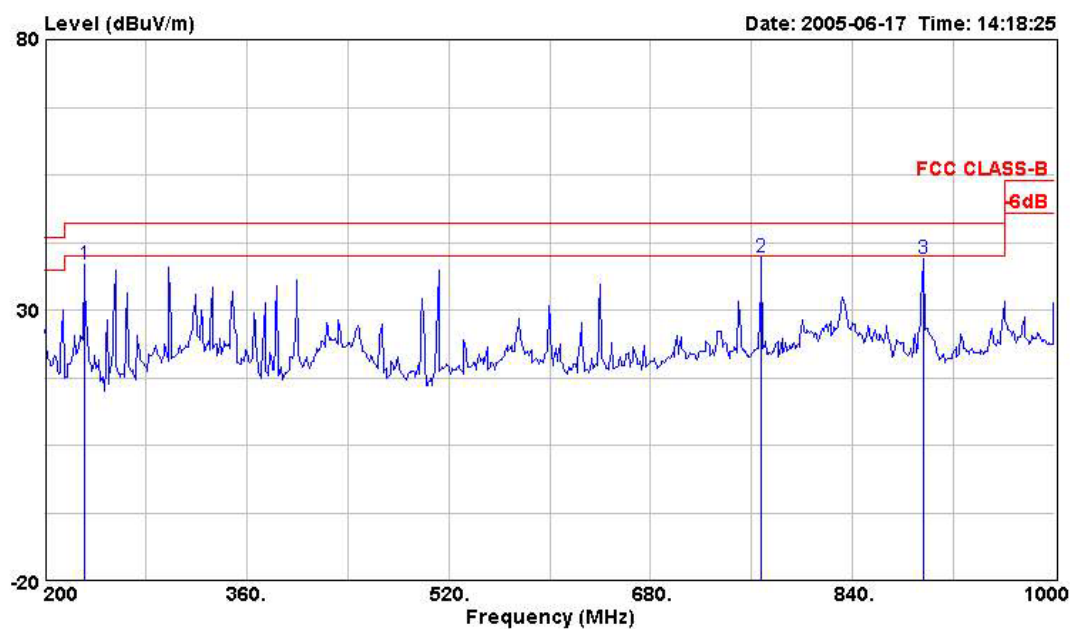


Site : 03CH03-HY  
 Condition: FCC CLASS-B 3m LOG-9111-221 HORIZONTAL  
 EUT : SpeedTouch 585(i)v6  
 Power : 120V/60Hz  
 Model : ST585(i)v6  
 Memo : TX CH06 2437MHz 11g

	Freq	Level	Over	Read	Limit		Cable	Preamp	
	MHz	dBuV/m	Limit	Level	Line	Factor	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB	dB	
1	231.200	38.48	-7.52	54.53	46.00	-16.05	1.48	31.30	Peak
2 0	768.000	39.63	-6.37	45.85	46.00	-6.22	2.79	30.53	Peak
3 0	896.000	39.44	-6.56	44.58	46.00	-5.14	3.11	29.97	Peak

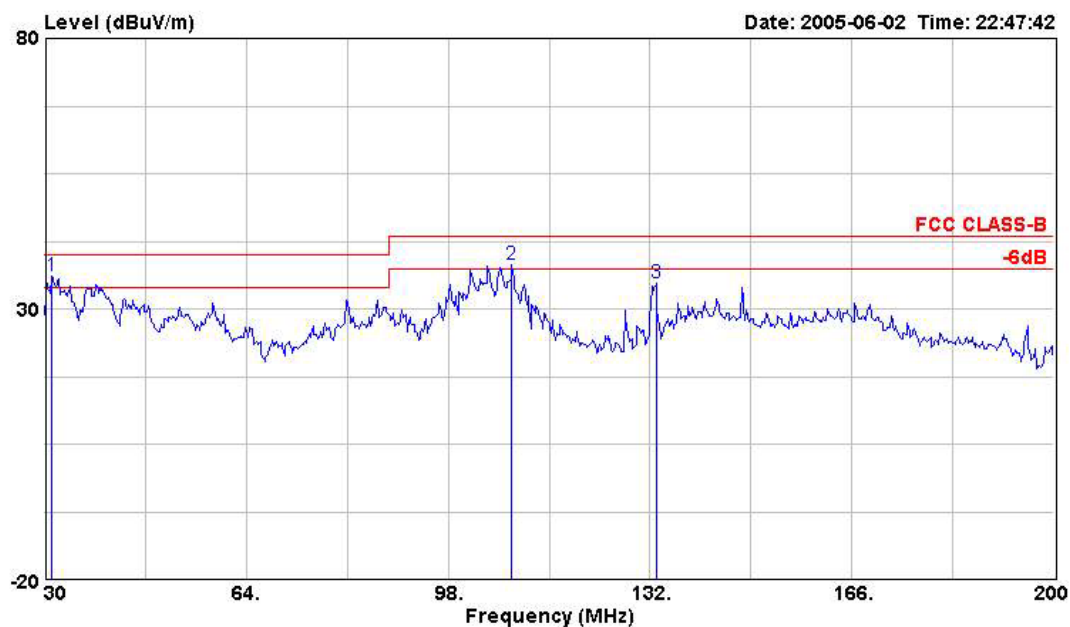

Site : 03CHO3-HY  
 Condition: FCC CLASS-B 3m BIC-9124--301 VERTICAL  
 EUT : SpeedTouch 585(i)v6  
 Power : 120V/60Hz  
 Model : ST585(i)v6  
 Memo : TX CH06 2437MHz 11g

	Freq	Level	Over	Read	Limit		Cable	Preamp	
	MHz	dBuV/m	Limit	Level	Line	Factor	Loss	Factor	Remark
			dB	dBuV	dBuV/m	dB	dB	dB	
1	31.190	36.03	-3.97	52.97	40.00	-16.94	0.57	30.28	Peak
2	108.710	38.23	-5.27	57.29	43.50	-19.06	1.02	30.33	Peak
3	133.020	34.62	-8.88	51.77	43.50	-17.15	1.15	30.72	Peak

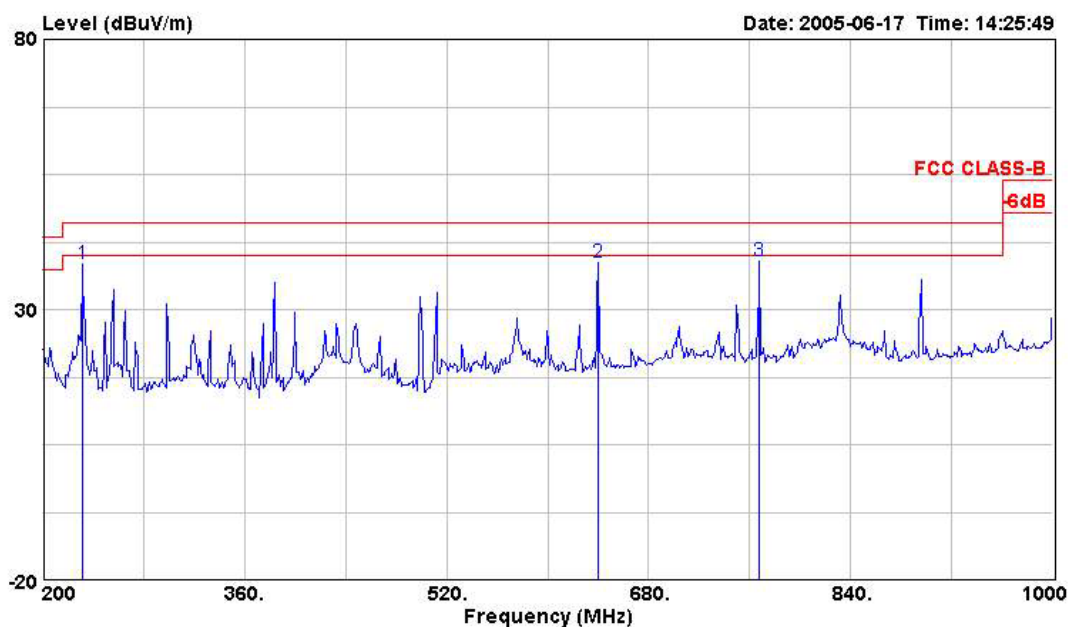

Site : 03CH03-HY  
 Condition: FCC CLASS-B 3m LOG-9111-221 VERTICAL  
 EUT : SpeedTouch 585(i)v6  
 Power : 120V/60Hz  
 Model : ST585(i)v6  
 Memo : TX CH06 2437MHz 11g


	Freq	Level	Over	Read	Limit		Cable	Preamp	
	MHz	dBuV/m	Limit	Level	Line	Factor	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB	dB	
1	231.200	38.52	-7.48	54.57	46.00	-16.05	1.48	31.30	Peak
2	640.000	38.69	-7.31	46.30	46.00	-7.61	2.47	30.61	Peak
3 0	768.000	39.00	-7.00	45.22	46.00	-6.22	2.79	30.53	Peak



- ADSL operation mode: ADSL2+ Annex A
- Radio operation mode: Continuous transmission
- Test Mode: DSSS CH01
- Test Distance: 3 M
- Temperature: 27°C
- Relative Humidity: 60%
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

■ The test was passed at the minimum margin that marked by the frame in the following table


- Spurious Emission

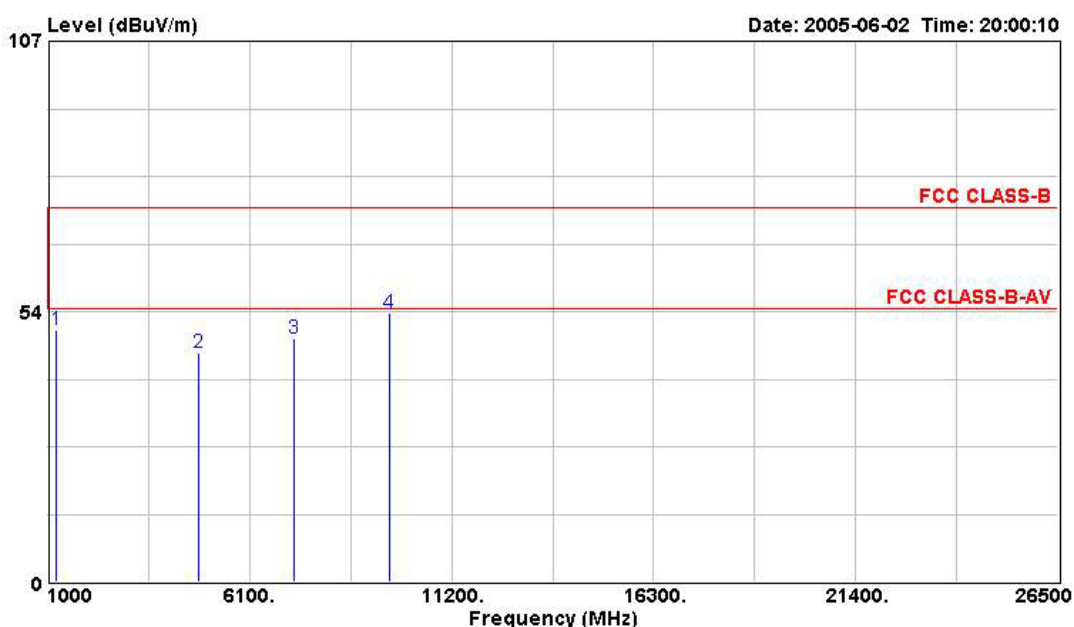

Site : 03CH03-HY  
 Condition: FCC CLASS-B 3m HORN-ANT-6741-200505 HORIZONTAL  
 EUT : SpeedTouch 585(i)v6  
 Power : 120V/60Hz  
 Model : ST585(i)v6  
 Memo : TX CH01 2412MHz 11b

	Freq	Level	Over	Read	Limit		Cable	Preamp	
	MHz	dBuV/m	Limit	Level	Line	Factor	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB	dB	
1	1214.000	49.99	-24.01	64.00	74.00	-14.01	1.33	40.09	Peak
2	4824.000	45.43	-28.57	51.27	74.00	-5.84	2.84	41.80	PEAK
3	7236.000	48.20	-25.80	50.78	74.00	-2.58	3.62	42.18	PEAK
4	9648.000	53.24	-20.76	49.86	74.00	3.38	4.01	39.01	PEAK



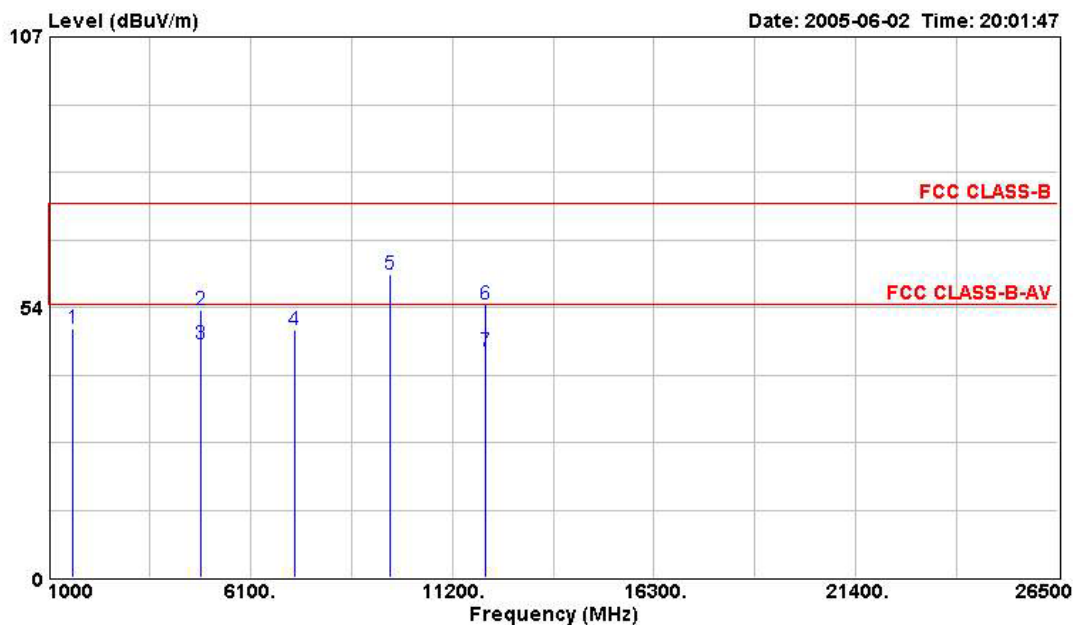


Site : 03CH03-HY  
 Condition: FCC CLASS-B 3m HORN-ANT-6741-200505 VERTICAL  
 EUT : SpeedTouch 585(i)v6  
 Power : 120V/60Hz  
 Model : ST585(i)v6  
 Memo : TX CH01 2412MHz 11b

	Freq	Level	Over	Read	Limit	Cable	Preamp	
	MHz	dBuV/m	Limit	Level	Line	Factor	Loss	Remark
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB	dB
1	1606.000	49.19	-24.81	62.17	74.00	-12.98	1.52	40.32 Peak
2	4832.000	52.99	-21.01	58.81	74.00	-5.82	2.86	41.80 PEAK
3	4832.000	46.06	-7.94	51.88	54.00	-5.82	2.86	41.80 Average
4	7232.000	49.00	-25.00	51.60	74.00	-2.60	3.62	42.20 PEAK
5	9648.000	60.07	-13.93	56.69	74.00	3.38	4.01	39.01 PEAK
6	12056.000	54.15	-19.85	49.85	74.00	4.30	4.63	39.58 PEAK
7	12056.000	44.68	-9.32	40.38	54.00	4.30	4.63	39.58 Average

- ADSL operation mode: ADSL2+ Annex A
- Radio operation mode: Continuous transmission
- Test Mode: DSSS CH 06
- Test Distance: 3 M
- Temperature: 27°C
- Relative Humidity: 60%
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level


■ The test was passed at the minimum margin that marked by the frame in the following table

- Spurious Emission

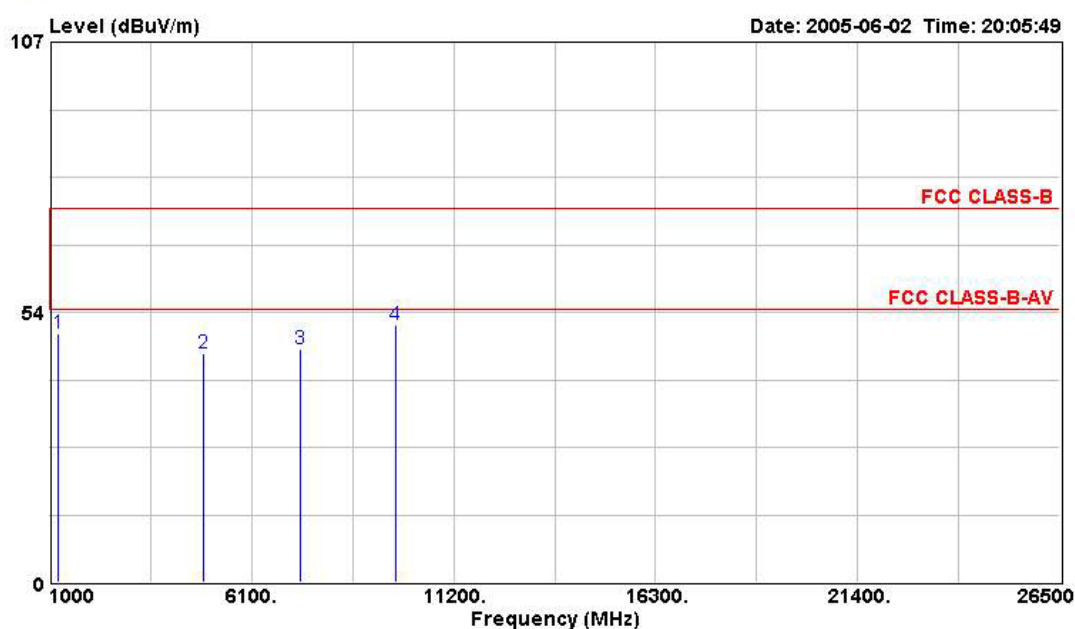

Site : 03CH03-HY  
 Condition: FCC CLASS-B 3m HORN-ANT-6741-200505 HORIZONTAL  
 EUT : SpeedTouch 585(i)v6  
 Power : 120V/60Hz  
 Model : ST585(i)v6  
 Memo : TX CH06 2437MHz 11b

	Freq	Level	Over	Read	Limit		Cable	Preamp	
	MHz	dBuV/m	Limit	Level	Line	Factor	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB	dB	
1	1214.000	49.30	-24.70	63.31	74.00	-14.01	1.33	40.09	Peak
2	4876.000	45.40	-28.60	51.12	74.00	-5.72	2.87	41.80	PEAK
3	7312.000	46.33	-27.67	48.64	74.00	-2.31	3.65	42.11	PEAK
4	9748.000	51.00	-23.00	47.47	74.00	3.53	4.00	39.04	PEAK

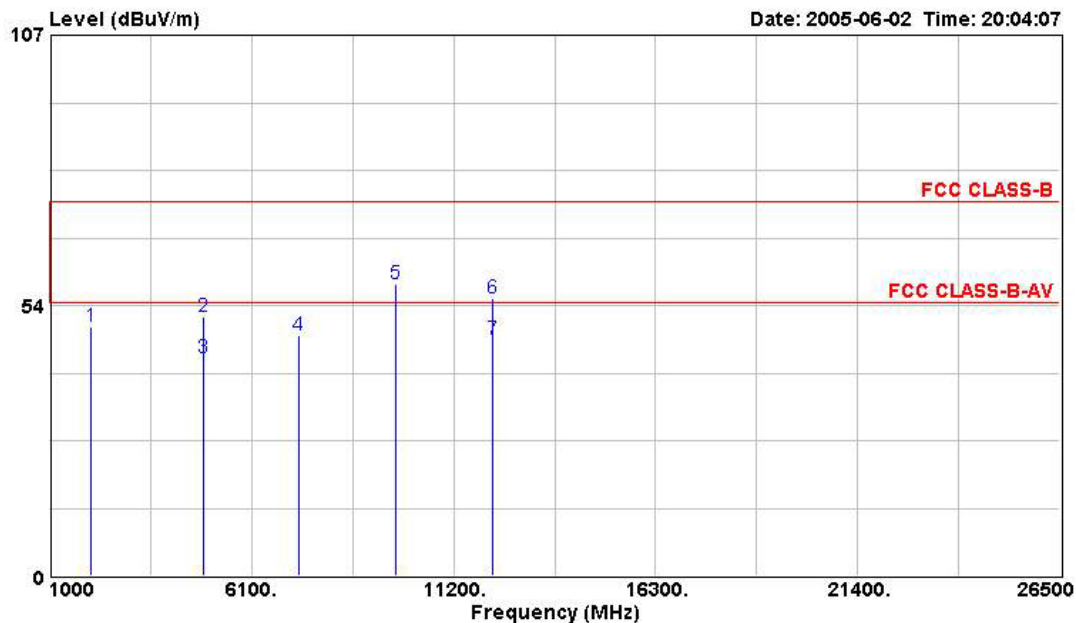


Site : 03CHO3-HY  
 Condition: FCC CLASS-B 3m HORN-ANT-6741-200505 VERTICAL  
 EUT : SpeedTouch 585(i)v6  
 Power : 120V/60Hz  
 Model : ST585(i)v6  
 Memo : TX CHO6 2437MHz 11b

	Freq	Level	Over	Read	Limit		Cable	Preamp	
	MHz	dBuV/m	Limit	Level	Line	Factor	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB	dB	
1	2046.000	49.19	-24.81	60.67	74.00	-11.48	1.73	40.81	Peak
2	4876.000	51.12	-22.88	56.84	74.00	-5.72	2.87	41.80	PEAK
3	4876.000	43.22	-10.78	48.94	54.00	-5.72	2.87	41.80	Average
4	7300.000	47.74	-26.26	50.08	74.00	-2.34	3.65	42.13	PEAK
5	9748.000	57.79	-16.21	54.26	74.00	3.53	4.00	39.04	PEAK
6	12184.000	54.84	-19.16	50.60	74.00	4.24	4.68	39.55	PEAK
7	12184.000	46.75	-7.25	42.51	54.00	4.24	4.68	39.55	Average

- ADSL operation mode: ADSL2+ Annex A
- Radio operation mode: Continuous transmission
- Test Mode: DSSS CH11
- Test Distance: 3 M
- Temperature: 27°C
- Relative Humidity: 60 %
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level


■ The test was passed at the minimum margin that marked by the frame in the following table

- Spurious Emission

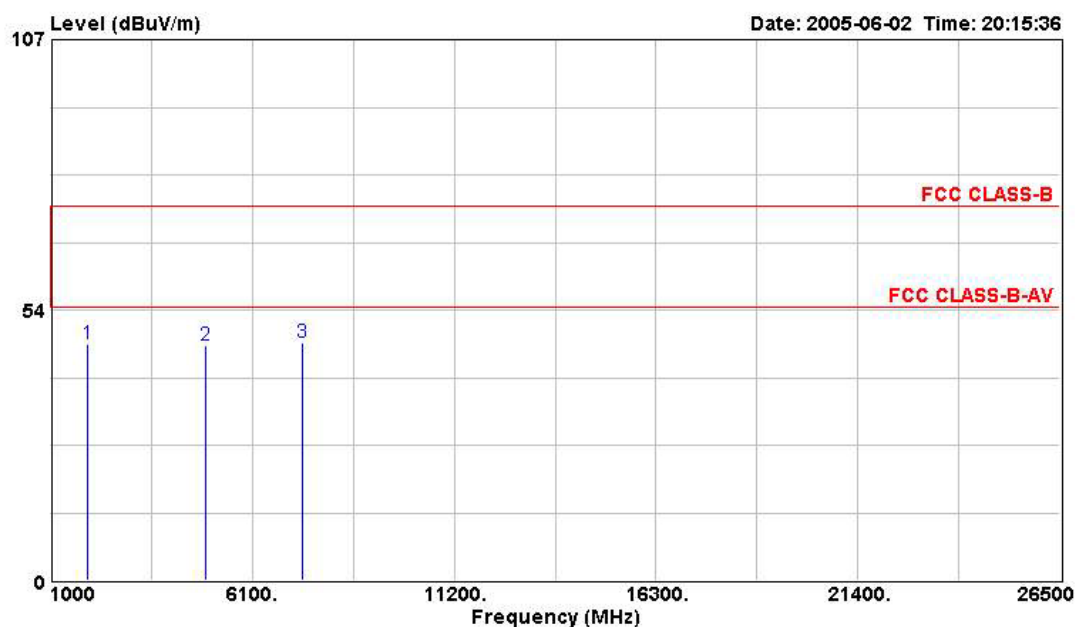

Site : 03CH03-HY  
 Condition: FCC CLASS-B 3m HORN-ANT-6741-200505 HORIZONTAL  
 EUT : SpeedTouch 585(i)v6  
 Power : 120V/60Hz  
 Model : ST585(i)v6  
 Memo : TX CH11 2462MHz 11b

	Freq	Level	Over	Read	Limit		Cable	Preamp	
	MHz	dBuV/m	Limit	Level	Line	Factor	Loss	Factor	Remark
			dB	dBuV	dBuV/m	dB	dB	dB	
1	1918.000	46.66	-27.34	58.54	74.00	-11.88	1.68	40.70	Peak
2	4928.000	46.40	-27.60	52.03	74.00	-5.62	2.89	41.80	PEAK
3	7380.000	47.08	-26.92	49.15	74.00	-2.07	3.68	42.06	PEAK

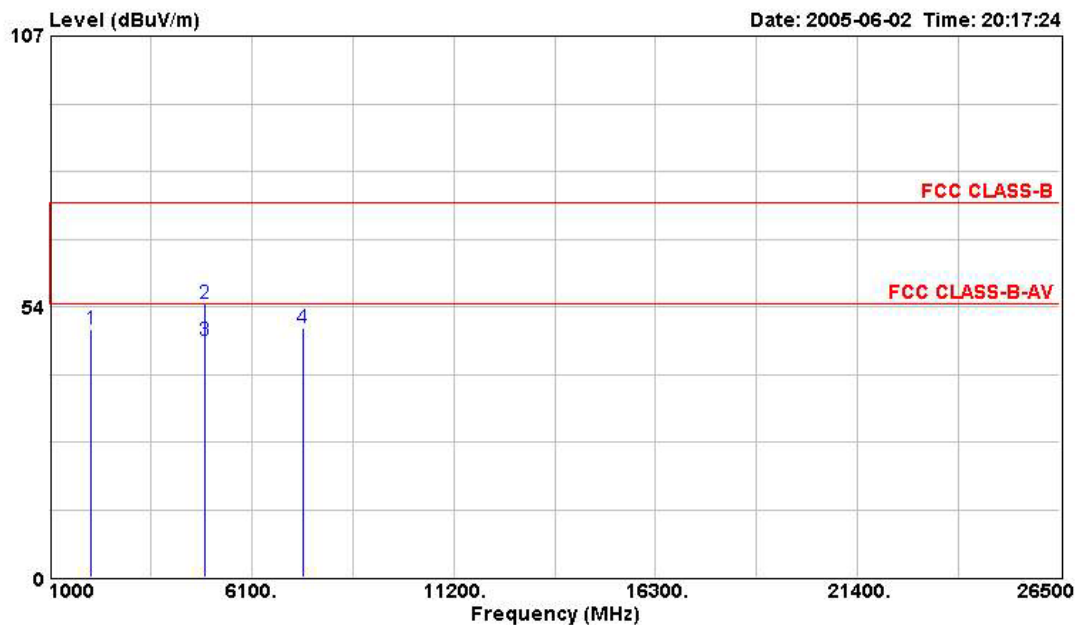


Site :03CH03-HY  
Condition:FCC CLASS-B 3m HORN-ANT-6741-200505 VERTICAL  
EUT :SpeedTouch 585(i)v6  
Power :120V/60Hz  
Model : ST585(i)v6  
Memo :TX CH11 2462MHz 11b

	Freq	Level	Over	Read	Limit		Cable	Preamp	
	MHz	dBuV/m	Limit	Level	Line	Factor	Loss	Factor	Remark
			dB	dBuV	dBuV/m	dB	dB	dB	
1	2046.000	48.88	-25.12	60.36	74.00	-11.48	1.73	40.81	Peak
2	4924.000	54.04	-19.96	59.66	74.00	-5.62	2.89	41.80	PEAK
3	4924.000	46.78	-7.22	52.40	54.00	-5.62	2.89	41.80	Average
4	7388.000	49.36	-24.64	51.37	74.00	-2.01	3.68	42.04	PEAK

- ADSL operation mode: ADSL2+ Annex A
- Radio operation mode: Continuous transmission
- Test Mode: OFDM CH 01
- Test Distance: 3 M
- Temperature: 27°C
- Relative Humidity: 60%
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level


■ The test was passed at the minimum margin that marked by the frame in the following table

- Spurious Emission

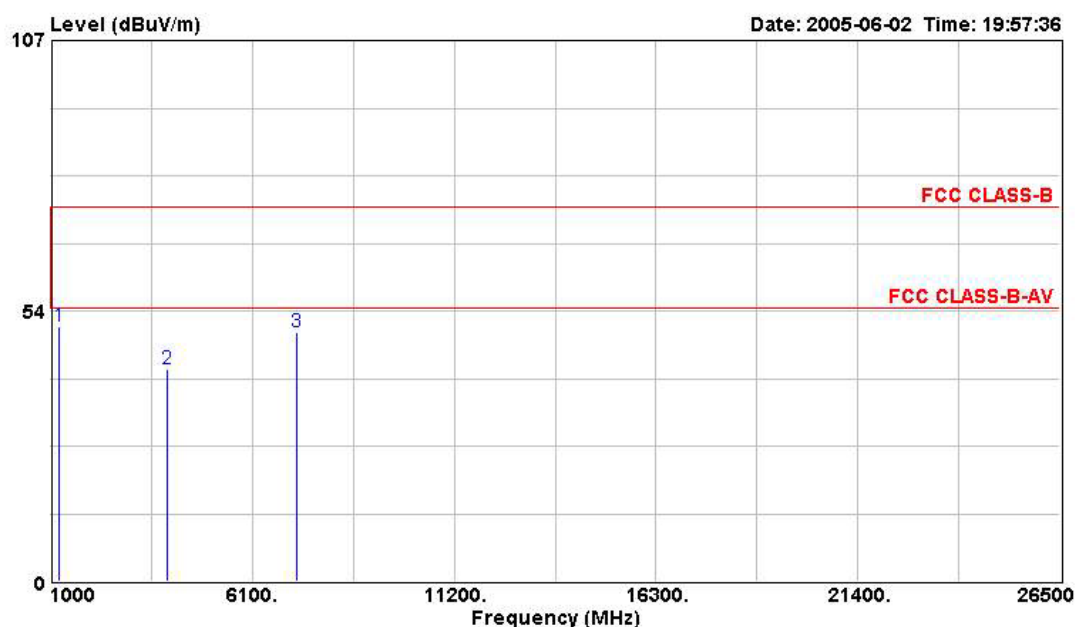

Site : 03CH03-HY  
 Condition: FCC CLASS-B 3m HORN-ANT-6741-200505 HORIZONTAL  
 EUT : SpeedTouch 585(i)v6  
 Power : 120V/60Hz  
 Model : ST585(i)v6  
 Memo : TX CH01 2412MHz 11g

	Freq	Level	Over	Read	Limit		Cable	Preamp	
	MHz	dBuV/m	Limit	Level	Line	Factor	Loss	Factor	Remark
			dB	dBuV	dBuV/m	dB	dB	dB	
1	1212.000	50.30	-23.70	64.34	74.00	-14.04	1.33	40.09	Peak
2	3948.000	42.09	-31.91	48.69	74.00	-6.60	2.48	41.53	PEAK
3	7236.000	49.20	-24.80	51.78	74.00	-2.58	3.62	42.18	PEAK

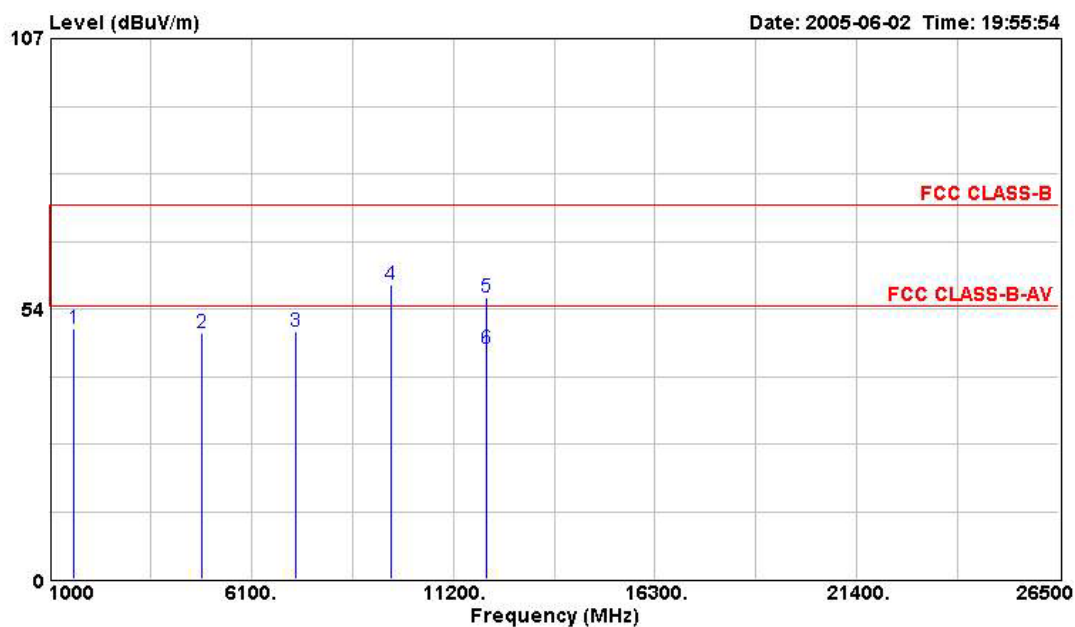


Site : 03CH03-HY  
 Condition: FCC CLASS-B 3m HORN-ANT-6741-200505 VERTICAL  
 EUT : SpeedTouch 585(i)v6  
 Power : 120V/60Hz  
 Model : ST585(i)v6  
 Memo : TX CH01 2412MHz 11g

	Freq	Level	Over	Read	Limit		Cable	Preamp	
	MHz	dBuV/m	Limit	Level	Line	Factor	Loss	Factor	Remark
			dB	dBuV	dBuV/m	dB	dB	dB	
1	1606.000	49.60	-24.40	62.58	74.00	-12.98	1.52	40.32	Peak
2	4832.000	48.73	-25.27	54.55	74.00	-5.82	2.86	41.80	PEAK
3	7236.000	49.14	-24.86	51.72	74.00	-2.58	3.62	42.18	PEAK
4	9648.000	58.18	-15.82	54.80	74.00	3.38	4.01	39.01	PEAK
5	12048.000	55.87	-18.13	51.58	74.00	4.30	4.63	39.58	PEAK
6	12048.000	45.67	-28.33	41.37	74.00	4.30	4.63	39.58	PEAK

- ADSL operation mode: ADSL2+ Annex A
- Radio operation mode: Continuous transmission
- Test Mode: OFDM CH06
- Test Distance: 3 M
- Temperature: 27°C
- Relative Humidity: 60%
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

■ The test was passed at the minimum margin that marked by the frame in the following table


- Spurious Emission

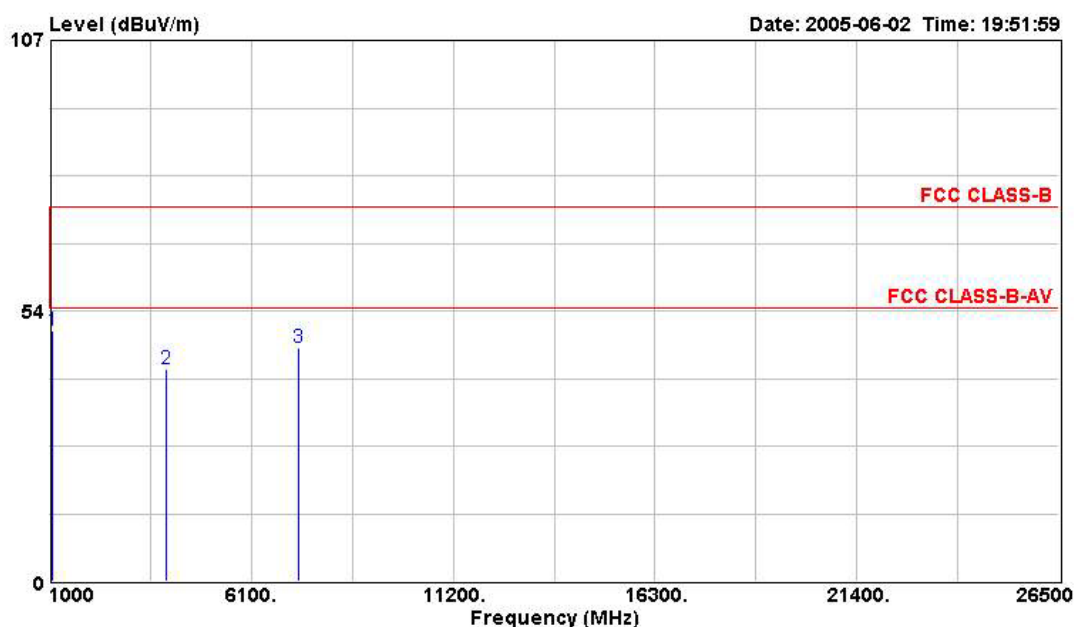

Site :03CHO3-HY  
 Condition:FCC CLASS-B 3m HORN-ANT-6741-200505 HORIZONTAL  
 EUT :SpeedTouch 585(i)v6  
 Power :120V/60Hz  
 Model : ST585(i)v6  
 Memo :TX CH06 2437MHz 11g

	Freq	Level	Over	Read	Limit	Cable	Preamp	
	MHz	dBuV/m	Limit	Level	Line	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB	
1	1086.000	49.62	-24.38	63.93	74.00	-14.31	1.26	40.05 Peak
2	3960.000	42.03	-31.97	48.58	74.00	-6.55	2.48	41.53 PEAK
3	7304.000	46.14	-27.86	48.48	74.00	-2.34	3.65	42.13 PEAK



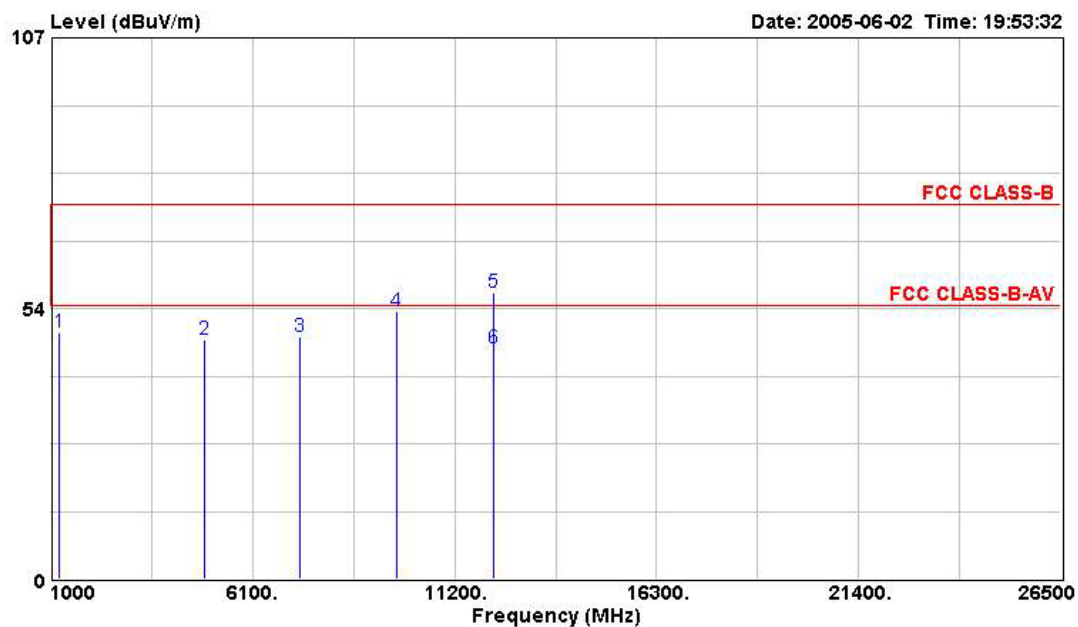


Site : 03CHO3-HY  
 Condition: FCC CLASS-B 3m HORN-ANT-6741-200505 VERTICAL  
 EUT : SpeedTouch 585(i)v6  
 Power : 120V/60Hz  
 Model : ST585(i)v6  
 Memo : TX CH06 2437MHz 11g

	Freq	Level	Over	Read	Limit		Cable	Preamp	
	MHz	dBuV/m	Limit	Level	Line	Factor	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB	dB	
1	1214.000	48.60	-25.40	62.61	74.00	-14.01	1.33	40.09	Peak
2	4888.000	47.35	-26.65	53.05	74.00	-5.70	2.87	41.80	PEAK
3	7308.000	47.97	-26.03	50.31	74.00	-2.34	3.65	42.13	PEAK
4	9748.000	53.08	-20.92	49.55	74.00	3.53	4.00	39.04	PEAK
5	12180.000	56.66	-17.34	52.43	74.00	4.23	4.68	39.56	PEAK
6	12180.000	45.50	-8.50	41.27	54.00	4.23	4.68	39.56	Average

- ADSL operation mode: ADSL2+ Annex A
- Radio operation mode: Continuous transmission
- Test Mode: OFDM CH11
- Test Distance: 3 M
- Temperature: 27°C
- Relative Humidity: 60%
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level


■ The test was passed at the minimum margin that marked by the frame in the following table

- Spurious Emission

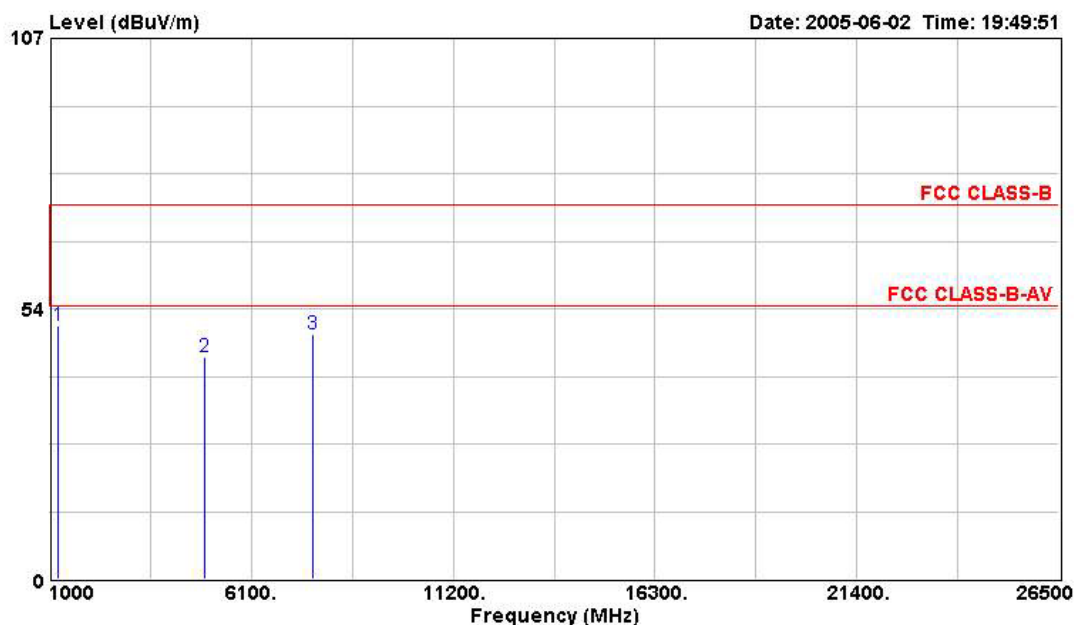

Site : 03CH03-HY  
 Condition: FCC CLASS-B 3m HORN-ANT-6741-200505 HORIZONTAL  
 EUT : SpeedTouch 585(i)v6  
 Power : 120V/60Hz  
 Model : ST585(i)v6  
 Memo : TX CH11 2462MHz 11g

	Freq	Level	Over	Read	Limit		Cable	Preamp	
	MHz	dBuV/m	Limit	Level	Line	Factor	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB	dB	
1	1214.000	50.00	-24.00	64.01	74.00	-14.01	1.33	40.09	Peak
2	4924.000	44.06	-29.94	49.68	74.00	-5.62	2.89	41.80	PEAK
3	7668.000	48.40	-25.60	49.60	74.00	-1.20	3.77	41.74	PEAK


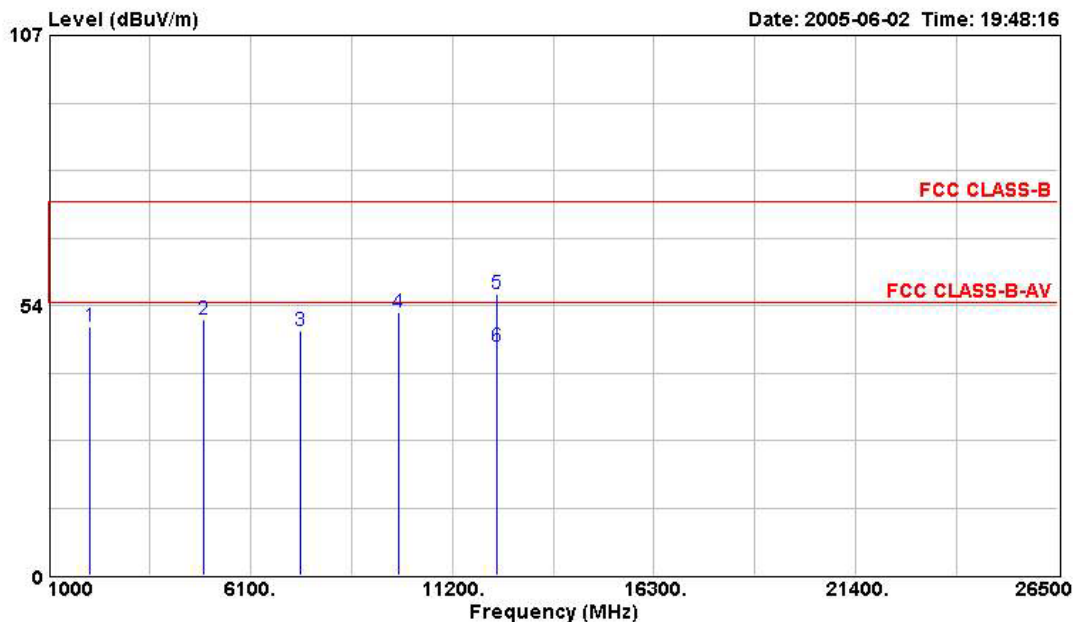


Site : 03CH03-HY  
 Condition: FCC CLASS-B 3m HORN-ANT-6741-200505 VERTICAL  
 EUT : SpeedTouch 585(i)v6  
 Power : 120V/60Hz  
 Model : ST585(i)v6  
 Memo : TX CH11 2462MHz 11g

	Freq	Level	Over	Read	Limit		Cable	Preamp	
	MHz	dBuV/m	Limit	Level	Line	Factor	Loss	Factor	Remark
			dB	dBuV	dBuV/m	dB	dB	dB	
1	2046.000	49.32	-24.68	60.80	74.00	-11.48	1.73	40.81	Peak
2	4924.000	50.67	-23.33	56.29	74.00	-5.62	2.89	41.80	PEAK
3	7376.000	48.49	-25.51	50.56	74.00	-2.07	3.68	42.06	PEAK
4	9848.000	52.12	-21.88	48.48	74.00	3.64	3.99	39.07	PEAK
5	12312.000	55.88	-18.12	51.68	74.00	4.20	4.74	39.53	PEAK
6	12312.000	45.22	-8.78	41.02	54.00	4.20	4.74	39.53	Average

**4.7.5. Photographs of Radiated Emission Test Configuration**

- The photographs show the configuration that generates the maximum emission.

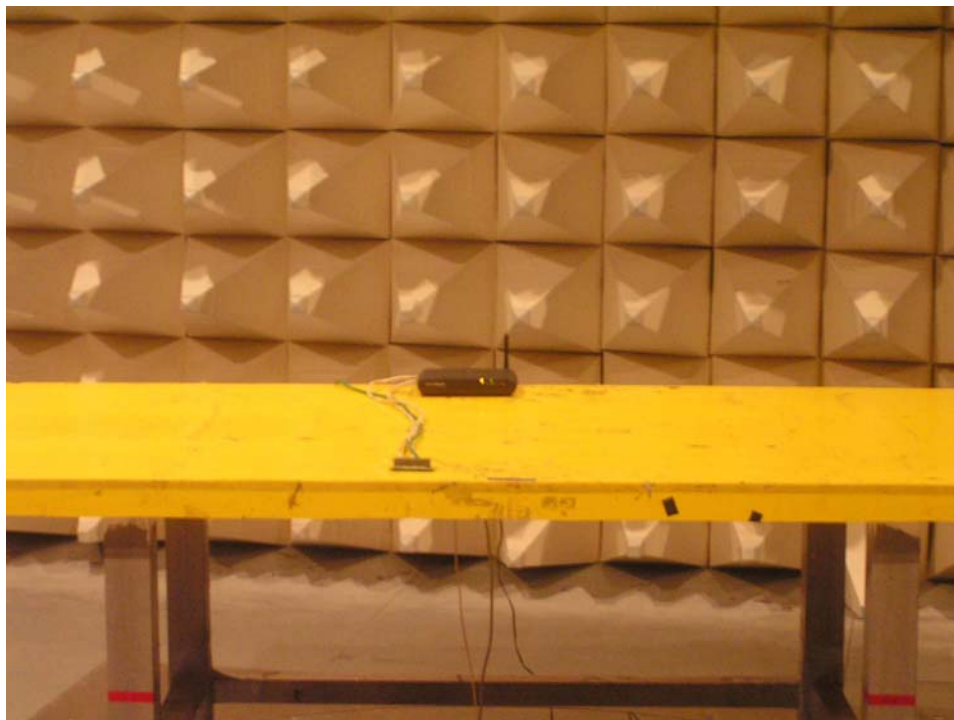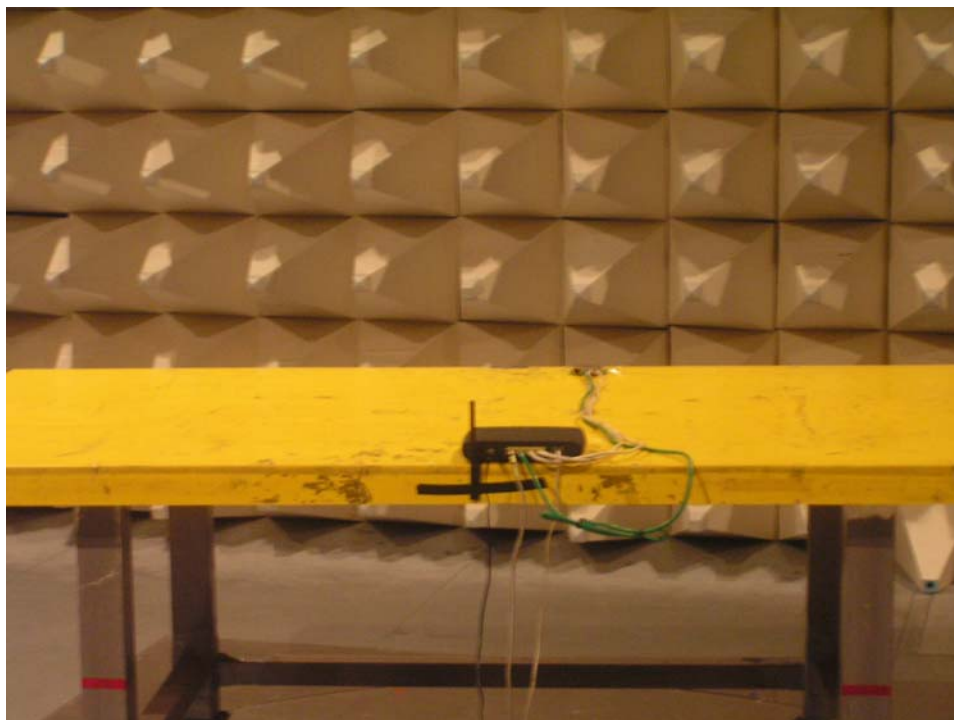**FRONT VIEW****REAR VIEW**

**4.8. Antenna Requirements****4.8.1. Standard Applicable**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**4.8.2. Antenna Connected Construction**

Two antennas are equipped on the EUT. The internal PIFA antenna is without any connector. The external dipole antenna connector fixed with a coaxial cable is MHF-type.

**4.9. RF Exposure**

FCC Rules and Regulations Part 1.1307, 1.1310, 2.1091, 2.1093:

RF Exposure Compliance

**4.9.1. Limits of Maximum Permissible Exposure (MPE)****(A) Limits for Occupational / Controlled Exposure**

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842/f	4.89/f	(900/f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

**(B) Limits for General Population / Uncontrolled Exposure**

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

F=frequency in MHz

\*Plane-wave equivalent power density

## 4.9.2. MPE Calculations

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (mW/cm}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak output power (mW)

G = Antenna numeric gain (numeric)

d = Separation distance (m)

Because the EUT is belong to General Population/ Uncontrolled Exposure. So the Limit of Power Density is 1.0 mW/cm<sup>2</sup>. We can change the formula to:

$$d = \sqrt{\frac{30 \times P \times G}{377}}$$

**CCK**

Channel NO.	Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power ( mW )	Power Density (S) (mW/cm <sup>2</sup> )	Limit of Power Density (S) (mW/cm <sup>2</sup> )
CH 01	3.80	2.40	17.97	62.66	0.0299	1
CH 06	3.80	2.40	17.72	59.16	0.0283	1
CH 11	3.80	2.40	18.16	65.46	0.0313	1

**OFDM**

Channel NO.	Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Calculated RF Exposure Separation Distance (m)	Minimum RF Exposure Separation Distance (m)
CH 01	3.80	2.40	19.81	95.72	0.0457	1
CH 06	3.80	2.40	19.54	89.95	0.0430	1
CH 11	3.80	2.40	20.04	100.93	0.0482	1

**4.9.3. FCC Radiation Exposure Statement**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. In order to avoid the possibility of exceeding the FCC radio frequency exposure limits, human proximity to the antenna shall not be less than 20 cm (8 inches) during normal operation. It is proposed to include the RF exposure safety information in user manual.



## 5. List of Measuring Equipments Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9 kHz – 2.75 GHz	Feb. 19, 2005	Conduction (CO04-HY)
LISN	EMCO	3810/2NM	9703-1839	9 kHz – 30 MHz	Mar. 15, 2005	Conduction (CO04-HY)
LISN (Support Unit)	PIC	NNB-2/16Z	2001/008	9 kHz – 30 MHz	May 06, 2005	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
RF Cable-CON	Suhner Switzerland	RG223/U	CB029	9 kHz – 30 MHz	Dec. 23, 2004	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz ~ 1 GHz 3m	Jun. 16, 2005	Radiation (03CH03-HY)
Spectrum analyzer	R&S	FSP40	100004	9 kHz ~ 40 GHz	Aug. 31, 2004	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	CPA9231A	18667	9 kHz ~ 2 GHz	Jan. 10, 2005	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz ~ 26.5 GHz	May 31, 2005	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	923364	26.5 GHz ~ 40 GHz	Jan. 05, 2004*	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz ~ 30 MHz	May 24, 2004*	Radiation (03CH03-HY)
Biconical Antenna	SCHWARZBECK	VHBB 9124	301	30 MHz ~ 200 MHz	Jul. 28, 2004	Radiation (03CH03-HY)
Log Antenna	SCHWARZBECK	VUSLP 9111	221	200 MHz ~ 1 GHz	Jul. 28, 2004	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1 GHz ~ 18 GHz	Apr. 22, 2005	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz ~ 40 GHz	Jun. 09, 2004*	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz ~ 1 GHz	Feb. 22, 2005	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz ~ 40 GHz	Dec. 01, 2004	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)

※ Calibration Interval of instruments listed above is one year.

※ \*Calibration Interval of instruments listed above is two year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum analyzer	R&S	FSP30	100023	9kHz ~ 30GHz	Aug. 02, 2004	Conducted (TH01-HY)
Power meter	R&S	NRVS	100444	DC ~ 40GHz	Jun. 14, 2005	Conducted (TH01-HY)
Power sensor	R&S	NRV-Z55	100049	DC ~ 40GHz	Jun. 14, 2005	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jun. 14, 2005	Conducted (TH01-HY)
AC power source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Jun. 16, 2004	Conducted (TH01-HY)
DC power source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Nov. 28, 2004	Conducted (TH01-HY)
Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 01, 2004	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Jan. 01, 2005	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Jan. 01, 2005	Conducted (TH01-HY)
Oscilloscope	Tektronix	TDS1012	CO38515	100MHz / 1GS/s	Apr. 15, 2005	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Dec. 31, 2004	Conducted (TH01-HY)
Data Generator	Tektronix	DG2030	063-2920-50	0.1Hz~400MHz	Jun. 02, 2005	Conducted (TH01-HY)

※ Calibration Interval of instruments listed above is one year.

## 6. Uncertainty of Test Site

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Contribution	Uncertainty of $x_i$		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.10	Normal(k=2)	0.05
Cable loss	0.10	Normal(k=2)	0.05
AMN insertion loss	2.50	Rectangular	0.63
Receiver Spec	1.50	Rectangular	0.43
Site imperfection	1.39	Rectangular	0.80
Mismatch	+0.34/-0.35	U-shape	0.24
<b>combined standard uncertainty Uc(y)</b>	<b>1.13</b>		
<b>Measuring uncertainty for a level of confidence of 95% U=2Uc(y)</b>	<b>2.26</b>		

### Uncertainty of Radiated Emission Measurement (30MHz ~ 1000MHz)

Contribution	Uncertainty of $x_i$		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.41	Normal(k=2)	0.21
Antenna factor calibration	0.83	Normal(k=2)	0.42
Cable loss calibration	0.25	Normal(k=2)	0.13
Pre Amplifier Gain calibration	0.27	Normal(k=2)	0.14
RCV/SPA specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site imperfection	1.43	Rectangular	0.83
Mismatch	+0.39/-0.41	U-shaped	0.28
<b>combined standard uncertainty Uc(y)</b>	<b>1.27</b>		
<b>Measuring uncertainty for a level of confidence of 95% U=2Uc(y)</b>	<b>2.54</b>		