

FCC ID: SDL-PD38XR01

EMI -- TEST REPORT

Test Report No. :	T30241-00-00XF	January 10, 2006 Date of issue
--------------------------	-----------------------	-----------------------------------

Type / Model Name : PD38

Product Description : Laser Rangemeter

Applicant : Hilti Corporation

Address : Feldkircherstrasse 100
FL-9494 Schaan, Principality of Liechtenstein

Manufacturer : HILLOS GmbH

Address : Prüssingstraße 41
D-07745 Jena

Licence holder : Hilti Corporation

Address : Feldkircherstrasse 100
FL-9494 Schaan, Principality of Liechtenstein

Test Result according to the standards listed in clause 1 test standards:	POSITIVE
--	-----------------



The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

Contents

1	<u>TEST STANDARDS</u>	3
2	<u>SUMMARY</u>	4
3	<u>EQUIPMENT UNDER TEST</u>	5
3.1	PHOTO DOCUMENTATION OF THE EUT	5
3.3	POWER SUPPLY SYSTEM UTILISED	13
3.4	SHORT DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT)	13
4	<u>TEST ENVIRONMENT</u>	14
4.1	ADDRESS OF THE TEST LABORATORY	14
4.2	ENVIRONMENTAL CONDITIONS	14
4.3	STATEMENT OF THE MEASUREMENT UNCERTAINTY	14
4.4	MEASUREMENT PROTOCOL FOR FCC, VCCI AND AUSTEL	14
5	<u>TEST CONDITIONS AND RESULTS</u>	16
5.1	CONDUCTED EMISSIONS	16
5.2	MAXIMUM PEAK OUTPUT POWER	22
5.3	RADIATED EMISSIONS (ELECTRIC FIELD) 9 KHz – 40 GHz	25
5.4	SPURIOUS RF CONDUCTED EMISSION	34
5.5	20 dB BANDWIDTH	36
5.6	BAND EDGE TEST	41
5.8	TIME OF OCCUPANCY (DWELL TIME)	45
5.9	CHANNEL SEPARATION TEST	49
5.10	QUANTITY OF HOPPING CHANNEL TEST	52
5.11	ANTENNA APPLICATIONS	57
5.12	RECEIVER CONDUCTED DISTURBANCES 0.15 - 30 MHz	58
5.13	RECEIVER RADIATED EMISSIONS (ELECTRIC FIELD) 9 KHz - 40 GHz	59
6	<u>USED TEST EQUIPMENT AND ACCESSORIES</u>	65

1 TEST STANDARDS

The tests were performed according to following standards:

FCC Rules and Regulations Part 15 Subpart C - Intentional Radiators (October 01, 2004)

Part 15, Subpart C, Section 15.35(c)	Correction for Pulse Operation (Duty Cycle)
Part 15, Subpart C, Section 15.207(a)	AC Line conducted emissions
Part 15, Subpart C, Section 15.209(a)	Radiated emissions, general requirements
Part 15, Subpart C, Section 15.247(c)	Radiated emissions, outside the used frequency band
Part 15, Subpart C, Section 15.203	Antenna requirement
Part 15, Subpart C, Section 15.204	External radio frequency power amplifiers and antenna modifications
Part 15, Subpart C, Section 15.247(1)(iii)	Bandwidth requirement
Part 15, Subpart C, Section 15.247(b)(1)	Maximum Peak output Power of intentional radiator

FCC Rules and Regulations Part 15 Subpart B - Unintentional Radiators (October 01, 2004)

Part 15, Subpart B, Section 15.107(a)	AC Line conducted emissions
Part 15, Subpart B, Section 15.109(a)	Radiated emissions, general requirements

2 SUMMARY

GENERAL REMARKS:

The frequency range was scanned from 9 kHz to 25000 MHz. All emissions not reported in this test report were more than 10 dB below the specified limit.

FINAL ASSESSMENT:

The equipment under test **fulfills** the EMI requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : September 21, 2005

Testing concluded on : January 05, 2006

Checked by:

Tested by:

Klaus Gegenfurtner
Dipl.-Ing.(FH)
Manager: Radio Group

Fischer Xaver

FCC ID: SDL-PD38XR01

3 EQUIPMENT UNDER TEST

3.1 Photo documentation of the EuT

Laser Rangemeter

T30241-00-00XF

External Photo

Front view



Laser Rangemeter

T30241-00-00XF

External Photo

Rear view



FCC ID: SDL-PD38XR01

Laser Rangemeter
T30241-00-00XF

External Photo
Side view of PCB



FCC ID: SDL-PD38XR01

Laser Rangemeter
T30241-00-00XF


Internal Photo
Open view



FCC ID: SDL-PD38XR01

Laser Rangemeter
T30241-00-00XF

Internal Photo
Front view of PCB

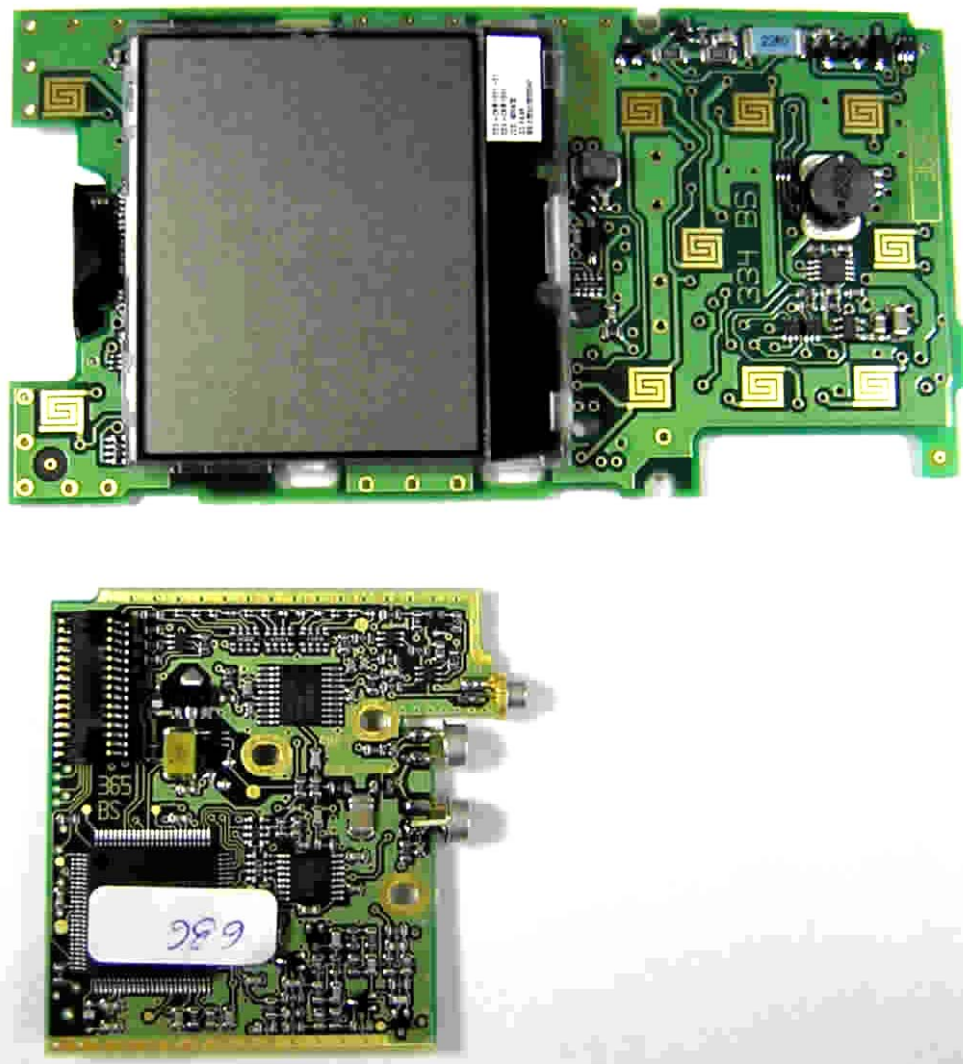

FCC ID: SDL-PD38XR01


Laser Rangemeter
T30241-00-00XF

Internal Photo
Front view of PCB



Laser Rangemeter
T30241-00-00XF

Internal Photo
Rear view of PCB

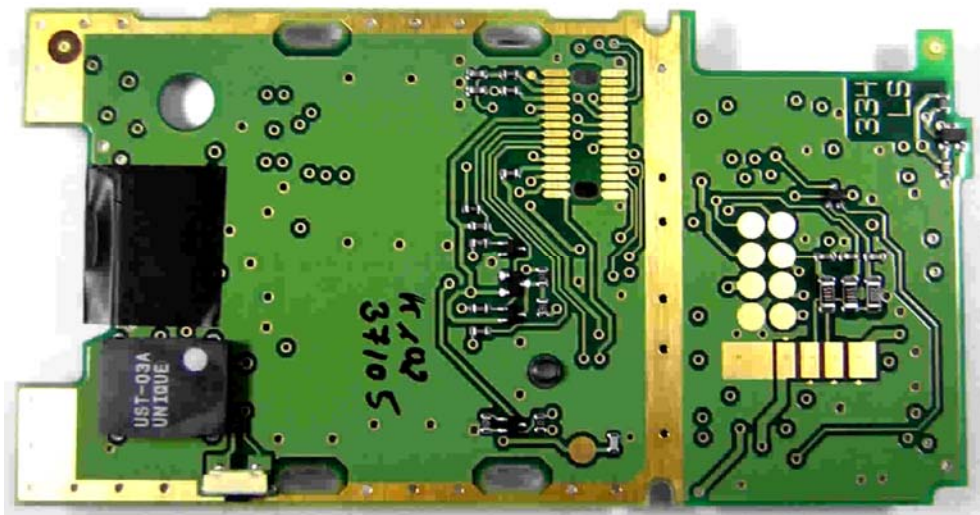

FCC ID: SDL-PD38XR01

Laser Rangemeter
T30241-00-00XF

Internal Photo
Front view of PCB



FCC ID: SDL-PD38XR01

Laser Rangemeter
T30241-00-00XF


Internal Photo
Rear view of PCB



FCC ID: SDL-PD38XR01

Laser Rangemeter
T30241-00-00XF

Internal Photo
Front view of BT module

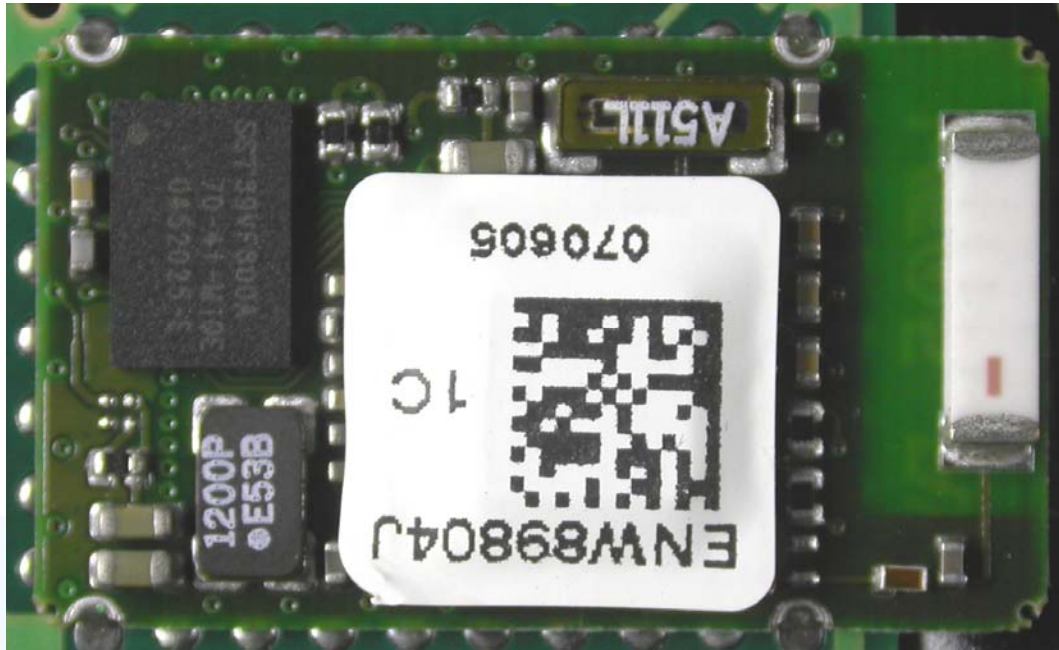

FCC ID: SDL-PD38XR01

Power supply system utilised

Power supply voltage : Internal: 3,0 V / DC
External: 115 V / 60 Hz / 1 ϕ

3.4 Short description of the Equipment under Test (EuT)

The distance is determined along a laser beam emitted by the range meter up to the surface where the laser beam is reflected. The red laser spot clearly identifies the target from which the measurement is taken. The measuring range depends on the reflectivity and the surface structure of the target surface.

The range meter is designed for:

- Measurement of distances
- Calculation of areas, volumes and distances
- Addition and subtraction of distances
- Operation and storage in the specified temperatures

Number of tested samples: 1
Serial number: Prototype

EuT operation mode:

The equipment under test was operated during the measurement under the following conditions:

- TX-mode with modulation

- TX-mode without modulation

- RX-mode

EuT configuration:

(The CDF filled by the applicant can be viewed at the test laboratory.)

The following peripheral devices and interface cables were connected during the measurements:

- _____	Model : _____
- _____	Model : _____
- _____	Model : _____
- _____	Model : _____
- _____	Model : _____
- _____	Model : _____

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

mikes-testingpartners gmbh
Ohmstrasse 2-4
94342 Strasskirchen
Germany

4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa

4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16-4-2 /11.2003 „Uncertainties, statistics and limit modelling – Uncertainty in EMC measurements“ and is documented in the quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

4.4 Measurement Protocol for FCC, VCCI and AUSTEL

4.4.1 GENERAL INFORMATION

4.4.1.1 Test Methodology

Conducted and radiated disturbance testing is performed according to the procedures in International Special Committee on Radio Interference (CISPR) Publication 22 (1997), European Standard EN 55022 and Australian Standard AS 3548 (which are based on CISPR 22).

The Japanese standard, "Voluntary Control Council for Interference (VCCI) by Data Processing Equipment and Electronic Office Machines, Technical Requirements" is technically equivalent to CISPR 22 (1997). For official compliance, a conformance report must be sent to and accepted by the VCCI.

In compliance with FCC Docket 92-152, "Harmonization of Rules for Digital Devices Incorporate International Standards", testing for FCC compliance may be done following the ANSI C63.4-2003 procedures and using the CISPR 22 Limits.

4.4.1.2 Justification

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral into it's characteristic impedance or left unterminated. When appropriate, the cables are manually manipulated with respect to each other to obtain maximum disturbances from the unit.

4.4.2 DETAILS OF TEST PROCEDURES

4.4.2.1 General Standard Information

The test methods used comply with CISPR Publication 22 (1997), EN 55022 (2001) and AS 3548 (1992) - "Limits and Methods of Measurement of Radio Interference Characteristics of Information Technology Equipment" and with ANSI C63.4-2003 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz."

mikes

TEST CONDITIONS AND RESULTS



5.1 Conducted emissions

For test instruments and accessories used see section 6 Part A 4.

5.1.1 Description of the test location

Test location: Shielded Room S2

5.1.2 Photo documentation of the test set-up

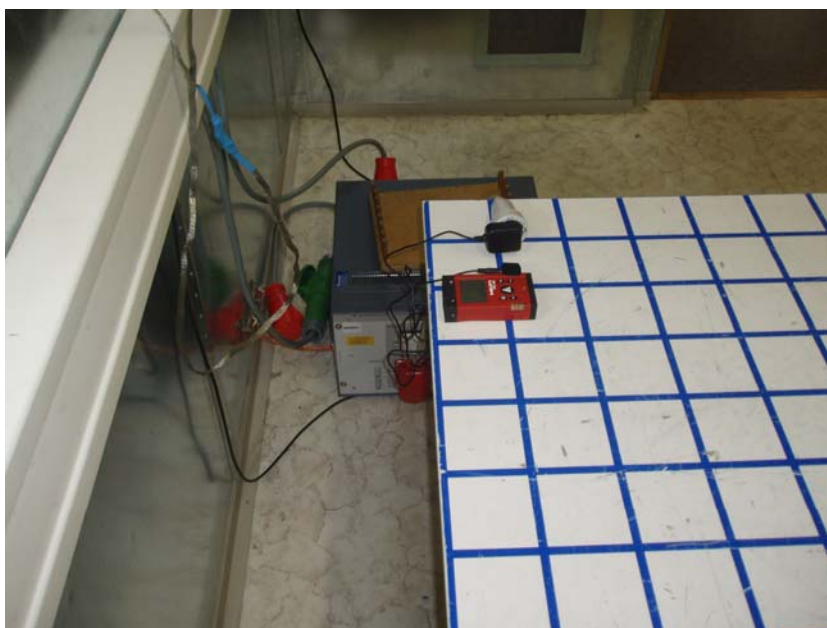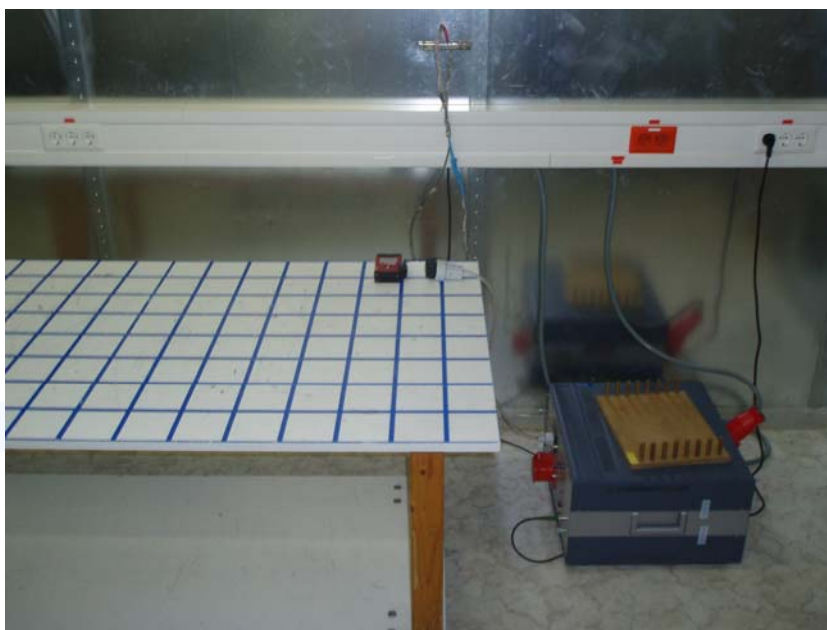

5.1.3 Description of Measurement

The final level, expressed in dB μ V, is arrived at by taking the reading directly from the EMI receiver. This level is compared directly to the FCC Limit or to the CISPR limit, which is equivalent to the Australian AS 3548 limit.

To convert between dB μ V and μ V, the following conversions apply:

$$\text{dB}\mu\text{V} = 20(\log \mu\text{V})$$

$$\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$$

Conducted emissions on the 50 Hz and/or 60 Hz power interface of the EuT are measured in the frequency range of 150 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection, and a Line Impedance Stabilization Network (LISN), with 50 Ω /50 μ H (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 centimeter's above the floor and is positioned 40 centimeter's from the vertical ground plane (wall) of the screen room. If the minimum passing margin appears to be less than 20 dB with a peak mode measurement, the emissions are remeasured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.

5.1.4 Test result

Frequency range: 0.15 MHz - 30 MHz

Min. limit margin 2,2 dB at 0.465 MHz

The requirements are **FULFILLED**.

Remarks:


FCC ID: SDL-PD38XR01

Test point: N
Operation mode: TX – and charging mode
Remarks:

Result: passed

Freq	QP- L	D -Limit	Freq	AV-L	D -Limit
kHz	dB[μV]	QP [dB]	kHz	dB[μV]	AV [dB]
175	50,7	14,0	175	40,1	14,6
225	31,6	31,0	225	19,1	33,5
230	45,3	17,1	230	35,8	16,6
290	47,2	13,3	290	40,3	10,2
410	47,9	9,7	405	39,5	8,3
465	52,4	4,2	465	42,8	3,8
640	42,4	13,6	640	32,8	13,2
700	46,4	9,6	700	36,1	9,9
820	39,4	16,6	990	29,2	16,8
1165	44,6	11,4	1165	33,6	12,4
1280	40,3	15,7	1515	28,9	17,1
1690	42	14,0	1635	30,2	15,8
2160	41,5	14,5	2100	29,9	16,1
2565	39,7	16,3	2510	27,9	18,1
3500	37,3	18,7	3035	26,1	19,9

Freq	QP- L	D -Limit	Freq	AV-L	D -Limit
kHz	dB[μV]	QP [dB]	kHz	dB[μV]	AV [dB]
3605	34,7	21,3	3915	23	23,0
4495	35,3	20,7	4495	22,8	23,2
5955	31,6	28,4	5835	18,9	31,1
7780	28,3	31,7	7720	16,9	33,1
8690	22,6	37,4	8415	13,5	36,5
12715	17,6	42,4			
15440	18,3	41,7			
15935	17,6	42,4			
19685	13,6	46,4			
24945	11,3	48,7			

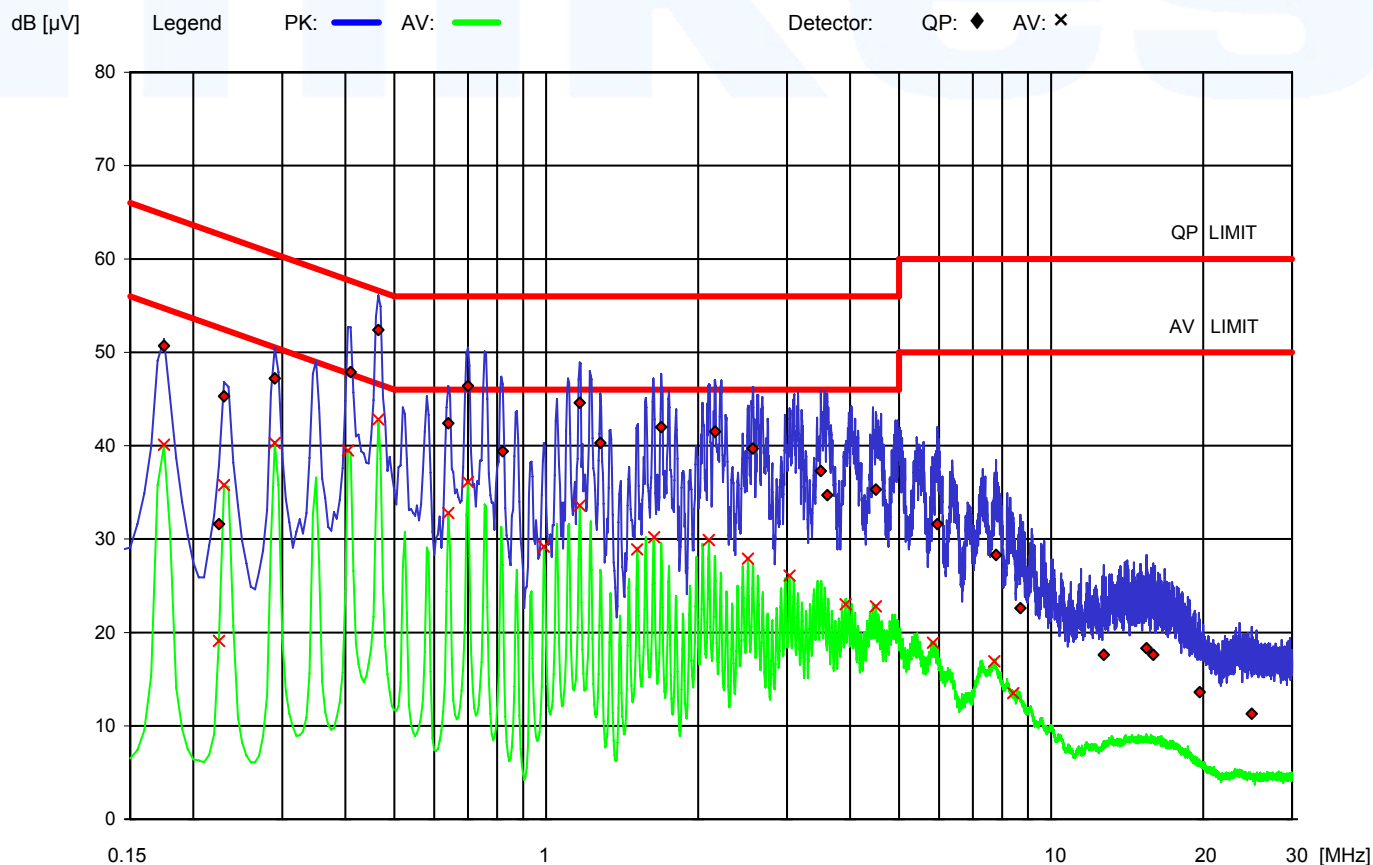


FCC ID: SDL-PD38XR01

Test point: L
Operation mode: Tracking – and charging mode
Remarks:

Result: passed

Freq	QP- L	D -Limit	Freq	AV-L	D -Limit
kHz	dB[μV]	QP [dB]	kHz	dB[μV]	AV [dB]
175	45,1	19,6	175	35,3	19,4
225	32,2	30,4	225	20,1	32,5
235	45,2	17,1	230	36,3	16,1
290	45,7	14,8	290	37,8	12,7
410	50,9	6,7	405	42,6	5,2
465	52,6	4,0	465	44,4	2,2
580	42,1	13,9	640	34,2	11,8
700	38,8	17,2	700	30,4	15,6
995	38,8	17,2	990	32,4	13,6
1105	42,2	13,8	1050	33,6	12,4
1280	40,4	15,6	1280	31,2	14,8
1865	40,6	15,4	1865	31,2	14,8
1925	40,7	15,3	1925	31,3	14,7
2685	39	17,0	2685	28,8	17,2
3440	36,5	19,5	3445	26,3	19,7

Freq	QP- L	D -Limit	Freq	AV-L	D -Limit
kHz	dB[μV]	QP [dB]	kHz	dB[μV]	AV [dB]
3615	34	22,0	4145	23,8	22,2
4860	31,2	24,8	4905	21,5	24,5
5625	28,2	31,8	5670	19,1	30,9
7695	27	33,0	7715	16,7	33,3
9825	21,8	38,2	8425	14,3	35,7
10455	21,4	38,6	10640	10,5	39,5
13365	16,2	43,8			
16240	13,6	46,4			
21560	11,9	48,1			
27630	11,4	48,6			

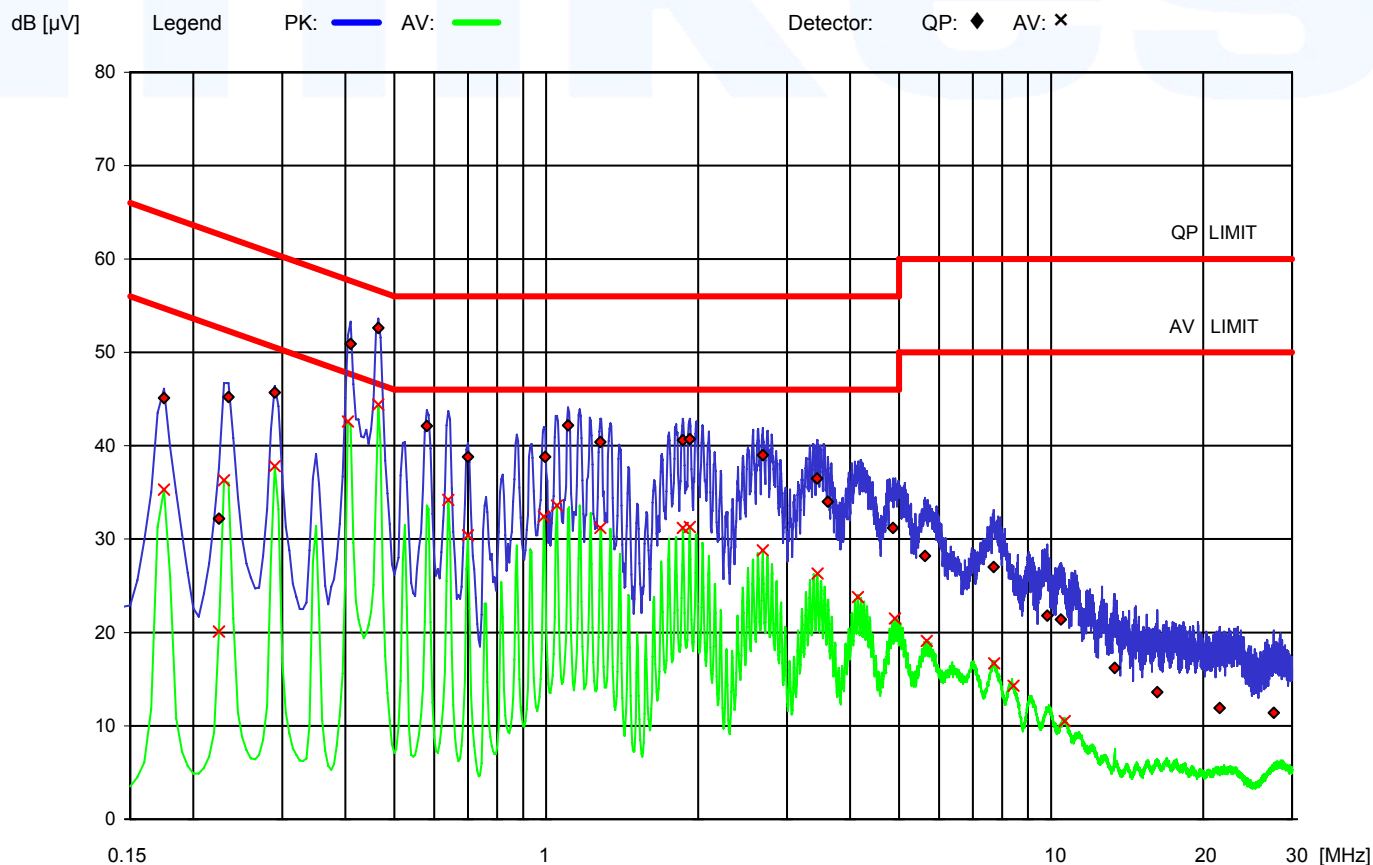

5.2 Maximum Peak Output Power

For test instruments and accessories used see section 6 Part CPR 3.

5.2.1 Description of the test location

Test location: Anechoic Chamber A2

Test distance: 3 metres

5.2.2 Description of Measurement

Conducted maximum peak output power:

A spectrum analyzer / EMI test receiver is connected to the output of the transmitter via a suitable attenuator while EuT was operating in transmit mode using the assigned frequency.

Analyzer Settings:

- Detector: Max hold
- RBW: greater than 20 dB Bandwidth
- VBW: $\geq$ RBW
- Sweep Time: Coupled

Alternative test procedure:

If antenna conducted tests cannot be performed on the EuT, radiated tests to show compliance with the various conducted requirements of Section 15.247 are performed. A pre-amp have been used in making the following requirements.

Radiated maximum peak output power:

Radiated maximum peak output power from the EuT is measured in the frequency range of 30 MHz to 1000 MHz using tuned receiver and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003. The Interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna was positioned 3, 10 or 30 meters horizontally from the EuT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarization's and the EuT are rotated 360 degrees.

The final level, expressed in dB μ V/m, is arrived by taking the reading from the EMI receiver (Level dB μ V) and adding the correction factors and cable loss factor (Factor dB) to it. This is done automatically in the EMI receiver, where the correction factors are stored. This result then has the FCC or CISPR limit subtracted from it to provide the Delta which gives the tabular data as shown in the data sheets at page.

The radiated emissions from the EuT are measured in the frequency range of 1 GHz to maximum frequency as specified in section 15.33, using a tuned receiver (Spectrum Analyser) and appropriate linearly polarized antennas. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003.


The Interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area.

FCC ID: SDL-PD38XR01

Measurement are made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 1 MHz. All tests are performed at a test-distance of 3 meters. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration procedure the highest emission relative the limit and therefore shall be used for final testing. During the tests the EUT is rotated all around to find the maximum levels of emissions. The cables and equipment were placed and moved within the range of position likely to find their maximum emissions. When the EuT is larger than the beamwidth of the measuring antenna, the measurement antenna will be moved over the surfaces for the four sides or the test distance will be reduced to demonstrate that emissions were at maximum at the limit distance.

Analyzer Settings:

- Detector: Max hold
- RBW: greater than 20 dB Bandwidth
- VBW: $\geq$ RBW
- Sweep Time: Coupled

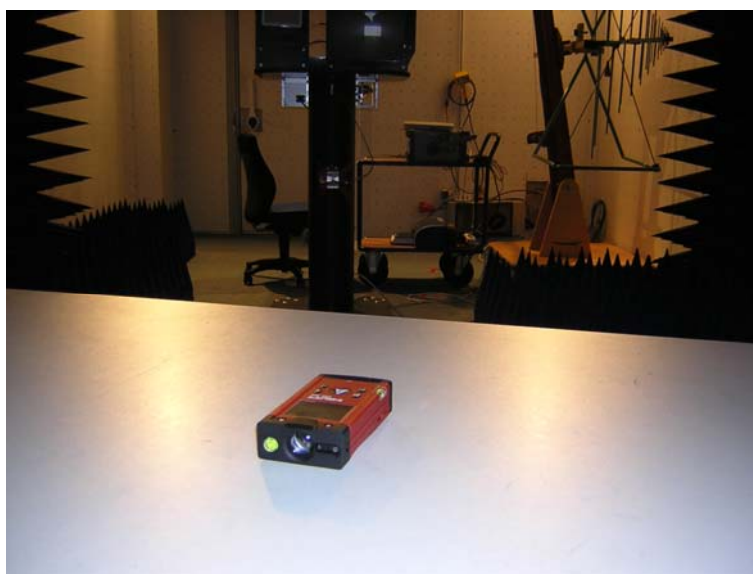5.2.3 Photo documentation of the test set-up

5.2.4 Test result

Channel	Frequency [MHz]	Peak Power Output (dBm)	Correct. [dB]	Corr. Peak Power Output (dBm)	Peak Power Limit (dBm)	Delta [dB]
0	2402	-3,3	-7,9	-11,2	30	-41,2
39	2441	-5,1	-7,9	-13,0	30	-43,0
78	2480	-6,0	-8,0	-14,0	30	-44,0

Peak Power Limit according to FCC Subpart 15.247(b)(3)

Frequency (MHz)	Peak Power Limit	
	(dBm)	(Watt)
902-928	30	1,0
2400-2483.5	30	1,0
5725-5850	30	1,0

The requirements are **FULFILLED**.

Remarks: It was used the alternative test procedure "radiated maximum peak output power" because the EuT has only an integral antenna without any external antenna connectors.

5.3 Radiated emissions (electric field) 9 kHz – 40 GHz

For test instruments and accessories used see section 6 Part SER1, SER 2, SER 3.

5.3.1 Description of the test location


Test location: OATS1
Anechoic Chamber A2

Test distance: 3 metres


5.3.2 Photo documentation of the test set-up



FCC ID: SDL-PD38XR01

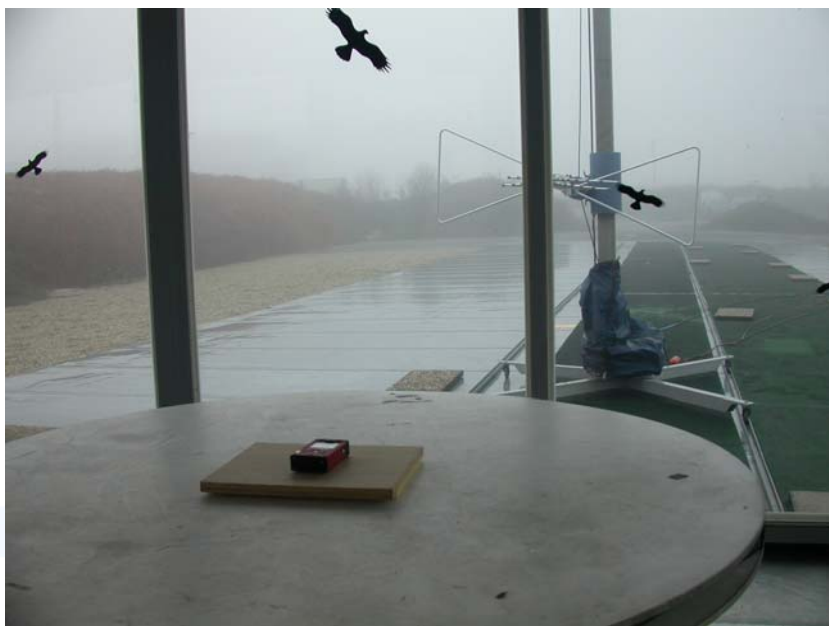

FCC ID: SDL-PD38XR01

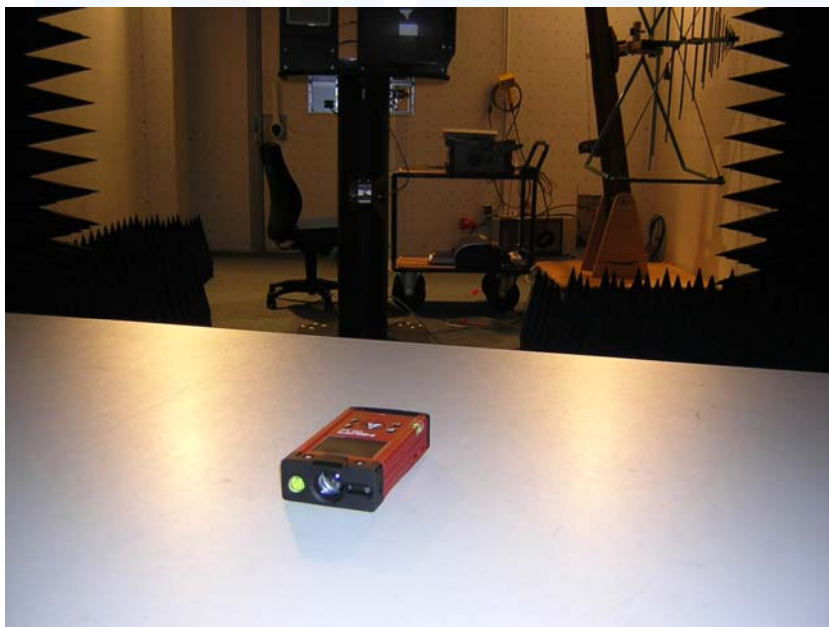

5.3.3 Description of Measurement

Spurious emissions from the EuT are measured in the frequency range of 9 kHz to 30 MHz using a tuned receiver and a shielded loop antenna. The antenna was positioned 3, 10 or 30 meters horizontally from the EuT. Measurements have been made in all three orthogonal axes and the shielded loop antenna was rotated to locate the maximum of the emissions.

The final level, expressed in dB μ V/m, is arrived at by taking the reading from the EMI receiver (Level dB μ V) and adding the antenna correction factor and cable loss factor (Factor dB) to it. This result then has to be compared with the relevant FCC limit.

The resolution bandwidth during the measurement is as follows:

9 kHz – 150 kHz: ResBW: 200 Hz

150 kHz – 30 MHz: ResBW: 9 kHz

Example:

Frequency (MHz)	Level (dB μ V)	+	Factor (dB)	=	Level (dB μ V/m)	Limit (dB μ V/m)	=	Delta (dB)
1.705	5	+	20	=	25	30	=	5

Radiated spurious emissions from the EuT are measured in the frequency range of 30 MHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003. The Interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna was positioned 3, 10 or 30 meters horizontally from the EuT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarization's and the EuT are rotated 360 degrees.

The final level, expressed in dB μ V/m, is arrived by taking the reading from the EMI receiver (Level dB μ V) and adding the correction factors and cable loss factor (Factor dB) to it. This is done automatically in the EMI receiver, where the correction factors are stored. This result then has the FCC or CISPR limit subtracted from it to provide the Delta which gives the tabular data as shown in the data sheets at page.

The radiated emissions from the EuT are measured in the frequency range of 1 GHz to maximum frequency as specified in section 15.33, using a tuned receiver (Spectrum Analyser) and appropriate linearly polarized antennas. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003.

The Interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna was positioned 3m horizontally from the EuT.

Measurement are made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 100 kHz and for any spurious emission or modulation product that falls in Restricted Band, as defined in Section 15.205, set the resolution and video bandwidth to 1 MHz.

All tests are performed at a test-distance of 3 meters. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration procedure the highest emission relative the limit and therefore shall be used for final testing. During the tests the EUT is rotated all around to find the maximum levels of emissions. The cables and equipment were placed and moved within the range of position likely to find their maximum emissions. When the EuT is larger than the beamwidth of the measuring antenna, the measurement

FCC ID: SDL-PD38XR01

antenna will be moved over the surfaces for the four sides or the test distance will be reduced to demonstrate that emissions were at maximum at the limit distance.

Analyzer Settings (EMI receiver) for spurious emissions which fall not in Restricted Band:

- Detector: Max hold
- RBW: 100 kHz for $f \geq 1\text{GHz}$, 120 kHz for $f \leq 1\text{GHz}$
- VBW: $\geq$ RBW
- Sweep Time: Coupled
- Detector function: Peak

Analyzer Settings (EMI receiver) for spurious emissions which fall in Restricted Band:

- Detector: Max hold
- RBW: 1 MHz for $f \geq 1\text{GHz}$, 120 kHz for $f \leq 1\text{GHz}$
- VBW: $\geq$ RBW
- Sweep Time: Coupled
- Detector function: Peak for $f \geq 1\text{GHz}$, Quasi Peak for $f \leq 1\text{GHz}$

mikes

FCC ID: SDL-PD38XR01

5.3.4 Test result

Testresult in detail: (<1GHz)

Corrected field strength of fundamental wave as reference for radiated emissions: 93,7 dBµV/m

Channel 0												
Frequency [MHz]	Restricted Band	Reading Level QP [dBµV]	Reading Level AV [dBµV]	Reading Level PK [dBµV]	Bandwidth [kHz]	Correct. factor [dB]	Corrected Level QP [dBµV/m]	Corrected Level AV [dBµV/m]	Corrected Level PK [dBµV/m]	Limit [dBµV/m]		Delta [dB]
										PK	QP	
0,009-0,15					0,2		< 30					
0,15-30					9		< 30					
30-1000					120				< 30	73,7		> -43,7
30-88	■				120		< 30				40	> -10,0
88-216	■				120		< 30				43,5	> -13,5
216-960	■				120		< 30				46	> -16,0
960-1000	■				120		< 30				54	> -24,0

Corrected field strength of fundamental wave as reference for radiated emissions: 92,0 dBµV/m

Channel 39												
Frequency [MHz]	Restricted Band	Reading Level QP [dBµV]	Reading Level AV [dBµV]	Reading Level PK [dBµV]	Bandwidth [kHz]	Correct. factor [dB]	Corrected Level QP [dBµV/m]	Corrected Level AV [dBµV/m]	Corrected Level PK [dBµV/m]	Limit [dBµV/m]		Delta [dB]
										PK	QP	
0,009-0,15					0,2		< 30					
0,15-30					9		< 30					
30-1000					120				< 30	72,0		> -42,0
30-88	■				120		< 30				40	> -10,0
88-216	■				120		< 30				43,5	> -13,5
216-960	■				120		< 30				46	> -16,0
960-1000	■				120		< 30				54	> -24,0

Corrected field strength of fundamental wave as reference for radiated emissions: 90,9dBµV/m

Channel 78												
Frequency [MHz]	Restricted Band	Reading Level QP [dBµV]	Reading Level AV [dBµV]	Reading Level PK [dBµV]	Bandwidth [kHz]	Correct. factor [dB]	Corrected Level QP [dBµV/m]	Corrected Level AV [dBµV/m]	Corrected Level PK [dBµV/m]	Limit [dBµV/m]		Delta [dB]
										PK	QP	
0,009-0,15					0,2		< 30					
0,15-30					9		< 30					
30-1000					120				< 30	70,9		> -40,9
30-88	■				120		< 30				40	> -10,0
88-216	■				120		< 30				43,5	> -13,5
216-960	■				120		< 30				46	> -16,0
960-1000	■				120		< 30				54	> -24,0

FCC ID: SDL-PD38XR01

Testresult in detail:(>1GHz)

Corrected field strength of fundamental wave as reference for radiated emissions: 93,7 dBµV/m

Channel 0											
Frequency [MHz]	Restricted Band	Reading Level PK [dBµV]	Corr. Duty Cycle [dB]	Level AV [dBµV] *)	Band-width [kHz]	Correct. Factor [dB]	Corrected Level PK [dBµV/m]	Corrected Level AV [dBµV/m]	Limit PK [dBµV/m]	Limit AV [dBµV/m]	Delta [dB]
1000-25000					100		< 47,0		73,7		< -26,7
1000-25000	■				1000			< 47,0		54,0	< -7,0

Corrected field strength of fundamental wave as reference for radiated emissions: 92,0 dBµV/m

Channel 39											
Frequency [MHz]	Restricted Band	Reading Level PK [dBµV]	Corr. Duty Cycle [dB]	Level AV [dBµV] *)	Band-width [kHz]	Correct. Factor [dB]	Corrected Level PK [dBµV/m]	Corrected Level AV [dBµV/m]	Limit PK [dBµV/m]	Limit AV [dBµV/m]	Delta [dB]
1000-25000					100		< 47,0		72,0		< -25,0
1000-25000	■				1000			< 47,0		54,0	< -7,0

Corrected field strength of fundamental wave as reference for radiated emissions: 90,9dBµV/m

Channel 78											
Frequency [MHz]	Restricted Band	Reading Level PK [dBµV]	Corr. Duty Cycle [dB]	Level AV [dBµV] *)	Band-width [kHz]	Correct. Factor [dB]	Corrected Level PK [dBµV/m]	Corrected Level AV [dBµV/m]	Limit PK [dBµV/m]	Limit AV [dBµV/m]	Delta [dB]
1000-25000					100		< 47,0		70,9		< -23,9
1000-25000	■				1000			< 47,0		54,0	< -7,0

Peak-Limit according to FCC Subpart 15.247(c)

In any 100 kHz bandwidth outside the frequency band 2400 – 2483.50 MHz, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

Attenuation below the general limits specified in §15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limit specified in §15.209(a) (see §15.205(c)).

Final radiated limits for spurious emissions which fall not in restricted band:

Frequency [MHz]	Limits acc. 15.209 [dBµV/m]	Measure- ment dis- tance (meters)	Limits acc. 15.247(c) [dBµV/m]			Final Radiated Limits [dBµV/m]		
			Ch 1	Ch 39	Ch 78	Ch 1	Ch 39	Ch 78
	Limit							
0,009-0,490	2400/F(kHz)	300	73,7	72,0	70,9	73,7	72,0	70,9
0,490-1,705	24000/F(kHz)	30	73,7	72,0	70,9	73,7	72,0	70,9
1,705-30	30	30	73,7	72,0	70,9	73,7	72,0	70,9
30-88	40	3	73,7	72,0	70,9	73,7	72,0	70,9
88-216	43,5	3	73,7	72,0	70,9	73,7	72,0	70,9
216-960	46	3	73,7	72,0	70,9	73,7	72,0	70,9
Above 960	54	3	73,7	72,0	70,9	73,7	72,0	70,9

Radiated limits according to FCC Part 15 Subpart 15.209(a) for spurious emissions which fall in restricted band:

Frequency (MHz)	Field strength of spurious emissions		Measurement distance (meters)
	(µV/m)	dB (µV/m)	
0,009-0,490	2400/F(kHz)		300
0,490-1,705	24000/F(kHz)		30
1,705-30	30	29,5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

FCC ID: SDL-PD38XR01

Restricted bands of operation:

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209

MHz	MHz	GHz
25.5 – 25.67	960 – 1240	4.5 – 5.15
37.5 – 38.25	1300 – 1427	5.35 – 5.46
73 – 74.6	1435 – 1626.5	7.25 – 7.75
74.8 – 75.2	1645.5 – 1646.5	8.025 – 8.5
108 – 121.94	1660 – 1710	9.0 – 9.2
123 – 138	1718.8 – 1722.2	9.3 – 9.5
149.9 – 150.05	2200 – 2300	10.6 – 12.7
156.52475 – 156.52525	2310 – 2390	13.25 – 13.4
156.7 – 156.9	2483.5 – 2500	14.47 – 14.5
162.0125 – 167.17	2655 – 2900	15.35 – 16.2
167.72 – 173.2	3260 – 3267	17.7 – 21.4
240 – 285	3332 – 3339	22.01 – 23.12
322 – 335.4	3345.8 – 3358	23.6 – 24.0
399.9 – 410	3600 – 4400	31.2 – 31.8
608 – 614		36.43 – 36.5

The requirements are **FULFILLED**.

Remarks: During the test, the Eut was set into normal modulation mode as intended for use.

The measurement was performed up to the 10th harmonic (25000MHz).

5.4 Spurious RF Conducted Emission

For test instruments and accessories used see section 6 Part SEC1, SEC2, SEC3.

5.4.1 Description of the test location

Test location:

5.4.2 Description of Measurement

A Spectrum analyzer / EMI test receiver is connected to the output of the transmitter via a suitable attenuator while EuT was operating in transmit mode using the assigned frequency.

Analyzer Settings:

- Detector: Max Hold
- RBW: 100 kHz
- VBW: $\geq$ RBW
- Sweep Time: Coupled
- Detector function: Peak

5.4.3 Photo documentation of the test set-up

5.4.4 Test result

Corrected field strength of fundamental wave as reference for conducted emissions: dB μ V

Channel xx											
Frequency [MHz]	Restricted Band	Reading Level PK [dB μ V]	Corr. Duty Cycle [dB]	Level AV [dB μ V] *)	Band-width [kHz]	Correct. Factor [dB]	Corrected Level PK [dB μ V/m]	Corrected Level AV [dB μ V/m]	Limit PK [dB μ V/m]	Limit AV [dB μ V/m]	Delta [dB]

Corrected field strength of fundamental wave as reference for conducted emissions: dB μ V

Channel xx											
Frequency [MHz]	Restricted Band	Reading Level PK [dB μ V]	Corr. Duty Cycle [dB]	Level AV [dB μ V] *)	Band-width [kHz]	Correct. Factor [dB]	Corrected Level PK [dB μ V/m]	Corrected Level AV [dB μ V/m]	Limit PK [dB μ V/m]	Limit AV [dB μ V/m]	Delta [dB]

FCC ID: SDL-PD38XR01

Corrected field strength of fundamental wave as reference for conducted emissions: dBμV

Channel xx											
Frequency [MHz]	Restricted Band	Reading Level PK [dBμV]	Corr. Duty Cycle [dB]	Level AV [dBμV] *)	Band-width [kHz]	Correct. Factor [dB]	Corrected Level PK [dBμV/m]	Corrected Level AV [dBμV/m]	Limit PK [dBμV/m]	Limit AV [dBμV/m]	Delta [dB]

Peak-Limit according to FCC Subpart 15.247(c)

In any 100 kHz bandwidth outside the frequency band 2400 – 2483.50 MHz, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limit specified in §15.209(a) (see §15.205(c)).

Restricted bands of operation:

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209

MHz	MHz	GHz
25.5 – 25.67	960 – 1240	4.5 – 5.15
37.5 – 38.25	1300 – 1427	5.35 – 5.46
73 – 74.6	1435 – 1626.5	7.25 – 7.75
74.8 – 75.2	1645.5 – 1646.5	8.025 – 8.5
108 – 121.94	1660 – 1710	9.0 – 9.2
123 – 138	1718.8 – 1722.2	9.3 – 9.5
149.9 – 150.05	2200 – 2300	10.6 – 12.7
156.52475 – 156.52525	2310 – 2390	13.25 – 13.4
156.7 – 156.9	2483.5 – 2500	14.47 – 14.5
162.0125 – 167.17	2655 – 2900	15.35 – 16.2
167.72 – 173.2	3260 – 3267	17.7 – 21.4
240 – 285	3332 – 3339	22.01 – 23.12
322 – 335.4	3345.8 – 3358	23.6 – 24.0
399.9 – 410	3600 – 4400	31.2 – 31.8
608 – 614		36.43 – 36.5

The requirements are **FULFILLED**.

Remarks: This test is not applicable because the EuT has only an integral antenna without any external antenna connections.

5.5 20 dB Bandwidth

For test instruments and accessories used see section 6 Part MB.

5.5.1 Description of the test location

Test location: AREA4

5.5.2 Photo documentation of the test set-up



5.5.3 Description of Measurement

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio of -20 dB. The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or the first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The resolution bandwidth of measuring instrument was set to a value as shown in the following table below according to ANSI C63.4-2003.

Fundamental frequency	Minimum resolution bandwidth
9 kHz to 30 MHz	1kHz
30 to 1000 MHz	10 kHz
1000 MHz to 40 GHz	100 kHz

5.5.4 Test result

Channel Frequency [MHz]	20 dB Bandwidth [kHz]
2402	870
2441	866
2480	858

FCC ID: SDL-PD38XR01

Requirement according to FCC Subpart 15.247(a)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Remarks: For detailed test result please refer to following test protocol.

mikes

FCC ID: SDL-PD38XR01

5.5.5 Test protocol

Channel 0
2402 MHz




*RBW 30 kHz Marker 3 [T1]
VBW 100 kHz -60.58 dBm
SWT 5 ms 2.402432000 GHz

Ref -20 dBm

*Att 0 dB

1 PK
VIEW

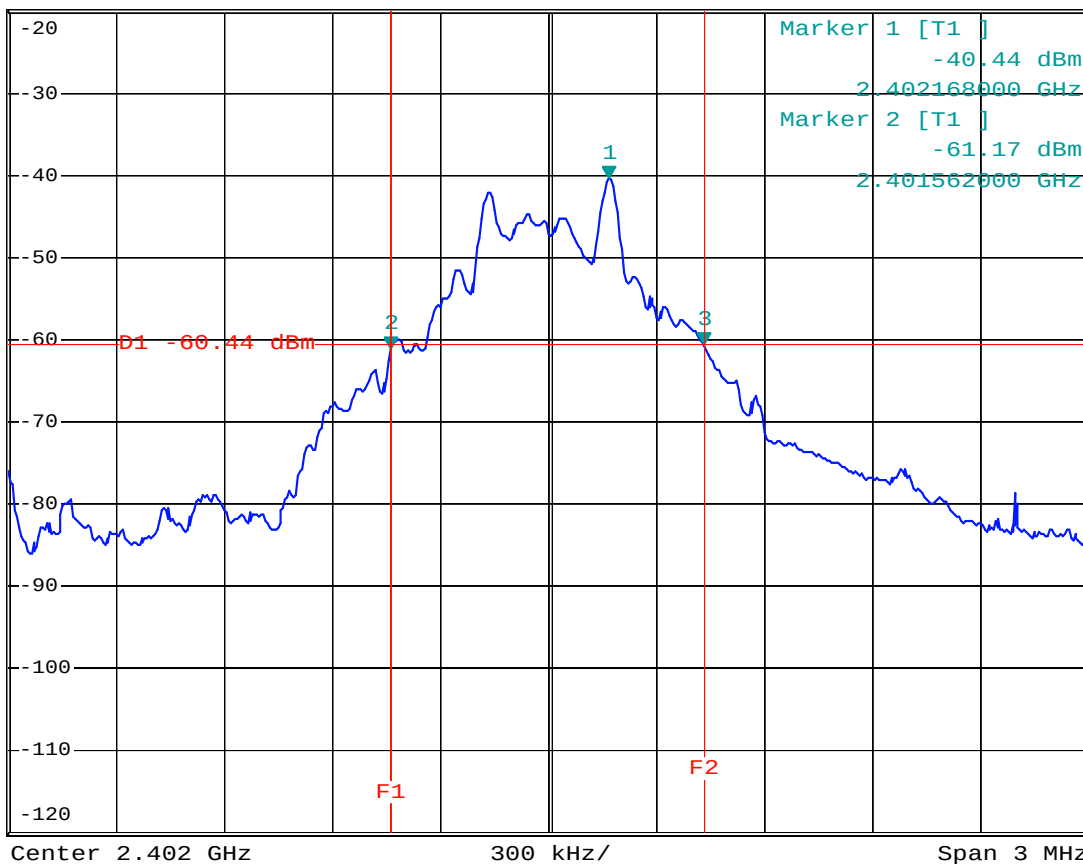

FCC ID: SDL-PD38XR01

Channel 39
2441 MHz




*RBW 30 kHz Marker 3 [T1]
VBW 100 kHz -72.45 dBm
SWT 5 ms 2.441432000 GHz

Ref -20 dBm

*Att 0 dB

1 PK
VIEW

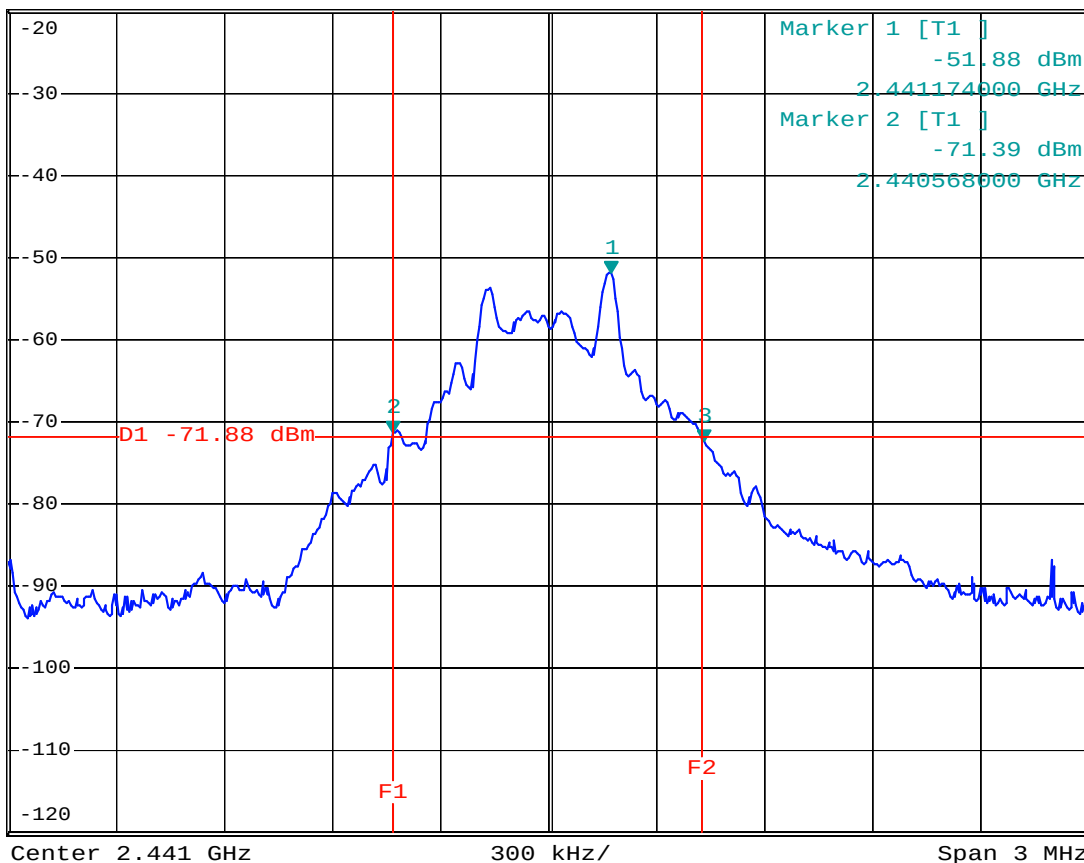

FCC ID: SDL-PD38XR01

Channel 78
2480 MHz




*RBW 30 kHz Marker 3 [T1]
VBW 100 kHz -71.09 dBm
SWT 5 ms 2.480432000 GHz

Ref -20 dBm

*Att 0 dB

1 PK
VIEW

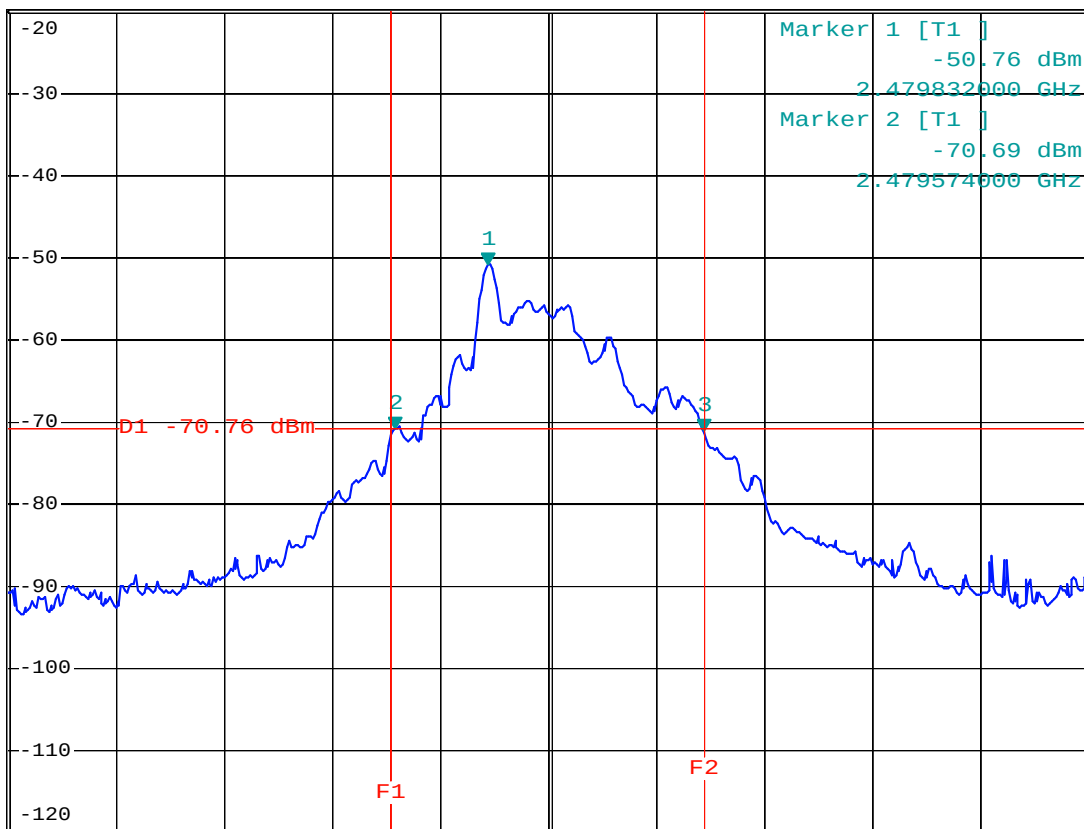

Center 2.48 GHz

300 kHz/

Span 3 MHz

5.6 Band edge test

For test instruments and accessories used see section 6 Part MB.

5.6.1 Description of the test location

Test location: AREA4

5.6.2 Photo documentation of the test set-up



5.6.3 Description of Measurement

The EuT was connected to the spectrum analyzer with a suitable attenuator. The span of the spectrum analyzer was set wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation. The highest amplitude appearing on spectral display was measured and it was set as the reference level for the emission mask. It was allowed the trace to stabilize and after then it was set the emission mask on the reference level to show the compliance with the bandedge requirements.

Further settings on the spectrum analyzer:

RBW: $\geq 1\%$ of the span
VBW: $\geq$ RBW
Sweep: Auto
Detector function: Peak

5.6.4 Test result

Frequency [MHz]	Peak Power Output [dBm]	Spurious emission read value [dBm]	Result of Band edge [dBc]	Band edge LIMIT [dBc]
< 2400	-40,77	-77,39	36,62	≥ 20
> 2483,5	-50,44	-80,62	30,18	≥ 20

FCC ID: SDL-PD38XR01

Peak-Limit according to FCC Subpart 15.247(c)

In any 100 kHz bandwidth outside the frequency band 2400 – 2483.50 MHz, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

Attenuation below the general limits specified in §15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limit specified in §15.209(a) (see §15.205(c)).

The requirements are **FULFILLED**.**Remarks:** For detailed test result please refer to following test protocol.



FCC ID: SDL-PD38XR01

5.6.5 Test protocol

Lower Channel 2402 MHz




*RBW 30 kHz Marker 3 [T1]
VBW 100 kHz -77.39 dBm
SWT 5 ms 2.400494000 GHz

Ref -20 dBm

*Att 0 dB

1 PK
VIEW

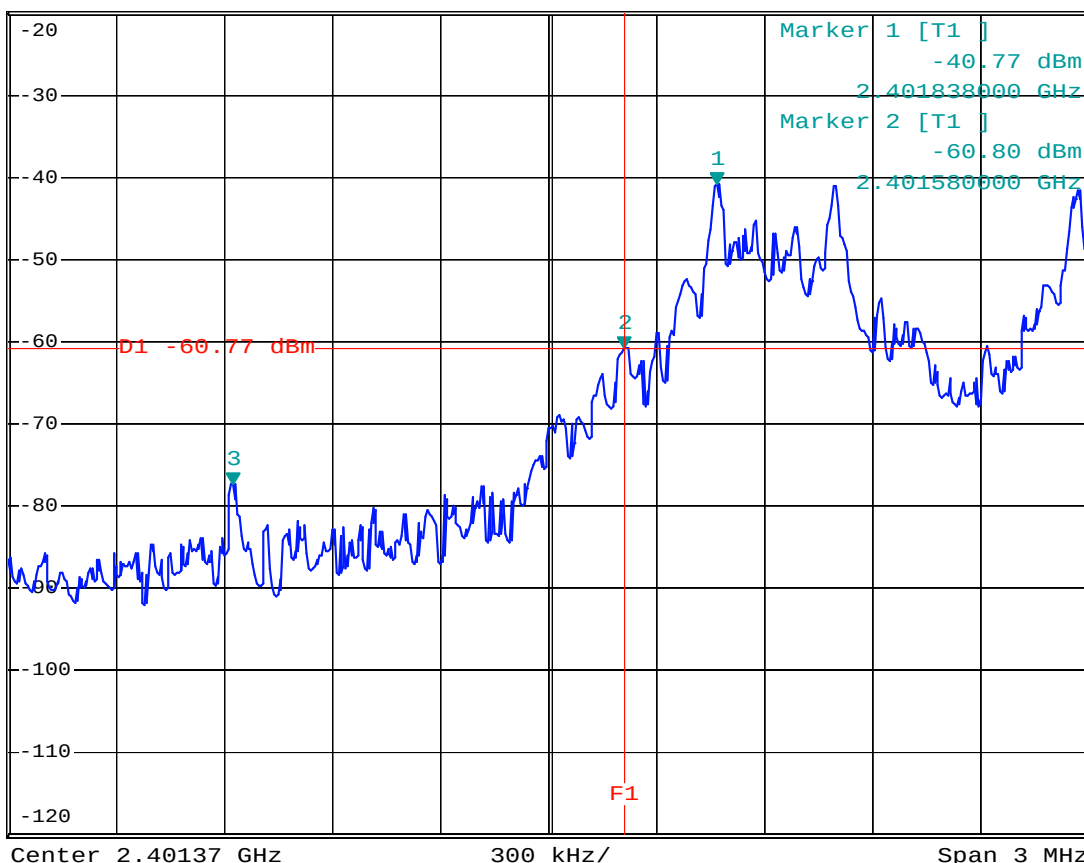

FCC ID: SDL-PD38XR01

Higher Channel
2480 MHz




*RBW 30 kHz Marker 4 [T1]
VBW 100 kHz -80.62 dBm
SWT 5 ms 2.481842000 GHz

Ref -20 dBm

*Att 0 dB

1 PK
VIEW

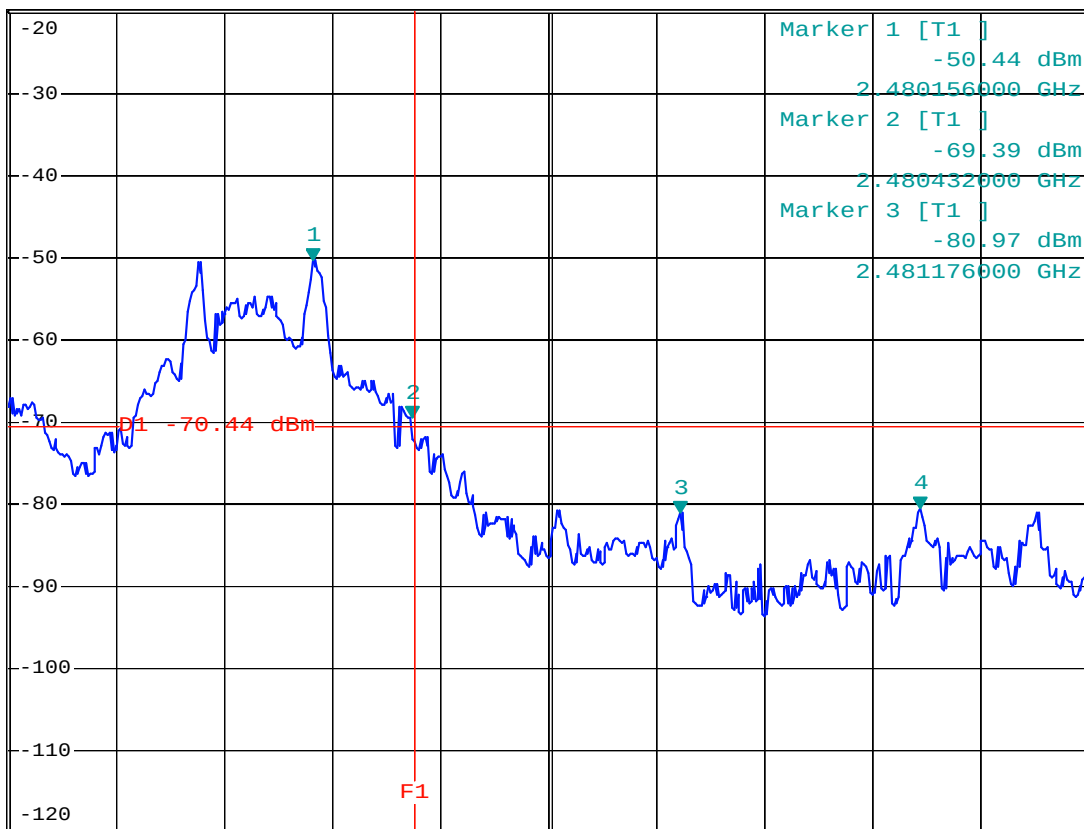

Center 2.48081 GHz

300 kHz/

Span 3 MHz

Time of occupancy (Dwell Time)

For test instruments and accessories used see section 6 Part DC.

5.8.1 Description of the test location

Test location: AREA4

5.8.2 Photo documentation of the test set-up



5.8.3 Test result

Channel frequency [MHz]	Pulse Time [µs]	Bursts (in 1 second)	Time of occupancy (Dwell time) [ms]	Avarage time of Occupancy LIMIT [ms]
2441	106,96	100	337,99	400

Limit according to FCC Subpart 15.247 (1)(iii)

Frequency hopping systems shall be used at least 15 non-overlapping channels. The average time of occupancy on any channel shall no be greater than 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems which use fewer than 75 hopping frequencies may employ intelligent hopping techniques to avoid interference to other transmissions. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels are used.

The requirements are **FULFILLED**.

Remarks: For detailed test result please refer to following test protocol.


FCC ID: SDL-PD38XR01

Time of occupancy (Dwell time)
FCC Part 15 Subpart 15.247 (1)(iii)



Ref -20 dBm *Att 0 dB RBW 1 MHz Delta 2 [T1] 0.27 dB
SWT 140 µs 106.960000 µs

1 AP
VIEW

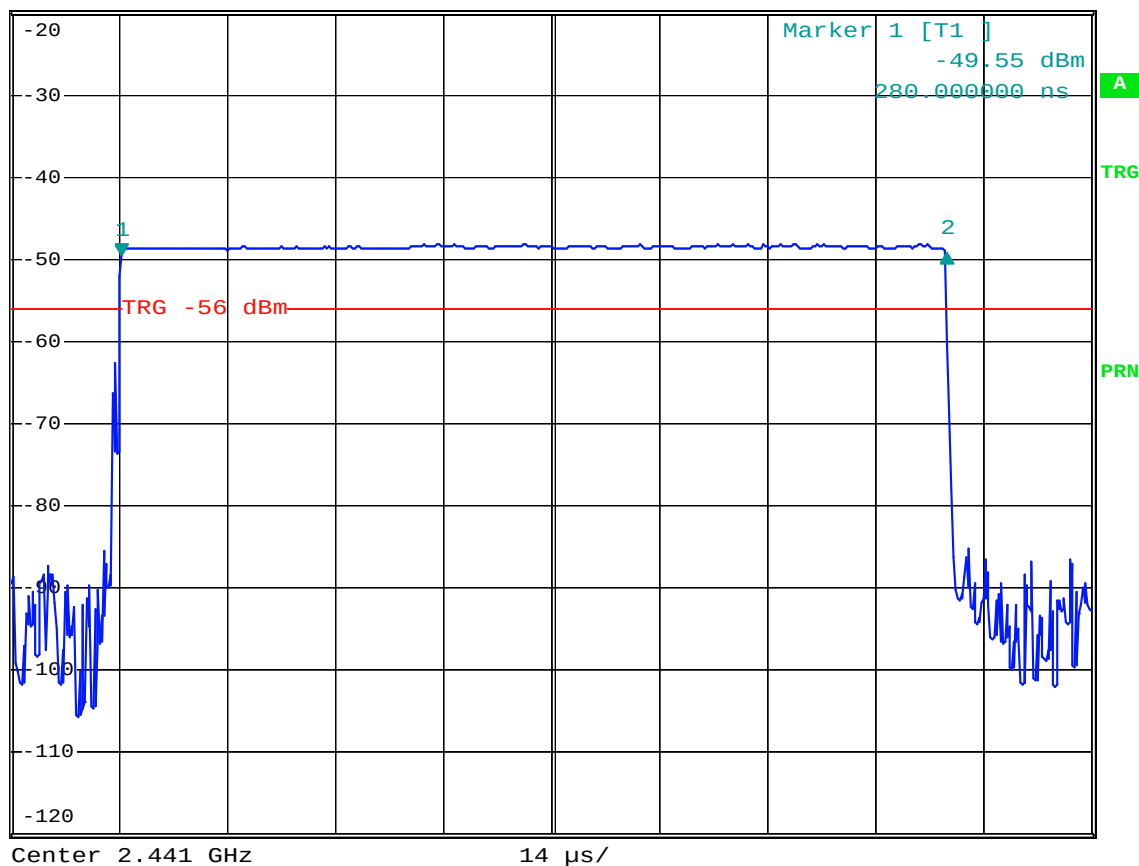


FCC ID: SDL-PD38XR01

Time of occupancy (Dwell time)
FCC Part 15 Subpart 15.247 (1)(iii)



1 AP
VIEW

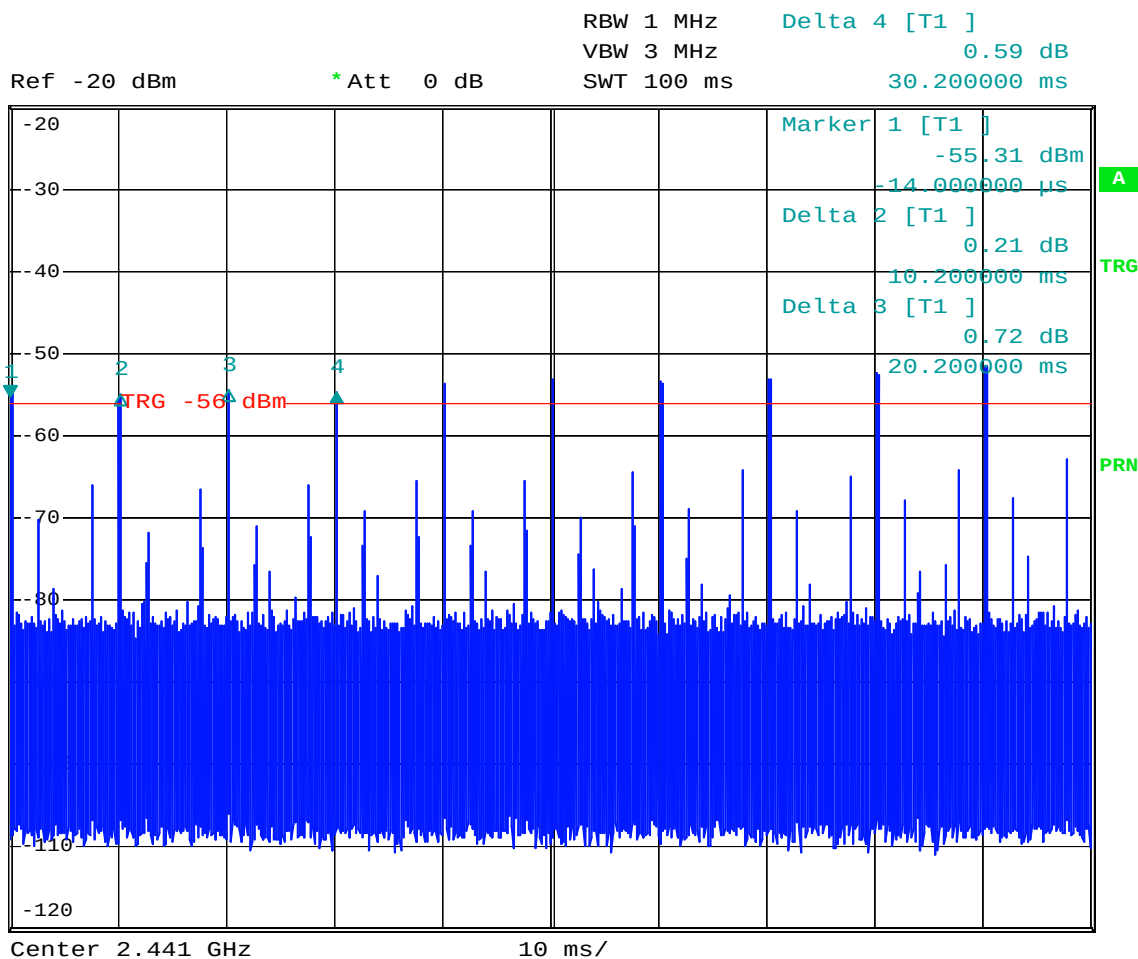


FCC ID: SDL-PD38XR01

Time of occupancy (Dwell time)
FCC Part 15 Subpart 15.247 (1)(iii)



Ref -20 dBm * Att 0 dB RBW 1 MHz Delta 2 [T1] -0.43 dB
SWT 1 s 10.000000 ms

1 AP
VIEW

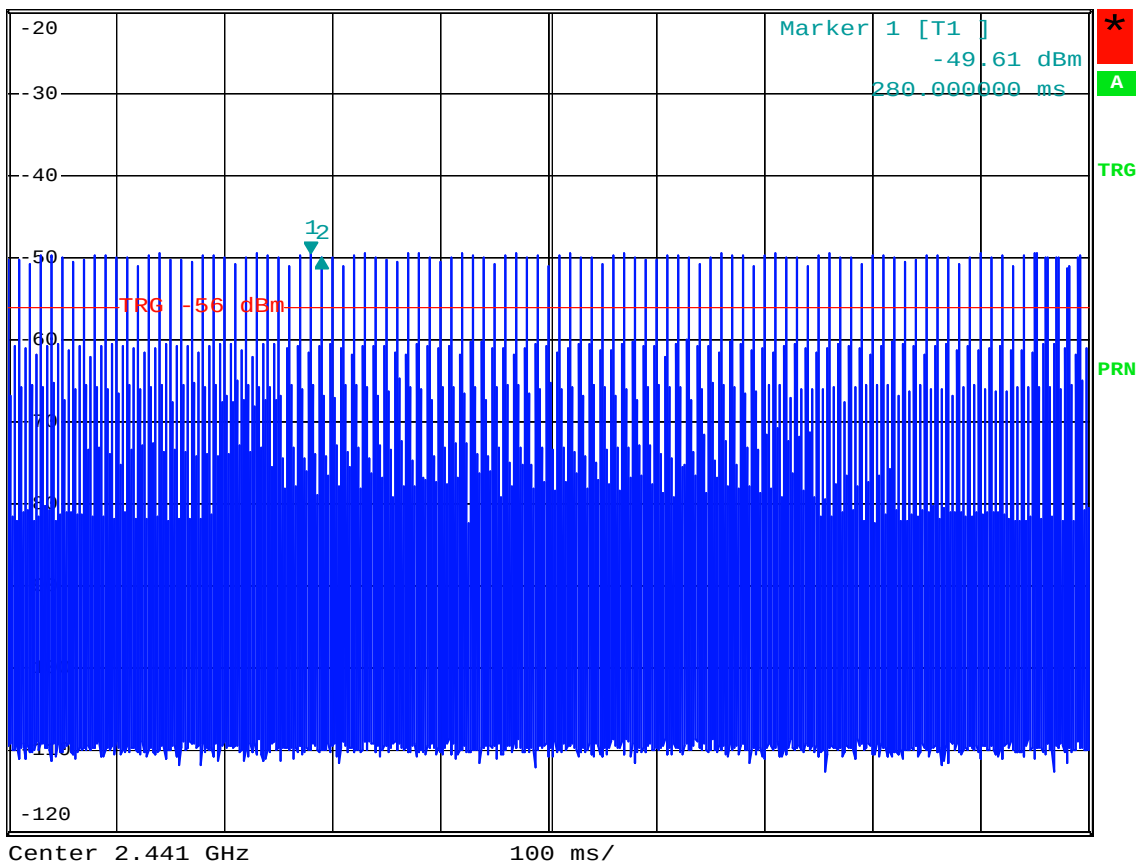

5.9 Channel separation test

For test instruments and accessories used see section 6 Part MB.

5.9.1 Description of the test location

Test location: AREA4

5.9.2 Photo documentation of the test set-up



5.9.3 Test result

Channel 0 [MHz]	Channel 1 [MHz]	Separation Value [kHz]	Separation LIMIT [kHz]
2402,18	2403,16	980	≥ 870

Limit according to FCC Subpart 15.247 (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

FCC ID: SDL-PD38XR01

The requirements are **FULFILLED**.

Remarks: For detailed test result please refer to following test protocol.

mikes

FCC ID: SDL-PD38XR01

Channel separation test
FCC Subpart 15.247 (1)




*RBW 100 kHz Marker 4 [T1]
VBW 300 kHz -41.23 dBm
SWT 2.5 ms 2.405180000 GHz

Ref -30 dBm

*Att 0 dB

1 PK
VIEW

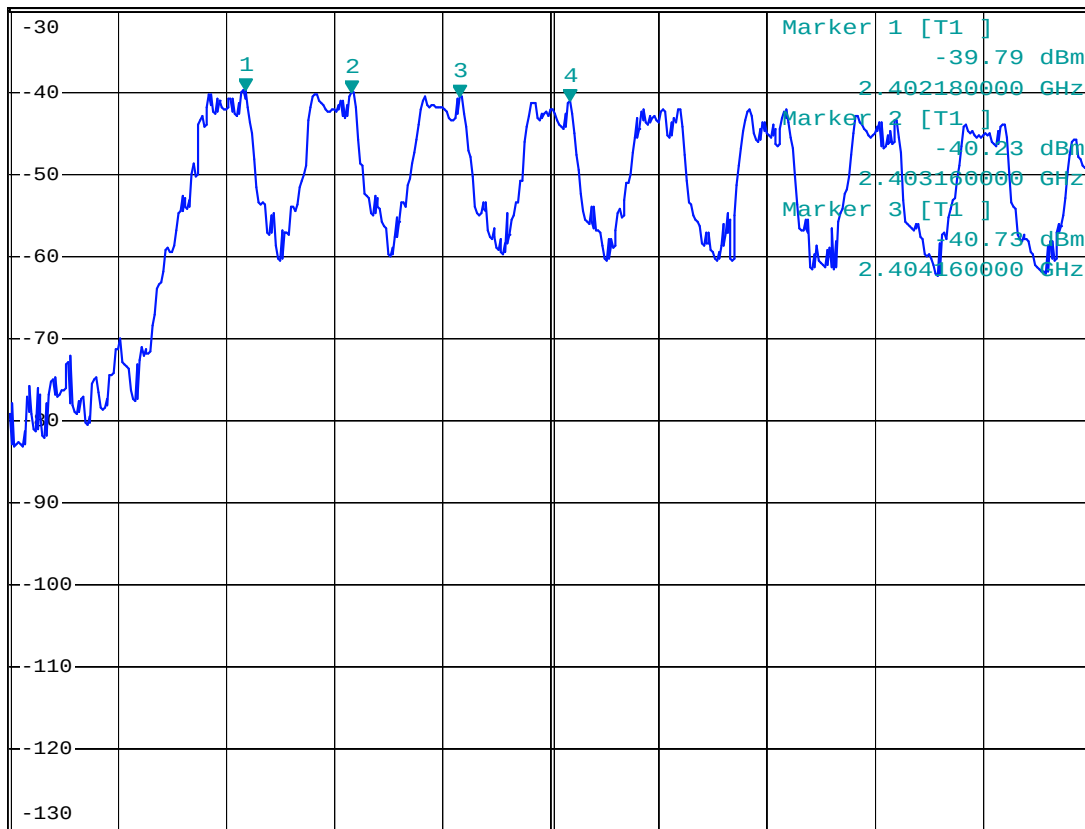

Start 2.4 GHz

1 MHz/

Stop 2.41 GHz

5.10 Quantity of Hopping Channel test

For test instruments and accessories used see section 6 Part MB.

5.10.1 Description of the test location

Test location: AREA4

5.10.2 Photo documentation of the test set-up



5.10.3 Test result

Hopping Channel Frequency range	Quantity of hopping Channel value	Quantity of hopping Channel MINIMUM LIMIT
2402 - 2480	79	15

Limit according to FCC Subpart 15.247 (1)(iii)

Frequency range [MHz]	LIMIT (Quantity of Hopping Channel)			
	20dB Bandwidth < 250kHz	20dB Bandwidth > 250kHz	20dB Bandwidth < 1 MHz	20dB Bandwidth > 1MHz
902 - 928	50	25	n.A	n.A
2400 – 2483,5	15	15	15	15
5725 - 5850	n.A	n.A	75	n.A

FCC ID: SDL-PD38XR01

The requirements are **FULFILLED**.

Remarks: For detailed test result please refer to following test protocol.

mikes

FCC ID: SDL-PD38XR01

Quantity of hopping channel
FCC Subpart 15.247 (1)(iii)
Channel 0-28




*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -40.68 dBm
SWT 5 ms 2.401840000 GHz

Ref -20 dBm

*Att 0 dB

1 PK
VIEW

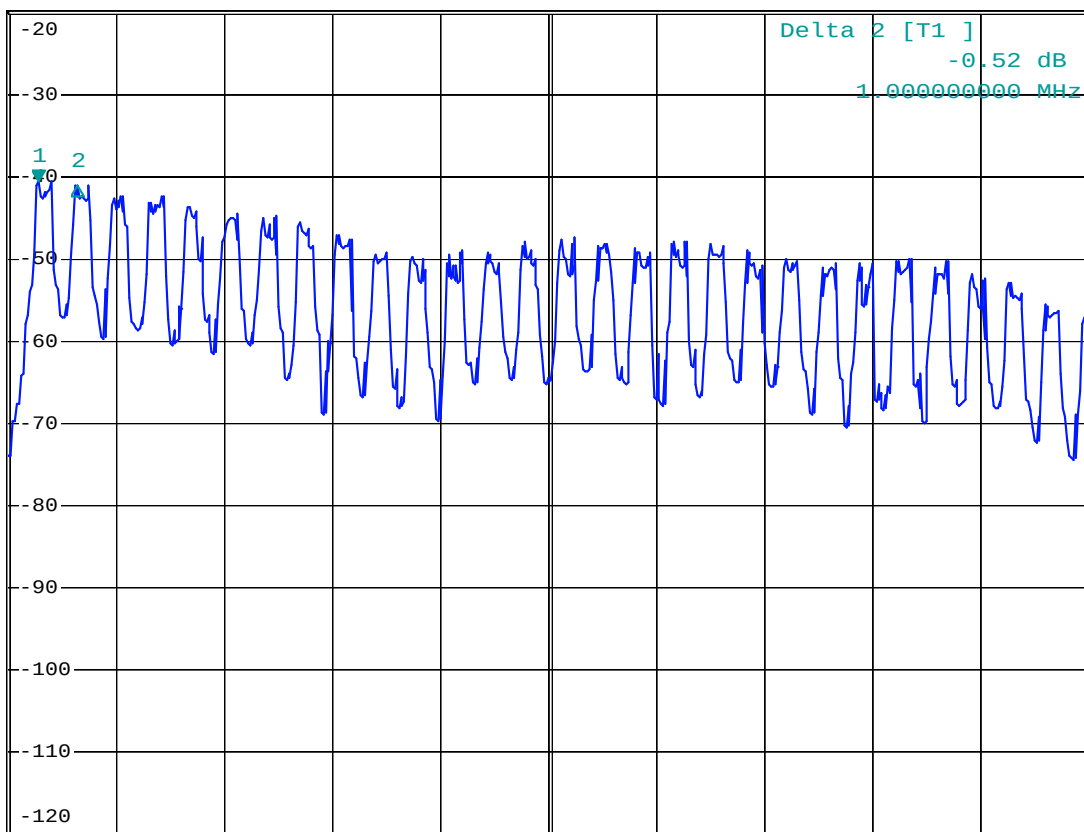

Start 2.401 GHz 2.9 MHz/ Stop 2.43 GHz

FCC ID: SDL-PD38XR01

Quantity of hopping channel
FCC Subpart 15.247 (1)(iii)
Channel 29-58




*RBW 100 kHz Delta 2 [T1]
VBW 300 kHz -1.31 dB
SWT 5 ms 1.020000000 MHz

Ref -20 dBm

*Att 0 dB

1 PK
VIEW

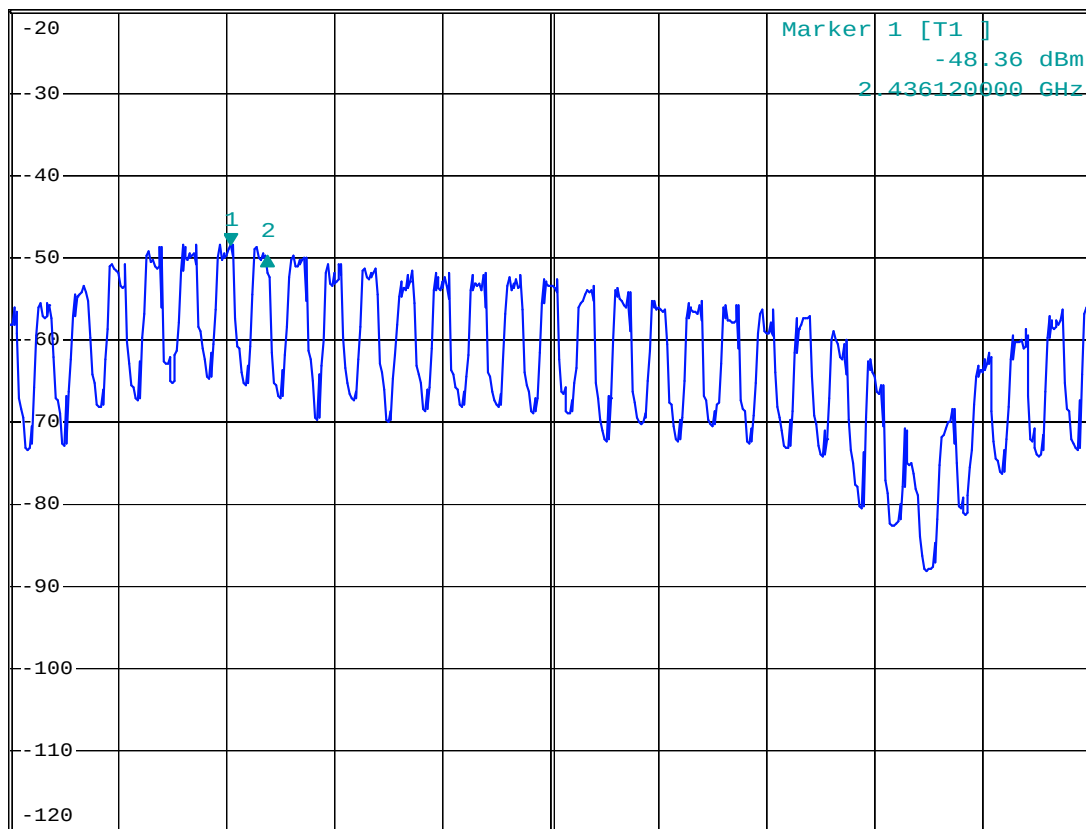

Start 2.43 GHz

3 MHz/

Stop 2.46 GHz

FCC ID: SDL-PD38XR01

Quantity of hopping channel
FCC Subpart 15.247 (1)(iii)
Channel 58-78




*RBW 100 kHz Delta 2 [T1]
VBW 300 kHz -0.66 dB
SWT 5 ms 1.020000000 MHz

Ref -20 dBm

*Att 0 dB

1 PK
VIEW

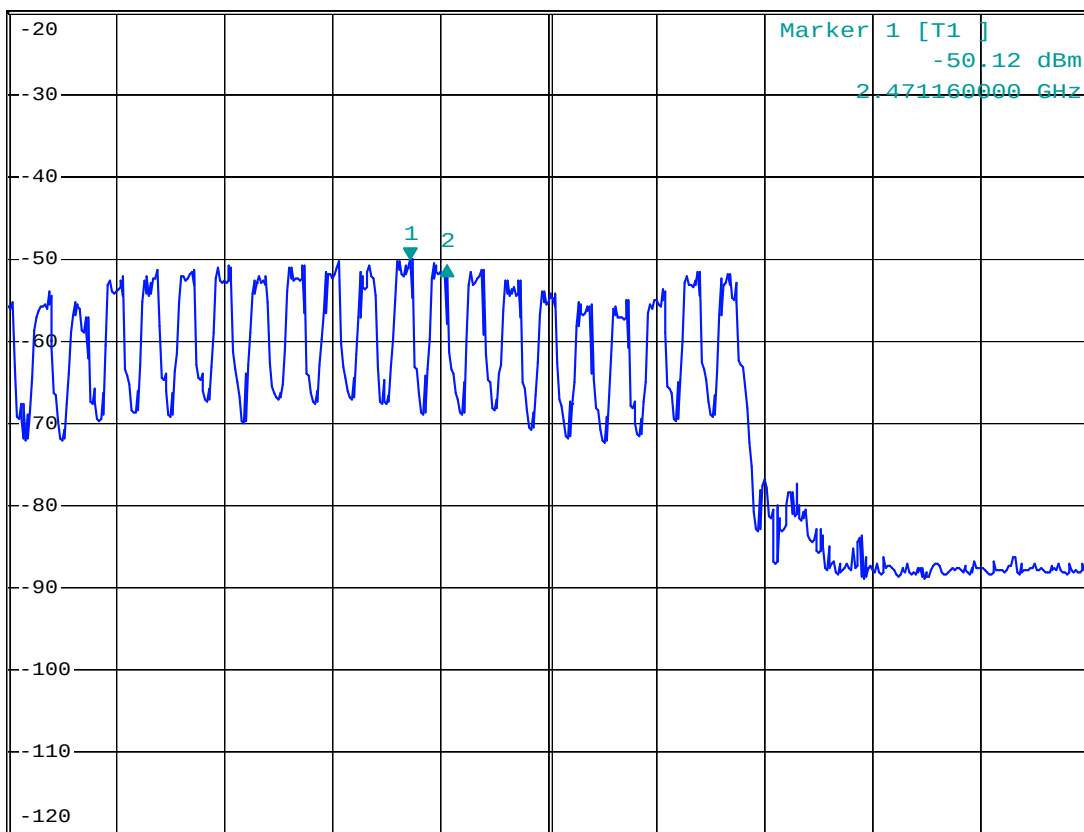

Start 2.46 GHz

3 MHz/

Stop 2.49 GHz

5.11 Antenna Applications

5.11.1 Antenna requirement

The EuT's antenna is met the requirement of FCC part 15C section 15.203 and 15.204.

FCC part 15C section 15.247 requirement:

Systems operating in the 2400-2483,5 MHz band that are used exclusively for fixed, point to point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

5.11.2 Result

The EUT used a dipole antenna and is printed on the PCB. The gain of antenna is -3dBi and no other antenna than that furnished by the responsible party are be used with the device.

mikes

5.12 Receiver conducted disturbances 0.15 - 30 MHz

For test instruments and accessories used see section 6 Part A 4.

5.12.1 Description of the test location

Test location:

5.12.2 Photo documentation of the test set-up

5.12.3 Description of Measurement

The final level, expressed in dB μ V, is arrived at by taking the reading directly from the EMI receiver. This level is compared directly to the FCC Limit or to the CISPR limit, which is equivalent to the Australian AS 3548 limit.

To convert between dB μ V and μ V, the following conversions apply:

$$\text{dB}\mu\text{V} = 20(\log \mu\text{V})$$

$$\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$$

Conducted emissions on the 50 Hz and/or 60 Hz power interface of the EuT are measured in the frequency range of 150 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection, and a Line Impedance Stabilization Network (LISN), with 50 Ω /50 μ H (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 centimeter's above the floor and is positioned 40 centimeter's from the vertical ground plane (wall) of the screen room. If the minimum passing margin appears to be less than 20 dB with a peak mode measurement, the emissions are remeasured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.

5.12.4 Test result

Frequency range:

Min. limit margin

Remarks: The measurement is not applicable because the EuT is battery powered.

FCC ID: SDL-PD38XR01

5.13 Receiver radiated emissions (electric field) 9 kHz - 40 GHz

For test instruments and accessories used see section 6 Part SER1, SER2 and SER3.

5.13.1 Description of the test location


Test location: OATS1
Anechoic Chamber A2

Test distance: 3 metres


5.13.2 Photo documentation of the test set-up



FCC ID: SDL-PD38XR01

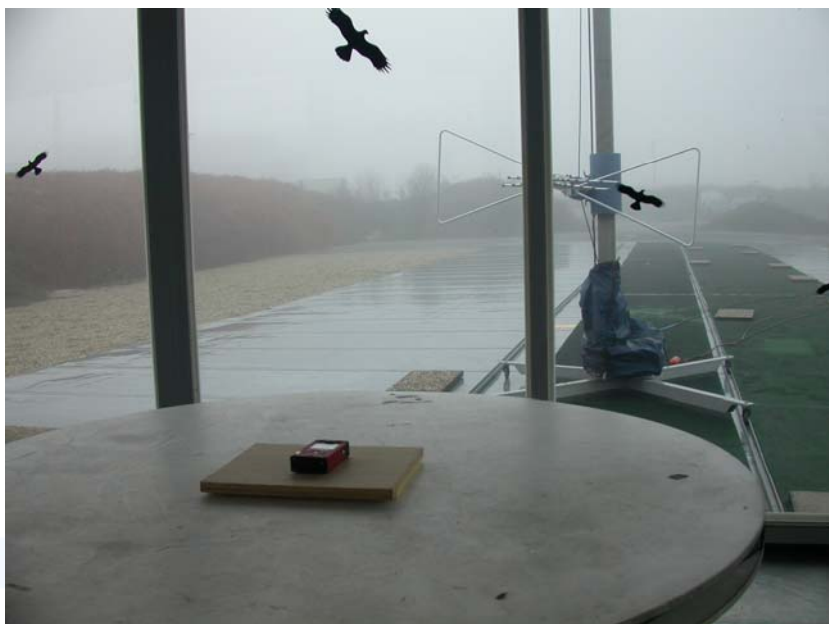

FCC ID: SDL-PD38XR01

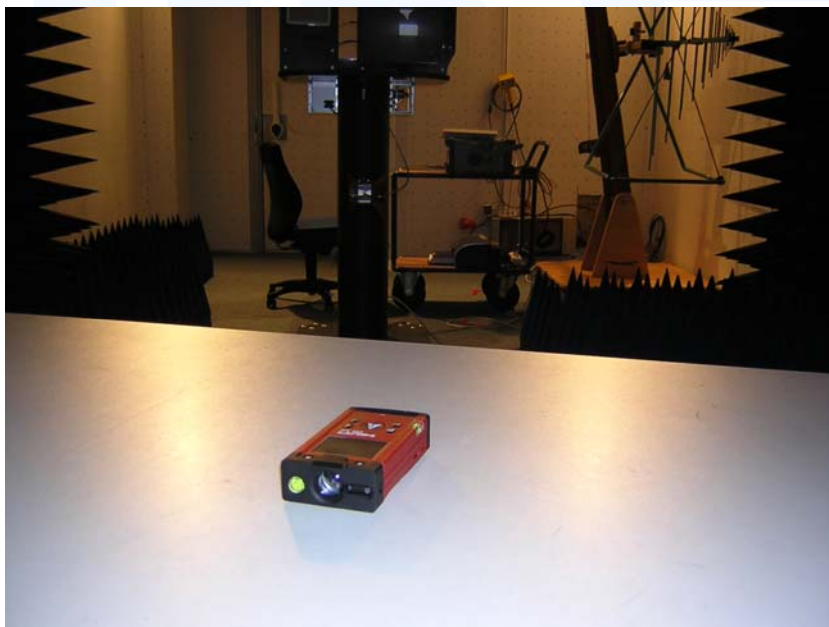

5.13.3 Description of Measurement

Radiated spurious emissions from the EuT are measured in the frequency range of 30 MHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003. The Interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna was positioned 3, 10 or 30 meters horizontally from the EuT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarization's and the EuT are rotated 360 degrees.

The final level, expressed in dB μ V/m, is arrived by taking the reading from the EMI receiver (Level dB μ V) and adding the correction factors and cable loss factor (Factor dB) to it. This is done automatically in the EMI receiver, where the correction factors are stored. This result then has the FCC or CISPR limit subtracted from it to provide the Delta which gives the tabular data as shown in the data sheets at page.

The radiated emissions from the EuT are measured in the frequency range of 1 GHz to maximum frequency as specified in section 15.33, using a tuned receiver (Spectrum Analyser) and appropriate linearly polarized antennas. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003.

The Interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna was positioned 3m horizontally from the EuT.

Measurement are made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 100 kHz and for any spurious emission or modulation product that falls in Restricted Band, as defined in Section 15.205, set the resolution and video bandwidth to 1 MHz.

All tests are performed at a test-distance of 3 meters. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration procedure the highest emission relative the limit and therefore shall be used for final testing. During the tests the EUT is rotated all around to find the maximum levels of emissions. The cables and equipment were placed and moved within the range of position likely to find their maximum emissions. When the EuT is larger than the beamwidth of the measuring antenna, the measurement antenna will be moved over the surfaces for the four sides or the test distance will be reduced to demonstrate that emissions were at maximum at the limit distance.

Analyzer Settings (EMI receiver) for spurious emissions which fall not in Restricted Band:

- Detector: Max hold
- RBW: 100 kHz for $f \geq 1\text{GHz}$, 120 kHz for $f \leq 1\text{GHz}$
- VBW: $\geq$ RBW
- Sweep Time: Coupled
- Detector function: Peak

Analyzer Settings (EMI receiver) for spurious emissions which fall in Restricted Band:

- Detector: Max hold
- RBW: 1 MHz for $f \geq 1\text{GHz}$, 120 kHz for $f \leq 1\text{GHz}$
- VBW: $\geq$ RBW
- Sweep Time: Coupled
- Detector function: Peak for $f \geq 1\text{GHz}$, Quasi Peak for $f \leq 1\text{GHz}$

FCC ID: SDL-PD38XR01

5.13.4 Test result

Testresult in detail: (<1GHz)

Channel 0												
Frequency [MHz]	Reading Level QP [dBµV]	Reading Level AV [dBµV]	Reading Level PK [dBµV]	Bandwidth [kHz]	Correct. factor [dB]	Corrected Level QP [dBµV/m]	Corrected Level AV [dBµV/m]	[Corrected Level PK [dBµV/m]	Limit [dBµV/m]			Delta [dB]
									QP	AV	PK	
0,009-0,15				0,2		< 30						
0,15-30				9		< 30						
30-1000				120		< 30						

Channel 39												
Frequency [MHz]	Reading Level QP [dBµV]	Reading Level AV [dBµV]	Reading Level PK [dBµV]	Bandwidth [kHz]	Correct. factor [dB]	Corrected Level QP [dBµV/m]	Corrected Level AV [dBµV/m]	[Corrected Level PK [dBµV/m]	Limit [dBµV/m]			Delta [dB]
									QP	AV	PK	
0,009-0,15				0,2		< 30						
0,15-30				9		< 30						
30-1000				120		< 30						

Channel 78												
Frequency [MHz]	Reading Level QP [dBµV]	Reading Level AV [dBµV]	Reading Level PK [dBµV]	Bandwidth [kHz]	Correct. factor [dB]	Corrected Level QP [dBµV/m]	Corrected Level AV [dBµV/m]	[Corrected Level PK [dBµV/m]	Limit [dBµV/m]			Delta [dB]
									QP	AV	PK	
0,009-0,15				0,2		< 30						
0,15-30				9		< 30						
30-1000				120		< 30						

FCC ID: SDL-PD38XR01

Test result >1GHz

Channel 0									
Frequency [MHz]	Reading Level PK [dBμV]	Reading Level AV [dBμV] *)	Bandwidth [kHz]	Correct. Factor [dB]	Corrected Level PK [dBμV/m]	Corrected Level AV [dBμV/m]	Limit PK [dBμV/m]	Limit AV [dBμV/m]	Delta [dB]
1000-13000			1000		< 50				

Channel 39									
Frequency [MHz]	Reading Level PK [dBμV]	Reading Level AV [dBμV] *)	Bandwidth [kHz]	Correct. Factor [dB]	Corrected Level PK [dBμV/m]	Corrected Level AV [dBμV/m]	Limit PK [dBμV/m]	Limit AV [dBμV/m]	Delta [dB]
1000-13000			1000		< 50				

Channel 78									
Frequency [MHz]	Reading Level PK [dBμV]	Reading Level AV [dBμV] *)	Bandwidth [kHz]	Correct. Factor [dB]	Corrected Level PK [dBμV/m]	Corrected Level AV [dBμV/m]	Limit PK [dBμV/m]	Limit AV [dBμV/m]	Delta [dB]
1000-13000			1000		< 50				

Limit according to FCC Subpart 15.109(a)

Frequency of emission [MHz]	Field strength Limits [μV/m]	Field strength Limits [dBμV/m]
0,009-0,490	2400/F(kHz)	
0,490-1,705	24000/F(kHz)	
1,705-30	30	
30-88	100	40
88-216	150	44
216-960	200	46
Above 960	500	54

The requirements are **FULFILLED**.

Remarks: The Limits are met.

During the test, the Eut was set into continuous receiving mode.

The measurement was performed up to the 5th harmonic (13000 MHz).

6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used, in addition to the test accessories, are calibrated and verified regularly.

The calibration intervals and the calibration history will be given out on request.

Test ID	Model / Type	Kind of Equipment	Manufacturer	Equipment No.
CPR 3	FSP 30	Spectrum Analyzer	Rohde & Schwarz München	02-02/11-05-001
	AFS4-01000400-10-10P-4	RF Amplifier 1-4 GHz	PARZICH GMBH	02-02/17-05-003
	AMF-4F-04001200-15-10P	RF Amplifier 4-12 GHz	PARZICH GMBH	02-02/17-05-004
	AFS5-12001800-18-10P-6	RF Amplifier 12-18 GHz	PARZICH GMBH	02-02/17-05-005
	3117	Horn Antenna 1-18 GHz	EMCO Elektronik GmbH	02-02/24-05-009
	Sucoflex N-1600-SMA	RF Cable	novotronik Signalverarbeitung	02-02/50-05-073
	Sucoflex N-2000-SMA	RF Cable	novotronik Signalverarbeitung	02-02/50-05-075
DC	FSP 30	Spectrum Analyzer	Rohde & Schwarz München	02-02/11-05-001
	THS730A	Handheld Scope	Tektronix GmbH	02-02/13-05-007
	WK-340/40	Climatic Chamber	Weiss Umwelttechnik GmbH	02-02/45-05-001
	HM-8142	Power Supply	A.H.-Systems Inc.	02-02/50-05-047
MB	FSP 30	Spectrum Analyzer	Rohde & Schwarz München	02-02/11-05-001
	THS730A	Handheld Scope	Tektronix GmbH	02-02/13-05-007
	WK-340/40	Climatic Chamber	Weiss Umwelttechnik GmbH	02-02/45-05-001
	HM-8142	Power Supply	A.H.-Systems Inc.	02-02/50-05-047
SER 1	FMZB 1516	Antenna 9kHz - 30 MHz	Schwarzbeck Mess-Elektronik	01-02/24-01-018
	ESHS 30	Test Receiver	Rohde & Schwarz München	02-02/03-05-002
SER 2	ESVS 30	Test Receiver	Rohde & Schwarz München	02-02/03-05-006
	VULB 9168	Trilog-Broadband Antenna	Schwarzbeck Mess-Elektronik	02-02/24-05-005
	S10162-B / +11N-50-10-5 / +	RF Cable 33 m	Huber + Suhner	02-02/50-05-031
	KK-EF393-21N-16	RF Cable 20 m	Huber + Suhner	02-02/50-05-033
	NW-2000-NB	RF Cable	Huber + Suhner	02-02/50-05-113
SER 3	R 3162	Spectrum Analyzer	Advantest	02-02/11-05-003
	AFS4-01000400-10-10P-4	RF Amplifier 1-4 GHz	PARZICH GMBH	02-02/17-05-003
	AMF-4F-04001200-15-10P	RF Amplifier 4-12 GHz	PARZICH GMBH	02-02/17-05-004
	AFS5-12001800-18-10P-6	RF Amplifier 12-18 GHz	PARZICH GMBH	02-02/17-05-005
	3117	Horn Antenna 1-18 GHz	EMCO Elektronik GmbH	02-02/24-05-009
	Sucoflex N-1600-SMA	RF Cable	novotronik Signalverarbeitung	02-02/50-05-073
	Sucoflex N-2000-SMA	RF Cable	novotronik Signalverarbeitung	02-02/50-05-075