

# EMC Test Report

Tested in accordance with  
Federal Communications Commission (FCC)  
Personal Communications Services  
CFR 47, Part 15 Subpart C and E  
&  
Industry Canada (IC) RSS-210, RSS-GEN



**REPORT NO.:** RTS-6067-1505-16


**PRODUCT MODEL NO.:** RHR191LW (SQW100-4)  
**TYPE NAME:** BlackBerry® smartphone  
**FCC ID:** L6ARHR190LW  
**IC:** 2503A-RHR190LW

**DATE:** May 15, 2015

RTS is accredited  
according to  
EN ISO/IEC 17025 by:



**592**

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model<br>RHR191LW (SQW100-4) |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015                            | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

### **Statement of Performance:**

The BlackBerry® smartphone, model RHR191LW (SQW100-4), part number CER-59662-001 Rev3-x10-00 and its accessories perform within the requirements of the test standards when configured and operated under BlackBerry's operation instructions.

### **Declaration:**

We hereby certify that:

The test data reported herein is an accurate record of the performance of the sample(s) tested.

The test results are valid for the tested unit (s) only.

The test equipment used was suitable for the tests performed and within manufacturer's published specifications and operating parameters.

The test methods were consistent with the methods described in the relevant standards.

Documented by:


Reviewed by:

\_\_\_\_\_  
Shiva Kumbham  
Compliance Associate

\_\_\_\_\_  
Savtej S. Sandhu  
Compliance Specialist I


Reviewed and Approved by:

\_\_\_\_\_  
Masud S. Attayi, P.Eng.  
Manager, Regulatory Compliance


|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model<br>RHR191LW (SQW100-4) |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015                            | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

## Table of Contents

|    |   |     |
|----|---|-----|
| A. | Scope.....  | 5   |
| B. | Associated Documents .....  | 5   |
| C. | Product Identification.....   | 5   |
| D. | Support Equipment used for the testing of the EUT.....  | 7   |
| E. | Test Results Chart .....  | 8   |
| F. | Summary of Results.....   | 10  |
| G. | Compliance Test Equipment Used .....  | 22  |
| H. | Test Software Used.....   | 23  |
|    | APPENDIX 1 – AC POWER LINE CONDUCTED EMISSIONS TEST DATA/PLOTSAC Conducted Emission Test Results..... | 24  |
|    | APPENDIX 2 – BLUETOOTH, BLUETOOTH LOW ENERGY AND 802.11b/g/n RADIATED EMISSIONS TEST DATA.....        | 33  |
|    | APPENDIX 3 – 802.11a/n RADIATED EMISSIONS TEST DATA .....   | 51  |
|    | APPENDIX 4 – 802.11ac RADIATED EMISSIONS TEST DATA.....   | 65  |
|    | APPENDIX 5 – BLUETOOTH AND BLUETOOTH LOW ENERGY CONDUCTED EMISSIONS TEST DATA/PLOTS.....              | 76  |
|    | APPENDIX 6 – 802.11b/g/n CONDUCTED EMISSIONS TEST DATA/PLOTS .....                                    | 113 |

|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4) |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015                         | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

|  |     |
|--|-----|
| APPENDIX 7 – 802.11a/n CONDUCTED EMISSIONS TEST DATA/PLOTS ..... | 135 |
| APPENDIX 8 – 802.11ac CONDUCTED EMISSIONS TEST DATA/PLOTS .....  | 187 |
| APPENDIX 9 – NEAR FIELD COMMUNICATIONS TEST DATA/PLOTS .....     | 228 |

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model<br>RHR191LW (SQW100-4) |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015                            | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

## A. Scope

This report details the results of compliance tests which were performed in accordance to the requirements of:

- o FCC CFR 47 Part 15, Subpart C and E, October, 2014
- o Industry Canada, RSS-210, Issue 8, December 2010, and Amendment1, February 2015, License-Exempt, Low Power Radio Apparatus operating in the Television Bands
- o Industry Canada, RSS-GEN, Issue 04, November 2014, General Requirements for Compliance of Radio Apparatus
- o 789033 D02 General UNII Test Procedures v01
- o 905462 D06 802.11 Channel Plans v01

## B. Associated Documents

1. RHR191LW-R158-HWD\_CER-59662-001-Rev2-x08-01
2. RHR191LW-R158-HWD\_CER-59662-001-Rev2-x08-02
3. RHR191LW-R164-HWD\_CER-59662-001-Rev3-x10-00
4. MultiSourceDeclaration\_R164\_AAA728\_10.3.2.2025

## C. Product Identification

Manufactured by BlackBerry Limited whose headquarters is located at:

2200 University Ave. East  
Waterloo, Ontario  
Canada, N2K 0A7

Phone: 519 888 7465


Fax: 519 888 6906

The equipment under test (EUT) was tested at the following locations:

BlackBerry RTS EMC test facilities

305 Phillip Street  
Waterloo, Ontario  
Canada, N2L 3W8  
Phone: 519-888-7465  
Fax: 519-888-6906

440 Phillip Street  
Waterloo, Ontario  
Canada, N2L 5R9  
Phone: 519-888-7465  
Fax: 519-888-6906

|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4) |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015                         | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |


The testing was performed from April 02 – May 14, 2015.

| SAMPLE | MODEL                  | CER NUMBER                   | SN/PIN     | SOFTWARE   |
|--------|------------------------|------------------------------|------------|--|
| 1      | RHR191LW<br>(SQW100-4) | CER-59662-001<br>Rev1-x08-00 | 1160694539 | Software Build: AAA728   |
| 2      | RHR191LW<br>(SQW100-4) | CER-59662-001<br>Rev1-x08-00 | 1160693373 | Software Build: AAA728   |
| 3      | RHR191LW<br>(SQW100-4) | CER-59662-001<br>Rev1-x08-00 | 1160692430 | Software Build: AAA728   |
| 4      | RHR191LW<br>(SQW100-4) | CER-59662-001<br>Rev1-x08-00 | 1160685324 | Software Build: AAA728   |
| 5      | RHR191LW<br>(SQW100-4) | CER-59662-001<br>Rev1-x08-00 | 1160686597 | Software Build: AAA728   |
| 6      | RHR191LW<br>(SQW100-4) | CER-59662-001<br>Rev1-x08-00 | 1160685327 | Software Build: AAA728   |
| 7      | RHR191LW<br>(SQW100-4) | CER-59662-001<br>Rev3-x10-00 | 2FFE9034   | OS Version: 10.3.2.2024<br>Radio Version: 10.3.2.2025<br>SW Release Version: 10.3.2.2012 |
| 8      | RHR191LW<br>(SQW100-4) | CER-59662-001<br>Rev3-x10-00 | 2FFE9016   | OS Version: 10.3.2.2024<br>Radio Version: 10.3.2.2025<br>SW Release Version: 10.3.2.2012 |
| 9      | RHR191LW<br>(SQW100-4) | CER-59662-001<br>Rev3-x10-00 | 2FFE9017   | OS Version: 10.3.2.2024<br>Radio Version: 10.3.2.2025<br>SW Release Version: 10.3.2.2012 |

AC Line Conducted Emissions testing was performed on sample 1.  
Conducted Emissions testing was performed on sample 5, 6, 8, and 9.  
Radiated Emissions testing was performed on sample 2, 3, 4, and 7.  
Near Field Communications testing was performed on sample 7.

The characteristics that may have been affected by the changes from Rev1-x08-00 to Rev3-x10-00 for RHR191LW were verified/re-tested. If necessary  
For more details, refer to RHR191LW-R158-HWD\_CER-59662-001-Rev2-x08-01,  
RHR191LW-R158-HWD\_CER-59662-001-Rev2-x08-02, and  
RHR191LW-R164-HWD\_CER-59662-001-Rev3-x10-00.

To view the differences between software builds AAA728 to 10.3.2.2024 for RHR191LW, see document MultiSourceDeclaration\_R164\_AAA728\_10.3.2.2025.


|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model<br>RHR191LW (SQW100-4) |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015                            | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

### BlackBerry® smartphone Accessories Tested

- 1) NA Fixed Blade Charger, part number HDW-58920-001, with an output voltage 5 volts dc, 1300mA
- 2) Headset, part number HDW-49299-001, with a lead length of 1.1 meters
- 3) Alt Headset, part number HDW-44306-001, with a lead length of 1.1 meters
- 4) USB Cable, part number HDW-50071-001, with a lead length of 1.2 meters
- 5) Alt USB Cable, part number HDW-51800-001, with a lead length of 1.2 meters

### **D. Support Equipment Used for the Testing of the EUT**


- 1) Lenovo Thinkpad laptop, type 4236-D84, S/N PB-HX502 12/02, product ID 4236D84

|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4) |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015                         | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

## E. Test Results Chart


| SPECIFICATION              |                    | TEST TYPE  | Meets Requirements | TEST DATA |
|----------------------------|--------------------|--|--------------------|-----------|
| FCC CFR 47                 | IC                 |  |                    | APPENDIX  |
| Part 15.207                | RSS-210<br>RSS-GEN | AC Powerline Conducted Emission                    | Pass               | 1         |
| Part 15.209<br>Part 15.247 | RSS-210<br>RSS-GEN | BT/BLE Radiated Spurious Emissions                 | Pass               | 2         |
| Part 15.209<br>Part 15.247 | RSS-210<br>RSS-GEN | BT/BLE Radiated Band Edge Compliance               | Pass               | 2         |
| Part 15.209<br>Part 15.247 | RSS-210<br>RSS-GEN | 802.11b/g/n Radiated Spurious Emissions            | Pass               | 2         |
| Part 15.209<br>Part 15.247 | RSS-210<br>RSS-GEN | 802.11b/g/n Radiated Band Edge Compliance          | Pass               | 2         |
| Part 15.209<br>Part 15.407 | RSS-210<br>RSS-GEN | 802.11a/n Radiated Spurious Emissions              | Pass               | 3         |
| Part 15.209<br>Part 15.407 | RSS-210<br>RSS-GEN | 802.11a/n Radiated Band Edge Compliance            | Pass               | 3         |
| Part 15.209<br>Part 15.407 | RSS-210<br>RSS-GEN | 802.11ac Radiated Spurious Emissions               | Pass               | 4         |
| Part 15.209<br>Part 15.407 | RSS-210<br>RSS-GEN | 802.11ac Radiated Band Edge Compliance             | Pass               | 4         |
| Part 15.247(a)             | RSS-210            | BT, 20 dB Bandwidth                                | Pass               | 5         |
| Part 15.247(a)             | RSS-210            | BT, Carrier Frequency Separation                   | Pass               | 5         |
| Part 15.247(a)             | RSS-210            | BT, Number of Hopping Frequencies                  | Pass               | 5         |
| Part 15.247(a)             | RSS-210            | BT, Time of Occupancy (Dwell Time)                 | Pass               | 5         |
| Part 15.247(b)             | RSS-210            | BT, Maximum Peak Conducted Output Power            | Pass               | 5         |
| Part 15.247(c)             | RSS-210            | BT, Band-Edge Compliance of RF Conducted Emissions | Pass               | 5         |
| Part 15.247(c)             | RSS-210            | BT, Spurious RF Conducted Emissions                | Pass               | 5         |
| Part 15.247(a)             | RSS-210            | BLE, 6 dB Bandwidth                                | Pass               | 5         |
| Part 15.247(b)             | RSS-210            | BLE, Maximum Conducted Output Power                | Pass               | 5         |
| Part 15.247(c)             | RSS-210            | BLE, Band-Edge                                     | Pass               | 5         |
| Part 15.247(d)             | RSS-210            | BLE, Peak Power Spectral Density                   | Pass               | 5         |
| Part 15.247(c)             | RSS-210            | BLE, Spurious RF Conducted Emissions               | Pass               | 5         |



|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4) |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015                         | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

### Test Results Chart cont'd

| SPECIFICATION                 |                    | TEST TYPE                                      | Meets Requirements | TEST DATA |
|-------------------------------|--------------------|--|--------------------|-----------|
| FCC CFR 47                    | IC                 |  |                    | APPENDIX  |
| Part 15.247(a)                | RSS-210            | 802.11b/g/n, 6 dB Bandwidth                    | Pass               | 6         |
| Part 15.247(b)                | RSS-210            | 802.11b/g/n, Maximum Conducted Output Power    | Pass               | 6         |
| Part 15.247(c)                | RSS-210            | 802.11b/g/n, Band-Edge                         | Pass               | 6         |
| Part 15.247(d)                | RSS-210            | 802.11b/g/n, Peak Power Spectral Density       | Pass               | 6         |
| Part 15.247(c)                | RSS-210            | 802.11b/g/n, Spurious RF Conducted Emissions   | Pass               | 6         |
| Part 15.407                   | RSS-210            | 802.11a/n, 6 dB Bandwidth                      | Pass               | 7         |
| Part 15.407                   | RSS-210            | 802.11a/n, Maximum Conducted Output Power      | Pass               | 7         |
| Part 15.407                   | RSS-210            | 802.11a/n, Band-Edge                           | Pass               | 7         |
| Part 15.407                   | RSS-210            | 802.11a/n, Peak Power Spectral Density         | Pass               | 7         |
| Part 15.407                   | RSS-210            | 802.11a/n, Spurious RF Conducted Emissions     | Pass               | 7         |
| Part 15.407                   | RSS-210            | 802.11ac, 6 dB Bandwidth                       | Pass               | 8         |
| Part 15.407                   | RSS-210            | 802.11ac, Maximum Conducted Output Power       | Pass               | 8         |
| Part 15.407                   | RSS-210            | 802.11ac, Band-Edge                            | Pass               | 8         |
| Part 15.407                   | RSS-210            | 802.11ac, Peak Power Spectral Density          | Pass               | 8         |
| Part 15.407                   | RSS-210            | 802.11ac, Spurious RF Conducted Emissions      | Pass               | 8         |
| Part 15.209<br>Part 15.225(a) | RSS-210<br>RSS-GEN | Near Field Communications, Radiated Emissions  | Pass               | 9         |
| Part 15.225(e)                | RSS-210            | Near Field Communications, Occupied Bandwidth  | Pass               | 9         |
| Part 15.225(e)                | RSS-210            | Near Field Communications, Frequency Stability | Pass               | 9         |

|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4) |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015                         | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

## F. Summary of Results

### 1) AC POWER LINE CONDUCTED EMISSIONS

The AC Powerline conducted emissions were measured using the test procedure outlined in CISPR Recommendation 22 through a 50 Ohm Line Impedance Stabilization Network (LISN), which was inserted in the power line to the equipment to provide the specified impedance for measurements. The EUT was placed on a nonconductive wooden table, 80 cm high that was positioned 40 cm from a vertical ground plane. The RF output of the network was connected to an EMI receiver system with characteristics that duplicate those of the receiver specified in CISPR Publication 16.

BlackBerry® smartphone was in battery charging mode. The input voltage was 120 V, 60 Hz.


The following test configurations were measured:

| Test Configuration | Operating Mode(s) | Charger + Accessories                                   |
|--------------------|-------------------|---|
| 1                  | NFC TX            | NA Fixed Blade Charger + Headset + USB Cable 1.20m      |
| 2                  | Bluetooth TX      | Fixed Blade Charger + Alt Headset + Alt USB Cable 1.20m |
| 3                  | 802.11b TX        | Fixed Blade Charger + Headset + Alt USB Cable 1.20m     |
| 4                  | 802.11ac TX       | Fixed Blade Charger + Alt Headset + Alt USB Cable 1.20m |

The sample EUT's conducted emissions were compared with respect to the FCC CFR 47 Part 15, Subpart C and E as well as IC RSS-210 limits. The sample EUT had a worst case test margin of 11.57 dB below the QP limit at 0.164 MHz with the NA Fixed Blade Charger in Test Configuration 1.

See APPENDIX 1 for the test data.

### Measurement Uncertainty $\pm 3.2$ dB

|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4) |   |
| Test Report No.:<br>RTS-6067-1505-16  | Dates of Test:<br>April 02 – May 14, 2015                                | FCC ID: L6ARHR190LW<br>IC: 2503A-RHR190LW |

## 2) BLUETOOTH, BLUETOOTH LOW ENERGY AND 802.11b/g/n RADIATED EMISSIONS

### a) Radiated Spurious Emissions and Harmonics

The EUT was placed on a nonconductive styrofoam table, 1.5 metres high that was positioned on a remotely controlled turntable. The test distance used between the EUT and the receiving antenna was three metres. The turntable was rotated to determine the azimuth of the peak emissions. Then the emissions were maximized by elevating the antenna in the range of 1 to 4 metres. The maximum emission level was recorded. The frequency range measured was from 30 MHz to 25.0 GHz. Both the horizontal and vertical polarizations of the emissions were measured.

The measurements were done in a semi-anechoic chamber (SAC) below 1 GHz and a modified semi-anechoic chamber (modified SAC) with floor absorbers above 1 GHz. The SAC's FCC registration number is **778487** and the Industry Canada (IC) file number is **2503B-1**. The modified SAC's FCC registration number is **959115** and the IC file number is **2503C-1**.


The EUT was configured and operated to produce the maximum radiated emissions while still keeping within BlackBerry's specifications.

The BlackBerry® smartphone was measured in standalone configuration with Bluetooth transmitting in single frequency mode at low channel (0), middle channel (39) and high channel (78) for packet type "DH5", "2-DH5" and "3-DH5". The system's radiated emission levels were compared with respect to the FCC CFR 47 Part 15, Subpart C, 15.247 and RSS-210.

The BlackBerry® smartphone was measured in standalone configuration with Bluetooth Low Energy transmitting in single frequency mode at low channel (0), middle channel (20) and high channel (39). The system's radiated emission levels were compared with respect to the FCC CFR 47 Part 15, Subpart C, 15.247 and RSS-210.

The BlackBerry® smartphone was measured in standalone configuration transmitting on channels 1, 6 & 11 at 1 Mbps for 802.11b mode, at 6 Mbps for 802.11g mode, and at MCS 0 for 802.11n mode. The system's radiated emission levels were compared with respect to the FCC CFR 47 Part 15 Subpart C, 15.247 and RSS-210.

The Bluetooth harmonics were investigated up to the 10th harmonic. All emissions had a test margin of greater than 25 dB.

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model<br>RHR191LW (SQW100-4) |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015                            | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

The Bluetooth Low Energy harmonics were investigated up to the 10th harmonic. The sample EUT emissions were in the noise floor (NF).

The 802.11b/g/n harmonics were investigated up to the 10th harmonic. All emissions had a test margin of greater than 25 dB.


See APPENDIX 2 for the test data.

b) Band-Edge Compliance of RF Radiated Emissions

The BlackBerry® smartphone met the requirements for band-edge compliance of RF radiated emissions for Bluetooth, Bluetooth Low Energy and 802.11b/g/n as per the requirements of 15.247, 15.209, and RSS-210/RSS-GEN.

See APPENDIX 2 for the test data

**Measurement Uncertainty  $\pm 4.2$  dB**

|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4) |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015                         | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

### 3) 802.11a/n RADIATED EMISSIONS

#### a) Radiated Spurious and Harmonic Emissions

The EUT was placed on a nonconductive styrofoam table, 1.5 metres high that was positioned on a remotely controlled turntable. The test distance used between the EUT and the receiving antenna was three metres. The turntable was rotated to determine the azimuth of the peak emissions. Then the emissions were maximized by elevating the antenna in the range of 1 to 4 metres. The maximum emission level was recorded. The frequency range measured was from 30 MHz to 40.0 GHz. Both the horizontal and vertical polarizations of the emissions were measured.

The measurements were done in a semi-anechoic chamber (SAC) below 1 GHz and a modified semi-anechoic chamber (modified SAC) with floor absorbers above 1 GHz. The SAC's FCC registration number is **778487** and the Industry Canada (IC) file number is **2503B-1**. The modified SAC's FCC registration number is **959115** and the IC file number is **2503C-1**.

The EUT was configured and operated to produce the maximum radiated emissions while still keeping within BlackBerry's specifications.

The BlackBerry® smartphone was measured in standalone configuration transmitting on channels 36, 48, 64, 100, 140 and 165 at 6 Mbps for 802.11a mode and at MCS 0 for 802.11n. The system's radiated emission levels were compared with respect to the FCC CFR 47 Part 15 Subpart E, 15.407 and RSS-210/RSS-GEN.

The 802.11a/n harmonics were investigated up to the 10th harmonic. All emissions had a test margin of greater than 25 dB.


See APPENDIX 3 for the test data.

#### b) Band-Edge Compliance of RF Radiated Emissions

The BlackBerry® smartphone met the requirements for band-edge compliance of RF radiated emissions for 802.11a/n as per the requirements of 15.407, 15.209 and RSS-210/ RSS-GEN.

See APPENDIX 3 for the test data

**Measurement Uncertainty  $\pm 4.2$  dB**

|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4) |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015                         | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

#### 4) 802.11ac RADIATED EMISSIONS

##### a) Radiated Spurious and Harmonic Emissions

The EUT was placed on a nonconductive styrofoam table, 1.5 metres high that was positioned on a remotely controlled turntable. The test distance used between the EUT and the receiving antenna was three metres. The turntable was rotated to determine the azimuth of the peak emissions. Then the emissions were maximized by elevating the antenna in the range of 1 to 4 metres. The maximum emission level was recorded. The frequency range measured was from 30 MHz to 40.0 GHz. Both the horizontal and vertical polarizations of the emissions were measured.

The measurements were done in a semi-anechoic chamber (SAC) below 1 GHz and a modified semi-anechoic chamber (modified SAC) with floor absorbers above 1 GHz. The SAC's FCC registration number is **778487** and the Industry Canada (IC) file number is **2503B-1**. The modified SAC's FCC registration number is **959115** and the IC file number is **2503C-1**.

The EUT was configured and operated to produce the maximum radiated emissions while still keeping within BlackBerry's specifications.

The BlackBerry® smartphone was measured in standalone configuration transmitting on channels 36 and 38 for 802.11ac mode 20MHz bandwidth; on channels 38 and 151 for 802.11ac mode 40MHz bandwidth and on channel 138 for 802.11ac mode 80MHz bandwidth. The system's radiated emission levels were compared with respect to the FCC CFR 47 Part 15 Subpart E, 15.407 and RSS-210/RSS-GEN.

The 802.11ac harmonics were investigated up to the 10th harmonic. All emissions had a test margin of greater than 25 dB.


See APPENDIX 4 for the test data.

##### b) Band-Edge Compliance of RF Radiated Emissions

The BlackBerry® smartphone met the requirements for band-edge compliance of RF radiated emissions for 802.11ac as per the requirements of 15.407, 15.209 and RSS-210/ RSS-GEN.

See APPENDIX 4 for the test data

**Measurement Uncertainty  $\pm 4.2$  dB**

|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4) |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015                         | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

## 5) i) BLUETOOTH RF CONDUCTED EMISSIONS

The Bluetooth conducted RF emissions from the BlackBerry® smartphone were measured using the methods outlined in FCC CFR 47 Part 15, Subpart C.

### a) 20 dB Bandwidth

The BlackBerry® smartphone met the requirements of the 20 dB bandwidth as per 47 CFR 15.247(a) and RSS-210. Low channel (0), middle channel (39) and high channel (78) were measured. The result includes both normal data rate and EDR. The worst case 20 dB Bandwidth was 0.930 MHz for channel 39 in normal data rate mode and 1.338 MHz for channels 0, 39 and 78 in EDR mode. See APPENDIX 5 for the test data.

### b) Carrier Frequency Separation

The BlackBerry® smartphone met the requirements of the carrier frequency separation as per 47 CFR 15.247(a) and RSS-210. Channel 38 to 39 was measured. The result includes both normal data rate and EDR. See APPENDIX 5 for the test data.

### c) Number of Hopping Frequencies


The BlackBerry® smartphone met the requirements of the number of hopping frequencies as per 47 CFR 15.247(a) and RSS-210. The number of hopping channels measured was 79. See APPENDIX 5 for the test data.

### d) Time of Occupancy (Dwell Time)

The EUT met the requirements of the dwell time as per 47 CFR 15.247(a) and RSS-210. Low channel (0), middle channel (39) and high channel (78) were measured in DH1, DH3 and DH5 modes. Bluetooth was operating in frequency hopping (Euro/US) mode during the measurements. See APPENDIX 5 for the test data.

### e) Maximum Peak Conducted Output Power

The BlackBerry® smartphone met the requirements of the maximum peak conducted output power as per 47 CFR 15.247(b) and RSS-210. Low channel (0), middle channel (39) and high channel (78) were measured. The result includes both normal data rate and EDR. The worst case Conducted Output Power level was 9.60 dBm (0.00912 W) for Channel 39 in normal data rate mode and 8.90 dBm (0.00776 W) for channel 39 in EDR mode. See APPENDIX 5 for the test data.

|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4) |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015                         | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

f) Band-Edge Compliance of RF Conducted Emissions

The BlackBerry® smartphone met the requirements of the band-edge compliance of RF conducted emissions as per 47 CFR 15.247(c) and RSS-210. Channels 0 and 78 were measured in frequency hopping (Euro/US) mode and single frequency mode. The result includes both normal data rate and EDR.

See APPENDIX 5 for the test data.

g) Spurious RF Conducted Emissions

The BlackBerry® smartphone met the requirements of the spurious RF conducted emissions as per 47 CFR 15.247(c) and RSS-210. The frequency range measured was 10 MHz to 26 GHz. Low channel (0), middle channel (39) and high channel (78) were measured in single frequency mode and frequency hopping (Euro/US) mode. The result includes both normal data rate and EDR.

See APPENDIX 5 for the test data.

## ii) BLUETOOTH LOW ENERGY RF CONDUCTED EMISSIONS

The Bluetooth Low Energy conducted RF emissions from the BlackBerry® smartphone were measured using the methods outlined in FCC CFR 47 Part 15, Subpart C.

a) 6dB Bandwidth

The EUT met the requirements of the 6 dB bandwidth as per 47 CFR 15.247(b) and RSS-210. Low channel (0), middle channel (20) and high channel (39) were measured. The worst case 6 dB Bandwidth was 0.682 MHz for channel 0.

See APPENDIX 5 for the test data.

b) Maximum Conducted Output Power

The EUT met the requirements of the maximum conducted output power as per 47 CFR 15.247(b) and RSS-210. Low channel (0), middle channel (20) and high channel (39) were measured. The worst case Conducted Output Power level was 6.53 dBm (0.0045 W) for channel 20.


See APPENDIX 5 for the test data

c) Band-Edge Compliance of RF Conducted Emissions

The EUT met the requirements of band-edge compliance of RF conducted emissions as per 47 CFR 15.247(b) and RSS-210. Low channel (0) and high channel (39) were measured.

See APPENDIX 5 for the test data.



|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4) |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015                         | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

d) Peak Power Spectral Density

The EUT met the requirements of peak power spectral density as per 47 CFR 15.247(b) and RSS-210. Low channel (0), middle channel (20) and high channel (39) were measured.

See APPENDIX 5 for the test data.

e) Spurious RF Conducted Emissions

The EUT met the requirements of the spurious RF conducted emissions as per 47 CFR 15.247(c) and RSS-210. The frequency range measured was 30 MHz to 26 GHz. Low channel (0), middle channel (20) and high channel (39) were measured.

See APPENDIX 5 for the test data.

## 6) 802.11b/g/n RF CONDUCTED EMISSIONS

The 802.11b/g/n conducted RF emissions from the BlackBerry® smartphone were measured using the methods outlined in FCC CFR 47 Part 15, Subpart C.

a) 6dB Bandwidth

The EUT met the requirements of the 6 dB bandwidth as per 47 CFR 15.247(b) and RSS-210. Low channel (1), middle channel (6) and high channel (11) were measured. The worst case 6 dB Bandwidth was 8.48 MHz for channel 6 in 802.11b mode, 16.50 MHz for channel 6 in 802.11g mode, and 17.72 MHz for channel 6 in 802.11n mode.

See APPENDIX 6 for the test data.

b) Maximum Conducted Output Power


The EUT met the requirements of the maximum conducted output power as per 47 CFR 15.247(b) and RSS-210. Low channel (1), middle channel (6) and high channel (11) were measured. The worst case Conducted Output Power level was 14.97 dBm (0.0313 W) for channel 6 in 802.11b mode, 16.78 dBm (0.0477 W) for channel 6 in 802.11g mode, and 16.92 dBm (0.0492 W) for channel 6 in 802.11n mode.

See APPENDIX 6 for the test data

c) Band-Edge Compliance of RF Conducted Emissions

The EUT met the requirements of band-edge compliance of RF conducted emissions as per 47 CFR 15.247(b) and RSS-210. Low channel (1) and high channel (11) were measured.

See APPENDIX 6 for the test data.

|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4) |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015                         | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

d) Peak Power Spectral Density

The EUT met the requirements of peak power spectral density as per 47 CFR 15.247(b) and RSS-210. Low channel (1), middle channel (6) and high channel (11) were measured.

See APPENDIX 6 for the test data.

e) Spurious RF Conducted Emissions

The EUT met the requirements of the spurious RF conducted emissions as per 47 CFR 15.247(c) and RSS-210. The frequency range measured was 30 MHz to 26 GHz. Low channel (1), middle channel (6) and high channel (11) were measured.

See APPENDIX 6 for the test data.

## 7) 802.11a/n RF CONDUCTED EMISSIONS

The 802.11a/n conducted RF emissions from the BlackBerry® smartphone were measured using the methods outlined in FCC CFR 47 Part 15, Subpart E.

a) 6 dB Bandwidth

The EUT met the requirements of the 6 dB bandwidth as per 47 CFR 15.407 and RSS-210. Channels 36, 64, 100, 140 and 165 were measured. The worst case 6 dB Bandwidth was 16.48 MHz for channels 36, 64 in 802.11a mode. The worst case 6 dB Bandwidth was 17.76 MHz for channels 100 and 165 for 20 MHz bandwidth; 36.52 MHz for channel 36 in 40 MHz bandwidth for 802.11n mode.

See APPENDIX 7 for the test data.

b) Maximum Conducted Output Power


The EUT met the requirements of the maximum conducted output power as per 47 CFR 15.407 and RSS-210. Channels 36, 64, 100, 140 and 165 were measured. The worst case Conducted Output Power level was 17.29 dBm (0.0535 W) for channel 165 in 802.11a mode. The worst case Conducted Output Power level was 16.53 dBm (0.0450 W) for channel 100 in 20 MHz bandwidth and 18.88 dBm (0.0773 W) in 40 MHz bandwidth for channel 140 in 802.11n mode.

See APPENDIX 7 for the test data

c) Band-Edge Compliance of RF Conducted Emissions

The EUT met the requirements of band-edge compliance of RF conducted emissions as per 47 CFR 15.407 and RSS-210. Channels 36, 64, 100, 140, 149 and 165 were measured.

See APPENDIX 7 for the test data.

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model<br>RHR191LW (SQW100-4) |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015                            | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

d) Peak Power Spectral Density


The EUT met the requirements of peak power spectral density as per 47 CFR 15.407 and RSS-210. Channels 36, 48, 64, 100, 140 and 165 were measured for 802.11a and channels 36, 100 and 165 were measured for 802.11n with 20 MHz and 40 MHz bandwidth.

See APPENDIX 7 for the test data.

e) Spurious RF Conducted Emissions

The EUT met the requirements of the spurious RF conducted emissions as per 47 CFR 15.407 and RSS-210. The frequency range measured was 30 MHz to 40 GHz. Channels 36, 64, 100 and 140 were measured.

See APPENDIX 7 for the test data.

|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4) |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015                         | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

## 8) 802.11ac RF CONDUCTED EMISSIONS

The 802.11ac conducted RF emissions from the BlackBerry® smartphone were measured using the methods outlined in FCC CFR 47 Part 15, Subpart E.

### a) 6 dB Bandwidth

The EUT met the requirements of the 6 dB bandwidth as per 47 CFR 15.407 and RSS-210. Channels 36, 64, 140 and 149 were measured for 20MHz bandwidth, channels 38, 62, 142 and 151 were measured for 40MHz bandwidth, channels 42, 58, 138 and 155 were measured for 80MHz bandwidth. The worst case 6 dB Bandwidth was 17.74 MHz for channel 36 for 802.11ac mode, 20MHz bandwidth; the worst case 6 dB Bandwidth was 36.48 MHz for channels 38 and 142 for 802.11ac mode, 40MHz bandwidth; the worst case 6 dB Bandwidth was 76.48 MHz for channel 58 for 802.11ac mode, 80MHz bandwidth.

See APPENDIX 7 for the test data.

### b) Maximum Conducted Output Power

The EUT met the requirements of the maximum conducted output power as per 47 CFR 15.407 and RSS-210. Channels 36, 64, 100, 140 and 149 were measured for 20MHz bandwidth, channels 38, 62, 102, 142 and 151 were measured for 40MHz bandwidth, and channels 42, 58, 105, 138 and 151 were measured for 80MHz bandwidth. The worst case Conducted Output Power level was 16.61 dBm (0.0457 W ) for channel 100 for 802.11ac mode, 20MHz bandwidth; the worst case Conducted Output Power level was 16.23 dBm (0.0420 W ) for channel 142 for 802.11ac mode, 40MHz bandwidth; the worst case Conducted Output Power level was 14.36 dBm ( 0.0272 W ) for channel 138 for 802.11ac mode, 80MHz bandwidth

See APPENDIX 7 for the test data.

### b) Band-Edge Compliance of RF Conducted Emissions

The EUT met the requirements of band-edge compliance of RF conducted emissions as per 47 CFR 15.407 and RSS-210. Channels 36, 64, 100, 140, 149 and 165 were measured for 20MHz bandwidth, channels 38, 62, 102, 142, 151 and 159 were measured for 40MHz bandwidth, and channels 42, 58, 105, 138 and 155 were measured for 80MHz bandwidth.

See APPENDIX 7 for the test data.


### d) Peak Power Spectral Density

The EUT met the requirements of peak power spectral density as per 47 CFR 15.407 and RSS-210. Channels 36, 64, 140 and 149 were measured for 20MHz bandwidth, channels 38, 62, 142 and 151 were measured for 40MHz bandwidth, and channels 42, 58, 138 and 155 were measured for 80MHz bandwidth.

See APPENDIX 7 for the test data.

### e) Spurious RF Conducted Emissions

The EUT met the requirements of the spurious RF conducted emissions as per 47 CFR 15.407 and RSS-210. The frequency range measured was 30 MHz to

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model<br>RHR191LW (SQW100-4) |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015                            | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

40 GHz. Channels 36, 64, 140 and 149 were measured for 20MHz bandwidth, channels 38, 62, 142 and 151 were measured for 40MHz bandwidth, and channels 42, 58, 138 and 155 were measured for 80MHz bandwidth.  
See APPENDIX 7 for the test data.

#### 9) Near Field Communications (NFC)

The Near Field Communications emissions from the BlackBerry® smartphone were measured using the methods outlined in FCC CFR 47 Part 15, Subpart C.

##### a) Radiated Emissions


The BlackBerry® smartphone was measured in standalone configuration transmitting at 13.57 MHz. The system's radiated emission levels were compared with respect to the FCC CFR 47 Part 15 Subpart C, 15.209, 15.225(a) and RSS-210/RSS-GEN.  
See APPENDIX 9 for the test data.

##### b) Occupied Bandwidth

The EUT met the requirements of the Occupied bandwidth as per 47 CFR 15 C and RSS-210. The EUT was measured in test mode with modulation on and transmitting at 13.56 MHz.  
See APPENDIX 9 for the test data.


##### c) Frequency Stability

The EUT met the requirements of the Frequency Stability as per 47 CFR 15.225(e) and RSS-210. The EUT was measured in test mode with modulation on and transmitting at 13.56 MHz.  
See APPENDIX 9 for the test data.

|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4) |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015                         | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

## G. Compliance Test Equipment Used

| <u>UNIT</u>           | <u>MANUFACTURER</u> | <u>MODEL</u> | <u>SERIAL<br/>NUMBER</u> | <u>CAL DUE<br/>DATE</u><br>(YY MM DD) | <u>USE</u>                         |
|-----------------------|---------------------|--------------|--------------------------|---------------------------------------|------------------------------------|
| EMI Test Receiver     | Rohde & Schwarz     | ESIB 40      | 100255                   | 15-12-04                              | Conducted/Radiated Emissions       |
| EMI Test Receiver     | Rohde & Schwarz     | ESU 40       | 100162                   | 15-12-02                              | Conducted/Radiated Emissions       |
| Hybrid Log Antenna    | EMC Automation      | HLP-3003C    | 017401                   | 16-02-03                              | Radiated Emissions                 |
| Horn Antenna          | CMT                 | 3116         | R52734-001               | 17-03-02                              | Radiated Emissions                 |
| Horn Antenna          | ETS-Lindgren        | 3117         | 2538                     | 15-08-07                              | Radiated Emissions                 |
| Active Loop Antenna   | EMCO                | 6507         | 00032                    | 15-08-21                              | Radiated Emissions                 |
| Preamplifier          | Rohde & Schwarz     | TS-ANA4-SP   | 001                      | 15-09-10                              | Radiated Emissions                 |
| Preamplifier          | Sonoma              | 310N/11909A  | 185831                   | 15-10-22                              | Radiated Emissions                 |
| Preamplifier          | Rohde & Schwarz     | TS-ANA-SP    | 001                      | 15-09-10                              | Radiated Emissions                 |
| L.I.S.N.              | Rohde & Schwarz     | ENV216       | 100060                   | 15-10-08                              | Conducted Emissions                |
| Environment Monitor   | Omega               | iTHX-SD      | 0380561                  | 16-11-15                              | Radiated Emissions                 |
| EMC Analyzer          | Agilent             | E7405A       | US40240226               | 16-01-23                              | Radiated Emissions                 |
| DC Power Supply       | HP                  | 6632B        | US37472178               | 15-10-20                              | RF Conducted Emissions             |
| Environment Monitor   | Omega               | iTHX-SD      | 0340060                  | 16-09-11                              | RF Conducted Emissions             |
| Environmental Chamber | Test Equity         | 107          | 0900246                  | N/R                                   | Frequency Stability                |
| Bluetooth Tester      | Rohde & Schwarz     | CBT          | 119549                   | 15-12-04                              | RF Conducted Emissions             |
| Bluetooth Tester      | Rohde & Schwarz     | CBT35        | 100368                   | 15-11-25                              | Radiated Emissions                 |
| Bluetooth Tester      | Rohde & Schwarz     | CBT35        | 100370                   | 15-12-04                              | Radiated Emissions                 |
| Power Meter           | Agilent             | N1911A       | MY45100951               | 15-09-10                              | RF Conducted / Frequency Stability |
| Power Sensor          | Agilent             | N1921A       | MY45241383               | 15-09-05                              | RF Conducted / Frequency Stability |
| Environment Monitor   | Omega               | iTHX-SD      | 0380567                  | 16-11-15                              | Radiated Emissions                 |


|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4) |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015                         | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

## H. Test Software Used

| <u>SOFTWARE</u>            | <u>COMPANY</u>   | <u>VERSION</u> | <u>USE</u>         |
|----------------------------|------------------|----------------|--------------------|
| EMC32                      | Rohde & Schwarz  | 8.53.0         | Radiated Emissions |
| TDK Standard Emission Test | TDK RF Solutions | 8.53.1.62      | Radiated Emissions |

## **APPENDIX 1 – AC POWER CONDUCTED EMISSIONS TEST DATA/PLOTS**



|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model<br>RHR191LW (SQW100-4)<br><b>APPENDIX 1</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015   | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

### **AC Powerline Conducted Emission Test Results**

The following tests were performed by Winston Vernon

#### **Test Configuration 1**

The BlackBerry® smartphone was tested on April 17, 2015


The environmental test conditions were: Temperature: 25.1 °C  
Relative Humidity: 39.4 %

| Frequency<br>(MHz) | Line | Reading<br>(QP)<br>(dBμV) | Correction<br>Factor<br>(dB) | Corrected<br>Reading<br>(QP)<br>(dB) | Limit<br>(QP)<br>(dBμV) | Limit<br>(AV)<br>(dBμV) | Margin<br>(QP)<br>Limits<br>(dB) |
|--------------------|------|---------------------------|------------------------------|--------------------------------------|-------------------------|-------------------------|----------------------------------|
| <b>0.164</b>       | L1   | 42.62                     | 11.11                        | 53.73                                | 65.30                   | 55.30                   | <b>-11.57</b>                    |
| 0.204              | N    | 40.95                     | 10.85                        | 51.80                                | 63.40                   | 53.40                   | -11.60                           |
| 0.227              | L1   | 37.23                     | 10.67                        | 47.90                                | 62.60                   | 52.60                   | -14.70                           |
| 0.299              | N    | 34.55                     | 10.18                        | 44.74                                | 60.30                   | 50.30                   | -15.57                           |
| 0.533              | L1   | 30.75                     | 9.89                         | 40.64                                | 56.00                   | 46.00                   | -15.36                           |
| 0.537              | N    | 31.00                     | 9.90                         | 40.90                                | 56.00                   | 46.00                   | -15.10                           |
| 1.100              | L1   | 30.45                     | 9.80                         | 40.25                                | 56.00                   | 46.00                   | -15.75                           |
| 1.401              | N    | 27.59                     | 9.81                         | 37.40                                | 56.00                   | 46.00                   | -18.60                           |
| 16.094             | L1   | 25.93                     | 10.12                        | 36.05                                | 60.00                   | 50.00                   | -23.95                           |

All other emission levels were at least 25 dB below the limit.

Measurements were done with the quasi-peak detector.

See figure 1-1 and figure 1-2 for the measurement plot of the L1 and N lines of AC power line conducted emissions.

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 1</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

## AC Powerline Conducted Emissions Test Graphs

### Test Configuration 1

Figure 1-1: L1 lines


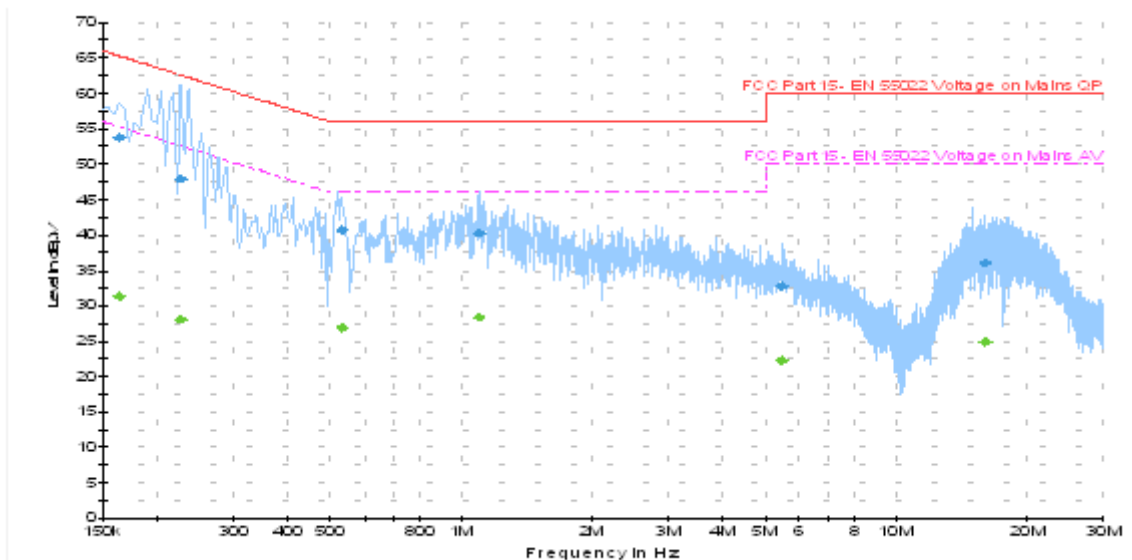



Figure 1-2: N Lines

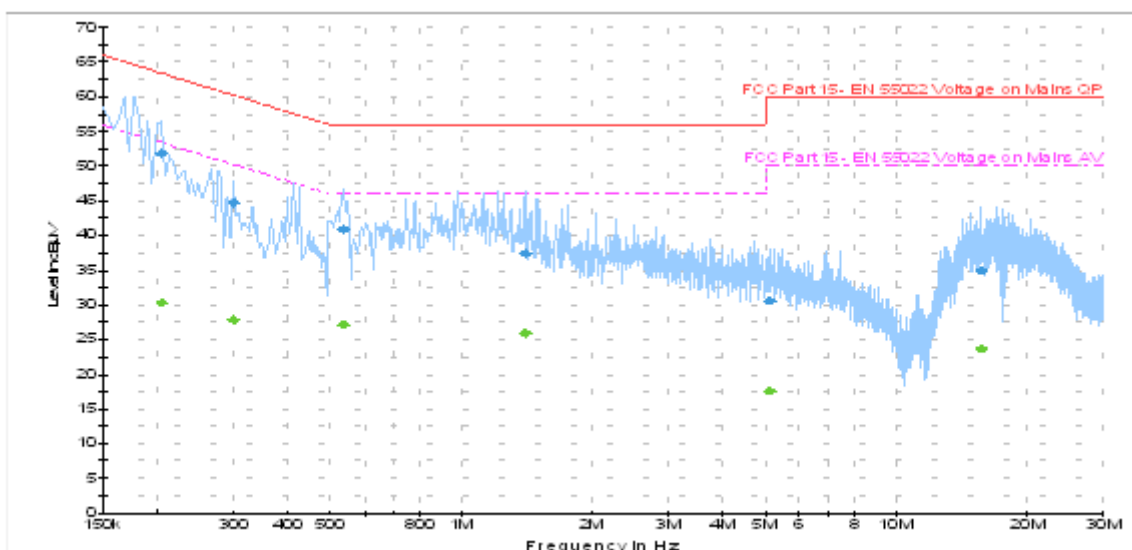

|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model<br>RHR191LW (SQW100-4)<br><b>APPENDIX 1</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015   | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

## AC Powerline Conducted Emission Test Results cont'd

### Test Configuration 2

The BlackBerry® smartphone was tested on April 17, 2015

The environmental test conditions were: Temperature: 25.1 °C  
Relative Humidity: 39.4 %

| Frequency<br>(MHz) | Line | Reading<br>(QP)<br>(dBµV) | Correction<br>Factor<br>(dB) | Corrected<br>Reading<br>(QP)<br>(dB) | Limit<br>(QP)<br>(dBµV) | Limit<br>(AV)<br>(dBµV) | Margin<br>(QP)<br>Limits<br>(dB) |
|--------------------|------|---------------------------|------------------------------|--------------------------------------|-------------------------|-------------------------|----------------------------------|
| 0.173              | N    | 37.33                     | 11.08                        | 48.41                                | 64.80                   | 54.80                   | -16.40                           |
| 0.191              | L1   | 35.20                     | 10.92                        | 46.13                                | 64.00                   | 54.00                   | -17.87                           |
| 0.290              | L1   | 24.88                     | 10.23                        | 35.11                                | 60.50                   | 50.50                   | -25.39                           |
| 0.443              | N    | 28.13                     | 9.96                         | 38.09                                | 57.00                   | 47.00                   | -18.91                           |
| 0.470              | L1   | 34.71                     | 9.93                         | 44.64                                | 56.50                   | 46.50                   | -11.87                           |
| 1.163              | N    | 30.02                     | 9.80                         | 39.83                                | 56.00                   | 46.00                   | -16.17                           |
| 1.356              | L1   | 29.83                     | 9.80                         | 39.63                                | 56.00                   | 46.00                   | -16.37                           |
| 1.743              | N    | 27.07                     | 9.82                         | 36.89                                | 56.00                   | 46.00                   | -19.11                           |
| 2.423              | N    | 26.18                     | 9.85                         | 36.03                                | 56.00                   | 46.00                   | -19.97                           |
| 2.823              | L1   | 25.54                     | 9.87                         | 35.40                                | 56.00                   | 46.00                   | -20.60                           |
| 14.474             | L1   | 27.95                     | 10.07                        | 38.02                                | 60.00                   | 50.00                   | -21.98                           |
| 15.680             | N    | 27.63                     | 10.09                        | 37.72                                | 60.00                   | 50.00                   | -22.28                           |

All other emission levels were at least 25 dB below the limit.

Measurements were done with the quasi-peak detector.

See figure 1-3 and figure 1-4 for the measurement plot of the L1 and N lines of AC power line conducted emissions.


|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 1</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

Figure 1-3: L1 lines


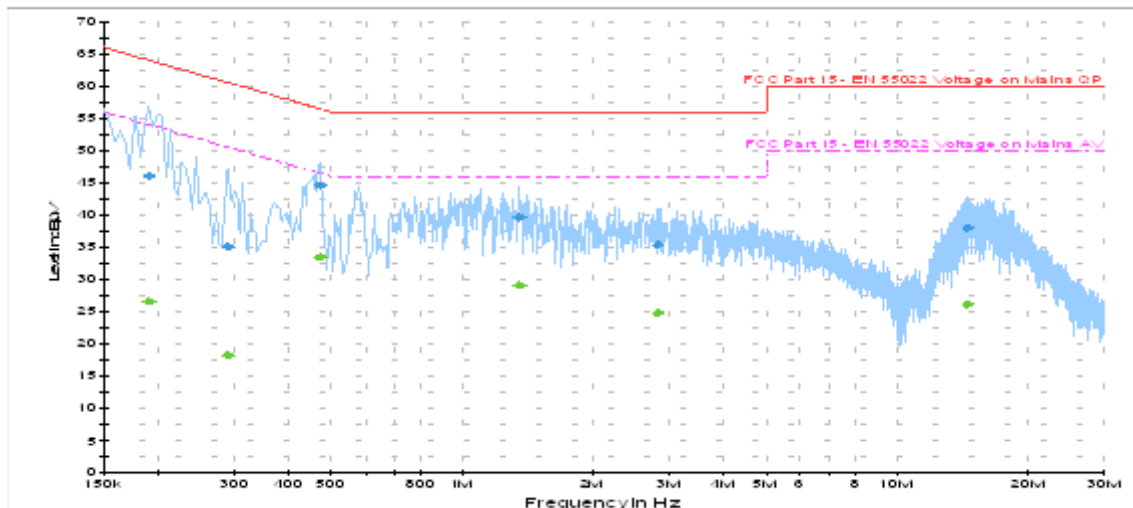



Figure 1-4: N Lines

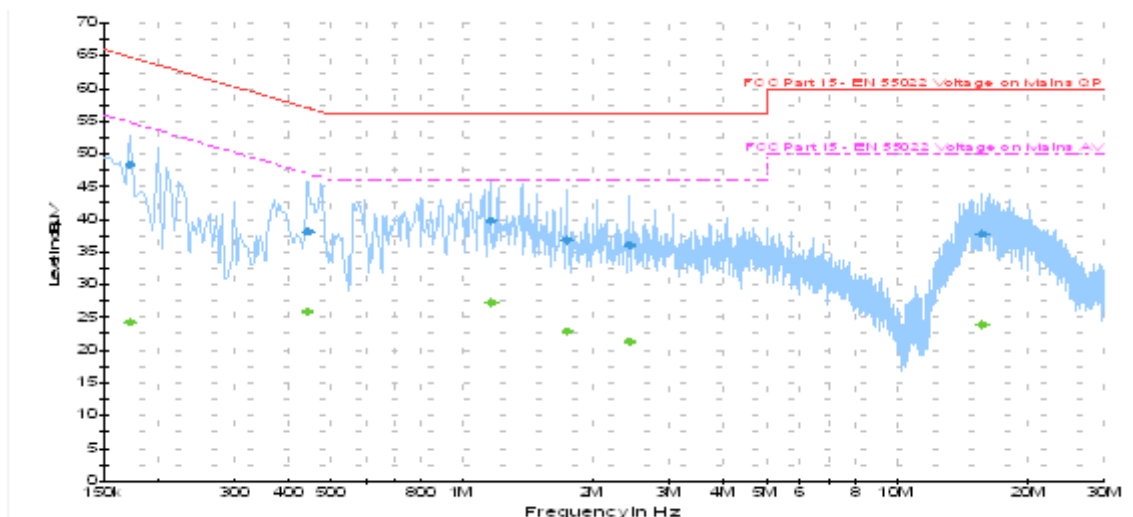

|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model<br>RHR191LW (SQW100-4)<br><b>APPENDIX 1</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015   | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

## AC Powerline Conducted Emissions Test Results cont'd

### Test Configuration 3

The BlackBerry® smartphone was tested on April 17, 2015


The environmental test conditions were: Temperature: 22.4 °C  
Relative Humidity: 38.0 %

| Frequency<br>(MHz) | Line | Reading<br>(QP)<br>(dBµV) | Correction<br>Factor<br>(dB) | Corrected<br>Reading<br>(QP)<br>(dB) | Limit<br>(QP)<br>(dBµV) | Limit<br>(AV)<br>(dBµV) | Margin<br>(QP)<br>Limits<br>(dB) |
|--------------------|------|---------------------------|------------------------------|--------------------------------------|-------------------------|-------------------------|----------------------------------|
| 0.155              | L1   | 41.42                     | 11.17                        | 52.59                                | 65.80                   | 55.80                   | -13.21                           |
| 0.164              | N    | 38.69                     | 11.14                        | 49.83                                | 65.30                   | 55.30                   | -15.47                           |
| 0.195              | L1   | 36.60                     | 10.89                        | 47.50                                | 63.80                   | 53.80                   | -16.31                           |
| 0.474              | N    | 33.55                     | 9.93                         | 43.48                                | 56.40                   | 46.40                   | -12.92                           |
| 0.474              | L1   | 34.51                     | 9.92                         | 44.43                                | 56.40                   | 46.40                   | -11.97                           |
| 1.104              | N    | 30.12                     | 9.81                         | 39.92                                | 56.00                   | 46.00                   | -16.08                           |
| 1.104              | L1   | 31.24                     | 9.80                         | 41.04                                | 56.00                   | 46.00                   | -14.96                           |
| 1.748              | N    | 27.15                     | 9.82                         | 36.97                                | 56.00                   | 46.00                   | -19.03                           |
| 3.156              | L1   | 24.37                     | 9.88                         | 34.25                                | 56.00                   | 46.00                   | -21.75                           |
| 4.776              | N    | 21.22                     | 9.91                         | 31.13                                | 56.00                   | 46.00                   | -24.87                           |
| 14.442             | N    | 26.72                     | 10.08                        | 36.80                                | 60.00                   | 50.00                   | -23.20                           |
| 16.278             | L1   | 26.87                     | 10.13                        | 37.00                                | 60.00                   | 50.00                   | -23.00                           |

All other emission levels were at least 25 dB below the limit.

Measurements were done with the quasi-peak detectors.

See figure 1-5 and 1-6 for the measurement plot of the L1 and N lines of AC power line conducted emissions.

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 1</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

## AC Powerline Conducted Emissions Test Graphs

### Test Configuration 3

Figure 1-5: L1 Lines


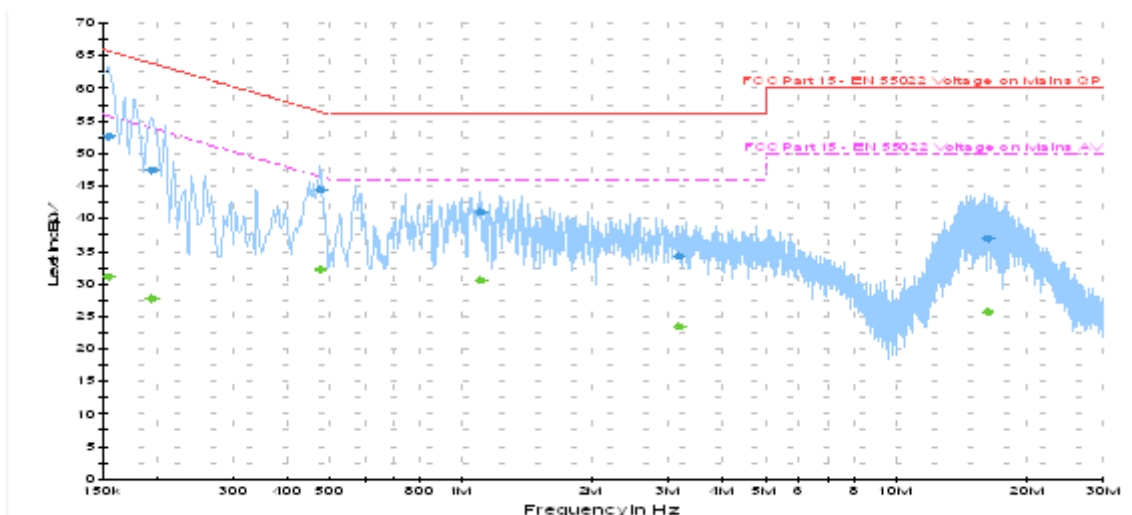



Figure 1-6: N Lines

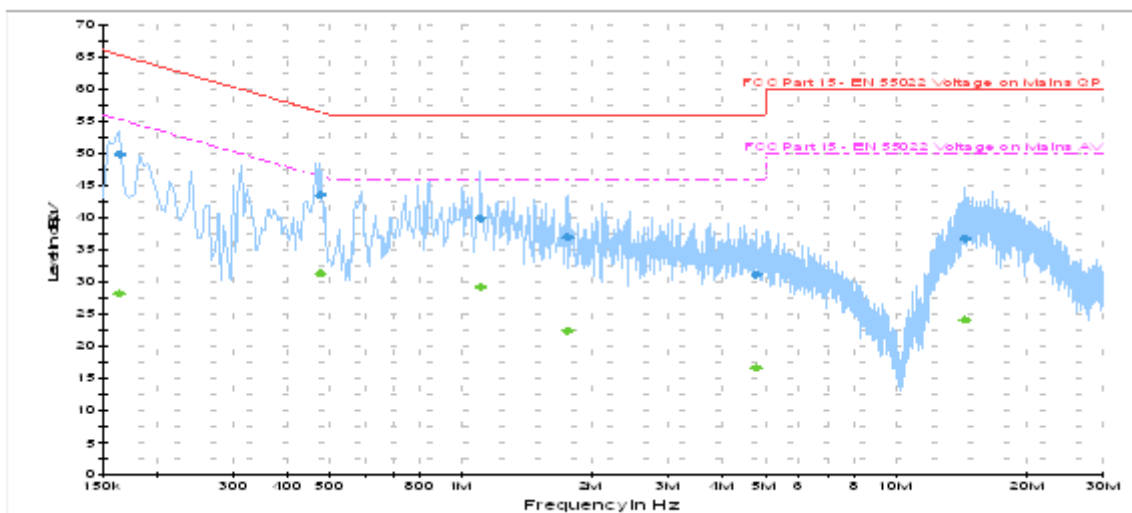

|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model<br>RHR191LW (SQW100-4)<br><b>APPENDIX 1</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015   | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

## AC Powerline Conducted Emission Test Results cont'd

### Test Configuration 4

The BlackBerry® smartphone was tested on April 17, 2015


The environmental test conditions were: Temperature: 25.1 °C  
Relative Humidity: 39.4 %

| Frequency<br>(MHz) | Line | Reading<br>(QP)<br>(dBµV) | Correction<br>Factor<br>(dB) | Corrected<br>Reading<br>(QP)<br>(dB) | Limit<br>(QP)<br>(dBµV) | Limit<br>(AV)<br>(dBµV) | Margin<br>(QP)<br>Limits<br>(dB) |
|--------------------|------|---------------------------|------------------------------|--------------------------------------|-------------------------|-------------------------|----------------------------------|
| 0.164              | L1   | 42.50                     | 11.11                        | 53.61                                | 65.30                   | 55.30                   | -11.69                           |
| 0.164              | N    | 41.85                     | 11.14                        | 52.99                                | 65.30                   | 55.30                   | -12.31                           |
| 0.191              | L1   | 39.66                     | 10.92                        | 50.59                                | 64.00                   | 54.00                   | -13.41                           |
| 0.200              | N    | 37.23                     | 10.89                        | 48.11                                | 63.60                   | 53.60                   | -15.49                           |
| 0.434              | L1   | 34.04                     | 9.96                         | 44.00                                | 57.20                   | 47.20                   | -13.20                           |
| 0.447              | N    | 31.99                     | 9.95                         | 41.94                                | 56.90                   | 46.90                   | -14.96                           |
| 0.938              | L1   | 31.97                     | 9.81                         | 41.78                                | 56.00                   | 46.00                   | -14.22                           |
| 1.334              | N    | 26.53                     | 9.81                         | 36.34                                | 56.00                   | 46.00                   | -19.66                           |
| 1.959              | N    | 23.16                     | 9.83                         | 32.99                                | 56.00                   | 46.00                   | -23.02                           |
| 2.909              | L1   | 25.47                     | 9.87                         | 35.33                                | 56.00                   | 46.00                   | -20.67                           |
| 15.621             | N    | 27.47                     | 10.09                        | 37.56                                | 60.00                   | 50.00                   | -22.44                           |
| 16.526             | L1   | 27.64                     | 10.14                        | 37.79                                | 60.00                   | 50.00                   | -22.21                           |

All other emission levels were at least 25 dB below the limit.

Measurements were done with the quasi-peak detectors.

See figure 1-7 and figure 1-8 for the measurement plot of the L1 and N lines of AC power line conducted emissions.

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 1</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

## AC Powerline Conducted Emissions Test Graphs

### Test Configuration 4

Figure 1-7: L1 lines


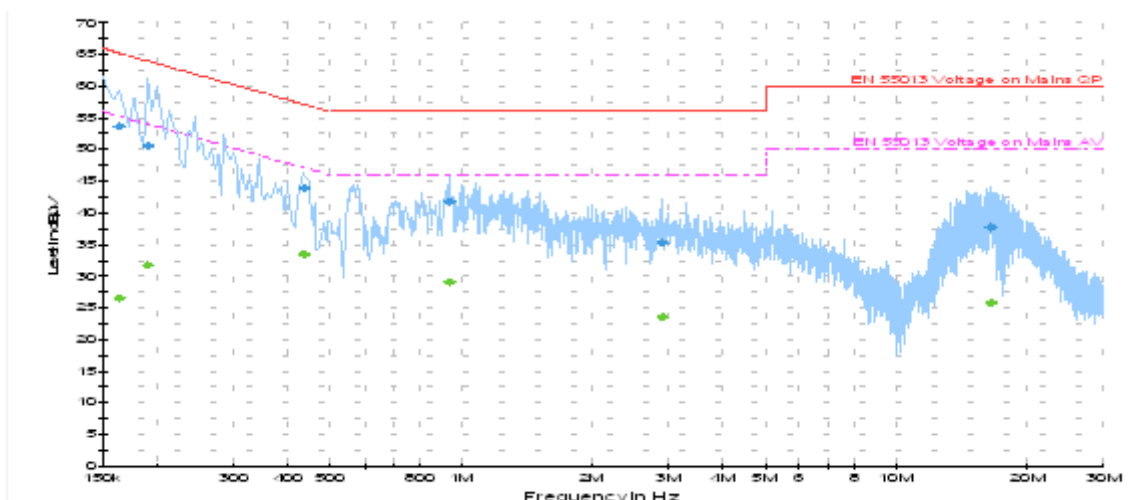



Figure 1-8: N Lines



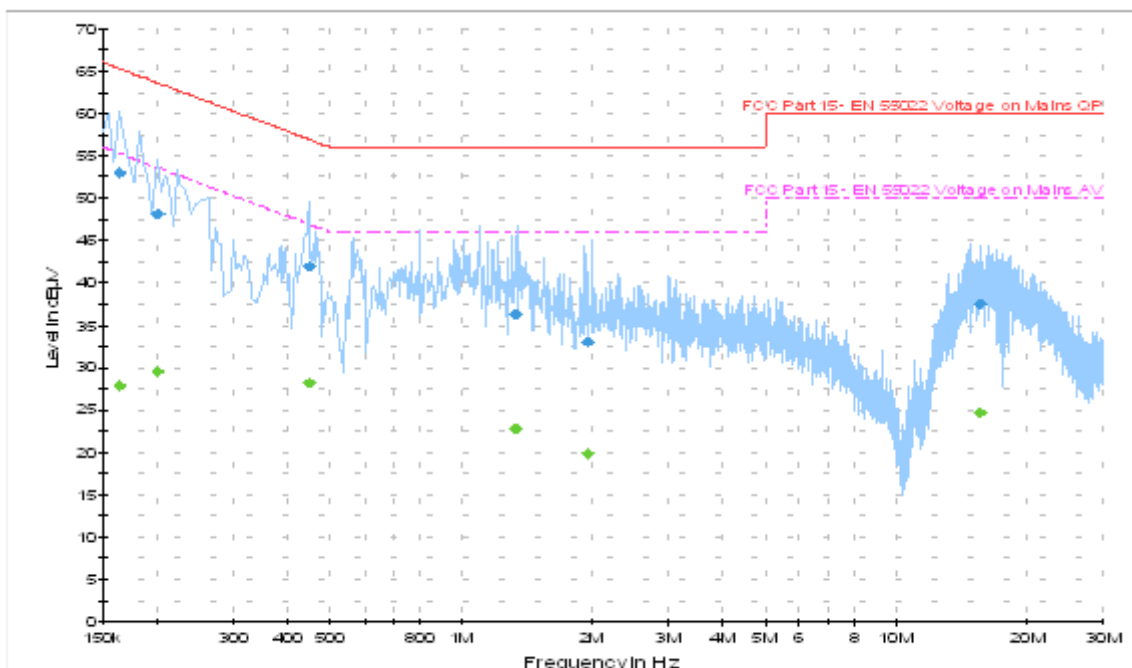

**APPENDIX 2 – BLUETOOTH, BLUETOOTH LOW ENERGY AND 802.11b/g/n  
RADIATED EMISSIONS TEST DATA**

|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model<br>RHR191LW (SQW100-4)<br><br><b>APPENDIX 2</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015   | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

Radiated Emissions Test Results  
Bluetooth Band

Date of Test: April 13, 2015

Measurements were performed by Shiva Kumbham.


The environmental test conditions were: Temperature: 27.7°C  
Relative Humidity: 24.8 %

The test distance was 3.0 meters with a EUT height of 1.5 meters, and sweep frequency of 30 MHz to 1 GHz.

The BlackBerry® smartphone in Bluetooth TX mode was in volume key down position.

The frequency sweep measurements were performed in single frequency mode on channels 0, 39 and 78 using packet types “DH5”, “2-DH5” and “3-DH5”.

All the emission had a test margin of 25 dB.

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 2</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

Radiated Emissions Test Results cont'd  
Bluetooth Band cont'd

Date of Test: April 09, 10, 14, 15, and 24, 2015  
Measurements were performed by Winston Vernon


The environmental test conditions were: Temperature: 26.0°C  
Relative Humidity: 31.2%

The test distance was 3.0 meters with a EUT height of 1.5 meters, and sweep frequency of 1GHz to 25GHz.

The BlackBerry® smartphone in Bluetooth TX mode was in volume key up position.

The frequency sweep measurements were performed in single frequency mode on channels 0, 39 and 78 using packet types “DH5”, “2-DH5” and “3-DH5”.

All the emission had a test margin of greater than 25 dB.

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 2</b> |   |
| Test Report No.:<br>RTS-6067-1505-16  | Dates of Test:<br>April 02 – May 14, 2015   | FCC ID: L6ARHR190LW<br>IC: 2503A-RHR190LW |

**Band-Edge Compliance of RF Radiated Emissions Test Results**  
**Bluetooth Band**

Date of test: April 23, 2015

Measurements were performed by Shiva Kumbham.


The environmental test conditions were: Temperature: 25.3 ° C  
Relative Humidity: 12.7 %

The BlackBerry® smartphone was in standalone, volume key down position and pattern type “Static PBRs” in “DH5”, “2-DH5” and “3-DH5” modulation during the measurements.

The test distance was 3.0 meters.

The test distance was 0.6 meters.

| Channel                         | Freq. | Rx Antenna |      | Detector | VBW   | Reading | Corrected Reading | Delta Marker | Corrected Band edge | Limit | Diff. To Limit |
|---------------------------------|-------|------------|------|----------|-------|---------|-------------------|--------------|---------------------|-------|----------------|
|                                 | (MHz) | Type       | POL. |          |       |         |                   |              |                     |       |                |
| Low Channel, Packet Type DH5    |       |            |      |          |       |         |                   |              |                     |       |                |
| 0                               | 2402  | Horn       | V    | PK       | 1 MHz | 90.13   | 100.35            | 59.00        | 41.35               | 74.00 | -32.65         |
| 0                               | 2402  | Horn       | H    | PK       | 1 MHz | 94.07   | 104.29            | 64.00        | 40.29               | 74.00 | -33.71         |
| 0                               | 2402  | Horn       | V    | AV       | 10 Hz | 83.33   | 93.55             | 59.00        | 34.55               | 54.00 | -19.45         |
| 0                               | 2402  | Horn       | H    | AV       | 10 Hz | 87.21   | 97.43             | 64.00        | 33.43               | 54.00 | -20.57         |
| High Channel, Packet Type DH5   |       |            |      |          |       |         |                   |              |                     |       |                |
| 78                              | 2480  | Horn       | V    | PK       | 1 MHz | 87.42   | 98.57             | 55.75        | 42.82               | 74.00 | -31.18         |
| 78                              | 2480  | Horn       | H    | PK       | 1 MHz | 90.04   | 101.19            | 59.14        | 42.05               | 74.00 | -31.95         |
| 78                              | 2480  | Horn       | V    | AV       | 10 Hz | 81.17   | 92.32             | 55.75        | 36.57               | 54.00 | -17.43         |
| 78                              | 2480  | Horn       | H    | AV       | 10 Hz | 83.20   | 94.35             | 59.14        | 35.21               | 54.00 | -18.79         |
| Low Channel, Packet Type 2-DH5  |       |            |      |          |       |         |                   |              |                     |       |                |
| 0                               | 2402  | Horn       | V    | PK       | 1 MHz | 88.11   | 98.33             | 55.96        | 42.37               | 74.00 | -31.63         |
| 0                               | 2402  | Horn       | H    | PK       | 1 MHz | 92.11   | 102.33            | 59.38        | 42.95               | 74.00 | -31.05         |
| 0                               | 2402  | Horn       | V    | AV       | 10 Hz | 79.24   | 89.46             | 55.96        | 33.50               | 54.00 | -20.50         |
| 0                               | 2402  | Horn       | H    | AV       | 10 Hz | 82.90   | 93.12             | 59.38        | 33.74               | 54.00 | -20.26         |
| High Channel, Packet Type 2-DH5 |       |            |      |          |       |         |                   |              |                     |       |                |
| 78                              | 2480  | Horn       | V    | PK       | 1 MHz | 84.94   | 96.09             | 53.21        | 42.88               | 74.00 | -31.12         |
| 78                              | 2480  | Horn       | H    | PK       | 1 MHz | 87.51   | 98.66             | 55.83        | 42.83               | 74.00 | -31.17         |
| 78                              | 2480  | Horn       | V    | AV       | 10 Hz | 76.50   | 87.65             | 53.21        | 34.44               | 54.00 | -19.56         |
| 78                              | 2480  | Horn       | H    | AV       | 10 Hz | 78.23   | 89.38             | 55.83        | 33.55               | 54.00 | -20.45         |

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 2</b> |   |
| Test Report No.:<br>RTS-6067-1505-16  | Dates of Test:<br>April 02 – May 14, 2015   | FCC ID: L6ARHR190LW<br>IC: 2503A-RHR190LW |

Band-Edge Compliance of RF Radiated Emissions Test Results cont'd  
Bluetooth Band

| Channel                         | Freq.<br>(MHz) | Rx Antenna |      | Detector | VBW   | Reading<br>(dBuV) | Corrected<br>Reading<br>(dBuV/m) | Delta<br>Marker<br>(dB) | Corrected<br>Band edge<br>(dBuV/m) | Limit<br>(dBuV/m) | Diff. To<br>Limit<br>(dB) |
|---------------------------------|----------------|------------|------|----------|-------|-------------------|----------------------------------|-------------------------|------------------------------------|-------------------|---------------------------|
|                                 |                | Type       | POL. |          |       |                   |                                  |                         |                                    |                   |                           |
| Low Channel, Packet Type 3-DH5  |                |            |      |          |       |                   |                                  |                         |                                    |                   |                           |
| 0                               | 2402           | Horn       | V    | PK       | 1 MHz | 88.41             | 98.63                            | 55.27                   | 43.36                              | 74.00             | -30.64                    |
| 0                               | 2402           | Horn       | H    | PK       | 1 MHz | 92.28             | 102.50                           | 59.37                   | 43.13                              | 74.00             | -30.87                    |
| 0                               | 2402           | Horn       | V    | AV       | 10 Hz | 79.32             | 89.54                            | 55.27                   | 34.27                              | 54.00             | -19.73                    |
| 0                               | 2402           | Horn       | H    | AV       | 10 Hz | 83.02             | 93.24                            | 59.37                   | 33.87                              | 54.00             | -20.13                    |
| High Channel, Packet Type 3-DH5 |                |            |      |          |       |                   |                                  |                         |                                    |                   |                           |
| 78                              | 2480           | Horn       | V    | PK       | 1 MHz | 85.30             | 96.45                            | 52.50                   | 43.95                              | 74.00             | -30.05                    |
| 78                              | 2480           | Horn       | H    | PK       | 1 MHz | 87.72             | 98.87                            | 55.46                   | 43.41                              | 74.00             | -30.59                    |
| 78                              | 2480           | Horn       | V    | AV       | 10 Hz | 76.42             | 87.57                            | 52.50                   | 35.07                              | 54.00             | -18.93                    |
| 78                              | 2480           | Horn       | H    | AV       | 10 Hz | 78.25             | 89.40                            | 55.46                   | 33.94                              | 54.00             | -20.06                    |

See figures 2-1 to 2-12 for the plots of the Bluetooth band-edge compliance.



EMC Test Report for the BlackBerry® smartphone Model  
RHR191LW (SQW100-4)

APPENDIX 2

Test Report No.:  
RTS-6067-1505-16

Dates of Test:  
April 02 – May 14, 2015

FCC ID: L6ARHR190LW  
IC: 2503A-RHR190LW

Bluetooth Band-Edge Compliance of RF Radiated Emissions cont'd

Figure 2-1: Band-Edge Compliance of RF Rad. Emissions.  
Bluetooth, Single freq., Static PBRs,  
DH5, Channel 0, Pol: V, Detector: PK

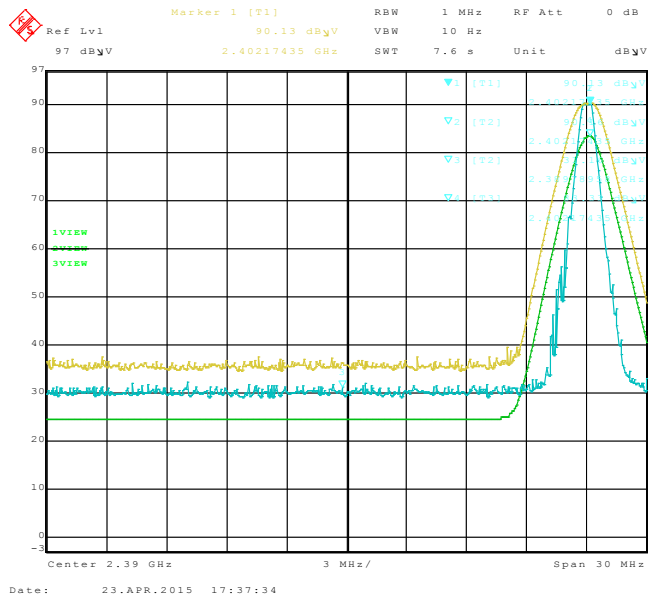


Figure 2-2: Band-Edge Compliance of RF Rad. Emissions.  
Bluetooth, Single freq., Static PBRs,  
DH5, Channel 0, Pol: H, Detector: PK

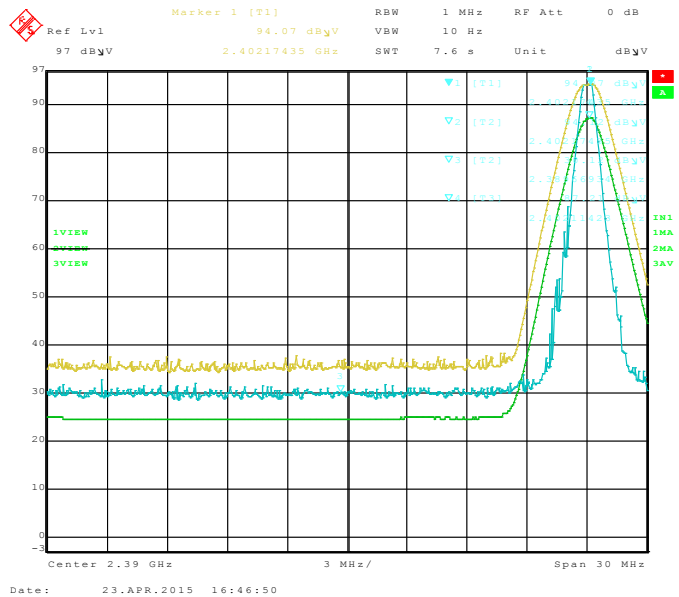


Figure 2-3: Band-Edge Compliance of RF Rad. Emissions.  
Bluetooth, Single freq., Static PBRs,  
DH5, Channel 78, Pol: V, Detector: PK


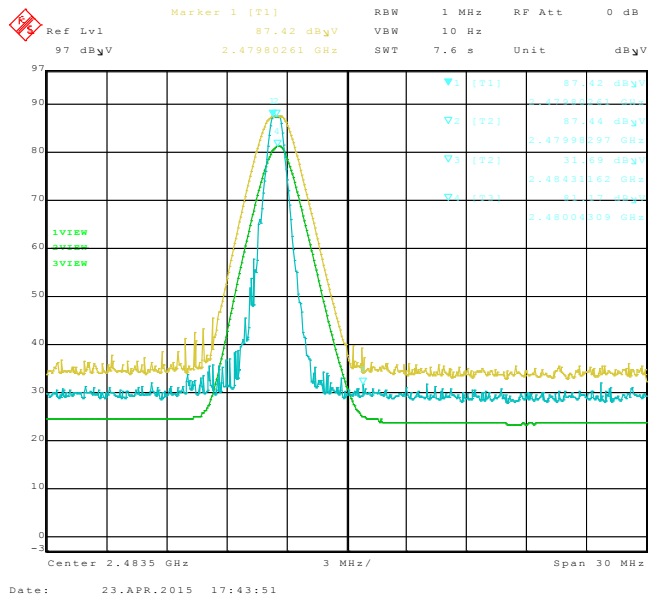


Figure 2-4: Band-Edge Compliance of RF Rad. Emissions.  
Bluetooth, Single freq., Static PBRs,  
DH5, Channel 78, Pol: H, Detector: PK



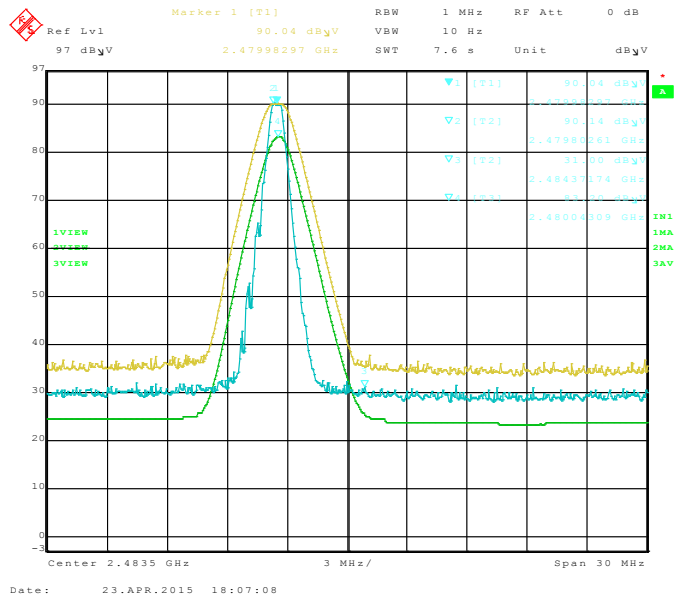

EMC Test Report for the BlackBerry® smartphone Model  
RHR191LW (SQW100-4)

**APPENDIX 2**


**Test Report No.:**  
RTS-6067-1505-16

**Dates of Test:**  
April 02 – May 14, 2015


**FCC ID:** L6ARHR190LW  
**IC:** 2503A-RHR190LW

Bluetooth Band-Edge Compliance of RF Radiated Emissions cont'd


**Figure 2-5: Band-Edge Compliance of RF Rad. Emissions.**  
Bluetooth, Single freq., Static PBRs,  
2-DH5, Channel 0, Pol: V, Detector: PK

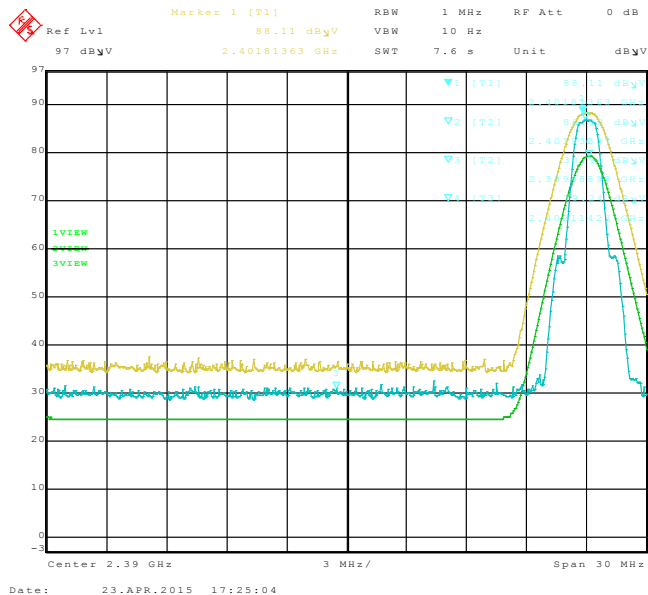


**Figure 2-6: Band-Edge Compliance of RF Rad. Emissions.**  
Bluetooth, Single freq., Static PBRs,  
2-DH5, Channel 0, Pol: H, Detector: PK

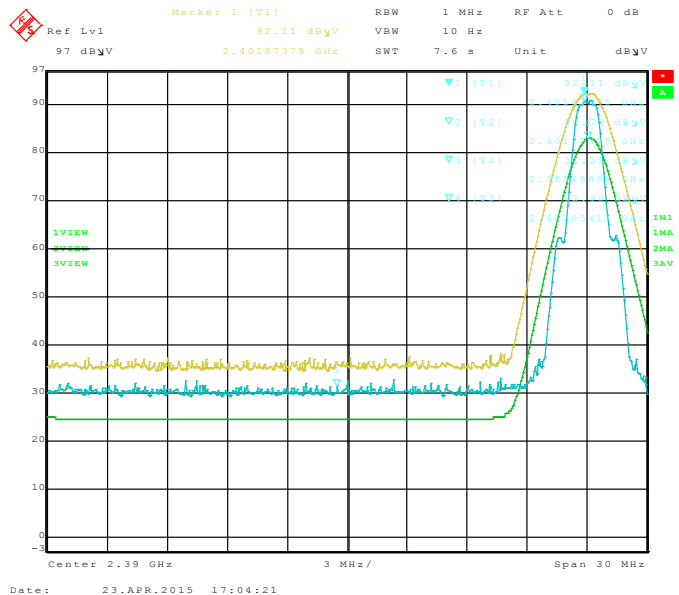

**Figure 2-7: Band-Edge Compliance of RF Rad. Emissions.**  
Bluetooth, Single freq., Static PBRs,  
2-DH5, Channel 78, Pol: V, Detector: PK

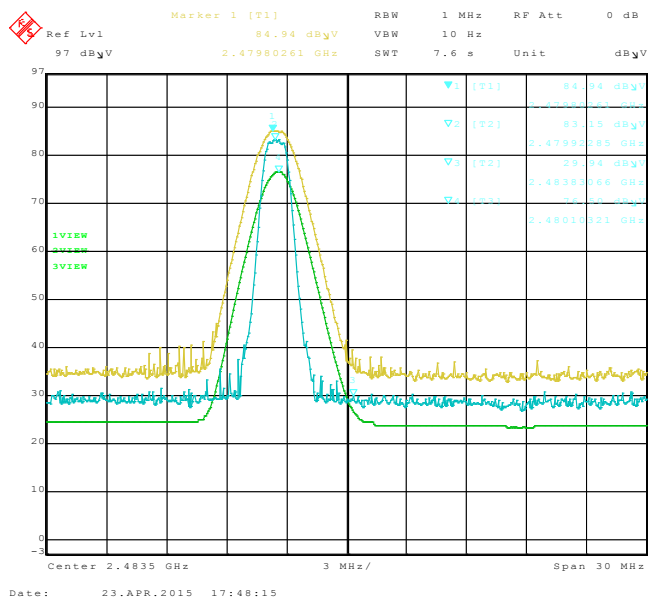

**Figure 2-8: Band-Edge Compliance of RF Rad. Emissions.**  
Bluetooth, Single freq., Static PBRs,  
2-DH5, Channel 78, Pol: H, Detector: PK

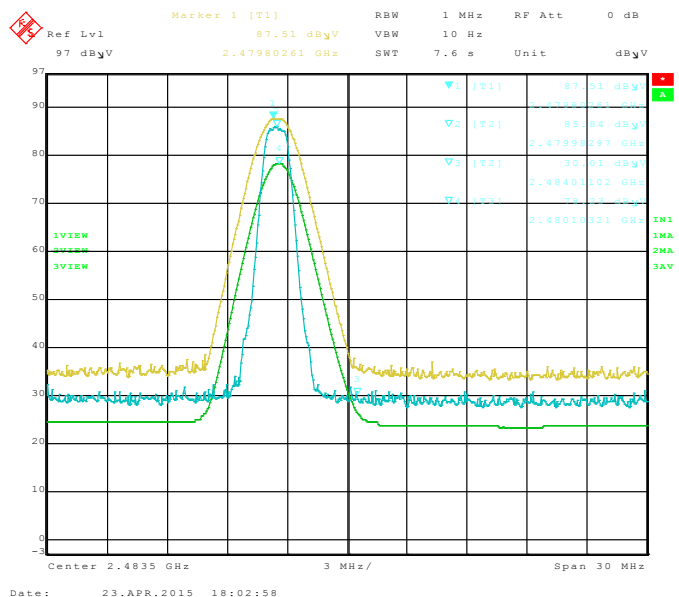



EMC Test Report for the BlackBerry® smartphone Model  
RHR191LW (SQW100-4)

**APPENDIX 2**


**Test Report No.:**  
RTS-6067-1505-16

**Dates of Test:**  
April 02 – May 14, 2015


**FCC ID:** L6ARHR190LW  
**IC:** 2503A-RHR190LW

Bluetooth Band-Edge Compliance of RF Radiated Emissions cont'd


**Figure 2-9: Band-Edge Compliance of RF Rad. Emissions.**  
Bluetooth, Single freq., Static PBRs,  
3-DH5, Channel 0, Pol: V, Detector: PK

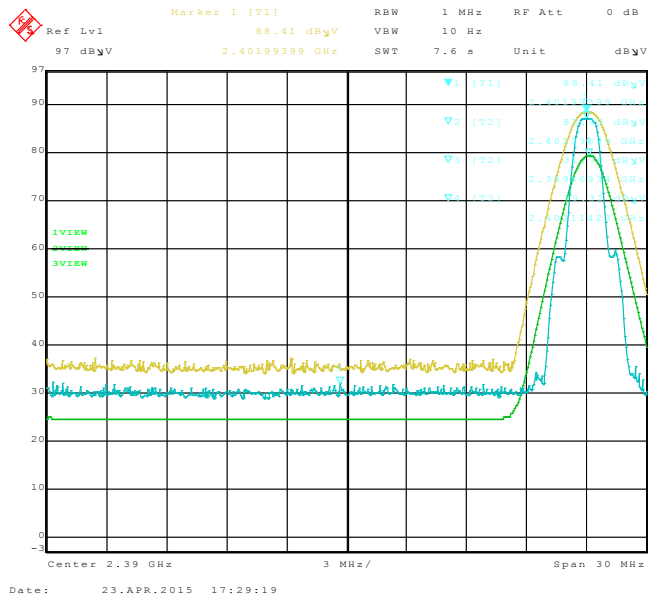


**Figure 2-10: Band-Edge Compliance of RF Rad. Emissions.**  
Bluetooth, Single freq., Static PBRs,  
3-DH5, Channel 0, Pol: H, Detector: PK

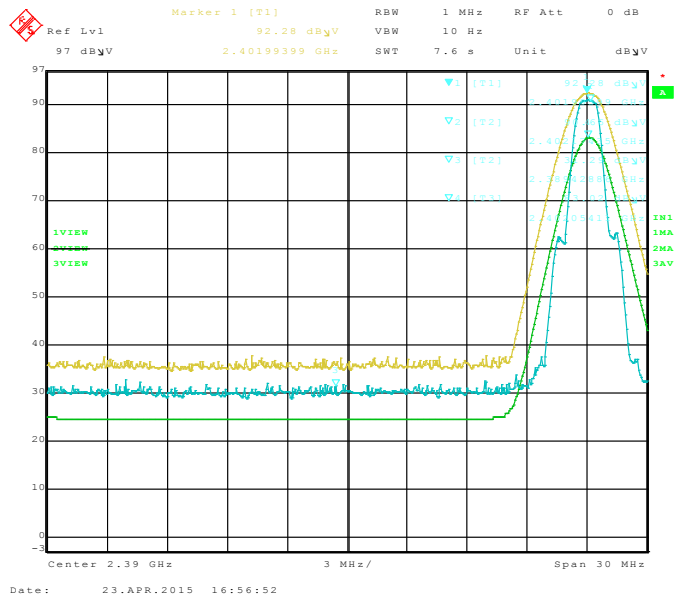


**Figure 2-11: Band-Edge Compliance of RF Rad. Emissions.**  
Bluetooth, Single freq., Static PBRs,  
3-DH5, Channel 78, Pol: V, Detector: PK

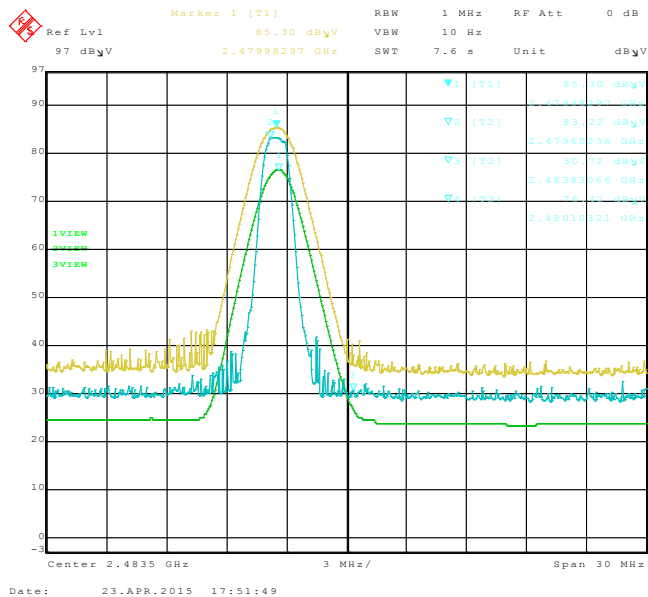

**Figure 2-12: Band-Edge Compliance of RF Rad. Emissions.**  
Bluetooth, Single freq., Static PBRs,  
3-DH5, Channel 78, Pol: H, Detector: PK

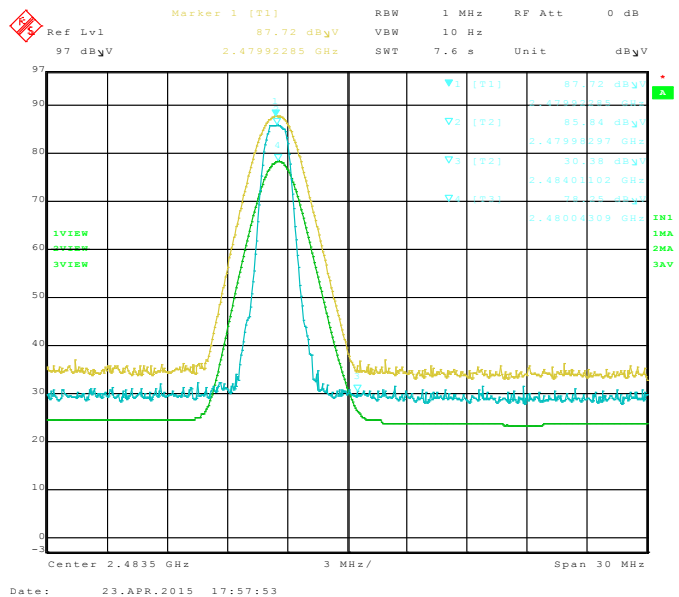



|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 2</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

Radiated Emissions Test Results cont'd  
Bluetooth Low Energy Band

Date of Test: April 17, 2015

Measurements were performed by Shiva Kumbham.

The environmental test conditions were: Temperature: 26.7 °C  
Relative Humidity: 20.8 %

The test distance was 3.0 meters with a EUT height of 1.5 meters, and sweep frequency of 30 MHz to 1 GHz.

The BlackBerry® smartphone in Bluetooth Low Energy TX mode was in volume key down position.

The frequency sweep measurements were performed in single frequency mode on channels 0, 20 and 39.

All emissions had a test margin of greater than 25.0 dB.

Date of Test: April 14 and 24, 2015

Measurements were performed by Kevin Guo.


The environmental test conditions were: Temperature: 25.2°C  
Relative Humidity: 35.8%

The test distance was 3.0 meters with a EUT height of 1.5 meters, and sweep frequency of 1GHz to 25GHz.

The BlackBerry® smartphone in Bluetooth Low Energy TX mode was in volume key up position.

The frequency sweep measurements were performed in single frequency mode on channels 0, 20 and 39.

All other emission levels were at least 25 dB below the limit.

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 2</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

Band-Edge Compliance of RF Radiated Emissions Test Results  
Bluetooth Low Energy Band

Date of test: April 23, 2015

Measurements were performed by Shiva Kumbham.

The environmental test conditions were: Temperature: 25.3° C  
Relative Humidity: 12.7 %

The BlackBerry® smartphone was in volume key down position.

The test distance was 3.0 meters.

| Channel          | Freq. | Rx Antenna |      | Detector | VBW   | Reading | Corrected Reading | Delta Marker | Corrected Band edge | Limit    | Diff. To Limit |
|------------------|-------|------------|------|----------|-------|---------|-------------------|--------------|---------------------|----------|----------------|
|                  | (MHz) | Type       | POL. |          |       | (dBuV)  | (dBuV/m)          | (dB)         | (dBuV/m)            | (dBuV/m) | (dB)           |
| Low Channel, LE  |       |            |      |          |       |         |                   |              |                     |          |                |
| 0                | 2402  | Horn       | V    | PK       | 1 MHz | 86.27   | 96.49             | 55.61        | 40.88               | 74.00    | -33.12         |
| 0                | 2402  | Horn       | H    | PK       | 1 MHz | 88.53   | 98.75             | 57.07        | 41.68               | 74.00    | -32.32         |
| 0                | 2402  | Horn       | V    | AV       | 10 Hz | 81.44   | 91.66             | 55.61        | 36.05               | 54.00    | -17.95         |
| 0                | 2402  | Horn       | H    | AV       | 10 Hz | 83.71   | 93.93             | 57.07        | 36.86               | 54.00    | -17.14         |
| High Channel, LE |       |            |      |          |       |         |                   |              |                     |          |                |
| 39               | 2480  | Horn       | V    | PK       | 1 MHz | 86.73   | 97.88             | 56.50        | 41.38               | 74.00    | -32.62         |
| 39               | 2480  | Horn       | H    | PK       | 1 MHz | 87.29   | 98.44             | 56.20        | 42.24               | 74.00    | -31.76         |
| 39               | 2480  | Horn       | V    | AV       | 10 Hz | 81.94   | 93.09             | 56.50        | 36.59               | 54.00    | -17.41         |
| 39               | 2480  | Horn       | H    | AV       | 10 Hz | 82.46   | 93.61             | 56.20        | 37.41               | 54.00    | -16.59         |

See figures 2-13 to 2-16 for the plots of the Bluetooth Low Energy band-edge compliance.



## APPENDIX 2


**Test Report No.:**  
RTS-6067-1505-16

**Dates of Test:**  
April 02 – May 14, 2015


**FCC ID:** L6ARHR190LW  
**IC:** 2503A-RHR190LW

### Bluetooth Low Energy Band-Edge Compliance of RF Radiated Emissions cont'd


**Figure 2-13: Band-Edge Compliance of RF Rad. Emissions.**  
Bluetooth Low Energy, Single freq.,  
LE, Channel 0, Pol: V, Detector: PK

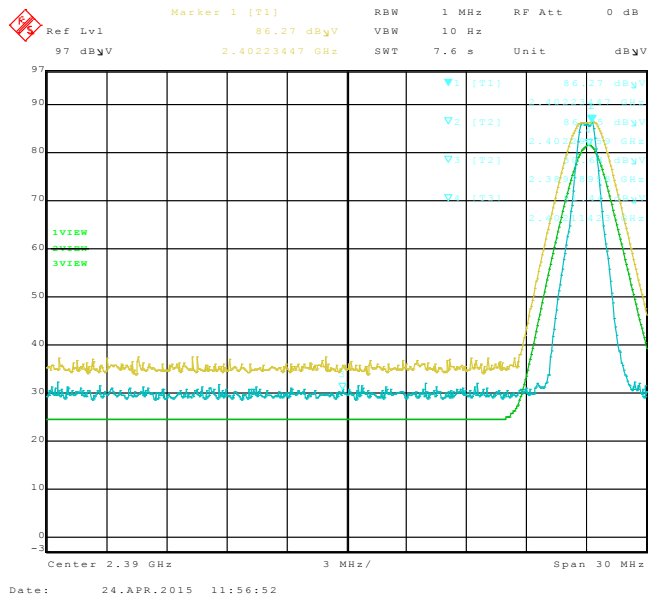


**Figure 2-14: Band-Edge Compliance of RF Rad. Emissions.**  
Bluetooth Low Energy, Single freq.,  
LE, Channel 0, Pol: H, Detector: PK

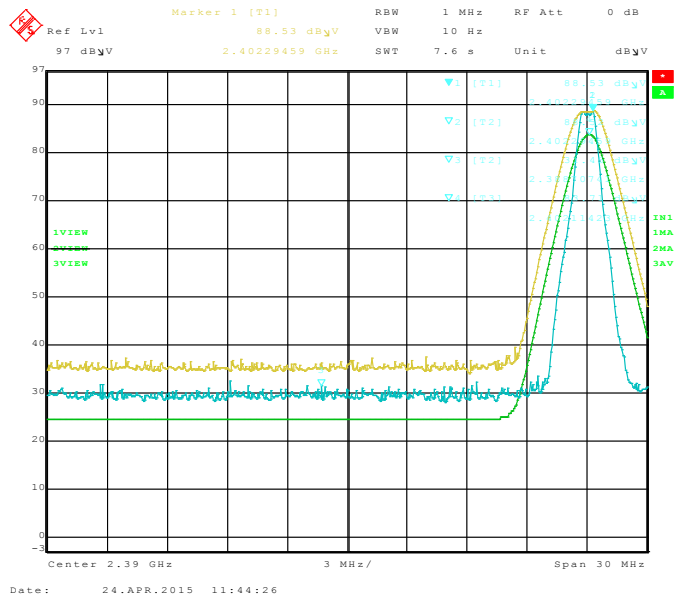


**Figure 2-15: Band-Edge Compliance of RF Rad. Emissions.**  
Bluetooth Low Energy, Single freq.,  
LE, Channel 39, Pol: V, Detector: PK

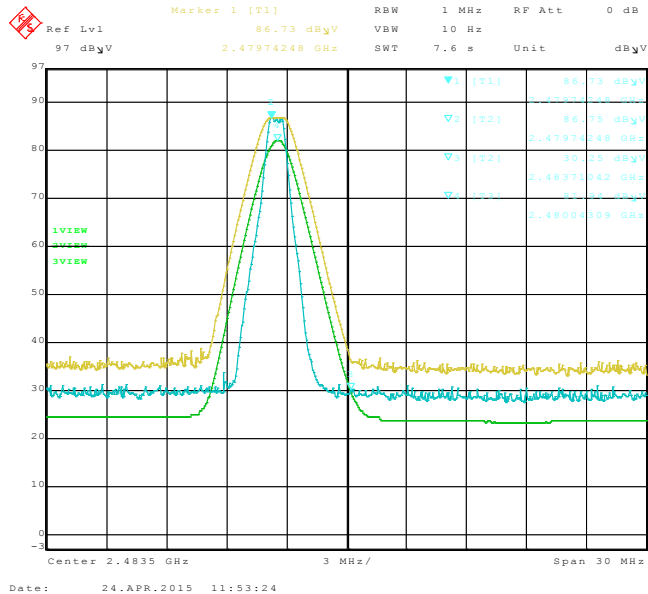

**Figure 2-16: Band-Edge Compliance of RF Rad. Emissions**  
Bluetooth Low Energy, Single freq.,  
LE, Channel 39, Pol: H, Detector: PK

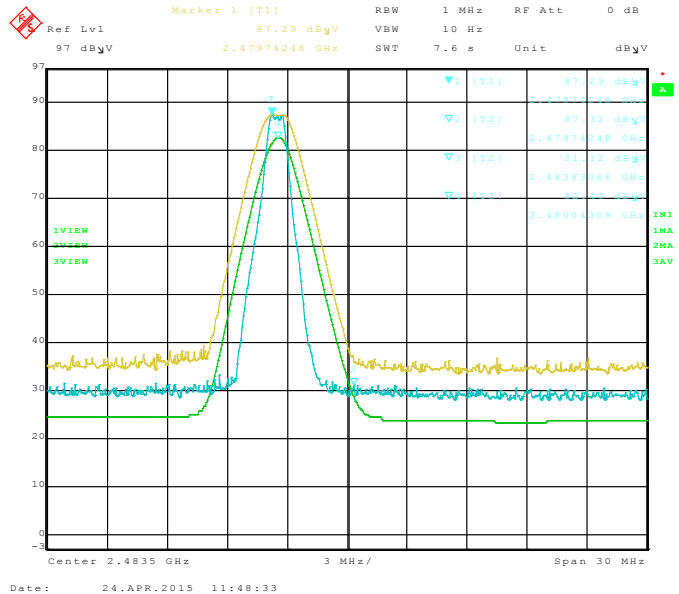

|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model<br>RHR191LW (SQW100-4)<br><br><b>APPENDIX 2</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015   | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

Radiated Emissions Test Results cont'd  
802.11b/g/n Band

Date of Test: April 1, 2015  
Measurements performed by Shiva Kumbham.

The environmental test conditions were: Temperature: 27.1 °C  
Relative Humidity: 8.1%

The test distance was 3.0 meters with a EUT height of 1.5 meters, and sweep frequency of 30 MHz to 1 GHz.

The BlackBerry® smartphone was in volume key down position.

The frequency sweep measurements were performed in 802.11b TX mode at 1 Mbps on channels 1, 6 and 11, in 802.11g TX mode at 6 Mbps on channels 1, 6 and 11, and in 802.11n TX mode at MCS 0 on channels 1, 6 and 11.

All emissions had a test margin of greater than 25.0 dB.

Date of Test: April 07, 10, 20 and 24, 2015  
Measurements performed by Winston Vernon.


The environmental test conditions were: Temperature: 25.1 °C  
Relative Humidity: 36.5 %

The test distance was 3.0 meters with a EUT height of 1.5 meters, and sweep frequency of 1GHz to 25GHz.

The BlackBerry® smartphone was in horizontal position.

The frequency sweep measurements were performed in 802.11b TX mode at 1 Mbps on channels 1, 6 and 11, in 802.11g TX mode at 6 Mbps on channels 1, 6 and 11, and in 802.11n TX mode at MCS 0 on channels 1, 6 and 11.

All emissions had a test margin of greater than 25.0 dB.

|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model<br>RHR191LW (SQW100-4)<br><b>APPENDIX 2</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015   | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

### 802.11b/g/n Band-Edge Compliance of RF Radiated Emissions

Date of Tests: May 14, 2015

Measurements performed by Savtej Sandhu.


The environmental test conditions were: Temperature: 23.9 °C  
Relative Humidity: 22.6 %

### 802.11b Band

The measurements were performed on BlackBerry® smartphone in standalone, volume key down configuration on channels 1 and 11 for 802.11b mode at 1 Mbps.

The test distance was 3 meters.

| Channel                    | Freq.<br>(MHz) | Rx Antenna |      | Detector<br>(MHz) | VBW   | Reading<br>(dBuV) | Corrected<br>Band<br>edge<br>(dBuV/m) | Limit<br>(dBuV/m) | Diff. To<br>Limit<br>(dB) |
|----------------------------|----------------|------------|------|-------------------|-------|-------------------|---------------------------------------|-------------------|---------------------------|
|                            |                | Type       | POL. |                   |       |                   |                                       |                   |                           |
| Low channel 802.11b,1Mbps  |                |            |      |                   |       |                   |                                       |                   |                           |
| 1.0                        | 2412.00        | Horn       | V    | PK                | 1 MHz | 36.14             | 46.36                                 | 74.00             | -27.64                    |
| 1.0                        | 2412.00        | Horn       | H    | PK                | 1 MHz | 36.07             | 46.29                                 | 74.00             | -27.71                    |
| 1.0                        | 2412.00        | Horn       | V    | AV                | 10 Hz | 24.36             | 34.58                                 | 54.00             | -19.42                    |
| 1.0                        | 2412.00        | Horn       | H    | AV                | 10 Hz | 24.36             | 34.58                                 | 54.00             | -19.42                    |
| High channel 802.11b,1Mbps |                |            |      |                   |       |                   |                                       |                   |                           |
| 11.0                       | 2462.00        | Horn       | V    | PK                | 1 MHz | 37.69             | 48.84                                 | 74.00             | -25.16                    |
| 11.0                       | 2462.00        | Horn       | H    | PK                | 1 MHz | 42.05             | 53.20                                 | 74.00             | -20.80                    |
| 11.0                       | 2462.00        | Horn       | V    | AV                | 10 Hz | 25.52             | 36.67                                 | 54.00             | -17.33                    |
| 11.0                       | 2462.00        | Horn       | H    | AV                | 10 Hz | 29.04             | 40.19                                 | 54.00             | -13.81                    |


|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 2</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

### 802.11g Band

The measurements were performed on the BlackBerry® smartphone in standalone, volume key down configuration on channels 1 and 11 for 802.11g mode at 6 Mbps.

The test distance was 3 meters.

| Channel                    | Freq.<br>(MHz) | Rx Antenna |      | Detector<br>(MHz) | VBW   | Reading<br>(dBuV) | Corrected<br>Band edge<br>(dBuV/m) | Limit<br>(dBuV/m) | Diff. To<br>Limit<br>(dB) |
|----------------------------|----------------|------------|------|-------------------|-------|-------------------|------------------------------------|-------------------|---------------------------|
|                            |                | Type       | POL. |                   |       |                   |                                    |                   |                           |
| Low channel 802.11g,6Mbps  |                |            |      |                   |       |                   |                                    |                   |                           |
| 1.0                        | 2412.00        | Horn       | V    | PK                | 1 MHz | 40.04             | 50.26                              | 74.00             | -23.74                    |
| 1.0                        | 2412.00        | Horn       | H    | PK                | 1 MHz | 42.04             | 52.26                              | 74.00             | -21.74                    |
| 1.0                        | 2412.00        | Horn       | V    | AV                | 10 Hz | 27.01             | 37.23                              | 54.00             | -16.77                    |
| 1.0                        | 2412.00        | Horn       | H    | AV                | 10 Hz | 29.39             | 39.61                              | 54.00             | -14.39                    |
| High channel 802.11g,6Mbps |                |            |      |                   |       |                   |                                    |                   |                           |
| 11.0                       | 2462.00        | Horn       | V    | PK                | 1 MHz | 45.54             | 56.69                              | 74.00             | -17.31                    |
| 11.0                       | 2462.00        | Horn       | H    | PK                | 1 MHz | 51.51             | 62.66                              | 74.00             | -11.34                    |
| 11.0                       | 2462.00        | Horn       | V    | AV                | 10 Hz | 33.48             | 44.63                              | 54.00             | -9.37                     |
| 11.0                       | 2462.00        | Horn       | H    | AV                | 10 Hz | 39.16             | 50.31                              | 54.00             | -3.69                     |

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 2</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

### 802.11n Band

The measurements were performed on the BlackBerry® smartphone in standalone, volume key down configuration on channels 1 and 11 for 802.11n mode at MCS 0.

The test distance was 3 meters.

| Channel                    | Freq.<br>(MHz) | Rx Antenna |      | Detector<br>(MHz) | VBW   | Reading<br>(dBuV) | Corrected<br>Band edge<br>(dBuV/m) | Limit<br>(dBuV/m) | Diff. To<br>Limit<br>(dB) |
|----------------------------|----------------|------------|------|-------------------|-------|-------------------|------------------------------------|-------------------|---------------------------|
|                            |                | Type       | POL. |                   |       |                   |                                    |                   |                           |
| Low channel 802.11n, MCS0  |                |            |      |                   |       |                   |                                    |                   |                           |
| 1.0                        | 2412.00        | Horn       | V    | PK                | 1 MHz | 37.33             | 47.55                              | 74.00             | -26.45                    |
| 1.0                        | 2412.00        | Horn       | H    | PK                | 1 MHz | 40.12             | 50.34                              | 74.00             | -23.66                    |
| 1.0                        | 2412.00        | Horn       | V    | AV                | 10 Hz | 24.96             | 35.18                              | 54.00             | -18.82                    |
| 1.0                        | 2412.00        | Horn       | H    | AV                | 10 Hz | 26.04             | 36.26                              | 54.00             | -17.74                    |
| High channel 802.11n, MCS0 |                |            |      |                   |       |                   |                                    |                   |                           |
| 11.0                       | 2462.00        | Horn       | V    | PK                | 1 MHz | 45.29             | 56.44                              | 74.00             | -17.56                    |
| 11.0                       | 2462.00        | Horn       | H    | PK                | 1 MHz | 52.11             | 63.26                              | 74.00             | -10.74                    |
| 11.0                       | 2462.00        | Horn       | V    | AV                | 10 Hz | 27.88             | 39.03                              | 54.00             | -14.97                    |
| 11.0                       | 2462.00        | Horn       | H    | AV                | 10 Hz | 33.03             | 44.18                              | 54.00             | -9.82                     |

See figures 2-17 to 2-20 for the plots of the 802.11b band-edge compliance.  
See figures 2-21 to 2-24 for the plots of the 802.11g band-edge compliance.  
See figures 2-25 to 2-28 for the plots of the 802.11n band-edge compliance.



EMC Test Report for the BlackBerry® smartphone Model  
RHR191LW (SQW100-4)

APPENDIX 2

Test Report No.:  
RTS-6067-1505-16

Dates of Test:  
April 02 – May 14, 2015

FCC ID: L6ARHR190LW  
IC: 2503A-RHR190LW

802.11b/g/n Band-Edge Compliance of RF Radiated Emissions cont'd

Figure 2-17: Band-Edge Compliance of RF Radiated Emission  
802.11b, Channel 1, 2412 MHz, Max Pol: V,  
Detector: PK

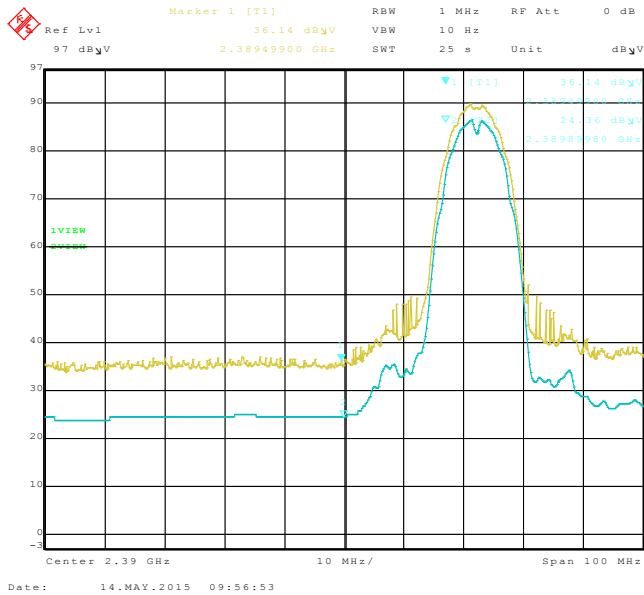


Figure 2-18: Band-Edge Compliance of RF Radiated Emission  
802.11b, Channel 1, 2412 MHz, Max Pol: H,  
Detector: PK

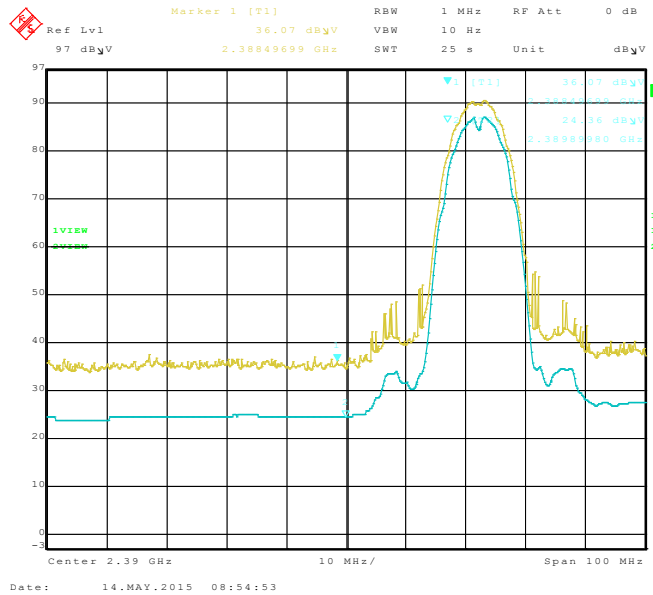


Figure 2-19: Band-Edge Compliance of RF Radiated Emission  
802.11b, Channel 11, 2462 MHz, Max Pol: V,  
Detector: PK


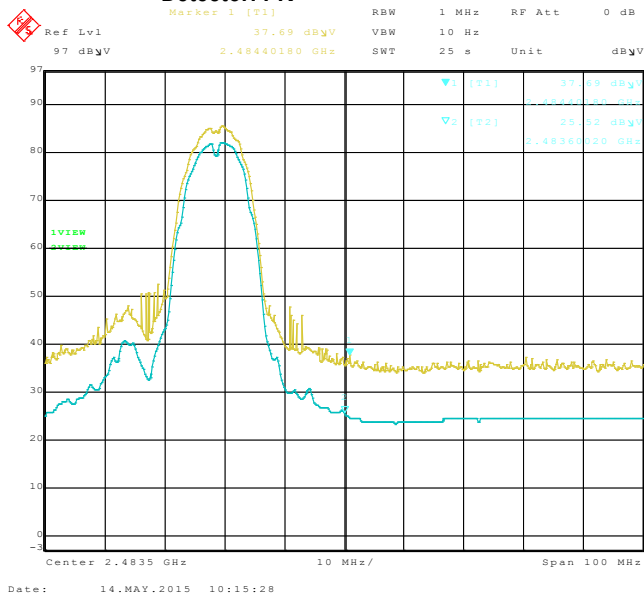


Figure 2-20: Band-Edge Compliance of RF Radiated Emission  
802.11b, Channel 11, 2462 MHz, Max Pol: H,  
Detector: PK





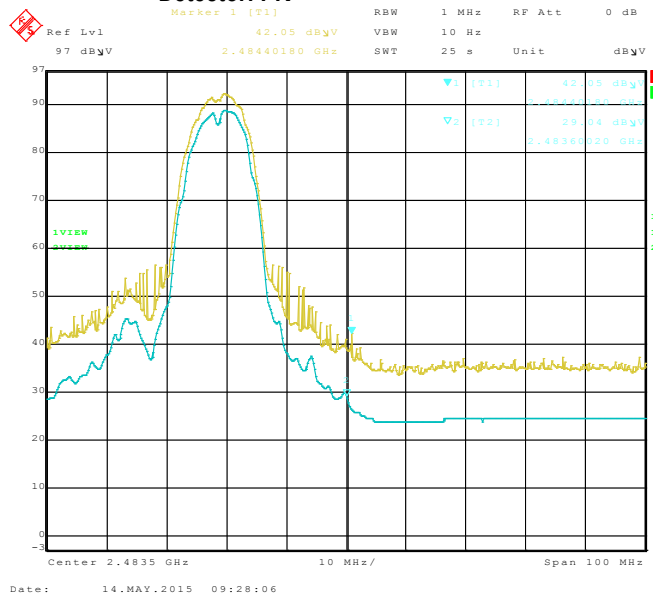

EMC Test Report for the BlackBerry® smartphone Model  
RHR191LW (SQW100-4)

APPENDIX 2

Test Report No.:  
RTS-6067-1505-16

Dates of Test:  
April 02 – May 14, 2015

FCC ID: L6ARHR190LW  
IC: 2503A-RHR190LW

Figure 2-21: Band-Edge Compliance of RF Radiated Emission  
802.11g, Channel 1, 2412 MHz, Max Pol: V,  
Detector: PK

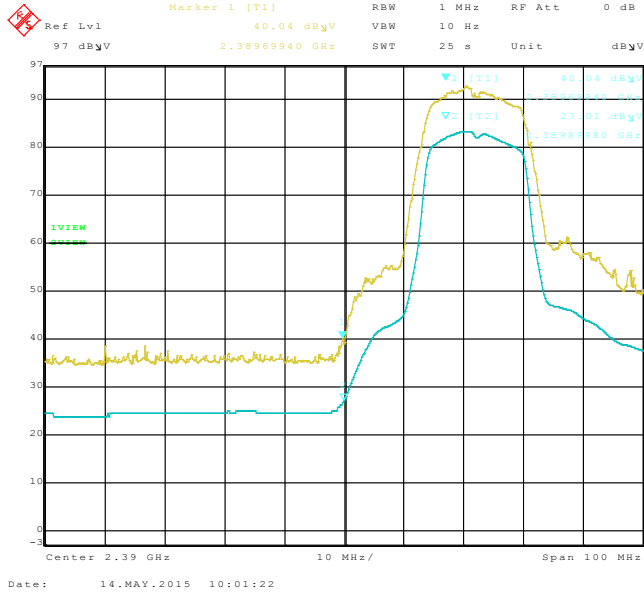


Figure 2-22: Band-Edge Compliance of RF Radiated Emission  
802.11g, Channel 1, 2412 MHz, Max Pol: H,  
Detector: PK

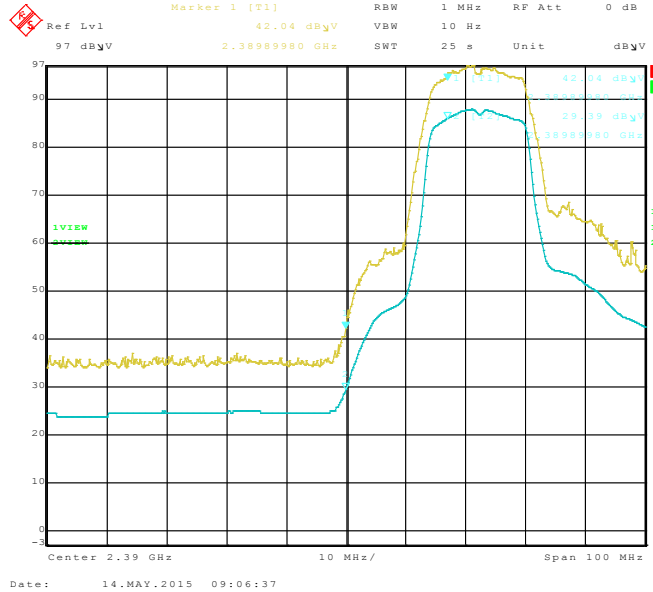


Figure 2-23: Band-Edge Compliance of RF Radiated Emission  
802.11g, Channel 11, 2462 MHz, Max Pol: V,  
Detector: PK


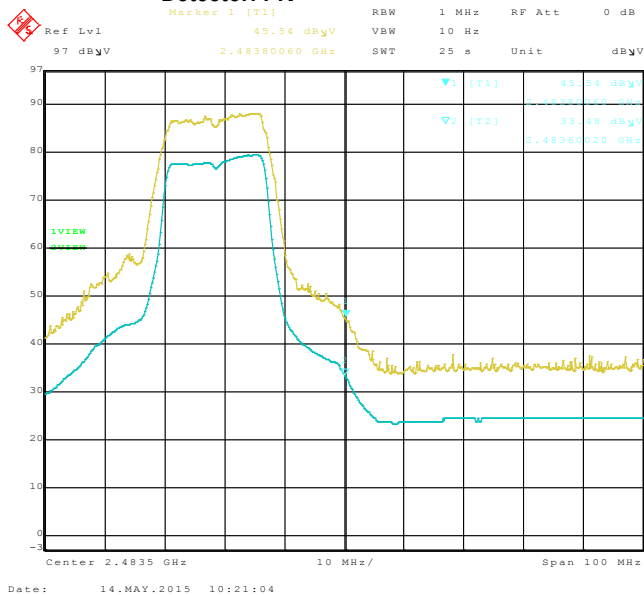


Figure 2-24: Band-Edge Compliance of RF Radiated Emission  
802.11g, Channel 11, 2462 MHz, Max Pol: H,  
Detector: PK



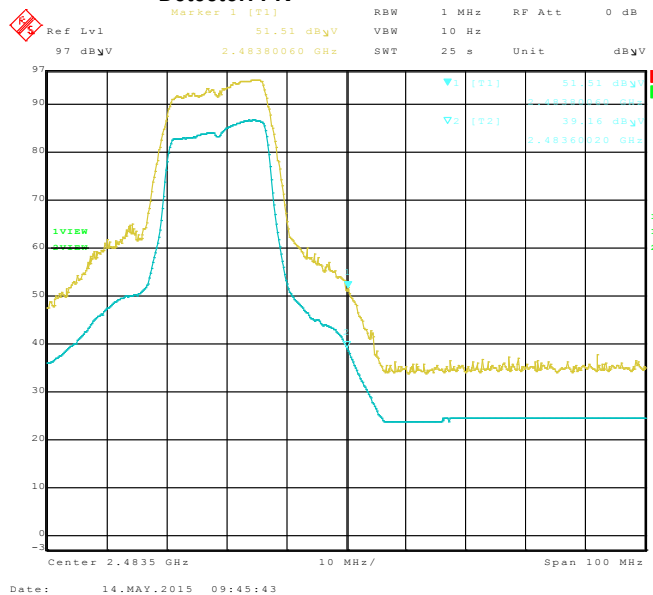

EMC Test Report for the BlackBerry® smartphone Model  
RHR191LW (SQW100-4)


**APPENDIX 2**

**Test Report No.:**  
RTS-6067-1505-16


**Dates of Test:**  
April 02 – May 14, 2015

**FCC ID:** L6ARHR190LW  
**IC:** 2503A-RHR190LW


**Figure 2-25: Band-Edge Compliance of RF Radiated Emission**  
802.11n, Channel 1, 2412 MHz, Max Pol: V,  
Detector: PK

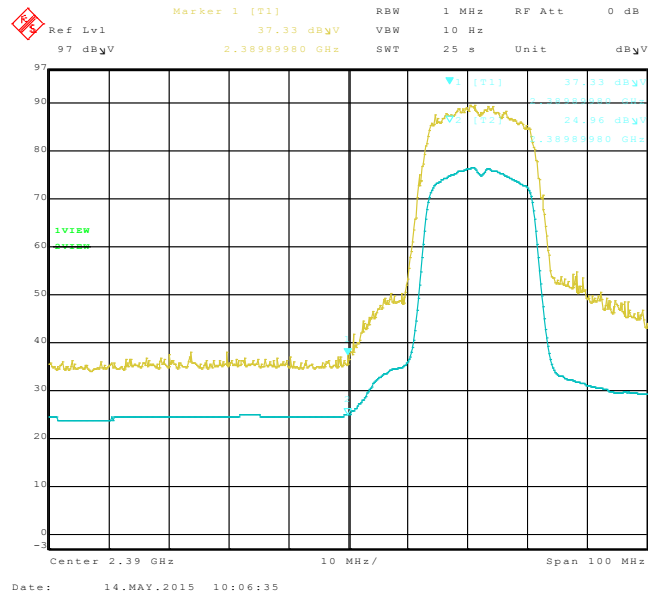


**Figure 2-26: Band-Edge Compliance of RF Radiated Emission**  
802.11n, Channel 1, 2412 MHz, Max Pol: H,  
Detector: PK

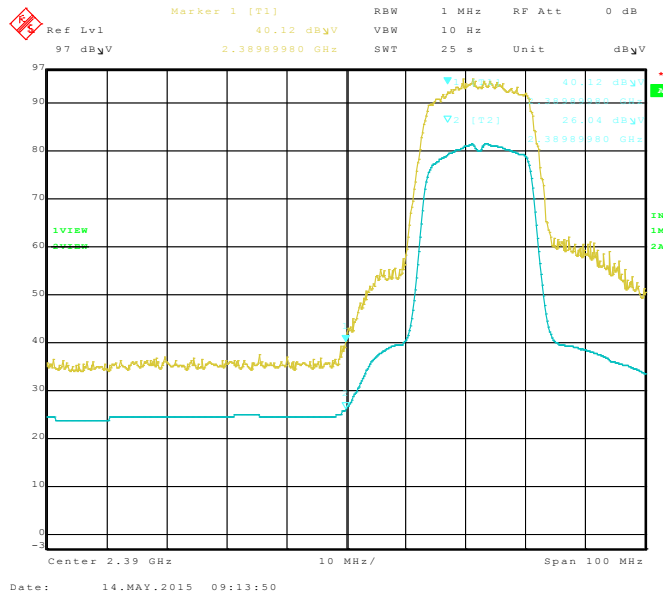


**Figure 2-27: Band-Edge Compliance of RF Radiated Emission**  
802.11n, Channel 11, 2462 MHz, Max Pol: V,  
Detector: PK

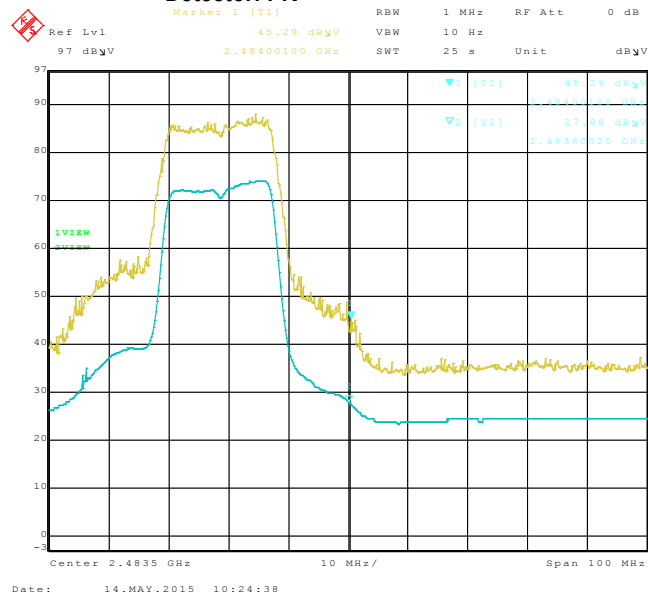

**Figure 2-28: Band-Edge Compliance of RF Radiated Emission**  
802.11n, Channel 11, 2462 MHz, Max Pol: H,  
Detector: PK

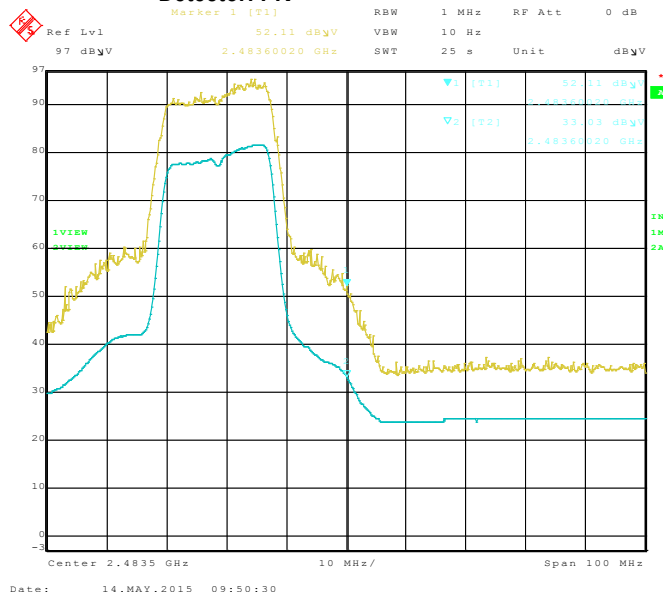

## **APPENDIX 3 – 802.11a/n RADIATED EMISSIONS TEST DATA**

|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model<br>RHR191LW (SQW100-4)<br><b>APPENDIX 3</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015   | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

Radiated Emissions Test Results  
802.11a Band

Date of Test: April 02, 2015

Measurements were performed by Savtej Sandhu

The environmental test conditions were: Temperature: 26.7 °C  
Relative Humidity: 13.3 %

The test distance was 3.0 meters with a EUT height of 1.5 meters, and sweep frequency of 30 MHz to 1 GHz.

The BlackBerry® smartphone was in volume key up position.

The frequency sweep measurements were performed in 802.11a TX mode at 6 Mbps on channels 36, 48, 64, 100, 140 and 165.

All emission had a test margin of greater than 25 dB.

Radiated Emissions Test Results  
802.11a Band

Date of Test: April 13, 15, and 20, 2015

Measurements were performed by Winston Vernon.


The environmental test conditions were: Temperature: 24.8°C  
Relative Humidity: 38.6 %

The test distance was 3.0 meters with a EUT height of 1.5 meters, and sweep frequency of 1GHz to 40GHz.

The BlackBerry® smartphone was in Volume Key Up position.

The frequency sweep measurements were performed in 802.11a TX mode at 6 Mbps on channels 36, 48, 64, 100, 140 and 165.

All emission had a test margin of greater than 25 dB.

|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model<br>RHR191LW (SQW100-4)<br><b>APPENDIX 3</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015   | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

Radiated Emissions Test Results cont'd  
802.11n Band

Date of Test: April 02, 2015

Measurements were performed by Savtej Sandhu

The environmental test conditions were: Temperature: 26.7 °C  
Relative Humidity: 13.3 %

The test distance was 3.0 meters with a EUT height of 1.5 meters, and sweep frequency of 30 MHz to 1 GHz.

The BlackBerry® smartphone was in volume key up position.

The frequency sweep measurements were performed in 802.11n TX mode at MCS 0 on channels 38, 62, 102 and 159.

All emission had a test margin of greater than 25 dB.

Radiated Emissions Test Results cont'd  
802.11n Band

Date of Test: April 15, and 20 2015

Measurements were performed by Winston Vernon.


The environmental test conditions were: Temperature: 24.8°C  
Relative Humidity: 38.6 %

The test distance was 3.0 meters with a EUT height of 1.5 meters, and sweep frequency of 1GHz to 40GHz.

The BlackBerry® smartphone was in Volume Key Up.

The frequency sweep measurements were performed in 802.11n TX mode at MCS 0 on channels 38, 62, 102, and 159.

All emission had a test margin of greater than 25 dB.

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 3</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

### 802.11a Band-Edge Compliance of RF Radiated Emissions

Date of Tests: May 13, 2015

Measurements performed by Shiva Kumbham.

The environmental test conditions were: Temperature: 23.9 °C


Relative Humidity: 22.6 %

The measurements were performed on BlackBerry® smartphone in standalone, volume key up configuration on channels 36, 64, 100, 140 for 802.11a mode at 6 Mbps.

The test distance was performed at a distance of 3 meters.

#### Bandwidth 20MHz


| Channel                                | Freq.   | Rx Antenna |      | Detector | VBW   | Reading | Corrected<br>Band edge | Limit | Diff. To<br>Limit |
|--|---------|------------|------|----------|-------|---------|------------------------|-------|-------------------|
|  | (MHz)   | Type       | POL. |          |       |         |                        |       |                   |
| Centre at Band-Edge: 5150 MHz, 802.11a |         |            |      |          |       |         |                        |       |                   |
| 36.0                                   | 5180.00 | Horn       | V    | PK       | 1 MHz | 41.57   | 64.79                  | 74.00 | -9.21             |
| 36.0                                   | 5180.00 | Horn       | H    | PK       | 1 MHz | 35.97   | 59.19                  | 74.00 | -14.81            |
| 36.0                                   | 5180.00 | Horn       | V    | AV       | 10 Hz | 24.96   | 48.18                  | 54.00 | -5.82             |
| 36.0                                   | 5180.00 | Horn       | H    | AV       | 10 Hz | 23.71   | 46.93                  | 54.00 | -7.07             |
| Centre at Band-Edge: 5350 MHz, 802.11a |         |            |      |          |       |         |                        |       |                   |
| 64.0                                   | 5320.00 | Horn       | V    | PK       | 1 MHz | 41.35   | 65.31                  | 74.00 | -8.69             |
| 64.0                                   | 5320.00 | Horn       | H    | PK       | 1 MHz | 35.97   | 59.93                  | 74.00 | -14.07            |
| 64.0                                   | 5320.00 | Horn       | V    | AV       | 10 Hz | 25.52   | 49.48                  | 54.00 | -4.52             |
| 64.0                                   | 5320.00 | Horn       | H    | AV       | 10 Hz | 24.36   | 48.32                  | 54.00 | -5.68             |

|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model<br>RHR191LW (SQW100-4)<br><b>APPENDIX 3</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015   | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

### 802.11a Band-Edge Compliance of RF Radiated Emissions cont'd

| Channel                                | Freq.   | Rx Antenna |      | Detector | VBW   | Reading<br>(dBuV) | Corrected<br>Band edge | Limit    | Diff. To<br>Limit |
|--|---------|------------|------|----------|-------|-------------------|------------------------|----------|-------------------|
|  | (MHz)   | Type       | POL. |          |       |                   | (MHz)                  | (dBuV/m) | (dBuV/m)          |
| Centre at Band-Edge: 5470 MHz, 802.11a |         |            |      |          |       |                   |                        |          |                   |
| 100.0                                  | 5500.00 | Horn       | V    | PK       | 1 MHz | 40.74             | 65.57                  | 74.00    | -8.43             |
| 100.0                                  | 5500.00 | Horn       | H    | PK       | 1 MHz | 36.06             | 60.89                  | 74.00    | -13.11            |
| 100.0                                  | 5500.00 | Horn       | V    | AV       | 10 Hz | 24.96             | 49.79                  | 54.00    | -4.21             |
| 100.0                                  | 5500.00 | Horn       | H    | AV       | 10 Hz | 23.71             | 48.54                  | 54.00    | -5.46             |
| Centre at Band-Edge: 5725 MHz, 802.11a |         |            |      |          |       |                   |                        |          |                   |
| 140.0                                  | 5700.00 | Horn       | V    | PK       | 1 MHz | 36.31             | 61.53                  | 68.20    | -6.67             |
| 140.0                                  | 5700.00 | Horn       | H    | PK       | 1 MHz | 35.80             | 61.02                  | 68.20    | -7.18             |

See figures 3-1 to 3-8 for the plots of the 802.11a band-edge compliance.

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 3</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

### 802.11n Band-Edge Compliance of RF Radiated Emissions

Date of Tests: May 13, 2015

Measurements performed by Shiva Kumbham.

The environmental test conditions were: Temperature: 23.9 °C  
Relative Humidity: 22.6 %


The measurements were performed on BlackBerry® smartphone in standalone, Vertical Down configuration on channels 36, 64, 100 and 140 for 802.11n mode at MCS 0.

The test distance was performed at a distance of 3 meters.

Bandwidth 20MHz

| Channel                                | Freq.   | Rx Antenna |      | Detector | VBW   | Reading | Corrected<br>Band edge | Limit | Diff. To<br>Limit |
|--|---------|------------|------|----------|-------|---------|------------------------|-------|-------------------|
|  | (MHz)   | Type       | POL. |          |       |         |                        |       |                   |
| Centre at Band-Edge: 5150 MHz, 802.11n |         |            |      |          |       |         |                        |       |                   |
| 36.0                                   | 5180.00 | Horn       | V    | PK       | 1 MHz | 42.15   | 65.37                  | 74.00 | -8.63             |
| 36.0                                   | 5180.00 | Horn       | H    | PK       | 1 MHz | 37.08   | 60.30                  | 74.00 | -13.70            |
| 36.0                                   | 5180.00 | Horn       | V    | AV       | 10 Hz | 25.52   | 48.74                  | 54.00 | -5.26             |
| 36.0                                   | 5180.00 | Horn       | H    | AV       | 10 Hz | 23.71   | 46.93                  | 54.00 | -7.07             |
| Centre at Band-Edge: 5350 MHz, 802.11n |         |            |      |          |       |         |                        |       |                   |
| 64.0                                   | 5320.00 | Horn       | V    | PK       | 1 MHz | 39.60   | 63.56                  | 74.00 | -10.44            |
| 64.0                                   | 5320.00 | Horn       | H    | PK       | 1 MHz | 36.41   | 60.37                  | 74.00 | -13.63            |
| 64.0                                   | 5320.00 | Horn       | V    | AV       | 10 Hz | 25.52   | 49.48                  | 54.00 | -4.52             |
| 64.0                                   | 5320.00 | Horn       | H    | AV       | 10 Hz | 24.36   | 48.32                  | 54.00 | -5.68             |




|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model<br>RHR191LW (SQW100-4)<br><b>APPENDIX 3</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015   | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

### 802.11n Band-Edge Compliance of RF Radiated Emissions cont'd

| Channel                                | Freq.   | Rx Antenna |      | Detector | VBW   | Reading | Corrected | Limit    | Diff. To |
|--|---------|------------|------|----------|-------|---------|-----------|----------|----------|
|  | (MHz)   | Type       | POL. |          |       |         | Band edge | (dBuV/m) |          |
| (dB)                                   |         |            |      |          |       |         |           |          |          |
| Centre at Band-Edge: 5470 MHz, 802.11n |         |            |      |          |       |         |           |          |          |
| 100.0                                  | 5500.00 | Horn       | V    | PK       | 1 MHz | 43.40   | 68.23     | 74.00    | -5.77    |
| 100.0                                  | 5500.00 | Horn       | H    | PK       | 1 MHz | 36.33   | 61.16     | 74.00    | -12.84   |
| 100.0                                  | 5500.00 | Horn       | V    | AV       | 10 Hz | 26.04   | 50.87     | 54.00    | -3.13    |
| 100.0                                  | 5500.00 | Horn       | H    | AV       | 10 Hz | 23.71   | 48.54     | 54.00    | -5.46    |
| Centre at Band-Edge: 5725 MHz, 802.11n |         |            |      |          |       |         |           |          |          |
| 140.0                                  | 5700.00 | Horn       | V    | PK       | 1 MHz | 39.19   | 64.41     | 68.20    | -3.79    |
| 140.0                                  | 5700.00 | Horn       | H    | PK       | 1 MHz | 35.03   | 60.25     | 68.20    | -7.95    |


### Bandwidth 40MHz

| Channel                                | Freq.  | Rx Antenna |      | Detector | VBW   | Reading | Corrected Band edge | Limit | Diff. To Limit |
|--|--------|------------|------|----------|-------|---------|---------------------|-------|----------------|
|  | (MHz)  | Type       | POL. |          |       |         |                     |       |                |
| Centre at Band-Edge: 5150 MHz, 802.11n |        |            |      |          |       |         |                     |       |                |
| 38.00                                  | 5190.0 | Horn       | V    | PK       | 1 MHz | 47.33   | 70.55               | 74.00 | -3.45          |
| 38.00                                  | 5190.0 | Horn       | H    | PK       | 1 MHz | 37.08   | 60.30               | 74.00 | -13.70         |
| 38.00                                  | 5190.0 | Horn       | V    | AV       | 10 Hz | 29.39   | 52.61               | 54.00 | -1.39          |
| 38.00                                  | 5190.0 | Horn       | H    | AV       | 10 Hz | 24.36   | 47.58               | 54.00 | -6.42          |

|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model<br>RHR191LW (SQW100-4)<br><b>APPENDIX 3</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015   | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |


| Channel                                | Freq.  | Rx Antenna |      | Detector | VBW   | Reading | Corrected<br>Band edge | Limit | Diff. To<br>Limit |
|--|--------|------------|------|----------|-------|---------|------------------------|-------|-------------------|
|  | (MHz)  | Type       | POL. |          |       |         |                        |       |                   |
| Centre at Band-Edge: 5350 MHz, 802.11n |        |            |      |          |       |         |                        |       |                   |
| 62.00                                  | 5310.0 | Horn       | V    | PK       | 1 MHz | 43.71   | 67.67                  | 74.00 | -6.33             |
| 62.00                                  | 5310.0 | Horn       | H    | PK       | 1 MHz | 37.29   | 61.25                  | 74.00 | -12.75            |
| 62.00                                  | 5310.0 | Horn       | V    | AV       | 10 Hz | 26.04   | 50.00                  | 54.00 | -4.00             |
| 62.00                                  | 5310.0 | Horn       | H    | AV       | 10 Hz | 24.36   | 48.32                  | 54.00 | -5.68             |
| Centre at Band-Edge: 5470 MHz, 802.11n |        |            |      |          |       |         |                        |       |                   |
| 102.00                                 | 5510.0 | Horn       | V    | PK       | 1 MHz | 45.38   | 70.21                  | 74.00 | -3.79             |
| 102.00                                 | 5510.0 | Horn       | H    | PK       | 1 MHz | 38.66   | 63.49                  | 74.00 | -10.51            |
| 102.00                                 | 5510.0 | Horn       | V    | AV       | 10 Hz | 27.46   | 52.29                  | 54.00 | -1.71             |
| 102.00                                 | 5510.0 | Horn       | H    | AV       | 10 Hz | 24.36   | 49.19                  | 54.00 | -4.81             |

See figures 3-9 to 3-22 for the plots of the 802.11n band-edge compliance.


|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model<br>RHR191LW (SQW100-4)<br><b>APPENDIX 3</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015   | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

## 802.11a Band-Edge Compliance of RF Radiated Emissions cont'd


**Figure 3-1: Band-Edge Compliance of RF Radiated Emission 802.11a, Ch. 36, 5180 MHz, Centre of Band-Edge: 5150 MHz**  
**Pol: V, Detector: PK**

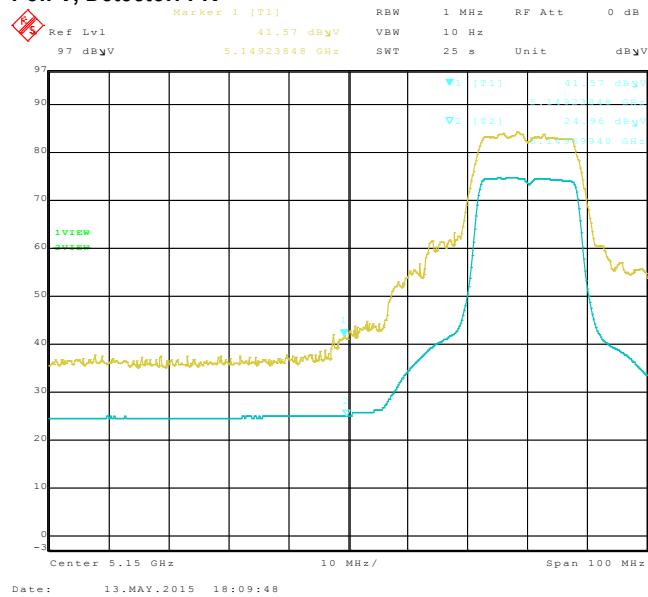


**Figure 3-2: Band-Edge Compliance of RF Radiated Emission 802.11a, Ch. 36, 5180 MHz, Centre of Band-Edge: 5150 MHz**  
**Pol: H, Detector: PK**

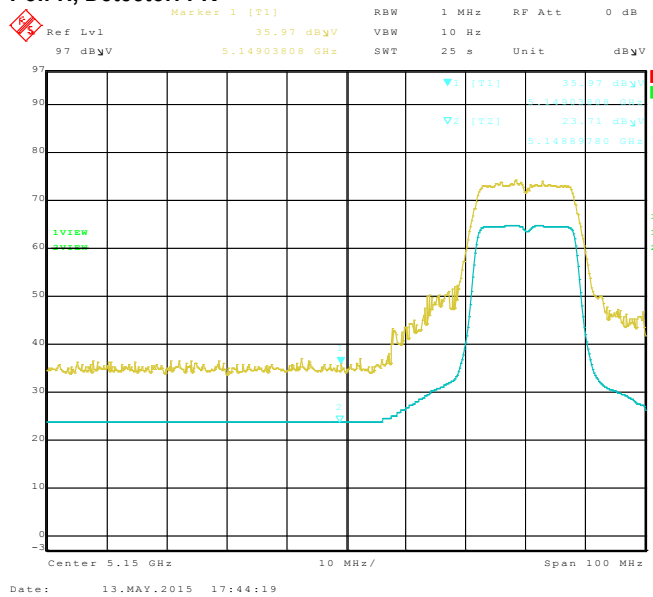


**Figure 3-3: Band-Edge Compliance of RF Radiated Emission 802.11a, Ch. 64, 5320 MHz, Centre of Band-Edge: 5350 MHz**  
**Pol: V, Detector: PK**

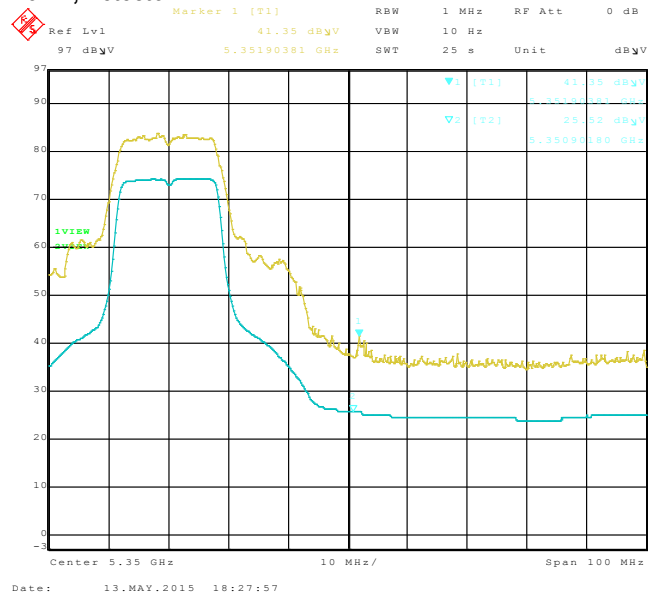

**Figure 3-4: Band-Edge Compliance of RF Radiated Emission 802.11a, Ch. 64, 5320 MHz, Centre of Band-Edge: 5350 MHz**  
**Pol: H, Detector: PK**

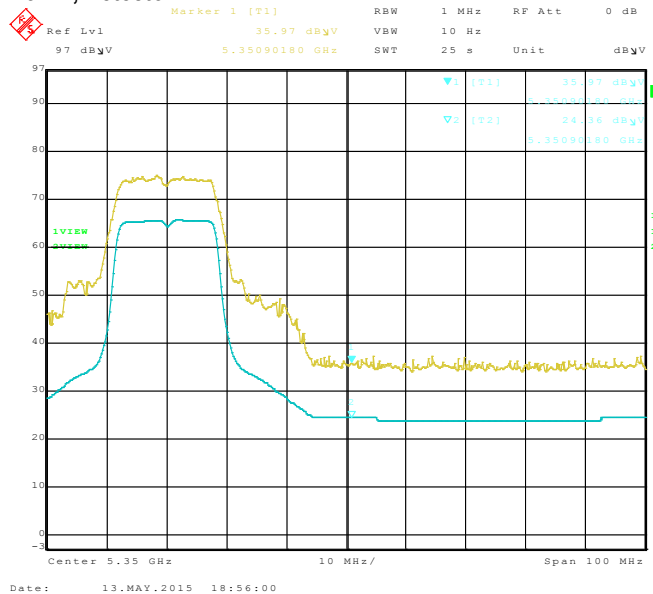

|   |  |   |
|---|--|---|
|  | <b>EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)</b><br><b>APPENDIX 3</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015   | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

802.11a Band-Edge Compliance of RF Radiated Emissions cont'd

Figure 3-5: Band-Edge Compliance of RF Radiated Emission 802.11a, Ch. 100, 5500 MHz, Centre of Band-Edge: 5460 MHz Pol: V, Detector: PK

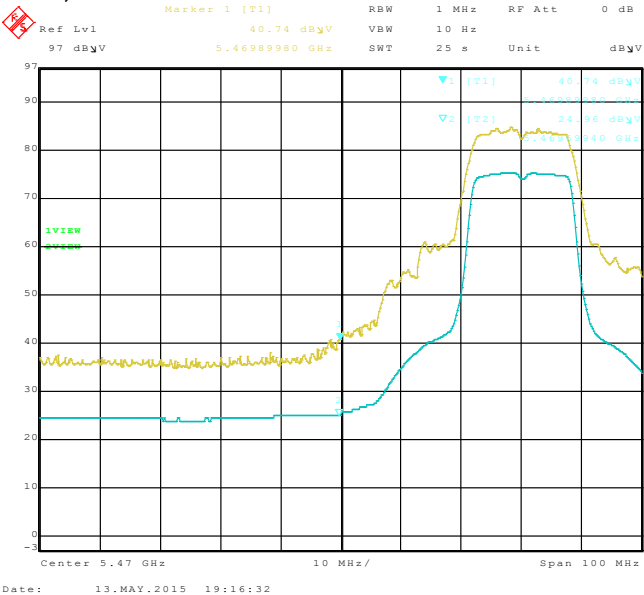


Figure 3-6: Band-Edge Compliance of RF Radiated Emission. 802.11a, Ch. 100, 5500 MHz, Centre of Band-Edge: 5460 MHz Pol: H, Detector: PK

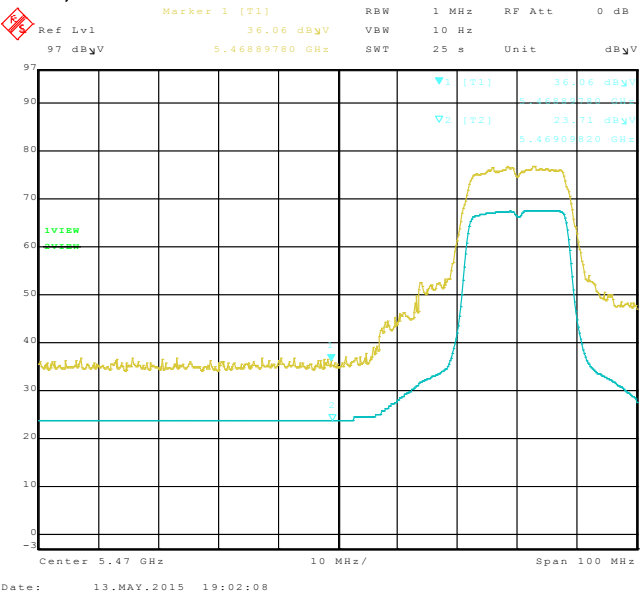


Figure 3-7: Band-Edge Compliance of RF Radiated Emission. 802.11a, Ch. 140, 5700 MHz, Centre of Band-Edge: 5725 MHz Pol: V, Detector: PK






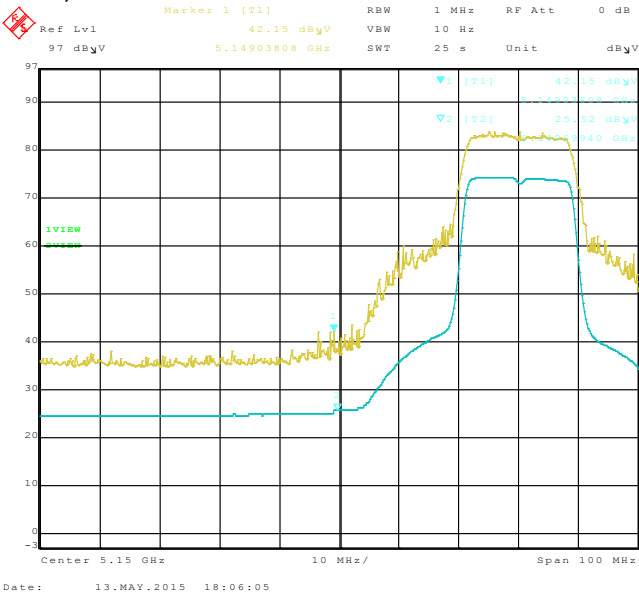
Figure 3-8: Band-Edge Compliance of RF Radiated Emission. 802.11a, Ch. 140, 5700 MHz, Centre of Band-Edge: 5725 MHz Pol: H, Detector: PK




|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model<br>RHR191LW (SQW100-4)<br><b>APPENDIX 3</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015   | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

# 802.11n Band-Edge Compliance of RF Radiated Emissions 20 MHz Bandwidth

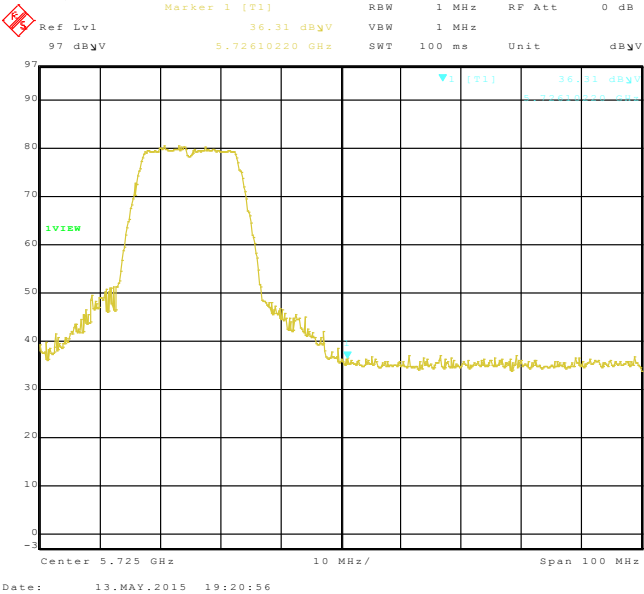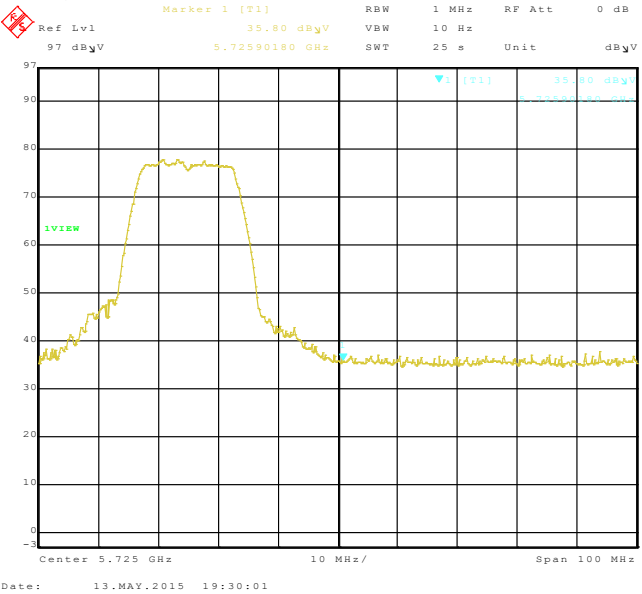
**Figure 3-9: Band-Edge Compliance of RF Radiated Emission 802.11n, Ch. 36, 5180 MHz, Centre of Band-Edge: 5150 MHz Pol: V, Detector: PK**




**Figure 3-10: Band-Edge Compliance of RF Radiated Emission 802.11n, Ch. 36, 5180 MHz, Centre of Band-Edge: 5150 MHz Pol: H, Detector: PK**

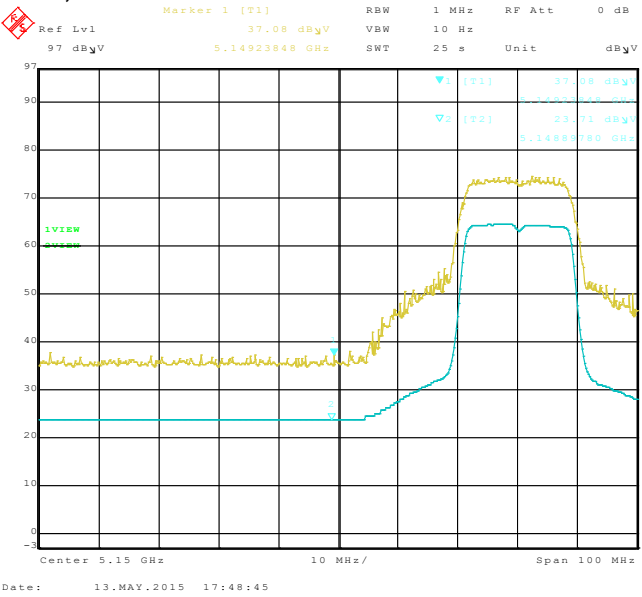


**Figure 3-11: Band-Edge Compliance of RF Radiated Emission 802.11n, Ch. 64, 5320 MHz, Centre of Band-Edge: 5350 MHz Pol: V, Detector: PK**

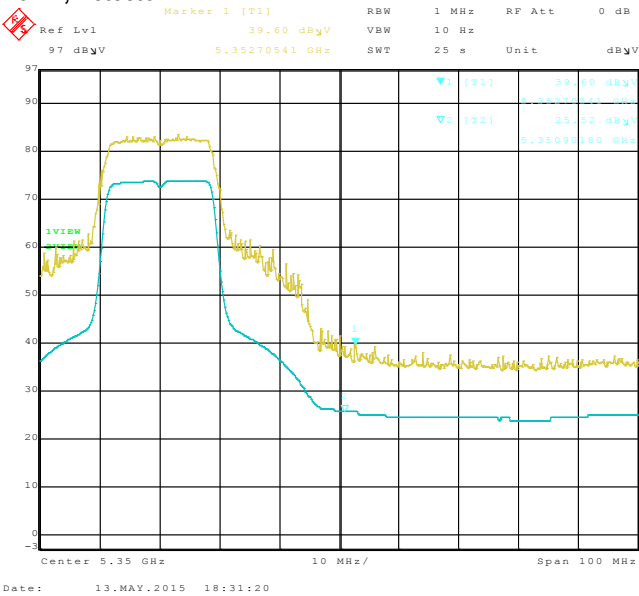


**Figure 3-12: Band-Edge Compliance of RF Radiated Emission 802.11n Ch. 64, 5320 MHz, Centre of Band-Edge: 5350 MHz Pol: H, Detector: PK**

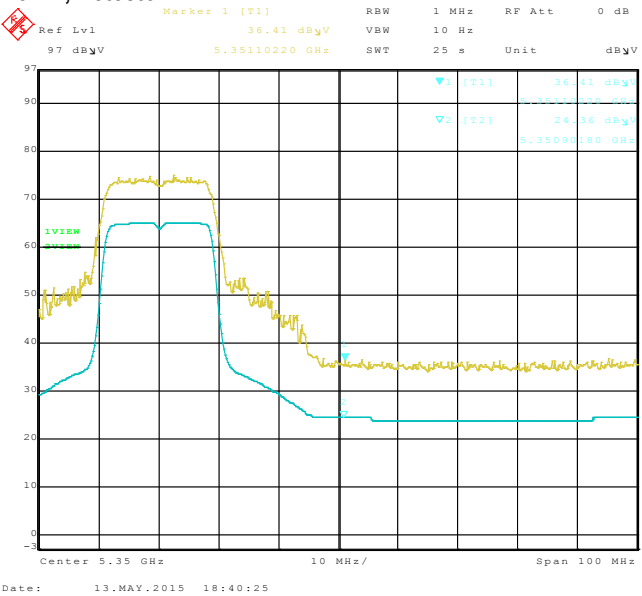


|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 3</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

# 802.11n Band-Edge Compliance of RF Radiated Emissions cont'd


**Figure 3-13: Band-Edge Compliance of RF Radiated Emission**  
802.11n, Ch. 100, 5500 MHz, Centre of Band-Edge: 5460 MHz  
Pol: V, Detector: PK

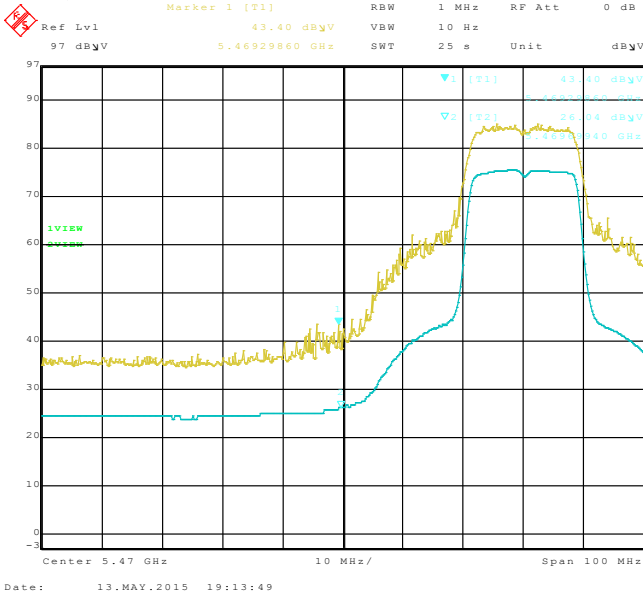


**Figure 3-14: Band-Edge Compliance of RF Radiated Emission.**  
802.11n, Ch. 100, 5500 MHz, Centre of Band-Edge: 5460 MHz  
Pol: H, Detector: PK

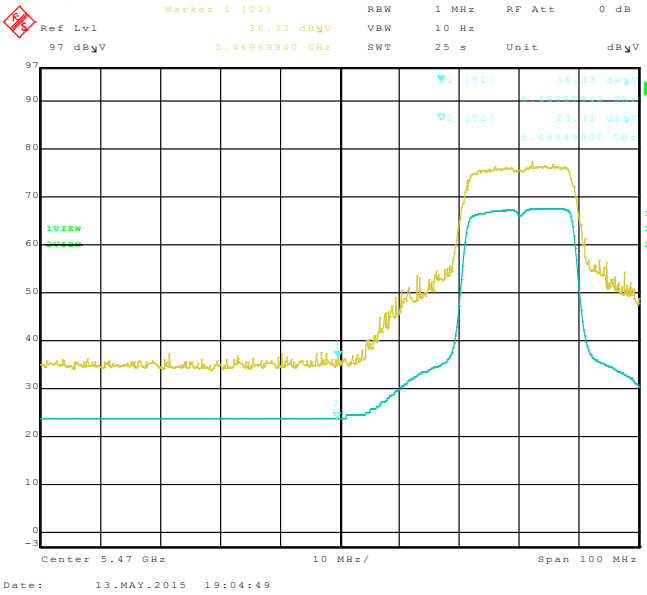

**Figure 3-15: Band-Edge Compliance of RF Radiated Emission.**  
802.11n, Ch. 140, 5700 MHz, Centre of Band-Edge: 5725 MHz  
Pol: V, Detector: PK

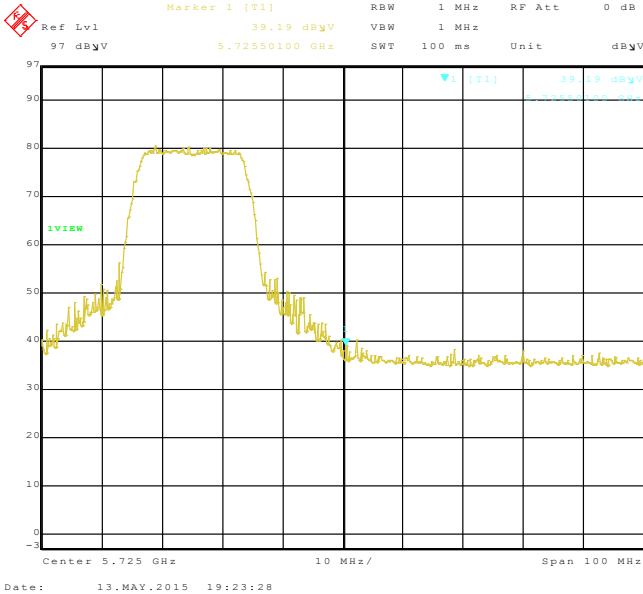

**Figure 3-16: Band-Edge Compliance of RF Radiated Emission.**  
802.11n, Ch. 140, 5700 MHz, Centre of Band-Edge: 5725 MHz  
Pol: H, Detector: PK

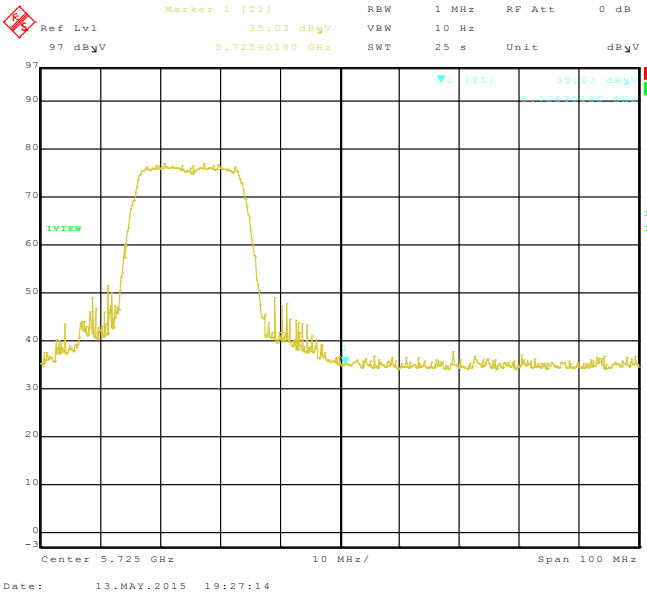



EMC Test Report for the BlackBerry® smartphone Model  
RHR191LW (SQW100-4)

**APPENDIX 3**


**Test Report No.:**  
RTS-6067-1505-16

**Dates of Test:**  
April 02 – May 14, 2015


**FCC ID:** L6ARHR190LW  
**IC:** 2503A-RHR190LW

**802.11n Band-Edge Compliance of RF Radiated Emissions**  
**40 MHz Bandwidth**


**Figure 3-17: Band-Edge Compliance of RF Radiated Emission**  
802.11n, Ch. 38, 5190 MHz, Centre of Band-Edge: 5150 MHz  
Pol: V, Detector: PK

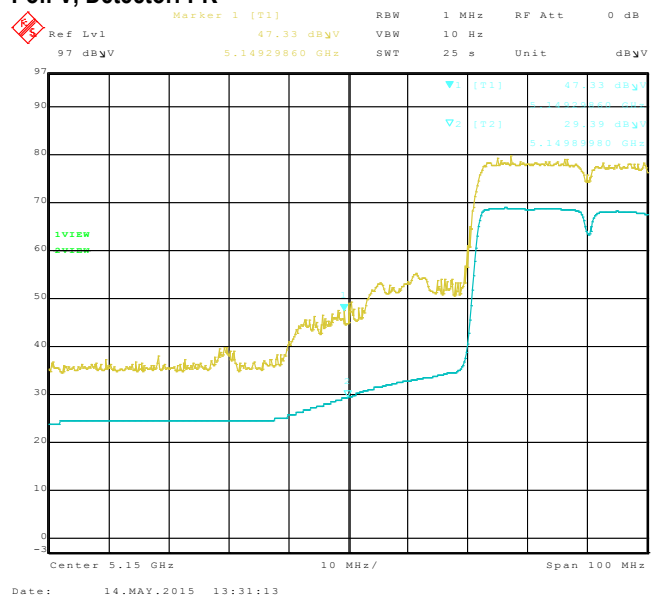


**Figure 3-18: Band-Edge Compliance of RF Radiated Emission**  
802.11n, Ch. 38, 5190 MHz, Centre of Band-Edge: 5150 MHz  
Pol: H, Detector: PK

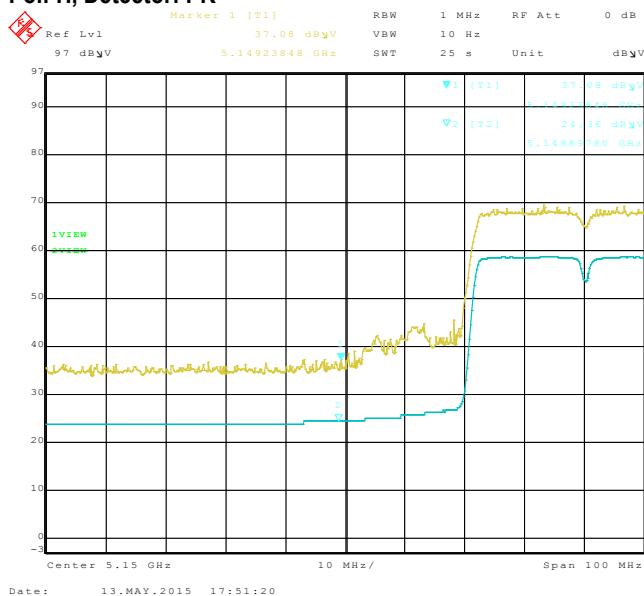


**Figure 3-19 Band-Edge Compliance of RF Radiated Emission**  
802.11n, Ch. 62, 5310 MHz, Centre of Band-Edge: 5350 MHz  
Pol: V, Detector: PK

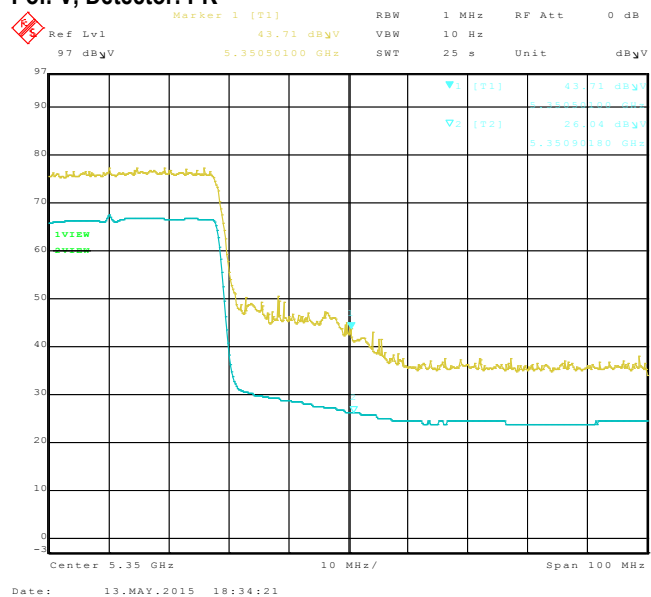

**Figure 3-20: Band-Edge Compliance of RF Radiated Emission**  
802.11n Ch. 62, 5310 MHz, Centre of Band-Edge: 5350 MHz  
Pol: H, Detector: PK

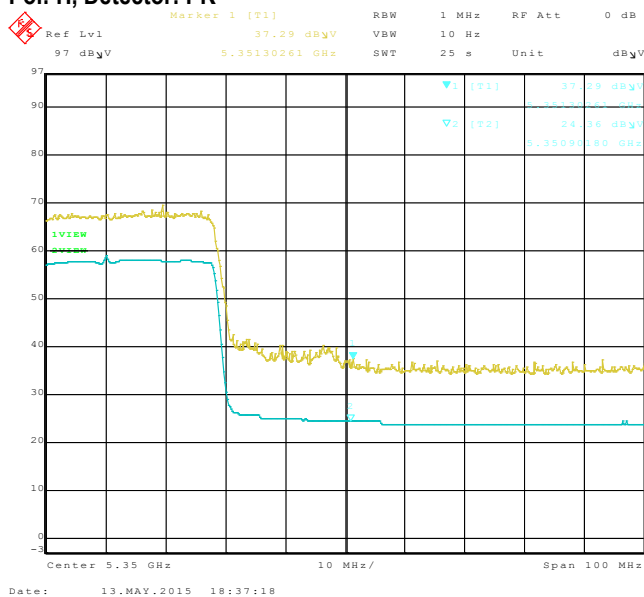

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 3</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

802.11n Band-Edge Compliance of RF Radiated Emissions cont'd

Figure 3-21: Band-Edge Compliance of RF Radiated Emission  
802.11n, Ch. 102, 55100 MHz, Centre of Band-Edge: 5470 MHz  
Pol: V, Detector: PK


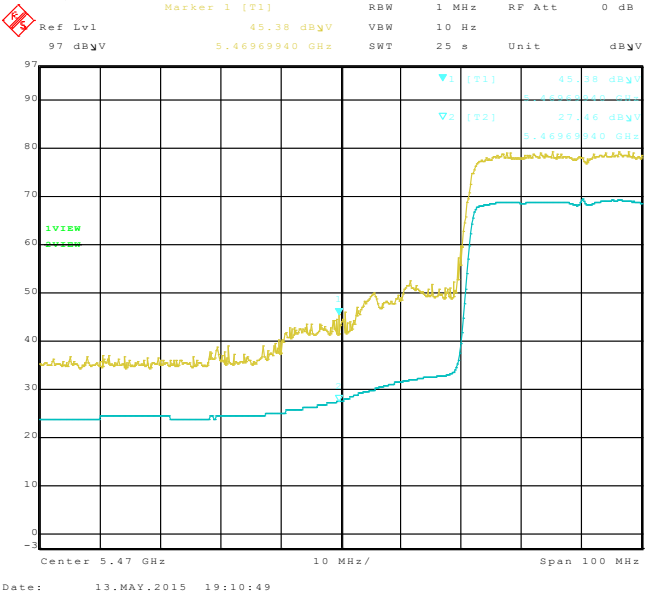




Figure 3-22: Band-Edge Compliance of RF Radiated Emission.  
802.11n, Ch. 102, 5510 MHz, Centre of Band-Edge: 5470 MHz  
Pol: H, Detector: PK



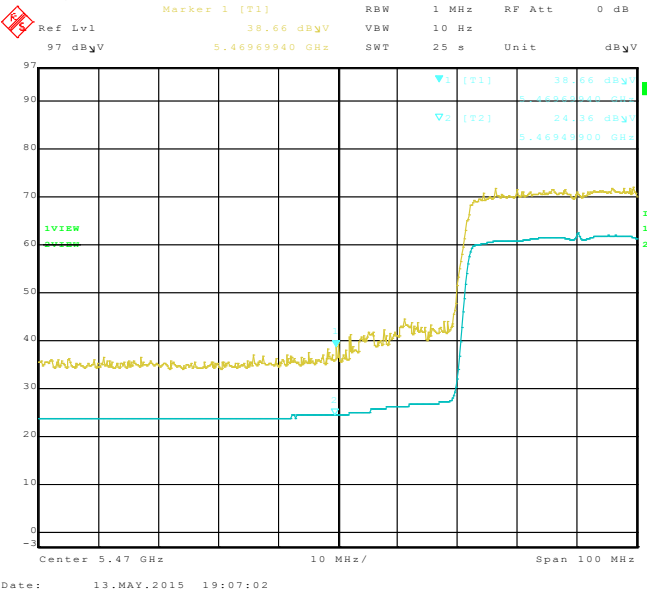

|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model<br>RHR191LW (SQW100-4)<br><br><b>APPENDIX 4</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015   | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

## APPENDIX 4 – 802.11ac RADIATED EMISSIONS TEST DATA

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 4</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

Radiated Emissions Test Results  
802.11ac Band

Date of Test: April 6, 2015  
Measurements were performed by Savtej Sandhu

The environmental test conditions were: Temperature: 27.5 °C  
Relative Humidity: 13.7 %

The test distance was 3.0 meters with a EUT height of 1.5 meters, and sweep frequency of 30 MHz to 1 GHz.

The BlackBerry® smartphone was in volume key up position.

The frequency sweep measurements were performed in 802.11ac TX mode at 6 Mbps on channels 42, 58, 106, and 155 bandwidth 80MHz.

All emission had a test margin of greater than 25 dB.

Radiated Emissions Test Results  
802.11ac Band

Date of Test: April 20 and 24, 2015  
Measurements were performed by Winston Vernon.


The environmental test conditions were: Temperature: 25.1°C  
Relative Humidity: 36.5 %

The test distance was 3.0 meters with a EUT height of 1.5 meters, and sweep frequency of 1GHz to 40GHz.

The BlackBerry® smartphone was in horizontal position.

The frequency sweep measurements were performed in 802.11ac TX mode at 6 Mbps on channel 42, 58, 106, and 155 bandwidth 40 MHz and 80MHz.

All emission had a test margin of greater than 25 dB.

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 4</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

### 802.11ac Band-Edge Compliance of RF Radiated Emissions

Date of Tests: May 13, 2015

Measurements performed by Shiva Kumbham.


The environmental test conditions were: Temperature: 24.2 °C  
Relative Humidity: 20.8 %

The measurements were performed on BlackBerry® smartphone in standalone, volume key up configuration on Bandwidth 20MHz, channel 36, 64, 100, 140; Bandwidth 40MHz, channels 38, 62 and 102; Bandwidth 80 MHz, channels 42, 58 and 106 for 802.11ac mode at MCS0 data rate.

The test distance was performed at a distance of 3 meters.

#### Bandwidth 20MHz

| Channel                                 | Freq.<br><br>(MHz) | Rx Antenna |      | Detector<br><br>(MHz) | VBW for<br>peak<br>(dBuV/m) | Carrier Freq<br><br>(dBuV/m) | Corrected<br>Band edge<br><br>(dBuV/m) | Limit<br><br>(dBuV/m) | Diff. To Limit<br><br>(dB) |
|---|--------------------|------------|------|-----------------------|-----------------------------|------------------------------|--|-----------------------|----------------------------|
|   |                    | Type       | POL. |                       |                             |                              |  |                       |                            |
| Centre at Band-Edge: 5150 MHz, 802.11ac |                    |            |      |                       |                             |                              |  |                       |                            |
| 36.0                                    | 5180.00            | Horn       | V    | PK                    | 1 MHz                       | 42.24                        | 65.46                                  | 74.00                 | -8.54                      |
| 36.0                                    | 5180.00            | Horn       | H    | PK                    | 1 MHz                       | 35.85                        | 59.07                                  | 74.00                 | -14.93                     |
| 36.0                                    | 5180.00            | Horn       | V    | AV                    | 10 Hz                       | 24.96                        | 48.18                                  | 54.00                 | -5.82                      |
| 36.0                                    | 5180.00            | Horn       | H    | AV                    | 10 Hz                       | 23.71                        | 46.93                                  | 54.00                 | -7.07                      |
| Centre at Band-Edge: 5350 MHz, 802.11ac |                    |            |      |                       |                             |                              |  |                       |                            |
| 64.0                                    | 5320.00            | Horn       | V    | PK                    | 1 MHz                       | 41.10                        | 65.06                                  | 74.00                 | -8.94                      |
| 64.0                                    | 5320.00            | Horn       | H    | PK                    | 1 MHz                       | 36.55                        | 60.51                                  | 74.00                 | -13.49                     |
| 64.0                                    | 5320.00            | Horn       | V    | AV                    | 10 Hz                       | 25.52                        | 49.48                                  | 54.00                 | -4.52                      |
| 64.0                                    | 5320.00            | Horn       | H    | AV                    | 10 Hz                       | 24.36                        | 48.32                                  | 54.00                 | -5.68                      |

|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model<br>RHR191LW (SQW100-4)<br><b>APPENDIX 4</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015   | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

### 802.11ac Band-Edge Compliance of RF Radiated Emissions cont'd


#### Bandwidth 20MHz

| Channel                                 | Freq.<br>(MHz) | Rx Antenna |      | Detector<br>(MHz) | VBW   | Reading<br>(dBuV) | Corrected<br>Band edge<br>(dBuV/m) | Limit<br>(dBuV/m) | Diff. To<br>Limit<br>(dB) |
|---|----------------|------------|------|-------------------|-------|-------------------|------------------------------------|-------------------|---------------------------|
|   |                | Type       | POL. |                   |       |                   |                                    |                   |                           |
| Centre at Band-Edge: 5470 MHz, 802.11ac |                |            |      |                   |       |                   |                                    |                   |                           |
| 100                                     | 5500           | Horn       | V    | PK                | 1 MHz | 42.52             | 67.35                              | 74.00             | -6.65                     |
| 100                                     | 5500           | Horn       | H    | PK                | 1 MHz | 37.75             | 62.58                              | 74.00             | -11.42                    |
| 100                                     | 5500           | Horn       | V    | AV                | 10 Hz | 26.54             | 51.37                              | 54.00             | -2.63                     |
| 100                                     | 5500           | Horn       | H    | AV                | 10 Hz | 24.96             | 49.79                              | 54.00             | -4.21                     |
| Centre at Band-Edge: 5725 MHz, 802.11ac |                |            |      |                   |       |                   |                                    |                   |                           |
| 140                                     | 5700           | Horn       | V    | PK                | 1 MHz | 38.39             | 63.61                              | 68.20             | -4.59                     |
| 140                                     | 5700           | Horn       | H    | PK                | 1 MHz | 37.27             | 62.49                              | 68.20             | -5.71                     |

#### Bandwidth 40MHz

| Channel                                 | Freq.<br>(MHz) | Rx Antenna |      | Detector<br>(MHz) | VBW   | Reading<br>(dBuV) | Corrected<br>Band edge<br>(dBuV/m) | Limit<br>(dBuV/m) | Diff. To<br>Limit<br>(dB) |
|---|----------------|------------|------|-------------------|-------|-------------------|------------------------------------|-------------------|---------------------------|
|   |                | Type       | POL. |                   |       |                   |                                    |                   |                           |
| Centre at Band-Edge: 5150 MHz, 802.11ac |                |            |      |                   |       |                   |                                    |                   |                           |
| 38.0                                    | 5190.00        | Horn       | V    | PK                | 1 MHz | 45.32             | 68.54                              | 74.00             | -5.46                     |
| 38.0                                    | 5190.00        | Horn       | H    | PK                | 1 MHz | 37.27             | 60.49                              | 74.00             | -13.51                    |
| 38.0                                    | 5190.00        | Horn       | V    | AV                | 10 Hz | 27.46             | 50.68                              | 54.00             | -3.32                     |
| 38.0                                    | 5190.00        | Horn       | H    | AV                | 10 Hz | 24.36             | 47.58                              | 54.00             | -6.42                     |
| Centre at Band-Edge: 5350 MHz, 802.11ac |                |            |      |                   |       |                   |                                    |                   |                           |
| 62.0                                    | 5310.00        | Horn       | V    | PK                | 1 MHz | 39.07             | 63.03                              | 74.00             | -10.97                    |
| 62.0                                    | 5310.00        | Horn       | H    | PK                | 1 MHz | 36.22             | 60.18                              | 74.00             | -13.82                    |
| 62.0                                    | 5310.00        | Horn       | V    | AV                | 10 Hz | 26.04             | 50.00                              | 54.00             | -4.00                     |
| 62.0                                    | 5310.00        | Horn       | H    | AV                | 10 Hz | 24.36             | 48.32                              | 54.00             | -5.68                     |

### 802.11ac Band-Edge Compliance of RF Radiated Emissions cont'd

|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model<br>RHR191LW (SQW100-4)<br><b>APPENDIX 4</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015   | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

#### Bandwidth 40MHz

| Channel                                 | Freq.<br><br>(MHz) | Rx Antenna |      | Detector<br><br>(MHz) | VBW   | Reading<br><br>(dBuV) | Corrected<br>Band edge<br><br>(dBuV/m) | Limit<br><br>(dBuV/m) | Diff. To<br>Limit<br><br>(dB) |
|---|--------------------|------------|------|-----------------------|-------|-----------------------|--|-----------------------|-------------------------------|
|   |                    | Type       | POL. |                       |       |                       |  |                       |                               |
| Centre at Band-Edge: 5470 MHz, 802.11ac |                    |            |      |                       |       |                       |  |                       |                               |
| 102.0                                   | 5510.0             | Horn       | V    | PK                    | 1 MHz | 44.23                 | 69.06                                  | 74.00                 | -4.94                         |
| 102.0                                   | 5510.0             | Horn       | H    | PK                    | 1 MHz | 40.52                 | 65.35                                  | 74.00                 | -8.65                         |
| 102.0                                   | 5510.0             | Horn       | V    | AV                    | 10 Hz | 27.01                 | 51.84                                  | 54.00                 | -2.16                         |
| 102.0                                   | 5510.0             | Horn       | H    | AV                    | 10 Hz | 26.04                 | 50.87                                  | 54.00                 | -3.13                         |

#### Bandwidth 80MHz


| Channel                                 | Freq.<br>(MHz) | Rx Antenna |      | Detector<br>(MHz) | VBW   | Reading<br>(dBuV) | Corrected<br>Band edge<br>(dBuV/m) | Limit<br>(dBuV/m) | Diff. To Limit<br>(dB) |
|---|----------------|------------|------|-------------------|-------|-------------------|------------------------------------|-------------------|------------------------|
|   |                | Type       | POL. |                   |       |                   |                                    |                   |                        |
| Centre at Band-Edge: 5150 MHz, 802.11ac |                |            |      |                   |       |                   |                                    |                   |                        |
| 42.0                                    | 5210.00        | Horn       | V    | PK                | 1 MHz | 38.76             | 61.98                              | 74.00             | -12.02                 |
| 42.0                                    | 5210.00        | Horn       | H    | PK                | 1 MHz | 34.94             | 58.16                              | 74.00             | -15.84                 |
| 42.0                                    | 5210.00        | Horn       | V    | AV                | 10 Hz | 24.96             | 48.18                              | 54.00             | -5.82                  |
| 42.0                                    | 5210.00        | Horn       | H    | AV                | 10 Hz | 23.71             | 46.93                              | 54.00             | -7.07                  |
| Centre at Band-Edge: 5350 MHz, 802.11ac |                |            |      |                   |       |                   |                                    |                   |                        |
| 58.0                                    | 5290.00        | Horn       | V    | PK                | 1 MHz | 37.26             | 61.22                              | 74.00             | -12.78                 |
| 58.0                                    | 5290.00        | Horn       | H    | PK                | 1 MHz | 36.38             | 60.34                              | 74.00             | -13.66                 |
| 58.0                                    | 5290.00        | Horn       | V    | AV                | 10 Hz | 24.96             | 48.92                              | 54.00             | -5.08                  |
| 58.0                                    | 5290.00        | Horn       | H    | AV                | 10 Hz | 24.36             | 48.32                              | 54.00             | -5.68                  |
| Centre at Band-Edge: 5470 MHz, 802.11ac |                |            |      |                   |       |                   |                                    |                   |                        |
| 106.0                                   | 5530.0         | Horn       | V    | PK                | 1 MHz | 38.34             | 63.17                              | 74.00             | -10.83                 |
| 106.0                                   | 5530.0         | Horn       | H    | PK                | 1 MHz | 36.86             | 61.69                              | 74.00             | -12.31                 |
| 106.0                                   | 5530.0         | Horn       | V    | AV                | 10 Hz | 24.96             | 49.79                              | 54.00             | -4.21                  |
| 106.0                                   | 5530.0         | Horn       | H    | AV                | 10 Hz | 24.36             | 49.19                              | 54.00             | -4.81                  |

See figures 4-1 to 4-20 for the plots of the 802.11ac band-edge compliance.


## 802.11ac Band-Edge Compliance of RF Radiated Emissions cont'd

Bandwidth 20MHz


**Figure 4-1: Band-Edge Compliance of RF Radiated Emission  
802.11ac, Ch. 36, 5180 MHz, Centre of Band-Edge: 5150 MHz  
Pol: V, Detector: PK**

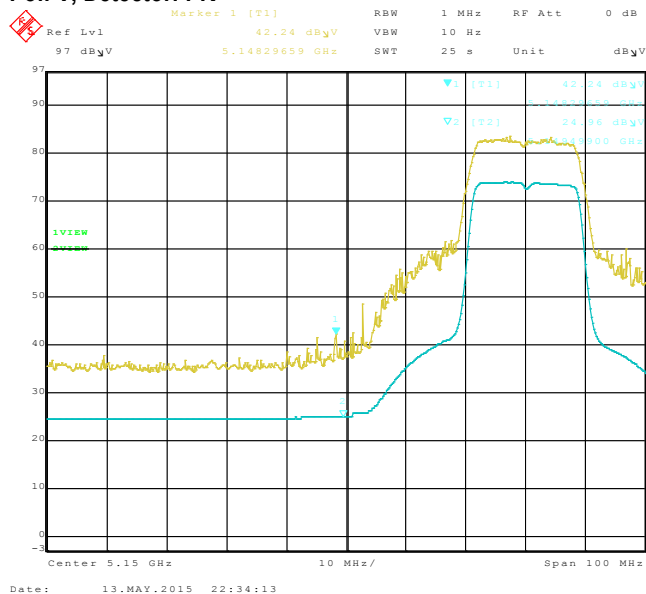


**Figure 4-2: Band-Edge Compliance of RF Radiated Emission**  
**802.11ac, Ch. 36, 5180 MHz, Centre of Band-Edge: 5150 MHz**  
**Pol: H, Detector: PK**

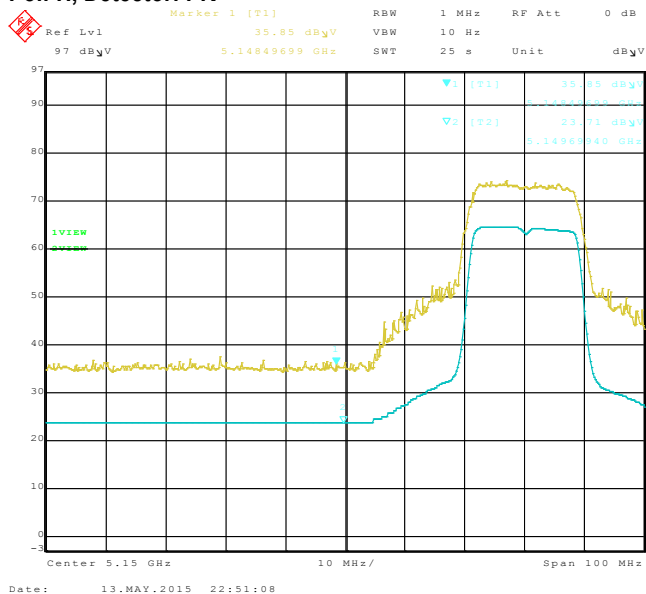

**Figure 4-3: Band-Edge Compliance of RF Radiated Emission**  
**802.11ac, Ch. 64, 5320 MHz, Centre of Band-Edge: 5350 MHz**  
**Pol: V, Detector: PK**

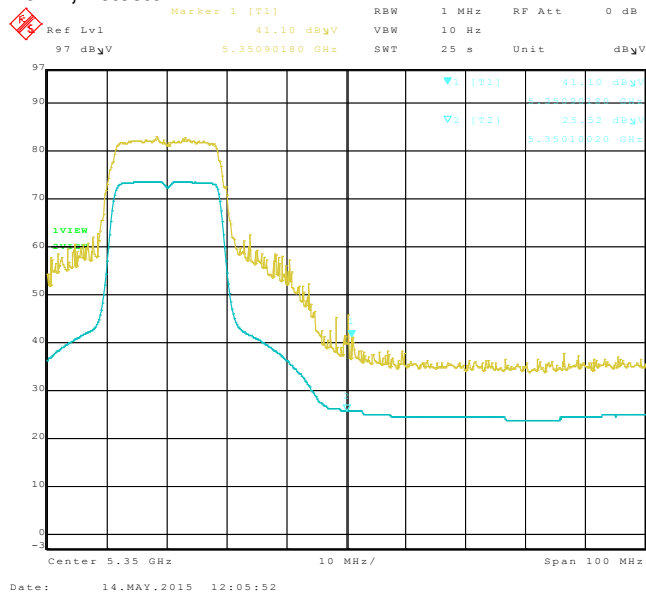


**Figure 4-4: Band-Edge Compliance of RF Radiated Emission**  
**802.11ac, Ch. 64, 5320 MHz, Centre of Band-Edge: 5350 MHz**  
**Pol: H, Detector: PK**

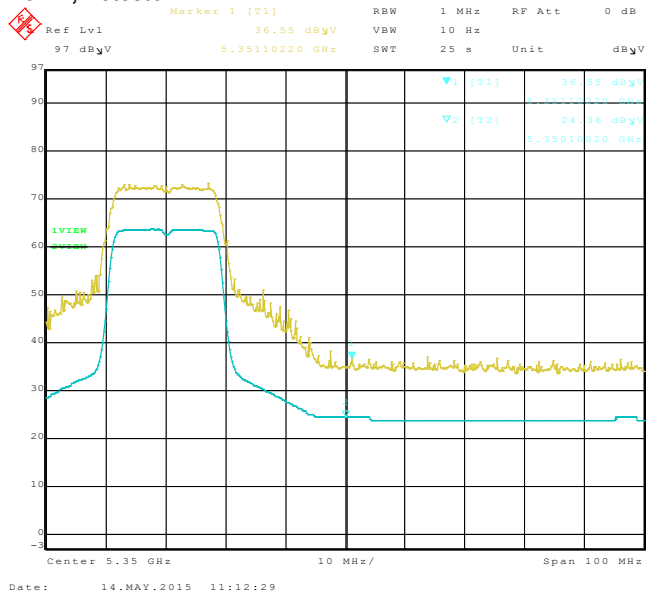

This report shall NOT be reproduced except in full without the written consent of BlackBerry RTS - A division of BlackBerry Limited.  
Copyright 2005-2015


Page 70 of 232

|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model<br>RHR191LW (SQW100-4)<br><b>APPENDIX 4</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015   | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |


## 802.11ac Band-Edge Compliance of RF Radiated Emissions cont'd

### Bandwidth 20MHz


**Figure 4-5: Band-Edge Compliance of RF Radiated Emission**  
802.11ac, Ch. 100, 5500 MHz, Centre of Band-Edge: 5470 MHz  
Pol: V, Detector: PK

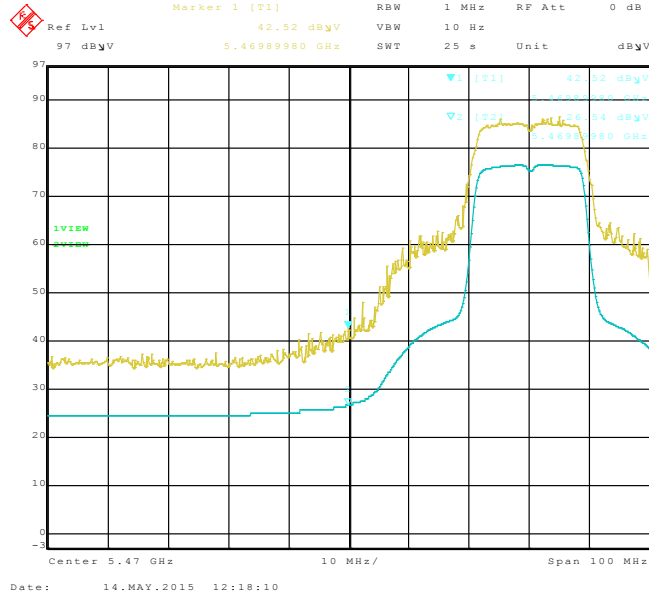


**Figure 4-6: Band-Edge Compliance of RF Radiated Emission.**  
802.11ac, Ch. 100, 5500 MHz, Centre of Band-Edge: 5470 MHz  
Pol: H, Detector: PK

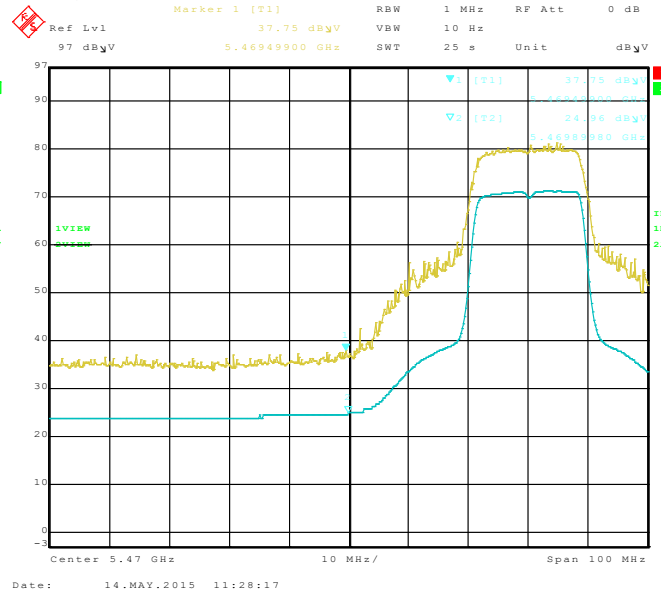


**Figure 4-7: Band-Edge Compliance of RF Radiated Emission.**  
802.11ac, Ch. 140, 5700 MHz, Centre of Band-Edge: 5725 MHz  
Pol: V, Detector: PK

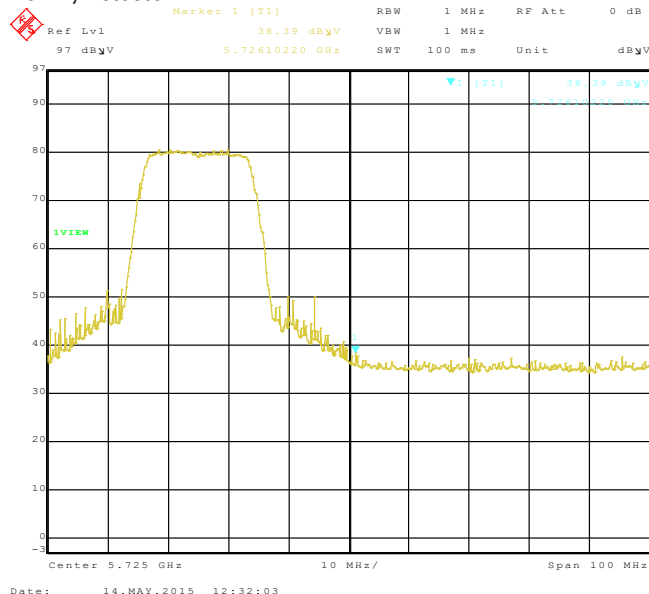

**Figure 4-8: Band-Edge Compliance of RF Radiated Emission.**  
802.11ac, Ch. 140, 5700 MHz, Centre of Band-Edge: 5725 MHz  
Pol: H, Detector: PK

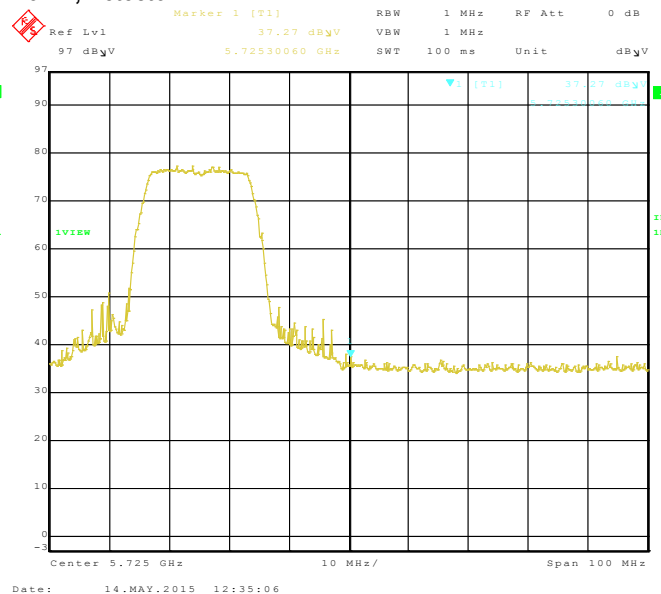


|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model<br>RHR191LW (SQW100-4)<br><b>APPENDIX 4</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015   | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |


## 802.11ac Band-Edge Compliance of RF Radiated Emissions cont'd

### Bandwidth 40MHz


**Figure 4-9: Band-Edge Compliance of RF Radiated Emission 802.11ac, Ch. 38, 5190 MHz, Centre of Band-Edge: 5150 MHz Pol: V, Detector: PK**

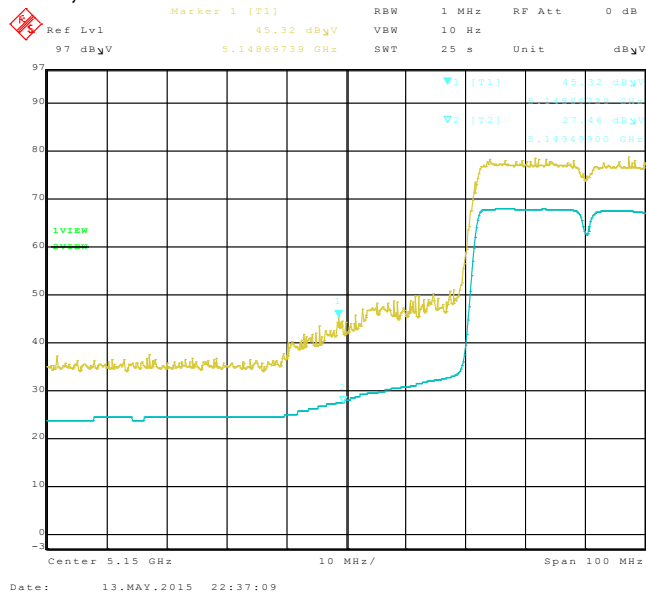


**Figure 4-10: Band-Edge Compliance of RF Radiated Emission 802.11ac, Ch. 38, 5190 MHz, Centre of Band-Edge: 5150 MHz Pol: H, Detector: PK**

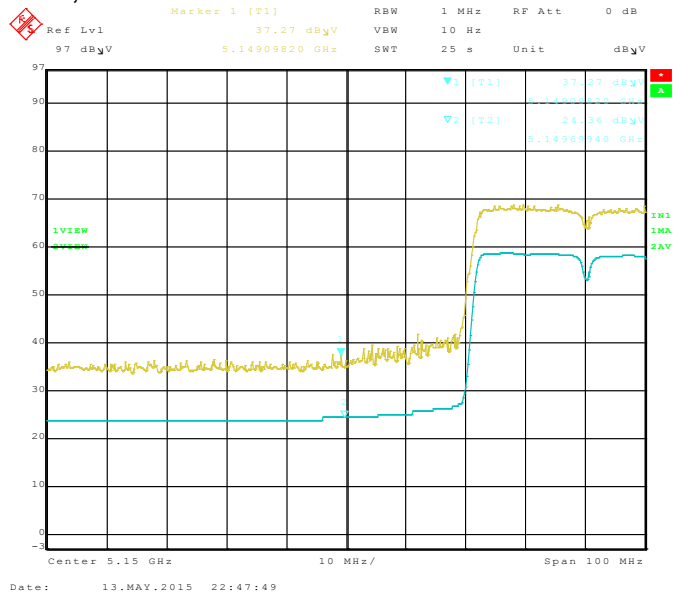


**Figure 4-11: Band-Edge Compliance of RF Radiated Emission 802.11ac, Ch. 62, 5310 MHz, Centre of Band-Edge: 5350 MHz Pol: V, Detector: PK**

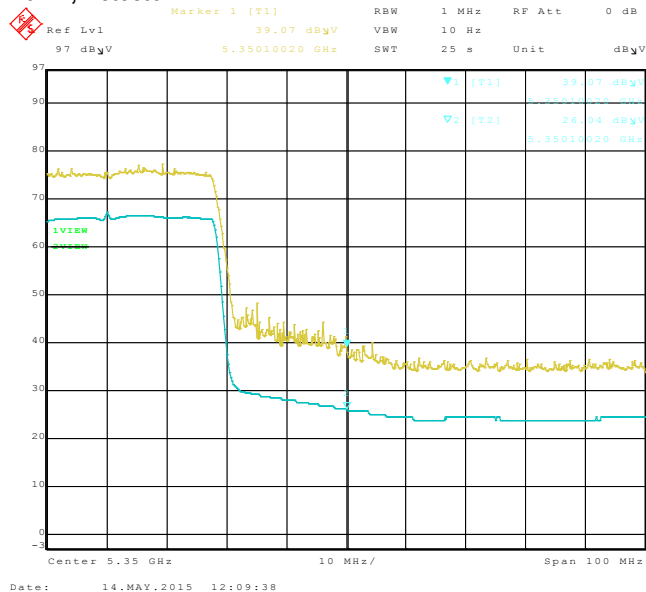

**Figure 4-12: Band-Edge Compliance of RF Radiated Emission 802.11ac, Ch. 62, 5310 MHz, Centre of Band-Edge: 5350 MHz Pol: H, Detector: PK**

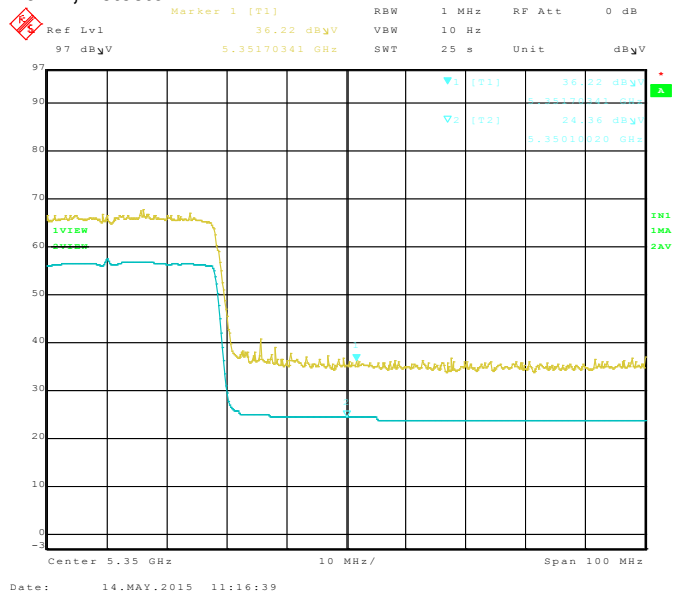



|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 4</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

802.11ac Band-Edge Compliance of RF Radiated Emissions cont'd

Bandwidth 40MHz

Figure 4-13: Band-Edge Compliance of RF Radiated Emission  
802.11ac, Ch. 102, 5510 MHz, Centre of Band-Edge: 5470 MHz  
Pol: V, Detector: PK


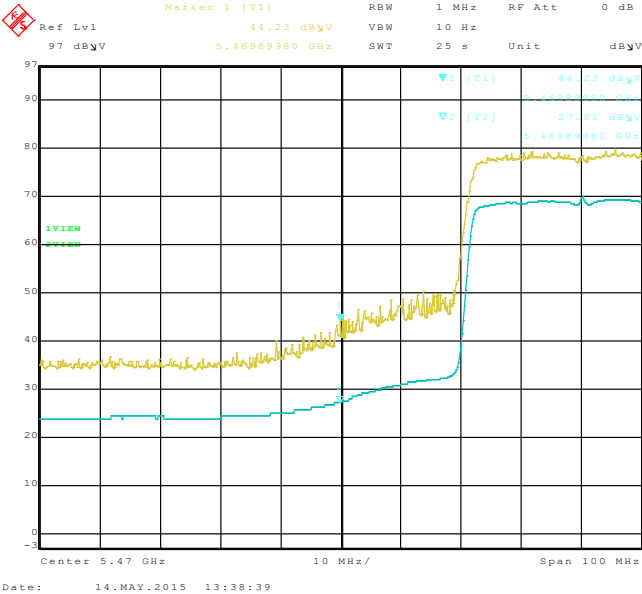



Figure 4-14: Band-Edge Compliance of RF Radiated Emission.  
802.11ac, Ch. 102, 5510 MHz, Centre of Band-Edge: 5470 MHz  
Pol: H, Detector: PK

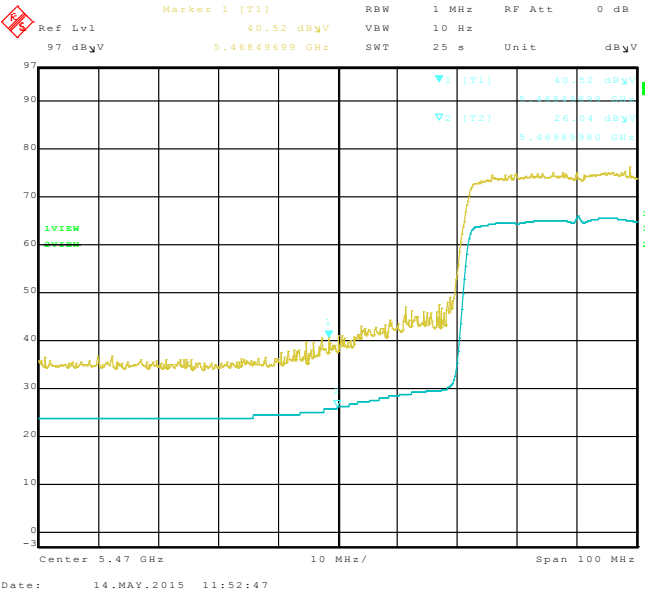


|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model<br>RHR191LW (SQW100-4)<br><b>APPENDIX 4</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015   | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |


## 802.11ac Band-Edge Compliance of RF Radiated Emissions cont'd

Bandwidth 80MHz


**Figure 4-15: Band-Edge Compliance of RF Radiated Emission 802.11ac, Ch. 42, 5210 MHz, Centre of Band-Edge: 5150 MHz Pol: V, Detector: PK**

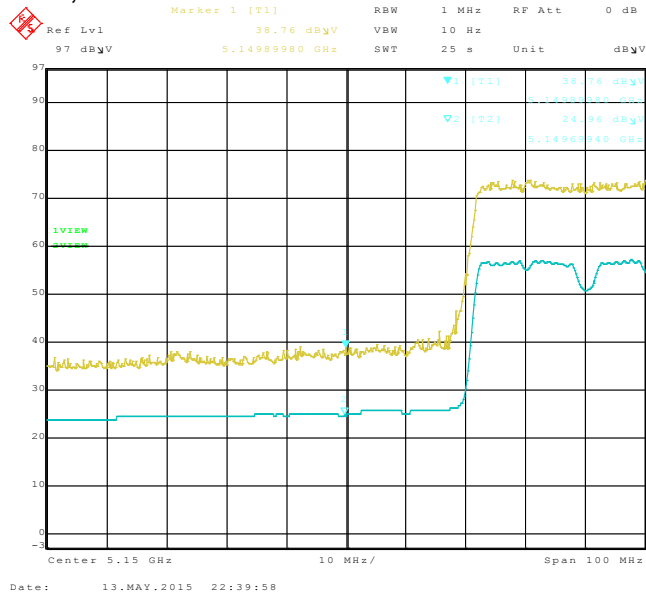


**Figure 4-16: Band-Edge Compliance of RF Radiated Emission 802.11ac, Ch. 42, 5210 MHz, Centre of Band-Edge: 5150 MHz Pol: H, Detector: PK**

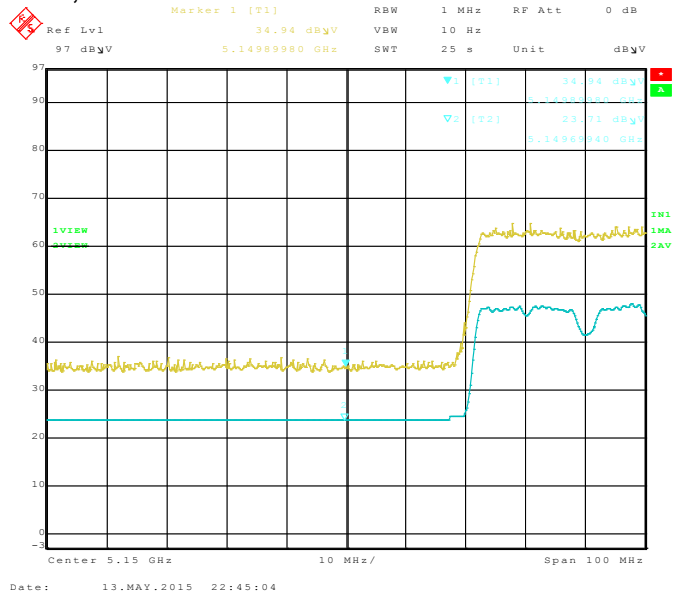


**Figure 4-17: Band-Edge Compliance of RF Radiated Emission 802.11ac, Ch. 58, 5290 MHz, Centre of Band-Edge: 5350 MHz Pol: V, Detector: PK**

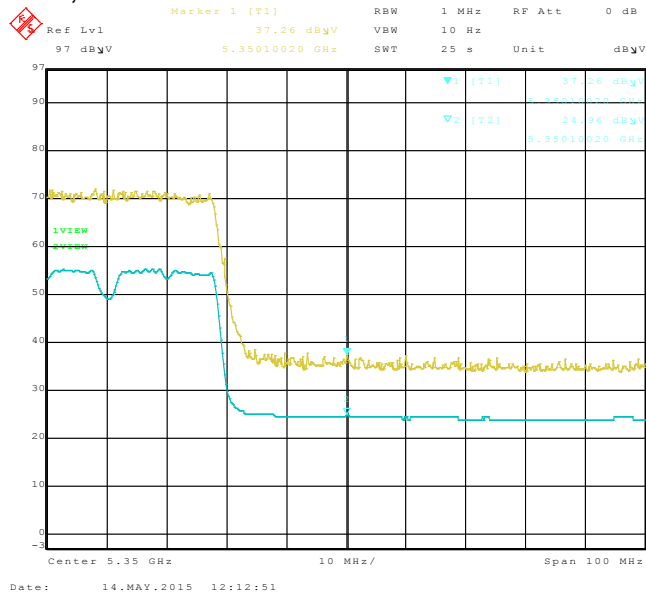

**Figure 4-18: Band-Edge Compliance of RF Radiated Emission 802.11ac, Ch. 58, 5290 MHz, Centre of Band-Edge: 5350 MHz Pol: H, Detector: PK**

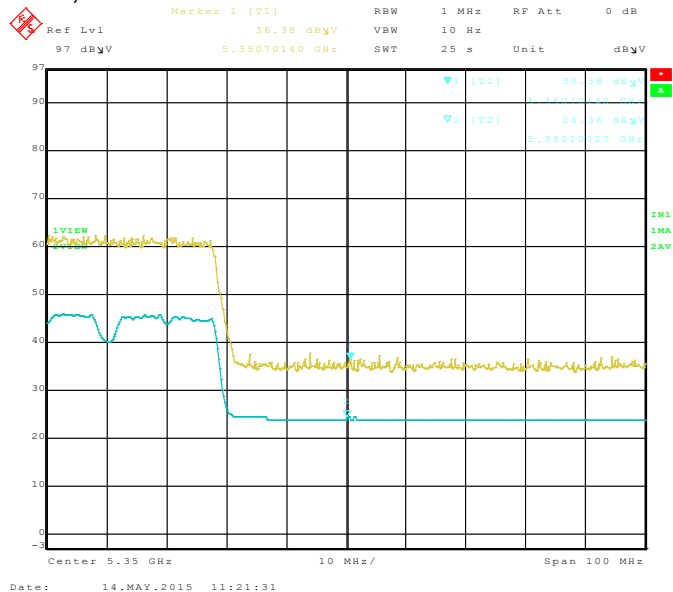

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 4</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

802.11ac Band-Edge Compliance of RF Radiated Emissions cont'd

Bandwidth 40MHz

Figure 4-19: Band-Edge Compliance of RF Radiated Emission  
802.11ac, Ch. 106, 5530 MHz, Centre of Band-Edge: 5470 MHz  
Pol: V, Detector: PK


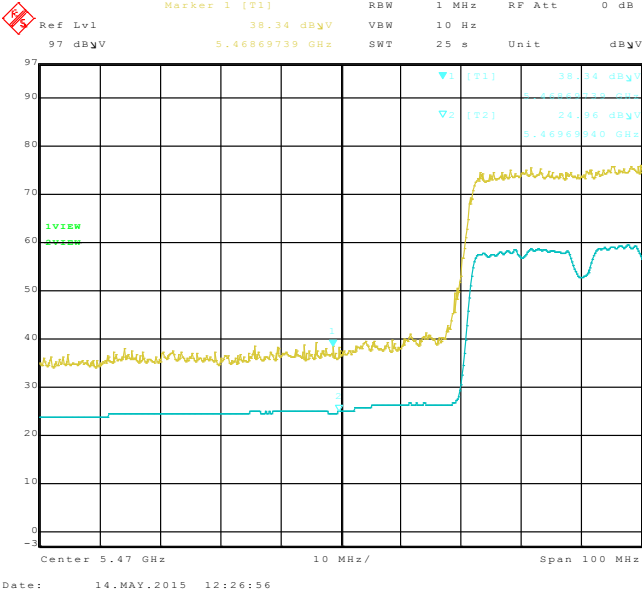



Figure 4-20: Band-Edge Compliance of RF Radiated Emission.  
802.11ac, Ch. 106, 5530 MHz, Centre of Band-Edge: 5470 MHz  
Pol: H, Detector: PK

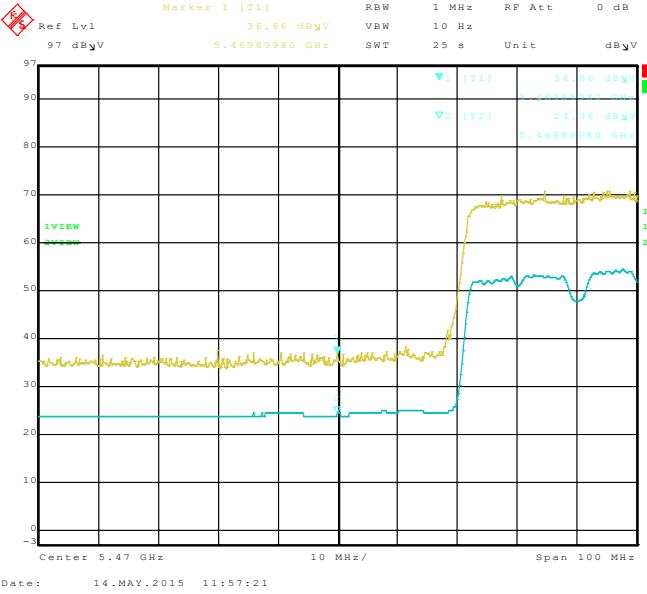

**APPENDIX 5 – BLUETOOTH AND BLUETOOTH LOW ENERGY CONDUCTED  
EMISSIONS TEST DATA/PLOTS**

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |


### Bluetooth RF Conducted Emission Test Results

Bluetooth power output from BlackBerry® smartphone was at maximum for all the recorded measurements shown below.

The measurements were performed by Sijia Li

Date of test: April 27, 2015


### Test Setup Diagram

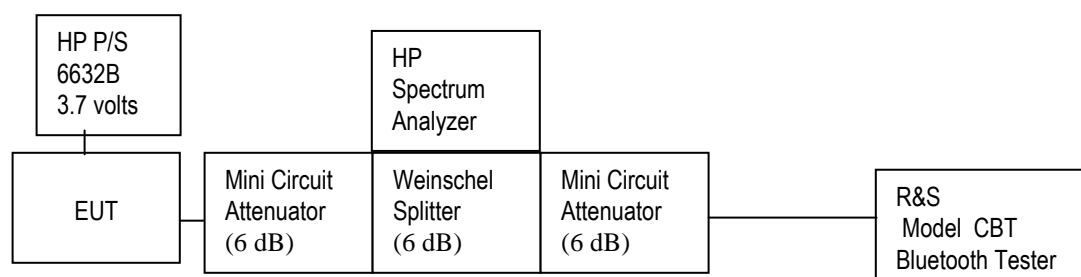

| <u>UNIT</u>  | <u>MANUFACTURER</u> | <u>MODEL</u>  | <u>SERIAL<br/>NUMBER</u> |
|--------------|---------------------|---------------|--------------------------|
| Attenuator 1 | Mini-Circuits       | BW-S6W2+      | 0647                     |
| Attenuator 2 | Mini-Circuits       | BW-S6W2+      | 0648                     |
| Attenuator 3 | Mini-Circuits       | BW-S20-2W263+ | 1234                     |
| Splitter 1   | Weinschel           | 1515          | MES 92                   |

A reference offset of 12.4 dB was applied to the spectrum analyzer reference level for the attenuators and coaxial cable loss in the test circuit.

The environmental test conditions were: Temperature: 24.7 °C  
Relative Humidity: 41.0 %

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

## Bluetooth RF Conducted Emission Test Results cont'd

### 20 dB Bandwidth


The EUT met the requirements of the 20 dB bandwidth as per 47 CFR 15.247(a) and RSS-210. Low channel (0), middle channel (39) and high channel (78) were measured. Bluetooth was operating in single frequency mode.

Using pattern type “Static PBRS” and packet type “DH5” during the measurements.

| Bluetooth Channel | Limit (MHz) | Measured Level (MHz) |
|-------------------|-------------|----------------------|
| 0                 | ≤1.0        | 0.926                |
| 39                | ≤1.0        | <b>0.930</b>         |
| 78                | ≤1.0        | 0.928                |


See figures 5-1 to 5-3 for the plots of the 20 dB bandwidth measurements.

**Figure 5-1: 20 dB Bandwidth**  
**Single freq. CH 0 Static PBRS, DH5**

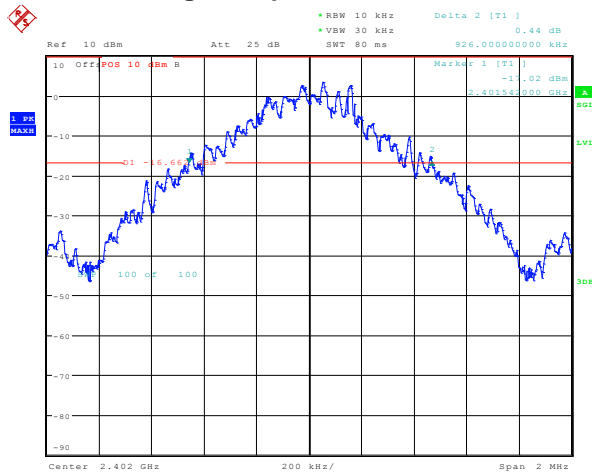


Date: 28.APR.2015 11:31:10

**Figure 5-2: 20 dB Bandwidth**  
**Single freq. CH 39 Static PBRS, DH5**

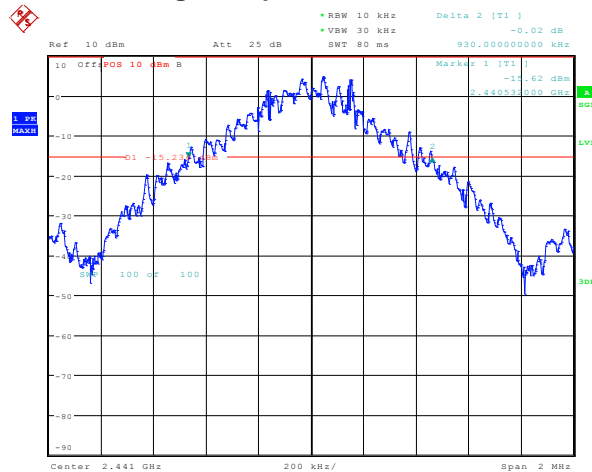


Date: 28.APR.2015 11:31:24

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

### Bluetooth RF Conducted Emission Test Results cont'd

**Figure 5-3: 20 dB Bandwidth**  
**Single freq. CH 78 Static PBRs, DH5**

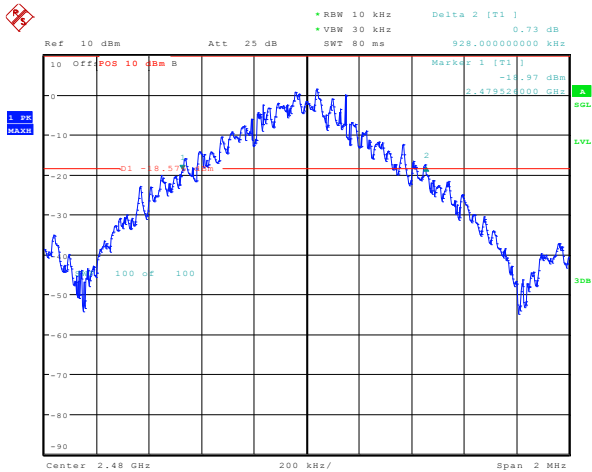


Date: 28.APR.2015 11:31:38

Using Pattern type “Static PBRs” and packet type “2-DH5” during the measurements.


| Bluetooth Channel | Limit (MHz) | Measured Level (MHz) |
|-------------------|-------------|----------------------|
| 0                 | ≤1.5        | 1.328                |
| 39                | ≤1.5        | 1.322                |
| 78                | ≤1.5        | 1.322                |

See figures 5-4 to 5-6 for the plots of the 20 dB bandwidth measurements.

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |


Bluetooth RF Conducted Emission Test Results cont'd

Figure 5-4: 20 dB Bandwidth  
Single freq. CH 0 Static PBRS, 2-DH5

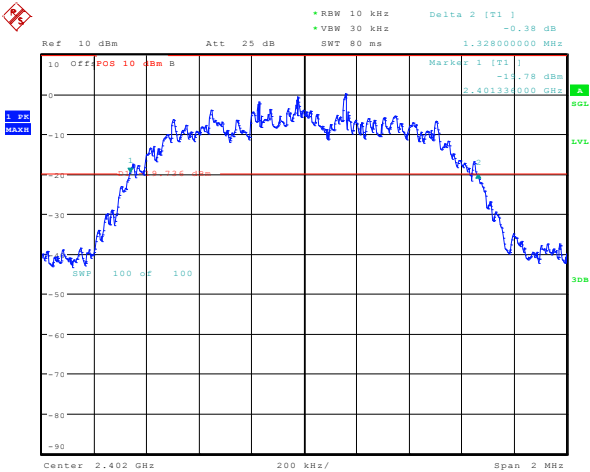


Date: 28.APR.2015 11:31:53

Figure 5-5: 20 dB Bandwidth  
Single freq. CH 39 Static PBRS, 2-DH5

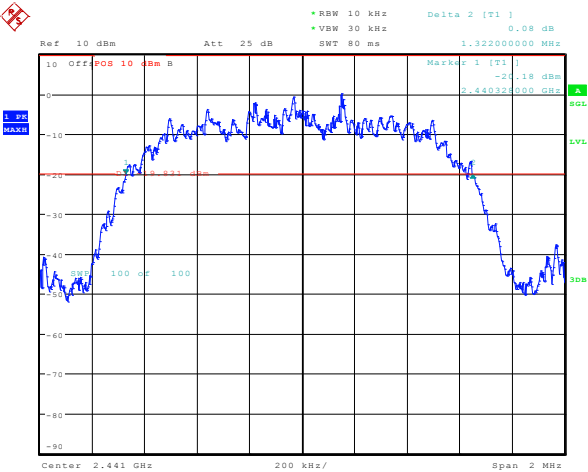


Date: 28.APR.2015 11:32:07

Figure 5-6: 20 dB Bandwidth  
Single freq. CH 78 Static PBRS, 2-DH5

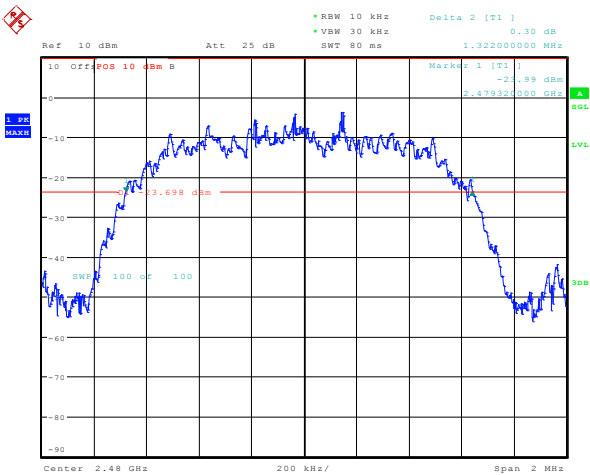

Date: 28.APR.2015 11:32:21



|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |


Using Pattern type “Static PBRs” and packet type “3-DH5” during the measurements.

| Bluetooth Channel | Limit (MHz) | Measured Level (MHz) |
|-------------------|-------------|----------------------|
| 0                 | ≤1.5        | 1.338                |
| 39                | ≤1.5        | 1.338                |
| 78                | ≤1.5        | 1.338                |

See figures 5-7 to 5-9 for the plots of the 20 dB bandwidth measurements.

Figure 5-7: 20 dB Bandwidth


Single freq. CH 0 Static PBRs, 3-DH5

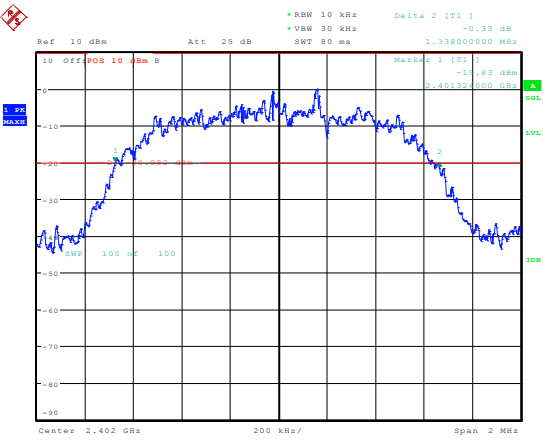

Date: 28.APR.2015 11:32:35

Figure 5-8: 20 dB Bandwidth


Single freq. CH 39 Static PBRs, 3-DH5

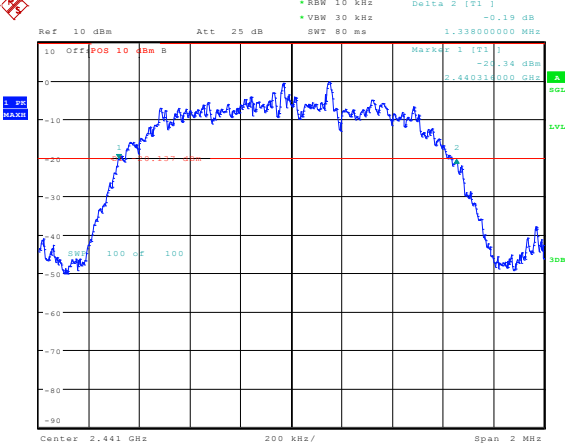


Date: 28.APR.2015 11:32:49

Figure 5-9: 20 dB Bandwidth

Single freq. CH 78 Static PBRs, 3-DH5

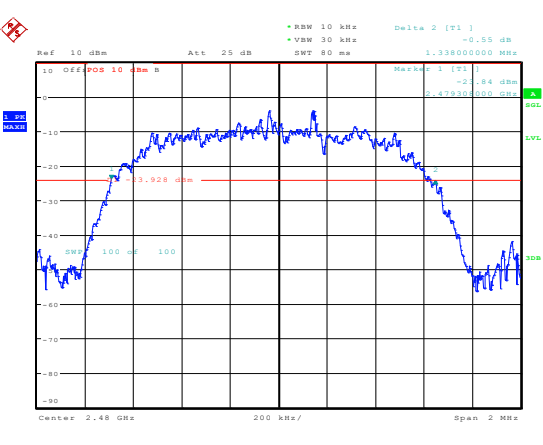

Date: 28.APR.2015 11:33:03

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

## Bluetooth RF Conducted Emission Test Results cont'd

### Carrier Frequency Separation


The EUT met the requirements of the Carrier Frequency Separation as per 47 CFR 15.247(a) and RSS-210. Channel 38 to 39 was measured. Bluetooth was operating in frequency hopping (Euro/US) mode.

Using pattern type “Static PBRS” and packet type “DH5” during the measurements.


| Bluetooth Channels | Limit (MHz)                | Measured Level (MHz) |
|--------------------|----------------------------|----------------------|
| 38 to 39           | ≥ 0.025 or 20 dB bandwidth | 1.000                |

See figure 5-10 for the plot of the Carrier Frequency Separation measurement.

**Figure 5-10: Carrier Frequency Separation, Freq. Hopping, Static PBRS, DH5, Channels 38 to 39**

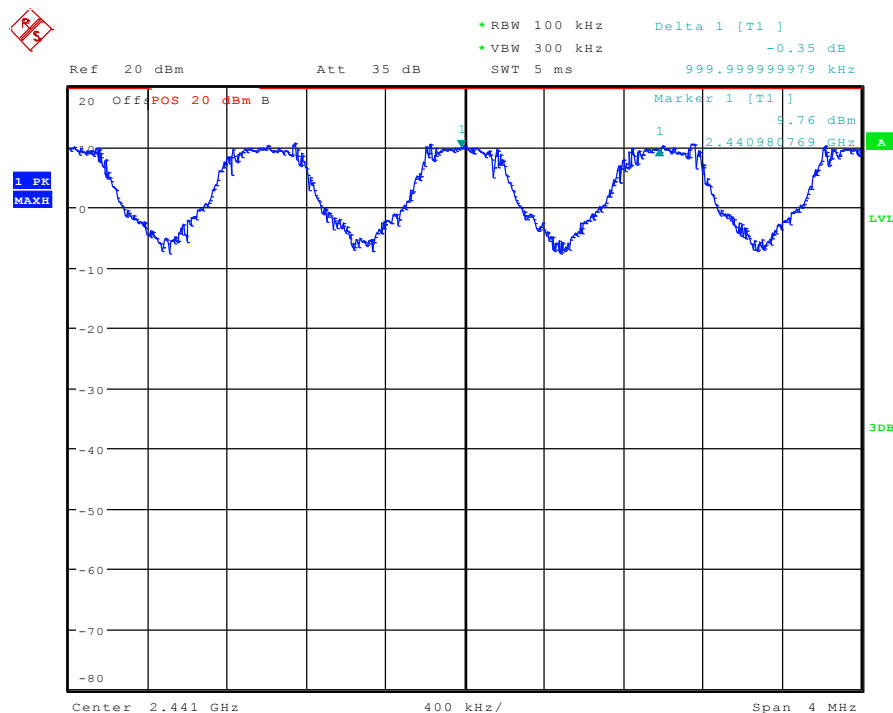

Date: 28.APR.2015 11:37:33

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |


### Bluetooth RF Conducted Emission Test Results cont'd

Using Pattern type “Static PBRs” and packet type “2-DH5” during the measurements.


| Bluetooth Channels | Limit (MHz)                | Measured Level (MHz) |
|--------------------|----------------------------|----------------------|
| 38 to 39           | ≥ 0.025 or 20 dB bandwidth | 1.000                |

See figure 5-11 for the plot of the Carrier Frequency Separation measurement.

**Figure 5-11: Carrier Frequency Separation, Freq. Hopping, Static PBRs, 2-DH5, Channels 38 to 39**

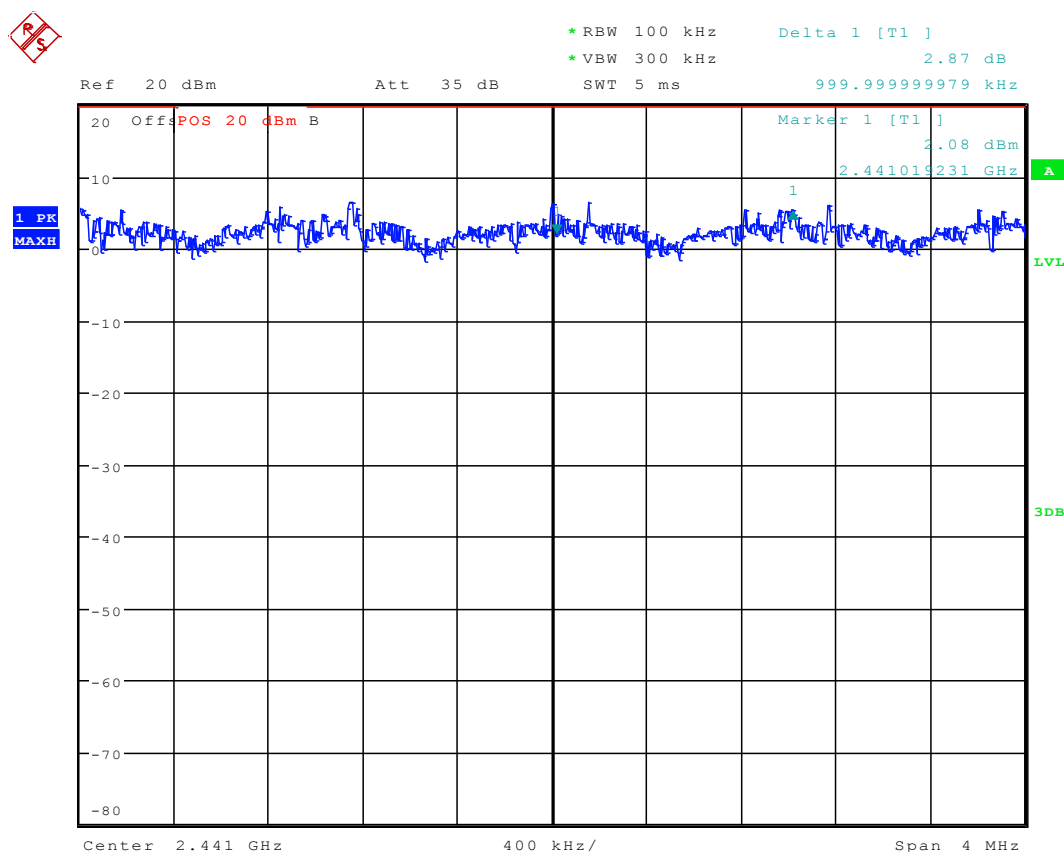

Date: 28.APR.2015 11:38:49

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |


### Bluetooth RF Conducted Emission Test Results cont'd

Using Pattern type “Static PBRs” and packet type “3-DH5” during the measurements.


| Bluetooth Channels | Limit (MHz)                | Measured Level (MHz) |
|--------------------|----------------------------|----------------------|
| 38 to 39           | ≥ 0.025 or 20 dB bandwidth | 1.000                |

See figure 5-12 for the plot of the Carrier Frequency Separation measurement.

**Figure 5-12: Carrier Frequency Separation, Freq. Hopping, Static PBRs, 3-DH5, Channels 38 to 39**

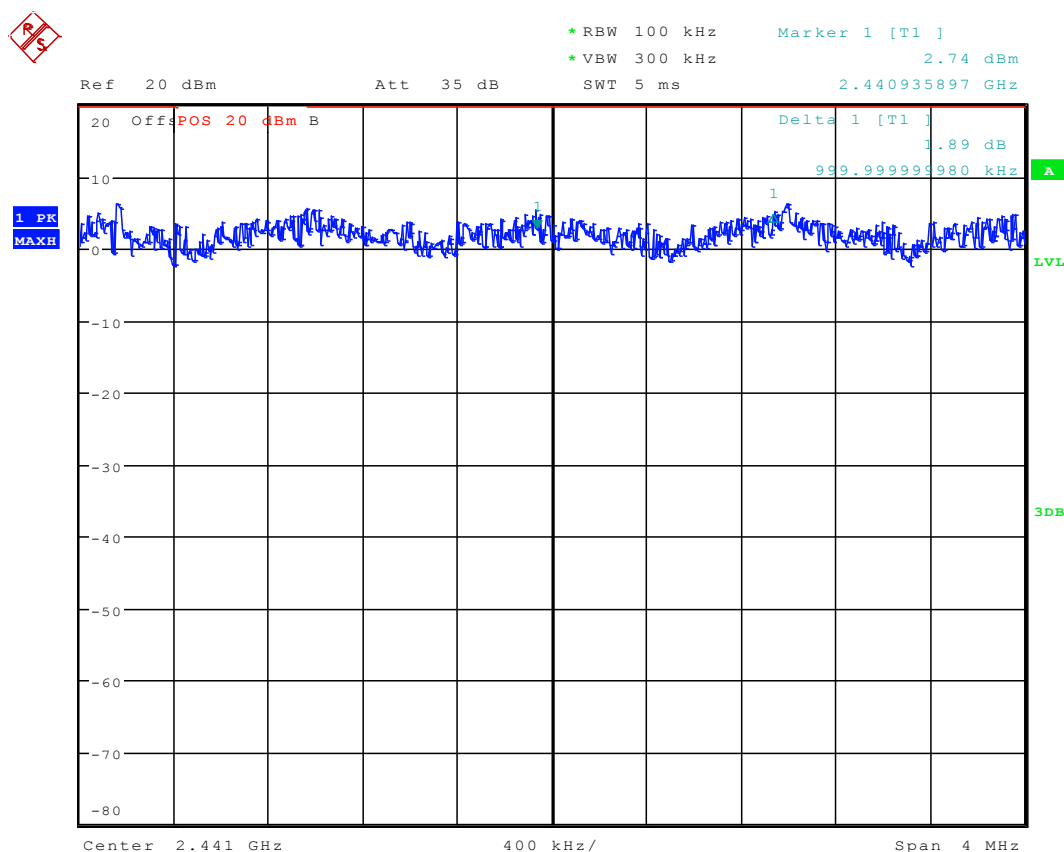

Date: 28.APR.2015 11:40:18

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

### Bluetooth RF Conducted Emission Test Results cont'd

#### Number of Hopping Frequencies


The EUT met the requirements of the number of hopping frequencies as per 47 CFR 15.247(a) and RSS-210. Bluetooth was operating in frequency hopping (Euro/US) mode.

Using pattern type “Static PBRs” and packet type “DH5” during the measurements.

| Limit<br>(CH) | Number of Hopping Frequencies<br>(CH) |
|---------------|---------------------------------------|
| ≥75           | 79                                    |


See figures 5-13 to 5-16 for the plots of the number of hopping frequencies.

**Figure 5-13: Number of Hopping Frequencies  
Static PBRs, DH5**

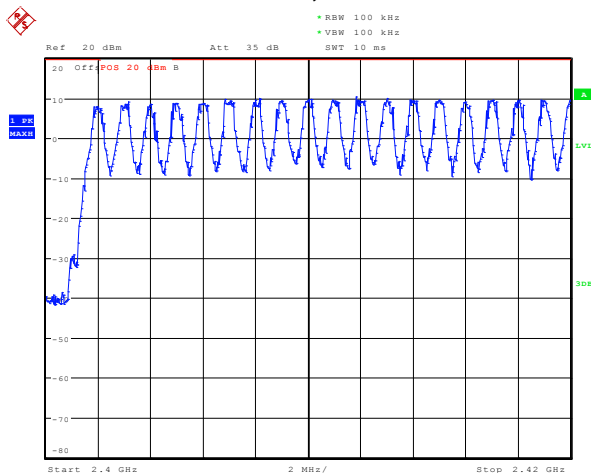


Date: 28.APR.2015 11:44:44

**Figure 5-14: Number of Hopping Frequencies  
Static PBRs, DH5**

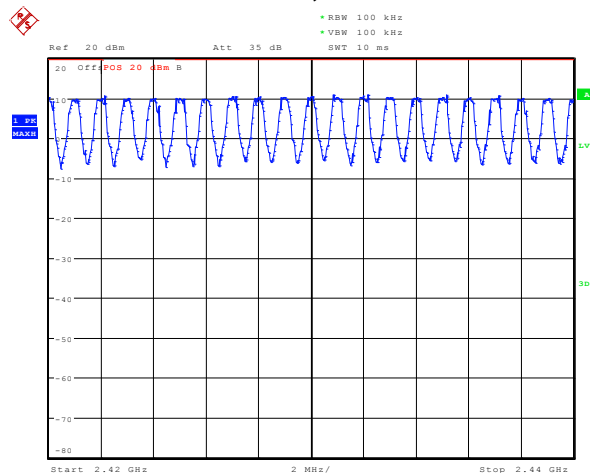


Date: 28.APR.2015 11:47:07

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| Test Report No.:<br>RTS-6067-1505-16  | Dates of Test:<br>April 02 – May 14, 2015   | FCC ID: L6ARHR190LW<br>IC: 2503A-RHR190LW |


Bluetooth RF Conducted Emission Test Results cont'd

**Figure 5-15: Number of Hopping Frequencies  
Static PBRs, DH5**

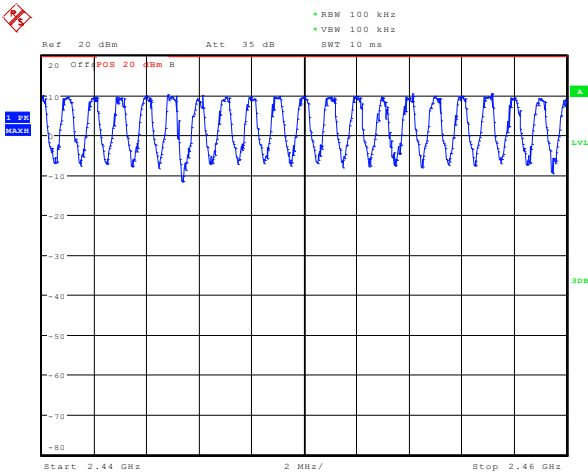


Date: 28.APR.2015 11:49:43

**Figure 5-16: Number of Hopping Frequencies  
Static PBRs, DH5**

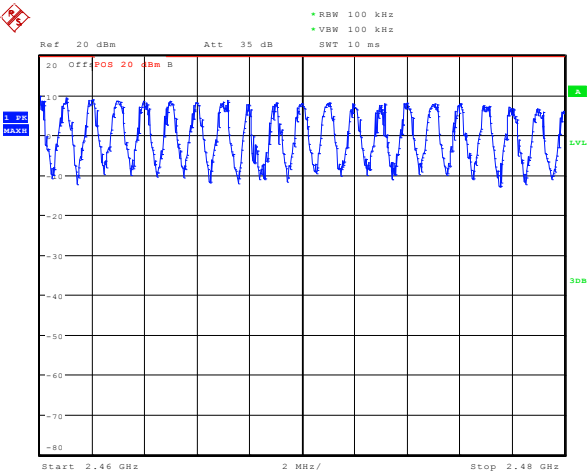

Date: 28.APR.2015 11:51:46

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

### Time of Occupancy (Dwell Time)

The EUT met the requirements of the time of occupancy (dwell time) as per 47 CFR 15.247(a) and RSS-210. Low channel (0), middle channel (39) and high channel (78) were measured in packet types DH1, DH3 and DH5. Bluetooth was operating in frequency hopping (Euro/US) mode during the measurements. The frequency hopping is 1600 hops per second for a dwell time of 625 µsec for 79 channels.


A DH1 packet needs one time slot for transmitting and one time slot for receiving. The frequency hopping is 800 hops per second with 79 channels which is 10.127 times per second. As per 15.247(a) (iii) “The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed”. Therefore for 31.6 seconds (79x0.4) there are 320.0 times of appearance.

A DH3 packet needs one time slot for transmitting and one time slot for receiving. The frequency hopping is 400 hops per second with 79 channels which is 5.06 times per second. Therefore for 31.6 seconds there are 159.9 times of appearance.

A DH5 packet needs one time slot for transmitting and one time slot for receiving. The frequency hopping is 266.7 hops per second with 79 channels which is 3.38 times per second. Therefore for 31.6 seconds there are 106.8 times of appearance.


| Bluetooth Channel | Mode | TX Time (ms) | Dwell Time/31.6 sec. (msec.)  | Limit (msec.) | Margin (msec.) |
|-------------------|------|--------------|-------------------------------|---------------|----------------|
| 0                 | DH1  | 0.3940       | $0.394 \times 320.0 = 126.08$ | 400           | 273.92         |
| 39                | DH1  | 0.3920       | $0.392 \times 320.0 = 125.44$ | 400           | 274.56         |
| 78                | DH1  | 0.3970       | $0.397 \times 320.0 = 127.04$ | 400           | 272.96         |
| 0                 | DH3  | 1.5785       | $1.579 \times 159.9 = 252.4$  | 400           | 147.60         |
| 39                | DH3  | 1.6870       | $1.687 \times 159.9 = 269.75$ | 400           | 130.25         |
| 78                | DH3  | 1.6870       | $1.687 \times 159.9 = 269.75$ | 400           | 130.25         |
| 0                 | DH5  | 2.9370       | $2.937 \times 106.8 = 313.67$ | 400           | 86.33          |
| 39                | DH5  | 2.9370       | $2.937 \times 106.8 = 313.67$ | 400           | 86.33          |
| 78                | DH5  | 2.9370       | $2.937 \times 106.8 = 313.67$ | 400           | 86.33          |

See figures 5-17 to 5-25 for the plots of the dwell time.

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |


## Bluetooth RF Conducted Emission Test Results cont'd

**Figure 5-17: Time of Occupancy (Dwell Time)**  
**Freq. Hopping, Static PBRS, DH1**

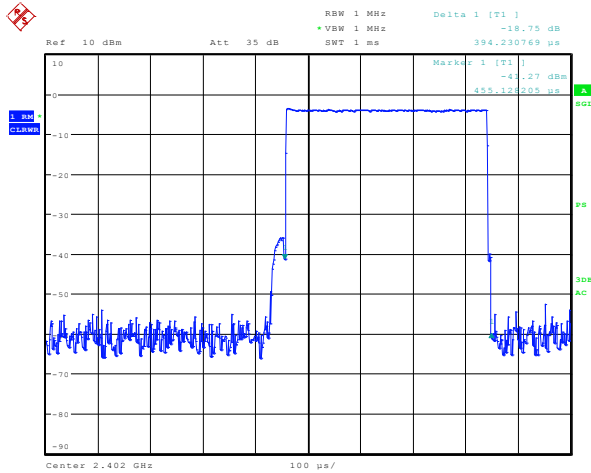


Date: 27.APR.2015 10:30:31

**Figure 5-18: Time of Occupancy (Dwell Time)**  
**Freq. Hopping, Static PBRS, DH1**

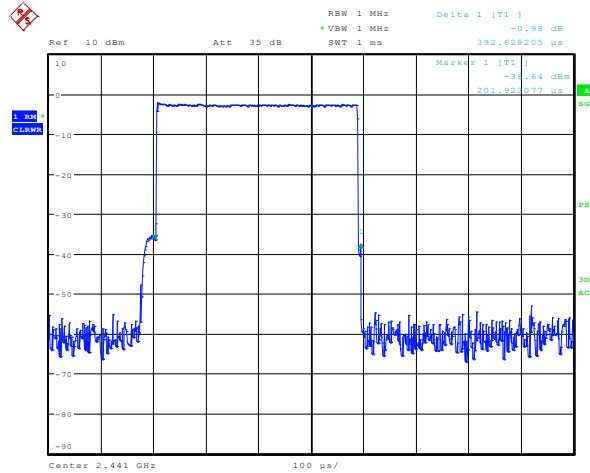


Date: 27.APR.2015 10:31:57

**Figure 5-19: Time of Occupancy (Dwell Time)**  
**Freq. Hopping, Static PBRS, DH1**

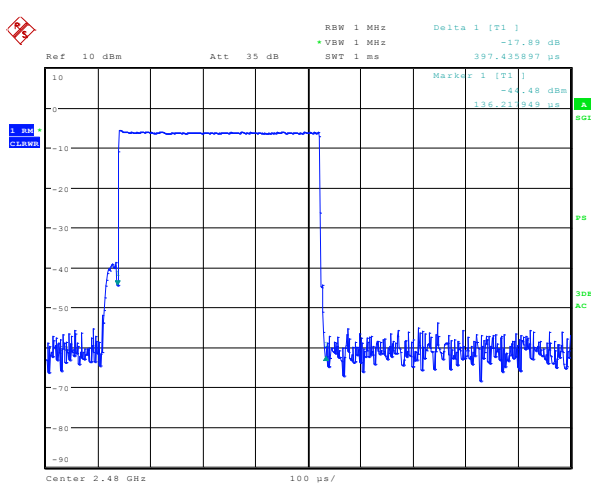


Date: 27.APR.2015 10:32:55

**Figure 5-20: Time of Occupancy (Dwell Time)**  
**Freq. Hopping, Static PBRS, DH3**

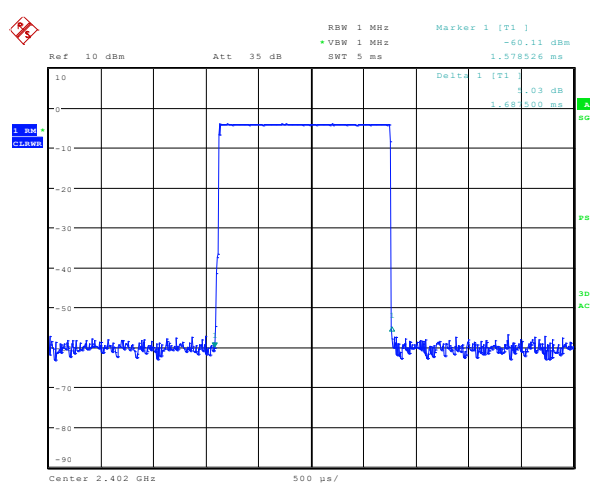


Date: 27.APR.2015 10:34:32



|   |  |   |
|---|--|---|
|  | <b>EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)</b><br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015   | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |


## Bluetooth RF Conducted Emission Test Results cont'd

**Figure 5-21: Time of Occupancy (Dwell Time)**  
**Freq. Hopping, Static PBRS, DH3**

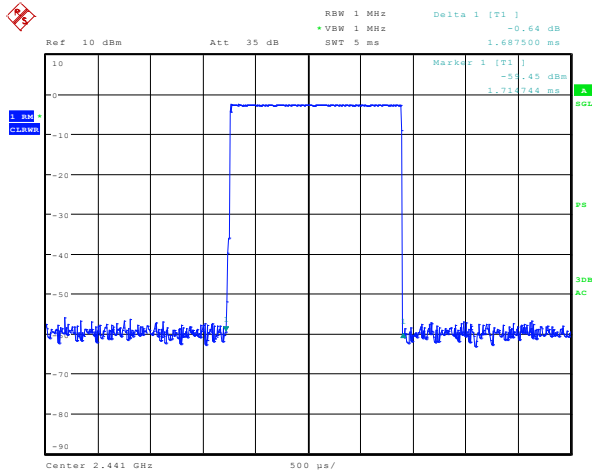


Date: 27.APR.2015 10:36:45

**Figure 5-22: Time of Occupancy (Dwell Time)**  
**Freq. Hopping, Static PBRS, DH3**

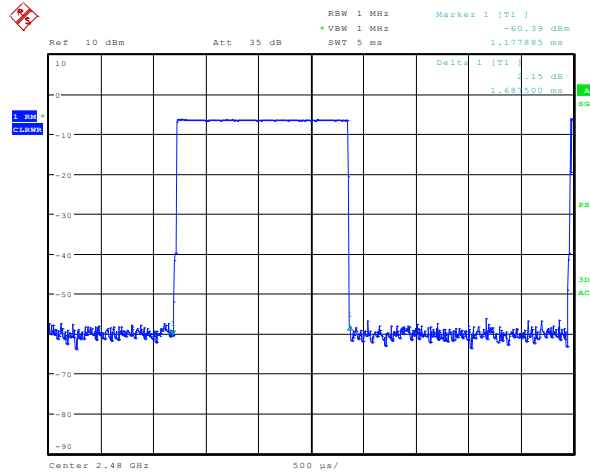


Date: 27.APR.2015 10:37:23

**Figure 5-23: Time of Occupancy (Dwell Time)**  
**Freq. Hopping, Static PBRS, DH5**

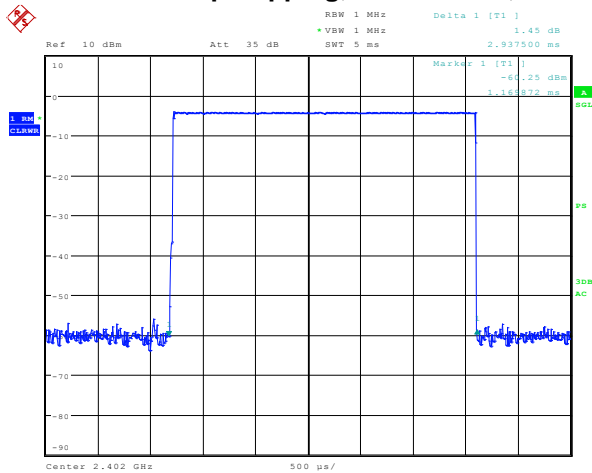


Date: 27.APR.2015 10:39:16

**Figure 5-24: Time of Occupancy (Dwell Time)**  
**Freq. Hopping, Static PBRS, DH5**

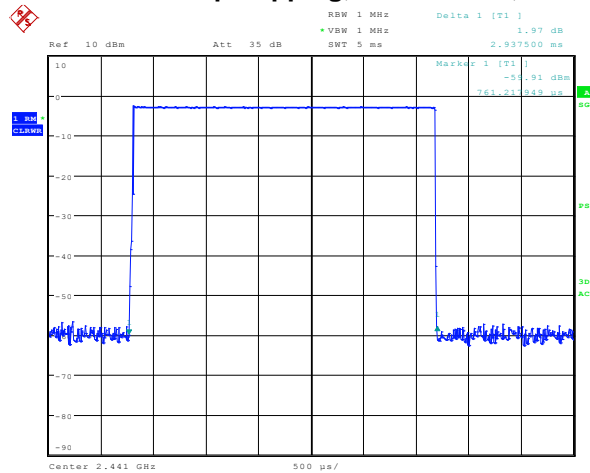


Date: 27.APR.2015 10:40:08


|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

Bluetooth RF Conducted Emission Test Results cont'd

Figure 5-25: Time of Occupancy (Dwell Time)  
Freq. Hopping, Static PBRs, DH5

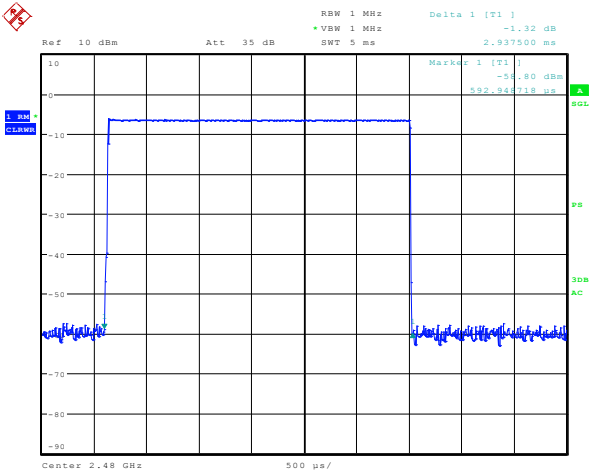

Date: 27.APR.2015 10:40:49

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

### Bluetooth RF Conducted Emission Test Results cont'd

#### **Maximum Peak Conducted Output Power**

The EUT met the requirements of the maximum peak conducted output power of class 1 as per 47 CFR 15.247(b) and RSS-210. Low channel (0), middle channel (39) and high channel (78) were measured. Bluetooth was operating in single frequency mode during the measurements. A reference offset of 12.4 dB was applied to the spectrum analyzer reference level for the coaxial cable loss and attenuators in the test circuit.

Using pattern type “Static PBRs” and packet type “DH5” during the measurements.


| Bluetooth Channel | Measured Level (dBm) | Measured Level (W) | Class 1 Limit (dBm) |
|-------------------|----------------------|--------------------|---------------------|
| 0                 | 7.70                 | 0.00589            | 0.0 to 20.0         |
| 39                | <b>9.60</b>          | <b>0.00912</b>     | 0.0 to 20.0         |
| 78                | 8.80                 | 0.00759            | 0.0 to 20.0         |

Using Pattern type “Static PBRs” and packet type “2-DH5” during the measurements.

| Bluetooth Channel | Measured Level (dBm) | Measured Level (W) | Class 1 Limit (dBm) |
|-------------------|----------------------|--------------------|---------------------|
| 0                 | 6.90                 | 0.00490            | 0.0 to 20.0         |
| 39                | <b>8.90</b>          | <b>0.00776</b>     | 0.0 to 20.0         |
| 78                | 4.90                 | 0.00309            | 0.0 to 20.0         |

Using Pattern type “Static PBRs” and packet type “3-DH5” during the measurements.

| Bluetooth Channel | Measured Level (dBm) | Measured Level (W) | Class 1 Limit (dBm) |
|-------------------|----------------------|--------------------|---------------------|
| 0                 | 5.10                 | 0.00324            | 0.0 to 20.0         |
| 39                | 7.50                 | 0.00562            | 0.0 to 20.0         |
| 78                | 5.80                 | 0.00380            | 0.0 to 20.0         |

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

## Bluetooth RF Conducted Emission Test Results cont'd

### Band Edge Compliance


The EUT met the requirements of the band edge compliance as per 47 CFR 15.247(c) and RSS-210. Low channel (0) and high channel (78) were measured. Bluetooth was operating in single frequency and hopping mode.

Using pattern type “Static PBRs” and packet type “DH5” during the measurements.

| Bluetooth Channel | Operating Mode   | Measured Level (dBc) | Limit (dBc) | Margin (dB) |
|-------------------|------------------|----------------------|-------------|-------------|
| 0                 | Single Frequency | -51.02               | -20         | -31.02      |
| 78                | Single Frequency | -51.36               | -20         | -31.36      |
| 0                 | Hopping          | -53.01               | -20         | -33.01      |
| 78                | Hopping          | -50.49               | -20         | -30.49      |


See figures 5-26 to 5-29 for the plots of the band edge compliance measurements.

**Figure 5-26: Band Edge Compliance**  
Single Freq., Static PBRs, DH5

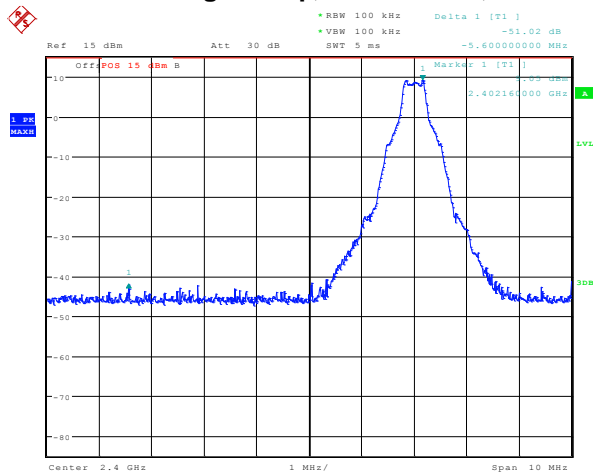


Date: 28.APR.2015 12:28:31

**Figure 5-27: Band Edge Compliance**  
Single Freq., Static PBRs, DH5

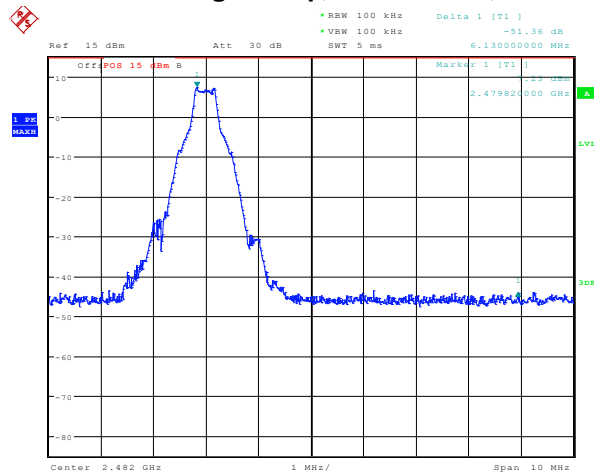


Date: 28.APR.2015 12:45:15

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |


### Bluetooth RF Conducted Emission Test Results cont'd

**Figure 5-28: Band Edge Compliance**  
**Freq. Hopping, Static PBRS, DH5**

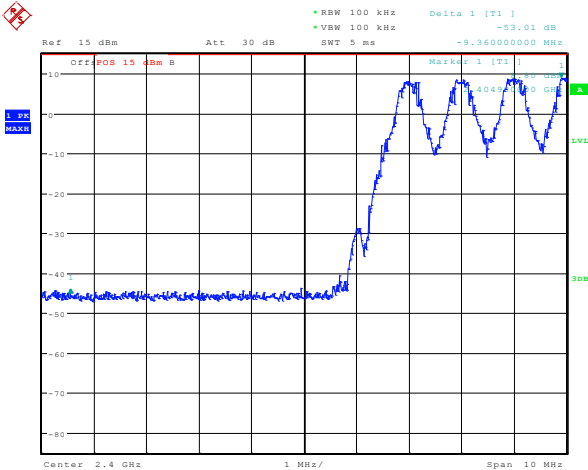

Date: 28.APR.2015 12:35:45

**Figure 5-29: Band Edge Compliance**  
**Freq. Hopping, Static PBRS, DH5**

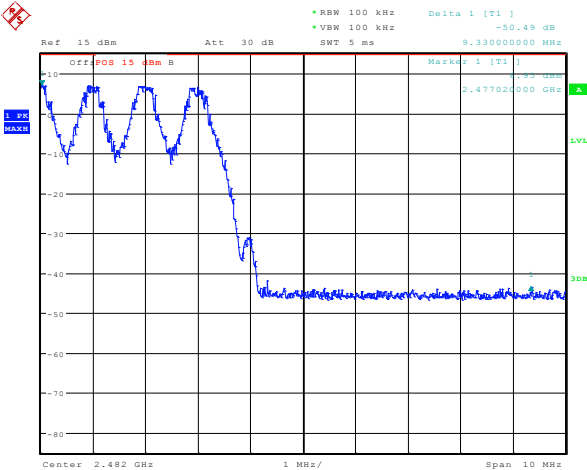


Date: 28.APR.2015 12:37:32

Using pattern type “Static PBRS” and packet type “2-DH5” during the measurements.


| Bluetooth Channel | Operating Mode   | Measured Level (dBc) | Limit (dBc) | Margin (dB) |
|-------------------|------------------|----------------------|-------------|-------------|
| 0                 | Single Frequency | -49.35               | -20         | -29.35      |
| 78                | Single Frequency | -47.45               | -20         | -27.45      |
| 0                 | Hopping          | -52.61               | -20         | -32.61      |
| 78                | Hopping          | -46.32               | -20         | -26.32      |

See figures 5-30 to 5-33 for the plots of the band edge compliance measurements.

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |


## Bluetooth RF Conducted Emission Test Results cont'd

**Figure 5-30: Band Edge Compliance  
Single Freq., Static PBRS, 2-DH5**

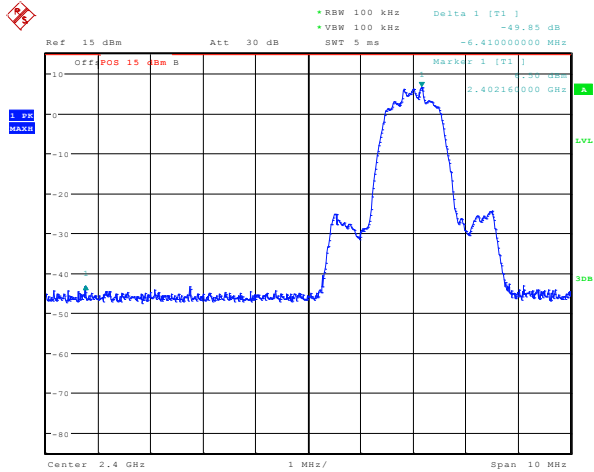


Date: 28.APR.2015 12:29:21

**Figure 5-31: Band Edge Compliance  
Single Freq., Static PBRS, 2-DH5**

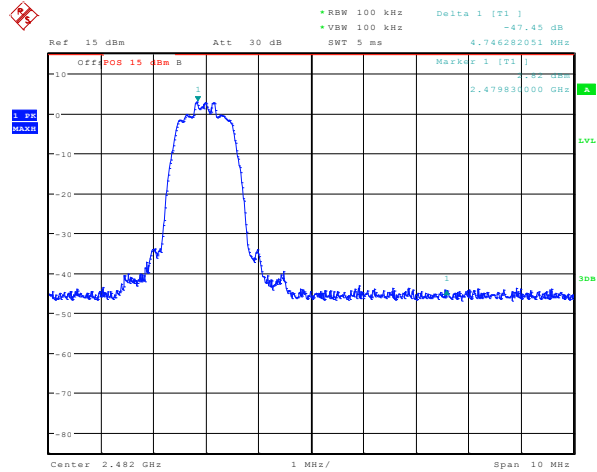


Date: 28.APR.2015 12:43:46

**Figure 5-32: Band Edge Compliance  
Freq. Hopping, Static PBRS, 2-DH5**

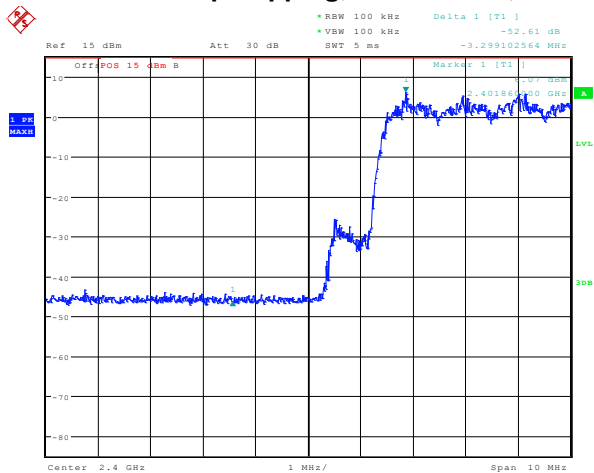


Date: 28.APR.2015 12:34:23

**Figure 5-33: Band Edge Compliance  
Freq. Hopping, Static PBRS, 2-DH5**

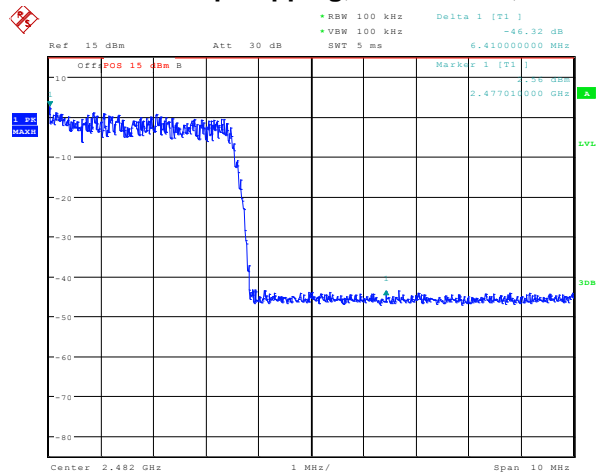

Date: 28.APR.2015 12:38:44

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |


### Bluetooth RF Conducted Emission Test Results cont'd

Using pattern type “Static PBRs” and packet type “3-DH5” during the measurements.

| Bluetooth Channel | Operating Mode   | Measured Level (dBc) | Limit (dBc) | Margin (dB) |
|-------------------|------------------|----------------------|-------------|-------------|
| 0                 | Single Frequency | -50.77               | -20         | -30.77      |
| 78                | Single Frequency | -46.46               | -20         | -26.46      |
| 0                 | Hopping          | -48.71               | -20         | -28.71      |
| 78                | Hopping          | -46.21               | -20         | -26.21      |


See figures 5-34 to 5-37 for the plots of the band edge compliance measurements.

**Figure 5-34: Band Edge Compliance**  
Single Freq., Static PBRs, 3-DH5

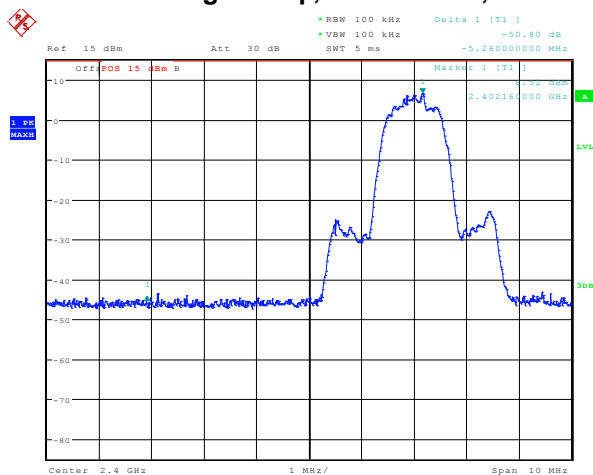


Date: 28.APR.2015 12:30:45

**Figure 5-35: Band Edge Compliance**  
Single Freq., Static PBRs, 3-DH5

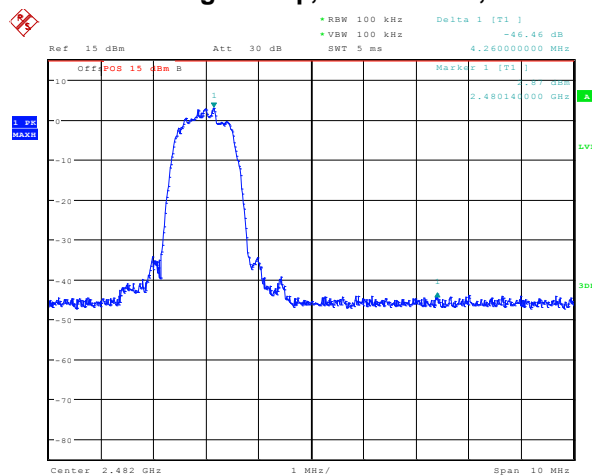


Date: 28.APR.2015 12:42:21

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |


Bluetooth RF Conducted Emission Test Results cont'd

Figure 5-36: Band Edge Compliance  
Freq. Hopping, Static PBRS, 3-DH5

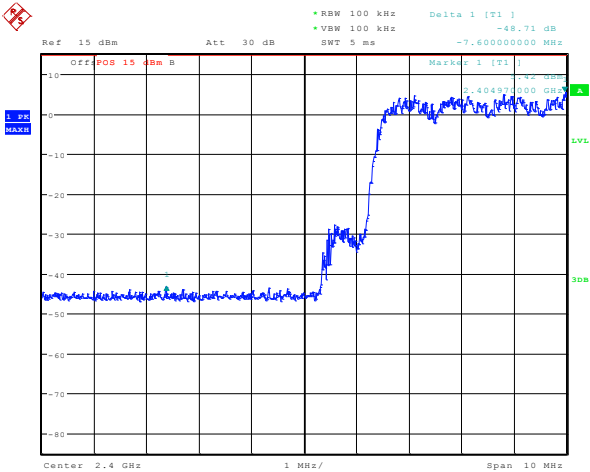


Date: 28.APR.2015 12:32:59

Figure 5-37: Band Edge Compliance  
Freq. Hopping, Static PBRS, 3-DH5

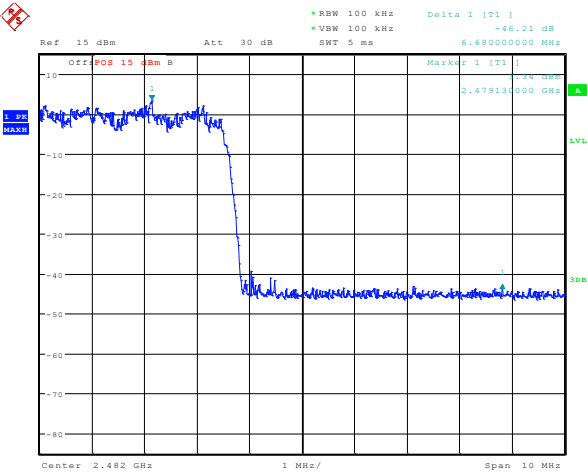

Date: 28.APR.2015 12:41:14



|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model<br>RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015   | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

### Bluetooth RF Conducted Emission Test Results cont'd


#### **Spurious RF Conducted Emissions**

The EUT met the requirements of the spurious RF conducted emissions as per 47 CFR 15.247(c) and RSS-210. Low channel (0), mid channel (39) and high channel (78) were measured. Bluetooth was operating in single frequency and hopping mode. A reference offset of 12.4 dB was applied to the spectrum analyzer reference level for the attenuators and coaxial cable loss in the test circuit.

Using pattern type “Static PBRS” and packet type “DH5” during the measurements.



| Bluetooth Channel | Channel Power (dBm) | Max. Measured Level (dBm) | Max. Measured Level from carrier (dBc) | Limit (dBc) |
|-------------------|---------------------|---------------------------|--|-------------|
| 0.00              | 7.70                | -48.50                    | -56.20                                 | -20.00      |
| 39.00             | 9.60                | -48.78                    | -58.38                                 | -20.00      |
| 78.00             | 8.80                | -48.69                    | -57.49                                 | -20.00      |
| Hopping mode      | 7.70                | -48.23                    | -55.93                                 | -20.00      |

See figures 5-38 to 5-41 for the plots of the spurious RF conducted emissions.



|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |


## Bluetooth RF Conducted Emission Test Results cont'd

**Figure 5-38: Spurious RF Conducted Emissions  
Single Freq., Static PBRS, DH5,**

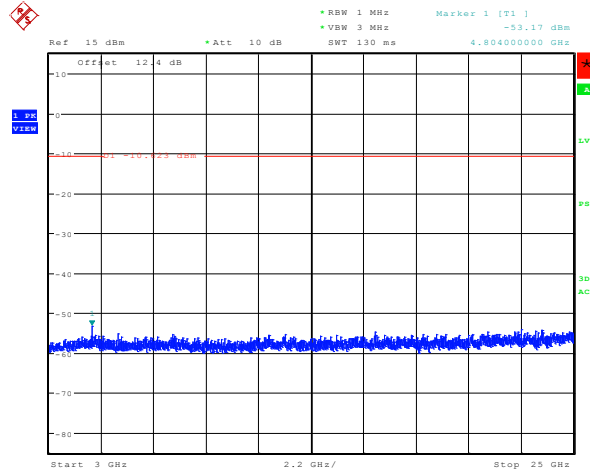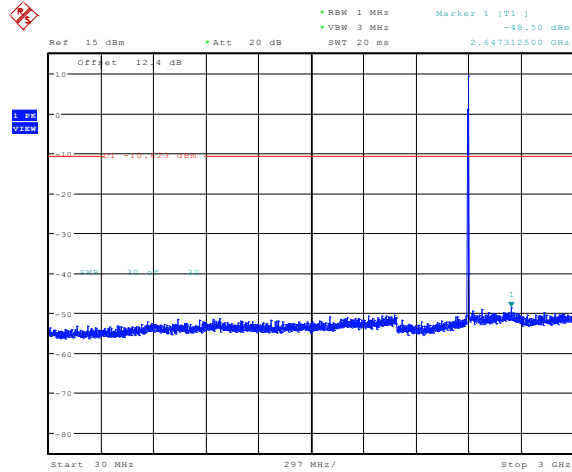


**Figure 5-39: Spurious RF Conducted Emissions  
Single Freq., Static PBRS, DH5**

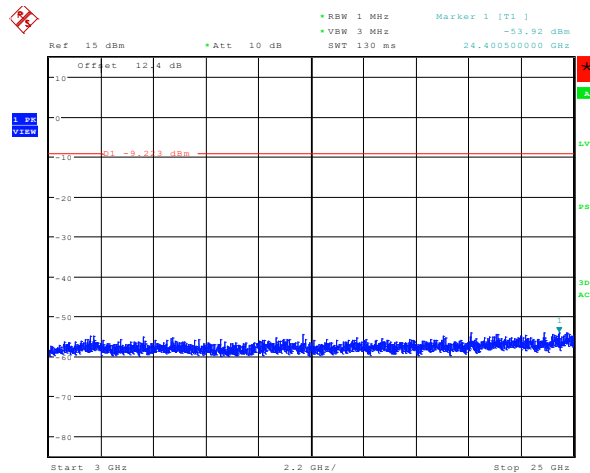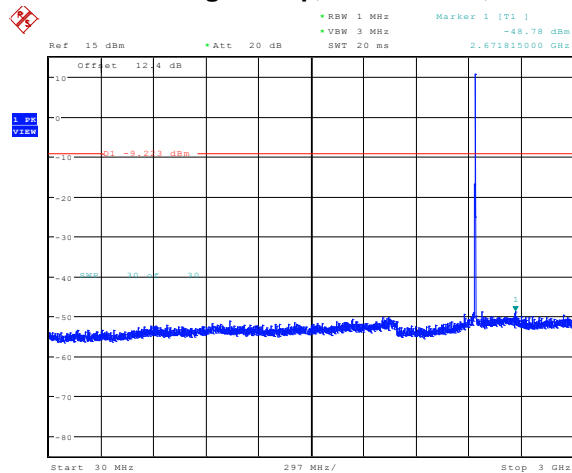


|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

## Bluetooth RF Conducted Emission Test Results cont'd

**Figure 5-40: Spurious RF Conducted Emissions  
Single Freq., Static PBRs, DH5**

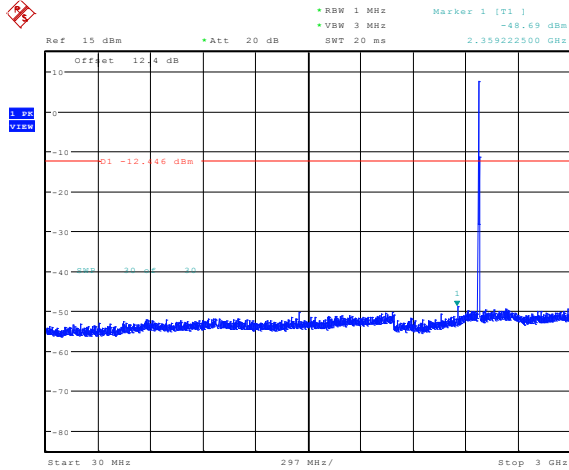


Date: 27.APR.2015 12:24:36

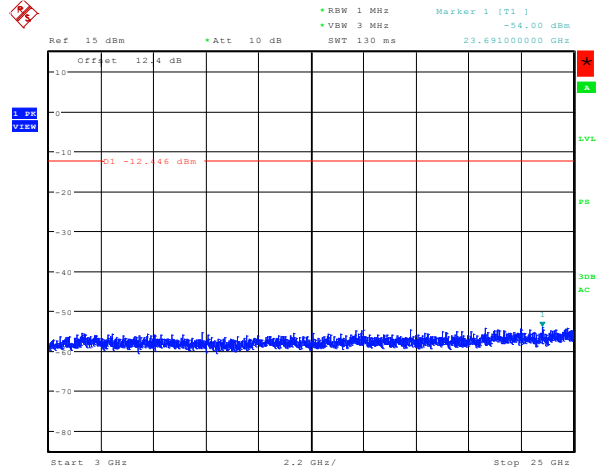


Date: 27.APR.2015 12:24:43


**Figure 5-41: Spurious RF Conducted Emissions  
Freq. Hopping, Static PBRs, DH5**

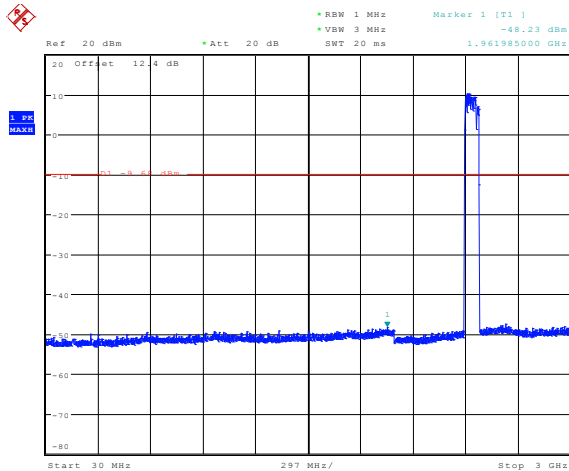

Date: 27.APR.2015 12:43:47

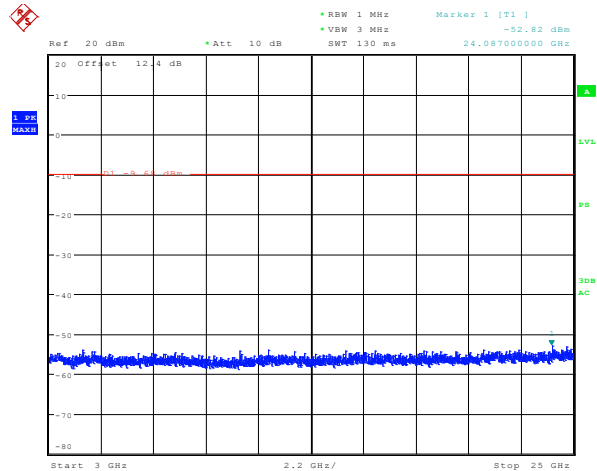

Date: 27.APR.2015 12:44:28


|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model<br>RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015   | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

### Bluetooth RF Conducted Emission Test Results cont'd

Using pattern type “Static PBRS” and packet type “2-DH5” during the measurements.


| Bluetooth Channel | Channel Power (dBm) | Max. Measured Level (dBm) | Max. Measured Level from carrier (dBc) | Limit (dBc) |
|-------------------|---------------------|---------------------------|--|-------------|
| 0.00              | 5.10                | -49.09                    | -54.19                                 | -20.00      |
| 39.00             | 7.50                | -49.08                    | -56.58                                 | -20.00      |
| 78.00             | 5.80                | -49.02                    | -54.82                                 | -20.00      |
| Hopping mode      | 5.10                | -49.43                    | -54.53                                 | -20.00      |

See figures 5-42 to 5-45 for the plots of the spurious RF conducted emissions.


|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

## Bluetooth RF Conducted Emission Test Results cont'd

**Figure 5-42: Spurious RF Conducted Emissions  
Single Freq., Static PBRs, 2-DH5**

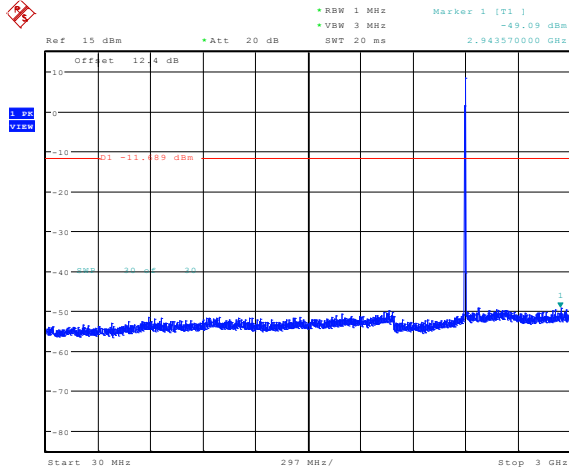


Date: 27.APR.2015 12:25:04

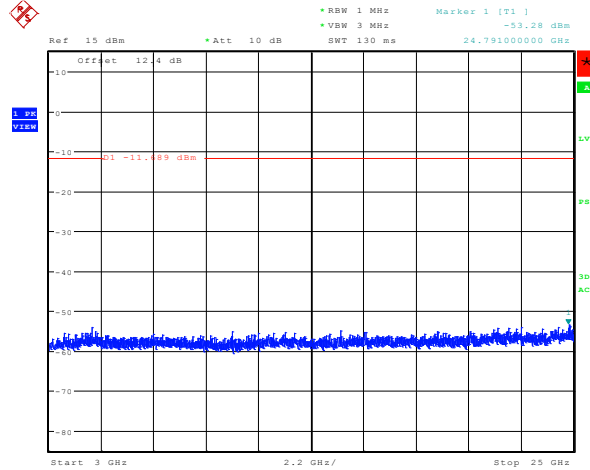


Date: 27.APR.2015 12:25:11


**Figure 5-43: Spurious RF Conducted Emissions  
Single Freq., Static PBRs, 2-DH5**

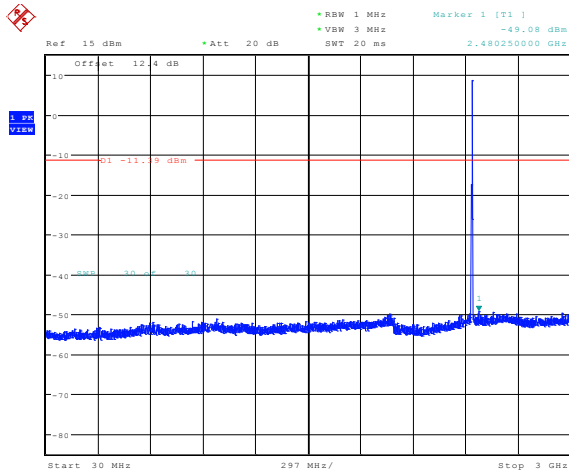

Date: 27.APR.2015 12:25:32

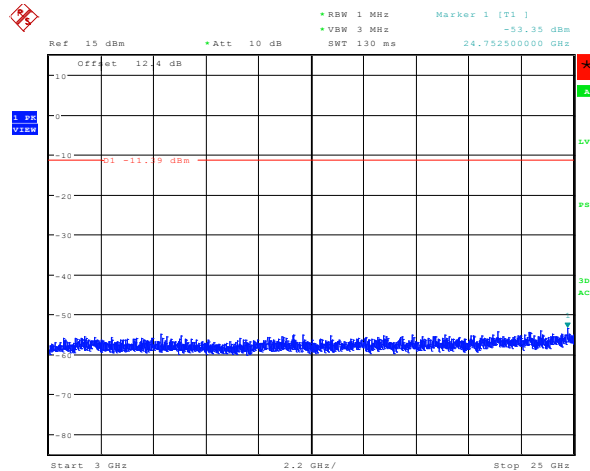


Date: 27.APR.2015 12:25:39


|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

## Bluetooth RF Conducted Emission Test Results cont'd

**Figure 5-44: Spurious RF Conducted Emissions  
Single Freq., Static PBRs, 2-DH5**

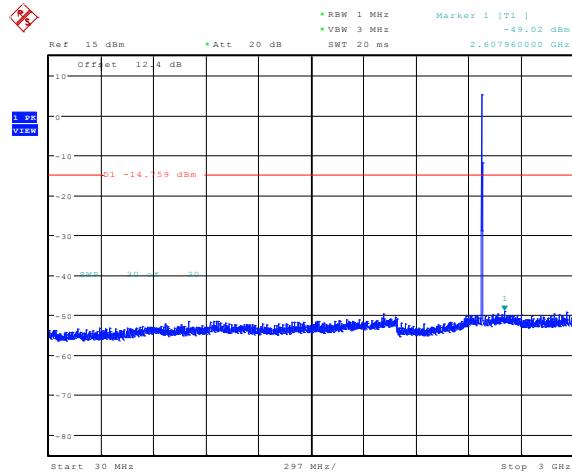


Date: 27.APR.2015 12:26:00

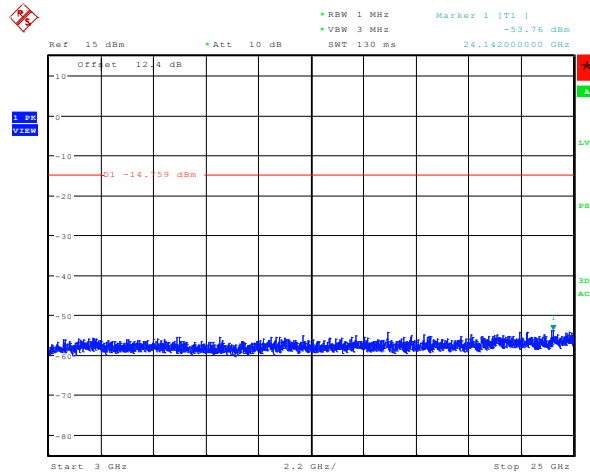


Date: 27.APR.2015 12:26:07


**Figure 5-45: Spurious RF Conducted Emissions  
Freq. Hopping, Static PBRs, 2-DH5**

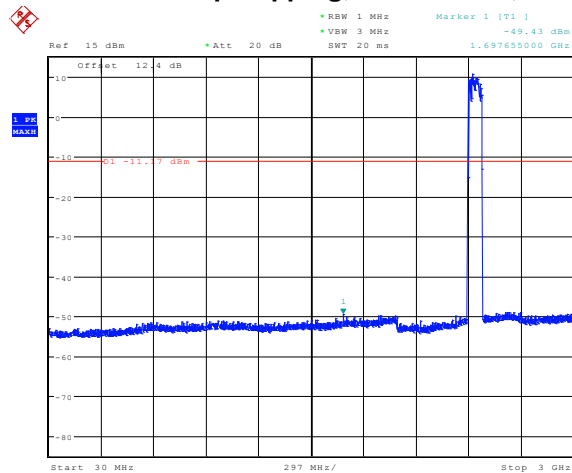

Date: 27.APR.2015 12:35:33

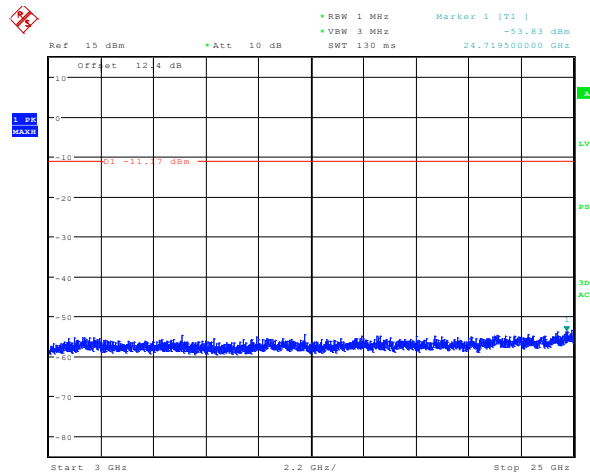

Date: 27.APR.2015 12:36:20


|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model<br>RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015   | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

### Bluetooth RF Conducted Emission Test Results cont'd

Using pattern type “Static PBRS” and packet type “3-DH5” during the measurements.


| Bluetooth Channel | Channel Power (dBm) | Max. Measured Level (dBm) | Max. Measured Level from carrier (dBc) | Limit (dBc) |
|-------------------|---------------------|---------------------------|--|-------------|
| 0.00              | 6.90                | -48.37                    | -55.27                                 | -20.00      |
| 39.00             | 8.90                | -49.20                    | -58.10                                 | -20.00      |
| 78.00             | 4.90                | -48.95                    | -53.85                                 | -20.00      |
| Hopping mode      | 4.90                | -44.11                    | -49.01                                 | -20.00      |

See figures 5-46 to 5-49 for the plots of the spurious RF conducted emissions.


|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

## Bluetooth RF Conducted Emission Test Results cont'd

**Figure 5-46: Spurious RF Conducted Emissions  
Single Freq., Static PBRs, 3-DH5**

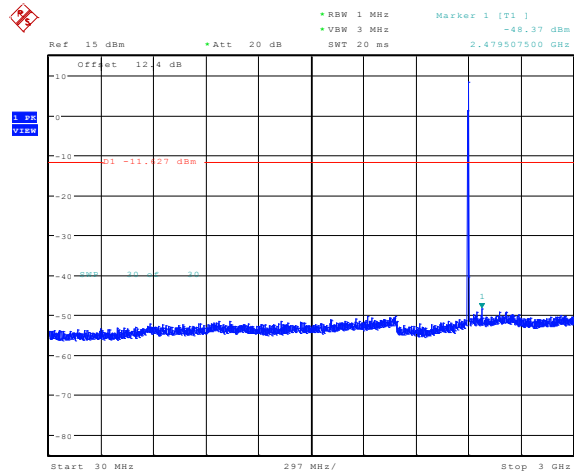


Date: 27.APR.2015 12:26:28

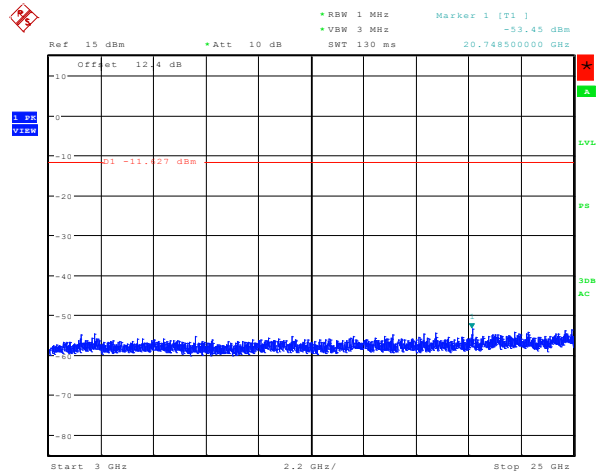


Date: 27.APR.2015 12:26:36

**Figure 5-47: Spurious RF Conducted Emissions  
Single Freq., Static PBRs, 3-DH5**

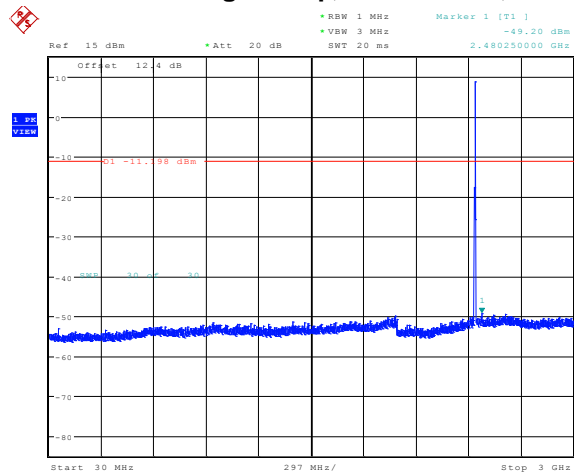

Date: 27.APR.2015 12:26:56

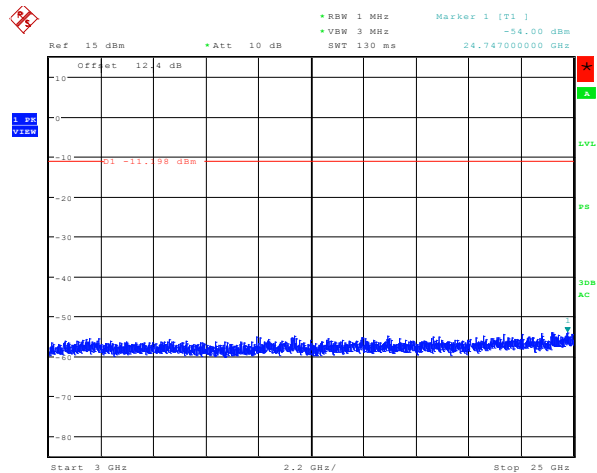


Date: 27.APR.2015 12:27:03




## Bluetooth RF Conducted Emission Test Results cont'd

**Figure 5-48: Spurious RF Conducted Emissions  
Single Freq., Static PBRS, 3-DH5**

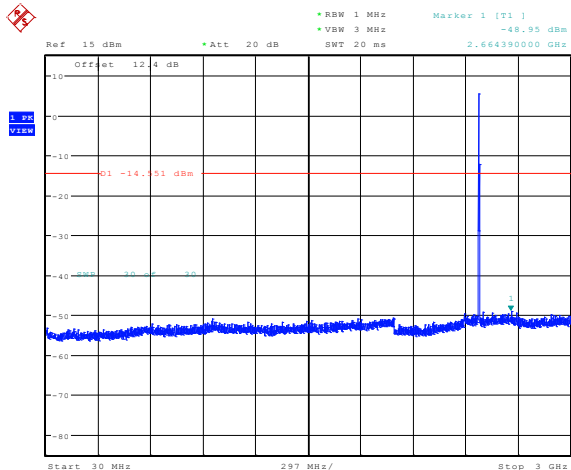


Date: 27.APR.2015 12:27:24

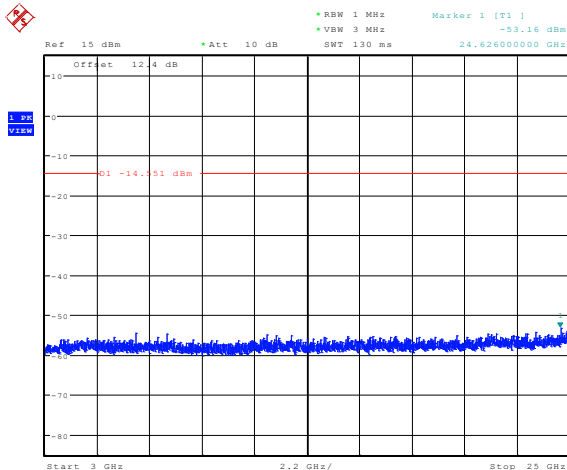


Date: 27.APR.2015 12:27:31


**Figure 5-49: Spurious RF Conducted Emissions**  
**Freq. Hopping, Static PBRS, 3-DH5**

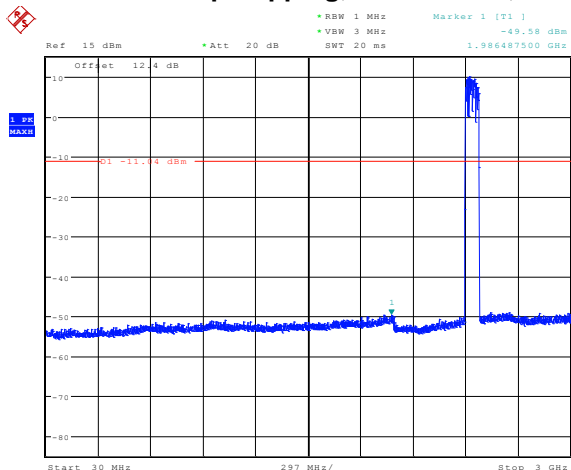

Date: 27.APR.2015 12:20:11

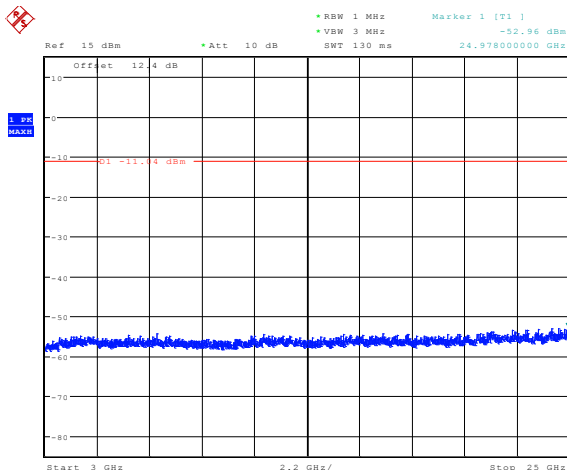

Date: 27.APR.2015 12:22:55

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

## Bluetooth Low Energy RF Conducted Emission Test Results

### 6 dB Bandwidth


The EUT met the requirements of the 6 dB bandwidth as per 47 CFR 15.247(a)(2) and RSS-210.

Channels 0, 20 and 39 were measured.

| Channel | Limit (kHz) | Measured Level (kHz) |
|---------|-------------|----------------------|
| 0       | ≥ 500       | <b>682.00</b>        |
| 20      | ≥ 500       | 670.64               |
| 39      | ≥ 500       | 642.00               |


See figures 5-50 to 5-52 for the plots of the 6 dB bandwidth measurements for Channels 0, 20, and 39.

**Figure 5-50: 6 dB Bandwidth  
LE, Channel 0**

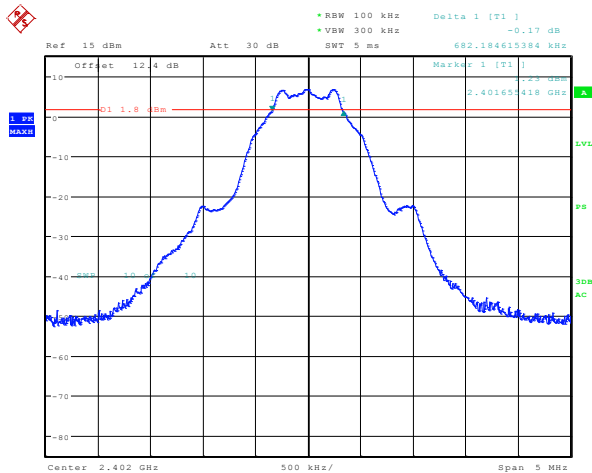


Date: 27.APR.2015 16:35:29

**Figure 5-51: 6 dB Bandwidth  
LE, Channel 20**

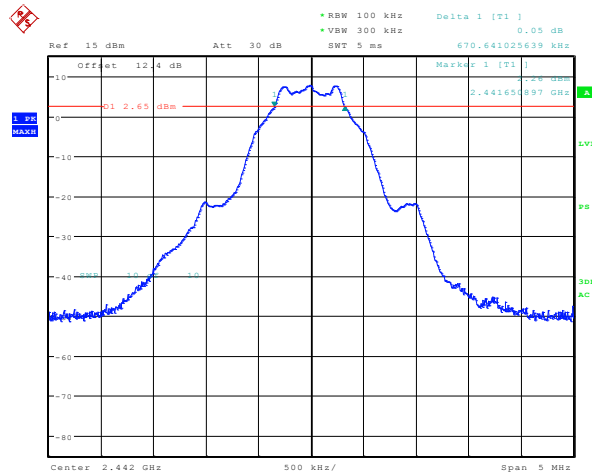


Date: 27.APR.2015 16:53:07


|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

Bluetooth Low Energy RF Conducted Emission Test Results cont'd

**Figure 5-52: 6 dB Bandwidth  
LE, Channel 39**

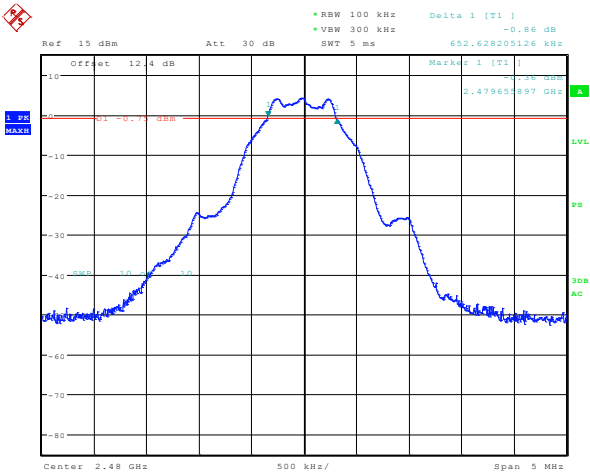

Date: 27.APR.2015 17:03:59

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

### Bluetooth Low Energy RF Conducted Emission Test Results cont'd

#### **Maximum Conducted Output Power**

The EUT met the requirements of the maximum conducted output power of class 2 as per 47 CFR 15.247(b)(3) and RSS-210. Channels 0, 20 and 39 were measured using an Agilent power meter, model N1911A with model N1921A power sensor. A reference offset of 6.4 dB was applied to the power meter reference level for the coaxial cable loss and attenuators in the test circuit.


| Channel | Class 2 Limit (W) | Measured Level (dBm) | Measured Level (W) |
|---------|-------------------|----------------------|--------------------|
| 0       | < 1.00            | 6.42                 | .00439             |
| 20      | < 1.00            | <b>6.53</b>          | <b>.0450</b>       |
| 39      | < 1.00            | 5.83                 | .00383             |

#### **Band Edge Compliance**


The EUT met the requirements of the band edge compliance as per 47 CFR 15.247(c) and RSS-210. Channels 0 and 39 were measured.

| Channel | Limit (dBc) | Measured Level (dBc) | Margin (dBc) |
|---------|-------------|----------------------|--------------|
| 0       | < -20       | -57.66               | -37.66       |
| 39      | < -20       | -54.71               | -34.71       |

See figures 5-53 to 5-54 for the plots of the band edge compliance measurements for Channels 0 and 39.


|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

**Figure 5-53: Band Edge Compliance  
LE, Channel 0**

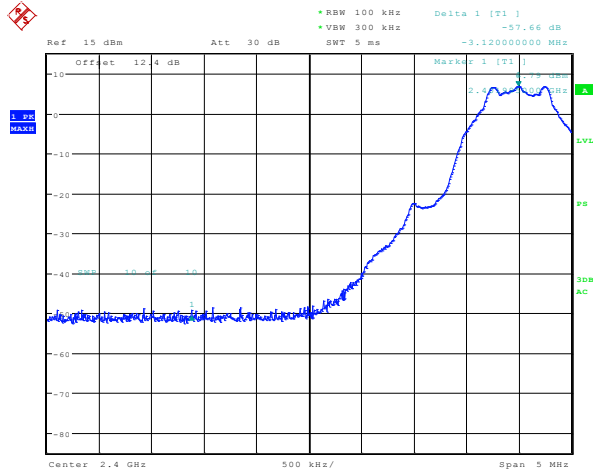

Date: 27.APR.2015 16:37:22

**Figure 5-54: Band Edge Compliance  
LE, Channel 39**

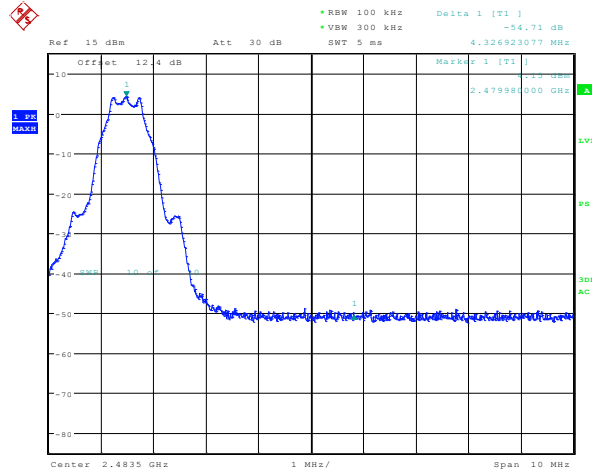


Date: 27.APR.2015 17:11:00

### Peak Power Spectral Density

The EUT met the requirements of the peak power spectral density as per 47 CFR 15.247(d) and RSS-210. Channels 0, 20 and 39 were measured.


| Channel | Limit (dBm) | Measured Level (dBm) | Margin (dBm) |
|---------|-------------|----------------------|--------------|
| 0       | < 8.00      | -6.77                | -14.77       |
| 20      | < 8.00      | -9.74                | -17.74       |
| 39      | < 8.00      | -11.07               | -19.07       |

See figures 5-55 to 5-57 for the plots of the peak power spectral density for Channels 0, 20 and 39.

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |


Bluetooth Low Energy RF Conducted Emission Test Results cont'd

Figure 5-55: Peak Power Spectral Density  
LE, Channel 0

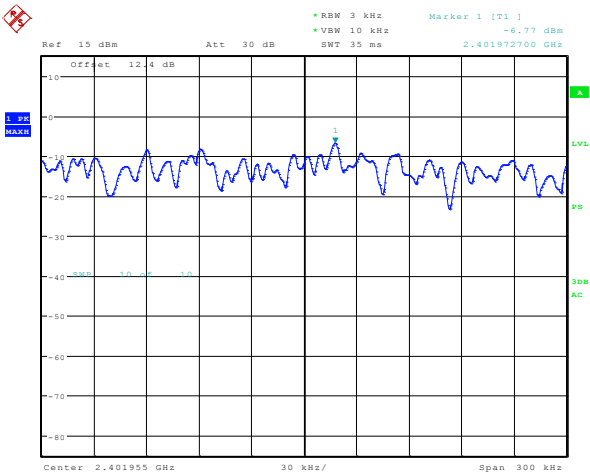


Date: 27.APR.2015 16:42:16

Figure 5-56: Peak Power Spectral Density  
LE, Channel 20

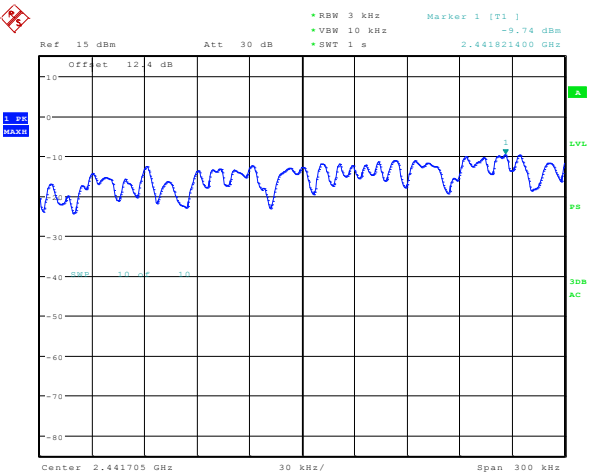


Date: 27.APR.2015 16:56:08

Figure 5-57: Peak Power Spectral Density  
LE, Channel 39

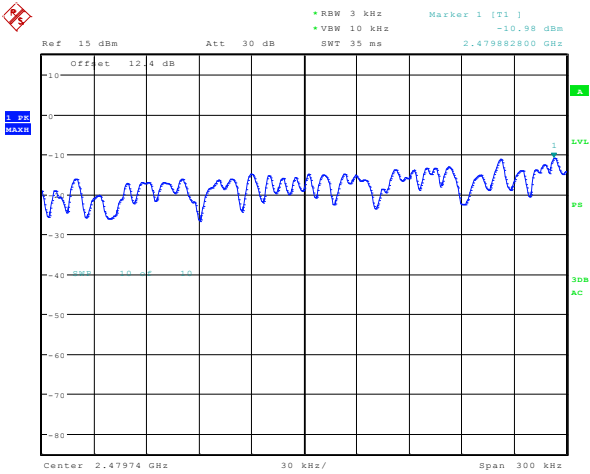

Date: 27.APR.2015 17:13:44

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

## Bluetooth Low Energy RF Conducted Emission Test Results cont'd

### Spurious RF Conducted Emissions


The EUT met the requirements of the spurious RF conducted emissions as per 47 CFR 15.247(c) and RSS-210. Channels 0, 20 and 39 were measured. Peak power was measured using an Agilent power meter, model N1911A with model N1921A power sensor. A reference offset of 6.4 dB was applied to the power meter reference level for the coaxial cable loss and attenuators in the test circuit.

| Channel | Power (dBm) | Max. Measured Level (dBm) | Max. Measured Level from Carrier (dBc) | Limit (dBc) |
|---------|-------------|---------------------------|--|-------------|
| 0       | 6.4         | -43.0                     | -49.4                                  | -20.0       |
| 20      | 6.5         | -44.5                     | -51.1                                  | -20.0       |
| 39      | 5.8         | -43.9                     | -49.7                                  | -20.0       |


The emissions were in the NF.

See figures 5-58 to 5-60 for the plots of the spurious RF conducted emissions for Channels 0, 20 and 39.


**Figure 5-58: Spurious Conducted RF Emissions  
LE, Channel 0**

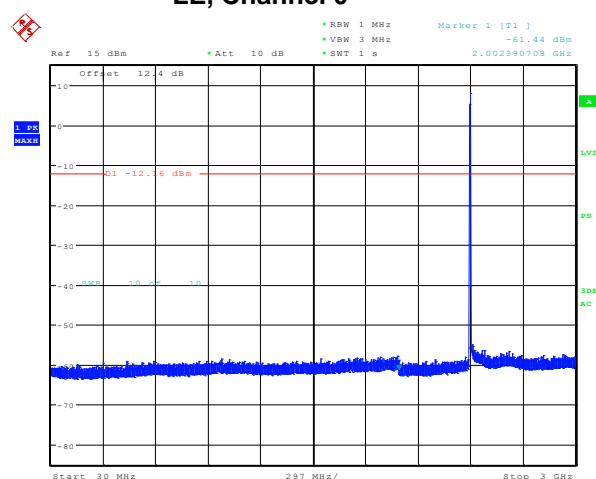

Date: 27.APR.2015 16:27:58

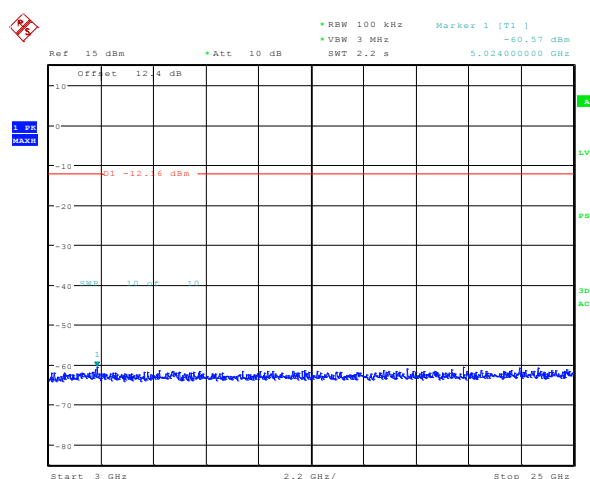


Date: 27.APR.2015 17:16:51


|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 5</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

# Bluetooth Low Energy RF Conducted Emission Test Results cont'd

**Figure 5-59 : Spurious Conducted RF Emissions  
LE, Channel 20**

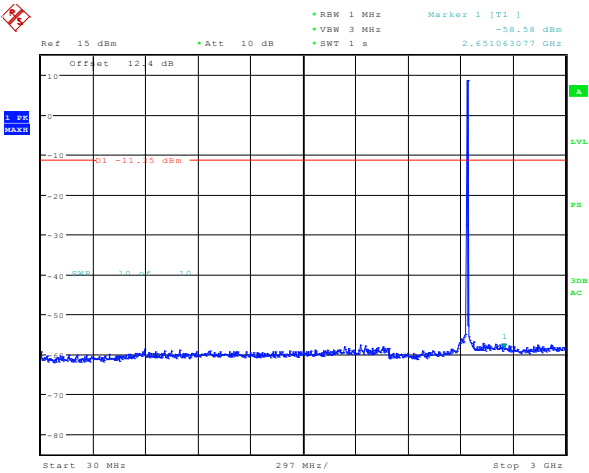


Date: 27.APR.2015 16:50:23

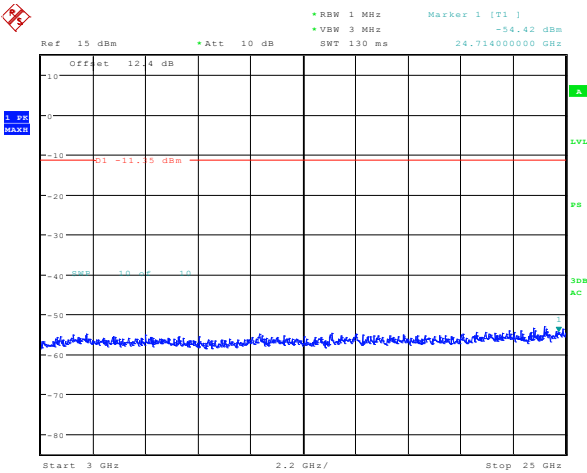


Date: 27.APR.2015 17:17:39

**Figure 5-60: Spurious Conducted RF Emissions  
LE, Channel 39**

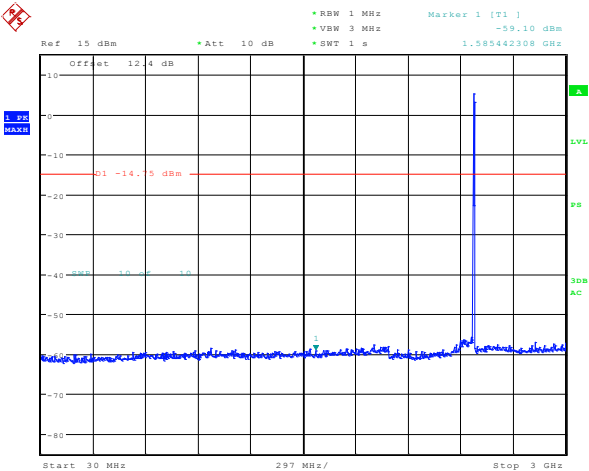


Date: 27.APR.2015 17:02:10

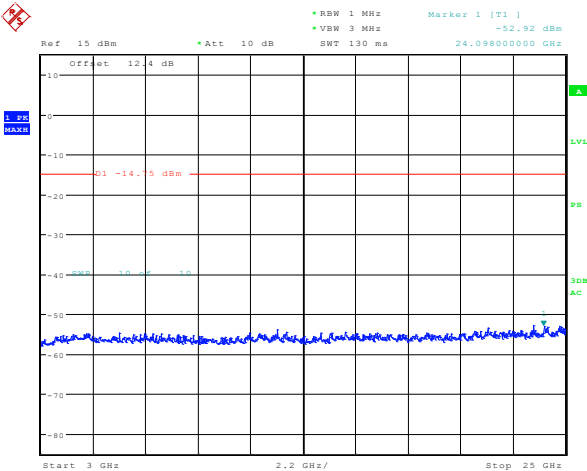

Date: 27.APR.2015 17:18:26




## **APPENDIX 6 – 802.11b/g/n CONDUCTED EMISSIONS TEST DATA/PLOTS**

|   |   |   |
|---|---|---|
|  | EMC Test Report for the BlackBerry® smartphone Model RHR191LW (SQW100-4)<br><b>APPENDIX 6</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015  | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

### **802.11b/g/n RF Conducted Emission Test Results**

#### **Test Setup Diagram**

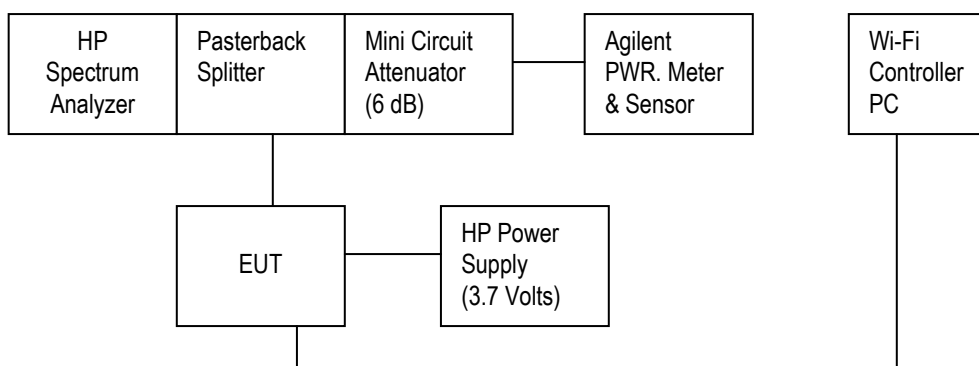


| <u>UNIT</u>  | <u>MANUFACTURER</u> | <u>MODEL</u>  | <u>SERIAL NUMBER</u> |
|--------------|---------------------|---------------|----------------------|
| Attenuator 1 | Mini-Circuits       | BW-S6W2+      | 0647                 |
| Attenuator 2 | Mini-Circuits       | BW-S6W2+      | 0648                 |
| Attenuator 3 | Mini-Circuits       | BW-S20-2W263+ | 1234                 |
| Splitter 1   | Weinschel           | 1515          | MES 92               |

A reference offset of 20.4 dB was applied to the spectrum analyzer and 6.6 dB was applied to the Power Meter reference level for the attenuators and coaxial cable loss in the test circuit.

Date of test: May 12, 2015

The measurements on the BlackBerry® smartphone were performed by Sijia Li.

The environmental test conditions were:    Temperature:        23.7 °C  
    Relative Humidity:    39.8 %

|   |  |   |
|---|--|---|
|  | EMC Test Report for the BlackBerry® smartphone Model<br>RHR191LW (SQW100-4)<br><b>APPENDIX 6</b> |   |
| <b>Test Report No.:</b><br>RTS-6067-1505-16                                       | <b>Dates of Test:</b><br>April 02 – May 14, 2015   | <b>FCC ID:</b> L6ARHR190LW<br><b>IC:</b> 2503A-RHR190LW |

### 802.11b/g/n RF Conducted Emission Test Results cont'd

#### 6 dB Bandwidth

The EUT met the requirements of the 6 dB bandwidth as per 47 CFR 15.247(a)(2) and RSS-210. Channels 1, 6 and 11 were measured at 1 Mbps, 5.5 Mbps, and 11Mbps each for 802.11b mode, 6 Mbps, 24 Mbps, and 54 Mbps each for 802.11g mode, and MCS 0, 4, and 7 for 802.11n mode.

| Channel | Data Rate | Limit (kHz) | Measured Level (MHz) |
|---------|-----------|-------------|----------------------|
| 1       | 1 Mbps    | ≥ 500       | 8.08                 |
|         | 5.5 Mbps  | ≥ 500       | 7.92                 |
|         | 11 Mbps   | ≥ 500       | 7.34                 |
|         | 6 Mbps    | ≥ 500       | 14.20                |
|         | 24 Mbps   | ≥ 500       | 16.44                |
|         | 54 Mbps   | ≥ 500       | 15.64                |
|         | MCS 0     | ≥ 500       | 16.36                |
|         | MCS 4     | ≥ 500       | 17.04                |
|         | MCS 7     | ≥ 500       | 17.28                |
| 6       | 1 Mbps    | ≥ 500       | <b>8.48</b>          |
|         | 5.5 Mbps  | ≥ 500       | 8.34                 |
|         | 11 Mbps   | ≥ 500       | 7.94                 |
|         | 6 Mbps    | ≥ 500       | 16.38                |
|         | 24 Mbps   | ≥ 500       | <b>16.50</b>         |
|         | 54 Mbps   | ≥ 500       | 16.44                |
|         | MCS 0     | ≥ 500       | 17.50                |
|         | MCS 4     | ≥ 500       | 17.66                |
|         | MCS 7     | ≥ 500       | <b>17.72</b>         |
| 11      | 1 Mbps    | ≥ 500       | 8.02                 |
|         | 5.5 Mbps  | ≥ 500       | 8.44                 |
|         | 11 Mbps   | ≥ 500       | 8.42                 |
|         | 6 Mbps    | ≥ 500       | 16.40                |
|         | 24 Mbps   | ≥ 500       | 16.32                |
|         | 54 Mbps   | ≥ 500       | 16.46                |
|         | MCS 0     | ≥ 500       | 17.66                |
|         | MCS 4     | ≥ 500       | 17.32                |
|         | MCS 7     | ≥ 500       | 16.94                |