

# TEST REPORT

EMI Test for FCC Certification / ISED of LM-Q620WA Model

APPLICANT

LG Electronics USA, Inc.

REPORT NO.

HCT-EM-1909-FI003

DATE OF ISSUE

September 24, 2019

**HCT Co., Ltd.**

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 645 6300 Fax. +82 31 645 6401



HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 645 6300 Fax. +82 31 645 6401

# TEST REPORT

EMI Test for  
FCC Certification  
/ISED

## REPORT NO.

HCT-EM-1909-FI003

## DATE OF ISSUE

September 24, 2019

## FCC ID / IC

ZNFQ620WA / 2703C-Q620WA

Applicant LG Electronics USA, Inc.  
1000 Sylvan Avenue, Englewood Cliffs NJ 07632 United States

Product Name SMART PHONE  
Model Name LM-Q620WA  
Series Model Name Refer to the clause 1.1 Description of EUT

Date of Test September 06, 2019 to September 16, 2019

Test Standard Used FCC CFR 47 PART 15 Subpart B Class B / ICES-003 Issue 6 Class B  
ANSI C63.4-2014

Test Results Refer to the present document

Manufacturer LG Electronics Inc.

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Tested by  
Na-Eun Song

(signature)

Technical Manager  
Jeong-Hyun Choi

(signature)

## REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	September 24, 2019	Initial Release

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2014. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

## CONTENTS

1. GENERAL INFORMATION	5
1.1 Description of EUT	5
1.2 Tested System Details	7
1.3 Cable Description	8
1.4 Noise Suppression Parts on Cable. (I/O Cable)	8
1.5 Test Facility	9
1.6 Calibration of Measuring Instrument	9
1.7 Measurement Uncertainty	10
2. DESCRIPTION OF TEST	11
2.1 Measurement of Conducted Emission	11
2.2 Measurement of Radiated Emission	12
2.3 Configuration of Tested System	13
3. PRELIMINARY TEST	14
3.1 Conducted Emission	14
3.2 Radiated Emission	14
4. CONDUCTED EMISSION AND RADIATED EMISSION TEST SUMMARY	15
4.1 Conducted Emission	15
4.2 Radiated Emission Below 1 GHz	22
4.3 Radiated Emission Above 1 GHz	24
5. CONCLUSION	27
6. APPENDIX A. TEST SETUP PHOTO	28

## 1. GENERAL INFORMATION

### 1.1 Description of EUT

<b>FCC ID</b>	ZNFQ620WA
<b>IC</b>	2703C-Q620WA
<b>Model Name</b>	LM-Q620WA
<b>Series Model Name</b>	LMQ620WA, Q620WA, LM-Q620VA, LMQ620VA, Q620VA, LM-Q620VL, LMQ620VL, Q620VL, LM-Q620QM6, LMQ620QM6, Q620QM6, LM-Q620QM, LMQ620QM, Q620QM
<b>Product Name</b>	SMART PHONE
<b>TX Frequency</b>	824.70 MHz to 848.31 MHz (CDMA BC0) 1 851.25 MHz to 1 908.75 MHz (CDMA BC1) 817.90 MHz to 823.10 MHz (CDMA BC10) 824.20 MHz to 848.80 MHz (GSM 850) 1 850.20 MHz to 1 909.80 MHz (GSM 1 900) 1 852.4 MHz to 1 907.6 MHz (WCDMA B2) 1712.4 MHz to 1752.6 MHz (WCDMA B4) 826.40 MHz to 846.60 MHz (WCDMA B5) 1 850 MHz to 1 910 MHz (LTE B2) 1 710 MHz to 1 755 MHz (LTE B4) 824 MHz to 849 MHz (LTE B5) 2 496 MHz to 2 570 MHz (LTE B7) 699 MHz to 716 MHz (LTE B12) 777 MHz to 787 MHz (LTE B13) 704 MHz to 716 MHz (LTE B17) 1 850 MHz to 1 915 MHz (LTE B25) 814 MHz to 849 MHz (LTE B26) 2 496 MHz to 2 690 MHz (LTE B41) 3 550 MHz to 3 700 MHz (LTE B48) 1 710 MHz to 1 780 MHz (LTE B66) 663 MHz to 698 MHz (LTE B71) 2 402 MHz to 2 480 MHz (Bluetooth) 2 412 MHz to 2 462 MHz (WiFi 2.4 GHz)

	5 180 MHz to 5 240 MHz (WiFi 5 GHz_UNII 1) 5 260 MHz to 5 320 MHz (WiFi 5 GHz_UNII 2A) 5 500 MHz to 5 720 MHz (WiFi 5 GHz_UNII 2C) 5 745 MHz to 5 825 MHz (WiFi 5 GHz_UNII 3)
<b>RX Frequency</b>	869.70 MHz to 893.31 MHz (CDMA BC0) 1 931.25 MHz to 1 988.75 MHz (CDMA BC1) 862.00 MHz to 894.00 MHz (CDMA BC10) 869.20 MHz to 893.80 MHz (GSM 850) 1 930.20 MHz to 1 989.80 MHz (GSM 1 900) 1 932.4 MHz to 1 987.6 MHz (WCDMA B2) 2 112.4 MHz to 2 152.6 MHz (WCDMA B4) 871.40 MHz to 891.60 MHz (WCDMA B5) 1 930 MHz to 1 990 MHz (LTE B2) 2 110 MHz to 2 155 MHz (LTE B4) 869 MHz to 894 MHz (LTE B5) 2 516 MHz to 2 690 MHz (LTE B7) 729 MHz to 746 MHz (LTE B12) 746 MHz to 756 MHz (LTE B13) 734 MHz to 746 MHz (LTE B17) 1 925 MHz to 1 990 MHz (LTE B25) 859 MHz to 894 MHz (LTE B26) 2 496 MHz to 2 690 MHz (LTE B41) 3 550 MHz to 3 700 MHz (LTE B48) 2 110 MHz to 2 200 MHz (LTE B66) 617 MHz to 652 MHz (LTE B71) 2 402 MHz to 2 480 MHz (Bluetooth) 2 412 MHz to 2 462 MHz (WiFi 2.4 GHz) 5 180 MHz to 5 240 MHz (WiFi 5 GHz_UNII 1) 5 260 MHz to 5 320 MHz (WiFi 5 GHz_UNII 2A) 5 500 MHz to 5 720 MHz (WiFi 5 GHz_UNII 2C) 5 745 MHz to 5 825 MHz (WiFi 5 GHz_UNII 3)

## 1.2 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Model Name	Serial Number	Manufacturer
EUT	LM-Q620WA	-	LG
Data Cable	EAD64746102	-	LUXSHARE
Data Cable	EAD64746105	-	KSD
Data Cable	EAD64746101	-	Ningbo Broad
Earphone	EAB63728251	-	CRESYN
Earphone	EAB63728252	-	BUJEON
Notebook PC	ProBook6560b	5CB2053MXF	HP
Notebook PC Adaptor	Series PPP009L-E	-	LITE-ON TECHNOLOGY
Gateway	DIR-806M	-	D-Link
Gateway Adaptor	AMS1-0501200FK	-	D-Link
Serial Mouse	Serial 2 Button mouse	02031069	Radio Shack
RJ45 cable	-	-	-
Micro SD card	SAMSUNG EVO+ microSDXC CLASS10 UHS- I (256 GB)	-	SAMSUNG

### 1.3 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
EUT	USB Type C	Y	Y	(P,D) 1.0
	Earphone	N/A	N	(D) 1.2
Notebook PC	RJ 45	N/A	N	(D) 1.6
	Serial(Mouse)	N/A	Y	(D) 1.8
	DC IN	N	N/A	(P) 1.8
Gateway	DC IN	N	N/A	(P) 1.8

NOTE. The marked "(D)" means the data cable and "(P)" means the power cable.

### 1.4 Noise Suppression Parts on Cable (I/O Cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
EUT	USB Type C	N	N/A	Y	Both End
	Earphone	N	N/A	Y	EUT End
Notebook PC	RJ 45	N	N/A	N	N/A
	Serial(Mouse)	N	N/A	Y	Notebook PC End



## 1.5 Test Facility

Test site is located at 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, South Korea. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4-2014. The Normalized site attenuations (30 MHz to 1 GHz) and Site validation (1 GHz to 18 GHz) were performed in accordance with the standard in ANSI C63.4-2014

Measurement Facilities	Designation No.
Radiated Field strength measurement facility 3 m Semi Anechoic chamber	KR0032
Radiated Field strength measurement facility 10 m Semi Anechoic chamber #1	
Radiated Field strength measurement facility 10 m Semi Anechoic chamber #2	
Filing the EMI Measurement Facility (3 m Semi Anechoic Chamber and Shielded Room)	IC 5944A-4
Filing the EMI Measurement Facility (10 m Semi-Anechoic Chamber)	IC 5944A-2

## 1.6 Calibration of Measuring Instrument

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturers recommendations for utilizing calibration equipment, which is traceable to recognized national standards. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5:2017

## 1.7 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty
Conducted Emission (0.15 MHz to 30 MHz)	1.8 dB
Radiated Emissions (30 MHz to 1 GHz)	4.8 dB
Radiated Emissions (1 GHz to 18 GHz)	5.4 dB
Radiated Emissions (18 GHz to 40 GHz)	5.7 dB

## 2. DESCRIPTION OF TEST

### 2.1 Measurement of Conducted Emission

The test procedure was in accordance with ANSI C63.4-2014, Clause 7.3

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN).  
If the EUT is connected to the PC through USB, the AC power-line adapter of the PC is directly connected to a line impedance stabilization network (LISN).  
Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both conducted lines are measured in Quasi-Peak and Average mode, including the worst-case data points for each tested configuration.
- c. The frequency range from 150 kHz to 30 MHz was searched.

#### Conducted Emission Limits

Frequency (MHz)	Resolution Bandwidth (kHz)	Class A		Class B	
		Quasi-Peak (dBμV)	Average (dBμV)	Quasi-Peak (dBμV)	Average (dBμV)
0.15 to 0.5	9	79	66	66 to 56*	56 to 46*
0.5 to 5	9	73	60	56	46
5 to 30	9	73	60	60	50

NOTE. Decreases with the logarithm of the frequency.

## 2.2 Measurement of Radiated Emission

The test procedure was in accordance with ANSI C63.4-2014, Clause 8.3

- The EUT was placed on the top of a turn table 0.8 meters above the ground at a semi-anechoic chamber.  
The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 m away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from 1 m to 4 m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 m to 4 m and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- The test-receiver system was set to Peak and Average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.  
(1 GHz to 40 GHz)

### Radiated Emission Limits


Frequency (MHz)	Class A			Class B		
	Antenna Distance (m)	Field Strength ( $\mu\text{V/m}$ )	Quasi-Peak (dB $\mu\text{V/m}$ )	Antenna Distance (m)	Field Strength ( $\mu\text{V/m}$ )	Quasi-Peak (dB $\mu\text{V/m}$ )
30 to 88	10	90	39.0	3	100	40.0
88 to 216	10	150	43.5	3	150	43.5
216 to 960	10	210	46.4	3	200	46.0
Above 960	10	300	49.5	3	500	54.0
Frequency (MHz)	Antenna Distance (m)	Class A		Class B		
		Peak (dB $\mu\text{V/m}$ )	Average (dB $\mu\text{V/m}$ )	Peak (dB $\mu\text{V/m}$ )	Average (dB $\mu\text{V/m}$ )	
Above 1 000	3	80	60	74	54	

### 2.2.1 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5th harmonic of the highest frequency or 40 GHz, whichever is lower

### 2.3 Configuration of Tested System

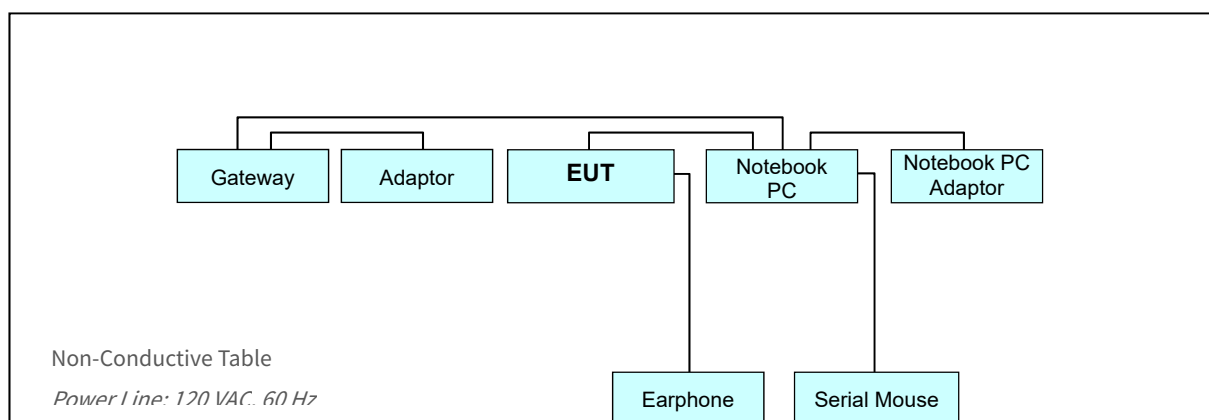

### 3. PRELIMINARY TEST

#### 3.1 Conducted Emission

It was tested the following operating mode, after connecting all peripheral devices.

**Operating Modes:** Data Communication mode

#### 3.2 Radiated Emission

It was tested the following operating mode, after connecting all peripheral devices.

**Operating Modes:** Data Communication mode

## 4. CONDUCTED EMISSION AND RADIATED EMISSION TEST SUMMARY

### 4.1 Conducted Emission

#### 4.1.1 Measuring instruments

	Type	Manufacturer	Model Name	Serial Number	Calibration Cycle	Calibration Date
<input checked="" type="checkbox"/>	EMI Test Receiver	Rohde & Schwarz	ESCI	100584	1 year	06.18.2019
<input checked="" type="checkbox"/>	LISN	Rohde & Schwarz	ENV216	102245	1 year	09.11.2019
<input checked="" type="checkbox"/>	LISN	Rohde & Schwarz	ENV216	100073	1 year	04.30.2019
<input checked="" type="checkbox"/>	Software	Rohde & Schwarz	EMC32	-	-	-


#### 4.1.2 Operating Condition

The test results of conducted emission at mains ports provide the following information:

Test Standard Used	FCC CFR 47 PART 15 Subpart B Class B ICES-003 Issue 6 Class B ANSI C63.4-2014
Detector	Quasi-Peak, CISPR-Average
Bandwidth	9 kHz (6 dB)
Operating Mode	Data Communication mode
Worst Case of Data Cable / Earphone	LUXSHARE (EAD64746102) / CRESYN (EAB63728251)
Kind of Test Site	Shielded Room
Temperature	25.6 °C
Relative Humidity	46.2 %
Test Date	September 16, 2019

### 4.1.3 Measuring Data

Figure 1: Conducted Emission, AC Main Port, Line (L1)

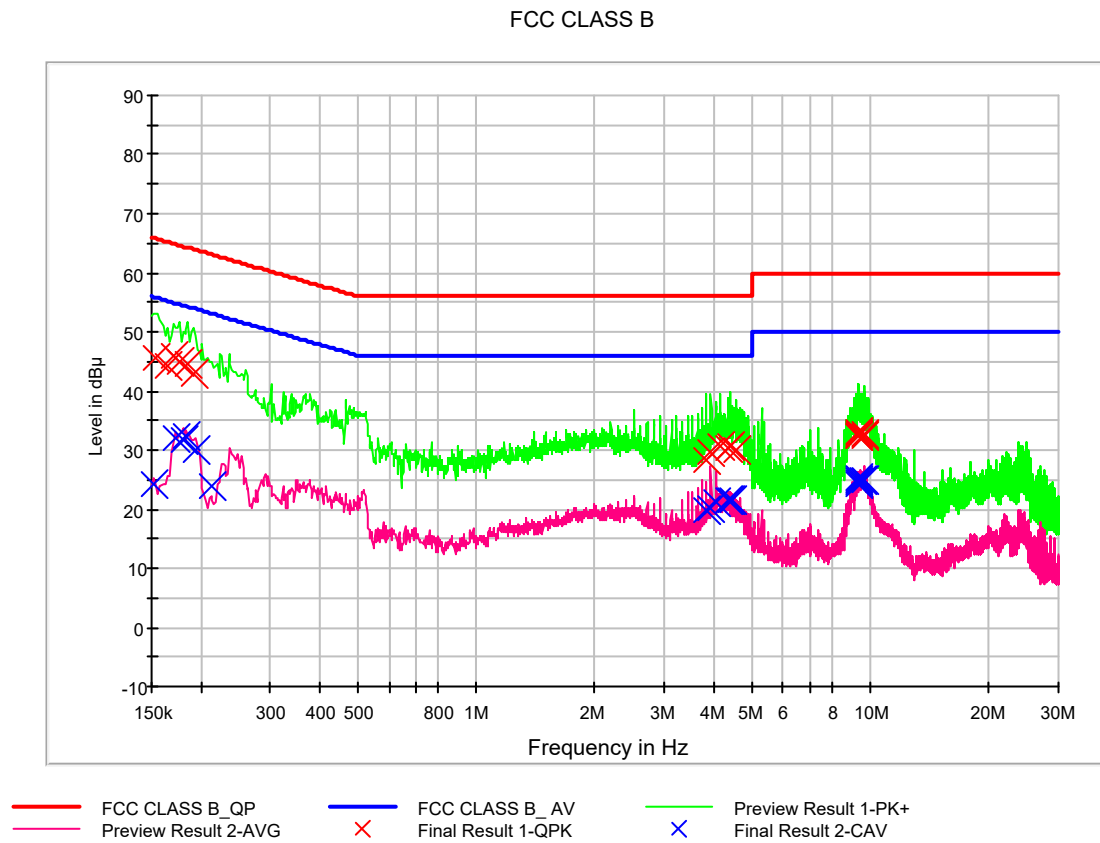



## QuasiPeak Final Result, Line (L1)

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.154000	45.7	9.000	L1	9.7	20.1	65.8
0.164000	44.2	9.000	L1	9.7	21.0	65.3
0.170000	45.9	9.000	L1	9.7	19.1	65.0
0.176000	45.0	9.000	L1	9.7	19.7	64.7
0.186000	44.6	9.000	L1	9.7	19.6	64.2
0.192000	42.9	9.000	L1	9.7	21.1	63.9
3.842000	28.3	9.000	L1	9.8	27.7	56.0
3.942000	29.5	9.000	L1	9.8	26.5	56.0
4.148000	30.5	9.000	L1	9.8	25.5	56.0
4.352000	30.5	9.000	L1	9.8	25.5	56.0
4.388000	30.7	9.000	L1	9.8	25.3	56.0
4.550000	29.9	9.000	L1	9.9	26.1	56.0
9.282000	32.2	9.000	L1	10.0	27.8	60.0
9.314000	32.8	9.000	L1	10.0	27.2	60.0
9.338000	32.9	9.000	L1	10.0	27.1	60.0
9.348000	32.4	9.000	L1	10.0	27.6	60.0
9.622000	32.7	9.000	L1	10.0	27.3	60.0
9.642000	32.4	9.000	L1	10.0	27.6	60.0


## Calculation Formula:

1. Conductor L1 = Hot, Conductor N = Neutral
2. Corr. = LISN Factor + Cable Loss
3. QuasiPeak or CAverage= Receiver Reading + Corr.
4. Margin = Limit – QuasiPeak or CAverage

## CAverage Final Result, Line (L1)

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.152000	24.4	9.000	L1	9.7	31.5	55.9
0.172000	32.1	9.000	L1	9.7	22.8	54.9
0.180000	31.8	9.000	L1	9.7	22.7	54.5
0.184000	32.5	9.000	L1	9.7	21.8	54.3
0.194000	30.1	9.000	L1	9.7	23.8	53.9
0.212000	24.0	9.000	L1	9.7	29.1	53.1
3.840000	19.9	9.000	L1	9.8	26.1	46.0
3.942000	20.1	9.000	L1	9.8	25.9	46.0
4.044000	21.0	9.000	L1	9.8	25.0	46.0
4.352000	21.5	9.000	L1	9.8	24.5	46.0
4.388000	21.7	9.000	L1	9.8	24.3	46.0
4.472000	21.4	9.000	L1	9.8	24.6	46.0
9.286000	24.2	9.000	L1	10.0	25.8	50.0
9.312000	25.1	9.000	L1	10.0	24.9	50.0
9.334000	24.4	9.000	L1	10.0	25.6	50.0
9.338000	24.9	9.000	L1	10.0	25.1	50.0
9.500000	25.0	9.000	L1	10.0	25.0	50.0
9.622000	24.7	9.000	L1	10.0	25.3	50.0

Figure 2: Conducted Emission, AC Main Port, Line (N)

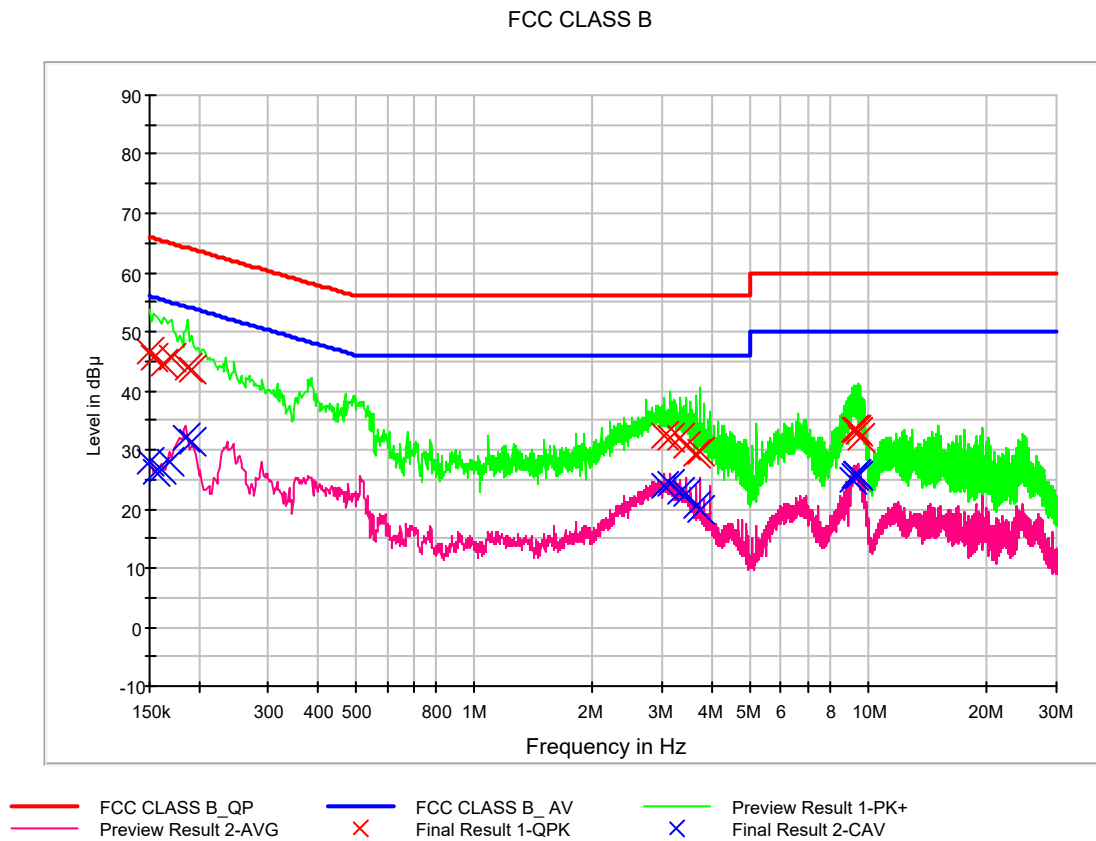

## QuasiPeak Final Result, Line (N)

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	46.6	9.000	N	9.7	19.4	66.0
0.154000	45.7	9.000	N	9.7	20.1	65.8
0.162000	44.7	9.000	N	9.7	20.7	65.4
0.170000	45.5	9.000	N	9.7	19.5	65.0
0.188000	43.8	9.000	N	9.7	20.3	64.1
0.192000	43.7	9.000	N	9.7	20.3	63.9
3.026000	32.2	9.000	N	9.8	23.8	56.0
3.128000	32.2	9.000	N	9.8	23.8	56.0
3.332000	32.0	9.000	N	9.8	24.0	56.0
3.434000	30.8	9.000	N	9.8	25.2	56.0
3.644000	29.3	9.000	N	9.8	26.7	56.0
3.742000	29.5	9.000	N	9.8	26.5	56.0
9.198000	33.3	9.000	N	10.0	26.7	60.0
9.258000	33.4	9.000	N	10.0	26.6	60.0
9.270000	33.4	9.000	N	10.0	26.6	60.0
9.296000	33.3	9.000	N	10.0	26.7	60.0
9.398000	33.2	9.000	N	10.0	26.8	60.0
9.502000	32.0	9.000	N	10.0	28.0	60.0

CAverage Final Result, Line (N)

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	28.0	9.000	N	9.7	28.0	56.0
0.156000	26.3	9.000	N	9.7	29.3	55.7
0.160000	26.6	9.000	N	9.7	28.8	55.5
0.168000	27.9	9.000	N	9.7	27.2	55.1
0.186000	32.1	9.000	N	9.7	22.1	54.2
0.192000	31.4	9.000	N	9.7	22.5	53.9
3.026000	23.8	9.000	N	9.8	22.2	46.0
3.128000	24.1	9.000	N	9.8	21.9	46.0
3.332000	23.0	9.000	N	9.8	23.0	46.0
3.434000	22.4	9.000	N	9.8	23.6	46.0
3.644000	20.4	9.000	N	9.8	25.6	46.0
3.742000	20.0	9.000	N	9.8	26.0	46.0
9.090000	25.1	9.000	N	10.0	24.9	50.0
9.198000	25.6	9.000	N	10.0	24.4	50.0
9.270000	25.9	9.000	N	10.0	24.1	50.0
9.278000	26.0	9.000	N	10.0	24.0	50.0
9.296000	25.9	9.000	N	10.0	24.1	50.0
9.398000	25.5	9.000	N	10.0	24.5	50.0

## 4.2 Radiated Emission Below 1 GHz

### 4.2.1 Measuring instruments

	Type	Manufacturer	Model Name	Serial Number	Calibration Cycle	Calibration Date
<input checked="" type="checkbox"/>	EMI test receiver	Rohde & Schwarz	ESU40	100524	1 year	05.17.2019
<input checked="" type="checkbox"/>	Trilog antenna	Schwarzbeck	VULB 9168	255	2 year	03.26.2019
<input checked="" type="checkbox"/>	Antenna master	INNCO Systems	MA4640-XP-ET	-	N/A	-
<input checked="" type="checkbox"/>	Antenna master controller	INNCO Systems	CO 3000	CO3000/870/ 35990515/L	N/A	-
<input checked="" type="checkbox"/>	Turn Table	INNCO Systems	1060	-	N/A	-
<input checked="" type="checkbox"/>	Turn table controller	INNCO Systems	CO2000	CO2000/095/ 7590304/L	N/A	-
<input checked="" type="checkbox"/>	Software	Rohde & Schwarz	EMC32	-	-	-

### 4.2.2 Operating Condition

The test results of radiated emission provide the following information:

<b>Used Test Standard</b>	FCC CFR 47 PART 15 Subpart B Class B ICES-003 Issue 6 Class B ANSI C63.4-2014
<b>Detector</b>	Quasi-Peak
<b>Bandwidth</b>	120 kHz (6 dB)
<b>Operating Mode</b>	Data Communication mode
<b>Worst Case of Data Cable / Earphone</b>	LUXSHARE (EAD64746102) / CRESYN (EAB63728251)
<b>Kind of Test Site</b>	3 m semi anechoic chamber
<b>Temperature</b>	23.3 °C
<b>Relative Humidity</b>	41.9 %
<b>Test Date</b>	September 06, 2019

### 4.2.3 Measuring Data

Frequency (MHz)	Quasi Peak (dBμV/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
30.081600	25.3	100.0	V	125.0	18.3	14.7	40.0
82.028800	31.4	199.8	H	107.0	15.5	8.6	40.0
133.261600	31.2	100.0	V	140.0	18.5	12.3	43.5
186.708800	32.1	192.7	H	99.0	17.8	11.4	43.5
265.573600	34.4	125.1	H	121.0	19.3	11.6	46.0
499.967200	31.1	174.8	H	62.0	25.3	14.9	46.0

#### - Calculation Formula:

1. POL. H = Horizontal, POL. V = Vertical
2. QuasiPeak = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor + Cable Loss
4. Margin = Limit - QuasiPeak

### 4.3 Radiated Emission Above 1 GHz

#### 4.3.1 Measuring instruments

	Type	Manufacturer	Model Name	Serial Number	Calibration Cycle	Calibration Date
<input checked="" type="checkbox"/>	EMI test receiver	Rohde & Schwarz	ESU40	100524	1 year	05.17.2019
<input checked="" type="checkbox"/>	Antenna master	INNCO Systems	MA4640-XP-ET	-	N/A	-
<input checked="" type="checkbox"/>	Antenna master controller	INNCO Systems	CO3000	CO3000/870/ 35990515/L	N/A	-
<input checked="" type="checkbox"/>	Turn table	INNCO Systems	1060	-	N/A	-
<input checked="" type="checkbox"/>	Turn table controller	INNCO Systems	CO2000	CO2000/095/ 7590304/L	N/A	-
<input checked="" type="checkbox"/>	Low Noise amplifier	TESTEK	TK-PA18H	170034-L	1 year	03.04.2019
<input checked="" type="checkbox"/>	Horn antenna	Schwarzbeck	BBHA 9120D	01836	1 year	07.19.2019
<input checked="" type="checkbox"/>	Power Amplifier	TK-PA1840H	TESTEK	170030-L	1 year	12.17.2018
<input checked="" type="checkbox"/>	Horn Antenna	BBHA 9170	Schwarzbeck	BBHA9170 #786	2 year	12.05.2017
<input checked="" type="checkbox"/>	Software	Rohde & Schwarz	EMC32	-	-	-



#### 4.3.2 Operating Condition

The test results of radiated emission provide the following information:

Used Test Standard	FCC CFR 47 PART 15 Subpart B Class B ICES-003 Issue 6 Class B ANSI C63.4-2014
Detector	Peak mode: Peak (RBW: 1 MHz, VBW: 3 MHz) CISPR-Average mode: Peak (RBW: 1 MHz, VBW: 10 Hz)
Highest Frequency	5 825 MHz
Tested Frequency Range	1 GHz to 30 GHz
Operation Mode	Data Communication mode
Worst Case of Data Cable / Earphone	LUXSHARE (EAD64746102) / CRESYN (EAB63728251)
Kind of Test Site	3 m semi anechoic chamber
Temperature	22.1 °C
Relative Humidity	42.3 %
Test Date	September 10, 2019

### 4.3.3 Measuring Data

Frequency (MHz)	Peak (dBμV/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1330.085000	47.2	310.5	V	81.0	-26.3	26.8	74.0
1994.285000	51.7	113.3	V	50.0	-25.2	22.3	74.0
2660.130000	49.9	110.5	V	3.0	-22.6	24.1	74.0
4498.175000	42.8	150.0	V	12.0	-17.5	31.2	74.0
5982.470000	49.5	349.9	V	105.0	-14.7	24.5	74.0
9268.835000	47.6	245.6	V	165.0	-5.8	26.4	74.0

Frequency (MHz)	CAverage (dBμV/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1330.085000	22.9	310.5	V	81.0	-26.3	31.1	54.0
1994.285000	26.3	113.3	V	50.0	-25.2	27.7	54.0
2660.130000	23.5	110.5	V	3.0	-22.6	30.5	54.0
4498.175000	27.0	150.0	V	12.0	-17.5	27.0	54.0
5982.470000	31.4	349.9	V	105.0	-14.7	22.6	54.0
9268.835000	34.9	245.6	V	165.0	-5.8	19.1	54.0

#### - Calculation Formula:

1. POL. H = Horizontal, POL. V = Vertical
2. Peak or CAverage = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor+ Cable Loss –Amplifier Gain
4. Margin = Limit - Peak or CAverage

## 5. CONCLUSION

The data collected shows that the **Product Name: SMART PHONE, Model: LM-Q620WA** complies with §15.107 and §15.109 of the FCC rules and ICES-003 Issue 6 of the IC rules.

## 6. APPENDIX A. TEST SETUP PHOTO

Please refer to Appendix. A and test setup photo file no. as follows;

File No.	Date of Issue	Description
HCT-EM-1909-FI003-P	September 24, 2019	Initial Release

End of report