

**FCC  
Electromagnetic Compatibility  
Test Report**

**For**

**3M™ Model 7210 Digital SelfCheckä System**

**Safety and Security Systems Division  
Library Systems  
St. Paul, MN 55144-1000**

30 September, 2002

Report Number F0702003

Prepared By:

CR-SEMS Product Safety  
Building 76-1-01  
410 East Fillmore Avenue  
St. Paul, Minnesota 55144-1000

3M Product Safety 3M Center Building 76-1-01 St. Paul MN 55144-1000	Phone: 651 778 6279 Fax: 651 778 6252 E-mail: <a href="mailto:rdkuhn1@mmm.com">rdkuhn1@mmm.com</a>	<b>3</b> EMC Laboratory
--	--	-------------------------------

## CERTIFICATE OF COMPLIANCE

### USA STANDARD 47 CODE OF FEDERAL REGULATIONS

**Radiated Emissions (FCC Part 15, Subpart B, Class A)**  
**Conducted Emissions (FCC Part 15, Subpart B, Class A)**  
**Radiated Emissions (FCC Part 15, Subpart C)**  
**Conducted Emissions (FCC Part 15, Subpart C)**

MANUFACTURER'S NAME:	3M Company Safety and Security Systems Division Library Systems St. Paul, MN 55144-1000
NAME OF EQUIPMENT:	Digital SelfCheck™ System
MODEL NUMBER:	7210
SERIAL NUMBER	6210351
TEST REPORT NUMBER:	F0702003
DATE:	30 September, 2002

As the responsible EMC Project Engineer, I hereby declare that the equipment tested, as specified in the test report, at the 3M Product Safety EMC Laboratory is in compliance with 47 CFR, Part 15, Subpart B and Subpart C. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

---

Roger D. Kuhn  
EMC Test Engineer

3	Model 7210 Digital SelfCheck™ System	Report: F0702003	3
EMC Laboratory	Product Safety	30 September, 2002	Page 3 of 45

## TABLE OF CONTENTS

Title Page

Certificate of Compliance

Table of Contents

1.0 Test Summary

2.0 Introduction

2.1 Scope

2.2 EUT Description and Operation

2.3 Block Diagram

2.4 Part List

2.5 Modifications to EUT

2.6 Measurement Uncertainty

3.0 Applicable Documents

4.0 Conducted Emissions

4.1 Test Procedure

4.2 Test Criteria

4.3 Test Results

5.0 Radiated Emissions

5.1 Frequency Stability

5.1.1 Test Procedure

5.1.2 Test Criteria

5.1.3 Test Results

5.2 Emissions Bandwidth

5.2.1 Test Procedure

5.2.2 Test Criteria

5.2.3 Test Results

5.3 Spurious Emissions (12.5 to 30 MHz.)

5.3.1 Test Procedure

5.3.2 Test Criteria

5.3.3 Test Results

5.4 Radiated Emissions (30 to 40000 MHz.)

5.4.1 Test Procedure

5.4.2 Test Criteria

5.4.3 Test Results

6.0 List of Test Equipment

7.0 Labeling Information

Appendix A Conducted Emissions Test Data

Appendix B Emissions Bandwidth Test Data

Appendix C Spurious Emissions Test Data

Appendix D Radiated Emissions Test Data

Appendix E Test Photographs

3	Model 7210 Digital SelfCheck™ System	Report: F0702003	3
EMC Laboratory	Product Safety	30 September, 2002	Page 4 of 45

## 1.0 TEST SUMMARY

Test Report Number: F0702003

Requester: Ed Goff

Company: 3M  
Safety and Security Systems Division  
Library Systems  
Building 209  
St. Paul, MN 55144

Telephone Number: 651 – 737-4736

Test Dates: August 22 through September 20, 2002

Equipment Under Test Model 7210 Digital SelfCheck™ System

Date Of Receipt: August 22, 2002

Test Environment Temperature: 20 to 30 degrees C  
Relative Humidity: 30 to 70 % RH

Test Results: Passed the following tests:  
Conducted Emissions: FCC Part 15 Subpart B Class A;  
Radiated Emissions: FCC Part 15 Subpart B Class A;  
Conducted Emissions: FCC Part 15 Subpart C;  
Radiated Emissions: FCC Part 15 Subpart C;

Modifications: Modifications were required (See Paragraph 2.5)

Test Location: 3M Product Safety EMC Laboratory  
Building 76  
410 Fillmore Ave.  
St. Paul, MN 55144-1000

3	Model 7210 Digital SelfCheck™ System	Report: F0702003	3
EMC Laboratory	Product Safety	30 September, 2002	Page 5 of 45

## 2.0 INTRODUCTION

### 2.1 Scope

This report contains results describing the conformance of the Equipment Under Test (EUT) to FCC Part 15, Subpart B, "Class A" rules for unintentional radiators and FCC Part 15, Subpart C rules for intentional radiators.

This report is the confidential property of the client and applies only to the specific item tested under the stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics. This report shall not be reproduced without the written approval of the testing laboratory. When approval has been granted, the report shall be reproduced in its entirety.

The appropriate testing standards and references that were used are contained in Section 3.0. Worst case test data, test configuration, and photographs (worst case configuration) are provided in the Appendices. Equipment and documentation labeling information is contained in Section 7.0.

Subsequent tests are necessary from time to time on equipment taken at random from production. Re-testing of the EUT is also required when the EMC profile has been changed or is suspected of being changed.

The 3M Product Safety EMC Laboratory is recognized under the United States Department of Commerce National Institute of Standards and Technology's National Voluntary Laboratory Program (NVLAP) for satisfactory compliance with criteria established in Title 15, Part 285 Code of Federal Regulations. These criteria encompass the requirements of ISO/IEC Guide 25 and the relevant requirements of ISO 9002 (ANSI/ASQ Q92-1987) as suppliers of test results. Accreditation by the National Voluntary Laboratory Accreditation Program is awarded for specific services, listed on the Scope of Accreditation for: Electromagnetic Compatibility and Telecommunications, FCC, under Lab Code 200033. A complete copy of the Scope of Accreditation is available upon request. The FCC Site Registration Number is 93334.

The NVLAP accreditation or this test report does not in any way constitute or imply product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

3	Model 7210 Digital SelfCheck™ System	Report: F0702003	3
EMC Laboratory	Product Safety	30 September, 2002	Page 6 of 45

## 2.2 EUT Descriptions and Operation

The Equipment Under Test (EUT) is the 3M™ Model 7210 Digital SelfCheck™ System, Serial Number 6210351.

The 3M™ Model 7210 Digital SelfCheck™ System allows library patrons to check out and check in library items on their own. The system emulates the checkout and checkin procedures performed by a librarian.


The reader has a transmit frequency of 13.56 MHz. And a power output level of 0.400 watts (26 dBm) as measured into a 50 ohm load. This is factory preset.

The EUT has two integral antennas with areas of 42.45 square inches (0.028 square meters) and 96.66 square inches (0.064 square meters) that are poled alternately. The antennas are adhered to the back and bottom of the sense/desense coil cover of the EUT and are connected to the reader via a coax cables and the switchboard, which employ SMC connectors.

All tests were made using an input of 120 V RMS, 60 Hz, and single-phase power. The EUT was tested with an EMC programs exercising all functions. The Reader was set to the fastest read time and was reading tags during all testing.

3	Model 7210 Digital SelfCheck™ System	Report: F0702003	3
EMC Laboratory	Product Safety	30 September, 2002	Page 7 of 45

## 2.3 Block Diagram

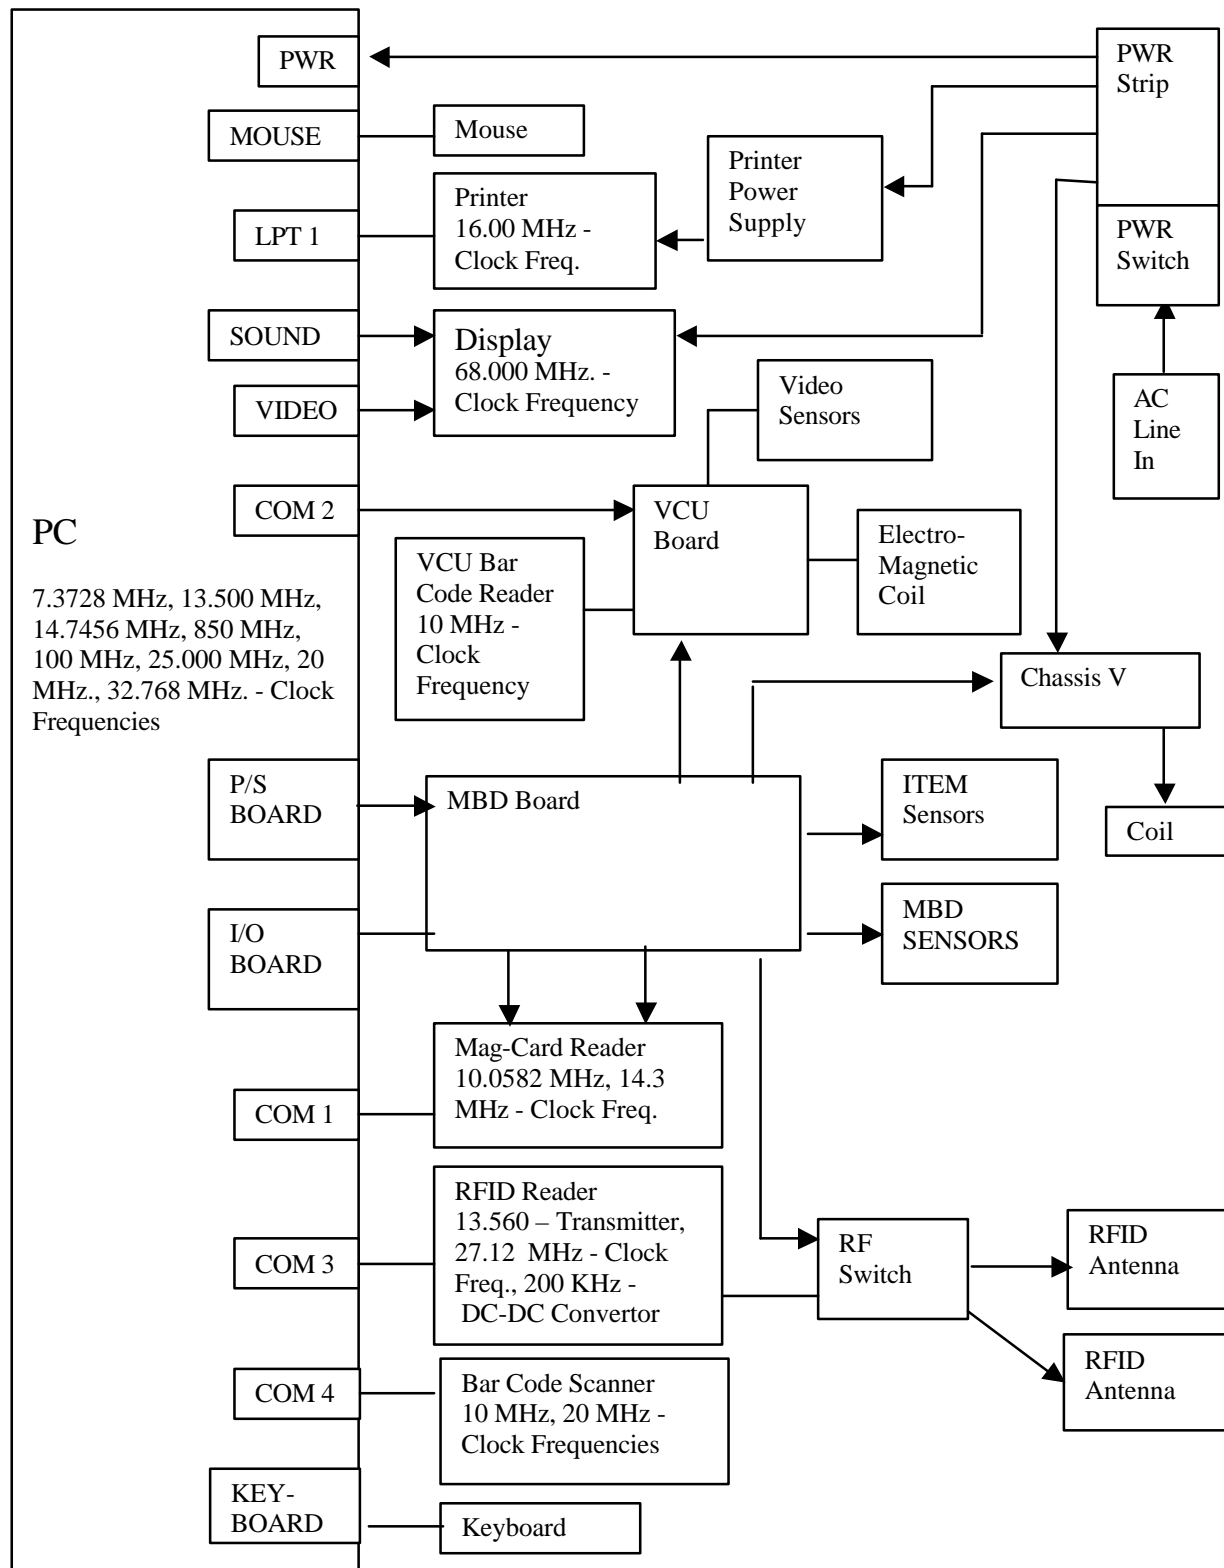

3	Model 7210 Digital SelfCheck™ System	Report: F0702003	3
EMC Laboratory	Product Safety	30 September, 2002	Page 8 of 45

## 2.4 Parts List

<u>Description</u>	<u>Manufacturer</u>	<u>Model / Type</u>	<u>Remark</u>
Computer (SBC)	SBS Micro Alliance Inc	200-S0076CA CA Rev. 4	78-8123-7443-3
Network Board			Integrated into SBC
Dual Port Serial I/O Board	Blastronix	232/2s-PCI-SBS	
Sound Board			Integrated into SBC
Video Board			Integrated into SBC
Sensor Board Driver	Blue Chip Technologies	PI048	
Mouse	Logitech	M-CAA42	FCC ID DZL211146
External Power Supply	Astec	LPT65	
Printer	3M	MTP-3	
Display	Phillips Consumer Electronics Comp.	150P3	FCC Declaration - Class B
Video Sensors	3M	78-8118-7572-9	
Video Bar Code Reader	Opticom, Inc.	2126	
VCU Board	3M	78-8118-7249-4	
Electro-magnetic Coil	Mag-Com	MC73270	



3	Model 7210 Digital SelfCheck™ System	Report: F0702003	3
EMC Laboratory	Product Safety	30 September, 2002	Page 9 of 45

Electronics Chassis V	3M	78-8118-7380-7	
Coil	3M	78-8118-7399-7	
MBD	3M	78-8121-0948-2	
Item Sensors	3M 3M	78-8118-7662-8 78-8121-0792-0	
MDB Sensors	3M 3M	78-8118-7661-0 78-8121-0793-2	
Mag-Card Reader	Neuron	932N-2R-5002	
RFID Reader	3M	Model 700	
RF Switch	3M	78-8123-1529-5	
Antenna (Upper)	3M	78-8121-0937-5	
Antenna (Lower)	3M	78-8121-0938-3	
Bar Code Scanner	Accu-Sort Systems	22	
Keyboard <sup>1</sup>	Ortek Technology	MCK-600W	FCC ID KJXMCK-701W

1 - This is used to set up the EUT or for servicing, not attached during normal operation.

3	Model 7210 Digital SelfCheck™ System	Report: F0702003	3
EMC Laboratory	Product Safety	30 September, 2002	Page 10 of 45

## 2.5 Modifications to the EUT

The following EMC modifications of the EUT were necessary to meet the emission requirements of the test standards (see modification photographs in Appendix C):

<u>Equipment</u>	<u>Modifications</u>	<u>Where</u>	<u>Material</u>	<u>Turns</u>
Printer Cable	Common Mode Choke	At the computer - LPT1	Steward 28B2024-0A0	1 Turns
Printer Cable	Common Mode Choke	At the printer	Steward 28B2029-0A0	1 Turns
Flat Cable	Common Mode Choke	At the computer – COM2	Steward 28B2029-0A0	3 Turns
Mouse/Keyboard “Y” Cable	Common Mode Choke	At the computer – Common Lead	Steward 28B1225-000	2 Turns
Ethernet Cable	Common Mode Choke	At the computer	Steward 28B2029-0A0	2 Turns
Power Supply Board Cable	Common Mode Choke	At the computer	Steward 28B2025-0A0	1 Turns
Scanner Cable	Common Mode Choke	At the Computer – COM4	Steward 28B2029-0A0	1 Turns
VCU Scanner Cable	Common Mode Choke	At the VCU	Steward 28B2025-0A0	1 Turns
Reader Power Cable	Common Mode Choke	At the Reader	Steward 28B2024-0A0	1 Turns
Reader RS232 Cable	Common Mode Choke	At the Reader	Steward 28B2024-0A0	2 Turns
Keyboard Cable	Common Mode Choke	At the PS Interface Board X2 End	Steward 28B2029-0A0	3 Turns
50 Pin Flat Cable	Common Mode Choke	At the PS Interface Board – X22	Steward 28S2011-000	1 Turns

3	Model 7210 Digital SelfCheck™ System	Report: F0702003	3
EMC Laboratory	Product Safety	30 September, 2002	Page 11 of 45

50 Pin Cable

Shield is  
grounded at the  
Computer and  
at the bulkhead

Sensor Cable

Common Mode  
Choke

At the Interface  
Board – P1

Steward  
28B2029-0A0

1 Turns

Sensor Cable

Common Mode  
Choke

At the Front Side  
of the Bulkhead

Steward  
28B2029-0A0

1 Turns

3	Model 7210 Digital SelfCheck™ System	Report: F0702003	3
EMC Laboratory	Product Safety	30 September, 2002	Page 12 of 45

## 2.6 Measurement Uncertainty

The data and test results referenced in this report are true and accurate. However, there may be deviations within the calibration limits of the test equipment and facilities that can account for a nominal measurement deviation of  $\pm 2$  dB. Furthermore, EUT component and manufacturing process variables may result in additional deviation. The calculated confidence level is 95 %.

## 3.0 APPLICABLE DOCUMENTS

The following documents were used as reference for the limits and test procedures specified herein.

CFR 47	Part 15 Radio Frequency Devices	2002
ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 KHz to 40 GHz.	2000
CISPR 16-1	Specification for radio disturbance and immunity measuring apparatus and methods Part 1: Radio disturbance and immunity measuring apparatus	1998
CISPR 16-2	Specification for radio disturbance and immunity measuring apparatus and methods Part 2: Methods of measurements of disturbances and immunity	1996

3	Model 7210 Digital SelfCheck™ System	Report: F0702003	3
EMC Laboratory	Product Safety	30 September, 2002	Page 13 of 45

## 4.0 CONDUCTED EMISSIONS

Conducted emissions testing was performed in accordance with ANSI C63.4. The limits are prescribed in FCC Part 15, Subpart B and in FCC Part 15, Subpart C.

### 4.1 Test Procedure

The EUT was placed in a shielded chamber for the tests and tested while exercising all functions with a dummy load attached to the Reader output terminal (See ANSI C63.4-1992 Paragraph 13.1.3.1).

A Line Impedance Stabilization Network (LISN) with a 50 Ohm / 50 micro Henry characteristic impedance was used to isolate the EUT and give accurate and repeatable readings. An EMI test receiver was used for the emissions measurements in the range from 450 KHz to 30 MHz. Initial sweep measurements were taken with the receiver in continuous frequency overview mode utilizing peak level signal detection. Acceptance analysis was performed on the initial measurements to determine which discrete frequencies to maximize. These frequencies were remeasured utilizing quasi-peak detection. Measurement results were automatically calculated via software running the EMI receiver. The final quasi-peak measurements recorded were determined by the following formula:

Result (dB $\mu$ V) = receiver reading (dB $\mu$ V) + LISN CF (dB) + cable loss (dB)

### 4.2 Test Criteria

The FCC Part 15, Subpart B, "Class A" conducted limits are given below.

<u>Frequency</u> (MHz)	<u>Limit</u> Quasi-Peak (dB $\mu$ V)
0.450 to 1.705	60.00
1.705 to 30.00	69.54

The FCC Part 15, Subpart C conducted limits are given below.

<u>Frequency</u> (MHz)	<u>Limit</u> Quasi-Peak (dB $\mu$ V)
0.450 to 30.00	47.96

The lower limit shall apply at the transition frequency.

3	Model 7210 Digital SelfCheck™ System	Report: F0702003	3
EMC Laboratory	Product Safety	30 September, 2002	Page 14 of 45

### 4.3 Test Results

The EUT met conducted emission requirements for FCC Part 15, Subpart B, "Class A" and met FCC Part 15, Subpart C. All the conducted emissions test data is shown in Appendix A. The worst-case peak and quasi-peak emissions were as follows:

<u>Frequency</u> <u>(MHz)</u>	<u>Limit</u> <u>(dBμV)</u>	<u>L1 - Line</u> <u>Q-P (dBμV)</u>	<u>L2 - Neutral</u> <u>Q-P (dBμV)</u>	<u>Passing Margin</u> <u>(dB)</u>
5.074	47.96	44.5	44.3	3.46

FCC Part 15, Subpart C limit is shown.

3	Model 7210 Digital SelfCheck™ System	Report: F0702003	3
EMC Laboratory	Product Safety	30 September, 2002	Page 15 of 45

## 5.0 RADIATED EMISSIONS

Radiated emissions testing was performed in accordance with ANSI C63.4. The limits are prescribed in FCC Part 15, Subpart B and in FCC Part 15, Subpart C.

### 5.1 Frequency Stability

The Frequency Stability testing was performed in accordance with ANSI C63.4 and FCC Part 15 to insure that the intentional radiator frequency stability was within the allowable limits for input power and temperature variations.

#### 5.1.1 Test Procedure

The Frequency Stability was measured using the radiated signals from the EUT so that the measurement equipment would not load the radio frequency circuits. An EMI receiver was used for the frequency stability measurements. The Reader was put into a continuous output mode through instructions from the host computer (test mode of operation). 1) The frequency was measured while the input AC power to the External Power Supply was varied over the required input voltage range. 2) The frequency was also measured while the ambient air temperature was varied over the required ambient temperature range (at startup, 2 minutes, 5 minutes, and 10 minutes).

#### 5.1.2 Test Criteria

The FCC Part 15, Subpart C for Frequency Stability Limits versus Supply Voltage is given below.

<u>Carrier Frequency</u>	<u>Voltage Range</u>	<u>Max.Frequency Change</u>
<u>(MHz)</u>	<u>(% of Nominal Supply)</u>	<u>(%)</u>
13.56	85 % to 115 %, (102 to 138 V RMS)	+/- 0.01 %

The FCC Part 15, Subpart C for Frequency Stability Limits versus Temperature is given below.

<u>Carrier Frequency</u>	<u>Temperature Range</u>	<u>Max. Frequency Change</u>
<u>(MHz)</u>	<u>(degrees C)</u>	<u>(%)</u>
13.56	-20 to +50	+/- 0.01 %

3	Model 7210 Digital SelfCheck™ System	Report: F0702003	3
EMC Laboratory	Product Safety	30 September, 2002	Page 16 of 45

### 5.1.3 Test Results

The EUT met the FCC Part 15, Subpart C Frequency Stability requirement.

#### Carrier Frequency Stability versus Supply Voltage

<u>Carrier Frequency</u> <u>(MHz)</u>	<u>Lowest Frequency</u> <u>(MHz)</u>	<u>Highest Frequency</u> <u>(MHz)</u>	<u>Frequency Change</u> <u>(%)</u>
13.5601	13.5599	13.5602	+/- 0.0015 %

#### Carrier Frequency Stability versus Temperature

<u>Carrier Frequency</u> <u>(MHz)</u>	<u>Lowest Frequency</u> <u>(MHz)</u>	<u>Highest Frequency</u> <u>(MHz)</u>	<u>Frequency Change</u> <u>(%)</u>
13.5601	13.5599	13.5602	+/- 0.0015 %



3	Model 7210 Digital SelfCheck™ System	Report: F0702003	3
EMC Laboratory	Product Safety	30 September, 2002	Page 17 of 45

## 5.2 Emission Bandwidth

The EUT was placed in an anechoic chamber and the Emission Bandwidth testing was preformed in accordance with ANSI C63.4 and FCC Part 15, Paragraph 15.225. The Emission Bandwidth measurements were made to determine the intentional radiator frequency and determine the level of electromagnetic energy radiated at that frequency and at the band edges from the EUT.

### 5.2.1 Test Procedure

A measurement antenna (loop) was positioned at a distance of 5 meters (to insure far field measurements) from the center of the EUT. An EMI receiver was used for the emissions measurements. Initial sweep measurements were taken with the receiver in continuous frequency overview mode utilizing peak level signal detection. The intentional radiator frequency and band edge frequencies utilizing quasi-peak detection were then maximized. Maximizing a frequency involves finding the angle of the highest emission levels by rotating the EUT 360 degrees (sampling at least every 4 degrees). Then the antenna, which was fixed at 1-meter height, was rotated until the highest emissions levels found. Measurement results were automatically calculated via software running the EMI receiver. The final quasi-peak measurements recorded were determined by the following formula:

Result (dBμV/m) = receiver level (μV) + antenna factor (dB/m) + cable loss (dB) - preamp gain (dB) + lineal conversion (dB).

### 5.2.2 Test Criteria

The FCC Part 15 Subpart C, Paragraph 15.225 Carrier Frequency Limits are given below.

Lower Band Edge	Upper Band Edge
<u>(MHz)</u>	<u>(MHz)</u>
13.553	13.567

The FCC Part 15, Subpart C radiated limits are given below.

Frequency	Distance	Field Strength
<u>(MHz)</u>	<u>(m)</u>	<u>(dB μV/m)</u>
1.705 to 30.00	10	48.62
13.553 to 13.567	10	99.08

Note: A 40 dB/decade extrapolation factor was used per 15.31.

3	Model 7210 Digital SelfCheck™ System	Report: F0702003	3
EMC Laboratory	Product Safety	30 September, 2002	Page 18 of 45

### 5.2.3 Test Results

The EUT met the FCC Part 15, Subpart C Emission Bandwidth requirements. The intentional radiator frequency was within the allowed band and all maximized quasi-peak measurements for the EUT were below the quasi-peak limits. The test scan is shown in Appendix B.

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Passing Margin (dB)	Turntable (degrees)	Antenna Orientation/Angle (Polarity/degrees)
13.5602 <sup>1</sup>	64.3	99.08	34.78	0	Antenna was at +0 degrees from the X-axis.
13.553 <sup>2</sup>	34.0	48.62	12.62	0	Antenna was at +0 degrees from the X-axis.
13.567 <sup>2</sup>	33.8	48.62	12.82	0	Antenna was at +0 degrees from the X-axis.

1 - Intentional Radiator Frequency

2 - Band edges measured with a receiver bandwidth setting of 1 KHz. Per ANSI C63.4 Paragraph 13.1.7.

3	Model 7210 Digital SelfCheck™ System	Report: F0702003	3
EMC Laboratory	Product Safety	30 September, 2002	Page 19 of 45

### 5.3 Spurious Emissions (12.5 to 30 MHz.)

The EUT was placed in an anechoic chamber and the Spurious Emissions testing was preformed in accordance with ANSI C63.4 and FCC Part 15, Subpart C. The Spurious Emission measurements were made to determine the level of electromagnetic energy radiated from the EUT.

#### 5.3.1 Test Procedure

A measurement antenna (loop) was positioned at a distance of 5 meters (to insure far field measurements) from the center of the EUT. An EMI receiver was used for the emissions measurements. Initial sweep measurements were taken with the receiver in continuous frequency overview mode utilizing peak level signal detection. Acceptance analysis of these sweeps was used to determine which discrete frequencies, other than the intentional radiator frequency and band edge frequencies, were to be maximized. Maximizing a frequency involves finding the angle of the highest emission levels by rotating the EUT 360 degrees (sampling at least every 4 degrees). Then the antenna, which was fixed at 1-meter height, was rotated until the highest emissions levels found. Final measurements were taken utilizing quasi-peak detection. Measurement results were automatically calculated via software running the EMI receiver. The final measurements recorded were determined by the following formula:

Result (dBμV/m) = receiver level (μV) + antenna factor (dB/m) + cable loss (dB) - preamp gain (dB) + lineal conversion (dB).

#### 5.2.2 Test Criteria

The FCC Part 15, Subpart C radiated limits are given below.

Frequency (MHz)	Distance (m)	Field Strength (dB μV/m)
1.705 to 30.00	10	48.62
13.553 to 13.567	10	99.08

Note: A 40 dB/decade extrapolation factor was used per 15.31.

3	Model 7210 Digital SelfCheck™ System	Report: F0702003	3
EMC Laboratory	Product Safety	30 September, 2002	Page 20 of 45

### 5.3.3 Test Results

The EUT met the FCC Part 15, Subpart C Spurious Emissions (12.5 to 30 MHz.) requirements. All maximized quasi-peak measurements for the EUT were below the quasi-peak limits. Test data is shown in Appendix C. The worst-case quasi-peak emission was as follows:

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Passing Margin (dB)	Turntable (degrees)	Antenna Orientation/Angle (Polarity/degrees)
13.5715	45.7	48.62	2.92	0	Antenna was at +0 degrees from the X-axis.

3	Model 7210 Digital SelfCheck™ System	Report: F0702003	3
EMC Laboratory	Product Safety	30 September, 2002	Page 21 of 45

## 5.4 Radiated Emissions (30 to 40000 MHz)

The EUT was placed in an anechoic chamber and the Spurious Emissions testing was performed in accordance with ANSI C63.4, FCC Part 15, Subpart B "Class A", and FCC Part 15, Subpart C. The Radiated Emission measurements were made to determine the level of electromagnetic energy radiated from the EUT.

### 5.4.1 Test Procedure

A measurement antenna was positioned at a distance of 3 meters from the center of the EUT. An EMI receiver was used for the emissions measurements in the range of 30 MHz to 2000 MHz (the upper limit of measurement is determined by Paragraph 15.33). Initial sweep measurements were taken with the receiver in continuous frequency overview mode utilizing peak level signal detection. Acceptance analysis of these sweeps was made to determine which discrete frequencies were to be maximized. Maximizing a frequency involves finding the angle of the highest emission levels by rotating the EUT 360 degrees (sampling at least every 4 degrees) and varying antenna height between 1 and 4 meters at the angle of highest emissions levels found. Final measurements were taken utilizing quasi-peak detection (peak and average detectors were used above 1000 MHz). Measurement results were automatically calculated via software running the EMI receiver. The final measurements recorded were determined by the following formula:

Result (dBμV/m) = receiver level (μV) + antenna factor (dB/m) + cable loss (dB) - preamp gain (dB) + lineal conversion (dB).

### 5.4.2 Test Criteria

The FCC Part 15, Subpart C radiated limits are given below.

Frequency (MHz)	Distance (m)	Field Strength (dB μV/m)
30 to 88	10	29.54
88 to 216	10	33.06
216 to 960	10	35.56
960 to 40000	10	43.52

3	Model 7210 Digital SelfCheck™ System	Report: F0702003	3
EMC Laboratory	Product Safety	30 September, 2002	Page 22 of 45

The FCC Part 15, Subpart B, "Class A" radiated limits are given below. The lower limit shall apply at the transition frequency.

Frequency (MHz)	Distance (m)	Field Strength (dB µV/m)
30 to 88	10	39.08
88 to 216	10	43.52
216 to 960	10	46.44
960 to 1000	10	49.54
1000 to 40000	3	59.5 and 79.5*

\* Per 15.35(B)

### 5.34.3 Test Results

The EUT met the FCC Part 15, Subpart C and the FCC Part 15, Subpart B, "Class A" Radiated Emissions (30 to 40000MHz.) requirements. All maximized quasi-peak measurements for the EUT were below the quasi-peak limits. Test data is shown in Appendix D. The worst-case quasi-peak emission was as follows:

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Passing Margin (dB)	Turntable (degrees)	Antenna (Meters/Polarity)
691.54	32.2	35.56 <sup>1</sup>	3.36	0	1.0/H
299.91	31.0	46.44	15.44	95	2.0/V

1 - This is a harmonic of the intentional radiator; therefore the lower limit level (FCC Part 15 Subpart C) is shown.

3	Model 7210 Digital SelfCheck™ System	Report: F0702003	3
EMC Laboratory	Product Safety	30 September, 2002	Page 23 of 45

## **6.0 LIST OF TEST EQUIPMENT**

The following test equipment was used to perform the indicated tests. All of the test equipment was calibrated by an accredited calibration laboratory or by the manufacturer. All calibration intervals are one year. All equipment calibrations, test procedures, and the test facility are traceable to the standards of the National Institute of Standards and Technology (NIST). The test facility site attenuation verification results fall within the normalized site attenuation (NSA) criteria for open area test sites using volumetric measurements.

### **CONDUCTED EMISSIONS**

EMCO LISN, Model 3825-2, Serial No. 1039 (cal due date: 08 May 01)  
Solar High Pass Filter, Model 8131 - 5.0 (cal due date: 12 Mar 01)  
HP RF Limiter, Model 11867A, Serial No. 01211 (cal due date: 12 Mar 01)  
Rohde & Schwarz EMI Receiver, Model ESBI 52, S/N 835387/003 (cal due date: 04 May 01)  
Rohde & Schwarz EMI Receiver Display, Serial No. 835518/001 (cal due date: 04 May 01)  
Rohde & Schwarz ES-K1, ES-K2, & ES-K12 EMI Software, Version 1.50

### **Frequency Stability/Power Output**

Advantest Spectrum Analyzer, Model R3272A, Serial No. J00233 (cal due date: 28 July 00)  
Thermotron Environmental Chamber, Model SM-3SS, Serial No. 19972-S (cal due date: 17 June 00)

### **RADIATED EMISSIONS**

ElectroMetrics Large Loop Antenna. Model ALR25M, Serial No. 603 (cal due date: 08 May 01)  
EMCO Biconilog Antenna, Model 3143, Serial No. 1111 (cal due date: 08 May 01)  
HP Pre-Amplifier, Model 8447D, Serial No. 2944A08064 (cal due date: 09 May 01)  
HP RF Limiter, Model 11867A, Serial No. 01211 (cal due date: 12 Mar 01)  
Rohde & Schwarz EMI Receiver, Model ESBI 52, S/N 835387/003 (cal due date: 04 May 01)  
Rohde & Schwarz EMI Receiver Display, Serial No. 835518/001 (cal due date: 04 May 01)  
Rohde & Schwarz ES-K1, ES-K2, & ES-K12 EMI Software, Version 1.50

3	Model 7210 Digital SelfCheck™ System	Report: F0702003	3
EMC Laboratory	Product Safety	30 September, 2002	Page 24 of 45

## TEST FACILITY

Lindgren Semi-Anechoic Chamber, Model 11867A, serial No. 01211 (verification due date: 28 Apr 01)

The radiated and conducted emission measurements were performed in our Anechoic Chamber located at 3M Building 76, 410 Fillmore Street, St. Paul, MN. Details concerning the site are on file with the FCC laboratory Division in Columbia Maryland.

The Facility Registration Number is 93334, 31-March - 2000.



3	Model 7210 Digital SelfCheck™ System	Report: F0702003	3
EMC Laboratory	Product Safety	30 September, 2002	Page 25 of 45

## 7.0 LABELING INFORMATION

The FCC (Federal Communications Commission) requires the following labeling information. Since the equipment has intentional and unintentional radiators, it must be labeled as a digital device and as an intentional radiator.

### Labels on the Product

The following statement shall be placed in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC ID: \_\_\_\_\_

### Labels in the Manuals

The following statement shall be placed in a prominent location in the text of the user manual:

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide a reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

FCC ID: \_\_\_\_\_

NO MODIFICATIONS. Modifications to this device shall not be made without the written consent of 3M, Incorporated. Unauthorized modifications may void the authority granted under Federal Communications Commission Rules permitting the operation of this device.

3	Model 7210 Digital SelfCheck™ System	Report: F0702003	3
EMC Laboratory	Product Safety	30 September, 2002	Page 26 of 45

## Appendix A

### Conducted Emissions Test Data

# CONDUCTED EMISSIONS

**3**  
**EMC Lab**

SHEET 1 OF 1

TEST REPORT # 0702003

EUT MODEL # 7210

EUT SERIAL # 6210351

DESCRIPTION Digital Self Check



FREQUENCY (MHz)	PEAK (dB $\mu$ V)		QUASI-PEAK (dB $\mu$ V)				AVERAGE (dB $\mu$ V)			
	L1 Line	L2 Neutral	L1 Line	L2 Neutral	Limit	Passing Margin (dB)	L1 Line	L2 Neutral	Limit	Passing Margin (dB)
0.200	48.5	48.5	46.9	46.9						
0.2667	48.8	48.6	47.5	47.5						
0.3333	51.3	49.0	48.0	47.8			43.8	43.5		
1.2653	45.8	45.7	44.5	44.3	48.0	3.5				
2.7967	41.5	41.0	39.3	38.7	48.0	8.7				
4.1947	42.9	42.1	41.0	40.3	48.0	7.0				
5.0614	41.4	41.6	39.1	39.5	48.0	8.5				
21.4000	18.8	18.5	12.3	11.6	48.0	35.7				
25.041	35.1	34.2	29.3	27.0	48.0	18.7				

Test Engineer: \_\_\_\_\_

Date: 28 August 2002

Reviewed by: \_\_\_\_\_

Date: 30 September 2002

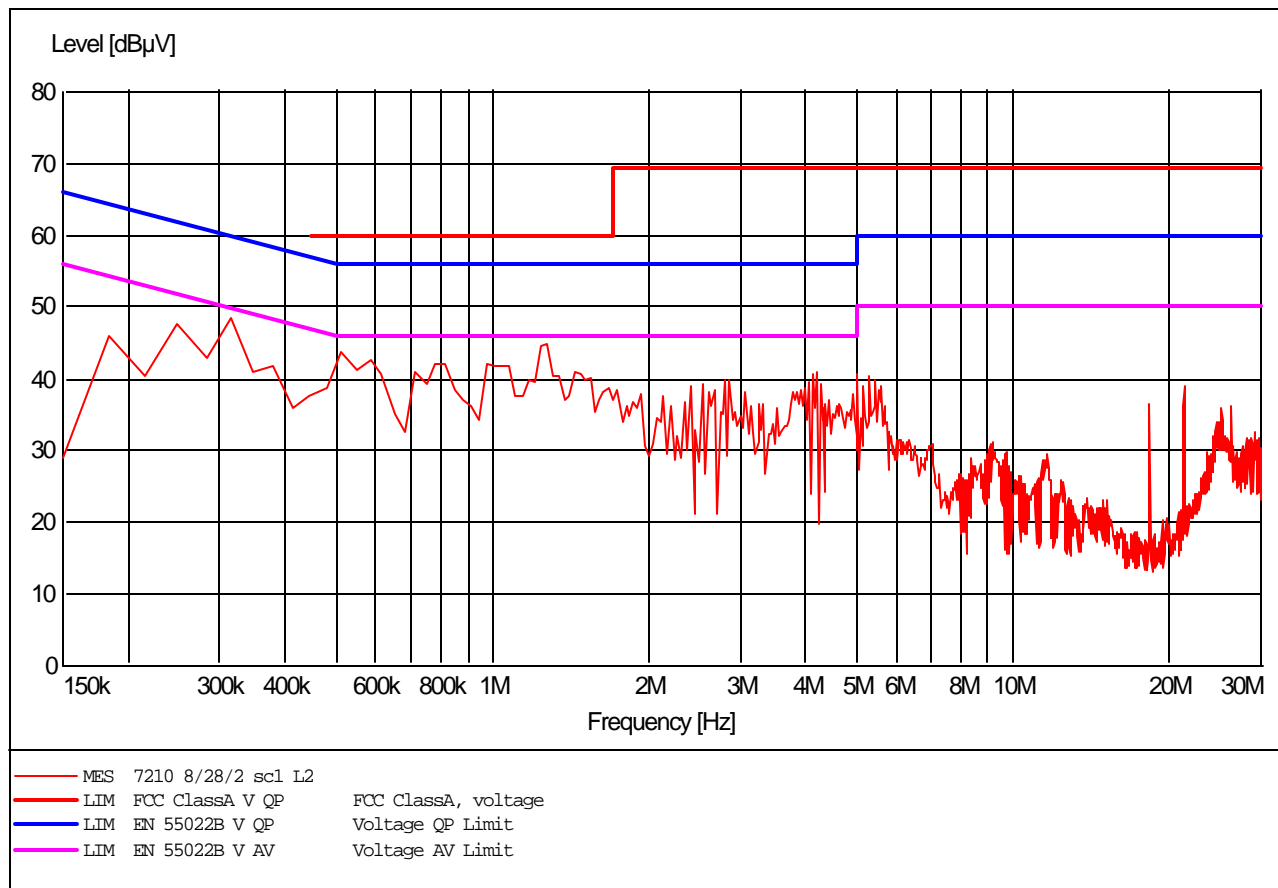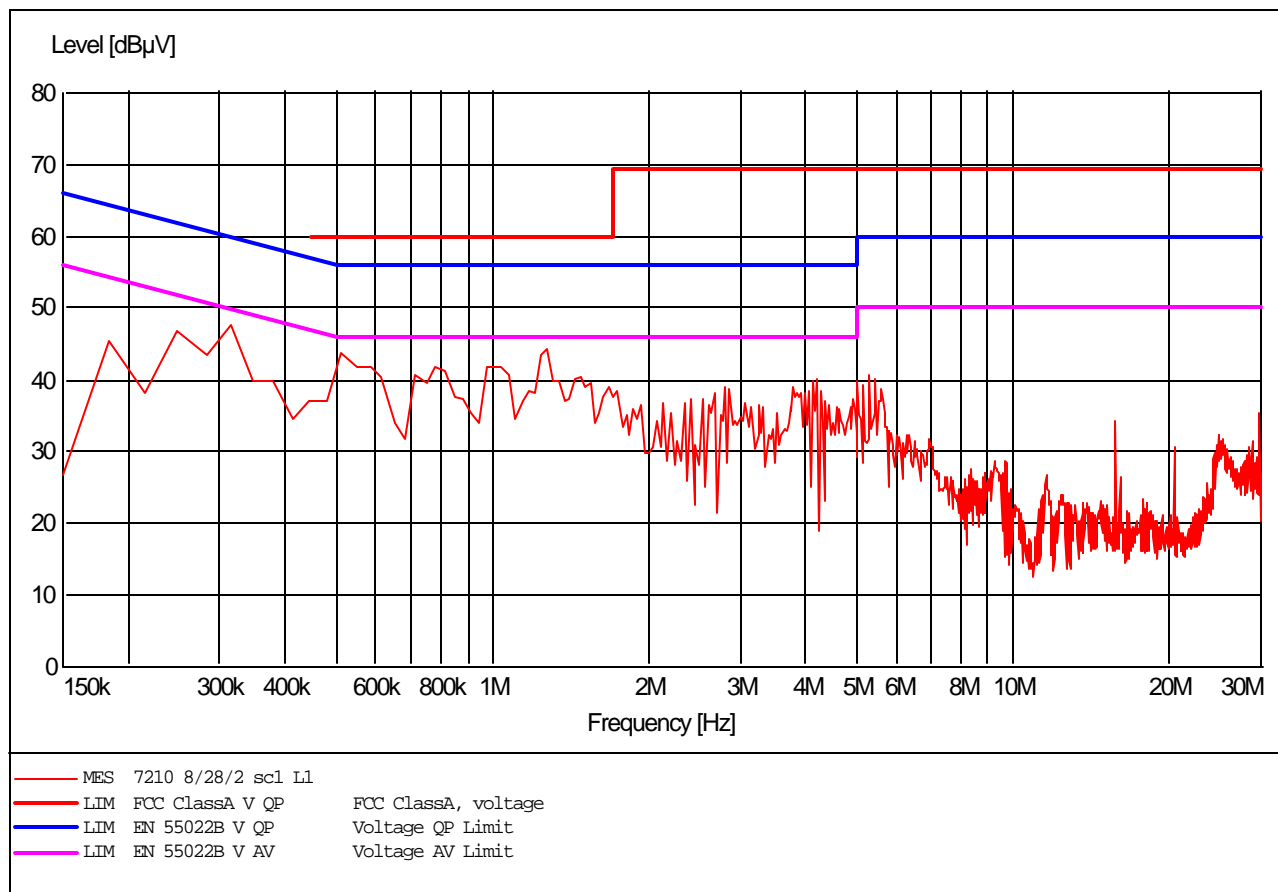


3	Model 7210 Digital SelfCheck™ System	Report: F0702003	3
EMC Laboratory	Product Safety	30 September, 2002	Page 29 of 45

## **Appendix B**


### **Emission Bandwidth**

Level [dB $\mu$ V/m]

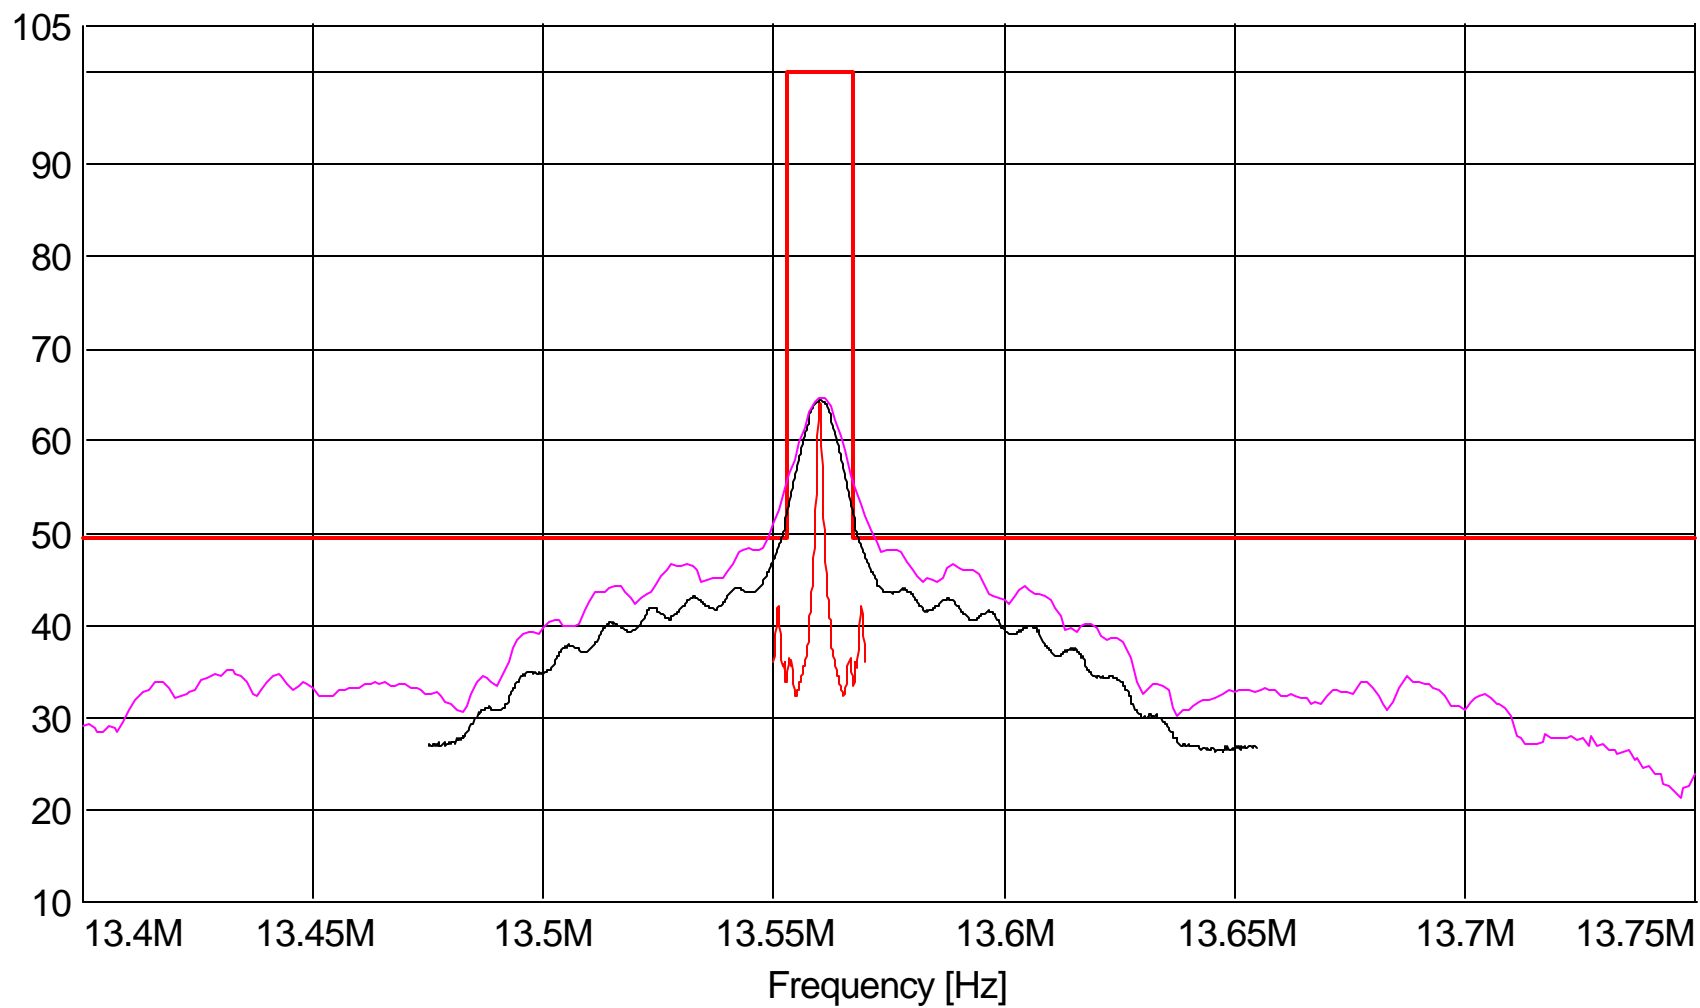

MES	7210	9/19/2	sc1	x	Bandwidth Sweep - Hold MaxPeak
MES	7210	9/19/2	sc3	x	Bandwidth Scan - QP 9 KHz RBW
MES	7210	9/19/2	sc4	x	Bandwidth Scan - QP 1 KHz RBW
LIM	FCC	12.5-30	MHz		

Level [dB $\mu$ V/m]

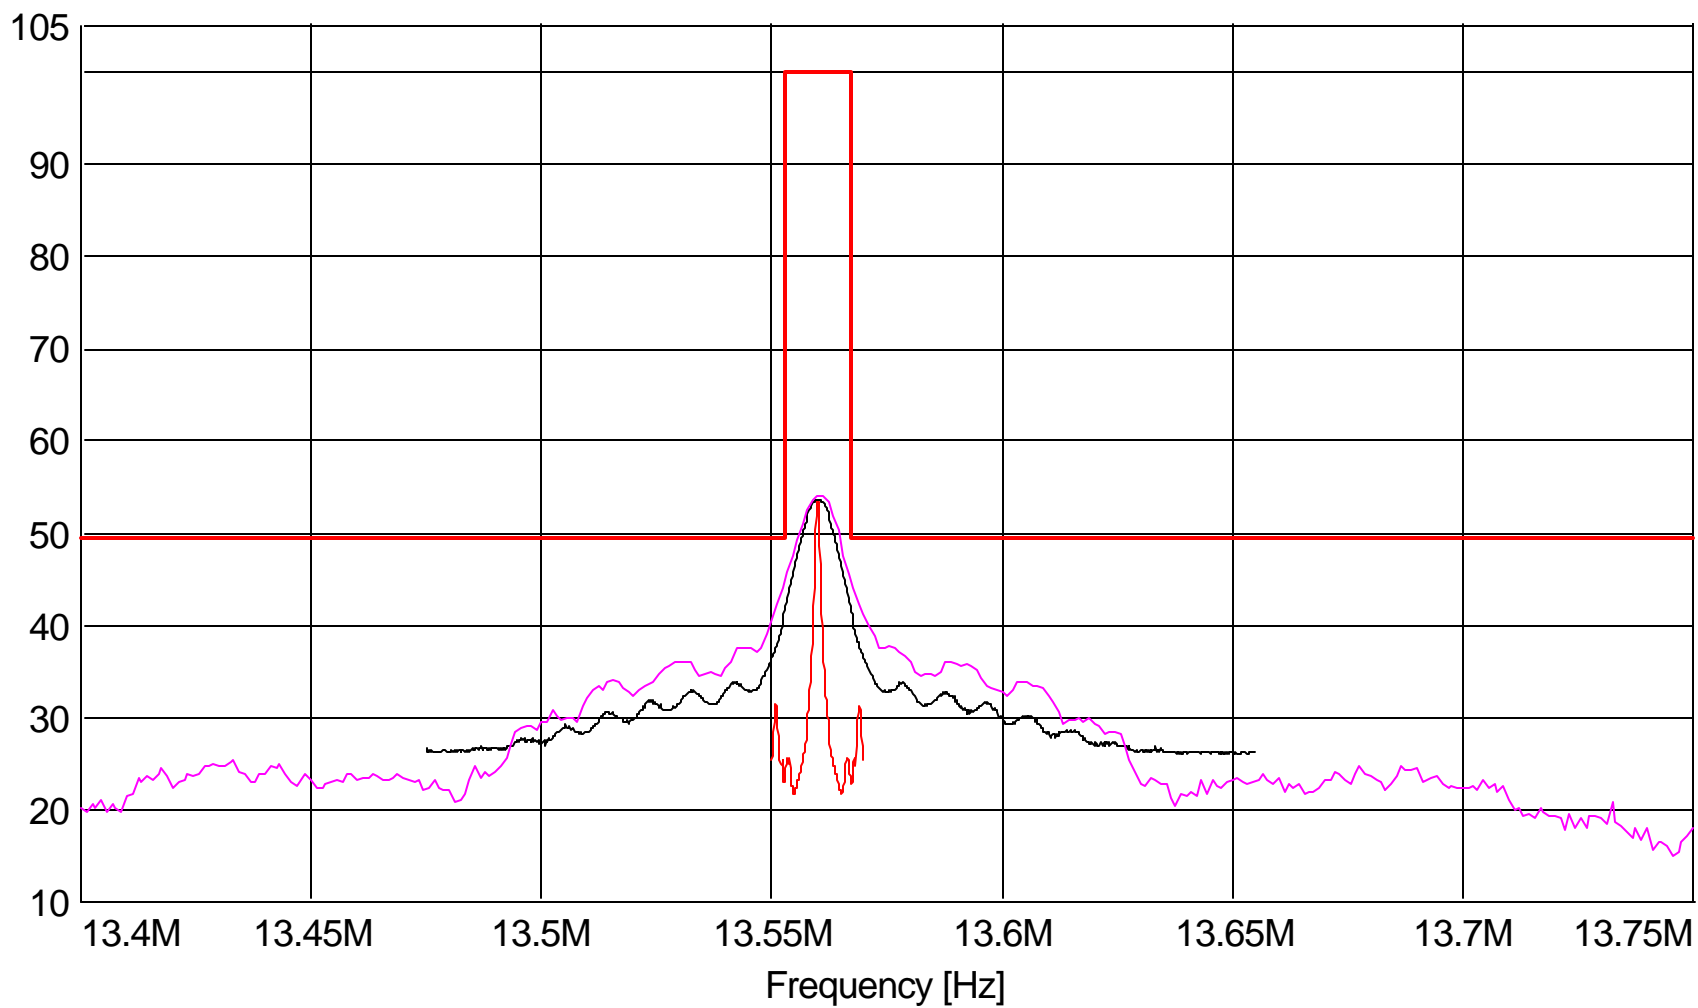

MES	7210	9/19/2	sc6	x	Bandwidth Sweep - Hold MaxPeak
MES	7210	9/19/2	sc8	x	Bandwidth Scan - QP 9 KHz RBW
MES	7210	9/19/2	sc9	x	Spur. Emissions - Hold MaxPeak
LIM	FCC	12.5-30	MHz		

3	Model 7210 Digital SelfCheck™ System	Report: F0702003	3
EMC Laboratory	Product Safety	30 September, 2002	Page 32 of 45

## **Appendix C**

### **Spurious Emissions (12.5 to 30 MHz.)**



# SPURIOUS EMISSIONS

**3**  
**EMC Lab**

SHEET 1 OF 1

TEST REPORT # F0702003

EUT MODEL # 7210

EUT SERIAL # 6210351

DESCRIPTION Digital Self Check

FREQ. (MHz)	MAXIMIZED QP SIGNAL		LIMIT LINE (dBμV/m)	PASSING MARGIN (dB)	MAXIMIZED POSITION		REMARKS
	H/V	(dBμV/m)*			TURNTABLE (°)	ANTENNA (M)	
Lower Antenna							
13.5485	V	45.6	48.6	3.0	0	1.0	Antenna was at +0 degrees from the X-axis.
13.5715	V	45.7	48.6	2.9	0	1.0	Antenna was at +0 degrees from the X-axis.
27.122	V	4.6 <sup>1</sup>	48.6	42.0	0	1.0	Antenna was at +0 degrees from the X-axis.
Upper Antenna							
13.5485	V	35.0	48.6	13.6	0	1.0	Antenna was at -5 degrees from the X-axis.
13.5715	V	35.1	48.6	13.5	0	1.0	Antenna was at -5 degrees from the X-axis.
27.122	V	1.4 <sup>1</sup>	48.6	47.2	0	1.0	Antenna was at -5 degrees from the X-axis.

1 - Equipment noise baseline.


Test Engineer: \_\_\_\_\_

Date: 22 August 2002

Reviewed by: \_\_\_\_\_


Date: 30 September 2002

Level [dB $\mu$ V/m]

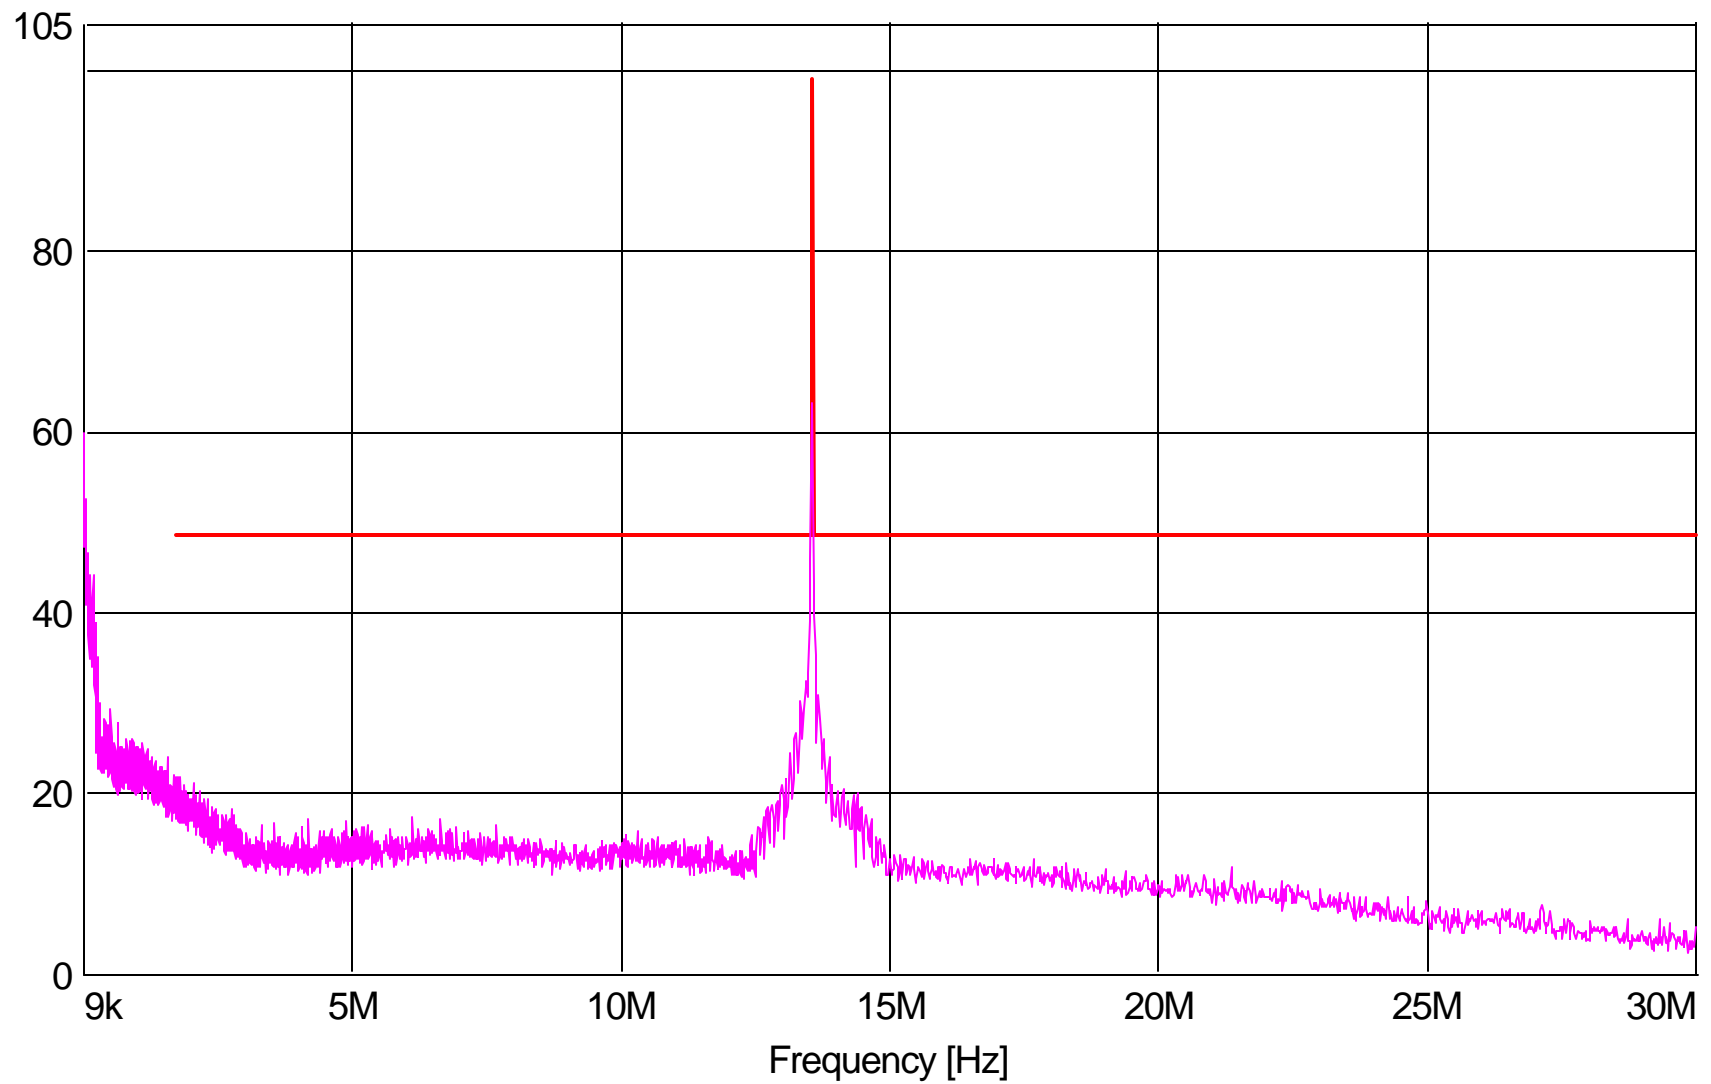

MES 7210 9/19/2 sc5 x Spur. Emissions - Hold MaxPeak  
LIM FCC 1.705-30 MHz

Level [dB $\mu$ V/m]

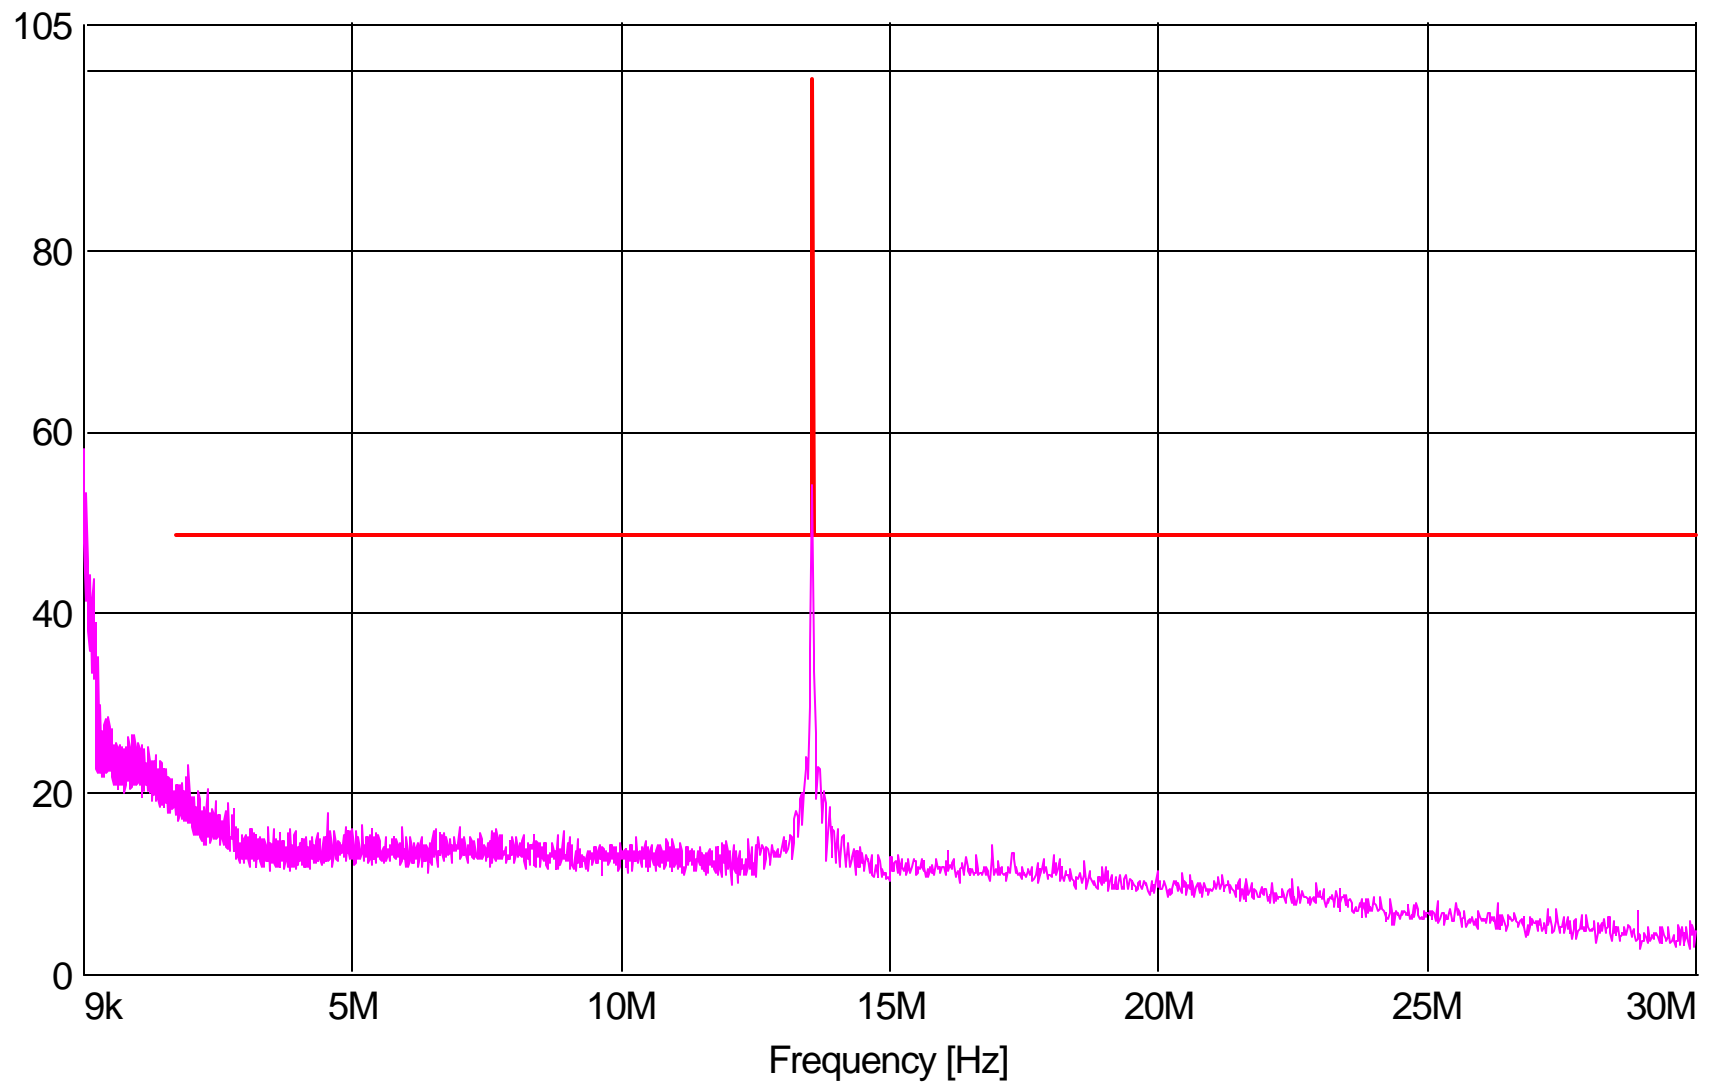

MES 7210 9/19/2 sc10 x  
LIM FCC 1.705-30 MHz

3	Model 7210 Digital SelfCheck™ System	Report: F0702003	3
EMC Laboratory	Product Safety	30 September, 2002	Page 36 of 45

**This Page Left Blank Intentionally**

3	Model 7210 Digital SelfCheck™ System	Report: F0702003	3
EMC Laboratory	Product Safety	30 September, 2002	Page 37 of 45

## Appendix D

### Radiated Emissions

# RADIATED EMISSIONS

**3**  
**EMC Lab**

SHEET 1 OF 1

TEST REPORT # F0702003

EUT MODEL # 7210

EUT SERIAL # 6210351

DESCRIPTION Digital Self Check

FREQ. (MHz)	MAXIMIZED QP SIGNAL		LIMIT LINE (dBμV/m)	PASSING MARGIN (dB)	MAXIMIZED POSITION		REMARKS
	H/V	(dBμV/m)*			TURNTABLE (°)	ANTENNA (M)	
86.00	V	21.5	39.1	17.6	60	1.05	
122.869	V	20.9	43.5	22.6	130	1.0	
135.16	V	19.6	43.5	23.9	0	1.0	
180.011	H	17.3	43.5	26.2	20	1.0	BB Spikes
189.828	H	24.1	33.1	9.0	350	1.5	Note 1
299.911	H	28.3	46.4	18.1	220	1.0	
299.911	V	31.0	46.4	15.4	95	2.0	
441.983	H	28.7	46.4	17.7	30	1.2	
499.944	V	24.6	46.4	21.8	80	3.5	
528.826	V	30.2	35.6	5.4	337	2.6	Note 1
583.064	H	26.5	35.6	9.1	40	1.0	Note 1
596.484	V	21.4	46.4	25.0	0	2.4	
610.187	V	28.5	35.6	7.1	20	1.15	Note 1
691.545	H	32.2	35.6	3.4	0	1.0	Note 1
718.666	V	31.2	35.6	5.0	344	1.1	Note 1
772.902	V	29.5	35.6	6.1	345	1.05	Note 1

Note 1 - This is a harmonic of the intentional radiator, so the Subpart C limit is used.

Test Engineer: \_\_\_\_\_

Date: 18 September 2002

Reviewed by: \_\_\_\_\_

Date: 30 September 2002

## RADIATED EMISSIONS (1-5 GHz)

### 3 EMC Lab

SHEET 1 OF 1

TEST REPORT # F0702003

EUT MODEL # 7210EUT SERIAL # 6210351

DESCRIPTION	Digital Self Check
-------------	--------------------



[illegible]

Test Engineer:\_\_\_\_\_



Date: 18 September 2002

Reviewed by: \_\_\_\_\_

Date: 30 September 2002

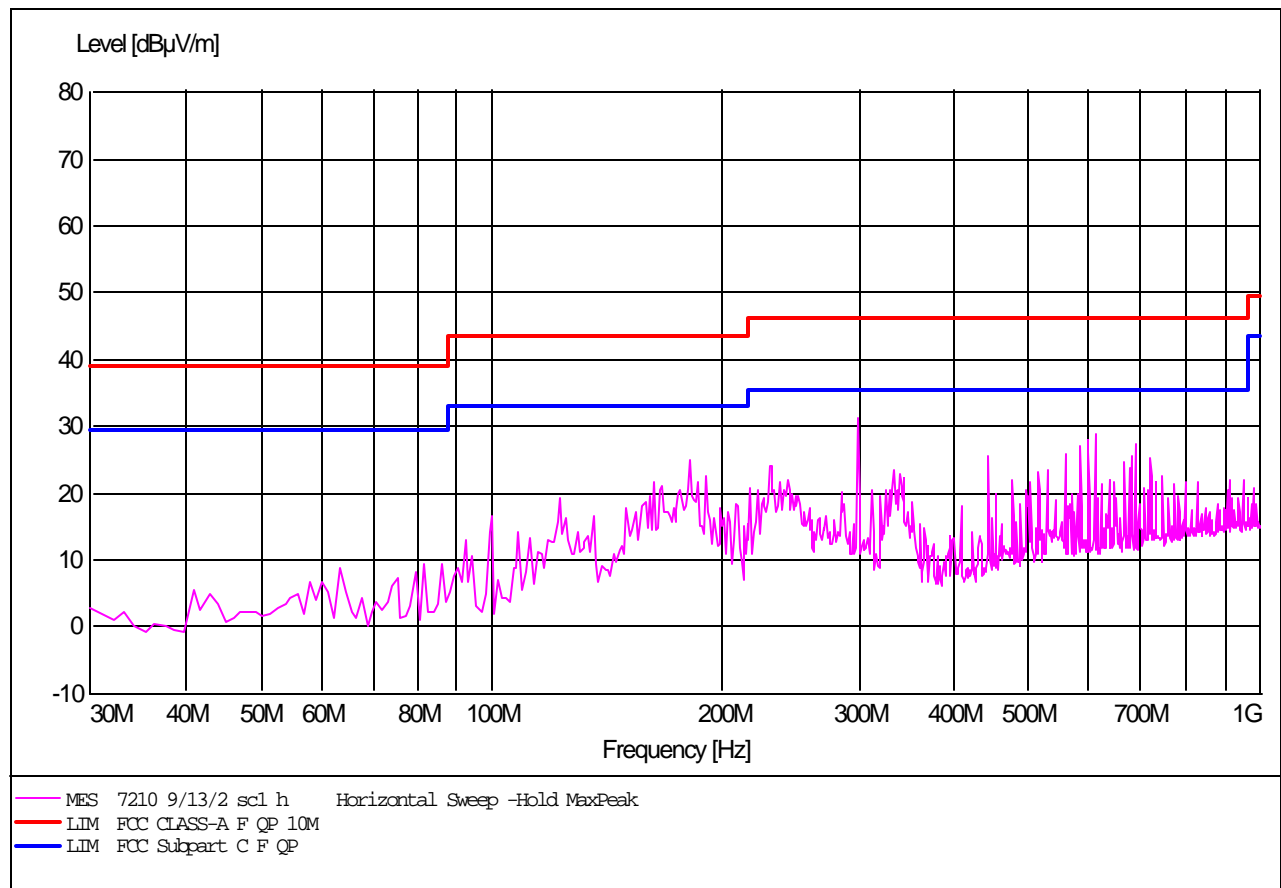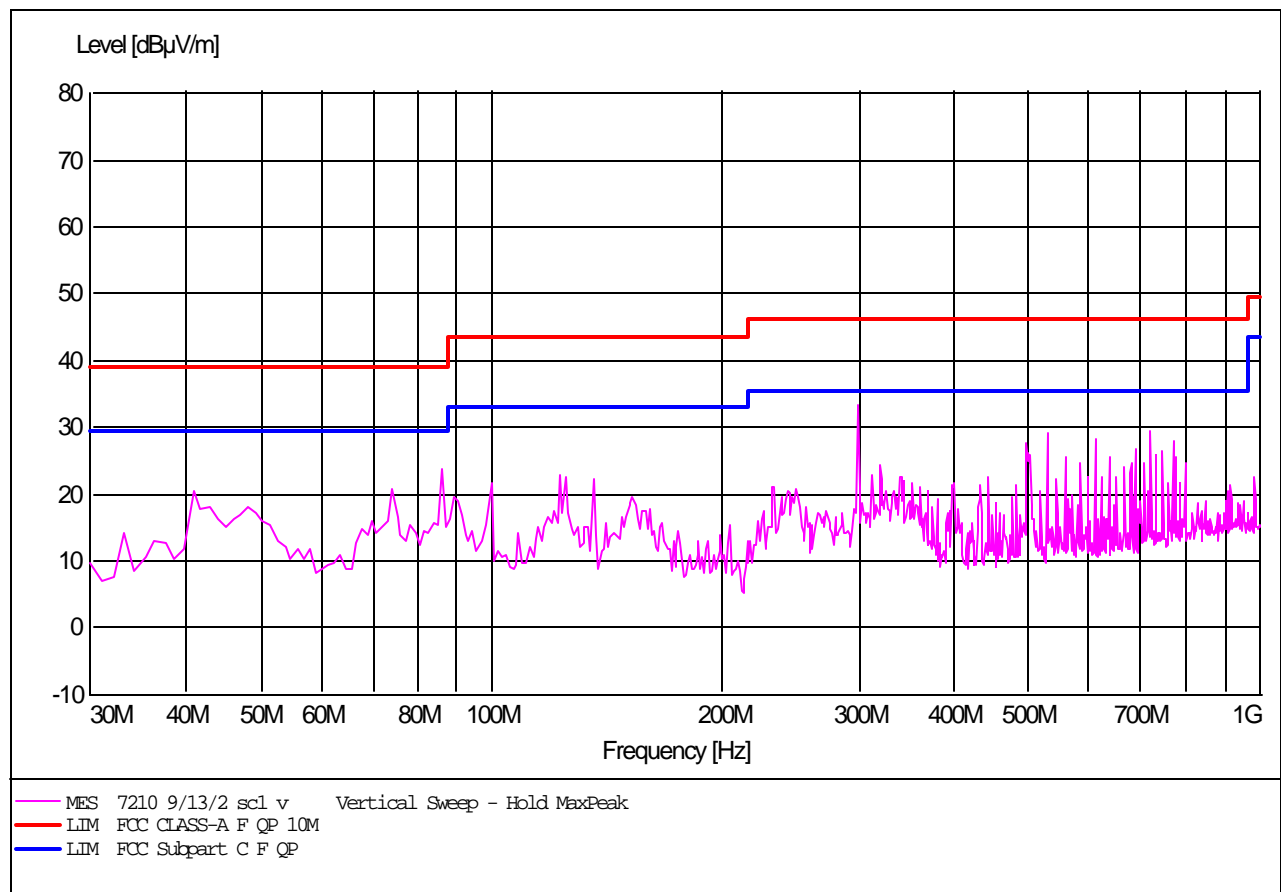



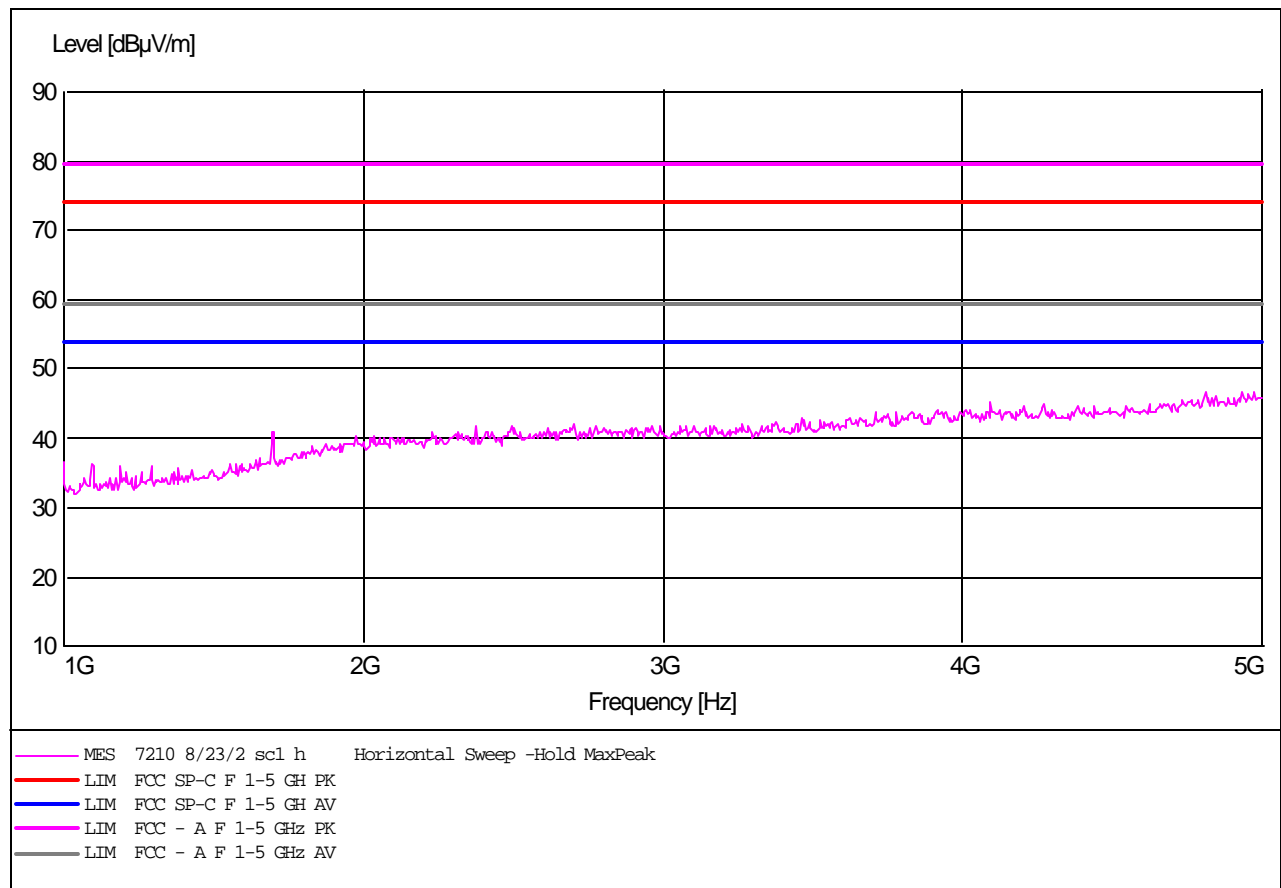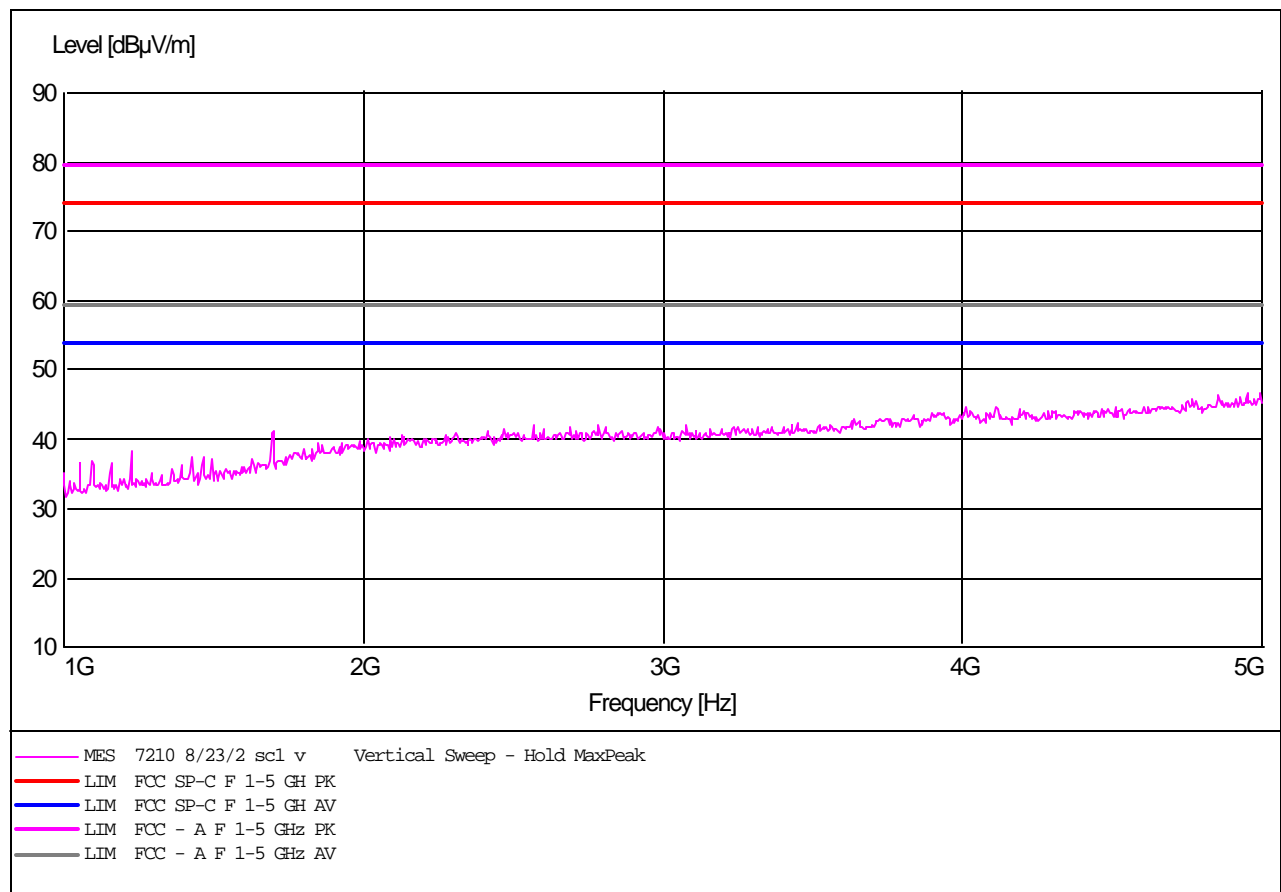

3	Model 7210 Digital SelfCheck™ System	Report: F0702003	3
EMC Laboratory	Product Safety	30 September, 2002	Page 42 of 45


## **Appendix E**

### **Photographs**

3	Model 7210 Digital SelfCheck™ System	Report: F0702003	3
EMC Laboratory	Product Safety	30 September, 2002	Page 43 of 45




Conducted Emissions

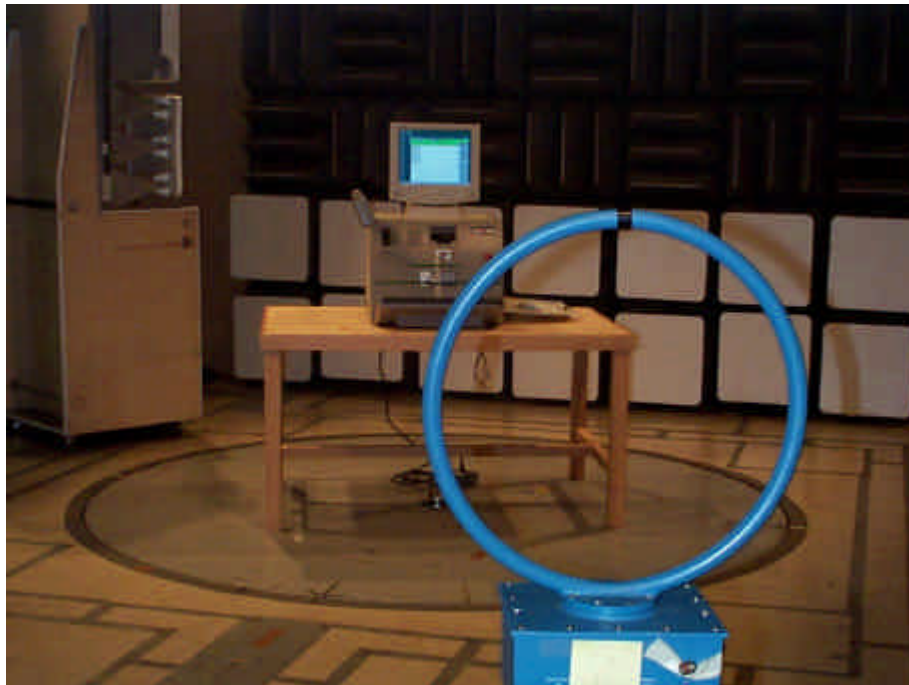

Bandwidth and Spurious Emissions

3	Model 7210 Digital SelfCheck™ System	Report: F0702003	3
EMC Laboratory	Product Safety	30 September, 2002	Page 44 of 45

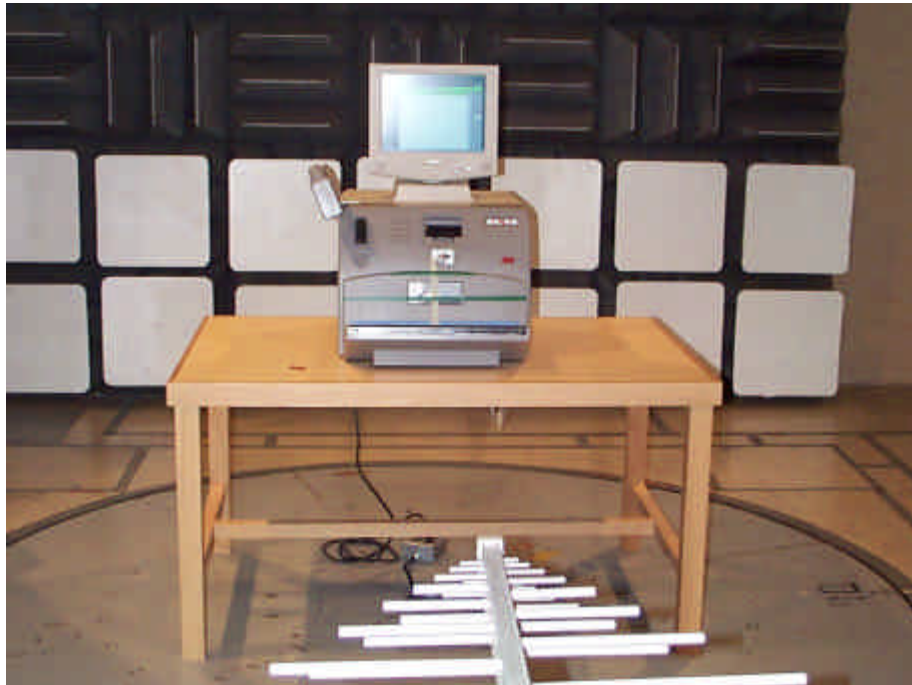

Radiated Emissions (30-1000 MHz)



Radiated Emissions (1-5 GHz)

3	Model 7210 Digital SelfCheck™ System	Report: F0702003	3
EMC Laboratory	Product Safety	30 September, 2002	Page 45 of 45

**End of Report**