

FCC Test Report

(PART 27)

Report No.: RF181205C03-2

FCC ID: B32V400M4GWW

Test Model: V400m Plus 4G WW

Received Date: Dec. 05, 2018

Test Date: Dec. 22, 2018 ~ Jan. 07, 2019

Issued Date: Jan. 14, 2019

Applicant: Verifone, Inc.

Address: 1400 West Stanford Ranch Road Suite 200 Rocklin CA 95765 USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
(R.O.C)

Test Location : No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil, Kwei Shan Dist., Taoyuan City
33383, Taiwan (R.O.C)

FCC Registration /
Designation Number: 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results.....	6
2.1 Measurement Uncertainty.....	7
2.2 Test Site and Instruments	8
3 General Information	10
3.1 General Description of EUT	10
3.2 Configuration of System under Test.....	12
3.2.1 Description of Support Units.....	12
3.3 Test Mode Applicability and Tested Channel Detail	13
3.4 EUT Operating Conditions	17
3.5 General Description of Applied Standards.....	17
4 Test Types and Results.....	18
4.1 Output Power Measurement.....	18
4.1.1 Limits of Output Power Measurement	18
4.1.2 Test Procedures.....	18
4.1.3 Test Setup.....	19
4.1.4 Test Results	20
4.2 Modulation Characteristics Measurement	29
4.2.1 Limits of Modulation Characteristics	29
4.2.2 Test Setup.....	29
4.2.3 Test Procedure	29
4.2.4 Test Results	30
4.3 Frequency Stability Measurement	31
4.3.1 Limits of Frequency Stability Measurement	31
4.3.2 Test Procedure	31
4.3.3 Test Setup.....	31
4.3.4 Test Results	32
4.4 Occupied Bandwidth Measurement.....	43
4.4.1 Limits of Occupied Bandwidth Measurement	43
4.4.2 Test Procedure	43
4.4.3 Test Setup.....	43
4.4.4 Test Result	44
4.5 Band Edge Measurement	50
4.5.1 Limits of Band Edge Measurement	50
4.5.2 Test Setup.....	50
4.5.3 Test Procedures.....	50
4.5.4 Test Results	51
4.6 Peak to Average Ratio	62
4.6.1 Limits of Peak to Average Ratio Measurement	62
4.6.2 Test Setup.....	62
4.6.3 Test Procedures.....	62
4.6.4 Test Results	63
4.7 Conducted Spurious Emissions.....	69
4.7.1 Limits of Conducted Spurious Emissions Measurement.....	69
4.7.2 Test Setup.....	69
4.7.3 Test Procedure	69
4.7.4 Test Results	70
4.8 Radiated Emission Measurement.....	95
4.8.1 Limits of Radiated Emission Measurement	95
4.8.2 Test Procedure	95
4.8.3 Deviation from Test Standard	95
4.8.4 Test Setup.....	96

4.8.5 Test Results	97
5 Pictures of Test Arrangements	139
Appendix – Information of the Testing Laboratories	140

Release Control Record

Issue No.	Description	Date Issued
RF181205C03-2	Original Release	Jan. 14, 2019

1 Certificate of Conformity

Product: Point of Sale Terminal

Brand: Verifone

Test Model: V400m Plus 4G WW

Sample Status: Identical Prototype

Applicant: Verifone, Inc.

Test Date: Dec. 22, 2018 ~ Jan. 07, 2019

Standards: FCC Part 27, Subpart C, H, L

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Flora Huang , Date: Jan. 14, 2019
Flora Huang / Specialist

Approved by : Dylan Chiou , Date: Jan. 14, 2019
Dylan Chiou / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 27 & Part 2 (WCDMA)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(d)(4)	Equivalent Isotropic Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049 27.53(h)	Occupied Bandwidth	Pass	Meet the requirement of limit.
27.50(d)(5)	Peak to Average Ratio	Pass	Meet the requirement of limit.
27.53(h)	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 27.53(h)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(h)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -25.24 dB at 37.76 MHz.

Applied Standard: FCC Part 27 & Part 2 (LTE 4)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(d)(4)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049 27.53(h)	Occupied Bandwidth	Pass	Meet the requirement of limit.
27.50(d)(5)	Peak to Average Ratio	Pass	Meet the requirement of limit.
27.53(h)	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 27.53(h)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(h)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -33.47 dB at 43.58 MHz.

Applied Standard: FCC Part 27 & Part 2 (LTE 12)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(c)(10)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Occupied Bandwidth	Pass	Meet the requirement of limit.
27.50(d)(5)	Peak to Average Ratio	Pass	Meet the requirement of limit.
27.53(g)	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 27.53(g)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(g)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -35.64 dB at 44.55 MHz.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Radiated Emissions up to 1 GHz	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Mar. 16, 2018	Mar. 15, 2019
Spectrum Analyzer Agilent	N9010A	MY52220314	Dec. 13, 2018	Dec. 12, 2019
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Jan. 11, 2018	Jan. 10, 2019
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-969	Nov. 25, 2018	Nov. 24, 2019
BILOG Antenna SCHWARZBECK	VULB 9168	9168-472	Nov. 23, 2018	Nov. 22, 2019
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 16, 2018	Apr. 15, 2019
MXG Vector signal generator Agilent	N5182B	MY53050430	Nov. 19, 2018	Nov. 18, 2019
Preamplifier EMCI	EMC 330H	980112	Oct. 12, 2018	Oct. 11, 2019
Preamplifier EMCI	EMC 012645	980115	Oct. 12, 2018	Oct. 11, 2019
Power Meter Anritsu	ML2495A	1012010	Sep. 05, 2018	Sep. 04, 2019
Power Sensor Anritsu	MA2411B	1315050	Sep. 04, 2018	Sep. 03, 2019
RF Coaxial Cable HUBER+SUHNNER	EMC104-SM-SM- 8000&3000	140811+170717	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM- 1000(140807)	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable WOKEN	8D-FB	Cable-Ch10-01	Oct. 12, 2018	Oct. 11, 2019
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Communications Tester- Wireless Agilent	8960 Series 10	MY53201073	Jun. 28, 2017	Jun. 27, 2019
Radio Communication Analyzer Anritsu	MT8820C	6201300640	Aug. 16, 2017	Aug. 15, 2019

Temperature & Humidity Chamber	GTH-120-40-CP-AR	MAA1306-019	Sep. 05, 2018	Sep. 04, 2019
--------------------------------	------------------	-------------	---------------	---------------

- Note:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The calibration interval of the loop antenna is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. The test was performed in HwaYa Chamber 10.
 4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 5. The FCC Site Registration No. is 690701.
 6. The IC Site Registration No. is 7450F-10.

3 General Information

3.1 General Description of EUT

Product	Point of Sale Terminal	
Brand	Verifone	
Test Model	V400m Plus 4G WW	
Status of EUT	Identical Prototype	
Power Supply Rating	5.0 Vdc (Adapter) 3.85 Vdc (Li-ion battery)	
Modulation Type	WCDMA	QPSK
	LTE	QPSK, 16QAM
Frequency Range	WCDMA	1712.4 ~ 1752.6 MHz
	LTE Band 4 (Channel Bandwidth: 1.4 MHz)	1710.7 ~ 1754.3 MHz
	LTE Band 4 (Channel Bandwidth: 3 MHz)	1711.5 ~ 1753.5 MHz
	LTE Band 4 (Channel Bandwidth: 5 MHz)	1712.5 ~ 1752.5 MHz
	LTE Band 4 (Channel Bandwidth: 10 MHz)	1715.0 ~ 1750.0 MHz
	LTE Band 4 (Channel Bandwidth: 15 MHz)	1717.5 ~ 1747.5 MHz
	LTE Band 4 (Channel Bandwidth: 20 MHz)	1720.0 ~ 1745.0 MHz
	LTE Band 12 (Channel Bandwidth: 1.4 MHz)	699.7 ~ 715.3 MHz
	LTE Band 12 (Channel Bandwidth: 3 MHz)	700.5 ~ 714.5 MHz
	LTE Band 12 (Channel Bandwidth: 5 MHz)	701.5 ~ 713.5 MHz
	LTE Band 12 (Channel Bandwidth: 10 MHz)	704.0 ~ 711.0 MHz
Emission Designator	WCDMA	4M08F9W
	LTE Band 4 (Channel Bandwidth: 1.4 MHz)	1M09W7D
	LTE Band 4 (Channel Bandwidth: 3 MHz)	2M70G7D
	LTE Band 4 (Channel Bandwidth: 5 MHz)	4M49W7D
	LTE Band 4 (Channel Bandwidth: 10 MHz)	8M97W7D
	LTE Band 4 (Channel Bandwidth: 15 MHz)	13M5G7D
	LTE Band 4 (Channel Bandwidth: 20 MHz)	18M0W7D
	LTE Band 12 (Channel Bandwidth: 1.4 MHz)	1M09W7D
	LTE Band 12 (Channel Bandwidth: 3 MHz)	2M70G7D
	LTE Band 12 (Channel Bandwidth: 5 MHz)	4M49W7D
	LTE Band 12 (Channel Bandwidth: 10 MHz)	8M99G7D
Max. ERP Power	LTE Band 12 (Channel Bandwidth: 1.4 MHz)	140.93 mW
	LTE Band 12 (Channel Bandwidth: 3 MHz)	148.94 mW
	LTE Band 12 (Channel Bandwidth: 5 MHz)	158.12 mW
	LTE Band 12 (Channel Bandwidth: 10 MHz)	167.11 mW
Max. EIRP Power	WCDMA	323.59 mW
	LTE Band 4 (Channel Bandwidth: 1.4 MHz)	208.45 mW
	LTE Band 4 (Channel Bandwidth: 3 MHz)	220.29 mW
	LTE Band 4 (Channel Bandwidth: 5 MHz)	233.88 mW
	LTE Band 4 (Channel Bandwidth: 10 MHz)	248.89 mW
	LTE Band 4 (Channel Bandwidth: 15 MHz)	264.24 mW
	LTE Band 4 (Channel Bandwidth: 20 MHz)	278.61 mW

Antenna Type	Fixed Internal Antenna
Antenna Gain	WCDMA B4 and LTE B4: 1.9 dBi LTE B12: 0.4 dBi
Accessory Device	Refer to Note as below
Data Cable Supplied	Refer to Note as below

Note:


1. The EUT contains following accessory devices.

Product	Brand	Model	Description
Adapter 1	Verifone	AM11A-050A	I/P: 100-240 Vac, 50/60 Hz, 500 mA O/P: 5 Vdc, 2.2 A 1.75m non-shielded cable w/o core Manufacturer: Phihong
Adapter 2	Verifone	VF0402	I/P: 100-240 Vac, 50/60 Hz, 500 mA O/P: 5 Vdc, 2.2 A 1.75m non-shielded cable w/o core Manufacturer: Salcomp
Battery 1	Verifone	BPK475-001	3.85 Vdc, 2890 mAh
Battery 2	Verifone	BPK475-001	3.85 Vdc, 2900 mAh


2. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

<Radiated Emission Test>

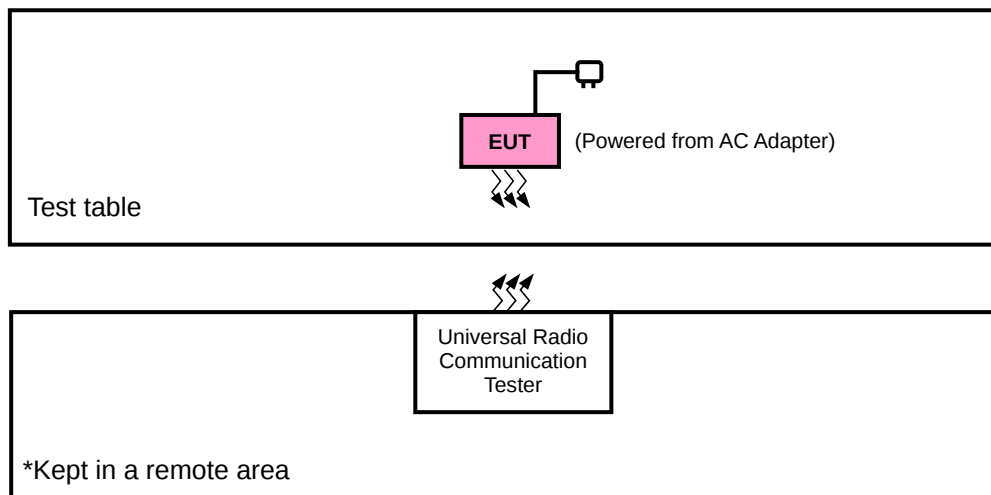

<E.R.P. Test>

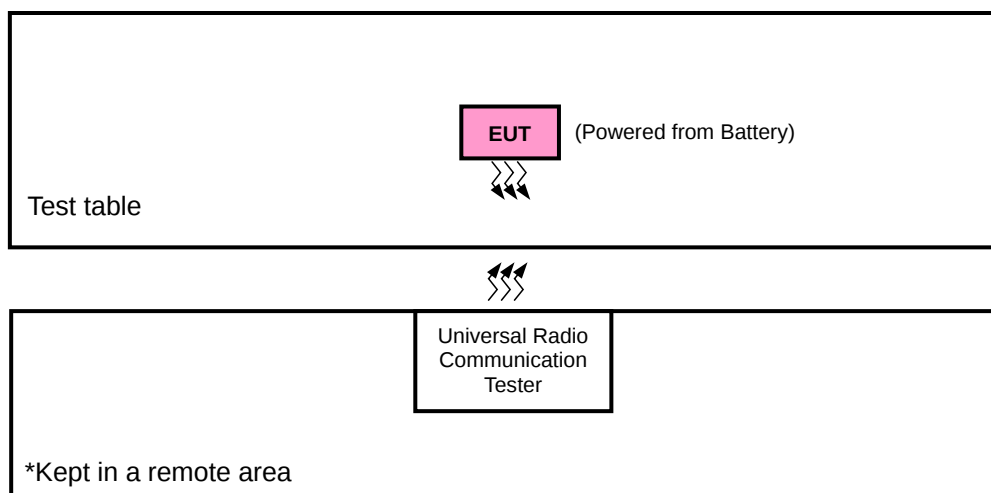

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	ERP / EIRP	Radiated Emission
WCDMA	Y-plane	Y-axis
LTE Band 4	Y-plane	Y-axis
LTE Band 12	X-plane	Y-axis

WCDMA

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	EIRP	1312 to 1513	1312, 1413, 1513	WCDMA
-	Modulation Characteristics	1312 to 1513	1413	WCDMA
-	Frequency Stability	1312 to 1513	1312, 1513	WCDMA
-	Occupied Bandwidth	1312 to 1513	1312, 1413, 1513	WCDMA
-	Band Edge	1312 to 1513	1312, 1513	WCDMA
-	Peak to Average Ratio	1312 to 1513	1312, 1413, 1513	WCDMA
-	Conducted Emission	1312 to 1513	1312, 1413, 1513	WCDMA
-	Radiated Emission	1312 to 1513	1312, 1413, 1513	WCDMA

LTE Band 4

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	20050 to 20300	20175	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
-	Frequency Stability	19957 to 20393	19957, 20393	1.4 MHz	QPSK	1 RB / 0 RB Offset
		19965 to 20385	19965, 20385	3 MHz	QPSK	1 RB / 0 RB Offset
		19975 to 20375	19975, 20375	5 MHz	QPSK	1 RB / 0 RB Offset
		20000 to 20350	20000, 20350	10 MHz	QPSK	1 RB / 0 RB Offset
		20025 to 20325	20025, 20325	15 MHz	QPSK	1 RB / 0 RB Offset
		20050 to 20300	20050, 20300	20 MHz	QPSK	1 RB / 0 RB Offset
-	Occupied Bandwidth	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15 MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
-	Peak to Average Ratio	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	Band Edge	19957 to 20393	19957	1.4 MHz	QPSK	1 RB / 0 RB Offset
			20393	1.4 MHz	QPSK	6 RB / 0 RB Offset
		19965 to 20385	19965	3 MHz	QPSK	1 RB / 5 RB Offset
			20385	3 MHz	QPSK	6 RB / 0 RB Offset
		19975 to 20375	19975	5 MHz	QPSK	1 RB / 0 RB Offset
			20375	5 MHz	QPSK	15 RB / 0 RB Offset
		20000 to 20350	20000	10 MHz	QPSK	1 RB / 14 RB Offset
			20350	10 MHz	QPSK	15 RB / 0 RB Offset
		20025 to 20325	20025	15 MHz	QPSK	1 RB / 0 RB Offset
			20325	15 MHz	QPSK	25 RB / 0 RB Offset
		20050 to 20300	20050	20 MHz	QPSK	1 RB / 24 RB Offset
			20300	20 MHz	QPSK	25 RB / 0 RB Offset
		19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK	1 RB / 0 RB Offset
			19965, 20175, 20385	3 MHz	QPSK	1 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK	1 RB / 0 RB Offset
			20000, 20175, 20350	10 MHz	QPSK	1 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15 MHz	QPSK	1 RB / 0 RB Offset
			20050, 20175, 20300	20 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK	1 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK	1 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE Band 12

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23025 to 23165	23025, 23095, 23165	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	23060 to 23130	23095	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
-	Frequency Stability	23017 to 23173	23017, 23173	1.4 MHz	QPSK	1 RB / 0 RB Offset
		23025 to 23165	23025, 23165	3 MHz	QPSK	1 RB / 0 RB Offset
		23035 to 23155	23035, 23155	5 MHz	QPSK	1 RB / 0 RB Offset
		23060 to 23130	23060, 23130	10 MHz	QPSK	1 RB / 0 RB Offset
-	Occupied Bandwidth	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		23025 to 23165	23025, 23095, 23165	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
-	Peak to Average Ratio	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23025 to 23165	23025, 23095, 23165	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Band Edge	23017 to 23173	23017	1.4 MHz	QPSK	1 RB / 0 RB Offset
			23173	1.4 MHz	QPSK	6 RB / 0 RB Offset
		23025 to 23165	23025	3 MHz	QPSK	1 RB / 5 RB Offset
			23165	3 MHz	QPSK	6 RB / 0 RB Offset
		23035 to 23155	23035	5 MHz	QPSK	1 RB / 0 RB Offset
			23155	5 MHz	QPSK	15 RB / 0 RB Offset
		23060 to 23130	23060	10 MHz	QPSK	1 RB / 14 RB Offset
			23130	10 MHz	QPSK	15 RB / 0 RB Offset
		23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK	1 RB / 0 RB Offset
			23025, 23095, 23165	3 MHz	QPSK	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK	1 RB / 0 RB Offset
-	Conducted Emission	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK	1 RB / 0 RB Offset
		23025 to 23165	23025, 23095, 23165	3 MHz	QPSK	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK	1 RB / 0 RB Offset
		23025 to 23165	23025, 23095, 23165	3 MHz	QPSK	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	23060 to 23130	23060, 23095, 23130	10 MHz	QPSK	1 RB / 0 RB Offset
		23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK	1 RB / 0 RB Offset
		23025 to 23165	23025, 23095, 23165	3 MHz	QPSK	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
ERP / EIRP	25 deg. C, 65 % RH	120 Vac, 60 Hz	Jisyong Wang
Modulation Characteristics	25 deg. C, 65 % RH	3.85 Vdc	Getaz Yang
Frequency Stability	25 deg. C, 65 % RH	3.85 Vdc	Getaz Yang
Occupied Bandwidth	25 deg. C, 65 % RH	3.85 Vdc	Getaz Yang
Band Edge	25 deg. C, 65 % RH	3.85 Vdc	Getaz Yang
Peak to Average Ratio	25 deg. C, 65 % RH	3.85 Vdc	Getaz Yang
Conducted Emission	25 deg. C, 65 % RH	3.85 Vdc	Getaz Yang
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Jisyong Wang

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

Note: All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

Portable stations (hand-held device) operating in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

4.1.2 Test Procedures

EIRP / ERP Measurement:

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 5 MHz for WCDMA and 10 MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step b. Record the power level of S.G.
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. E.R.P power can be calculated from E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15 \text{ dB}$.


Conducted Power Measurement:

- a. The EUT was set up for the maximum power with WCDMA and LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 Test Setup

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

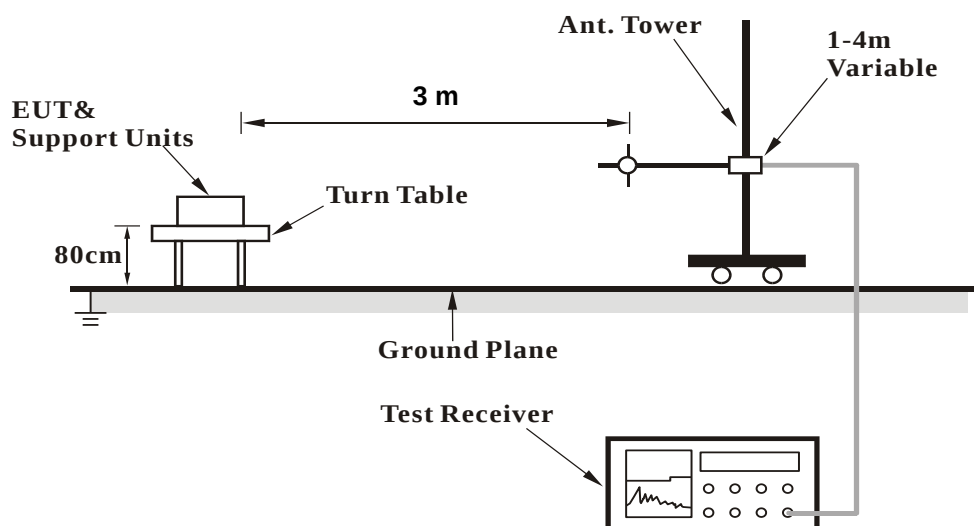


<Radiated Emission above 1 GHz>

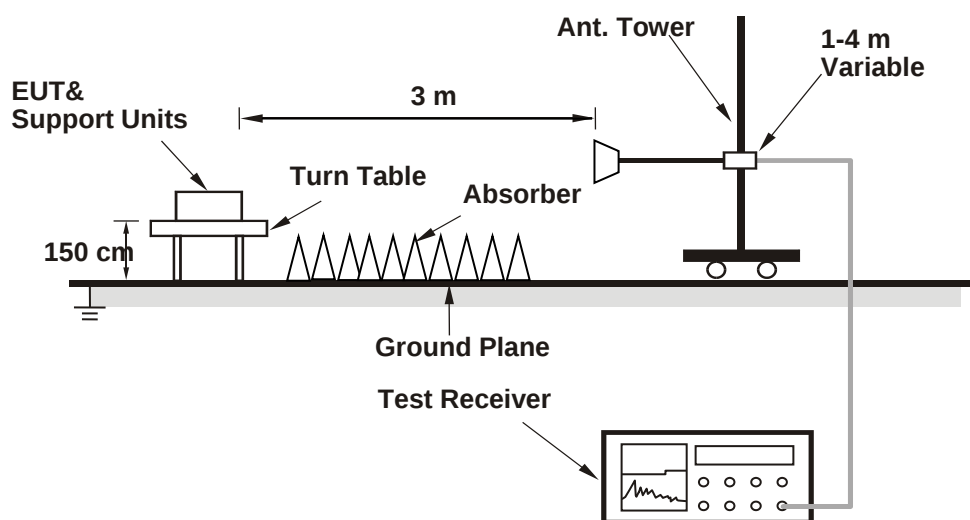

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:



4.1.4 Test Results

Conducted Output Power (dBm)

Band	WCDMA IV		
Channel	1312	1413	1513
Frequency (MHz)	1712.4	1732.6	1752.6
RMC 12.2K	24.08	23.72	23.78
HSDPA Subtest-1	23.98	23.60	23.67
HSDPA Subtest-2	23.08	22.72	22.90
HSDPA Subtest-3	22.58	22.22	22.28
HSDPA Subtest-4	22.39	22.04	22.08
HSUPA Subtest-1	22.60	22.24	22.27
HSUPA Subtest-2	20.76	20.35	20.46
HSUPA Subtest-3	21.86	21.54	21.54
HSUPA Subtest-4	21.08	20.77	20.78
HSUPA Subtest-5	23.00	22.62	22.70

LTE Band 4															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20050	20175	20300				Channel		20025	20175	20325	
		Frequency (MHz)		1720.0	1732.5	1745.0				Frequency (MHz)		1717.5	1732.5	1747.5	
20M	QPSK	1	0	22.83	22.86	22.81	0	15M	QPSK	1	0	22.83	22.85	22.72	0
		1	50	22.18	22.21	22.16	0			1	37	22.13	22.20	22.07	0
		1	99	21.86	21.89	21.84	0			1	74	21.83	21.85	21.77	0
		50	0	21.80	21.83	21.78	1			36	0	21.73	21.82	21.73	1
		50	25	21.50	21.53	21.48	1			36	19	21.47	21.51	21.41	1
		50	50	21.35	21.38	21.33	1			36	39	21.35	21.38	21.28	1
	16QAM	100	0	21.64	21.67	21.62	1			75	0	21.60	21.64	21.52	1
		1	0	21.81	21.84	21.79	1		16QAM	1	0	21.76	21.79	21.78	1
		1	50	21.16	21.19	21.14	1			1	37	21.15	21.12	21.05	1
		1	99	20.84	20.87	20.82	1			1	74	20.78	20.81	20.73	1
		50	0	20.78	20.81	20.76	2			36	0	20.68	20.76	20.67	2
		50	25	20.48	20.51	20.46	2			36	19	20.48	20.46	20.41	2
10M	QPSK	50	50	20.33	20.36	20.31	2	5M	QPSK	36	39	20.28	20.36	20.23	2
		100	0	20.62	20.65	20.60	2			75	0	20.57	20.57	20.52	2
	16QAM	1	0	21.58	21.78	21.68	1		16QAM	1	0	21.68	21.73	21.65	1
		1	24	21.12	21.01	21.02	1			1	12	21.12	20.95	21.09	1
		1	49	20.70	20.68	20.59	1			1	24	20.69	20.80	20.71	1
		25	0	20.59	20.78	20.61	2			12	0	20.66	20.69	20.64	2
		25	12	20.31	20.35	20.42	2			12	6	20.36	20.28	20.40	2
		25	25	20.17	20.27	20.14	2			12	13	20.14	20.22	20.18	2
3M	QPSK	50	0	20.51	20.53	20.49	2	1.4M	QPSK	25	0	20.58	20.47	20.49	2
		1	0	22.71	22.81	22.66	0			1	0	22.74	22.74	22.63	0
		1	7	22.14	22.19	22.06	0			1	2	21.99	22.18	21.98	0
		1	14	21.74	21.81	21.69	0			1	5	21.72	21.81	21.78	0
		8	0	21.75	21.69	21.67	1			3	0	22.68	22.76	22.64	0
		8	3	21.38	21.44	21.43	1			3	1	22.39	22.50	22.28	0
	16QAM	8	7	21.18	21.17	21.27	1			3	3	22.28	22.24	22.24	0
		15	0	21.43	21.55	21.52	1			6	0	21.61	21.60	21.47	1
		1	0	21.67	21.64	21.59	1		16QAM	1	0	21.75	21.73	21.62	1
		1	7	21.11	20.95	21.02	1			1	2	20.93	20.97	21.05	1
		1	14	20.64	20.78	20.76	1			1	5	20.70	20.76	20.65	1
		8	0	20.62	20.57	20.62	2			3	0	21.68	21.74	21.68	1
3M	QPSK	8	3	20.31	20.37	20.27	2			3	1	21.33	21.40	21.33	1
		8	7	20.14	20.17	20.20	2			3	3	21.22	21.19	21.24	1
		15	0	20.43	20.53	20.49	2			6	0	20.53	20.61	20.53	2

LTE Band 12															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		23060	23095	23130				Channel		23035	23095	23155	
		Frequency (MHz)		704.0	707.5	711.0				Frequency (MHz)		701.5	707.5	713.5	
10M	QPSK	1	0	22.25	22.31	22.23	0	5M	QPSK	1	0	22.25	22.24	22.15	0
		1	24	22.15	22.21	22.13	0			1	12	22.13	22.17	22.13	0
		1	49	21.96	22.02	21.94	0			1	24	21.96	22.00	21.86	0
		25	0	21.51	21.57	21.49	1			12	0	21.50	21.53	21.42	1
		25	12	21.47	21.53	21.45	1			12	6	21.40	21.45	21.44	1
		25	25	21.39	21.45	21.37	1			12	13	21.37	21.35	21.28	1
		50	0	21.41	21.47	21.39	1			25	0	21.39	21.45	21.30	1
	16QAM	1	0	21.19	21.25	21.17	1		16QAM	1	0	21.14	21.25	21.16	1
		1	24	21.09	21.15	21.07	1			1	12	21.03	21.05	21.00	1
		1	49	20.90	20.96	20.88	1			1	24	20.87	20.95	20.84	1
		25	0	20.45	20.51	20.43	2			12	0	20.37	20.50	20.42	2
		25	12	20.41	20.47	20.39	2			12	6	20.41	20.46	20.35	2
		25	25	20.33	20.39	20.31	2			12	13	20.23	20.35	20.22	2
		50	0	20.35	20.41	20.33	2			25	0	20.30	20.33	20.30	2
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		23025	23095	23165				Channel		23017	23095	23173	
		Frequency (MHz)		700.5	707.5	714.5				Frequency (MHz)		699.7	707.5	715.3	
3M	QPSK	1	0	22.21	22.25	22.11	0	1.4M	QPSK	1	0	22.16	22.29	22.19	0
		1	7	21.97	22.18	22.06	0			1	2	22.08	21.99	22.04	0
		1	14	21.75	21.91	21.75	0			1	5	21.78	21.86	21.87	0
		8	0	21.43	21.36	21.39	1			3	0	22.35	22.52	22.36	0
		8	3	21.36	21.35	21.41	1			3	1	22.40	22.41	22.38	0
		8	7	21.24	21.42	21.19	1			3	3	22.26	22.40	22.20	0
		15	0	21.29	21.39	21.23	1			6	0	21.26	21.41	21.24	1
	16QAM	1	0	21.09	21.08	21.04	1		16QAM	1	0	21.11	21.11	21.01	1
		1	7	20.87	21.05	20.87	1			1	2	20.91	20.98	21.01	1
		1	14	20.79	20.80	20.81	1			1	5	20.67	20.87	20.66	1
		8	0	20.33	20.32	20.29	2			3	0	21.27	21.41	21.29	1
		8	3	20.28	20.28	20.38	2			3	1	21.24	21.29	21.33	1
		8	7	20.15	20.30	20.18	2			3	3	21.32	21.20	21.12	1
		15	0	20.25	20.35	20.22	2			6	0	20.25	20.29	20.23	2

ERP Power (dBm)

LTE Band 12							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	23017	699.7	-6.78	30.36	21.43	139.00	H
	23095	707.5	-6.53	30.17	21.49	140.93	
	23173	715.3	-6.61	30.17	21.41	138.36	
	23017	699.7	-12.99	32.03	16.89	48.87	V
	23095	707.5	-12.72	31.98	17.11	51.40	
	23173	715.3	-13.13	32.06	16.78	47.64	
Channel Bandwidth: 1.4 MHz / 16QAM							
X	23017	699.7	-7.78	30.36	20.43	110.41	H
	23095	707.5	-7.53	30.17	20.49	111.94	
	23173	715.3	-7.61	30.17	20.41	109.90	
	23017	699.7	-13.99	32.03	15.89	38.82	V
	23095	707.5	-13.72	31.98	16.11	40.83	
	23173	715.3	-14.13	32.06	15.78	37.84	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 12							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	23025	700.5	-6.35	30.17	21.67	146.89	H
	23095	707.5	-6.29	30.17	21.73	148.94	
	23165	714.5	-6.38	30.18	21.65	146.22	
	23025	700.5	-12.68	31.96	17.13	51.64	V
	23095	707.5	-12.48	31.98	17.35	54.33	
	23165	714.5	-12.86	32.03	17.02	50.35	
Channel Bandwidth: 3 MHz / 16QAM							
X	23025	700.5	-7.35	30.17	20.67	116.68	H
	23095	707.5	-7.29	30.17	20.73	118.30	
	23165	714.5	-7.38	30.18	20.65	116.14	
	23025	700.5	-13.68	31.96	16.13	41.02	V
	23095	707.5	-13.48	31.98	16.35	43.15	
	23165	714.5	-13.86	32.03	16.02	39.99	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 12							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	23035	701.5	-6.09	30.17	21.93	155.96	H
	23095	707.5	-6.03	30.17	21.99	158.12	
	23155	713.5	-6.12	30.18	21.91	155.24	
	23035	701.5	-12.42	31.96	17.39	54.83	V
	23095	707.5	-12.22	31.98	17.61	57.68	
	23155	713.5	-12.60	32.03	17.28	53.46	
Channel Bandwidth: 5 MHz / 16QAM							
X	23035	701.5	-7.12	30.17	20.90	123.03	H
	23095	707.5	-7.06	30.17	20.96	124.74	
	23155	713.5	-7.15	30.18	20.88	122.46	
	23035	701.5	-13.45	31.96	16.36	43.25	V
	23095	707.5	-13.25	31.98	16.58	45.50	
	23155	713.5	-13.63	32.03	16.25	42.17	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 12							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	23060	704.0	-5.85	30.17	22.17	164.82	H
	23095	707.5	-5.79	30.17	22.23	167.11	
	23130	711.0	-5.88	30.18	22.15	164.06	
	23060	704.0	-12.18	31.96	17.63	57.94	V
	23095	707.5	-11.98	31.98	17.85	60.95	
	23130	711.0	-12.36	32.03	17.52	56.49	
Channel Bandwidth: 10 MHz / 16QAM							
X	23060	704.0	-6.87	30.17	21.15	130.32	H
	23095	707.5	-6.81	30.17	21.21	132.13	
	23130	711.0	-6.90	30.18	21.13	129.72	
	23060	704.0	-13.20	31.96	16.61	45.81	V
	23095	707.5	-13.00	31.98	16.83	48.19	
	23130	711.0	-13.38	32.03	16.50	44.67	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

EIRP Power (dBm)

WCDMA							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	1312	1712.4	-11.19	36.29	25.10	323.59	H
	1413	1732.6	-11.95	36.69	24.74	297.85	
	1513	1752.6	-12.18	36.98	24.80	302.00	
	1312	1712.4	-18.03	37.11	19.08	80.91	V
	1413	1732.6	-18.95	37.60	18.65	73.28	
	1513	1752.6	-18.86	37.65	18.79	75.68	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 4							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	19957	1710.7	-13.29	36.45	23.16	207.01	H
	20175	1732.5	-13.61	36.80	23.19	208.45	
	20393	1754.3	-13.80	36.94	23.14	206.06	
	19957	1710.7	-18.93	37.28	18.35	68.39	V
	20175	1732.5	-19.04	37.63	18.59	72.28	
	20393	1754.3	-19.52	37.64	18.12	64.86	
Channel Bandwidth: 1.4 MHz / 16QAM							
Y	19957	1710.7	-14.29	36.45	22.16	164.44	H
	20175	1732.5	-14.61	36.80	22.19	165.58	
	20393	1754.3	-14.80	36.94	22.14	163.68	
	19957	1710.7	-19.93	37.28	17.35	54.33	V
	20175	1732.5	-20.04	37.63	17.59	57.41	
	20393	1754.3	-20.52	37.64	17.12	51.52	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 4							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	19965	1711.5	-13.05	36.45	23.40	218.78	H
	20175	1732.5	-13.37	36.80	23.43	220.29	
	20385	1753.5	-13.56	36.94	23.38	217.77	
	19965	1711.5	-18.69	37.28	18.59	72.28	V
	20175	1732.5	-18.80	37.63	18.83	76.38	
	20385	1753.5	-19.28	37.64	18.36	68.55	
Channel Bandwidth: 3 MHz / 16QAM							
Y	19965	1711.5	-14.03	36.45	22.42	174.58	H
	20175	1732.5	-14.35	36.80	22.45	175.79	
	20385	1753.5	-14.54	36.94	22.40	173.78	
	19965	1711.5	-19.67	37.28	17.61	57.68	V
	20175	1732.5	-19.78	37.63	17.85	60.95	
	20385	1753.5	-20.26	37.64	17.38	54.70	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 4							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	19975	1712.5	-12.79	36.45	23.66	232.27	H
	20175	1732.5	-13.11	36.80	23.69	233.88	
	20375	1752.5	-13.30	36.94	23.64	231.21	
	19975	1712.5	-18.43	37.28	18.85	76.74	V
	20175	1732.5	-18.54	37.63	19.09	81.10	
	20375	1752.5	-19.02	37.64	18.62	72.78	
Channel Bandwidth: 5 MHz / 16QAM							
Y	19975	1712.5	-13.79	36.45	22.66	184.50	H
	20175	1732.5	-14.11	36.80	22.69	185.78	
	20375	1752.5	-14.30	36.94	22.64	183.65	
	19975	1712.5	-19.43	37.28	17.85	60.95	V
	20175	1732.5	-19.54	37.63	18.09	64.42	
	20375	1752.5	-20.02	37.64	17.62	57.81	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 4							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	20000	1715.0	-12.71	36.64	23.93	247.17	H
	20175	1732.5	-12.84	36.80	23.96	248.89	
	20350	1750.0	-12.89	36.80	23.91	246.04	
	20000	1715.0	-18.32	37.44	19.12	81.66	V
	20175	1732.5	-18.27	37.63	19.36	86.30	
	20350	1750.0	-18.75	37.64	18.89	77.45	
Channel Bandwidth: 10 MHz / 16QAM							
Y	20000	1715.0	-13.72	36.64	22.92	195.88	H
	20175	1732.5	-13.85	36.80	22.95	197.24	
	20350	1750.0	-13.90	36.80	22.90	194.98	
	20000	1715.0	-19.33	37.44	18.11	64.71	V
	20175	1732.5	-19.28	37.63	18.35	68.39	
	20350	1750.0	-19.76	37.64	17.88	61.38	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 4							
Channel Bandwidth: 15 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	20025	1717.5	-12.26	36.45	24.19	262.42	H
	20175	1732.5	-12.58	36.80	24.22	264.24	
	20325	1747.5	-12.77	36.94	24.17	261.22	
	20025	1717.5	-17.90	37.28	19.38	86.70	V
	20175	1732.5	-18.01	37.63	19.62	91.62	
	20325	1747.5	-18.49	37.64	19.15	82.22	
Channel Bandwidth: 15 MHz / 16QAM							
Y	20025	1717.5	-13.27	36.45	23.18	207.97	H
	20175	1732.5	-13.59	36.80	23.21	209.41	
	20325	1747.5	-13.78	36.94	23.16	207.01	
	20025	1717.5	-18.91	37.28	18.37	68.71	V
	20175	1732.5	-19.02	37.63	18.61	72.61	
	20325	1747.5	-19.50	37.64	18.14	65.16	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 4							
Channel Bandwidth: 20 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	20050	1720.0	-12.03	36.45	24.42	276.69	H
	20175	1732.5	-12.35	36.80	24.45	278.61	
	20300	1745.0	-12.54	36.94	24.40	275.42	
	20050	1720.0	-17.67	37.28	19.61	91.41	V
	20175	1732.5	-17.78	37.63	19.85	96.61	
	20300	1745.0	-18.26	37.64	19.38	86.70	
Channel Bandwidth: 20 MHz / 16QAM							
Y	20050	1720.0	-13.04	36.45	23.41	219.28	H
	20175	1732.5	-13.36	36.80	23.44	220.80	
	20300	1745.0	-13.55	36.94	23.39	218.27	
	20050	1720.0	-18.68	37.28	18.60	72.44	V
	20175	1732.5	-18.79	37.63	18.84	76.56	
	20300	1745.0	-19.27	37.64	18.37	68.71	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

4.2 Modulation Characteristics Measurement

4.2.1 Limits of Modulation Characteristics

N/A




4.2.2 Test Setup



4.2.3 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector. The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

4.2.4 Test Results

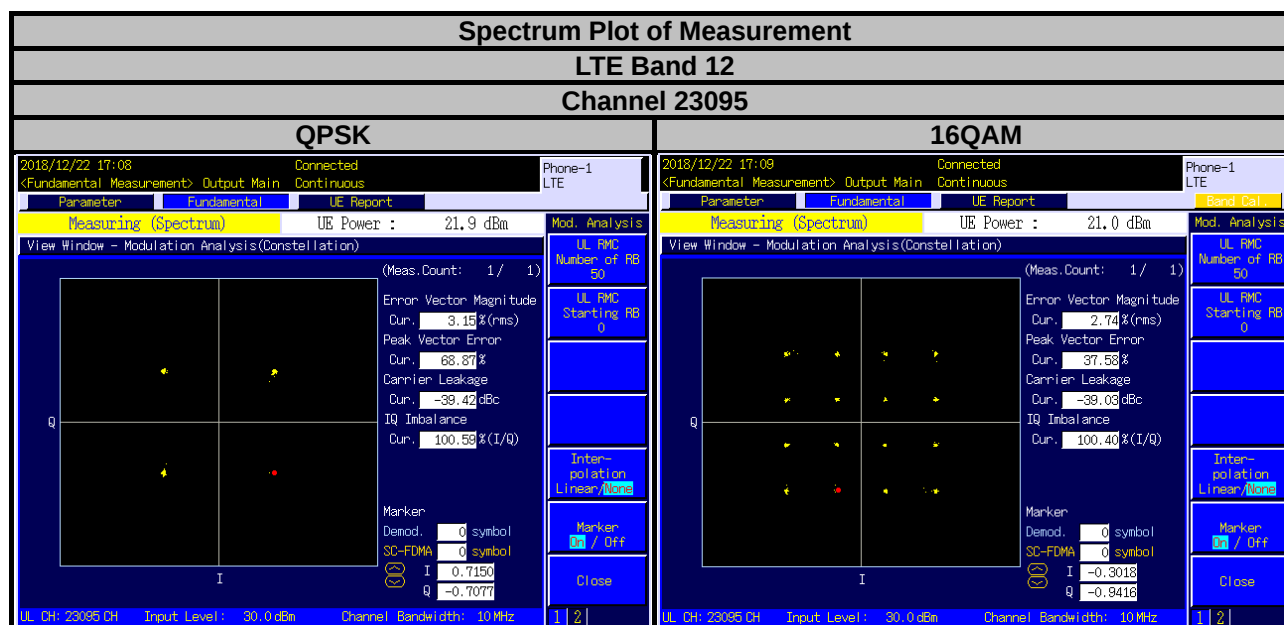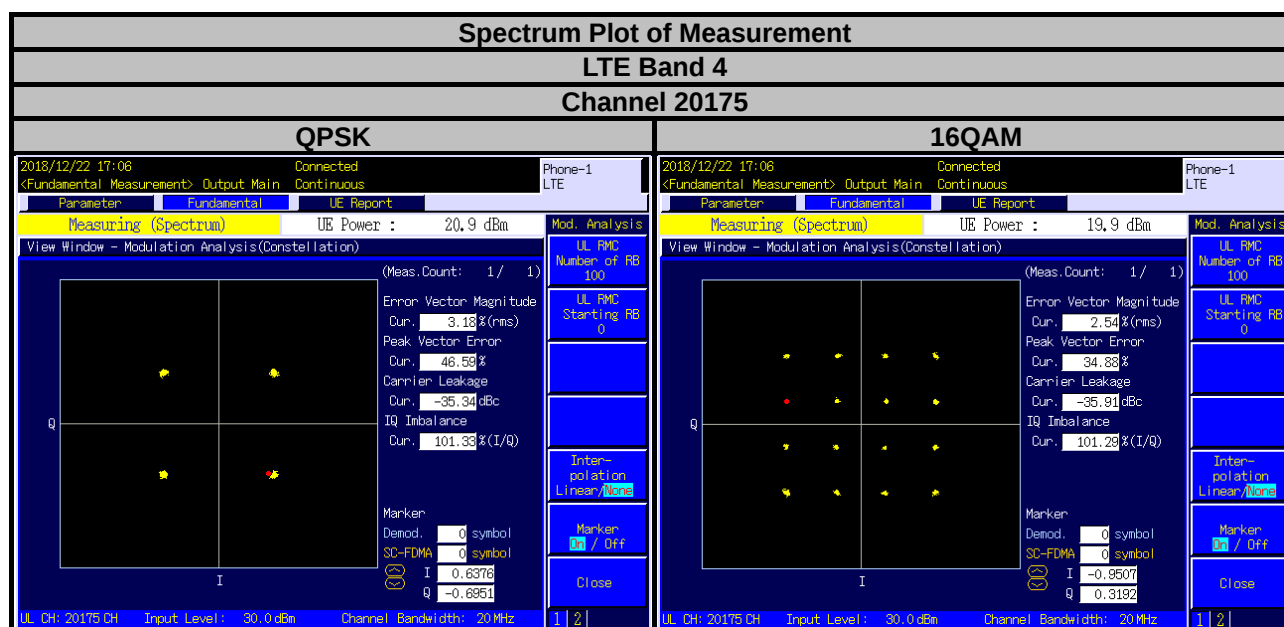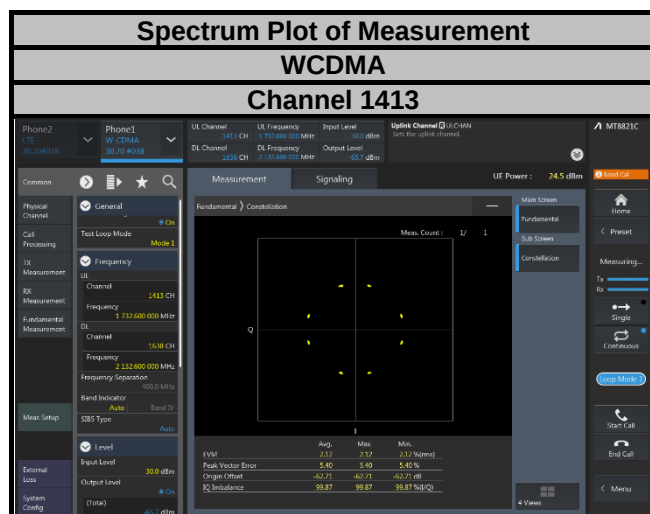

4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

4.3.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the ± 0.5 °C during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

Note: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

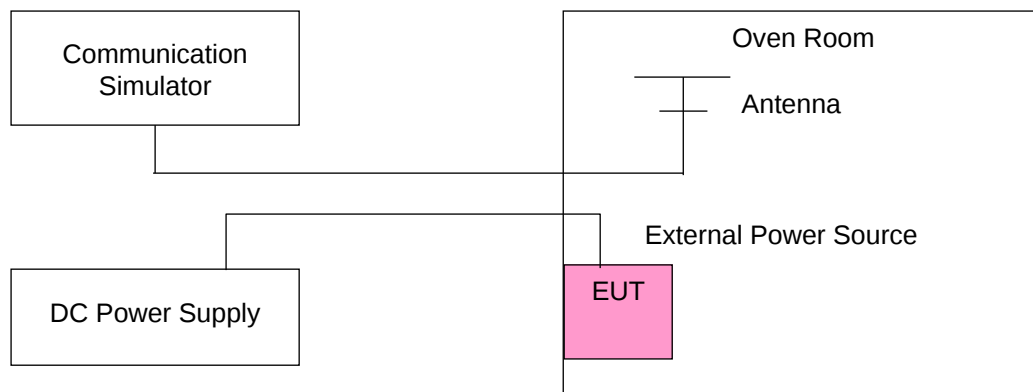

4.3.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	WCDMA			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	1712.400003	0.002	1752.600002	0.001
3.27	1712.400004	0.002	1752.600002	0.001
4.23	1712.400001	0.001	1752.600002	0.001

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.23 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	WCDMA			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1712.400001	0.001	1752.600002	0.001
-20	1712.400004	0.002	1752.600001	0.001
-10	1712.400004	0.002	1752.600001	0.001
0	1712.400003	0.001	1752.600001	0.001
10	1712.400002	0.001	1752.600003	0.002
20	1712.399997	-0.002	1752.599999	-0.001
30	1712.399997	-0.002	1752.599998	-0.001
40	1712.399997	-0.002	1752.599999	-0.001
50	1712.399998	-0.001	1752.599998	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	1710.700002	0.001	1754.300003	0.002
3.27	1710.700003	0.002	1754.300002	0.001
4.23	1710.700002	0.001	1754.300002	0.001

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.23 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1710.700003	0.002	1754.300003	0.002
-20	1710.700004	0.002	1754.300003	0.001
-10	1710.700002	0.001	1754.300001	0.001
0	1710.700001	0.001	1754.300003	0.002
10	1710.700003	0.002	1754.300002	0.001
20	1710.699997	-0.002	1754.299998	-0.001
30	1710.699999	-0.001	1754.299999	-0.001
40	1710.699997	-0.002	1754.299997	-0.002
50	1710.699997	-0.002	1754.299998	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	1711.500003	0.002	1753.500002	0.001
3.27	1711.500004	0.002	1753.500003	0.002
4.23	1711.500002	0.001	1753.500002	0.001

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.23 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1711.500002	0.001	1753.500004	0.002
-20	1711.500001	0.001	1753.500001	0.001
-10	1711.500002	0.001	1753.500002	0.001
0	1711.500004	0.002	1753.500003	0.002
10	1711.500003	0.002	1753.500002	0.001
20	1711.499997	-0.002	1753.499998	-0.001
30	1711.499999	-0.001	1753.499998	-0.001
40	1711.499999	-0.001	1753.499997	-0.002
50	1711.499999	-0.001	1753.499997	-0.002

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	1712.500001	0.001	1752.500003	0.002
3.27	1712.500001	0.001	1752.500002	0.001
4.23	1712.500001	0.001	1752.500003	0.002

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.23 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1712.500001	0.001	1752.500002	0.001
-20	1712.500003	0.002	1752.500002	0.001
-10	1712.500002	0.001	1752.500004	0.002
0	1712.500003	0.002	1752.500002	0.001
10	1712.500002	0.001	1752.500002	0.001
20	1712.499998	-0.001	1752.499999	-0.001
30	1712.499998	-0.001	1752.499998	-0.001
40	1712.499997	-0.002	1752.499997	-0.002
50	1712.499997	-0.002	1752.499999	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	1715.000004	0.002	1750.000001	0.001
3.27	1715.000003	0.002	1750.000004	0.002
4.23	1715.000002	0.001	1750.000001	0.001

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.23 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1715.000002	0.001	1750.000003	0.002
-20	1715.000004	0.002	1750.000002	0.001
-10	1715.000003	0.002	1750.000003	0.002
0	1715.000001	0.001	1750.000003	0.001
10	1715.000004	0.002	1750.000002	0.001
20	1714.999996	-0.002	1749.999998	-0.001
30	1714.999997	-0.002	1749.999996	-0.002
40	1714.999999	-0.001	1749.999997	-0.001
50	1714.999999	-0.001	1749.999997	-0.002

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	1717.500002	0.001	1747.500002	0.001
3.27	1717.500003	0.001	1747.500004	0.002
4.23	1717.500003	0.002	1747.500004	0.002

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.23 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1717.500002	0.001	1747.500003	0.002
-20	1717.500003	0.002	1747.500004	0.002
-10	1717.500003	0.002	1747.500003	0.001
0	1717.500003	0.001	1747.500004	0.002
10	1717.500003	0.002	1747.500003	0.002
20	1717.499998	-0.001	1747.499998	-0.001
30	1717.499997	-0.002	1747.499996	-0.002
40	1717.499998	-0.001	1747.499997	-0.002
50	1717.499998	-0.001	1747.499998	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	1720.000003	0.002	1745.000002	0.001
3.27	1720.000001	0.001	1745.000003	0.002
4.23	1720.000002	0.001	1745.000002	0.001

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.23 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1720.000001	0.001	1745.000002	0.001
-20	1720.000004	0.002	1745.000001	0.001
-10	1720.000004	0.002	1745.000003	0.002
0	1720.000002	0.001	1745.000004	0.002
10	1720.000003	0.002	1745.000002	0.001
20	1719.999996	-0.002	1744.999999	-0.001
30	1719.999998	-0.001	1744.999996	-0.002
40	1719.999997	-0.002	1744.999998	-0.001
50	1719.999997	-0.002	1744.999997	-0.002

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 12			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	699.700001	0.001	715.300004	0.005
3.27	699.700003	0.004	715.300003	0.005
4.23	699.700003	0.005	715.300003	0.004

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.23 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 12			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	699.700002	0.003	715.300003	0.003
-20	699.700002	0.003	715.300004	0.006
-10	699.700002	0.002	715.300002	0.003
0	699.700002	0.003	715.300002	0.002
10	699.700003	0.004	715.300004	0.006
20	699.699997	-0.004	715.299998	-0.002
30	699.699996	-0.006	715.299998	-0.003
40	699.699999	-0.002	715.299998	-0.002
50	699.699998	-0.004	715.299996	-0.005

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 12			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	700.500001	0.002	714.500004	0.005
3.27	700.500004	0.006	714.500002	0.003
4.23	700.500001	0.001	714.500002	0.003

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.23 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 12			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	700.500003	0.005	714.500004	0.005
-20	700.500004	0.006	714.500002	0.003
-10	700.500002	0.003	714.500002	0.003
0	700.500004	0.006	714.500002	0.003
10	700.500002	0.003	714.500003	0.004
20	700.499997	-0.004	714.499998	-0.003
30	700.499997	-0.005	714.499999	-0.002
40	700.499996	-0.006	714.499999	-0.002
50	700.499997	-0.005	714.499999	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 12			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	701.500004	0.005	713.500003	0.005
3.27	701.500001	0.002	713.500001	0.002
4.23	701.500001	0.002	713.500004	0.005

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.23 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 12			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	701.500003	0.004	713.500002	0.003
-20	701.500002	0.002	713.500002	0.003
-10	701.500002	0.003	713.500002	0.002
0	701.500002	0.003	713.500001	0.001
10	701.500004	0.005	713.500002	0.003
20	701.499998	-0.003	713.499999	-0.002
30	701.499997	-0.005	713.499998	-0.003
40	701.499997	-0.005	713.499996	-0.005
50	701.499999	-0.002	713.499999	-0.002

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 12			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	704.000003	0.004	711.000001	0.002
3.27	704.000003	0.005	711.000003	0.004
4.23	704.000002	0.003	711.000003	0.005

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.23 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 12			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	704.000001	0.002	711.000001	0.002
-20	704.000003	0.005	711.000003	0.004
-10	704.000002	0.002	711.000002	0.002
0	704.000004	0.005	711.000002	0.003
10	704.000002	0.003	711.000001	0.002
20	703.999998	-0.003	710.999997	-0.004
30	703.999998	-0.002	710.999997	-0.004
40	703.999997	-0.004	710.999998	-0.003
50	703.999997	-0.004	710.999996	-0.005

4.4 Occupied Bandwidth Measurement


4.4.1 Limits of Occupied Bandwidth Measurement

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

4.4.2 Test Procedure


- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.4.3 Test Setup

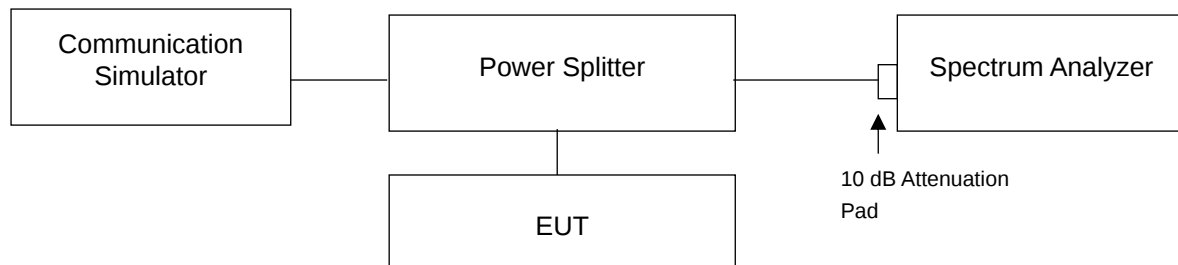


4.4.4 Test Result


WCDMA		
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)
1312	1712.4	4.0839
1413	1732.6	4.0756
1513	1752.6	4.0793

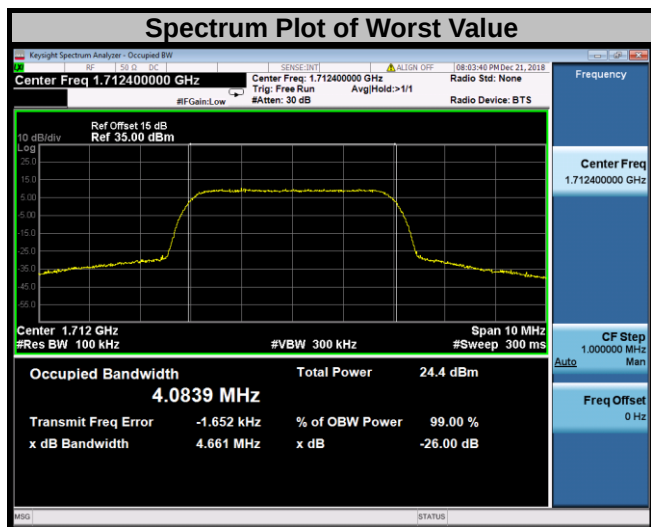


LTE Band 4							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
19957	1710.7	1.0893	1.0904	19965	1711.5	2.7029	2.6969
20175	1732.5	1.0894	1.0915	20175	1732.5	2.7007	2.6965
20393	1754.3	1.0893	1.0899	20385	1753.5	2.7005	2.6969

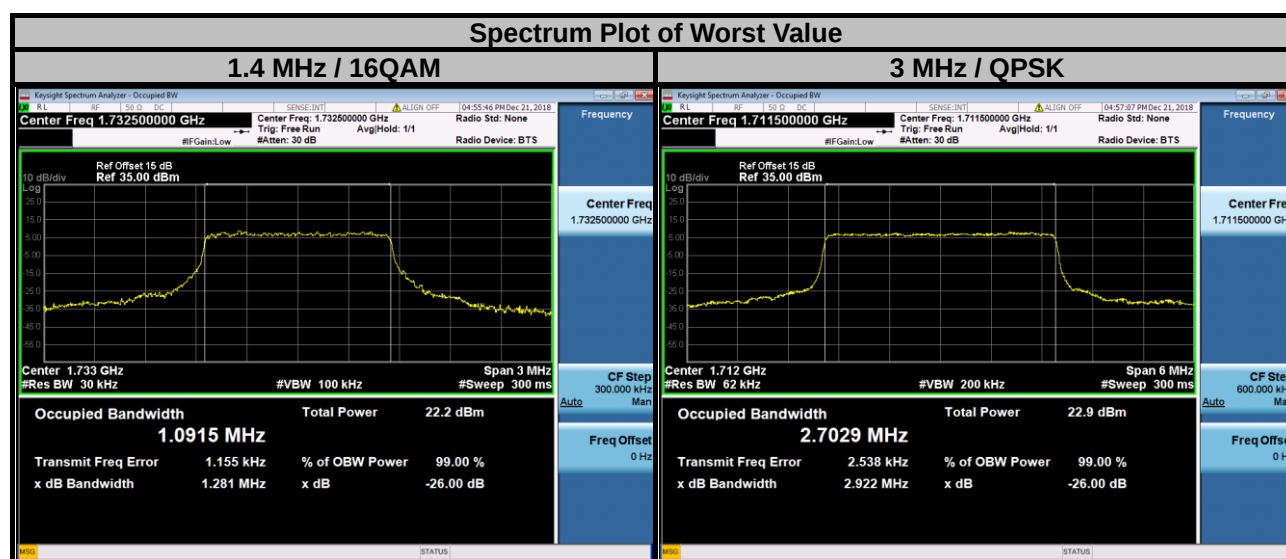


LTE Band 4							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
19975	1712.5	4.4836	4.4869	20000	1715.0	8.9651	8.9720
20175	1732.5	4.4804	4.4848	20175	1732.5	8.9674	8.9686
20375	1752.5	4.4837	4.4838	20350	1750.0	8.9715	8.9718

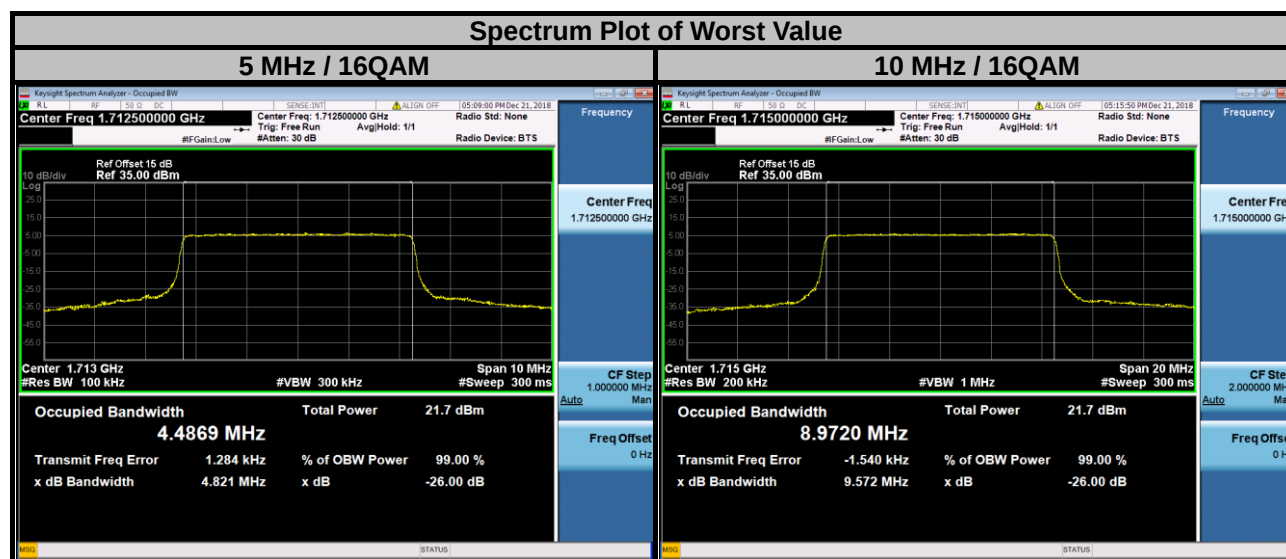


LTE Band 4							
Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
20025	1717.5	13.4722	13.4536	20050	1720.0	17.9395	17.9632
20175	1732.5	13.4549	13.4437	20175	1732.5	17.9238	17.9455
20325	1747.5	13.4571	13.4505	20300	1745.0	17.9177	17.9451

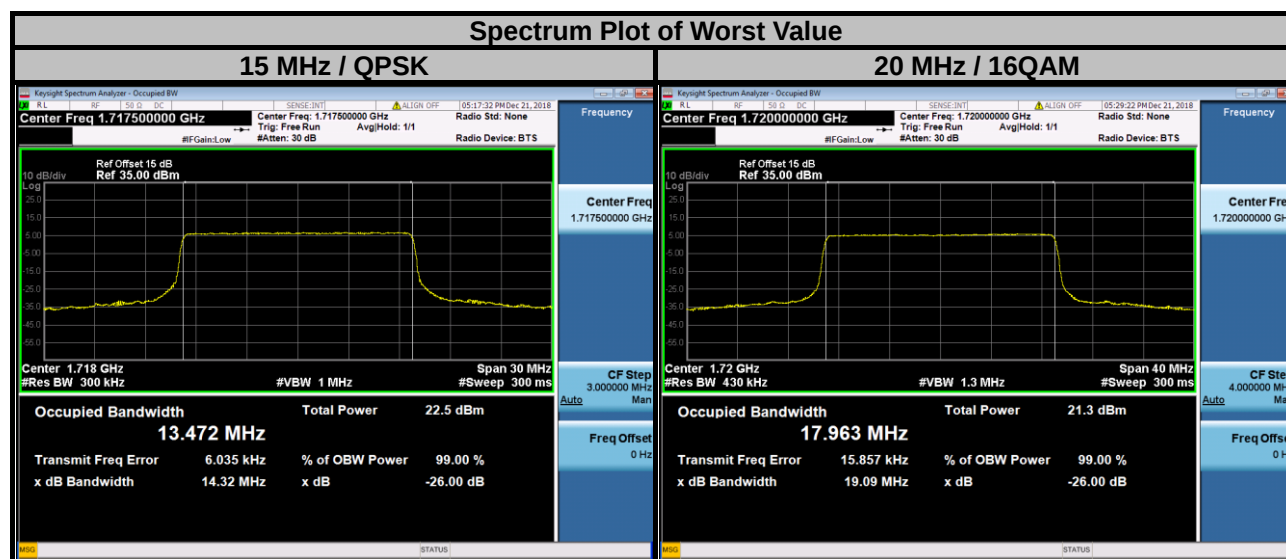

LTE Band 12							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
23017	699.7	1.0907	1.0907	23025	700.5	2.7044	2.6987
23095	707.5	1.0904	1.0919	23095	707.5	2.7012	2.6996
23173	715.3	1.0895	1.0920	23165	714.5	2.7010	2.6965

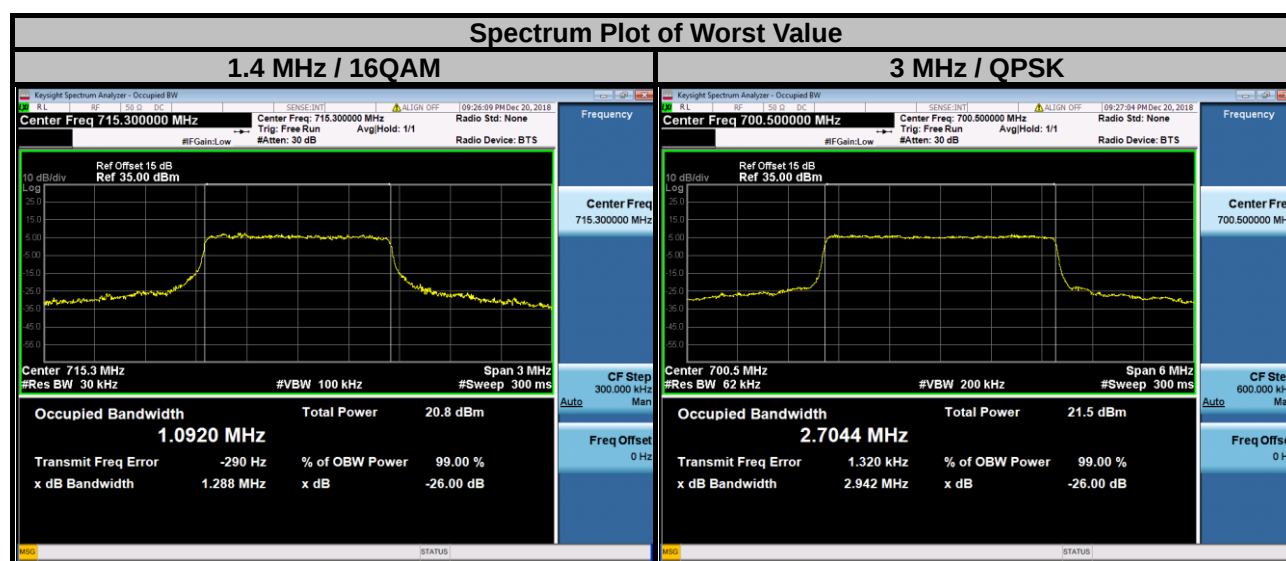

LTE Band 12							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
23035	701.5	4.4848	4.4891	23060	704.0	8.9938	8.9935
23095	707.5	4.4876	4.4883	23095	707.5	8.9791	8.9845
23155	713.5	4.4763	4.4802	23130	711.0	8.9298	8.9290

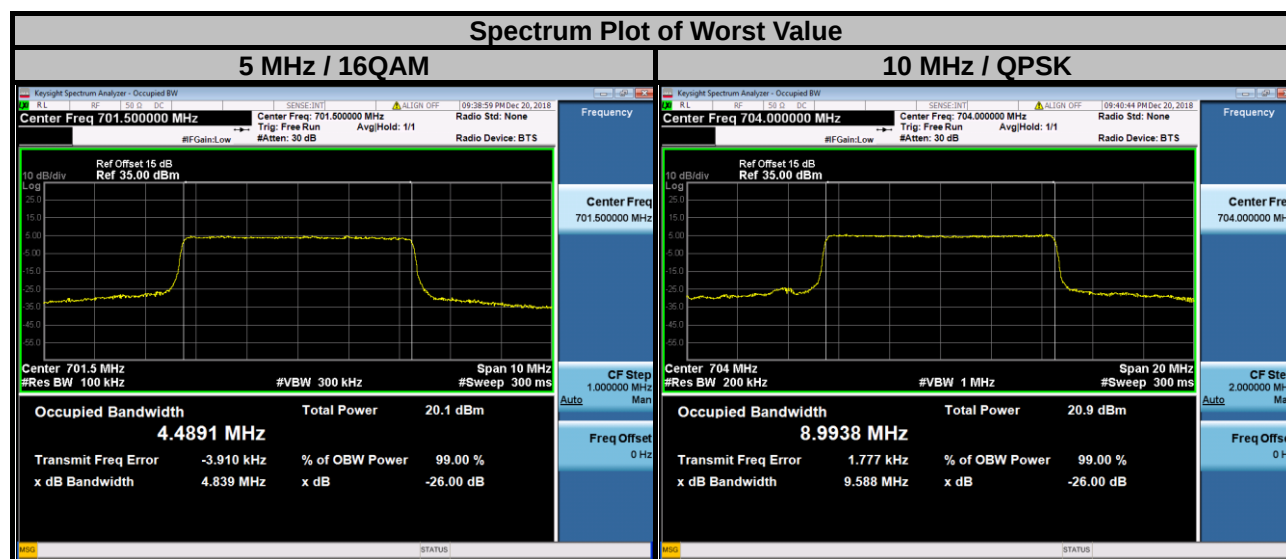

4.5 Band Edge Measurement


4.5.1 Limits of Band Edge Measurement

For operations in the 698-787 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater.

However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

For operations in the 1710–1755 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB.


4.5.2 Test Setup

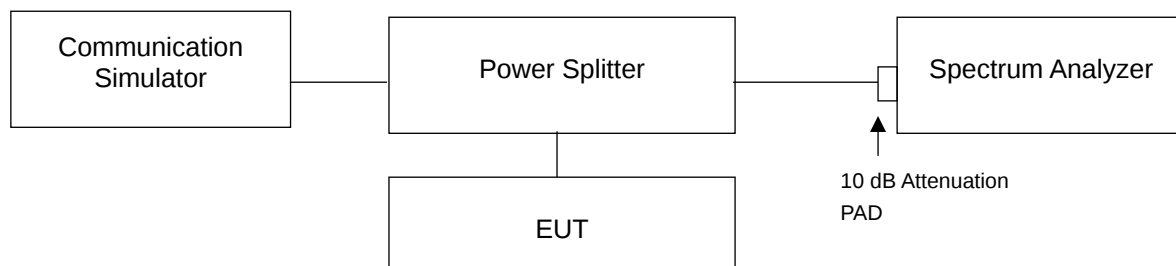



4.5.3 Test Procedures


- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 5 MHz. RB of the spectrum is 100 kHz and VB of the spectrum is 300 kHz (WCDMA).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 15 kHz and VB of the spectrum is 51 kHz (LTE Bandwidth 1.4 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 30 kHz and VB of the spectrum is 100 kHz (LTE Bandwidth 3 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 62 kHz and VB of the spectrum is 200 kHz (LTE Bandwidth 5 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 100 kHz and VB of the spectrum is 300 kHz (LTE Bandwidth 10 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 150 kHz and VB of the spectrum is 470 kHz (LTE Bandwidth 15 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 200 kHz and VB of the spectrum is 1 MHz (LTE Bandwidth 20 MHz).
- Record the max. trace plot into the test report.


4.5.4 Test Results

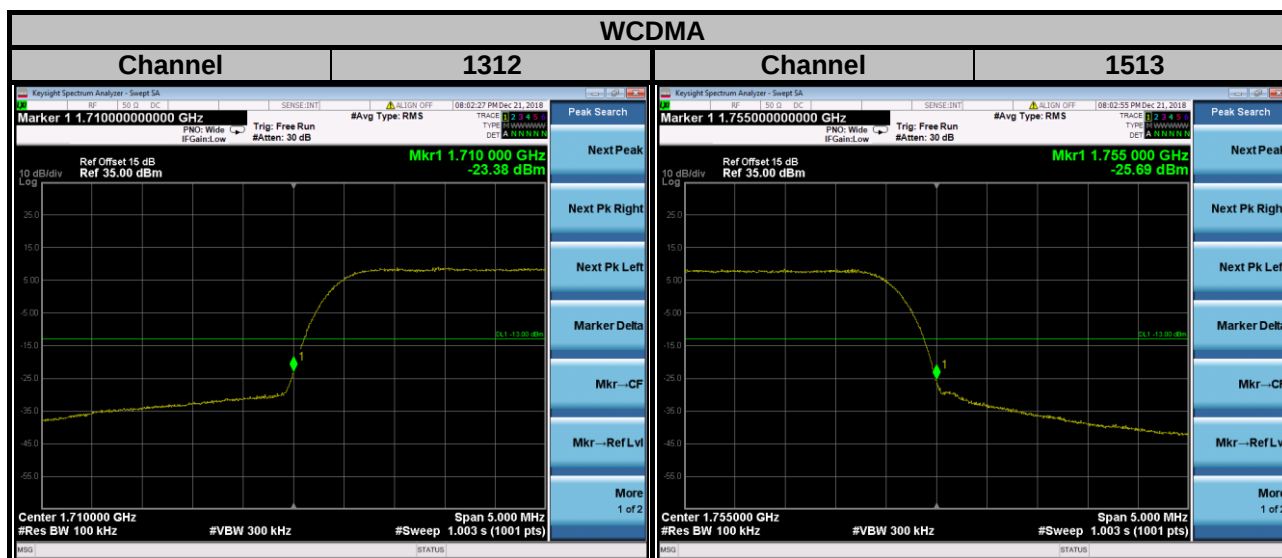


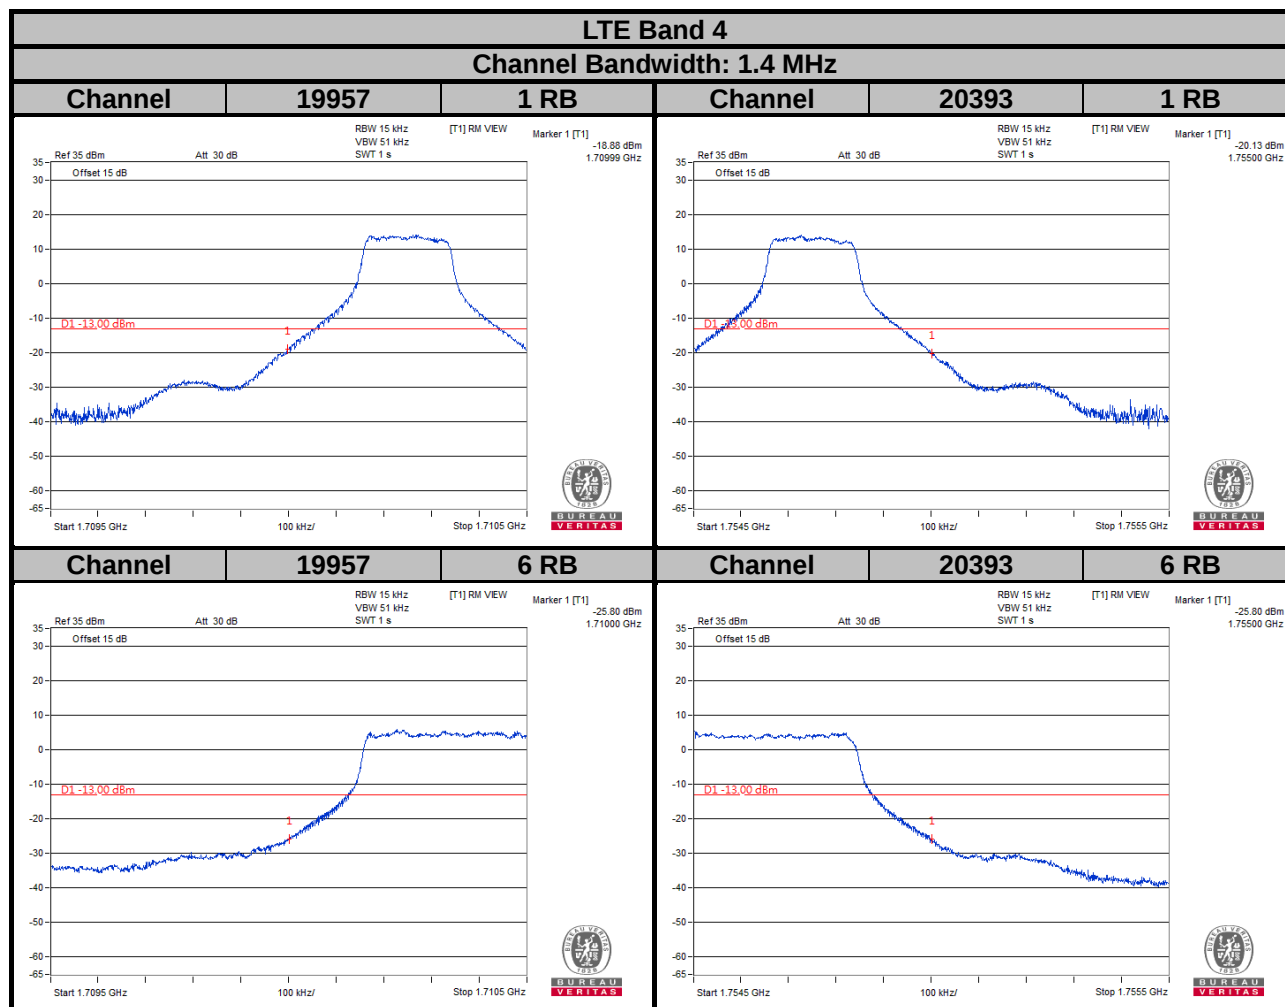


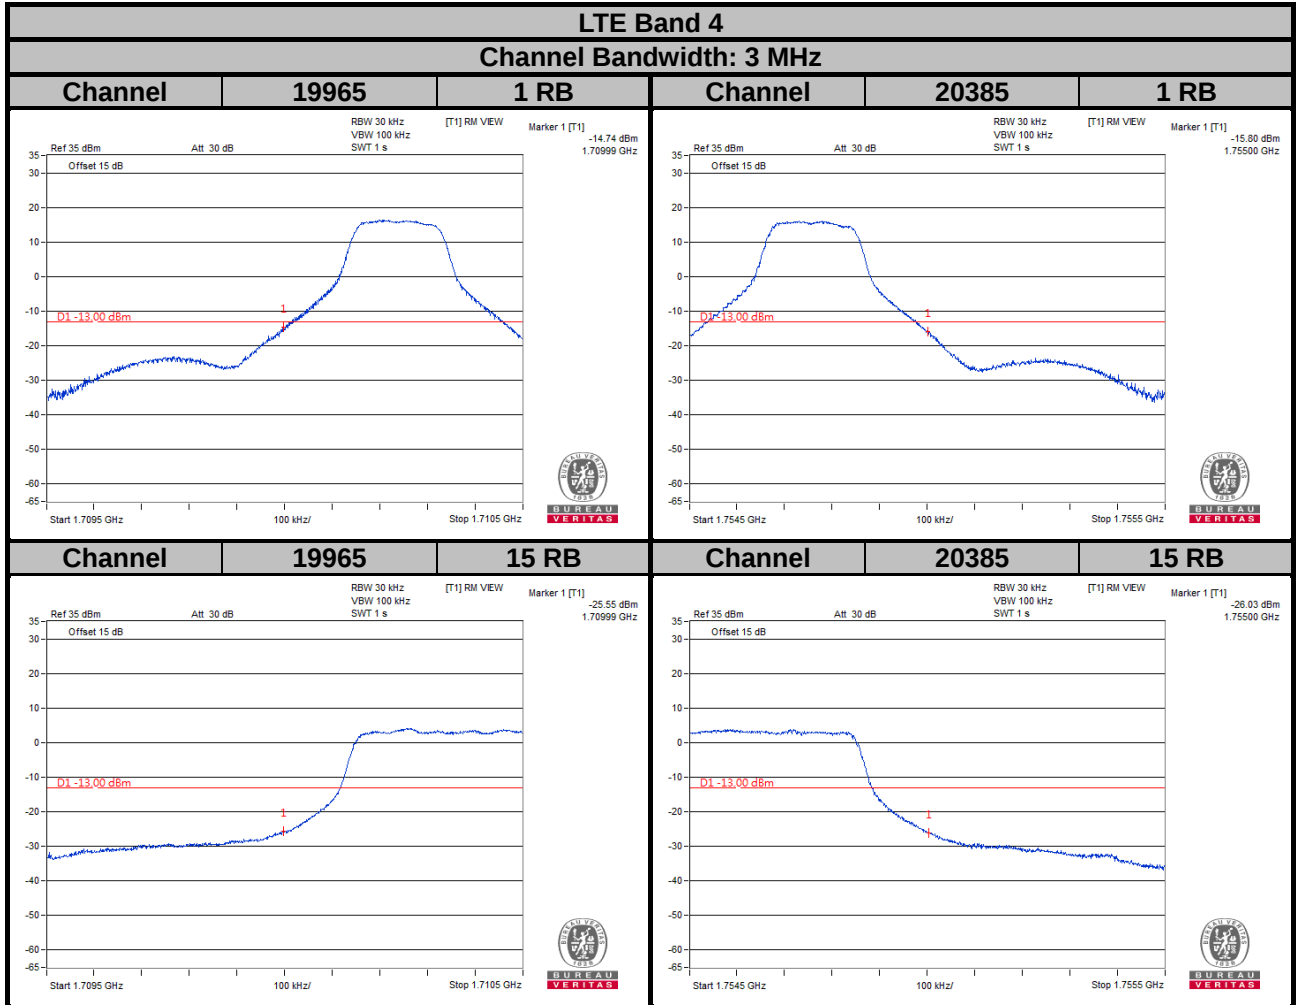


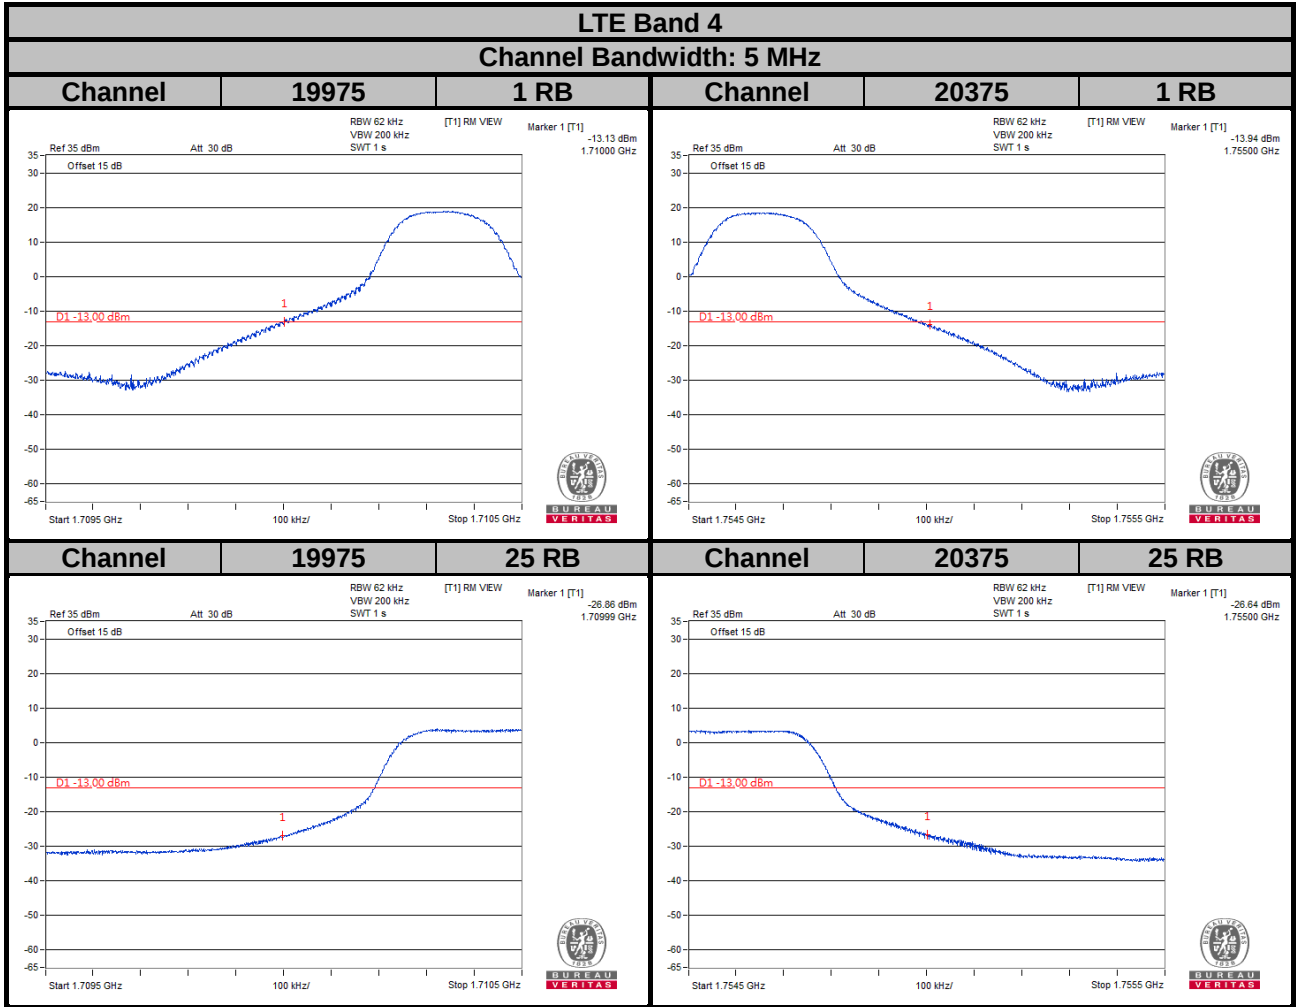


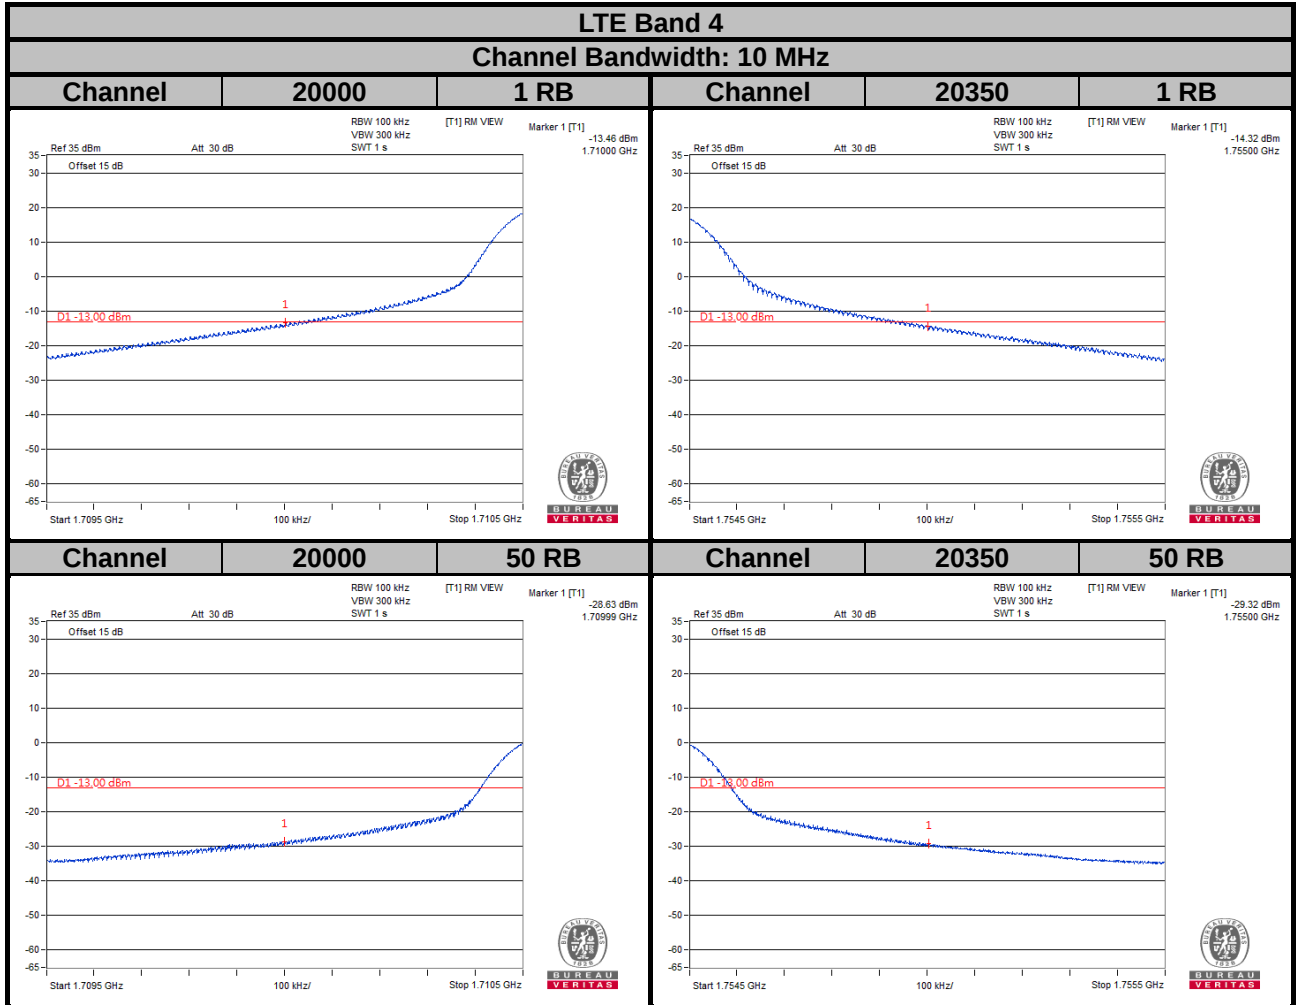


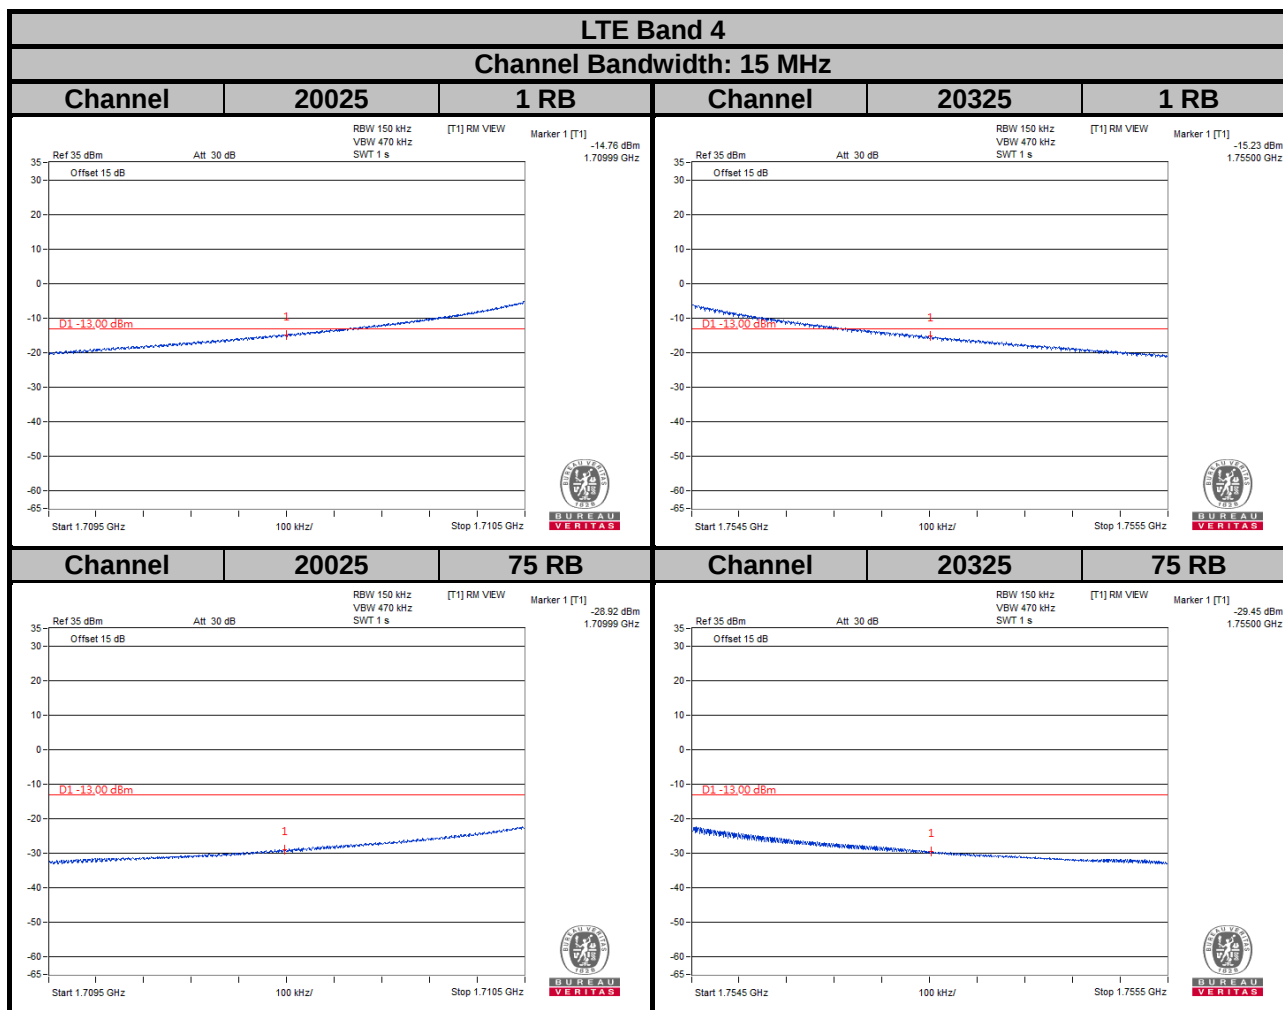


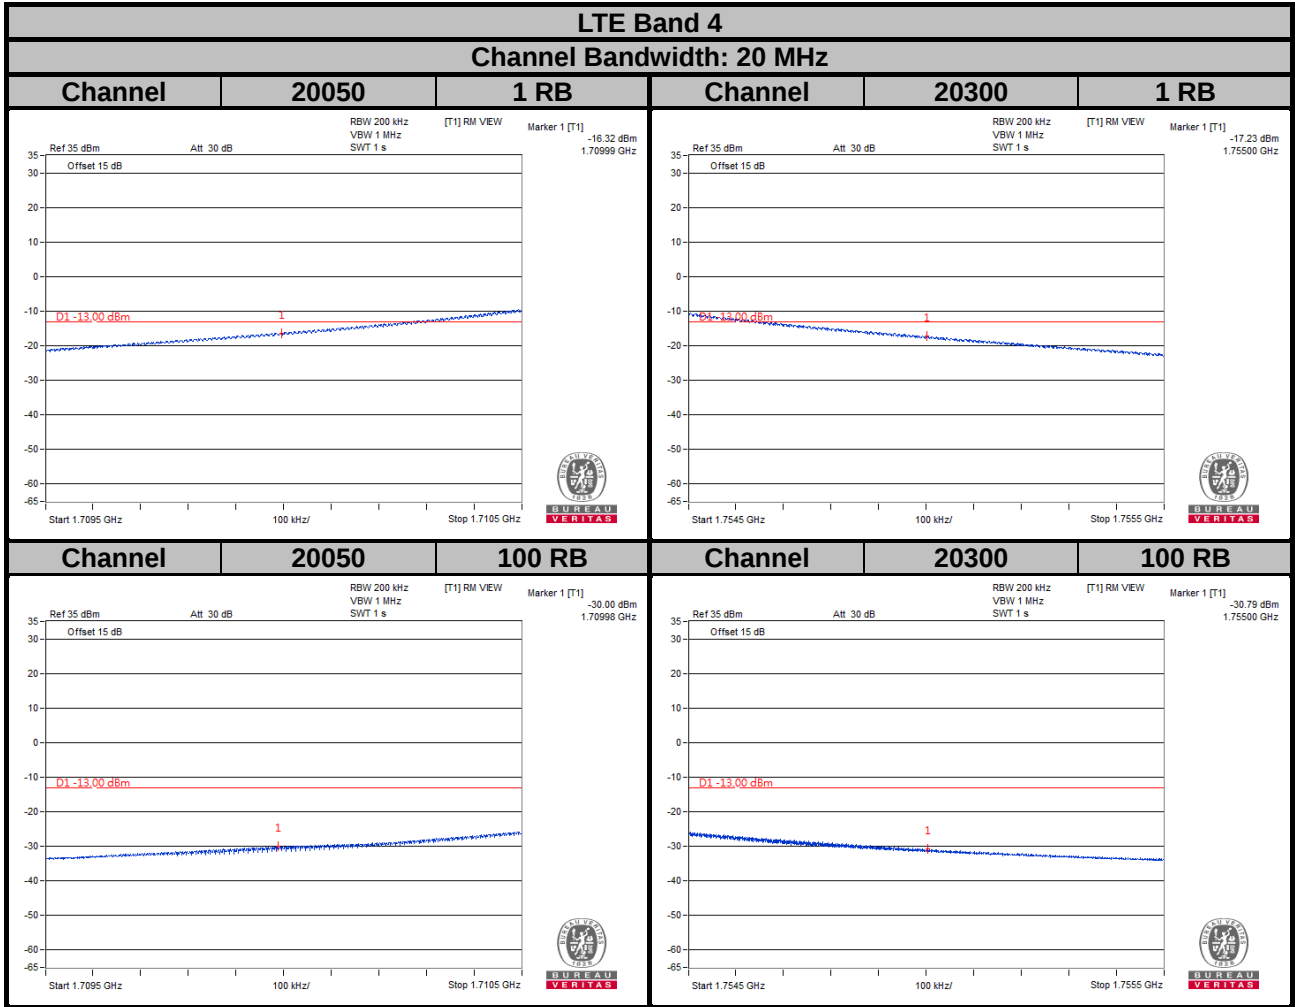

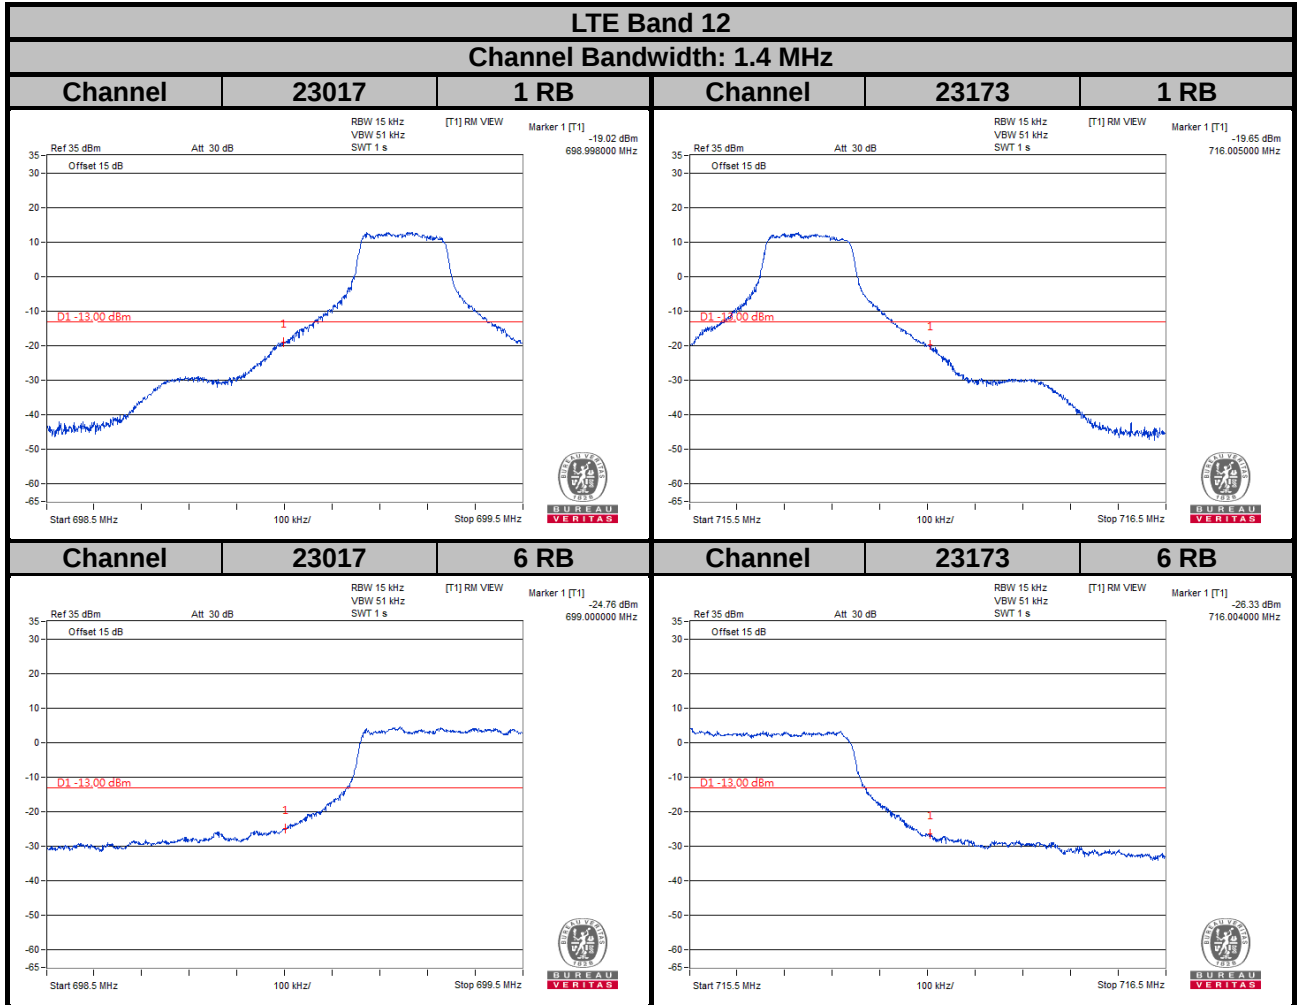

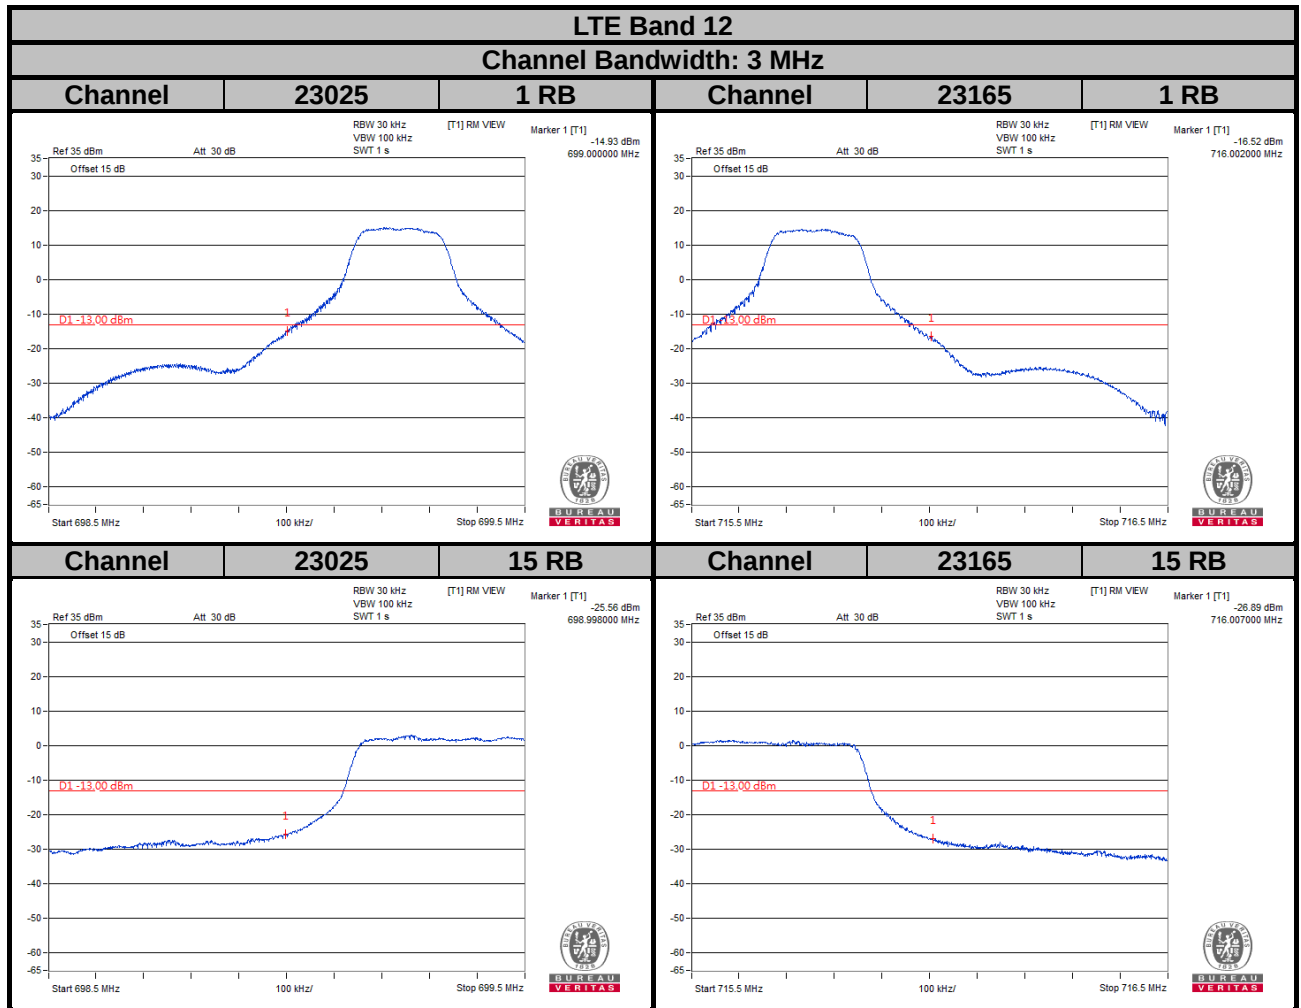

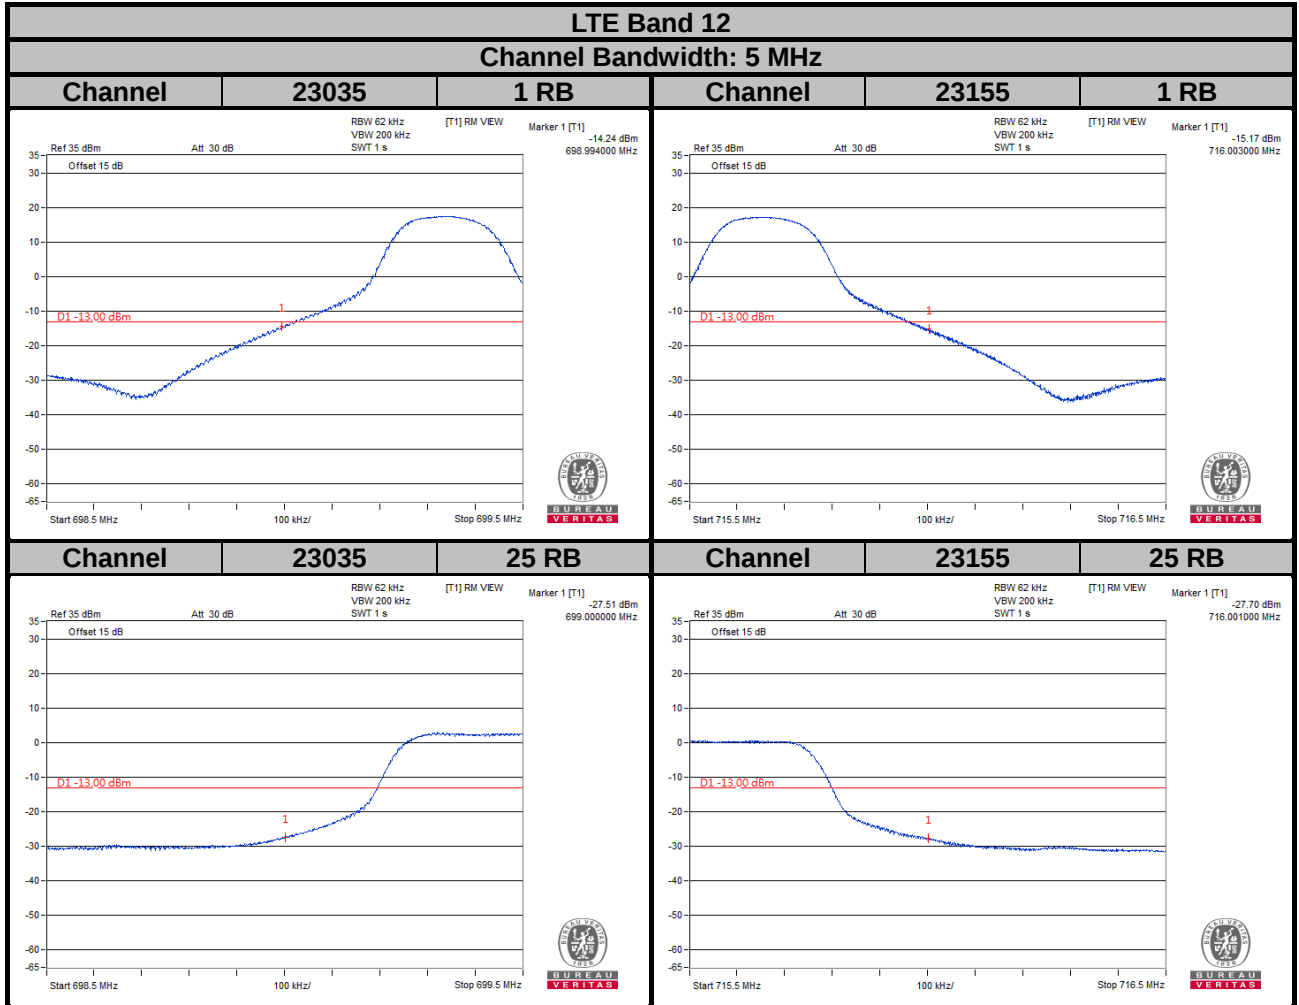

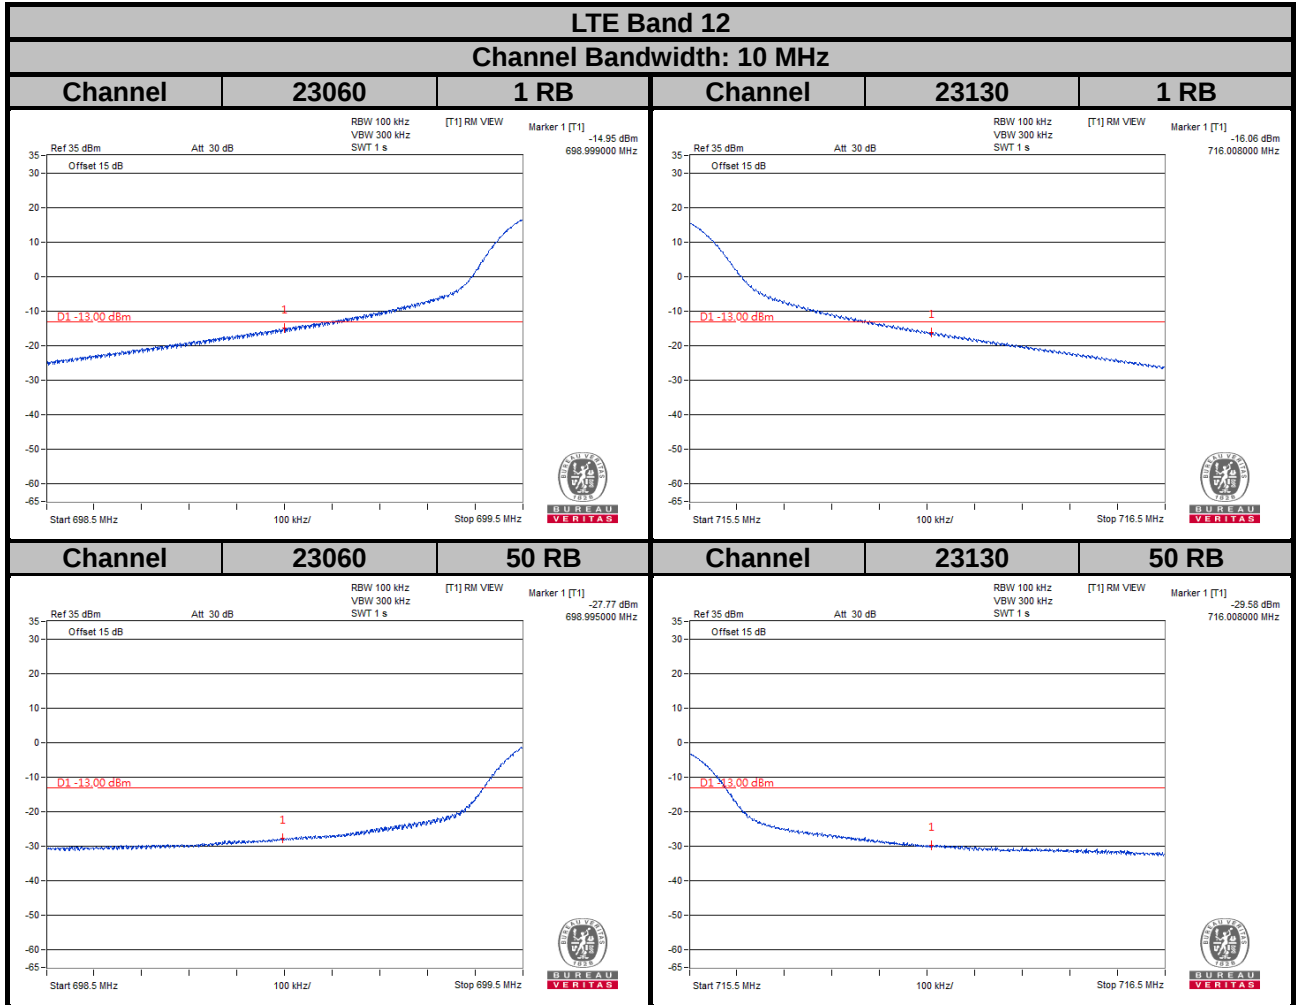


4.6 Peak to Average Ratio

4.6.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.6.2 Test Setup

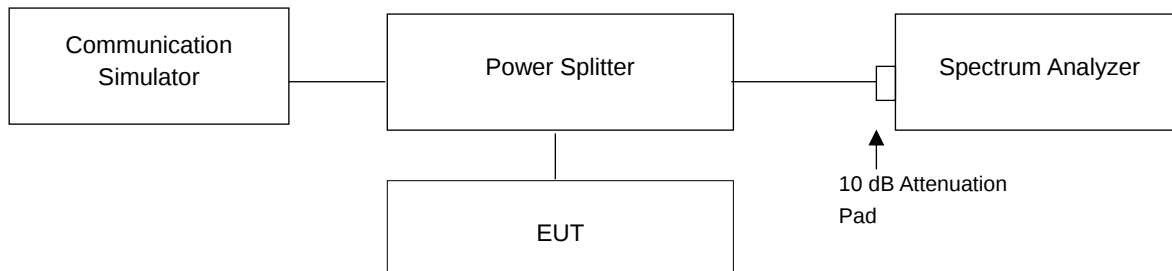


4.6.3 Test Procedures


1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1 %.

4.6.4 Test Results


WCDMA		
Channel	Frequency (MHz)	Peak to Average Ratio (dB)
1312	1712.4	3.11
1413	1732.6	3.22
1513	1752.6	3.27

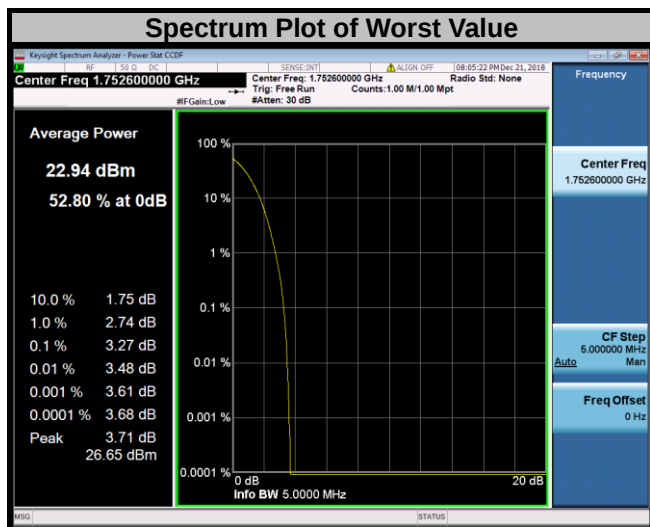


LTE Band 4							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
19957	1710.7	4.97	5.80	19965	1711.5	4.78	5.65
20175	1732.5	5.36	6.16	20175	1732.5	5.09	5.98
20393	1754.3	5.53	6.28	20385	1753.5	5.20	5.96

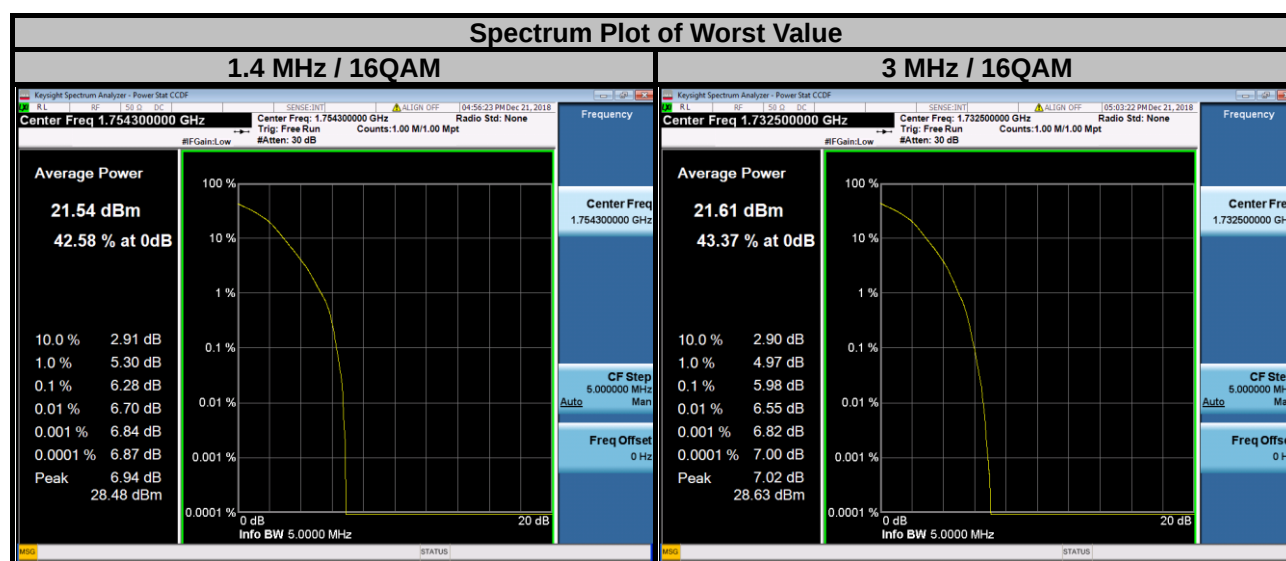


LTE Band 4							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
19975	1712.5	4.43	5.64	20000	1715.0	4.21	5.39
20175	1732.5	4.90	6.07	20175	1732.5	4.75	5.93
20375	1752.5	4.94	6.07	20350	1750.0	4.54	5.69

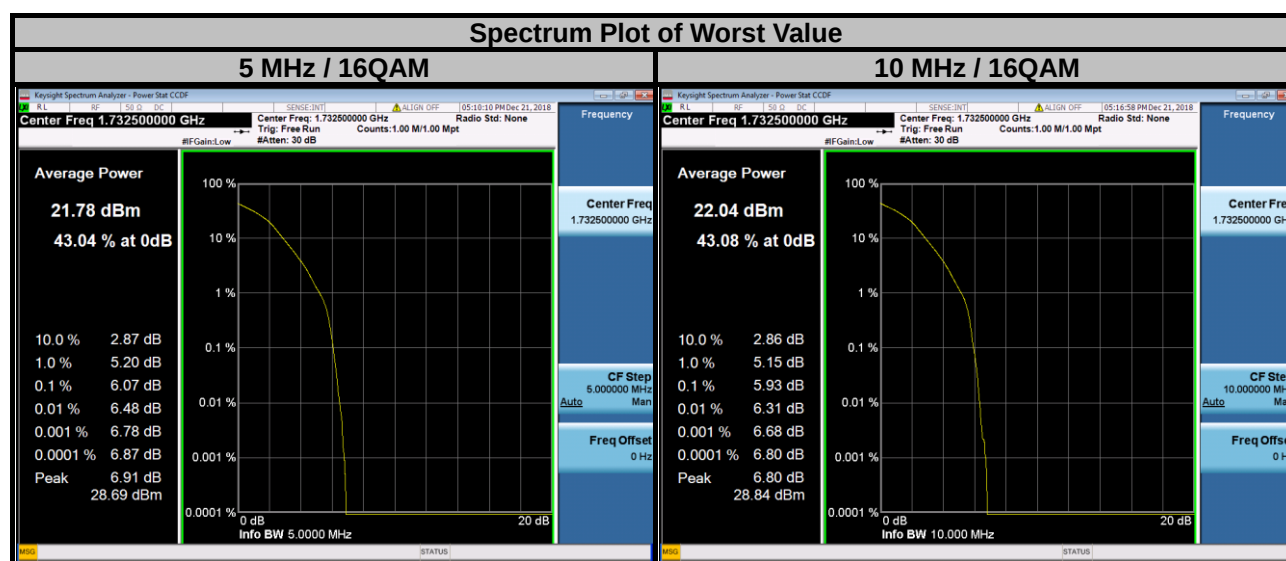


LTE Band 4							
Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
20025	1717.5	4.00	5.29	20050	1720.0	4.04	5.26
20175	1732.5	4.56	5.83	20175	1732.5	4.65	5.82
20325	1747.5	4.19	5.46	20300	1745.0	4.29	5.49

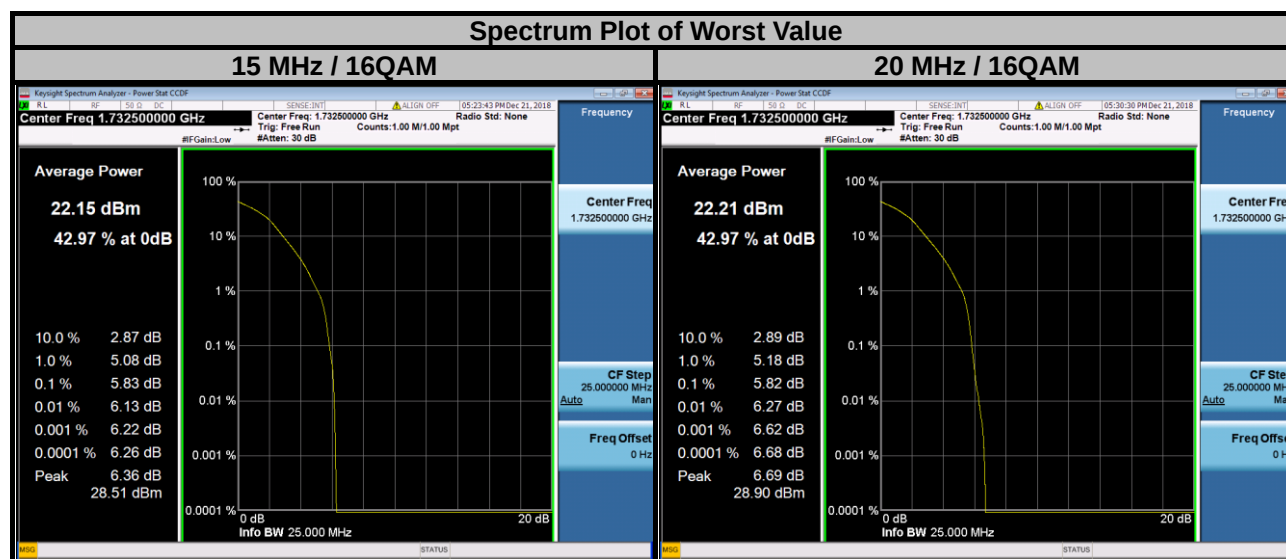

LTE Band 12							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
23017	699.7	3.81	4.61	23025	700.5	3.82	4.77
23095	707.5	4.45	5.30	23095	707.5	4.64	5.55
23173	715.3	4.36	5.20	23165	714.5	3.82	4.70

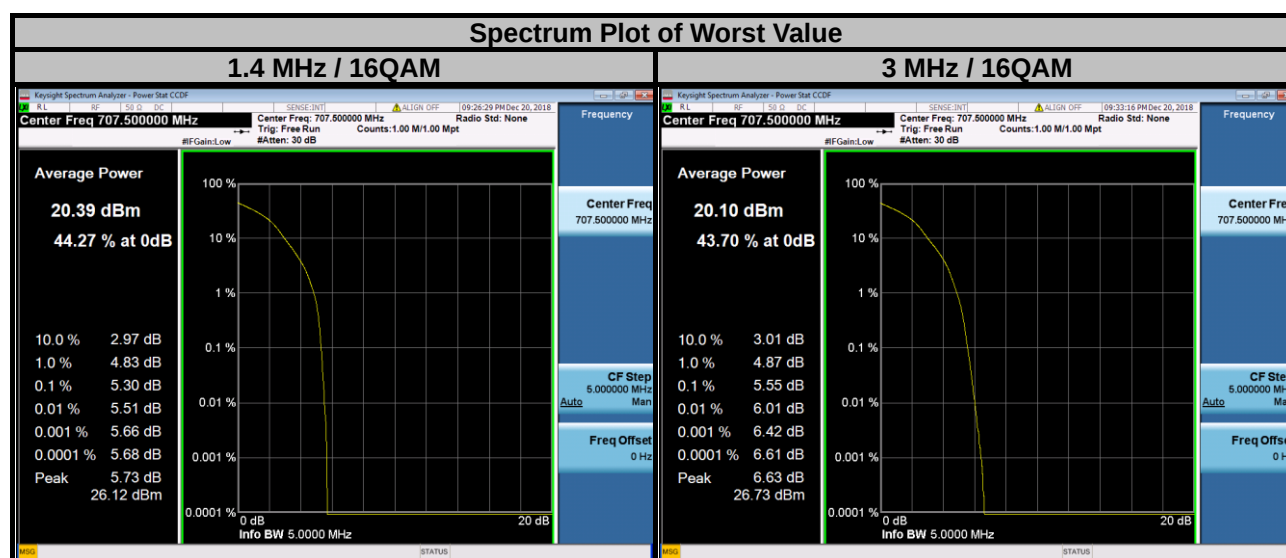

LTE Band 12							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
23035	701.5	3.91	4.65	23060	704.0	3.88	4.68
23095	707.5	4.92	5.69	23095	707.5	4.75	5.57
23155	713.5	3.47	4.21	23130	711.0	4.65	5.43

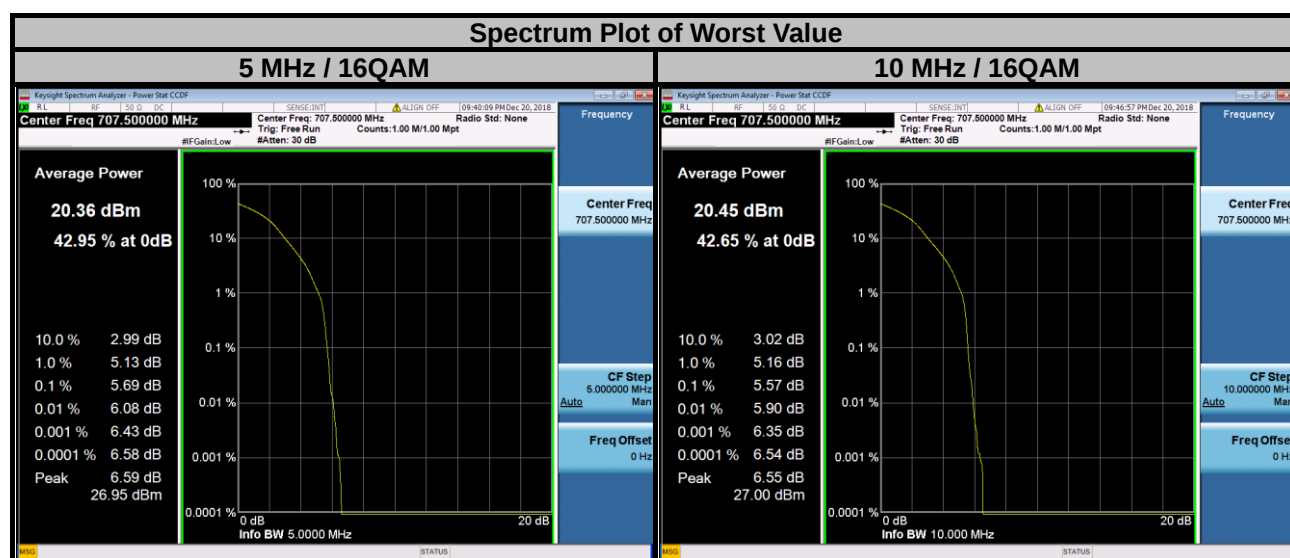


4.7 Conducted Spurious Emissions

4.7.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The limit of emission is equal to -13 dBm.


4.7.2 Test Setup

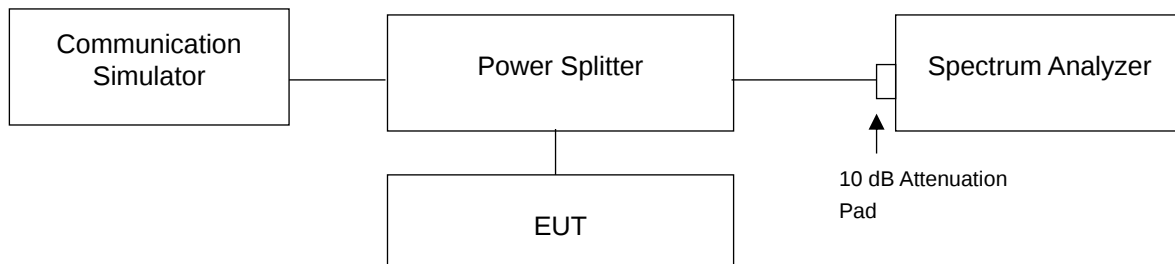


4.7.3 Test Procedure

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 1 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 100 kHz and VBW = 300 kHz is used for conducted emission measurement.
- Measuring frequency range is from 1 GHz to 10 GHz / 26.5 GHz / 27 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz is used for conducted emission measurement.


4.7.4 Test Results

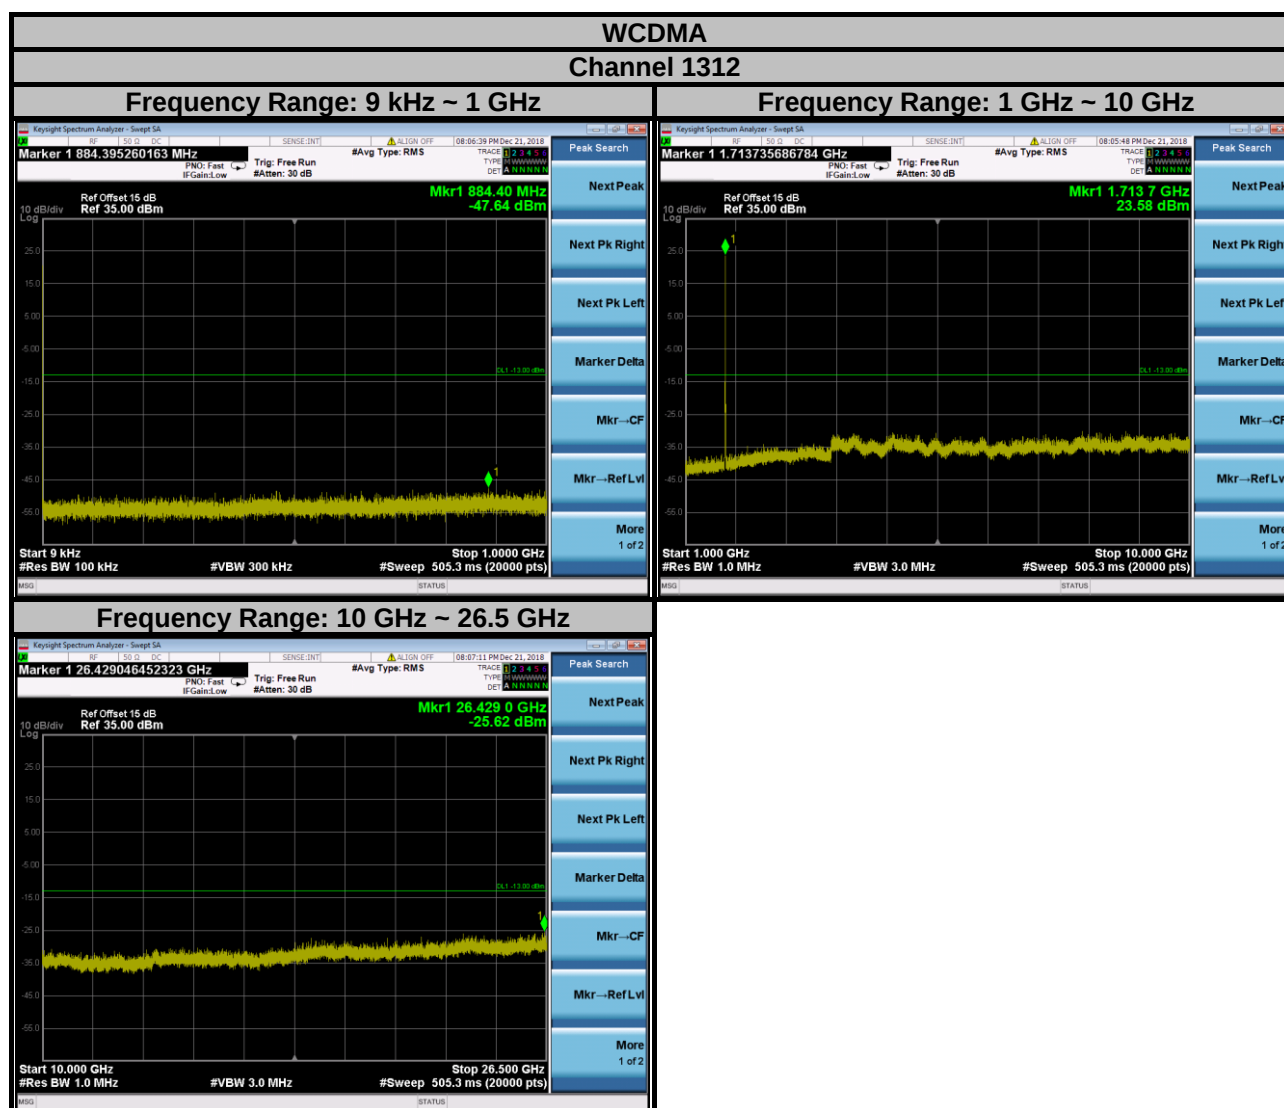


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

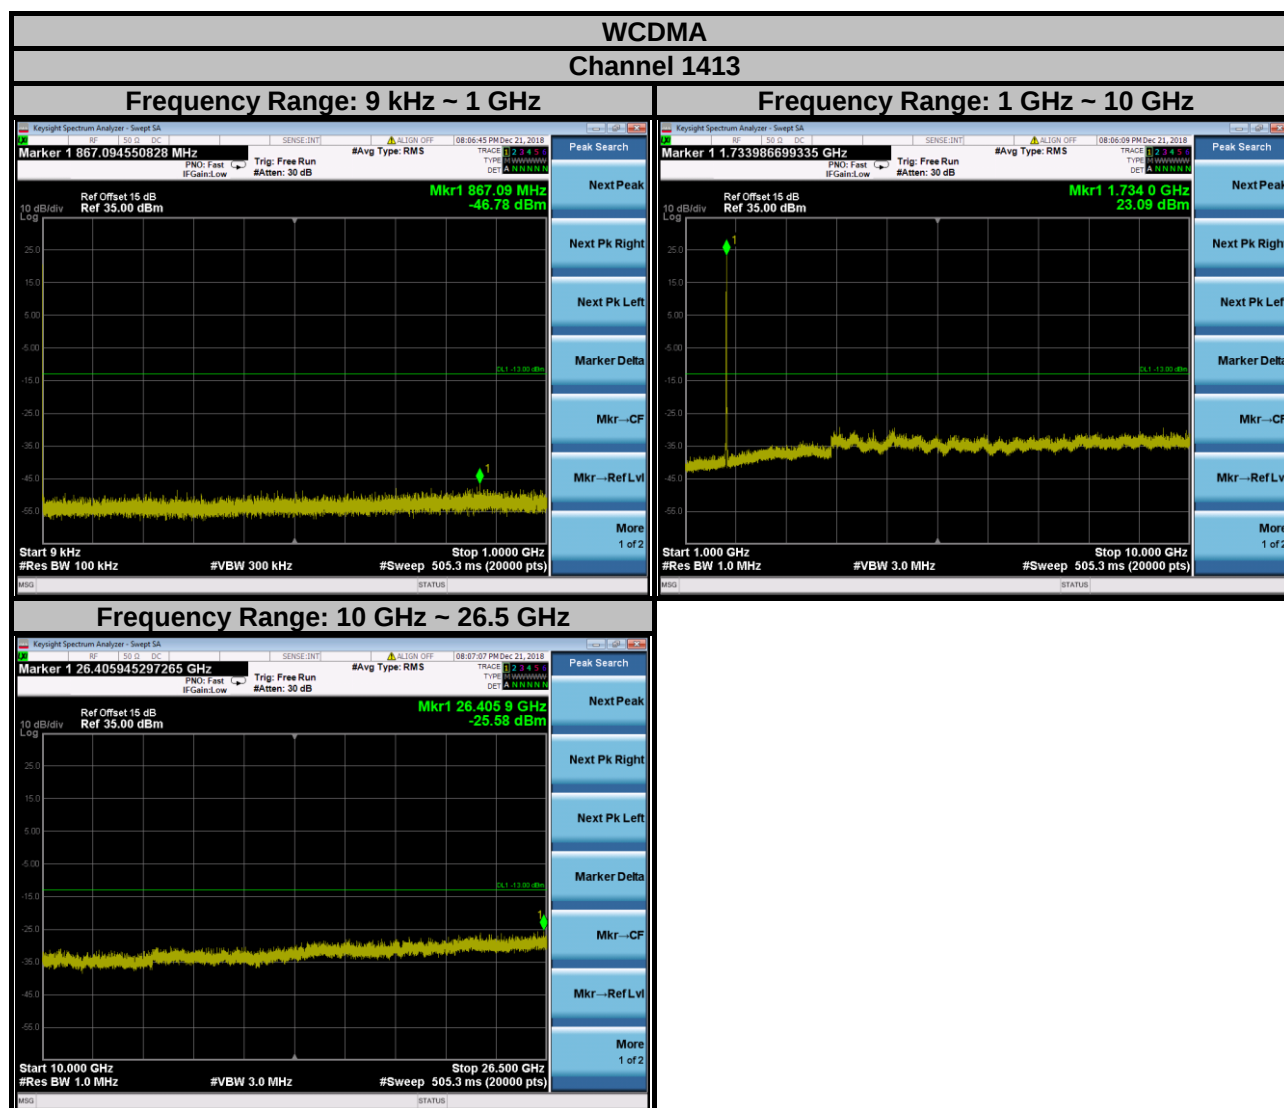


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

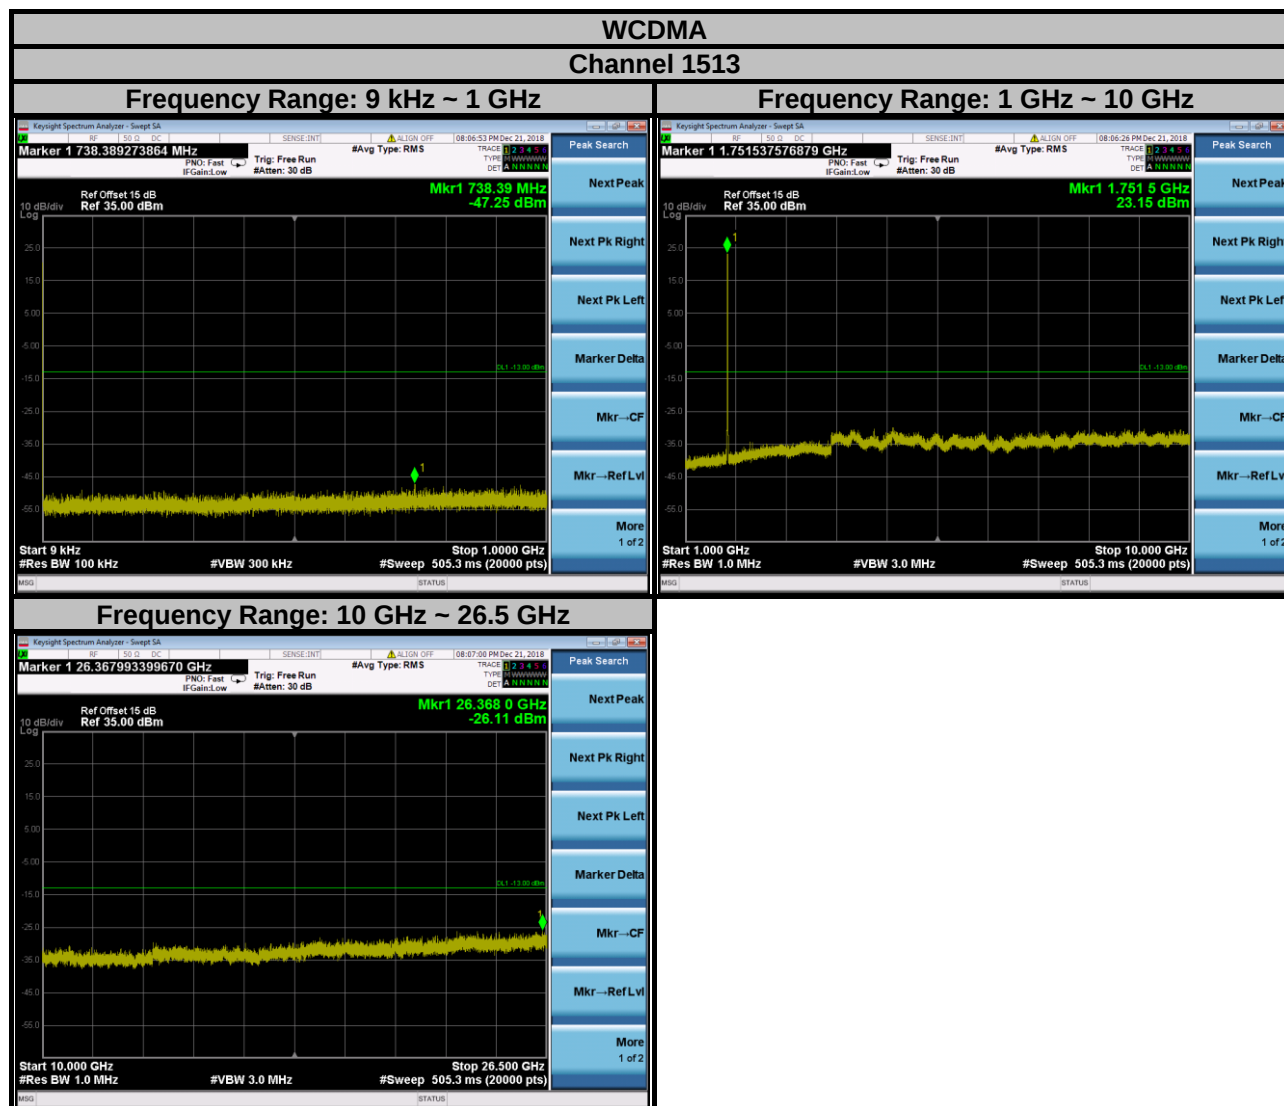


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

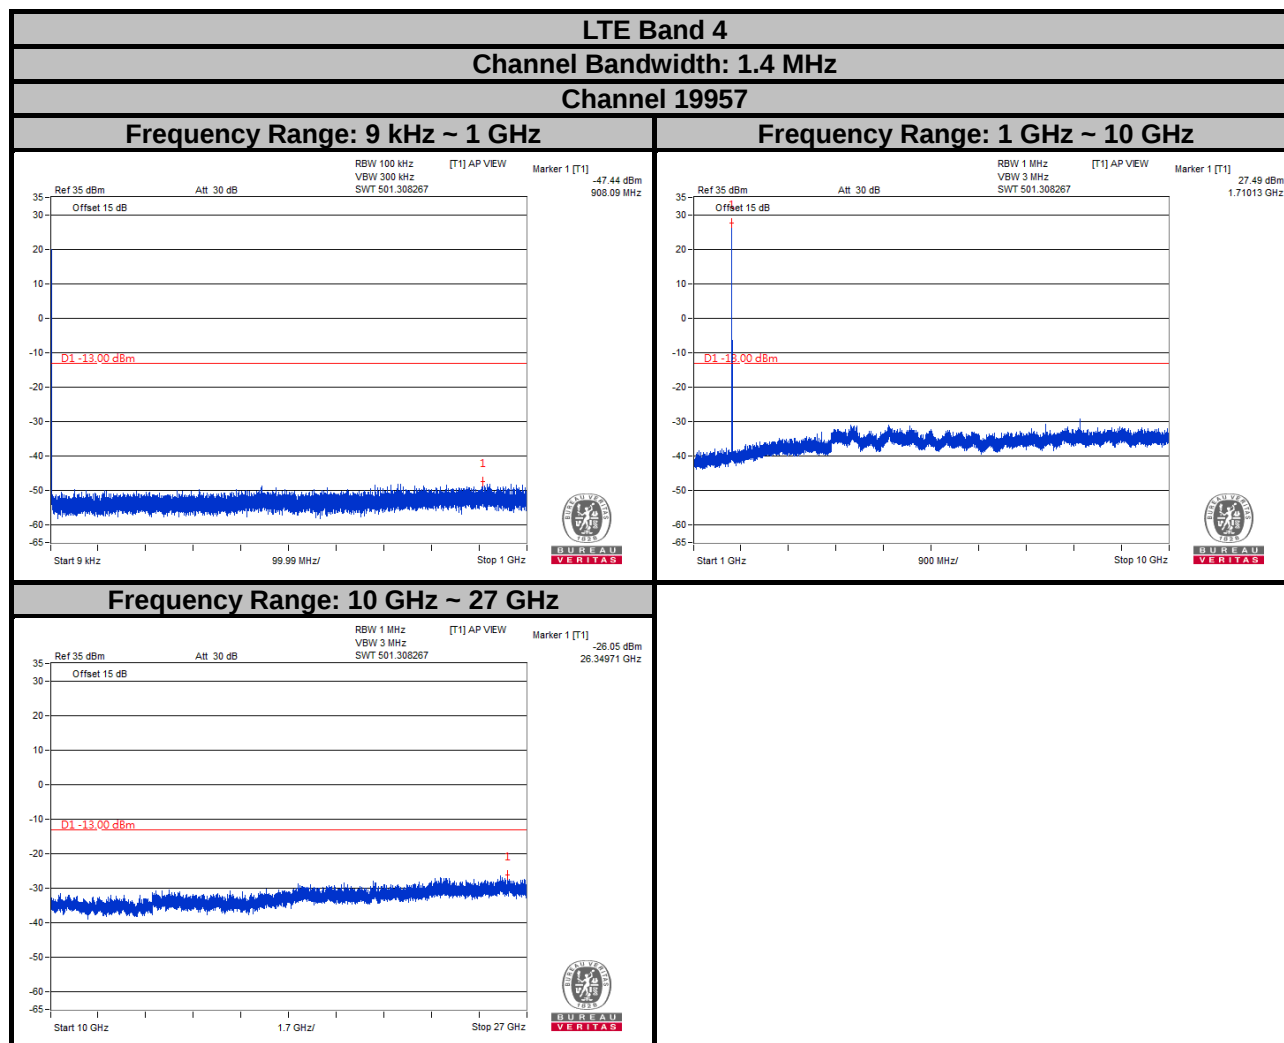


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

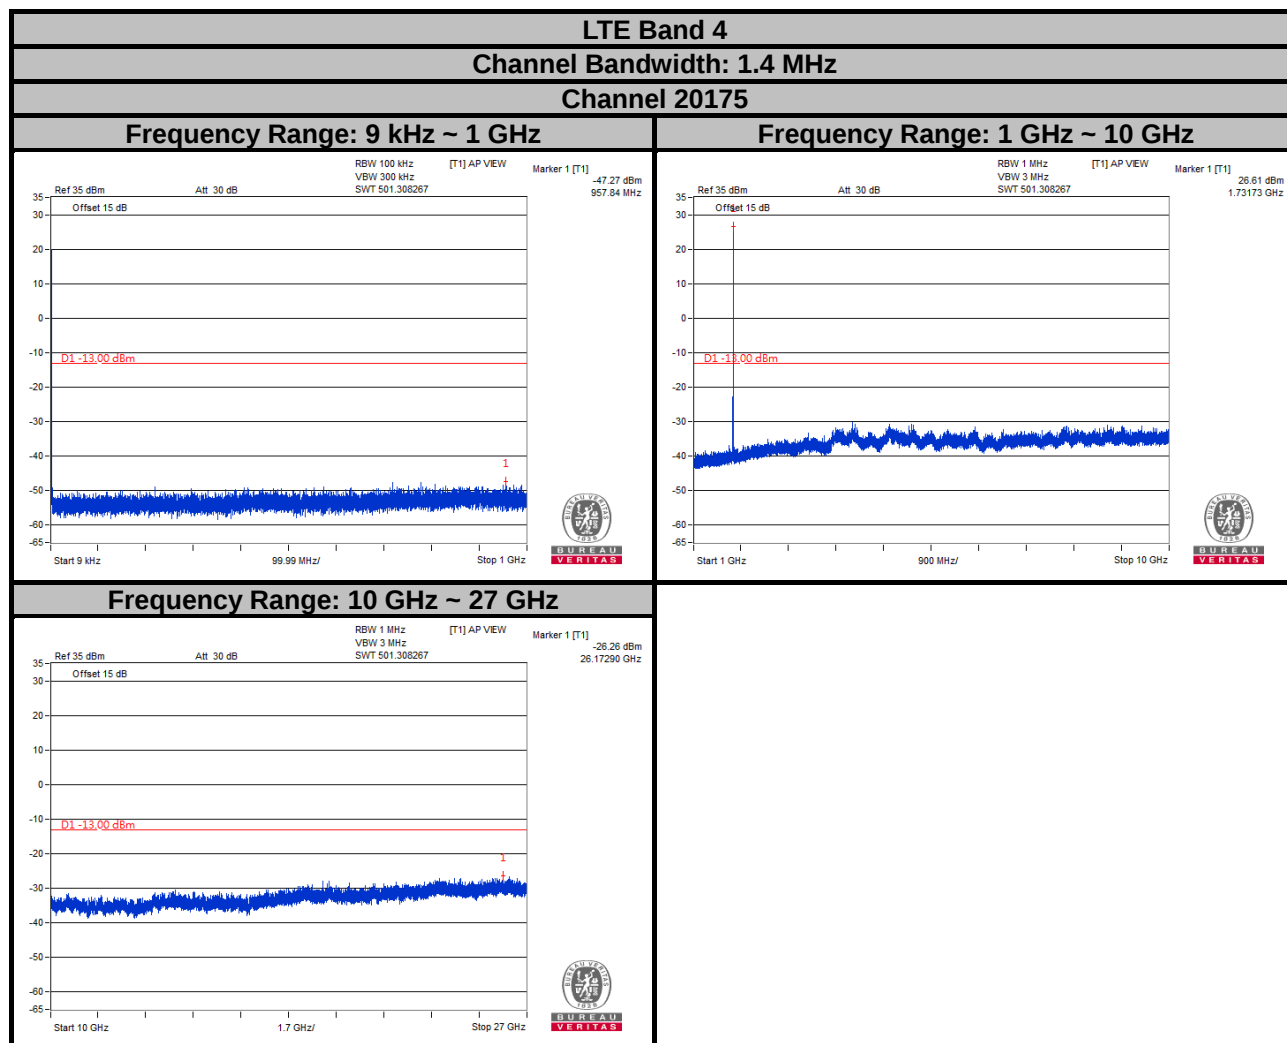


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

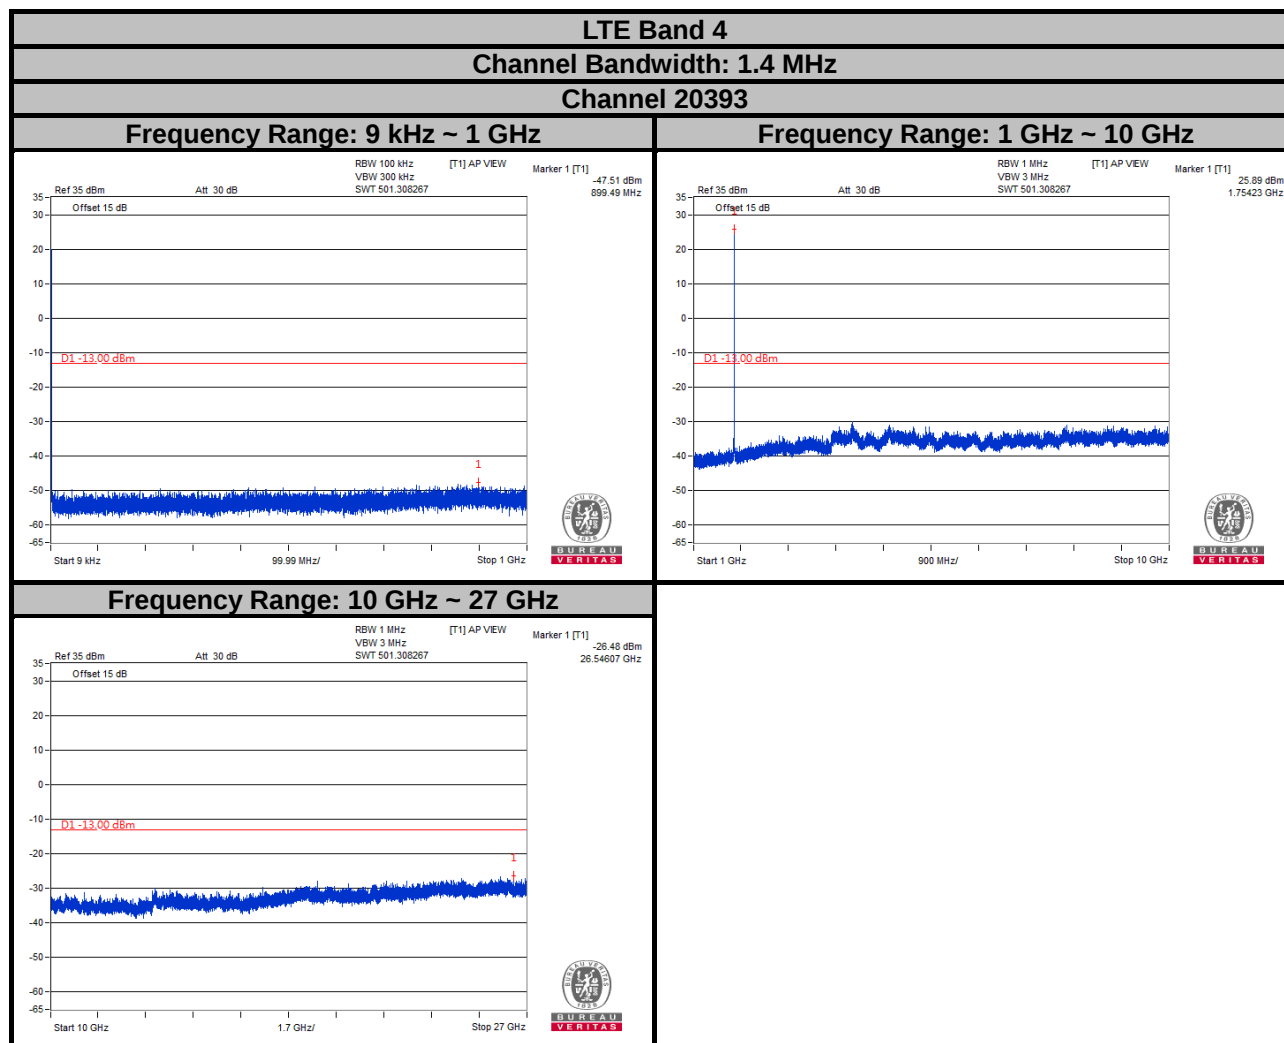


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

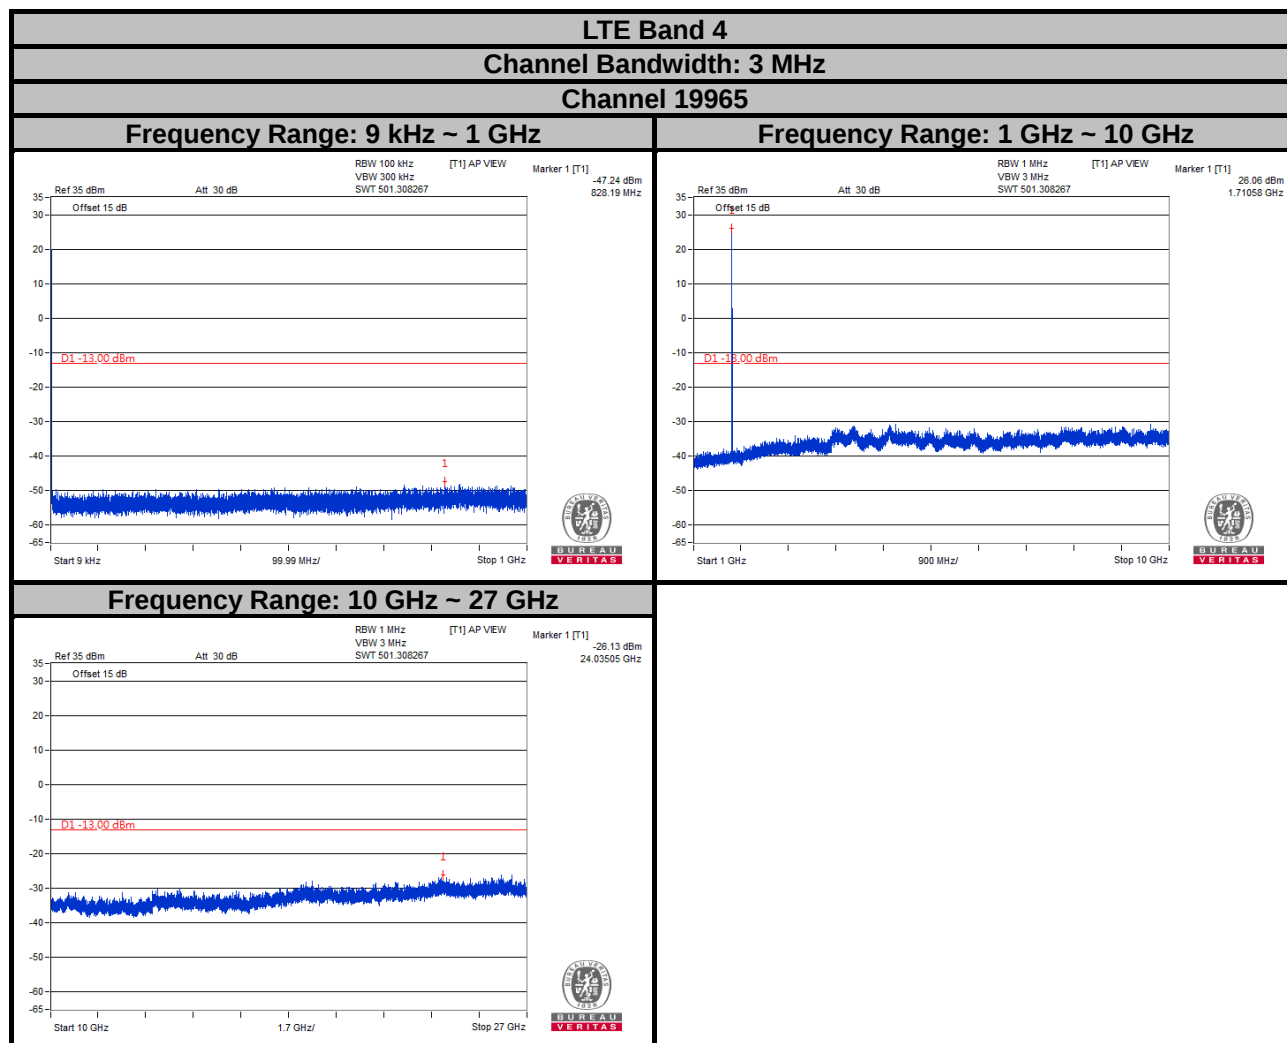


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

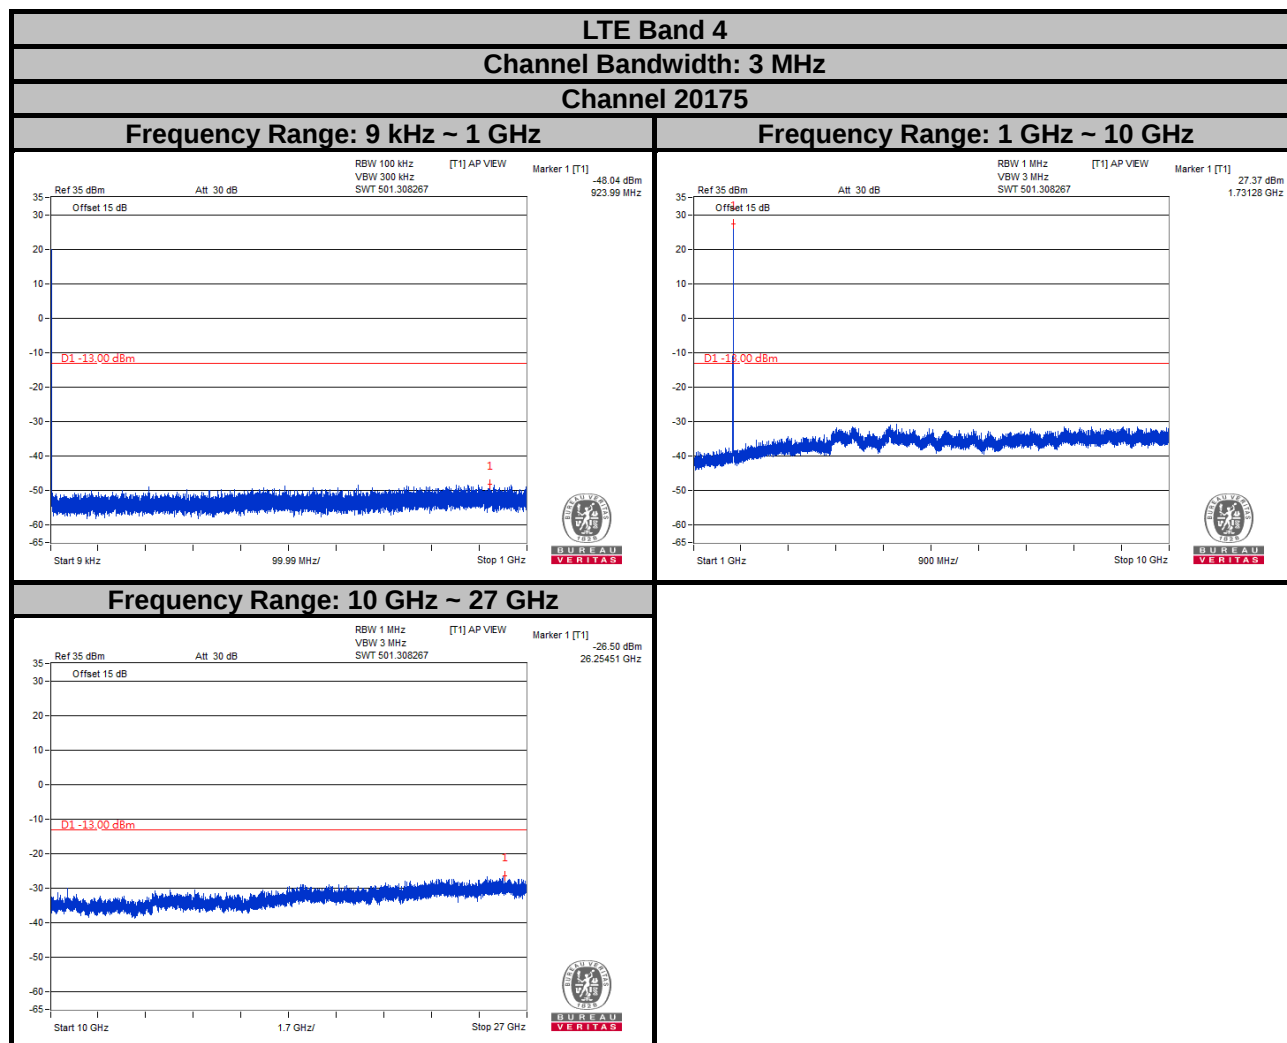


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

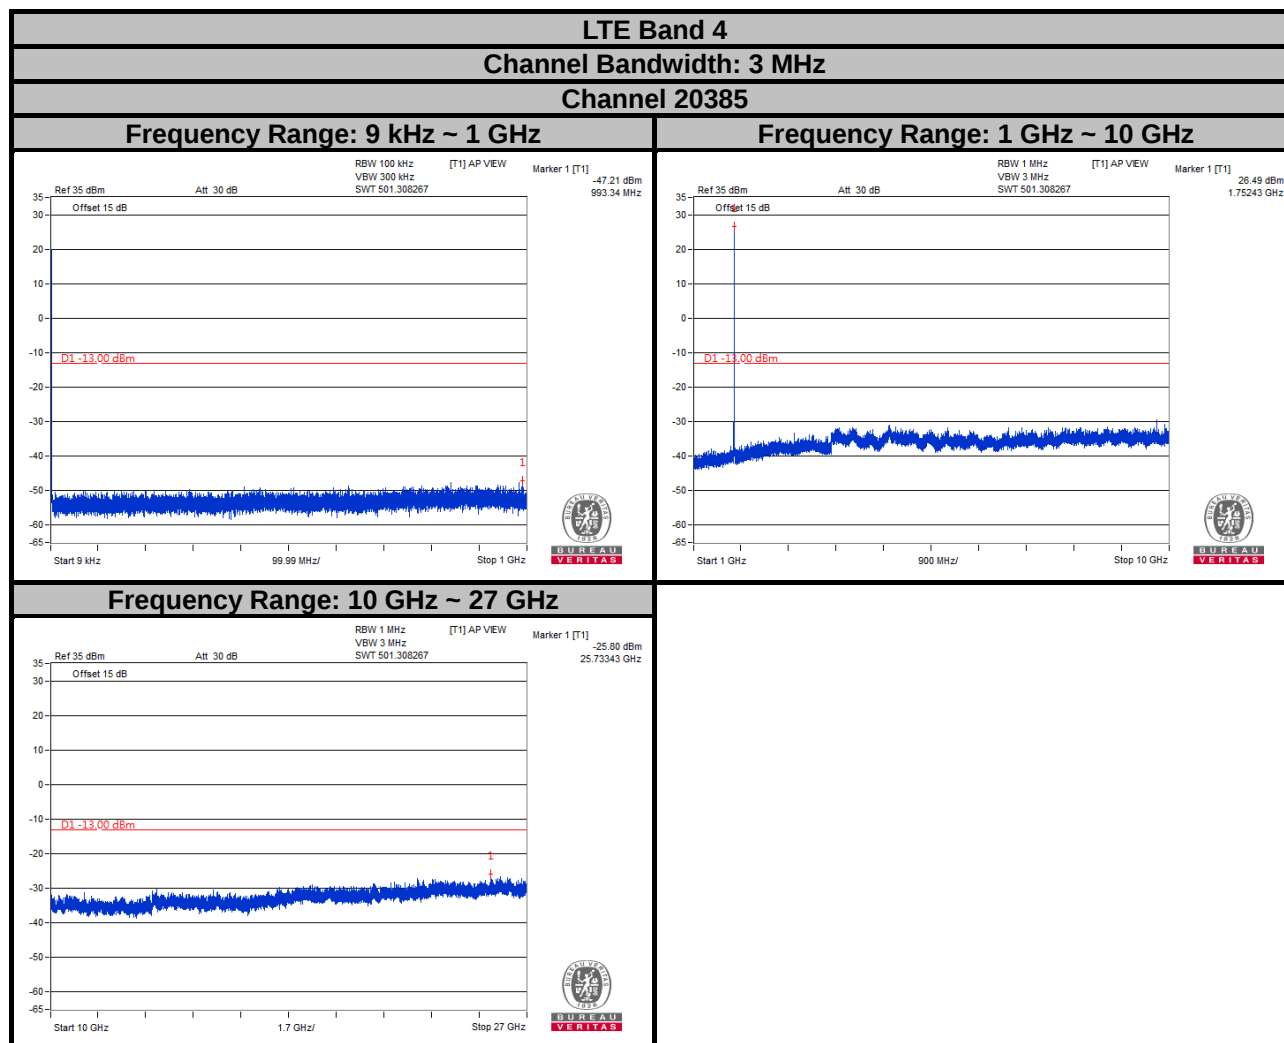


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

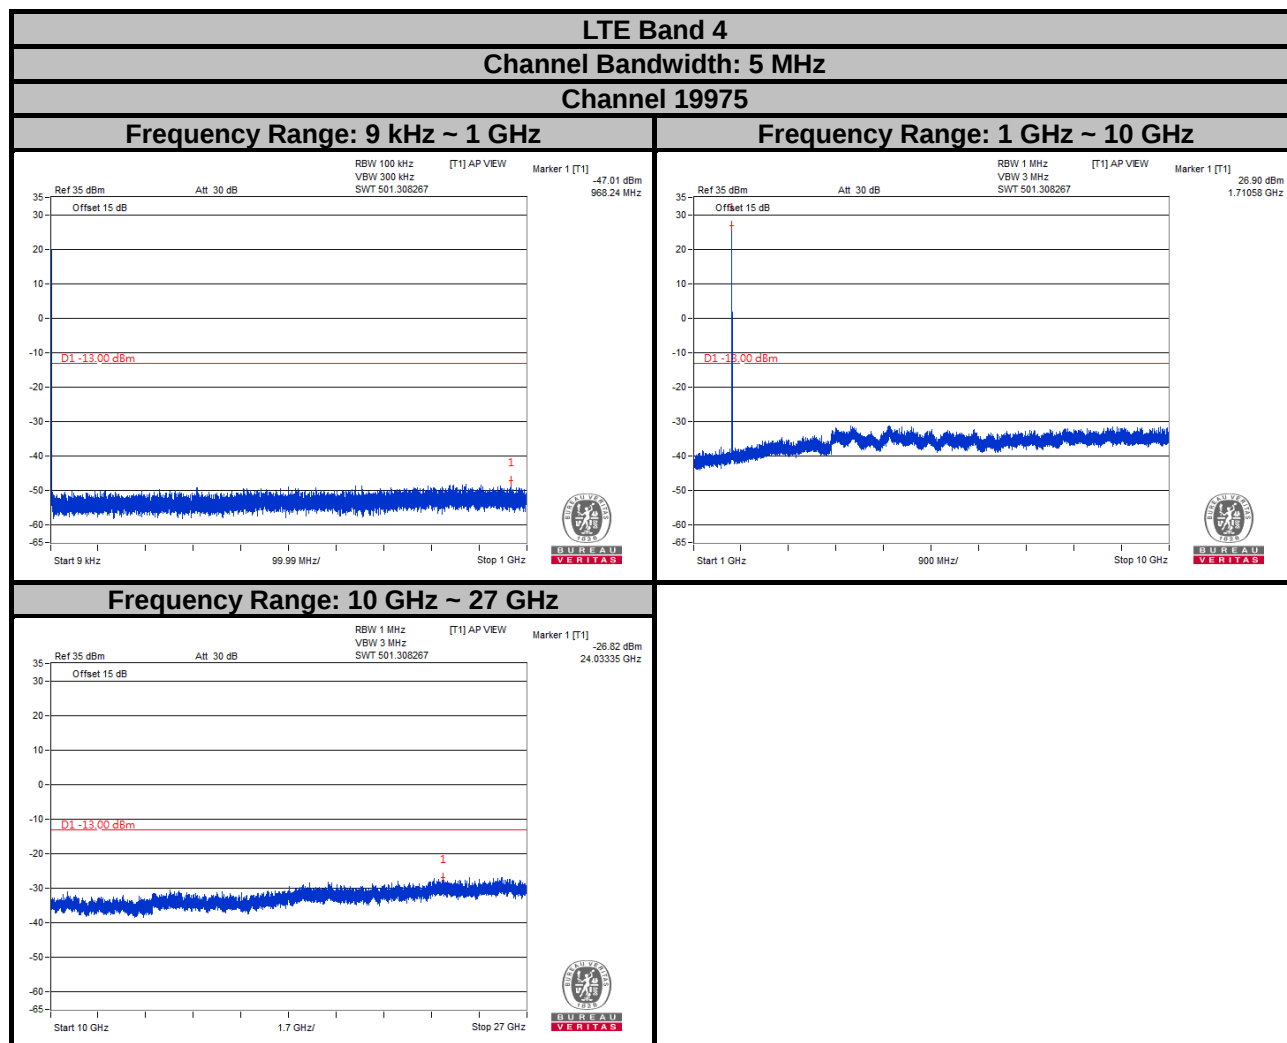


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

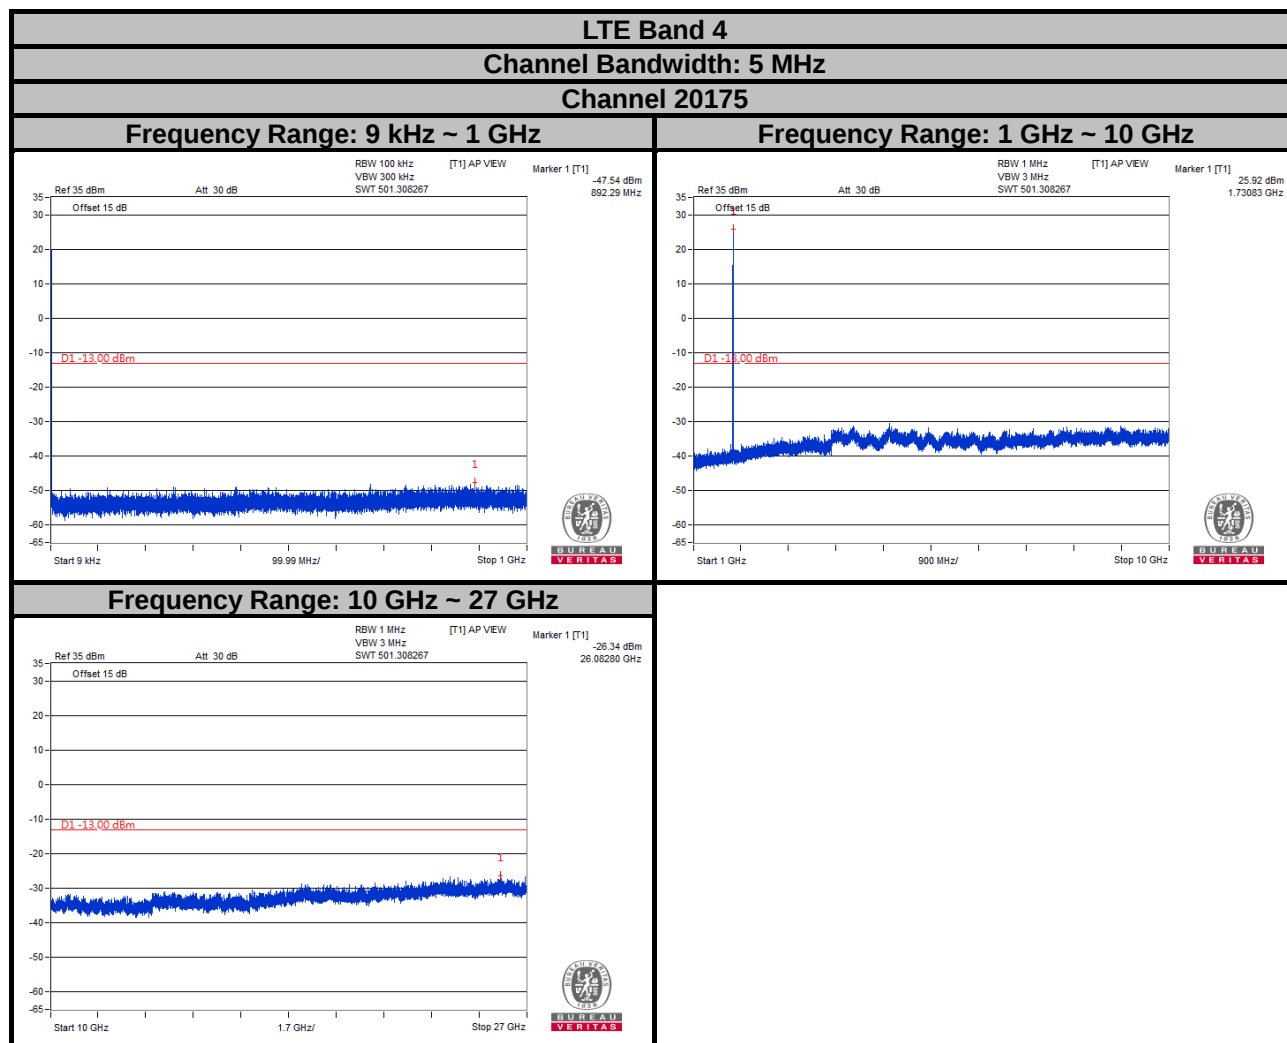


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

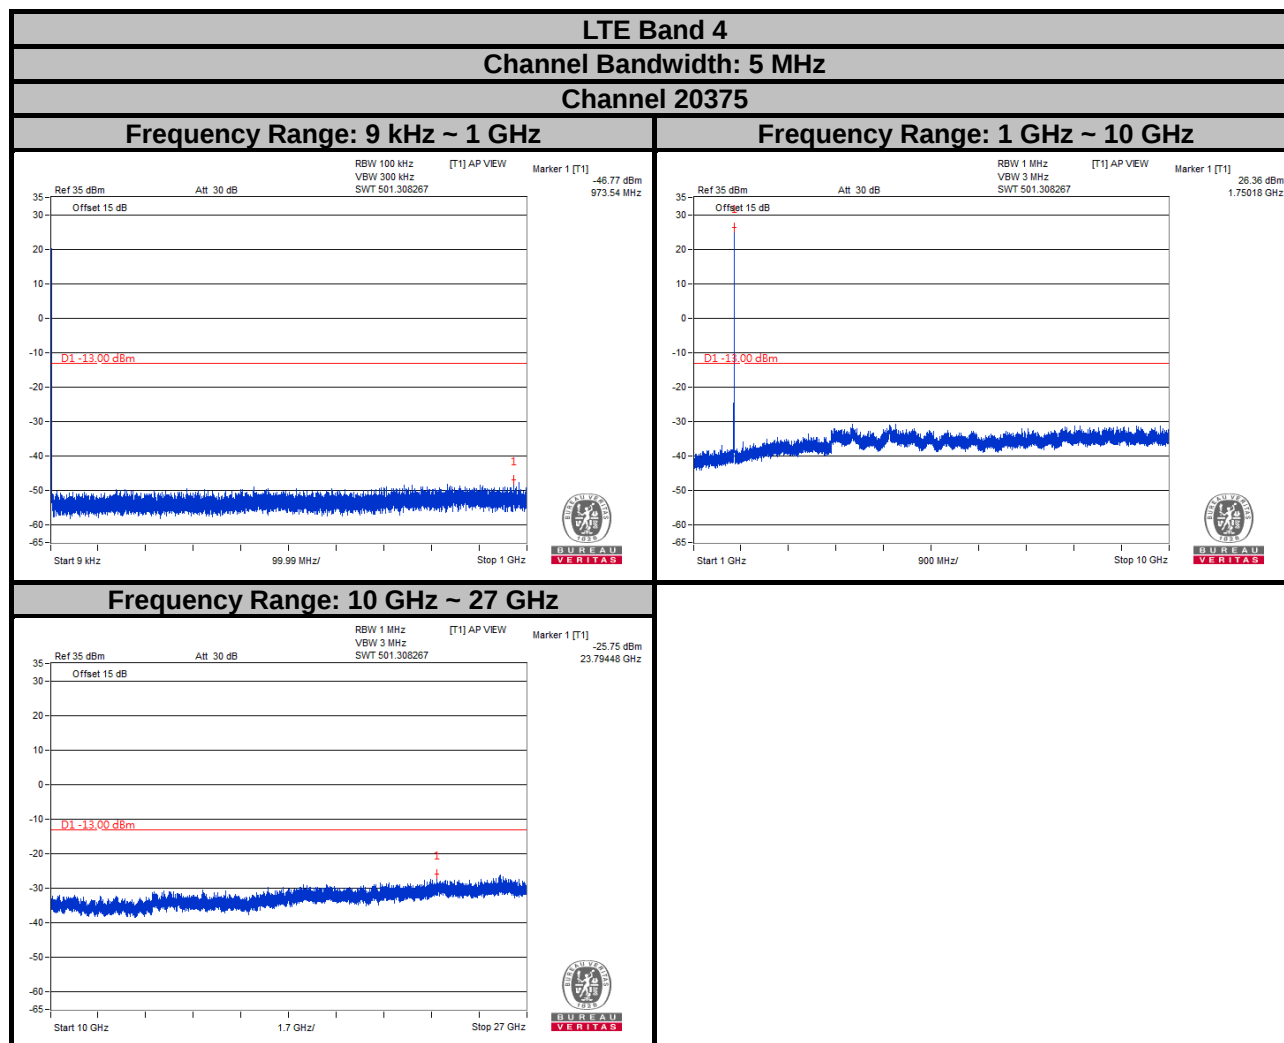


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

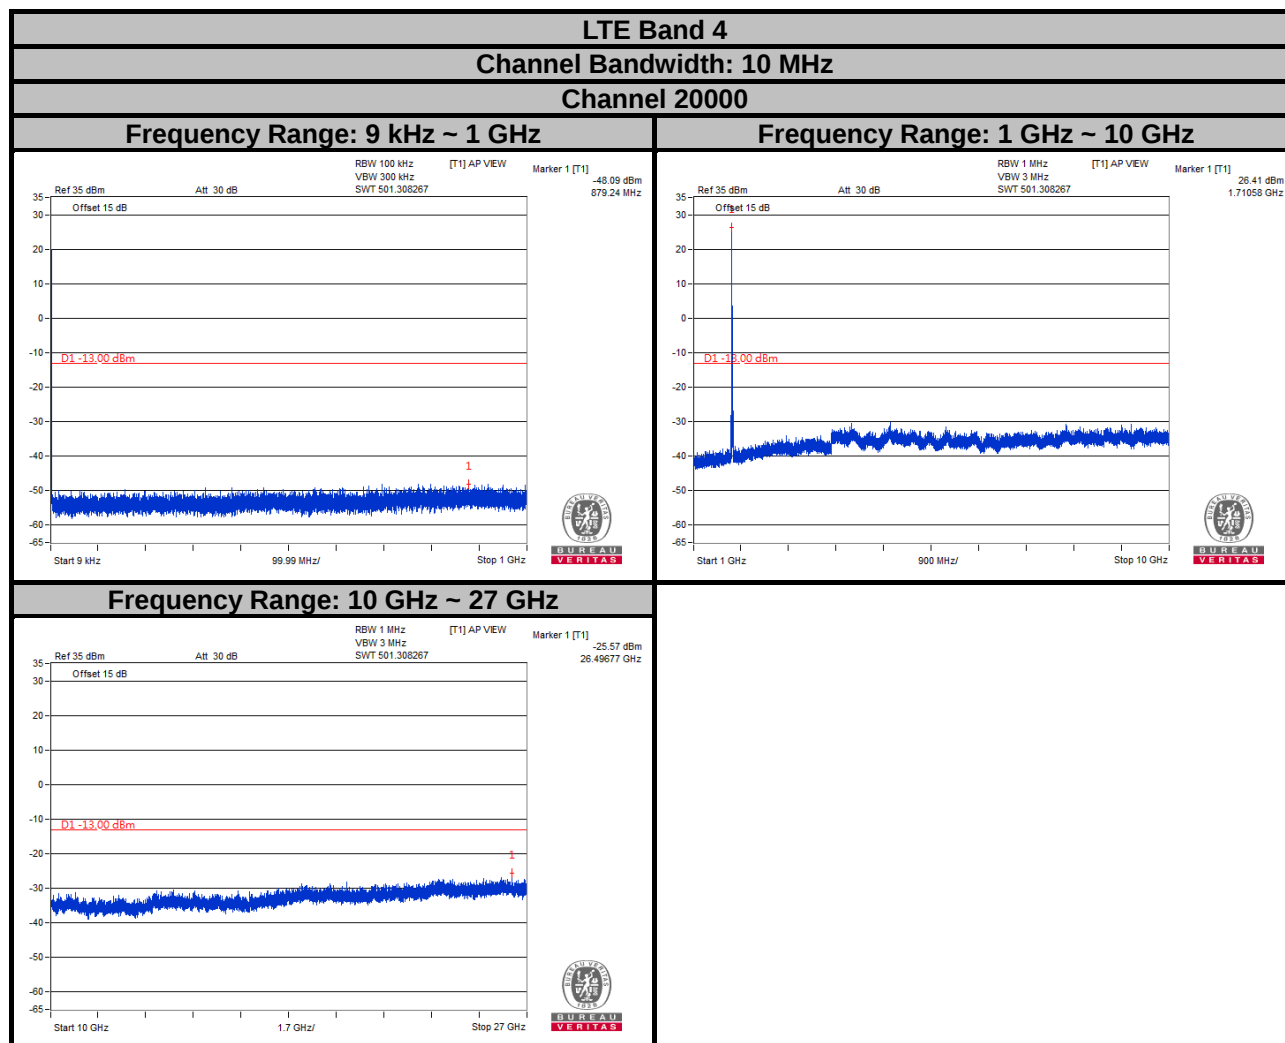


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

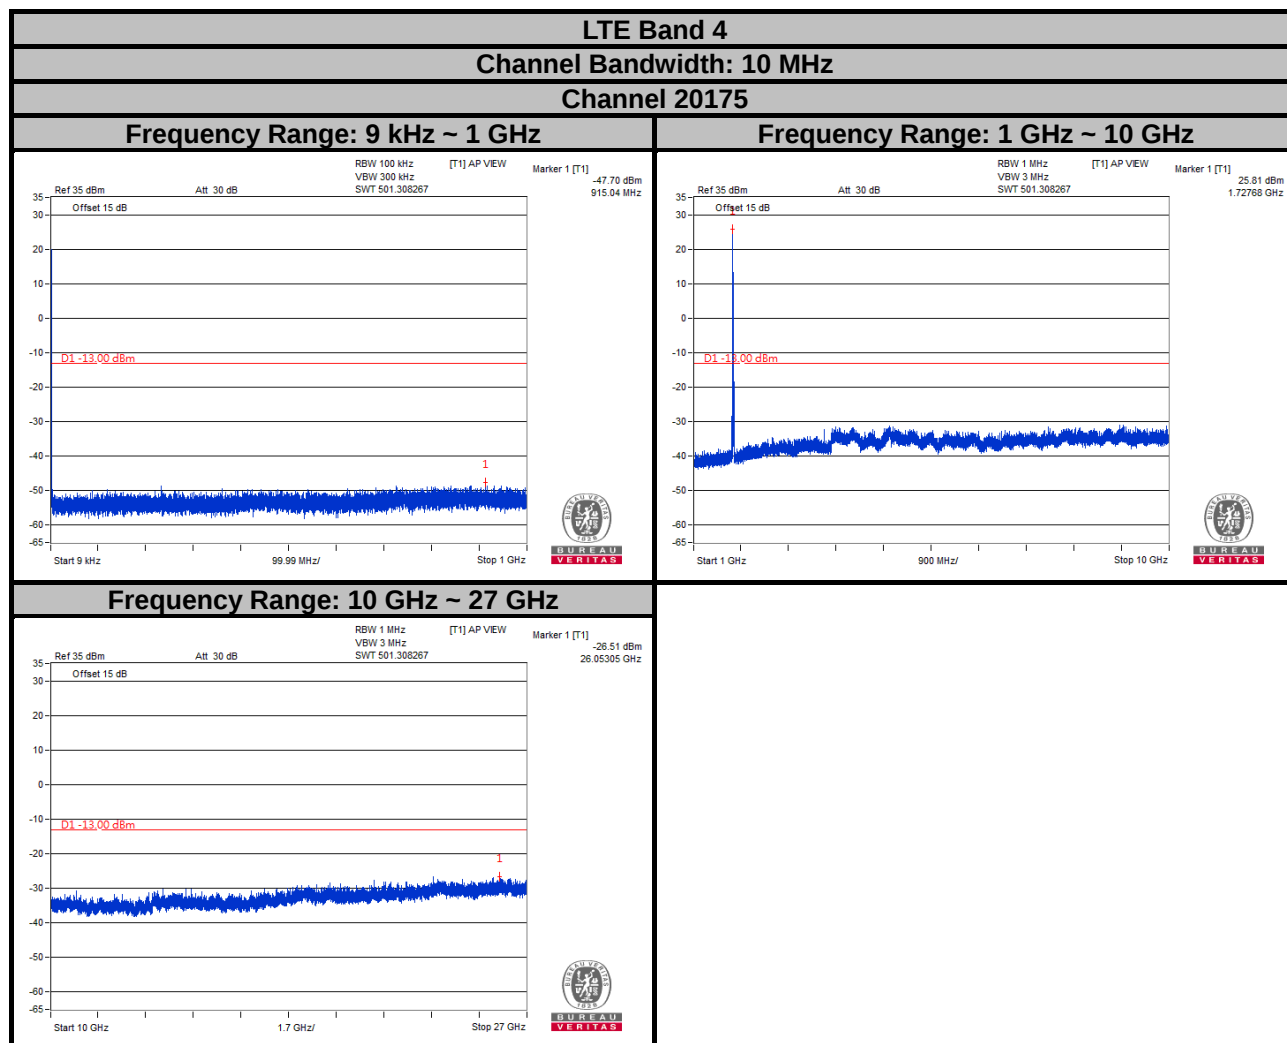


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

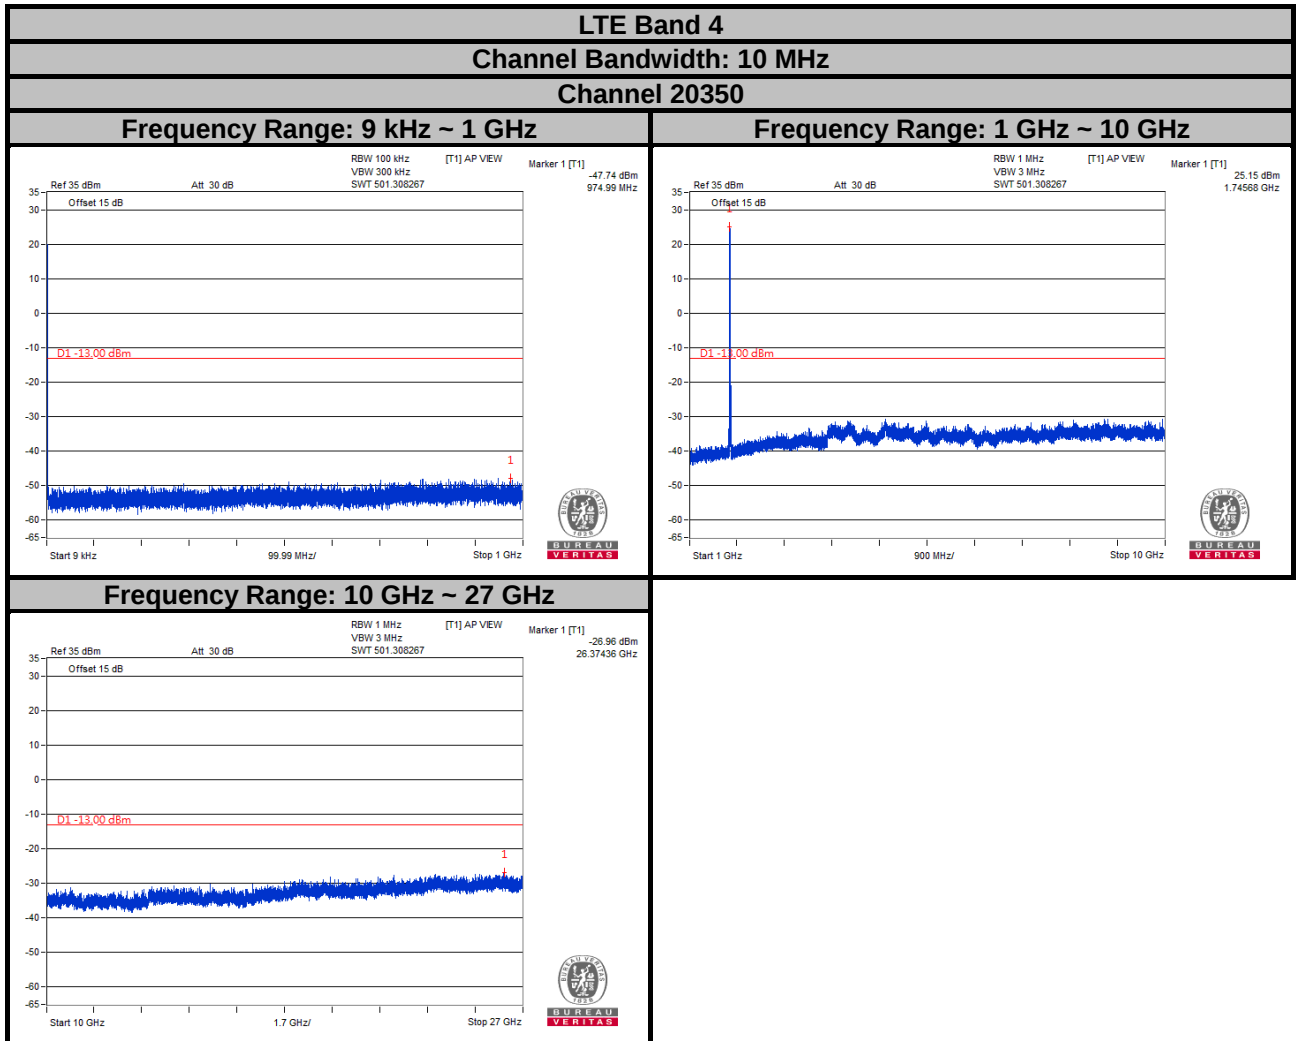


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

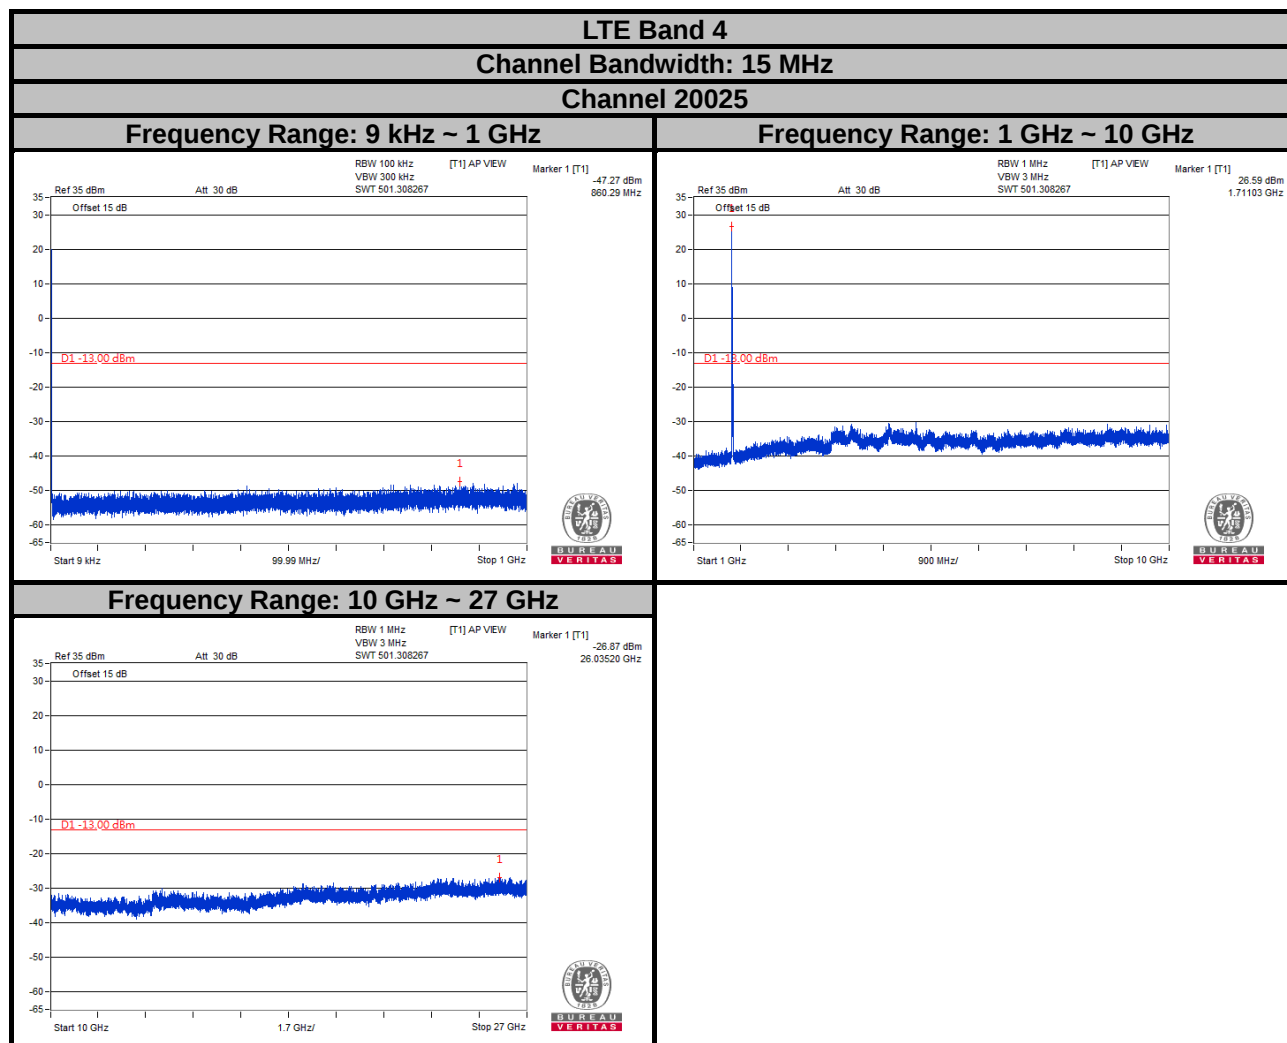


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

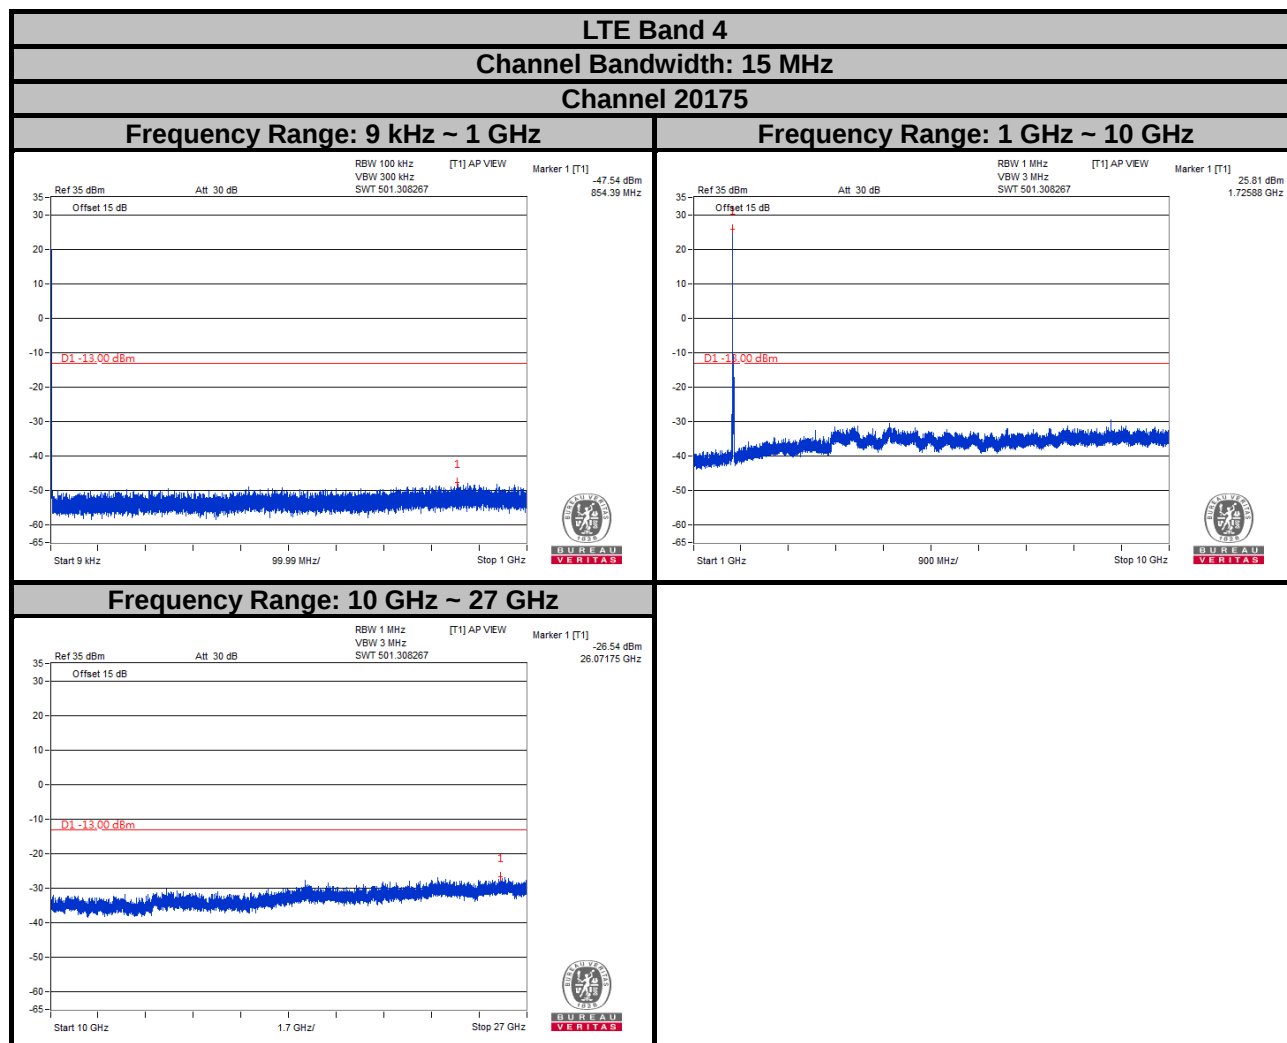


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

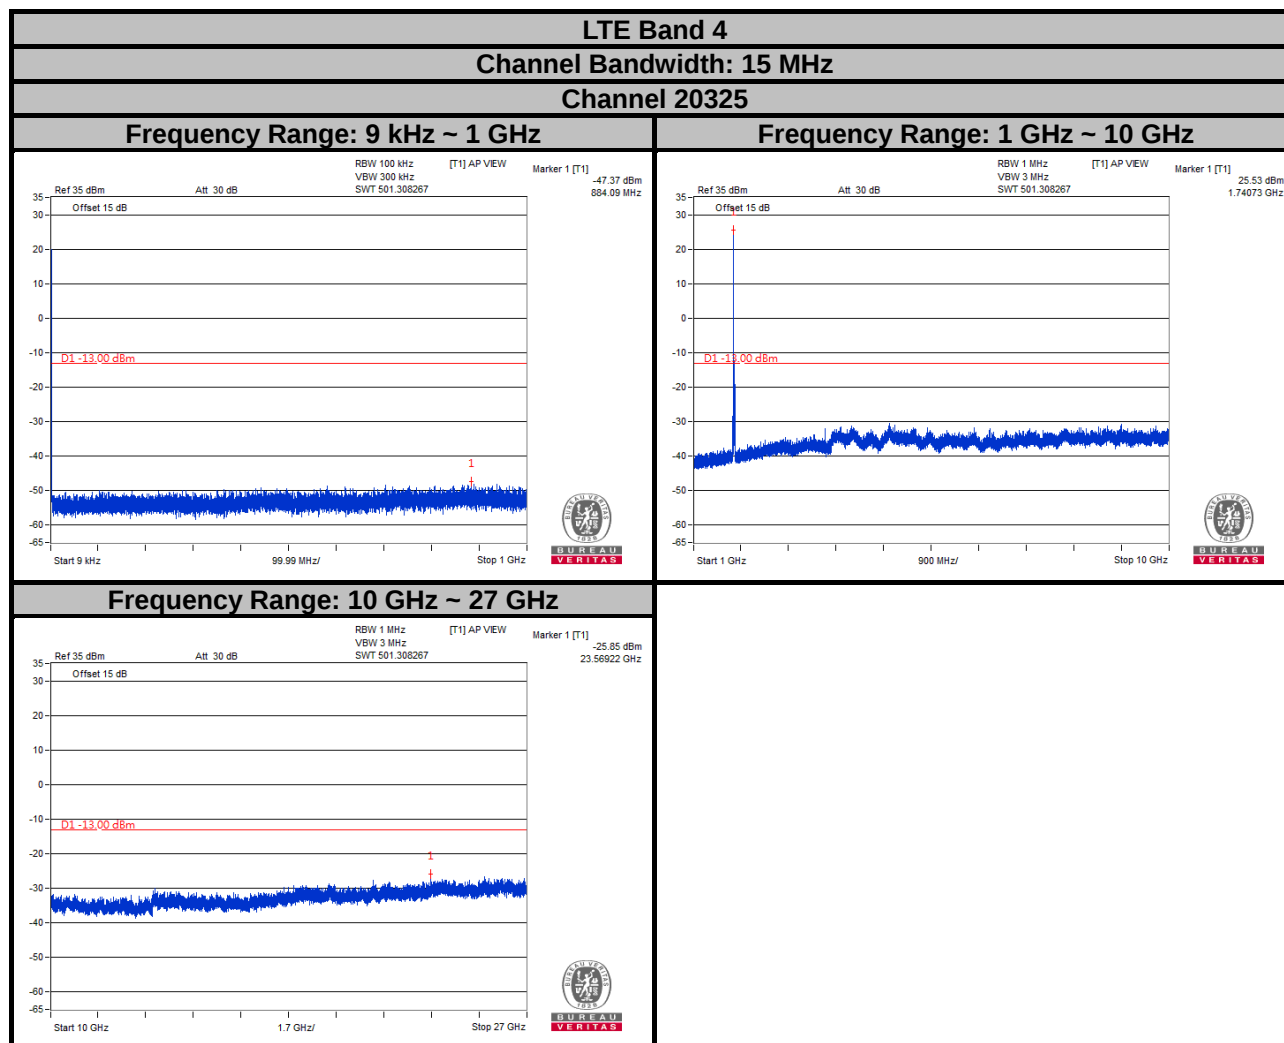


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

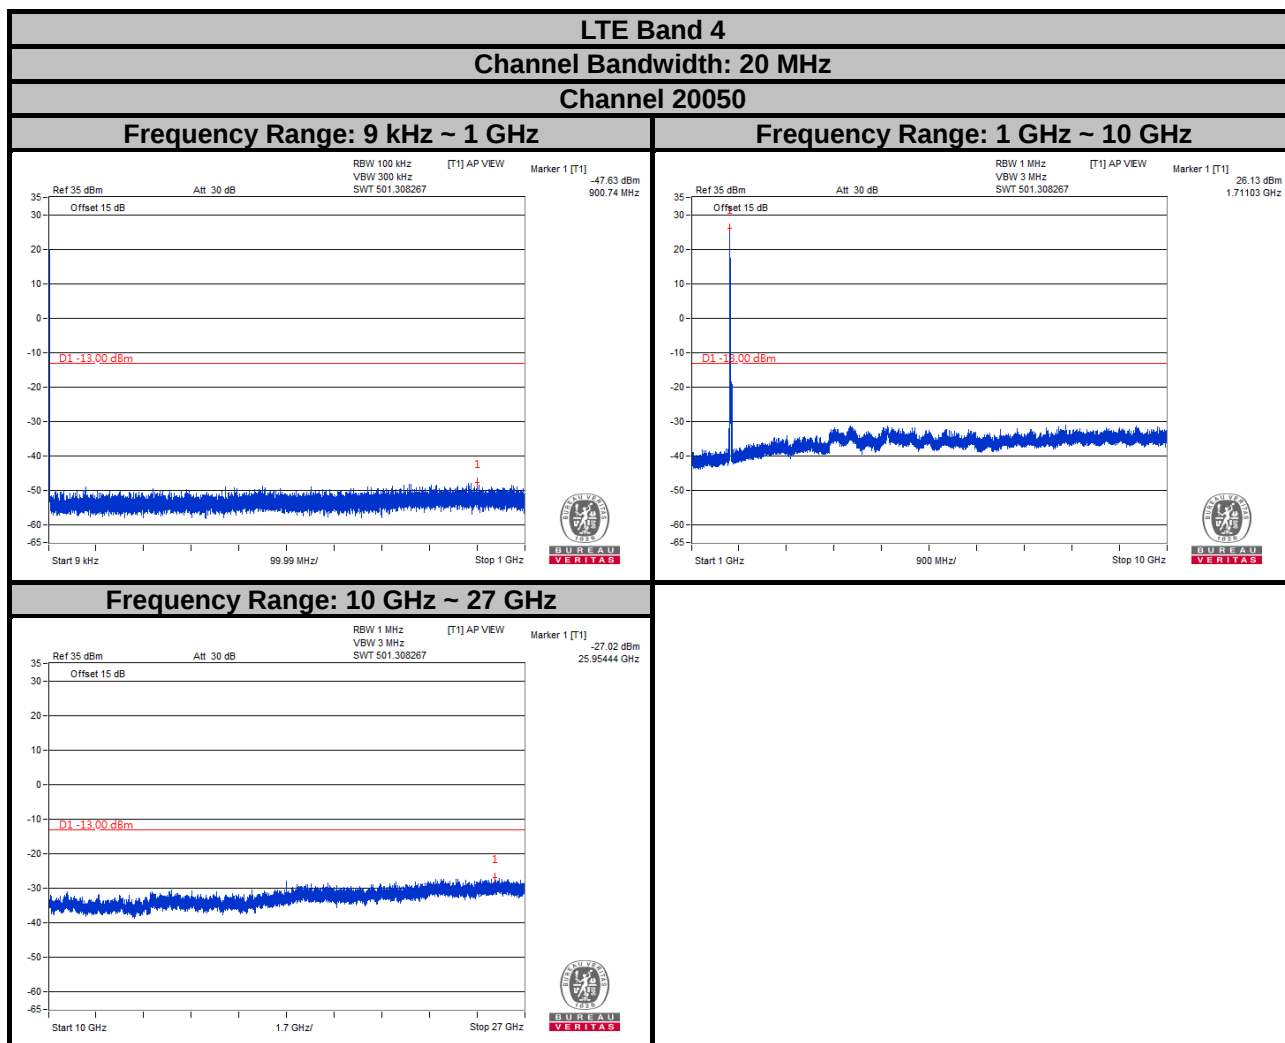


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

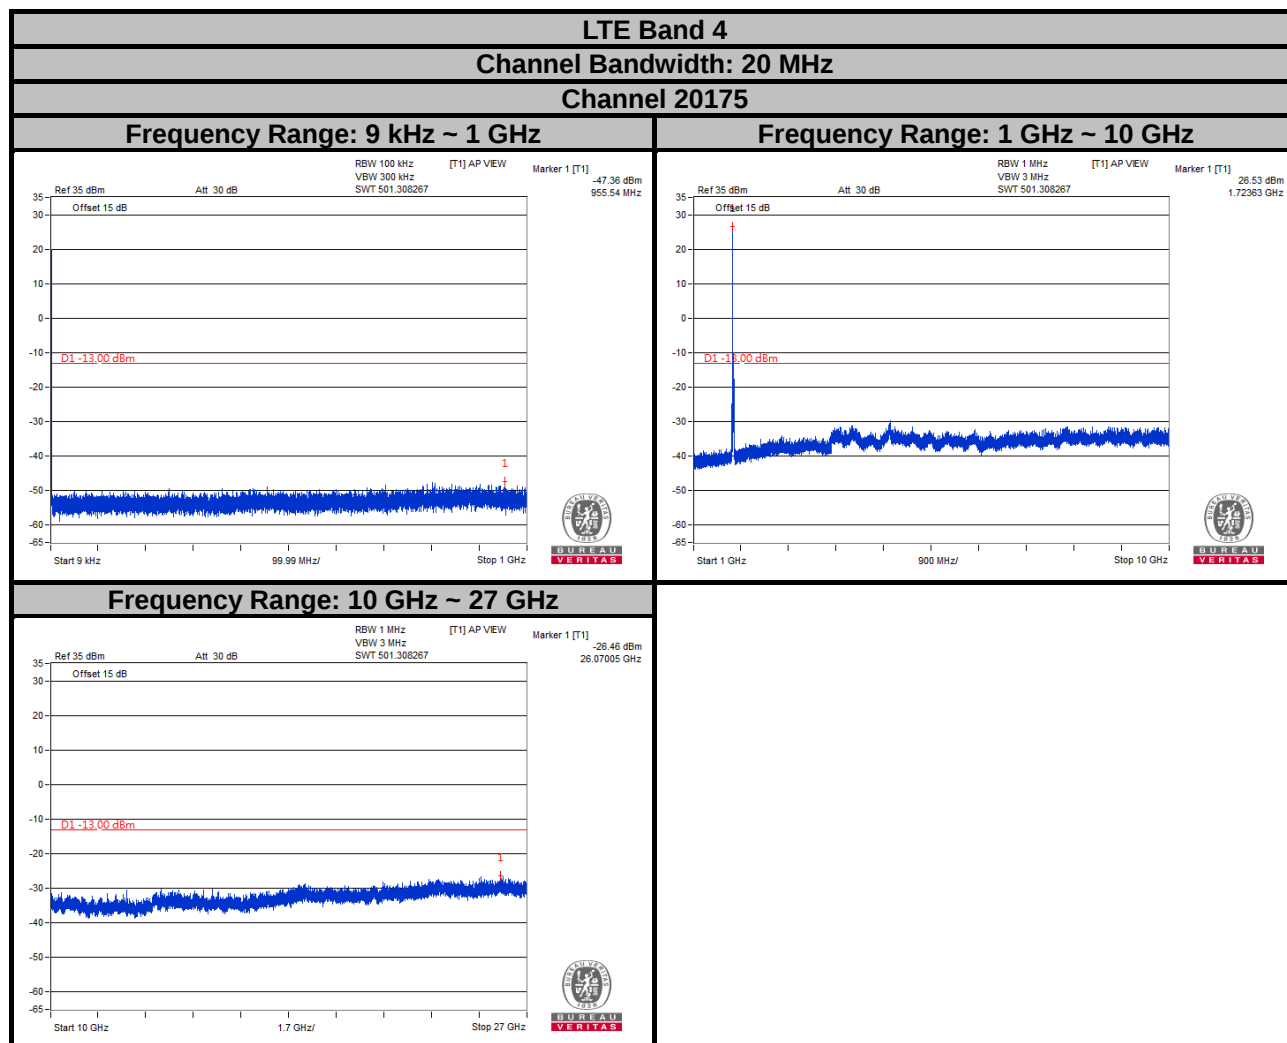


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

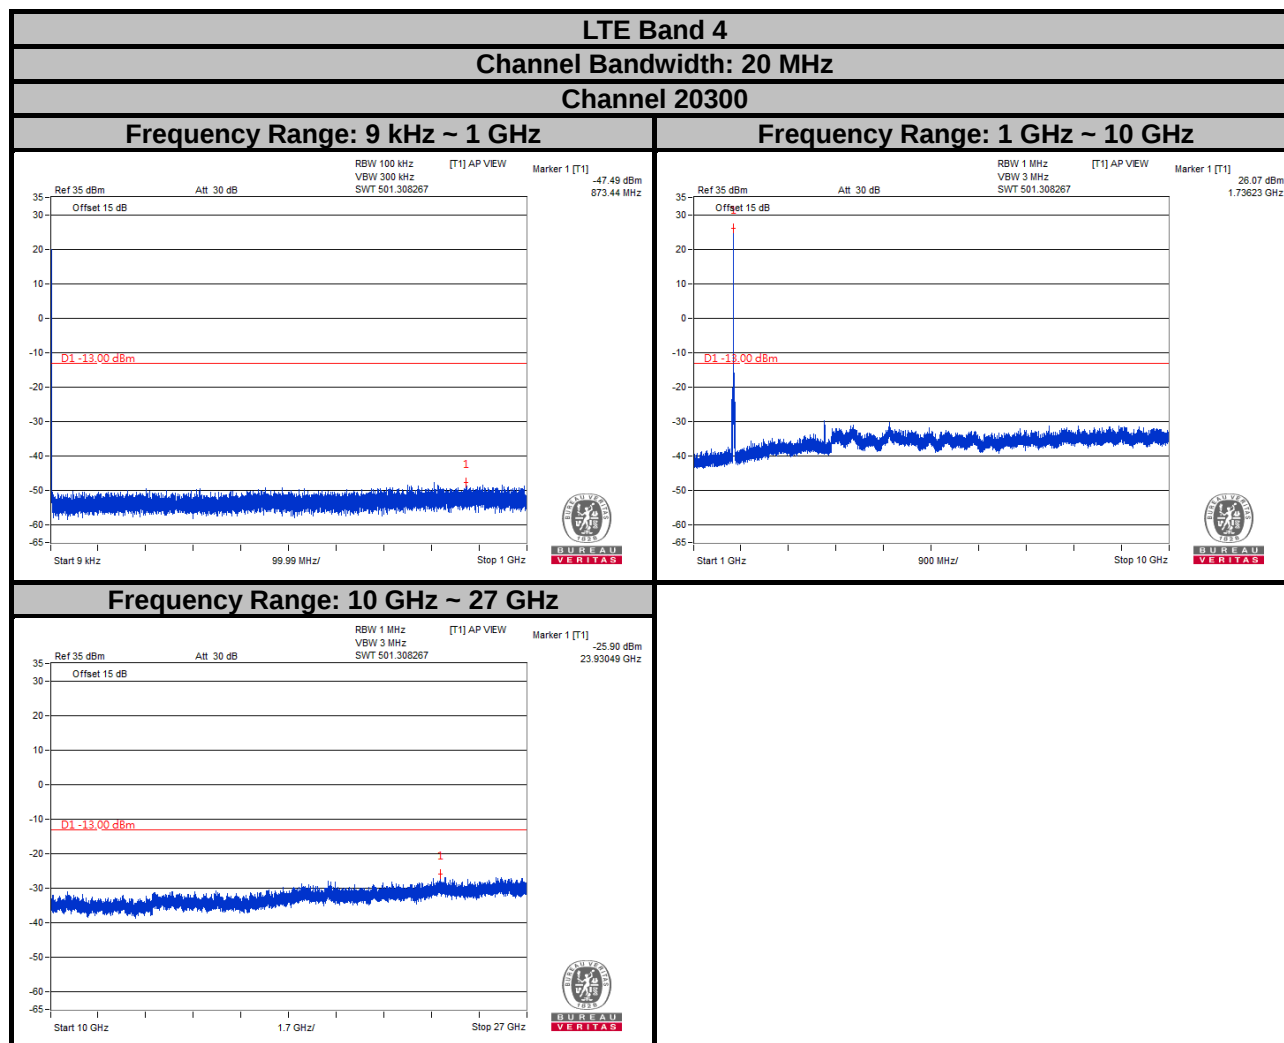


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

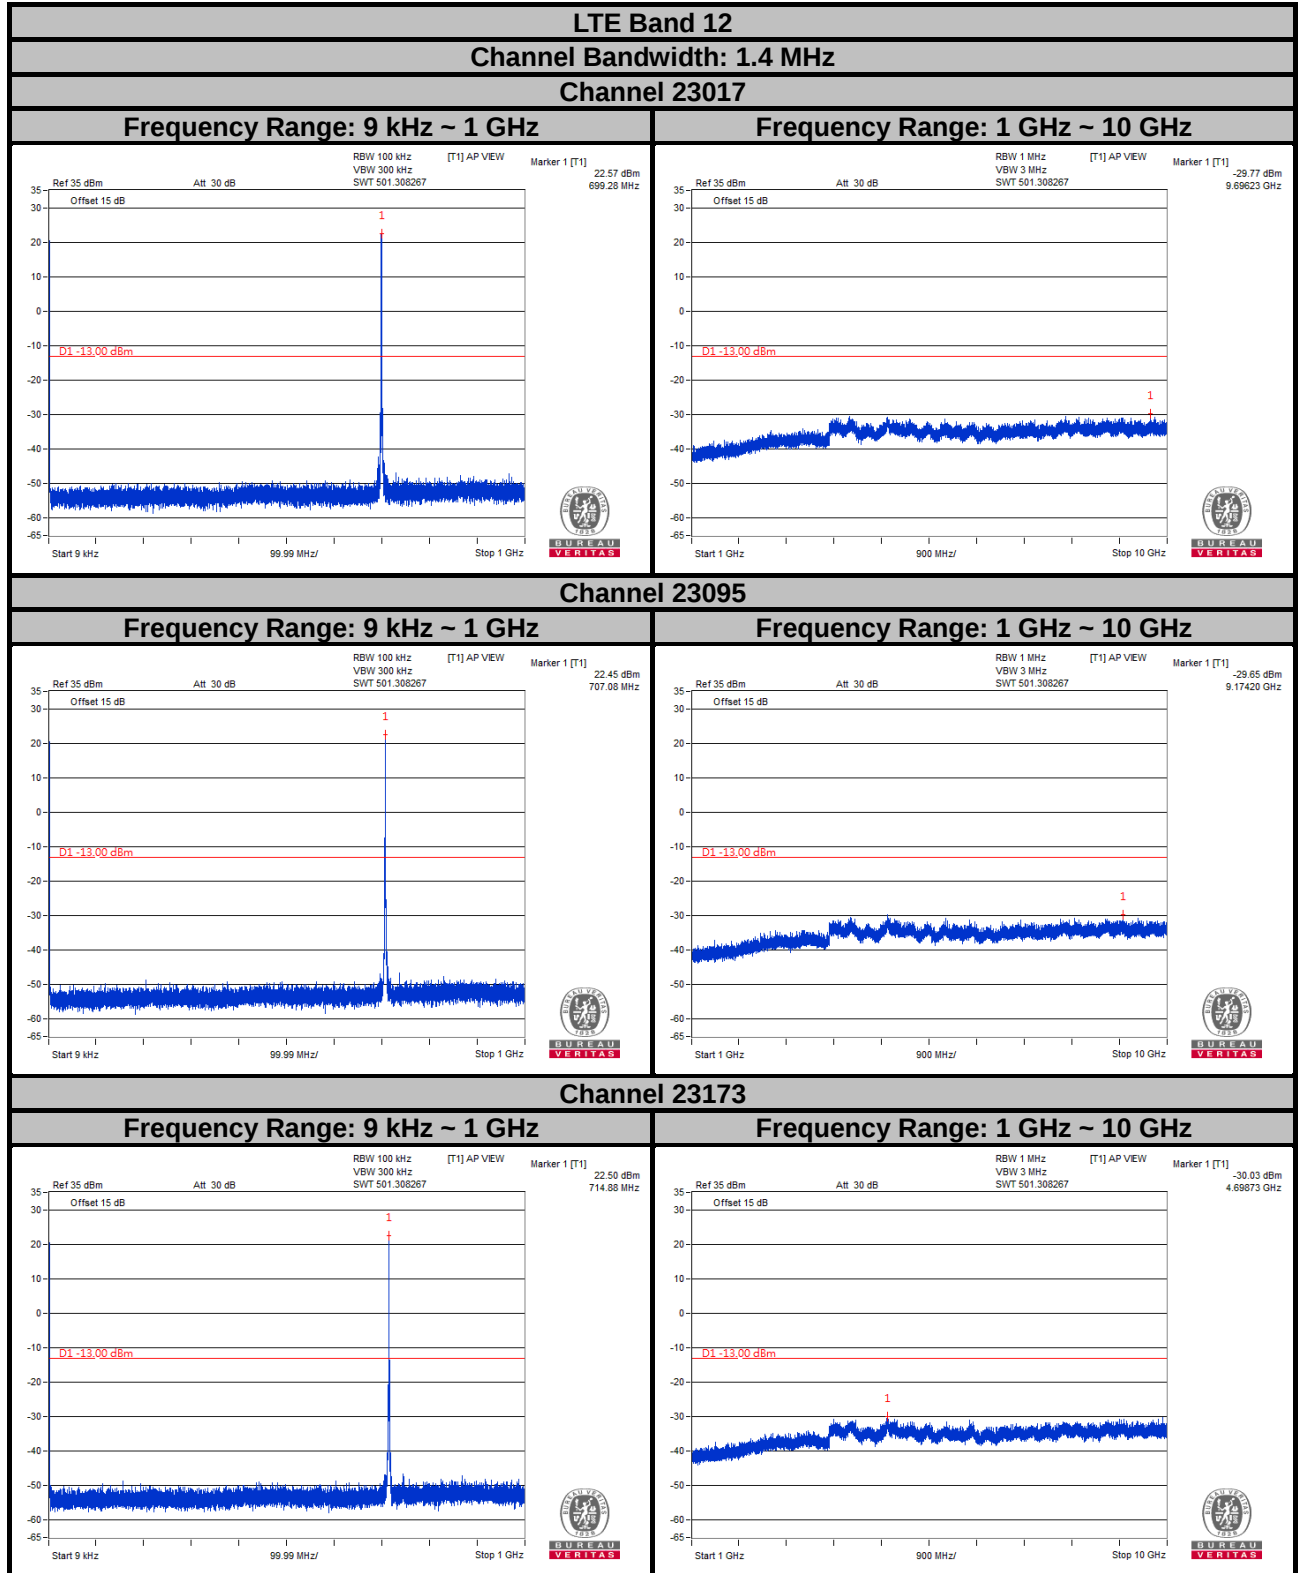


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

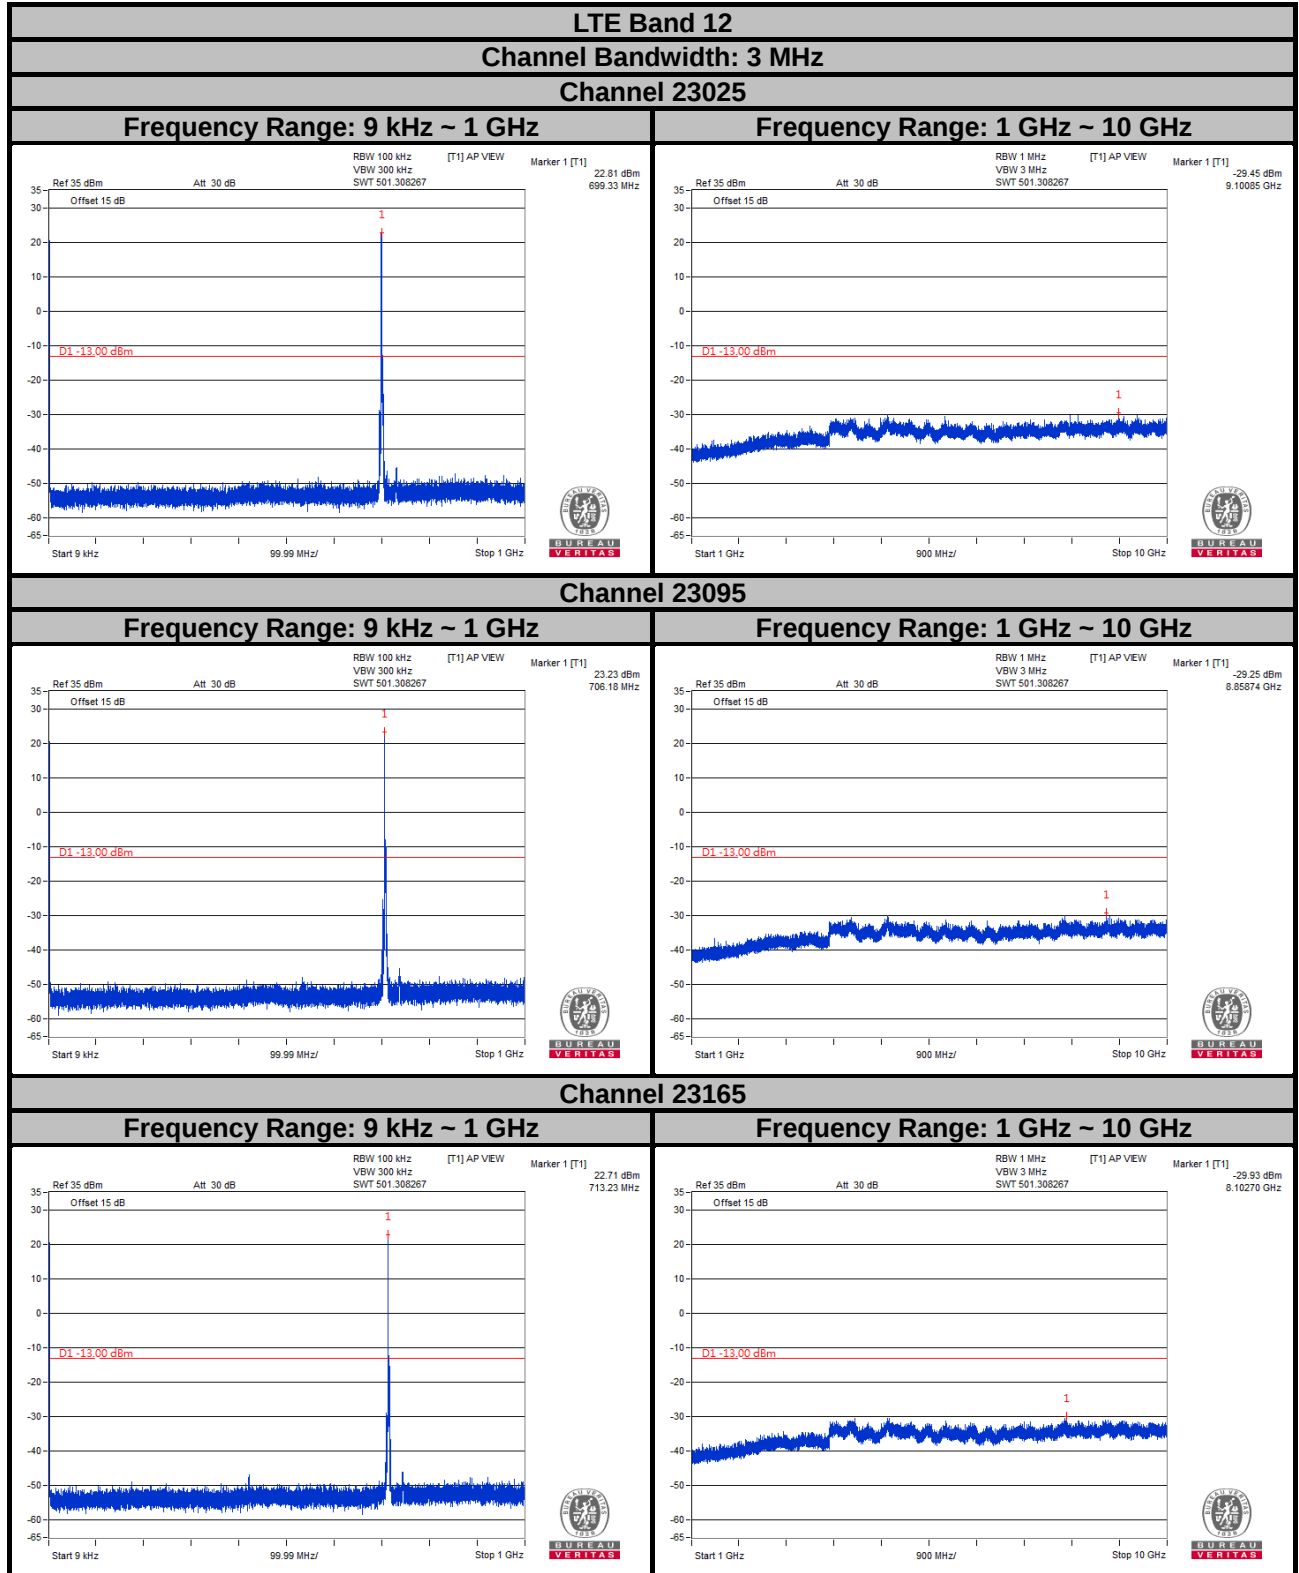

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

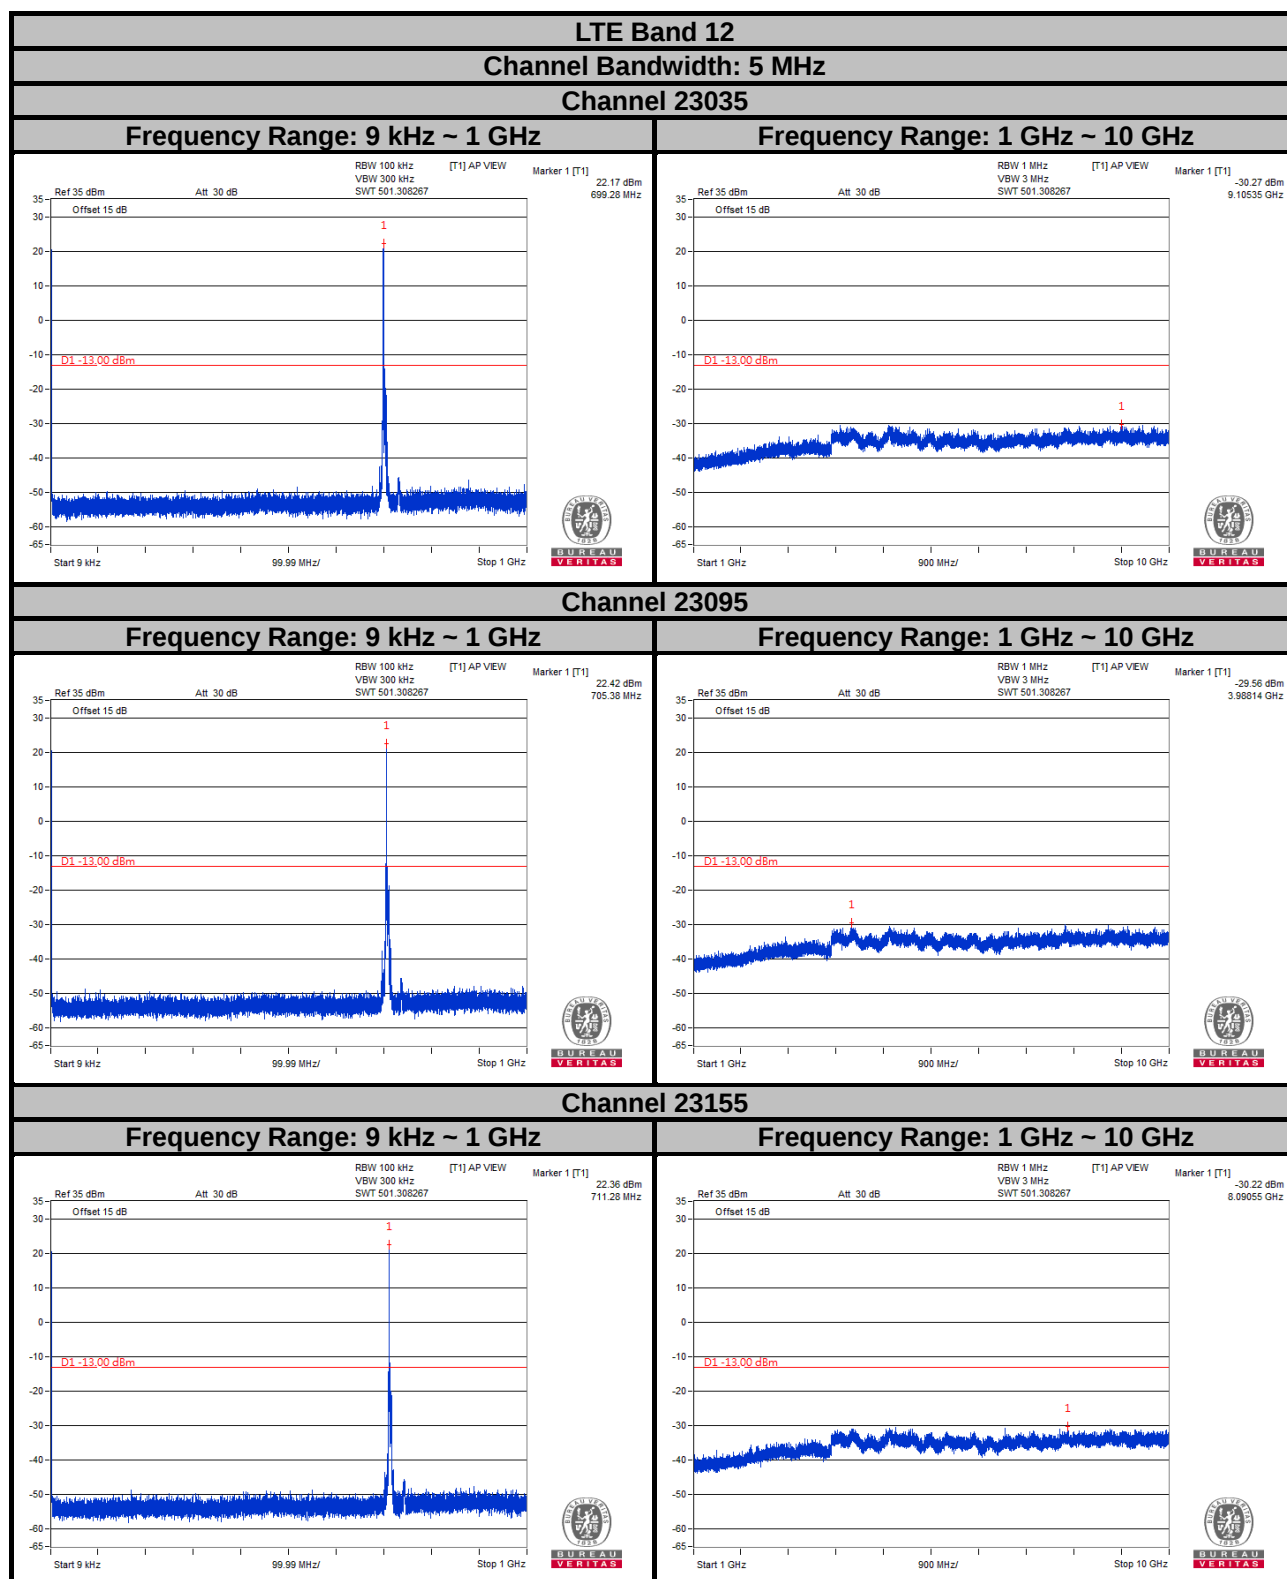

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

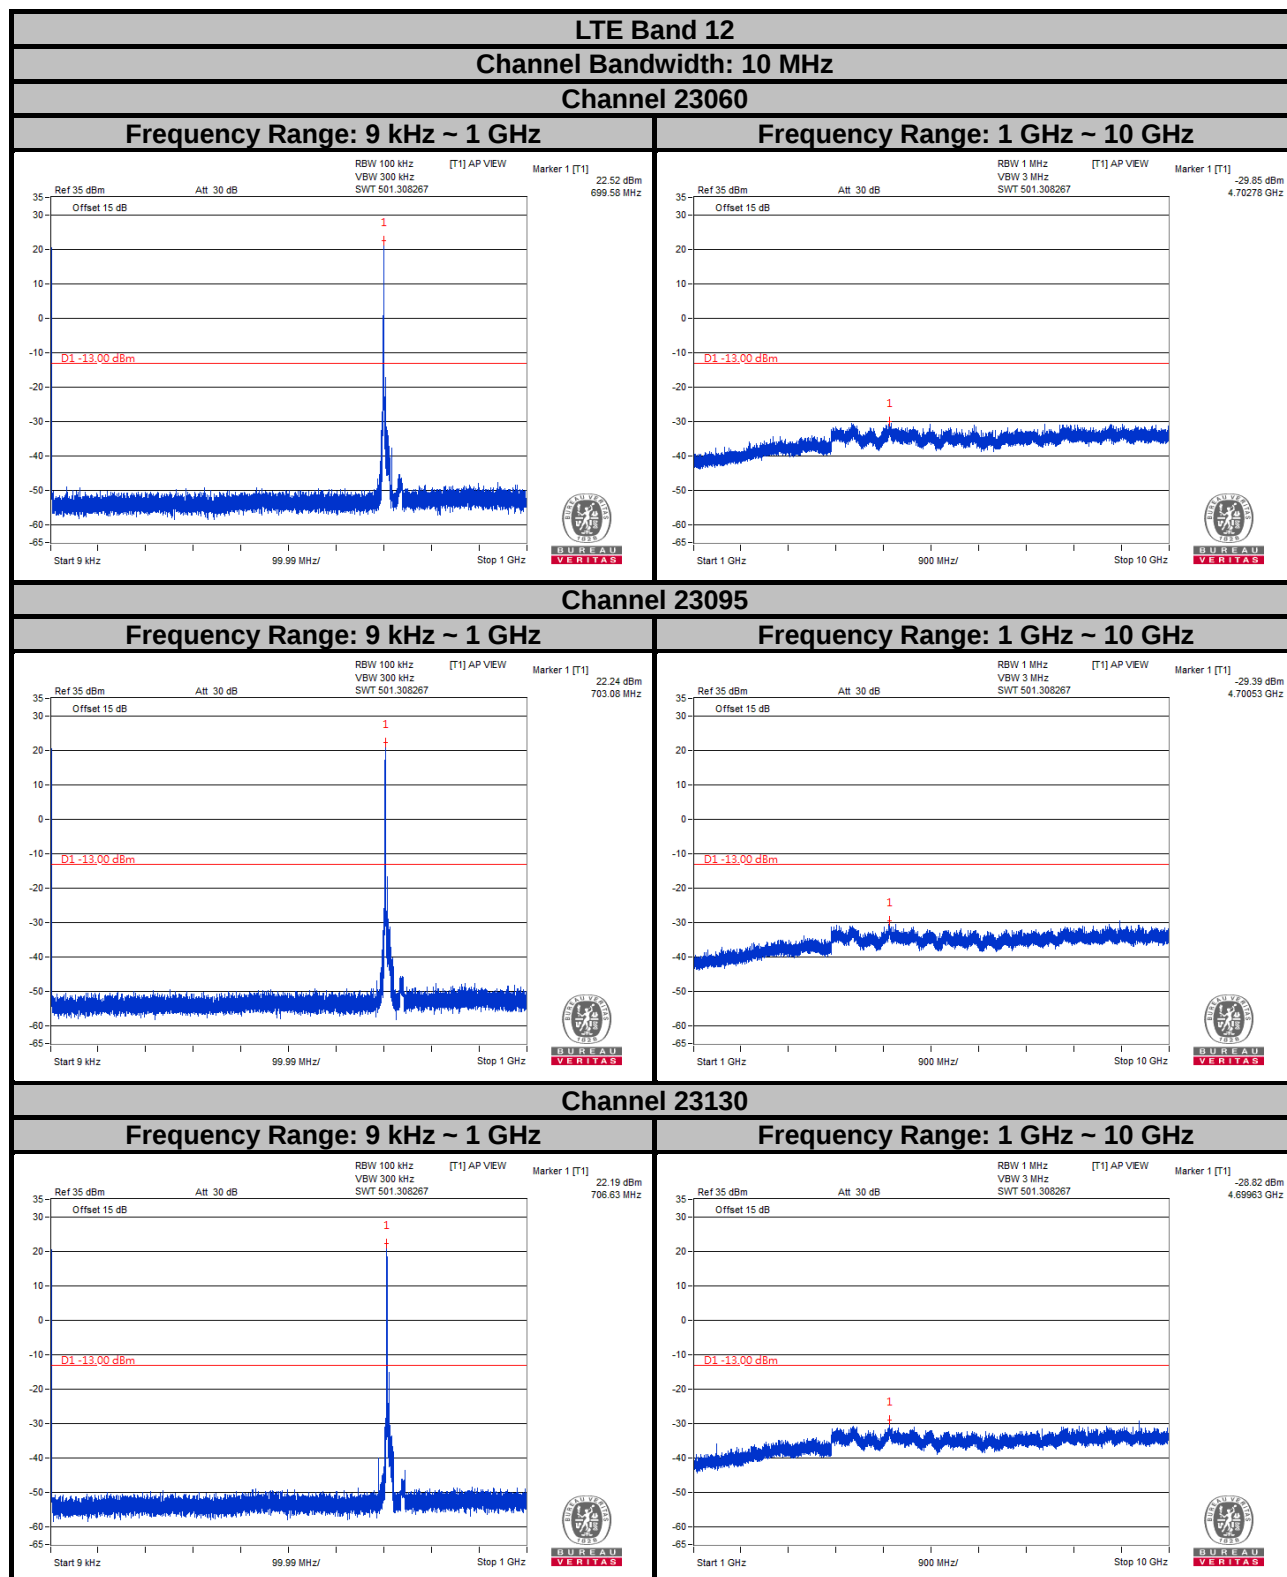

Note: The signal over the limit in 9 kHz is from spectrum analyzer.