


Page: 140 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11n 20 MHz / 5320 MHz	Temp/Hum	22.4(°C)/ 64%RH
Test Item	Harmonic	Test Date	July 8, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

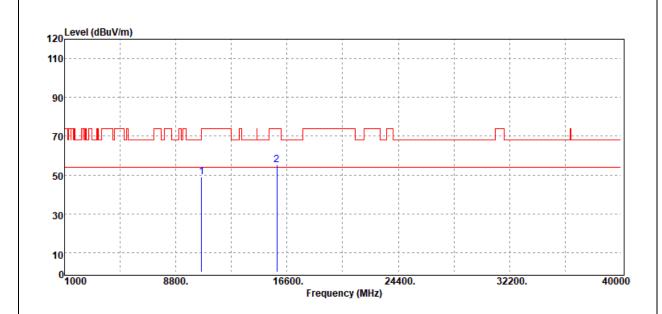

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
10600.00	Peak	30.58	18.32	48.90	68.20	-19.30
15900.00	Peak	30.70	24.40	55.10	74.00	-18.90
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 141 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11n 40 MHz / 5270 MHz	Temp/Hum	22.4(°C)/ 64%RH
Test Item	Harmonic	Test Date	July 8, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

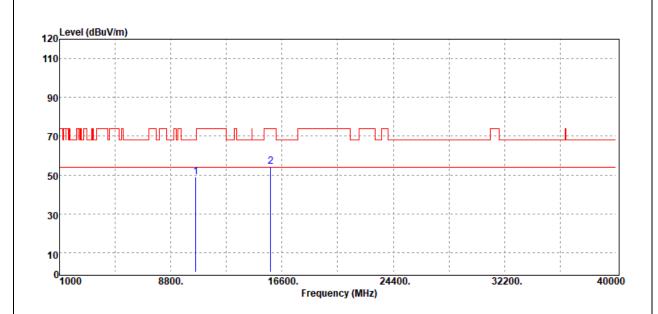

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
10540.00	Peak	30.69	18.34	49.03	68.20	-19.17
15810.00	Peak	30.88	23.31	54.19	74.00	-19.81
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 142 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11n 40 MHz / 5270 MHz	Temp/Hum	22.4(°C)/ 64%RH
Test Item	Harmonic	Test Date	July 8, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

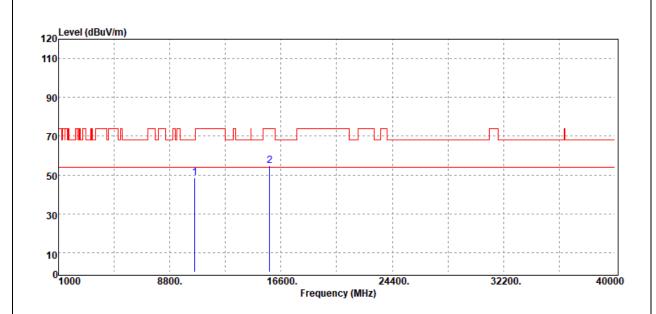

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
10540.00	Peak	30.09	18.34	48.43	68.20	-19.77
15810.00	Peak	31.54	23.31	54.85	74.00	-19.15
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 143 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11n 40 MHz / 5310 MHz	Temp/Hum	22.4(°C)/ 64%RH
Test Item	Harmonic	Test Date	July 8, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

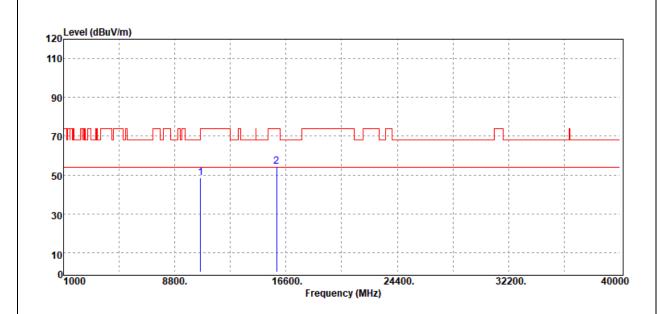

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
10620.00	Peak	30.09	18.35	48.44	74.00	-25.56
15930.00	Peak	30.03	24.44	54.47	74.00	-19.53
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 144 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11n 40 MHz / 5310 MHz	Temp/Hum	22.4(°C)/ 64%RH
Test Item	Harmonic	Test Date	July 8, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

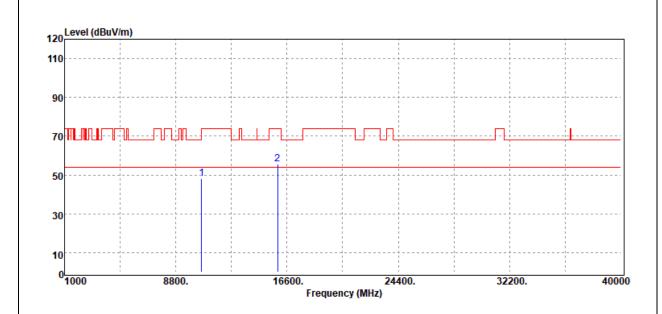

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
10620.00	Peak	29.95	18.35	48.30	74.00	-25.70
15930.00	Peak	31.21	24.44	55.65	74.00	-18.35
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 145 / 178

Report No.: T210413W01-RP4

Rev.: 01

# **Test Data for UNII-2c**

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	23.3(°C)/ 57%RH
Test Item	Harmonic	Test Date	July 7, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

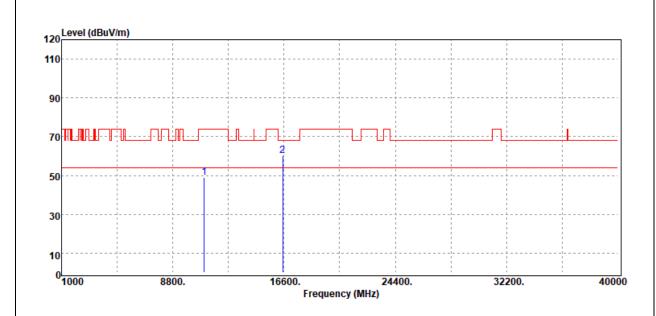

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11000.00	Peak	29.93	19.20	49.13	74.00	-24.87
16500.00	Peak	31.32	28.82	60.14	68.20	-8.06
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the ÉUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 146 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	23.3(°C)/ 57%RH
Test Item	Harmonic	Test Date	July 7, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

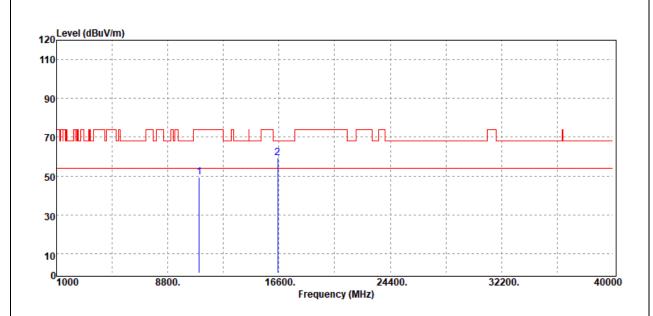

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11000.00	Peak	30.20	19.20	49.40	74.00	-24.60
16500.00	Peak	30.45	28.82	59.27	68.20	-8.93
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 147 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11a / 5580 MHz	Temp/Hum	23.3(°C)/ 57%RH
Test Item	Harmonic	Test Date	July 7, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

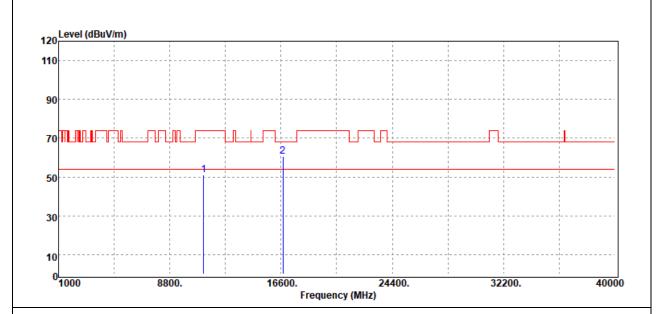

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dBµV/m	dB
11160.00	Peak	31.45	19.54	50.99	74.00	-23.01
16740.00	Peak	29.96	30.51	60.47	68.20	-7.73
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 148 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11a / 5580 MHz	Temp/Hum	23.3(°C)/ 57%RH
Test Item	Harmonic	Test Date	July 7, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

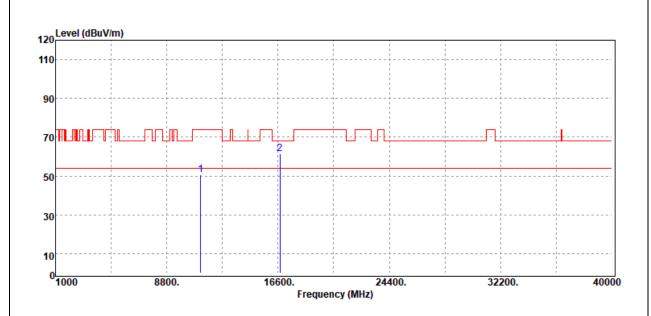

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11160.00	Peak	31.14	19.54	50.68	74.00	-23.32
16740.00	Peak	30.81	30.51	61.32	68.20	-6.88
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 149 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	23.3(°C)/ 57%RH
Test Item	Harmonic	Test Date	July 7, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

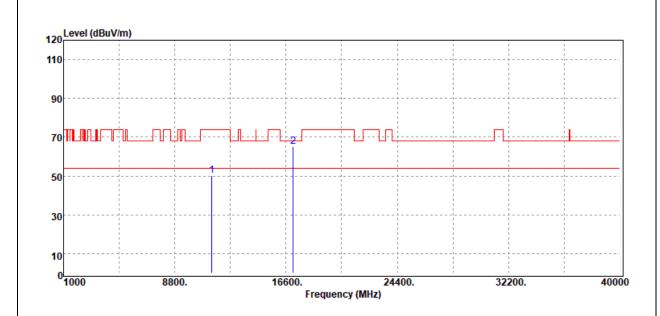

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11400.00	Peak	31.12	19.03	50.15	74.00	-23.85
17100.00	Peak	31.19	34.03	65.22	68.20	-2.98
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 150 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	23.3(°C)/ 57%RH
Test Item	Harmonic	Test Date	July 7, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

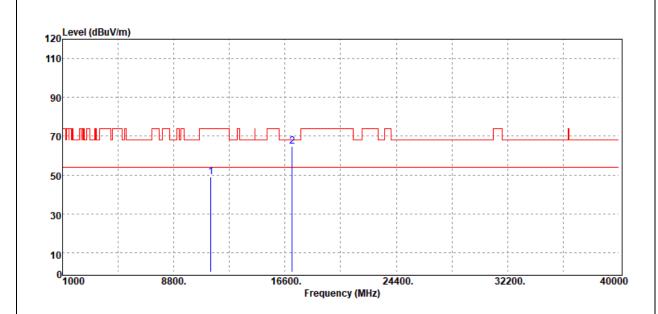

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11400.00	Peak	29.99	19.03	49.02	74.00	-24.98
17100.00	Peak	30.59	34.03	64.62	68.20	-3.58
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 151 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11n 20 MHz / 5500 MHz	Temp/Hum	22.4(°C)/ 64%RH
Test Item	Harmonic	Test Date	July 8, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

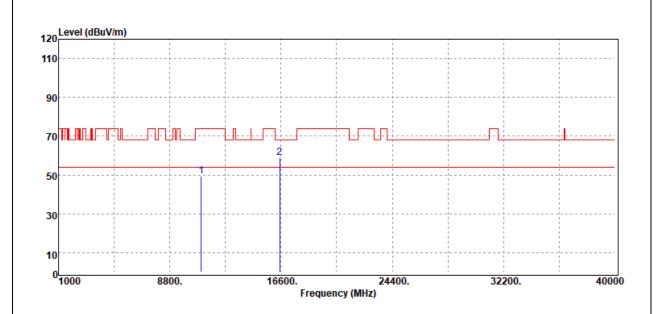

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11000.00	Peak	30.30	19.20	49.50	74.00	-24.50
16500.00	Peak	30.06	28.82	58.88	68.20	-9.32
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 152 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11n 20 MHz / 5500 MHz	Temp/Hum	22.4(°C)/ 64%RH
Test Item	Harmonic	Test Date	July 8, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

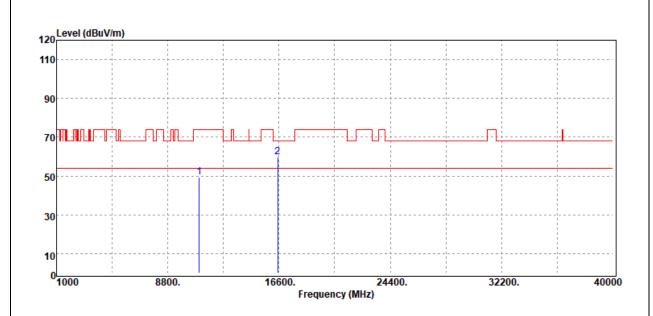

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11000.00	Peak	30.14	19.20	49.34	74.00	-24.66
16500.00	Peak	31.15	28.82	59.97	68.20	-8.23
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 153 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11n 20 MHz / 5580 MHz	Temp/Hum	22.4(°C)/ 64%RH
Test Item	Harmonic	Test Date	July 8, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

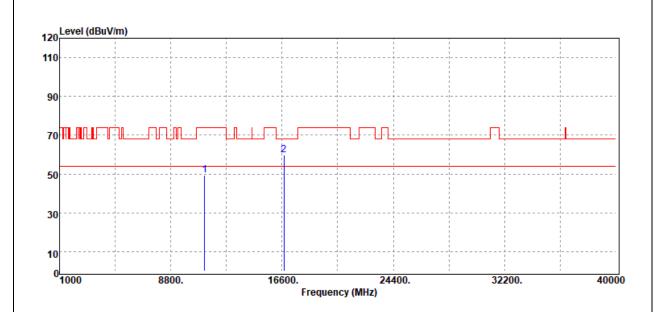

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11160.00	Peak	30.07	19.54	49.61	74.00	-24.39
16740.00	Peak	29.24	30.51	59.75	68.20	-8.45
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 154 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11n 20 MHz / 5580 MHz	Temp/Hum	22.4(°C)/ 64%RH
Test Item	Harmonic	Test Date	July 8, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

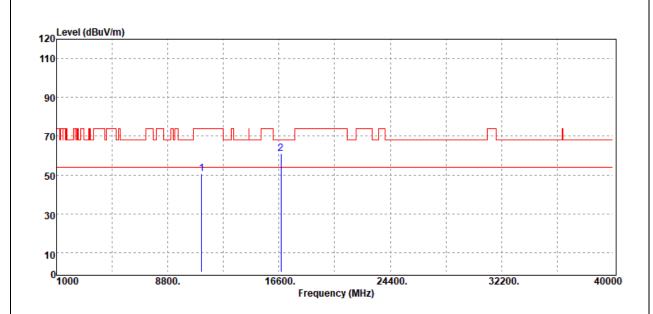

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11160.00	Peak	31.17	19.54	50.71	74.00	-23.29
16740.00	Peak	30.51	30.51	61.02	68.20	-7.18
N/A						


- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit



Page: 155 / 178 Report No.: T210413W01-RP4 Rev.:

01

Test Mode	IEEE 802.11n 20 MHz / 5700 MHz	Temp/Hum	22.4(°C)/ 64%RH
Test Item	Harmonic	Test Date	July 8, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

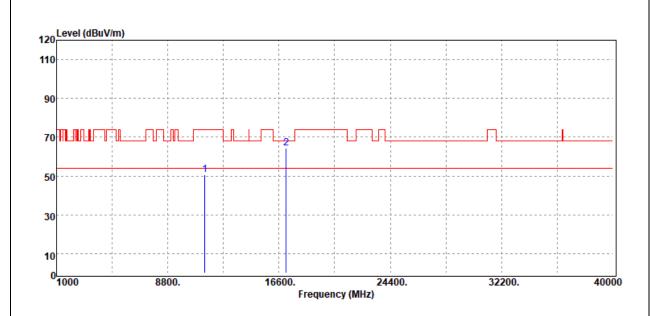

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11400.00	Peak	31.63	19.03	50.66	74.00	-23.34
17100.00	Peak	30.48	34.03	64.51	68.20	-3.69
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 156 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11n 20 MHz / 5700 MHz	Temp/Hum	22.4(°C)/ 64%RH
Test Item	Harmonic	Test Date	July 8, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

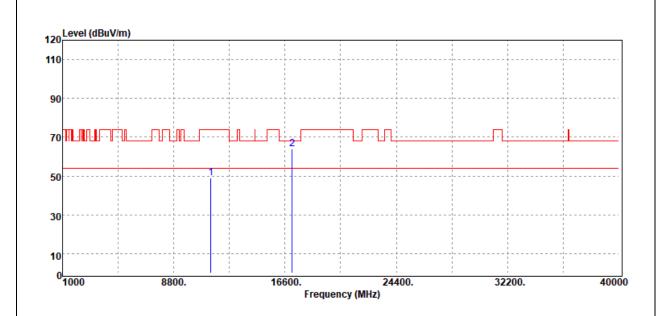

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11400.00	Peak	30.00	19.03	49.03	74.00	-24.97
17100.00	Peak	30.12	34.03	64.15	68.20	-4.05
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 157 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11n 40 MHz / 5510 MHz	Temp/Hum	22.4(°C)/ 64%RH
Test Item	Harmonic	Test Date	July 8, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

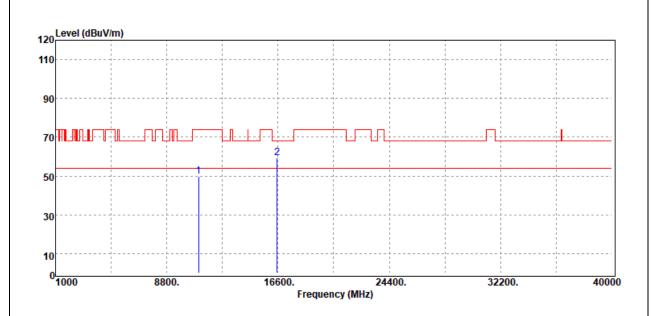

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11020.00	Peak	30.38	19.26	49.64	74.00	-24.36
16530.00	Peak	30.52	29.02	59.54	68.20	-8.66
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 158 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11n 40 MHz / 5510 MHz	Temp/Hum	22.4(°C)/ 64%RH
Test Item	Harmonic	Test Date	July 8, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

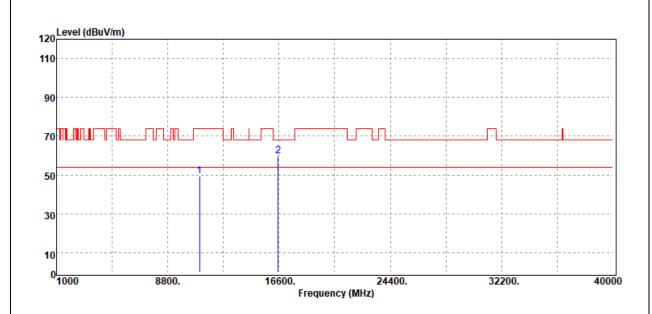

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11020.00	Peak	30.31	19.26	49.57	74.00	-24.43
16530.00	Peak	30.66	29.02	59.68	68.20	-8.52
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 159 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11n 40 MHz / 5550 MHz	Temp/Hum	22.4(°C)/ 64%RH
Test Item	Harmonic	Test Date	July 8, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

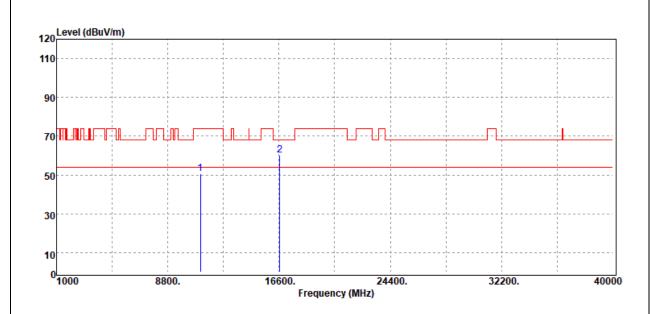

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11100.00	Peak	31.19	19.58	50.77	74.00	-23.23
16650.00	Peak	30.63	29.44	60.07	68.20	-8.13
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 160 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11n 40 MHz / 5550 MHz	Temp/Hum	22.4(°C)/ 64%RH
Test Item	Harmonic	Test Date	July 8, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

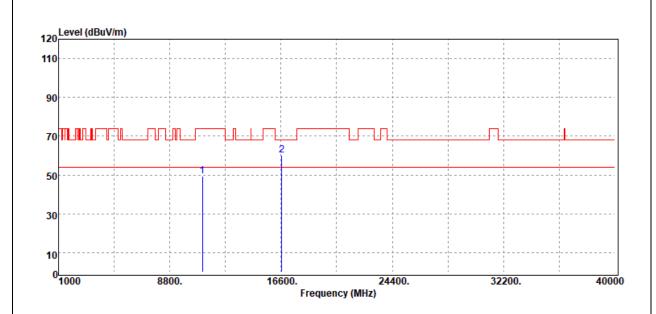

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11100.00	Peak	29.84	19.58	49.42	74.00	-24.58
16650.00	Peak	30.76	29.44	60.20	68.20	-8.00
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 161 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11n 40 MHz / 5670 MHz	Temp/Hum	22.4(°C)/ 64%RH
Test Item	Harmonic	Test Date	July 8, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

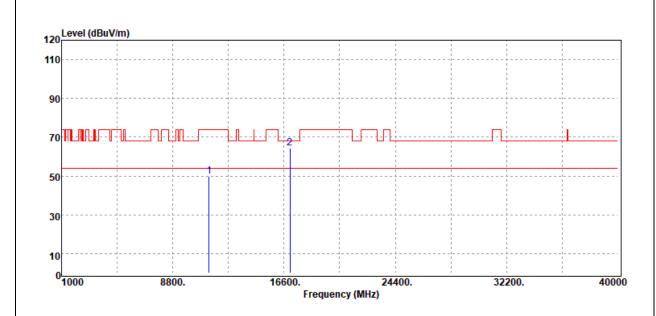

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11340.00	Peak	30.53	19.28	49.81	74.00	-24.19
17010.00	Peak	30.53	33.96	64.49	68.20	-3.71
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 162 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11n 40 MHz / 5670 MHz	Temp/Hum	22.4(°C)/ 64%RH
Test Item	Harmonic	Test Date	July 8, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

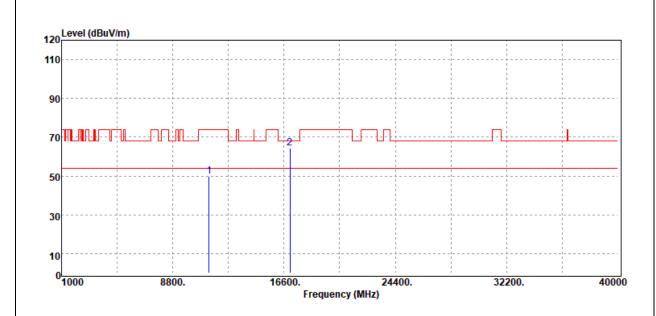

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11340.00	Peak	30.63	19.28	49.91	74.00	-24.09
17010.00	Peak	30.34	33.96	64.30	68.20	-3.90
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 163 / 178

Report No.: T210413W01-RP4

Rev.: 01

# **Test Data for UNII-3**

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	23.3(°C)/ 57%RH
Test Item	Harmonic	Test Date	July 7, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

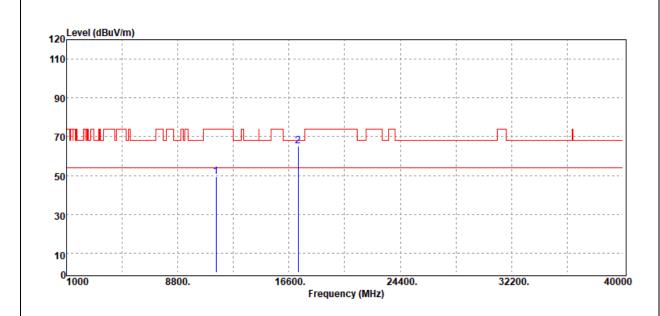

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11490.00	Peak	30.27	19.13	49.40	74.00	-24.60
17235.00	Peak	31.19	33.97	65.16	68.20	-3.04
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the ÉUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 164 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	23.3(°C)/ 57%RH
Test Item	Harmonic	Test Date	July 7, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

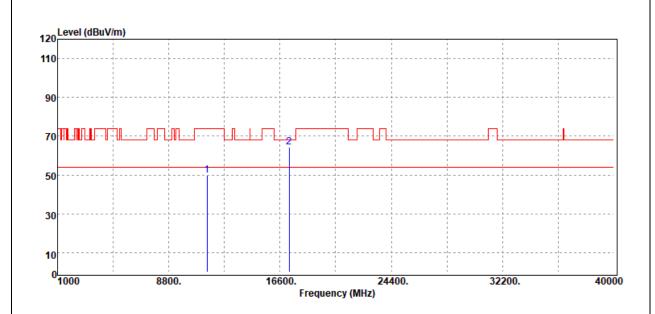

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11490.00	Peak	30.54	19.13	49.67	74.00	-24.33
17235.00	Peak	30.30	33.97	64.27	68.20	-3.93
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 165 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11a / 5785 MHz	Temp/Hum	22.4(°C)/ 64%RH
Test Item	Harmonic	Test Date	July 8, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

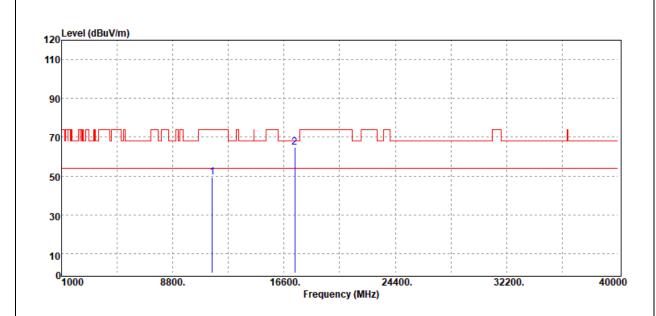

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11570.00	Peak	30.49	19.04	49.53	74.00	-24.47
17355.00	Peak	30.40	34.47	64.87	68.20	-3.33
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 166 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11a / 5785 MHz	Temp/Hum	22.4(°C)/ 64%RH
Test Item	Harmonic	Test Date	July 8, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

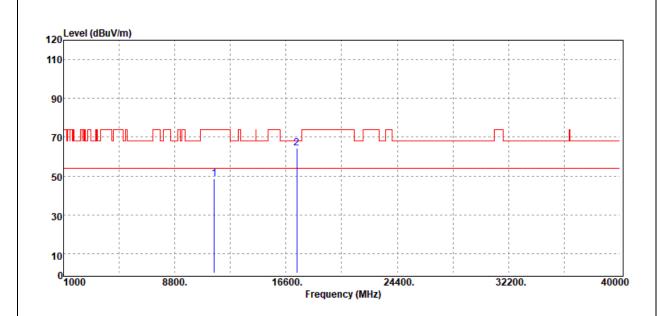

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11570.00	Peak	29.66	19.04	48.70	74.00	-25.30
17355.00	Peak	29.94	34.47	64.41	68.20	-3.79
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 167 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	22.4(°C)/ 64%RH
Test Item	Harmonic	Test Date	July 8, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

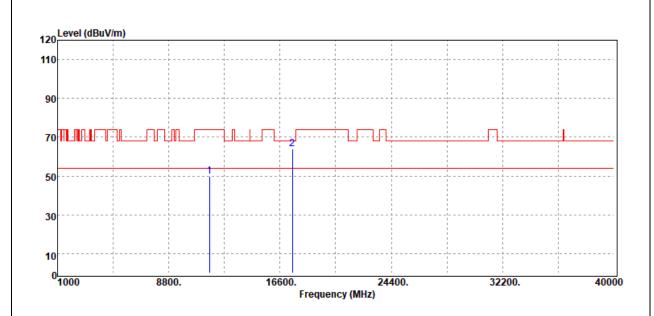

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11650.00	Peak	30.52	19.14	49.66	74.00	-24.34
17475.00	Peak	29.50	34.30	63.80	68.20	-4.40
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 168 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	22.4(°C)/ 64%RH
Test Item	Harmonic	Test Date	July 8, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

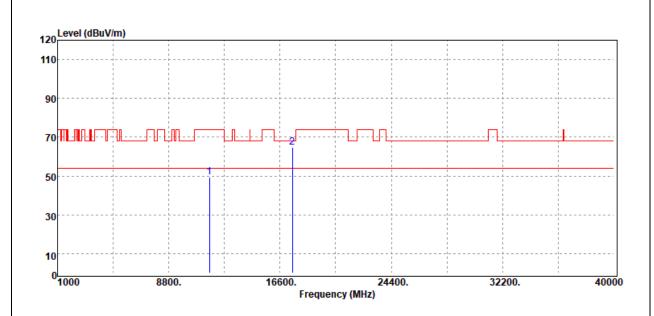

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11650.00	Peak	30.43	19.14	49.57	74.00	-24.43
17475.00	Peak	30.35	34.30	64.65	68.20	-3.55
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 169 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11n 20 MHz / 5745 MHz	Temp/Hum	22.4(°C)/ 64%RH
Test Item	Harmonic	Test Date	July 8, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

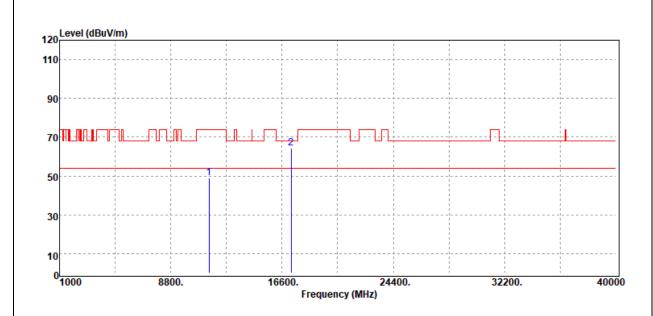

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11490.00	Peak	30.00	19.13	49.13	74.00	-24.87
17235.00	Peak	30.38	33.97	64.35	68.20	-3.85
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 170 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11n 20 MHz / 5745 MHz	Temp/Hum	22.4(°C)/ 64%RH
Test Item	Harmonic	Test Date	July 8, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

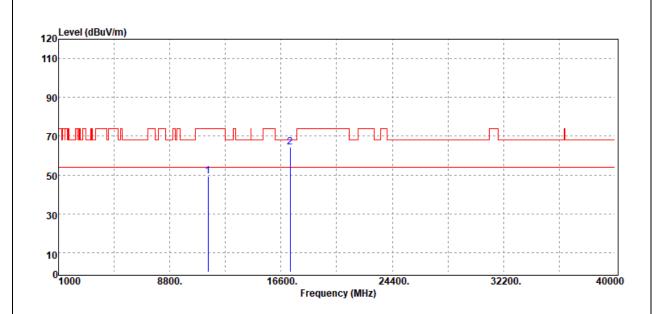

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11490.00	Peak	30.32	19.13	49.45	74.00	-24.55
17235.00	Peak	30.58	33.97	64.55	68.20	-3.65
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 171 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11n 20 MHz/ 5785 MHz	Temp/Hum	22.4(°C)/ 64%RH
Test Item	Harmonic	Test Date	July 8, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

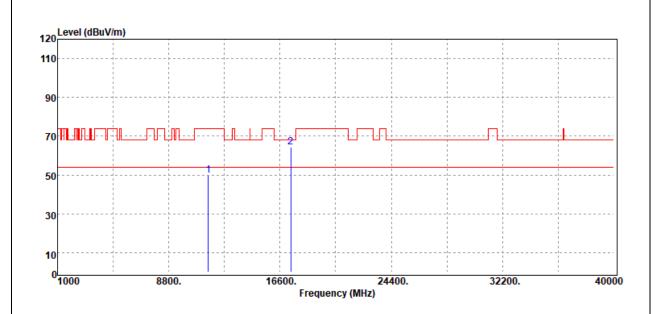

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11570.00	Peak	30.85	19.04	49.89	74.00	-24.11
17355.00	Peak	30.08	34.47	64.55	68.20	-3.65
N/A						


- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit



Page: 172 / 178 Report No.: T210413W01-RP4 Rev.:

Test Mode	IEEE 802.11n 20 MHz/ 5785 MHz	Temp/Hum	22.4(°C)/ 64%RH
Test Item	Harmonic	Test Date	July 8, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

01

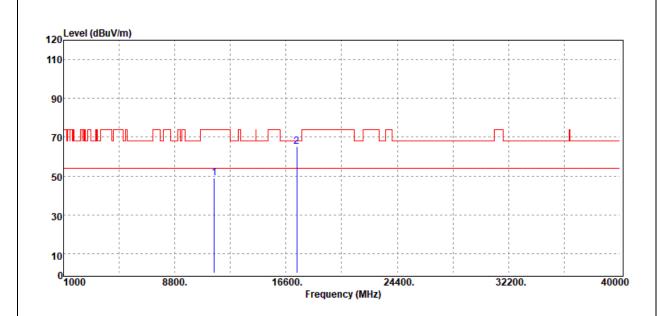

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11570.00	Peak	29.98	19.04	49.02	74.00	-24.98
17355.00	Peak	30.65	34.47	65.12	68.20	-3.08
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 173 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11n 20 MHz/ 5825 MHz	Temp/Hum	22.4(°C)/ 64%RH
Test Item	Harmonic	Test Date	July 8, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

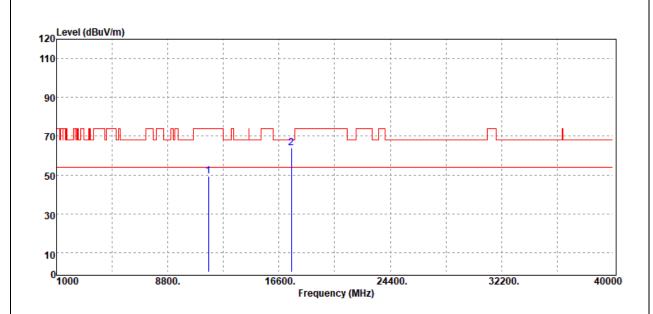

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11650.00	Peak	30.31	19.14	49.45	74.00	-24.55
17475.00	Peak	29.46	34.30	63.76	68.20	-4.44
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 174 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11n 20 MHz/ 5825 MHz	Temp/Hum	22.4(°C)/ 64%RH
Test Item	Harmonic	Test Date	July 8, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

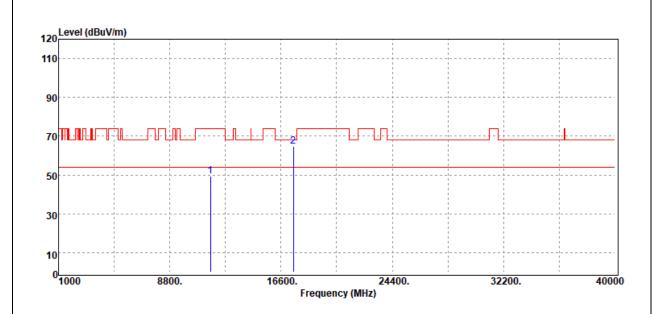

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11650.00	Peak	30.44	19.14	49.58	74.00	-24.42
17475.00	Peak	30.50	34.30	64.80	68.20	-3.40
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 175 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11n 40 MHz/ 5755 MHz	Temp/Hum	22.4(°C)/ 64%RH
Test Item	Harmonic	Test Date	July 8, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

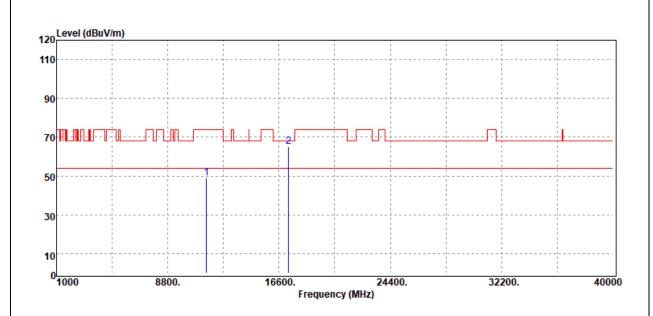

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dΒμV/m	dB
11510.00	Peak	29.82	19.13	48.95	74.00	-25.05
17265.00	Peak	31.41	33.98	65.39	68.20	-2.81
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 176 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11n 40 MHz/ 5755 MHz	Temp/Hum	22.4(°C)/ 64%RH
Test Item	Harmonic	Test Date	July 8, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

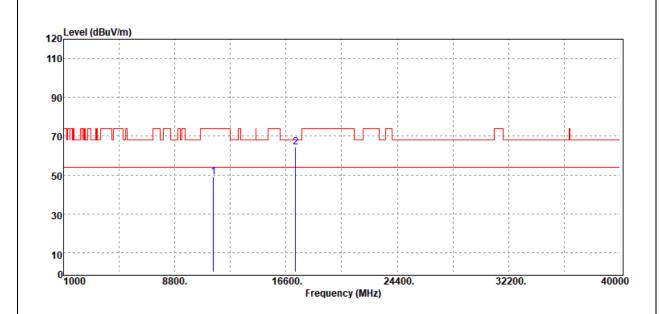

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11510.00	Peak	29.99	19.13	49.12	74.00	-24.88
17265.00	Peak	30.55	33.98	64.53	68.20	-3.67
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 177 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11n 40 MHz/ 5795 MHz	Temp/Hum	22.4(°C)/ 64%RH
Test Item	Harmonic	Test Date	July 8, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

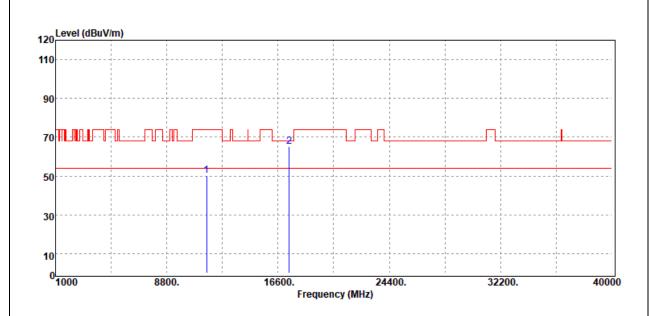

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11590.00	Peak	31.35	19.00	50.35	74.00	-23.65
17385.00	Peak	30.79	34.60	65.39	68.20	-2.81
N/A						

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Page: 178 / 178

Report No.: T210413W01-RP4

Rev.: 01

Test Mode	IEEE 802.11n 40 MHz/ 5795 MHz	Temp/Hum	22.4(°C)/ 64%RH
Test Item	Harmonic	Test Date	July 8, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

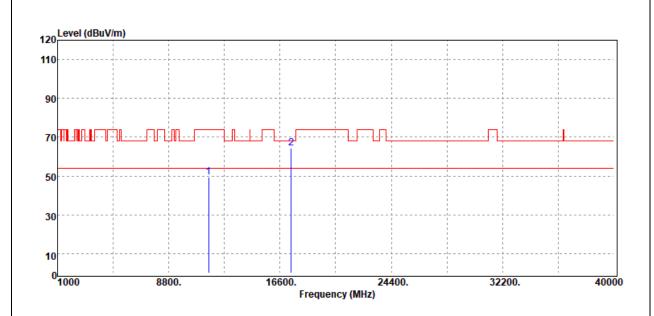

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11590.00	Peak	30.41	19.00	49.41	74.00	-24.59
17385.00	Peak	29.95	34.60	64.55	68.20	-3.65
N/A						

# Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

# - End of Test Report -