

Annex B. SAR Plots of SAR Measurement

The SAR plots for highest measured SAR in each exposure configuration, wireless mode and frequency band combination are shown as follows.

P01 WCDMA II_HSUPA Subtest-5_Front Face_10mm_Ch9262_Ant 1**DUT: P21050666**

Communication System: UID 10274 - CAB, UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10);

Frequency: 1852.4 MHz; Duty Cycle: 1:3.07

Medium: H16T20N1_0731 Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 39.09$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7555; ConvF(8.42, 8.42, 8.42) @ 1852.4 MHz; Calibrated: 2020/09/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2020/09/15
- Phantom: Twin-SAM V8.0_1988; Type: QD 000 P41 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x101x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.25 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 29.79 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.809 W/kg; SAR(10 g) = 0.475 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 17.2 mm

Ratio of SAR at M2 to SAR at M1 = 55.6%

Maximum value of SAR (measured) = 1.21 W/kg

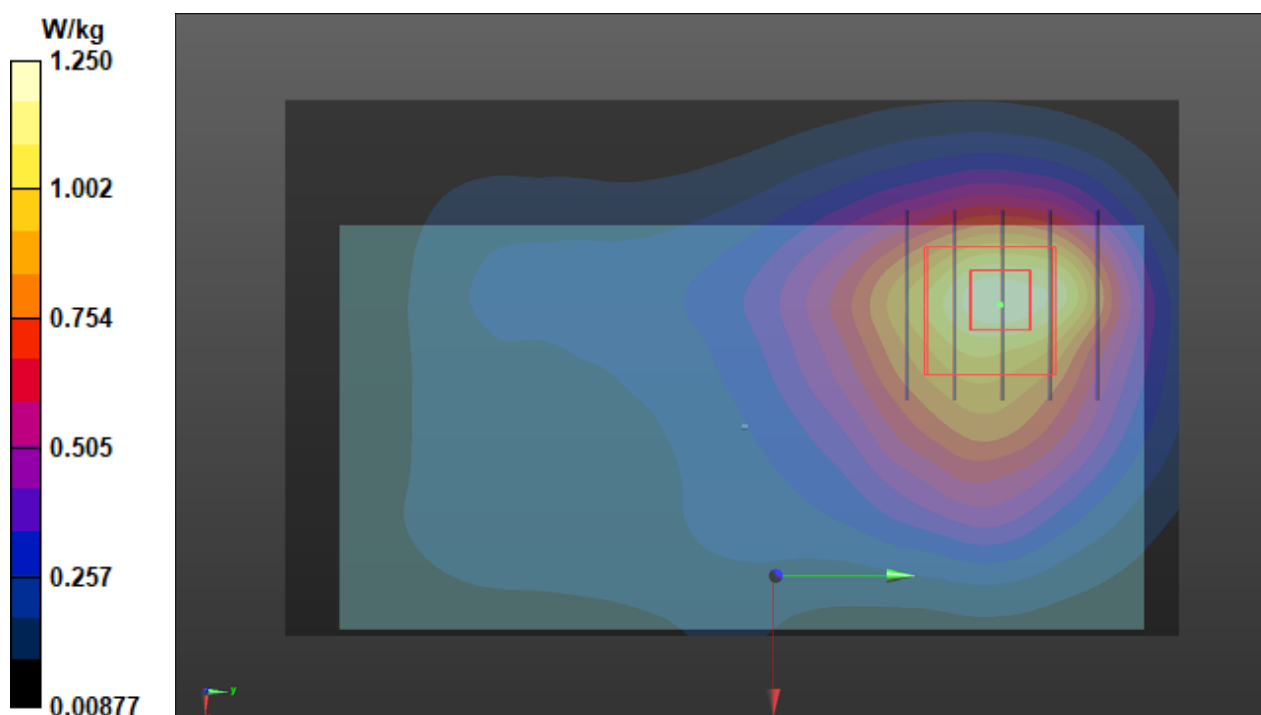

P02 WCDMA V_HSUPA Subtest-5_Front Face_10mm_Ch4233_Ant 2**DUT: P21050666**

Communication System: UID 10274 - CAB, UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10);

Frequency: 846.6 MHz; Duty Cycle: 1:3.07

Medium: H07T10N1_0731 Medium parameters used: $f = 847$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 40.678$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7555; ConvF(9.69, 9.69, 9.69) @ 846.6 MHz; Calibrated: 2020/09/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2020/09/15
- Phantom: Twin-SAM V8.0_1988; Type: QD 000 P41 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x101x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.412 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 22.03 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.473 W/kg

SAR(1 g) = 0.330 W/kg; SAR(10 g) = 0.236 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 71%

Maximum value of SAR (measured) = 0.425 W/kg

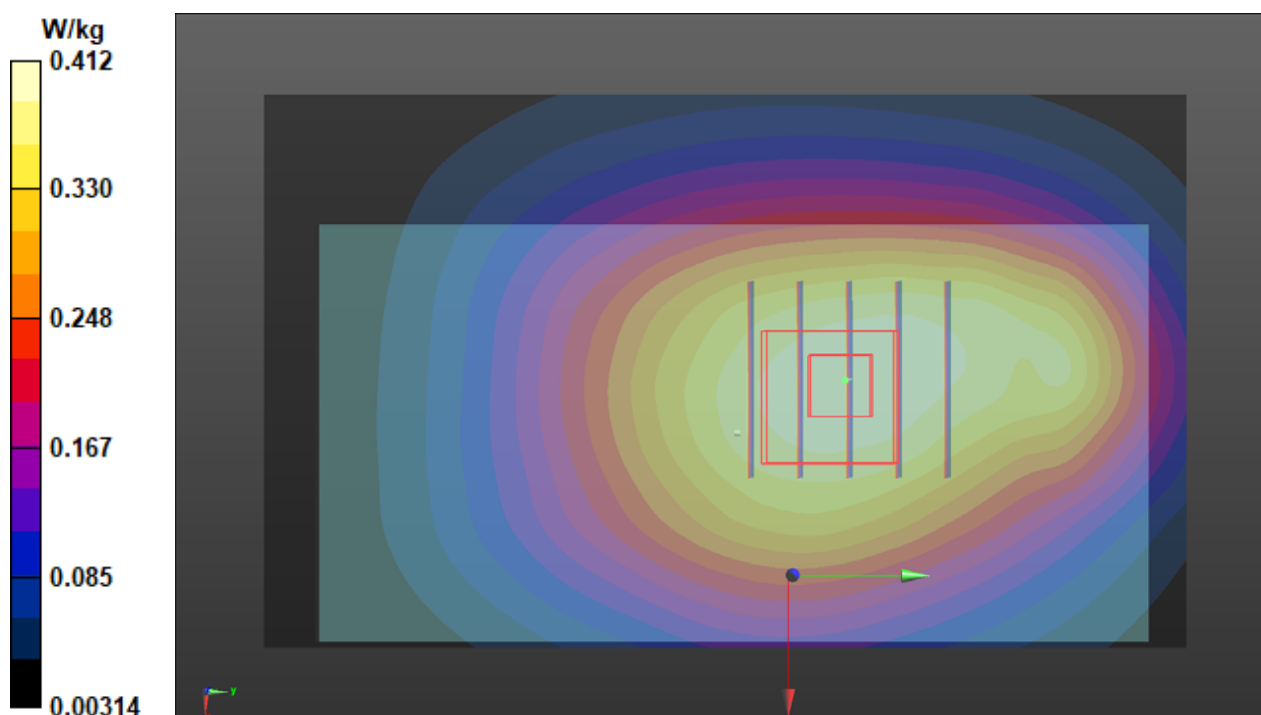

P03 LTE 5_QPSK10M_Front Face_10mm_Ch20525_1RB_OS0_Ant 2**DUT: P21050666**

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK);

Frequency: 836.5 MHz; Duty Cycle: 1:3.74

Medium: H07T10N1_0716 Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 40.78$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7555; ConvF(9.69, 9.69, 9.69) @ 836.5 MHz; Calibrated: 2020/09/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2020/09/15
- Phantom: Twin-SAM V8.0_1988; Type: QD 000 P41 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.557 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.64 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.583 W/kg

SAR(1 g) = 0.366 W/kg; SAR(10 g) = 0.226 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 24.4 mm

Ratio of SAR at M2 to SAR at M1 = 65.2%

Maximum value of SAR (measured) = 0.500 W/kg

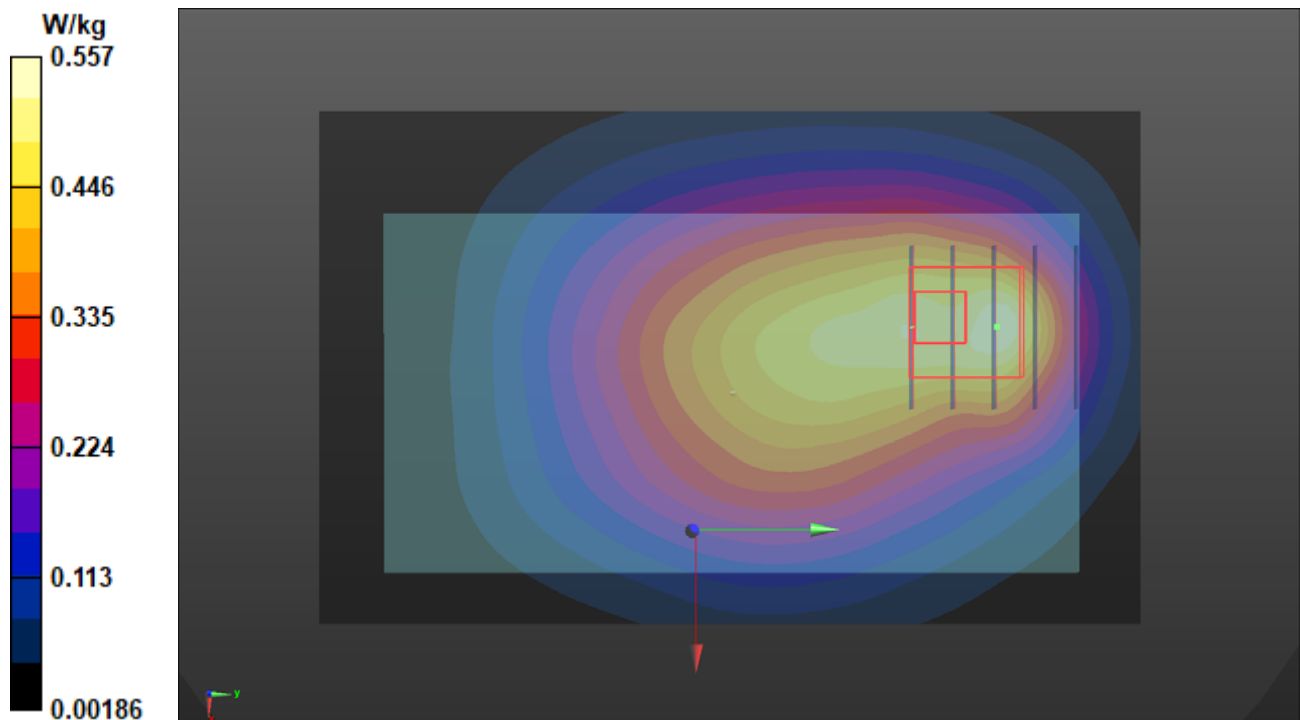

P04 LTE 17_QPSK10M_Front Face_10mm_Ch23790_1RB_OS0_Ant 2**DUT: P21050666**

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK);

Frequency: 710 MHz; Duty Cycle: 1:3.74

Medium: H06T09N1_0716 Medium parameters used: $f = 710 \text{ MHz}$; $\sigma = 0.849 \text{ S/m}$; $\epsilon_r = 43.957$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.6 °C; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7555; ConvF(10, 10, 10) @ 710 MHz; Calibrated: 2020/09/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2020/09/15
- Phantom: Twin-SAM V8.0_1988; Type: QD 000 P41 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.492 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.36 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.558 W/kg

SAR(1 g) = 0.316 W/kg; SAR(10 g) = 0.197 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 12.5 mm

Ratio of SAR at M2 to SAR at M1 = 44.4%

Maximum value of SAR (measured) = 0.403 W/kg

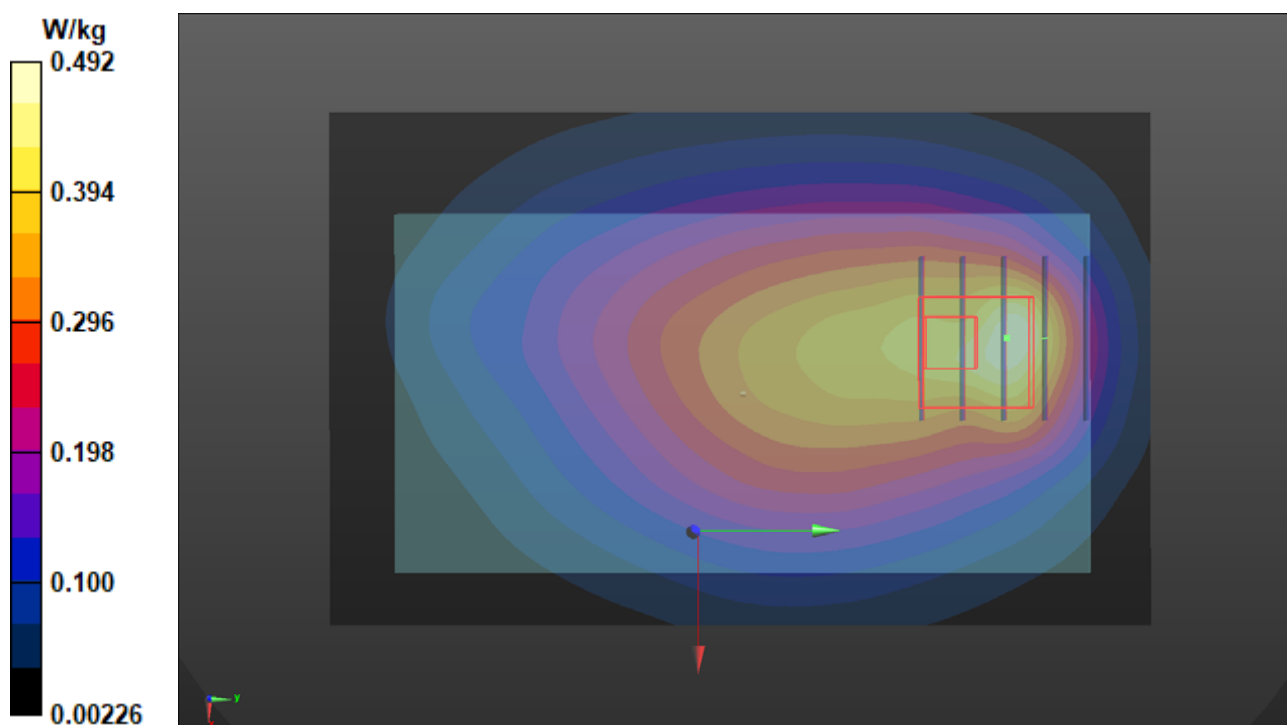

P05 WLAN2.4G_802.11b_Front Face_10mm_Ch6_Ant 1**DUT: P21050666**

Communication System: UID 10012 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps);

Frequency: 2437 MHz; Duty Cycle: 1:1.02

Medium: H19T27N1_0805 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.851$ S/m; $\epsilon_r = 38.001$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(7.61, 7.61, 7.61) @ 2437 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: SAM Phantom_1987; Type: QD 000 P41 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (91x141x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.113 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.092 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 0.147 W/kg

SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.040 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 52.5%

Maximum value of SAR (measured) = 0.120 W/kg

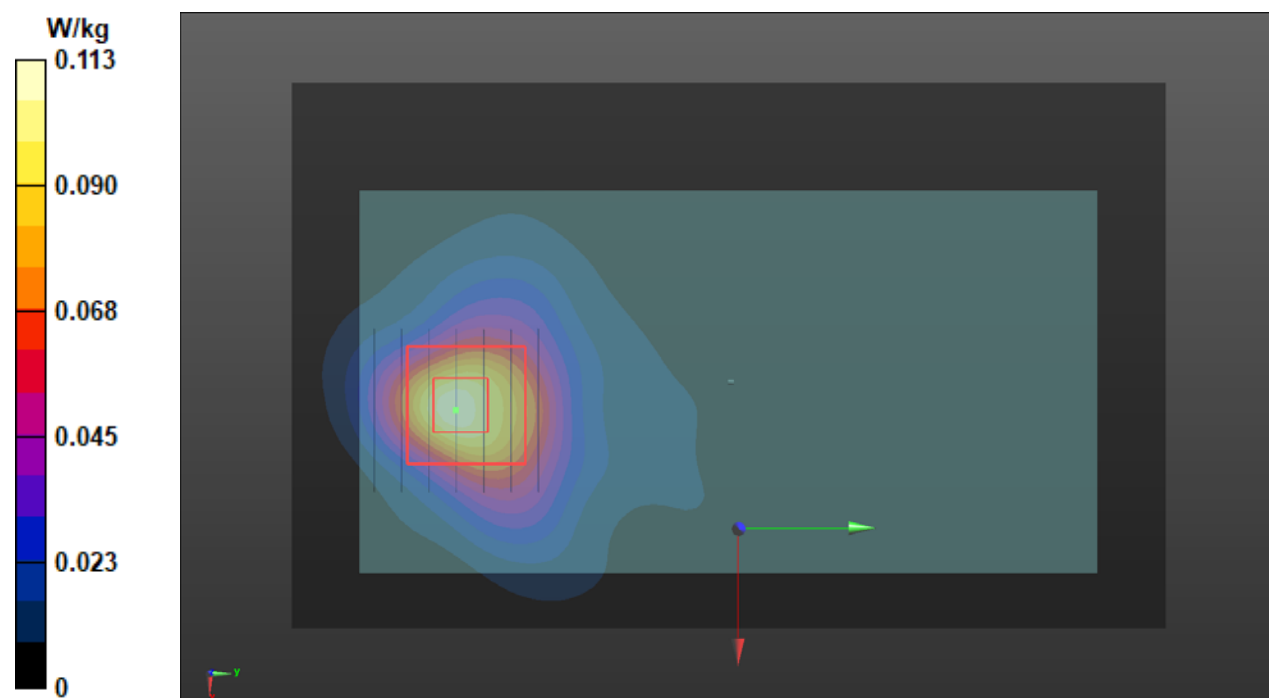

P06 BT_LE_Front Face_10mm_Ch19_Ant 0

DUT: BBWD-WTW-P21080871

Communication System: UID 10670 - AAA, Bluetooth Low Energy; Frequency: 2440 MHz; Duty Cycle: 1:1.63

Medium: H19T27N1_0805 Medium parameters used: $f = 2440$ MHz; $\sigma = 1.855$ S/m; $\epsilon_r = 37.991$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(7.61, 7.61, 7.61) @ 2440 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: Twin-SAM V8.0_1987; Type: QD 000 P41 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (91x181x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0 W/kg

