

客户品牌:DDPAI	项目名称:mola N3海外	产品类别:包装	产品料号:67010100-XXX-GP	版本类型:V0	归档日期:20191213
------------	----------------	---------	----------------------	---------	---------------

平面展开图:

DDPAI

MOLA N3

User Guide

1 PACKAGE CONTENTS

NOTE :If you need the Dash Cam to support GPS and SR, you need to purchase the GPS version of the Mmounting bracket.

Dash Cam

Mmounting bracket

Power Cable

User Guide

3M Adhesive

USB Charger

Installation Tool

2 PRODUCT OVERVIEW

- ① Parking monitoring indicator
- ② Lens
- ③ Working indicator
- ④ MIC
- ⑤ Reset button
- ⑥ Mmounting bracket
- ⑦ Speaker
- ⑧ Micro USB port
- ⑨ Lock button
- ⑩ micro SD card slot

3 INSTALLATION

1. Clean the area on the windshield where the Dash Cam will be installed, otherwise it may fall off easily in later.
2. Take out the Dash Cam and bracket from the box, pinch the lock button on the bracket, and insert the USB Type-C port of the bracket into the USB Type-C port of the Dash Cam to ensure that the bracket does not fall off.

3. Remove the protective film from the back of the bracket, attach the adhesive side of the bracket on the windshield where it has an unobstructed view of the road but does not interfere with the driver's view. As shown below.

4. Use the installation tool to lift the edges of the windshield /molding and tuck in the power cable. Connect the Dash Cam to the car charger (plugged into cigarette lighter socket) and power cable.

5. Turn on the Dash Cam after installation, you will hear "Hello, ding ding pai", and the blue light flashes slowly.
6. Connect the DDPai App, refer to the reference line on the preview interface, and rotate the bracket to adjust the camera angle.

4 LED INDICATOR INSTRUCTION

Product status	Indicator status
working properly	Blue light flashes slowly
Parking monitoring	Red light flashes slowly
Upgrading	Red and blue lights are always on
Storage abnormal / working anomalously	Blue and red lights flash quickly

5 INSTALL DDPai APP

For Android / iOS phones, search for "DDPAI" in the Google Play Store or Apple App Store. Download the App and install it on your phone.

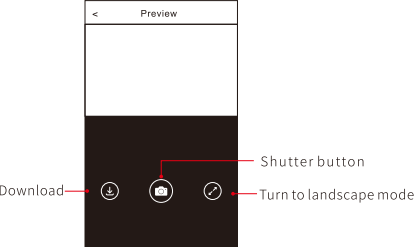
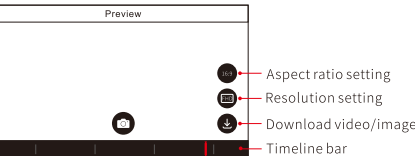


Note: In order to connect to camera Wi-Fi, please list the App in your trust application list and make sure the camera's Wi-Fi is on.

6 APP INSTRUCTION

6.1 On the Road

DDPAI users community, from here you can find nearby users, see the newest activities, user experience, installation tutorial etc.

6.2 Camera

Pair Smart Phone to Dash Cam 1). Launch DDPAI App, tap on Camera, then tap on +. 2). Choose your DDPAI Dash Cam from the network list (For Android system, App will start to search Dash Cam network automatically. For iOS phone: turn on WLAN from "Settings" -> "WLAN"). The Dash Cam's default SSID (or Wi-Fi name) is DDPAI_mola N3_XXXX. 3). Enter the password (the default password is "1234567890"). Preview/ Playback Connect to Dash Cam via direct Wi-Fi, to see recent videos and real-time display. 1) Open the DDPAI App, and add your Dash Cam. 2) Select Camera tab, then tap on (📷) button, this will bring you to preview page.  Rotate your smart phone or press expand (📐) icon, turn preview screen to landscape mode. 	6.4 Album  View images, videos and emergency clips, you also can edit and share them from here. 6.5 Me Settings, help center and about us.  Settings: From here you can set Dash Cam's name and password, camera volume, resolution, G-Sensor sensitivity, parking mode, format sd card, and so on. Help: How to use the Dash Cam. About: Update firmware, contact us, information about the Dash Cam.	2. Once you are connected, launch the App. You will get a notification asking you to upgrade, accept to upgrade. 3. If you don't get the notification, you can tap on "Me>About" in the App to manually upgrade: Tap on see more to view more information about your Dash Cam. If an update is available, a (🔄) will appear. Tap on the New firmware available to bring up the download page. If the App is the latest version, a notification of "Current version is the latest" will pop-out. 7.2 Upgrade the Firmware via PC 1. Download the latest firmware for your camera, unzip and copy the content you have unzipped onto the SD card. 2. Place the SD card back into the camera and it will apply the firmware automatically. 3. Power on the camera and it will apply the firmware automatically. NOTE: Do not power off your Dash Cam until it begins continuous recording as it may cause permanent damage to the Dash Cam.	9 FCC STATEMENT This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation. Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: • Reorient or relocate the receiving antenna. • Increase the separation between the equipment and receiver. • Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. • Consult the dealer or an experienced radio/TV technician for help.	FCC Radiation Exposure Statement: This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body. 10 CAUTION • The product's operating temperature range is -20°C – 70°C. • Install the device near the rear-view mirror to obtain the best open-field view. Do NOT install the Dash Cam in a location that will obstruct your required driving view. • The Dash Cam supports a class 10 micro SD card up to 128GB. Format the SD card via App before using, and format it regularly to maximize the lifetime of the memory card. • Do not use cardboard, paper towel, or napkin to clean the lens. • Do not attempt to repair, dismantle, or modify the Dash Camera hardware by yourself. • Do not install the product in an environment with high humidity, or combustible gases or liquids. • Drawings for illustration purpose only. Actual product may vary due to product enhancement.
	7 UPGRADE APP AND FIRMWARE 7.1 Upgrade the Firmware via App Our App and camera firmware will be updated regularly, you can update the firmware via App. Please follow these steps to upgrade the DDPAI App and the latest firmware version onto the DDPAI Dash Cam. 1. Open the Wi-Fi settings of your mobile device and connect to the Dash Cam via Wi-Fi.	8 SPECIFICATIONS CPU: H.265 hardware coding, HUAWEI HiSilicon dual-core processor Image sensor: 5 MP CMOS image sensor Lens: 6-layer glass lens, FOV 140°, F1.8 aperture Storage: Class 10 TF card up to 128 GB, loop recording Wi-Fi: Wi-Fi/ 2.4GHz Video Output: Wireless video output, support Android/iOS device G-Sensor: Built-in 3 Gyro sensor, motion locking, adjustable sensitivity via App Photo resolution: 2560*1600@30fps RAM: 1GB		11 CUSTOMER SUPPORT For customer support and firmware updates please visit en.ddpai.com. You can also email a Customer Support expert at support@ddpai.com.

DDPAI	设计人员:王巧云	产品经理:	包装类型:说明书	材质:100g书纸	工艺:双面油墨印刷,风琴折叠
	复查人员:	项目经理:李辉	比例尺寸:1:1	尺寸:120*70mm	颜色:彩色