



REPORT No. : SZ21110373W05

TEST REPORT

APPLICANT : Reliance Communications LLC

PRODUCT NAME : Orbic Turbo 4G MHS

MODEL NAME : RC440L

BRAND NAME : Orbic

FCC ID : 2ABGH-RC440L

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2021-11-30

TEST DATE : 2021-12-09 to 2022-01-10

ISSUE DATE : 2022-01-20

Edited by: Peng Mi
Peng Mi (Rapporteur)

Approved by: Shen Junsheng
Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Technical Information	3
1.1. Applicant and Manufacturer Information	3
1.2. Equipment Under Test (EUT) Description	3
1.3. Modulation Type and Data Rate of EUT	5
1.4. The Channel Number and Frequency	6
1.5. Test Standards and Results	7
1.6. Environmental Conditions	8
2. 47 CFR Part 15C Requirements	9
2.1. Antenna Requirement	9
2.2. Duty Cycle of Test Signal	10
2.3. Maximum Peak and Average Conducted Output Power	14
2.4. Bandwidth	17
2.5. Conducted Spurious Emissions and Band Edge	26
2.6. Power Spectral Density	39
2.7. Conducted Emission	56
2.8. Restricted Frequency Bands	60
2.9. Radiated Emission	73
Annex A Test Uncertainty	89
Annex B Testing Laboratory Information	90

Change History		
Version	Date	Reason for change
1.0	2022-01-20	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Reliance Communications LLC
Applicant Address:	91 Colin Drive, Unit 1, HOLBROOK, New York 11741, United States
Manufacturer:	Unimaxcomm
Manufacturer Address:	Room 602, Floor 6th, Building B, Software Park T3, Hi-Tech Park South, Nanshan District, Shenzhen, P.R. China

1.2. Equipment Under Test (EUT) Description

Product Name:	Orbic Turbo 4G MHS	
Sample No.:	9#	
Hardware Version:	V1.0	
Software Version:	ORB440L_v1.0.1_BVT-NA	
Modulation Technology:	DSSS, OFDM	
Modulation Type:	Refer to section 1.3	
Operating Frequency Range:	802.11b/g/n (HT20): 2412MHz–2462MHz 802.11n (HT40): 2422MHz–2452MHz	
Antenna Type:	PIFA Antenna	
Antenna Gain:	ANT 0: 0.70dBi; ANT 1: 0.70dBi	
Directional Gain:	3.71dBi ^{Note 3}	
Accessory Information:	Battery	
	Brand Name:	Orbic
	Model No.:	BTE-3401
	Serial No.:	N/A
	Capacity:	3400mAh
	Rated Voltage:	3.8V
	Charge Limit:	4.35V
	Manufacturer:	Phenix New Energy (Huizhou) Co., Ltd



Accessory Information:	AC Adapter	
	Brand Name:	N/A
	Model No.:	TPA-5950100UU
	Serial No.:	N/A
	Rated Output:	5V $\overline{\text{---}}$ 1A
	Rated Input:	100-240V $\sim$ 50/60Hz, 0.2A
	Manufacturer:	Shenzhen kingfulin Technology Co.,Ltd

Note 1: We use the dedicated software to control the EUT continuous transmission.

Note 2: The EUT has two antennas, only 802.11n modulation mode supports a MIMO function.

Note 3: According to KDB 662911 D01, the directional gain = $G_{ANT} + 10\log(N_{ANT})$ dBi, where G_{ANT} is the maximum antenna gain in dBi, N_{ANT} is the number of outputs.

Note 4: For conducted test item Conducted Output Power and Power Spectral Density of each modulation mode, we recorded the test result of two antennas separately, for other conducted test items both of the two antennas were tested separately, we only recorded the worst test result (ANT 0) in this report.

Note 5: Radiation test items for all modulation operate at 2Tx mode during the test, only the worst test result(ANT0) was recorded in this report.

Note 6: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.3. Modulation Type and Data Rate of EUT

Modulation technology	Modulation Type	Data Rate (Mbps) ^{Note1}
DSSS (802.11b)	DBPSK	1
	DQPSK	2
	CCK	5.5/ 11
OFDM (802.11g)	BPSK	6 / 9
	QPSK	12 / 18
	16QAM	24 / 36
	64QAM	48 / 54
OFDM (802.11n (HT20))	BPSK	6.5
	QPSK	13/19.5
	16QAM	26/39
	64QAM	52/58.5/65
OFDM (802.11n (HT40))	BPSK	13.5
	QPSK	27/40.5
	16QAM	54/81/108
	64QAM	121.5/135

Note1: The worst-case mode (bold face) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.

1.4. The Channel Number and Frequency

Test Mode	Channel	Frequency (MHz)	Channel	Frequency (MHz)
802.11b/g/ n (HT20)	1	2412	8	2447
	2	2417	9	2452
	3	2422	10	2457
	4	2427	11	2462
	5	2432		
	6	2437		
	7	2442		
Test Mode	Channel	Frequency (MHz)	Channel	Frequency (MHz)
802.11n (HT40)	3	2422	8	2447
	4	2427	9	2452
	5	2432		
	6	2437		
	7	2442		

Note 1: The black bold channels were selected for test.



1.5. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	N/A	Duty Cycle of Test Signal	Dec 10, 2021	Meng Shurui	PASS	No deviation
3	15.247(b)	Maximum Peak and Average Conducted Output Power	Dec 30, 2021	Meng Shurui	PASS	No deviation
4	15.247(a)	Bandwidth	Dec 30, 2021	Meng Shurui	PASS	No deviation
5	15.247(d)	Conducted Spurious Emission and Band Edge	Dec 30, 2021	Meng Shurui	PASS	No deviation
6	15.247(e)	Power Spectral Density	Dec 29, 2021	Meng Shurui	PASS	No deviation
7	15.207	Conducted Emission	Dec 15, 2021	Yang Lian	PASS	No deviation
8	15.247(d)	Restricted Frequency Bands	Dec 27, 2021 Jan 10, 2022	Su Zhan	PASS	No deviation
9	15.209, 15.247(d)	Radiated Emission	Dec 27, 2021	Su Zhan	PASS	No deviation

Note 1: The tests were performed according to the method of measurements prescribed in ANSIC63.10-2013, KDB558074 D01 v05r02.

Note 2: The path loss during the RF test is calibrated to correct the results by the offset setting



in the test equipments. The ref offset 12dB contains two parts that cable loss 2dB and Attenuator 10dB.

Note 3: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 4: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.

1.6. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106



2. 47 CFR Part 15C Requirements

2.1. Antenna Requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Test Result: Compliant

Inside of the EUT has a PIFA antenna coupled with the metal shrapnel. Please refer to the EUT internal photos.

2.2. Duty Cycle of Test Signal


2.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this subclause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be nonconstant.

2.2.2. Test Description

Test Setup:

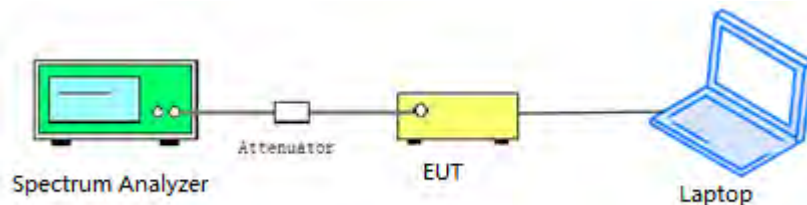

ANSI C63.10 2013 Clause 11.6 was used in order to prove compliance.




2.2.3. Test Result


A. Test Verdict:

Test Mode	Duty Cycle (%) (D)	Duty Factor ($10 \cdot \lg[1/D]$)
802.11b	99.28	0.03
802.11g	95.39	0.20
802.11n (HT20)	95.07	0.22
802.11n (HT40)	90.48	0.43


B. Test Plot:

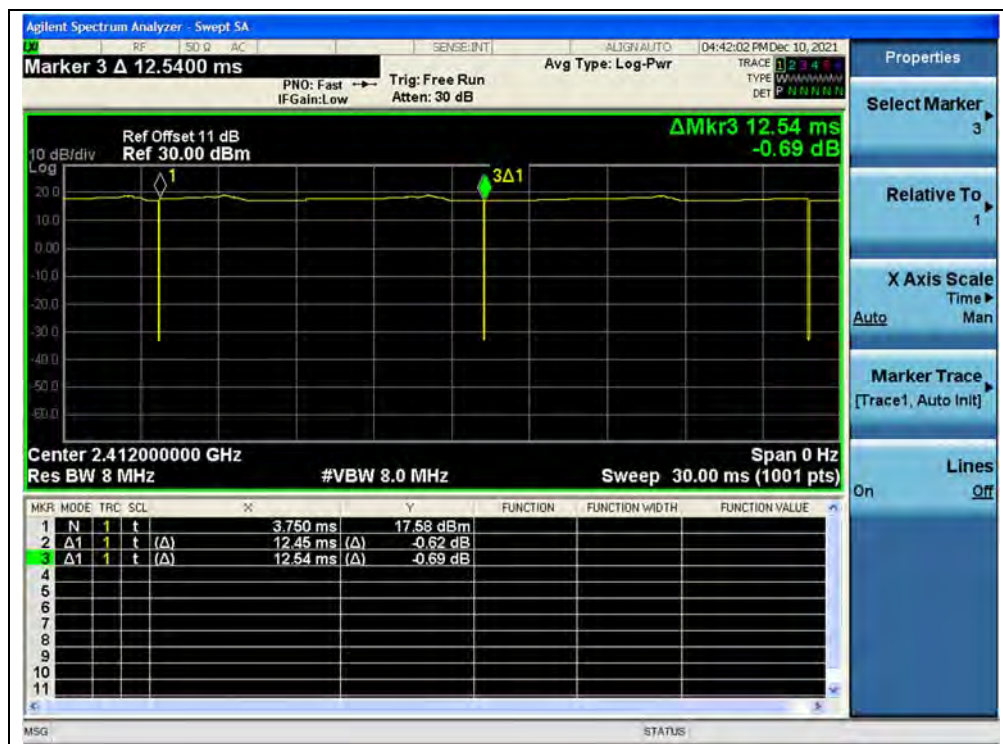


(Channel 1, 802.11b)

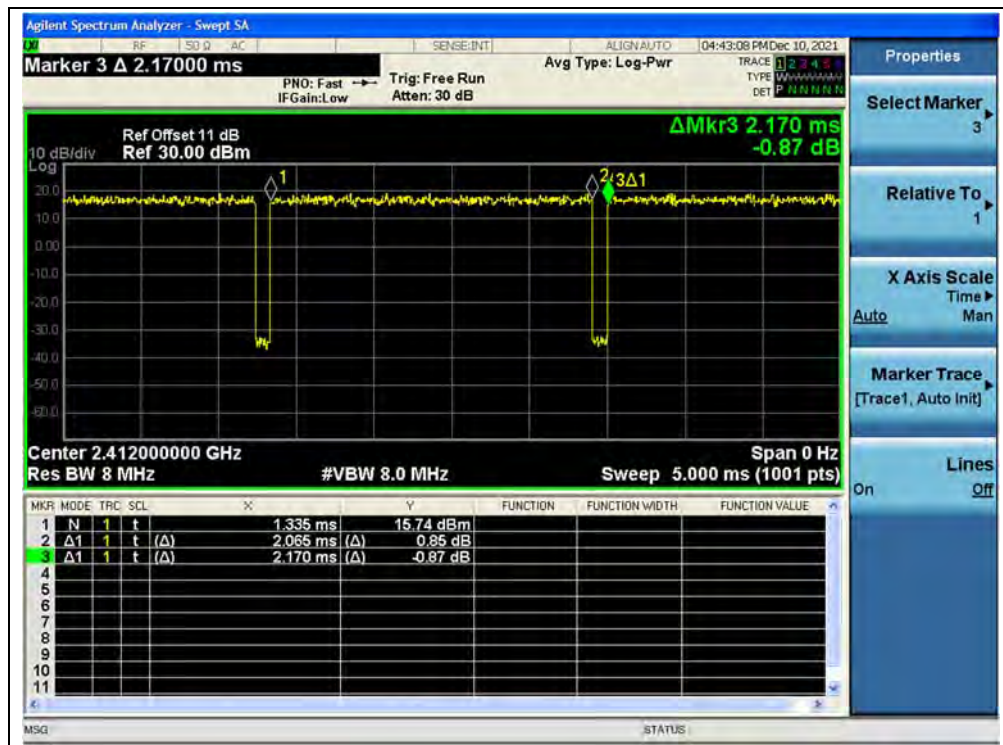

(Channel 1, 802.11g)

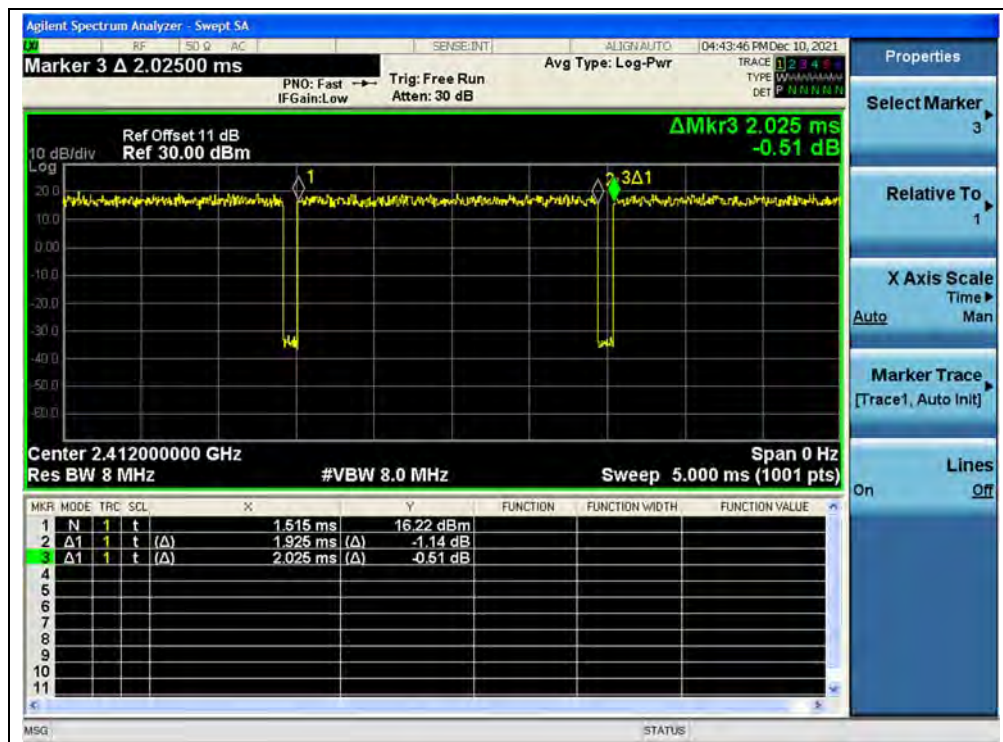

(Channel 1, 802.11n (HT20))

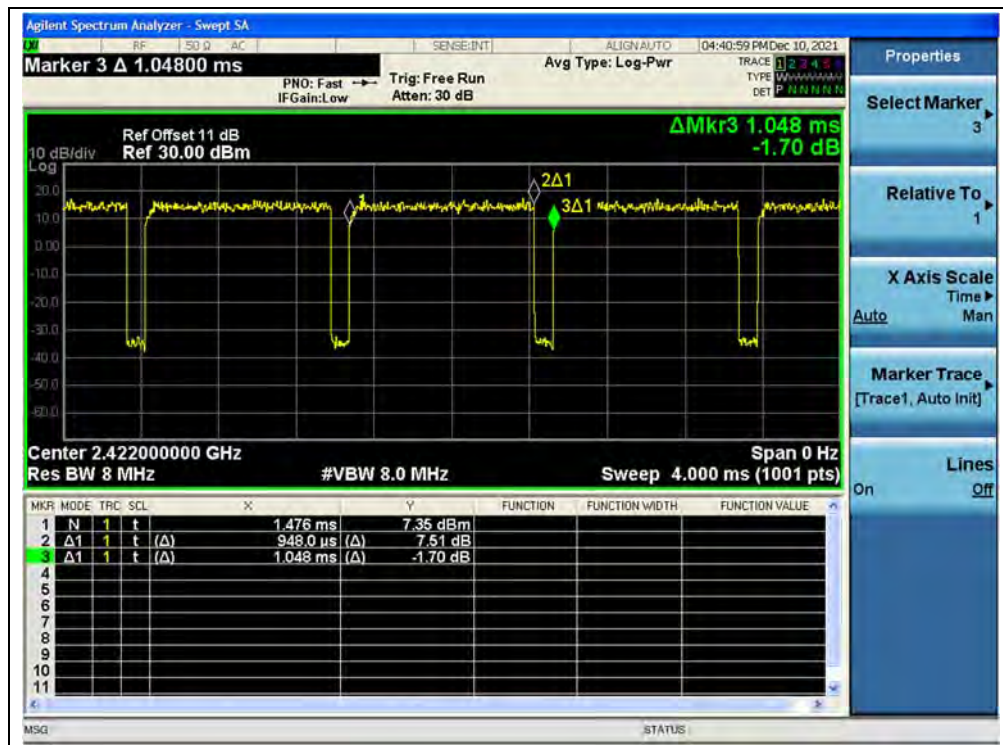

(Channel 3, 802.11n (HT40))

2.3. Maximum Peak and Average Conducted Output Power


2.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

2.3.2. Test Description

The measured output power was calculated by the reading of the USB Wideband Power Sensor and calibration.

Test Setup:

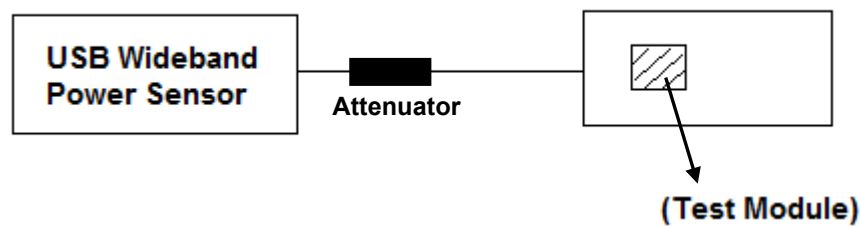

The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

**2.3.3. Test Result****Maximum Peak Conducted Output Power****802.11b Mode**

Channel	Frequency (MHz)	Measured Peak Power				Limit		Verdict
		ANT 0		ANT 1		(dBm)		
		dBm	W	dBm	W	dBm	W	
1	2412	16.27	0.042	15.35	0.034	30	1	PASS
6	2437	15.60	0.036	15.62	0.036			PASS
11	2462	15.61	0.036	15.27	0.034			PASS

802.11g Mode

Channel	Frequency (MHz)	Measured Peak Power				Limit		Verdict
		ANT 0		ANT 1		(dBm)		
		dBm	W	dBm	W	dBm	W	
1	2412	19.68	0.093	19.21	0.083	30	1	PASS
6	2437	17.88	0.061	18.24	0.067			PASS
11	2462	18.54	0.071	18.59	0.072			PASS

802.11n(HT20) Mode

Channel	Frequency (MHz)	Measured Peak Power (dBm)		Total Power (dBm)	Total Power (W)	Limit		Verdict
		ANT 0	ANT 1			dBm	W	
1	2412	19.78	19.25	22.53	0.179	30	1	PASS
6	2437	18.26	18.70	21.49	0.141			PASS
11	2462	18.99	19.08	22.04	0.160			PASS

Note: Directional gain = $0.7\text{dBi} + 10\log(2) = 3.71\text{dBi} < 6\text{dBi}$, so the power limit is 1W(30dBm).

802.11n(HT40) Mode

Channel	Frequency (MHz)	Measured Peak Power (dBm)		Total Power (dBm)	Total Power (W)	Limit		Verdict
		ANT 0	ANT 1			dBm	W	
3	2422	20.24	18.88	22.62	0.183	30	1	PASS
6	2437	17.64	18.45	21.07	0.128			PASS
9	2452	19.43	18.28	21.90	0.155			PASS

Note: Directional gain = $0.7\text{dBi} + 10\log(2) = 3.71\text{dBi} < 6\text{dBi}$, so the power limit is 1W(30dBm).

**Maximum Average Conducted Output Power****802.11b Mode**

Frequency (MHz)	Average Power							Limit		Verdict
	Measured		Duty Factor	Duty Factor Calculated						
	ANT0	ANT1		ANT0		ANT1				
	dBm	dBm		dBm	W	dBm	W	dBm	W	
2412	13.63	12.69	0.03	13.66	0.023	12.72	0.019	30	1	PASS
2437	13.14	12.79		13.17	0.021	12.82	0.019			PASS
2462	13.36	12.55		13.39	0.022	12.58	0.018			PASS

802.11g Mode

Frequency (MHz)	Average Power							Limit		Verdict
	Measured		Duty Factor	Duty Factor Calculated						
	ANT0	ANT1		ANT0		ANT1				
	dBm	dBm		dBm	W	dBm	W	dBm	W	
2412	13.03	12.16	0.20	13.23	0.021	12.36	0.017	30	1	PASS
2437	12.34	12.19		12.54	0.018	12.39	0.017			PASS
2462	12.32	12.07		12.52	0.018	12.27	0.017			PASS

802.11n (HT20) Mode

Frequency (MHz)	Average Power					Limit		Verdict
	Measured		Duty Factor	Total Power with Duty Factor				
	ANT0	ANT1						
	dBm	dBm		dBm	W	dBm	W	
2412	12.82	11.91	0.22	15.56	0.036	30	1	PASS
2437	12.14	11.95		15.31	0.034			PASS
2462	12.04	11.83		15.19	0.033			PASS
Note: Directional gain = 0.7dBi +10log(2) = 3.71dBi<6dBi, so the power limit is 1W(30dBm).								

802.11n (HT40) Mode

Frequency (MHz)	Average Power					Limit		Verdict
	Measured		Duty Factor	Total Power with Duty Factor				
	ANT0	ANT1						
	dBm	dBm		dBm	W	dBm	W	
2422	13.25	11.87	0.43	16.02	0.040	30	1	PASS
2437	10.87	11.52		14.62	0.029			PASS
2452	10.06	11.07		13.98	0.025			PASS
Note: Directional gain = 0.7dBi +10log(2) = 3.71dBi<6dBi, so the power limit is 1W(30dBm).								


2.4. Bandwidth

2.4.1. Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

2.4.2. Test Description

Test Setup:

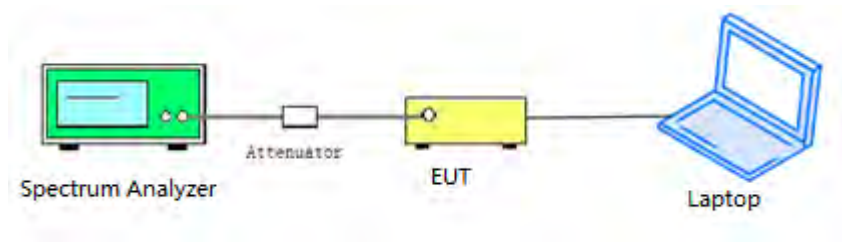

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ω; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

2.4.3. Test Procedure

KDB 558074 Section 8.2 was used in order to prove compliance.



2.4.4. Test Result

802.11b Mode

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	8.051	≥500	PASS
6	2437	8.067	≥500	PASS
11	2462	7.084	≥500	PASS

B. Test Plot:



(Channel 1, 802.11b)



(Channel 6, 802.11b)



(Channel 11, 802.11b)



802.11g Mode

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	15.04	≥500	PASS
6	2437	15.94	≥500	PASS
11	2462	12.56	≥500	PASS

B. Test Plot:



(Channel 1, 802.11g)



(Channel 6, 802.11g)



(Channel 11, 802.11g)



802.11n (HT20) Mode


A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	15.11	≥500	PASS
6	2437	15.95	≥500	PASS
11	2462	15.11	≥500	PASS

B. Test Plot:



(Channel 1, 802.11n (HT20))

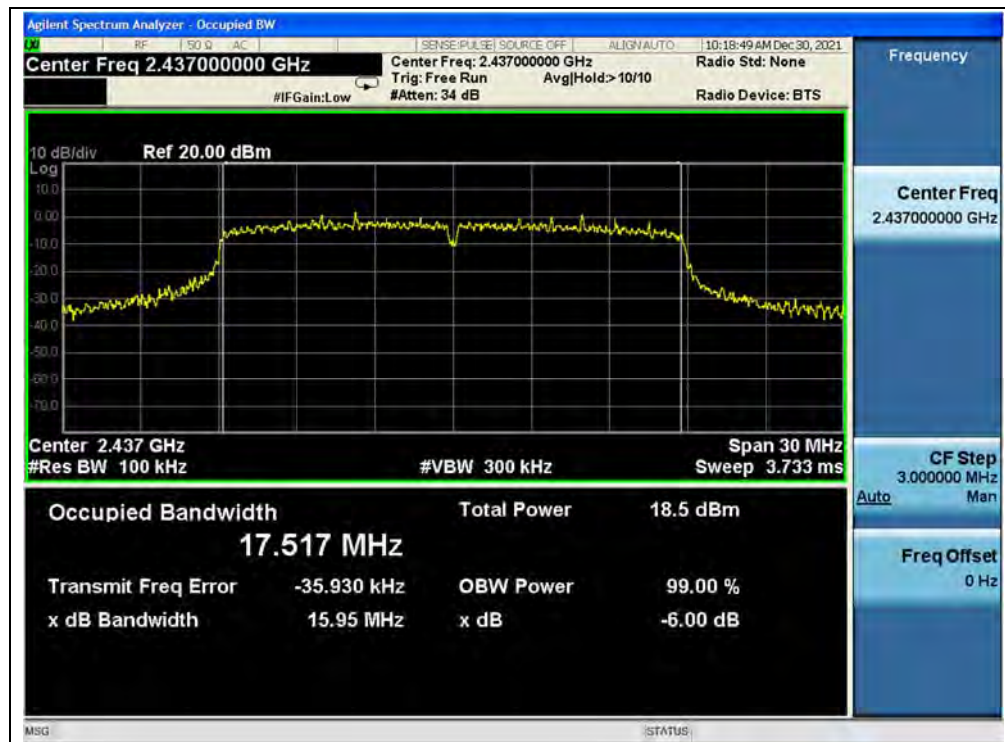

(Channel 6, 802.11n (HT20))



(Channel 11, 802.11n (HT20))



802.11n (HT40) Mode

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
3	2422	31.28	≥500	PASS
6	2437	35.74	≥500	PASS
9	2452	32.55	≥500	PASS

B. Test Plot:



(Channel 3, 802.11n (HT40))



(Channel 6, 802.11n (HT40))



(Channel 9, 802.11n (HT40))


2.5. Conducted Spurious Emissions and Band Edge

2.5.1. Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.5.2. Test Description

Test Setup:

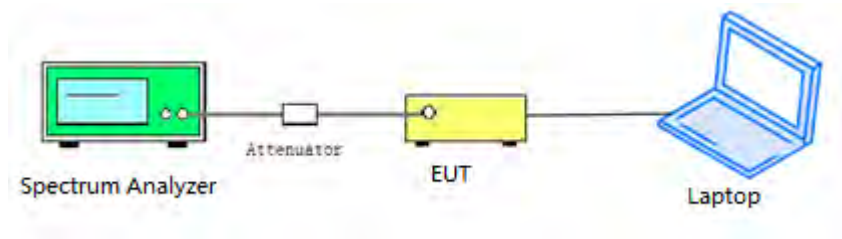

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

2.5.3. Test Procedure

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.




2.5.4. Test Result

802.11b Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-42.78	3.91	-16.09	PASS
6	2437	-43.13	5.84	-14.16	PASS
11	2462	-42.69	4.06	-15.94	PASS


B. Test Plot:

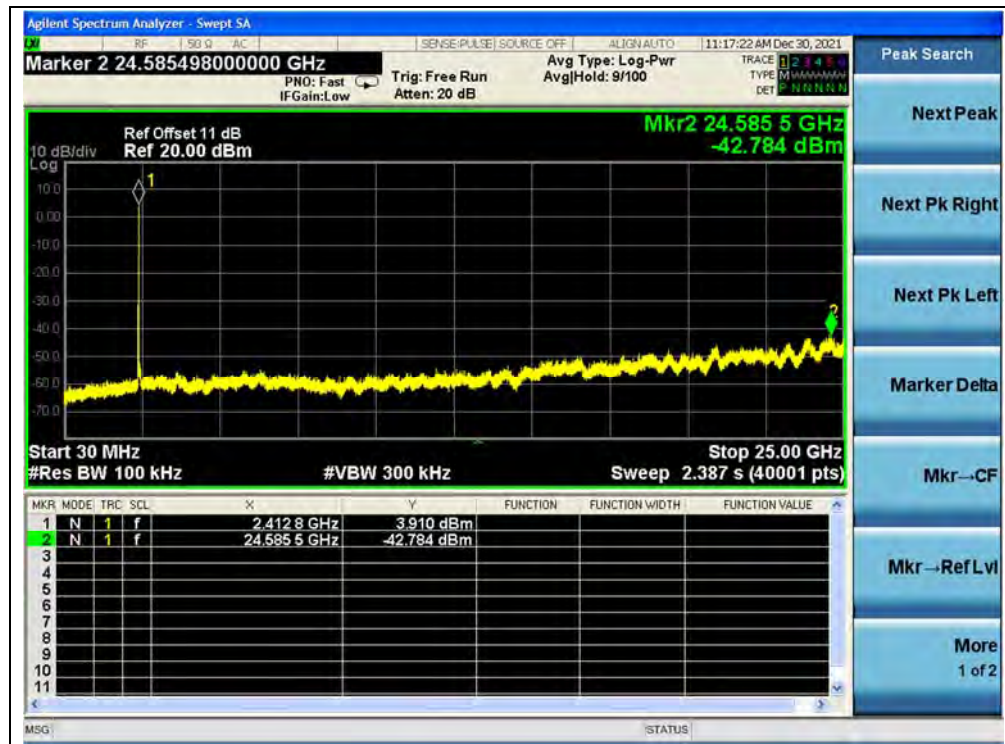


(30MHz to 25GHz, Channel 1, 802.11b)

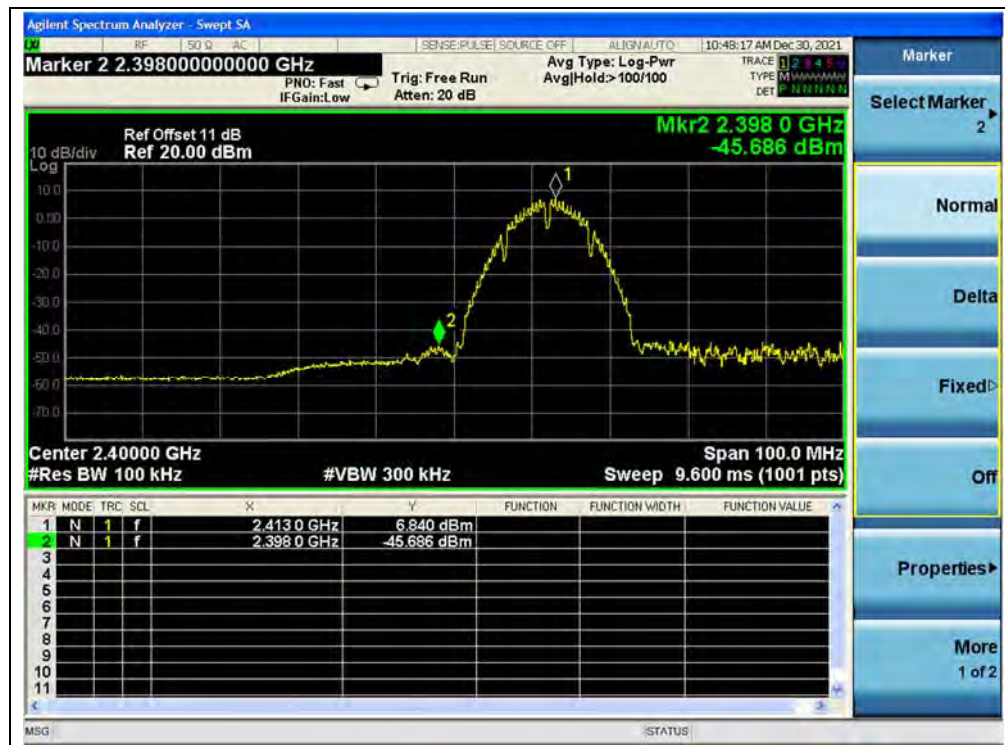


(Band Edge, Channel 1, 802.11b)

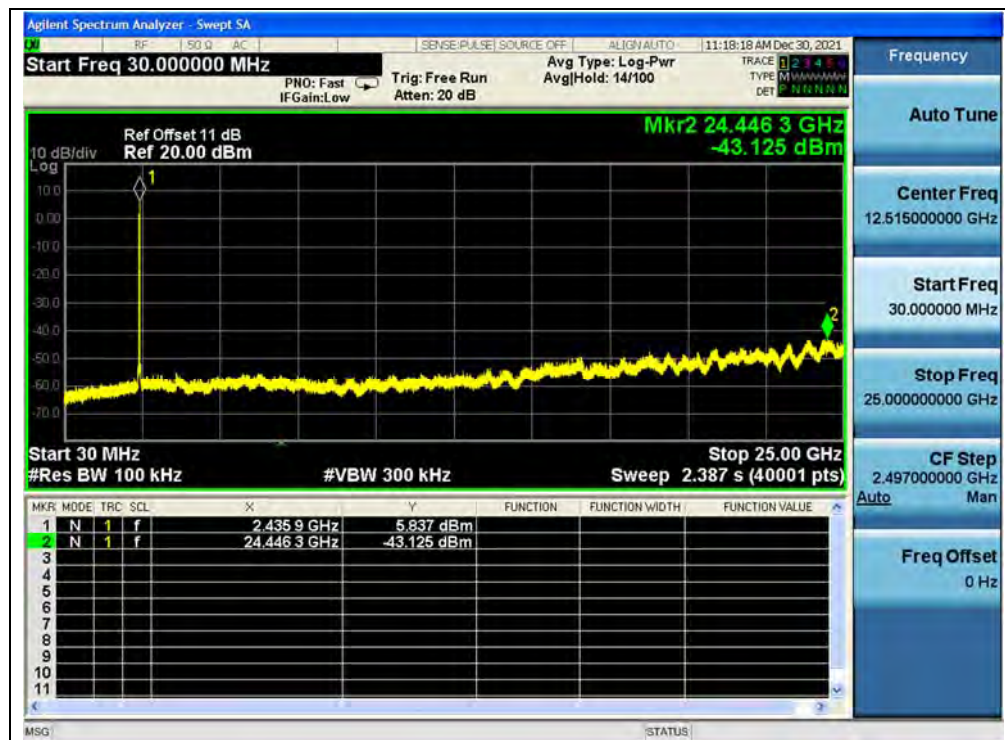

(30MHz to 25GHz, Channel 6, 802.11b)

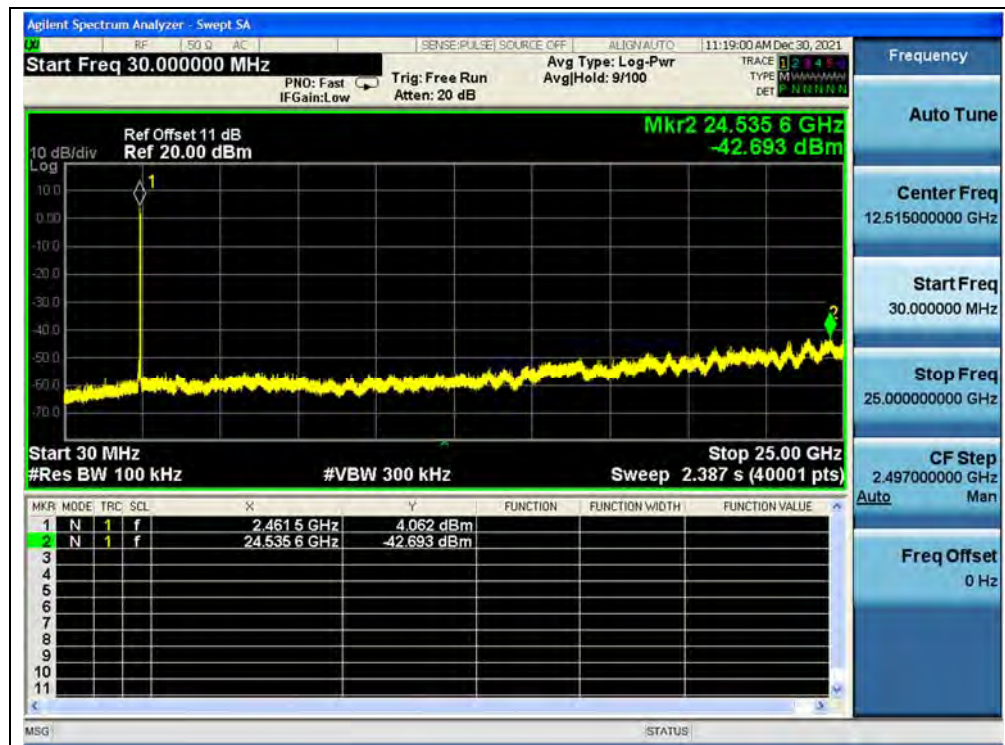

(30MHz to 25GHz, Channel 11, 802.11b)

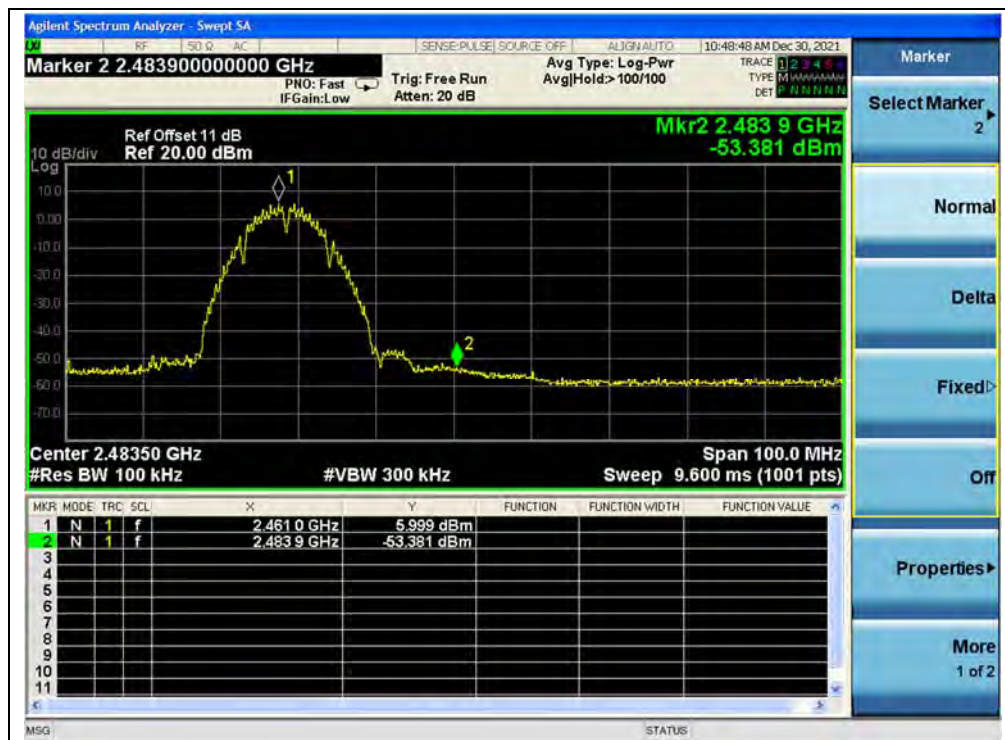

(Band Edge, Channel 11, 802.11b)




802.11g Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-42.33	0.19	-19.81	PASS
6	2437	-43.20	0.07	-19.93	PASS
11	2462	-41.69	1.46	-18.54	PASS


B. Test Plot:

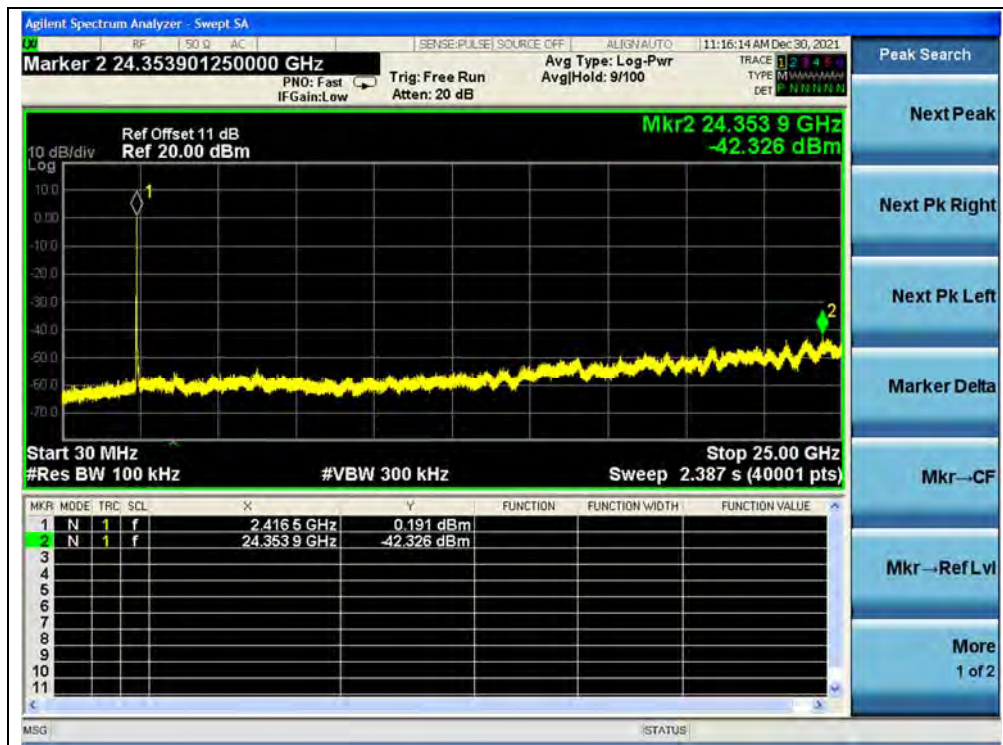


(30MHz to 25GHz, Channel 1, 802.11g)

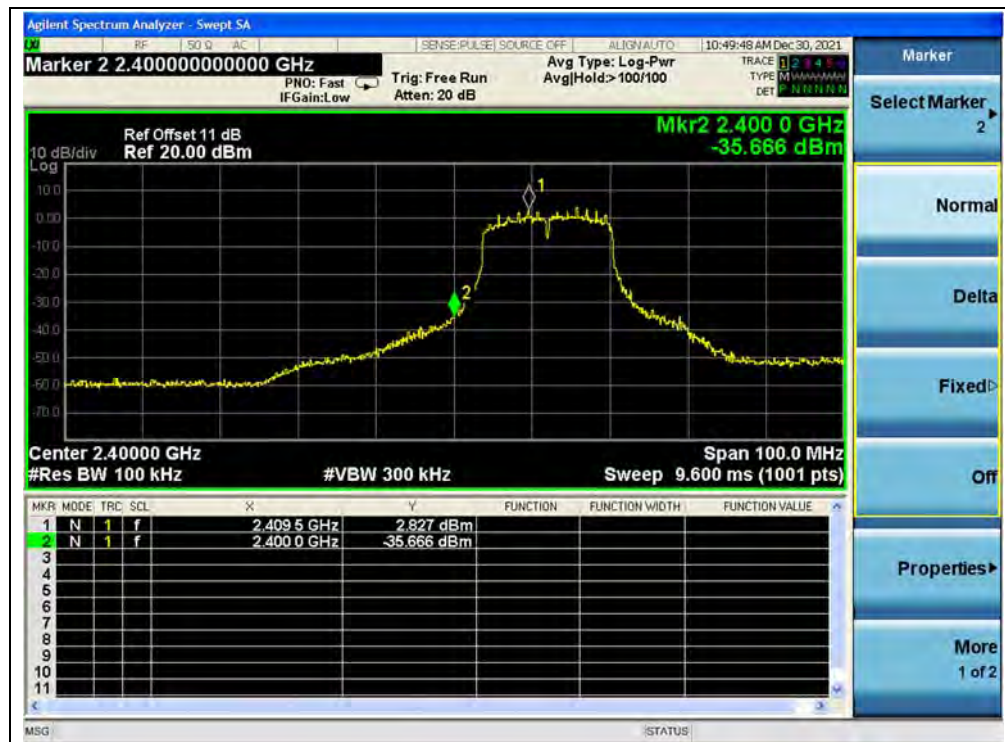

(Band Edge, Channel 1, 802.11g)

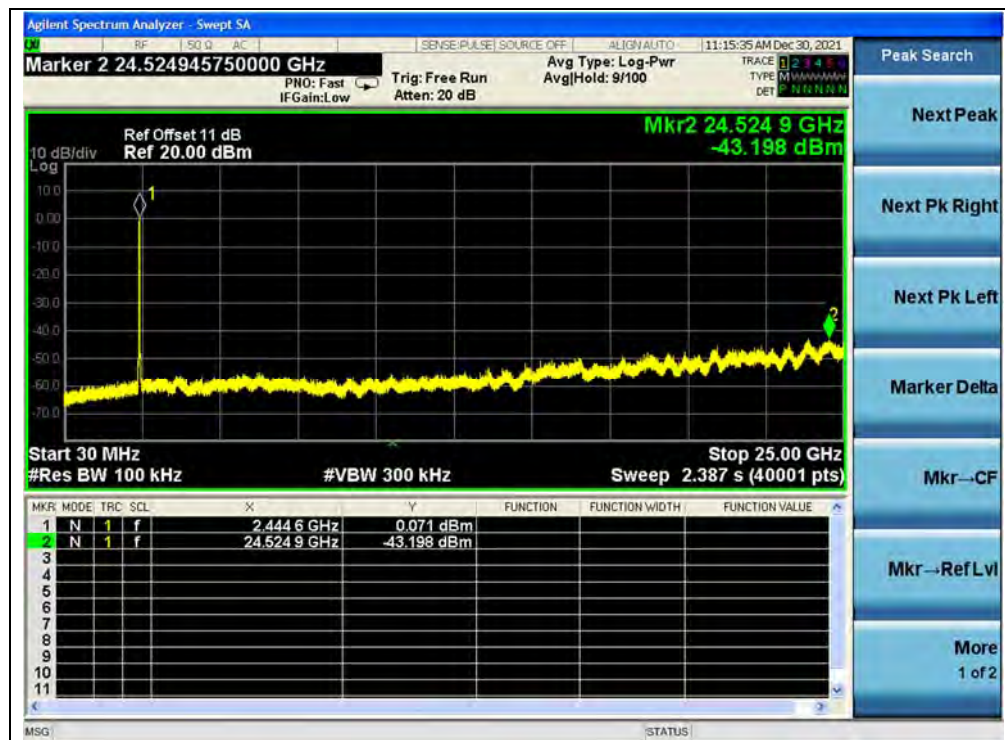

(30MHz to 25GHz, Channel 6, 802.11g)

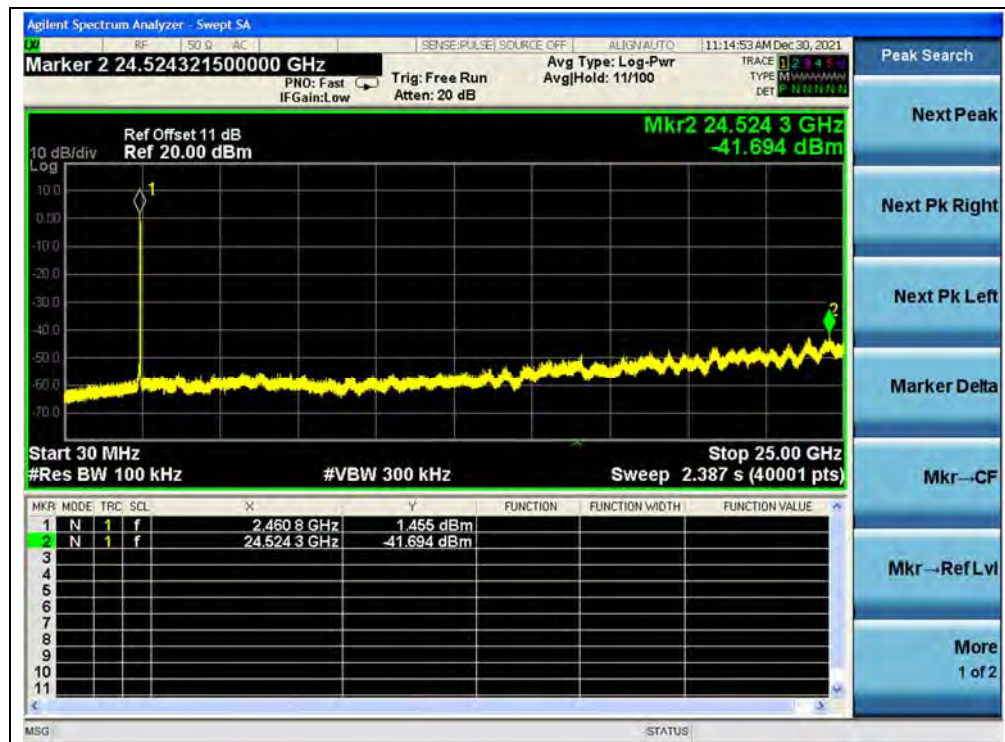


(30MHz to 25GHz, Channel 11, 802.11g)




(Band Edge, Channel 11, 802.11g)

**802.11n (HT20) Mode****A. Test Verdict:**

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-42.20	0.02	-19.98	PASS
6	2437	-41.47	2.49	-17.51	PASS
11	2462	-42.67	0.23	-19.77	PASS

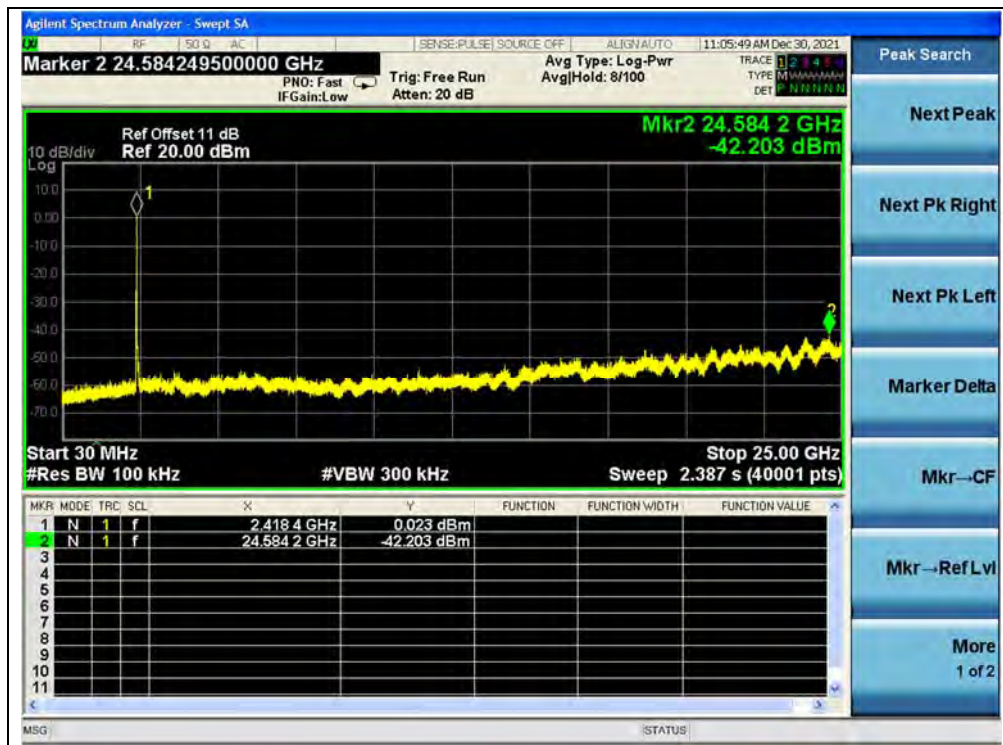B. Test Plot:


(30MHz to 25GHz, Channel 1, 802.11n (HT20))

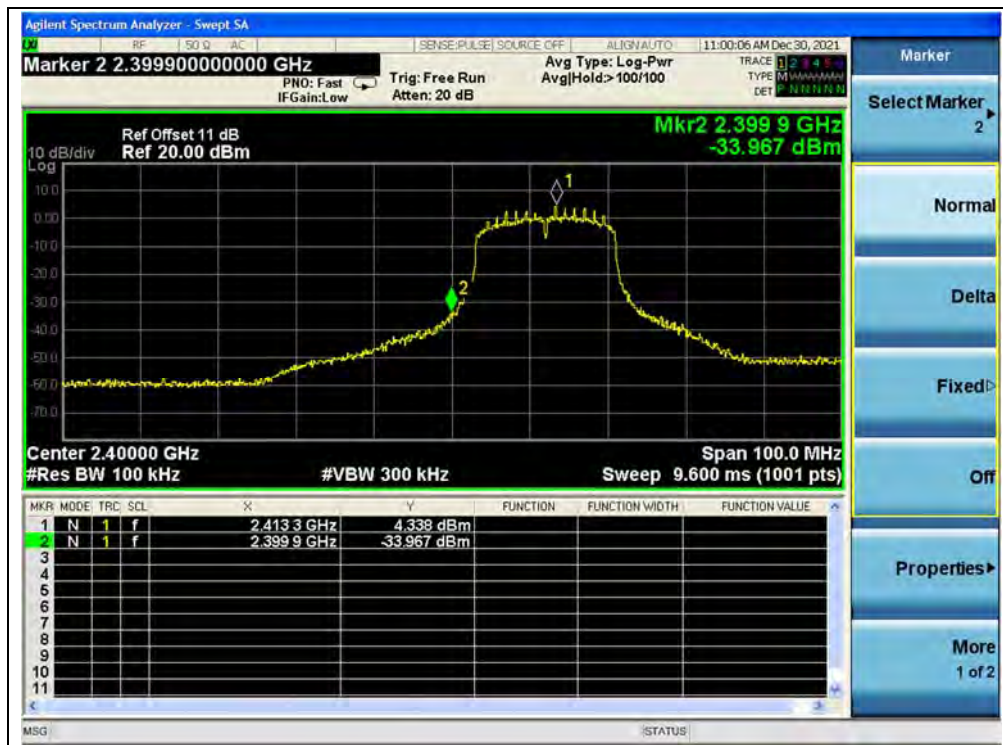


(Band Edge, Channel 1, 802.11n (HT20))



(30MHz to 25GHz, Channel 6, 802.11n (HT20))

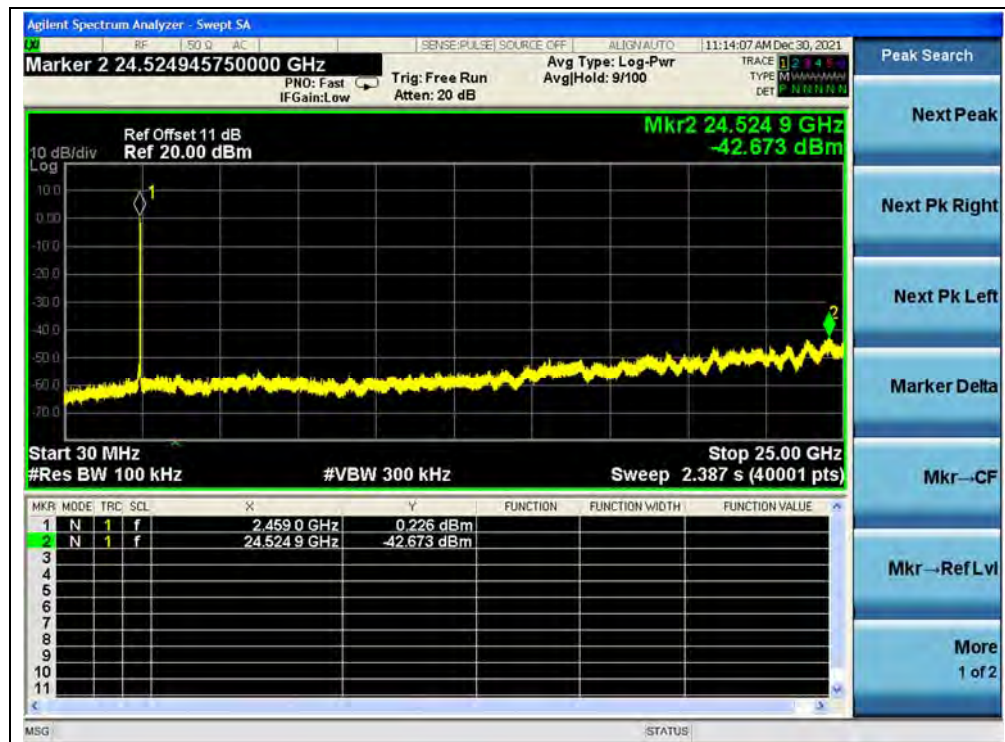

(30MHz to 25GHz, Channel 11, 802.11n (HT20))

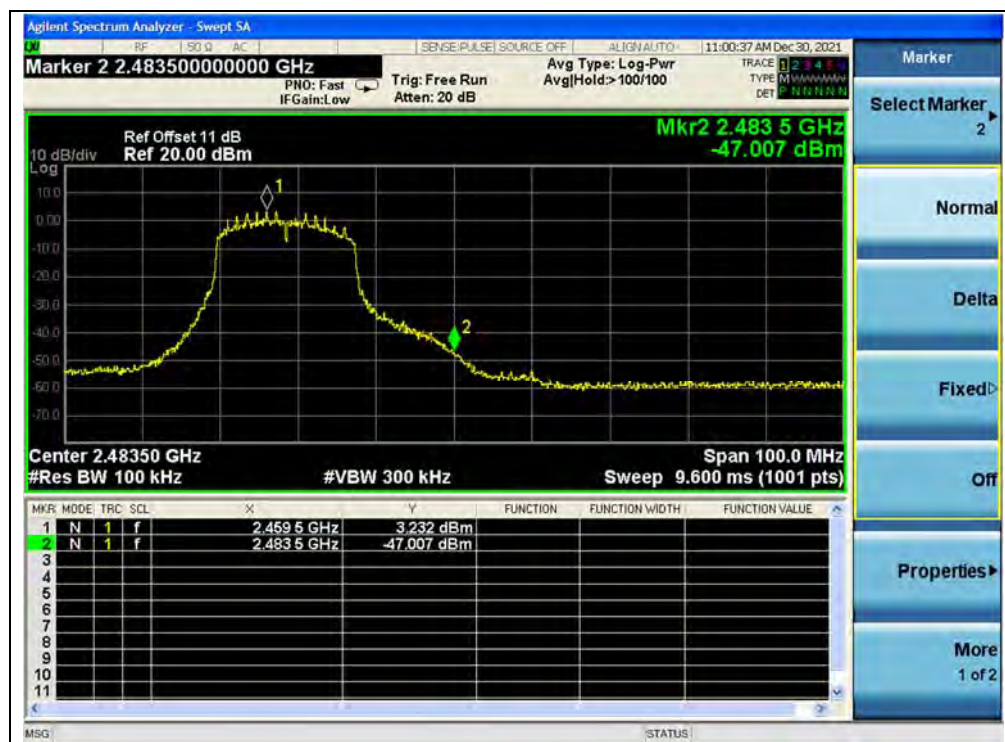

(Band Edge, Channel 11, 802.11n (HT20))




802.11n (HT40) Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
3	2422	-42.40	-1.71	-21.71	PASS
6	2437	-42.67	-2.82	-22.82	PASS
9	2452	-42.54	-2.86	-22.86	PASS


B. Test Plot:

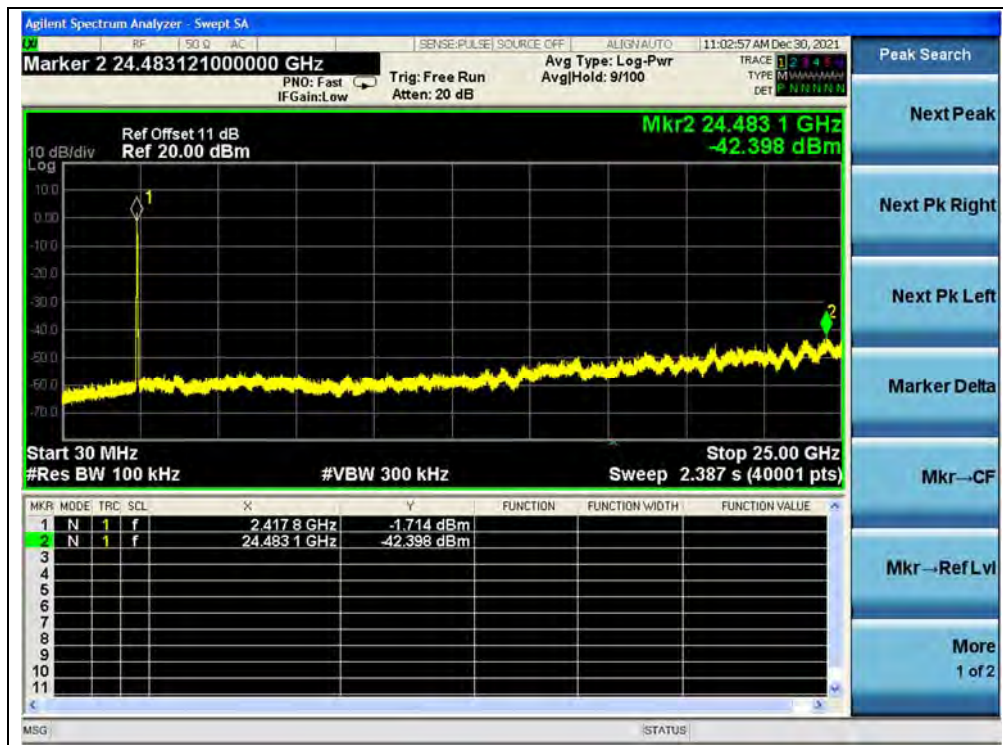


(30MHz to 25GHz, Channel 3, 802.11n HT40))



(Band Edge, Channel 3, 802.11n (HT40))

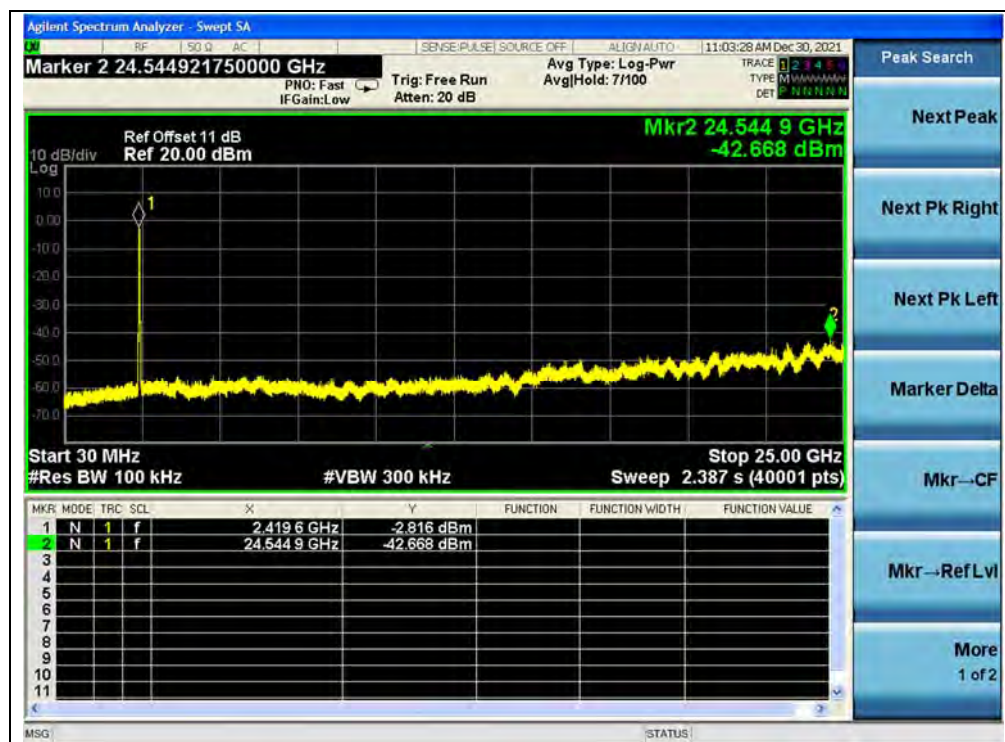

(30MHz to 25GHz, Channel 6, 802.11n (HT40))

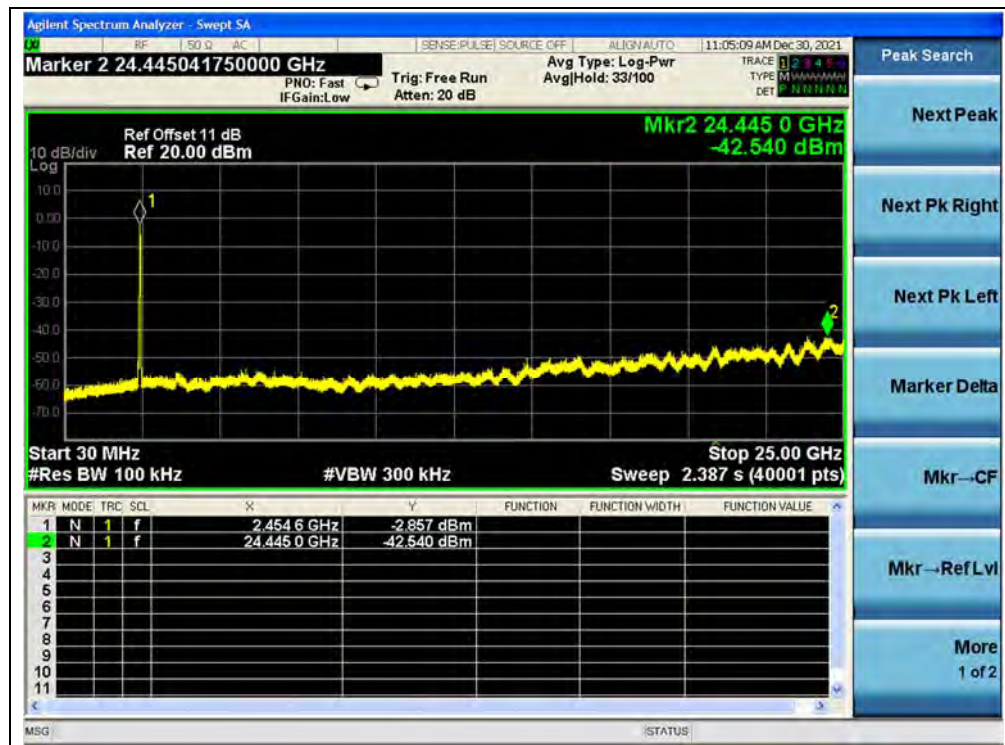

(30MHz to 25GHz, Channel 9, 802.11n (HT40))



(Band Edge, Channel 11, 802.11n (HT40))


2.6. Power Spectral Density

2.6.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

2.6.2. Test Description

Test Setup:

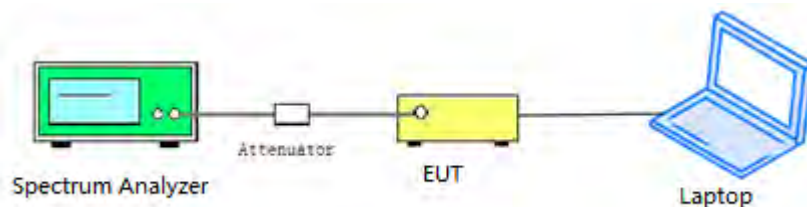

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.6.3. Test Procedure

KDB 558074 Section 8.4 was used in order to prove compliance.



2.6.4. Test Result

802.11b Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)		Limit (dBm/3kHz)	Verdict
		ANT 0	ANT 1		
1	2412	-10.13	-10.04	8	PASS
6	2437	-10.78	-11.26	8	PASS
11	2462	-11.51	-9.92	8	PASS

B. Test Plot:



(Channel 1, 802.11b, ANT0)



(Channel 6, 802.11b, ANT0)



(Channel 11, 802.11b, ANT0)




(Channel 1, 802.11b, ANT1)



(Channel 6, 802.11b, ANT1)



(Channel 11, 802.11b, ANT1)

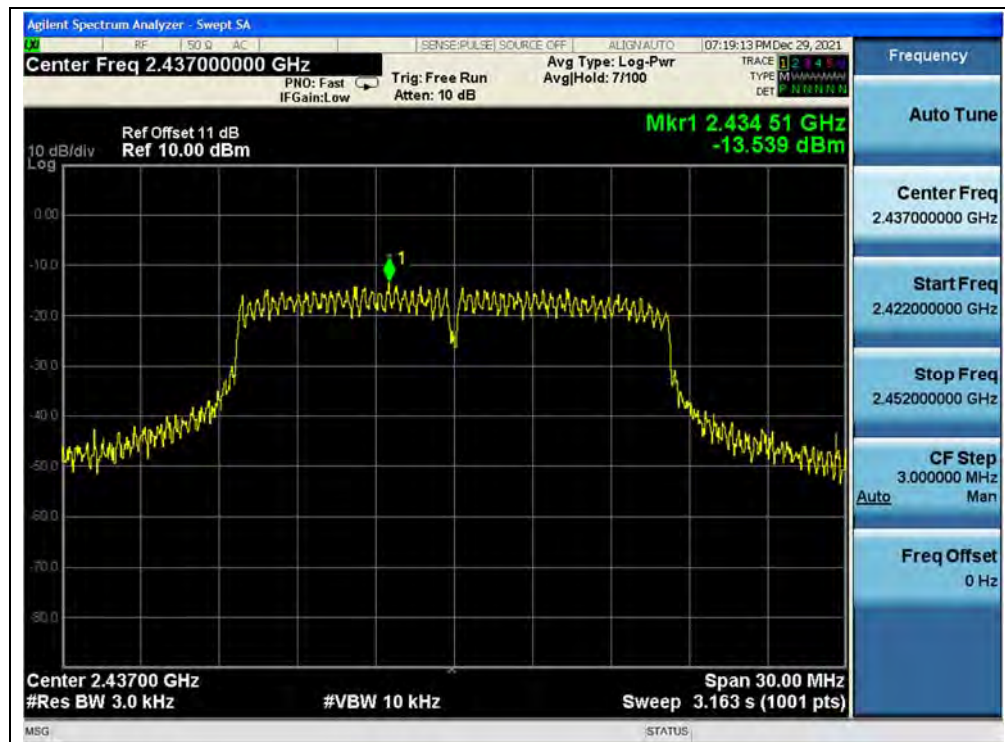

(Channel 6, 802.11g, ANT0)




(Channel 11, 802.11g, ANT0)



(Channel 1, 802.11g, ANT1)



(Channel 6, 802.11g, ANT1)

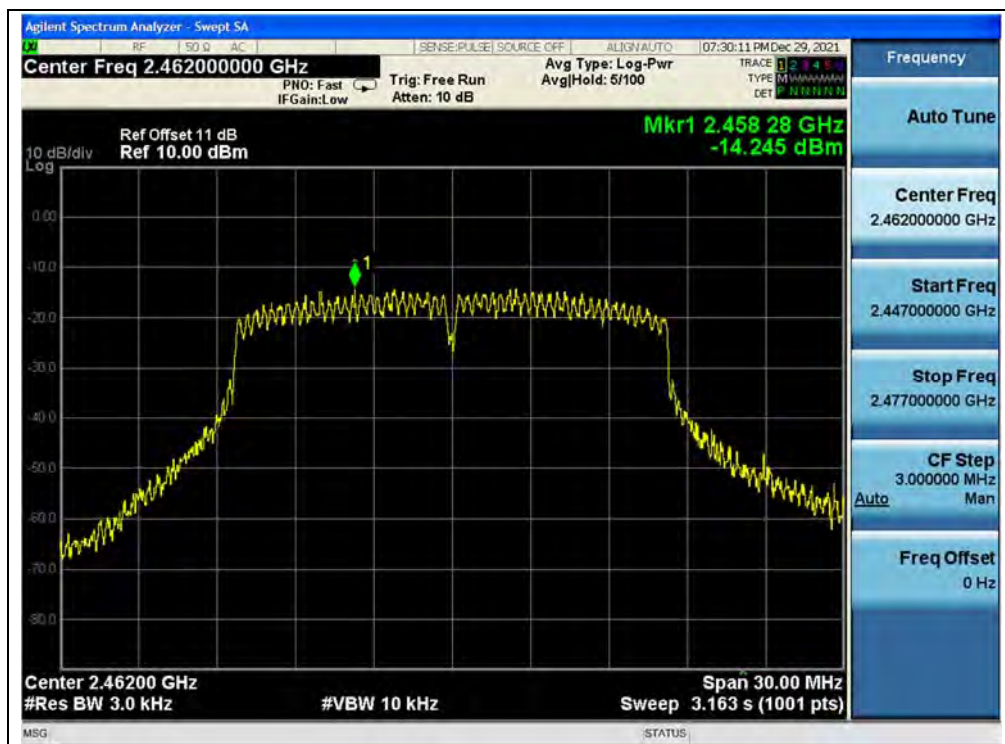

(Channel 11, 802.11g, ANT1)




802.11n (HT20) Mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
		ANT 0	ANT 1			
1	2412	-12.88	-13.96	-10.38	8	PASS
6	2437	-12.64	-13.97	-10.24	8	PASS
11	2462	-13.37	-13.48	-10.41	8	PASS

Note: Directional gain = $0.7\text{dBi} + 10\log(2) = 3.71\text{dBi} < 6\text{dBi}$, so the power limit is 8 dBm/3kHz.

B. Test Plot:

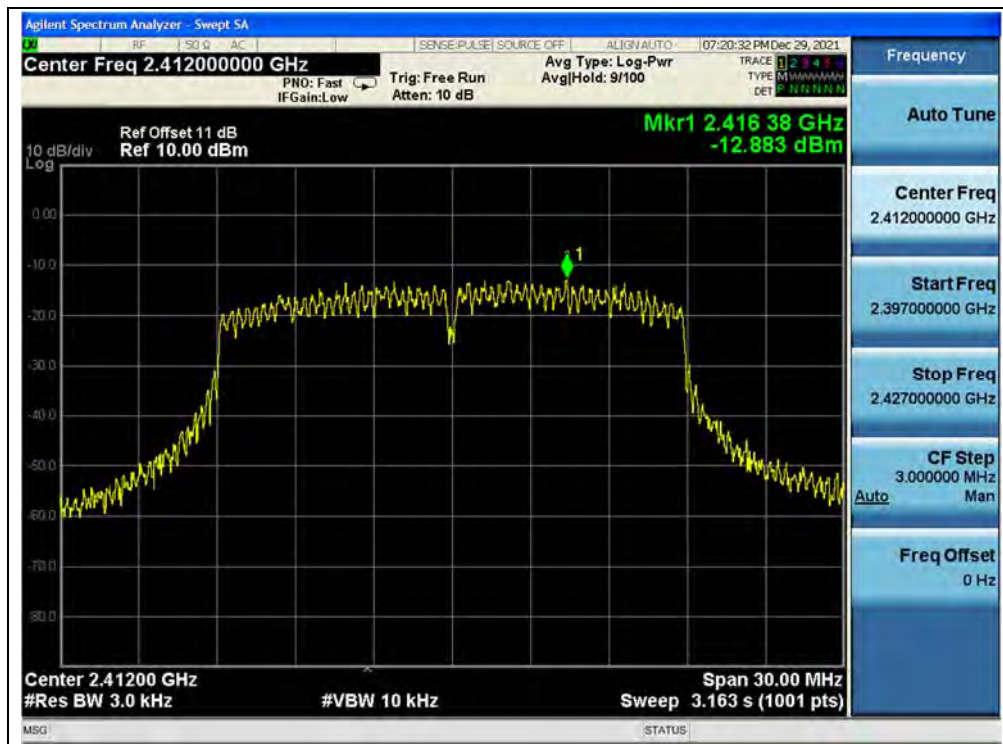


(Channel 1, 802.11n (HT20), ANT0)

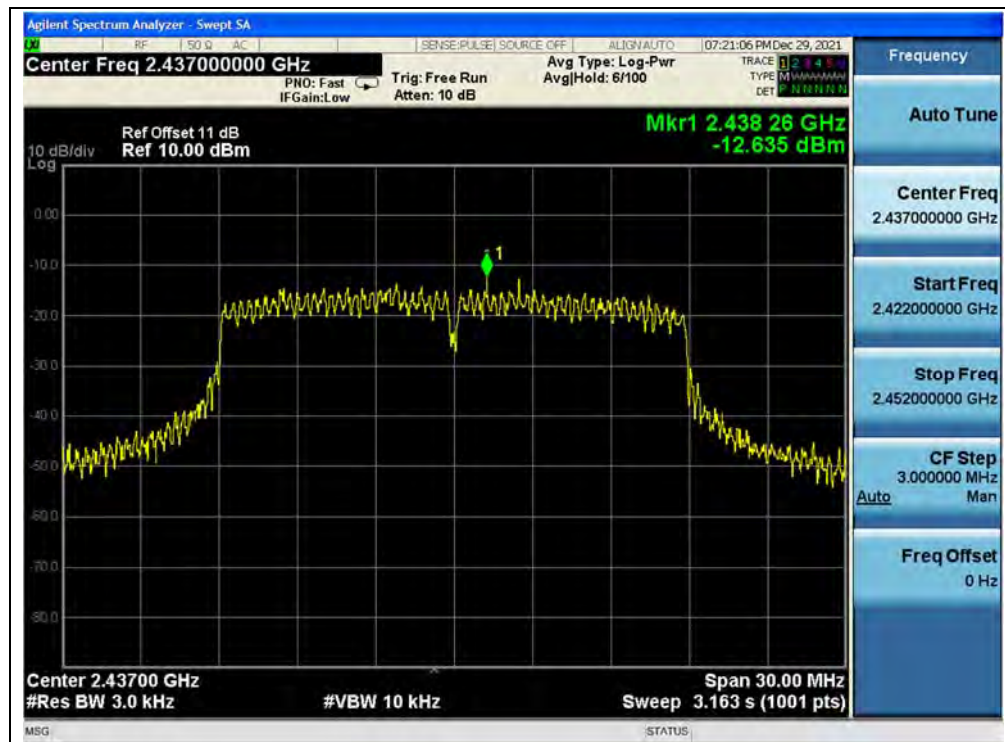


(Channel 6, 802.11n (HT20), ANT0)



(Channel 11, 802.11n (HT20), ANT0)

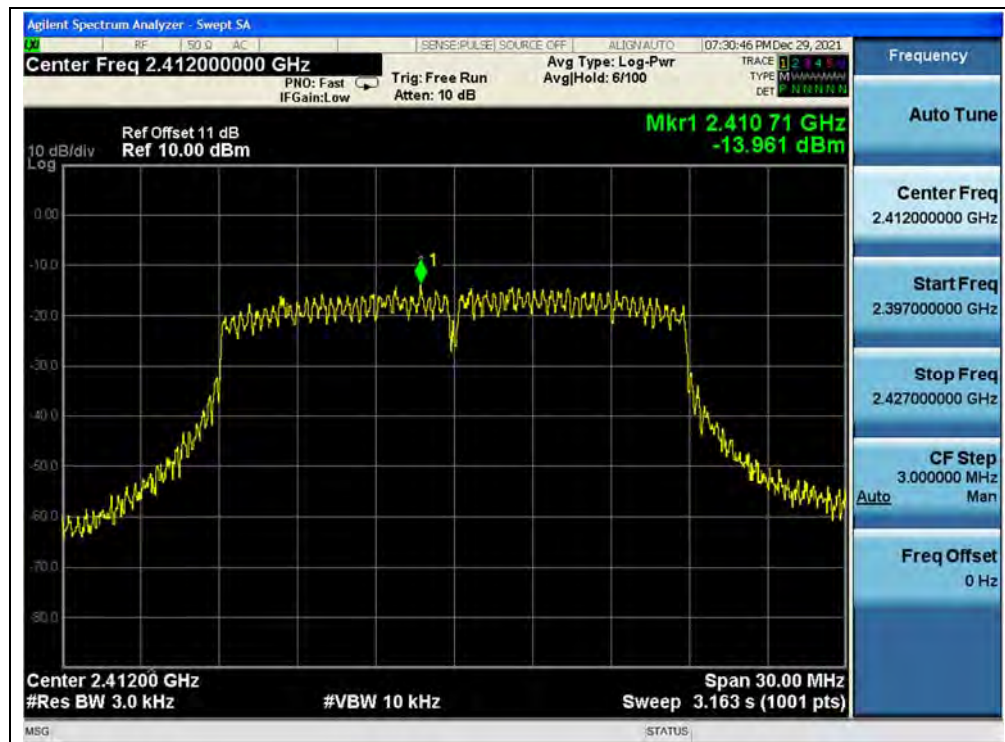

(Channel 1, 802.11n (HT20), ANT1)

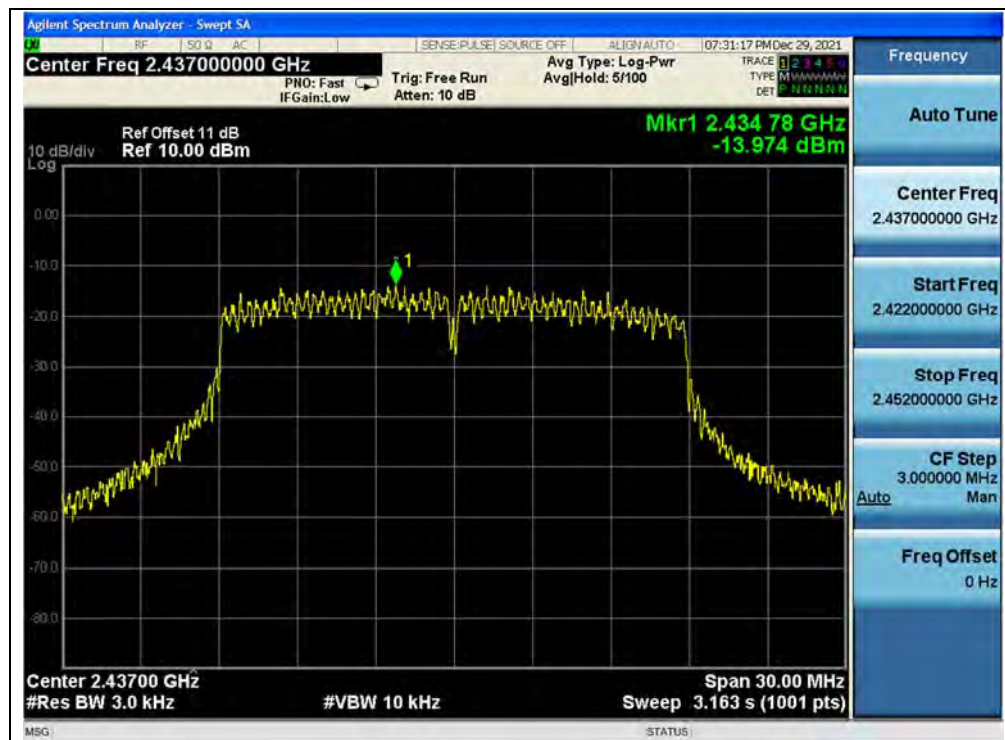

(Channel 6, 802.11n (HT20), ANT1)



(Channel 11, 802.11n (HT20), ANT1)




802.11n (HT40) Mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
		ANT 0	ANT 1			
3	2422	-13.80	-14.70	-11.22	8	PASS
6	2437	-16.35	-16.55	-13.44	8	PASS
9	2452	-16.05	-15.14	-12.56	8	PASS

Note: Directional gain = $0.7\text{dBi} + 10\log(2) = 3.71\text{dBi} < 6\text{dBi}$, so the power limit is 8 dBm/3kHz.


B. Test Plot:

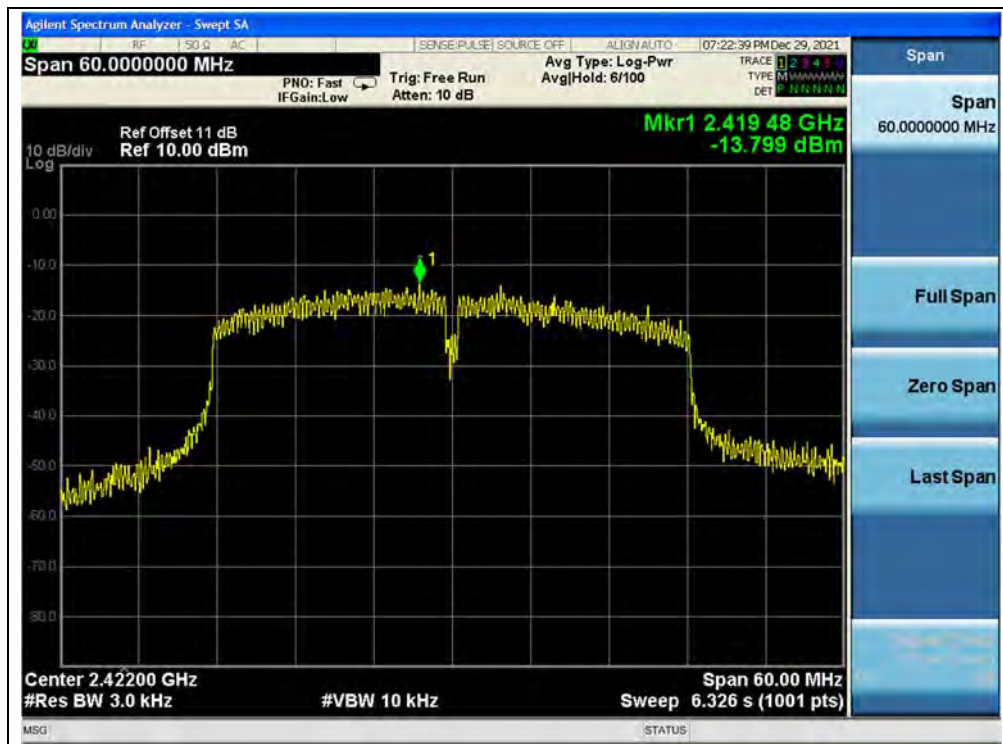


(Channel 3, 802.11n (HT40), ANT0)

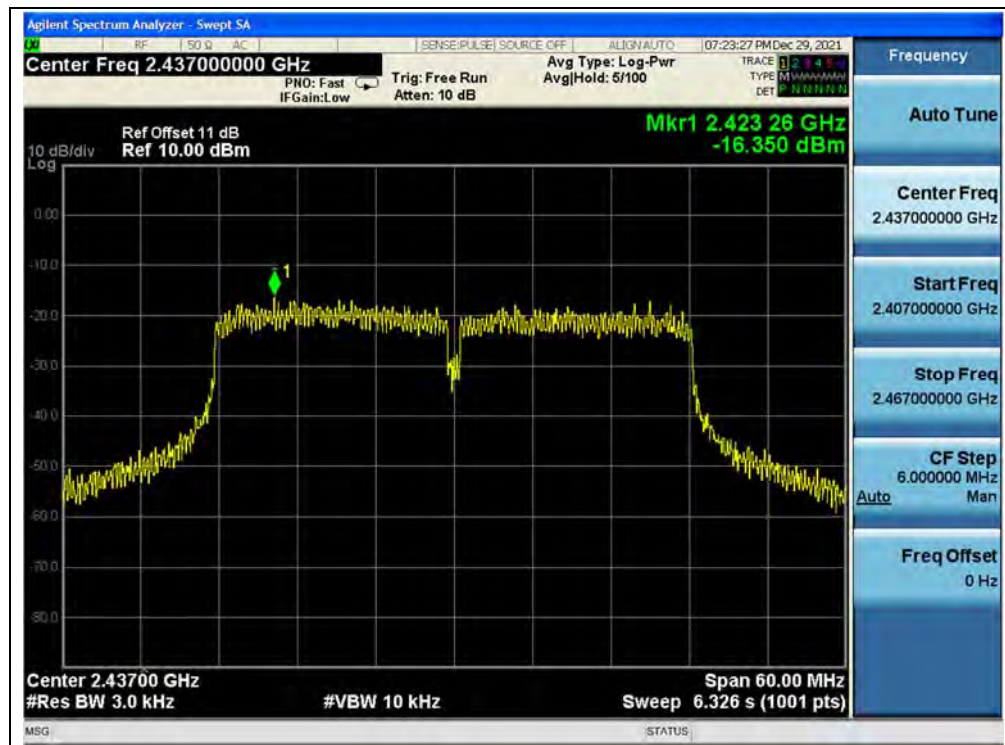


(Channel 6, 802.11n (HT40), ANT0)

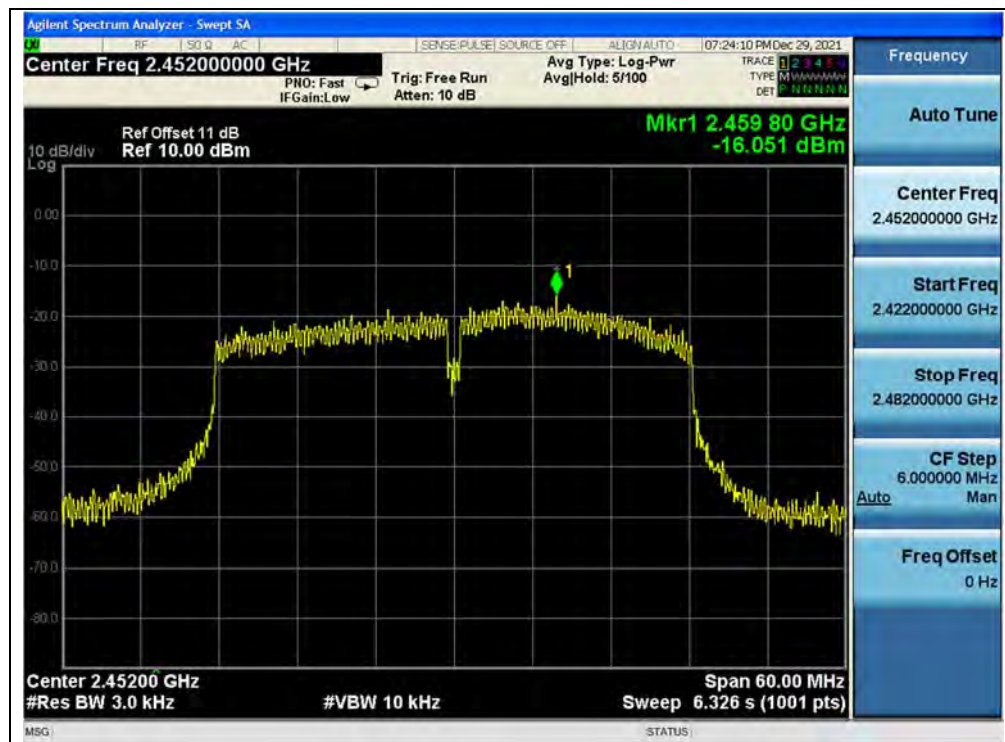


(Channel 9, 802.11n (HT40), ANT0)

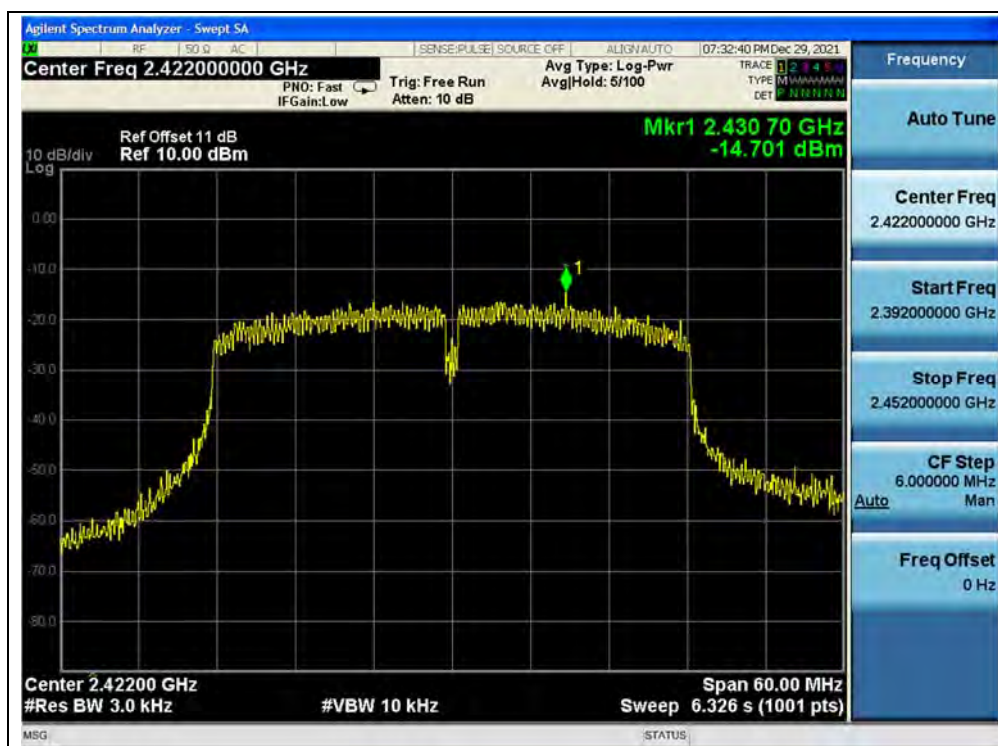

(Channel 3, 802.11n (HT40), ANT1)

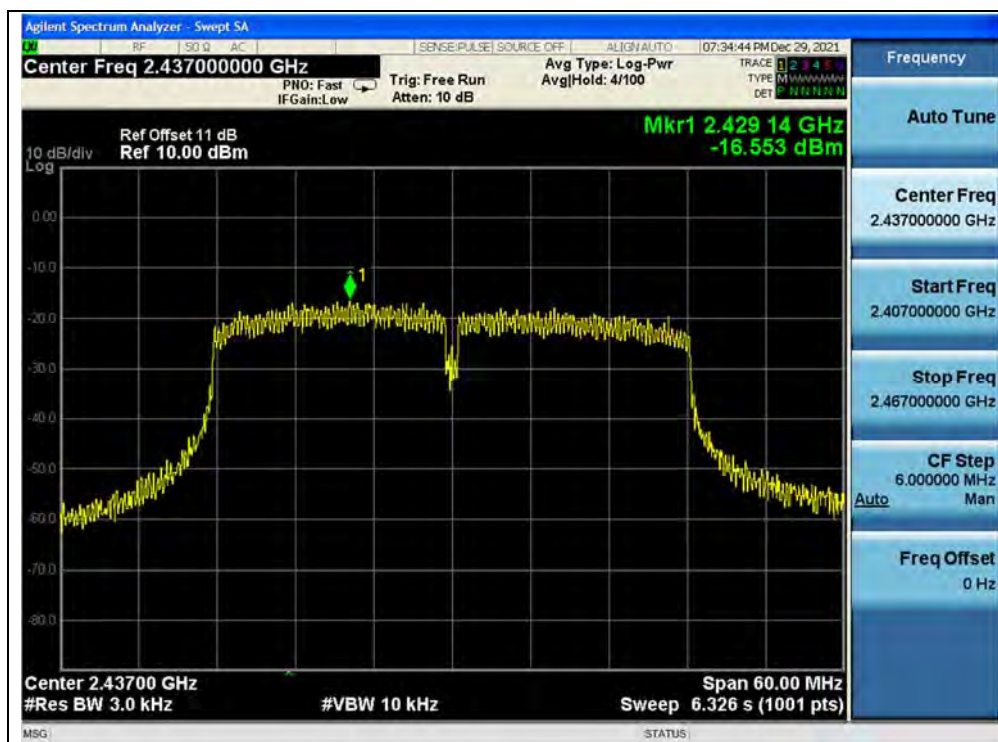

(Channel 6, 802.11n (HT40), ANT1)

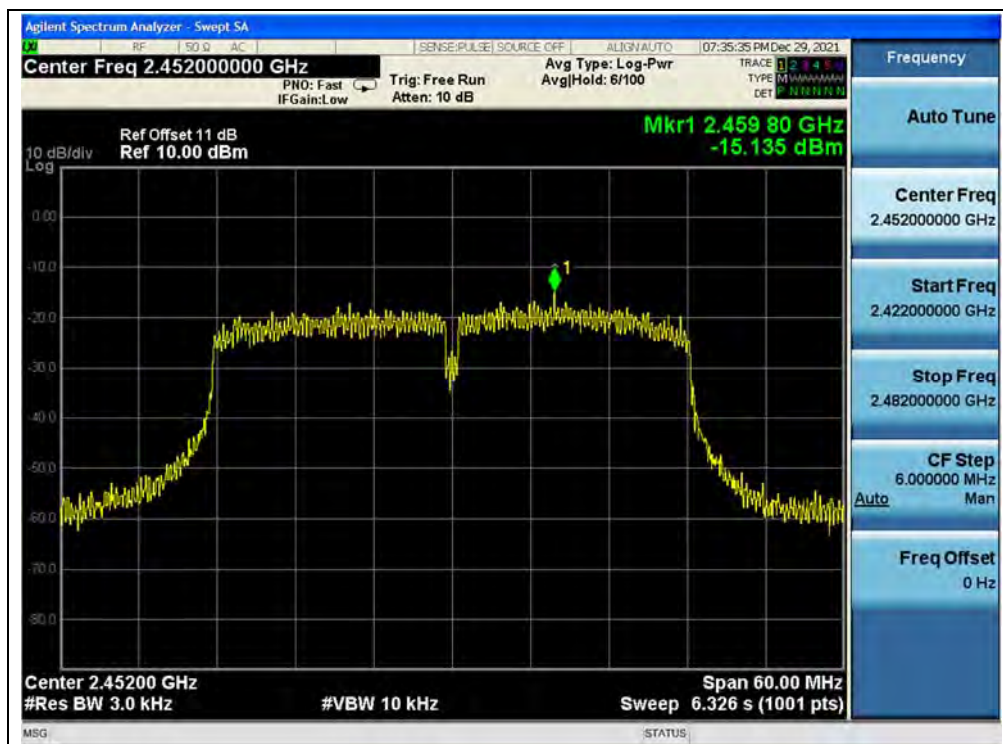

(Channel 9, 802.11n (HT40), ANT1)

2.7. Conducted Emission

2.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.7.2. Test Description

Test Setup:

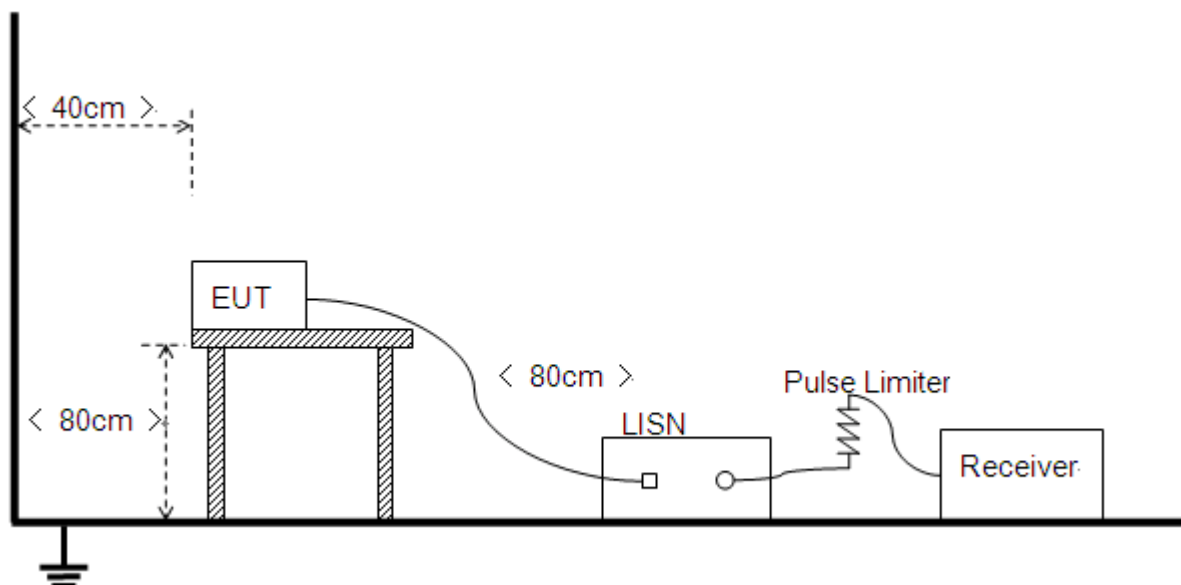

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10 2013.



2.7.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT+Adaptor+charging+WIFI TX

Test Voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V}] = U_R + L_{\text{Cable loss}} [\text{dB}] + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B. Test Plot:

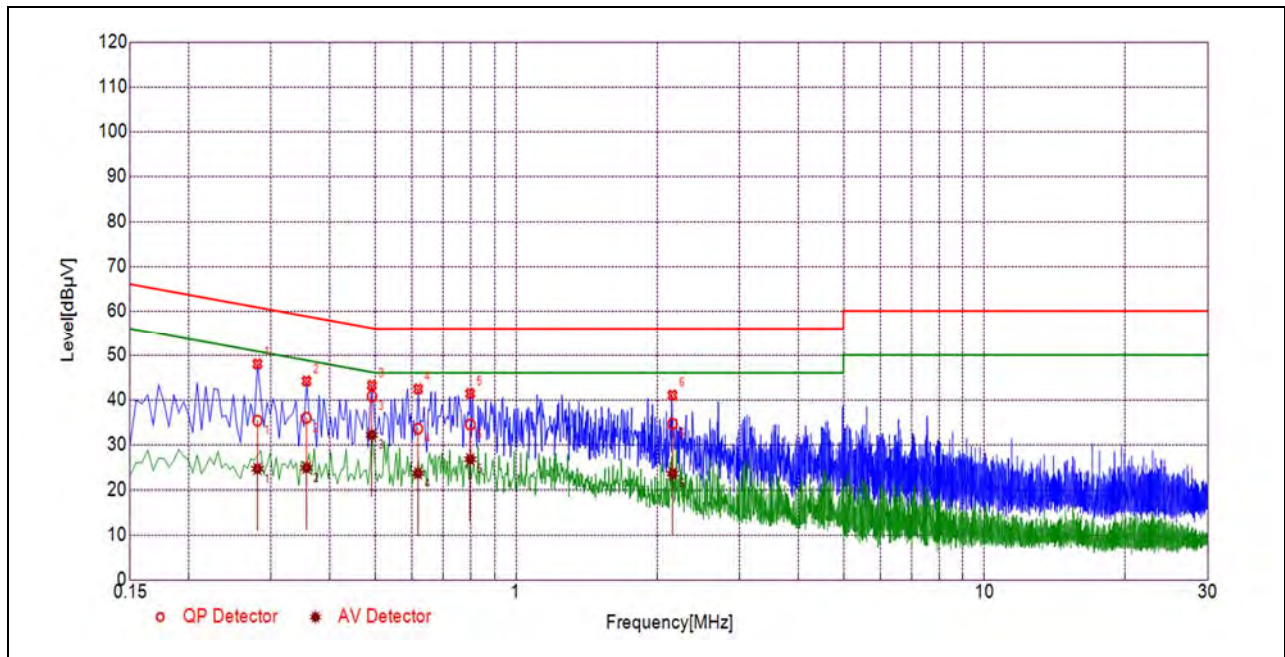

(L Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.2804	35.32	24.60	60.80	50.80	Line	PASS
2	0.3568	35.96	24.81	58.80	48.80		PASS
3	0.4923	40.79	32.14	56.13	46.13		PASS
4	0.6175	33.55	23.61	56.00	46.00		PASS
5	0.7985	34.46	26.73	56.00	46.00		PASS
6	2.1575	34.64	23.51	56.00	46.00		PASS

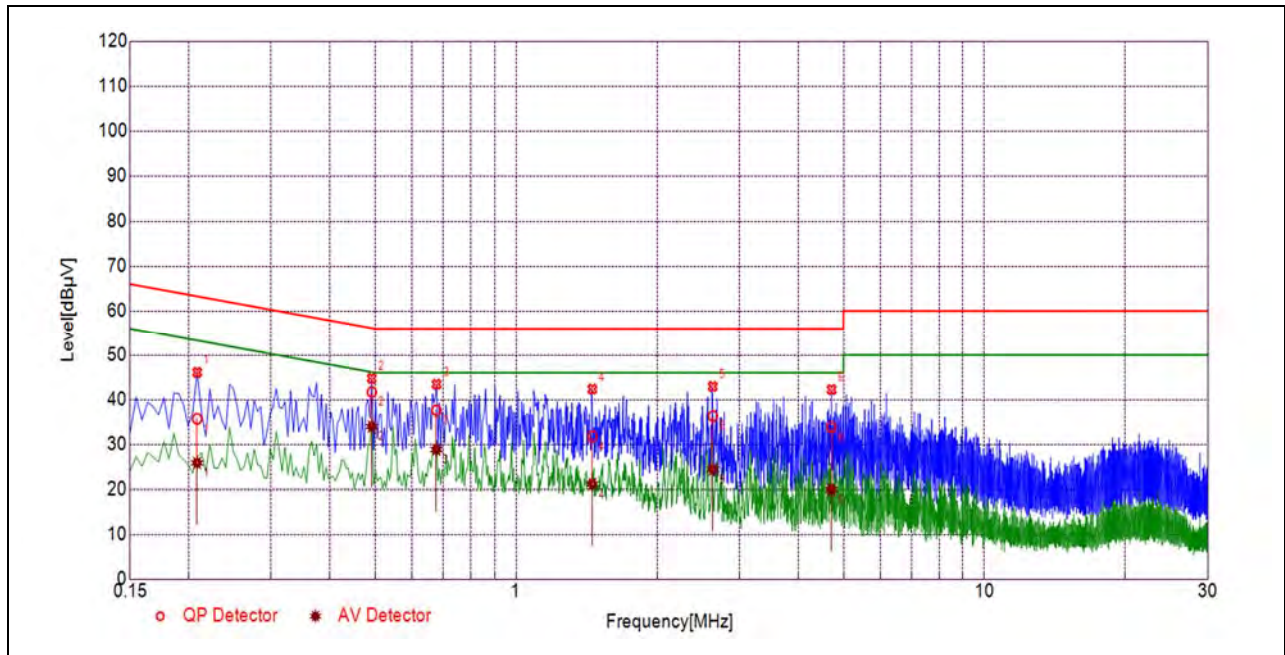

(N Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.2084	35.69	25.83	63.27	53.27	Neutral	PASS
2	0.4920	41.68	33.97	56.13	46.13		PASS
3	0.6759	37.61	28.81	56.00	46.00		PASS
4	1.4552	31.74	21.13	56.00	46.00		PASS
5	2.6312	36.31	24.35	56.00	46.00		PASS
6	4.7133	33.84	19.93	56.00	46.00		PASS


2.8. Restricted Frequency Bands

2.8.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.8.2. Test Description

Test Setup

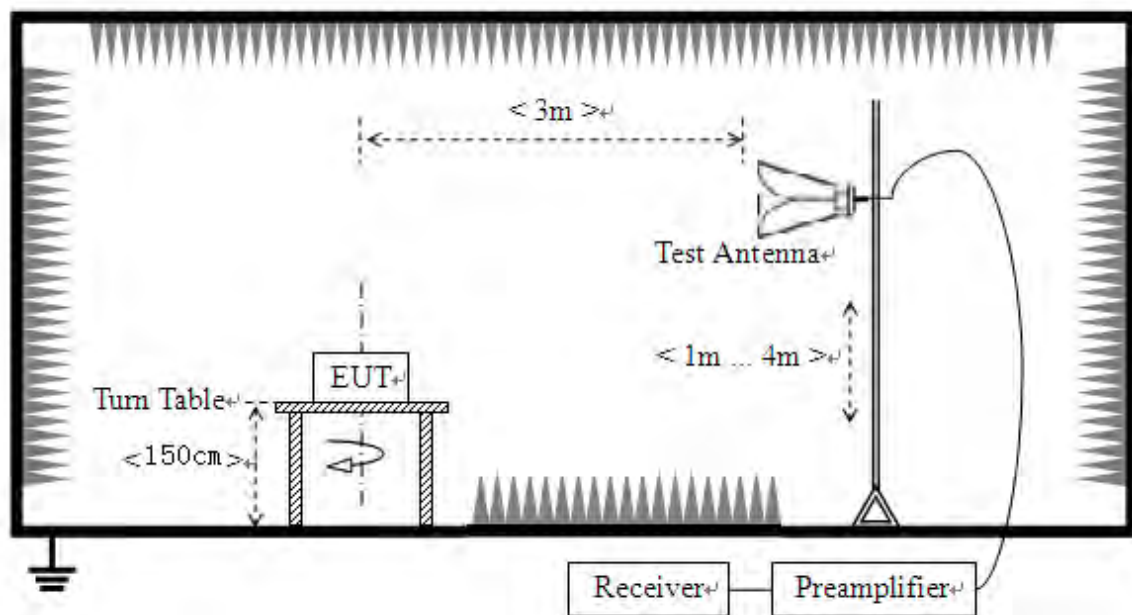

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.



2.8.3. Test Procedure

KDB 558074 Section 8.6 and 8.7 was used in order to prove compliance.

2.8.4. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m


Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

802.11b Mode

A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
1	2389.15	PK	23.29	6.74	27.20	57.23	74	PASS
1	2389.26	AV	10.76	6.74	27.20	44.70	54	PASS
11	2484.80	PK	22.88	6.74	27.20	56.82	74	PASS
11	2483.70	AV	10.23	6.74	27.20	44.17	54	PASS

B. Test Plot:

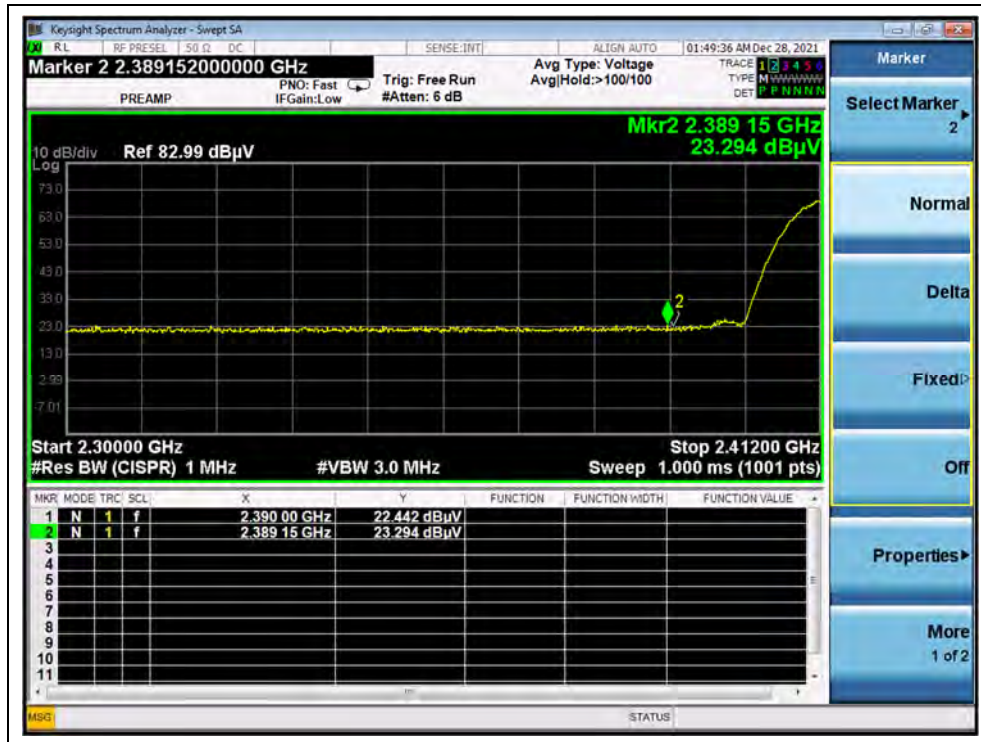

(PEAK, Channel 1, 802.11b)



(AVERAGE, Channel 1, 802.11b)



(PEAK, Channel 11, 802.11b)



(AVERAGE, Channel 11, 802.11b)




802.11g Mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
1	2390.00	PK	28.06	6.74	27.20	62.00	74	PASS
1	2390.00	AV	12.79	6.74	27.20	46.73	54	PASS
11	2484.23	PK	23.78	6.74	27.20	57.72	74	PASS
11	2484.08	AV	11.08	6.74	27.20	45.02	54	PASS

B. Test Plot:

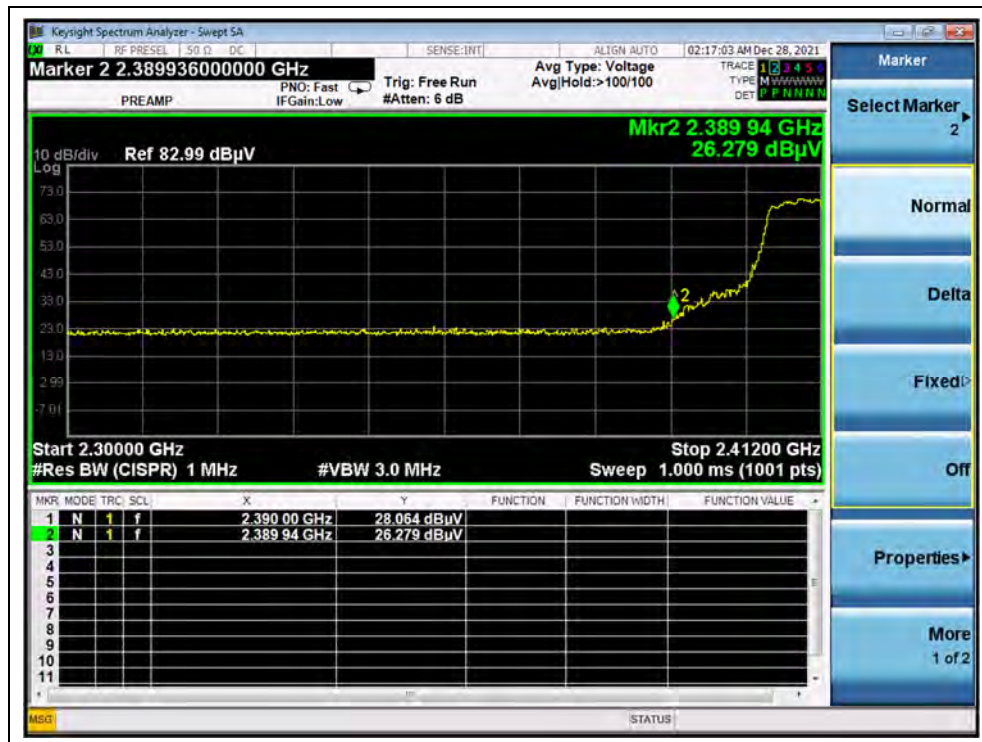

(PEAK, Channel 1, 802.11g)

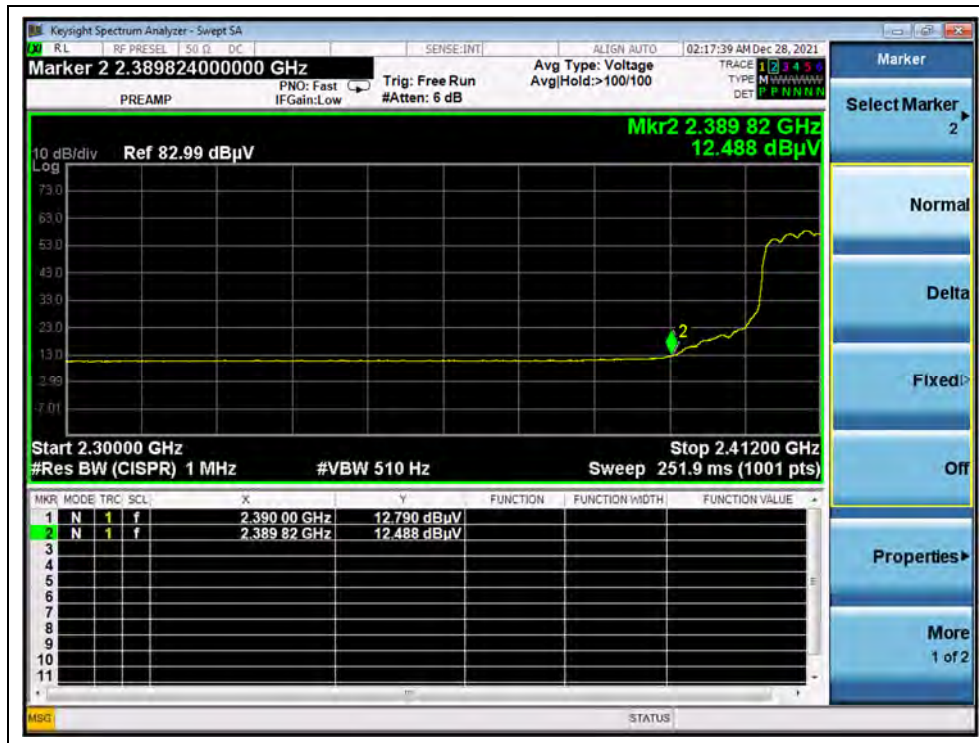

(AVERAGE, Channel 1, 802.11g)




(PEAK, Channel 11, 802.11g)




(AVERAGE, Channel 11, 802.11g)

**802.11 n (HT20) Mode****A. Test Verdict:**

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
1	2390.00	PK	28.57	6.74	27.20	62.51	74	PASS
1	2390.00	AV	14.14	6.74	27.20	48.08	54	PASS
11	2483.70	PK	23.57	6.74	27.20	57.51	74	PASS
11	2483.50	AV	11.34	6.74	27.20	45.28	54	PASS

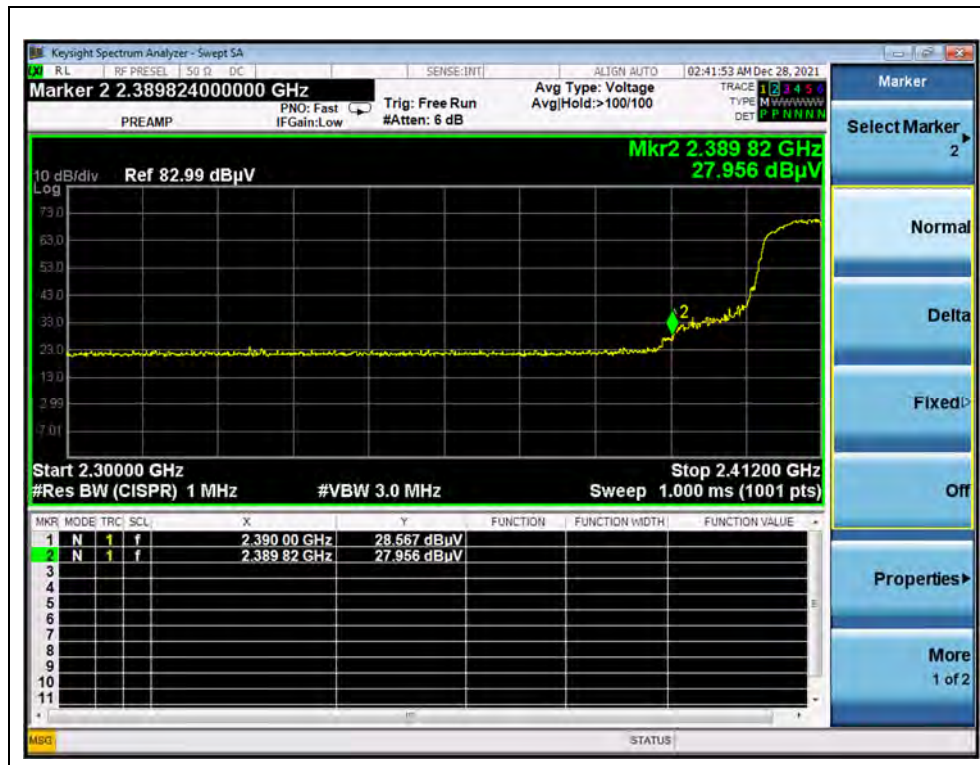B. Test Plot:

(PEAK, Channel 1, 802.11n (HT20))

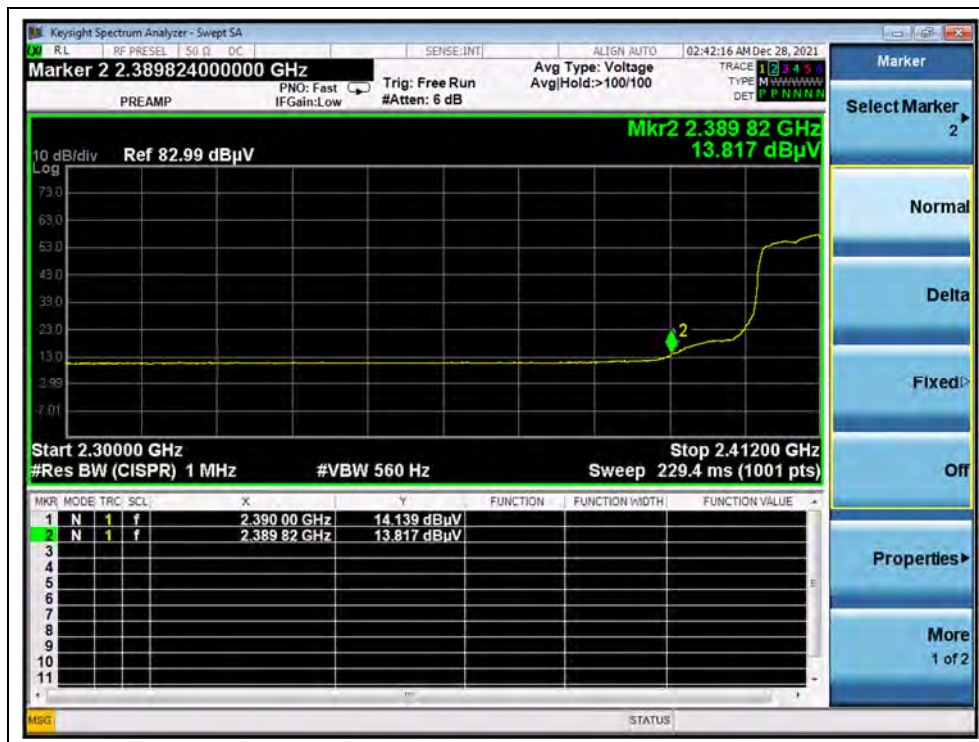

(AVERAGE, Channel 1, 802.11n (HT20))



(PEAK, Channel 11, 802.11n (HT20))



(AVERAGE, Channel 11, 802.11n (HT20))



802.11n (HT40) Mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBμV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
3	2388.70	PK	34.46	6.74	27.20	68.40	74	PASS
3	2390.00	AV	19.03	6.74	27.20	52.97	54	PASS
9	2484.00	PK	28.17	6.74	27.20	62.11	74	PASS
9	2483.74	AV	13.83	6.74	27.20	47.77	54	PASS

B. Test Plot:



(PEAK, Channel 3, 802.11n (HT40))

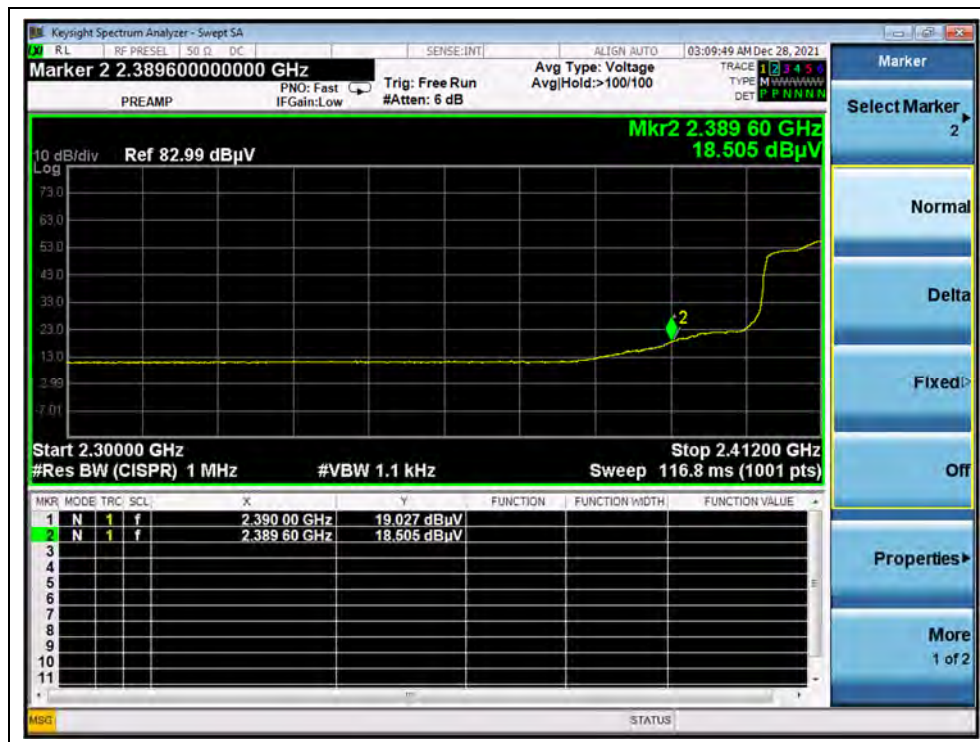

(AVERAGE, Channel 3, 802.11n (HT40))



(PEAK, Channel 9, 802.11n (HT40))



(AVERAGE, Channel 9, 802.11n (HT40))

2.9. Radiated Emission

2.9.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3


Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

Note2: For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK). In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).


2.9.2. Test Description

Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

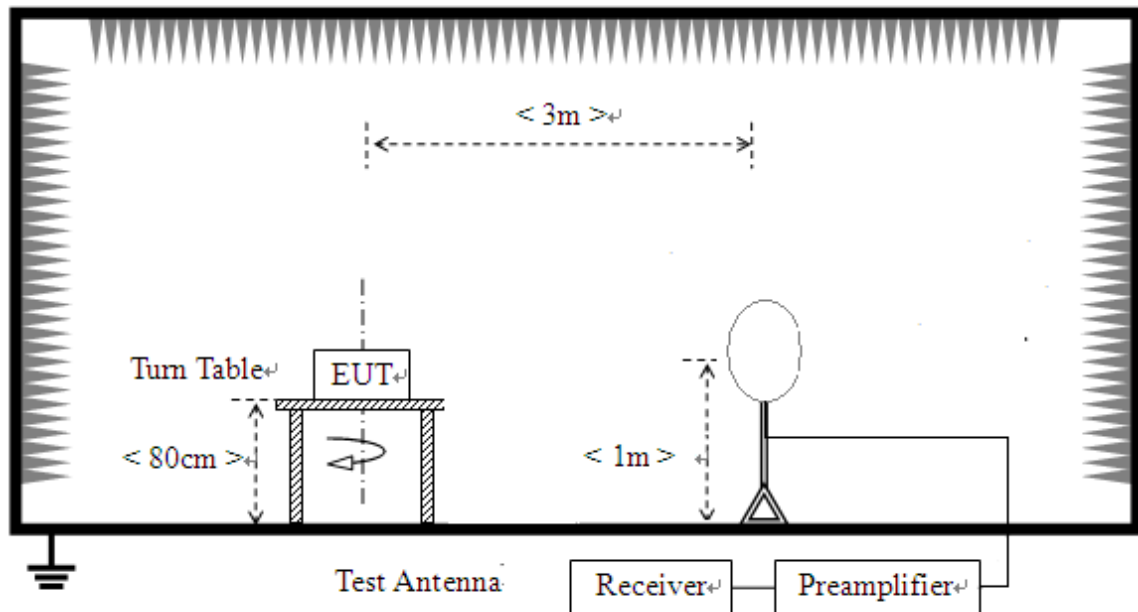

- 2) For radiated emissions from 30MHz to 1GHz

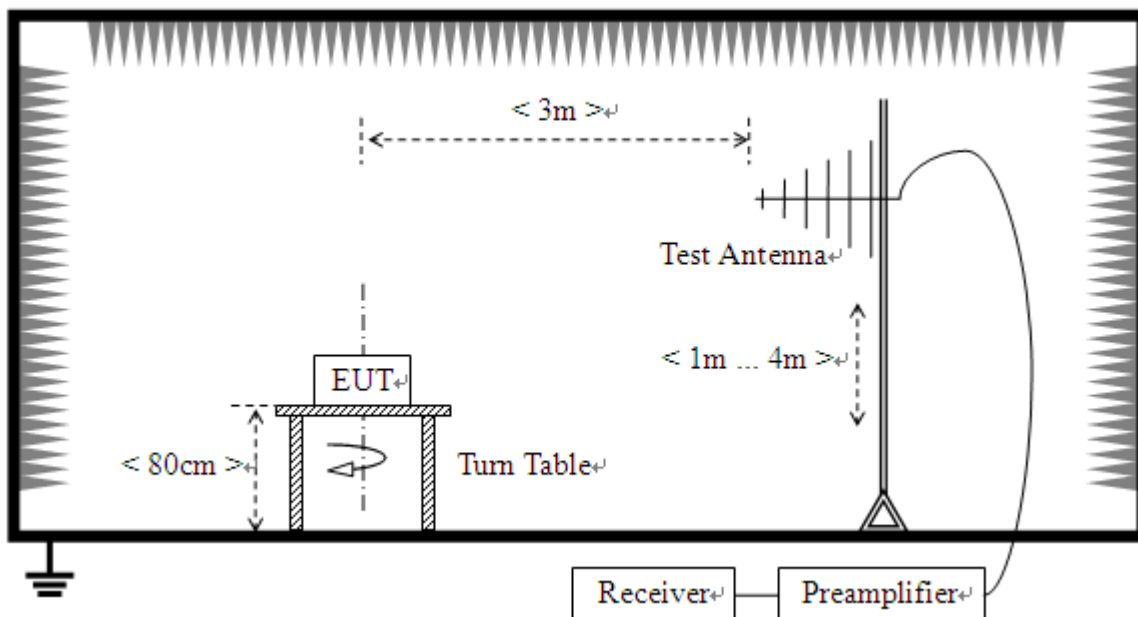

3) For radiated emissions above 1GHz

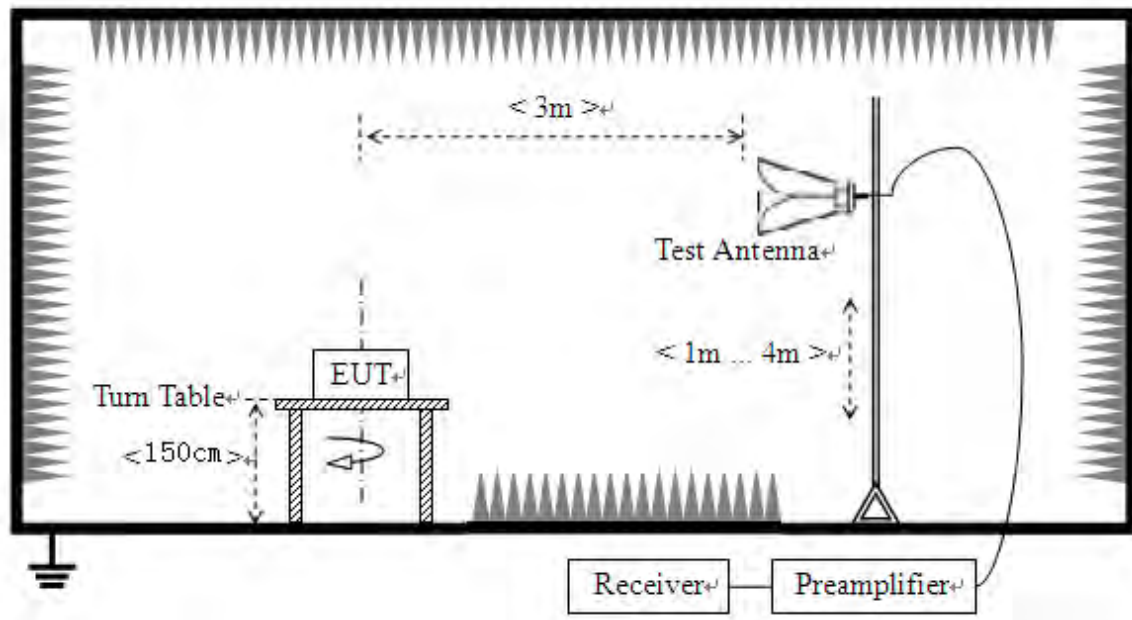

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.



2.9.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain


A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

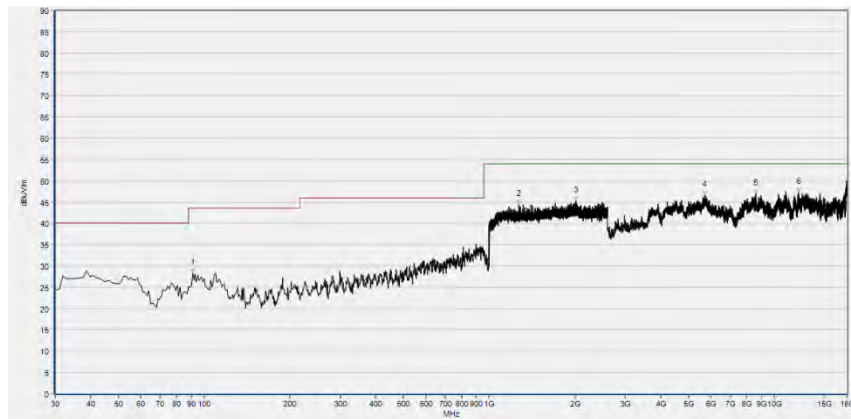**802.11b Mode****Plot for Channel 1**

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
91.110	28.34	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1268.267	44.36	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2018.133	45.28	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5689.240	46.53	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8593.680	46.91	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12129.520	47.23	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

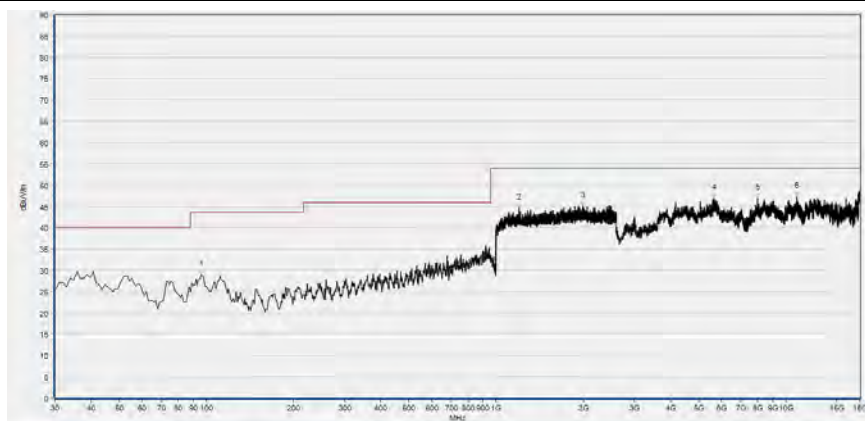


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
95.960	28.96	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1200.533	44.52	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1987.200	45.12	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5646.120	47.01	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7965.360	46.89	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10879.040	47.30	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 6

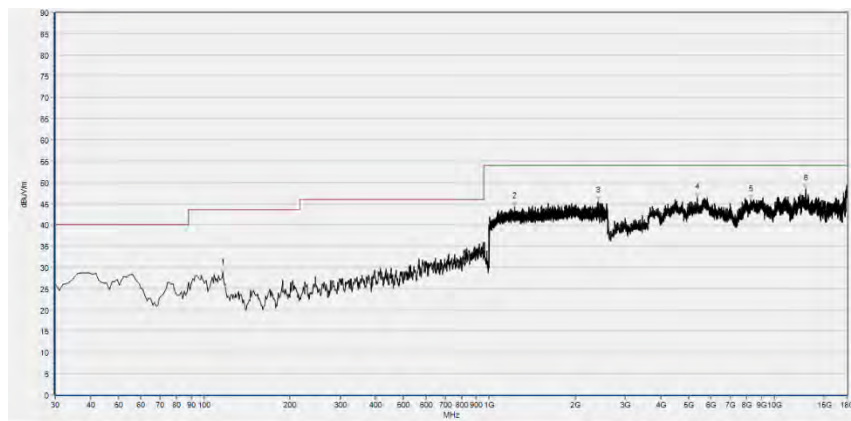

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
116.330	28.64	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1224.000	44.24	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2409.600	45.55	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5368.920	46.39	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8267.200	45.89	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12884.120	48.43	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

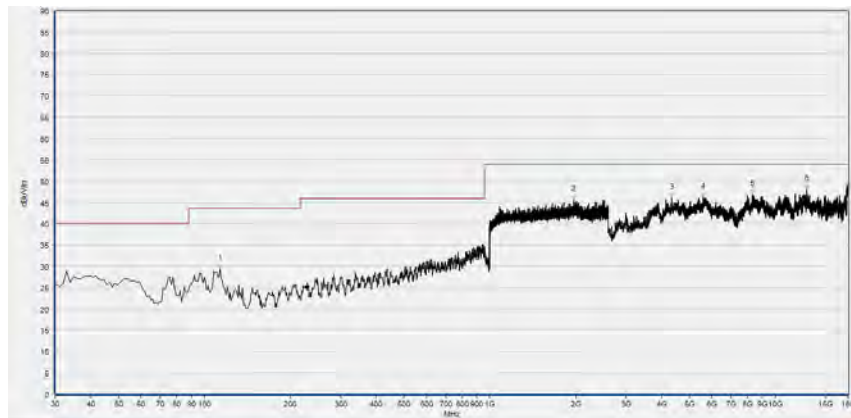


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
113.420	29.45	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1963.733	45.52	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4340.200	46.10	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5575.280	46.26	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8301.080	46.97	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12887.200	48.13	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 11

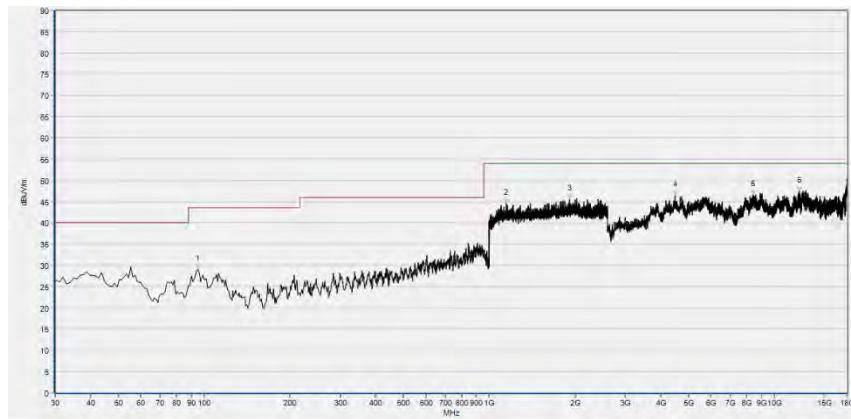

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
94.990	28.96	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1144.533	44.62	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
1907.733	45.52	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4484.960	46.42	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8424.280	46.59	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12209.600	47.38	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

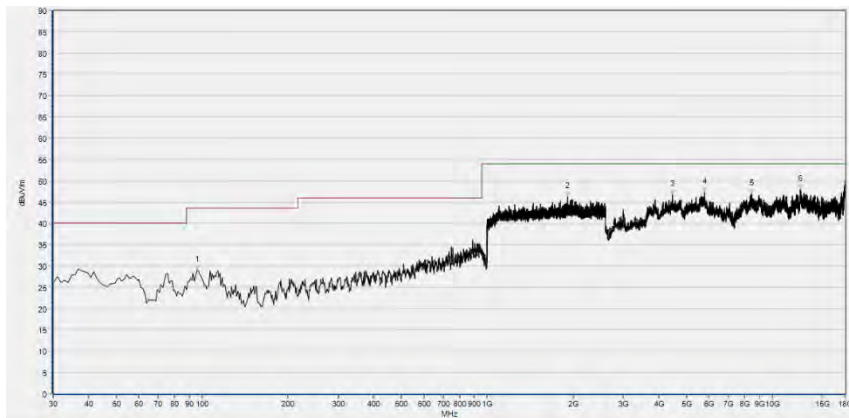


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
95.960	28.98	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1916.267	46.23	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4463.400	46.70	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5769.320	47.18	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8461.240	46.97	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12529.920	47.93	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




802.11g Mode

Plot for Channel 1

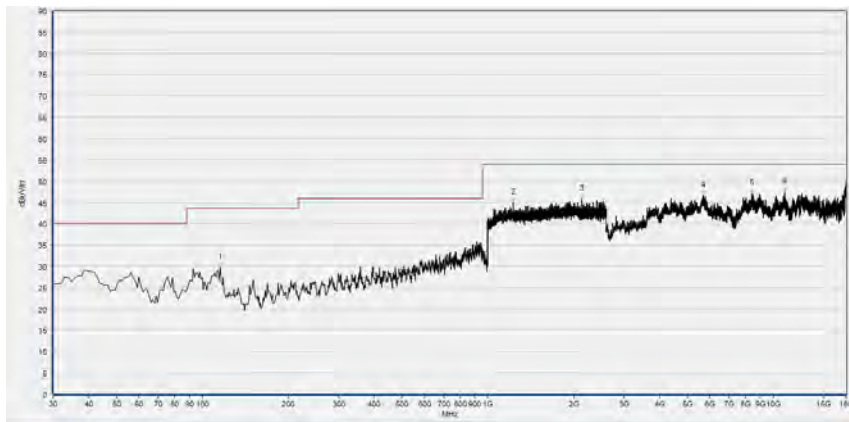

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
115.360	29.63	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1224.533	44.96	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2134.400	45.73	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5670.760	46.54	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8424.280	47.13	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10989.920	47.49	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

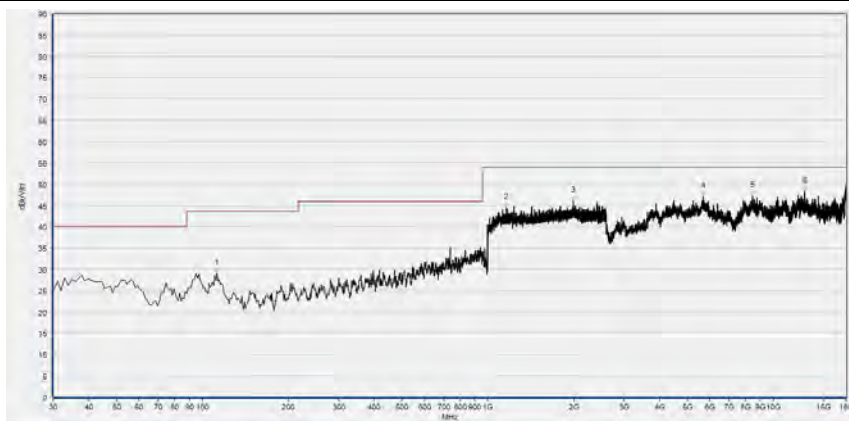


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
112.450	29.06	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1160.000	44.46	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1996.267	46.17	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5689.240	47.15	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8461.240	47.27	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12902.600	48.25	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 6

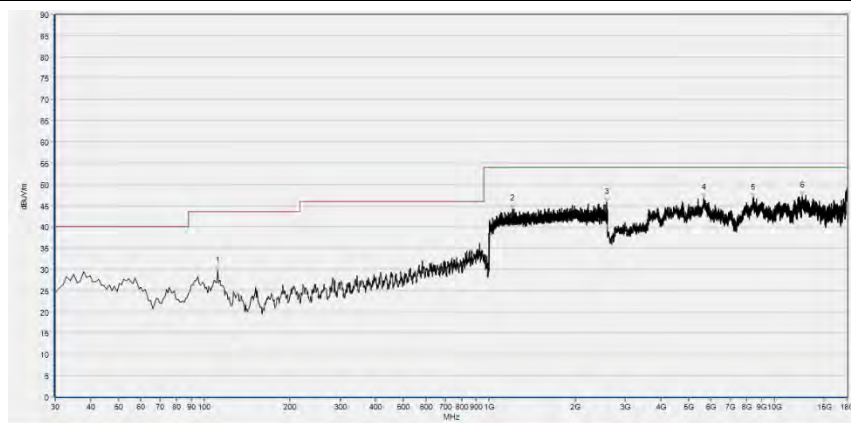

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
111.480	29.75	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1205.867	44.31	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2575.467	45.81	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5664.600	46.75	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8405.800	46.81	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12517.600	47.34	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

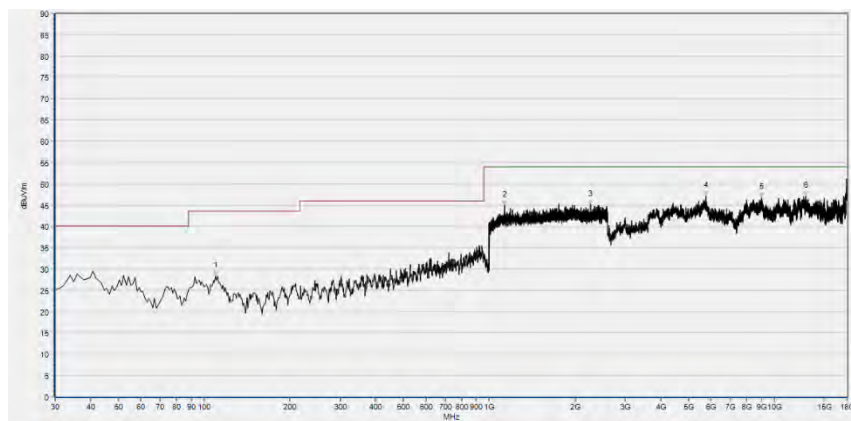


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	28.25	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1129.067	44.85	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2267.200	45.00	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5744.680	47.16	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9003.320	46.75	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12899.520	47.03	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 11

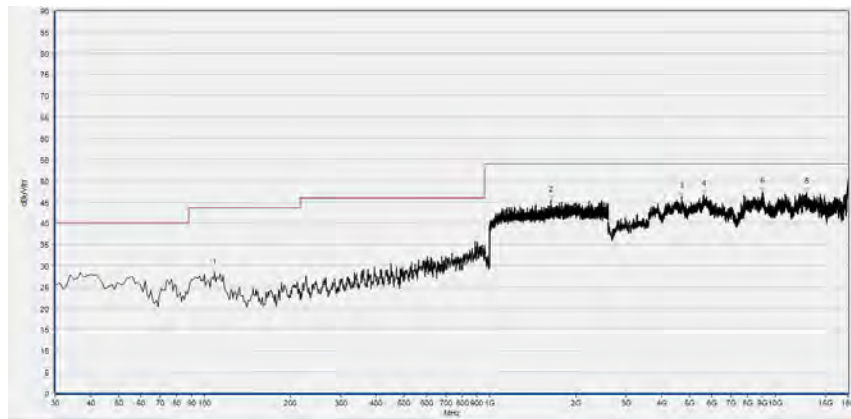

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
108.570	28.36	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1635.200	45.39	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4691.320	46.23	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5633.800	46.74	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9024.880	47.35	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12887.200	47.23	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

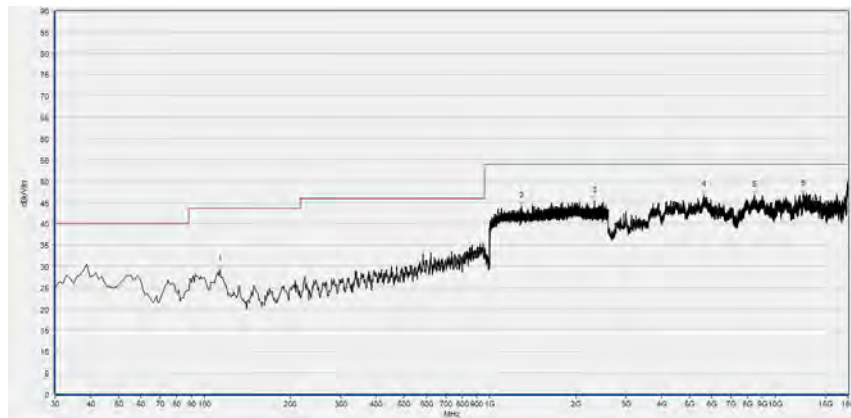


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
113.420	29.09	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1289.067	44.12	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2322.133	45.36	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5612.240	46.78	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8461.240	46.83	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12486.800	46.94	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)


**802.11n (HT20) Mode**

Plot for Channel 1

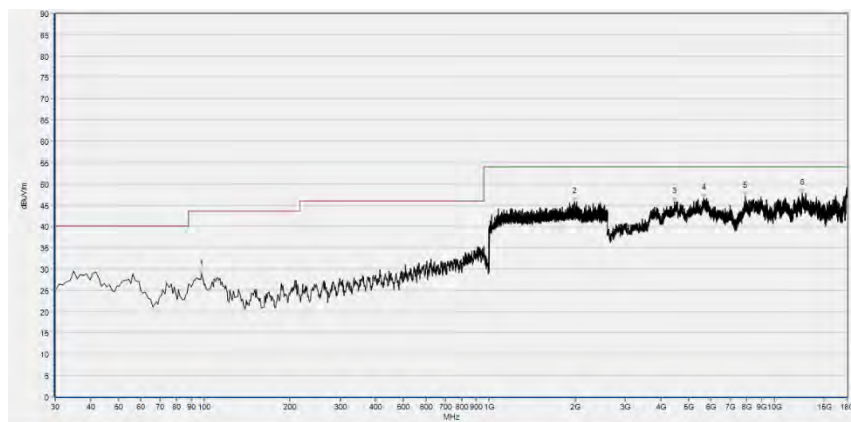

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
97.900	28.80	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1996.800	45.76	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4451.080	45.67	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5661.520	46.56	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7885.280	47.04	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12539.160	47.79	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

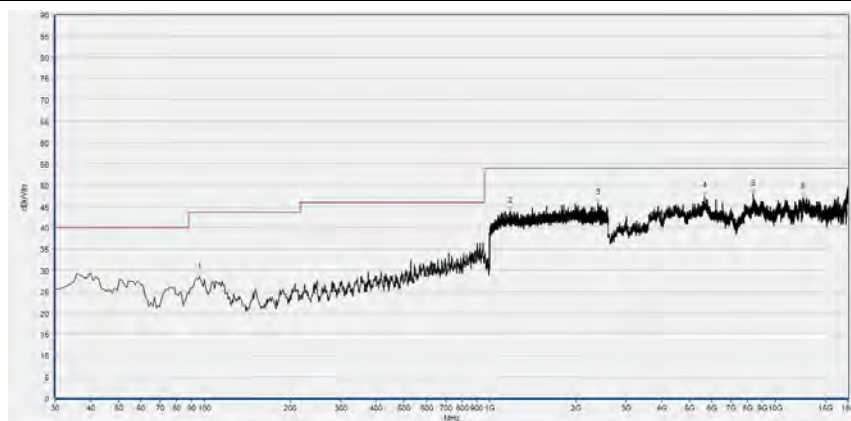


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
95.960	28.54	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1178.133	43.97	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2390.933	45.76	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5652.280	47.40	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8387.320	47.93	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12523.760	47.02	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 6

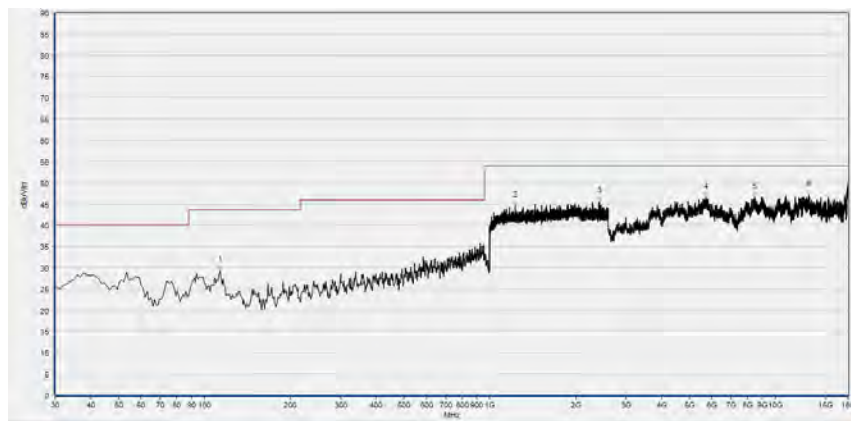

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
113.420	29.40	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1225.600	44.52	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2418.133	45.66	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5716.960	46.52	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8455.080	46.64	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
13084.320	47.01	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

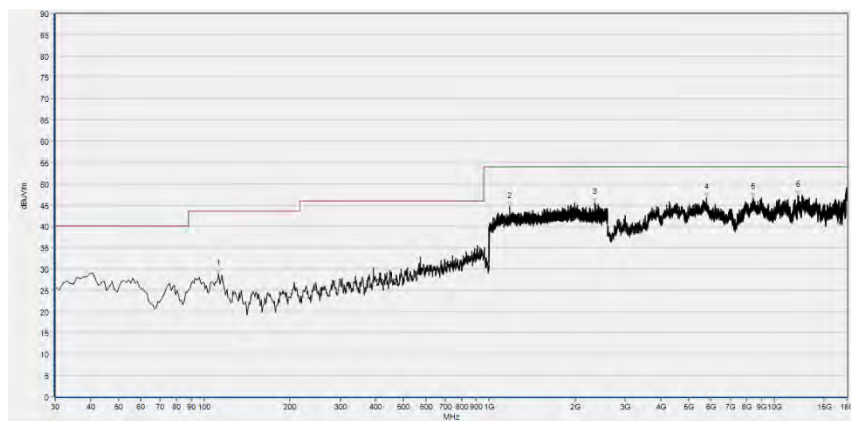


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
112.450	28.90	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1179.200	44.66	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2346.667	45.61	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5769.320	46.71	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8433.520	46.82	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12117.200	47.19	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 11

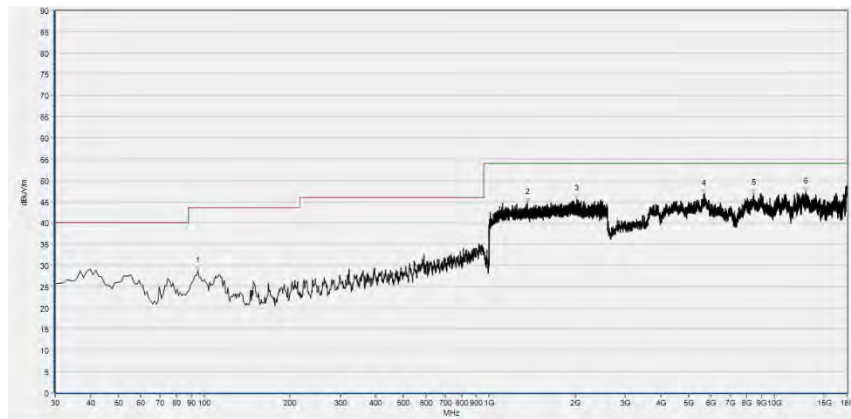

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
94.990	28.71	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1360.000	44.71	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2029.867	45.51	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5643.040	46.71	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8445.840	46.97	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12902.600	47.20	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

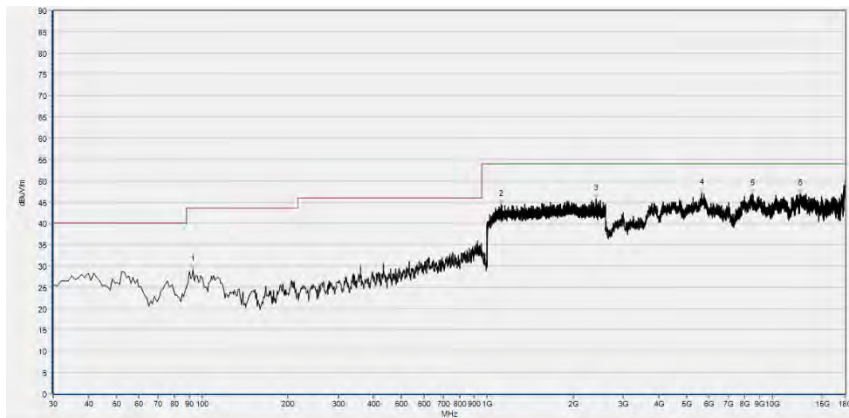


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
93.050	29.14	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1116.267	44.37	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2412.267	45.71	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5658.440	47.02	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8488.960	47.00	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12514.520	46.85	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)


**802.11n (HT40) Mode**

Plot for Channel 3

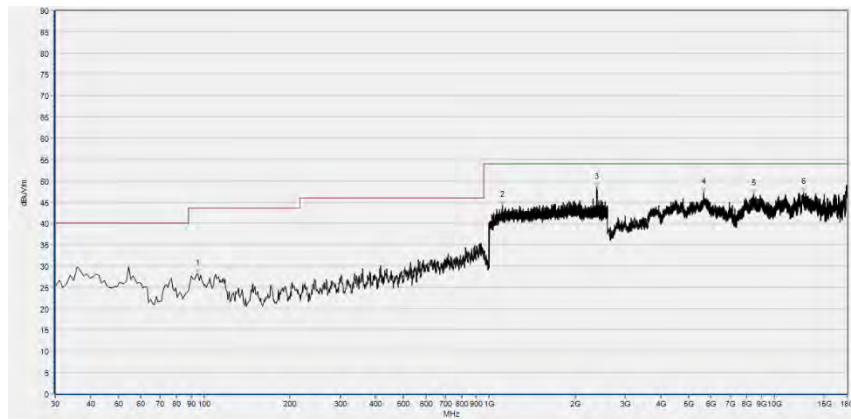

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
94.990	28.20	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1114.667	44.20	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2385.067	48.47	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5661.520	47.30	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8470.480	46.87	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12680.840	47.28	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

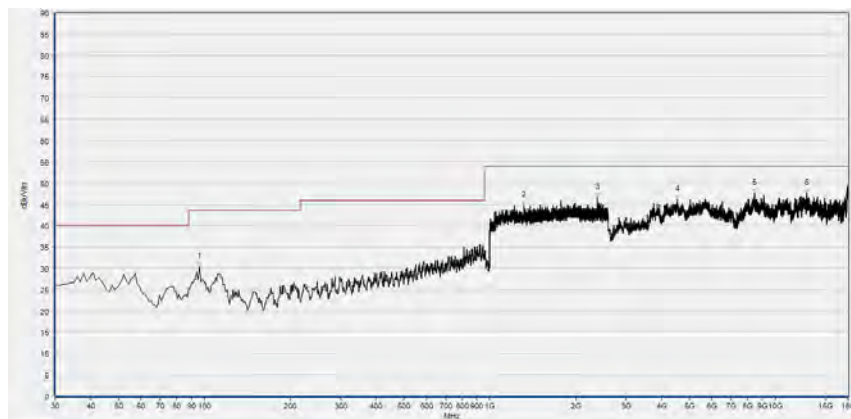


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
95.960	30.39	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1318.933	44.76	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2384.533	46.67	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4540.400	46.04	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8455.080	47.57	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12911.840	47.62	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 6

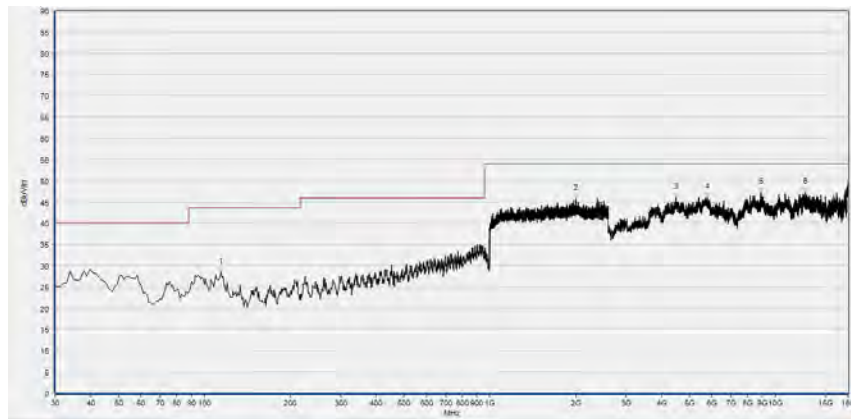

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
114.390	28.53	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1997.867	45.70	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4475.720	46.03	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5772.400	46.03	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8904.760	47.29	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12733.200	47.19	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

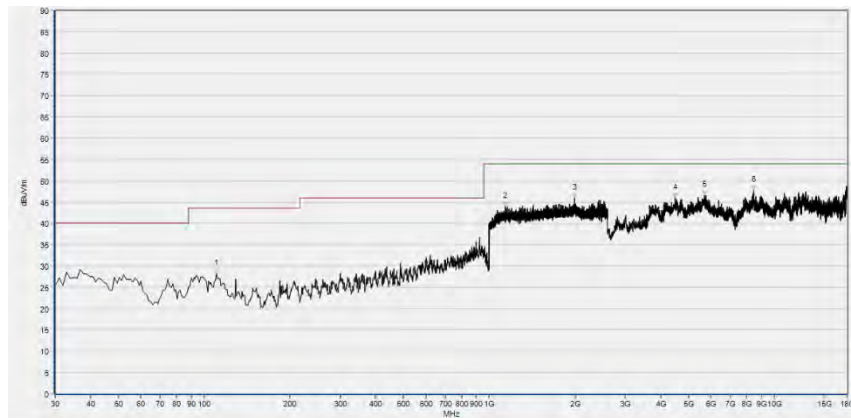


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
110.510	28.22	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1141.333	43.96	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1994.133	45.91	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4500.360	45.85	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5686.160	46.64	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8461.240	47.78	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 9

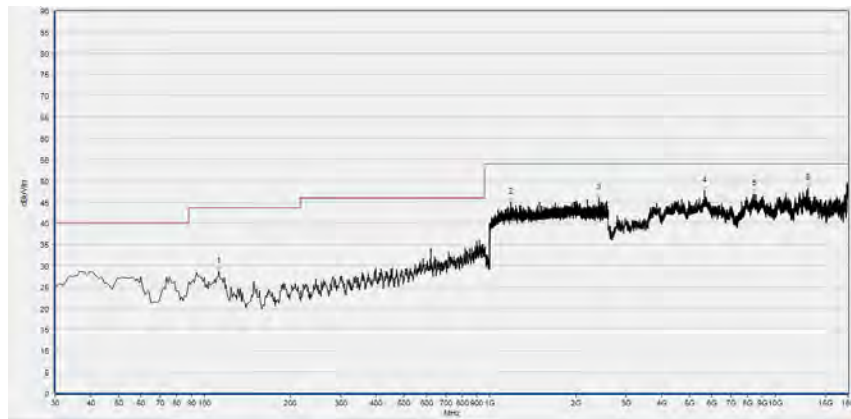

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
112.450	28.59	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1185.067	44.89	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2409.600	45.85	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5658.440	47.65	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8442.760	46.91	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
13016.560	48.31	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

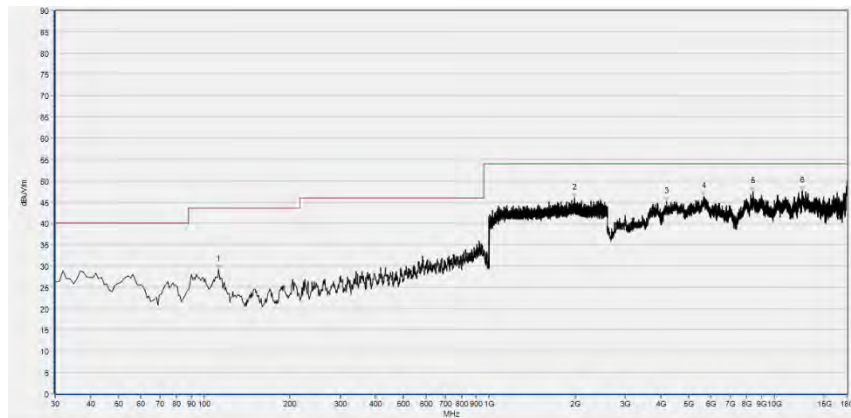

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
112.450	29.12	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1995.200	45.98	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4198.520	45.03	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5643.040	46.25	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8418.120	47.51	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12523.760	47.67	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)



Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test Items	Uncertainty
Peak Output Power	$\pm 2.22\text{dB}$
Power Spectral Density	$\pm 2.22\text{dB}$
Bandwidth	$\pm 5\%$
Conducted Spurious Emission	$\pm 2.77\text{dB}$
Restricted Frequency Bands	$\pm 5\%$
Radiated Emission	$\pm 2.95\text{dB}$
Conducted Emission	$\pm 2.44\text{dB}$

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Attenuator 1	(N/A.)	10dB	Resent	N/A	N/A
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2021.03.25	2022.03.24
USB Wideband Power Sensor	MY54180008	U2021XA	Agilent	2021.10.21	2022.10.20
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A
Computer	T430i	Think Pad	Lenovo	N/A	N/A

4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2021.03.09	2022.03.08
LISN	812744	NSLK 8127	Schwarzbeck	2021.03.09	2022.03.08
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2021.07.21	2022.07.20
Coaxial Cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A

4.3 List of Software Used

Description	Manufacturer	Software Version
Test System	Tonscend	V2.5.77.0418
Morlab EMCR V1.2	Morlab	V1.0
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

**4.4 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2021.07.16	2022.07.15
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2019.05.24	2022.05.23
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2019.02.14	2022.02.13
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2019.07.26	2022.07.25
Test Antenna – Horn	BBHA9170 #774	BBHA9170	Schwarzbeck	2019.07.26	2022.07.25
Coaxial Cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial Cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial Cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
Coaxial Cable (N male) (30MHz-40GHz)	CB05	EMC05	Morlab	N/A	N/A
1-18GHz pre-Amplifier	61171/61172	S020180L32 03	Tonscend	2021.07.16	2022.07.15
18-26.5GHz pre-Amplifier	46732	S10M100L38 02	Tonscend	2021.07.16	2022.07.15
26-40GHz pre-Amplifier	56774	S40M400L40 02	Tonscend	2021.07.16	2022.07.15
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	2021.07.16	2022.07.15
Anechoic Chamber	N/A	9m*6m*6m	CRT	2020.01.06	2023.01.05

_____ END OF REPORT _____