

FCC TEST REPORT

(Part 15, Subpart C)

Applicant:	Xiaomi Communications Co.,Ltd.
Address:	#019, 9th Floor, Building 6, 33Xi'erqi Middle Road, Haidian District



Manufacturer or Supplier:	Xiaomi Communications Co.,Ltd.
Address:	#019, 9th Floor, Building 6, 33Xi'erqi Middle Road, Haidian District
Product:	2.4GHz WIFI+Bluetooth dual-mode module
Brand Name:	MI
Model Name:	MHCWB9B-B
FCC ID:	2AFZZ-MHCWB9B-B
Date of tests:	Dec.16, 2024 ~ Dec. 25, 2024

The tests have been carried out according to the requirements of the following standard:

☒ **FCC Part 15, Subpart C, Section 15.247**

☒ **ANSI C63.10-2020**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
 Date: Dec. 25, 2024	 Date: Dec. 25, 2024

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	6
1 SUMMARY OF TEST RESULTS	7
1.1 MEASUREMENT UNCERTAINTY	8
2 GENERAL INFORMATION	9
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 DESCRIPTION OF TEST MODES	11
2.2.1 CONFIGURATION OF SYSTEM UNDER TEST	12
2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	12
2.3 DUTY CYCLE OF TEST SIGNAL	16
2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	17
2.5 DESCRIPTION OF SUPPORT UNITS	17
3 TEST TYPES AND RESULTS	18
3.1 CONDUCTED EMISSION MEASUREMENT	18
3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	18
3.1.2 TEST INSTRUMENTS	18
3.1.3 TEST PROCEDURES	19
3.1.4 DEVIATION FROM TEST STANDARD	19
3.1.5 TEST SETUP	20
3.1.6 EUT OPERATING CONDITIONS	20
3.1.7 TEST RESULTS	21
3.2 RADIATED EMISSION MEASUREMENT	22
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	22
3.2.2 TEST INSTRUMENTS	23
3.2.3 TEST PROCEDURES	24
3.2.4 DEVIATION FROM TEST STANDARD	24
3.2.5 TEST SETUP	25
3.2.6 EUT OPERATING CONDITIONS	26
3.2.7 TEST RESULTS	27
3.3 6 dB BANDWIDTH MEASUREMENT	141
3.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	141
3.3.2 TEST INSTRUMENTS	141
3.3.3 TEST PROCEDURE	141
3.3.4 DEVIATION FROM TEST STANDARD	142
3.3.5 TEST SETUP	142



3.3.6	EUT OPERATING CONDITIONS	142
3.3.7	TEST RESULTS	143
3.4	CONDUCTED OUTPUT POWER	144
3.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	144
3.4.2	TEST SETUP	144
3.4.3	TEST INSTRUMENTS	144
3.4.4	TEST PROCEDURES	144
3.4.5	DEVIATION FROM TEST STANDARD	144
3.4.6	EUT OPERATING CONDITIONS	144
3.4.7	TEST RESULTS	145
3.4.7.1	MAXIMUM PEAK OUTPUT POWER	145
3.4.7.2	AVERAGE OUTPUT POWER (FOR REFERENCE)	146
3.5	POWER SPECTRAL DENSITY MEASUREMENT	147
3.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	147
3.5.2	TEST SETUP	147
3.5.3	TEST INSTRUMENTS	147
3.5.4	TEST PROCEDURE	147
3.5.5	DEVIATION FROM TEST STANDARD	147
3.5.6	EUT OPERATING CONDITION	147
3.5.7	TEST RESULTS	148
3.6	OUT OF BAND EMISSION MEASUREMENT	149
3.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT	149
3.6.2	TEST SETUP	149
3.6.3	TEST INSTRUMENTS	149
3.6.4	TEST PROCEDURE	149
3.6.5	DEVIATION FROM TEST STANDARD	150
3.6.6	EUT OPERATING CONDITION	150
3.6.7	TEST RESULTS	150
3.7	ANTENNA REQUIREMENTS	151
3.7.1	STANDARD APPLICABLE	151
3.7.2	ANTENNA CONNECTED CONSTRUCTION	151
3.7.3	ANTENNA GAIN	151
4	PHOTOGRAPHS OF THE TEST CONFIGURATION	151
5	MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB 152	
6	APPENDIX 1	153



WLAN 2.4G	153
DTS BANDWIDTH	153
Test Result	153
Test Graphs	154
OCCUPIED CHANNEL BANDWIDTH	162
Test Result	162
Test Graphs	163
MAXIMUM CONDUCTED OUTPUT POWER	171
Test Result	171
MAXIMUM POWER SPECTRAL DENSITY	174
Test Result	174
Test Graphs	175
BAND EDGE MEASUREMENTS	185
Test Graphs	185
CONDUCTED SPURIOUS EMISSION	188
Test Result	188
DUTY CYCLE	196
Test Result	196
Test Graphs	197
7 APPENDIX 2 BLE	197
DTS BANDWIDTH	198
Test Result	198
Test Graphs	199
OCCUPIED CHANNEL BANDWIDTH	203
Test Result	203
Test Graphs	204
MAXIMUM CONDUCTED OUTPUT POWER	208
Test Result	208
MAXIMUM POWER SPECTRAL DENSITY	209
Test Result	209
Test Graphs	210
BAND EDGE MEASUREMENTS	214
Test Graphs	214
CONDUCTED SPURIOUS EMISSION	216
Test Graphs	216
DUTY CYCLE	220



Test Report No.: PSU-NQN2412260110RF01

Test Result	220
Test Graphs	220



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2412260110RF01

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
PSU-NQN2412260110RF01	Original release	Dec. 25, 2024



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2412260110RF01

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)		
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT
15.207	AC Power Conducted Emission	Compliance
15.205 15.209	Radiated Emissions	Compliance
15.247(d)	Out of band Emission Measurement	Compliance
15.247(a)(2)	6dB bandwidth	Compliance
15.247(b)	Conducted Output power	Compliance
15.247(e)	Power Spectral Density	Compliance
15.203	Antenna Requirement	Compliance

Note : 1.Except RSE, other data please refer to Appendix 1 (for WIFI-2.4G) and Appendix 2 (for BLE).



1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
AC Power Conducted emissions	$\pm 2.70\text{dB}$
Radiated emissions (9KHz~30MHz)	$\pm 2.68\text{dB}$
Radiated emissions (30MHz~1GHz)	$\pm 4.98\text{dB}$
Radiated emissions (1GHz ~6GHz)	$\pm 4.70\text{dB}$
Radiated emissions (6GHz ~18GHz)	$\pm 4.60\text{dB}$
Radiated emissions (18GHz ~40GHz)	$\pm 4.12\text{dB}$
Conducted emissions	$\pm 4.01\text{dB}$
Occupied Channel Bandwidth	$\pm 43.58\text{KHz}$
Conducted Output power	$\pm 2.06\text{dB}$
Power Spectral Density	$\pm 0.85\text{ dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	2.4GHz WIFI+Bluetooth dual-mode module
BRAND NAME	MI
MODEL NAME	MHCWB9B-B
NOMINAL VOLTAGE	3.3Vdc (DC supply)
MODULATION	DSSS, OFDM, GFSK, OFDMA
TRANSMISSION RATE	802.11b: 11/ 5.5/ 2.0 / 1.0 Mbps 802.11g: 54/ 48/ 36 / 24 / 18 / 9/ 6 Mbps 802.11n(HT20)/ax(HE20): up to 144.4 Mbps 802.11n(HT40)/ax(HE40): up to 300 Mbps BT_LE: 0.125 Mbps /0.5 Mbps /1 Mbps/2 Mbps 802.11ax 20 (RU26/52/106/242): up to 286.8Mbps 802.11ax 40 (RU484): up to 573.5Mbps
OPERATING FREQUENCY	2412-2462MHz for 11b/g/n(HT20/40)/ax(HE20/40) 2402-2480MHz for BT-LE(GFSK) 2412-2462MHz for ax(20M RU26/52/106/242)/ax (40M RU484)
MAX. OUTPUT POWER	WLAN: 0.087mW (Maximum) BT-LE: 0.037mW (Maximum)
ANTENNA TYPE	PCB Antenna with 0.4dBi gain for BLE/WIFI
HW VERSION	V1.1
SW VERSION	V1.0.0
I/O PORTS	Refer to user's manual



Test Report No.: PSU-NQN2412260110RF01

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The EUT incorporates a SISO function. Physically, the EUT provides one transmitter and one receiver.

MODULATION MODE	TX/RX FUNCTION
802.11b	1TX /1RX
802.11g	1TX /1RX
802.11n(HT20)/ax(HE20)	1TX /1RX
802.11n(HT40)/ax(HE40)	1TX /1RX
802.11ax (20MHz RU 26/52/106/242)	1TX /1RX
802.11ax (40MHz RU 26/52/106/242/484)	1TX /1RX
BT_LE(1MHz)	1TX /1RX

3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
4. Antenna gain and EUT conducted cable loss are provided by the customer, and the laboratory will record the results based on these items that involve these two parameters.



2.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20), 802.11ax20 (HE20), 802.11ax20 (RU 26/52/106/242):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n (HT40), 802.11ax40 (HE40), 802.11ax40 (RU 26/52/106/242/484):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422 MHz	7	2442 MHz
4	2427 MHz	8	2447 MHz
5	2432 MHz	9	2452 MHz
6	2437 MHz		

40 channels are provided for BT-LE (GFSK):

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480



2.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 4 photographs of the test configuration for reference.

2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports.

The worst case was found when positioned on Y axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
-	√	√	√	√	-

Where **RE<1G**: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

RADIATED EMISSION TEST (BELOW 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0
BT-LE	0 to 39	39	GFSK	1.0



RADIATED EMISSION TEST (ABOVE 1GHz):

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0
802.11g	1 to 11	1, 6, 11	OFDM	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	MCS0
802.11ax HE20	1 to 11	1, 6, 11	OFDM	MCS0
802.11n HT40	3 to 9	3,6,9	OFDM	MCS0
802.11ax HE40	3 to 9	3,6,9	OFDM	MCS0
802.11ax 20 (RU 26/52/106/242)	1 to 11	1, 11	OFDMA	MCS0
802.11ax 40 (RU 26/52/106/242/484)	3 to 9	3, 9	OFDMA	MCS0
BT-LE	0 to 39	0,19, 39	GFSK	1.0

POWER LINE CONDUCTED EMISSION TEST

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11ax 20	1 to 11	1, 11	OFDMA	MCS0

**BANDEDGE MEASUREMENT:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0
802.11g	1 to 11	1, 6, 11	OFDM	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	MCS0
802.11ax HE20	1 to 11	1, 6, 11	OFDM	MCS0
802.11n HT40	3 to 9	3,6,9	OFDM	MCS0
802.11n HT40	3 to 9	3,6,9	OFDM	MCS0
BT-LE	0 to 39	0,19, 39	GFSK	1.0
802.11ax 20 (RU 26/52/106/242)	1 to 11	1,11	OFDMA	MCS0
802.11ax 40 (RU 26/52/106/242/484)	3 to 9	3 ,9	OFDMA	MCS0

**ANTENNA PORT CONDUCTED MEASUREMENT:**

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0
802.11g	1 to 11	1, 6, 11	OFDM	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	MCS0
802.11ax HE20	1 to 11	1, 6, 11	OFDM	MCS0
802.11n HT40	3 to 9	3,6,9	OFDM	MCS0
802.11ax HE40	3 to 9	3,6,9	OFDM	MCS0
BT-LE	0 to 39	0,19, 39	GFSK	1.0
802.11ax 20 (RU 26/52/106/242)	1 to 11	1,11	OFDMA	MCS0
802.11ax 40 (RU 26/52/106/242/484)	3 to 9	3 ,9	OFDMA	MCS0

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	23deg. C, 70%RH	DC 3.3V DC Supply	Jace Hu
RE≥1G	23deg. C, 70%RH	DC 3.3V DC Supply	Jace Hu
PLC	25deg. C, 52%RH	DC 3.3V DC Supply	Carl Xie
APCM	25deg. C, 60%RH	DC 3.6V By DC Supply	James Fu



Test Report No.: PSU-NQN2412260110RF01

2.3 DUTY CYCLE OF TEST SIGNAL

Please Refer to Appendix1/2 Of this test report.

2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247

KDB 558074 D01 DTS Meas Guidance v05r02

ANSI C63.10-2020

Note :

1. All test items have been performed and recorded as per the above standards.
2. The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.

2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Desktop	Lenovo	M73 SFF	PC04GRQV	N/A
2	Desktop	Lenovo	M73 SFF	PC06CS27	N/A
3	Laptop	Lenovo	Thinkpad T450	PC-049PT1	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	AC Line: Unshielded, Detachable 1.5m
2	AC Line: Unshielded, Detachable 1.5m
3	AC Line: Unshielded, Detachable 1.5m



3 TEST TYPES AND RESULTS

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

3.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR3	101900	Feb. 13,24	Feb. 12,25
EMC32 test software	Rohde&Schwarz	EMC32	NA	NA	NA
LISN network	Rohde&Schwarz	ENV216	101922	Mar. 09,24	Mar. 08,25

NOTE:

1. The test was performed in CE shielded room.

2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



3.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.


NOTE: All modes of operation were investigated and the worst-case emissions are reported.

3.1.4 DEVIATION FROM TEST STANDARD

No deviation.



3.1.5 TEST SETUP

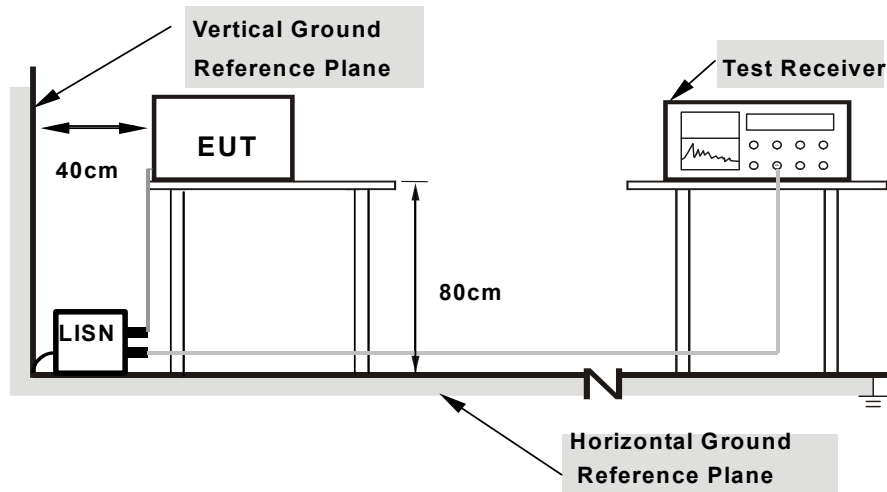

Note: 1.Support units were connected to second LISN.

**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80
from other units and other metal planes**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.6 EUT OPERATING CONDITIONS

- Turned on the power and connected of all equipment.
- EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.



BUREAU VERITAS Test Report No.: PSU-NQN2412260110RF01

3.1.7 TEST RESULTS

NA



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



3.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	Nov. 14,23	Nov. 13,26
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Feb. 17,24	Feb. 16,25
Horn Antenna	ETS-LINDGREN	3117	00168692	Feb. 17,24	Feb. 16,25
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-00361	15433	Sep.02, 24	Sep.01, 25
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	JS1120-3	3.2.06	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	N/A	May. 05,24	May. 04,25
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Mar. 27,24	Mar. 26,25
Signal Pre-Amplifier	EMSI	EMC 9135	980249	May. 05,24	May. 04,25
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	May.09,24	May.08,25
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Feb. 16,24	Feb. 15,25
DC Source	Kikusui/JP	PMX18-5A	0000001	Aug. 10,24	Aug. 09,25
Power Meter	Anritsu	ML2495A	1506002	Feb. 13,24	Feb. 12,25
Power Sensor	Anritsu	MA2411B	1339352	Feb. 13,24	Feb. 12,25
Loop Antenna	Schwarzbeck	FMZB 1519B	00173	Sep.01,24	Aug.31,25

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Chamber.
 3. The FCC Site Registration No. is 525120; The Designation No. is CN1171.



3.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

3.2.4 DEVIATION FROM TEST STANDARD

No deviation




BUREAU
VERITAS


Test Report No.: PSU-NQN2412260110RF01

3.2.5 TEST SETUP


<Frequency Range 9KHz~30MHz >

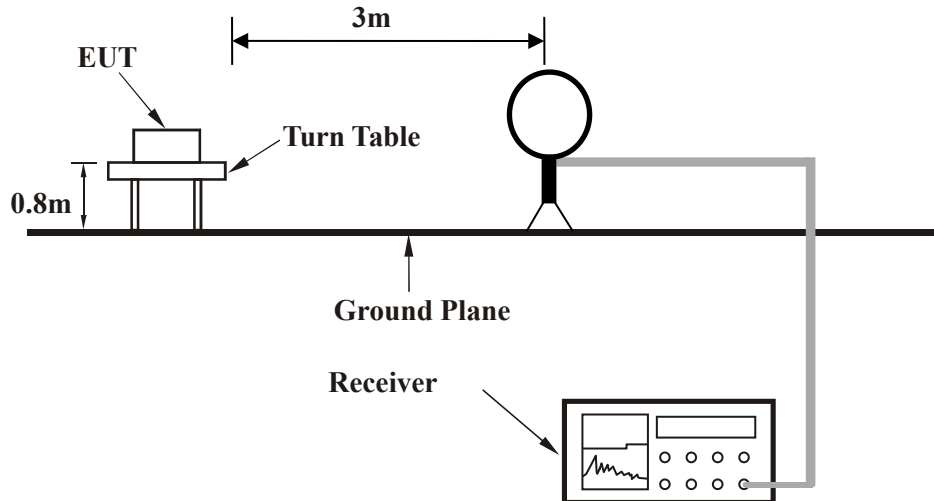

< Frequency Range 30MHz~1GHz >

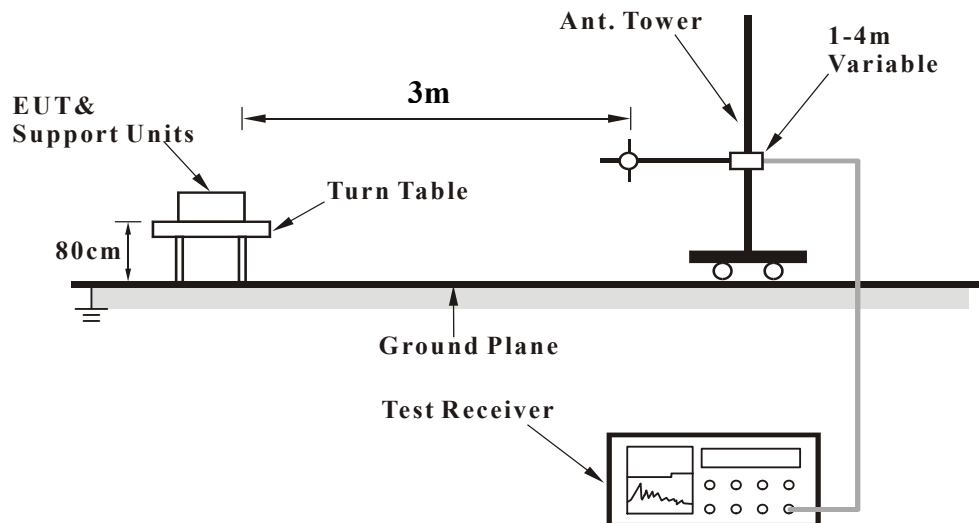

<Frequency Range above 1GHz>

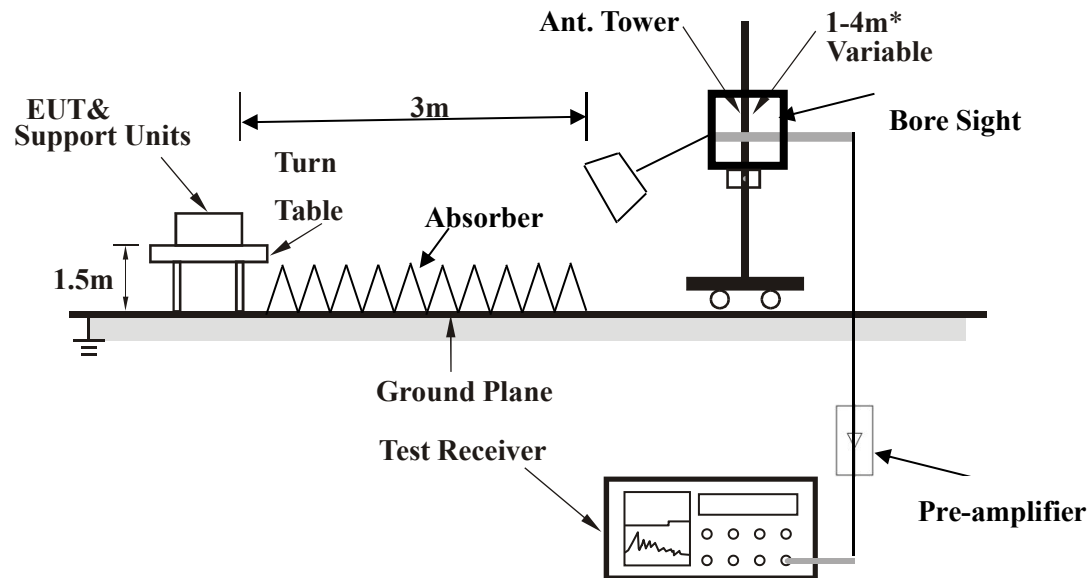

Note: Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.2.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.




BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

3.2.7 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

Radiated Emission Band Edge for BLE

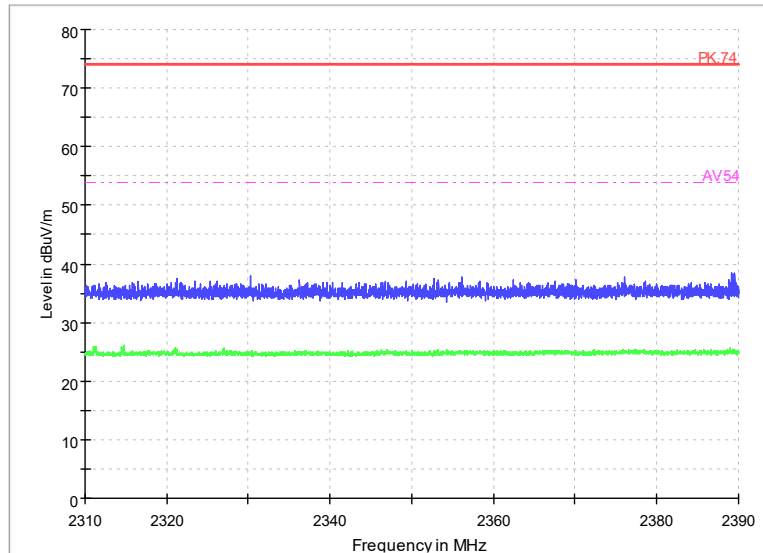


Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK (LE 1Mbps)

Polarity: Vertical

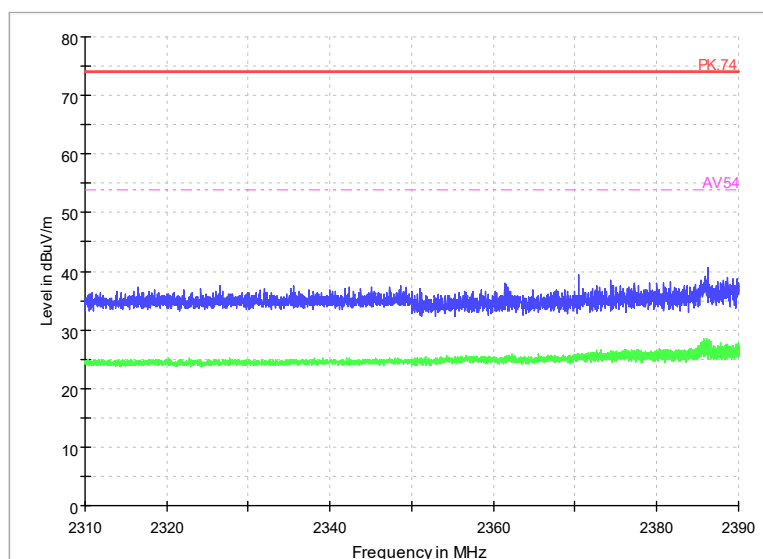

Carrier frequency (MHz): 2402

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

Room B37, Warehouse A5, No.3 Chiwan 4th Road,
Zhaoshang Street, Nanshan District Shenzhen,
Guangdong, People's Republic of China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



Test Report No.: PSU-NQN2412260110RF01

Channel No.:0


Test Mode: GFSK (LE 1Mbps)

Polarity: Horizontal



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

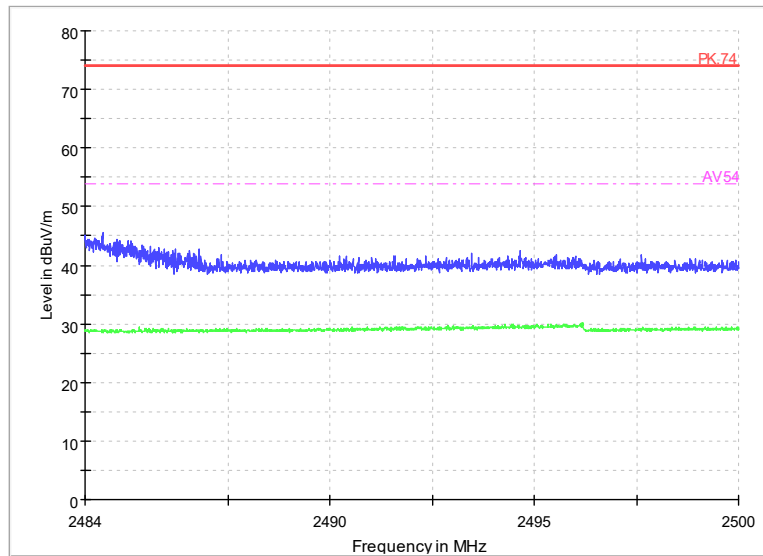


Carrier frequency (MHz): 2480

Channel No.:39

Test Mode: GFSK (LE 1Mbps)

Polarity: Vertical

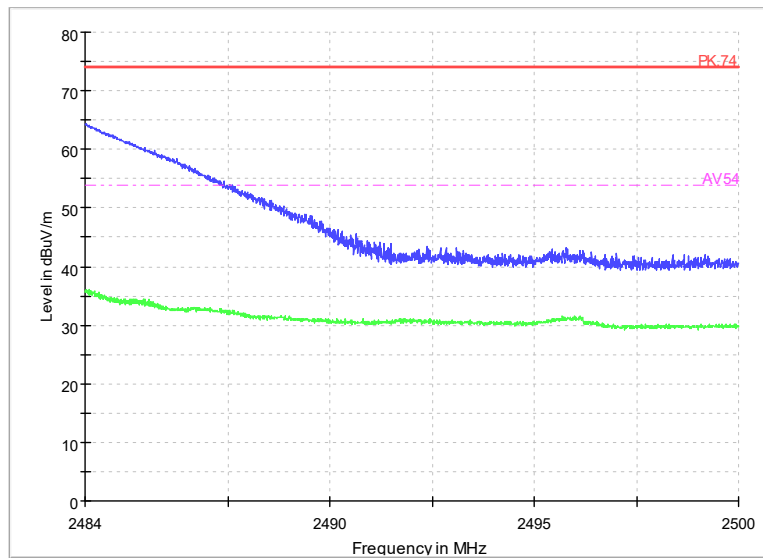


Carrier frequency (MHz): 2480

Channel No.:39

Test Mode: GFSK (LE 1Mbps)

Polarity: Horizontal

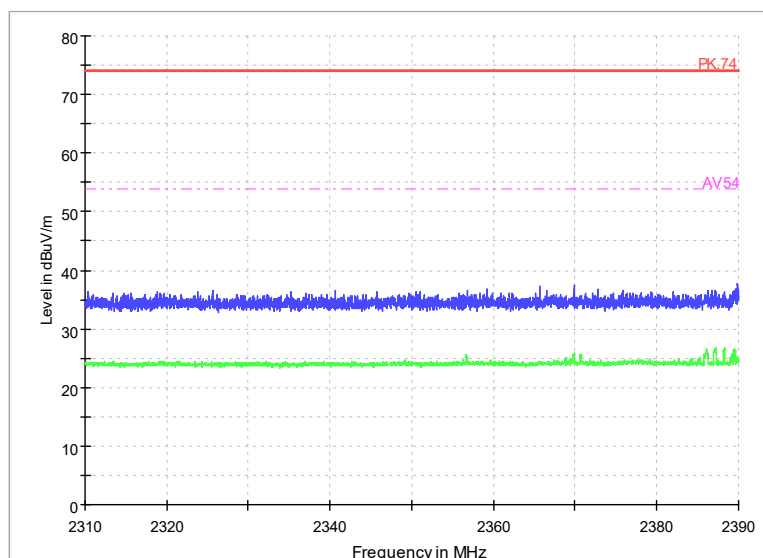


Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK (LE 2Mbps)

Polarity: Vertical

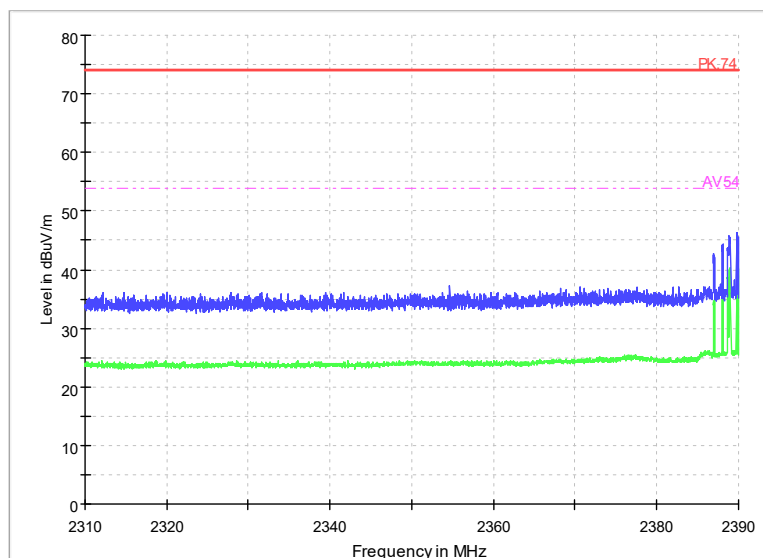

Carrier frequency (MHz): 2402



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2412260110RF01

Channel No.:0


Test Mode: GFSK (LE 2Mbps)

Polarity: Horizontal



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

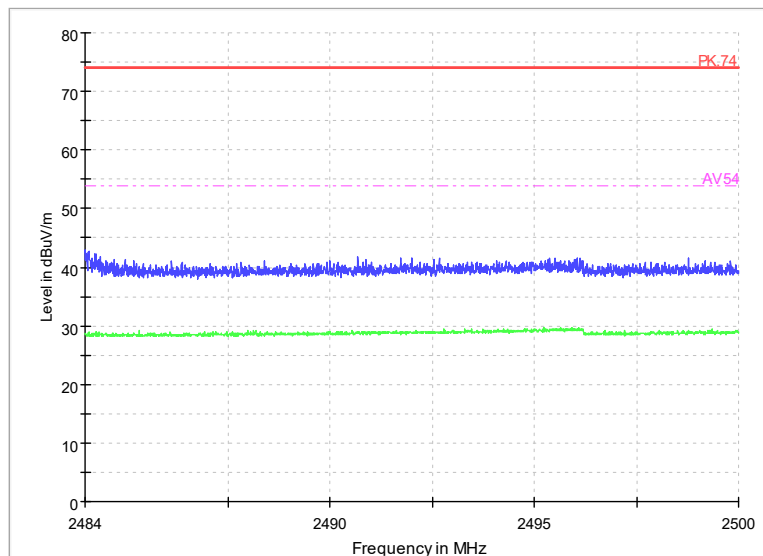


Carrier frequency (MHz): 2480

Channel No.:39

Test Mode: GFSK (LE 2Mbps)

Polarity: Vertical

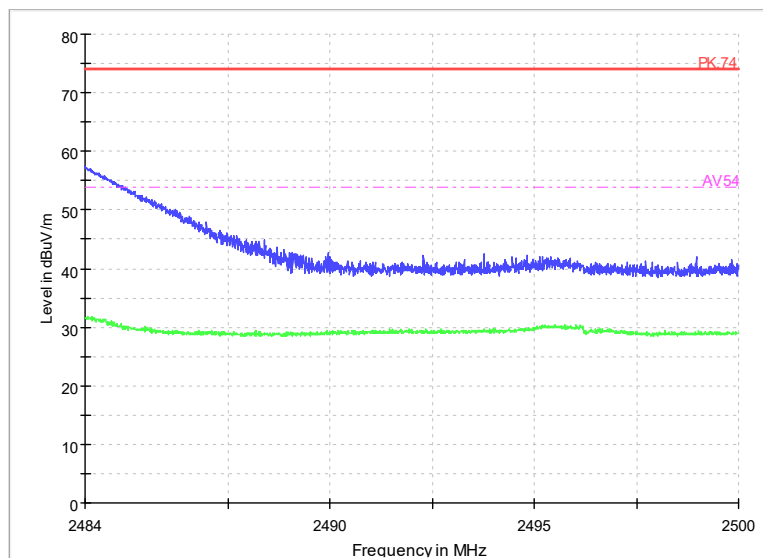


Carrier frequency (MHz): 2480

Channel No.:39

Test Mode: GFSK (LE 2Mbps)

Polarity: Horizontal

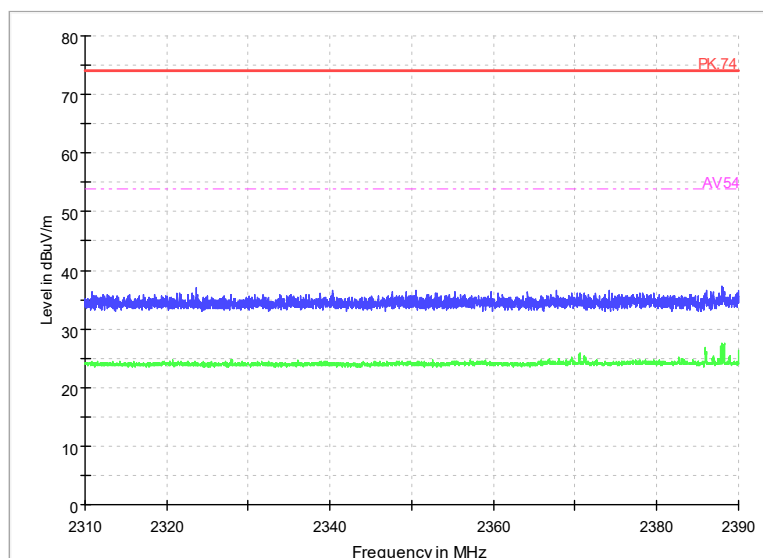


Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK (LE 125Khz S=8)

Polarity: Vertical

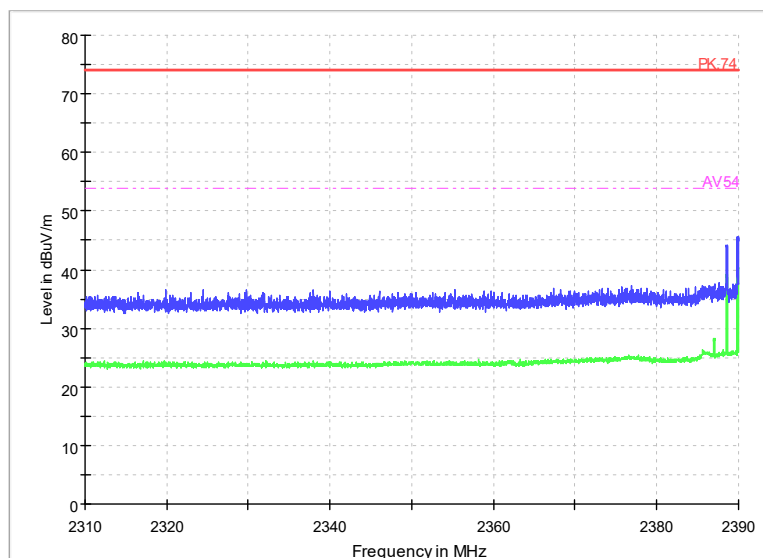

Carrier frequency (MHz): 2402



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2412260110RF01

Channel No.:0


Test Mode: GFSK (LE 125Khz S=8)

Polarity: Horizontal



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

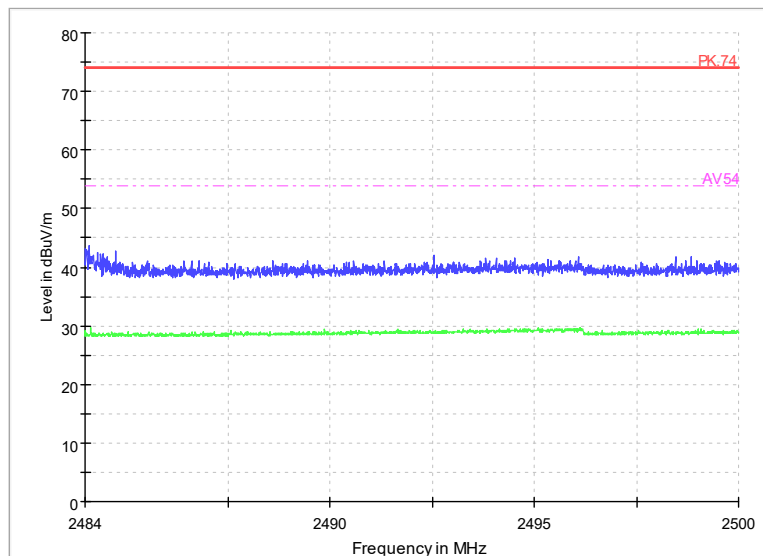


Carrier frequency (MHz): 2480

Channel No.:39

Test Mode: GFSK (LE 125Khz S=8)

Polarity: Vertical

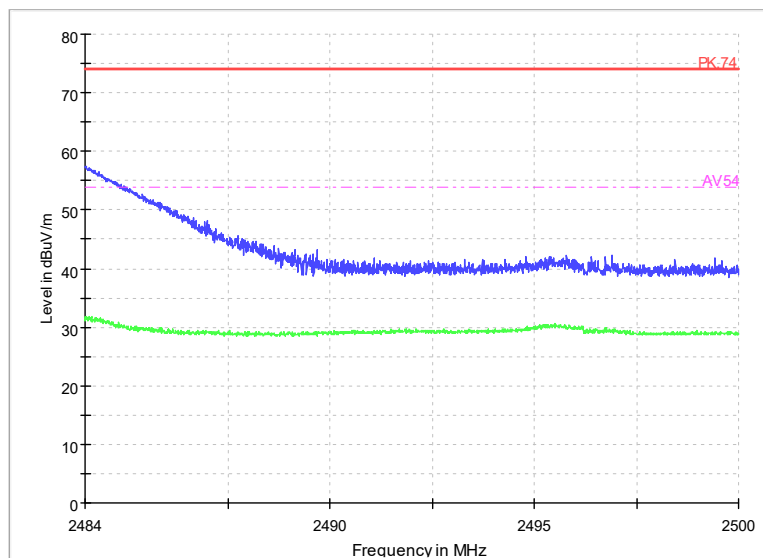


Carrier frequency (MHz): 2480

Channel No.:39

Test Mode: GFSK (LE 125Khz S=8)

Polarity: Horizontal

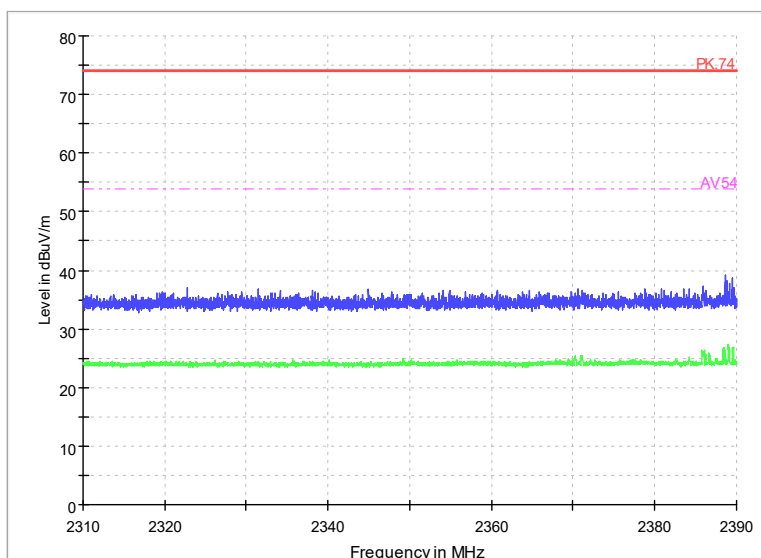


Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK (LE 500Khz S=2)

Polarity: Vertical

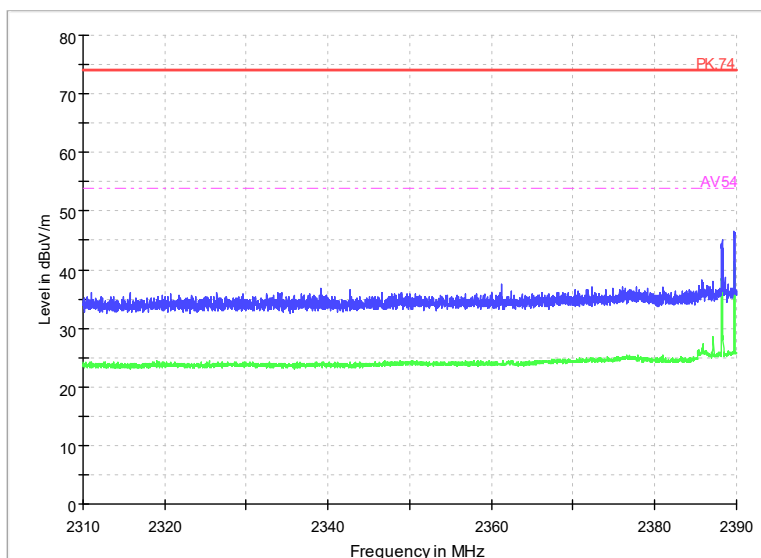

Carrier frequency (MHz): 2402



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2412260110RF01

Channel No.:0


Test Mode: GFSK (LE 500Khz S=2)

Polarity: Horizontal



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

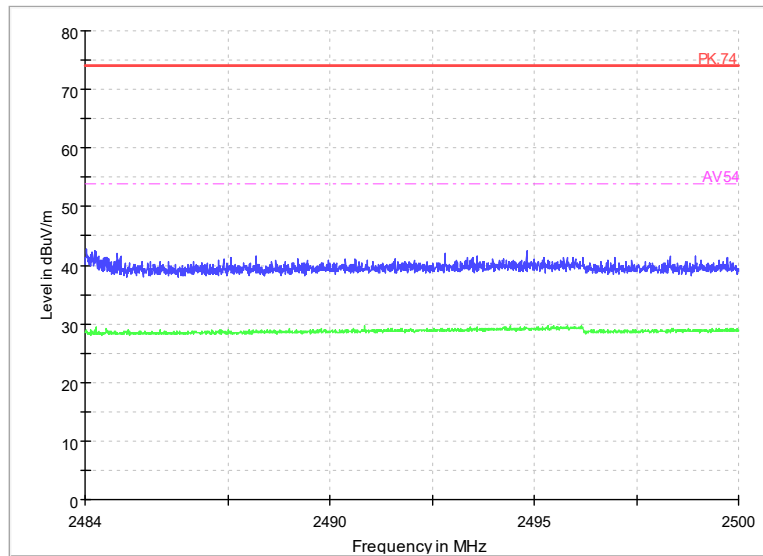


Carrier frequency (MHz): 2480

Channel No.:39

Test Mode: GFSK (LE 500Khz S=2)

Polarity: Vertical

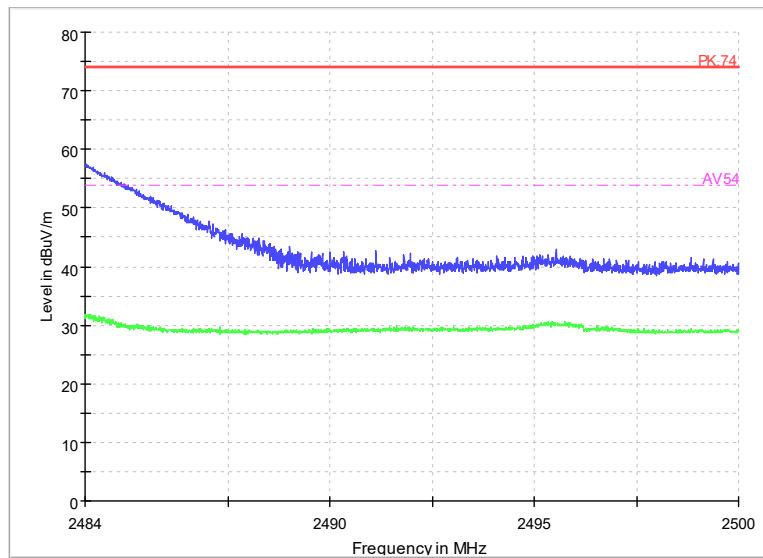

Carrier frequency (MHz): 2480

Channel No.:39

Test Mode: GFSK (LE 500Khz S=2)

Polarity: Horizontal



Radiated Emission for BLE

After comparison, the worst case attitude is EUT lay down.

Determining Spurious Emissions Levels

A “reference path loss” is established and the A_{Rpl} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{mea}} + A_{Rpl}$$

Sample calculation: $(10.67 \text{ dB}\mu\text{V/m}) = (26.47 \text{ BuV}) + (-15.8 \text{ dB/m})$, the corresponding frequency is 45.811 MHz.

For GFSK (LE 1Mbps)

Channel No.:0

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
45.811	10.67	-15.8	26.47	Vertical	40	29.33
64.338	10.81	-17.3	28.11	Vertical	40	29.19
160.174	7.65	-20.1	27.75	Vertical	43.5	35.85
199.9925	16.42	-16.6	33.02	Vertical	43.5	27.08
333.028	22.67	-13	35.67	Vertical	46	23.33
923.37	19.33	-1.7	21.03	Vertical	46	26.67

Channel No.:19

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
47.557	10.98	-15.5	26.48	Vertical	40	29.02
63.9015	15.02	-17.3	32.32	Vertical	40	24.98
172.1535	8.7	-19.5	28.2	Vertical	43.5	34.8
295.6345	11.65	-14.1	25.75	Vertical	46	34.35
331.9125	24.04	-13.1	37.14	Vertical	46	21.96
916.7255	19.29	-1.9	21.19	Vertical	46	26.71

Channel No.:39

**Test Report No.: PSU-NQN2412260110RF01**

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
43.871	12.59	-16	28.59	Vertical	40	27.41
63.562	12.86	-17.2	30.06	Vertical	40	27.14
170.456	6.54	-19.5	26.04	Vertical	43.5	36.96
263.964	18.52	-15.1	33.62	Vertical	46	27.48
331.9125	24	-13.1	37.1	Vertical	46	22
864.5395	18.53	-2.5	21.03	Vertical	46	27.47

For GFSK (LE 2Mbps)

Channel No.:0

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
48.042	20.96	-15.5	36.46	Vertical	40	19.04
60.167	22.75	-16.3	39.05	Vertical	40	17.25
172.687	19	-19.5	38.5	Vertical	43.5	24.5
199.9925	21.72	-16.6	38.32	Vertical	43.5	21.78
436.333	18.76	-10.4	29.16	Vertical	46	27.24
930.354	18.86	-1.6	20.46	Vertical	46	27.14

Channel No.:19

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
47.9935	20.66	-15.5	36.16	Vertical	40	19.34
60.0215	24.02	-16.3	40.32	Vertical	40	15.98
170.068	18.62	-19.5	38.12	Vertical	43.5	24.88
199.9925	21.61	-16.6	38.21	Vertical	43.5	21.89
497.8795	13.73	-9.3	23.03	Vertical	46	32.27
924.437	18.67	-1.8	20.47	Vertical	46	27.33

Channel No.:39

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
30	18.87	-18.7	37.57	Vertical	40	21.13
60.4095	23.11	-16.4	39.51	Vertical	40	16.89

**BUREAU VERITAS Test Report No.: PSU-NQN2412260110RF01**

173.075	19.05	-19.4	38.45	Vertical	43.5	24.45
175.4515	19.48	-19.3	38.78	Vertical	43.5	24.02
499.1405	14.04	-9.3	23.34	Vertical	46	31.96
907.074	18.5	-2.3	20.8	Vertical	46	27.5

For GFSK (LE 125Khz S=8)

Channel No.:0

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
48.236	20.9	-15.4	36.3	Vertical	40	19.1
59.585	24.51	-16.3	40.81	Vertical	40	15.49
172.008	18.79	-19.5	38.29	Vertical	43.5	24.71
177.44	19.11	-19.2	38.31	Vertical	43.5	24.39
551.957	15.94	-8.2	24.14	Vertical	46	30.06
888.062	18.28	-2.4	20.68	Vertical	46	27.72

Channel No.:19

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
47.945	20.45	-15.5	35.95	Vertical	40	19.55
59.391	20.98	-16.3	37.28	Vertical	40	19.02
172.396	19.18	-19.5	38.68	Vertical	43.5	24.32
177.1975	19.36	-19.2	38.56	Vertical	43.5	24.14
436.3815	19.59	-10.4	29.99	Vertical	46	26.41
831.8505	18.97	-3.3	22.27	Vertical	46	27.03

Channel No.:39

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
48.0905	21.41	-15.5	36.91	Vertical	40	18.59
59.9245	22.95	-16.3	39.25	Vertical	40	17.05
173.075	18.85	-19.4	38.25	Vertical	43.5	24.65
199.9925	21.62	-16.6	38.22	Vertical	43.5	21.88
455.9755	16.09	-10.4	26.49	Vertical	46	29.91
901.351	18.03	-2.5	20.53	Vertical	46	27.97



For GFSK (LE 500Khz S=2)

Channel No.:0

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
48.0905	21.37	-15.5	36.87	Vertical	40	18.63
58.906	23.96	-16.2	40.16	Vertical	40	16.04
171.62	18.92	-19.5	38.42	Vertical	43.5	24.58
174.2875	19.46	-19.4	38.86	Vertical	43.5	24.04
436.3815	19.6	-10.4	30	Vertical	46	26.4
830.9775	18.87	-3.3	22.17	Vertical	46	27.13

Channel No.:19

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
48.2845	20.63	-15.4	36.03	Vertical	40	19.37
60.4095	23.04	-16.4	39.44	Vertical	40	16.96
169.8255	18.42	-19.6	38.02	Vertical	43.5	25.08
199.9925	21.68	-16.6	38.28	Vertical	43.5	21.82
436.333	18.76	-10.4	29.16	Vertical	46	27.24
872.057	18.22	-2.4	20.62	Vertical	46	27.78


Channel No.:39

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
48.139	21.8	-15.5	37.3	Vertical	40	18.2
60.458	22.55	-16.4	38.95	Vertical	40	17.45
170.941	19.02	-19.5	38.52	Vertical	43.5	24.48
176.5185	19.27	-19.3	38.57	Vertical	43.5	24.23
436.3815	19.55	-10.4	29.95	Vertical	46	26.45
863.2785	18.08	-2.5	20.58	Vertical	46	27.92



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

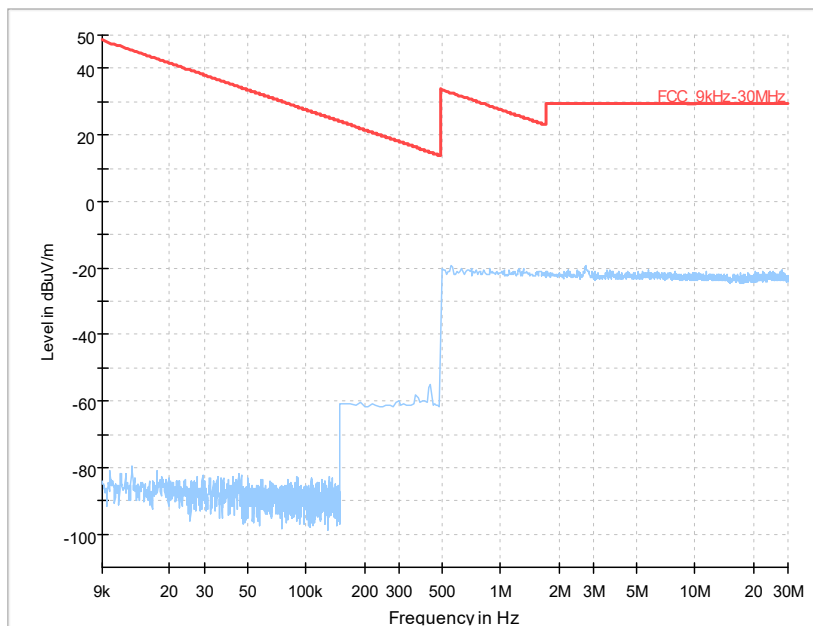

Frequency Range: 9kHz -30MHz

Detector: QP mode

Note: The relevant tests have been performed in order to verify in which mode would have the worst features, the result show above is the worst case.




BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

LE 1Mbps


Channel No.:0

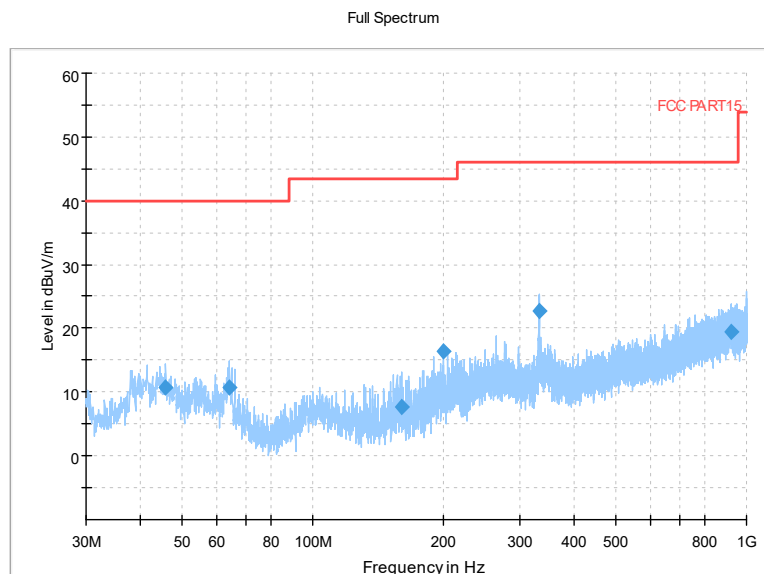

Frequency Range: 30MHz-1GHz

Detector: QP mode

Modulation type: GFSK (LE 1Mbps)

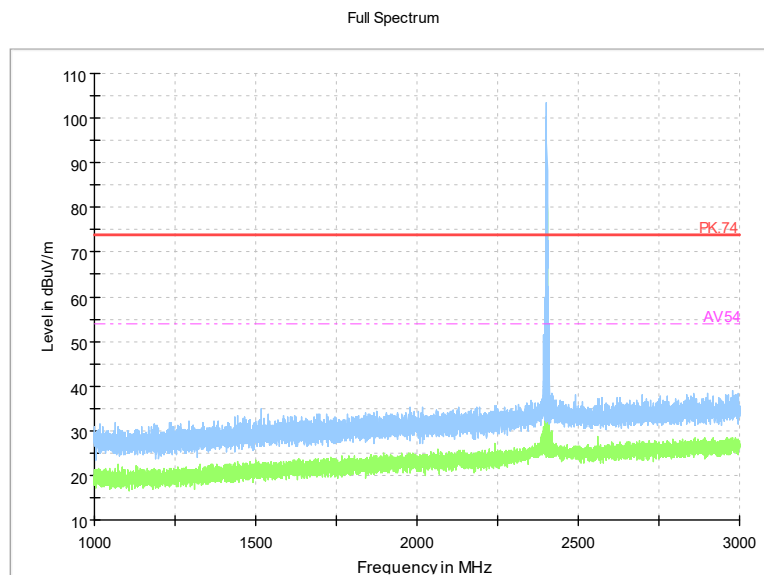

Frequency Range: 1GHz-3GHz

Detector: Av mode and PK mode

Modulation type: GFSK (LE 1Mbps)

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

Room B37, Warehouse A5, No.3 Chiwan 4th Road,
Zhaoshang Street, Nanshan District Shenzhen,
Guangdong, People's Republic of China


Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

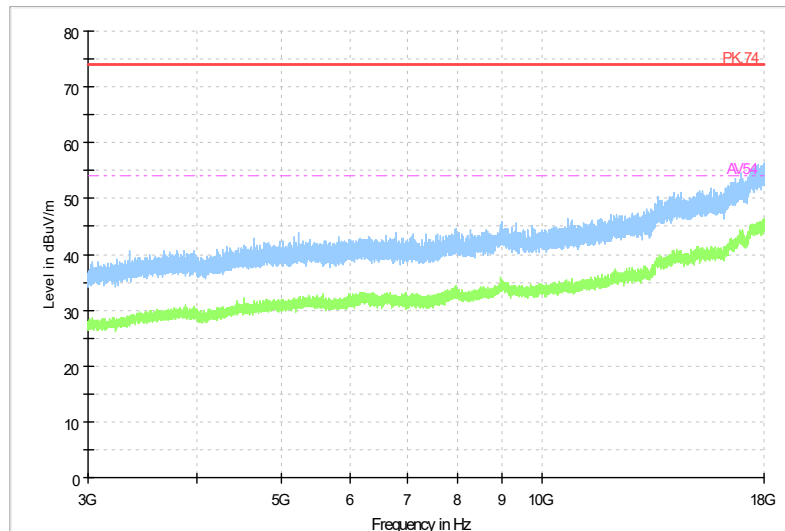


Frequency Range: 3GHz-18GHz

Detector: Av mode and PK mode

Modulation type: GFSK (LE 1Mbps)

Full Spectrum

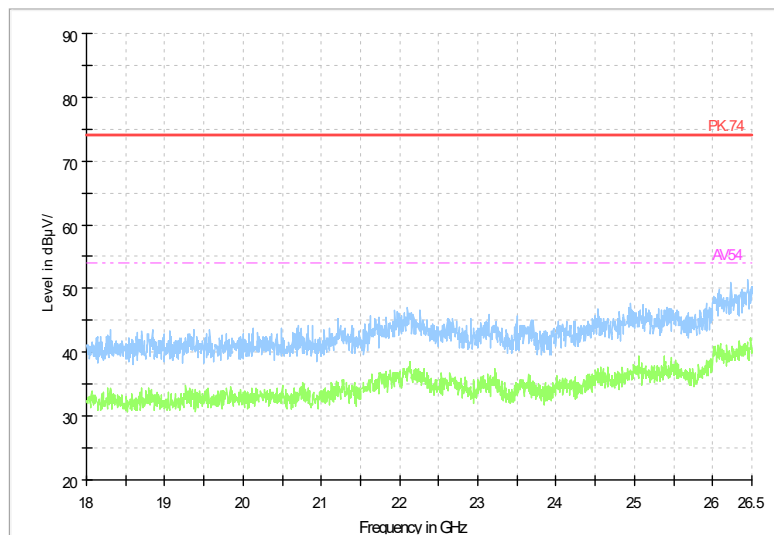

Frequency Range: 18GHz-26GHz

Detector: Av mode and PK mode

Modulation type: GFSK (LE 1Mbps)




BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Channel No.:19

Full Spectrum

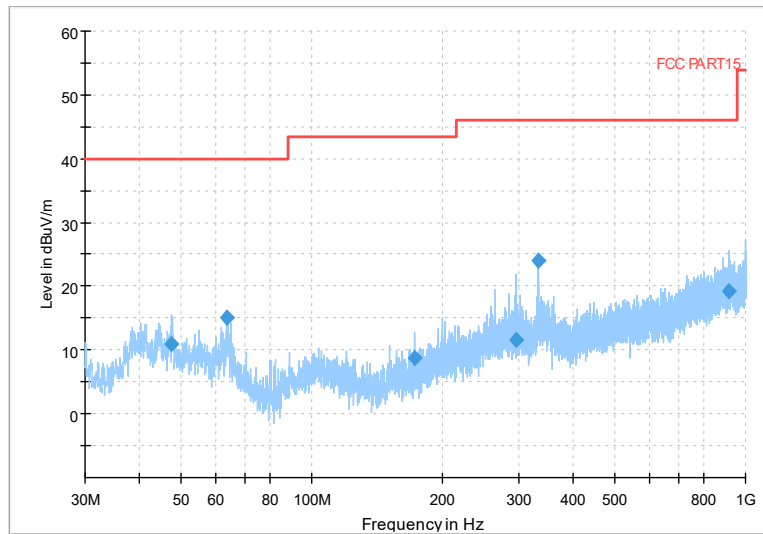


Frequency Range: 30MHz-1GHz

Detector: QP mode

Modulation type: GFSK (LE 1Mbps)

Full Spectrum

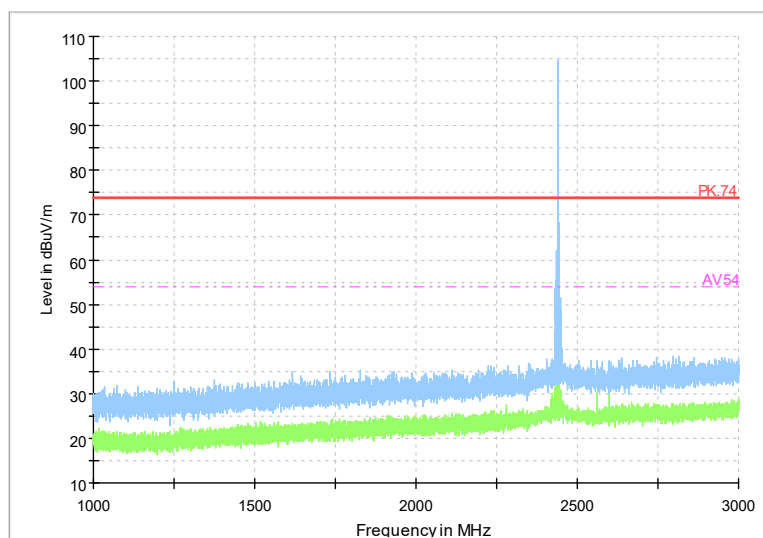

Frequency Range: 1GHz-3GHz

Detector: Av mode and PK mode


Modulation type: GFSK (LE 1Mbps)



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

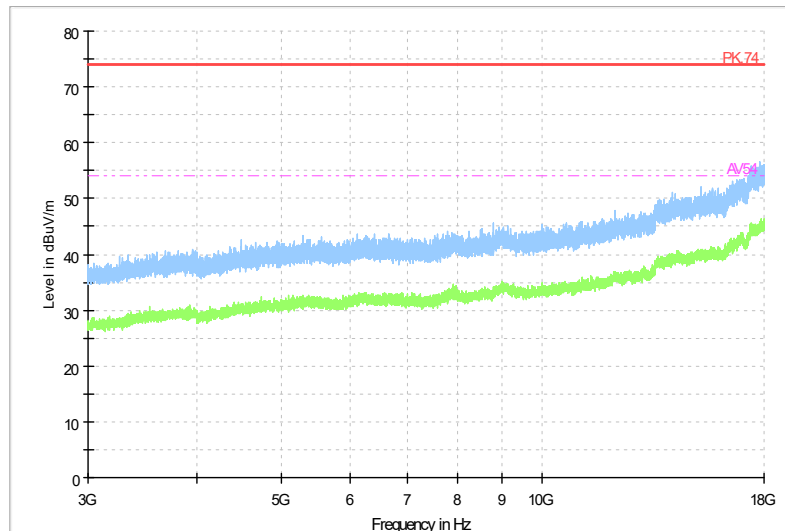


Frequency Range: 3GHz-18GHz

Detector: Av mode and PK mode

Modulation type: GFSK (LE 1Mbps)

Full Spectrum

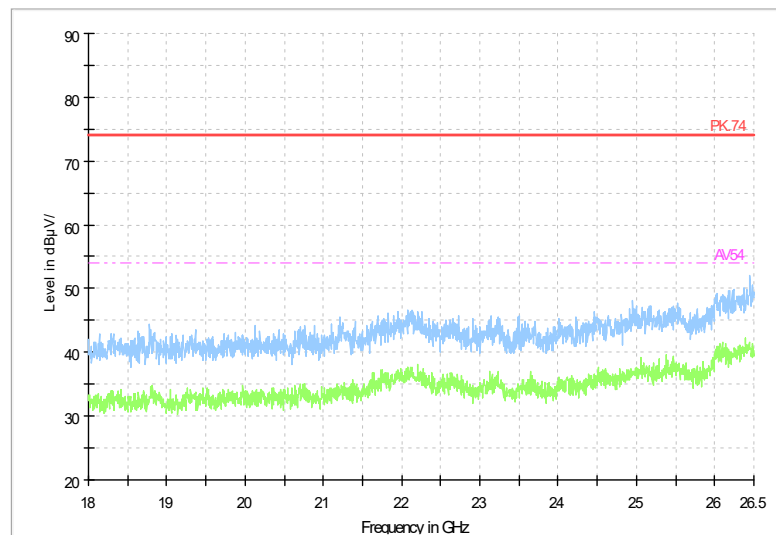

Frequency Range: 18GHz-26GHz

Detector: Av mode and PK mode


Modulation type: GFSK (LE 1Mbps)



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01


Channel No.:39

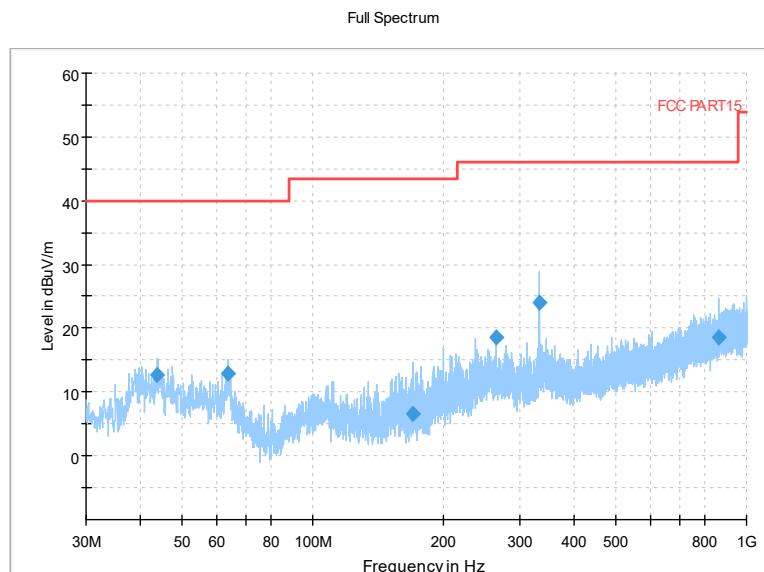

Frequency Range: 30MHz-1GHz

Detector: QP mode

Modulation type: GFSK (LE 1Mbps)

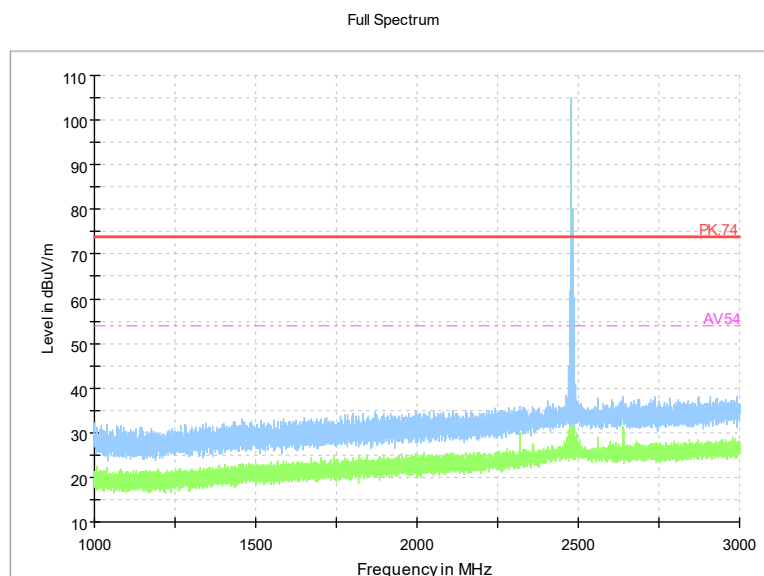

Frequency Range: 1GHz-3GHz

Detector: Av mode and PK mode


Modulation type: GFSK (LE 1Mbps)



BUREAU
VERITAS


Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

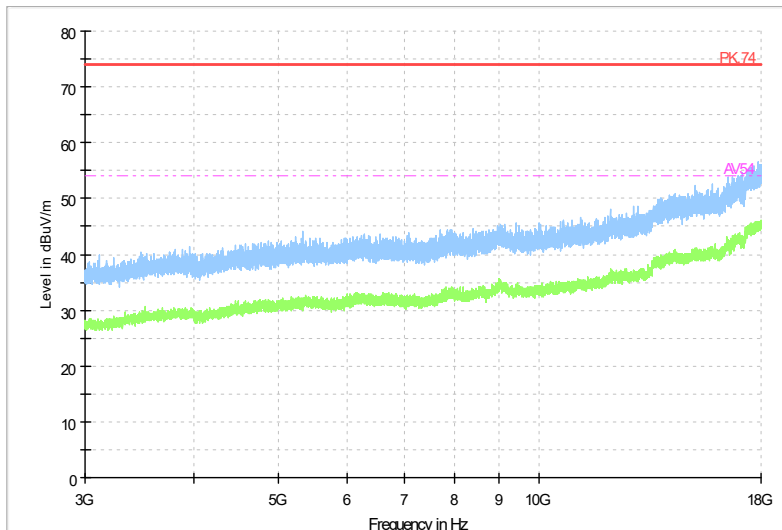

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 1Mbps)

Full Spectrum

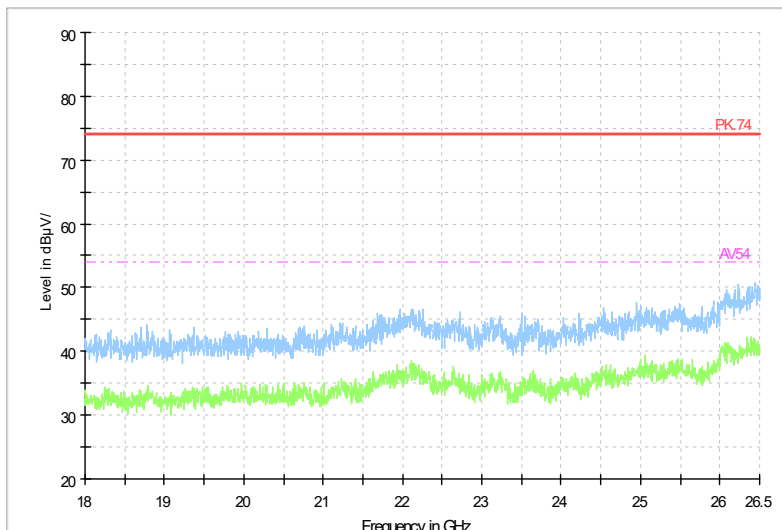

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 1Mbps)




BUREAU VERITAS Test Report No.: PSU-NQN2412260110RF01

LE 2Mbps

Channel No.:0

Full Spectrum

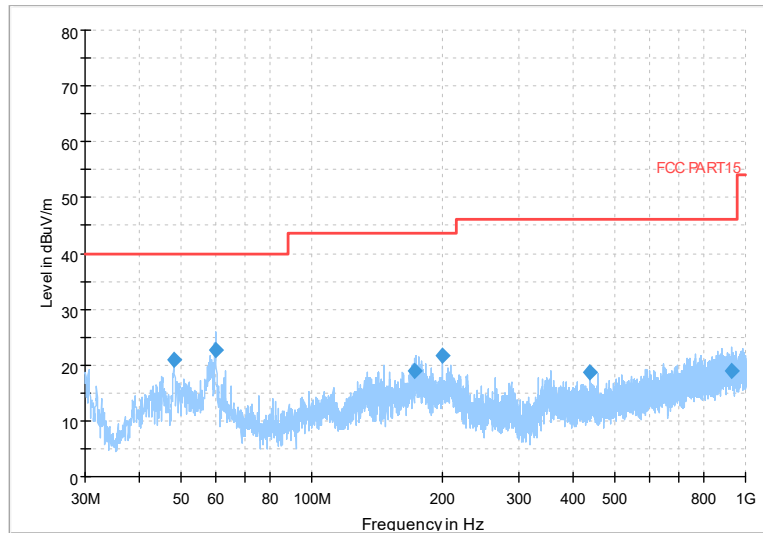


Frequency Range: 30MHz-1GHz

Detector:QP mode

Modulation type: GFSK (LE 2Mbps)

Full Spectrum

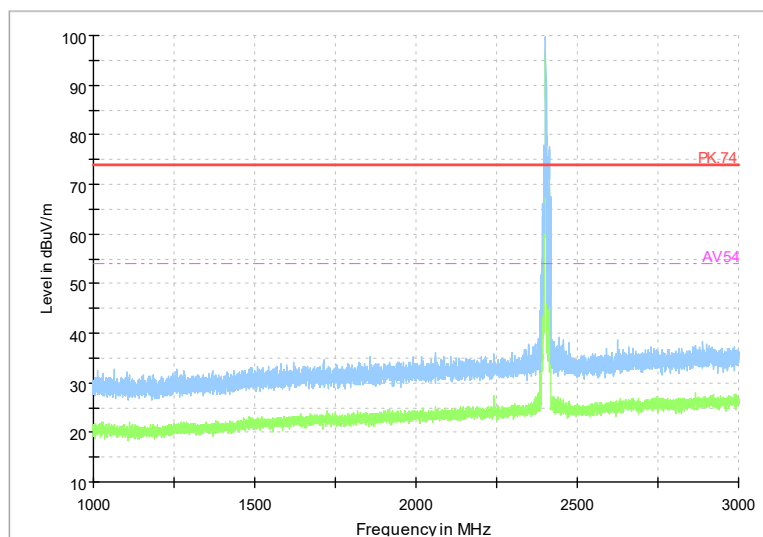

Frequency Range: 1GHz-3GHz

Detector: Av mode and PK mode

Modulation type: GFSK (LE 2Mbps)

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

Room B37, Warehouse A5, No.3 Chiwan 4th Road,
Zhaoshang Street, Nanshan District Shenzhen,
Guangdong, People's Republic of China


Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU
VERITAS


Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

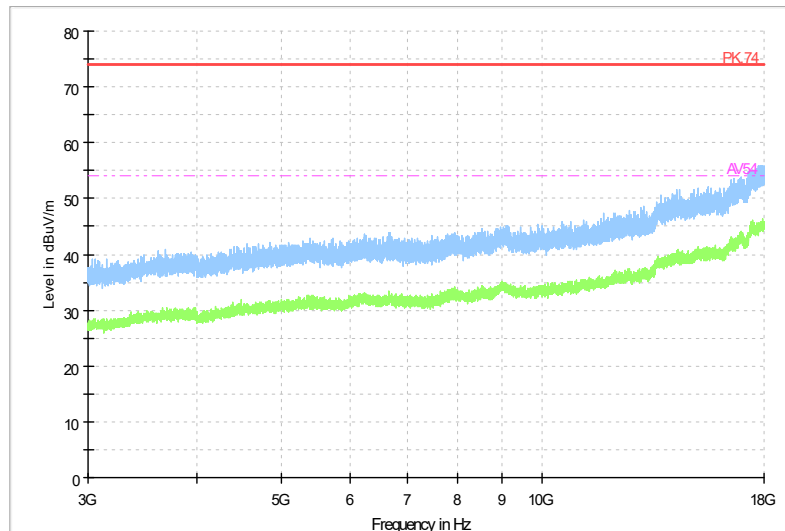

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 2Mbps)

Full Spectrum

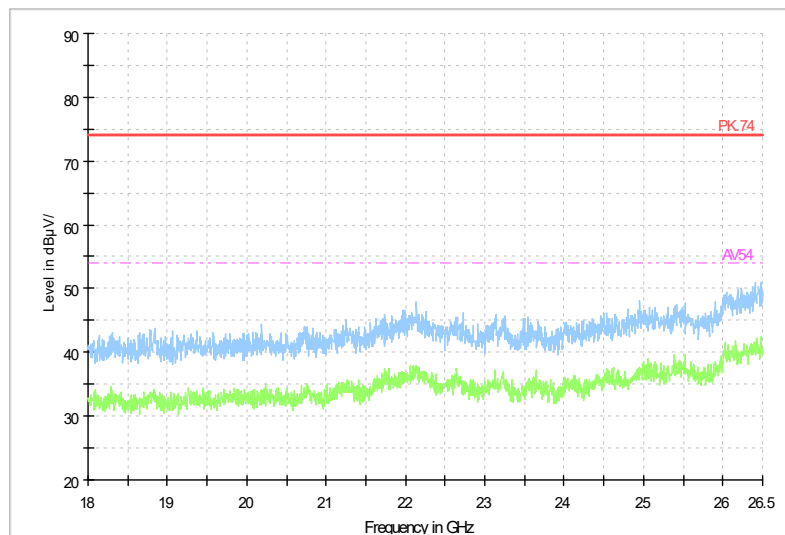

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 2Mbps)




BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Channel No.:19

Full Spectrum

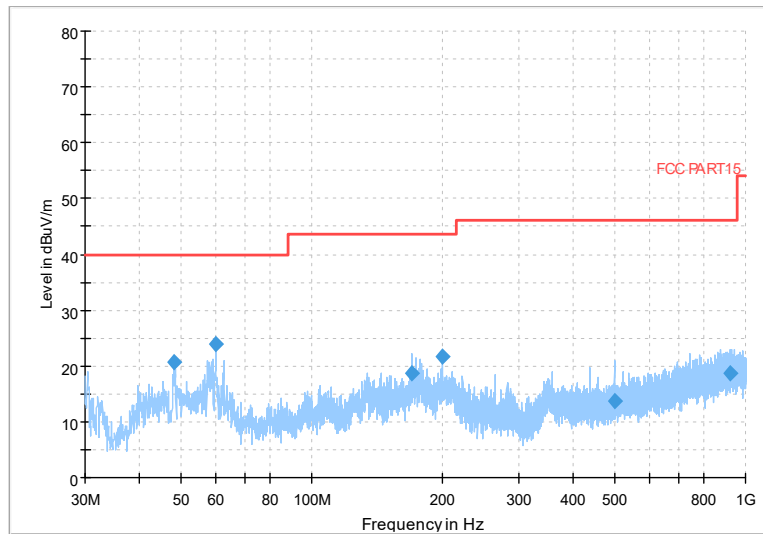


Frequency Range: 30MHz-1GHz

Detector: QP mode

Modulation type: GFSK (LE 2Mbps)

Full Spectrum

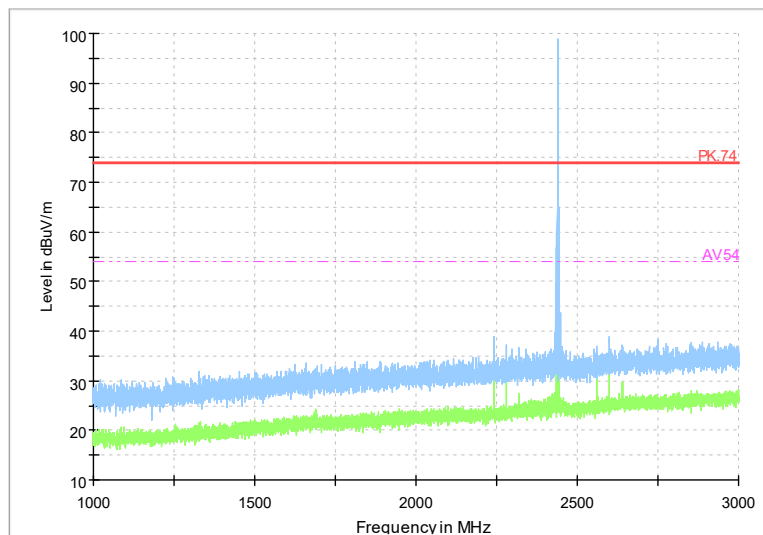

Frequency Range: 1GHz-3GHz

Detector: Av mode and PK mode


Modulation type: GFSK (LE 2Mbps)



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

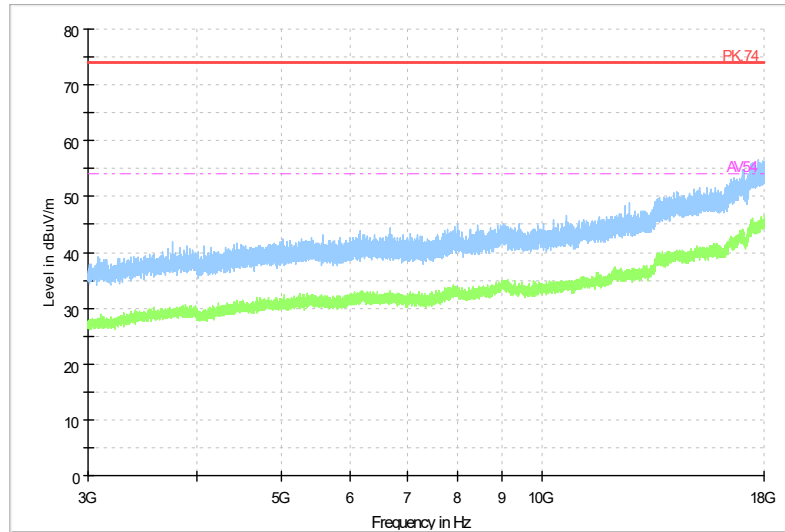


Frequency Range: 3GHz-18GHz

Detector: Av mode and PK mode

Modulation type: GFSK (LE 2Mbps)

Full Spectrum

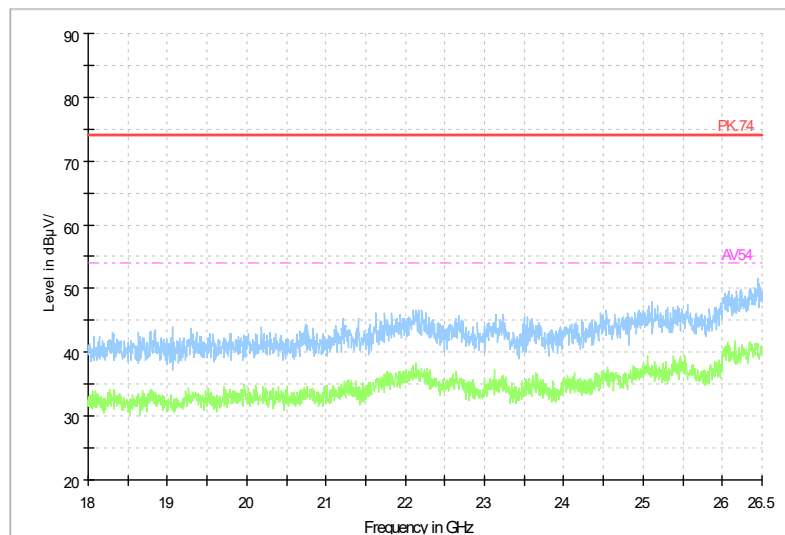

Frequency Range: 18GHz-26GHz

Detector: Av mode and PK mode

Modulation type: GFSK (LE 2Mbps)




BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Channel No.:39

Full Spectrum

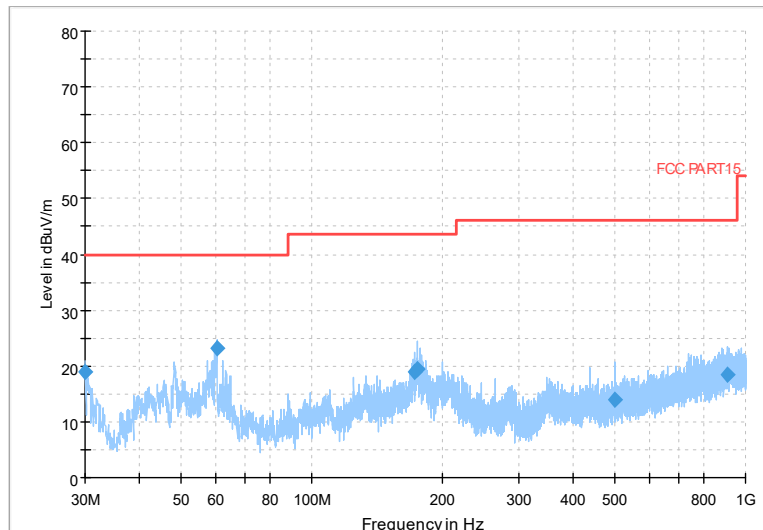


Frequency Range: 30MHz-1GHz

Detector: QP mode

Modulation type: GFSK (LE 2Mbps)

Full Spectrum

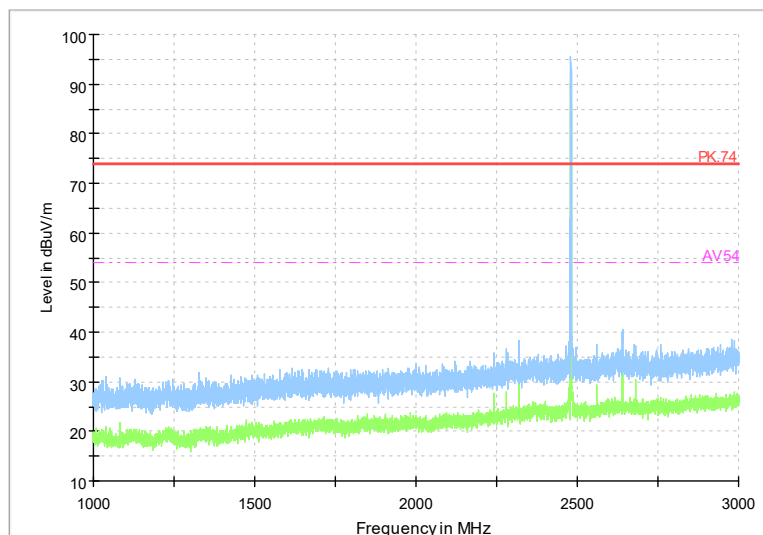

Frequency Range: 1GHz-3GHz

Detector: Av mode and PK mode


Modulation type: GFSK (LE 2Mbps)



BUREAU
VERITAS


Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

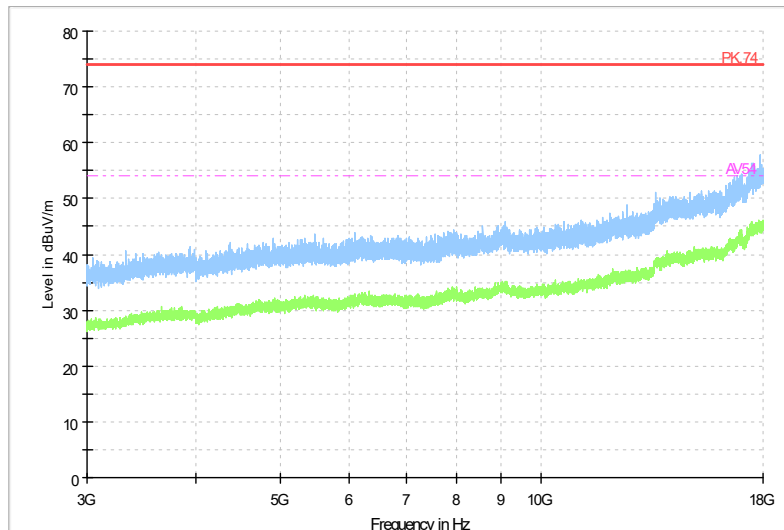

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 2Mbps)

Full Spectrum

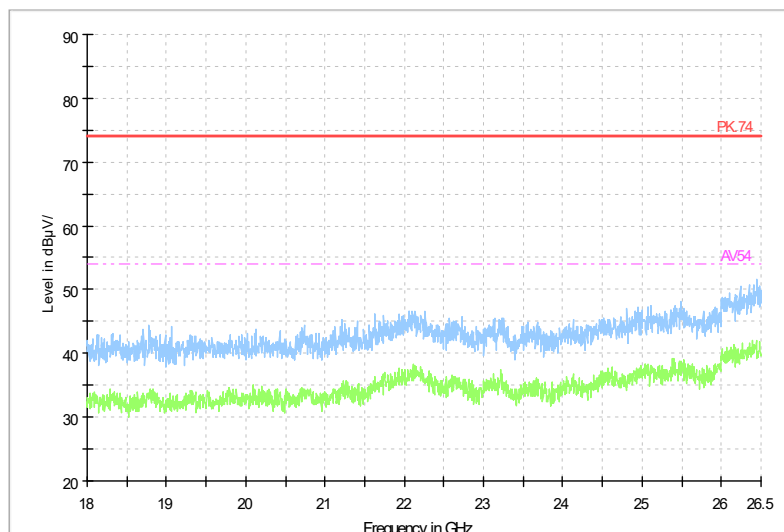

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 2Mbps)




BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

LE 125Khz S=8

Channel No.:0

Full Spectrum

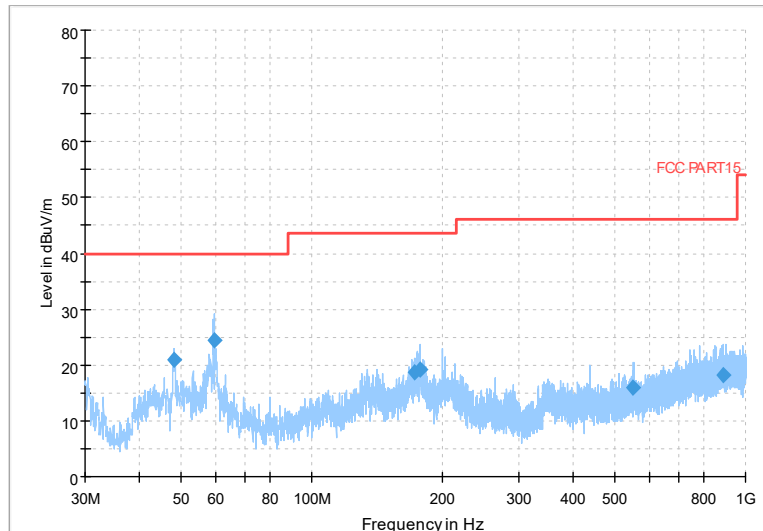


Frequency Range: 30MHz-1GHz

Detector:QP mode

Modulation type: GFSK (LE 125Khz S=8)

Full Spectrum

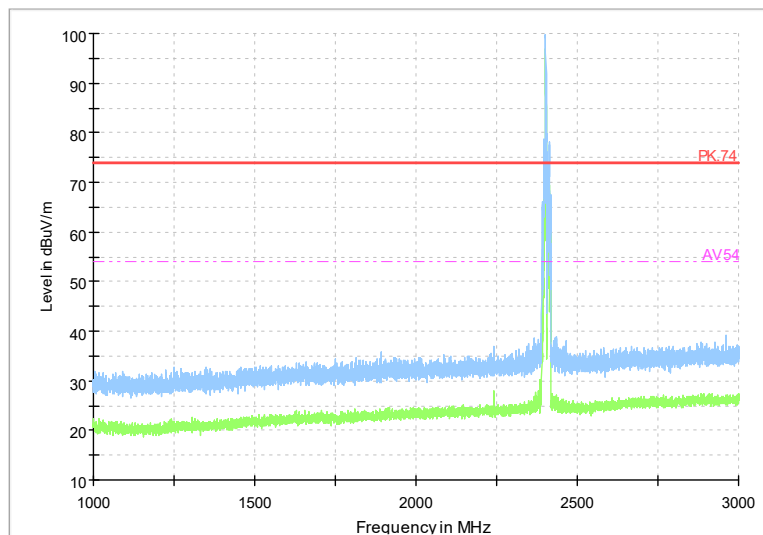

Frequency Range: 1GHz-3GHz

Detector: Av mode and PK mode

Modulation type: GFSK (LE 125Khz S=8)

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

Room B37, Warehouse A5, No.3 Chiwan 4th Road,
Zhaoshang Street, Nanshan District Shenzhen,
Guangdong, People's Republic of China


Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

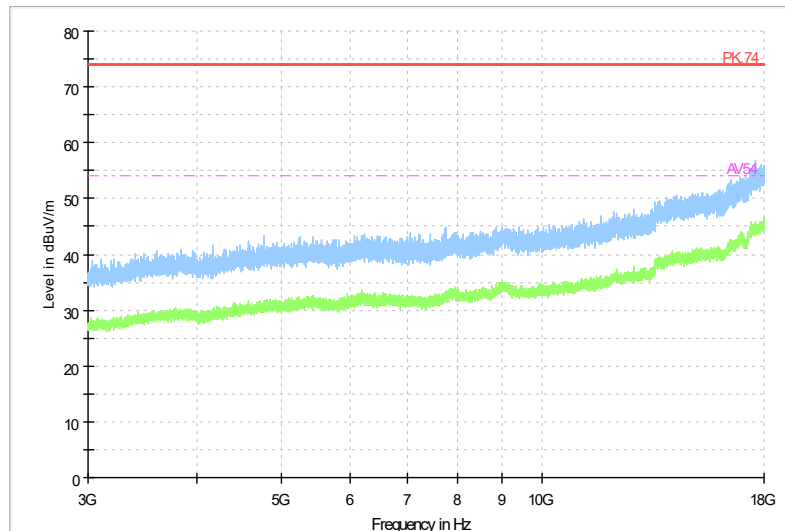


Frequency Range: 3GHz-18GHz

Detector: Av mode and PK mode

Modulation type: GFSK (LE 125Khz S=8)

Full Spectrum

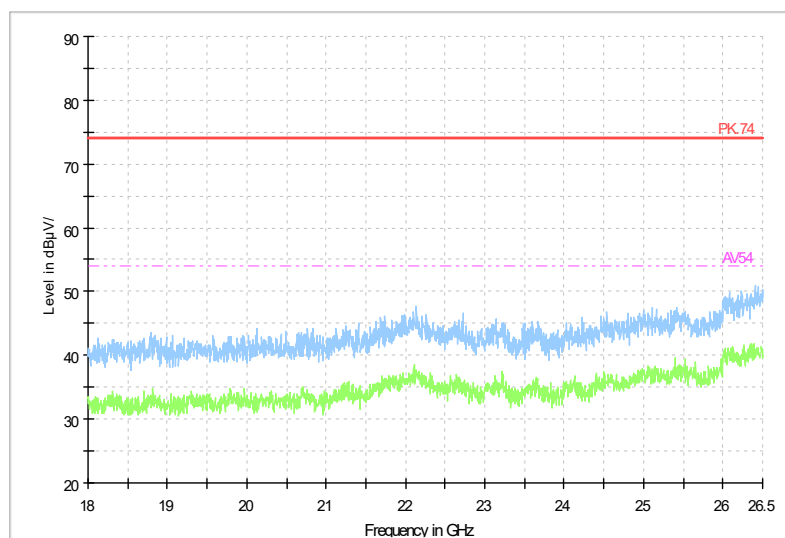

Frequency Range: 18GHz-26GHz

Detector: Av mode and PK mode

Modulation type: (LE 125Khz S=8)




BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Channel No.:19

Full Spectrum

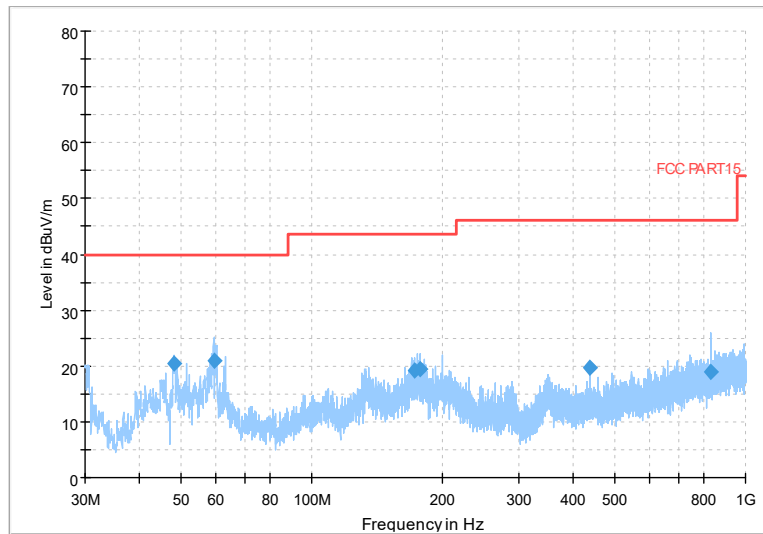


Frequency Range: 30MHz-1GHz

Detector: QP mode

Modulation type: GFSK (LE 125Khz S=8)

Full Spectrum

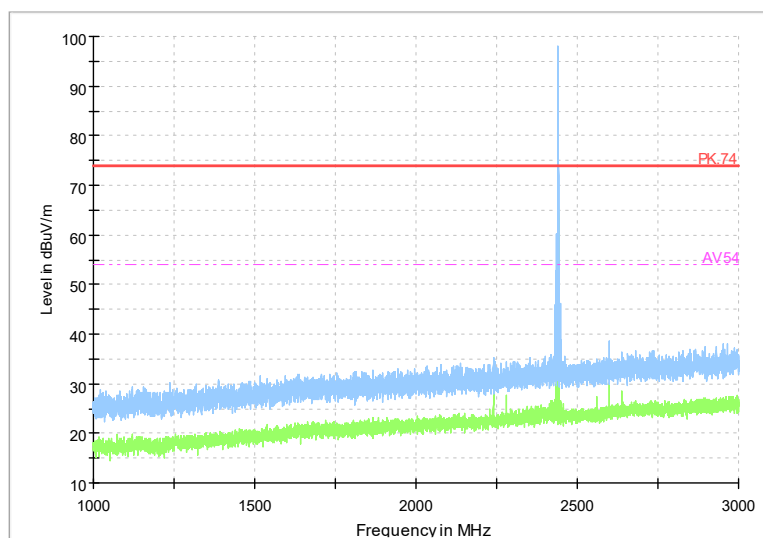

Frequency Range: 1GHz-3GHz

Detector: Av mode and PK mode


Modulation type: GFSK (LE 125Khz S=8)



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

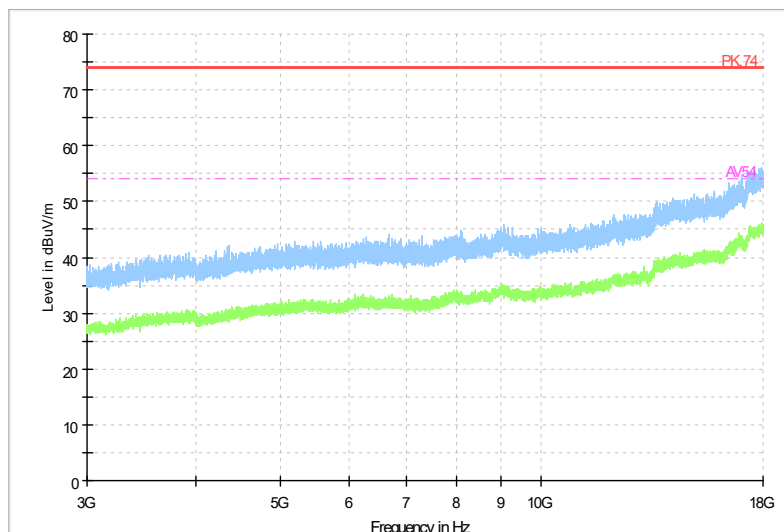


Frequency Range: 3GHz-18GHz

Detector: Av mode and PK mode

Modulation type: GFSK (LE 125Khz S=8)

Full Spectrum

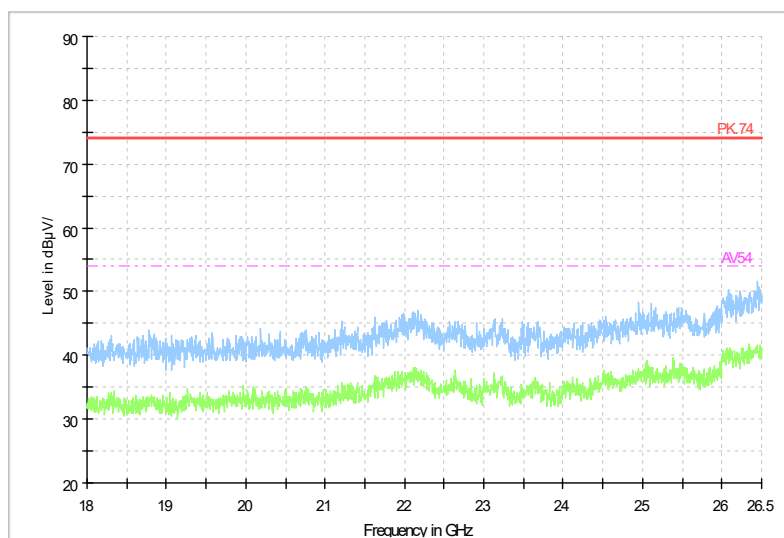

Frequency Range: 18GHz-26GHz

Detector: Av mode and PK mode


Modulation type: GFSK (LE 125Khz S=8)



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01


Channel No.:39

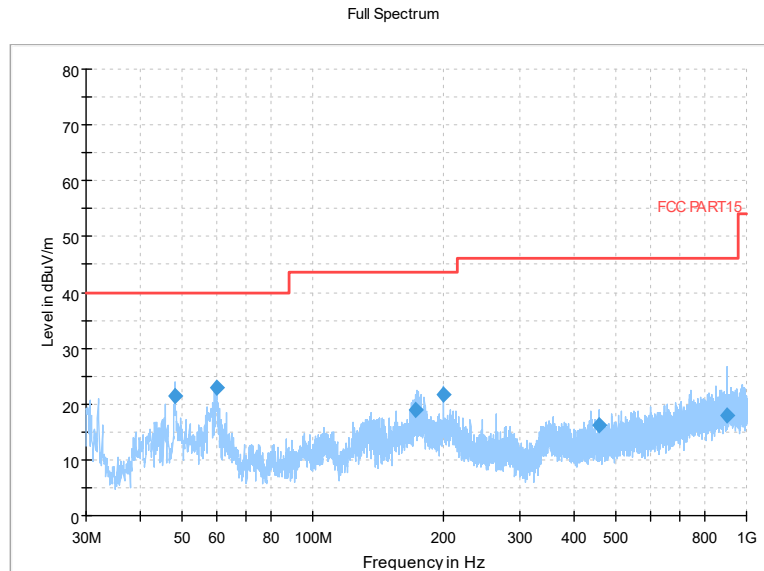

Frequency Range: 30MHz-1GHz

Detector: QP mode

Modulation type: GFSK (LE 125Khz S=8)

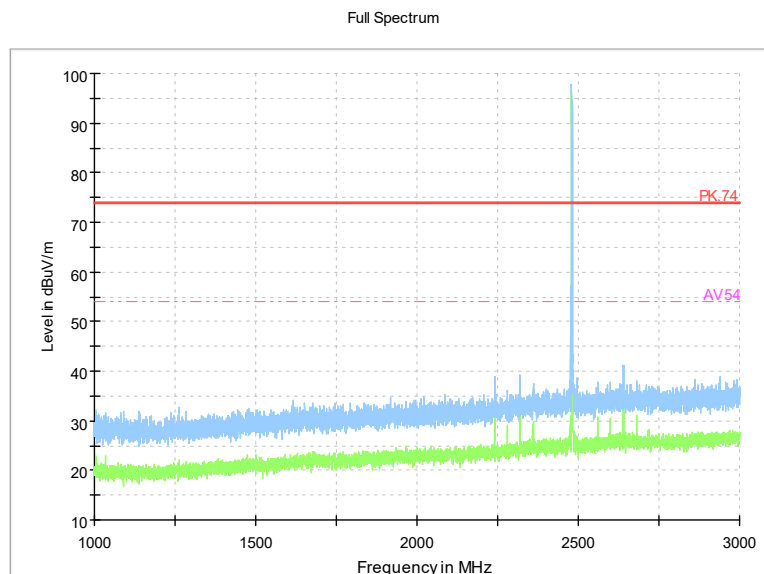

Frequency Range: 1GHz-3GHz

Detector: Av mode and PK mode


Modulation type: GFSK (LE 125Khz S=8)



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

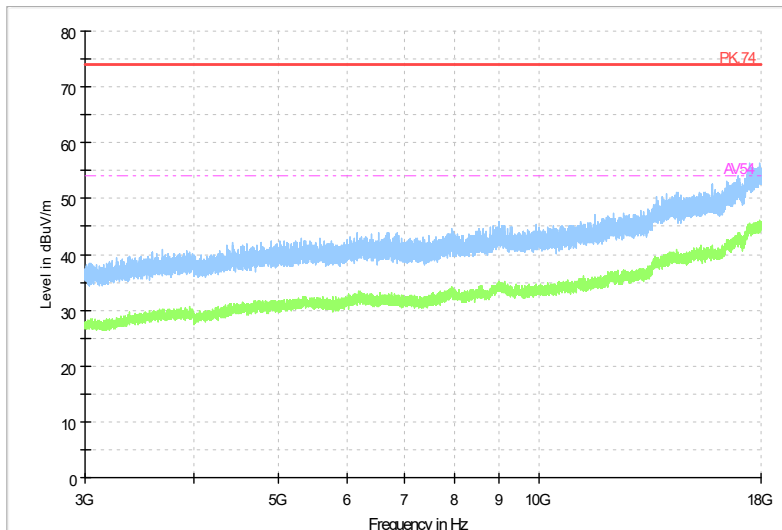


Frequency Range: 3GHz-18GHz

Detector: Av mode and PK mode

Modulation type: GFSK (LE 125Khz S=8)

Full Spectrum

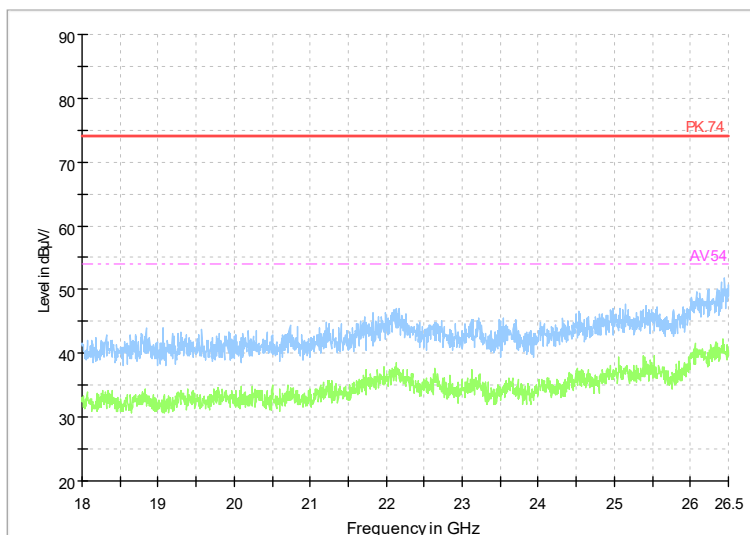

Frequency Range: 18GHz-26GHz

Detector: Av mode and PK mode

Modulation type: GFSK (LE 125Khz S=8)




BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

LE 500Khz S=2

Channel No.:0

Full Spectrum

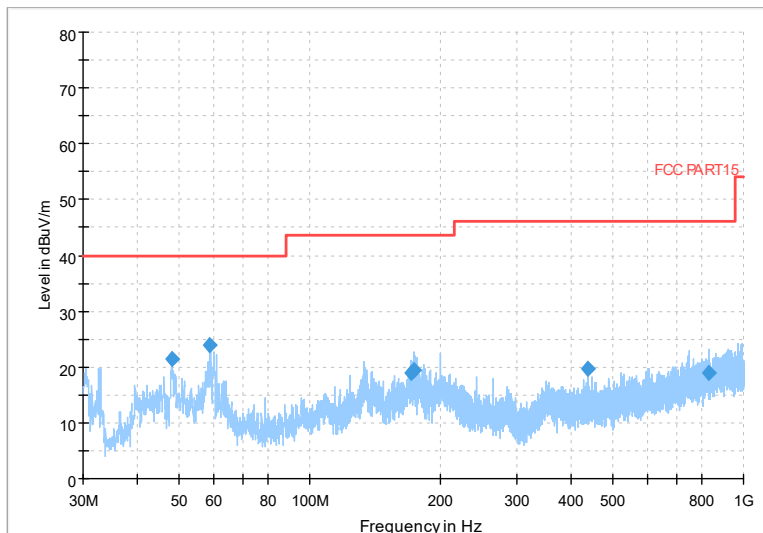


Frequency Range: 30MHz-1GHz

Detector:QP mode

Modulation type: GFSK (LE 500Khz S=2)

Full Spectrum

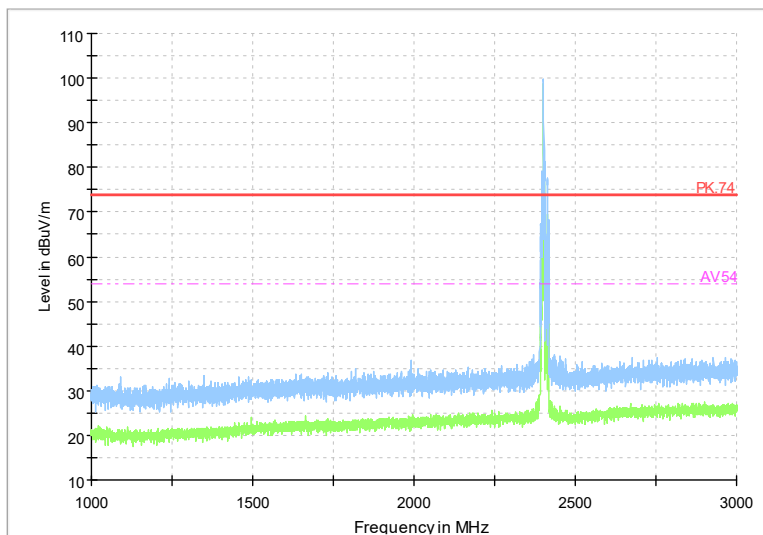

Frequency Range: 1GHz-3GHz

Detector: Av mode and PK mode

Modulation type: GFSK (LE 500Khz S=2)

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

Room B37, Warehouse A5, No.3 Chiwan 4th Road,
Zhaoshang Street, Nanshan District Shenzhen,
Guangdong, People's Republic of China


Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

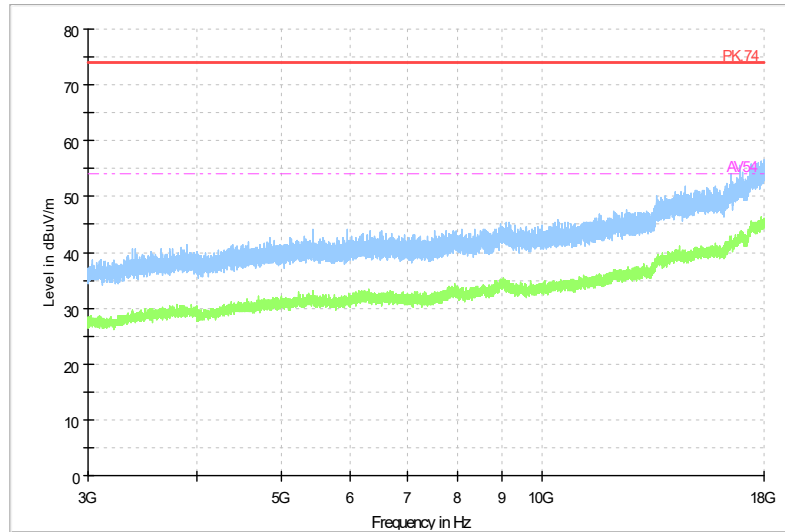


Frequency Range: 3GHz-18GHz

Detector: Av mode and PK mode

Modulation type: GFSK (LE 500Khz S=2)

Full Spectrum

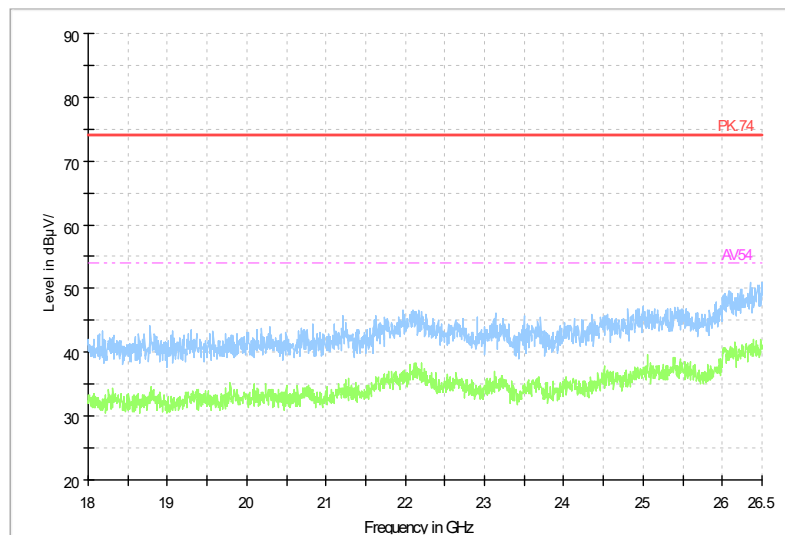

Frequency Range: 18GHz-26GHz

Detector: Av mode and PK mode

Modulation type: (LE 500Khz S=2)




BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Channel No.:19

Full Spectrum

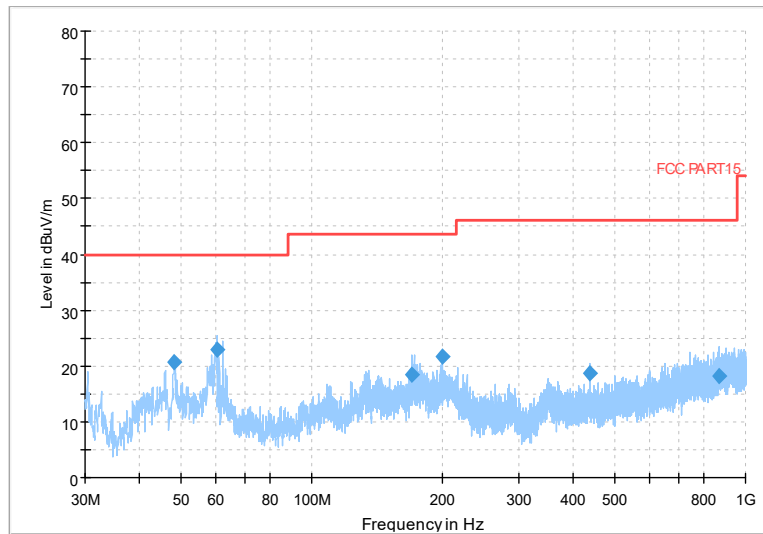


Frequency Range: 30MHz-1GHz

Detector: QP mode

Modulation type: GFSK (LE 500Khz S=2)

Full Spectrum

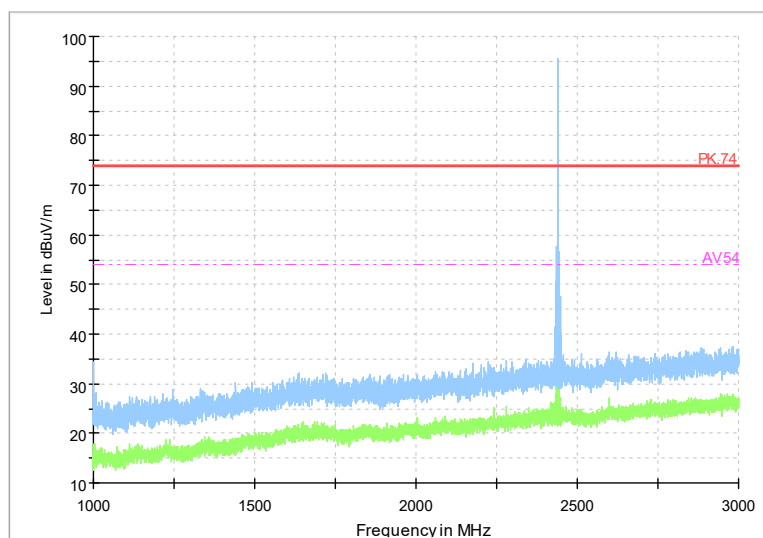

Frequency Range: 1GHz-3GHz

Detector: Av mode and PK mode


Modulation type: GFSK (LE 500Khz S=2)



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

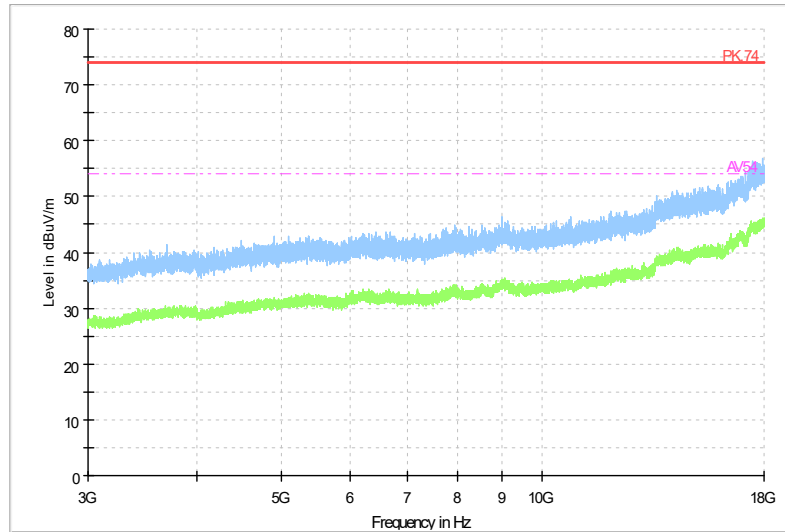


Frequency Range: 3GHz-18GHz

Detector: Av mode and PK mode

Modulation type: GFSK (LE 500Khz S=2)

Full Spectrum

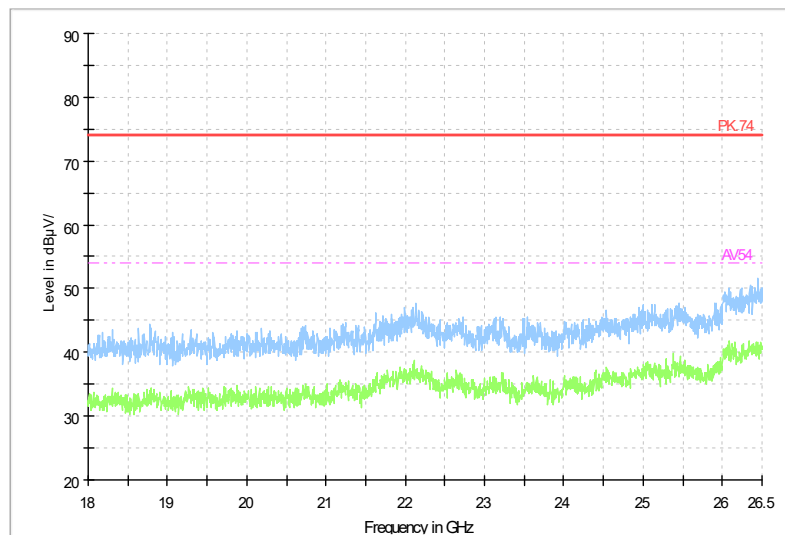

Frequency Range: 18GHz-26GHz

Detector: Av mode and PK mode

Modulation type: GFSK (LE 500Khz S=2)




BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Channel No.:39

Full Spectrum

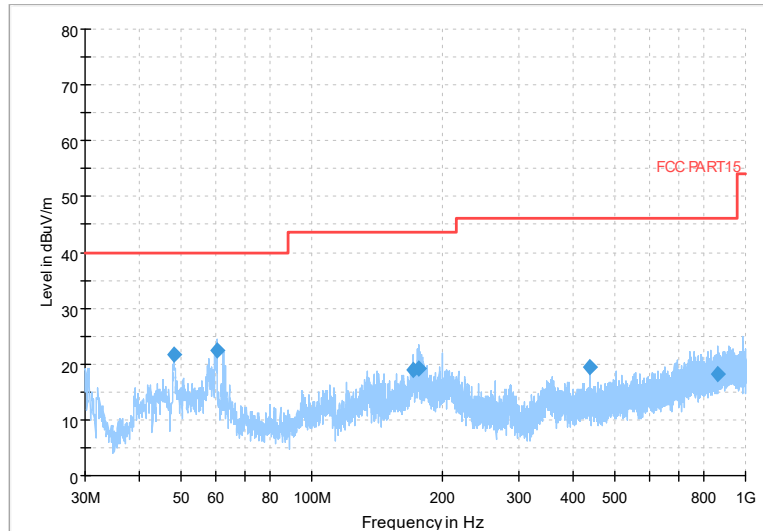


Frequency Range: 30MHz-1GHz

Detector: QP mode

Modulation type: GFSK (LE 500Khz S=2)

Full Spectrum

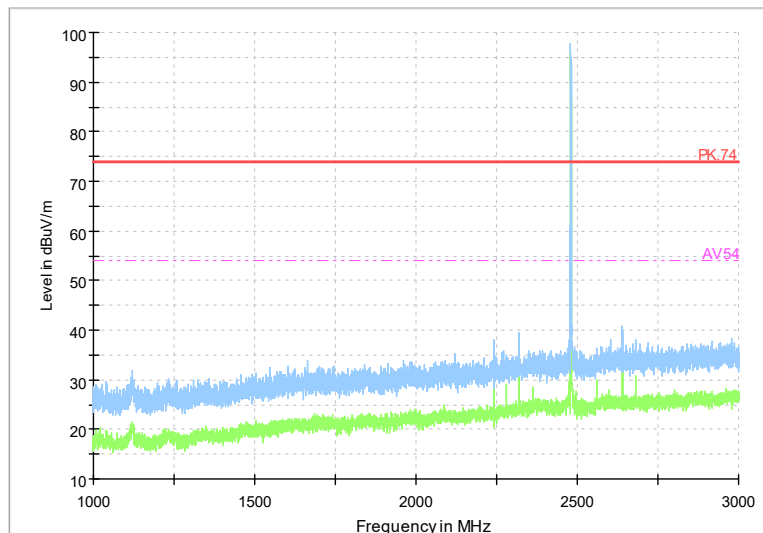

Frequency Range: 1GHz-3GHz


Detector: Av mode and PK mode

Modulation type: GFSK (LE 500Khz S=2)




BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

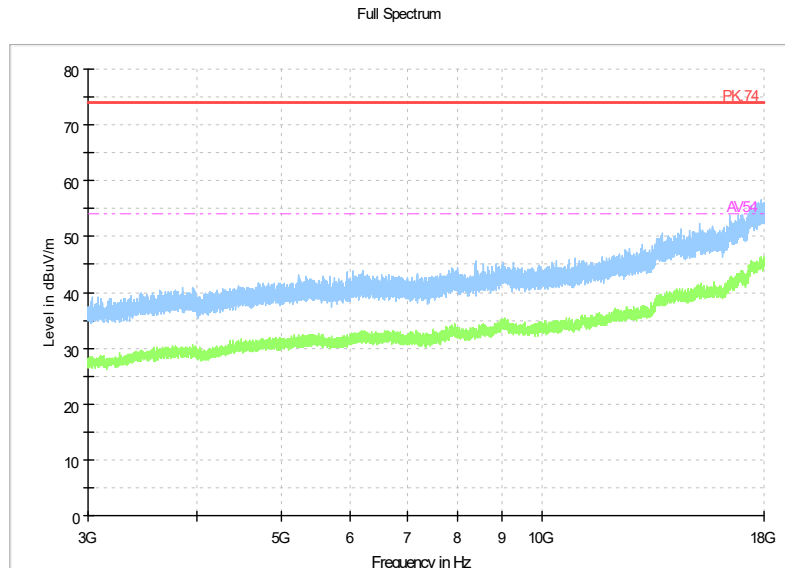

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 500Khz S=2)

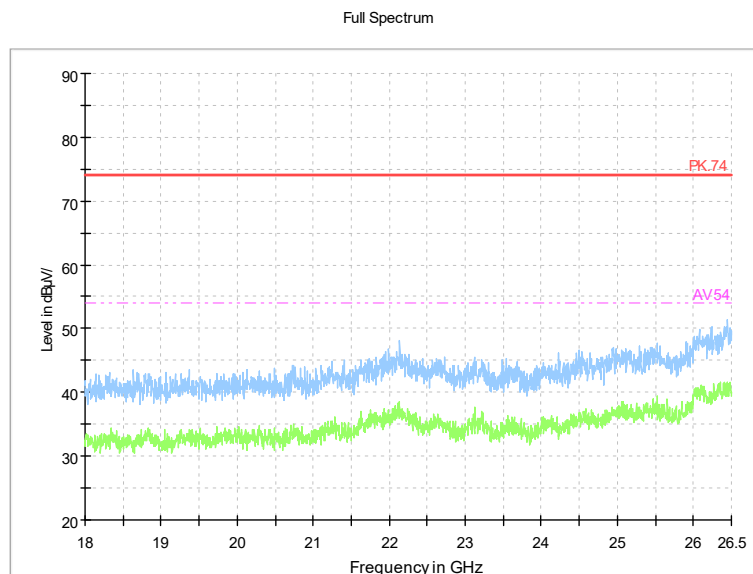


Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 500Khz S=2)



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Radiated Emission Band Edge for WIFI

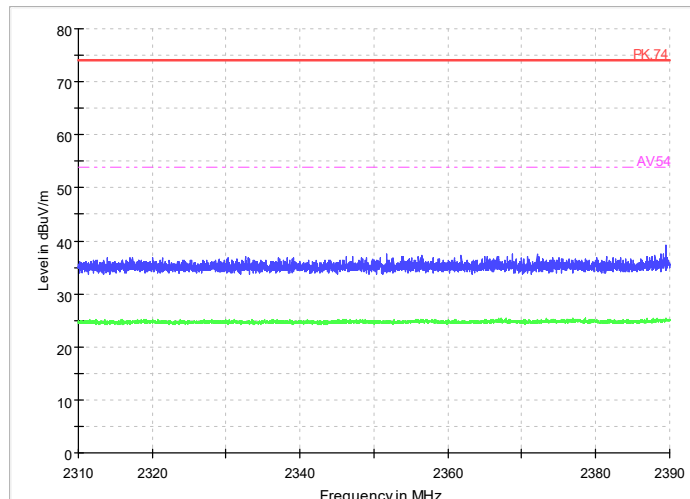


Radiated Emission Band Edge

Channel No.:1

Test Mode: 802.11b

Polarization: V

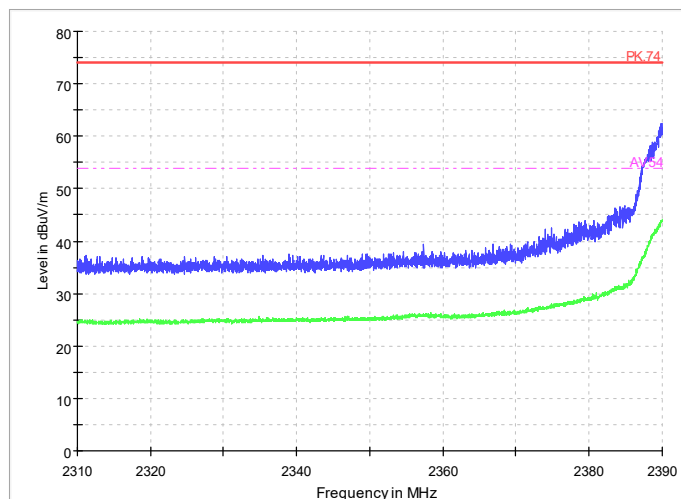

Radiated Emission Band Edge

Channel No.:1


Test Mode: 802.11b

Polarization: H



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

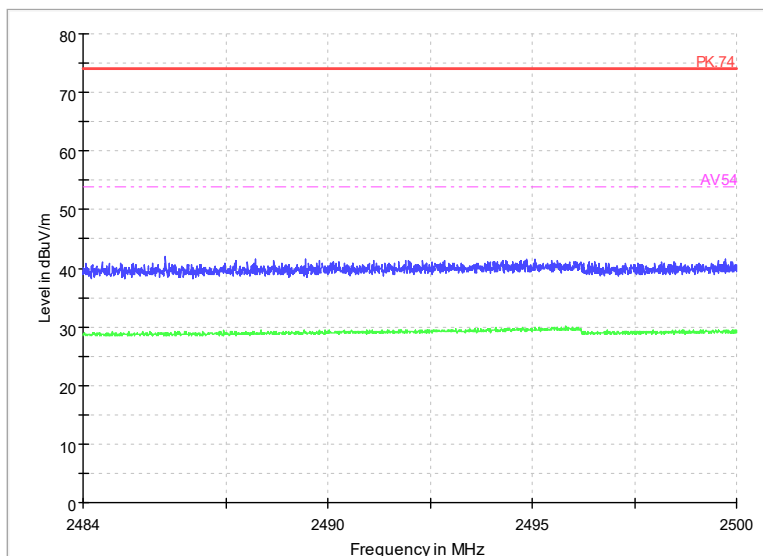


Radiated Emission Band Edge

Channel No.:11

Test Mode: 802.11b

Polarization: V

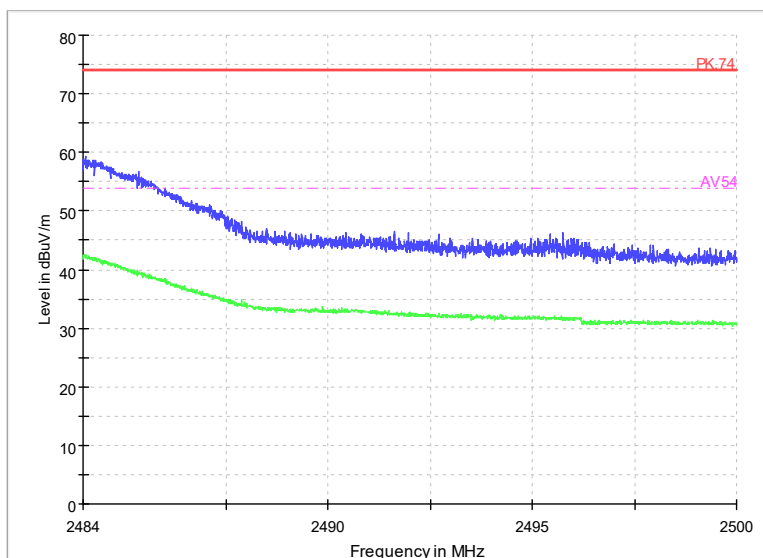

Radiated Emission Band Edge

Channel No.:11


Test Mode: 802.11b

Polarization: H



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

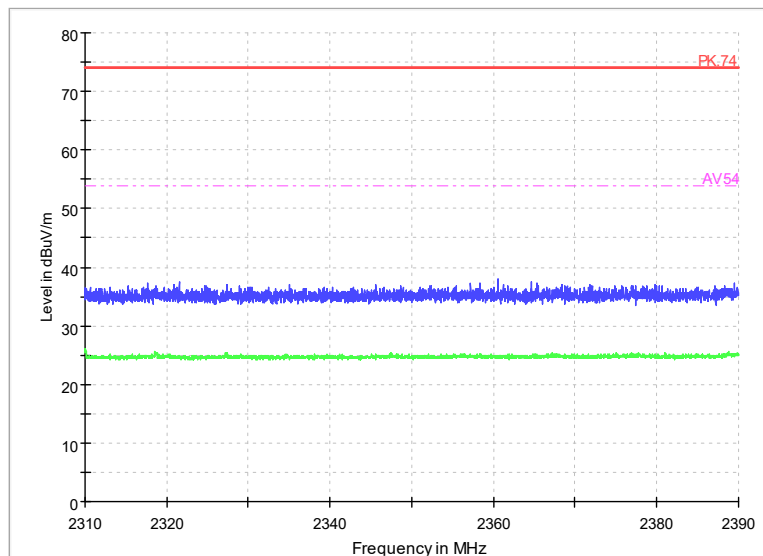


Radiated Emission Band Edge

Channel No.:1

Test Mode: 802.11g

Polarization: V

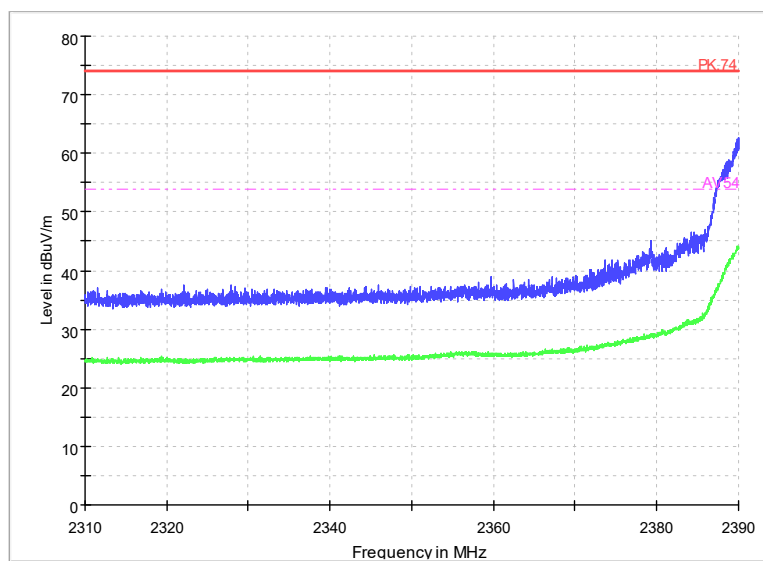

Radiated Emission Band Edge

Channel No.:1


Test Mode: 802.11g

Polarization: H



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

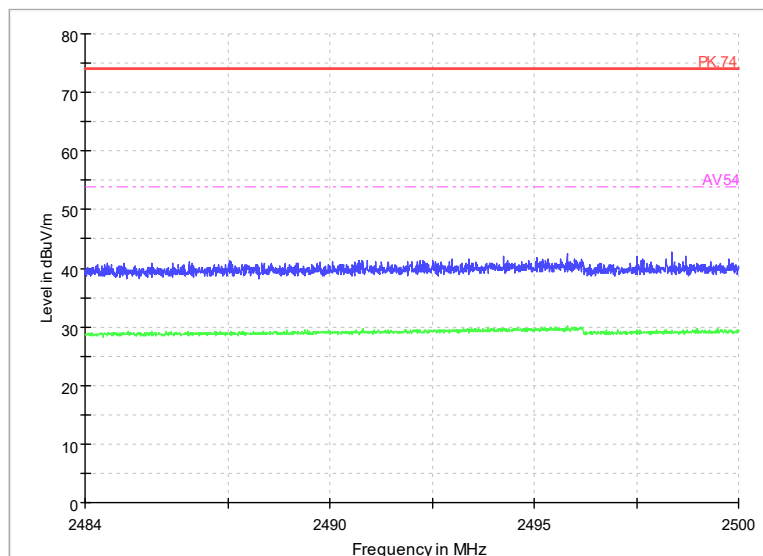


Radiated Emission Band Edge

Channel No.:11

Test Mode: 802.11g

Polarization: V

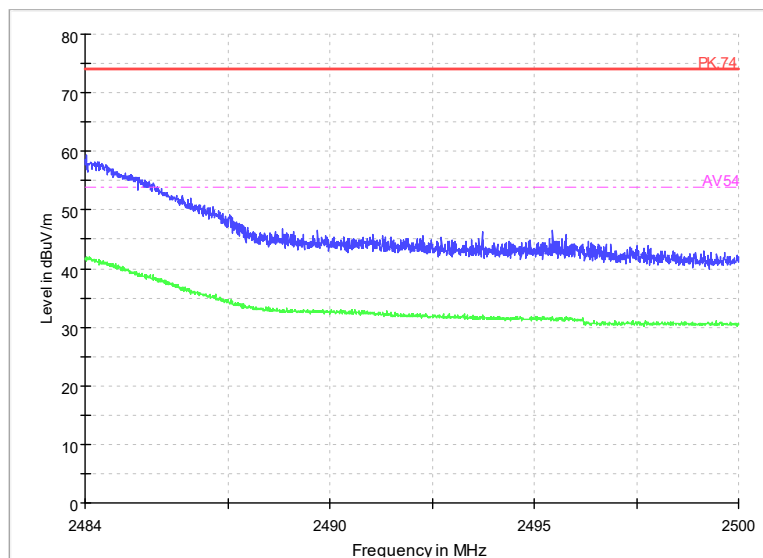

Radiated Emission Band Edge

Channel No.:11


Test Mode: 802.11g

Polarization: H



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

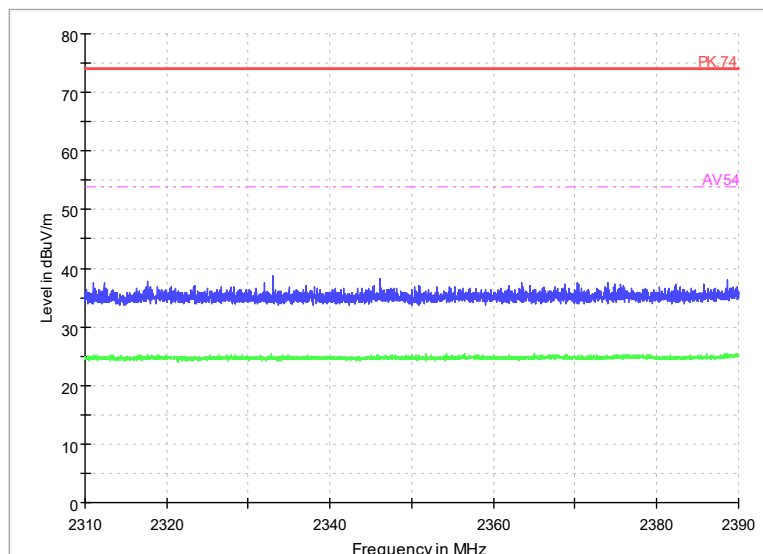


Radiated Emission Band Edge

Channel No.:1

Test Mode: 802.11n(HT20)

Polarization: V

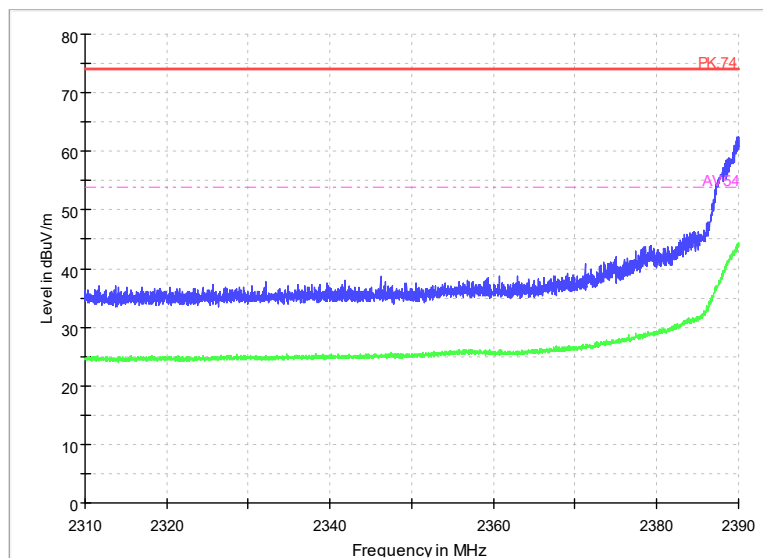

Radiated Emission Band Edge

Channel No.:1


Test Mode: 802.11n(HT20)

Polarization: H



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

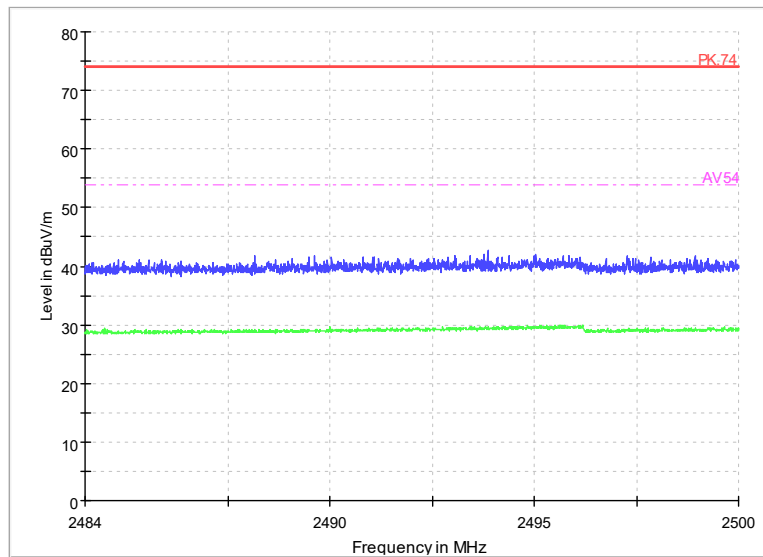


Radiated Emission Band Edge

Channel No.:11

Test Mode: 802.11n(HT20)

Polarization: V

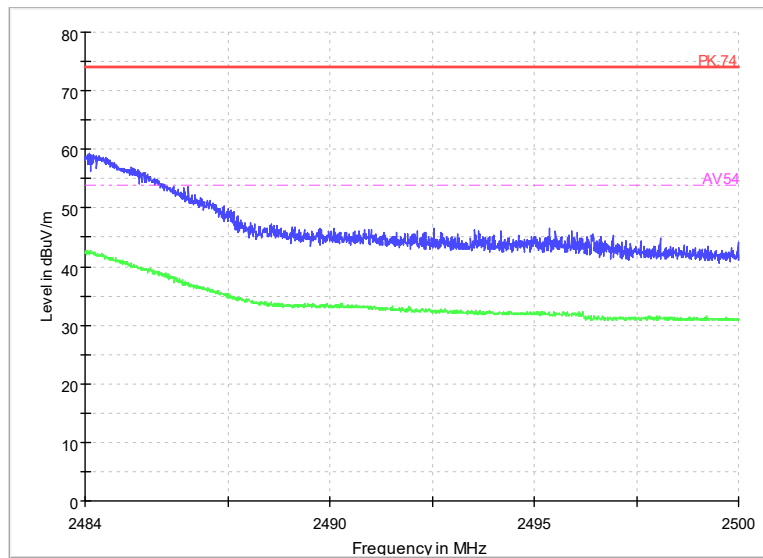

Radiated Emission Band Edge

Channel No.:11


Test Mode: 802.11n(HT20)

Polarization: H



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

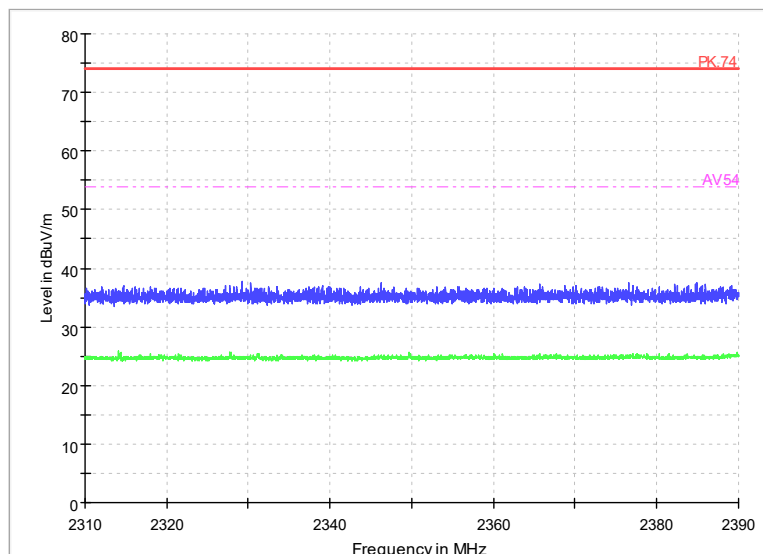


Radiated Emission Band Edge

Channel No.:1

Test Mode: 802.11ax(HE20)

Polarization: V

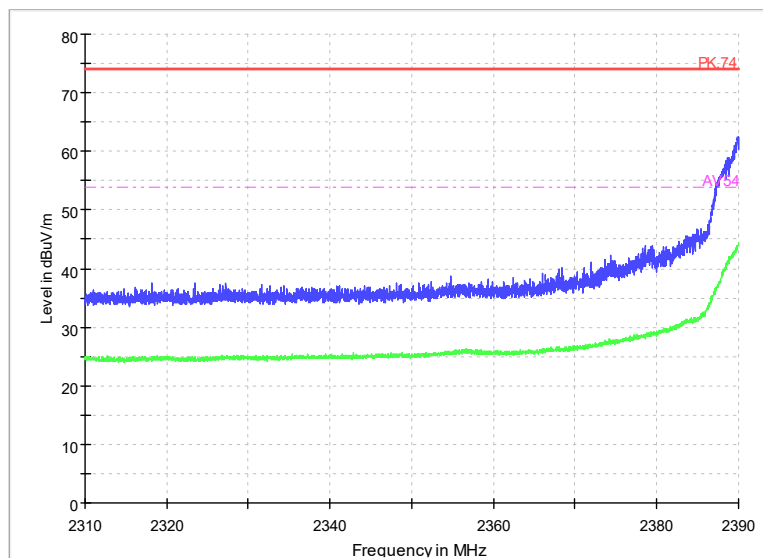

Radiated Emission Band Edge

Channel No.:1


Test Mode: 802.11ax(HE20)

Polarization: H



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

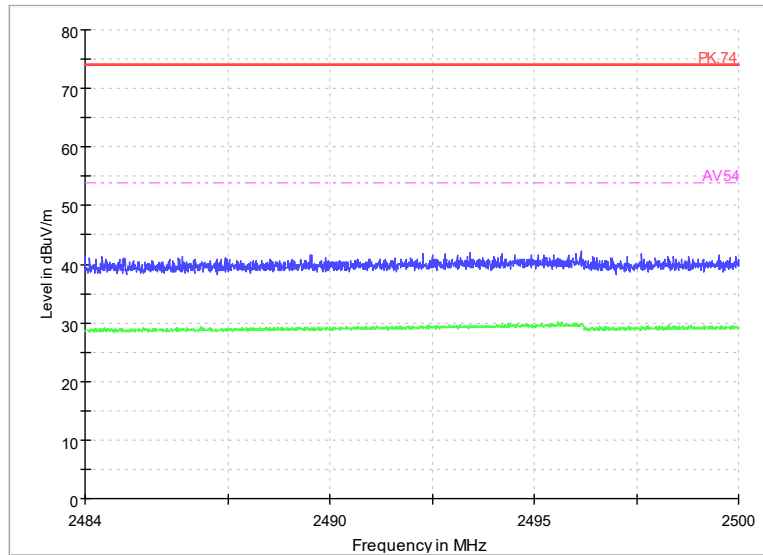


Radiated Emission Band Edge

Channel No.:11

Test Mode: 802.11ax(HE20)

Polarization: V

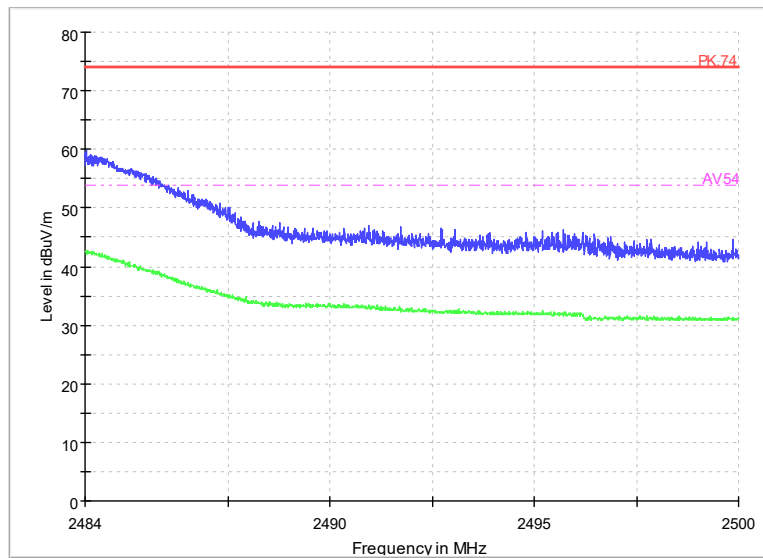

Radiated Emission Band Edge

Channel No.:11


Test Mode: 802.11ax(HE20)

Polarization: H



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

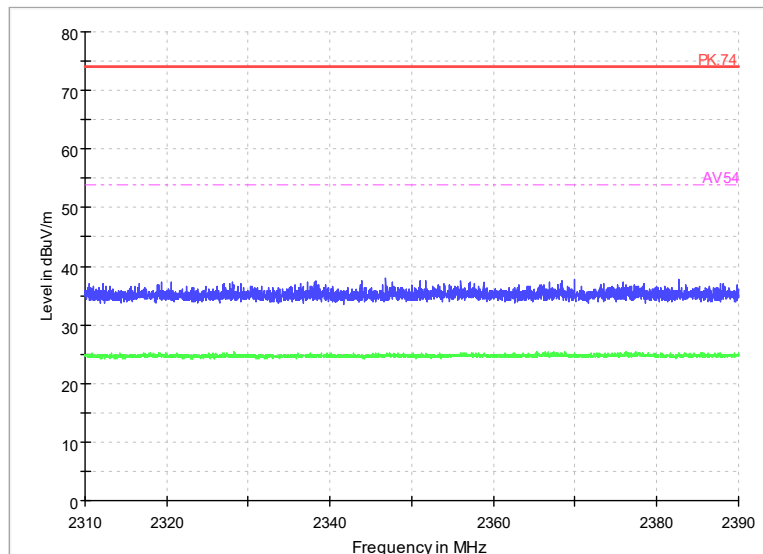


Radiated Emission Band Edge

Channel No.:3

Test Mode: 802.11n(HT40)

Polarization: V

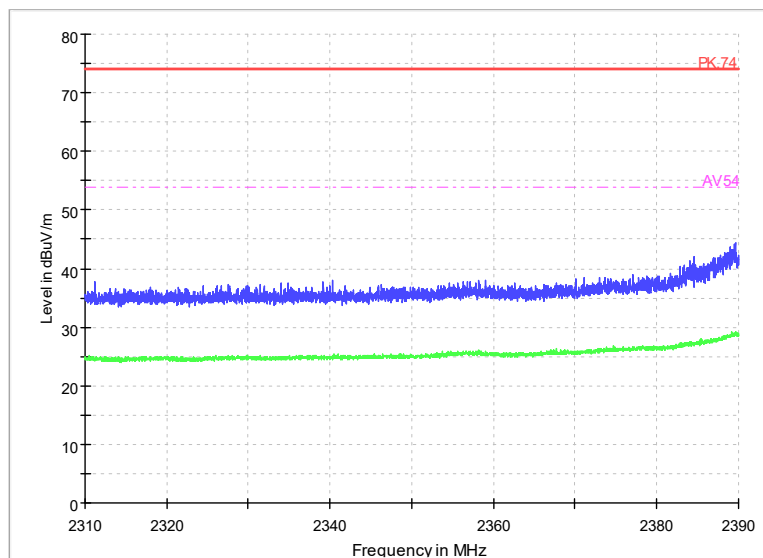

Radiated Emission Band Edge

Channel No.:3


Test Mode: 802.11n(HT40)

Polarization: H



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

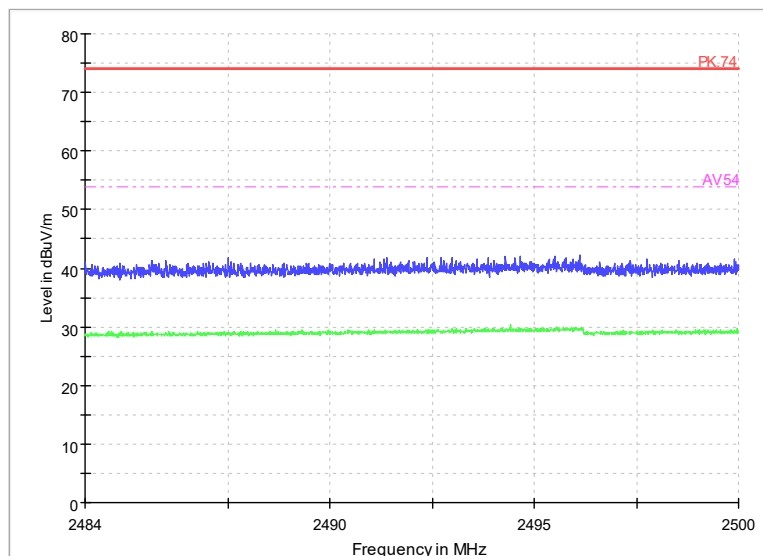


Radiated Emission Band Edge

Channel No.:9

Test Mode: 802.11n(HT40)

Polarization: V

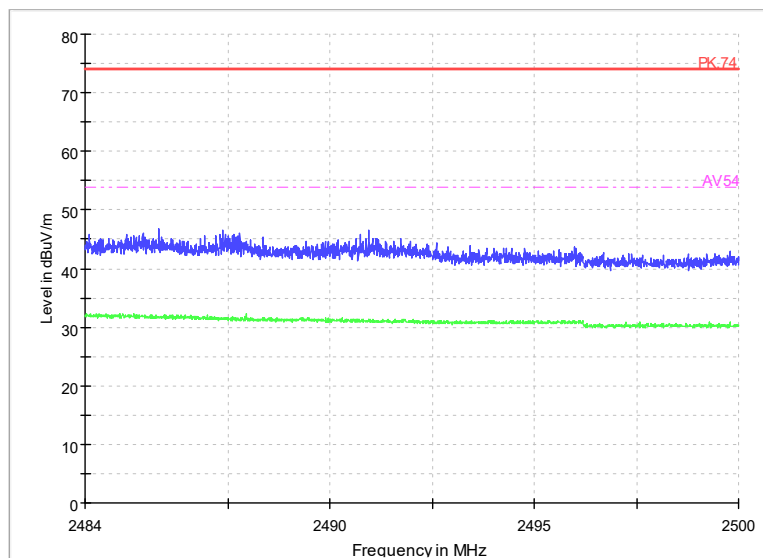

Radiated Emission Band Edge

Channel No.:9


Test Mode: 802.11n(HT40)

Polarization: H



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

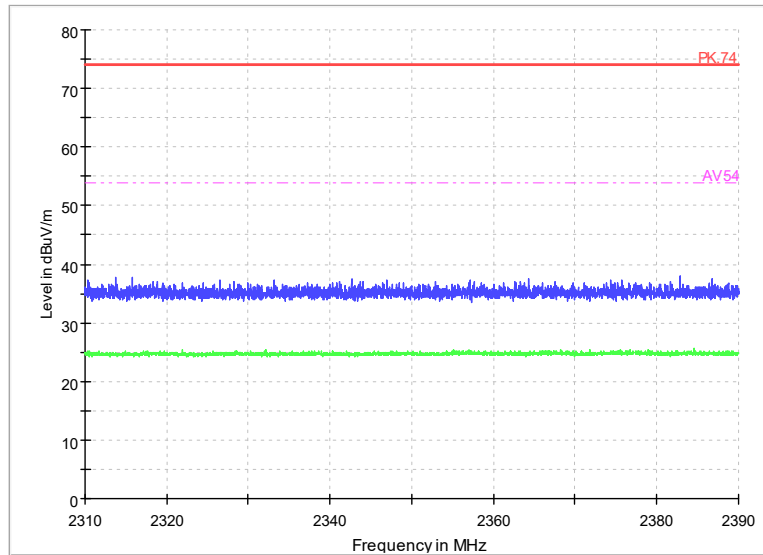


Radiated Emission Band Edge

Channel No.:3

Test Mode: 802.11ax(HE40)

Polarization: V

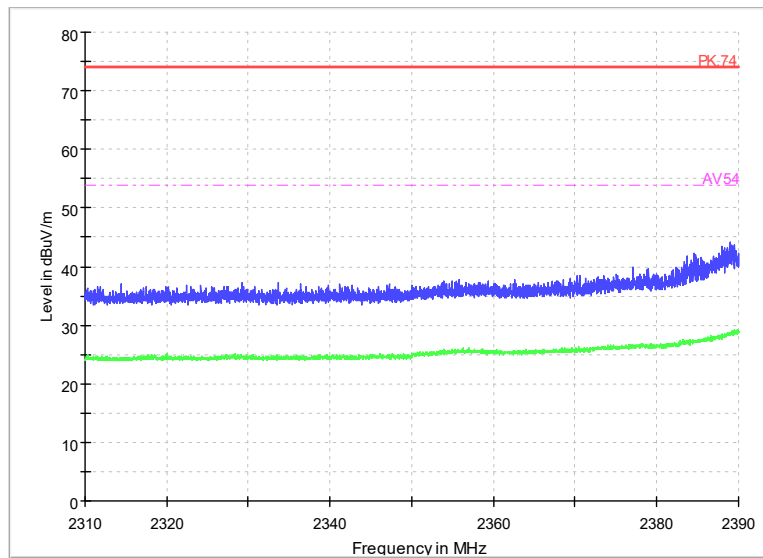

Radiated Emission Band Edge

Channel No.:3


Test Mode: 802.11ax(HE40)

Polarization: H



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

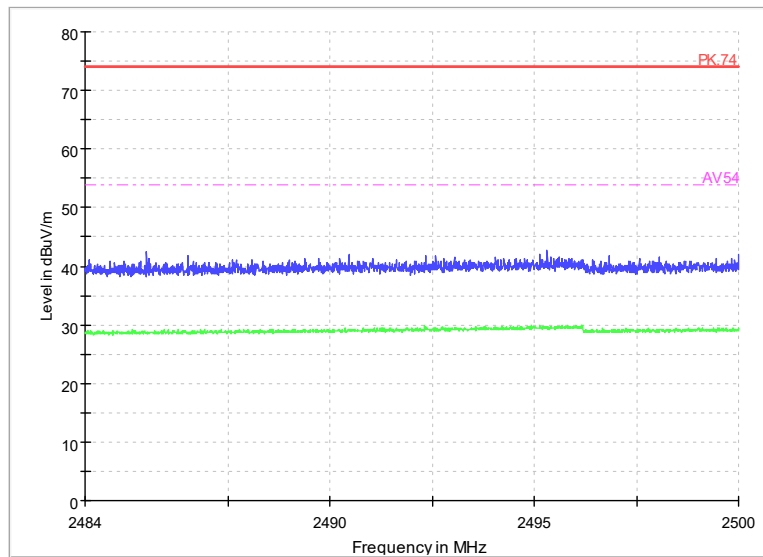


Radiated Emission Band Edge

Channel No.:9

Test Mode: 802.11ax(HE40)

Polarization: V

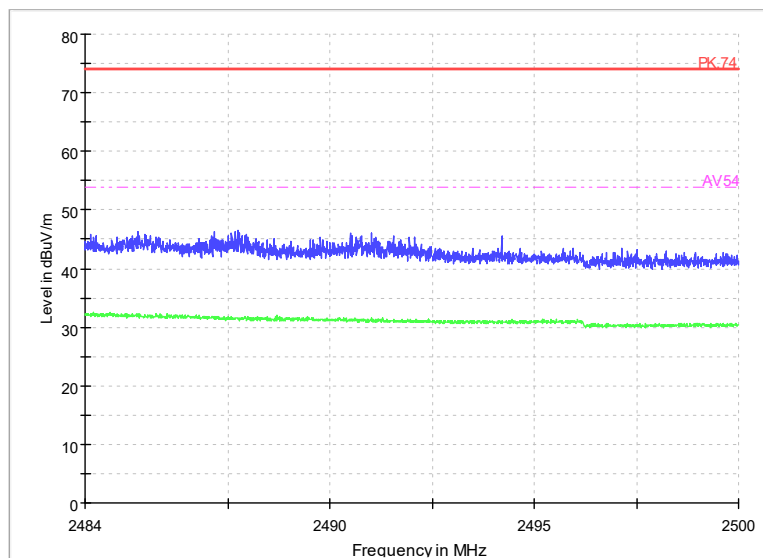

Radiated Emission Band Edge

Channel No.:9

Test Mode: 802.11ax(HE40)


Polarization: H



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Partial RU (Tone26)

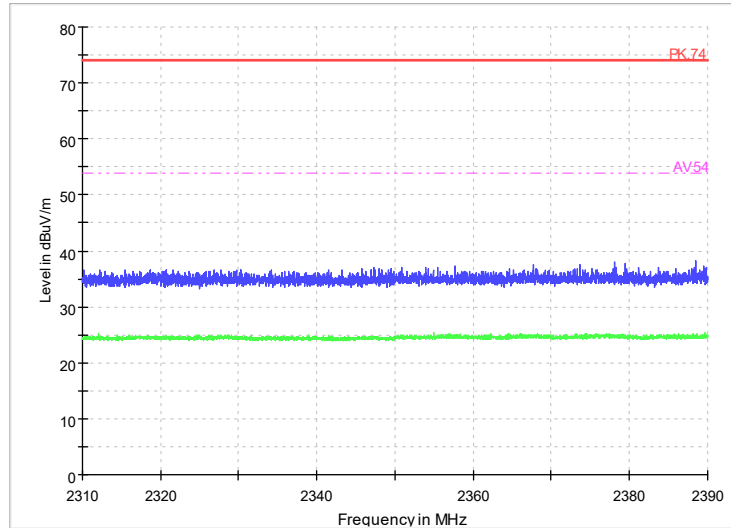


Radiated Emission Band Edge

Channel No.:1

Test Mode: 802.11ax(HE20)

Polarization: V

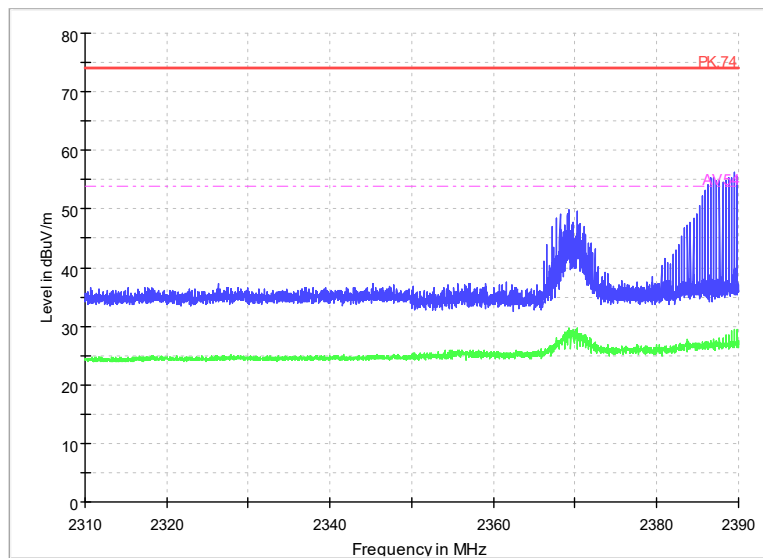

Radiated Emission Band Edge

Channel No.:1


Test Mode: 802.11ax(HE20)

Polarization: H



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

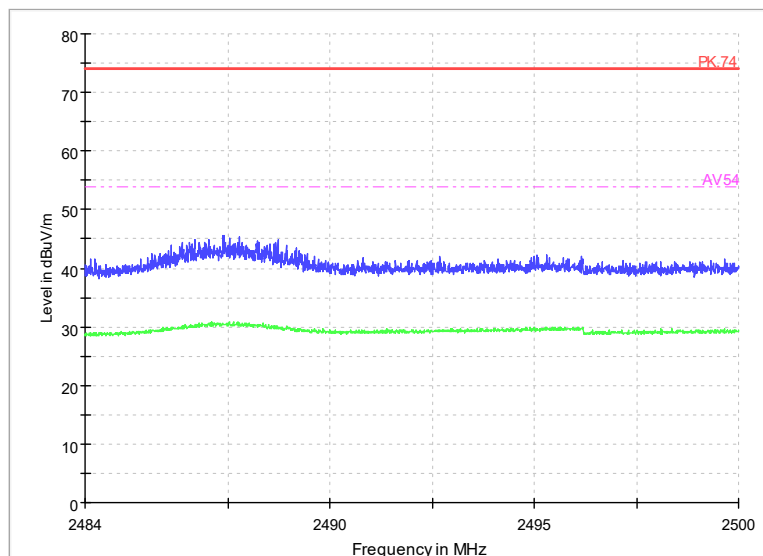


Radiated Emission Band Edge

Channel No.:11

Test Mode: 802.11ax(HE20)

Polarization: V

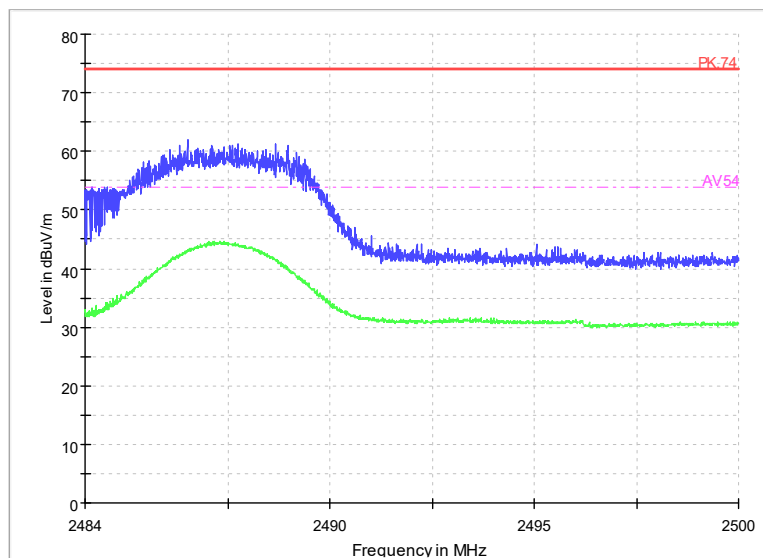

Radiated Emission Band Edge

Channel No.:11


Test Mode: 802.11ax(HE20)

Polarization: H



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

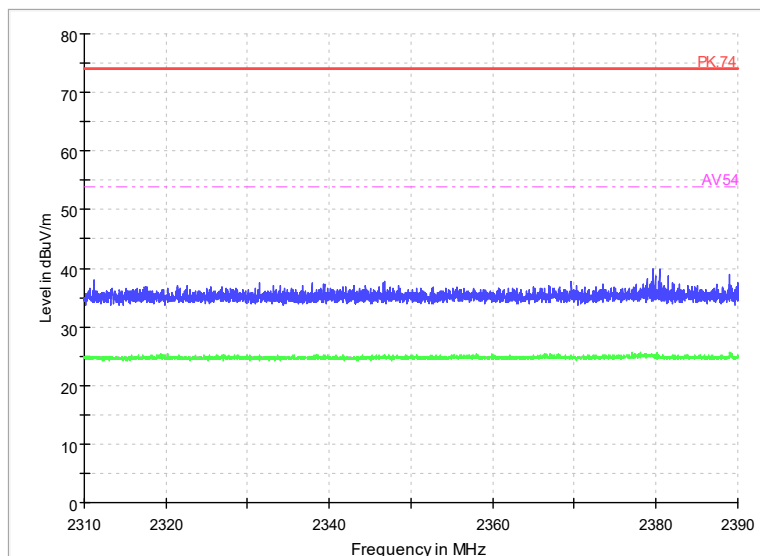


Radiated Emission Band Edge

Channel No.:3

Test Mode: 802.11ax(HE40)

Polarization: V

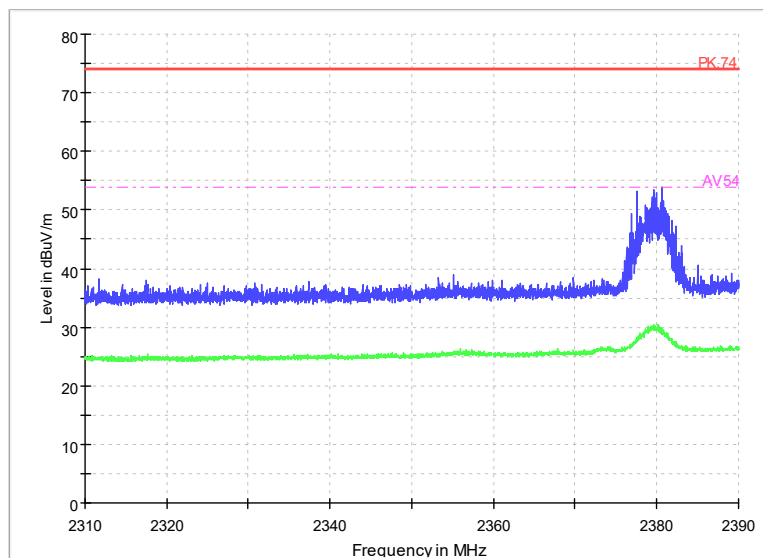

Radiated Emission Band Edge

Channel No.:3


Test Mode: 802.11ax(HE40)

Polarization: H



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

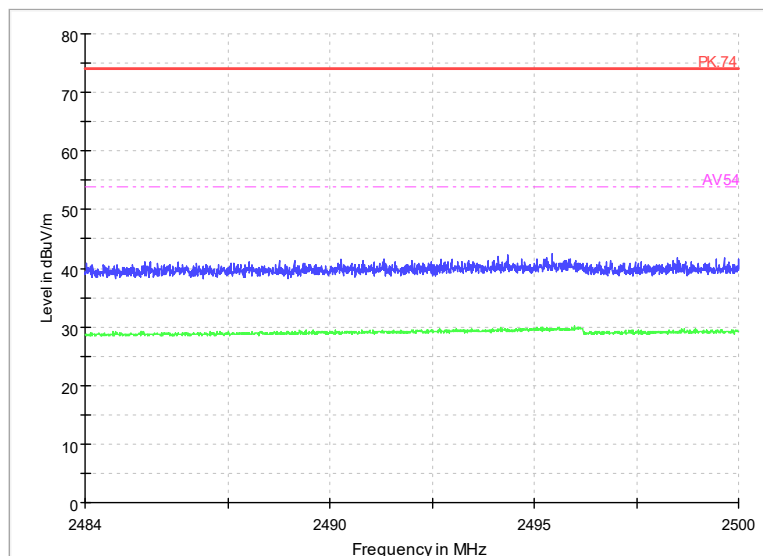


Radiated Emission Band Edge

Channel No.:9

Test Mode: 802.11ax(HE40)

Polarization: V

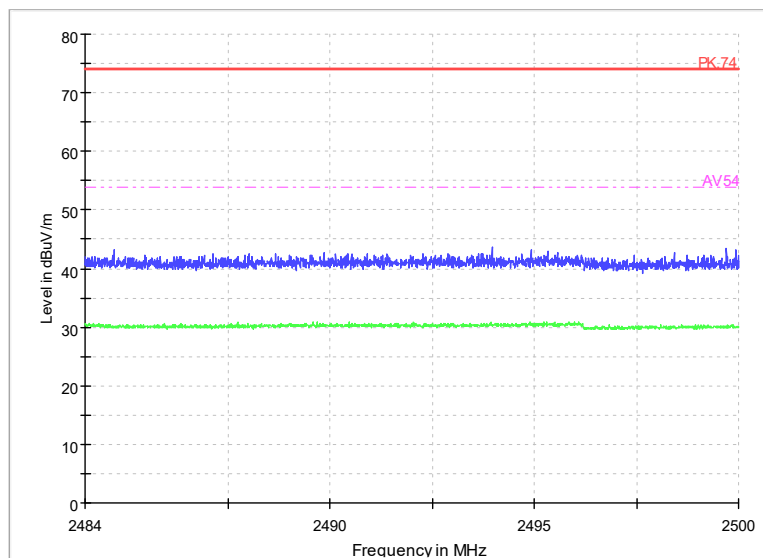

Radiated Emission Band Edge

Channel No.:9

Test Mode: 802.11ax(HE40)

Polarization: H

Radiated Emission for WIFI

After comparison, the worst case attitude is EUT lay down.

Determining Spurious Emissions Levels

A “reference path loss” is established and the A_{Rpl} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{mea}} + A_{Rpl}$$

Sample calculation: $(9.19 \text{ dB}\mu\text{V/m}) = (24.59 \text{ dB}\mu\text{V}) + (-15.4 \text{ dB/m})$, the corresponding frequency is 52.407 MHz.

For 802.11b Channel No.:1

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
52.407	9.19	-15.4	24.59	Vertical	40	30.81
55.6565	9.85	-15.7	25.55	Vertical	40	30.15
100.034	7.59	-17.2	24.79	Vertical	43.5	35.91
263.964	18.38	-15.1	33.48	Vertical	46	27.62
331.9125	20.16	-13.1	33.26	Vertical	46	25.84
900.575	19.31	-2.5	21.81	Vertical	46	26.69

For 802.11g Channel No.:1

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
47.4115	9.89	-15.6	25.49	Vertical	40	30.11
54.444	9.86	-15.6	25.46	Vertical	40	30.14
113.032	6.87	-17.9	24.77	Vertical	43.5	36.63
263.964	17.94	-15.1	33.04	Vertical	46	28.06
331.7185	14.37	-13.1	27.47	Vertical	46	31.63
926.9105	20.12	-1.7	21.82	Vertical	46	25.88

For 802.11n(HT20) Channel No.:1



Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
49.5455	9	-15.4	24.4	Vertical	40	31
53.959	9.75	-15.6	25.35	Vertical	40	30.25
97.0755	7.03	-17.7	24.73	Vertical	43.5	36.47
199.9925	16.09	-16.6	32.69	Vertical	43.5	27.41
505.397	13.67	-9.2	22.87	Vertical	46	32.33
945.9225	19.32	-2.1	21.42	Vertical	46	26.68

For 802.11ax(HE20) Channel No.:1

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
47.169	9.77	-15.6	25.37	Vertical	40	30.23
59.876	8.4	-16.3	24.7	Vertical	40	31.6
104.2535	7.78	-17	24.78	Vertical	43.5	35.72
263.964	18.04	-15.1	33.14	Vertical	46	27.96
504.815	13.62	-9.2	22.82	Vertical	46	32.38
920.1205	19.87	-1.7	21.57	Vertical	46	26.13

For 802.11b Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
44.5985	14.05	-15.8	29.85	Vertical	40	25.95
63.562	16.72	-17.2	33.92	Vertical	40	23.28
163.8115	10.57	-19.8	30.37	Vertical	43.5	32.93
263.964	19.54	-15.1	34.64	Vertical	46	26.46
332.155	22.59	-13	35.59	Vertical	46	23.41
927.1045	19.87	-1.7	21.57	Vertical	46	26.13

For 802.11g Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
42.028	12.3	-16.4	28.7	Vertical	40	27.7
63.853	14.32	-17.3	31.62	Vertical	40	25.68



BUREAU VERITAS Test Report No.: PSU-NQN2412260110RF01

165.9455	8.51	-19.8	28.31	Vertical	43.5	34.99
263.964	19.07	-15.1	34.17	Vertical	46	26.93
333.125	22.73	-13	35.73	Vertical	46	23.27
911.8755	19.4	-2.1	21.5	Vertical	46	26.6

For 802.11n(HT20) Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
44.453	13.62	-15.8	29.42	Vertical	40	26.38
63.562	13.98	-17.2	31.18	Vertical	40	26.02
110.704	7.42	-17.6	25.02	Vertical	43.5	36.08
263.964	19.02	-15.1	34.12	Vertical	46	26.98
333.1735	24.25	-13	37.25	Vertical	46	21.75
935.3495	19.54	-1.8	21.34	Vertical	46	26.46

For 802.11ax(HE20) Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
44.6955	13.51	-15.8	29.31	Vertical	40	26.49
63.6105	14.99	-17.2	32.19	Vertical	40	25.01
164.248	11.26	-19.8	31.06	Vertical	43.5	32.24
263.964	19.96	-15.1	35.06	Vertical	46	26.04
332.3005	20.97	-13	33.97	Vertical	46	25.03
875.646	19.07	-2.3	21.37	Vertical	46	26.93

For 802.11b Channel No.:11

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
46.781	12.93	-15.7	28.63	Vertical	40	27.07
63.6105	13.93	-17.2	31.13	Vertical	40	26.07
170.359	11.05	-19.5	30.55	Vertical	43.5	32.45
299.951	14.12	-14	28.12	Vertical	46	31.88
342.1945	15.14	-12.4	27.54	Vertical	46	30.86



BUREAU VERITAS Test Report No.: PSU-NQN2412260110RF01

934.137	19.53	-1.7	21.23	Vertical	46	26.47
---------	-------	------	-------	----------	----	-------

For 802.11g Channel No.:11

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
39.9425	11.62	-16.9	28.52	Vertical	40	28.38
64.2895	12.22	-17.3	29.52	Vertical	40	27.78
169.3405	6.87	-19.6	26.47	Vertical	43.5	36.63
199.9925	16.41	-16.6	33.01	Vertical	43.5	27.09
332.1065	23.31	-13	36.31	Vertical	46	22.69
908.82	19.12	-2.3	21.42	Vertical	46	26.88

For 802.11n(HT20) Channel No.:11

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
42.222	11.88	-16.4	28.28	Vertical	40	28.12
63.5135	12.62	-17.2	29.82	Vertical	40	27.38
152.511	6.05	-20.6	26.65	Vertical	43.5	37.45
199.9925	16.42	-16.6	33.02	Vertical	43.5	27.08
331.864	22.95	-13.1	36.05	Vertical	46	23.05
906.298	19.04	-2.4	21.44	Vertical	46	26.96

For 802.11ax(HE20) Channel No.:11

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
43.8225	12.92	-16	28.92	Vertical	40	27.08
63.9015	14.94	-17.3	32.24	Vertical	40	25.06
160.853	6.31	-20	26.31	Vertical	43.5	37.19
263.964	18.68	-15.1	33.78	Vertical	46	27.32
332.252	22.38	-13	35.38	Vertical	46	23.62
909.7415	19.23	-2.2	21.43	Vertical	46	26.77



BUREAU VERITAS Test Report No.: PSU-NQN2412260110RF01

For 802.11n(HT40) Channel No.:3

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
44.6955	13.07	-15.8	28.87	Vertical	40	26.93
63.853	13.94	-17.3	31.24	Vertical	40	26.06
170.65	5.8	-19.5	25.3	Vertical	43.5	37.7
209.9835	10.98	-17.2	28.18	Vertical	43.5	32.52
332.9795	23.36	-13	36.36	Vertical	46	22.64
954.798	18.85	-2.2	21.05	Vertical	46	27.16

For 802.11ax(HE40) Channel No.:3

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
39.506	11.82	-17.1	28.92	Vertical	40	28.18
63.562	13.06	-17.2	30.26	Vertical	40	26.94
106.8725	7.31	-17.3	24.61	Vertical	43.5	36.19
263.964	18.75	-15.1	33.85	Vertical	46	27.25
332.6885	22.1	-13	35.1	Vertical	46	23.9
930.645	19.68	-1.6	21.28	Vertical	46	26.32

For 802.11n(HT40) Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
44.5015	12.98	-15.8	28.78	Vertical	40	27.02
63.853	14.22	-17.3	31.52	Vertical	40	25.78
168.225	6.92	-19.7	26.62	Vertical	43.5	36.58
263.964	18.59	-15.1	33.69	Vertical	46	27.41
333.1735	23.95	-13	36.95	Vertical	46	22.05
870.6505	18.89	-2.4	21.29	Vertical	46	27.11

For 802.11ax(HE40) Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl	Pmea	Polarity	Limit	Margin
----------------	----------------	------	------	----------	-------	--------



		(dB)	(dBuV/m)		(dBuV/m)	(dB)
46.781	12.1	-15.7	27.8	Vertical	40	27.9
64.3865	12.61	-17.3	29.91	Vertical	40	27.39
106.5815	7.27	-17.2	24.47	Vertical	43.5	36.23
263.964	18.57	-15.1	33.67	Vertical	46	27.43
543.5665	14.12	-8.5	22.62	Vertical	46	31.88
935.689	19.44	-1.8	21.24	Vertical	46	26.56

For 802.11n(HT40) Channel No.:9

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
38.827	11.47	-17.3	28.77	Vertical	40	28.53
63.756	11.17	-17.3	28.47	Vertical	40	28.83
104.9325	7.64	-17	24.64	Vertical	43.5	35.86
263.964	18.85	-15.1	33.95	Vertical	46	27.15
332.1065	23.31	-13	36.31	Vertical	46	22.69
944.4675	19.08	-2.1	21.18	Vertical	46	26.92

For 802.11ax(HE40) Channel No.:9

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
44.55	12.97	-15.8	28.77	Vertical	40	27.03
63.9015	15.01	-17.3	32.31	Vertical	40	24.99
163.084	6	-19.9	25.9	Vertical	43.5	37.5
299.9995	14.86	-14	28.86	Vertical	46	31.14
332.1065	23.32	-13	36.32	Vertical	46	22.68
950.627	18.97	-2.1	21.07	Vertical	46	27.03



BUREAU VERITAS Test Report No.: PSU-NQN2412260110RF01

Partial RU (Tone26)

For 802.11ax(HE20) Channel No.:1

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
44.2105	12.81	-15.9	28.71	Vertical	40	27.19
63.853	13.89	-17.3	31.19	Vertical	40	26.11
105.272	7.44	-17.1	24.54	Vertical	43.5	36.06
263.964	18.56	-15.1	33.66	Vertical	46	27.44
333.125	22.21	-13	35.21	Vertical	46	23.79
895.1915	18.88	-2.5	21.38	Vertical	46	27.12

For 802.11ax(HE20) Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
43.7255	12.5	-16	28.5	Vertical	40	27.51
63.853	13.93	-17.3	31.23	Vertical	40	26.07
166.5275	7.73	-19.7	27.43	Vertical	43.5	35.77
263.964	18.51	-15.1	33.61	Vertical	46	27.49
333.61	14.35	-12.9	27.25	Vertical	46	31.65
941.9455	19.17	-1.9	21.07	Vertical	46	26.83

For 802.11ax(HE20) Channel No.:11

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
44.162	12.71	-15.9	28.61	Vertical	40	27.29
63.853	13.83	-17.3	31.13	Vertical	40	26.17
169.486	7.22	-19.6	26.82	Vertical	43.5	36.28
199.9925	16.23	-16.6	32.83	Vertical	43.5	27.27
333.028	22.52	-13	35.52	Vertical	46	23.48
913.282	19.19	-2.1	21.29	Vertical	46	26.81

For 802.11ax(HE40) Channel No.:3

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
44.3075	12.73	-15.9	28.63	Vertical	40	27.27



BUREAU VERITAS Test Report No.: PSU-NQN2412260110RF01

63.9015	14.93	-17.3	32.23	Vertical	40	25.07
112.2075	6.9	-17.7	24.6	Vertical	43.5	36.6
263.964	18.56	-15.1	33.66	Vertical	46	27.44
332.9795	23.43	-13	36.43	Vertical	46	22.57
959.0175	18.89	-2	20.89	Vertical	46	27.11

For 802.11ax(HE40) Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
42.6585	10.89	-16.3	27.19	Vertical	40	29.11
63.853	15.49	-17.3	32.79	Vertical	40	24.51
101.295	7.29	-17.1	24.39	Vertical	43.5	36.21
263.964	18.84	-15.1	33.94	Vertical	46	27.16
332.9795	23.24	-13	36.24	Vertical	46	22.76
951.0635	18.86	-2.1	20.96	Vertical	46	27.14


For 802.11ax(HE40) Channel No.:9

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
39.506	11.9	-17.1	29	Vertical	40	28.1
64.435	12.04	-17.4	29.44	Vertical	40	27.96
103.5745	7.58	-17	24.58	Vertical	43.5	35.92
263.964	18.64	-15.1	33.74	Vertical	46	27.36
332.931	22.43	-13	35.43	Vertical	46	23.57
949.6085	18.84	-2.1	20.94	Vertical	46	27.16



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

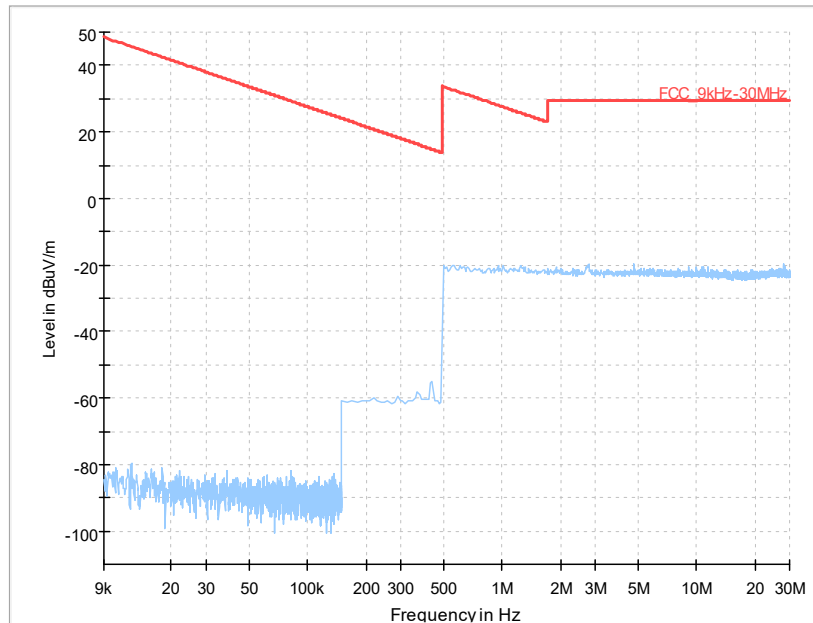


Frequency Range: 9kHz -30MHz

Detector: QP mode

Note: The relevant tests have been performed in order to verify in which mode would have the worst features, the result show above is the worst case.

Carrier frequency (MHz): 2412

Channel No.:1

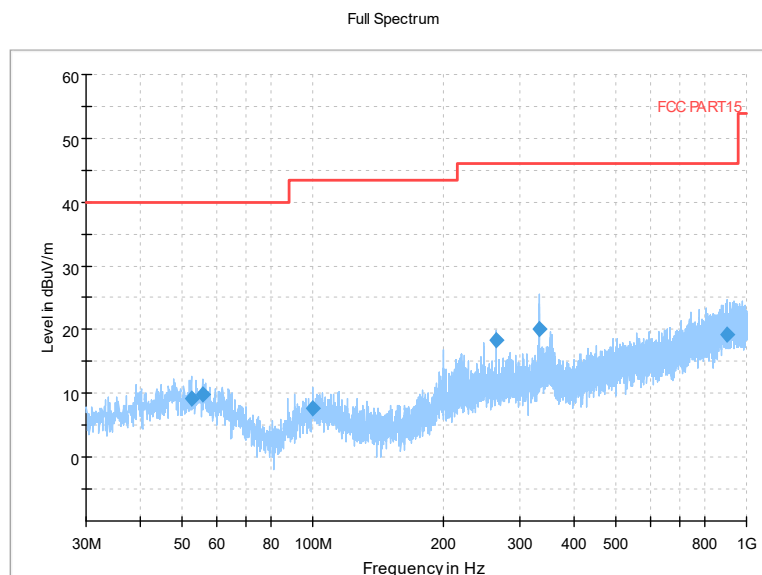

Frequency Range 30MHz -1GHz

Detector: Av mode and PK mode

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

Room B37, Warehouse A5, No.3 Chiwan 4th Road,
Zhaoshang Street, Nanshan District Shenzhen,
Guangdong, People's Republic of China


Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01


Modulation type: 802.11b

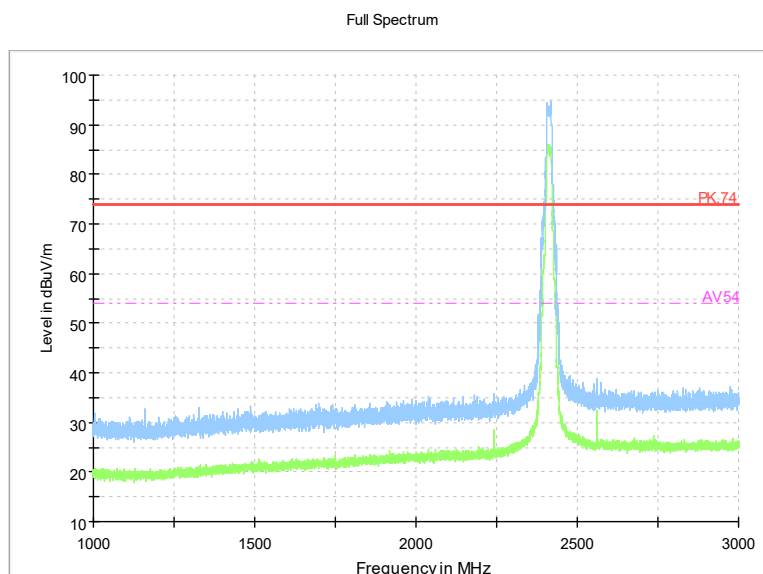

Frequency Range: 1GHz -3GHz

Detector: Av mode and PK mode

Modulation type: 802.11b

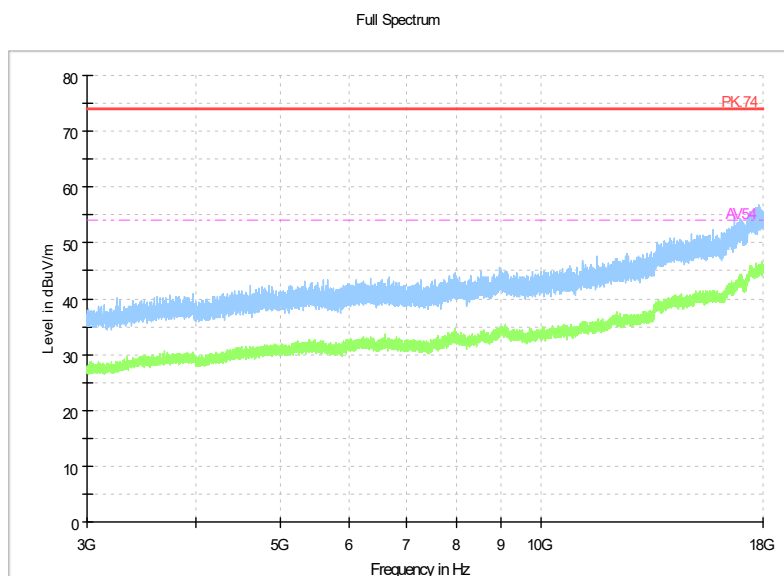

Frequency Range: 3GHz -18GHz

Detector: Av mode and PK mode


Modulation type: 802.11b



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

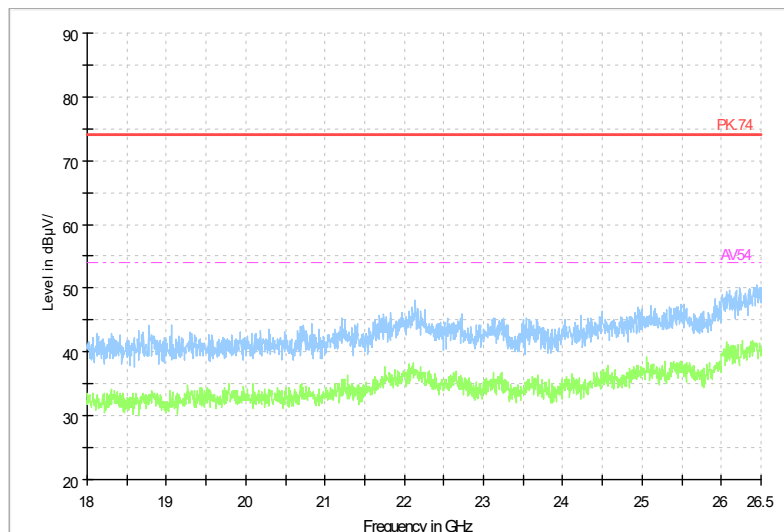


Frequency Range: 18GHz -26GHz

Detector: Av mode and PK mode

Modulation type: 802.11b

Full Spectrum

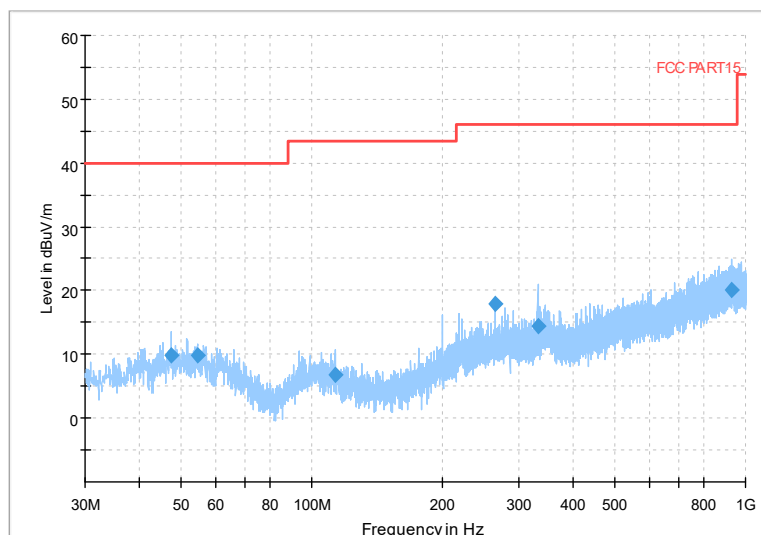

Frequency Range: 30MHz -1GHz

Detector: Av mode and PK mode


Modulation type: 802.11g



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

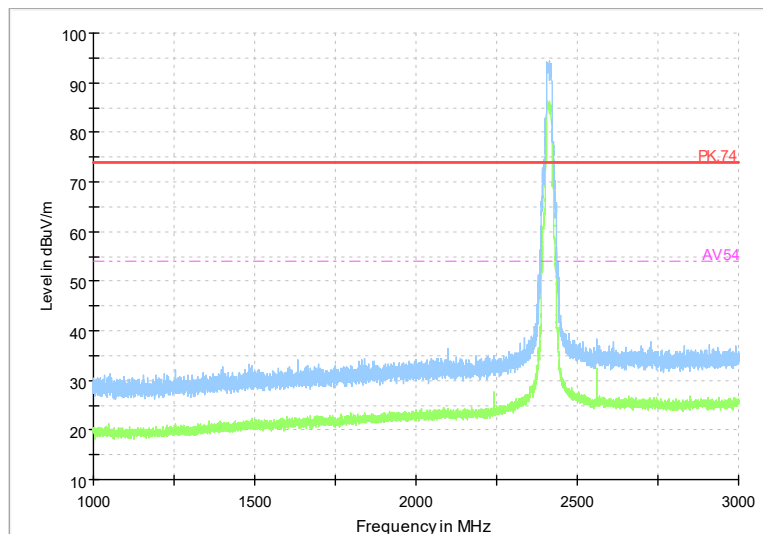


Frequency Range: 1GHz -3GHz

Detector: Av mode and PK mode

Modulation type: 802.11g

Full Spectrum

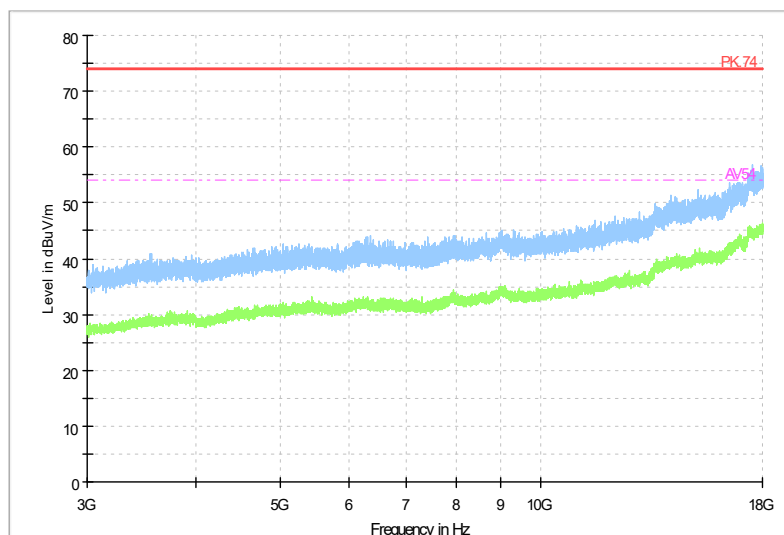

Frequency Range: 3GHz -18GHz

Detector: Av mode and PK mode


Modulation type: 802.11g



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

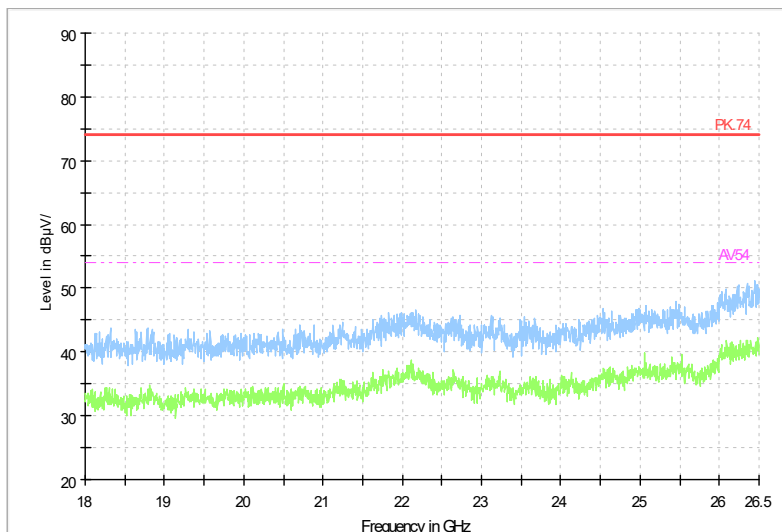


Frequency Range: 18GHz -26GHz

Detector: Av mode and PK mode

Modulation type: 802.11g

Full Spectrum

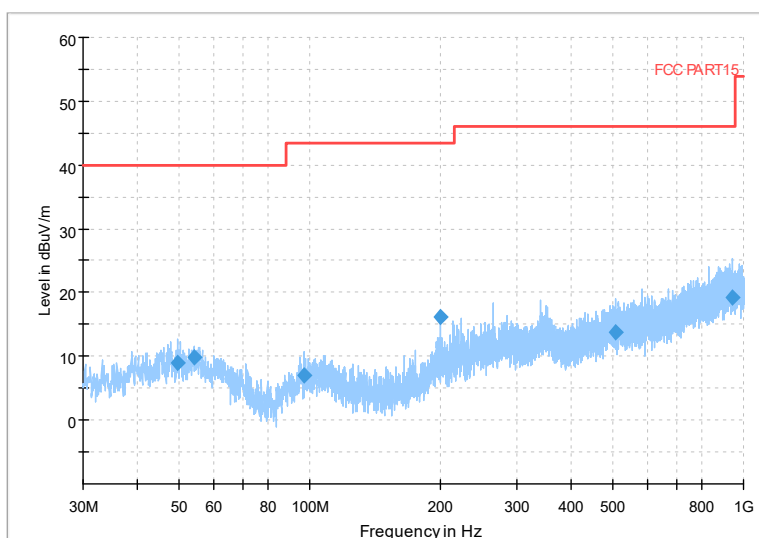

Frequency Range: 30MHz -1GHz

Detector: Av mode and PK mode


Modulation type: 802.11n(HT20)



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

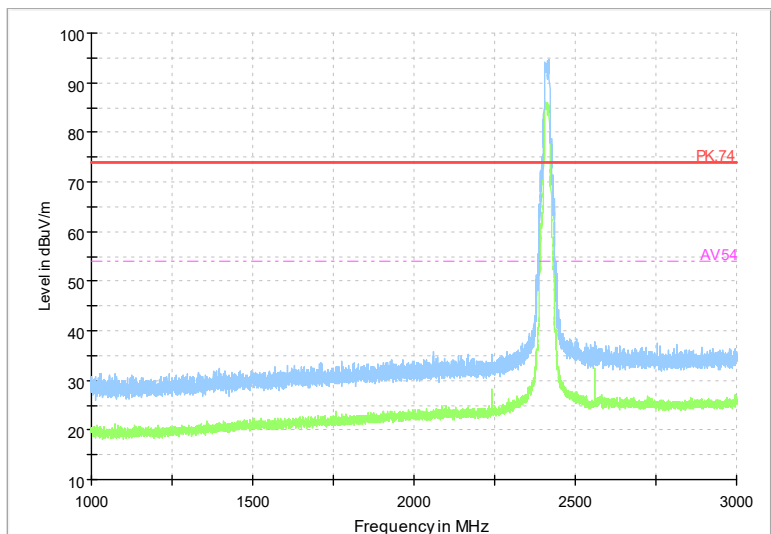


Frequency Range: 1GHz -3GHz

Detector: Av mode and PK mode

Modulation type: 802.11n(HT20)

Full Spectrum

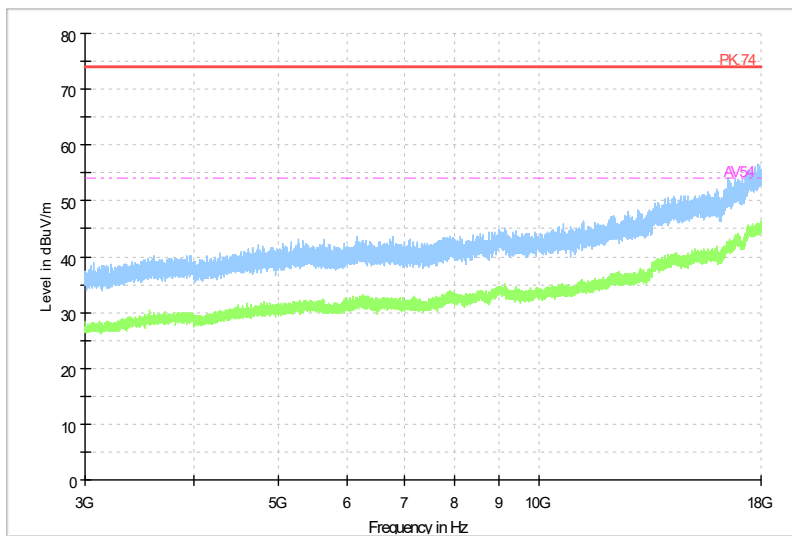

Frequency Range: 3GHz -18GHz

Detector: Av mode and PK mode


Modulation type: 802.11n(HT20)



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

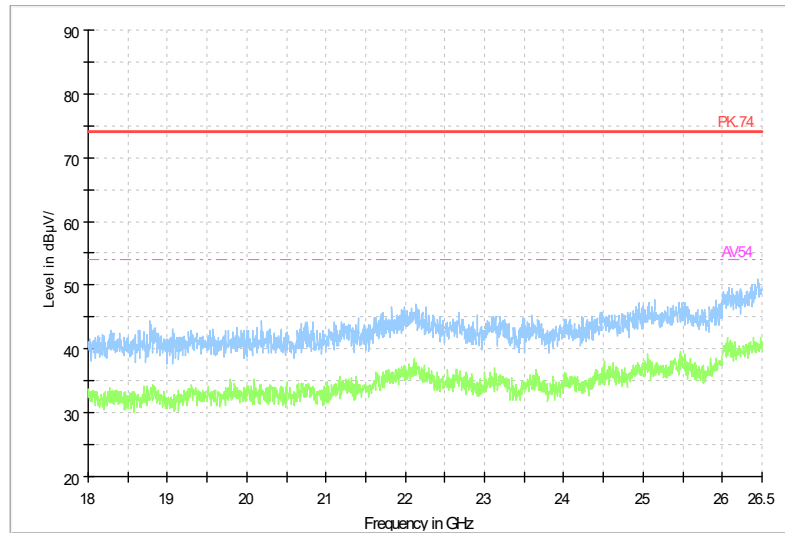


Frequency Range: 18GHz -26GHz

Detector: Av mode and PK mode

Modulation type: 802.11n(HT20)

Full Spectrum

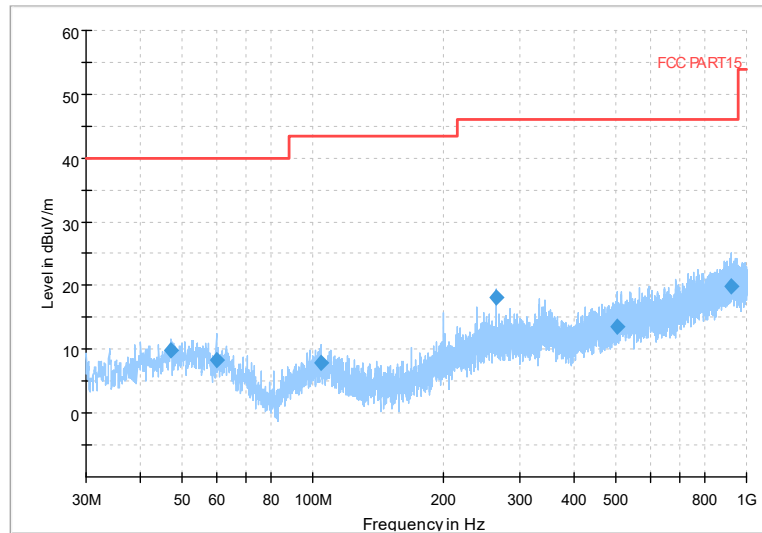

Frequency Range: 30MHz -1GHz

Detector: Av mode and PK mode


Modulation type: 802.11 ax(HE20)



BUREAU
VERITAS


Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

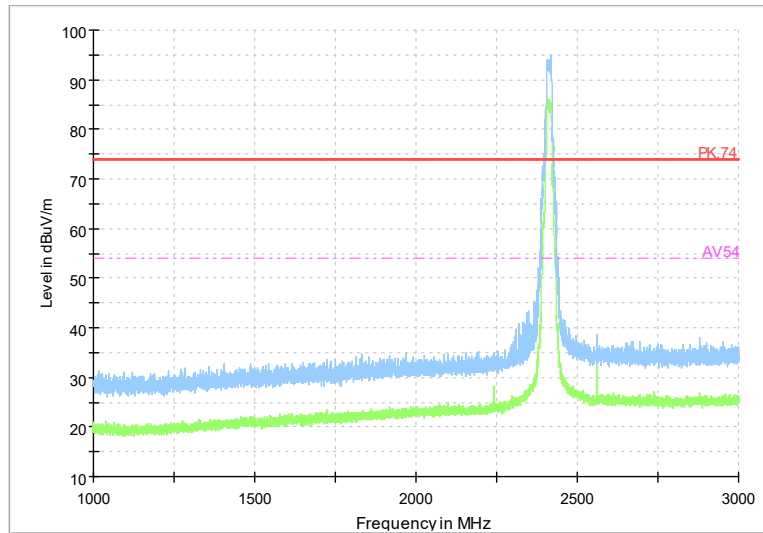

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11 ax(HE20)

Full Spectrum

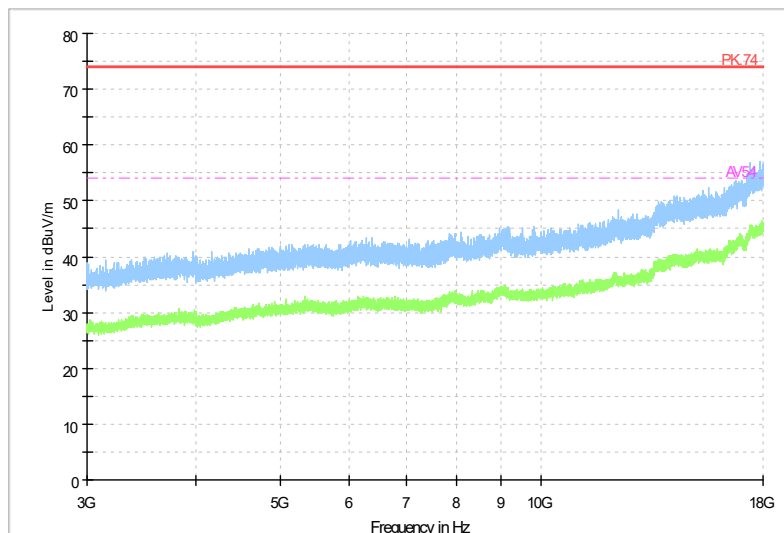


Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11 ax(HE20)



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

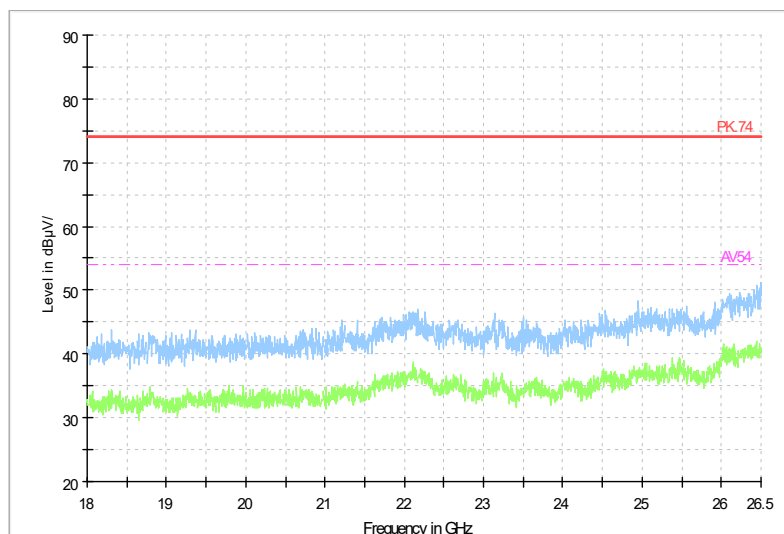

Frequency Range: 18GHz -26GHz


Detector: Av mode and PK mode

Modulation type: 802.11 ax(HE20)

Carrier frequency (MHz): 2437

Channel No.:6

Full Spectrum

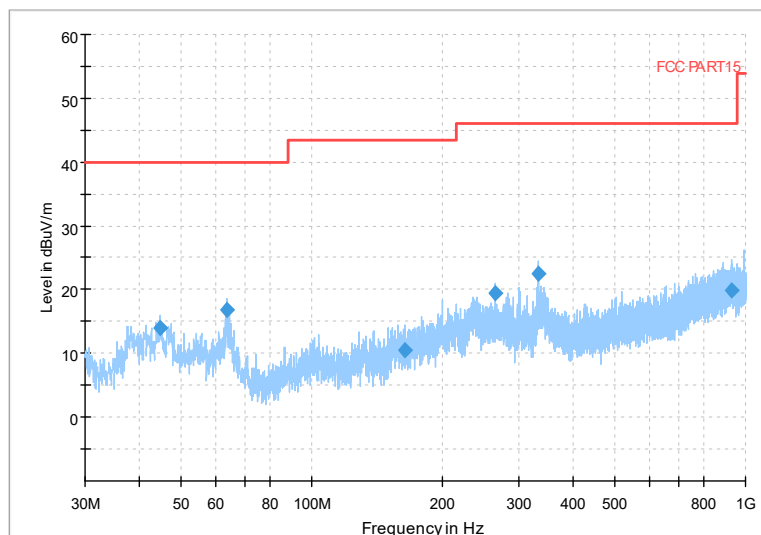

Frequency Range: 30MHz -1GHz

Detector: Av mode and PK mode


Modulation type: 802.11b



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

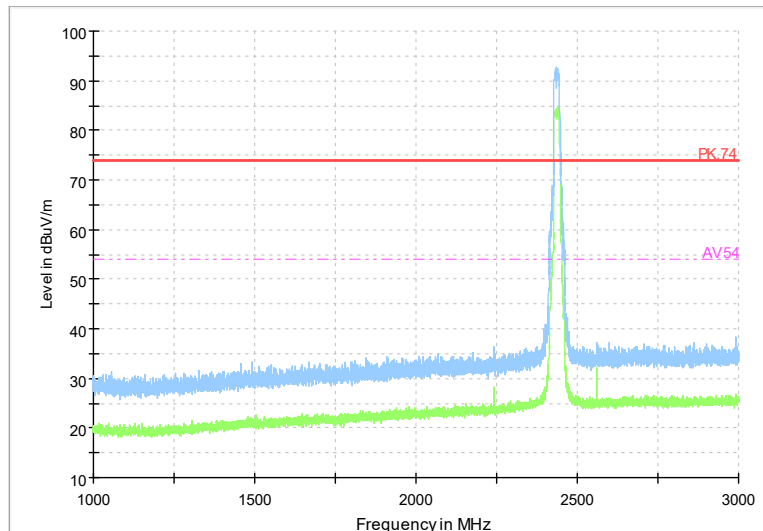


Frequency Range: 1GHz -3GHz

Detector: Av mode and PK mode

Modulation type: 802.11b

Full Spectrum

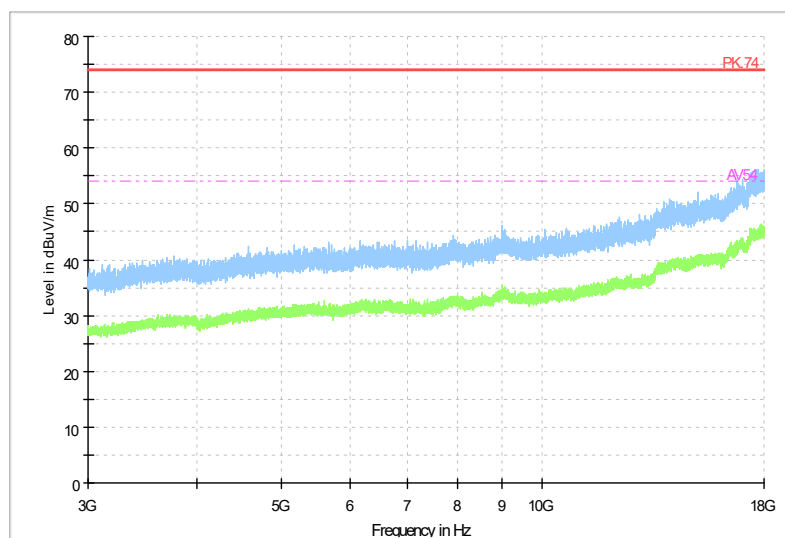

Frequency Range: 3GHz -18GHz

Detector: Av mode and PK mode


Modulation type: 802.11b



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

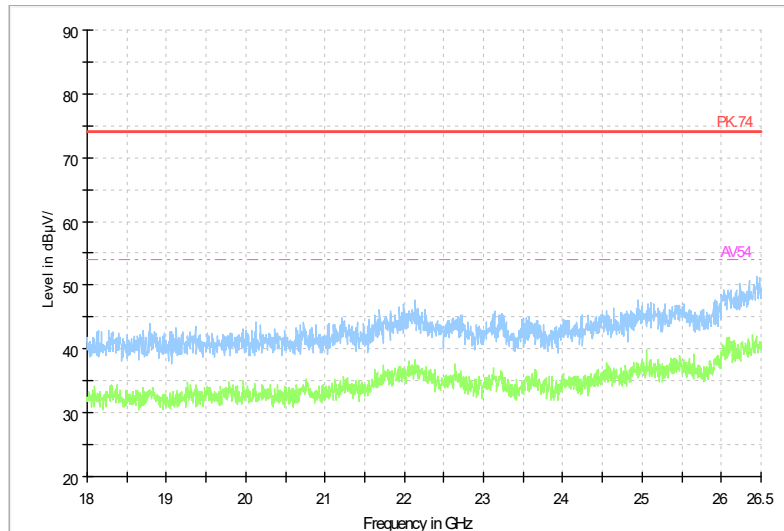


Frequency Range: 18GHz -26GHz

Detector: Av mode and PK mode

Modulation type: 802.11b

Full Spectrum

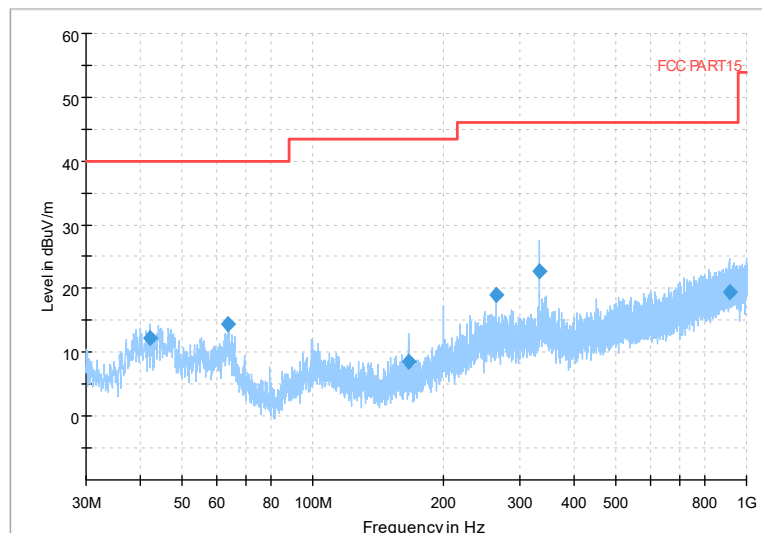

Frequency Range: 30MHz -1GHz

Detector: Av mode and PK mode


Modulation type: 802.11g



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

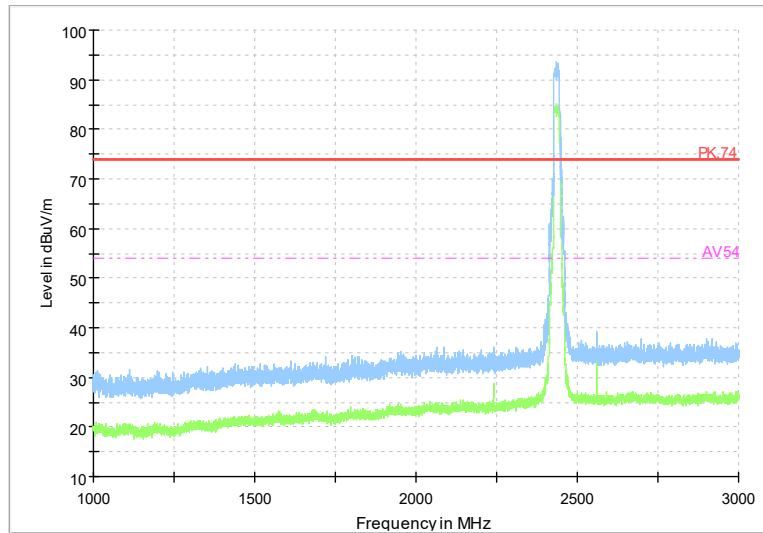


Frequency Range: 1GHz -3GHz

Detector: Av mode and PK mode

Modulation type: 802.11g

Full Spectrum

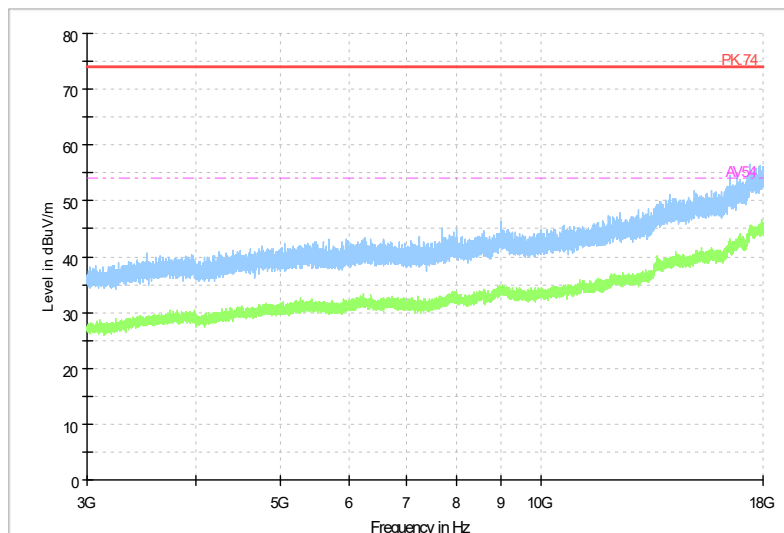

Frequency Range: 3GHz -18GHz

Detector: Av mode and PK mode


Modulation type: 802.11g



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

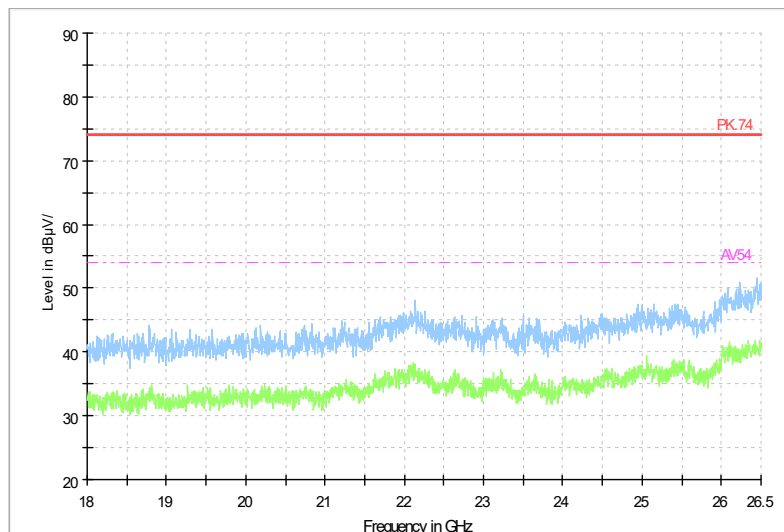


Frequency Range: 18GHz -26GHz

Detector: Av mode and PK mode

Modulation type: 802.11g

Full Spectrum

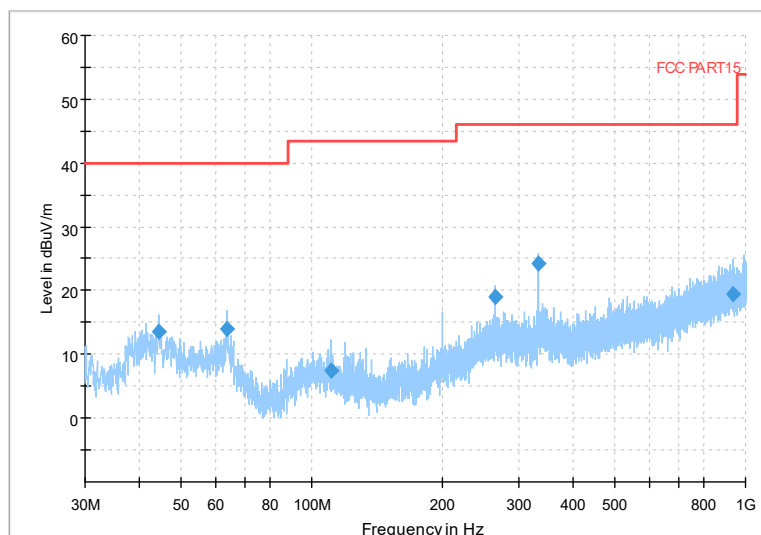

Frequency Range: 30MHz -1GHz

Detector: Av mode and PK mode


Modulation type: 802.11n(HT20)



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

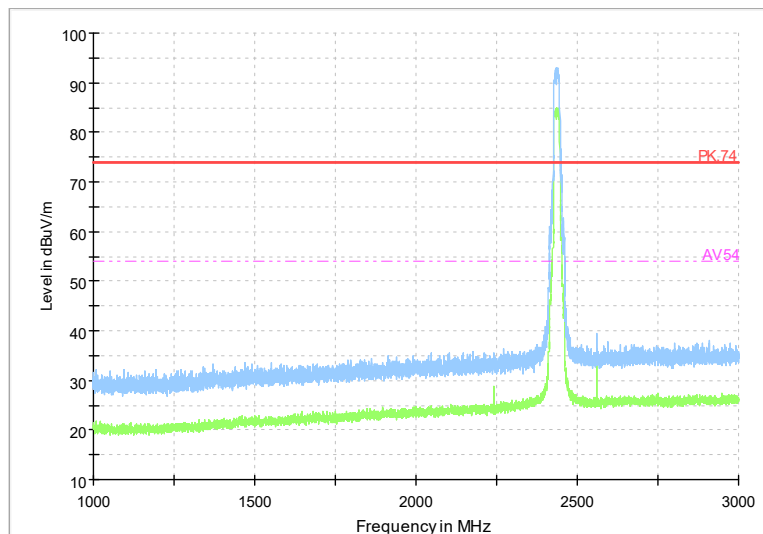


Frequency Range: 1GHz -3GHz

Detector: Av mode and PK mode

Modulation type: 802.11n(HT20)

Full Spectrum

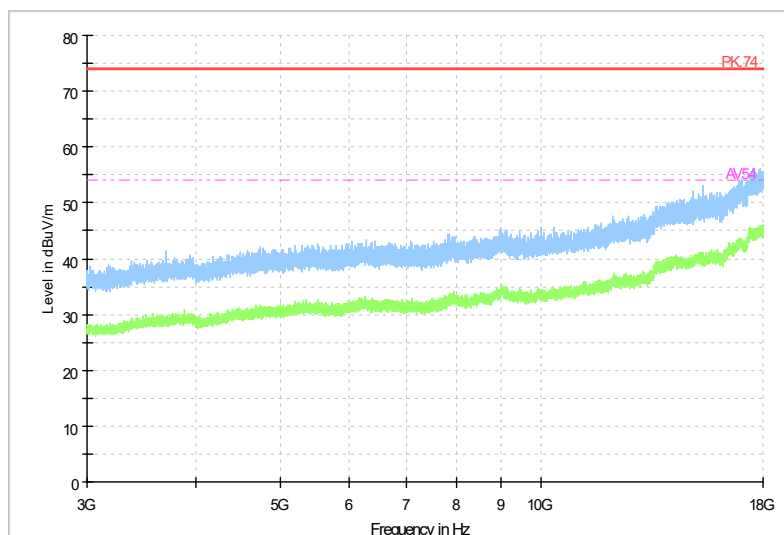

Frequency Range: 3GHz -18GHz

Detector: Av mode and PK mode


Modulation type: 802.11n(HT20)



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

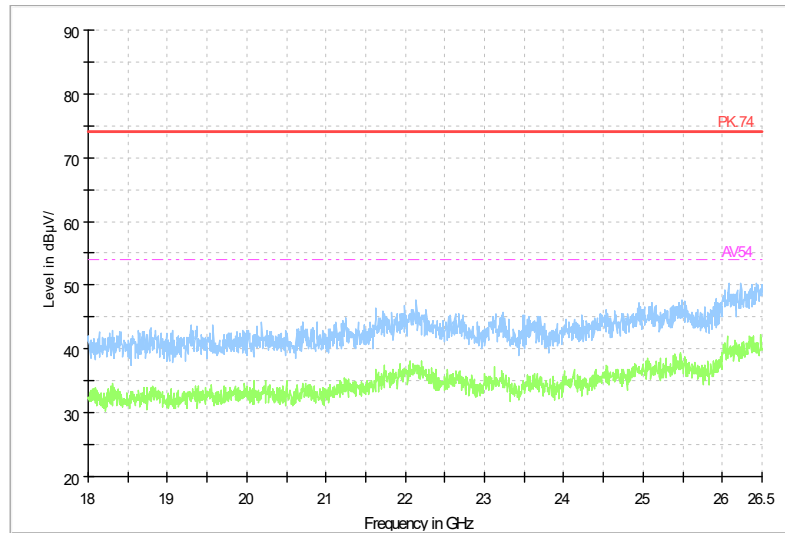


Frequency Range: 18GHz -26GHz

Detector: Av mode and PK mode

Modulation type: 802.11n(HT20)

Full Spectrum

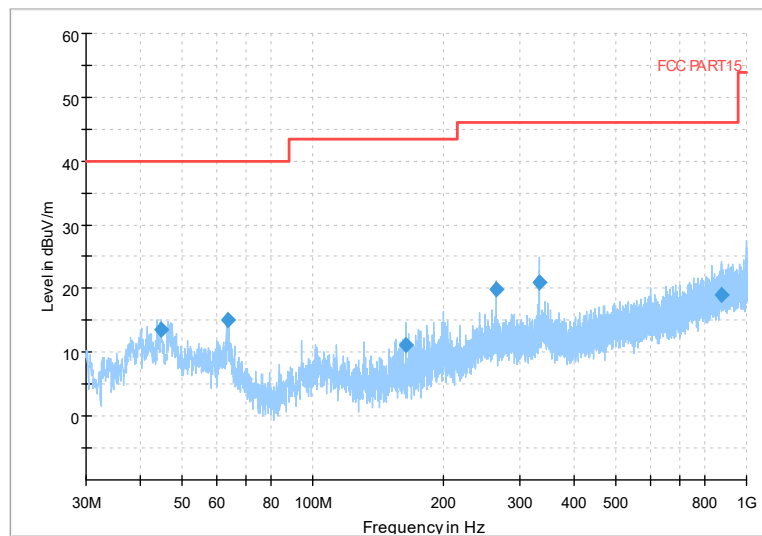

Frequency Range: 30MHz -1GHz

Detector: Av mode and PK mode


Modulation type: 802.11 ax(HE20)



BUREAU
VERITAS


Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

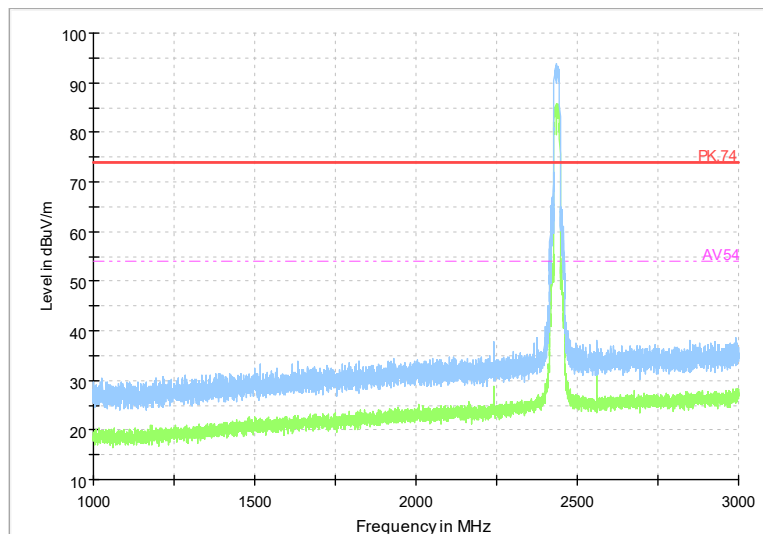

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11 ax(HE20)

Full Spectrum

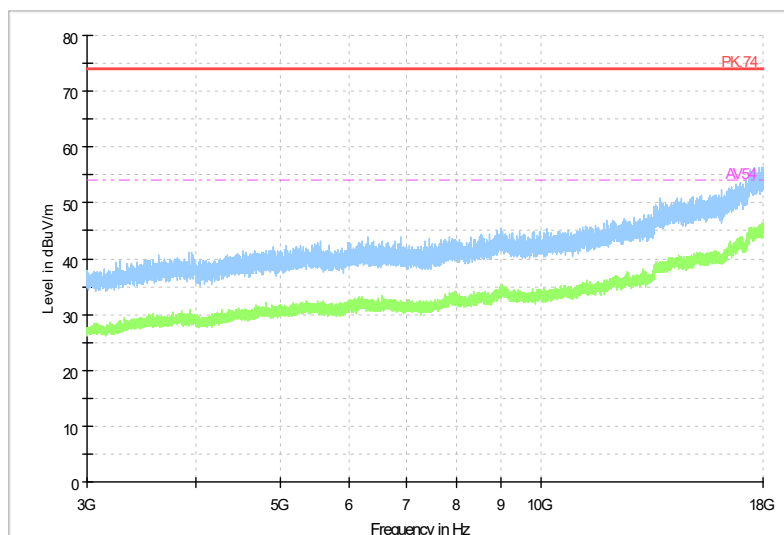


Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11 ax(HE20)



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

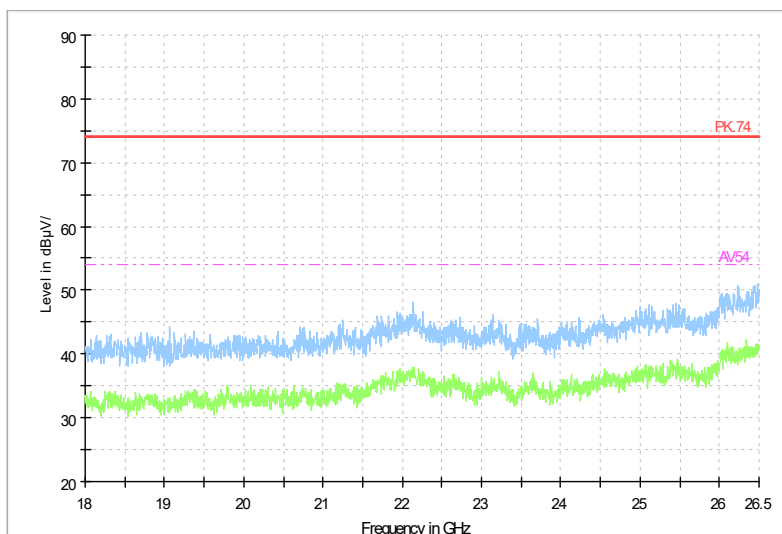

Frequency Range: 18GHz -26GHz


Detector: Av mode and PK mode

Modulation type: 802.11 ax(HE20)

Carrier frequency (MHz): 2462

Channel No.:11

Full Spectrum

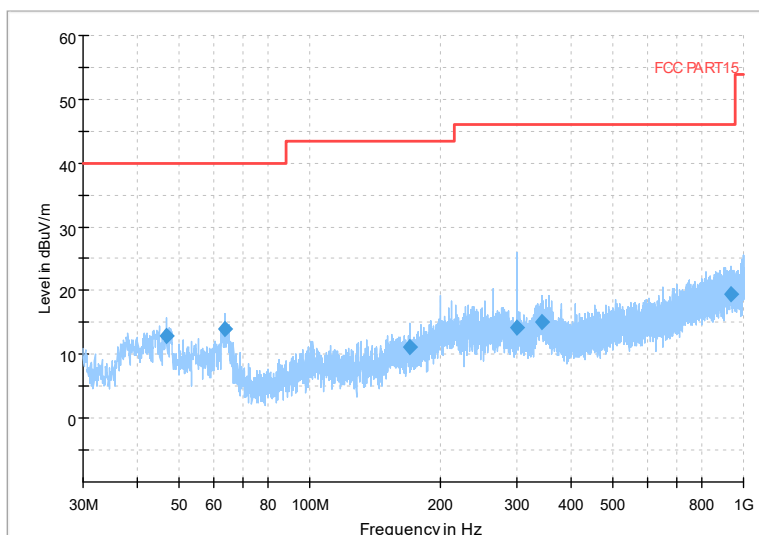

Frequency Range: 30MHz -1GHz

Detector: Av mode and PK mode

Modulation type: 802.11b

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

Room B37, Warehouse A5, No.3 Chiwan 4th Road,
Zhaoshang Street, Nanshan District Shenzhen,
Guangdong, People's Republic of China


Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

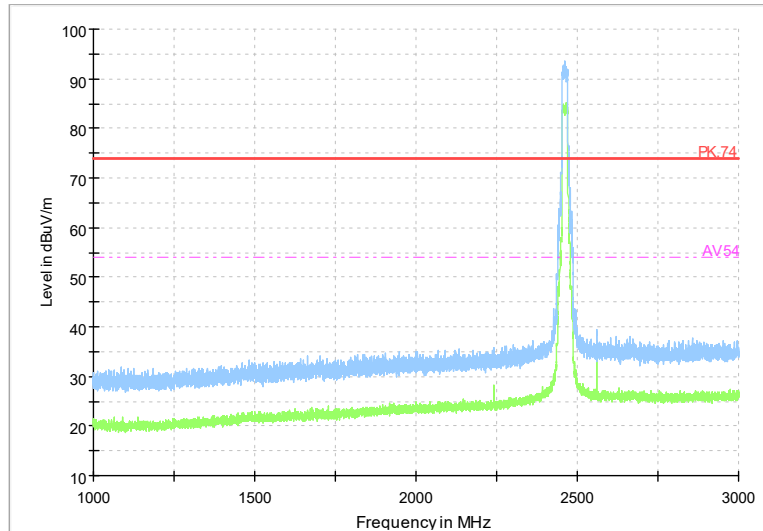


Frequency Range: 1GHz -3GHz

Detector: Av mode and PK mode

Modulation type: 802.11b

Full Spectrum

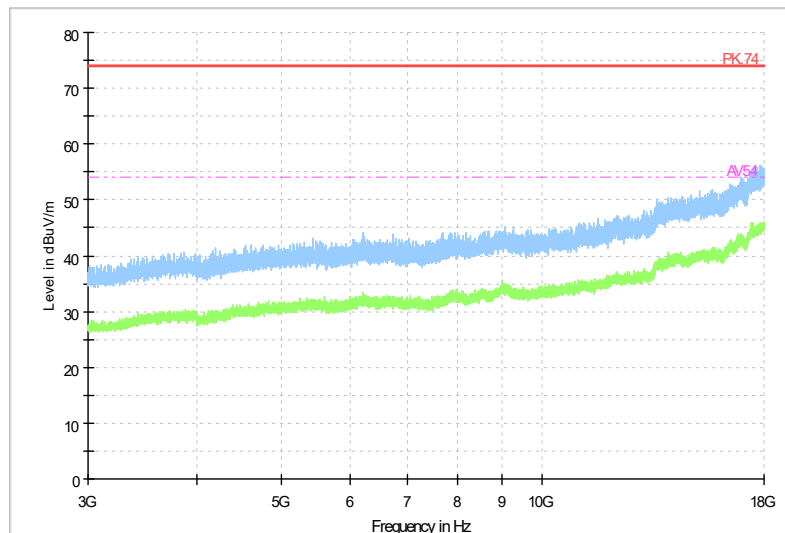

Frequency Range: 3GHz -18GHz

Detector: Av mode and PK mode


Modulation type: 802.11b



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

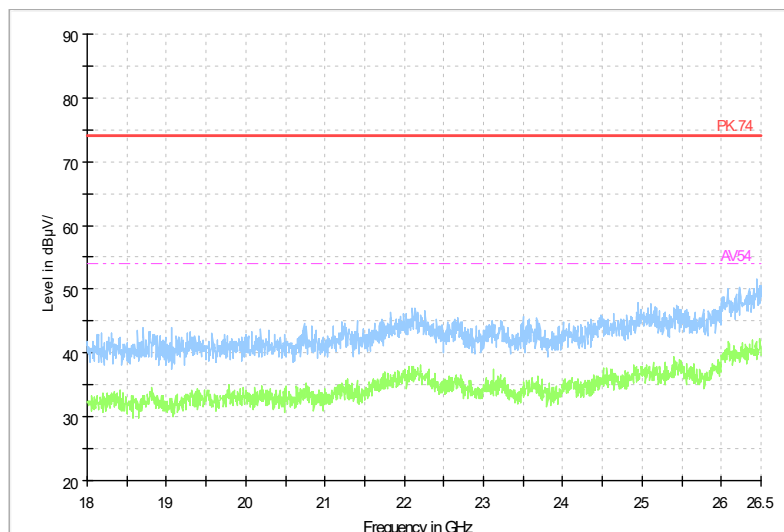


Frequency Range: 18GHz -26GHz

Detector: Av mode and PK mode

Modulation type: 802.11b

Full Spectrum

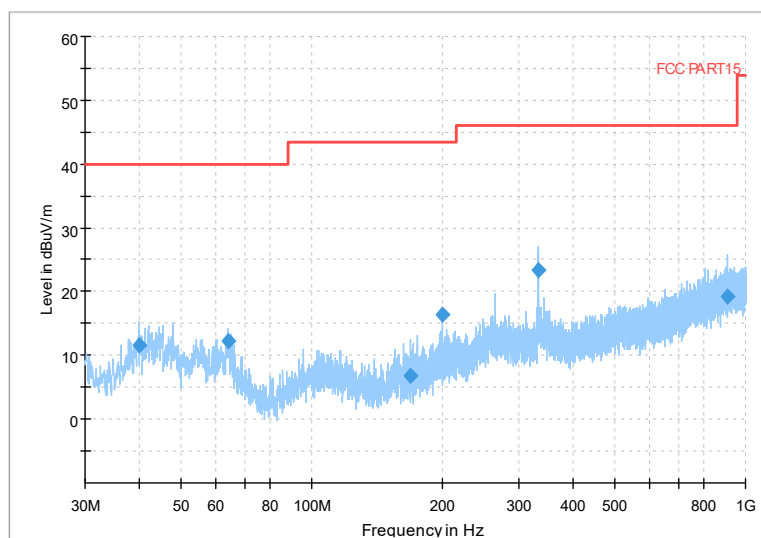

Frequency Range: 30MHz -1GHz

Detector: Av mode and PK mode


Modulation type: 802.11g



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

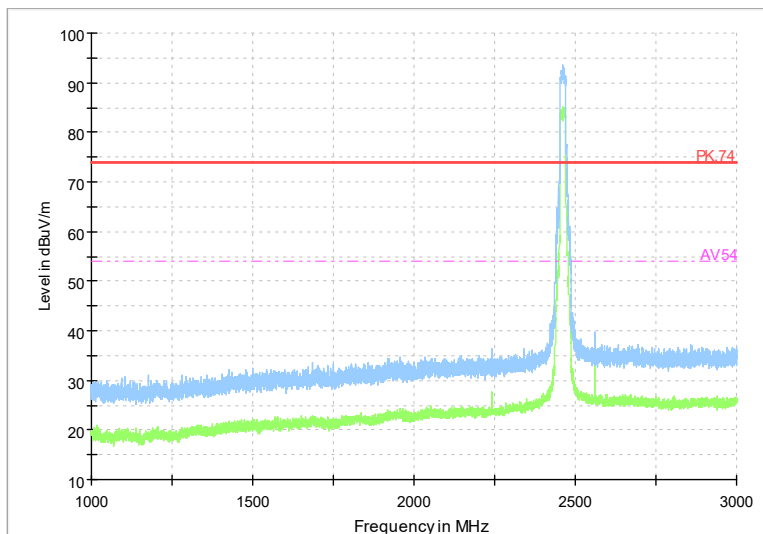


Frequency Range: 1GHz -3GHz

Detector: Av mode and PK mode

Modulation type: 802.11g

Full Spectrum

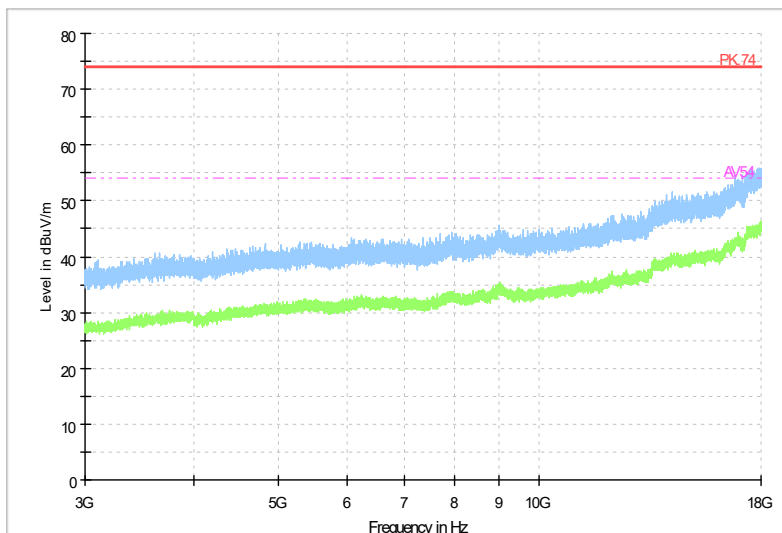

Frequency Range: 3GHz -18GHz

Detector: Av mode and PK mode


Modulation type: 802.11g



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

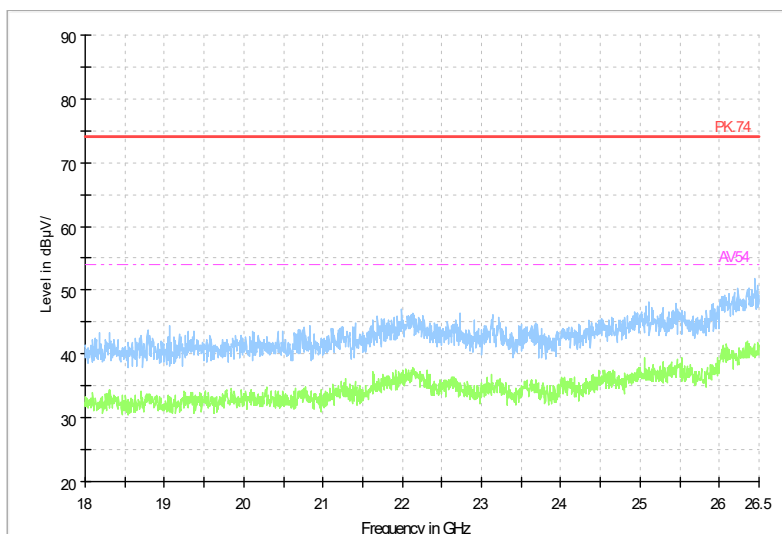


Frequency Range: 18GHz -26GHz

Detector: Av mode and PK mode

Modulation type: 802.11g

Full Spectrum

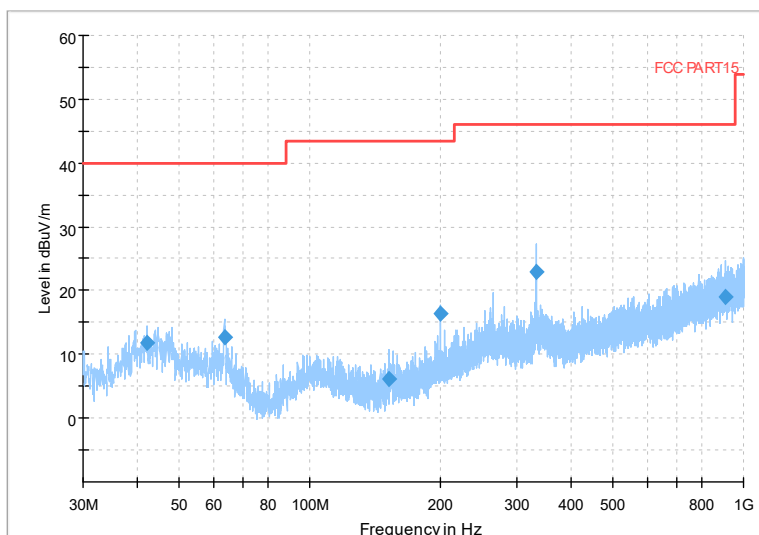

Frequency Range: 30MHz -1GHz

Detector: Av mode and PK mode


Modulation type: 802.11n(HT20)



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

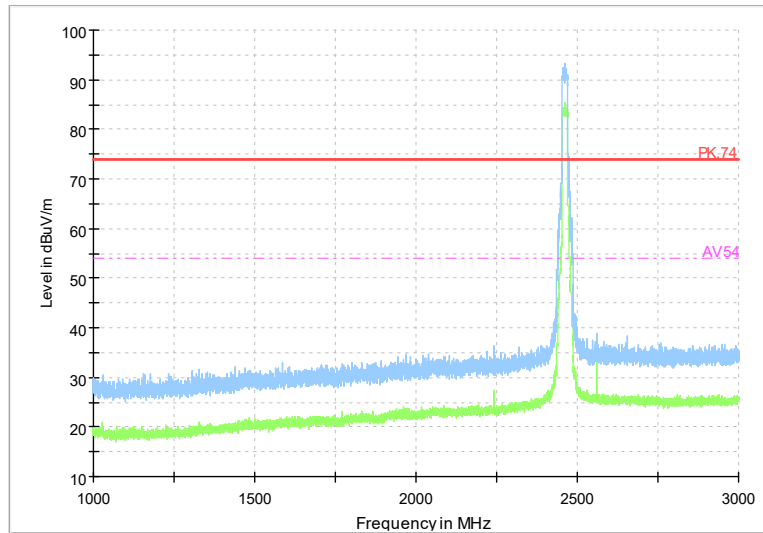


Frequency Range: 1GHz -3GHz

Detector: Av mode and PK mode

Modulation type: 802.11n(HT20)

Full Spectrum

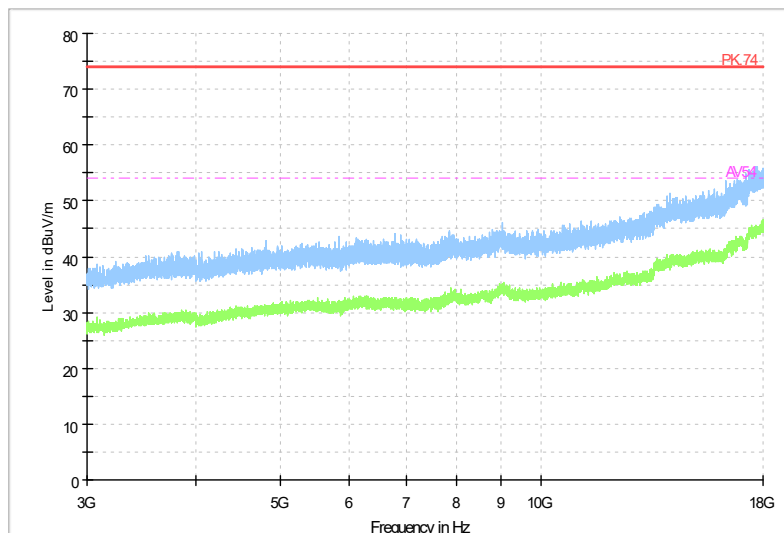

Frequency Range: 3GHz -18GHz

Detector: Av mode and PK mode


Modulation type: 802.11n(HT20)



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

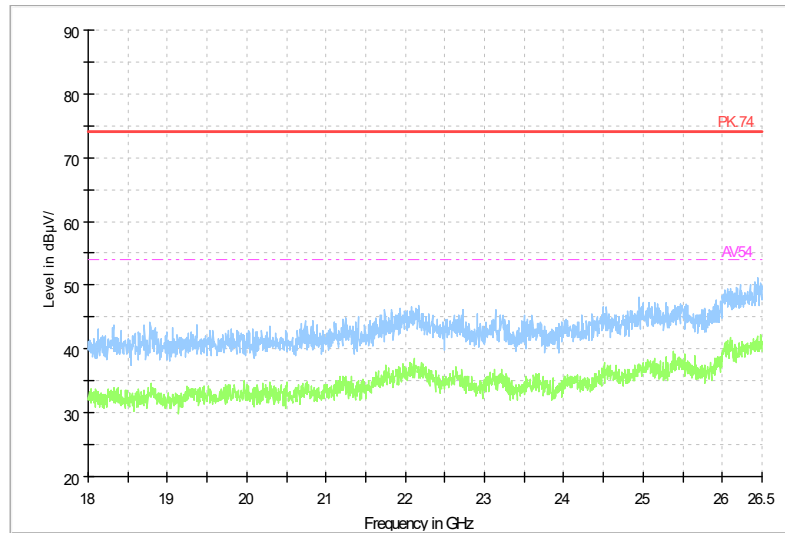


Frequency Range: 18GHz -26GHz

Detector: Av mode and PK mode

Modulation type: 802.11n(HT20)

Full Spectrum

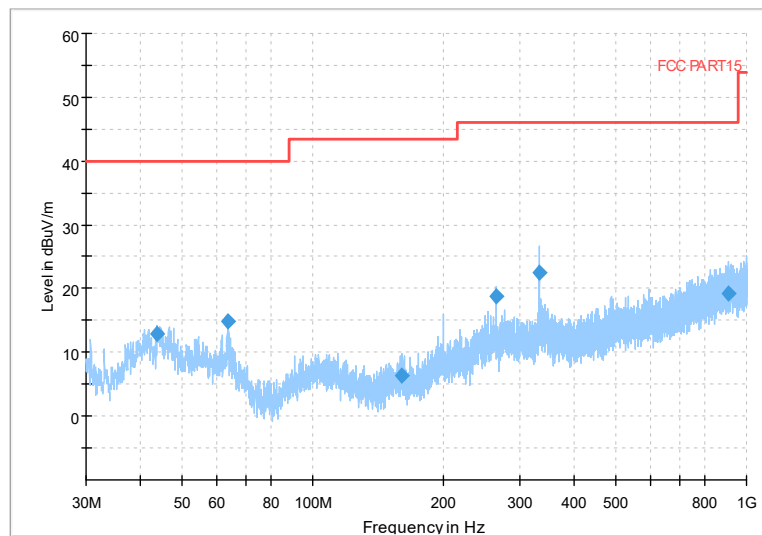

Frequency Range: 30MHz -1GHz

Detector: Av mode and PK mode


Modulation type: 802.11 ax(HE20)



BUREAU
VERITAS


Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

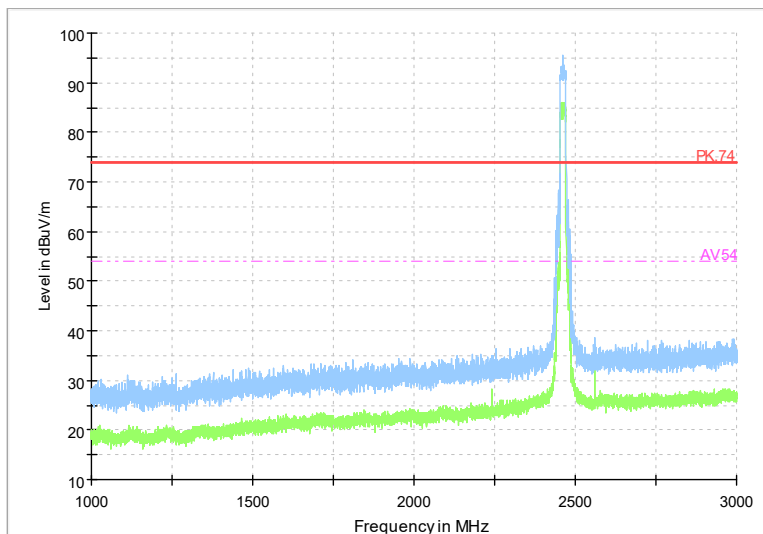

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11 ax(HE20)

Full Spectrum

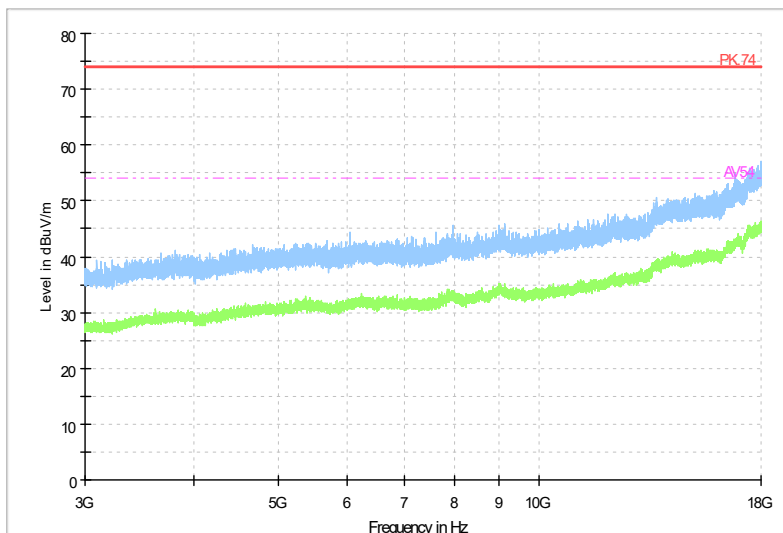


Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11 ax(HE20)



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

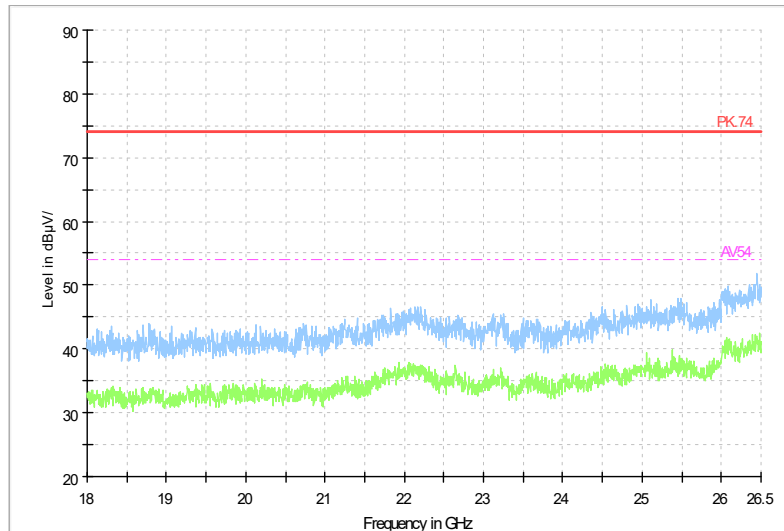

Frequency Range: 18GHz -26GHz


Detector: Av mode and PK mode

Modulation type: 802.11 ax(HE20)

Carrier frequency (MHz): 2422

Channel No.:3

Full Spectrum

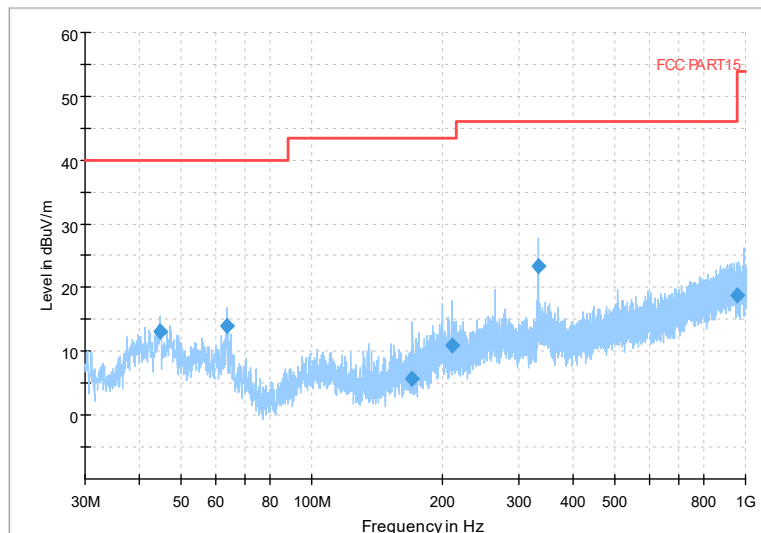

Frequency Range: 30MHz -1GHz

Detector: Av mode and PK mode


Modulation type: 802.11n(HT40)



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

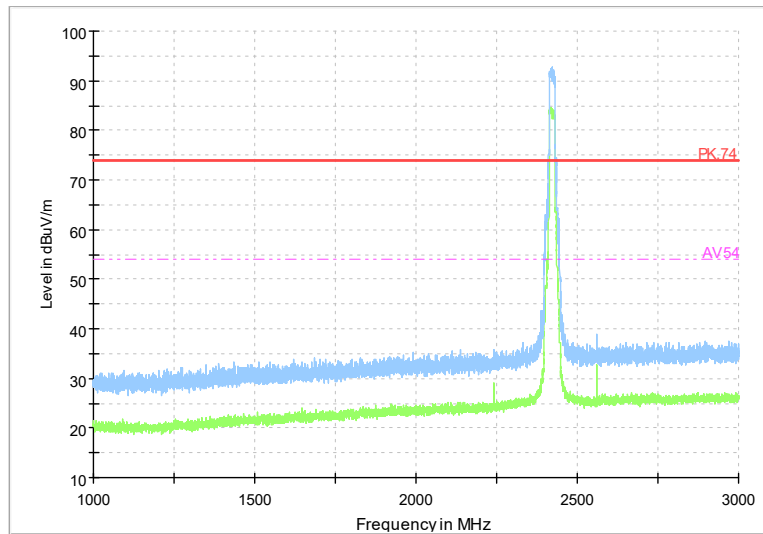


Frequency Range: 1GHz -3GHz

Detector: Av mode and PK mode

Modulation type: 802.11n(HT40)

Full Spectrum

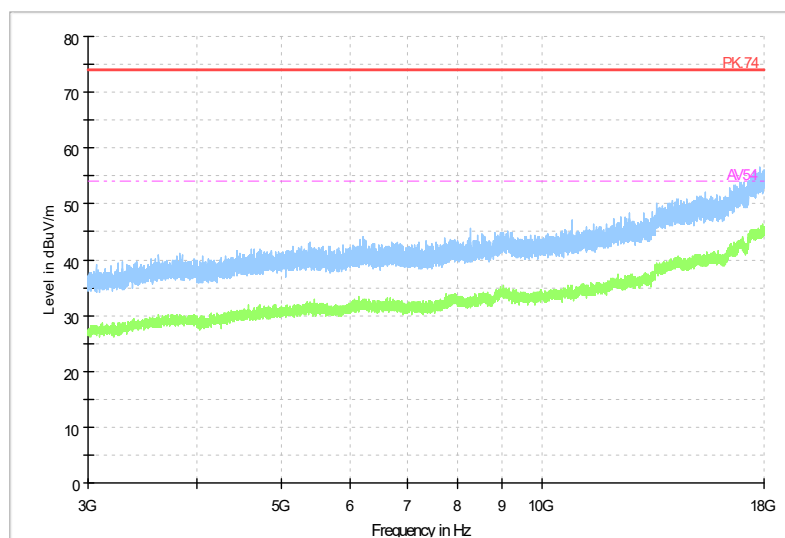

Frequency Range: 3GHz -18GHz

Detector: Av mode and PK mode


Modulation type: 802.11n(HT40)



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

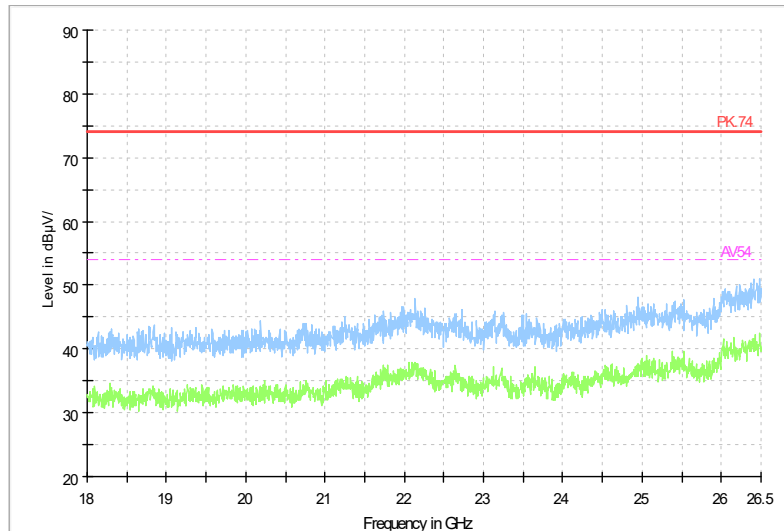


Frequency Range: 18GHz -26GHz

Detector: Av mode and PK mode

Modulation type: 802.11n(HT40)

Full Spectrum

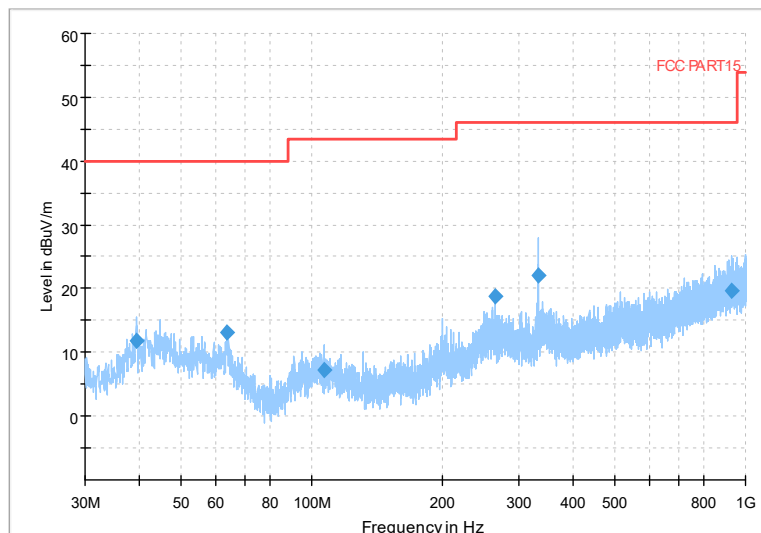

Frequency Range: 30MHz -1GHz

Detector: Av mode and PK mode


Modulation type: 802.11 ax(HE40)



BUREAU
VERITAS


Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

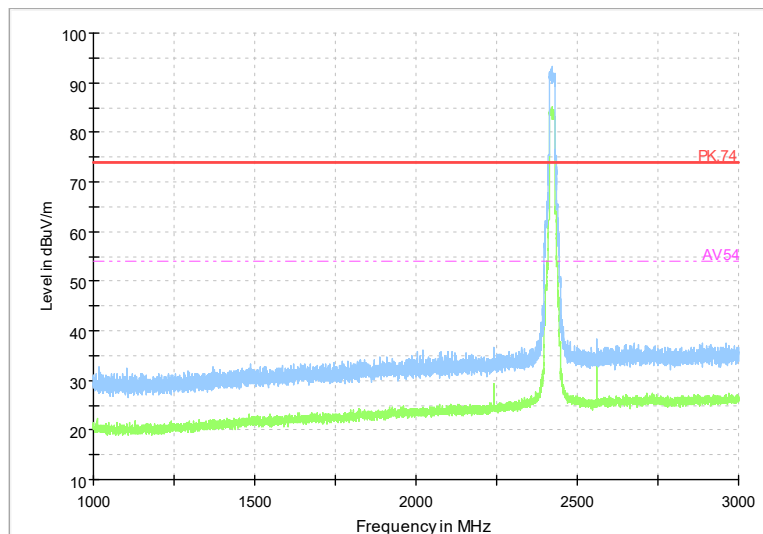

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11 ax(HE40)

Full Spectrum

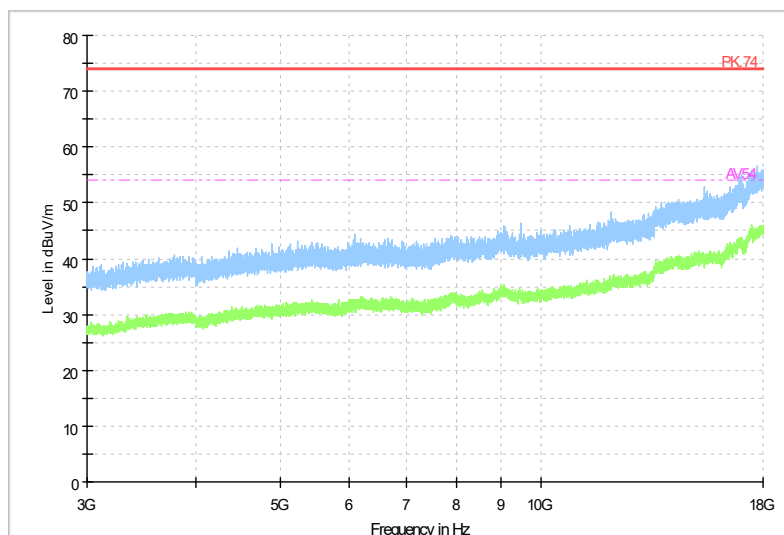


Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11 ax(HE40)



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

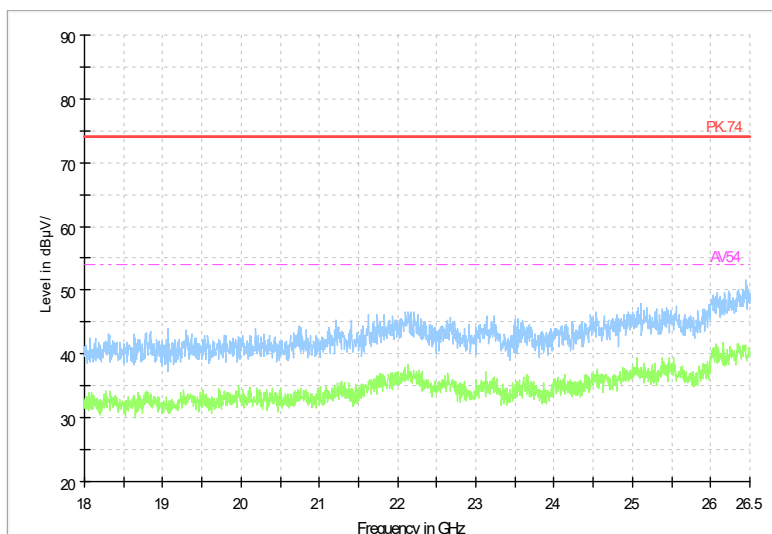

Frequency Range: 18GHz -26GHz


Detector: Av mode and PK mode

Modulation type: 802.11 ax(HE40)

Carrier frequency (MHz): 2437

Channel No.:6

Full Spectrum

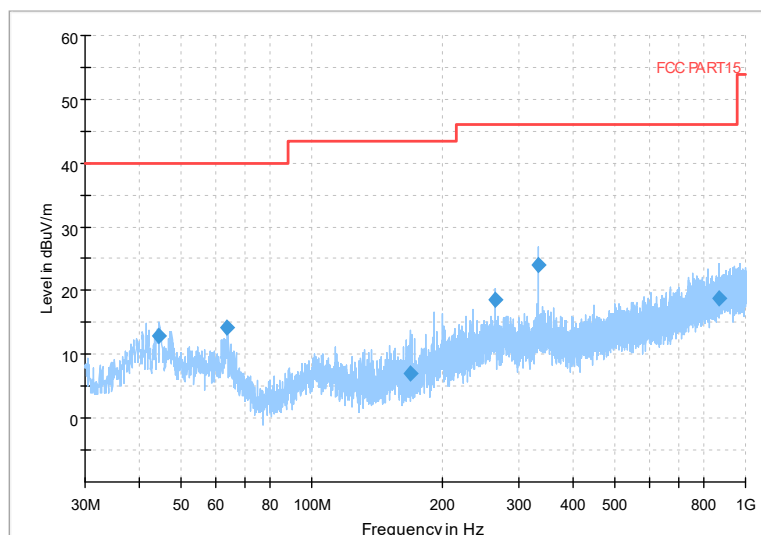

Frequency Range: 30MHz -1GHz

Detector: Av mode and PK mode

Modulation type: 802.11n(HT40)

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

Room B37, Warehouse A5, No.3 Chiwan 4th Road,
Zhaoshang Street, Nanshan District Shenzhen,
Guangdong, People's Republic of China


Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

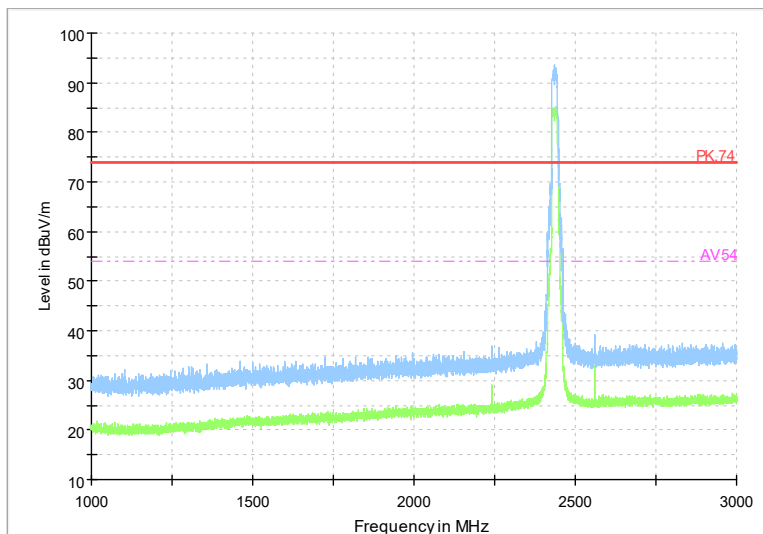


Frequency Range: 1GHz -3GHz

Detector: Av mode and PK mode

Modulation type: 802.11n(HT40)

Full Spectrum

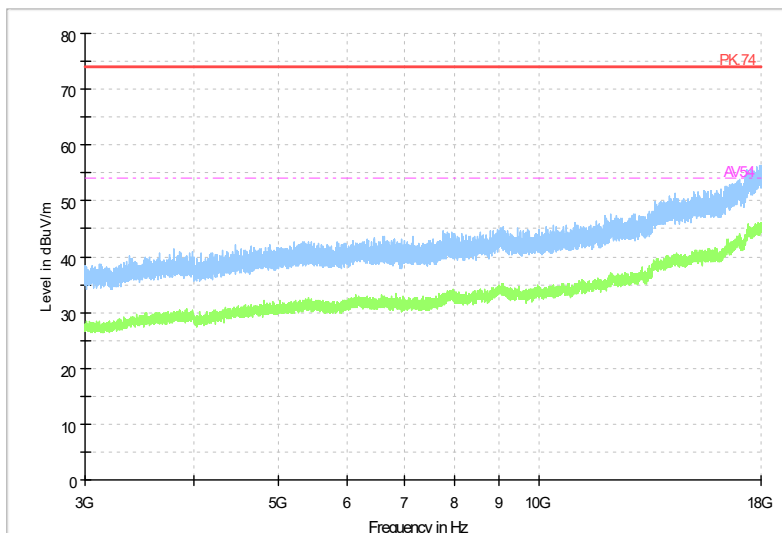

Frequency Range: 3GHz -18GHz

Detector: Av mode and PK mode


Modulation type: 802.11n(HT40)



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

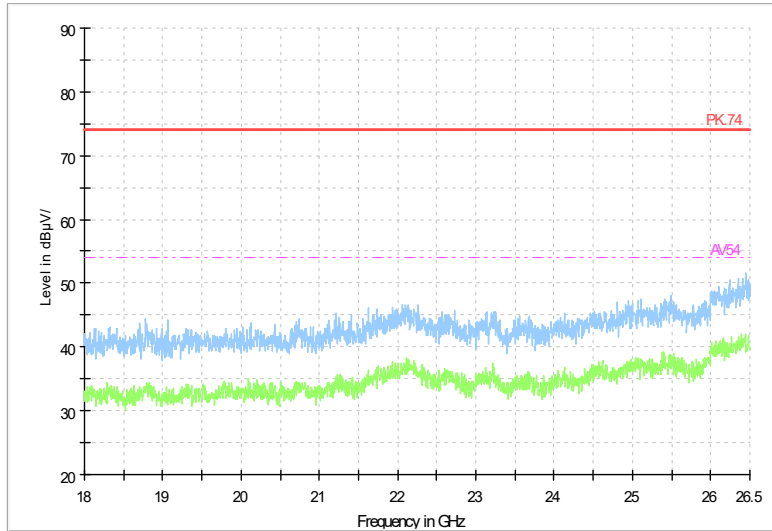


Frequency Range: 18GHz -26GHz

Detector: Av mode and PK mode

Modulation type: 802.11n(HT40)

Full Spectrum

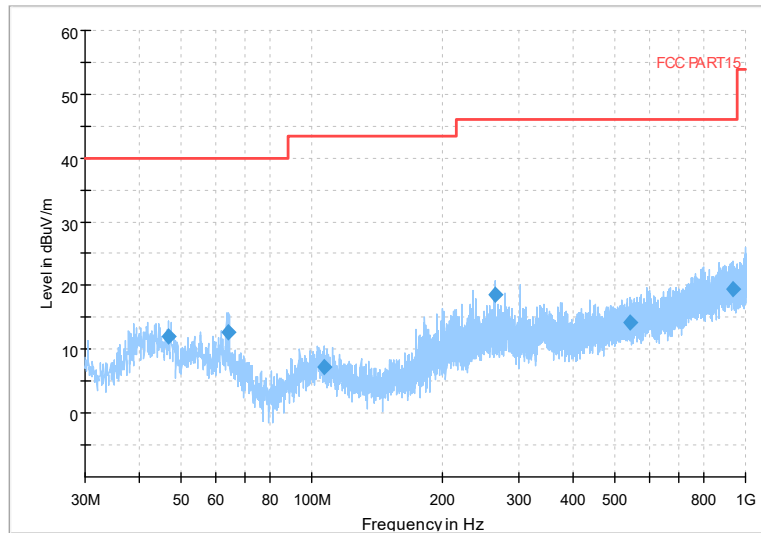

Frequency Range: 30MHz -1GHz

Detector: Av mode and PK mode


Modulation type: 802.11 ax(HE40)



BUREAU
VERITAS


Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

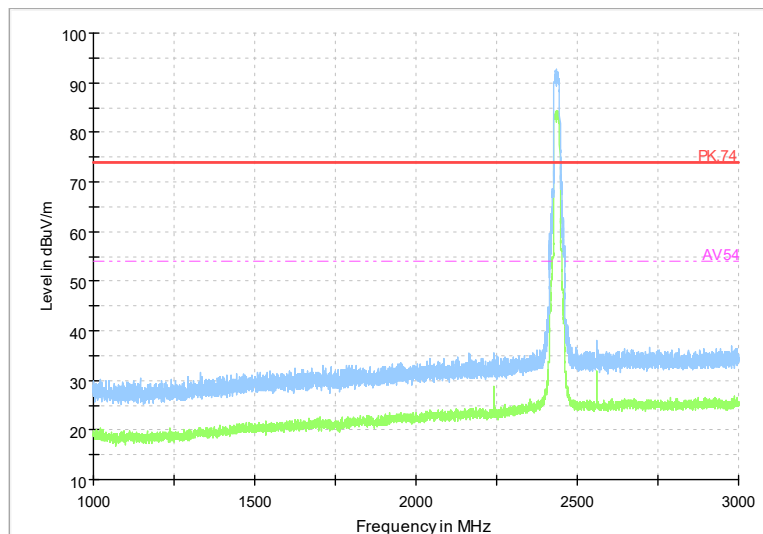

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11 ax(HE40)

Full Spectrum

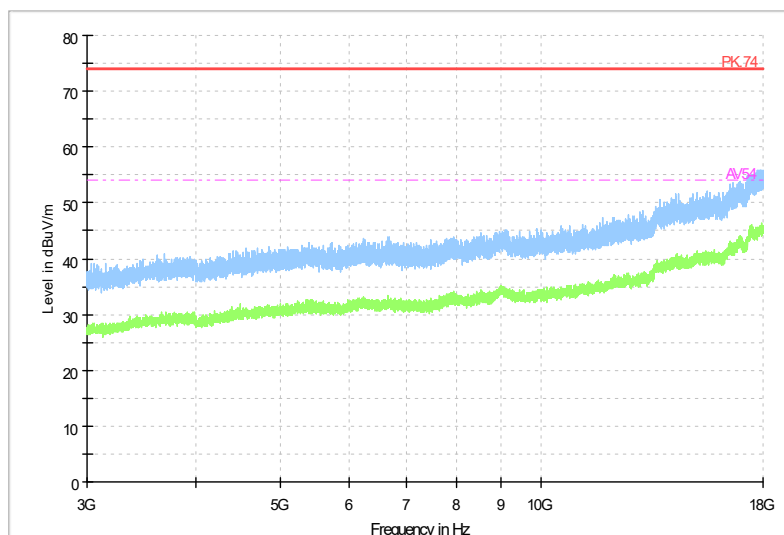


Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11 ax(HE40)



BUREAU
VERITAS

Test Report No.: PSU-NQN2412260110RF01

Full Spectrum

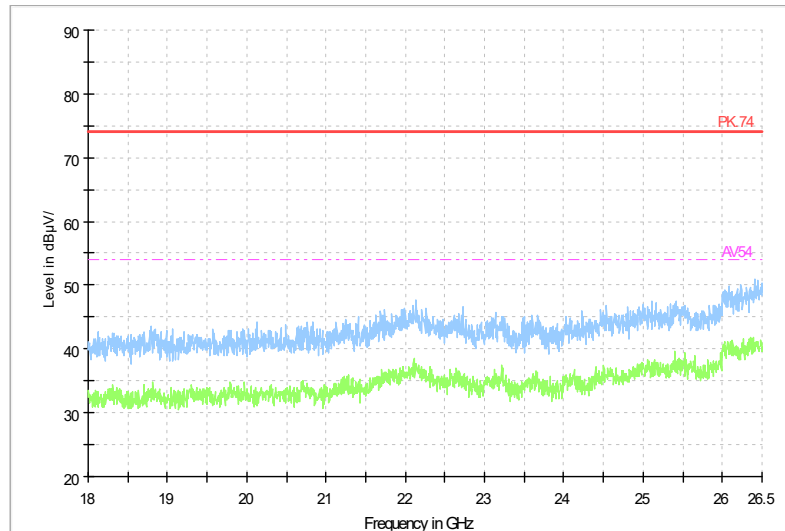

Frequency Range: 18GHz -26GHz


Detector: Av mode and PK mode

Modulation type: 802.11 ax(HE40)

Carrier frequency (MHz): 2452

Channel No.:9

Full Spectrum

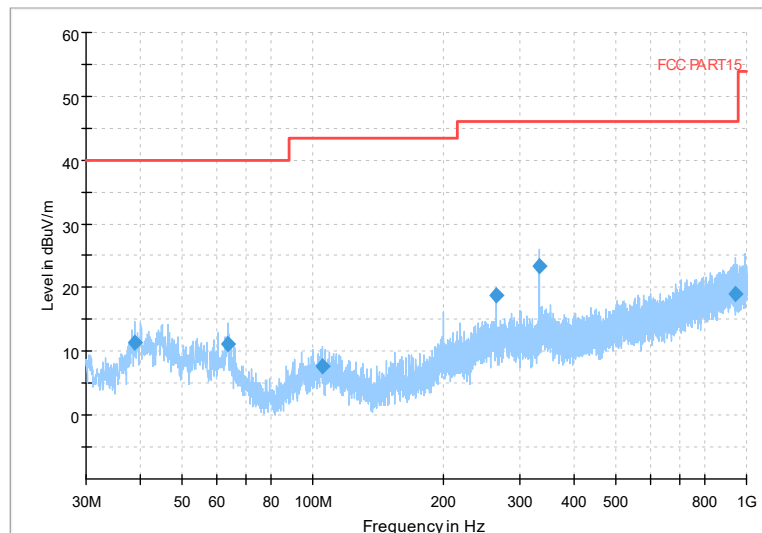

Frequency Range: 30MHz -1GHz

Detector: Av mode and PK mode

Modulation type: 802.11n(HT40)