

产品规格承认书

SPECIFICATIONS

客户:

CUSTOMER: _____

产品名称:

DESCRIPTION: _____ 双极天线

客户型号:

CUSTOMER PART NO: _____

产品型号:

OUR MODEL NO: _____ PBX2012MA05

日期:

DATE: _____

确认签字, 盖章后请返回承认书一份

PLEASE RETURN TO US ONE COPY OF “SPECIFICATION FOR APPROVAL” WITH YOUR APPROVED SIGNATURES

| | | | | | |
|----|----|----|----|----|-----|
| 核准 | 王海 | 审核 | 刘飞 | 制作 | 刘小美 |
|----|----|----|----|----|-----|

| | | | |
|-----------------------------|--|--|--|
| 客户确认签章 (APPROVED SIGNATURE) | | | |
| | | | |

PBX2012MA05 Specification

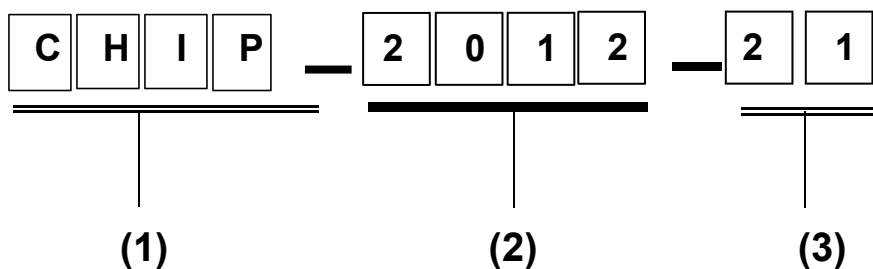
Operating Temp. : -40°C~+85°C

1. FEATURES:

- Light weight, compact
- Wide bandwidth, low cost
- Built-in antenna with high gain

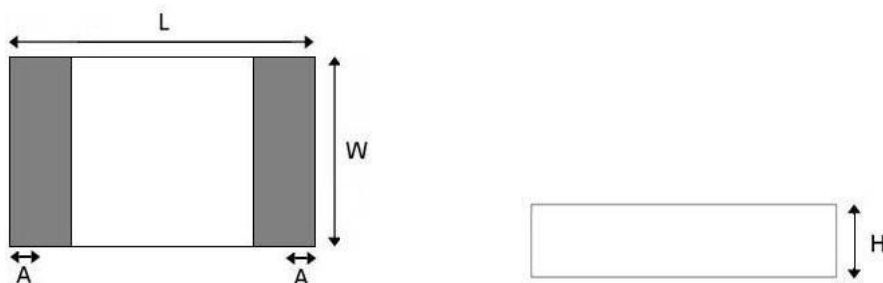
2. APPLICATIONS:

- Bluetooth, Wireless LAN, Mobile TV
- Home RF System, etc


3. PRODUCT IDENTIFICATION

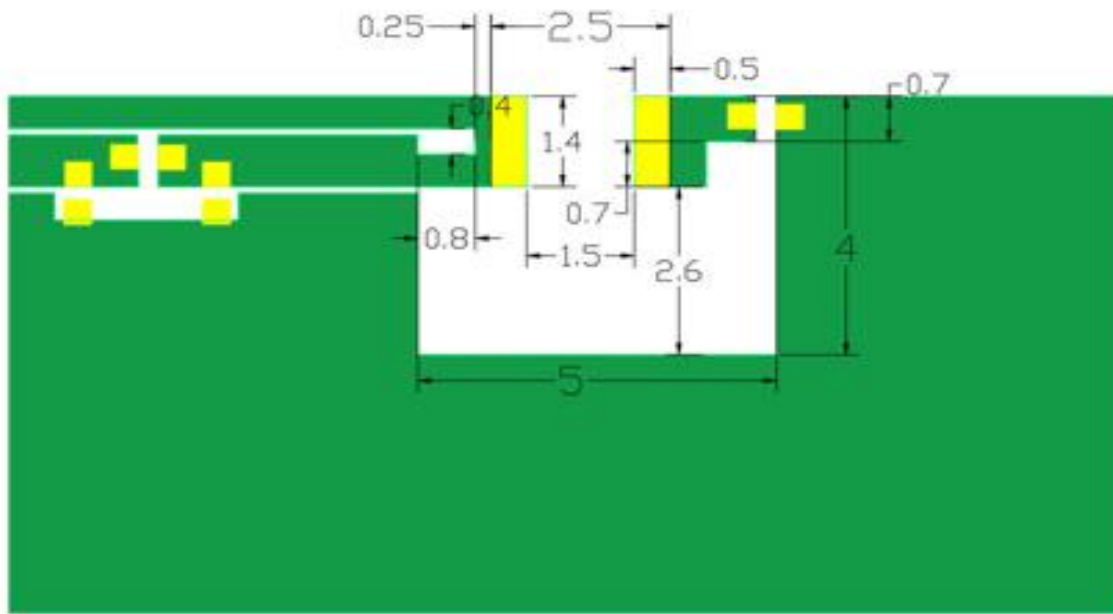
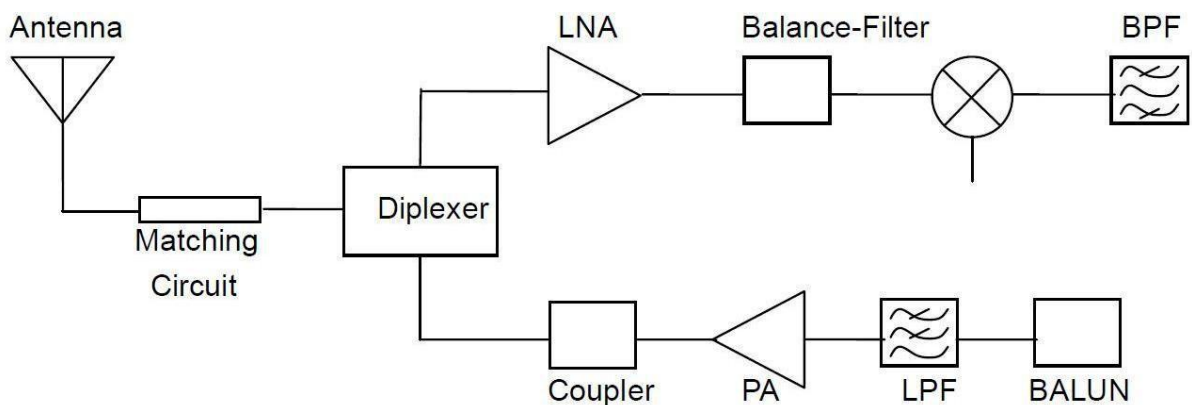
(1) Product type: Multilayer chip Antenna

(2) External Dimensions (L×W) (mm): 2.0*1.2

4. SHAPE AND DIMENSIONS:**SHAPE AND DIMENSIONS**

| L | W | H | A |
|---------|---------|----------|---------|
| 2.0±0.2 | 1.2±0.2 | 0.55±0.1 | 0.4±0.1 |

| | | | |
|--|-----------------|--|-----------------|
| UNLESS OTHER SPECIFIED TOLERANCES ON: X=± X.X=± X.XX=± ANGLES=± HOLEDIA=± | |  深圳市朋伴兴业科技有限公司 | |
| SCALE: N/A | UNIT: mm | THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PBXY TECHNOLOGY Limited AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION | |
| DRAWN BY : Sera | CHECKED BY: XD | | |
| DESIGNED BY: Sera | APPROVED BY: XD | | |
| TITLE: CHIP2450-21 Specification | | DOCUMENT NO. | 2012 |
| | | | SPEC REV. P1 |

TERMINAL-CONFIGURATION**EVALUATION BOARD****APPLICATION GUIDE**

UNLESS OTHER SPECIFIED TOLERANCES ON:

$X=\pm$ $X.X=\pm$ $X.XX=$
ANGLES $=\pm$ **HOLEDIA** $=\pm$

**深圳市朋伴兴业科技有限公司****SCALE:** N/A**UNIT:** mm**DRAWN BY:** Sera**CHECKED BY:** XD**DESIGNED BY:** Sera**APPROVED BY:** XD

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PBXY TECHNOLOGY Limited AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

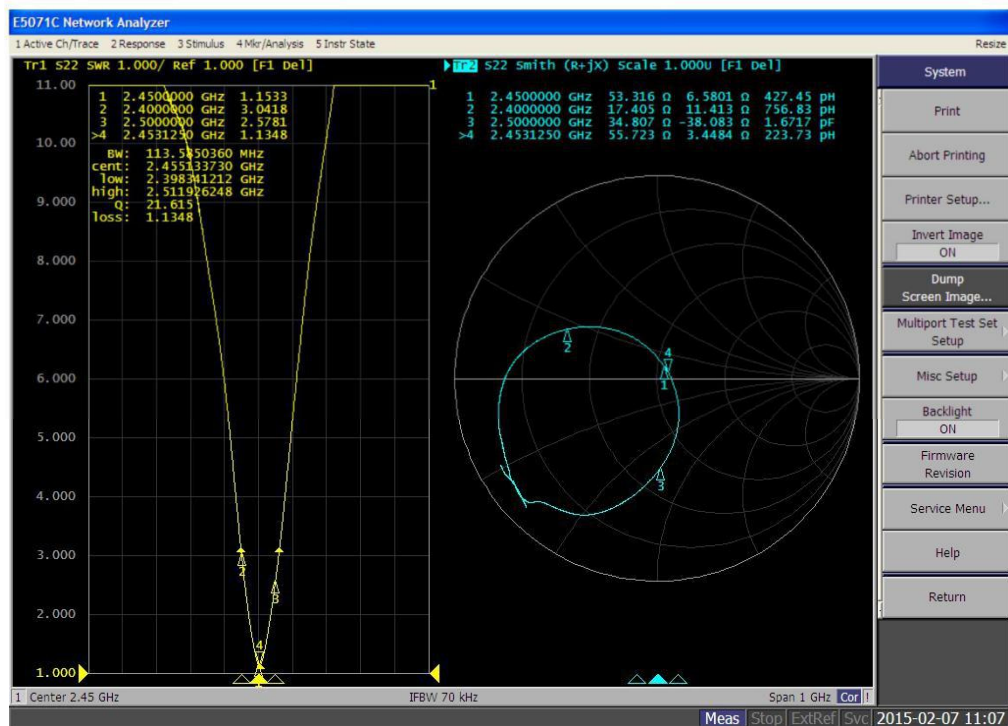
TITLE: CHIP2450-21 Specification**DOCUMENT NO.****2012**
SPEC REV.
P1

5. SPECIFICATIONS:

| ITEM | SPECIFICATION |
|------------------|------------------|
| Frequency Band | 2400MHz~2483MHz |
| VSWR | Less than 3 |
| Polarization | Linear |
| *Peak Gain | 2.48 dBi Typ. |
| *Peak Efficiency | 72.6% Typ. |
| Impedance | 50 Ω Typ. |

* Test condition: Test board size 98*65 mm

Matching circuit: Pi matching circuit will be required

6. Electrical Characteristics :**VSWR**

| Mark | Frequency | VSWR |
|------|-----------|------|
| 1 | 2400 MHz | 3.04 |
| 2 | 2450 MHz | 1.15 |
| 3 | 2500 MHz | 2.57 |

UNLESS OTHER SPECIFIED TOLERANCES ON:

$X=\pm$ $X.X=\pm$ $X.XX=$
ANGLES $=\pm$ **HOLEDIA** $=\pm$

SCALE: N/A

UNIT: mm

DRAWN BY : Sera

CHECKED BY: XD

DESIGNED BY: Sera

APPROVED BY: XD



深圳市朋伴兴业科技有限公司

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PBXY TECHNOLOGY Limited AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE: CHIP2450-21 Specification

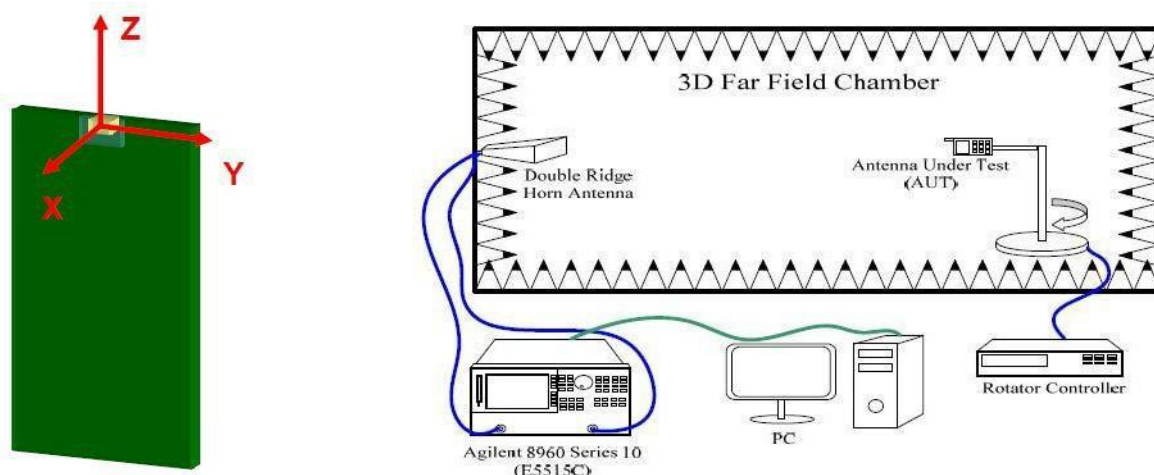
DOCUMENT
NO.

2012

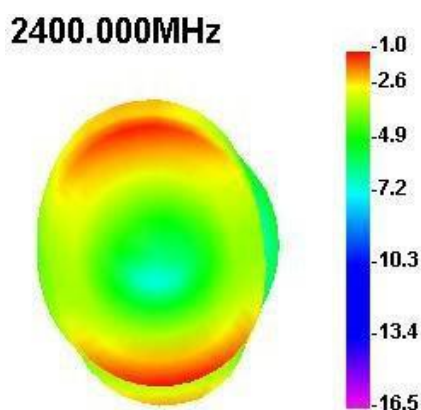
SPEC REV.
P1

Radiation Pattern

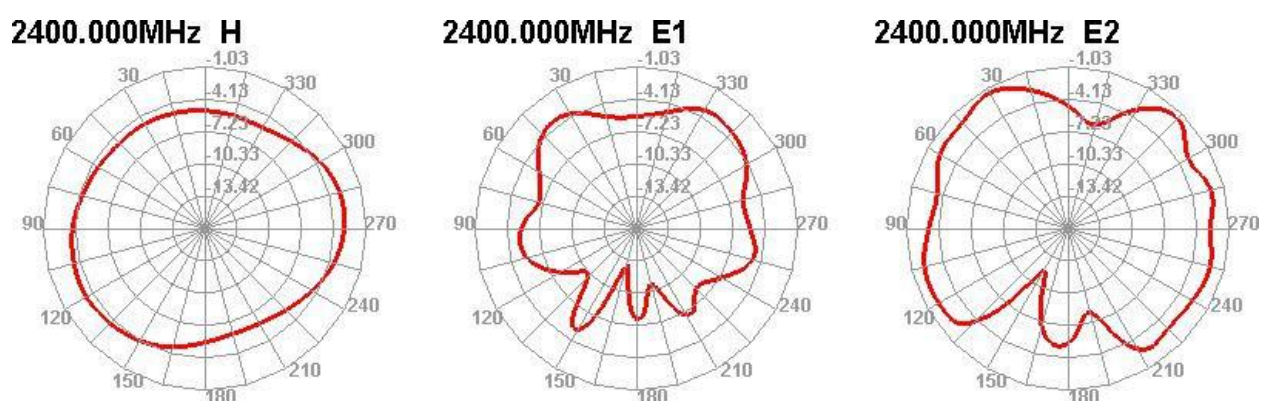
The Gain pattern is measured in INPAQ's FAR-field chamber. DUT is placed on the table of rotator, a standard horn antenna and Vector Network Analyzer is used to collect data.



© 3D Gain Pattern (2400 MHz)



© 2D Gain Pattern (2400 MHz)



UNLESS OTHER SPECIFIED TOLERANCES ON:

X=± X.X=± X.XX=±
 ANGLES=± HOLEDIA=±

SCALE: N/A

UNIT: mm

DRAWN BY: Sera

CHECKED BY: XD

DESIGNED BY: Sera

APPROVED BY: XD

TITLE: CHIP2450-21 Specification

DOCUMENT
NO.

2012

SPEC REV.
P1



深圳市朋伴兴业科技有限公司

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PBXY TECHNOLOGY Limited AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION