



EMC TEST REPORT

Applicant Bluebird Inc.
FCC ID SS4CF550
Product Cost-Effective Full Touch Handheld Computer
Brand BLUEBIRD
Model CF550
Report No. R2111A0957-E1V1
Issue Date January 28, 2022

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC Code CFR47 Part15B (2020)/ ANSI C63.4 (2014)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Wei Liu

Prepared by: Wei Liu

Guangchang Fan

Approved by: Guangchang Fan

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



Table of Contents

1	Test Laboratory.....	5
1.1	Notes of the Test Report.....	5
1.2	Test facility.....	5
1.3	Testing Location.....	5
2	General Description of Equipment under Test.....	6
2.1	Applicant and Manufacturer Information.....	6
2.2	General information.....	6
2.3	Applied Standards.....	8
2.4	Test Mode.....	9
3	Test Case Results	10
3.1	Radiated Emission	10
3.2	Conducted Emission	15
4	Main Test Instruments	19
	ANNEX A: The EUT Appearance.....	20
	ANNEX B: Test Setup Photos.....	21



Version	Revision description	Issue Date
Rev.0	Initial issue of report.	January 7, 2022
Rev.1	Update description in Page 9.	January 28, 2022
Note: This revised report (Report No. R2111A0957-E1V1) supersedes and replaces the previously issued report (Report No. R2111A0957-E1). Please discard or destroy the previously issued report and dispose of it accordingly.		



Summary of measurement results

Number	Test Case	Clause in FCC Rules	Conclusion
1	Radiated Emission	FCC Part15.109, ANSI C63.4-2014	PASS
2	Conducted Emission	FCC Part15.107, ANSI C63.4-2014	PASS
Date of Testing: December 2, 2021 ~ December 5, 2021			
Date of Sample Received: November 9, 2021			
Note: All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2 Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Fan Guangchang
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: fanguangchang@ta-shanghai.com

2 General Description of Equipment under Test

2.1 Applicant and Manufacturer Information

Applicant	Bluebird Inc.
Applicant address	3F, 115, Irwon-ro, Gangnam-gu, Seoul, Republic of Korea
Manufacturer	Bluebird Inc.
Manufacturer address	3F, 115, Irwon-ro, Gangnam-gu, Seoul, Republic of Korea

2.2 General information

EUT Description			
Device Type	Movable Device		
Model	CF550		
IMEI	IMEI 1: 358671240002572 IMEI 2: 358671240002580		
HW Version	V1.0		
SW Version	20211026_R1.00		
Power Rating	3.85V		
Connecting I/O Port(s)	Please refer to the User's Manual.		
Antenna Type	Coupling type (LDS)		
Frequency	Band	Tx (MHz)	Rx (MHz)
	GSM 850	824 ~ 849	869 ~ 894
	GSM 1900	1850 ~ 1910	1930 ~ 1990
	WCDMA Band II	1850 ~ 1910	1930 ~ 1990
	WCDMA Band IV	1710 ~ 1755	2110 ~ 2155
	WCDMA Band V	824 ~ 849	869 ~ 894
	LTE Band 2	1850 ~ 1910	1930 ~ 1990
	LTE Band 4	1710 ~ 1755	2110 ~ 2155
	LTE Band 5	824 ~ 849	869 ~ 894
	LTE Band 7	2500 ~ 2570	2620 ~ 2690
	LTE Band 19	830 ~ 845	875 ~ 890
	LTE Band 26	824 ~ 849	869 ~ 894
	LTE Band 28A	703 ~ 733	758 ~ 788
	LTE Band 28B	718 ~ 748	773 ~ 803
	LTE Band 38	2570 ~ 2620	2570 ~ 2620
	LTE 40 subset 1	2305 ~ 2315	2305 ~ 2315

	LTE 40 subset 2	2350 ~ 2360	2350 ~ 2360
	LTE Band 41	2535 ~ 2655	2535 ~ 2655
	Bluetooth	2400 ~ 2483.5	2400 ~ 2483.5
	WIFI 2.4G	2400 ~ 2483.5	2400 ~ 2483.5
	WIFI 5G(U-NII-1)	5150 ~ 5250	5150 ~ 5250
	WIFI 5G(U-NII-2A)	5250 ~ 5350	5250 ~ 5350
	WIFI 5G(U-NII-2C)	5470 ~ 5725	5470 ~ 5725
	WIFI 5G(U-NII-3)	5725 ~ 5850	5725 ~ 5850
	NFC	13.56	13.56
EUT Accessory			
Adapter	Manufacturer: Kuantech (Beihai) Co., Ltd. Model: KSA29B0500200D5 Input: 100-240V~50/60Hz 0.3A Output: 5.0V ---2.0A 10.0W		
Battery	Manufacturer: Ningbo Veken Battery Co.,Ltd. Model: BAT-435001B DC 3.85V, 4350mAh, 16.75Wh		
USB Cable	Manufacturer: GAC Model: GAC-BBD20-002 100cm Cable, Shielded		
Auxiliary test equipment			
PC	PC Manufacturer: Microsoft Corporation Model: L20170076		
Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.			



2.3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

FCC Code CFR47 Part15B (2020)

ANSI C63.4 (2014)

2.4 Test Mode

Test Mode	
Mode 1:	Adapter +USB cable +charging base+ Front/Rear camera On
Mode 2:	Adapter +USB cable + Front/Rear camera On
Mode 3:	Adapter + USB cable +charging base + Mp4
Mode4:	Adapter + USB cable + Mp4
Mode 5:	Adapter + USB cable + GSM/WCDMA/LTE/Bluetooth /WLAN /NFC Traffic
Mode 6:	Adapter + USB cable + GSM/WCDMA/LTE/Bluetooth /WLAN /NFC RECEIVER
Mode 7:	Adapter + USB cable +charging base+ GSM/WCDMA/LTE/Bluetooth /WLAN /NFC Traffic
Mode 8:	Adapter + USB cable +charging base+ GSM/WCDMA/LTE/Bluetooth /WLAN /NFC RECEIVER
Mode 9:	USB Copy(EUT with PC) + USB cable + earphone
Mode 10:	Adapter + charging base +USB Copy(EUT with PC) + USB cable + earphone

During the test, the preliminary test was performed in all modes, mode 9 is selected as the worst condition. The test data of the worst-case condition was recorded in this report.

3 Test Case Results

3.1 Radiated Emission

Ambient condition

Temperature	Relative humidity	Pressure
15°C~35°C	30%~60%	101.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The distance between EUT and receive antenna should be 3 meters. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated signal level.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. During the test, the EUT is worked at maximum output power.

Set the spectrum analyzer in the following:

Below 1GHz:

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK Detector: RBW=1MHz / VBW=3MHz/ Sweep=AUTO


(b) AVERAGE Detector: RBW=1MHz / VBW=3MHz / Sweep=AUTO

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.


During the test, EUT is connected to a laptop via a USB cable in the case of Transfer Data mode. The EUT is used as the peripheral equipment of the PC. The data is transferred from EUT to PC; PC is connected to server via a long LAN cable.

Test Setup

Below 1GHz

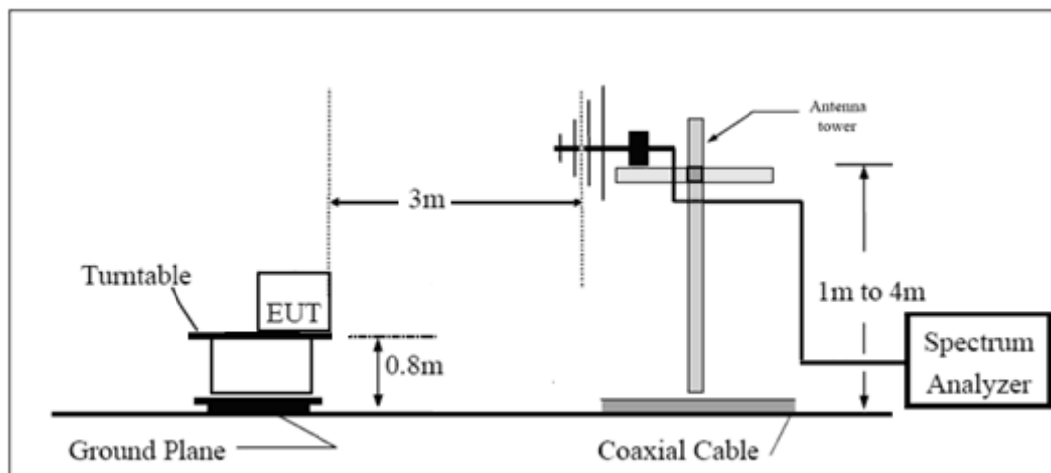

Above 1GHz

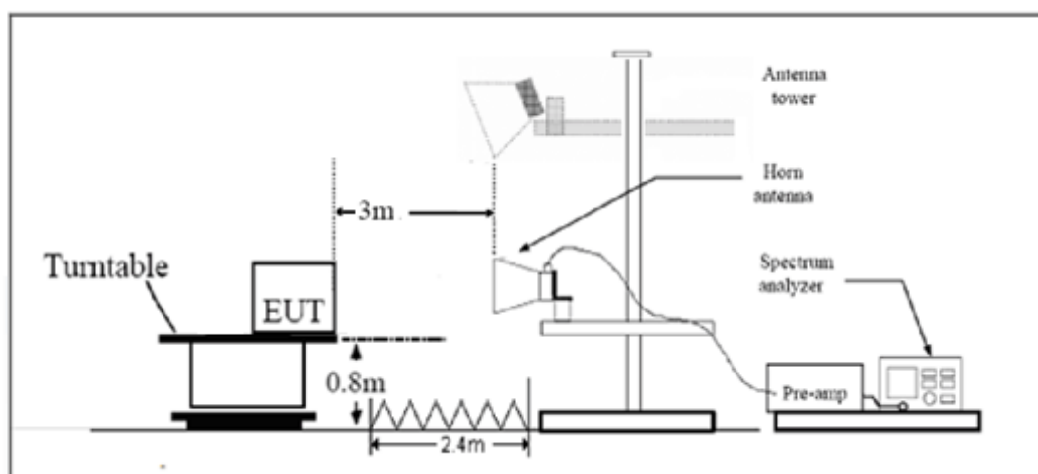

Note: Area side: 2.4mX3.6m

Antenna Tower meets ANSI C63.4 requirements for measurements above 1 GHz by keeping the antenna aimed at the EUT during the antenna's ascent/ descent along the antenna mast.

Limits

Class B

Frequency (MHz)	Field Strength (dB μ V/m)	Detector
30 -88	40.0	Quasi-peak
88-216	43.5	Quasi-peak
216 – 960	46.0	Quasi-peak
960-1000	54.0	Quasi-peak
1000-5 th harmonic of the highest frequency or 40GHz, which is lower	54 74	Average Peak

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
30MHz~200MHz	4.17 dB
200MHz~1000MHz	4.84 dB
1GHz~18GHz	4.35 dB


Test Results

Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. The Emissions in the frequency band 18GHz – 26.5GHz is more than 20dB below the limit are not reported.

The following graphs display the maximum values of horizontal and vertical by software.

For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

A font (Level in dB μ V/) in the test plot =(level in dB μ V/m)

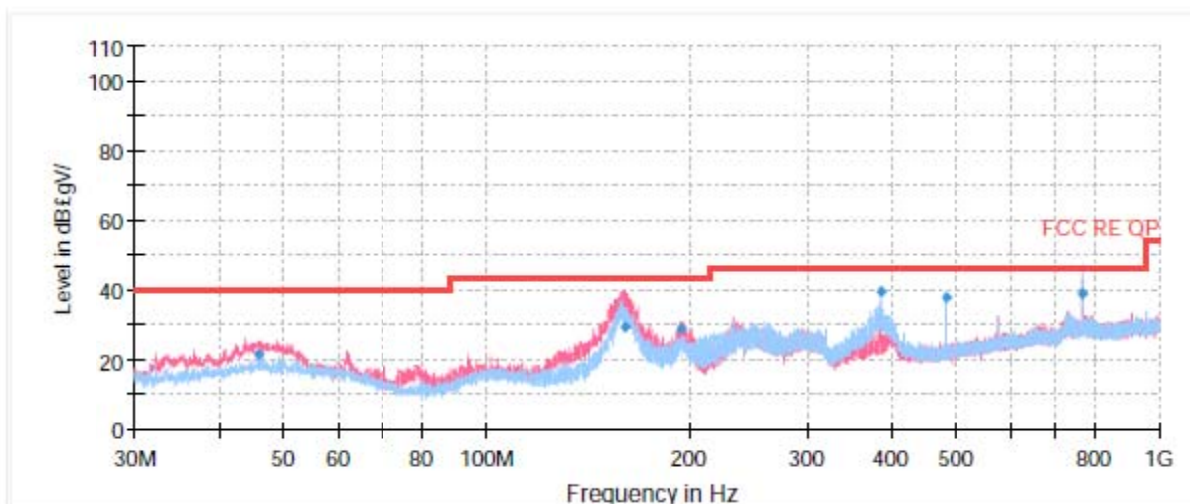


Radiated Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
45.677333	21.53	40.00	18.47	100.0	V	9.0	20
160.436000	29.51	43.50	13.99	100.0	V	343.0	15
195.086333	28.59	43.50	14.91	100.0	V	110.0	19
383.985333	39.68	46.00	6.32	100.0	H	161.0	23
479.983000	37.94	46.00	8.06	100.0	H	149.0	24
767.928333	38.92	46.00	7.08	100.0	H	167.0	29

Remark: 1. Correction Factor = Antenna factor + Insertion loss(cable loss+amplifier gain)

2. Margin = Limit – Quasi-Peak

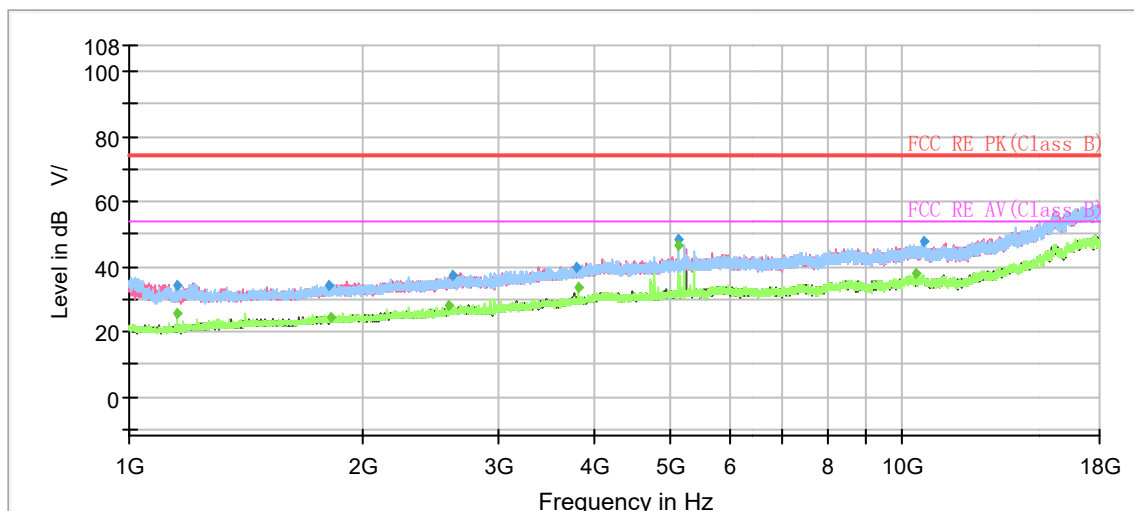

Radiated Emission from 1GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1151.866667	---	25.82	54.00	28.18	100.0	H	0.0	-18
1154.700000	34.46	---	74.00	39.54	100.0	H	128.0	-18
1812.600000	33.92	---	74.00	40.08	200.0	V	103.0	-14
1821.666667	---	24.29	54.00	29.71	200.0	V	288.0	-14
2591.766667	---	27.88	54.00	26.12	100.0	H	0.0	-10
2620.100000	37.15	---	74.00	36.85	200.0	V	300.0	-10
3790.833333	39.67	---	74.00	34.33	100.0	H	87.0	-5
3808.966667	---	33.51	54.00	20.49	100.0	H	352.0	-5
5129.866667	---	46.37	54.00	7.63	200.0	H	340.0	-1
5129.866667	48.15	---	74.00	25.85	200.0	H	340.0	-1
10419.133333	---	37.59	54.00	16.41	200.0	V	117.0	6
10663.933333	47.47	---	74.00	26.53	200.0	V	131.0	5

3.2 Conducted Emission

Ambient condition


Temperature	Relative humidity	Pressure
15°C~35°C	30%~60%	101.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

During the test, EUT is connected to a laptop via a USB cable in the case of Transfer Data mode. The EUT is used as the peripheral equipment of the PC. The data is transferred from EUT to PC; PC is connected to server via a long LAN cable.

Test Setup

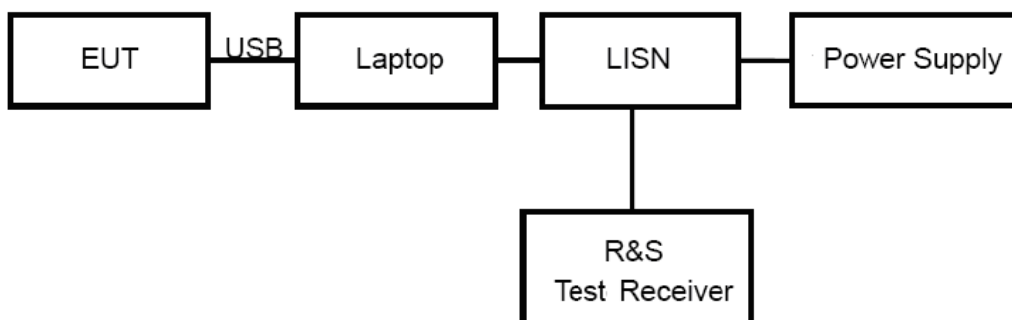

Note: Power Supply is AC Power source and it is used to change the voltage 120V/60Hz.

Limits

Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50
*: Decreases with the logarithm of the frequency.		

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is



with the coverage factor $k = 1.96$. $U = 2.57$ dB.

Test Results

Following plots, Blue trace uses the peak detection; Green trace uses the average detection.

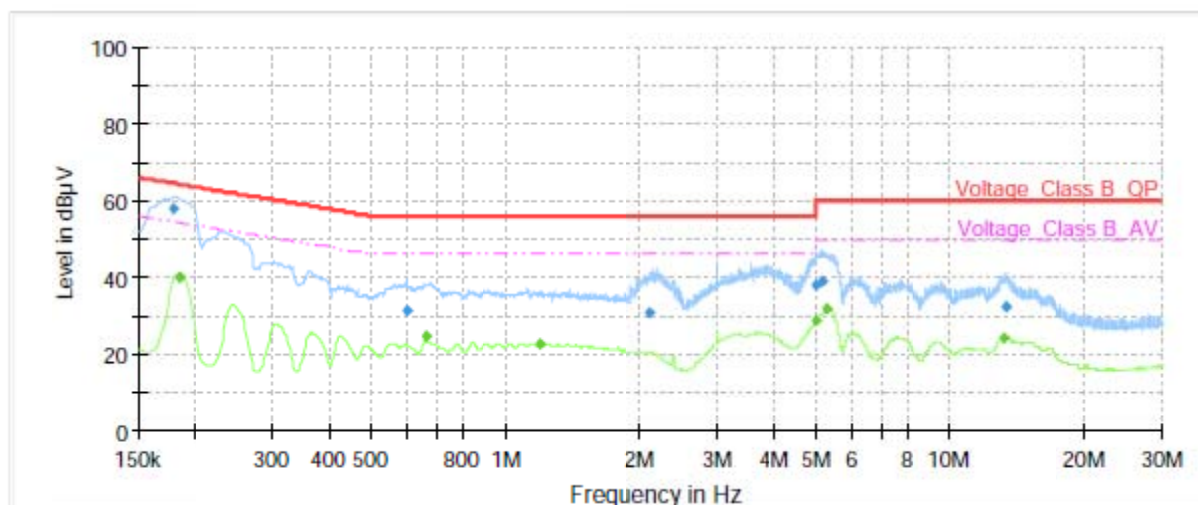


Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.18	57.87	---	64.52	6.65	70.0	9.000	L1	ON	21
0.18	---	40.12	54.31	14.19	70.0	9.000	L1	ON	21
0.60	31.23	---	56.00	24.77	70.0	9.000	L1	ON	20
0.66	---	24.39	46.00	21.61	70.0	9.000	L1	ON	20
1.20	---	22.61	46.00	23.39	70.0	9.000	L1	ON	20
2.12	30.66	---	56.00	25.34	70.0	9.000	L1	ON	20
4.99	37.83	---	56.00	18.17	70.0	9.000	L1	ON	19
5.00	---	28.80	46.00	17.20	70.0	9.000	L1	ON	19
5.15	39.16	---	60.00	20.84	70.0	9.000	L1	ON	19
5.31	---	31.55	50.00	18.45	70.0	9.000	L1	ON	19
13.28	---	24.23	50.00	25.77	70.0	9.000	L1	ON	20
13.33	32.23	---	60.00	27.77	70.0	9.000	L1	ON	20

Remark: Correct factor=cable loss + LISN factor

L line

Conducted Emission from 150 KHz to 30 MHz

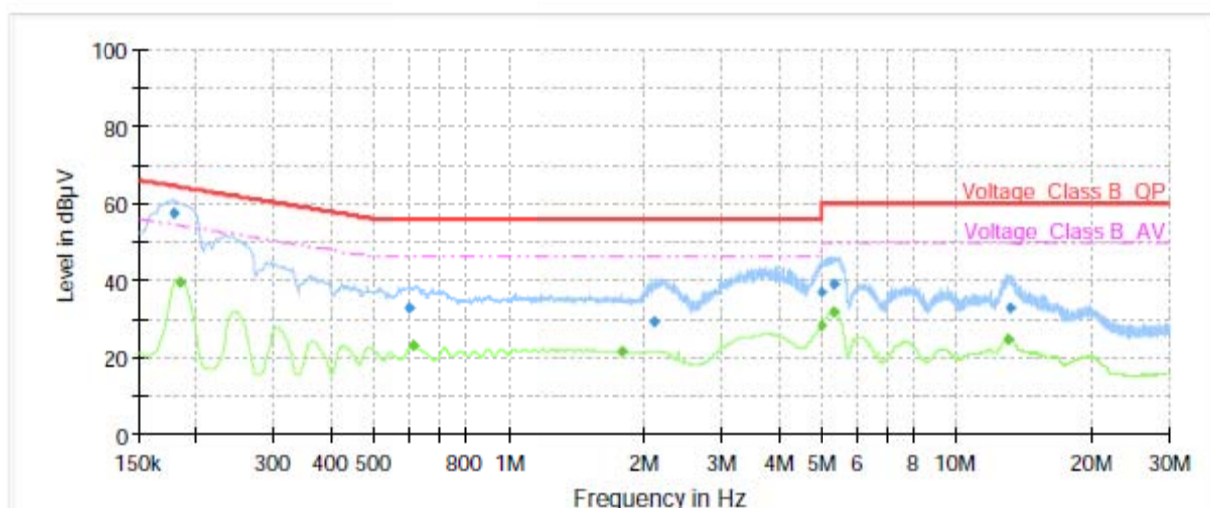

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.18	57.59	---	64.52	6.93	70.0	9.000	N	ON	21
0.18	---	39.58	54.31	14.73	70.0	9.000	N	ON	21
0.60	32.69	---	56.00	23.31	70.0	9.000	N	ON	20
0.62	---	23.30	46.00	22.70	70.0	9.000	N	ON	20
1.79	---	21.59	46.00	24.41	70.0	9.000	N	ON	20
2.12	29.34	---	56.00	26.66	70.0	9.000	N	ON	20
4.98	36.70	---	56.00	19.30	70.0	9.000	N	ON	19
5.00	---	28.26	46.00	17.74	70.0	9.000	N	ON	19
5.34	38.87	---	60.00	21.13	70.0	9.000	N	ON	19
5.36	---	31.79	50.00	18.21	70.0	9.000	N	ON	19
13.08	---	24.77	50.00	25.23	70.0	9.000	N	ON	20
13.18	32.88	---	60.00	27.12	70.0	9.000	N	ON	20

Remark: Correct factor=cable loss + LISN factor

N line

Conducted Emission from 150 KHz to 30 MHz

4 Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Time
Spectrum Analyzer	R&S	FSV40	15195-01-00	2021-05-15	2022-05-14
EMI Test Receiver	R&S	ESCI	100948	2021-05-15	2022-05-14
Trilog Antenna	SCHWARZBECK	VULB 9163	391	2019-12-16	2022-12-15
Horn Antenna	R&S	HF907	102723	2020-08-11	2023-08-10
Horn Antenna	ETS-Lindgren	3160-09	00102643	2021-10-10	2024-10-09
EMI Test Receiver	R&S	ESR	101667	2021-05-16	2022-05-15
LISN	R&S	ENV216	101171	2018-12-15	2021-12-14
Bore Sight Antenna mast	ETS	2171B	00058752	/	/
Test software	EMC32	R&S	9.26.0	/	/

*****END OF REPORT *****



ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.



ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.