

承 认 书

APPROVAL SHEET

客 户 名 称

CUSTOMER NAME: 熵基科技股份有限公司

产 品 名 称 2.4G FPC 内置天线 L=200mm+端子

PRODUCT NAME: 4G FPC 内置天线 L=211mm+端子

客 户 料 号

CUSTOMER P/N:

优比电子料号

Youbi P/N: UB01C85F2D2868A REV: A

	MANUFACTURER SIGNATURE	CUSTOMER SIGNATURE
CHECKED BY:	Yongxin. Lu 	
APPROVED BY:	Changxing. Liu	
DATE:	2022/10/22	

Modification History

Version	Content Revision	Issued by	Date
A	Original version	Yongxin. Lu	2022-4-17

Content



<i>Item</i>	<i>Description</i>
1.-----	Electrical Specification
2.-----	Test Items and Equipment
3.-----	S Parameter_2.4G
4.-----	Efficiency and Gain_2.4G
5.-----	Radiation Pattern_2.4G
6.-----	S Parameter_4G
7.-----	Efficiency and Gain_4G
8.-----	Radiation Pattern_4G
9.-----	Antenna installation diagram
10.-----	Mechanical Specification
11.-----	Packaging

1. Electrical Specification:

Characteristics	Specifications	Unit
Outline Dimensions	101.3x19,L200 / 211	mm
Frequency	2400-2500 824-960 / 1710-2170;2300-2700	MHz
Impedance	50	Ω
Return Loss_2.4G	-10 Max	dB
VSWR_4G	< 7 / 3	
Polarization	Linear Polarization	
Gain	1 REF@2.4G 0 REF@4G	dBi
Efficiency	> 30@2.4G > 5 / 20@4G	%
Connector Type	1.13 MHF-1-Plug	
Operating temperature	-20℃~+85℃	
Storage Temp	-20℃~+50℃	


2.Test Items and Equipment

	Test items	Test equipment
S Parameter	1.Return Loss 2.VSWR	Network analyzer (Agilent E5071B)
The whole machine of Passive parameters	1.Frequency 2.Gain 3.Radiation Pattern	1.3D microwave darkroom (5m*5m*5m) 2.Network analyzer (Agilent E5071B)
The whole machine of Active parameters	1.TRP 2.TIS	1.3D microwave darkroom (5m*5m*5m) 2.Comprehensive test instrument (CMW500)

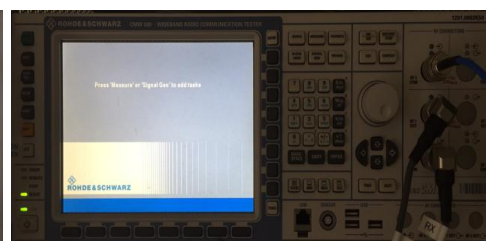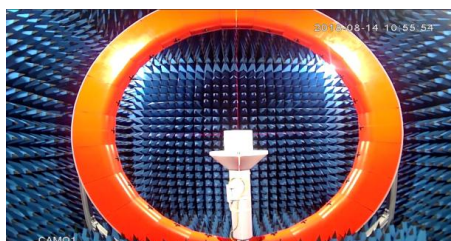

3. S Parameter_2.4G

Frequency (MHz)	Return Loss (dB)
2400	-14.09
2450	-12.53
2500	-13.02

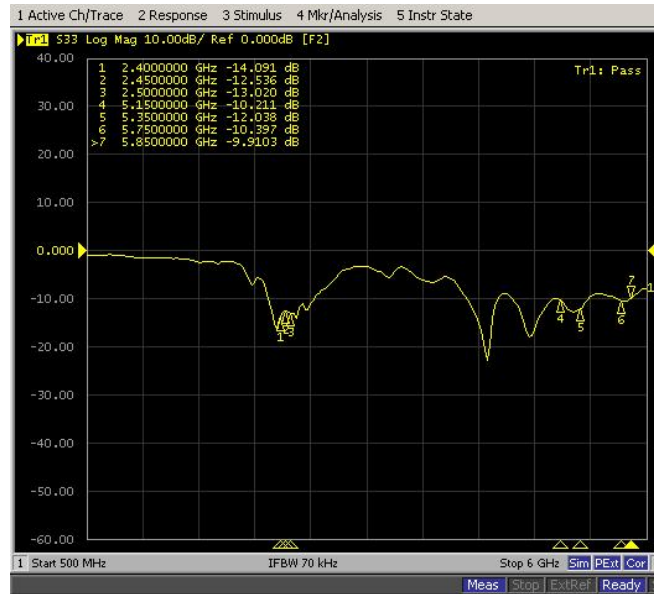



*Voltage Standing Wave Ratio(VSWR)

Return Loss(RL)

$$RL = 20 \cdot \log_{10}[(VSWR + 1) / (VSWR - 1)]$$


4. Efficiency and Gain_2.4G

Frequency (MHz)	2400	2450	2500
Efficiency (%)	48.08	46.88	34.28
Gain (dBi)	1.65	1.37	0.54

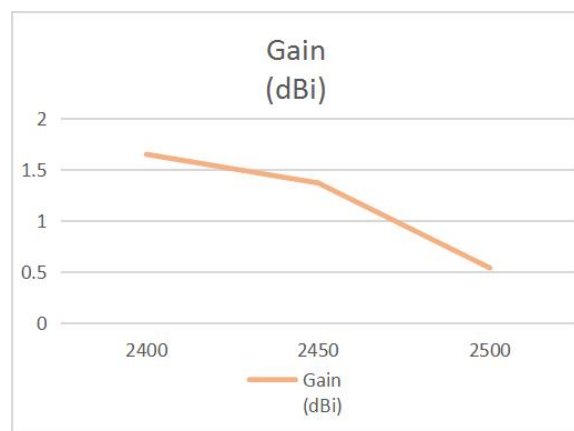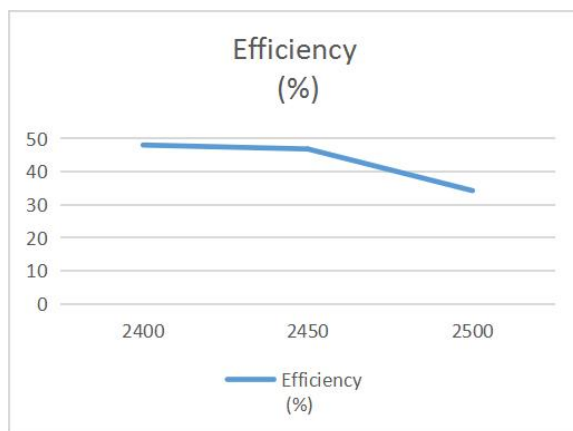


5. Radiation Pattern_2.4G


5-1 Antenna 3D Radiation Pattern

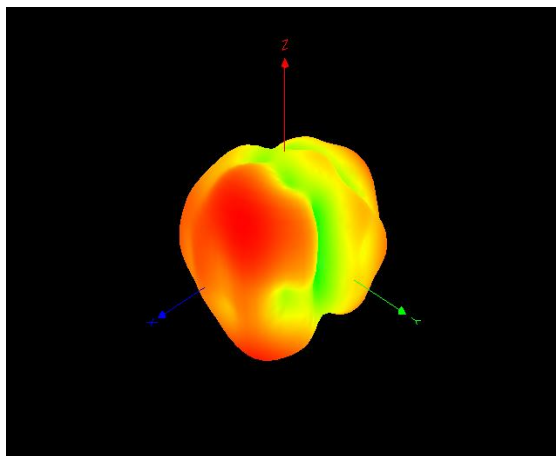

2400MHz

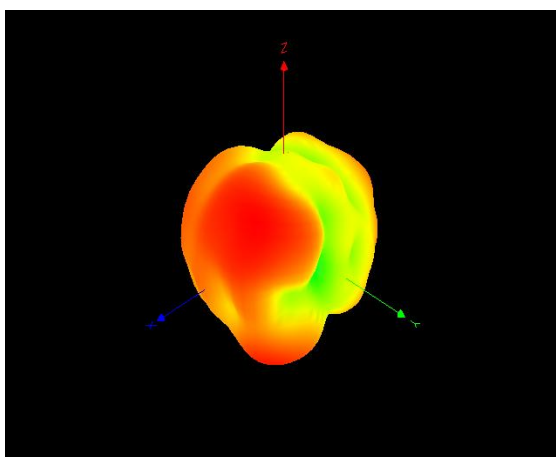


2450MHZ

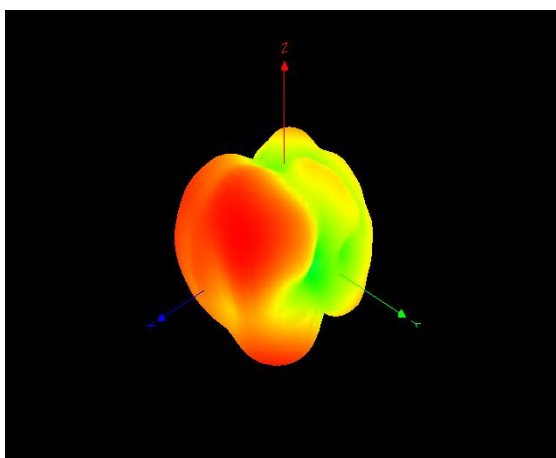


2500MHZ


5-2 Antenna 2D Radiation Pattern

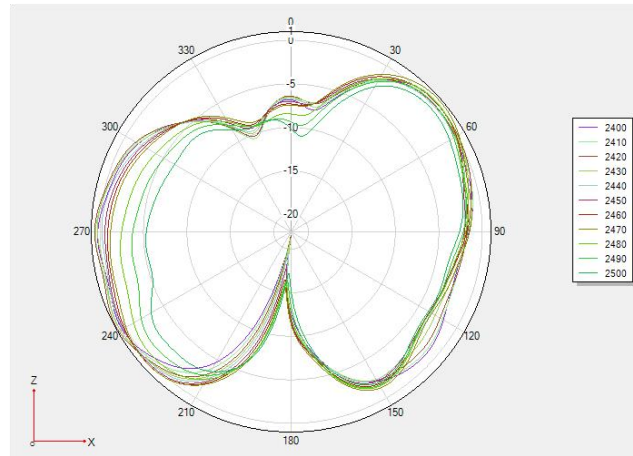

Phi 0 2D

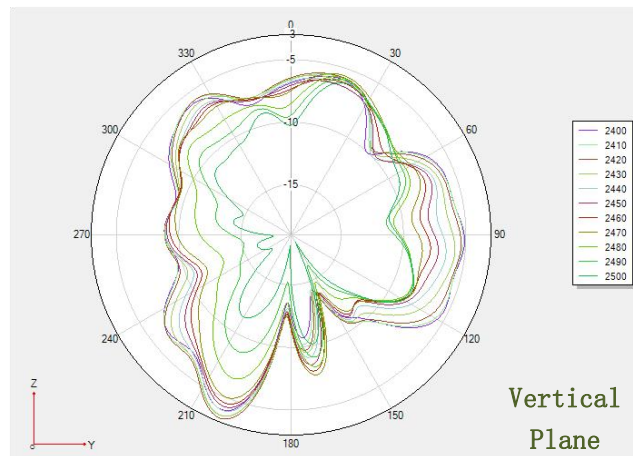

Phi 90 2D

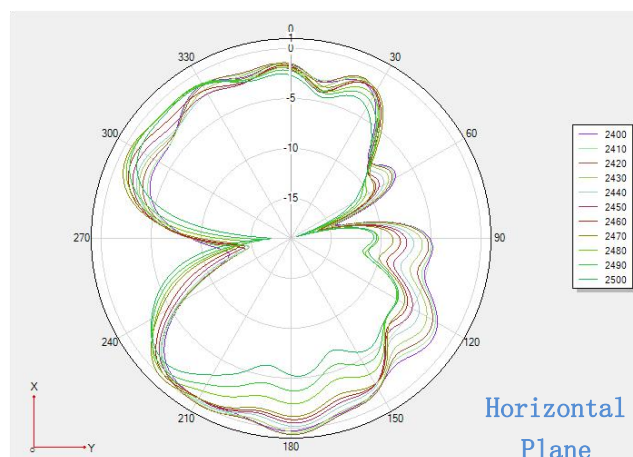


Theta 90 2D

3. S Parameter_4G


Frequency (MHz)	VSWR
824	5.78
960	5.94
1710	1.66
2170	2.04
2300	2.10
2700	2.71

*Voltage Standing Wave Ratio(VSWR)
Return Loss(RL)
 $RL = 20 * \log_{10}[(VSWR + 1) / (VSWR - 1)]$

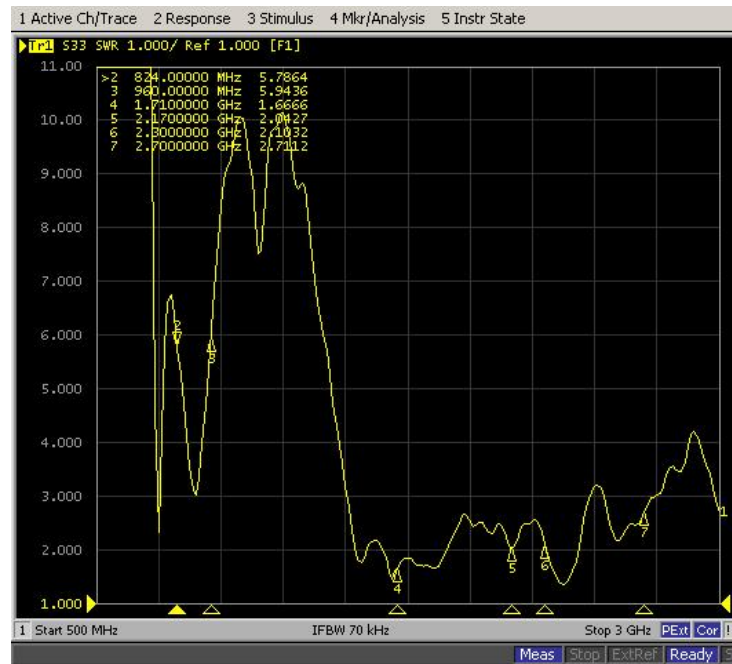


4. Efficiency and Gain_4G

Frequency (MHz)	824	960	1710	2170	2300	2700
Efficiency (%)	9.06	12.5	44.98	42.95	26.49	38.9
Gain (dBi)	-4.64	-5.39	1.89	-0.25	-1.22	1.99

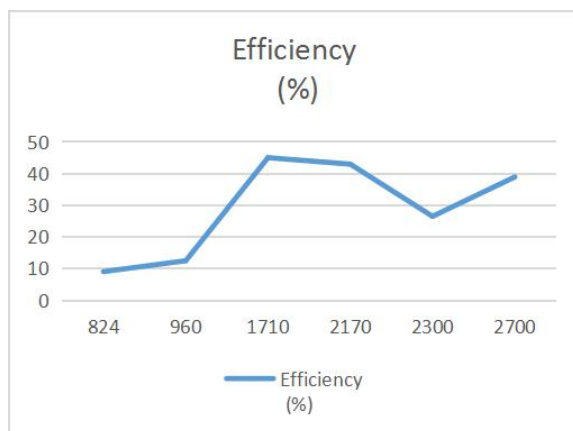


5. Radiation Pattern_4G


5-1 Antenna 3D Radiation Pattern

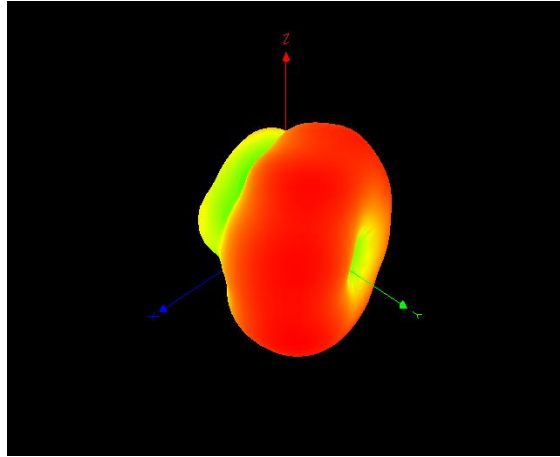


824MHz

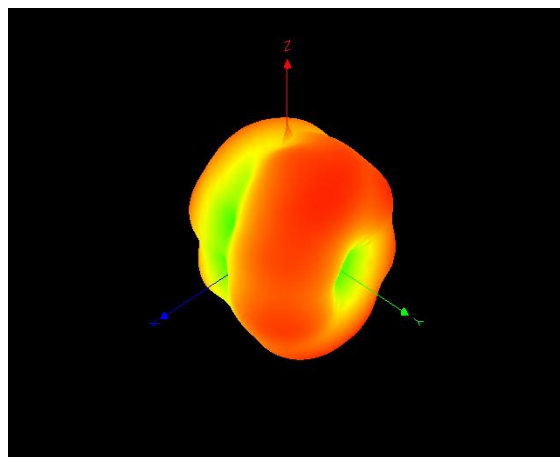


960MHZ

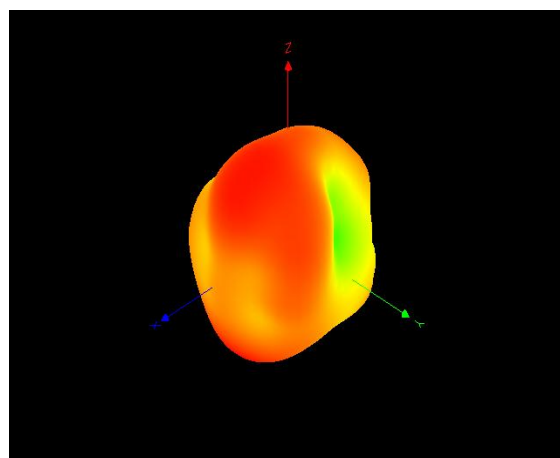


1710MHZ

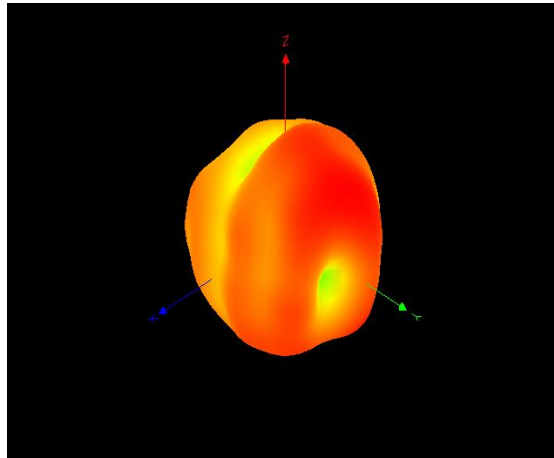

2170MHz

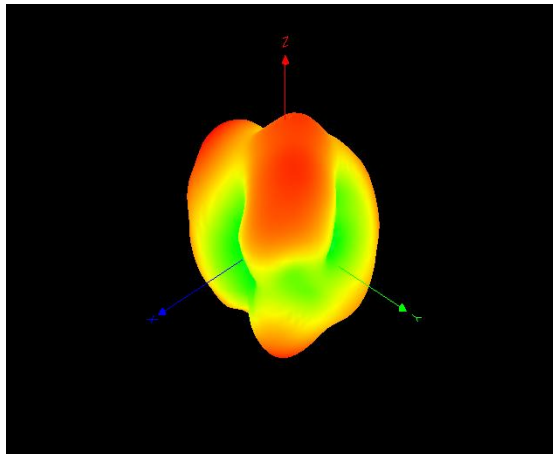


2300MHZ

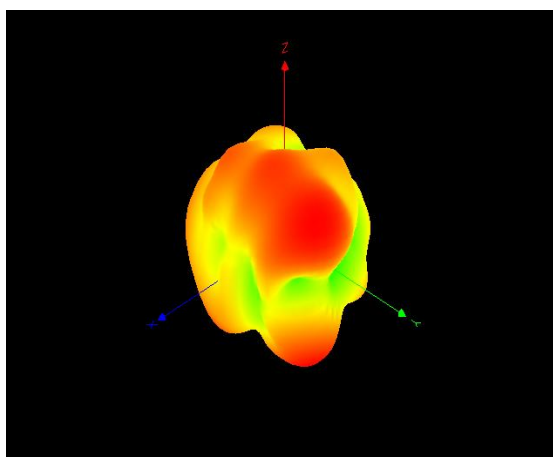


2700MHZ


5-2 Antenna 2D Radiation Pattern

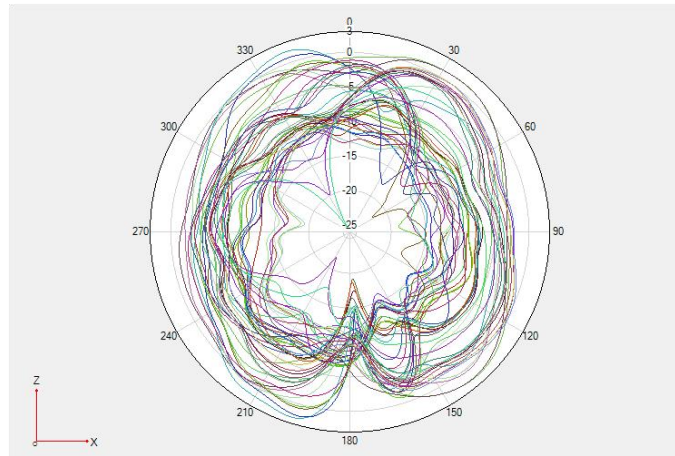

Phi 0 2D

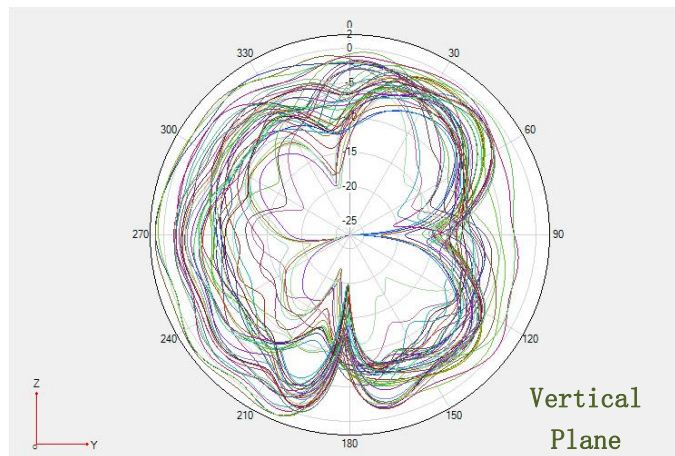


Phi 90 2D

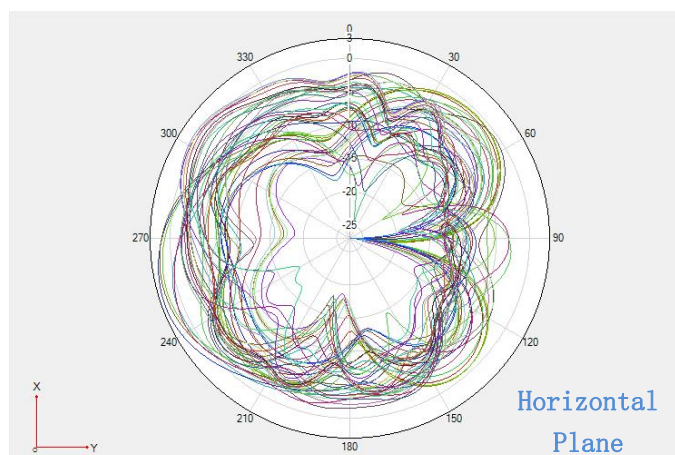


Theta 90 2D

6. Antenna installation diagram:

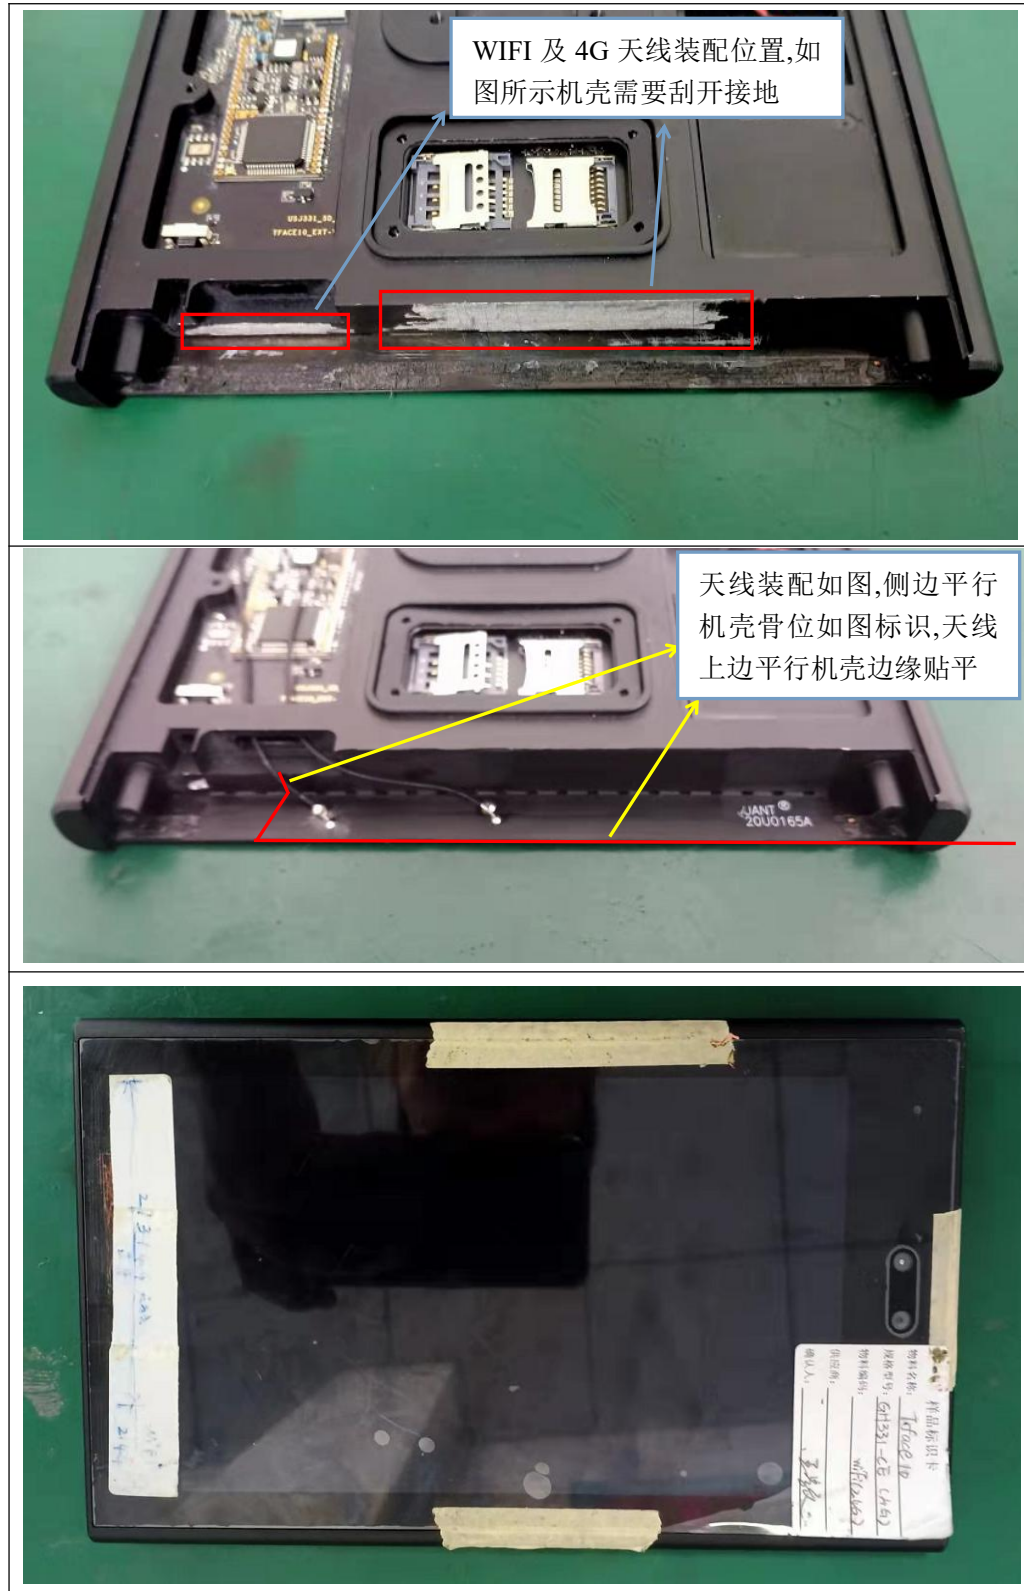

7.Mechanical Specification:

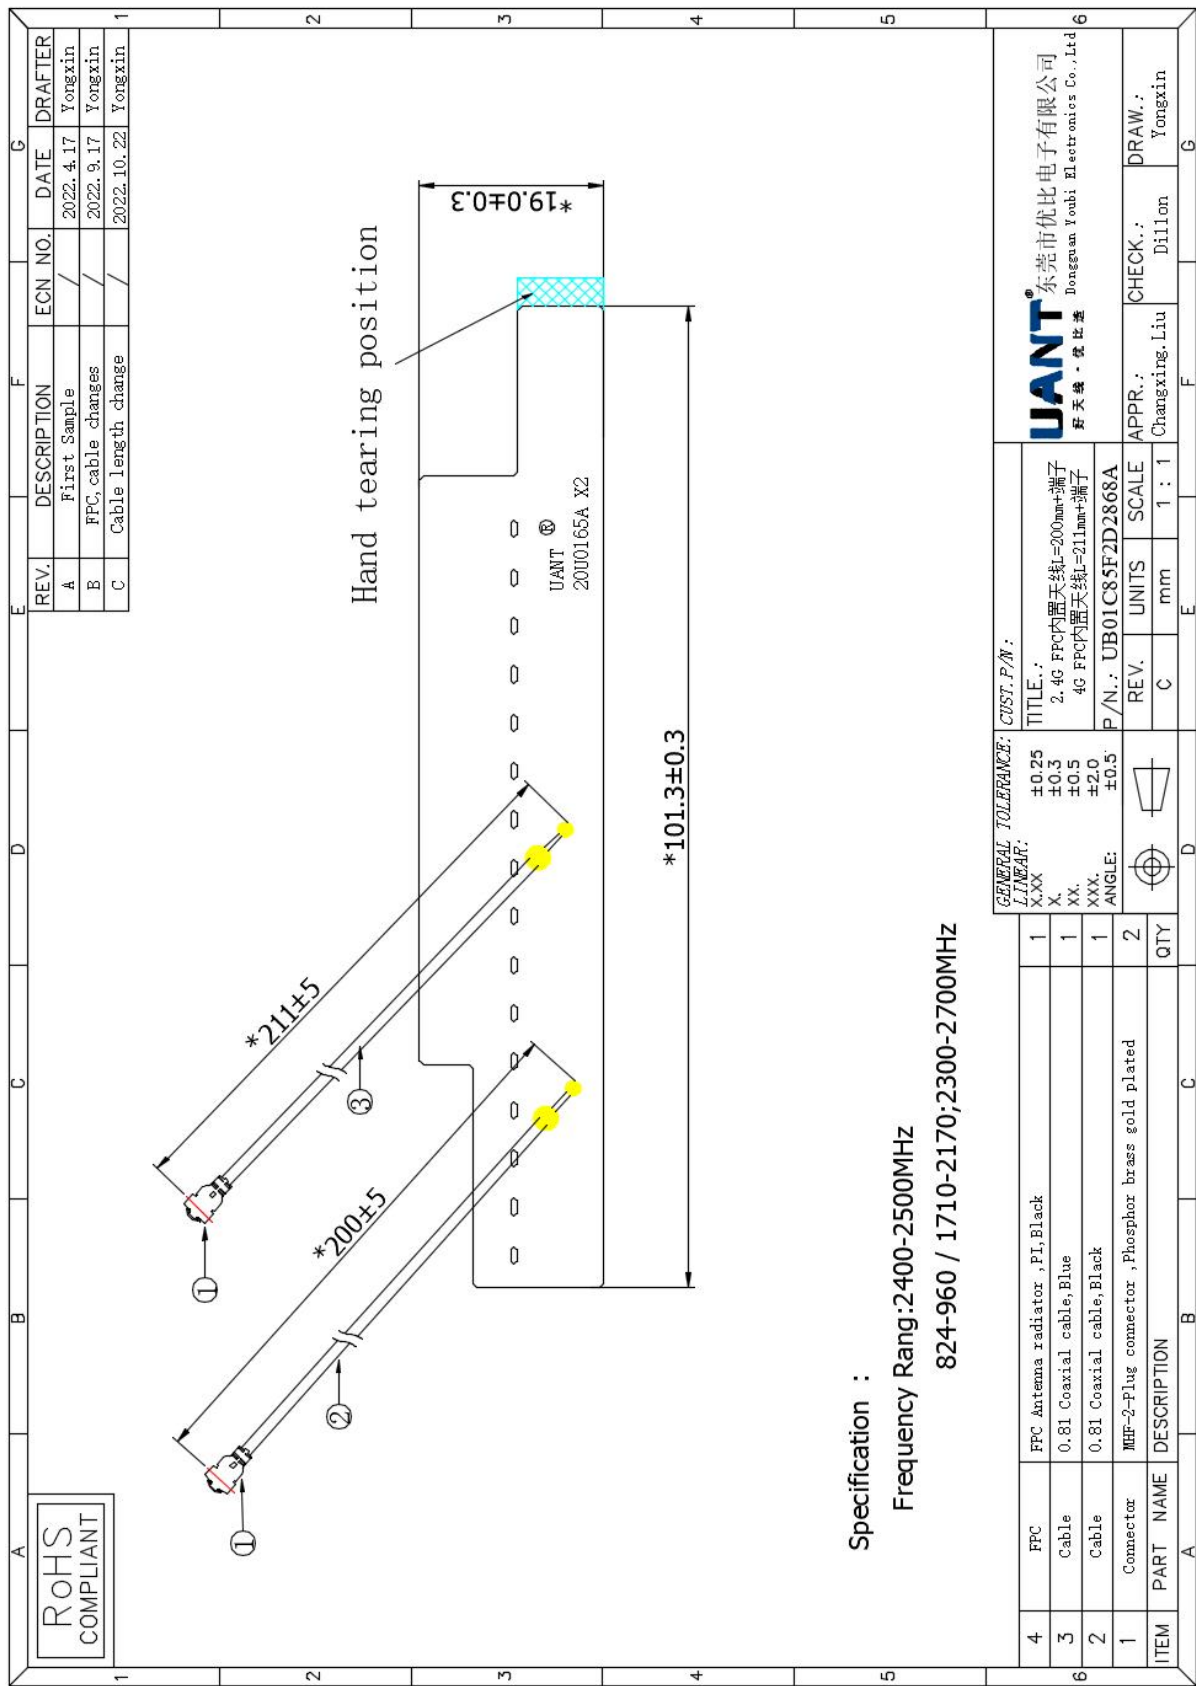

14 / 15

未使用特定化合物声明

兹有我司东莞市优比电子有限公司，应熵基科技股份有限公司要求，
我司所交货物料符合 ROHS 2.0 标准，特此声明我司所交物料符合 ROHS 2.0
标准，如有不符合项我司愿意承担一切责任：

欧盟 ROHS 2.0 法规及其豁免条列

铅 (Pb)	1000PPM
镉 (Cd)	100PPM
汞 (Hg)	1000PPM
六价铬 (Cr6+)	1000PPM
多溴联苯 (PBBs)	1000PPM
多溴联苯醚 (PBDEs)	1000PPM
邻苯二甲酸二 (2-乙基己基) 酯 (DEHP)	1000PPM
邻苯二甲酸甲苯基丁酯 (BBP)	1000PPM
邻苯二甲酸二丁基酯 (DBP)	1000PPM
邻苯二甲酸二异丁酯 (DIBP)	1000PPM

公司总经理签字及公司盖章：

日 期：