

FCC Co-Location Test Report

FCC ID : I88EMG3425Q10A

Equipment : Simultaneous Dual-Band Wireless AC2200

Gigabit Ethernet Gateway

Model No. : EMG3425-Q10A

Brand Name : ZyXEL

Applicant : ZyXEL Communications Corporation

Address : No. 2, Gongye E. 9th Road, Hsinchu Science

Park, Hsinchu, Taiwan.

Standard : 47 CFR FCC Part 15.247

47 CFR FCC Part 15.407

Received Date : Dec. 19, 2017

Tested Date : Jan. 16 ~ Jan. 17, 2018

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by: Approved by:

Report No.: FR570601-07CO

Report Version: Rev. 01

Page: 1 of 15



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	The Equipment List	6
1.3	Test Standards	6
1.4	Measurement Uncertainty	7
2	TEST CONFIGURATION	8
2.1	Testing Condition	8
2.2	The Worst Test Modes and Channel Details	8
3	TRANSMITTER TEST RESULTS	9
3.1	Unwanted Emissions into Restricted Frequency Bands	9
4	TEST LABORATORY INFORMATION	15



Release Record

Report No.	Version	Description	Issued Date
FR570601-07CO	Rev. 01	Initial issue	Mar. 09, 2018

Report No.: FR570601-07CO Page: 3 of 15



Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.247(d)			
15.407(b)	Radiated Emissions	[dBuV/m at 3m]: 49.99MHz 35.90 (Margin -4.10dB) - QP	Pass
15.209		(maigin mod2) qi	

Report No.: FR570601-07CO Page : 4 of 15



1 General Description

1.1 Information

This is a FCC Class II Permissive Change report (C2PC).

This report is issued as a supplementary report to original ICC report no. FR570601CO. The modifications are concerned with following items:

- ♦ 2.4G Power amplifier is changed.
- ♦ Increase output power of 5725 ~ 5850 MHz to comply with new emission limits by software setting.
- ♦ 2nd source components into power portion of Non-RF part: 12V(Q1), 5V(L4, L5) and 1.2V(L17).
- ♦ Remove one adapter.

1.1.1 Specification of the Equipment under Test (EUT)

Operating Frequency	802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz; 5745 MHz ~ 5825 MHz	
	802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)	

1.1.2 Antenna Details

Ant.	Typo	Operating Frequ	ency / Gain (dBi)	Connector
No.	Туре	2.4GHz	5GHz	Connector
1	Dipole	1.53	1.92	UFL

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	12Vdc from AC adapter
	1 = 1 3 3 1 3 1 1 1 1 3 3 3 3 3 4 3 3 3 3 3

1.1.4 Accessories

	Accessories					
No. Equipment Description						
1	AC adapter	Brand Name: APD Model Name: WA-36A12FU Power Rating: I/P: 100-240Vac, 50-60Hz, 0.9A Max O/P: 12Vdc, 3A Power Line: DC 1.5m non-shielded cable with one core				
2	RJ45 cable	1.0m non-shielded cable w/o core.				

Report No.: FR570601-07CO Page: 5 of 15



1.2 The Equipment List

Test Item	Radiated Emission					
Test Site	966 chamber 3 / (03CH03-WS)					
Tested Date	Jan. 16 ~ Jan. 17, 2018					
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until	
Spectrum Analyzer	R&S	FSV40	101498	Dec. 04, 2017	Dec. 03, 2018	
Receiver	R&S	ESR3	101658	Nov. 20, 2017	Nov. 19, 2018	
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Apr. 28, 2017	Apr. 27, 2018	
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Feb. 09, 2017	Feb. 08, 2018	
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 23, 2017	Nov. 22, 2018	
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 13, 2017	Nov. 12, 2018	
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Dec. 07, 2017	Dec. 06, 2018	
Preamplifier	EMC	EMC02325	980187	Sep. 04, 2017	Sep. 03, 2018	
Preamplifier	Agilent	83017A	MY53270014	Aug. 21, 2017	Aug. 20, 2018	
Preamplifier	EMC	EMC184045B	980192	Aug. 22, 2017	Aug. 21, 2018	
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Nov. 27, 2017	Nov. 26, 2018	
RF cable-8M	HUBER+SUHNER	SUCOFLEX104	MY32487/4	Nov. 27, 2017	Nov. 26, 2018	
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Nov. 27, 2017	Nov. 26, 2018	
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800 -001	Nov. 27, 2017	Nov. 26, 2018	
LF cable-3M	EMC	EMC8D-NM-NM-300 0	131103	Nov. 27, 2017	Nov. 26, 2018	
LF cable-13M	EMC	EMC8D-NM-NM-130 00	131104	Nov. 27, 2017	Nov. 26, 2018	
Measurement Software	AUDIX	e3	6.120210g	NA	NA	
Note: Calibration Inte	Note: Calibration Interval of instruments listed above is one year.					

1.3 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

47 CFR FCC Part 15.407

ANSI C63.10-2013

FCC KDB 558074 D01 DTS Meas Guidance v04

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01

FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Report No.: FR570601-07CO Page: 6 of 15



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty			
Parameters Uncertainty			
Radiated emission ≤ 1GHz	±3.66 dB		
Radiated emission > 1GHz	±5.37 dB		

Report No.: FR570601-07CO Page: 7 of 15



2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
Radiated Emissions	03CH03-WS	20-24°C / 62%	Vincent Yeh

FCC Designation No.: TW0009
 FCC site registration No.: 390588
 IC site registration No.: 10807C-1

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate			
Radiated Emissions	2.4G 11n HT20 + 5G 11a	CH6 + CH157	MCS 0 + MCS 0			
NOTE: The selected channel is the maximum power channel of Wi-Fi mode.						

Report No.: FR570601-07CO Page: 8 of 15



3 Transmitter Test Results

3.1 Unwanted Emissions into Restricted Frequency Bands

3.1.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit					
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)		
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300		
0.490~1.705	24000/F(kHz)	33.8 - 23	30		
1.705~30.0	30	29	30		
30~88	100	40	3		
88~216	150	43.5	3		
216~960	200	46	3		
Above 960	500	54	3		

Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.1.2 Test Procedures

- Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


Note:

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- 3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

Report No.: FR570601-07CO Page: 9 of 15




3.1.3 Test Setup

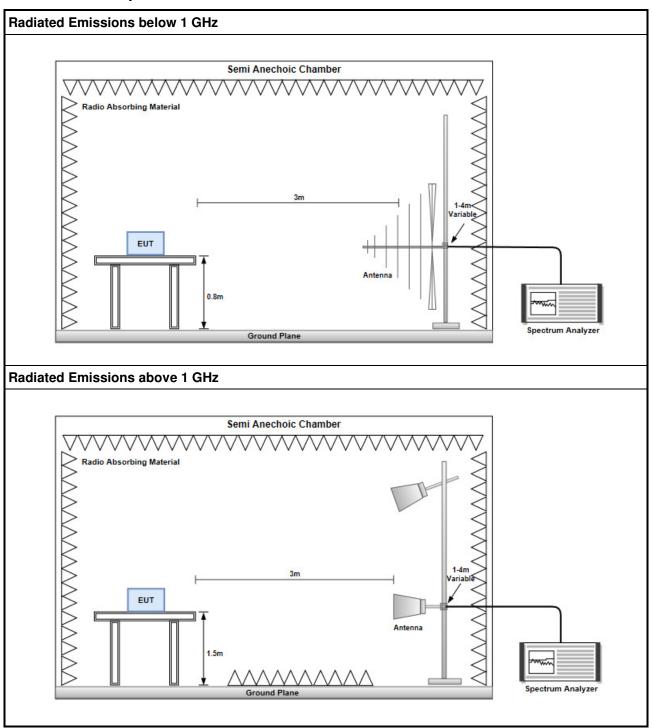

Report No.: FR570601-07CO Page: 10 of 15



3.1.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

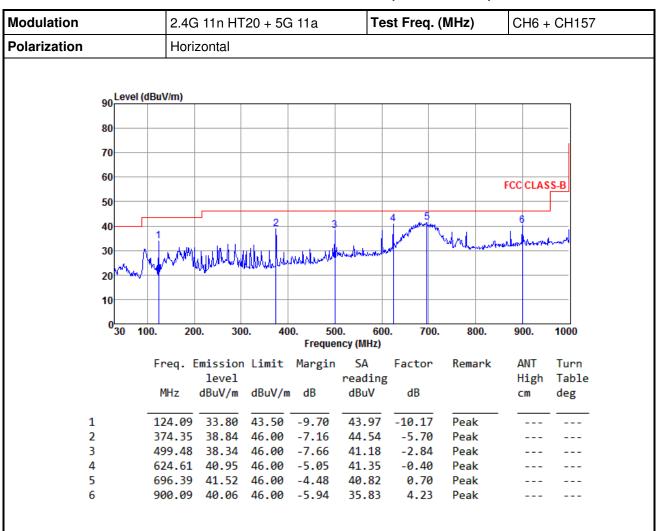

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR570601-07CO Page: 11 of 15



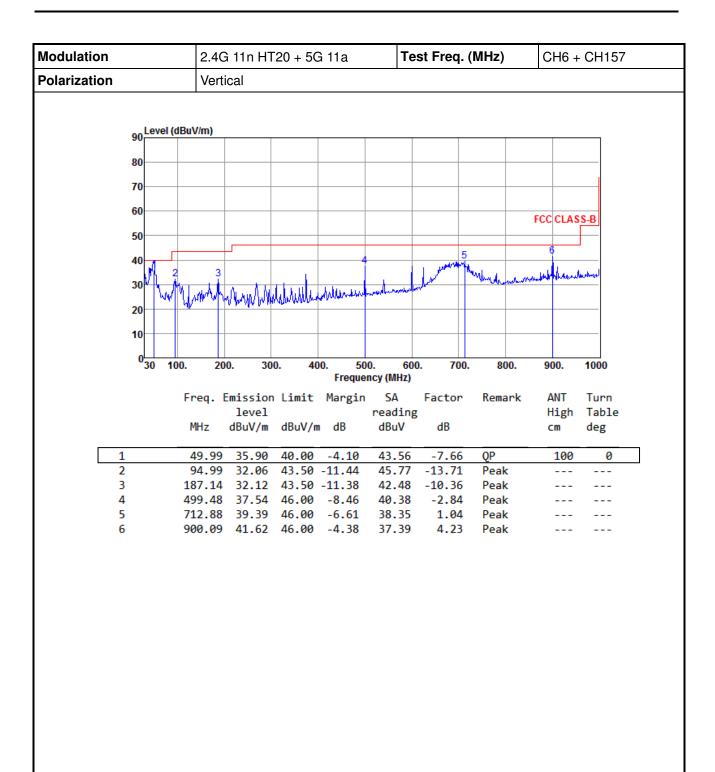

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR570601-07CO Page: 12 of 15



3.1.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)

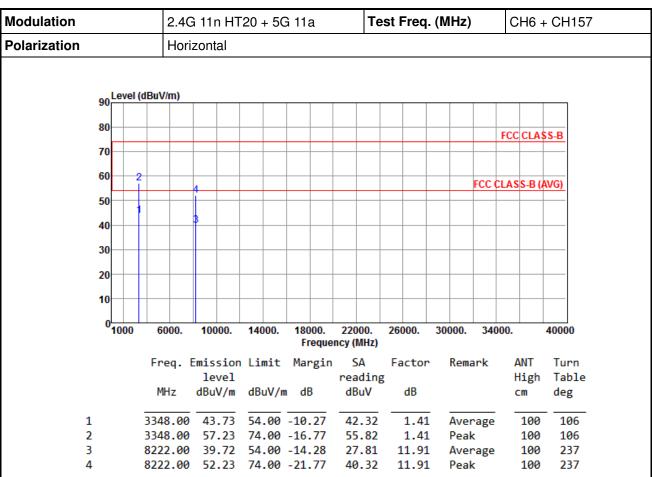

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR570601-07CO Page: 13 of 15



2

3

Modulation			2.40	3 11n H7	20 + 5G	i 11a	Т	est Fred	ą. (MHz)	CH	H6 + C	H157
Polarization			Vert	Vertical									
			•										
	90.	Level	(dBuV/m)										_
	80										FCC (CLASS-E	
	70												
	60		2										_
				4						FCC (CLASS	S-B (AVG	<u> </u>
	50												
	40			3									-
	30												
	20												
	10												-
	0	1000	6000.	10000.	14000.	18000.	22000.	26000.	30000.	240	000.	400	J
1000		1000	0000.	10000.	14000.	Frequency (MHz)			20000. 30000. 340		JUU.	00. 40000	
			Freq.	Emissior	Limit	Margin	SA	Facto	r Rem	ark	Α	NT T	urn
				level			readi					_	able
			MHz	dBuV/m	dBuV/m	dB	dBuV	dB			cr	n d	eg
	1		3348.00	46.91	54.00	-7.09	45.50	1.4	 1 Ave	rage		198	338

1.41 Peak

11.91

11.91

28.64

Average

Peak

198

126

126

338

179

179

3348.00 60.86 74.00 -13.14 59.45

8222.00 53.78 74.00 -20.22 41.87

8222.00 40.55 54.00 -13.45

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR570601-07CO Page: 14 of 15



4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website http://www.icertifi.com.tw.

Linkou

Tel: 886-2-2601-1640 No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City,

Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666 No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==

Report No.: FR570601-07CO Page: 15 of 15