


Applications

*Bluetooth products

*ISM band 2.4GHz applications



1. Dimensions

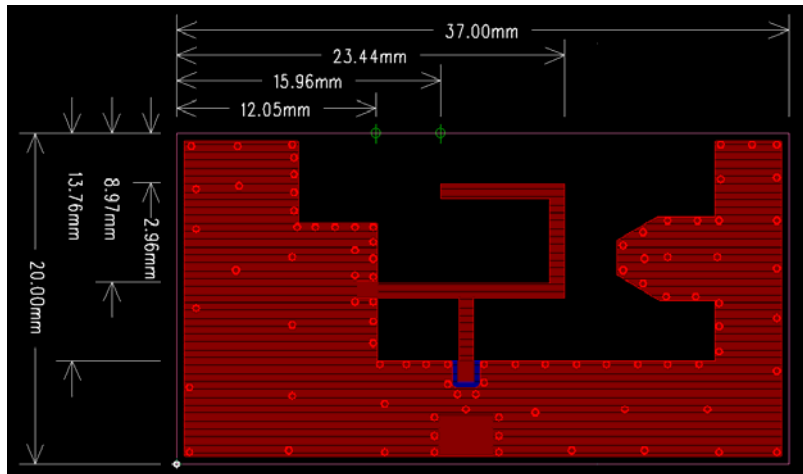


2.Specifications

Working Frequency Range	2.4 GHz ~ 2.5GHz
Gain	2 dBi (Typical)
VSWR	2 max.
Polarization	Linear
Azimuth Bandwidth	Omni-directional
Impedance	50Ω



3.Return Loss

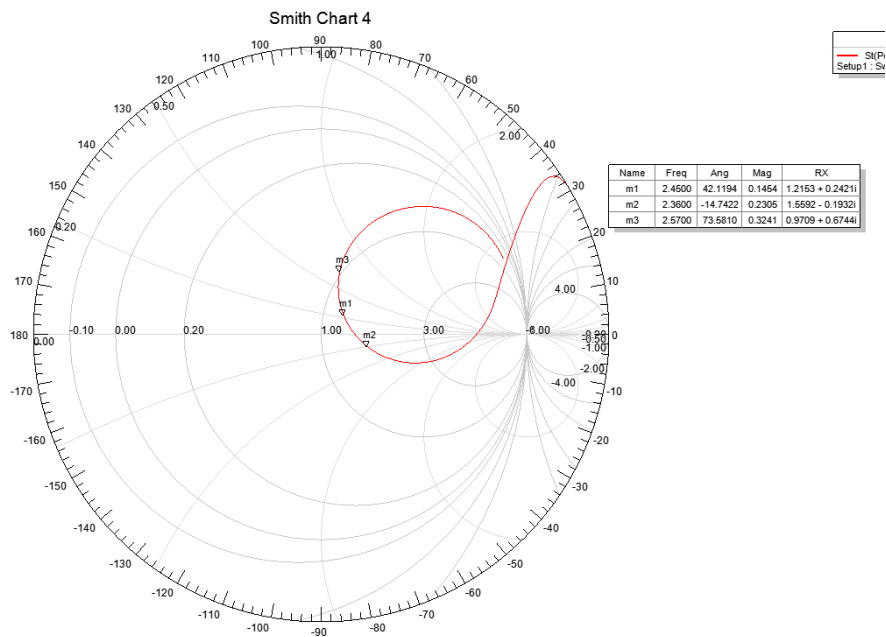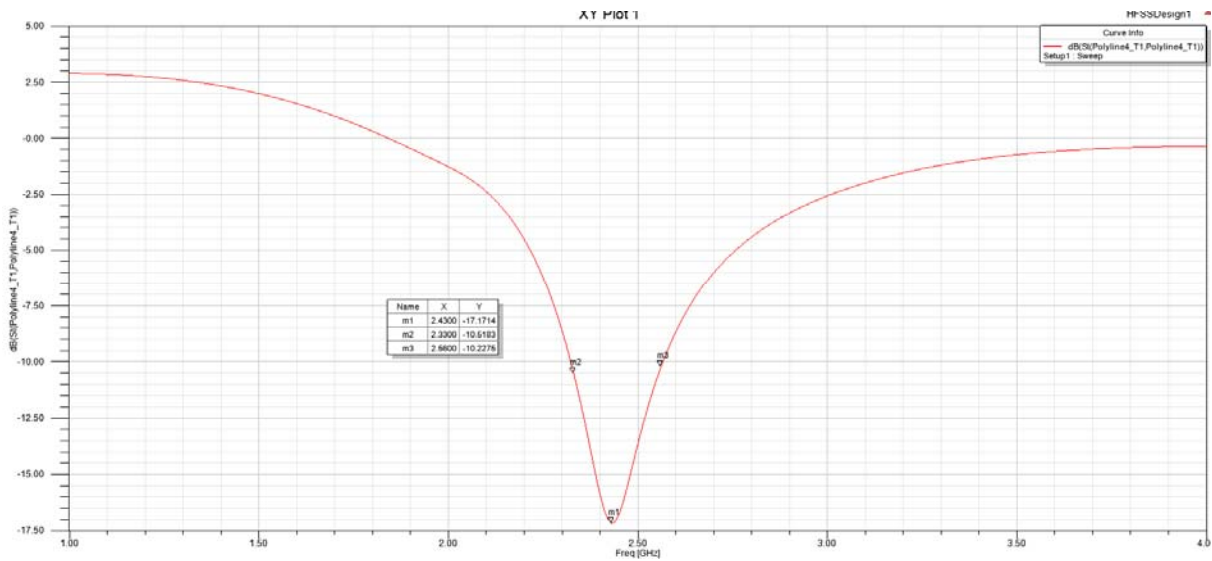



4. Radiation Patterns

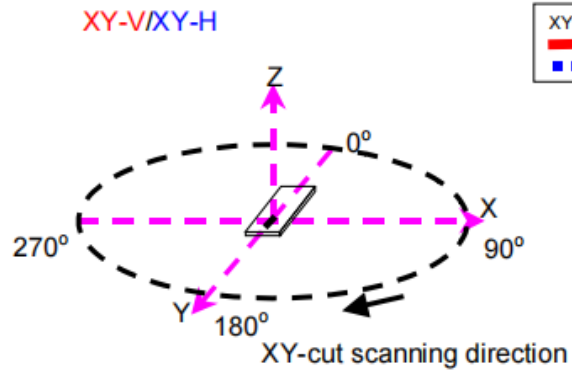

XY cut @2.45GHz
 — Vertical
 - - Horizontal

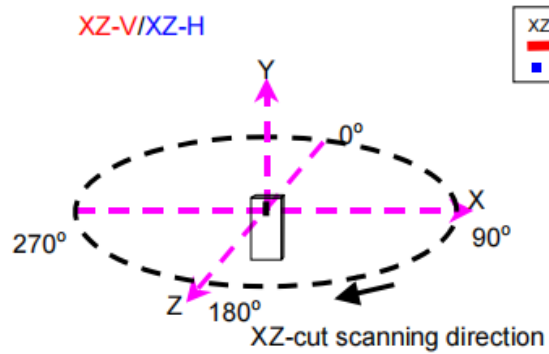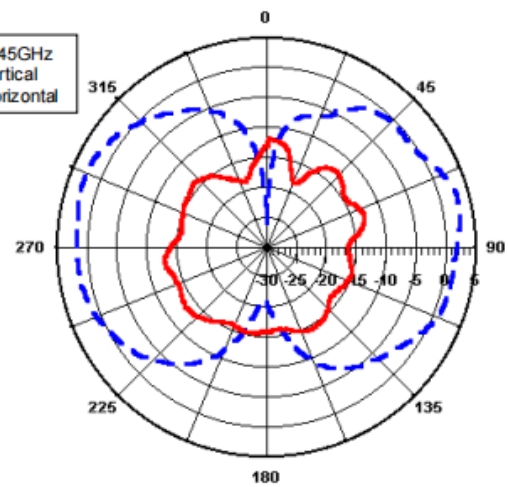

XZ cut @2.45GHz
 — Vertical
 - - Horizontal

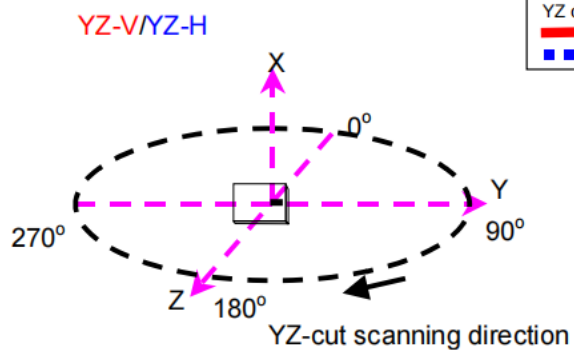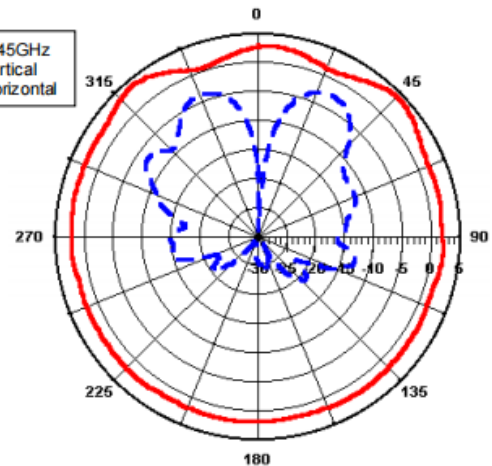

YZ cut @2.45GHz
 — Vertical
 - - Horizontal

