

Measurement Results

No.1-3547/21-01-14_Annex_MR_A1

Test logging

This document is electronically signed and valid without handwritten signature.
For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test/s performed:

Michael Dorongovski
Lab Manager
Radio Communications

Table of Content

EUT Information	4
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode	5
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode	7
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode	9
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode	11
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode	13
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode	15
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode	17
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode	19
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode	21
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode	23
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode	25
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode	27
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode	29
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode	33
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode	37
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode	41
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode	45
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode	49
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode	53
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode	57
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode	61
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode	65
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode	69
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode	73
FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 b mode	77
FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 b mode	79
FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 b mode	81
FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 g mode	83
FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 g mode	85
FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 g mode	87
FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 n-HT20 mode	89
FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 n-HT20 mode	91
FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 n-HT20 mode	93
FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 n-HT40 mode	95
FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 n-HT40 mode	97
FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 n-HT40 mode	99
FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 b mode	101
FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 b mode	103
FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 b mode	105
FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 g mode	107
FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 g mode	109
FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 g mode	111

FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 n-HT20 mode	113
FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 n-HT20 mode	115
FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 n-HT20 mode	117
FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 n-HT40 mode	119
FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 n-HT40 mode	121
FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 n-HT40 mode	123
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode	125
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode	128
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode	131
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 g mode	134
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 g mode	137
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 g mode	140
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT20 mode	143
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT20 mode	146
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT20 mode	149
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT40 mode	152
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT40 mode	155
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT40 mode	158

EUT Information

EUT DEFINITION	
Manufacturer	Digi International Inc.
Type	ConnectCard i.MX28N
Serial Number	0010180
Setup Number	1.0
Version SW	-/-
Version FW	82004604
Version HW	55002138-XX
Comment 1	
Comment 2	
Temperature [°C] Min	-40
Temperature [°C] Nom	20
Temperature [°C] Max	85
Voltage [V] Min	5
Voltage [V] Nom	5
Voltage [V] Max	5

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode

Test References

TC Start	16.08.2022 10:14:38
Ambit Temp [°C] Humidity [rel%]	27.9 49
System Version	3.3.0.2
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 b mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
 Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62
 Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	14.76	dBm	INFO
Ref. Frequency	---	---	2410.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.76 10.8 25
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	9028	kHz	PASS

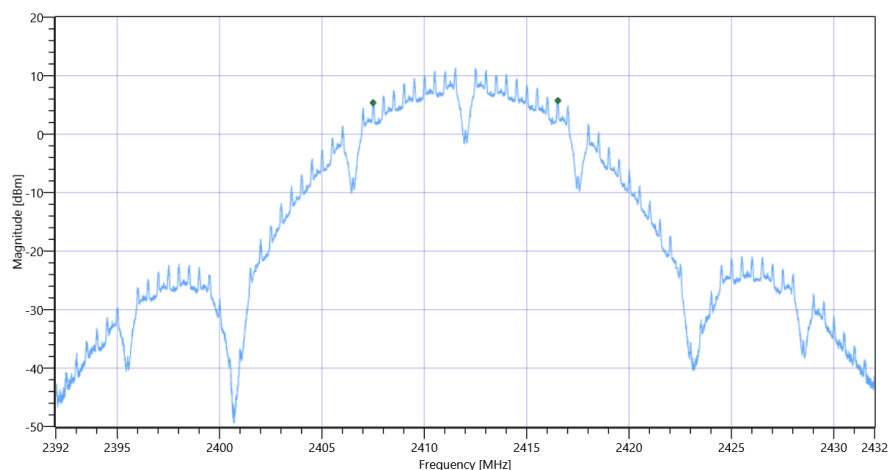

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode

General verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode

Test References

TC Start	16.08.2022 10:36:48
Ambit Temp [°C] Humidity [rel%]	28.2 47
System Version	3.3.0.2
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 b mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
 Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62
 Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	15.26	dBm	INFO
Ref. Frequency	---	---	2435.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	20.26 10.8 25
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	9020	kHz	PASS

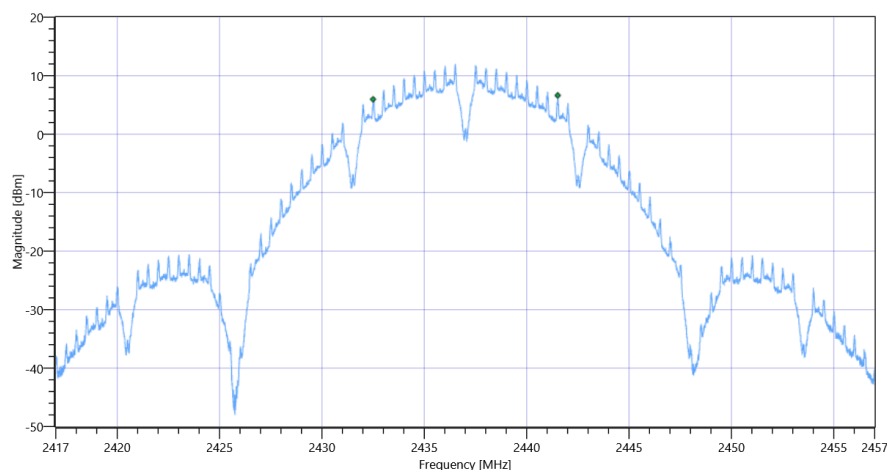

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode

General verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode

Test References

TC Start	16.08.2022 10:57:08
Ambit Temp [°C] Humidity [rel%]	28.6 46
System Version	3.3.0.2
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 b mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
 Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62
 Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	15.43	dBm	INFO
Ref. Frequency	---	---	2460.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	20.43 10.81 25
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	9044	kHz	PASS

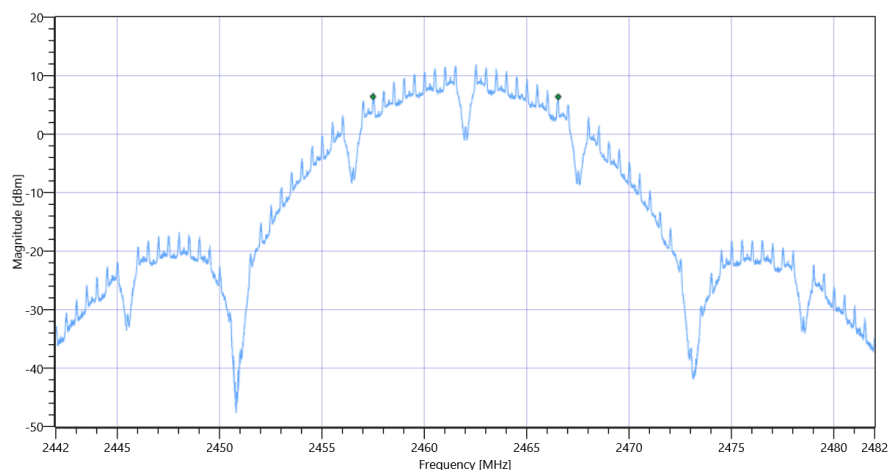

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode

General verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode

Test References

TC Start	16.08.2022 11:25:08
Ambit Temp [°C] Humidity [rel%]	28.6 46
System Version	3.3.0.2
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 g mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	11.26	dBm	INFO
Ref. Frequency	---	---	2406.410	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.26 10.8 25
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	16296	kHz	PASS

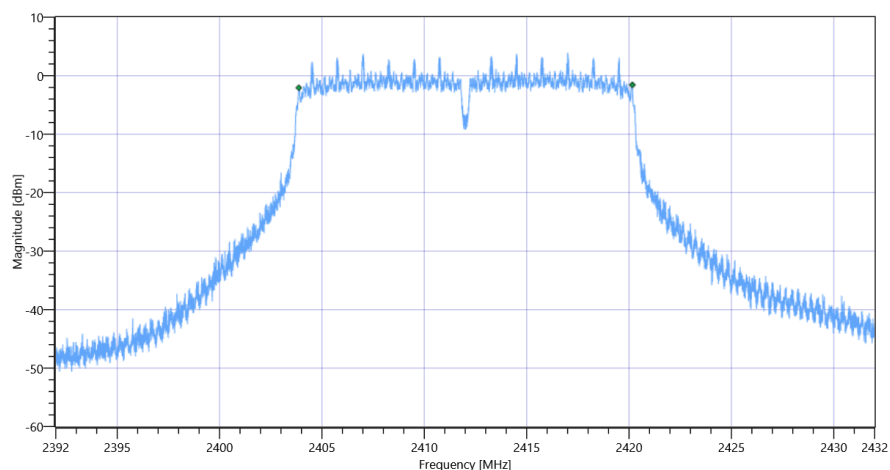

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode

General verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode

Test References

TC Start	16.08.2022 11:44:36
Ambit Temp [°C] Humidity [rel%]	29.2 44
System Version	3.3.0.2
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 g mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	12.06	dBm	INFO
Ref. Frequency	---	---	2434.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.06 10.8 25
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	16272	kHz	PASS

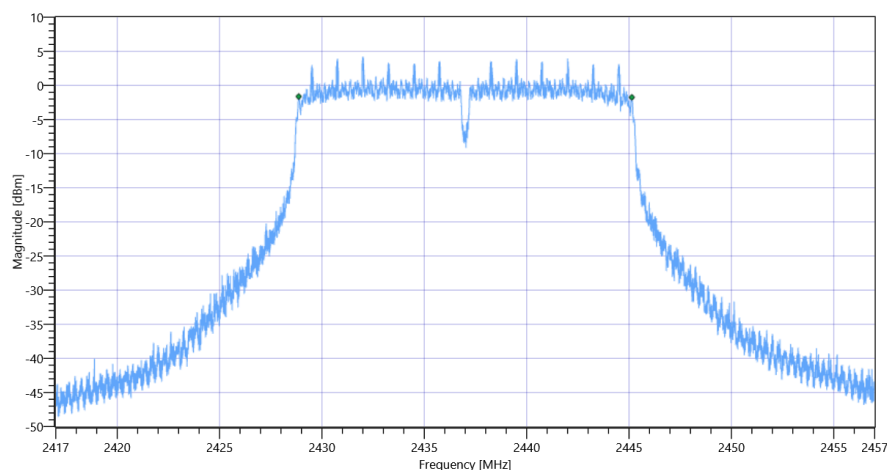

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode

General verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode

Test References	
TC Start	16.08.2022 11:56:56
Ambit Temp [°C] Humidity [rel%]	29.3 44
System Version	3.3.0.2
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 g mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 g mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

Test at TX 2462 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	12.48	dBm	INFO
Ref. Frequency	---	---	2456.510	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.48 10.81 25
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	16276	kHz	PASS

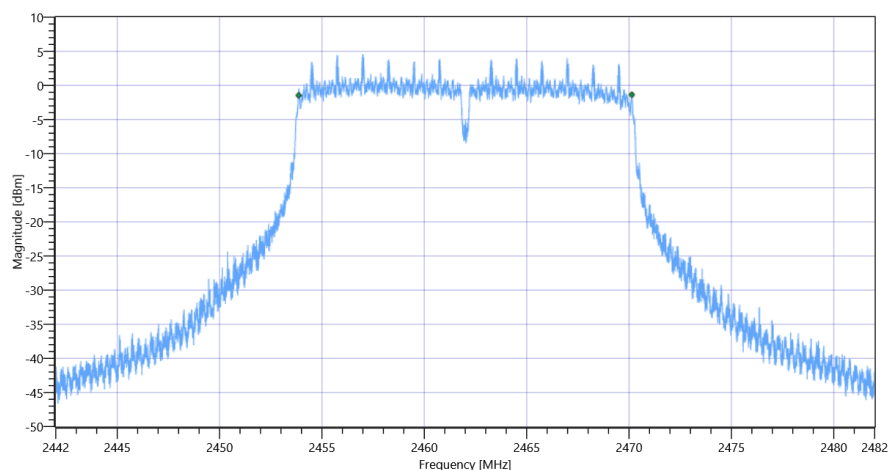

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode

General verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode

Test References

TC Start	16.08.2022 12:36:16
Ambit Temp [°C] Humidity [rel%]	25.3 44
System Version	3.3.0.2
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT20 mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	11.46	dBm	INFO
Ref. Frequency	---	---	2410.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.46 10.8 25
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	16656	kHz	PASS

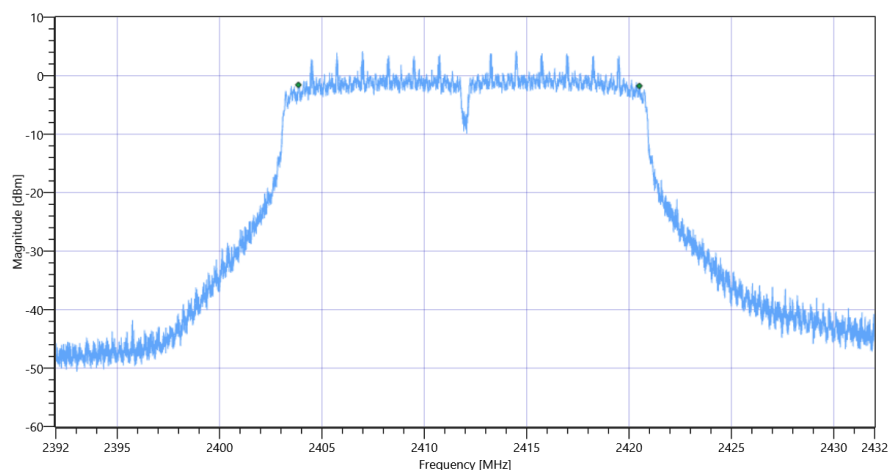

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode

General verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode

Test References

TC Start	16.08.2022 12:49:48
Ambit Temp [°C] Humidity [rel%]	25.4 45
System Version	3.3.0.2
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT20 mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
 Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62
 Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	12.45	dBm	INFO
Ref. Frequency	---	---	2438.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.45 10.8 25
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	16992	kHz	PASS

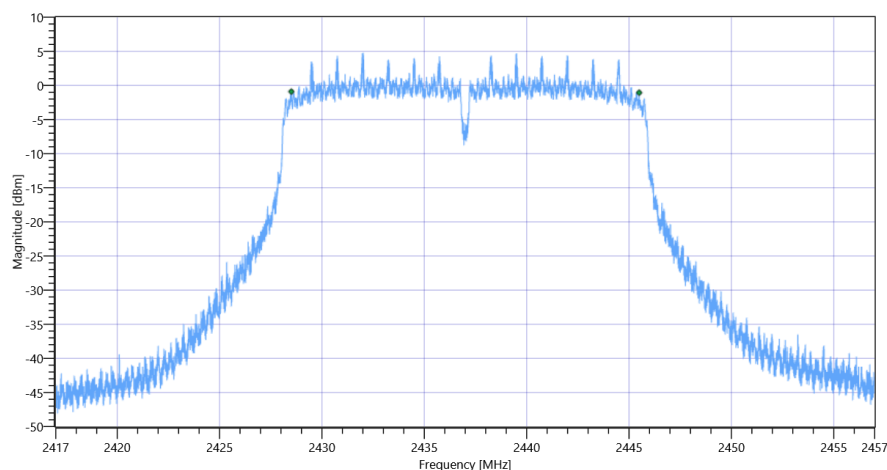

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode

General verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode

Test References

TC Start	16.08.2022 13:15:13
Ambit Temp [°C] Humidity [rel%]	24.9 45
System Version	3.3.0.2
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT20 mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	12.24	dBm	INFO
Ref. Frequency	---	---	2458.700	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.24 10.81 25
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	16648	kHz	PASS

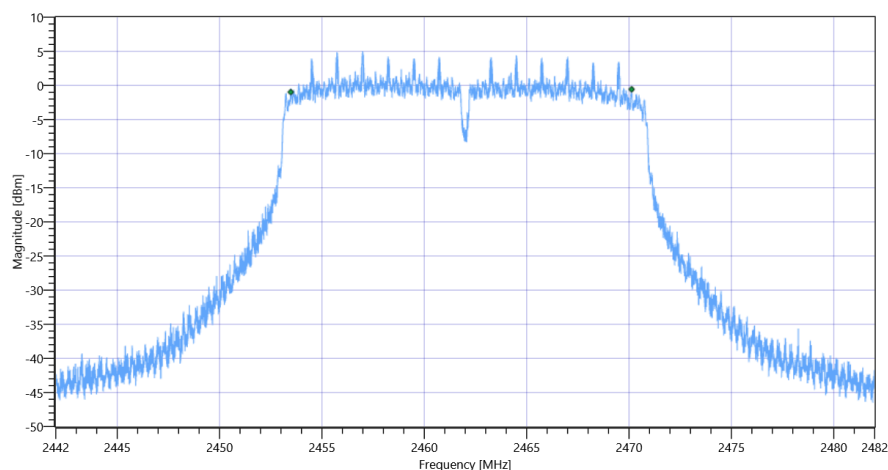

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode

General verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode

Test References

TC Start	16.08.2022 13:42:05
Ambit Temp [°C] Humidity [rel%]	24.6 46
System Version	3.3.0.2
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 nHT40_mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
 Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62
 Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI

Test at TX 2422 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	7.18	dBm	INFO
Ref. Frequency	---	---	2418.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.18 10.8 20
Start [MHz] Stop [MHz]	2382.000 2462.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	35800	kHz	PASS

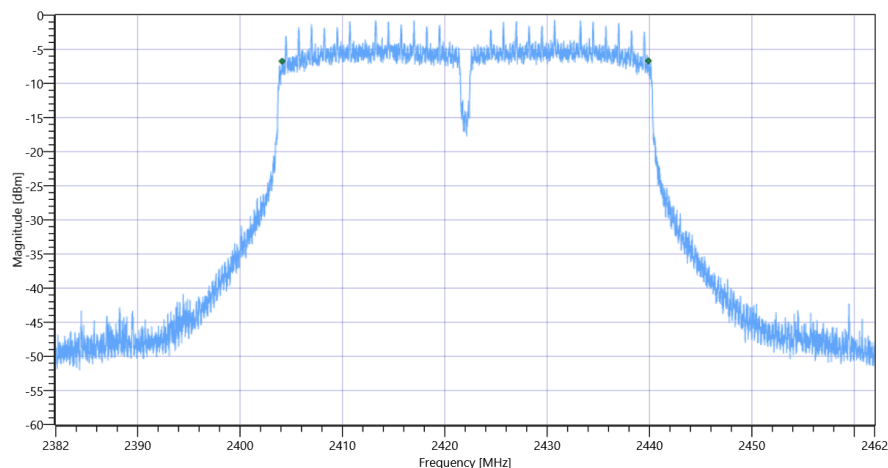

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode

General verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode

Test References	
TC Start	16.08.2022 13:58:33
Ambit Temp [°C] Humidity [rel%]	25.0 46
System Version	3.3.0.2
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 nHT40_mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

Test at TX 2437 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	7.49	dBm	INFO
Ref. Frequency	---	---	2428.310	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.49 10.8 20
Start [MHz] Stop [MHz]	2397.000 2477.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	35696	kHz	PASS

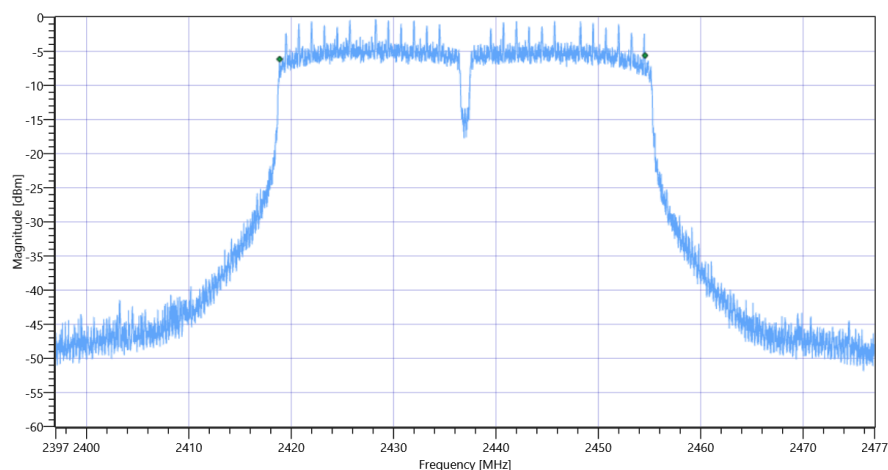

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode

General verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode

Test References	
TC Start	16.08.2022 14:09:43
Ambit Temp [°C] Humidity [rel%]	25.1 45
System Version	3.3.0.2
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 nHT40_mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

Test at TX 2452 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	7.88	dBm	INFO
Ref. Frequency	---	---	2440.410	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.88 10.8 20
Start [MHz] Stop [MHz]	2412.000 2492.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	35688	kHz	PASS

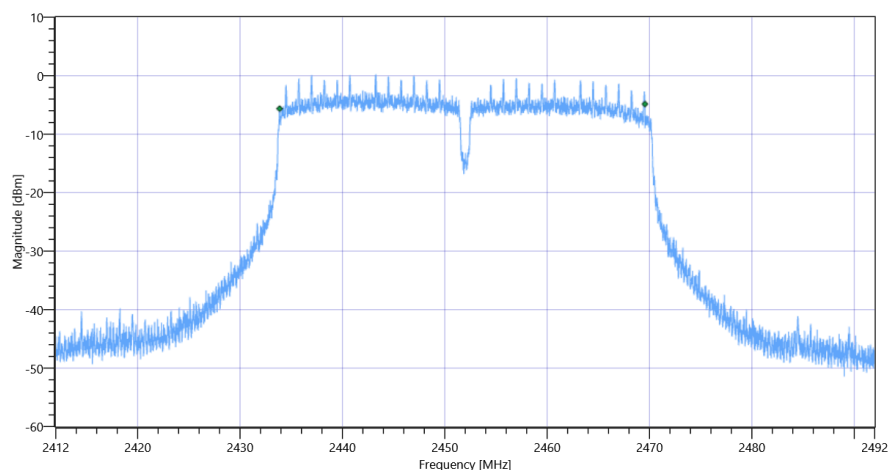

General verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode

Test References	
TC Start	16.08.2022 10:16:02
Ambit Temp [°C] Humidity [rel%]	28.0 48
System Version	3.3.0.2
Test Specification	FCC 15.247, ISED RSS247 -
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 b mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 b mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

Test at TX 2412 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	14.75	dBm	INFO
Ref. Frequency	---	---	2410.800	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.75 10.8 25
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	14651.000	kHz	INFO
T1 99%	2400.000000	---	2404.7727	MHz	PASS
T2 99%	---	2483.500000	2419.4233	MHz	PASS

Plot: Bandwidth only

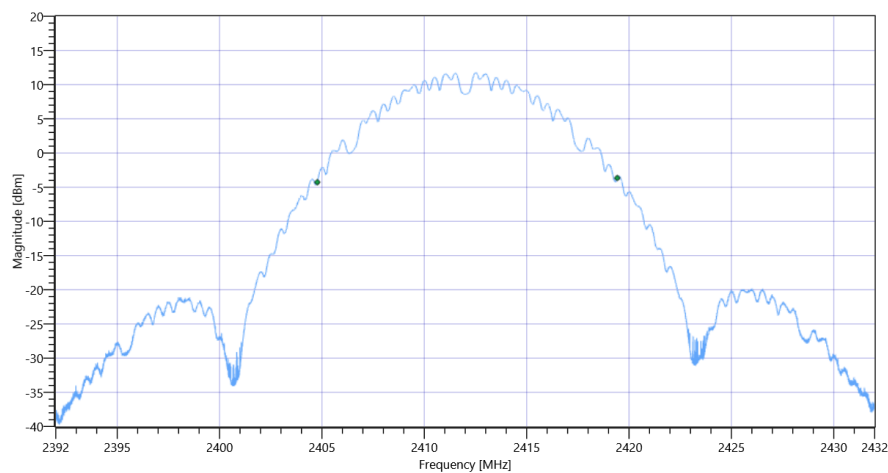

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode 99PCT


Plot: Bandwidth within Band

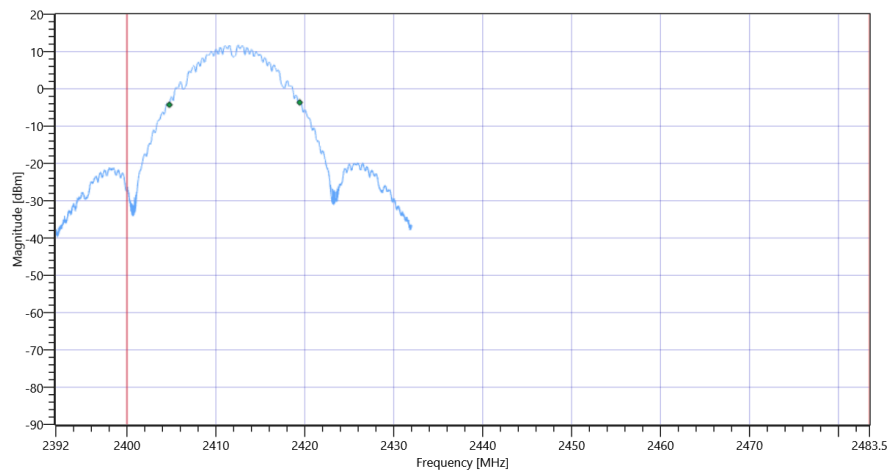

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	16924	kHz	INFO
T1 20dB	2400.000000	---	2403.6640	MHz	PASS
T2 20dB	---	2483.500000	2420.5880	MHz	PASS

Plot: Bandwidth only

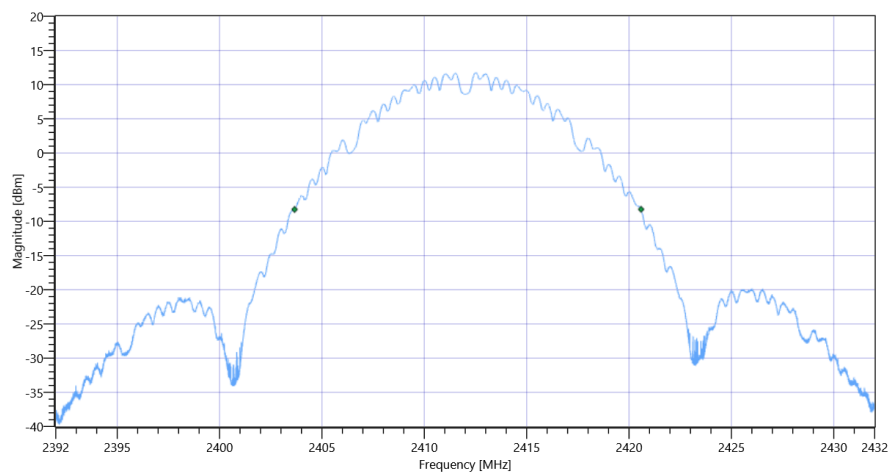

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode 20dB

Plot: Bandwidth within Band

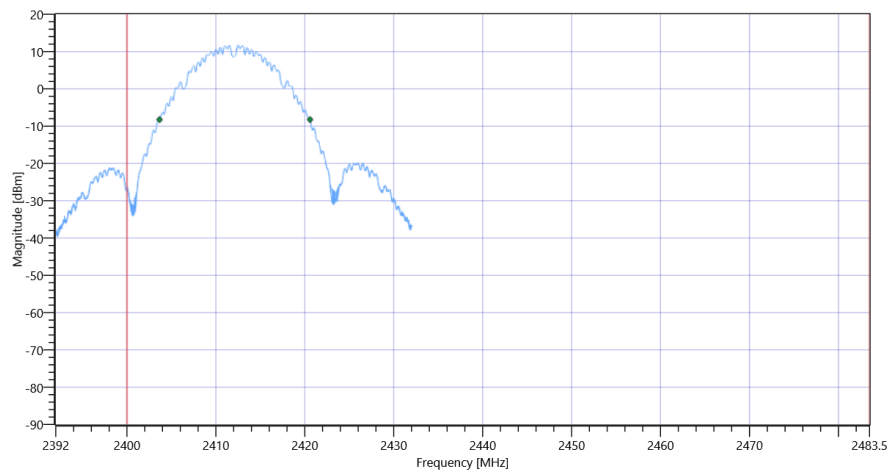

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode

General verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode

Test References

TC Start	16.08.2022 10:38:11
Ambit Temp [°C] Humidity [rel%]	28.2 47
System Version	3.3.0.2
Test Specification	FCC 15.247, ISED RSS247 -
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 b mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	15.26	dBm	INFO
Ref. Frequency	---	---	2435.800	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	20.26 10.8 25
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	14707.000	kHz	INFO
T1 99%	2400.000000	---	2429.6527	MHz	PASS
T2 99%	---	2483.500000	2444.3593	MHz	PASS

Plot: Bandwidth only

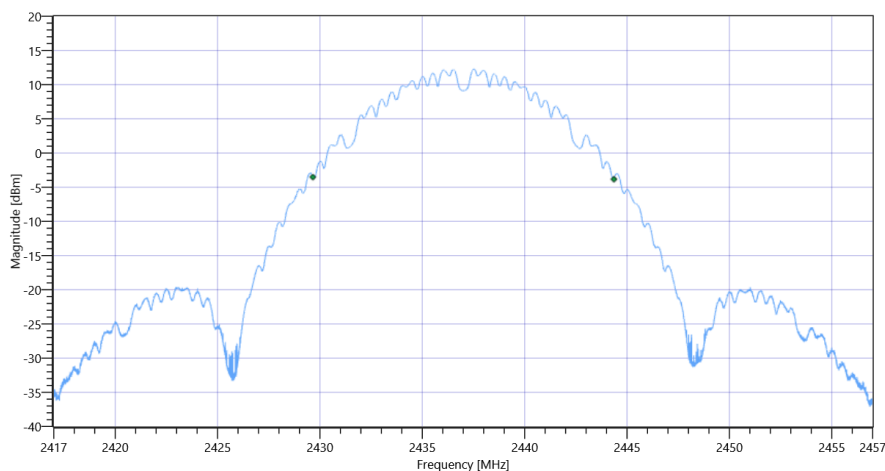

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode 99PCT


Plot: Bandwidth within Band

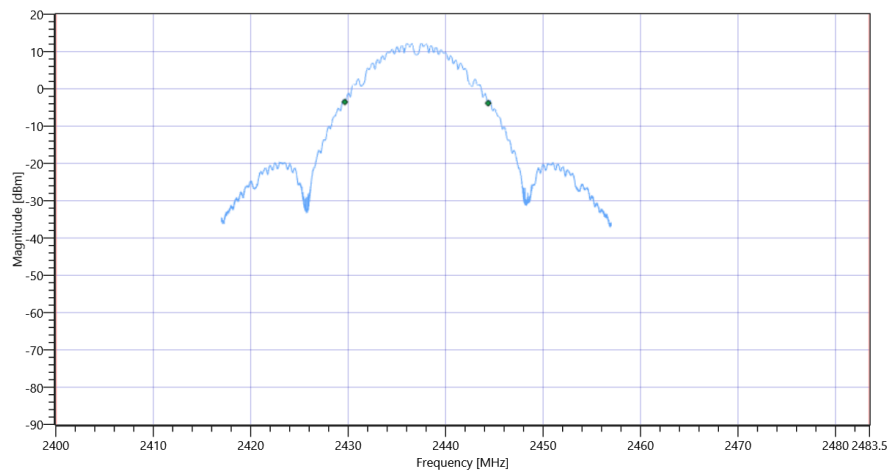


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	17096	kHz	INFO
T1 20dB	2400.000000	---	2428.4600	MHz	PASS
T2 20dB	---	2483.500000	2445.5560	MHz	PASS

Plot: Bandwidth only

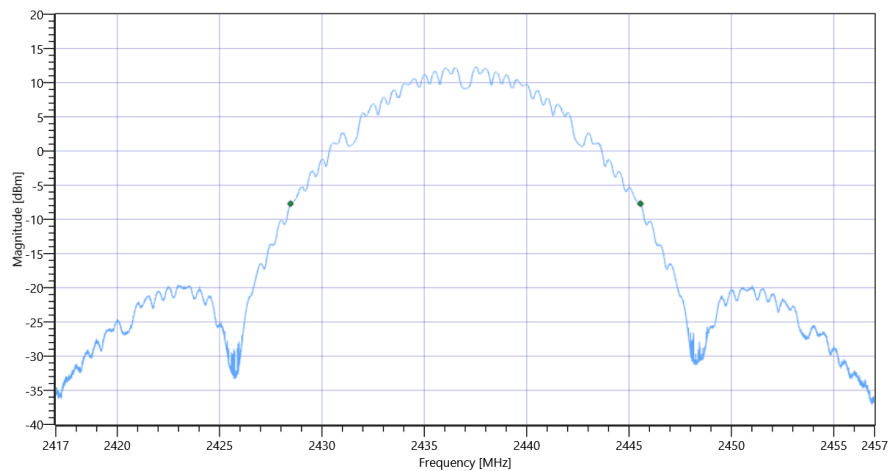

Plot: Bandwidth within Band

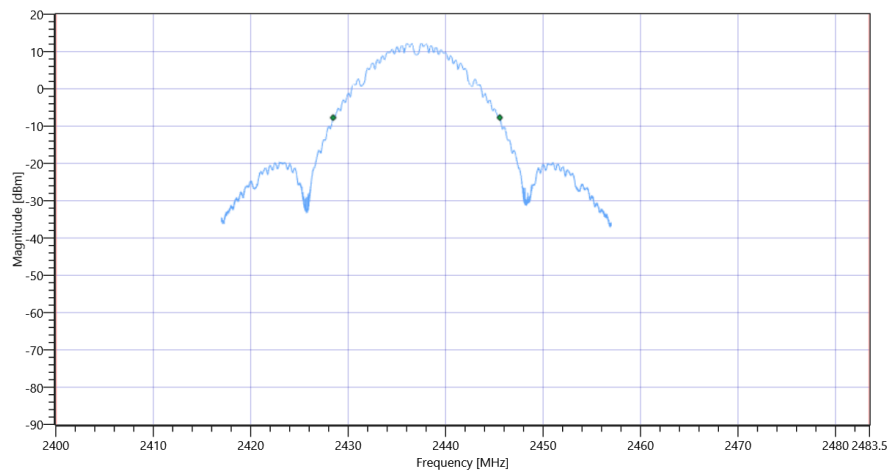

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode

General verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode

Test References	
TC Start	16.08.2022 10:58:32
Ambit Temp [°C] Humidity [rel%]	28.7 46
System Version	3.3.0.2
Test Specification	FCC 15.247, ISED RSS247 -
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 b mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 b mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

Test at TX 2462 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	15.42	dBm	INFO
Ref. Frequency	---	---	2460.800	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	20.42 10.81 25
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	15390.000	kHz	INFO
T1 99%	2400.000000	---	2454.2368	MHz	PASS
T2 99%	---	2483.500000	2469.6272	MHz	PASS

Plot: Bandwidth only

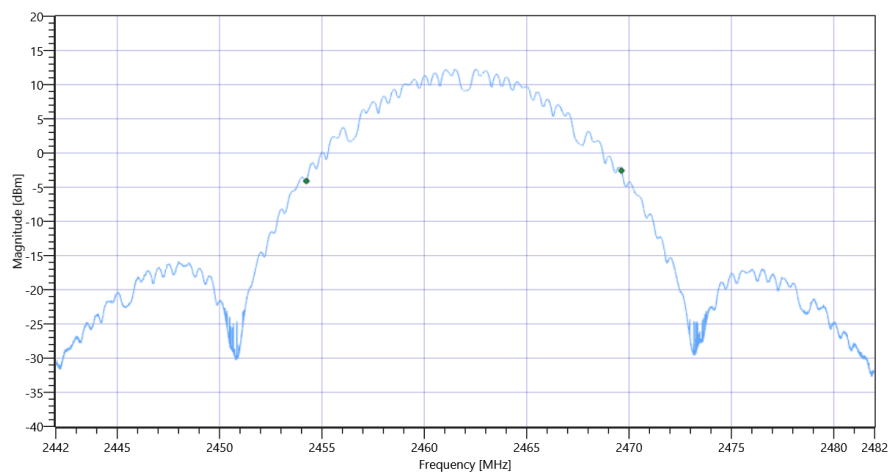

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode 99PCT


Plot: Bandwidth within Band

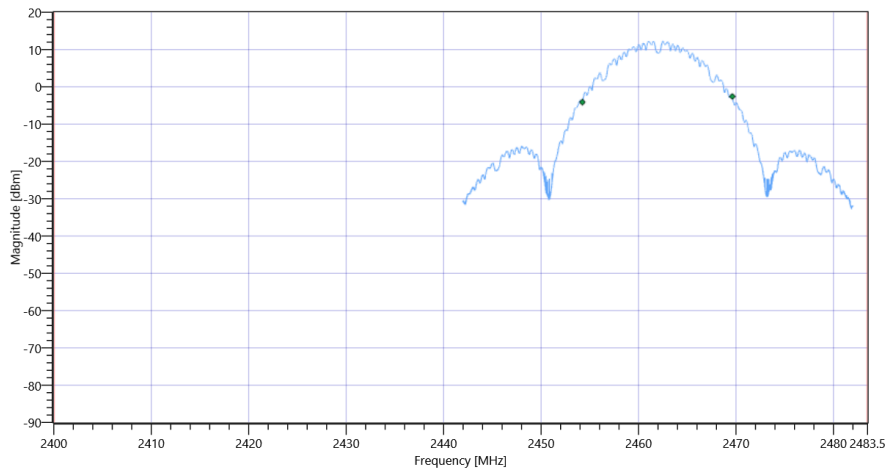


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	17380	kHz	INFO
T1 20dB	2400.000000	---	2453.3120	MHz	PASS
T2 20dB	---	2483.500000	2470.6920	MHz	PASS

Plot: Bandwidth only

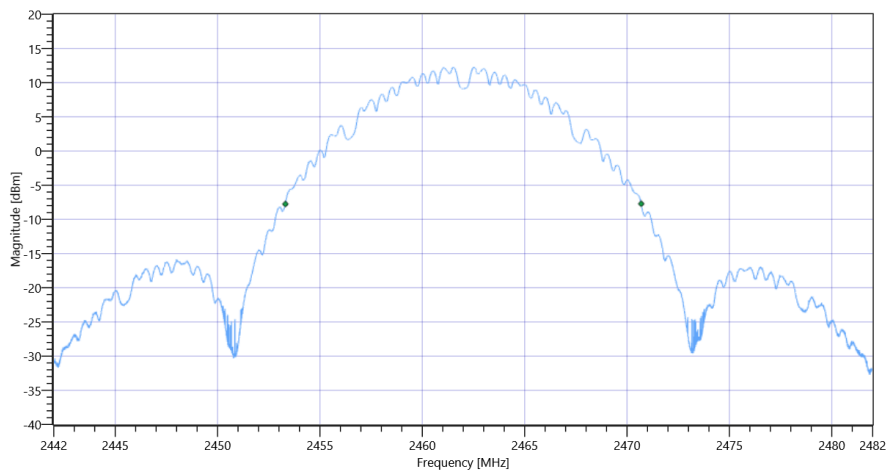

Plot: Bandwidth within Band

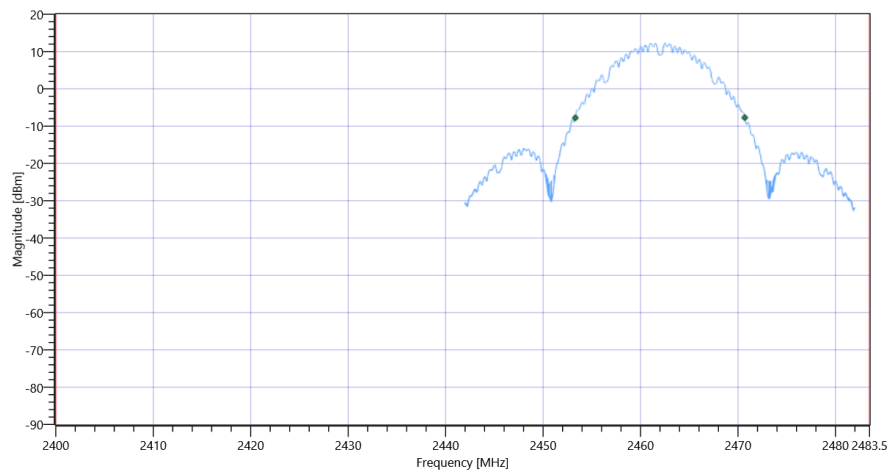

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode

General verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode

Test References

TC Start	16.08.2022 11:26:33
Ambit Temp [°C] Humidity [rel%]	28.7 46
System Version	3.3.0.2
Test Specification	FCC 15.247, ISED RSS247 -
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 g mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	11.50	dBm	INFO
Ref. Frequency	---	---	2415.500	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.50 10.8 25
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	16850.000	kHz	INFO
T1 99%	2400.000000	---	2403.6128	MHz	PASS
T2 99%	---	2483.500000	2420.4632	MHz	PASS

Plot: Bandwidth only

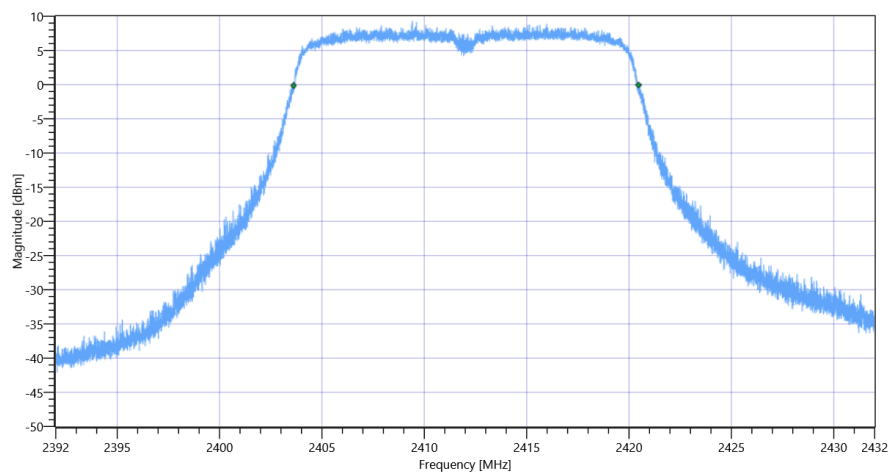

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode 99PCT


Plot: Bandwidth within Band

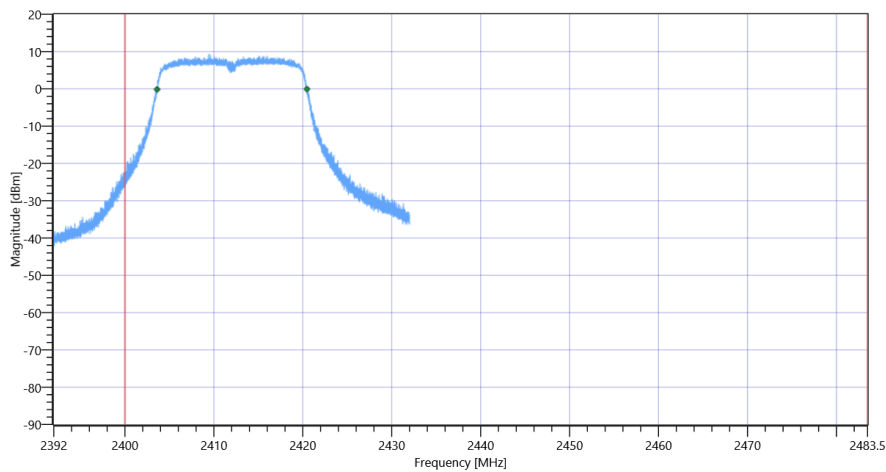

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	19408	kHz	INFO
T1 20dB	2400.000000	---	2402.3480	MHz	PASS
T2 20dB	---	2483.500000	2421.7560	MHz	PASS

Plot: Bandwidth only

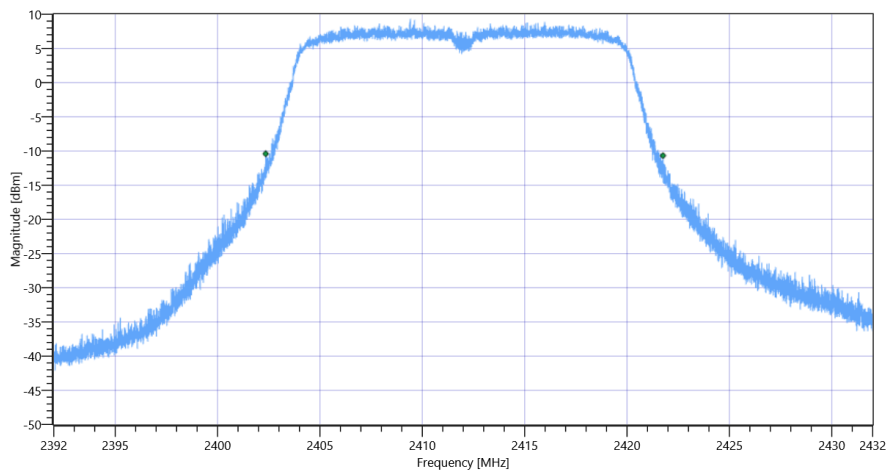

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode 20dB

Plot: Bandwidth within Band

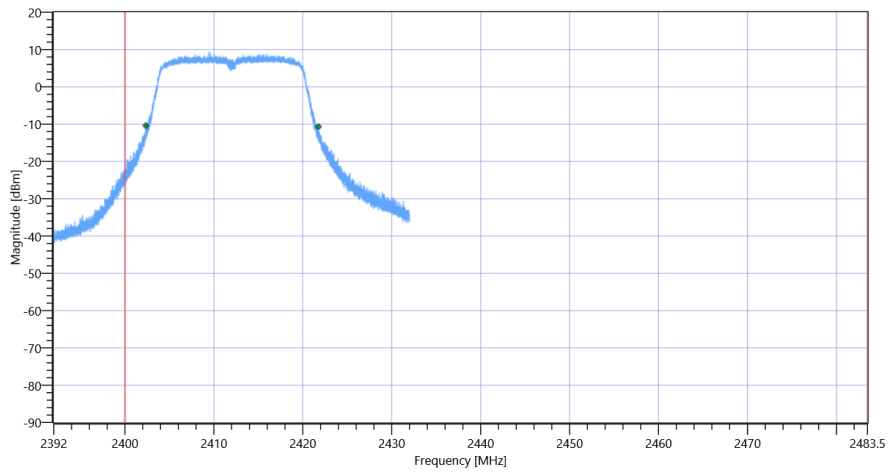

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode

General verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode

Test References	
TC Start	16.08.2022 11:46:00
Ambit Temp [°C] Humidity [rel%]	29.3 44
System Version	3.3.0.2
Test Specification	FCC 15.247, ISED RSS247 -
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 g mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 g mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

Test at TX 2437 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	12.06	dBm	INFO
Ref. Frequency	---	---	2432.600	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.06 10.8 25
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	16854.000	kHz	INFO
T1 99%	2400.000000	---	2428.5768	MHz	PASS
T2 99%	---	2483.500000	2445.4312	MHz	PASS

Plot: Bandwidth only

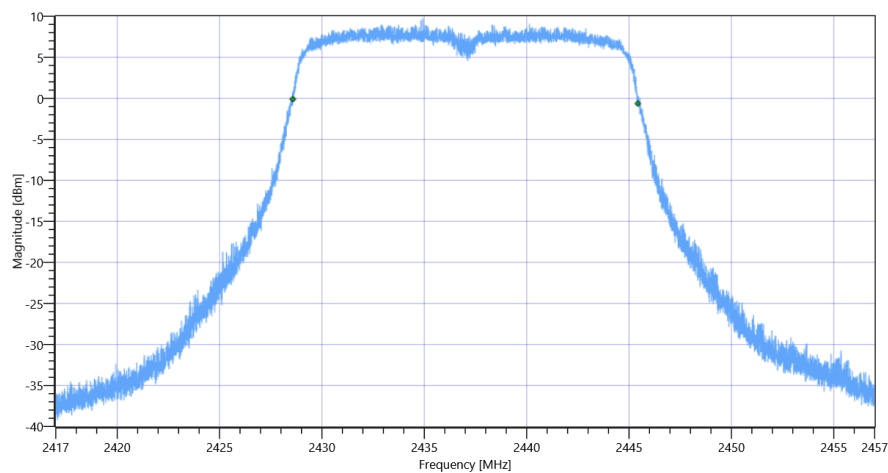

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode 99PCT


Plot: Bandwidth within Band

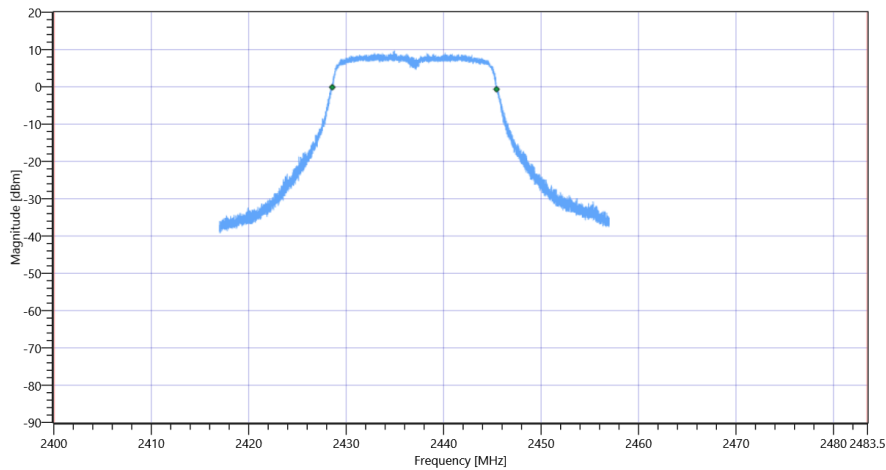

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	19076	kHz	INFO
T1 20dB	2400.000000	---	2427.5280	MHz	PASS
T2 20dB	---	2483.500000	2446.6040	MHz	PASS

Plot: Bandwidth only

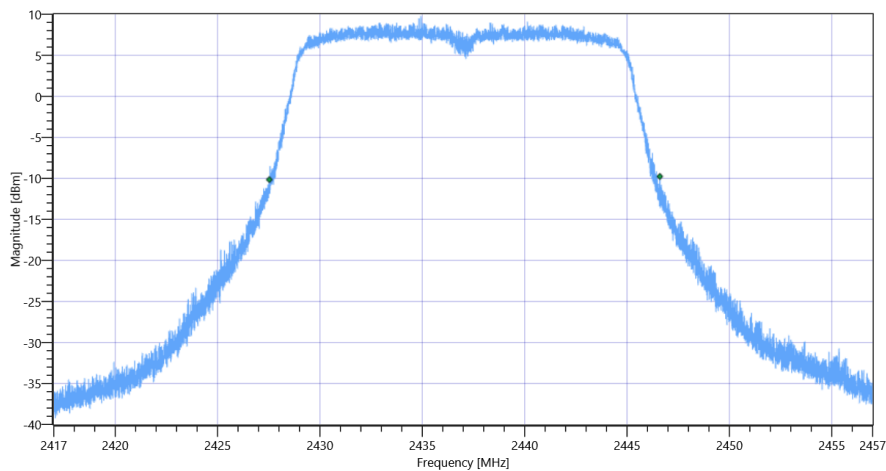

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode 20dB

Plot: Bandwidth within Band

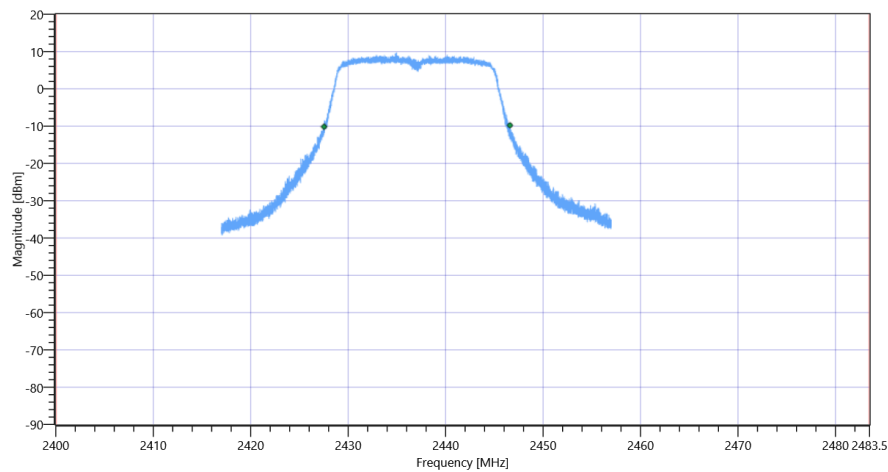

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode

General verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode

Test References

TC Start	16.08.2022 11:58:21
Ambit Temp [°C] Humidity [rel%]	29.1 43
System Version	3.3.0.2
Test Specification	FCC 15.247, ISED RSS247 -
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 g mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	12.64	dBm	INFO
Ref. Frequency	---	---	2457.300	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.64 10.81 25
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	16866.000	kHz	INFO
T1 99%	2400.000000	---	2453.5328	MHz	PASS
T2 99%	---	2483.500000	2470.3992	MHz	PASS

Plot: Bandwidth only

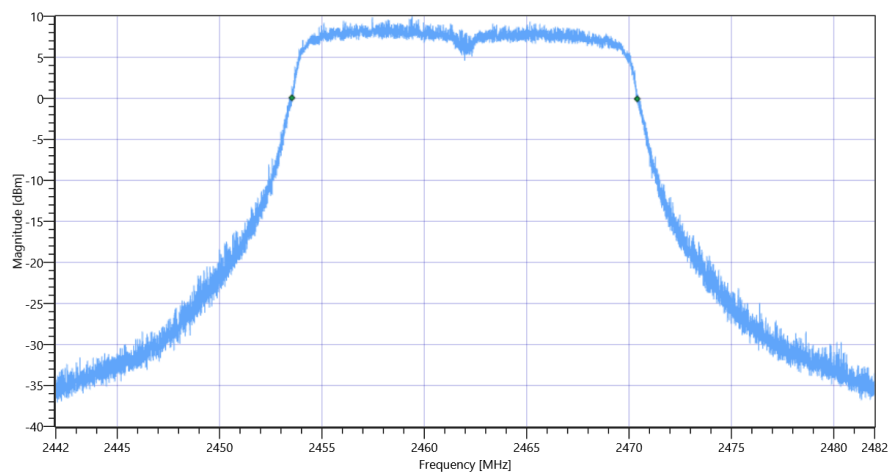

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode 99PCT


Plot: Bandwidth within Band

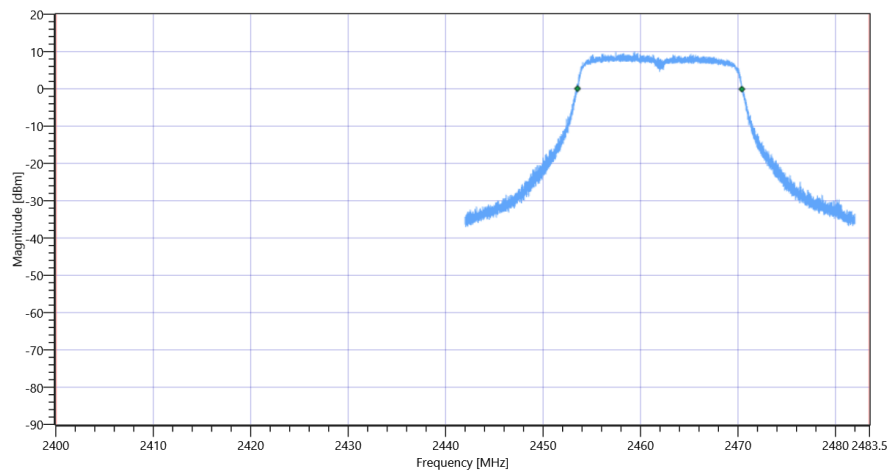

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	19140	kHz	INFO
T1 20dB	2400.000000	---	2452.3680	MHz	PASS
T2 20dB	---	2483.500000	2471.5080	MHz	PASS

Plot: Bandwidth only

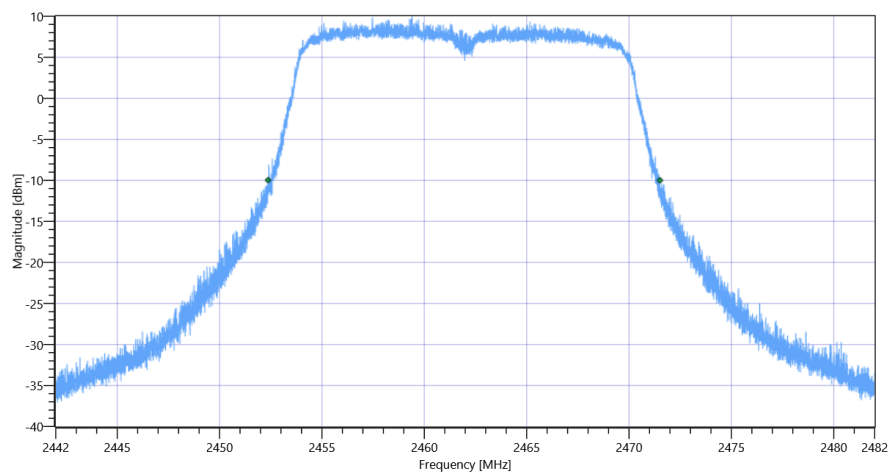

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode 20dB

Plot: Bandwidth within Band

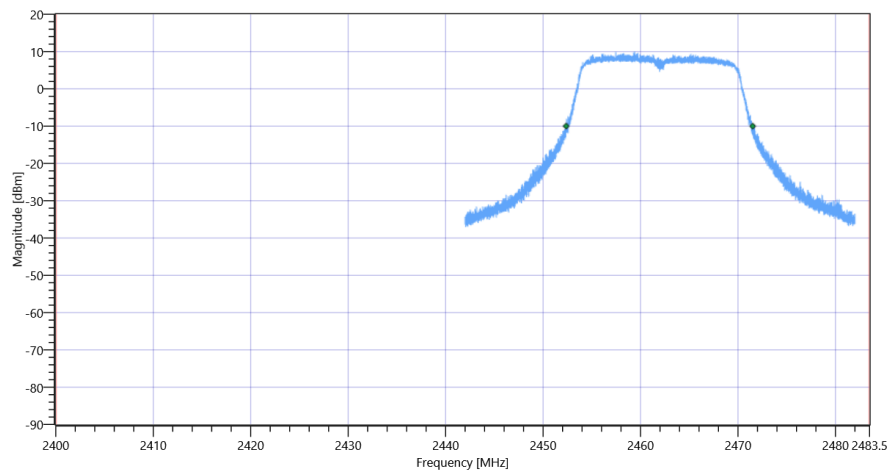

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode

General verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode

Test References

TC Start	16.08.2022 12:37:42
Ambit Temp [°C] Humidity [rel%]	25.3 43
System Version	3.3.0.2
Test Specification	FCC 15.247, ISED RSS247 -
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT20 mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
 Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62
 Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	11.38	dBm	INFO
Ref. Frequency	---	---	2413.700	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.38 10.8 25
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17858.000	kHz	INFO
T1 99%	2400.000000	---	2403.0889	MHz	PASS
T2 99%	---	2483.500000	2420.9471	MHz	PASS

Plot: Bandwidth only

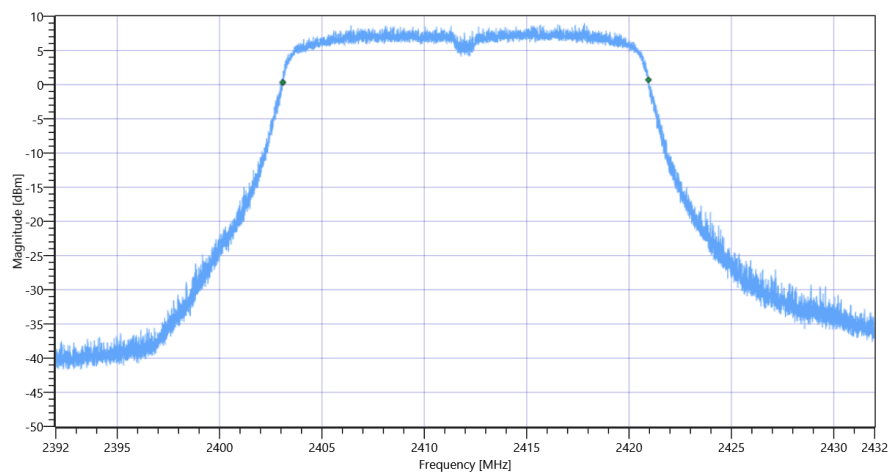

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode 99PCT


Plot: Bandwidth within Band

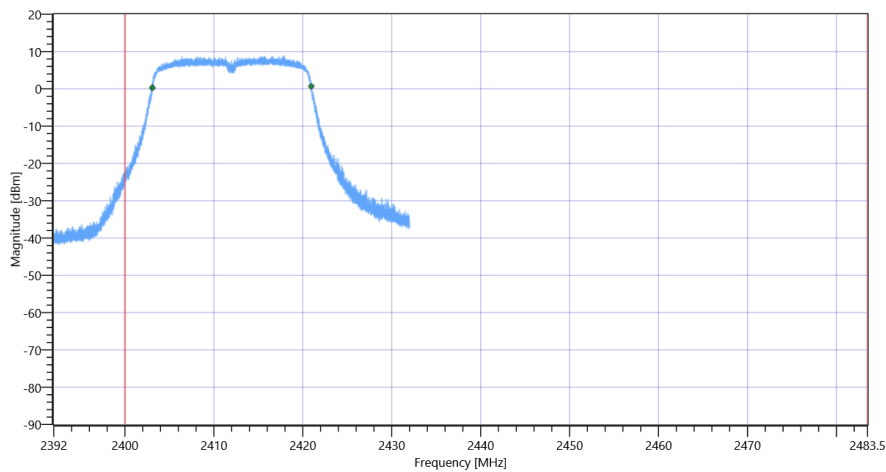

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	20060	kHz	INFO
T1 20dB	2400.000000	---	2401.9880	MHz	PASS
T2 20dB	---	2483.500000	2422.0480	MHz	PASS

Plot: Bandwidth only

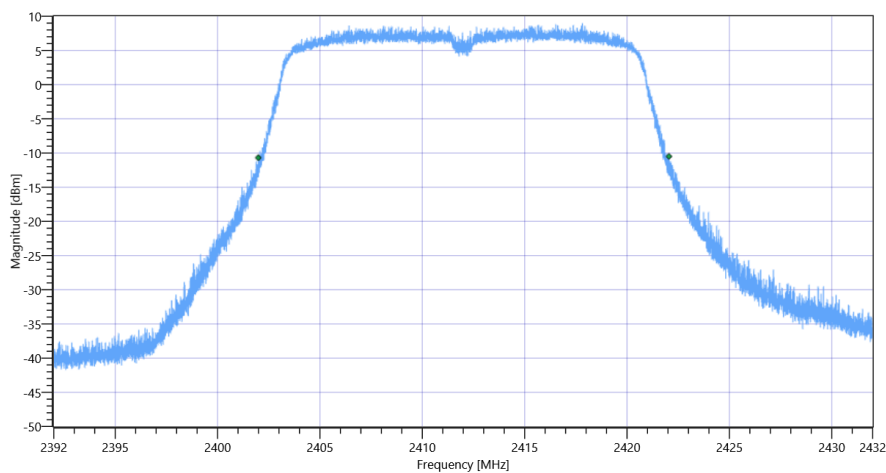

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode 20dB

Plot: Bandwidth within Band

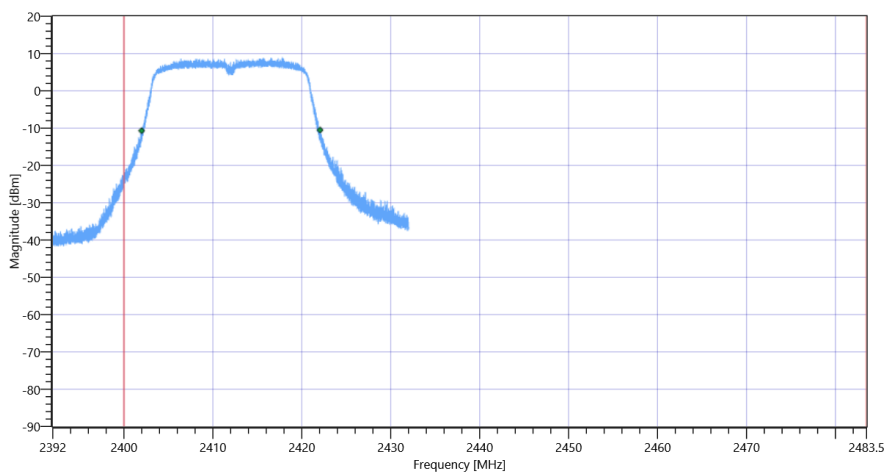

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode

General verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode

Test References

TC Start	16.08.2022 12:51:13
Ambit Temp [°C] Humidity [rel%]	25.4 43
System Version	3.3.0.2
Test Specification	FCC 15.247, ISED RSS247 -
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT20 mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
 Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62
 Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	12.07	dBm	INFO
Ref. Frequency	---	---	2432.600	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.07 10.8 25
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17878.000	kHz	INFO
T1 99%	2400.000000	---	2428.0529	MHz	PASS
T2 99%	---	2483.500000	2445.9311	MHz	PASS

Plot: Bandwidth only

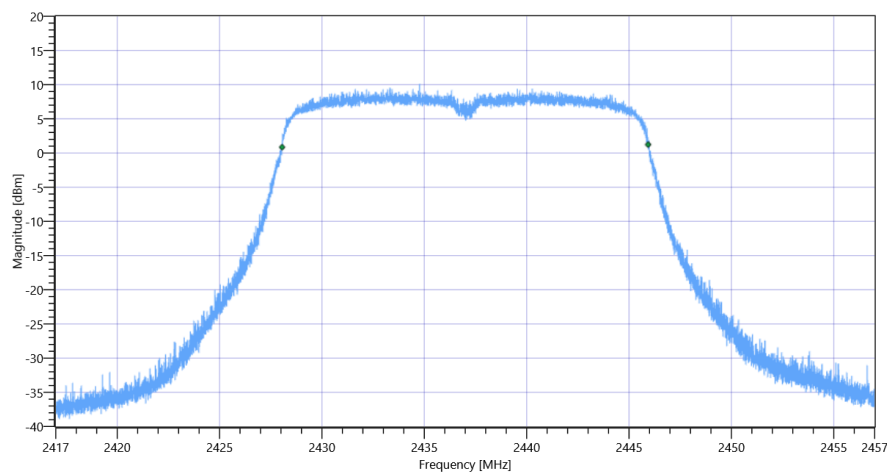

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode 99PCT


Plot: Bandwidth within Band

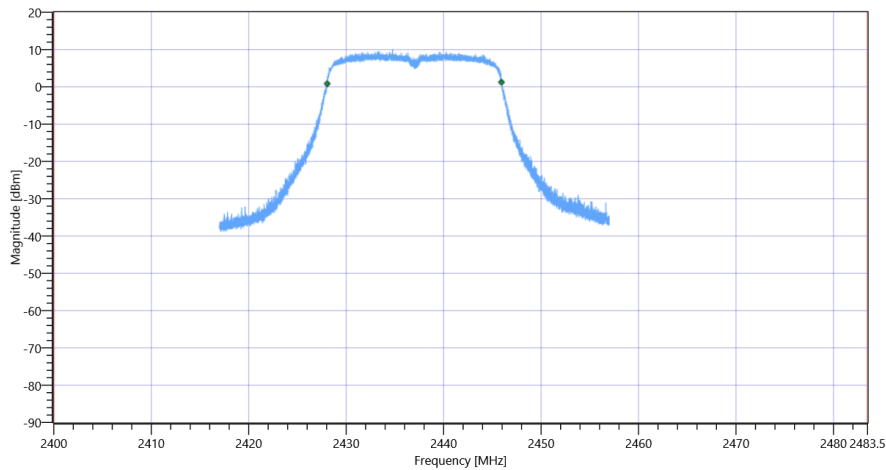

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	19960	kHz	INFO
T1 20dB	2400.000000	---	2426.9600	MHz	PASS
T2 20dB	---	2483.500000	2446.9200	MHz	PASS

Plot: Bandwidth only

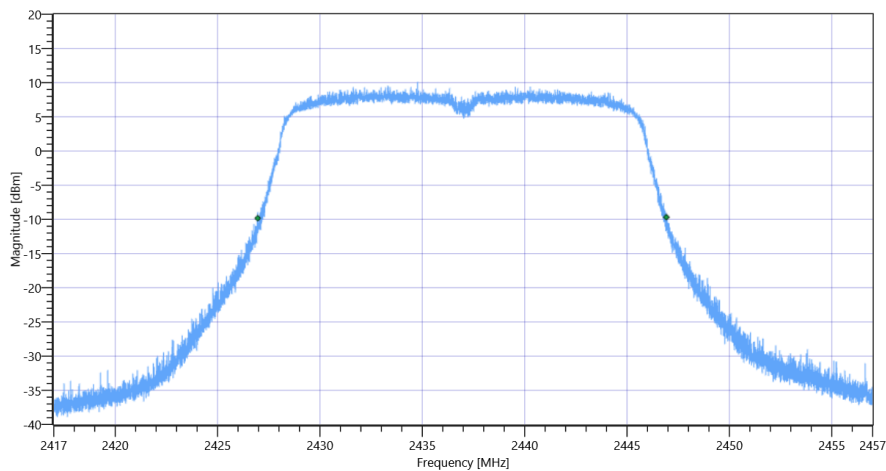

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode 20dB

Plot: Bandwidth within Band

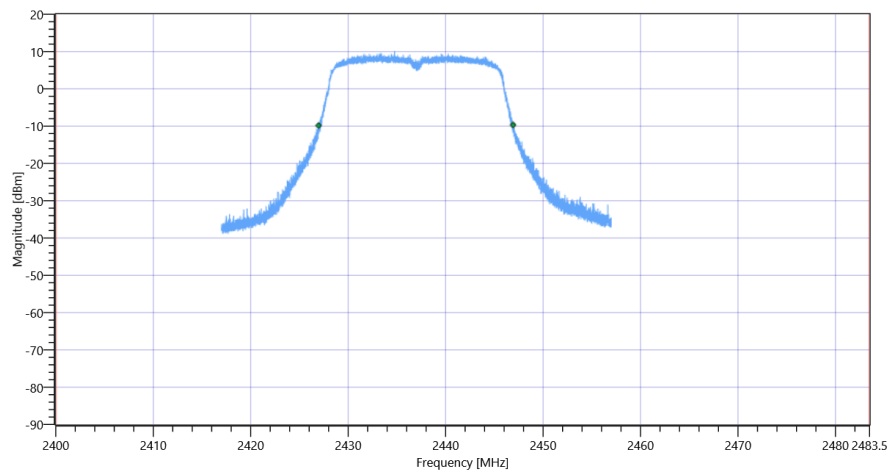

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode

General verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode

Test References

TC Start	16.08.2022 13:16:39
Ambit Temp [°C] Humidity [rel%]	24.9 44
System Version	3.3.0.2
Test Specification	FCC 15.247, ISED RSS247 -
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT20 mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
 Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62
 Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	12.21	dBm	INFO
Ref. Frequency	---	---	2464.500	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.21 10.81 25
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17910.000	kHz	INFO
T1 99%	2400.000000	---	2453.0049	MHz	PASS
T2 99%	---	2483.500000	2470.9151	MHz	PASS

Plot: Bandwidth only

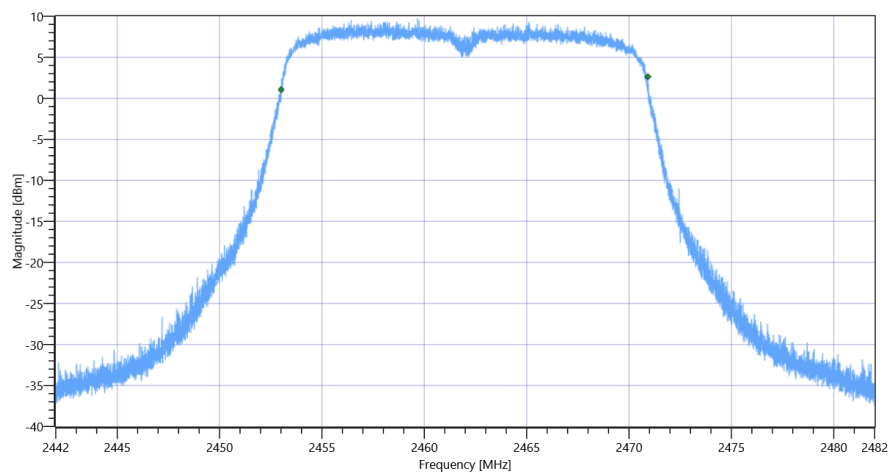

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode 99PCT


Plot: Bandwidth within Band

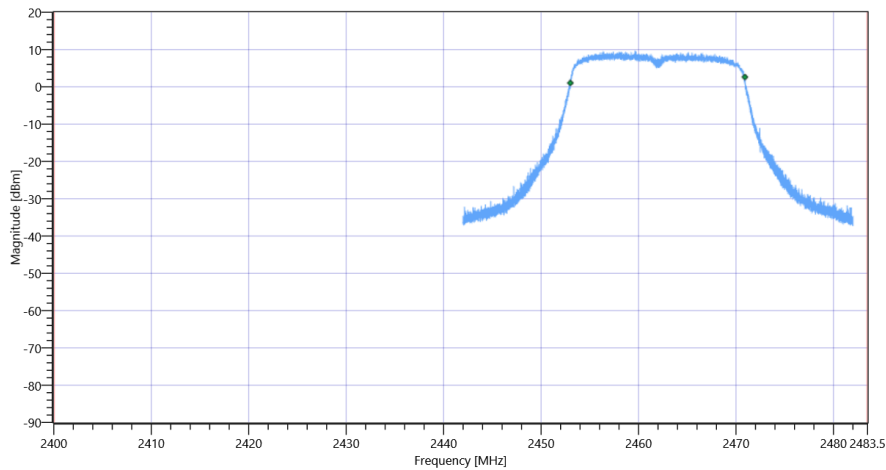

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	20156	kHz	INFO
T1 20dB	2400.000000	---	2451.8480	MHz	PASS
T2 20dB	---	2483.500000	2472.0040	MHz	PASS

Plot: Bandwidth only

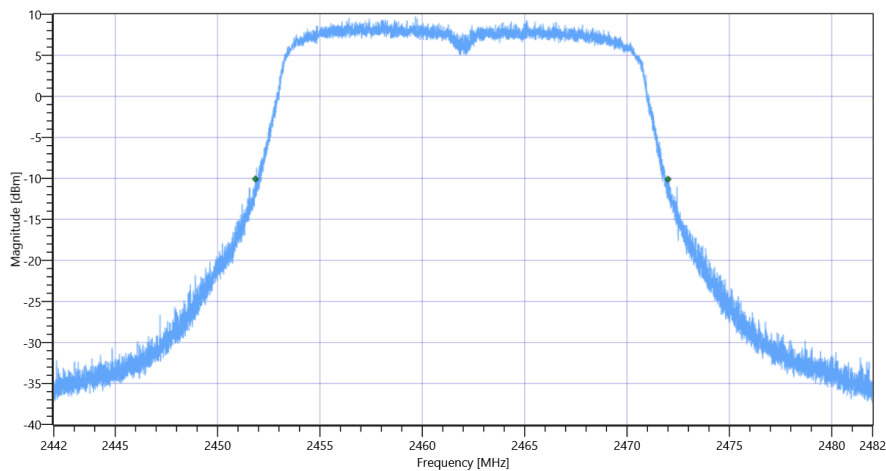

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode 20dB

Plot: Bandwidth within Band

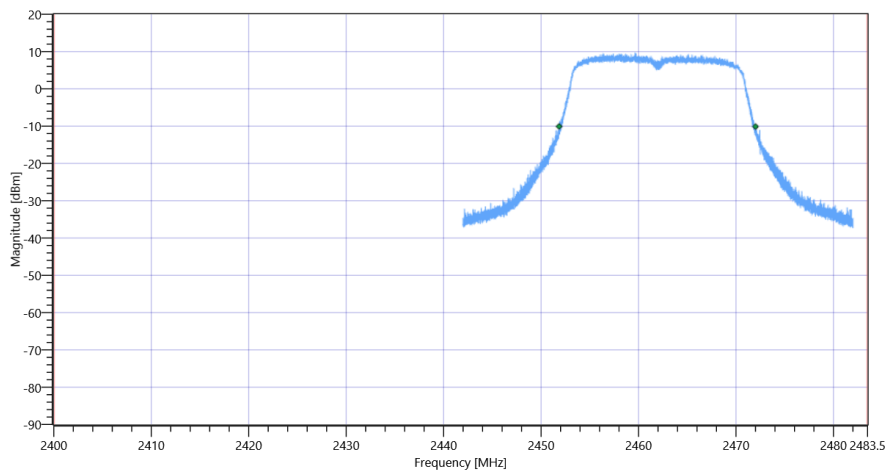

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode

General verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode

Test References

TC Start	16.08.2022 13:43:29
Ambit Temp [°C] Humidity [rel%]	24.7 46
System Version	3.3.0.2
Test Specification	FCC 15.247, ISED RSS247 -
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT40 mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
 Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62
 Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI

Test at TX 2422 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	7.11	dBm	INFO
Ref. Frequency	---	---	2432.590	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.11 10.8 20
Start [MHz] Stop [MHz]	2382.000 2462.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	36484.000	kHz	INFO
T1 99%	2400.000000	---	2403.7698	MHz	PASS
T2 99%	---	2483.500000	2440.2542	MHz	PASS

Plot: Bandwidth only

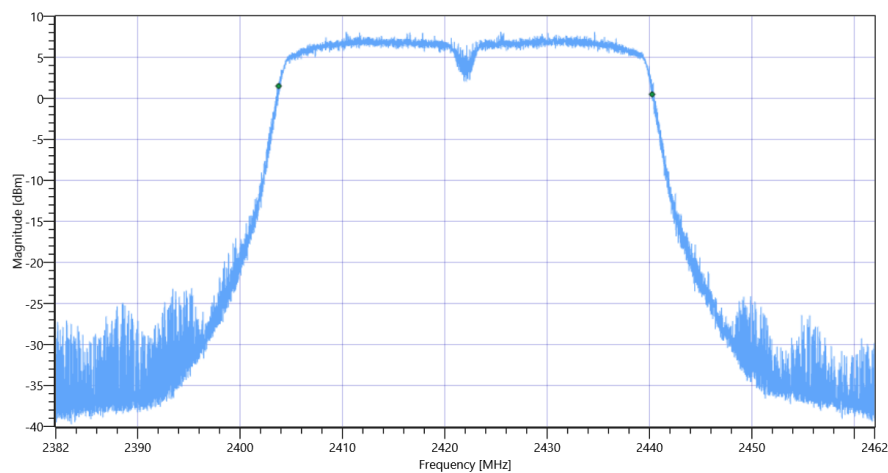

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode 99PCT


Plot: Bandwidth within Band

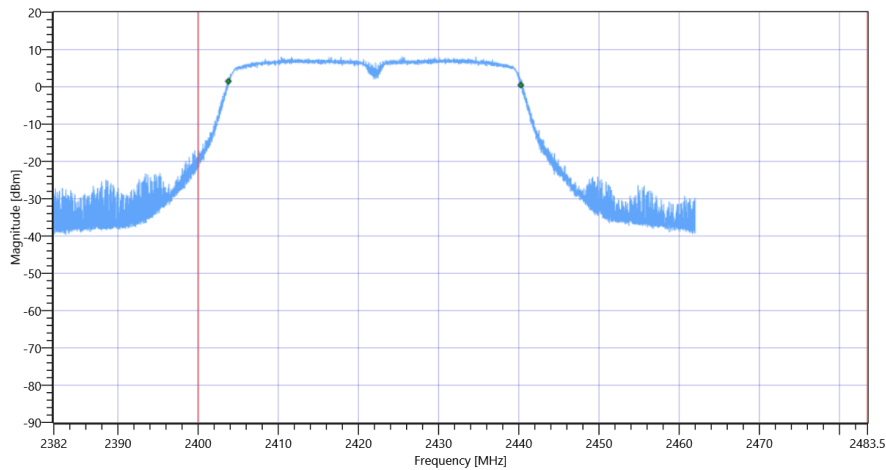

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	40680	kHz	INFO
T1 20dB	2400.000000	---	2401.8480	MHz	PASS
T2 20dB	---	2483.500000	2442.5280	MHz	PASS

Plot: Bandwidth only

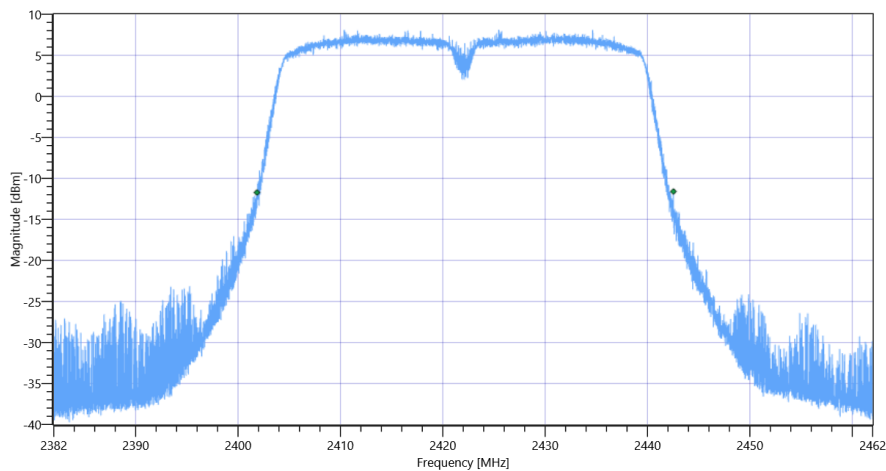

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode 20dB

Plot: Bandwidth within Band

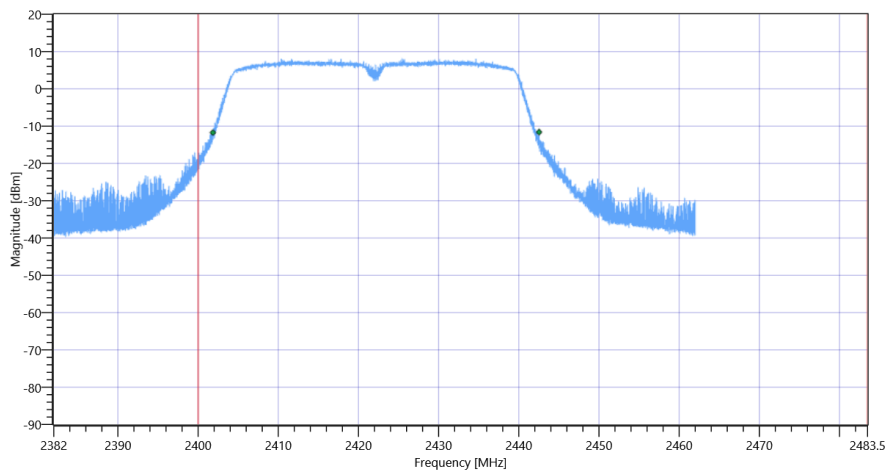

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode

General verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode

Test References

TC Start	16.08.2022 13:59:58
Ambit Temp [°C] Humidity [rel%]	25.0 46
System Version	3.3.0.2
Test Specification	FCC 15.247, ISED RSS247 -
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT40 mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
 Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62
 Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	7.11	dBm	INFO
Ref. Frequency	---	---	2433.400	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.11 10.8 20
Start [MHz] Stop [MHz]	2397.000 2477.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	36500.000	kHz	INFO
T1 99%	2400.000000	---	2418.6898	MHz	PASS
T2 99%	---	2483.500000	2455.1902	MHz	PASS

Plot: Bandwidth only

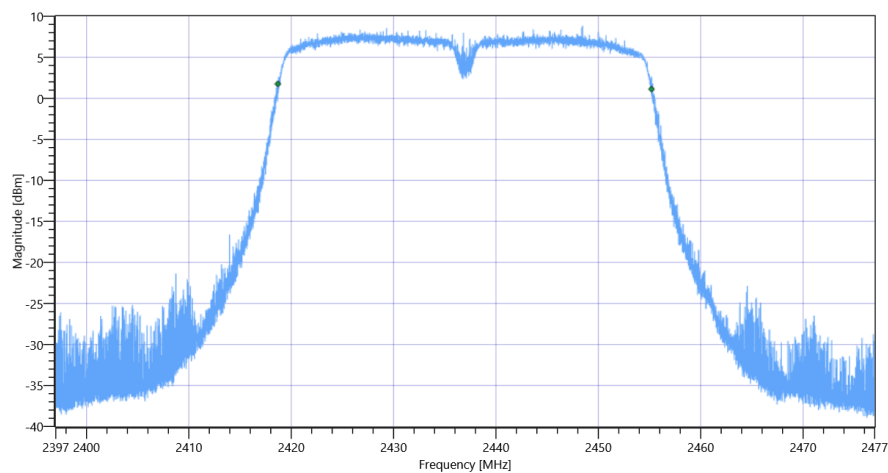


Plot: Bandwidth within Band

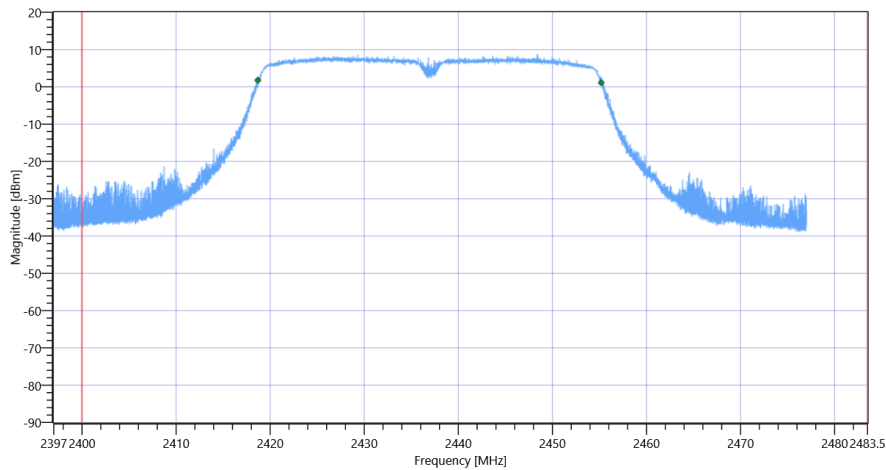

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	40336	kHz	INFO
T1 20dB	2400.000000	---	2416.6960	MHz	PASS
T2 20dB	---	2483.500000	2457.0320	MHz	PASS

Plot: Bandwidth only

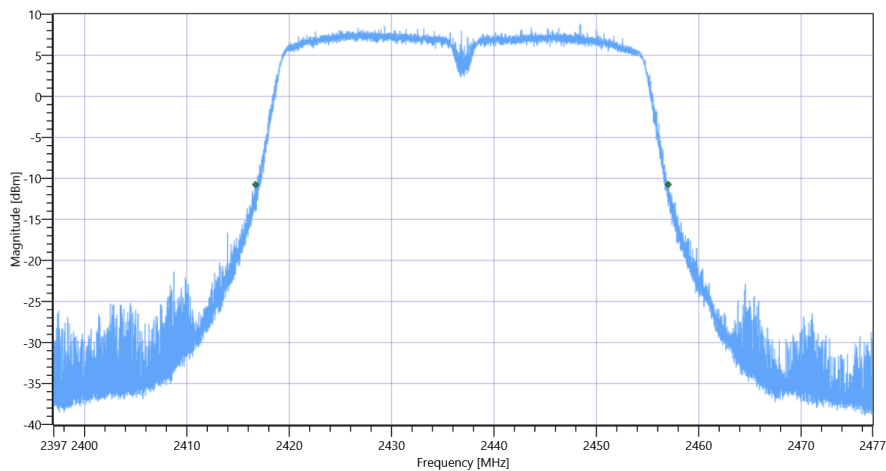

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode 20dB

Plot: Bandwidth within Band

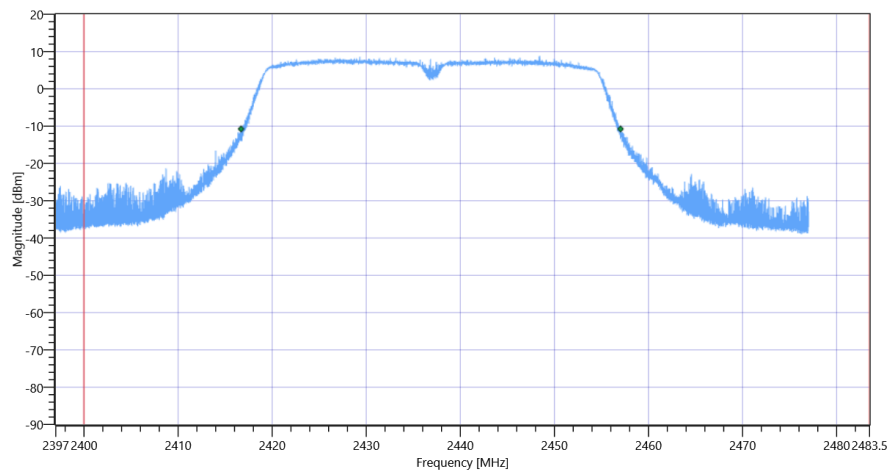

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode

General verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode

Test References

TC Start	16.08.2022 14:11:08
Ambit Temp [°C] Humidity [rel%]	25.1 44
System Version	3.3.0.2
Test Specification	FCC 15.247, ISED RSS247 -
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT40 mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
 Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62
 Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI

Test at TX 2452 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	8.28	dBm	INFO
Ref. Frequency	---	---	2440.910	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.28 10.8 20
Start [MHz] Stop [MHz]	2412.000 2492.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	36492.000	kHz	INFO
T1 99%	2400.000000	---	2433.6418	MHz	PASS
T2 99%	---	2483.500000	2470.1342	MHz	PASS

Plot: Bandwidth only

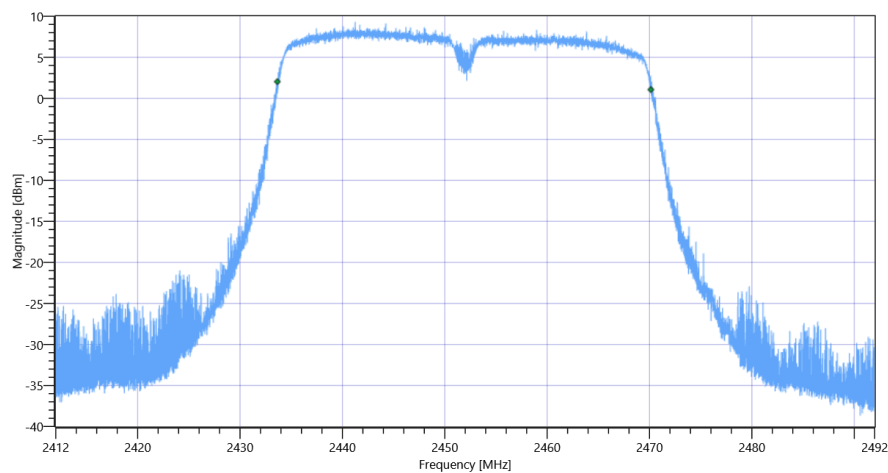


Plot: Bandwidth within Band

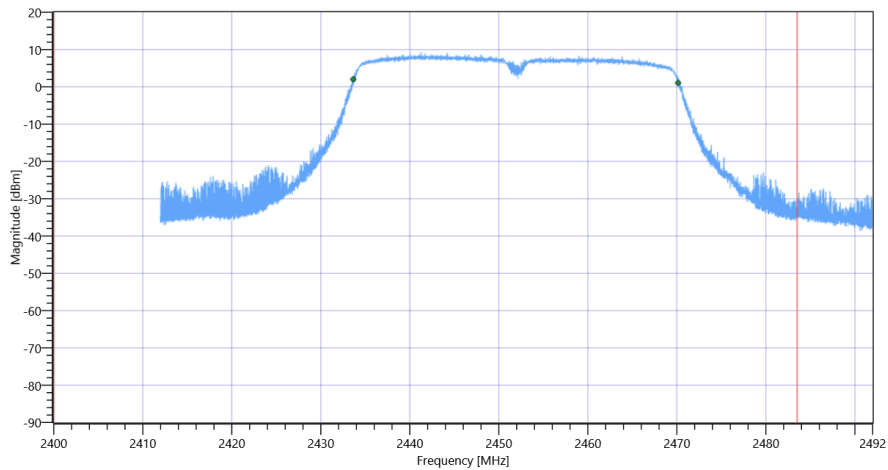

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	40496	kHz	INFO
T1 20dB	2400.000000	---	2431.5680	MHz	PASS
T2 20dB	---	2483.500000	2472.0640	MHz	PASS

Plot: Bandwidth only

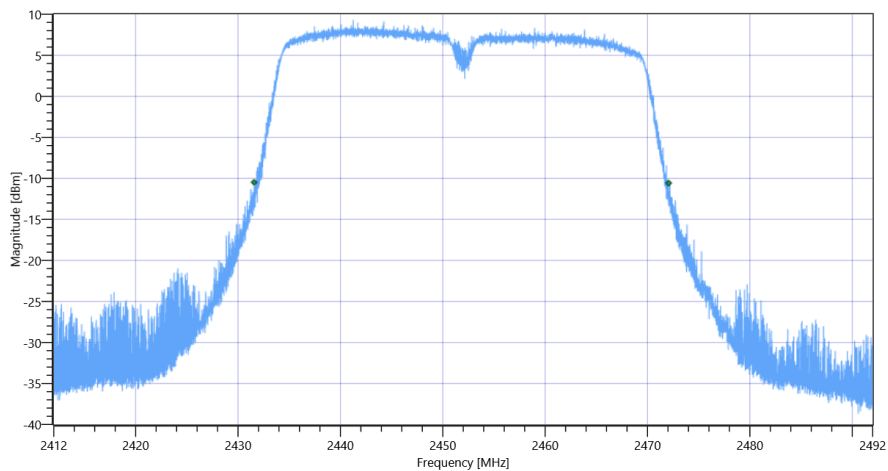

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode 20dB

Plot: Bandwidth within Band

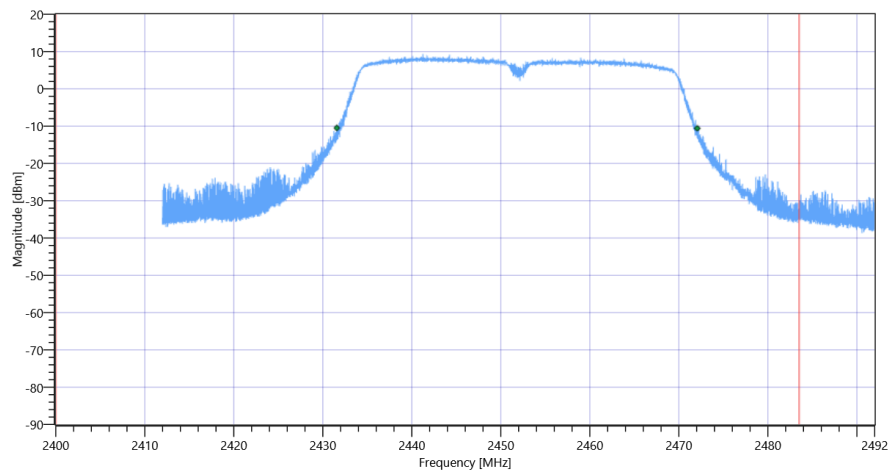

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode

General verdict

PASS

FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 b mode

Test References	
TC Start	16.08.2022 10:24:32
Ambit Temp [°C] Humidity [rel%]	28.0 48
System Version	3.3.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
TC Version	0.0.1
My Description	FCC 15.247 Max Peak Output Power Powermeter Conducted DTS - WLAN2G4 b mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 b mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - PowerMeter

Test Equipment	
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	
Power sensor,Keysight Technologies,L2061XA,MY58000020,A.02.06	

Test at TX 2412 MHz

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	20.16	dBm	PASS

General verdict

PASS

FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 b mode

Test References	
TC Start	16.08.2022 10:46:40
Ambit Temp [°C] Humidity [rel%]	28.5 46
System Version	3.3.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
TC Version	0.0.1
My Description	FCC 15.247 Max Peak Output Power Powermeter Conducted DTS - WLAN2G4 b mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 b mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - PowerMeter

Test Equipment	
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	
Power sensor,Keysight Technologies,L2061XA,MY58000020,A.02.06	

Test at TX 2437 MHz

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	20.18	dBm	PASS
General verdict			PASS		

FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 b mode

Test References

TC Start	16.08.2022 11:07:02
Ambit Temp [°C] Humidity [rel%]	28.6 46
System Version	3.3.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
TC Version	0.0.1
My Description	FCC 15.247 Max Peak Output Power Powermeter Conducted DTS - WLAN2G4 b mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - PowerMeter

Test Equipment

Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI
Power sensor,Keysight Technologies,L2061XA,MY58000020,A.02.06

Test at TX 2462 MHz

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	20.2	dBm	PASS

General verdict

PASS

FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 g mode

Test References	
TC Start	16.08.2022 11:35:03
Ambit Temp [°C] Humidity [rel%]	29.2 44
System Version	3.3.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
TC Version	0.0.1
My Description	FCC 15.247 Max Peak Output Power Powermeter Conducted DTS - WLAN2G4 g mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 g mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - PowerMeter

Test Equipment	
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	
Power sensor,Keysight Technologies,L2061XA,MY58000020,A.02.06	

Test at TX 2412 MHz

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	20.15	dBm	PASS
General verdict			PASS		

FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 g mode

Test References	
TC Start	16.08.2022 11:54:31
Ambit Temp [°C] Humidity [rel%]	29.4 44
System Version	3.3.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
TC Version	0.0.1
My Description	FCC 15.247 Max Peak Output Power Powermeter Conducted DTS - WLAN2G4 g mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 g mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - PowerMeter

Test Equipment	
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	
Power sensor,Keysight Technologies,L2061XA,MY58000020,A.02.06	

Test at TX 2437 MHz

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	20.17	dBm	PASS

General verdict

PASS

FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 g mode

Test References	
TC Start	16.08.2022 12:06:53
Ambit Temp [°C] Humidity [rel%]	27.0 40
System Version	3.3.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
TC Version	0.0.1
My Description	FCC 15.247 Max Peak Output Power Powermeter Conducted DTS - WLAN2G4 g mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 g mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - PowerMeter

Test Equipment	
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	
Power sensor,Keysight Technologies,L2061XA,MY58000020,A.02.06	

Test at TX 2462 MHz

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	20.21	dBm	PASS
General verdict			PASS		

FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 n-HT20 mode

Test References	
TC Start	16.08.2022 12:46:13
Ambit Temp [°C] Humidity [rel%]	25.4 44
System Version	3.3.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
TC Version	0.0.1
My Description	FCC 15.247 Max Peak Output Power Powermeter Conducted DTS - WLAN2G4 n-HT20 mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - PowerMeter

Test Equipment	
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	
Power sensor,Keysight Technologies,L2061XA,MY58000020,A.02.06	

Test at TX 2412 MHz

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	20.19	dBm	PASS

General verdict

PASS

FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 n-HT20 mode

Test References	
TC Start	16.08.2022 12:59:44
Ambit Temp [°C] Humidity [rel%]	24.5 43
System Version	3.3.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
TC Version	0.0.1
My Description	FCC 15.247 Max Peak Output Power Powermeter Conducted DTS - WLAN2G4 n-HT20 mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - PowerMeter

Test Equipment	
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	
Power sensor,Keysight Technologies,L2061XA,MY58000020,A.02.06	

Test at TX 2437 MHz

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	20.21	dBm	PASS

General verdict

PASS

FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 n-HT20 mode

Test References	
TC Start	16.08.2022 13:25:12
Ambit Temp [°C] Humidity [rel%]	24.7 44
System Version	3.3.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
TC Version	0.0.1
My Description	FCC 15.247 Max Peak Output Power Powermeter Conducted DTS - WLAN2G4 n-HT20 mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - PowerMeter

Test Equipment	
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	
Power sensor,Keysight Technologies,L2061XA,MY58000020,A.02.06	

Test at TX 2462 MHz

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	20.24	dBm	PASS
General verdict			PASS		

FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 n-HT40 mode

Test References	
TC Start	16.08.2022 13:52:02
Ambit Temp [°C] Humidity [rel%]	24.8 47
System Version	3.3.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
TC Version	0.0.1
My Description	FCC 15.247 Max Peak Output Power Powermeter Conducted DTS - WLAN2G4 n-HT40 mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - PowerMeter

Test Equipment	
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	
Power sensor,Keysight Technologies,L2061XA,MY58000020,A.02.06	

Test at TX 2422 MHz

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	19.02	dBm	PASS

General verdict

PASS

FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 n-HT40 mode

Test References	
TC Start	16.08.2022 14:08:32
Ambit Temp [°C] Humidity [rel%]	25.1 45
System Version	3.3.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
TC Version	0.0.1
My Description	FCC 15.247 Max Peak Output Power Powermeter Conducted DTS - WLAN2G4 n-HT40 mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - PowerMeter

Test Equipment	
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	
Power sensor,Keysight Technologies,L2061XA,MY58000020,A.02.06	

Test at TX 2437 MHz

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	18.87	dBm	PASS

General verdict

PASS

FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 n-HT40 mode

Test References	
TC Start	16.08.2022 14:19:42
Ambit Temp [°C] Humidity [rel%]	25.0 45
System Version	3.3.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
TC Version	0.0.1
My Description	FCC 15.247 Max Peak Output Power Powermeter Conducted DTS - WLAN2G4 n-HT40 mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - PowerMeter

Test Equipment	
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	
Power sensor,Keysight Technologies,L2061XA,MY58000020,A.02.06	

Test at TX 2452 MHz

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	19.33	dBm	PASS

General verdict

PASS

FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 b mode

Test References	
TC Start	16.08.2022 10:15:16
Ambit Temp [°C] Humidity [rel%]	28.0 48
System Version	3.3.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN2G4 b mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 b mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

Test at TX 2412 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	14.77	dBm	INFO
Ref. Frequency	---	---	2413.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.77 10.8 25
Start [MHz] Stop [MHz]	2397.000 2427.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-1.83	dBm/3KHz	PASS

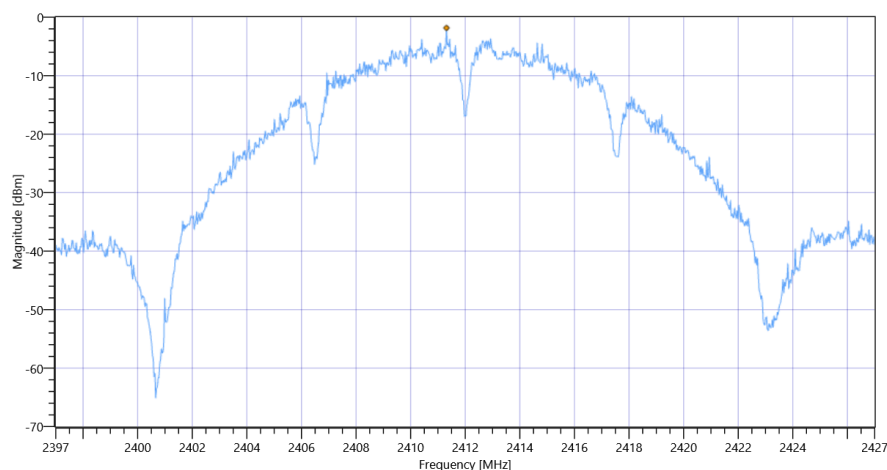

FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 b mode

General verdict

PASS

FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 b mode

Test References	
TC Start	16.08.2022 10:37:25
Ambit Temp [°C] Humidity [rel%]	28.2 47
System Version	3.3.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN2G4 b mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 b mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

Test at TX 2437 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	15.24	dBm	INFO
Ref. Frequency	---	---	2435.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	20.24 10.8 25
Start [MHz] Stop [MHz]	2422.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-2.1	dBm/3KHz	PASS

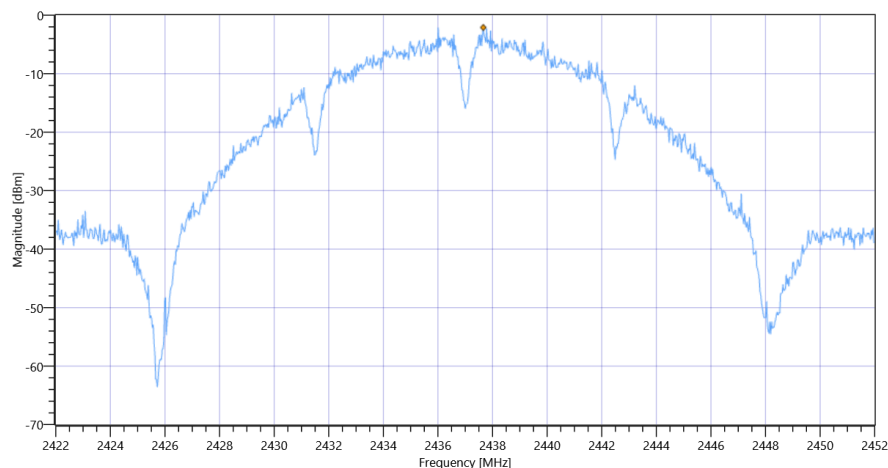

FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 b mode

General verdict

PASS

FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 b mode

Test References	
TC Start	16.08.2022 10:57:46
Ambit Temp [°C] Humidity [rel%]	28.6 46
System Version	3.3.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN2G4 b mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 b mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

Test at TX 2462 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	15.39	dBm	INFO
Ref. Frequency	---	---	2460.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	20.40 10.81 25
Start [MHz] Stop [MHz]	2447.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-2.79	dBm/3KHz	PASS

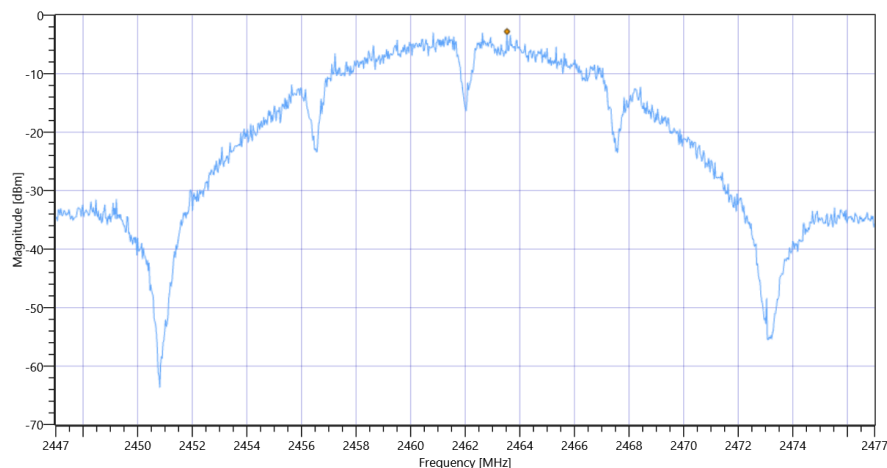

FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 b mode

General verdict

PASS

FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 g mode

Test References	
TC Start	16.08.2022 11:25:47
Ambit Temp [°C] Humidity [rel%]	28.7 46
System Version	3.3.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN2G4 g mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 g mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

Test at TX 2412 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	12.05	dBm	INFO
Ref. Frequency	---	---	2415.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.05 10.8 25
Start [MHz] Stop [MHz]	2397.000 2427.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-11.1	dBm/3KHz	PASS

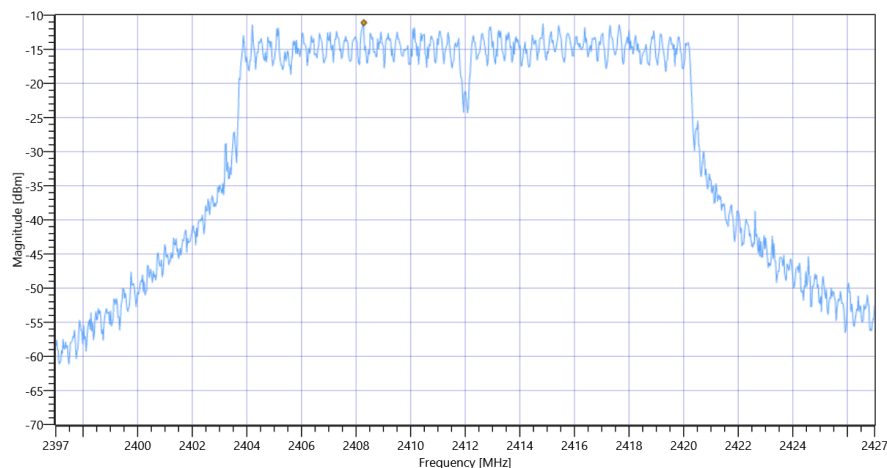

FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 g mode

General verdict

PASS

FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 g mode

Test References	
TC Start	16.08.2022 11:45:14
Ambit Temp [°C] Humidity [rel%]	29.2 44
System Version	3.3.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN2G4 g mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 g mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

Test at TX 2437 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	12.28	dBm	INFO
Ref. Frequency	---	---	2439.700	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.28 10.8 25
Start [MHz] Stop [MHz]	2422.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-9.88	dBm/3KHz	PASS

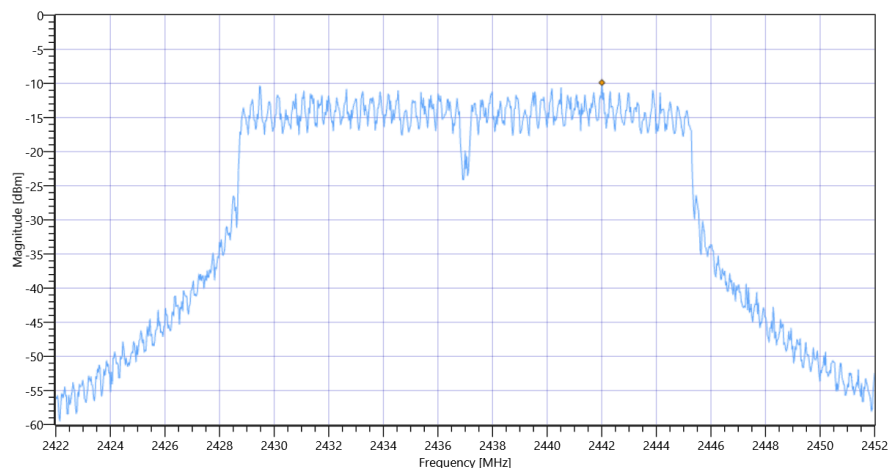

FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 g mode

General verdict

PASS

FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 g mode

Test References	
TC Start	16.08.2022 11:57:35
Ambit Temp [°C] Humidity [rel%]	29.3 43
System Version	3.3.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN2G4 g mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 g mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	