

Page 1 of 64

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO **FCC PART 15 SUBPART C REQUIREMENT**

Sharp Corporation, Mobile Communication B.U.

Applicant: 2-13-1, Hachihonmatsu-lida, Higashi-hiroshima-shi,

Hiroshima 739-0192, Japan

Sharp Corporation Manufacturer:

1 Takumi-cho, Sakai-ku, Sakai City, Osaka 590-8522, Japan

Product Name: Smart Phone

Report Number: T190308W01-RP2

FCC ID: APYHRO00273

FCC Rule Part: §15.247, Cat: DTS

Apr. 01, 2019 **Issue Date:**

Mar. 05, 2019 ~ Mar. 20, 2019 Date of Test:

Date of EUT Received: Mar. 05, 2019

Compliance Certification Services Inc.Wugu Lab.

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Tai-Issued by:

wan. (R.O.C.)

service@ccsrf.com

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory).

Tested By:

Approved By:

Kevin Tsai / Deputy Manager





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 2 of 64

Revision History

| Report Number | Revision | Description | Effected Page | Issue Date | Revised By |
|----------------|----------|------------------------------|---------------|---------------|---------------|
| T190308W01-RP2 | Rev.00 | Initial creation of document | All | Apr. 01, 2019 | Violetta Tang |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 3 of 64



Contents

| 1. GENERAL INFORMATION | 4 |
|---|----|
| 2. SYSTEM TEST CONFIGURATION | 6 |
| 3. SUMMARY OF TEST RESULTS | 8 |
| 4. DESCRIPTION OF TEST MODES | 9 |
| 5. MEASUREMENT UNCERTAINTY | 11 |
| 6. CONDUCTED EMISSION TEST | 12 |
| 7. PEAK OUTPUT POWER MEASUREMENT | 16 |
| 8. 6dB BANDWIDTH MEASUREMENT | 20 |
| 9. CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT | 26 |
| 10. RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT | 32 |
| 11. PEAK POWER SPECTRAL DENSITY | 61 |
| 12. ANTENNA REQUIREMENT | 64 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 4 of 64

1. GENERAL INFORMATION

1.1 Product Description

General:

| Product Name: | Smart Phone |
|-------------------|--|
| Hardware Version: | DVT |
| Software Version: | N/A |
| Power Supply: | 3.85V from Rechargeable Li-ion Battery |

Bluetooth Low Energy:

| Frequency Range: | 2.402GHz – 2.480GHz |
|----------------------|--------------------------------------|
| Bluetooth Version | BT V5.0 (dual mode) |
| Channel number: | 40 channels |
| Modulation type: | GFSK |
| Transmit Power: | 6.22dBm (BT 4.0) 6.46dBm (BT 5.0) |
| Antenna Designation: | Inverted-F Antenna, Gain: -3.3dBi |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 5 of 64

1.2 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247

KDB 558074 D01 v05r01 DTS Meas. Guidance

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

1.3 Test Facility

Compliance Certification Services Inc. Wugu Lab. No.11, Wugong 6th Rd.,

Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.) (TAF code 1309)

FCC Designation number: TW1309

1.4 Special Accessories

There are no special accessories used while test was conducted.

1.5 Equipment Modifications

There was no modification incorporated into the EUT.

1.6 Referencing test data across separate equipment authorization

The test report T190304W03-RP2 under original FCC ID: APYHRO00272 are fully referred for the new FCC ID: APYHRO00273 in this report.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 6 of 64

2. SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plan. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz,. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Conducted Test (RF)

The active antenna port of the unlicensed wireless device is connected to the spectrum analyzer with attenuator to protect the instrumentation. If a second antenna port is available, it is tested at one operating frequency, with other port(s) appropriately terminated, to verify it has similar output characteristics as the fully tested port.

2.3.2 Radiated Emissions

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 7 of 64

2.5 Configuration of Tested System Fig. 2-1 Radiated Emission



Fig. 2-2 AC Power Line Conducted **Emission**



Fig. 2-2 Conducted (Antenna Port) **Emission**




Table 2-1 Equipment Used in Tested System

| | | | • | | | |
|------|----------------------------|-----------|----------------|------------|------------|-------------------|
| Iten | n Equipment | Mfr/Brand | Model/Type No. | Series No. | Data Cable | Power Cord |
| 1. | Bluetooth Test Software | N/A | N/A | N/A | N/A | N/A |
| 2. | DC Power Supply | Anritsu | E3640A | MY52410006 | N/A | Unshielded |
| 3. | Notebook | Lenovo | T440P | PC-089AH5 | Shielded | Unshielded |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





3. SUMMARY OF TEST RESULTS

| FCC Rules | Description Of Test | Result |
|----------------------------------|---|-----------|
| §15.207(a) | AC Power Line Conducted Emission | Compliant |
| §15.247(b) (3) | Peak Output Power | Compliant |
| §15.247(a)(2) | 6dB Bandwidth | Compliant |
| §15.205 §15.209 §15.247(d) | Conducted Band Edge and Spurious Emission | Compliant |
| §15.205 §15.209 §15.247(d) | Radiated Band Edge and Spurious Emission | Compliant |
| §15.247(e) | Peak Power Density | Compliant |
| §15.203 §15.247(b) | Antenna Requirement | Compliant |



Page 9 of 64

4. DESCRIPTION OF TEST MODES

4.1 Operated in 2400 ~ 2483.5MHz Band

40 channels are provided for Bluetooth LE

| 10 011011110 | 40 Glarificio di e provided foi Bidetootti EE | | | | | |
|--------------|---|------|-----------|------|-----------|--|
| ITEM | FREQUENCY | ITEM | FREQUENCY | ITEM | FREQUENCY | |
| 1 | 2402 MHz | 15 | 2430 MHz | 29 | 2458 MHz | |
| 2 | 2404 MHz | 16 | 2432 MHz | 30 | 2460 MHz | |
| 3 | 2406 MHz | 17 | 2434 MHz | 31 | 2462 MHz | |
| 4 | 2408 MHz | 18 | 2436 MHz | 32 | 2464 MHz | |
| 5 | 2410 MHz | 19 | 2438 MHz | 33 | 2466 MHz | |
| 6 | 2412 MHz | 20 | 2440 MHz | 34 | 2468 MHz | |
| 7 | 2414 MHz | 21 | 2442 MHz | 35 | 2470 MHz | |
| 8 | 2416MHz | 22 | 2444 MHz | 36 | 2472 MHz | |
| 9 | 2418 MHz | 23 | 2446 MHz | 37 | 2474 MHz | |
| 10 | 2420 MHz | 24 | 2448 MHz | 38 | 2476 MHz | |
| 11 | 2422 MHz | 25 | 2450 MHz | 39 | 2478 MHz | |
| 12 | 2424 MHz | 26 | 2452 MHz | 40 | 2480 MHz | |
| 13 | 2426 MHz | 27 | 2454 MHz | | | |
| 14 | 2428 MHz | 28 | 2456 MHz | | | |



Page 10 of 64

4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
- 3. Investigation has been done on all the possible configurations for searching the worst case.

AC POWER LINE CONDUCTED EMISSION TEST:

| Test Condition | AC Power line conducted emission for line and neutral | |
|----------------|---|--|
| Worst Case | Operation in normal mode | |

RADIATED EMISSION TEST:

| RADIATED EMISSION TEST (BELOW 1 GHz) | | | | | | |
|--------------------------------------|--------------|------------------|------------|-----------|--|--|
| MODE | AVAILABLE | TESTED | MODULATION | DATA RATE | | |
| MODE | CHANNEL | CHANNEL | MODULATION | (Mbps) | | |
| Bluetooth LE | 2402 to 2480 | 2442 | GFSK | 1 | | |
| Bluetooth LE | 2402 to 2480 | 2442 | GFSK | 2 | | |
| RADIATED EMISSION TEST (ABOVE 1 GHz) | | | | | | |
| MODE | AVAILABLE | TESTED | MODULATION | DATA RATE | | |
| MODE | CHANNEL | CHANNEL | MODULATION | (Mbps) | | |
| Bluetooth LE | 2402 to 2480 | 2402, 2442, 2480 | GFSK | 1 | | |
| Bluetooth LE | 2402 to 2480 | 2402, 2442, 2480 | GFSK | 2 | | |

Note: The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth LE Transmitter for channel Low, Mid and High, the worst case E1 position was reported.

ANTENNA PORT CONDUCTED MEASUREMENT:

| 7.11.1 E1(1) 7.1 GG(1) GG(1) III E7(GG(1) E1(1) | | | | | |
|---|----------------------|-------------------|------------|---------------------|--|
| CONDUCTED TEST | | | | | |
| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION | DATA RATE (Mbps) | |
| Bluetooth LE | 2402 to 2480 | 2402, 2440, 2480 | GFSK | 1 | |
| Bluetooth LE | 2402 to 2480 | 2402, 2440, 2480 | GFSK | 2 | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製





5. MEASUREMENT UNCERTAINTY

| PARAMETER | UNCERTAINTY |
|---|---------------|
| AC Powerline Conducted Emission | +/- 1.2575 dB |
| Peak Output Power | +/- 1.922 dB |
| 6dB Bandwidth | +/- 61.248 Hz |
| 100 kHz Bandwidth of Frequency Band Edges | +/- 1.922 dB |
| Peak Power Density | +/- 2.004 dB |
| 3M Semi Anechoic Chamber / 30M~200M | +/- 4.12 dB |
| 3M Semi Anechoic Chamber / 200M~1000M | +/- 4.68 dB |
| 3M Semi Anechoic Chamber / 1G~8G | +/- 5.18 dB |
| 3M Semi Anechoic Chamber / 8G~18G | +/- 5.47 dB |
| 3M Semi Anechoic Chamber / 18G~26G | +/- 3.81 dB |
| 3M Semi Anechoic Chamber / 26G~40G | +/- 3.87 dB |

Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.
- 3. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.



Page 12 of 64

6. CONDUCTED EMISSION TEST

6.1 Standard Applicable:

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

| Frequency range | Lin dB(| nits uV) |
|-----------------|------------|-------------|
| MHz | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56 | 56 to 46 |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

Note

- 1. The lower limit shall apply at the transition frequencies
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

6.2 Measurement Equipment Used:

| Conducted Emission Test Site | | | | | | | | | | |
|------------------------------|-------------|-----------|-------------|------------|------------|--|--|--|--|--|
| EQUIPMENT | MFR | MODEL | SERIAL | LAST | CAL DUE. | | | | | |
| TYPE | | NUMBER | NUMBER | CAL. | | | | | | |
| CABLE | EMCI | CFD300-NL | CERF | 06/29/2018 | 06/28/2019 | | | | | |
| EMI Test Receiver | R&S | ESCI | 100064 | 07/24/2018 | 07/23/2019 | | | | | |
| LISN | SCHWARZBECK | NSLK 8127 | 8127-541 | 01/31/2019 | 01/30/2020 | | | | | |
| LISN | SCHAFFNER | NNB 41 | 03/10013 | 02/13/2019 | 02/12/2020 | | | | | |
| Software | | EZ-EMC(C | CCS-3A1-CE) | | | | | | | |

6.3 EUT Setup:


- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



6.4 Test SET-UP (Block Diagram of Configuration)

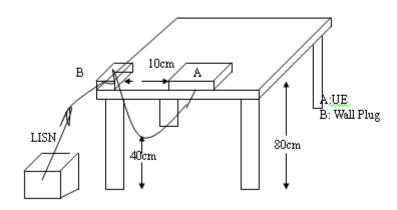

6.5 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

6.6 Measurement Result:

Note: Refer to next page for measurement data and plots.

Note2: The * reveals the worst-case results that closet to the limit

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




Page 14 of 64

AC POWER LINE CONDUCTED EMISSION TEST DATA

Description: Date: 2019/3/11 **Operation**

Temp.(℃)/**Hum.**(%): 24(°C)/52% Line: L1

Test Voltage: AC 120V/60Hz Test By: Peter

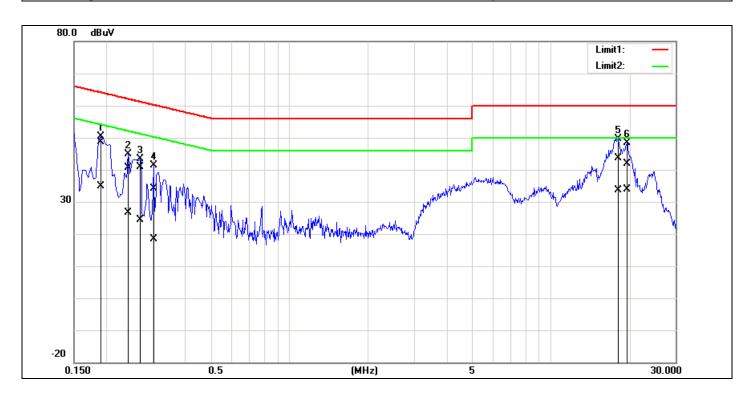

| No. | Frequency | QuasiPeak reading | Average reading | Correction | QuasiPeak result | Average | QuasiPeak limit | Average limit | QuasiPeak margin | Average margin | Remark |
|-----|-----------|----------------------|-----------------|------------|---------------------|---------|--------------------|------------------|---------------------|-------------------|--------|
| | (MHz) | (dBuV) | (dBuV) | (dB) | (dBuV) | (dBuV) | (dBuV) | (dBuV) | (dB) | (dB) | |
| 1* | 0.1900 | 48.48 | 34.61 | 0.15 | 48.63 | 34.76 | 64.03 | 54.04 | -15.40 | -19.28 | Pass |
| 2 | 0.2420 | 40.36 | 26.44 | 0.15 | 40.51 | 26.59 | 62.02 | 52.03 | -21.51 | -25.44 | Pass |
| 3 | 0.2700 | 40.69 | 24.21 | 0.15 | 40.84 | 24.36 | 61.12 | 51.12 | -20.28 | -26.76 | Pass |
| 4 | 0.3020 | 34.00 | 18.13 | 0.16 | 34.16 | 18.29 | 60.19 | 50.19 | -26.03 | -31.90 | Pass |
| 5 | 18.1100 | 42.96 | 33.00 | 0.65 | 43.61 | 33.65 | 60.00 | 50.00 | -16.39 | -16.35 | Pass |
| 6 | 19.5340 | 41.17 | 33.17 | 0.69 | 41.86 | 33.86 | 60.00 | 50.00 | -18.14 | -16.14 | Pass |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 15 of 64

Description: Operation Date: 2019/3/11

Temp.(℃)/**Hum.**(%): 24(°C)/52% Line:

AC 120V/60Hz Test By: **Test Voltage:** Peter

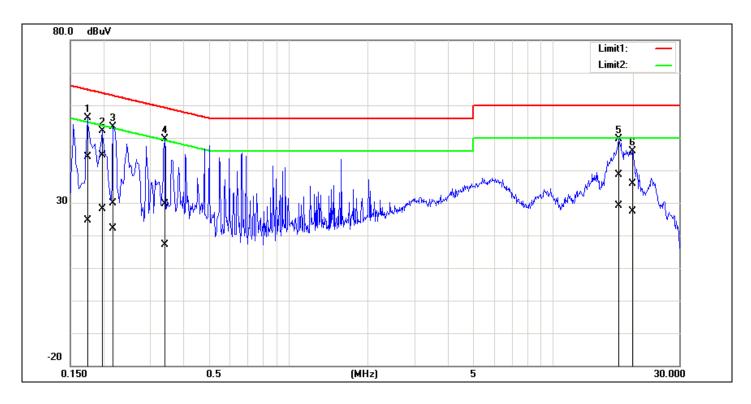

| No. | Frequency | QuasiPeak reading | Average reading | Correction factor | QuasiPeak result | Average result | QuasiPeak limit | Average limit | QuasiPeak margin | Average margin | Remark |
|-----|-----------|----------------------|--------------------|-------------------|---------------------|----------------|--------------------|------------------|---------------------|-------------------|--------|
| | (MHz) | (dBuV) | (dBuV) | (dB) | (dBuV) | (dBuV) | (dBuV) | (dBuV) | (dB) | (dB) | |
| 1 | 0.1740 | 44.02 | 24.65 | 0.10 | 44.12 | 24.75 | 64.76 | 54.77 | -20.64 | -30.02 | Pass |
| 2* | 0.1980 | 44.43 | 28.14 | 0.10 | 44.53 | 28.24 | 63.69 | 53.69 | -19.16 | -25.45 | Pass |
| 3 | 0.2180 | 29.75 | 22.13 | 0.10 | 29.85 | 22.23 | 62.89 | 52.89 | -33.04 | -30.66 | Pass |
| 4 | 0.3420 | 29.47 | 16.91 | 0.11 | 29.58 | 17.02 | 59.15 | 49.15 | -29.57 | -32.13 | Pass |
| 5 | 17.7099 | 38.12 | 28.61 | 0.51 | 38.63 | 29.12 | 60.00 | 50.00 | -21.37 | -20.88 | Pass |
| 6 | 19.9900 | 35.45 | 26.81 | 0.55 | 36.00 | 27.36 | 60.00 | 50.00 | -24.00 | -22.64 | Pass |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 16 of 64

7. PEAK OUTPUT POWER MEASUREMENT

7.1 Standard Applicable:

For systems using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1Watt.


If the transmitting antenna of directional gain greater than 6dBi are used the peak output power form the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.

In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

7.2 Measurement Equipment Used:

| Conducted Emission Test Site | | | | | | | | | |
|------------------------------|---------------------------------|-----------|------------|------------|------------|--|--|--|--|
| EQUIPMENT | EQUIPMENT MFR MODEL SERIAL LAST | | | | | | | | |
| TYPE | | NUMBER | NUMBER | CAL. | | | | | |
| Power Meter | Anritsu | ML2496A | 1242004 | 10/23/2018 | 10/22/2019 | | | | |
| Power Sensor | Anritsu | MA2411B | 1207365 | 10/23/2018 | 10/22/2019 | | | | |
| Power Sensor | Anritsu | MA2411B | 1207368 | 10/24/2018 | 10/23/2019 | | | | |
| DC Power Supply | Agilent | E3640A | KR93300208 | 08/15/2018 | 08/14/2019 | | | | |
| Attenuator | Mini-Circuit | BW-S10W2+ | 1 | 02/26/2019 | 02/25/2020 | | | | |

7.3 Test Set-up:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page 17 of 64

7.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.

Power Meter:

It is used as the auxiliary test equipment to conduct the output power measurement.

- 4. Record the max. Reading as observed from Power Meter.
- 5. Repeat above procedures until all test default channel measured was complete.


Formula:

Duty Cycle = Ton / (Ton+Toff)

Duty Factor

DATA RATE 1 Mbps:

| | Duty Cycle (%) | Duty Factor (dB) | 1/T (kHz) | VBW setting (kHz) |
|-----|----------------|---------------------|--------------|-------------------------|
| BLE | 62.00 | 2.08 | 2.56 | 3.00 |

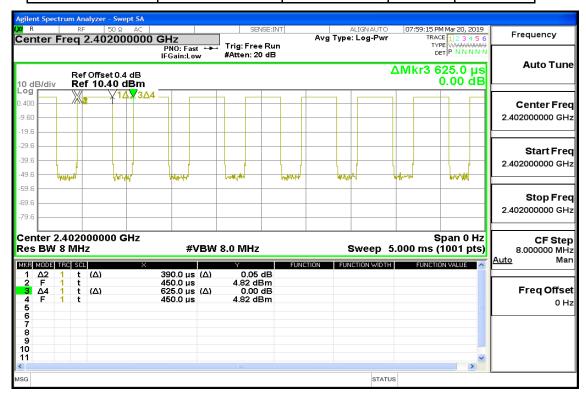

Duty Cycle Factor:10*log(1/(62/100))=2.08

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



DATA RATE 2 Mbps (BT 5.0):

| | Duty Cycle (%) | | 1/T (kHz) | VBW setting (kHz) |
|-----|----------------|------|--------------|-------------------------|
| BLE | 57.00 | 2.44 | 0.94 | 1.00 |



Duty Cycle Factor:10*log(1/(57/100))=2.44

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 19 of 64

7.5 Measurement Result:

DATA RATE 1 Mbps:

BLE mode:

| СН | Frequency (MHz) | Peak Power Output (dBm) | Required Limit |
|--------------------|--------------------|--|-----------------|
| Low | 2402 | 4.86 | 1 Watt = 30 dBm |
| Mid | 2442 | 6.22 | 1 Watt = 30 dBm |
| High | 2480 | 5.67 | 1 Watt = 30 dBm |
| BLE mo | de: | | |
| CH Frequency (MHz) | | Max. Avg. Output include tune up tolerance Power (dBm) | Required Limit |
| Low | 2402 | 4.74 | 1 Watt = 30 dBm |
| Mid | 2442 | 6.00 | 1 Watt = 30 dBm |
| High | 2480 | 5.51 | 1 Watt = 30 dBm |

^{*}Note: Measured by power meter, cable loss as 0.4 dB that offsets on the power meter in Peak

DATA RATE 2 Mbps (BT 5.0):

BLE mode:

| СН | Frequency (MHz) | Peak Power Output (dBm) | Required Limit |
|--------------------|--------------------|--|-----------------|
| 0 | 2402 | 5.10 | 1 Watt = 30 dBm |
| 20 | 2442 | 6.46 | 1 Watt = 30 dBm |
| 39 | 2480 | 5.92 | 1 Watt = 30 dBm |
| BLE mo | de: | | |
| CH Frequency (MHz) | | Max. Avg. Output include tune up tolerance Power (dBm) | Required Limit |
| 0 | 2402 | 4.95 | 1 Watt = 30 dBm |
| 20 | 2442 | 6.29 | 1 Watt = 30 dBm |
| 39 | 2480 | 5.61 | 1 Watt = 30 dBm |

^{*}Note: Measured by power meter, cable loss as 0.4 dB that offsets on the power meter in Peak

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

^{*}Note: Measured by power meter, as cable loss+ Duty cycle factor that offsets on the power meter

^{*}Note: Max. Output include tune up tolerance Power is average power

^{*}Note: Measured by power meter, as cable loss+ Duty cycle factor that offsets on the power meter

^{*}Note: Max. Output include tune up tolerance Power is average power



Page 20 of 64

8. 6DB BANDWIDTH MEASUREMENT


8.1 Standard Applicable

The minimum 6 dB bandwidth shall be at least 500 kHz.

8.2 Measurement Equipment Used

| moded of other Equipment cood | | | | | | | | | |
|------------------------------------|---------------|-----------|------------|------------|------------|--|--|--|--|
| Conducted Emission Test Site | | | | | | | | | |
| EQUIPMENT MFR MODEL SERIAL LAST CA | | | | | | | | | |
| TYPE | | NUMBER | NUMBER | CAL. | | | | | |
| DC Power Supply | Agilent | E3640A | KR93300208 | 08/15/2018 | 08/14/2019 | | | | |
| PXA Spectrum Analyzer | Agilent | N9030A | MY53120760 | 04/09/2018 | 04/08/2019 | | | | |
| DC Block | Mini-Circuits | BLK-18-S+ | 31129(1) | 02/26/2019 | 02/25/2020 | | | | |
| Attenuator | Mini-Circuit | BW-S10W2+ | 1 | 02/26/2019 | 02/25/2020 | | | | |

8.3 Test Set-up:



8.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. For 6dB Bandwidth:
 - Set the spectrum analyzer as RBW=100 kHz, VBW= 3*RBW, Span = 5MHz, Detector=Peak, Sweep=auto.
- 5. Mark the peak frequency and -6dB (upper and lower) frequency.
- 6. Repeat above procedures until all test default channel is completed

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page 21 of 64

8.5 Measurement Result: **DATA RATE 1 Mbps:**

BI F mode

| Frequency (MHz) | 6dB BW (MHz) | BW (MHz) | Result |
|--------------------|--------------------|-------------|--------|
| 2402 | 0.683 | > 0.5 | PASS |
| 2442 | 0.683 | > 0.5 | PASS |
| 2480 | 0.684 | > 0.5 | PASS |

DATA RATE 2 Mbps (BT 5.0):

BLE mode

| Frequency (MHz) | 6dB BW (MHz) | BW (MHz) | Result |
|--------------------|--------------------|-------------|--------|
| 2402 | 1.169 | > 0.5 | PASS |
| 2442 | 1.173 | > 0.5 | PASS |
| 2480 | 1.175 | > 0.5 | PASS |

Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 22 of 64




BLE mode

DATA RATE 1 Mbps:

6dB Band Width Test Data CH-Low

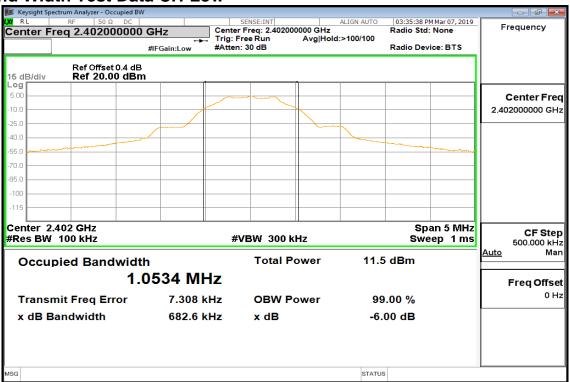

6dB Band Width Test Data CH-Mid

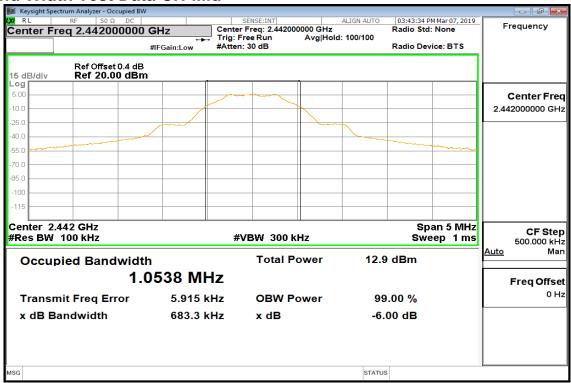


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) are retained for 90 days only.

Phis document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the company and the parties of the Company and the state of the company and t transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



6dB Band Width Test Data CH-High

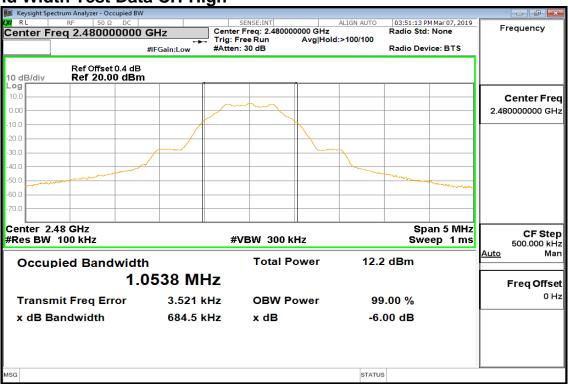

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) are retained for 90 days only.

Phis document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the company and the parties of the Company and the state of the company and t transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law






DATA RATE 2 Mbps (BT 5.0): 6dB Band Width Test Data CH-Low

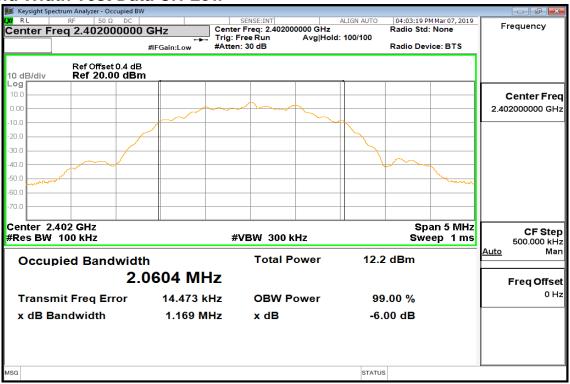

6dB Band Width Test Data CH-Mid

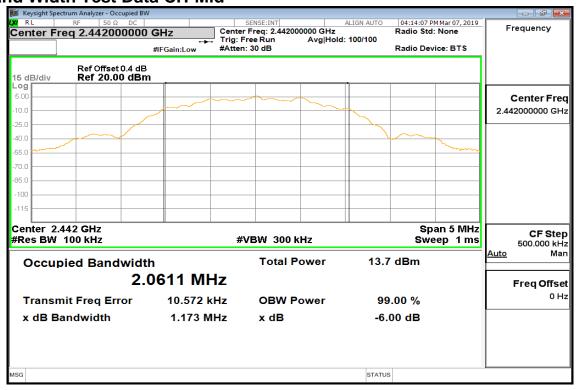


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) are retained for 90 days only.

Phis document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the company and the parties of the Company and the state of the company and t transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



6dB Band Width Test Data CH-High

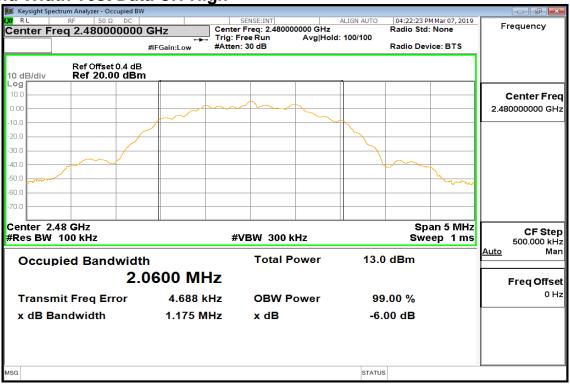

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) are retained for 90 days only.

Phis document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the company and the parties of the Company and the state of the company and t transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)



Page 26 of 64

9. CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT


9.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Measurement Equipment Used:

| Conducted Emission Test Site | | | | | | | | | |
|------------------------------|-------------------------------|-----------|-------------|------------|------------|--|--|--|--|
| EQUIPMENT | JIPMENT MFR MODEL SERIAL LAST | | | | CAL DUE. | | | | |
| TYPE | | NUMBER | NUMBER | CAL. | | | | | |
| DC Power Supply | Agilent | E3640A | KR93300208 | 08/15/2018 | 08/14/2019 | | | | |
| PXA Spectrum | A gilont | NOOSOA | MAXE2120760 | 04/00/2019 | 04/09/2010 | | | | |
| Analyzer | Agilent | N9030A | MY53120760 | 04/09/2016 | 04/06/2019 | | | | |
| DC Block | Mini-Circuits | BLK-18-S+ | 31129(1) | 02/26/2019 | 02/25/2020 | | | | |
| Attenuator | Mini-Circuit | BW-S10W2+ | 1 | 02/26/2019 | 02/25/2020 | | | | |

9.3 Test SET-UP:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 27 of 64

9.4 Measurement Procedure

9.4.1 Reference Level of Emission Limit:

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 100kHz & VBW = 300 kHz.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.

9.4.2 Conducted Band Edge:

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
- Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Detector = Peak, Sweep = auto
- 6. Mark the highest reading of the emission as the reference level measurement.
- Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 kHz immediately outside the authorized (2400~2483.5MHz) be attenuated by 20dB at least relative to the maximum emission of power.
- Repeat above procedures until all default test channel (low, middle, and high) was complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page 28 of 64

Conducted Spurious Emission:

- To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Set RBW = 100 kHz & VBW=300 kHz, Detector = Peak, Sweep = Auto
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

9.5 Measurement Result:

DATA RATE 1 Mbps:

Reference Level of Limit

| Frequency (MHz) | RF Power Density (dBm) | Reference Level of Limit = PSD - 20dB (dBm) |
|--------------------|---------------------------|---|
| 2402 | 4.61 | -15.39 |
| 2442 | 6.05 | -13.95 |
| 2480 | 5.39 | -14.61 |

NOTE: cable loss as 0.4dB that offsets in the spectrum

NOTE: Refer to next page for plots.

DATA RATE 2 Mbps (BT 5.0):

Reference Level of Limit

| Frequency (MHz) | RF Power Density (dBm) | Reference Level of Limit = PSD - 20dB (dBm) |
|-----------------|---------------------------|---|
| 2402 | 4.56 | -15.44 |
| 2442 | 6.00 | -14.00 |
| 2480 | 5.36 | -14.64 |

NOTE: cable loss as 0.4dB that offsets in the spectrum

NOTE: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms and conditions of liability, indemnification and Transaction documents, Subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/retring-e-occuments/fifth-e-occument/fifth-e-oc

Reference Level BLE 1M LowCH00-2402



Reference Level BLE 1M MidCH19-2442



Reference Level BLE 1M HighCH39-2480



Reference Level_BLE_2M_LowCH00-2402



Reference Level_BLE_2M_MidCH19-2442




Reference Level BLE 2M HighCH39-2480




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Band Edge_BLE_1M_LowCH00-2402

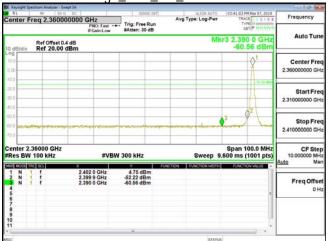


Band Edge_BLE_1M_HighCH39-2480

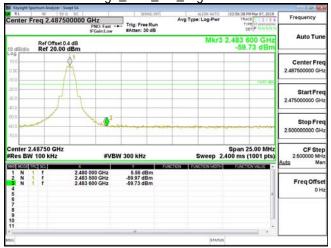

Band Edge_BLE_2M_LowCH00-2402

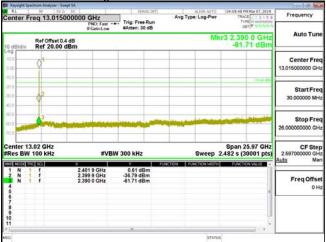

Band Edge_BLE_2M_HighCH39-2480

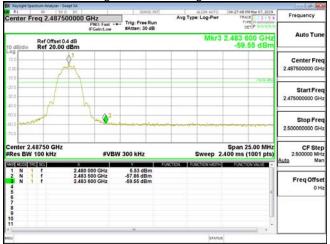


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Spurious Emission_BLE_1M_LowCH00-2402




Spurious Emission_BLE_1M_MidCH19-2442

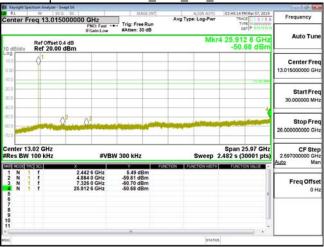


Spurious Emission_BLE_1M_HighCH39-2480



Spurious Emission_BLE_2M_LowCH00-2402

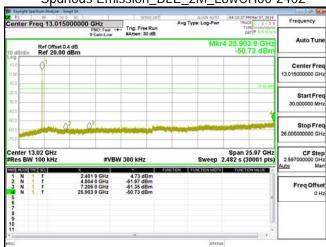

Spurious Emission_BLE_2M_MidCH19-2442

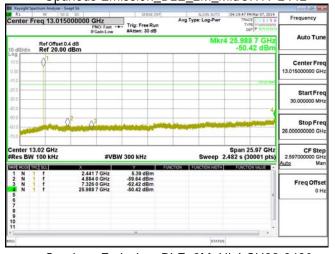

Spurious Emission_BLE_2M_HighCH39-2480



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 32 of 64

10. RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

10.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 limit as below.

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

| Frequency (MHz) | Field strength (microvolts/meter) | Distance (meters) |
|--------------------|--------------------------------------|----------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30 | 30 | 30 |
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level ($dB\mu V/m$) = 20 log Emission level ($dB\mu V/m$)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 33 of 64

10.2 Measurement Equipment Used

| 966A Chamber | | | | | |
|-------------------------------------|-------------------|--------------------|-------------|------------|------------|
| EQUIPMENT | MFR | MODEL | SERIAL | LAST | CAL DUE. |
| TYPE | | NUMBER | NUMBER | CAL. | |
| Band Reject Filters | MICRO TRONICS | BRM 50702 | 120 | 02/26/2019 | 02/25/2020 |
| Bilog Antenna | Sunol Sciences | JB3 | A030105 | 07/13/2018 | 07/12/2019 |
| Cable | HUBER SUHNER | SUCOFLEX 104PEA | 25157 | 02/26/2019 | 02/25/2020 |
| Cable | HUBER SUHNER | SUCOFLEX 104PEA | 20995 | 02/26/2019 | 02/25/2020 |
| Digital Thermo-Hygro Meter | WISEWIND | 1206 | D07 | 01/30/2019 | 01/29/2020 |
| double Ridged Guide Horn Antenna | ETC | MCTD 1209 | DRH13M02003 | 08/20/2018 | 08/19/2019 |
| Loop Ant | COM-POWER | AL-130 | 121051 | 03/21/2018 | 03/20/2019 |
| Pre-Amplifier | EMEC | EM330 | 060609 | 02/26/2019 | 02/25/2020 |
| Pre-Amplifier | HP | 8449B | 3008A00965 | 02/26/2019 | 02/25/2020 |
| PSA Series Spectrum Analyzer | Agilent | E4446A | MY46180323 | 05/31/2018 | 05/30/2019 |
| Antenna Tower | ccs | CC-A-1F | N/A | N.C.R | N.C.R |
| Controller | ccs | CC-C-1F | N/A | N.C.R | N.C.R |
| Turn Table | ccs | CC-T-1F | N/A | N.C.R | N.C.R |
| Software | e3 V6.11-20180413 | | | | |


NOTE: N.C.R refers to Not Calibrated Required.

Page 34 of 64




10.3 Test SET-UP


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

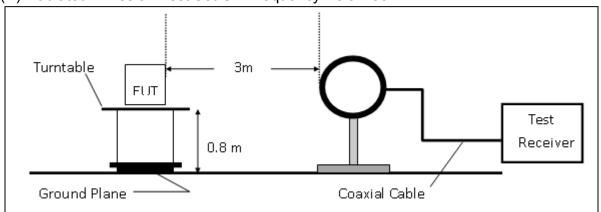

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

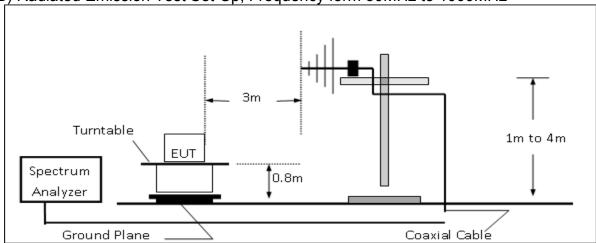

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

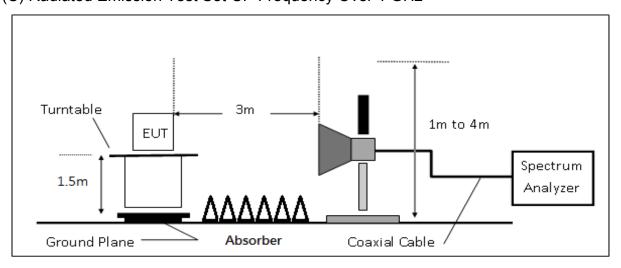

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 35 of 64

10.4 Measurement Procedure

- 1. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 0.8m for frequency> 1GHz above ground plan.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- 6. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- 7. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- 8. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 9. Maximum procedure was performed on the six highest emissions to ensure EUT compliance
- 10. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 11. Repeat above procedures until all default test channel measured were complete.



Page 36 of 64

10.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

| Where | <u> </u> | CL = Cable Attenuation Factor (Cable Loss) |
|-------|------------------------|--|
| | RA = Reading Amplitude | AG = Amplifier Gain |
| | AF = Antenna Factor | |

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

10.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

10.7 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 37 of 64


Radiated Band Edge Measurement Result (BLE mode) **DATA RATE 1 Mbps:**

Operation Band :BLE **Test Date** :2019-03-07

:2402 MHz :20 deg_C / 61 RH **Fundamental Frequency** Temp./Humi.

Operation Mode :Bandedge CH LOW Engineer :Wei

EUT Pol. :E1 Plane :VERTICAL Measurement Antenna Pol.

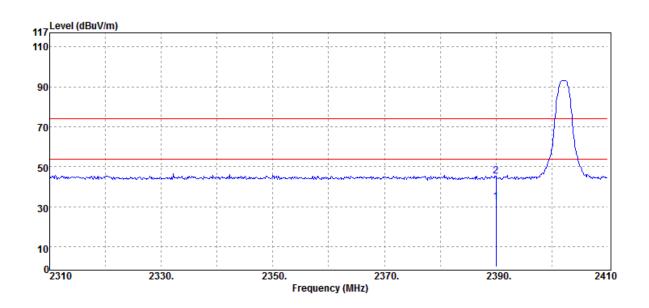

| eq. | Detector | Spectrum | Factor | Actual | Limit | Margin |
|-------|------------|-------------------------------|--|---|---|---|
| | Mode | Reading Level | | FS | @3m | |
| Hz | PK/QP/AV | dΒμV | dB | dΒμV/m | dBμV/m | dB |
| 00.00 | Average | 35.65 | -3.33 | 32.32 | 54.00 | -21.68 |
| 00.00 | Peak | 48.47 | -3.33 | 45.14 | 74.00 | -28.86 |
| | Hz 0.00 | Mode Hz PK/QP/AV 0.00 Average | Mode Reading Level Hz PK/QP/AV dBμV 0.00 Average 35.65 | Mode Reading Level Hz PK/QP/AV dBμV dB 0.00 Average 35.65 -3.33 | Mode Reading Level FS Hz PK/QP/AV dBμV dB dBμV/m 0.00 Average 35.65 -3.33 32.32 | Mode Reading Level FS @3m Hz PK/QP/AV dBμV dB dBμV/m dBμV/m 00.00 Average 35.65 -3.33 32.32 54.00 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 38 of 64

Operation Band Fundamental Frequency **Operation Mode**

:BLE :2402 MHz


:Bandedge CH LOW

EUT Pol. :E1 Plane **Test Date** :2019-03-07

Temp./Humi. :20 deg_C / 61 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

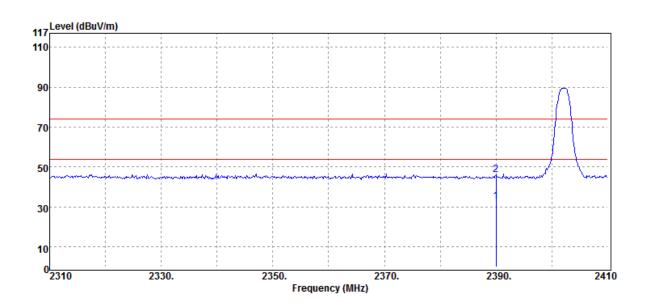

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin | |
|---------|----------|---------------|--------|--------|--------|--------|--|
| | Mode | Reading Level | | FS | @3m | | |
| MHz | PK/QP/AV | dΒμV | dB | dΒμV/m | dΒμV/m | dB | |
| 2390.00 | Average | 36.24 | -3.33 | 32.91 | 54.00 | -21.09 | |
| 2390.00 | Peak | 49.34 | -3.33 | 46.01 | 74.00 | -27.99 | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 39 of 64

Operation Band Fundamental Frequency **Operation Mode**

:BLE :2480 MHz


:Bandedge CH HIGH

EUT Pol. :E1 Plane **Test Date** :2019-03-07

Temp./Humi. :20 deg_C / 61 RH

Engineer :Wei

:VERTICAL Measurement Antenna Pol.

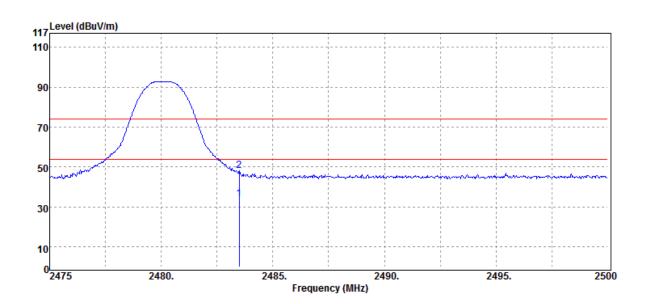

| | Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin |
|---|---------|----------|---------------|--------|--------|--------|--------|
| | | Mode | Reading Level | | FS | @3m | |
| _ | MHz | PK/QP/AV | dΒμV | dB | dBμV/m | dBμV/m | dB |
| | 2483.50 | Average | 36.57 | -2.72 | 33.85 | 54.00 | -20.15 |
| | 2483.50 | Peak | 50.79 | -2.72 | 48.07 | 74.00 | -25.93 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 40 of 64

Operation Band Fundamental Frequency **Operation Mode**

:BLE :2480 MHz


:Bandedge CH HIGH

EUT Pol. :E1 Plane **Test Date** :2019-03-07

Temp./Humi. :20 deg_C / 61 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

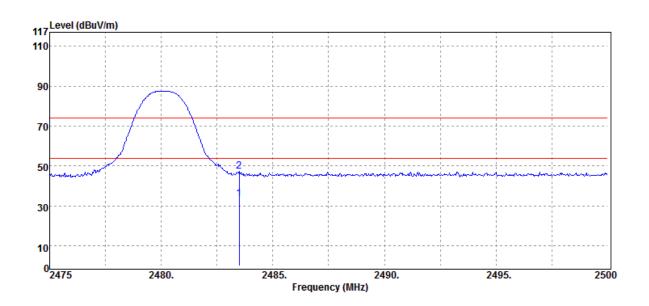

| | Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin |
|---|---------|----------|---------------|--------|--------|--------|--------|
| | | Mode | Reading Level | | FS | @3m | |
| _ | MHz | PK/QP/AV | dΒμV | dB | dΒμV/m | dBμV/m | dB |
| | 2483.50 | Average | 36.13 | -2.72 | 33.41 | 54.00 | -20.59 |
| | 2483.50 | Peak | 49.93 | -2.72 | 47.21 | 74.00 | -26.79 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 41 of 64

DATA RATE 2 Mbps (BT 5.0):

Operation Band :BLE(2M) **Fundamental Frequency** :2402 MHz


Operation Mode :Bandedge CH LOW

EUT Pol. :E1 Plane **Test Date** :2019-03-07

Temp./Humi. :20 deg_C / 61 RH

Engineer :Wei

:VERTICAL Measurement Antenna Pol.

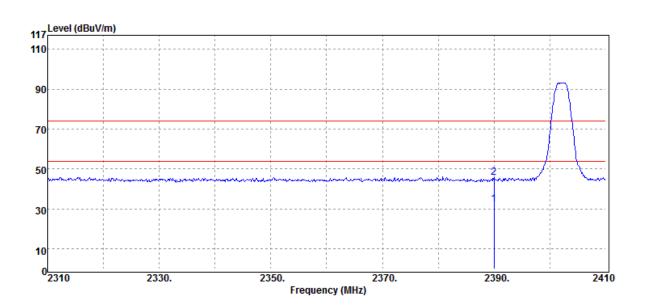

| | Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin | |
|---|---------|----------|---------------|--------|--------|--------|--------|--|
| | | Mode | Reading Level | | FS | @3m | | |
| _ | MHz | PK/QP/AV | dΒμV | dB | dBμV/m | dΒμV/m | dB | |
| | 2390.00 | Average | 35.56 | -3.33 | 32.23 | 54.00 | -21.77 | |
| | 2390.00 | Peak | 48.96 | -3.33 | 45.63 | 74.00 | -28.37 | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 42 of 64

Operation Band Fundamental Frequency **Operation Mode**

:BLE(2M) :2402 MHz


:Bandedge CH LOW

EUT Pol. :E1 Plane **Test Date** :2019-03-07

Temp./Humi. :20 deg_C / 61 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

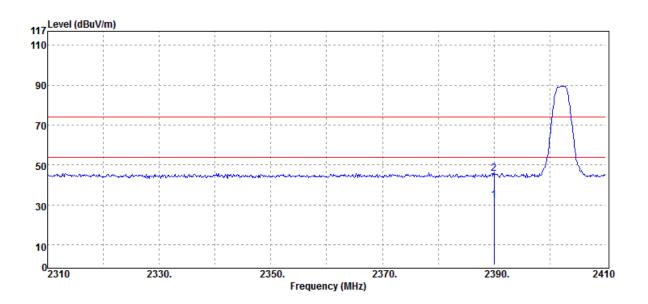

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin |
|---------|----------|---------------|--------|--------|--------|--------|
| | Mode | Reading Level | | FS | @3m | |
| MHz | PK/QP/AV | dΒμV | dB | dBμV/m | dBµV/m | dB |
| 2390.00 | Average | 35.55 | -3.33 | 32.22 | 54.00 | -21.78 |
| 2390.00 | Peak | 49.12 | -3.33 | 45.79 | 74.00 | -28.21 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 43 of 64

Operation Band Fundamental Frequency **Operation Mode**

:BLE(2M) :2480 MHz


:Bandedge CH HIGH

EUT Pol. :E1 Plane **Test Date** :2019-03-07

Temp./Humi. :20 deg_C / 61 RH

Engineer :Wei

:VERTICAL Measurement Antenna Pol.

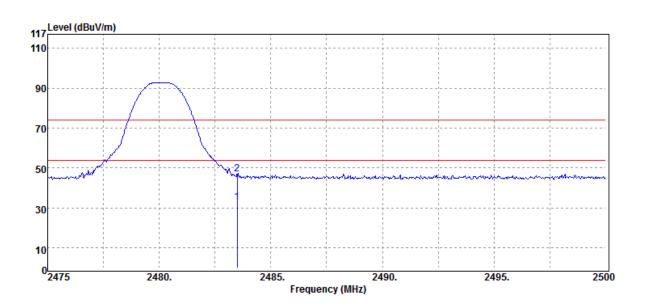

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin | |
|---------|----------|---------------|--------|--------|--------|--------|---|
| | Mode | Reading Level | | FS | @3m | | |
| MHz | PK/QP/AV | dΒμV | dB | dBμV/m | dΒμV/m | dB | _ |
| 2483.50 | Average | 35.67 | -2.72 | 32.95 | 54.00 | -21.05 | |
| 2483.50 | Peak | 49.83 | -2.72 | 47.11 | 74.00 | -26.89 | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 44 of 64

Operation Band Fundamental Frequency **Operation Mode**

:BLE(2M) :2480 MHz


:Bandedge CH HIGH

EUT Pol. :E1 Plane **Test Date** :2019-03-07

Temp./Humi. :20 deg_C / 61 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

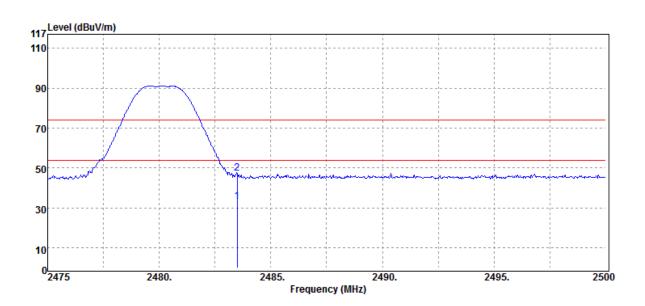

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin |
|---------|----------|---------------|--------|--------|--------|--------|
| | Mode | Reading Level | | FS | @3m | |
| MHz | PK/QP/AV | dΒμV | dB | dBμV/m | dΒμV/m | dB |
| 2483.50 | Average | 35.97 | -2.72 | 33.25 | 54.00 | -20.75 |
| 2483.50 | Peak | 49.90 | -2.72 | 47.18 | 74.00 | -26.82 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 45 of 64




Radiated Spurious Emission Measurement Result: (BLE mode) For Frequency from 30MHz to 1000MHz **DATA RATE 1 Mbps:**

Operation Band :BLE **Test Date** :2019-03-09

Fundamental Frequency :2442 MHz Temp./Humi. :20 deg_C / 61 RH Engineer Operation Mode :Tx CH MID :Wei

EUT Pol. :E1 Plane :VERTICAL Measurement Antenna Pol.

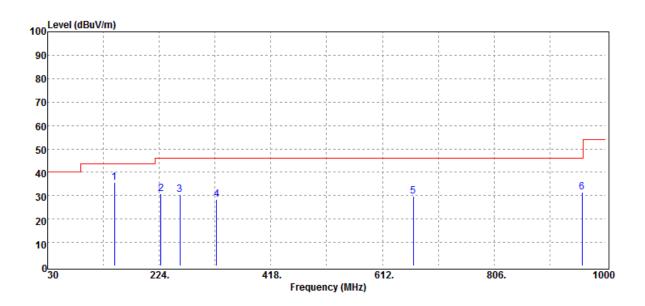

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin | |
|--------|----------|---------------|--------|--------|--------|--------|--|
| | Mode | Reading Level | | FS | @3m | | |
| MHz | PK/QP/AV | dΒμV | dB | dBμV/m | dBμV/m | dB | |
| 146.40 | Peak | 44.90 | -9.40 | 35.50 | 43.50 | -8.00 | |
| 226.91 | Peak | 41.03 | -10.31 | 30.72 | 46.00 | -15.28 | |
| 259.89 | Peak | 39.47 | -9.09 | 30.38 | 46.00 | -15.62 | |
| 323.91 | Peak | 34.89 | -6.59 | 28.30 | 46.00 | -17.70 | |
| 665.35 | Peak | 28.93 | 0.94 | 29.87 | 46.00 | -16.13 | |
| 959.26 | Peak | 25.56 | 5.85 | 31.41 | 46.00 | -14.59 | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 46 of 64

Operation Band :BLE Fundamental Frequency :2442 MHz **Operation Mode** :Tx CH MID EUT Pol. :E1 Plane

Test Date :2019-03-09 Temp./Humi. :20 deg_C / 61 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

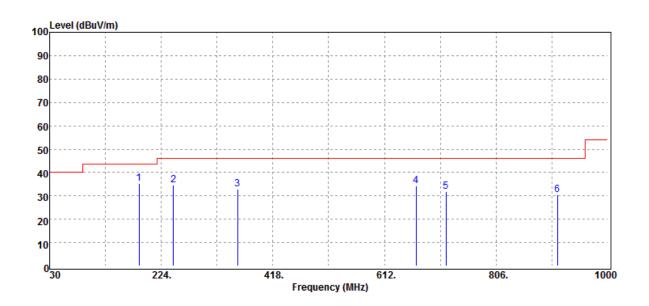

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin | |
|--------|----------|---------------|--------|--------|--------|--------|--|
| | Mode | Reading Level | | FS | @3m | | |
| MHz | PK/QP/AV | dΒμV | dB | dBμV/m | dΒμV/m | dB | |
| 185.20 | Peak | 45.69 | -10.50 | 35.19 | 43.50 | -8.31 | |
| 245.34 | Peak | 44.37 | -9.70 | 34.67 | 46.00 | -11.33 | |
| 356.89 | Peak | 38.74 | -5.87 | 32.87 | 46.00 | -13.13 | |
| 667.29 | Peak | 33.15 | 1.04 | 34.19 | 46.00 | -11.81 | |
| 718.70 | Peak | 30.66 | 1.28 | 31.94 | 46.00 | -14.06 | |
| 912.70 | Peak | 25.65 | 4.79 | 30.44 | 46.00 | -15.56 | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



:2019-03-09

Page 47 of 64


DATA RATE 2 Mbps (BT5.0):

Operation Band :BLE(2M) **Test Date**

Fundamental Frequency :2442 MHz Temp./Humi. :24.1 deg_C / 65 RH

:Tx CH MID **Operation Mode** Engineer :Wei

EUT Pol. :E1 Plan :VERTICAL Measurement Antenna Pol.

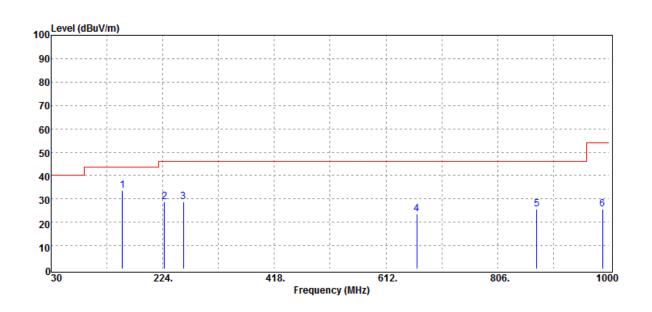

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin | |
|--------|----------|---------------|--------|--------|--------|--------|--|
| | Mode | Reading Level | | FS | @3m | | |
| MHz | PK/QP/AV | dΒμV | dB | dBμV/m | dBµV/m | dB | |
| 154.16 | Peak | 43.00 | -9.41 | 33.59 | 43.50 | -9.91 | |
| 226.91 | Peak | 38.99 | -10.31 | 28.68 | 46.00 | -17.32 | |
| 259.89 | Peak | 37.67 | -9.09 | 28.58 | 46.00 | -17.42 | |
| 665.35 | Peak | 22.76 | 0.94 | 23.70 | 46.00 | -22.30 | |
| 873.90 | Peak | 21.54 | 4.02 | 25.56 | 46.00 | -20.44 | |
| 988.36 | Peak | 19.32 | 6.44 | 25.76 | 54.00 | -28.24 | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 48 of 64

Operation Band Test Date :2019-03-09 :BLE(2M)

Fundamental Frequency :2442 MHz Temp./Humi. :24.1 deg_C / 65 RH

Operation Mode :Tx CH MID Engineer :Wei

EUT Pol. :E1 Plan :HORIZONTAL Measurement Antenna Pol.

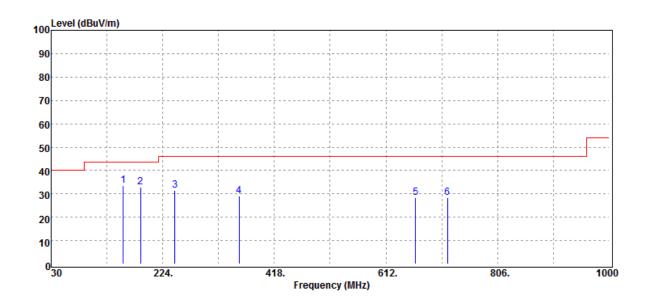

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin | |
|--------|----------|---------------|--------|--------|--------|--------|--|
| | Mode | Reading Level | | FS | @3m | | |
| MHz | PK/QP/AV | dΒμV | dB | dBμV/m | dΒμV/m | dB | |
| 155.13 | Peak | 42.78 | -9.32 | 33.46 | 43.50 | -10.04 | |
| 185.20 | Peak | 43.32 | -10.50 | 32.82 | 43.50 | -10.68 | |
| 245.34 | Peak | 41.20 | -9.70 | 31.50 | 46.00 | -14.50 | |
| 356.89 | Peak | 34.83 | -5.87 | 28.96 | 46.00 | -17.04 | |
| 663.41 | Peak | 27.66 | 0.83 | 28.49 | 46.00 | -17.51 | |
| 718.70 | Peak | 26.97 | 1.28 | 28.25 | 46.00 | -17.75 | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 49 of 64

Radiated Spurious Emission Measurement Result: (BLE mode)

For Frequency above 1 GHz **DATA RATE 1 Mbps:**

Operation Band :BLE

Fundamental Frequency

Operation Mode

:2402 MHz


Test Date :2019-03-09 Temp./Humi. :24.1 deg C / 65 RH

:Tx CH LOW

Engineer :Wei

EUT Pol. :E1 Plane

:VERTICAL Measurement Antenna Pol.

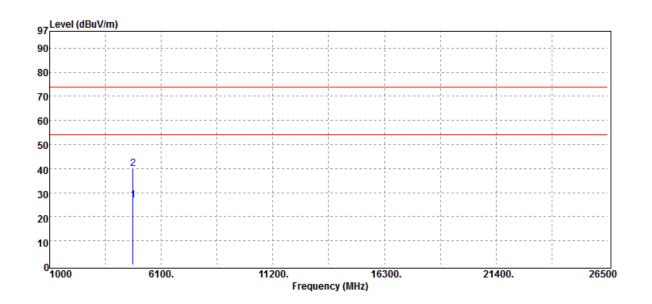

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin |
|---------|----------|---------------|--------|--------|--------|--------|
| | Mode | Reading Level | | FS | @3m | |
| MHz | PK/QP/AV | dΒμV | dB | dBμV/m | dBµV/m | dB |
| 4804.00 | Average | 23.82 | 3.11 | 26.93 | 54.00 | -27.07 |
| 4804.00 | Peak | 36.87 | 3.11 | 39.98 | 74.00 | -34.02 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 50 of 64

Operation Band :BLE **Test Date** :2019-03-09

Fundamental Frequency :2402 MHz Temp./Humi. :24.1 deg_C / 65 RH

Operation Mode :Tx CH LOW Engineer :Wei EUT Pol. :E1 Plane :HORIZONTAL

Measurement Antenna Pol.

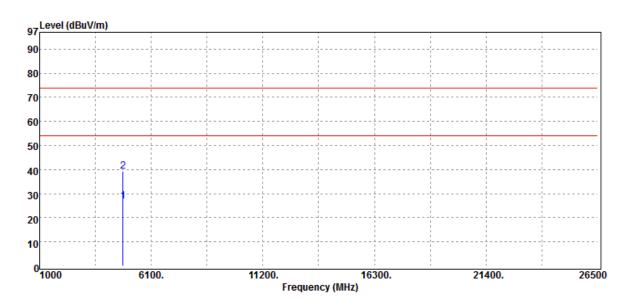

| | Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin | |
|---|---------|----------|---------------|--------|--------|--------|--------|--|
| | | Mode | Reading Level | | FS | @3m | | |
| _ | MHz | PK/QP/AV | dΒμV | dB | dBμV/m | dΒμV/m | dB | |
| | 4804.00 | Average | 23.89 | 3.11 | 27.00 | 54.00 | -27.00 | |
| | 4804.00 | Peak | 36.21 | 3.11 | 39.32 | 74.00 | -34.68 | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 51 of 64

Operation Band :BLE **Test Date** :2019-03-09

Fundamental Frequency :2442 MHz Temp./Humi. :24.1 deg_C / 65 RH

Operation Mode :Tx CH MID Engineer :Wei

EUT Pol. :E1 Plane :VERTICAL Measurement Antenna Pol.

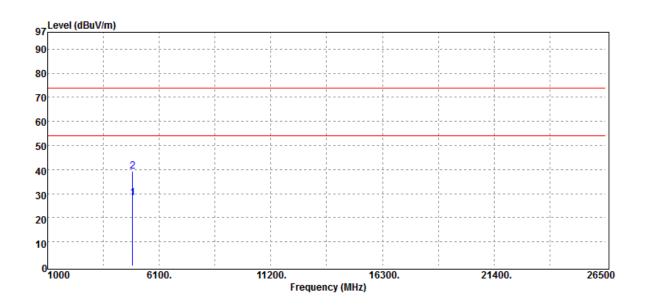

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin | |
|---------|----------|---------------|--------|--------|--------|--------|---|
| | Mode | Reading Level | | FS | @3m | | |
| MHz | PK/QP/AV | dΒμV | dB | dBμV/m | dΒμV/m | dB | _ |
| 4884.00 | Average | 24.67 | 3.47 | 28.14 | 54.00 | -25.86 | |
| 4884.00 | Peak | 35.68 | 3.47 | 39.15 | 74.00 | -34.85 | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 52 of 64

Operation Band :BLE **Test Date** :2019-03-09

Fundamental Frequency :2442 MHz Temp./Humi. :24.1 deg_C / 65 RH

Operation Mode :Tx CH MID Engineer :Wei EUT Pol.

:E1 Plane :HORIZONTAL Measurement Antenna Pol.

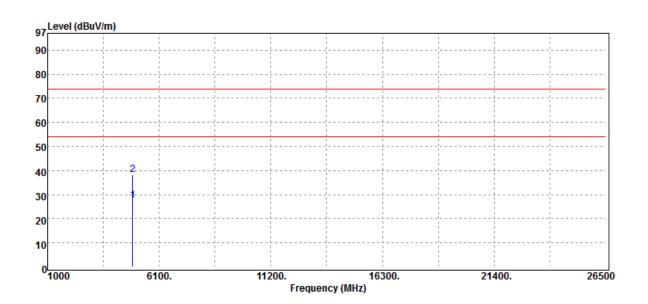

| | Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin | |
|---|---------|----------|---------------|--------|--------|--------|--------|---|
| | | Mode | Reading Level | | FS | @3m | | |
| _ | MHz | PK/QP/AV | dΒμV | dB | dBμV/m | dΒμV/m | dB | _ |
| | 4884.00 | Average | 24.07 | 3.47 | 27.54 | 54.00 | -26.46 | |
| | 4884.00 | Peak | 34.78 | 3.47 | 38.25 | 74.00 | -35.75 | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 53 of 64

Operation Band :BLE **Test Date** :2019-03-09

Fundamental Frequency :2480 MHz Temp./Humi. :24.1 deg_C / 65 RH

Operation Mode :Tx CH HIGH Engineer :Wei

EUT Pol. :E1 Plane :VERTICAL Measurement Antenna Pol.

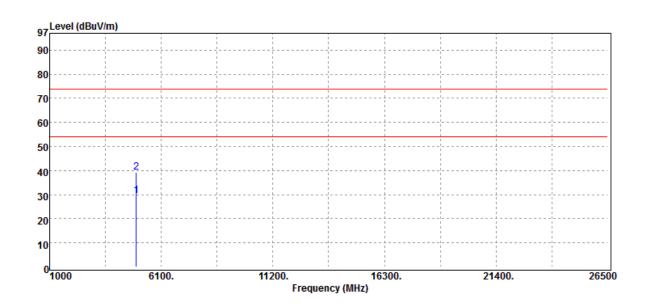

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin | |
|---------|----------|---------------|--------|--------|--------|--------|--|
| | Mode | Reading Level | | FS | @3m | | |
| MHz | PK/QP/AV | dΒμV | dB | dBμV/m | dΒμV/m | dB | |
| 4960.00 | Average | 25.13 | 4.48 | 29.61 | 54.00 | -24.39 | |
| 4960.00 | Peak | 34.84 | 4.48 | 39.32 | 74.00 | -34.68 | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 54 of 64


Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:BLE :2480 MHz :Tx CH HIGH :E1 Plane

Test Date :2019-03-09 Temp./Humi. :24.1 deg_C / 65 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

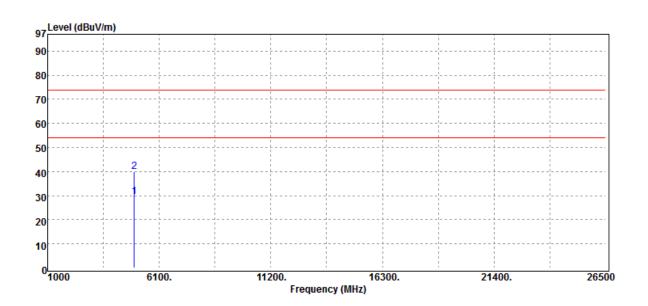

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin | |
|---------|----------|---------------|--------|--------|--------|--------|---|
| | Mode | Reading Level | | FS | @3m | | |
| MHz | PK/QP/AV | dΒμV | dB | dΒμV/m | dΒμV/m | dB | _ |
| 4960.00 | Average | 25.21 | 4.48 | 29.69 | 54.00 | -24.31 | |
| 4960.00 | Peak | 35.51 | 4.48 | 39.99 | 74.00 | -34.01 | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 55 of 64

DATA RATE 2 Mbps (BT5.0):

Operation Band :BLE(2M) **Test Date** :2019-03-09 Fundamental Frequency :2402 MHz Temp./Humi. :24.1 deg_C / 65 RH

Operation Mode :Tx CH LOW Engineer :Wei

EUT Pol. :E1 Plane :VERTICAL Measurement Antenna Pol.

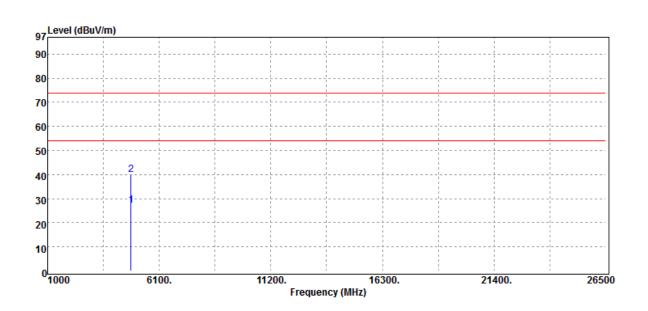

| | Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin | |
|---|---------|----------|---------------|--------|--------|--------|--------|---|
| | | Mode | Reading Level | | FS | @3m | | |
| _ | MHz | PK/QP/AV | dΒμV | dB | dBμV/m | dΒμV/m | dB | _ |
| | 4804.00 | Average | 23.98 | 3.11 | 27.09 | 54.00 | -26.91 | |
| | 4804.00 | Peak | 36.81 | 3.11 | 39.92 | 74.00 | -34.08 | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 56 of 64

Operation Band Test Date :BLE(2M) :2019-03-09

Fundamental Frequency :2402 MHz Temp./Humi. :24.1 deg_C / 65 RH

Operation Mode :Tx CH LOW Engineer :Wei

EUT Pol. :E1 Plane :HORIZONTAL Measurement Antenna Pol.

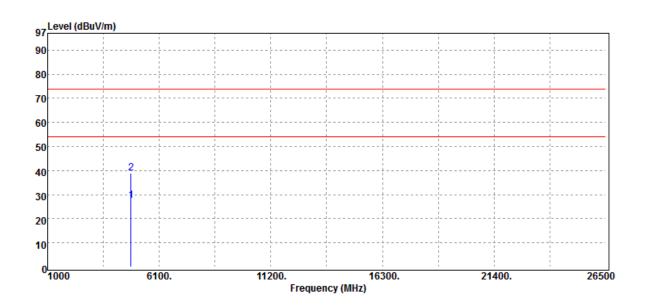

| | Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin | |
|---|---------|----------|---------------|--------|--------|--------|--------|---|
| | | Mode | Reading Level | | FS | @3m | | |
| _ | MHz | PK/QP/AV | dΒμV | dB | dBμV/m | dBμV/m | dB | _ |
| | 4804.00 | Average | 24.41 | 3.11 | 27.52 | 54.00 | -26.48 | |
| | 4804.00 | Peak | 35.96 | 3.11 | 39.07 | 74.00 | -34.93 | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 57 of 64

Operation Band Test Date :BLE(2M) :2019-03-09

Fundamental Frequency :2442 MHz Temp./Humi. :24.1 deg_C / 65 RH

Operation Mode :Tx CH MID Engineer :Wei

EUT Pol. :E1 Plane :VERTICAL Measurement Antenna Pol.

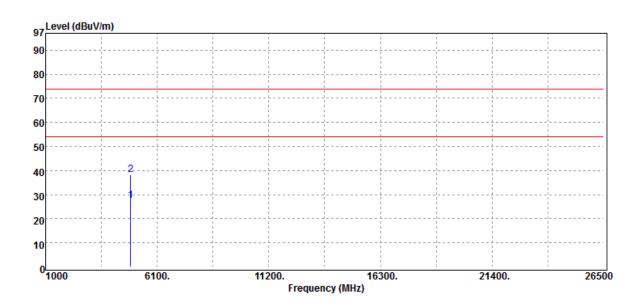

| | Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin | |
|---|---------|----------|---------------|--------|--------|--------|--------|--|
| | | Mode | Reading Level | | FS | @3m | | |
| _ | MHz | PK/QP/AV | dΒμV | dB | dBμV/m | dΒμV/m | dB | |
| | 4884.00 | Average | 24.22 | 3.47 | 27.69 | 54.00 | -26.31 | |
| | 4884.00 | Peak | 34.69 | 3.47 | 38.16 | 74.00 | -35.84 | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 58 of 64

Measurement Antenna Pol.

Operation Band Test Date :BLE(2M) :2019-03-09

Fundamental Frequency :2442 MHz Temp./Humi. :24.1 deg_C / 65 RH

Operation Mode :Tx CH MID Engineer :Wei EUT Pol. :E1 Plane :HORIZONTAL

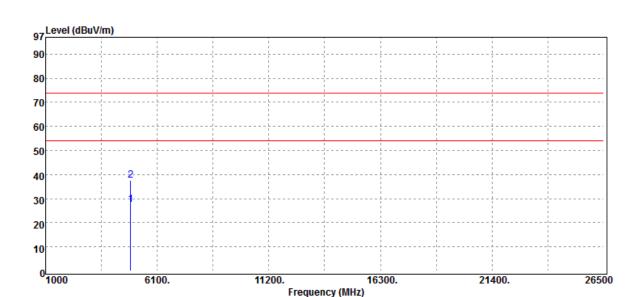

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin |
|---------|----------|---------------|--------|--------|--------|--------|
| | Mode | Reading Level | | FS | @3m | |
| MHz | PK/QP/AV | dΒμV | dB | dBμV/m | dΒμV/m | dB |
| 4884.00 | Average | 23.89 | 3.47 | 27.36 | 54.00 | -26.64 |
| 4884.00 | Peak | 34.24 | 3.47 | 37.71 | 74.00 | -36.29 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



1000

6100

Report No.: T190308W01-RP2

:VERTICAL

26500

Page 59 of 64

Measurement Antenna Pol.

21400.

Operation Band Test Date :BLE(2M) :2019-03-09

Fundamental Frequency :2480 MHz Temp./Humi. :24.1 deg_C / 65 RH

Operation Mode :Tx CH HIGH Engineer :Kane EUT Pol.

:E1 Plane



| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin | |
|---------|----------|---------------|--------|--------|--------|--------|---|
| | Mode | Reading Level | | FS | @3m | | |
| MHz | PK/QP/AV | dΒμV | dB | dBμV/m | dΒμV/m | dB | _ |
| 4960.00 | Average | 23.96 | 4.48 | 28.44 | 54.00 | -25.56 | |
| 4960.00 | Peak | 34.76 | 4.48 | 39.24 | 74.00 | -34.76 | |

Frequency (MHz)

16300.

11200.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 60 of 64

Operation Band :BLE(2M) Fundamental Frequency :2480 MHz


Operation Mode :Tx CH HIGH

EUT Pol. :E1 Plane **Test Date** :2019-03-09

Temp./Humi. :24.1 deg_C / 65 RH

Engineer :Kane

:HORIZONTAL Measurement Antenna Pol.

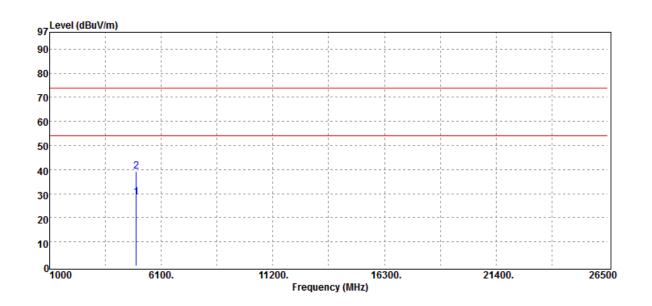

| | Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin | |
|---|---------|----------|---------------|--------|--------|--------|--------|--|
| | | Mode | Reading Level | | FS | @3m | | |
| _ | MHz | PK/QP/AV | dΒμV | dB | dBμV/m | dΒμV/m | dB | |
| | 4960.00 | Average | 24.17 | 4.48 | 28.65 | 54.00 | -25.35 | |
| | 4960.00 | Peak | 34.67 | 4.48 | 39.15 | 74.00 | -34.85 | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 61 of 64

11. PEAK POWER SPECTRAL DENSITY


11.1 Standard Applicable:

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

11.2 Measurement Equipment Used:

| Conducted Emission Test Site | | | | | | | |
|------------------------------|---------------|-----------|----------------|------------|------------|--|--|
| EQUIPMENT | MFR | MODEL | SERIAL | LAST | CAL DUE. | | |
| TYPE | | NUMBER | NUMBER | CAL. | | | |
| DC Power Supply | Agilent | E3640A | KR93300208 | 08/15/2018 | 08/14/2019 | | |
| PXA Spectrum | Agilent | N9030A | MY53120760 | 04/00/2019 | 04/08/2019 | | |
| Analyzer | Agiletit | N9030A | WIT 55 1207 00 | 04/09/2010 | 04/00/2019 | | |
| DC Block | Mini-Circuits | BLK-18-S+ | 31129(1) | 02/26/2019 | 02/25/2020 | | |
| Attenuator | Mini-Circuit | BW-S10W2+ | 1 | 02/26/2019 | 02/25/2020 | | |

11.3 Test Set-up:



11.4 Measurement Procedure:

- Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 3 kHz. & the VBW = 10 kHz
- 5. For defining Restricted Band Edge Limit: Set the RBW = 100kHz & VBW = 300 kHz.
- 6. Detector = peak.
- 7. Sweep time = auto couple.
- 8. Trace mode = max hold.
- 9. Allow trace to fully stabilize.
- 10. Use the peak marker function to determine the maximum amplitude level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page 62 of 64

11.5 Measurement Result: **DATA RATE 1 Mbps:**

BI F mode

| BLL IIIOGE | | | | | | |
|--------------------|---------------------------|---------------------|--------|--|--|--|
| Frequency (MHz) | RF Power Density (dBm) | Maximum Limit (dBm) | Result | | | |
| 2402 | -9.90 | 8 | PASS | | | |
| 2442 | -8.52 | 8 | PASS | | | |
| 2480 | -9.16 | 8 | PASS | | | |

NOTE: cable loss as 0.4dB that offsets in the spectrum

DATA RATE 2 Mbps (BT 5.0):

BLE mode

| Frequency (MHz) | RF Power Density (dBm) | Maximum Limit (dBm) | Result |
|--------------------|---------------------------|------------------------|--------|
| 2402 | -13.95 | 8 | PASS |
| 2442 | -12.57 | 8 | PASS |
| 2480 | -13.10 | 8 | PASS |

NOTE: cable loss as 0.4dB that offsets in the spectrum


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 63 of 64




Power Density_BLE_1M_LowCH00-2402

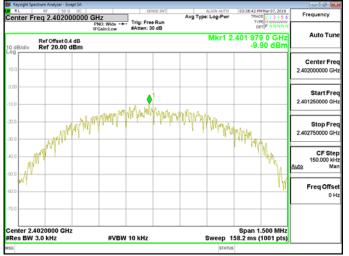

Power Density BLE 1M MidCH19-2442

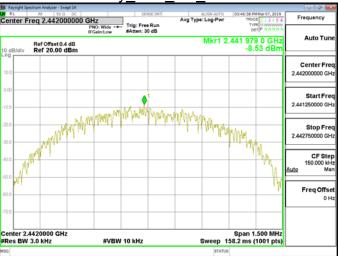

Power Density BLE 1M HighCH39-2480

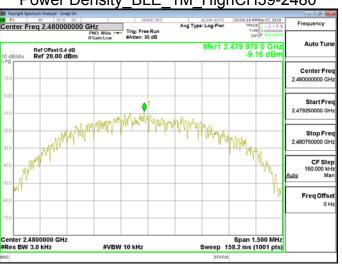


Power Density BLE 2M LowCH00-2402



Power Density BLE 2M MidCH19-2442



Power Density BLE 2M HighCH39-2480

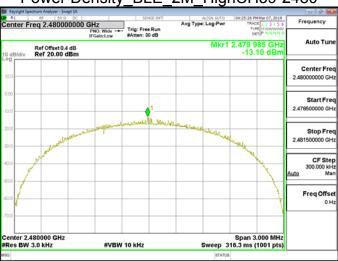

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page 64 of 64

12. ANTENNA REQUIREMENT

12.1 Standard Applicable:

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

12.2 Antenna Connected Construction:

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT photo for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。