


TEST REPORT

Product Name: Mini PC
FCC ID: 2A7AQ-AC8
Trademark: N/A
Model Number: AC8, AC8-Z, AC8-M
Prepared For: Newsmay Technology Co.,limited
Address: 4/F, Building A, Guangduoyao Innovation Industrial Park, Longhua
New District, Shenzhen, China
Manufacturer: Newsmay Technology Co.,limited
Address: 4/F, Building A, Guangduoyao Innovation Industrial Park, Longhua
New District, Shenzhen, China.
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Community,
Xinqiao Street, Baoan District, Shenzhen, Guangdong China
Sample Received Date: May. 09, 2022
Sample tested Date: May. 09, 2022 to Jun. 08, 2022
Issue Date: Jun. 08, 2022
Report No.: CTB220527025RFX
Test Standards 47 CFR Part 15 Subpart E
KDB 789033 V02r01
Test Results PASS
Remark: This is WIFI-5GHz band radio test report.

Compiled by:

Chen Zheng

Reviewed by:

Arron Liu

Approved by:

Bin Mei / Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	8
4.3 Support Equipment	8
4.5 Test Mode	9
4.6 Test Environment	10
5. TEST FACILITY AND TEST INSTRUMENT USED	11
5.1 Test Facility	11
5.2 Test Instrument Used	11
6. AC POWER LINE CONDUCTED EMISSION	14
6.1 Block Diagram Of Test Setup	14
6.2 Limit	14
6.3 Test procedure	14
6.4 Test Result	16
7. RADIATED SPURIOUS EMISSIONS	18
7.1 Block Diagram Of Test Setup	18
7.2 Limit	18
7.3 Test procedure	19
7.4 Test Result	20
8. BAND EDGE	25
8.1 Block Diagram Of Test Setup	25
8.2 Limit	25
8.3 Test procedure	25
8.4 Test Result	26
9. CONDUCTED PEAK OUTPUT POWER	34
9.1 Block Diagram Of Test Setup	34
9.2 Limit	34
9.3 Test procedure	35
9.4 Test Result	36
10. EMISSION BANDWIDTH& OCCUPIED BANDWIDTH	45
10.1 Block Diagram Of Test Setup	45
10.2 Limits	45
10.3 Test Procedure	45
10.4 Test Results	47
11. POWER SPECTRAL DENSITY	57
11.1 Block Diagram Of Test Setup	57
11.2 Limit	57
11.3 Test procedure	57

11.4	Test Result	59
12.	FREQUENCY STABILITY	68
12.1	Block Diagram Of Test Setup	68
12.2	Limit	68
12.3	Test procedure	68
12.4	Test Result	69
13.	OPERATION IN THE ABSENCE OF INFORMATION TO THE TRANSMIT ...	75
13.1	Requirement	75
13.2	Test Results	75
14.	ANTENNA REQUIREMENT	76
15.	EUT PHOTOGRAPHS	77
16.	EUT TEST SETUP PHOTOGRAPHS	78

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB220527025RFX	Jun. 08, 2022	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart E Section 15.407 (b)(9)	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart E Section 15.205/15.407(b)	KDB789033	PASS
Band edge	47 CFR Part 15 Subpart E Section 15.205/15.407(b)	KDB789033	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart E Section 15.407 (a)	KDB789033	PASS
Emission Bandwidth & Occupied Bandwidth	47 CFR Part 15 Subpart E Section 15.407 (a)(e)	KDB789033	PASS
Power Spectral Density	47 CFR Part 15 Subpart E Section 15.407 (a)	KDB789033	PASS
Frequency stability	47 CFR Part 15 Subpart E Section 15.407 (g)	KDB789033	PASS
Operation in the absence of information to the transmit	47 CFR Part 15 Subpart E Section 15.407 (c)	47 CFR Part 15 Subpart E	PASS
Antenna Requirement	47 CFR Part 15 Subpart E Section 15.203	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Uncertainty
1	Occupancy bandwidth	$U = \pm 54.3\text{Hz}$
2	Adjacent channel power	$U = \pm 1.3\text{dB}$
3	Conducted Adjacent channel power	$U = \pm 1.38\text{dB}$
4	Conducted output power Above 1G	$U = \pm 1.0\text{dB}$
5	Conducted output power below 1G	$U = \pm 0.9\text{dB}$
6	Power Spectral Density , Conduction	$U = \pm 1.0\text{dB}$
7	Conduction spurious emissions	$U = \pm 2.8\text{dB}$
8	Out of band emission	$U = \pm 54\text{Hz}$
9	3m chamber Radiated spurious emission(9KHz-30MHz)	$U = \pm 4.8\text{dB}$
10	3m chamber Radiated spurious emission(30MHz-1GHz)	$U = \pm 4.3\text{dB}$
11	3m chamber Radiated spurious emission(1GHz-18GHz)	$U = \pm 4.5\text{dB}$
12	3m chamber Radiated spurious emission(1GHz-40GHz)	$U = \pm 3.4\text{dB}$
13	humidity uncertainty	$U = \pm 5.3\%$
14	Temperature uncertainty	$U = \pm 0.59^{\circ}\text{C}$
15	Supply volyages	$U = \pm 3\%$
16	Time	$U = \pm 5\%$
17	Conducted Emission (9KHz-30MHz)	3.2 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	AC8, AC8-Z, AC8-M
Model Description:	All the model are the same circuit and RF module, only for model name. Test sample model: AC8
Wi-Fi Specification:	IEEE 802.11a/b/g/n/ac
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	IEEE 802.11a/n/ac(20M): 5150MHz ~5250MHz/ 4 channel IEEE 802.11n/ac(40M): 5150MHz ~5250MHz/ 2 channel IEEE 802.11ac(80M): 5150MHz ~5250MHz/ 1 channel IEEE 802.11a/n/ac(20M): 5725MHz ~5850MHz/ 5 channel IEEE 802.11n/ac(40M): 5725MHz ~5850MHz/ 2 channel IEEE 802.11ac(80M): 5725MHz ~5850MHz/ 1 channel
Max. RF output power:	WiFi (5G): 10.799dBm
Type of Modulation:	WiFi: OFDM, DSSS
Antenna installation:	WiFi: Internal antenna
Antenna Gain:	WiFi (5G): 1.0dBi
Ratings:	INPUT:100-240V~50/60Hz 1.5A OUTPUT:12.0V 2.5A 30.0w

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series	Note
1	AC Adapter	ShenZhen He Xing De Electronice Co.,Ltd	H361-1202500U	N/A	AC
2	Keyboard	DELL	KB216t	N/A	USB
3	Mouse	DELL	MS116c	N/A	USB
4	Monitor	HKC	2136	N/A	DVI

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

For 802.11a/n/ac(20M) Operation in the 5150MHz ~5250 MHz band			
Channel	Frequency	Channel	Frequency
36	5180MHz	44	5220MHz
40	5200MHz	48	5240MHz
For 802.11a/n/ac(20M) Operation in the 5725MHz ~5850 MHz band			
Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz	NA	NA

For 802.11n/ac(40M) Operation in the 5150MHz ~5250 MHz band			
Channel	Frequency	Channel	Frequency
38	5190MHz	46	5230MHz
For 802.11n/ac(40M) Operation in the 5725MHz ~5850 MHz band			
Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz

For 802.11ac(80M) Operation in the 5150MHz ~5250 MHz band			
Channel	Frequency	Channel	Frequency
42	5210MHz	NA	NA
For 802.11ac(80M) Operation in the 5725MHz ~5850 MHz band			
Channel	Frequency	Channel	Frequency
155	5775MHz	NA	NA

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
802.11a/n/ac(20M)	5150MHz ~5250 MHz	Channel 36	Channel 40	Channel 48
		5180MHz	5200MHz	5240MHz
802.11n/ac(40M)	5150MHz ~5250 MHz	Channel 38	N/A	Channel 46
		5190MHz	N/A	5230MHz
802.11ac(80M)	5150MHz ~5250 MHz	N/A	Channel 42	N/A
		N/A	5210MHz	N/A
802.11a/n/ac(20M)	5725MHz ~5850 MHz	Channel 149	Channel 157	Channel 165
		5745MHz	5785MHz	5825MHz
802.11n/ac(40M)	5725MHz ~5850 MHz	Channel 151	N/A	Channel 159
		5755MHz	N/A	5795MHz
802.11ac(80M)	5725MHz ~5850 MHz	N/A	Channel 155	N/A
		N/A	5775MHz	N/A

Test mode	rate
802.11a	54M
802.11n	500M
802.11/ac	500M

EUT has two Internal Antenna with Max Antenna Gain 1dBi on every antenna, CDD device with two spatial streams, according to KDB662911 D01 v02r01,

Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density(PSD) measurements,

Array Gain=10log(NANT/NSS)dB=10log(2/1)=3.01dB,

So the directional gain for PSD is 4.01dBi

2) For power measurements,

The Array gain=0 dB for NANT≤4,

So the directional gain for Power measurements is 1dBi

NOTE: Dutycycle>98%.

4.6 Test Environment

Humidity(%):	55
Atmospheric Pressure(kPa):	101.1
Normal Voltage(AC):NV	120
Normal Temperature(°C):NT	23
Low Temperature(°C):LT	0
High Temperature(°C):HT	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2021.09.27	2022.08.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2021.09.27	2022.08.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2021.09.27	2022.08.05
4	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
5	Spectrum Analyzer	R&S	FSP40	100550	2021.09.27	2022.08.05
6	Signal Generator	Agilent	N5181A	MY49060920	2021.09.27	2022.08.16
7	Signal Generator	Agilent	N5182A	MY47420195	2021.09.27	2022.08.05
8	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
9	band rejection filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2021.09.27	2022.08.05
10	band rejection filter	Shenxiang	MSF5150-5850MS-1155	20181015001	2021.09.27	2022.08.05
11	band rejection filter	Xingbo	XBLBQ-DZA120	190821-1-1	2021.09.27	2022.08.05
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	2021.09.27	2022.08.05
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2021.09.27	2022.08.05
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2021.09.27	2022.08.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	2021.09.27	2022.08.05

16	966 chamber	C.R.T.	966 Room	966	2021.09.27	2024.08.11
17	Receiver	R&S	ESPI	100362	2021.09.27	2022.08.05
18	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
19	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	869	2021.09.27	2022.08.07
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	2021.09.27	2022.08.08
22	Software	Fala	EZ-EMC	FA-03A2 RE	2021.09.27	2022.08.05
23	3-Loop Antenna	Daze	ZN30401	17014	2021.09.27	2022.08.05
24	loop antenna	ZHINAN	ZN30900A	/	2021.09.27	2022.08.05
25	Horn antenna	A/H/System	SAS-574	588	2021.09.27	2022.08.05
26	Amplifier	AEROFLEX	/	S/N/ 097	2021.09.27	2022.08.05

Continuous disturbance


No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	2021.09.27	2022.08.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2021.09.27	2022.08.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCS30	834115/006	2021.09.27	2022.08.05
4	Coaxial cable	ZDECL	Z302S	18091904	2021.09.27	2022.08.05
5	AAN	Schwarzbeck	NTFM8158	183	2021.09.27	2022.08.05
6	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
7	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

Radiated emission

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	1911	2021.11.01	2022.08.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	869	2021.11.01	2022.08.05
3	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
4	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI7	100362	2021.09.27	2022.08.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2021.09.27	2022.08.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2021.09.27	2022.08.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2021.09.27	2022.08.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-30 0 NI	/	2021.09.27	2022.08.05
10	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
11	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

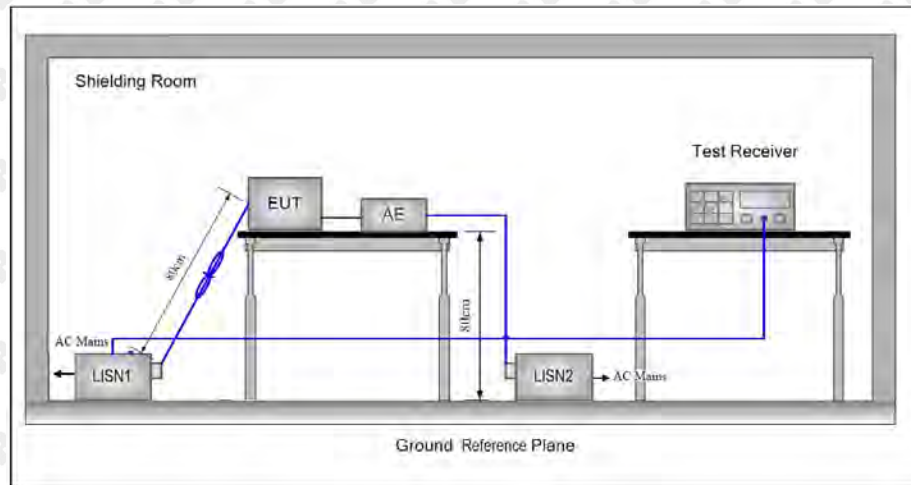

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference

plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result

L:

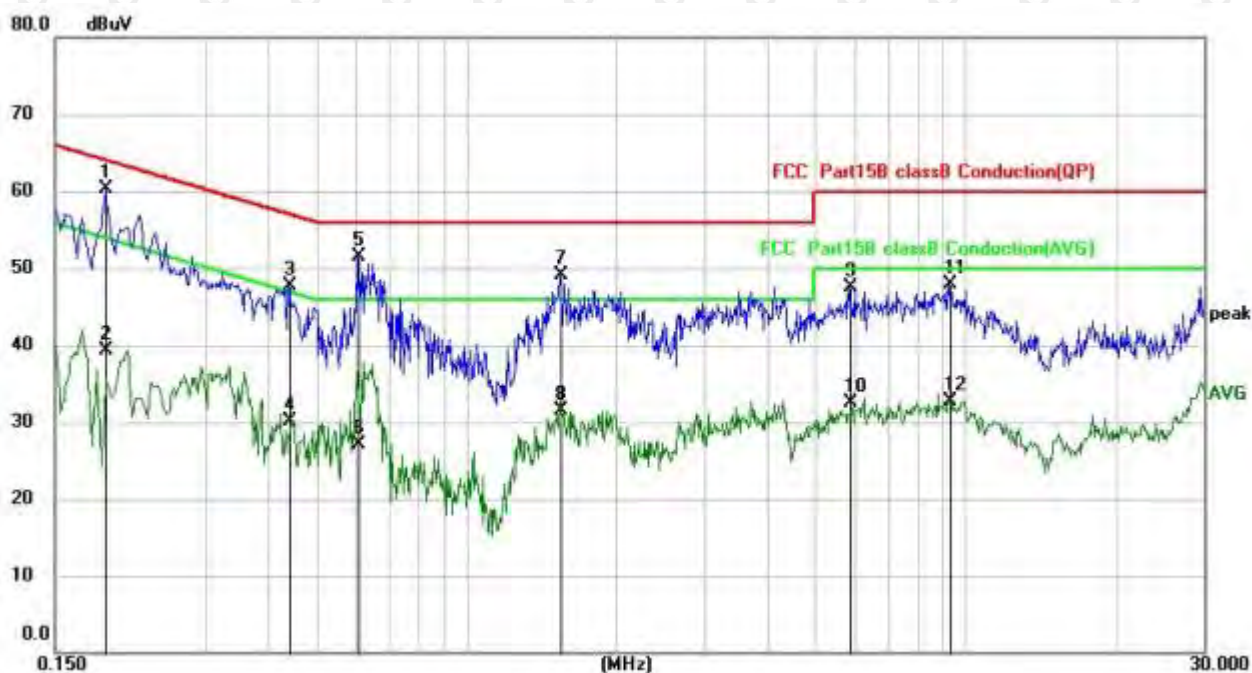


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1	*	0.1900	49.52	10.70	60.22	64.04	-3.82	QP
2		0.1900	28.66	10.70	39.36	54.04	-14.68	AVG
3		0.4420	37.13	10.55	47.68	57.02	-9.34	QP
4		0.4420	19.49	10.55	30.04	47.02	-16.98	AVG
5		0.6060	40.89	10.54	51.43	56.00	-4.57	QP
6		0.6060	16.53	10.54	27.07	46.00	-18.93	AVG
7		1.5380	38.53	10.62	49.15	56.00	-6.85	QP
8		1.5380	20.92	10.62	31.54	46.00	-14.46	AVG
9		5.8379	36.75	10.68	47.43	60.00	-12.57	QP
10		5.8379	21.77	10.68	32.45	50.00	-17.55	AVG
11		9.2819	37.10	10.80	47.90	60.00	-12.10	QP
12		9.2819	21.96	10.80	32.76	50.00	-17.24	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N:

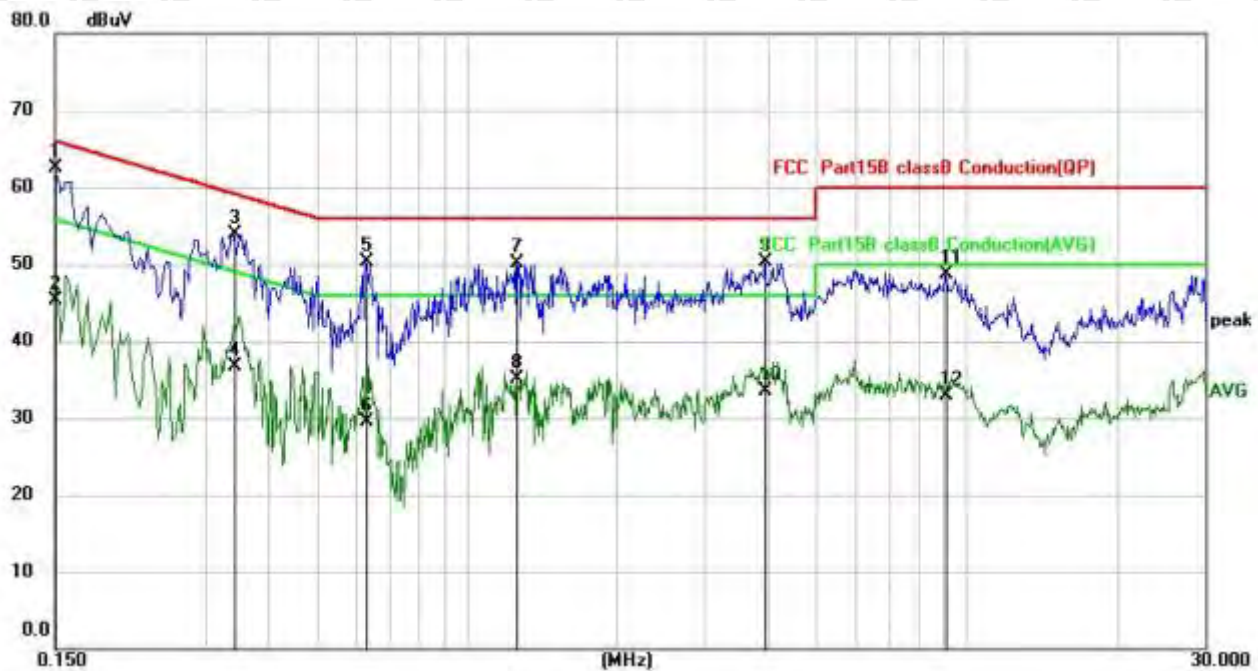

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1	*	0.1500	51.80	10.72	62.52	66.00	-3.48	QP
2		0.1500	34.59	10.72	45.31	56.00	-10.69	AVG
3		0.3420	43.33	10.61	53.94	59.15	-5.21	QP
4		0.3420	26.00	10.61	36.61	49.15	-12.54	AVG
5		0.6300	39.66	10.55	50.21	56.00	-5.79	QP
6		0.6300	18.89	10.55	29.44	46.00	-16.56	AVG
7		1.2579	39.53	10.62	50.15	56.00	-5.85	QP
8		1.2579	24.56	10.62	35.18	46.00	-10.82	AVG
9		3.9620	39.67	10.64	50.31	56.00	-5.69	QP
10		3.9620	22.88	10.64	33.52	46.00	-12.48	AVG
11		9.1059	37.95	10.79	48.74	60.00	-11.26	QP
12		9.1059	22.11	10.79	32.90	50.00	-17.10	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Remark:

- Factor = Cable loss + LISN factor, Margin = Limit – Level
- All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- All the test modes completed for test. Only the worst result of was reported.

7. RADIATED SPURIOUS EMISSIONS

7.1 Block Diagram Of Test Setup

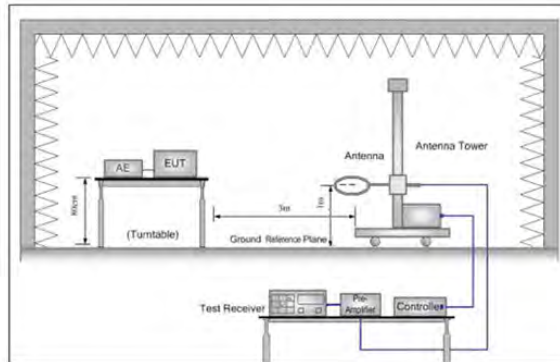


Figure 1. Below 30MHz

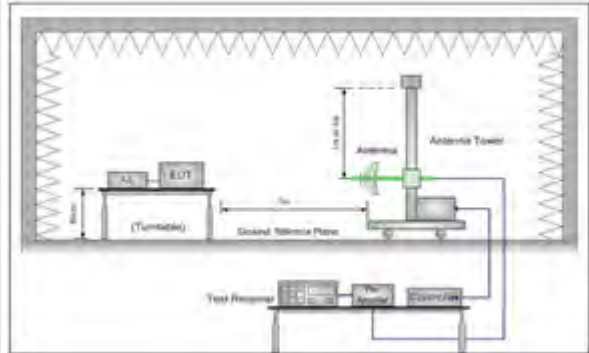


Figure 2. 30MHz to 1GHz

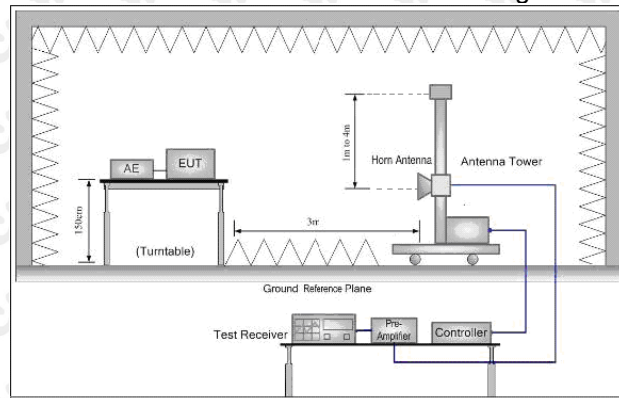


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (dBμV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	$20\log 2400/F \text{ (kHz)} + 80$	Quasi-peak	3
0.490MHz-1.705MHz	$20\log 24000/F \text{ (kHz)} + 40$	Quasi-peak	3
1.705MHz-30MHz	$20\log 30 + 40$	Quasi-peak	3
30MHz-88MHz	40.0	Quasi-peak	3
88MHz-216MHz	43.5	Quasi-peak	3
216MHz-960MHz	46.0	Quasi-peak	3
960MHz-1GHz	54.0	Quasi-peak	3
Above 1GHz	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

If radiated measurements are performed, field strength is then converted to EIRP as follows:

(i) $EIRP = ((E \cdot d)^2) / 30$

where:

- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

(ii) Working in dB units, the above equation is equivalent to:

$$EIRP[dBm] = E[dB\mu V/m] + 20 \log(d[meters]) - 104.77$$

(iii) Or, if d is 3 meters:

$$EIRP[dBm] = E[dB\mu V/m] - 95.2$$

7.3 Test procedure

Below 1GHz test procedure as below:

a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).

h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

j. Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement -X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

7.4 Test Result

30MHz-1GHz Test Results:

Modulation : 802.11a (the worst data)

Test Channel : 5745MHz

Antenna polarity: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		79.3816	39.15	-9.65	29.50	40.00	-10.50	QP
2	!	147.9214	45.49	-5.49	40.00	43.50	-3.50	QP
3	*	248.1165	48.70	-5.72	42.98	46.00	-3.02	QP
4	!	391.4082	44.93	-1.98	42.95	46.00	-3.05	QP
5	!	495.9343	42.10	0.61	42.71	46.00	-3.29	QP
6		991.2718	41.51	5.64	47.15	54.00	-6.85	QP

Antenna polarity: V



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	!	33.3278	41.59	-6.83	34.76	40.00	-5.24	QP
2	!	147.9214	44.08	-5.49	38.59	43.50	-4.91	QP
3	!	243.8042	47.71	-5.76	41.95	46.00	-4.05	QP
4	*	446.4139	42.88	-0.57	42.31	46.00	-3.69	QP
5	!	742.2586	37.21	4.84	42.05	46.00	-3.95	QP
6		991.2718	40.99	5.64	46.63	54.00	-7.37	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

- The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included.
Test Mode: 802.11a20 (the worst)

Radiated Spurious Emission (Above 1GHz):

ANT 1+ANT 2

Modulation : 802.11(a) (the worst data)

Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarization
Channel:5180MHz									
10360	39.69	16.34	56.03	74	-17.97	PK	1.36	25	H
10360	22.16	16.34	38.50	54	-15.50	AV	1.42	191	H
10360	38.96	16.34	55.30	74	-18.70	PK	1.74	323	V
10360	23.93	16.34	40.27	54	-13.73	AV	1.79	178	V
Channel:5240MHz									
10480	37.19	16.34	53.53	74	-20.47	PK	1.50	154	H
10480	24.16	16.34	40.50	54	-13.50	AV	1.52	205	H
10480	37.11	16.34	53.45	74	-20.55	PK	1.75	214	V
10480	23.58	16.34	39.92	54	-14.08	AV	1.80	97	V
Channel:5745MHz									
11490	38.44	16.34	54.78	74	-19.22	PK	1.47	96	H
11490	23.16	16.34	39.50	54	-14.50	AV	1.11	258	H
11490	39.35	16.34	55.69	74	-18.31	PK	1.14	259	V
11490	23.70	16.34	40.04	54	-13.96	AV	1.65	195	V
Channel:5825MHz									
11650	38.67	16.34	55.01	74	-18.99	PK	1.10	350	H
11650	22.91	16.34	39.25	54	-14.75	AV	1.20	303	H
11650	39.63	16.34	55.97	74	-18.03	PK	1.04	107	V
11650	24.02	16.34	40.36	54	-13.64	AV	1.73	108	V

Modulation : 802.11(n40) (the worst data)

Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarization
Channel:5190MHz									
10380	38.21	16.34	54.55	74	-19.45	PK	1.44	254	H
10380	23.94	16.34	40.28	54	-13.72	AV	1.36	247	H
10380	38.44	16.34	54.78	74	-19.22	PK	1.34	209	V
10380	22.03	16.34	38.37	54	-15.63	AV	1.88	42	V
Channel:5230MHz									
10460	38.65	16.34	54.99	74	-19.01	PK	1.63	232	H
10460	23.74	16.34	40.08	54	-13.92	AV	1.17	142	H
10460	37.64	16.34	53.98	74	-20.02	PK	1.74	127	V
10460	24.64	16.34	40.98	54	-13.02	AV	1.76	79	V
Channel:5755MHz									
11510	37.11	16.34	53.45	74	-20.55	PK	1.32	285	H
11510	22.16	16.34	38.50	54	-15.50	AV	1.65	140	H
11510	37.20	16.34	53.54	74	-20.46	PK	1.25	304	V
11510	23.45	16.34	39.79	54	-14.21	AV	1.60	214	V
Channel:5795MHz									
11590	37.33	16.34	53.67	74	-20.33	PK	1.17	131	H
11590	23.33	16.34	39.67	54	-14.33	AV	1.90	288	H
11590	37.23	16.34	53.57	74	-20.43	PK	1.18	156	V
11590	23.59	16.34	39.93	54	-14.07	AV	1.08	334	V

Modulation : 802.11(VH80) (the worst data)

Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarization
Channel:5210MHz									
10420	37.48	16.34	53.82	74	-20.18	PK	1.50	36	H
10420	22.28	16.34	38.62	54	-15.38	AV	1.61	45	H
10420	38.95	16.34	55.29	74	-18.71	PK	1.62	38	V
10420	23.13	16.34	39.47	54	-14.53	AV	1.52	226	V
Channel:5775MHz									
11550	37.10	16.34	53.44	74	-20.56	PK	1.16	338	H
11550	22.46	16.34	38.80	54	-15.20	AV	1.79	157	H
11550	38.43	16.34	54.77	74	-19.23	PK	1.47	28	V
11550	23.71	16.34	40.05	54	-13.95	AV	1.44	67	V

Remark:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

2. The EUT was tested in the low, high channel and the worst case position data was reported.

3. Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8. BAND EDGE

8.1 Block Diagram Of Test Setup

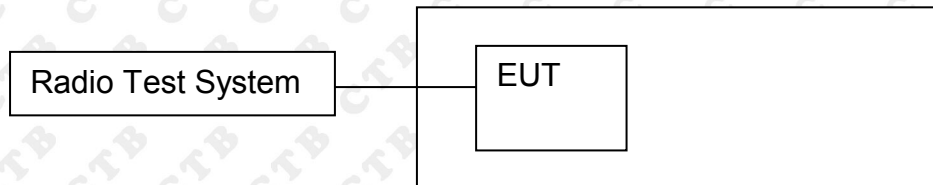

8.2 Limit

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.


8.3 Test procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

8.4 Test Result


Test Graph

ANT 1

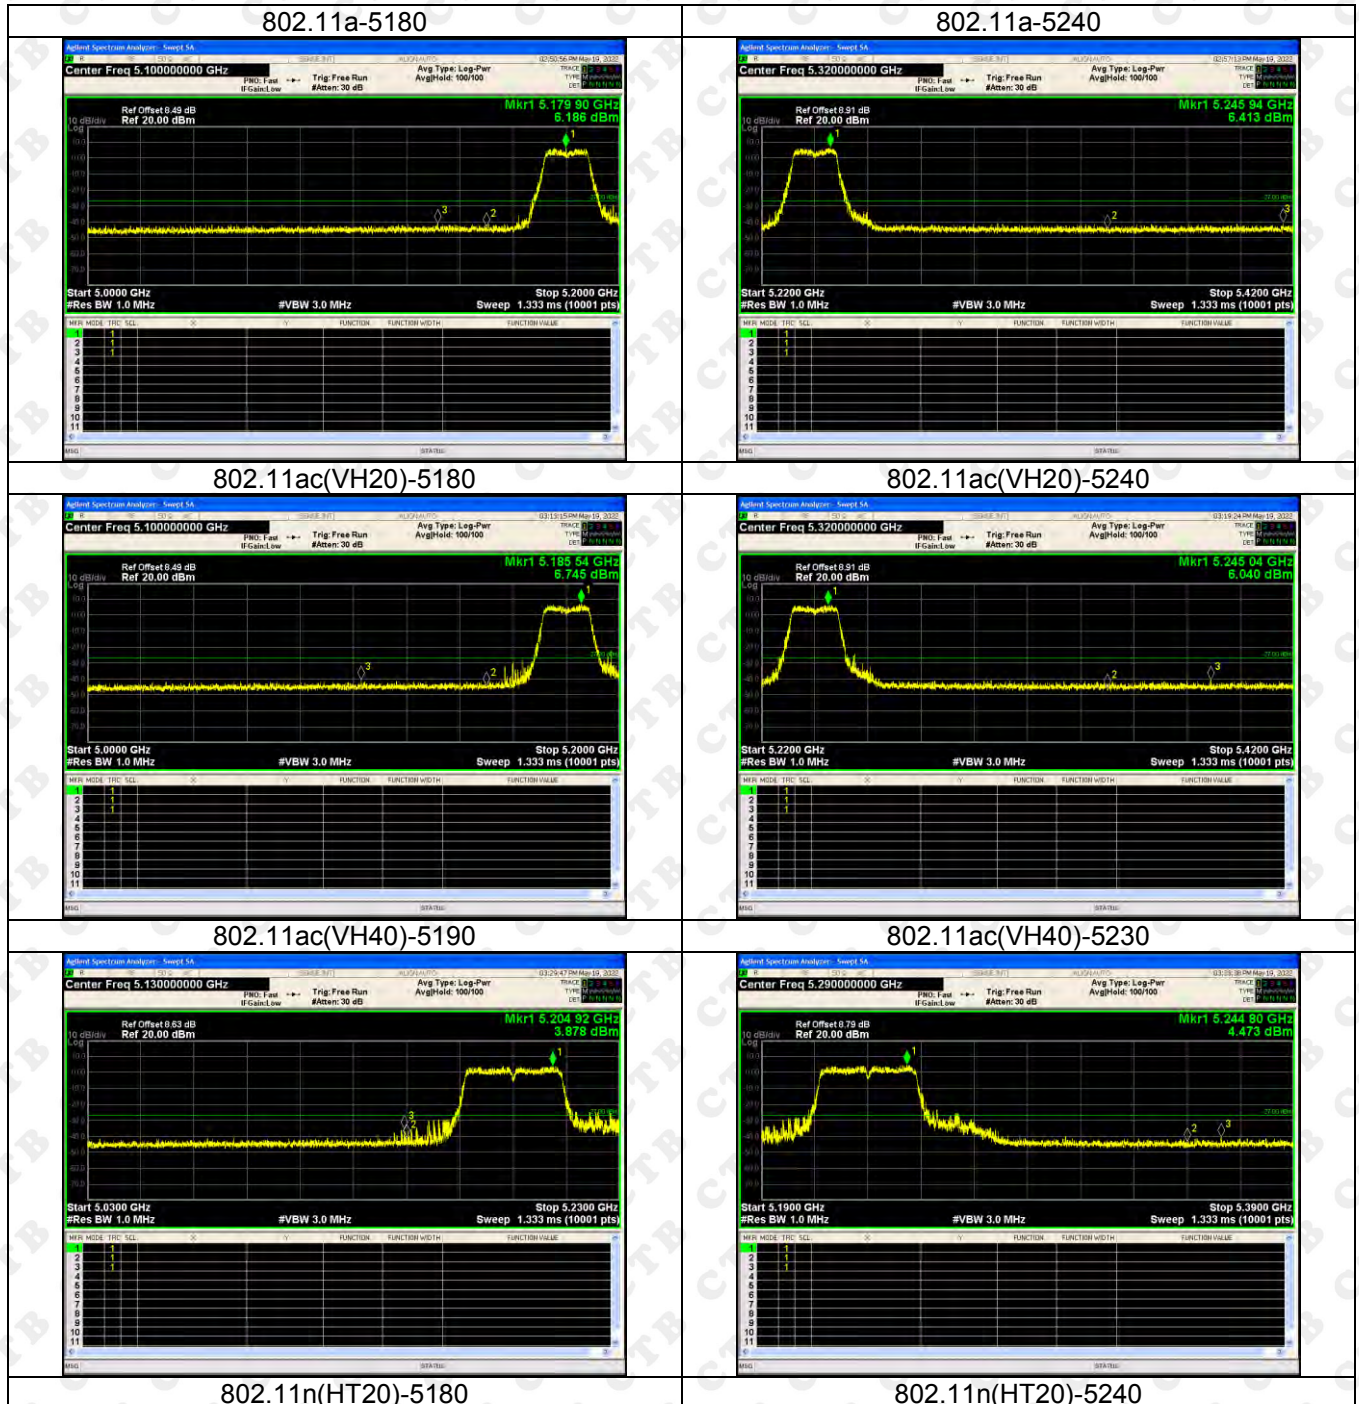


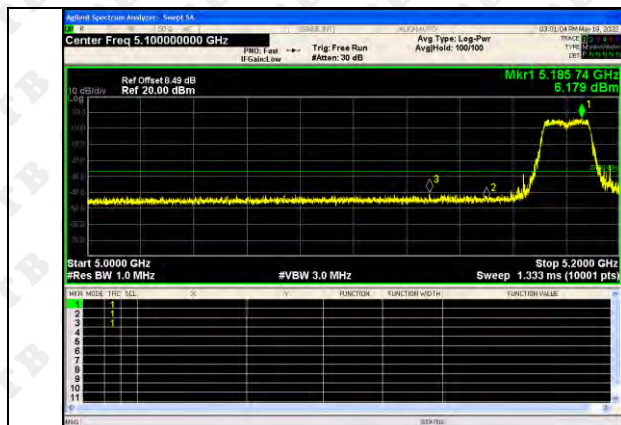



802.11n(HT40)-5190

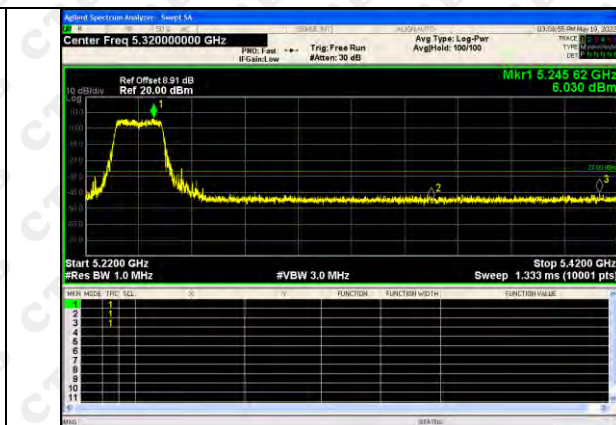


802.11n(HT40)-5230

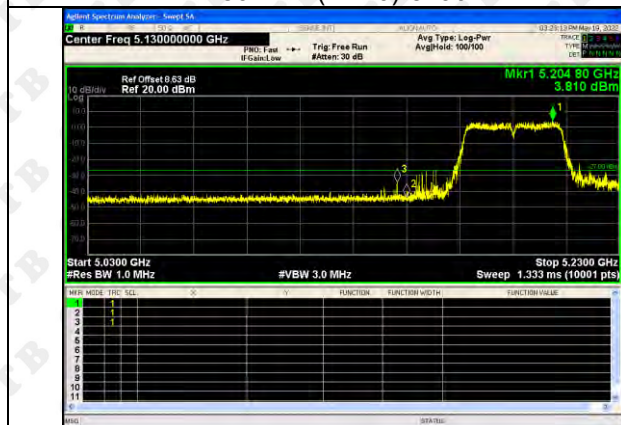

802.11ac(VH80)-5210

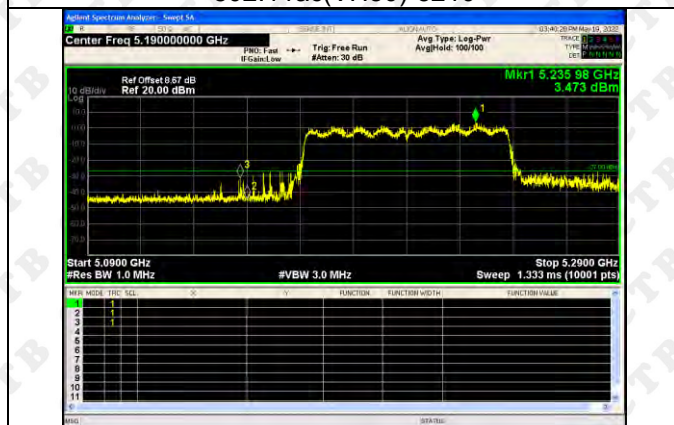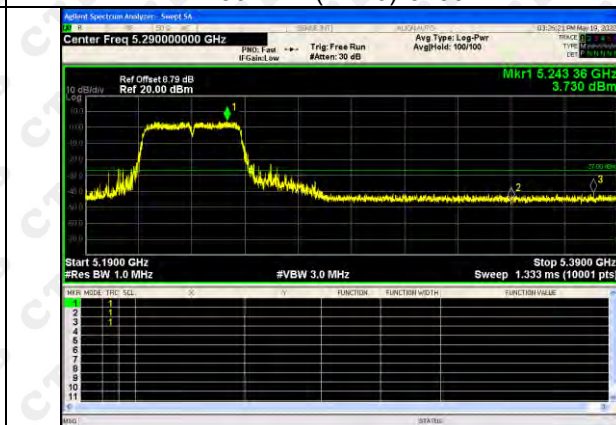


802.11a-5745

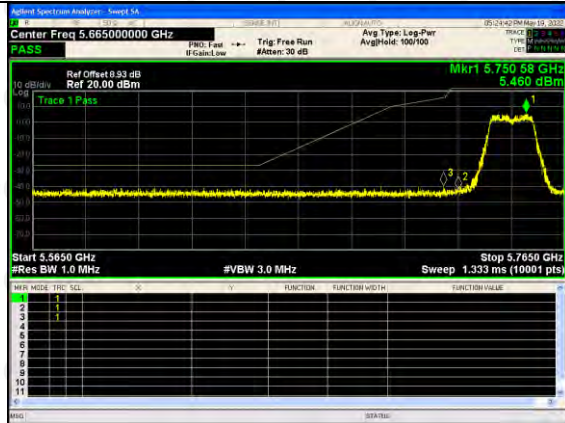

802.11a-5825



802.11(n20)-5745

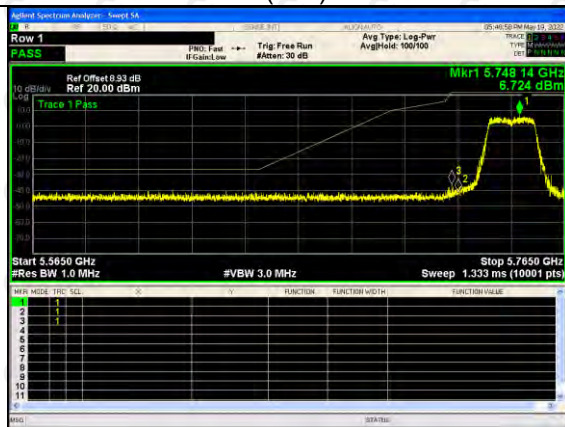

802.11(n20)-5825




802.11(n40)-5755




802.11(n40)-5795



802.11ac(VH20)-5745

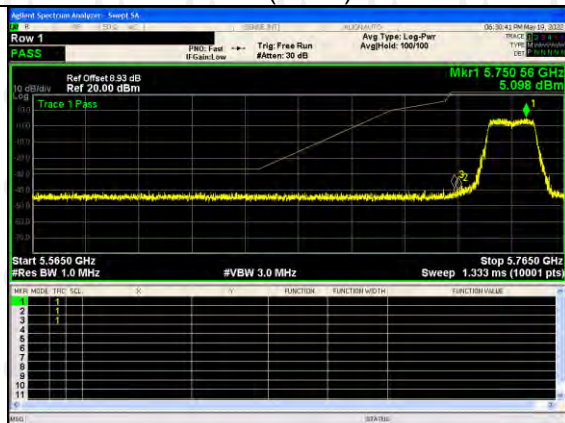

802.11ac(VH20)-5825

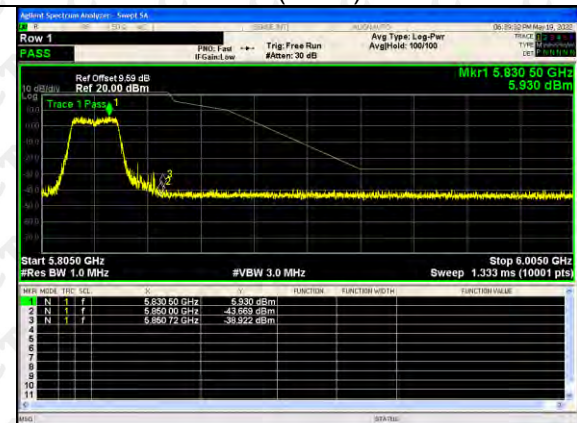

802.11ac(VH40)-5755


802.11ac(VH40)-5795



802.11ac(VH80)-5775



ANT 2

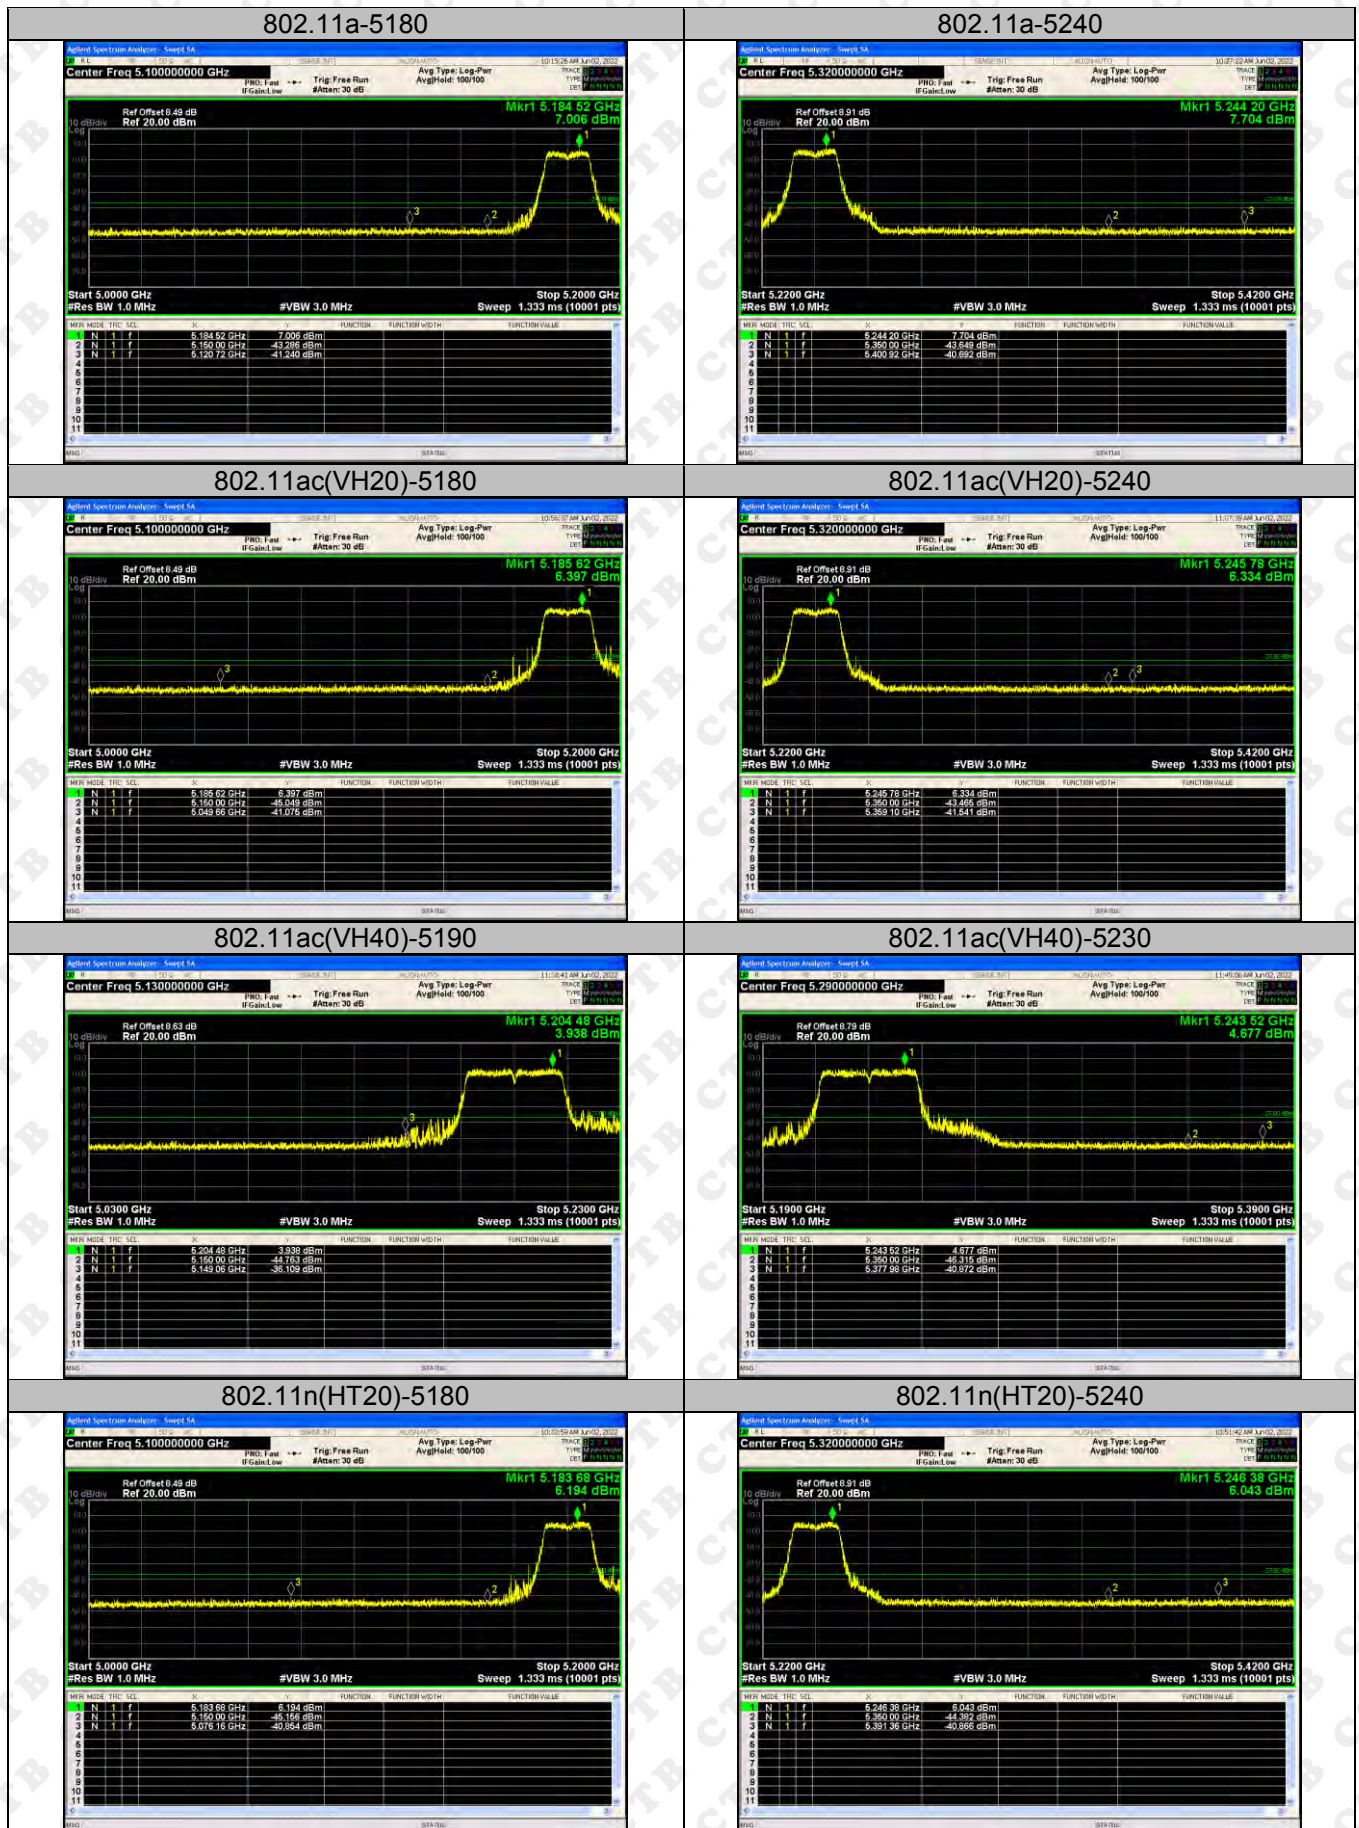


802.11n(HT40)-5190




802.11n(HT40)-5230



802.11ac(VH80)-5210

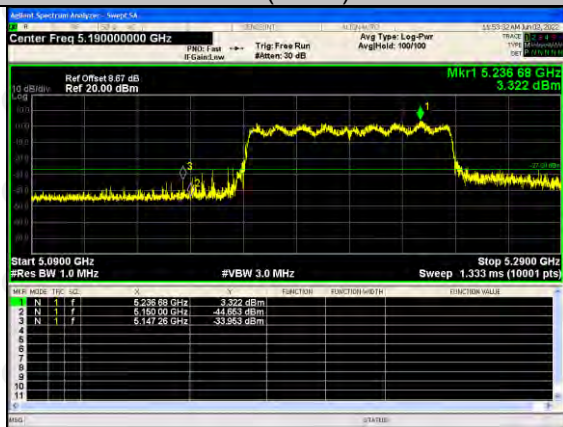


802.11a-5745

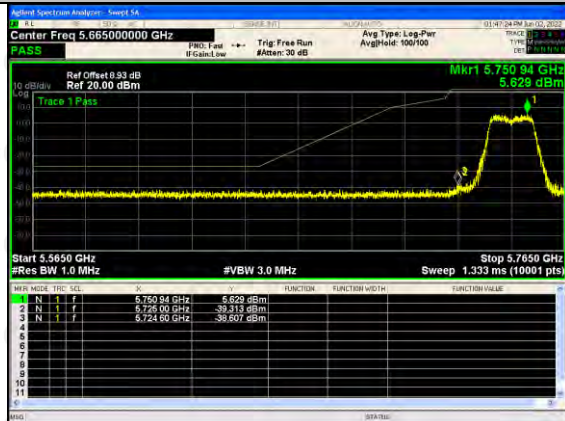

802.11a-5825




802.11(n20)-5745

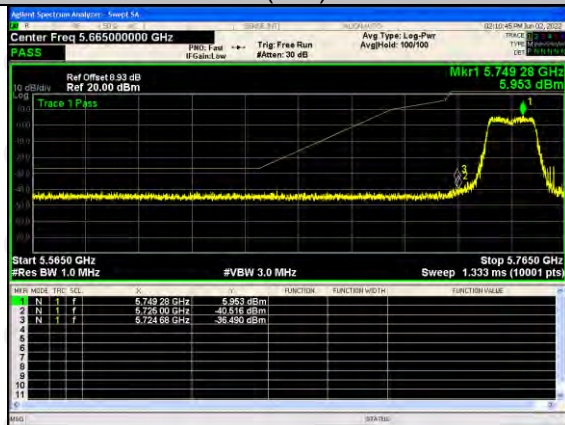

802.11(n20)-5825




802.11(n40)-5755

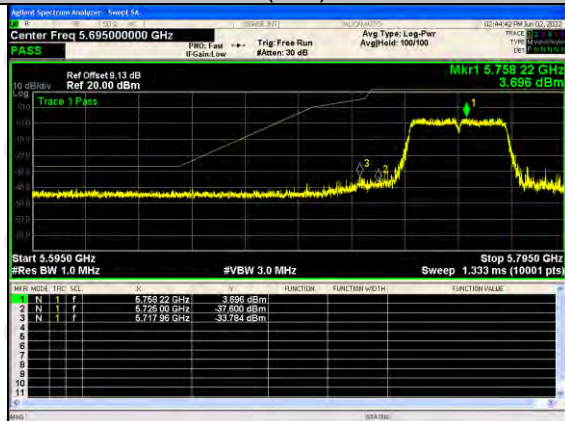

802.11(n40)-5795



802.11ac(VH20)-5745

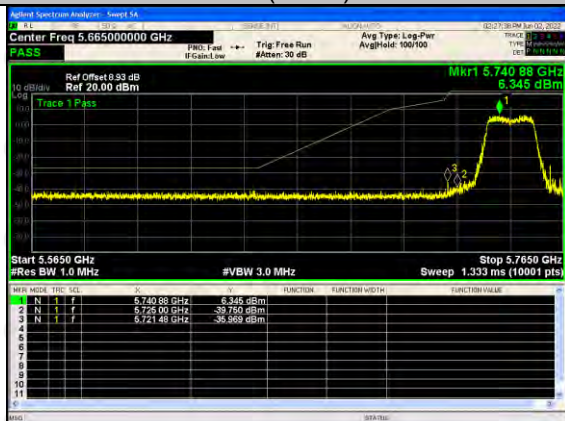

802.11ac(VH20)-5825



802.11ac(VH40)-5755



802.11ac(VH40)-5795




802.11ac(VH80)-5775



1.The margin of worst case ANT(1) test data has over 3dB, so the MIMO mode shall be passed.

9. CONDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

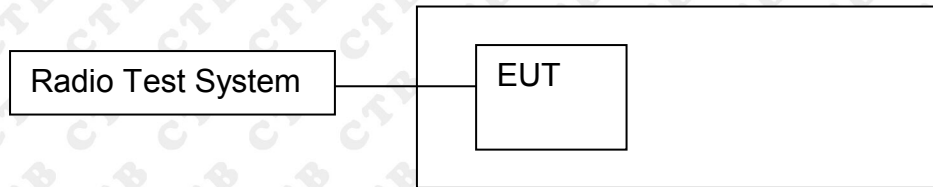

9.2 Limit

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p.

at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(4) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

(5) The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution

bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

(h) Transmit Power Control (TPC) and Dynamic Frequency Selection (DFS).

(1) Transmit power control (TPC). U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

9.3 Test procedure

According to KDB789033 D02v02r01 sectionE, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1 MHz.
- (iii) Set VBW $\geq$ 3 MHz.
- (iv) Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
- (v) Sweep time = auto.
- (vi) Detector = power averaging (rms), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle $< 98\%$, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run.”
- (viii) Trace average at least 100 traces in power averaging (rms) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

9.4 Test Result


ANT 1+ANT 2

Test mode1	Test Channel (MHz)	Output Power dBm ANT1	Output Power dBm ANT2	Output Power dBm Total	Limit dBm
802.11a	5180	7.193	7.251	10.232	23.98
	5200	7.368	7.321	10.355	23.98
	5240	7.45	7.59	10.531	23.98
802.11ac20	5180	7.543	7.493	10.528	23.98
	5200	7.605	7.589	10.607	23.98
	5240	7.612	7.658	10.645	23.98
802.11ac40	5190	6.384	6.437	9.421	23.98
	5230	6.648	6.618	9.643	23.98
802.11ac80	5210	5.382	5.359	8.381	23.98
802.11n(HT20)	5180	7.58	7.47	10.536	23.98
	5200	7.472	7.627	10.560	23.98
	5240	7.683	7.608	10.656	23.98
802.11n(HT40)	5190	6.221	6.328	10.232	23.98
	5230	6.497	6.398	10.355	23.98


Test mode1	Test Channel (MHz)	Output Power dBm ANT1	Output Power dBm ANT2	Output Power dBm Total	Limit dBm
802.11a	5745	7.382	7.205	10.305	30
	5785	7.528	7.543	10.546	30
	5825	7.096	7.272	10.195	30
802.11ac20	5745	7.132	7.233	10.193	30
	5785	7.815	7.719	10.778	30
	5825	7.763	7.719	10.751	30
802.11ac40	5755	6.572	6.521	9.557	30
	5795	6.703	6.775	9.749	30
802.11ac80	5775	5.612	5.448	8.541	30
802.11n(HT20)	5745	7.647	7.521	10.595	30
	5785	7.633	7.64	10.647	30
	5825	7.808	7.77	10.799	30
802.11n(HT40)	5755	6.427	6.537	10.305	30
	5795	6.747	6.659	10.546	30

ANT 1


802.11a-5180

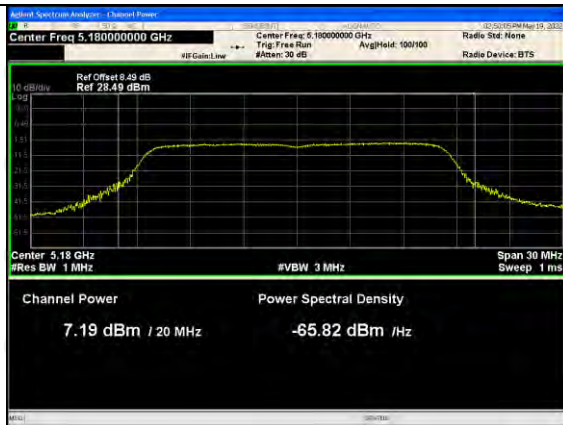


802.11a-5200

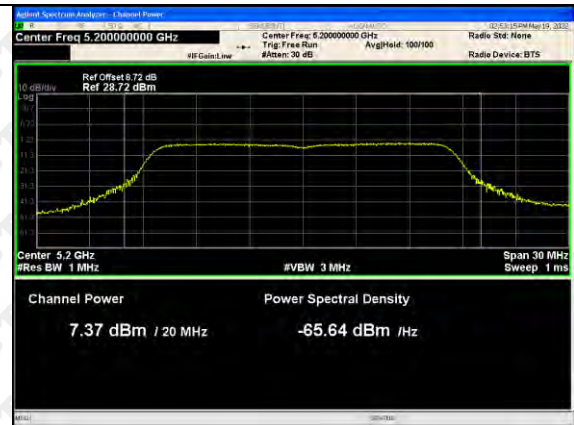


802.11a-5240

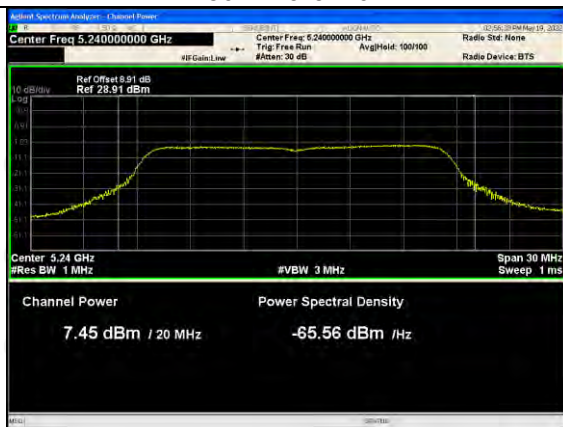


802.11n(HT20)-5180

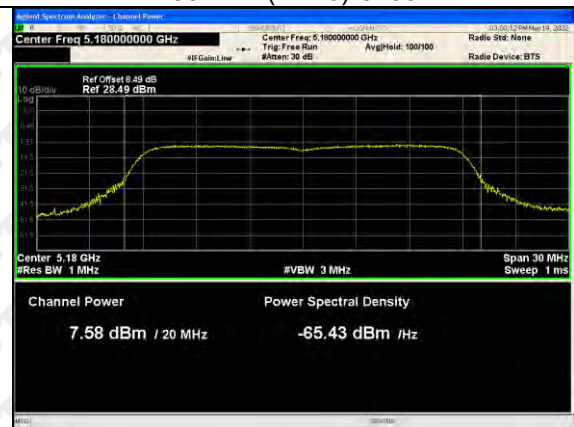


802.11n(HT20)-5200

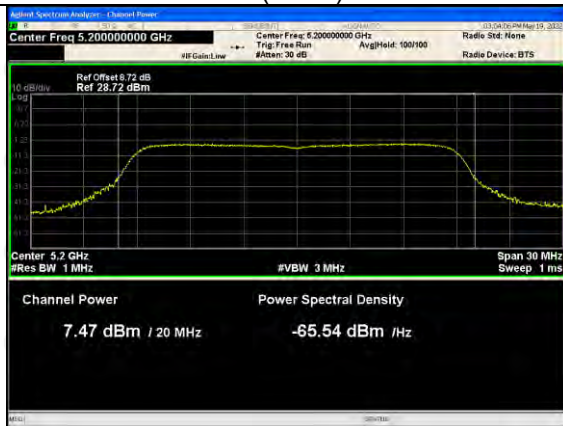


802.11n(HT20)-5240

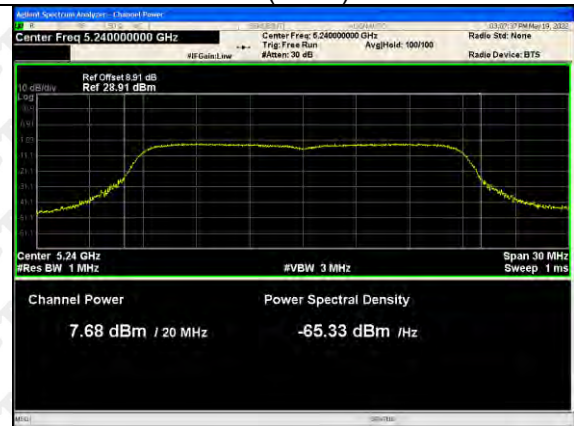


802.11n(HT40)-5190

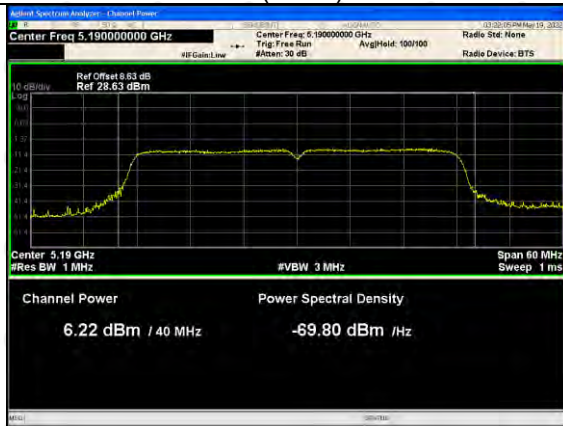


802.11n(HT40)-5230

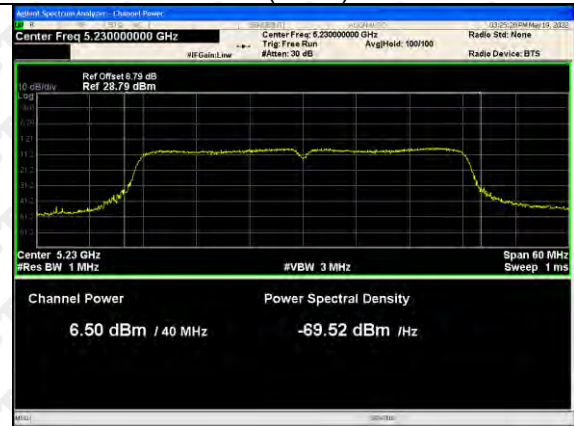


802.11ac(VH20)-5180

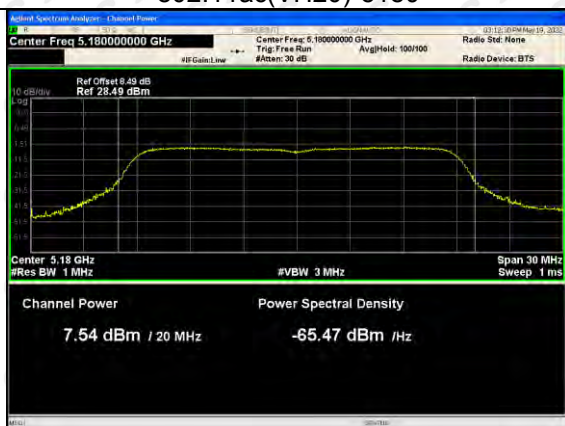


802.11ac(VH20)-5200

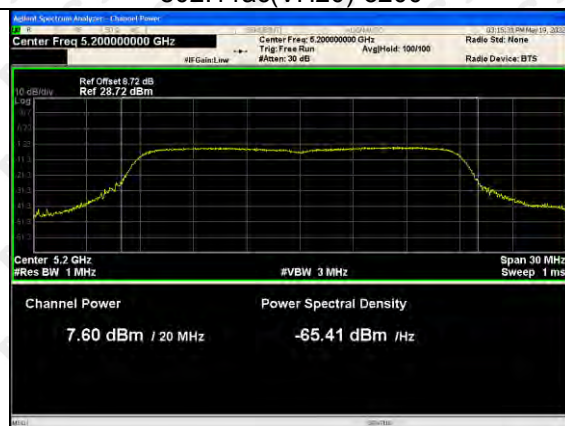


802.11ac(VH20)-5240

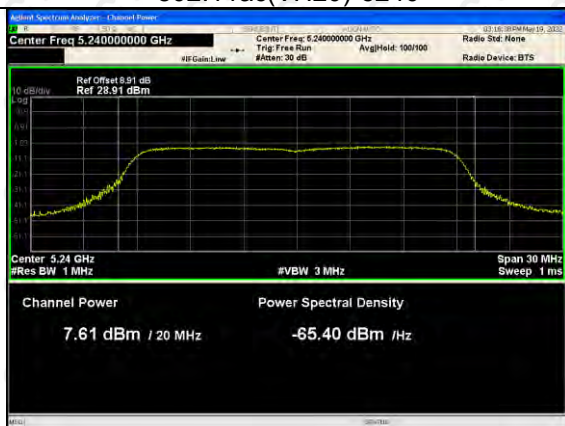


802.11ac(VH40)-5190

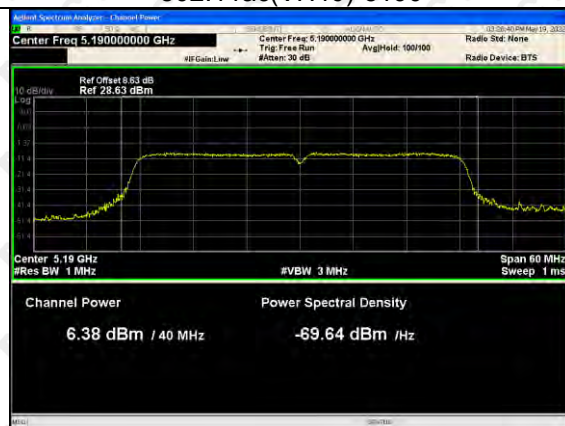


802.11ac(VH40)-5230

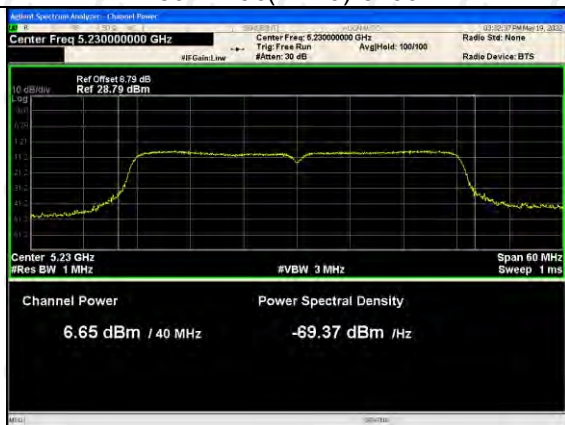


802.11ac(VH80)-5230

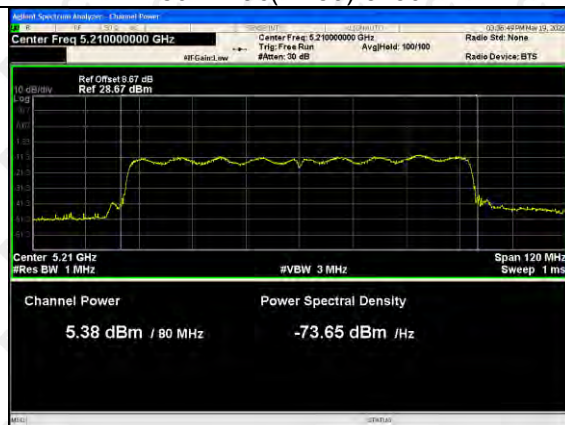


802.11a-5745

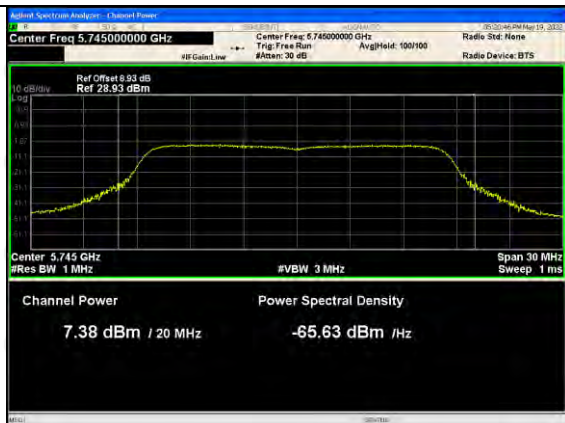


802.11a-5785

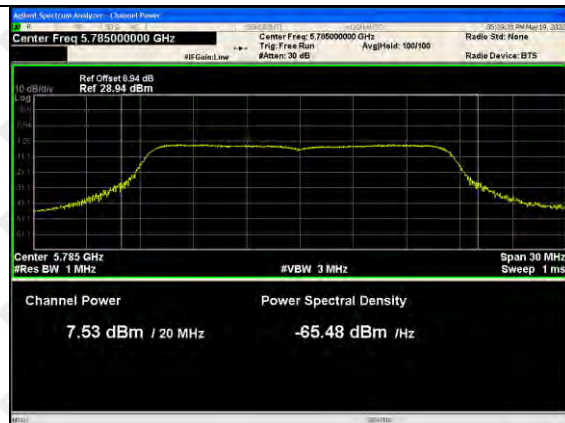


802.11a-5825

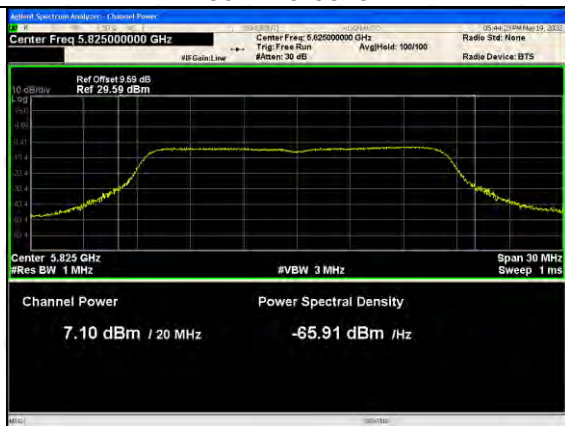


802.11n(HT20)-5745

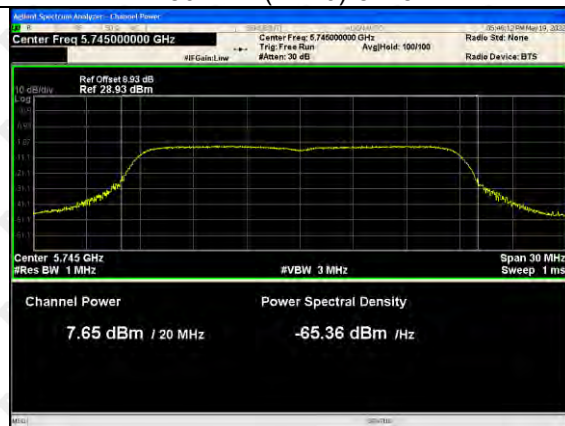


802.11n(HT20)-5785

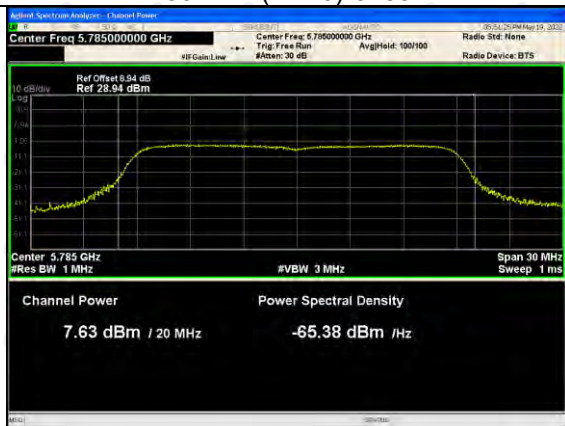


802.11n(HT20)-5825

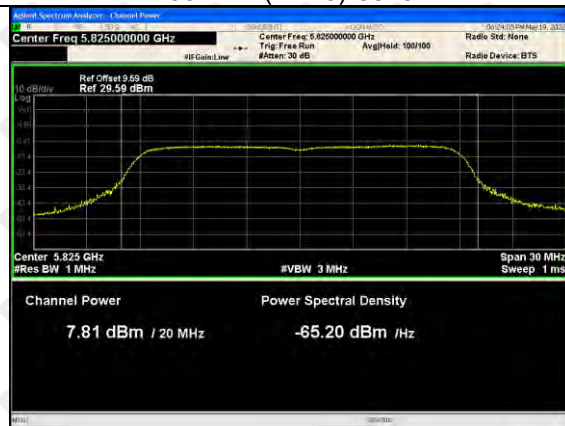


802.11n(HT40)-5755

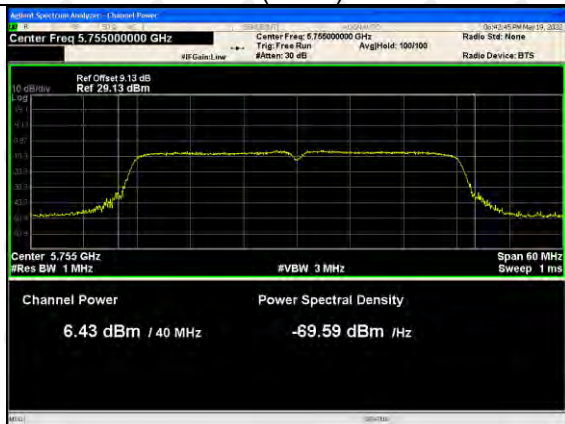


802.11n(HT40)-5795

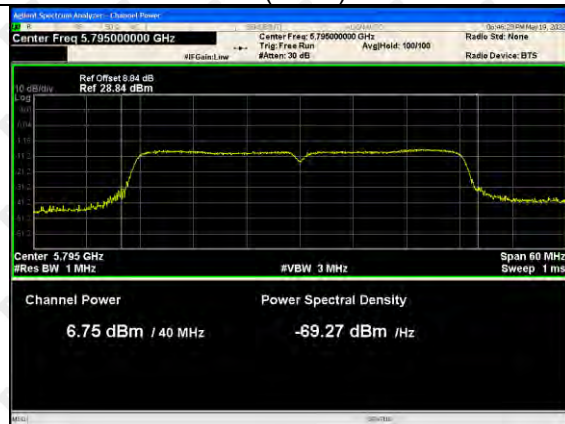


802.11ac(VH20)-5745

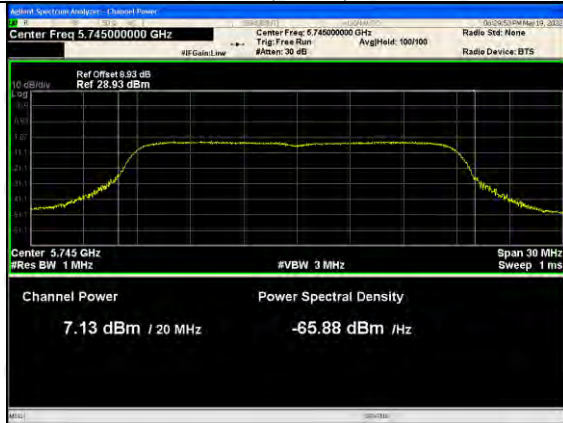


802.11ac(VH20)-5785

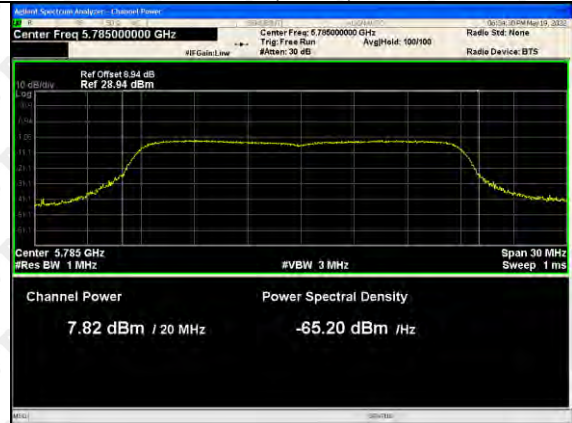


802.11ac(VH20)-5825

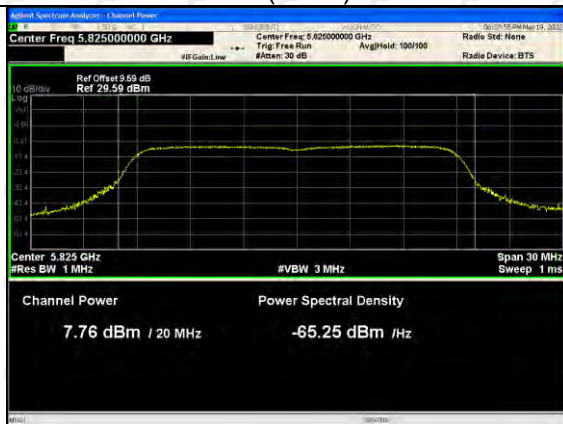


802.11ac(VH40)-5755

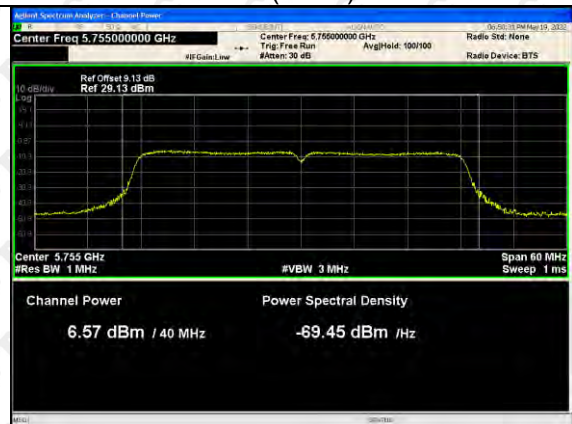


802.11ac(VH40)-5795

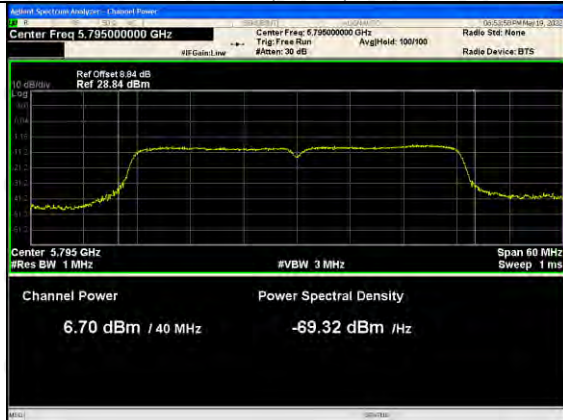


802.11ac(VH80)-5775

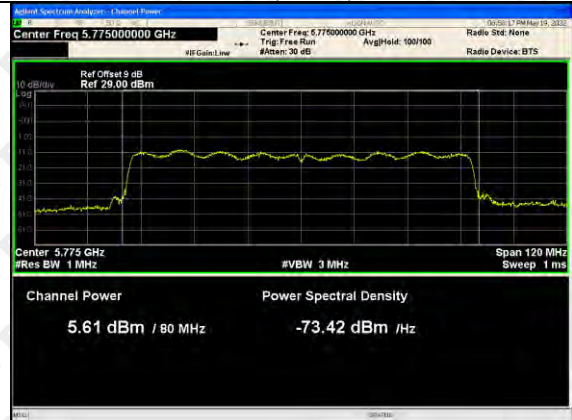


ANT 2

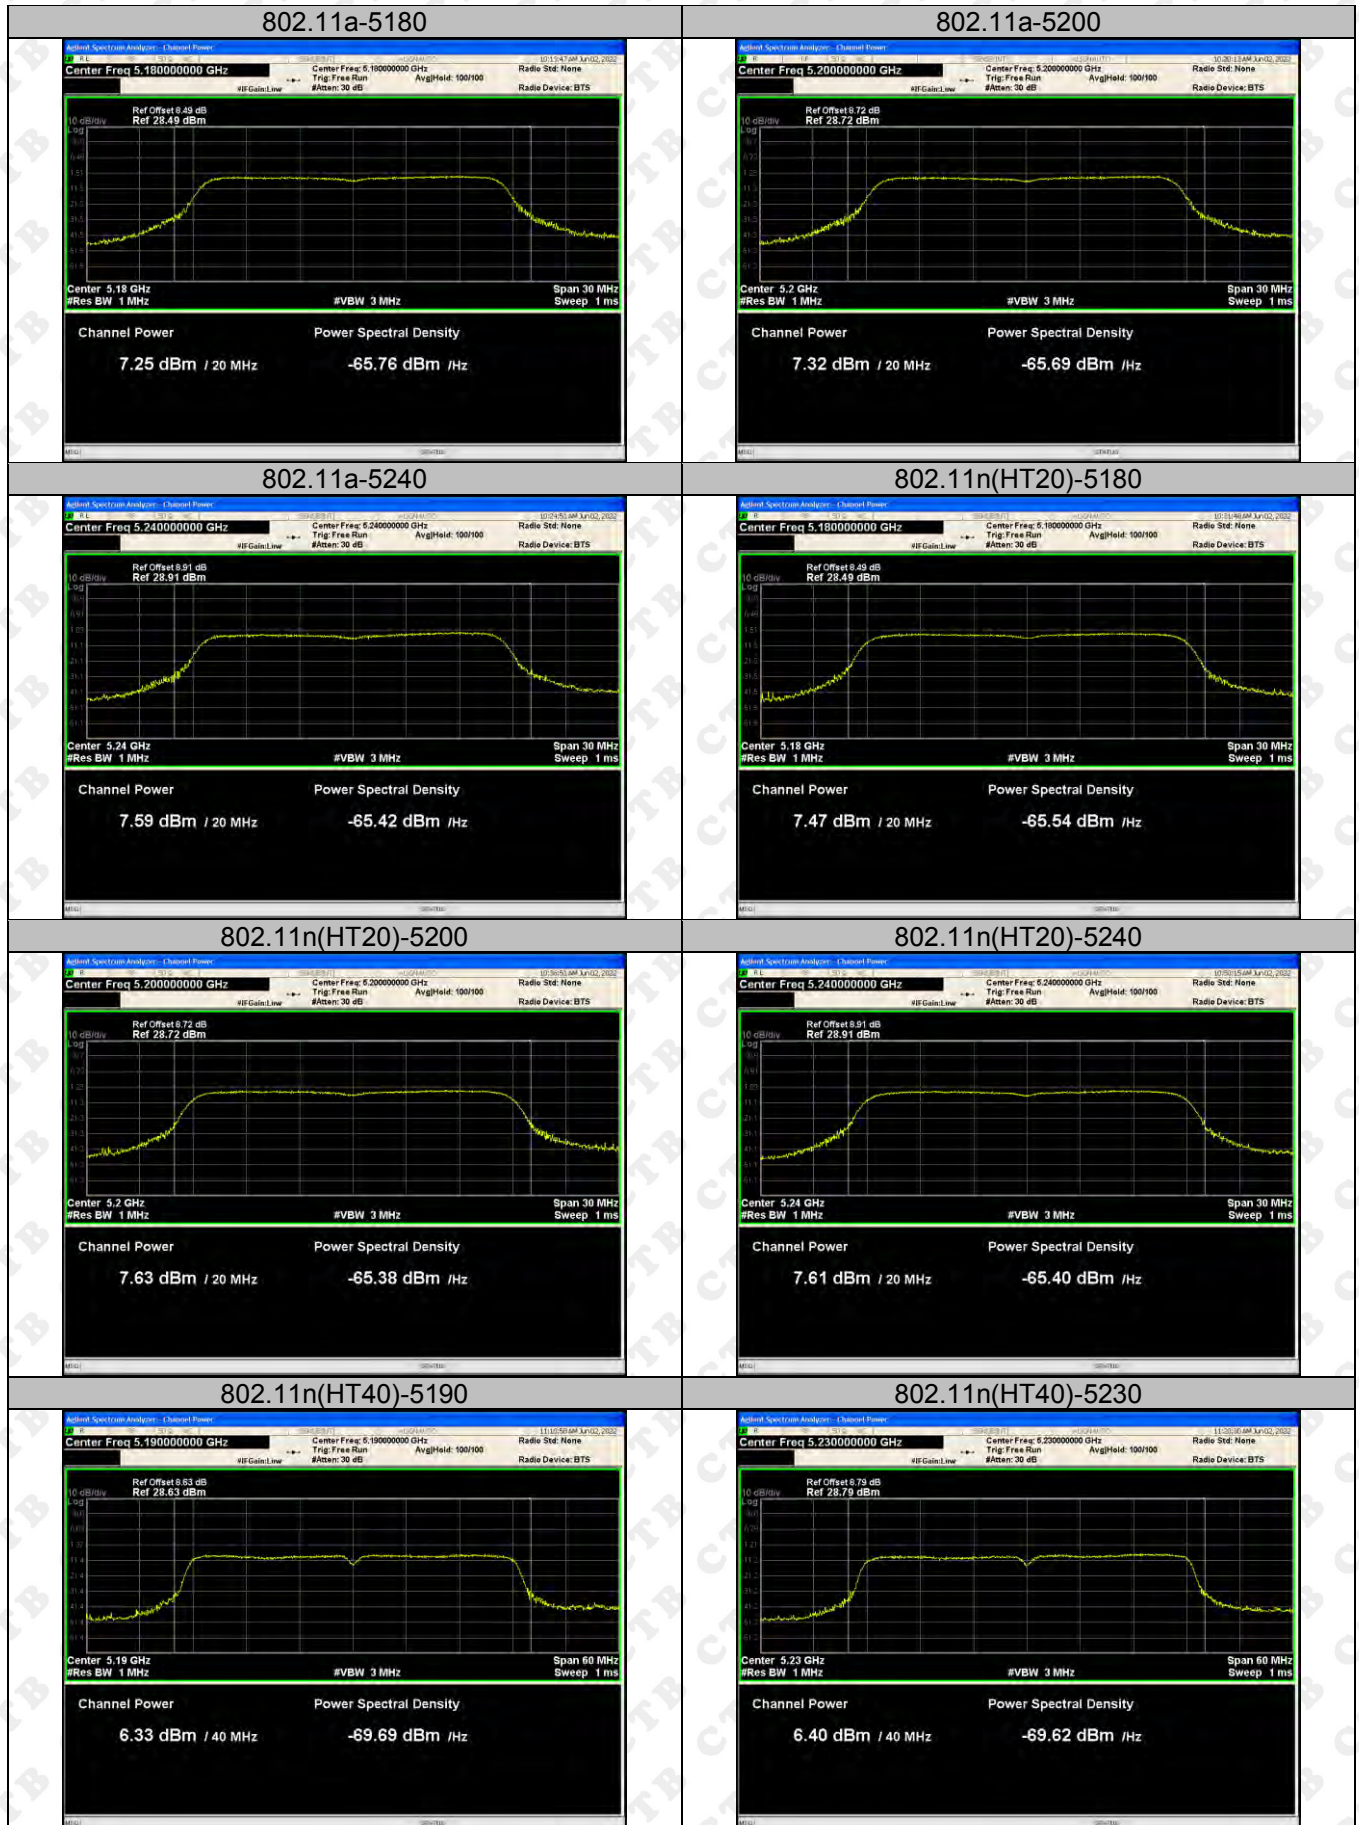


802.11ac(VH20)-5180

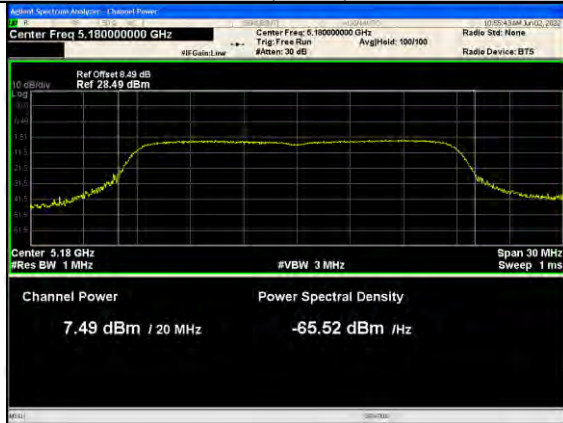


802.11ac(VH20)-5200

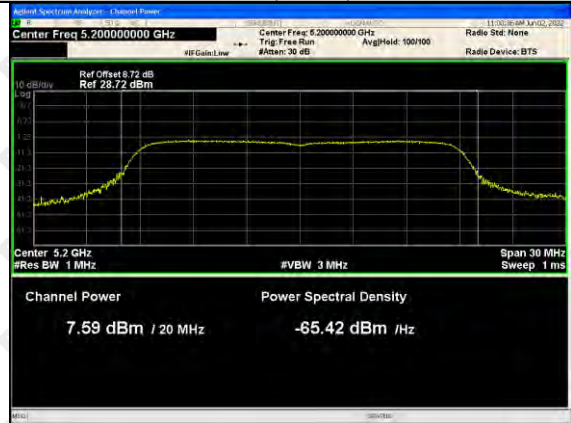


802.11ac(VH20)-5240

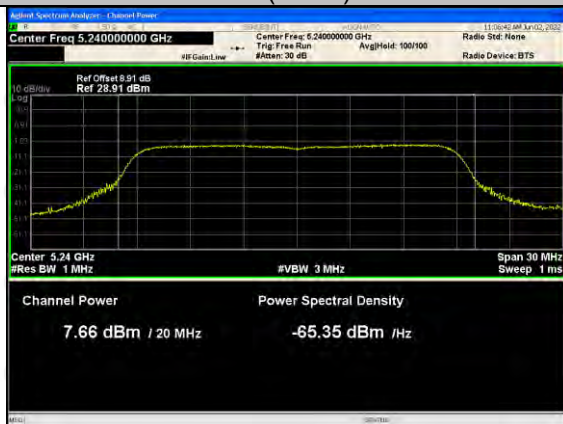


802.11ac(VH40)-5190

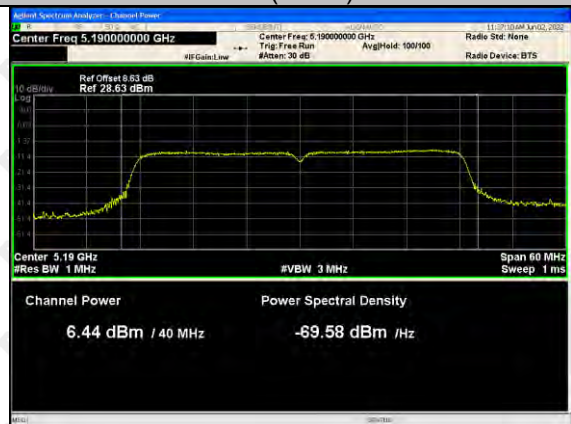


802.11ac(VH40)-5230

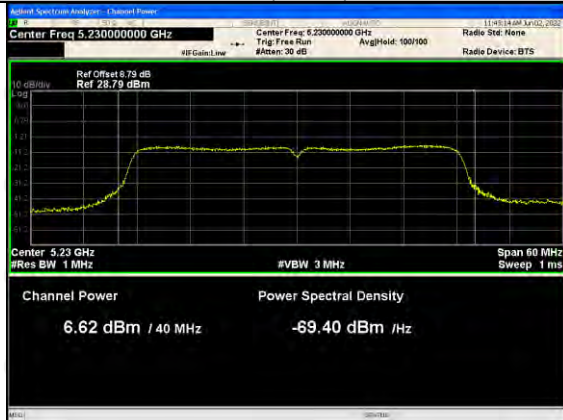


802.11ac(VH80)-5210

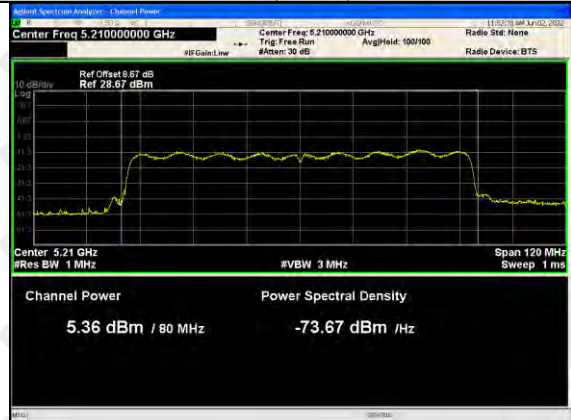


802.11a-5745

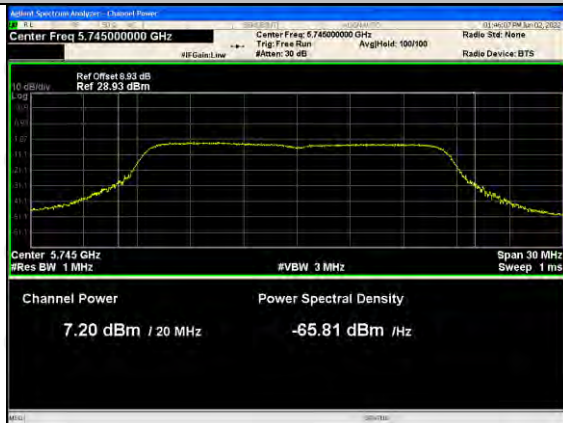

802.11a-5785

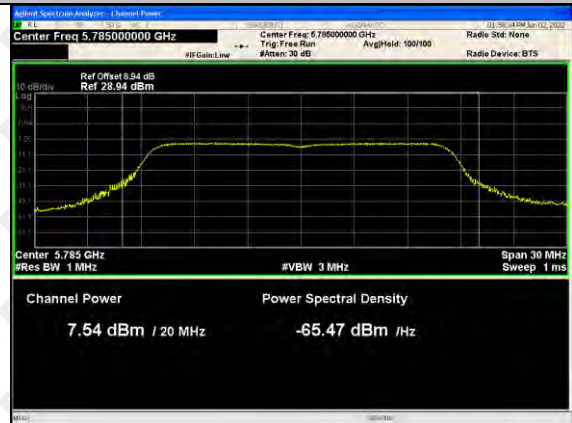


802.11a-5825

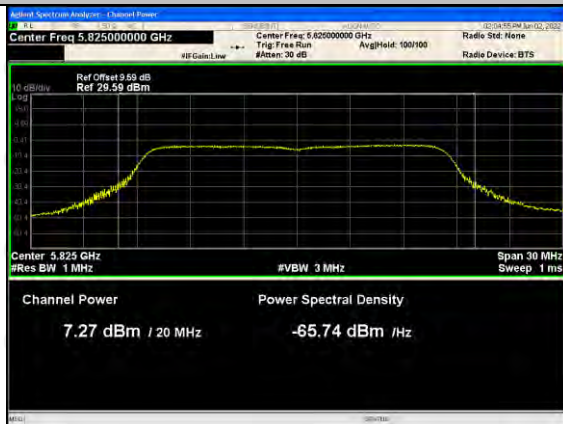


802.11n(HT20)-5745




802.11n(HT20)-5785

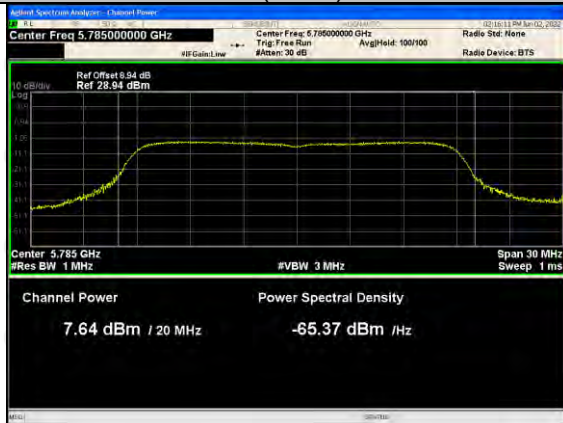


802.11n(HT20)-5825

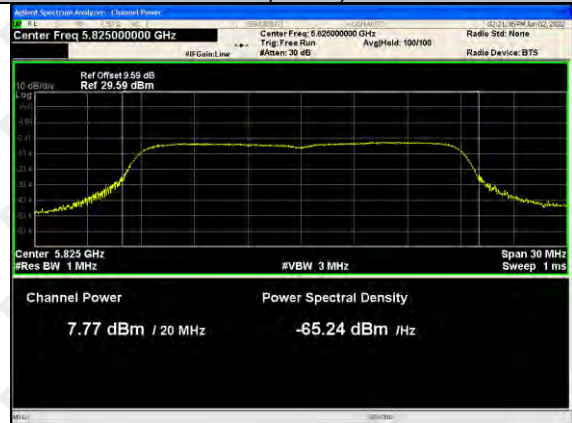


802.11n(HT40)-5755

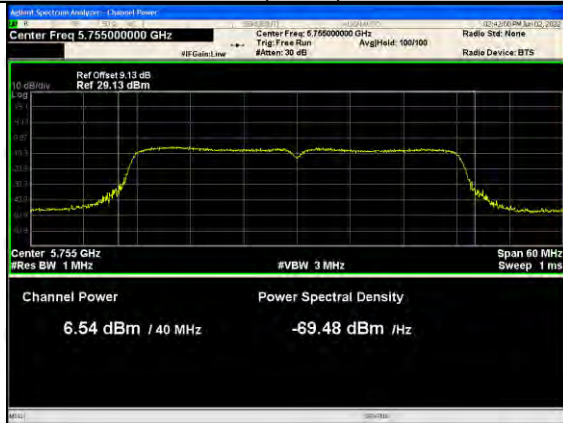


802.11n(HT40)-5795

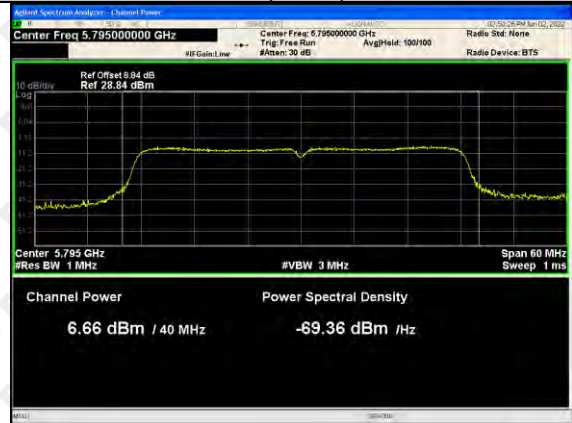


802.11ac(VH20)-5745

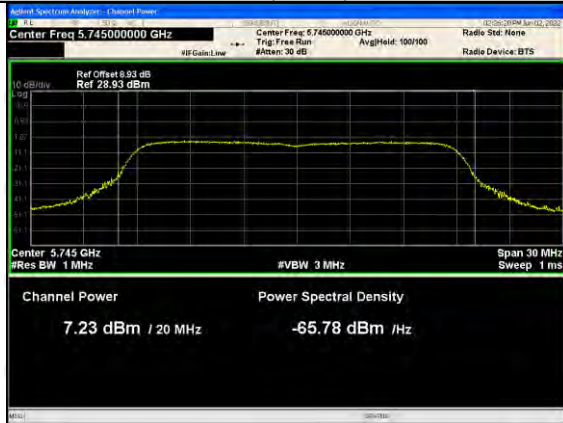


802.11ac(VH20)-5785

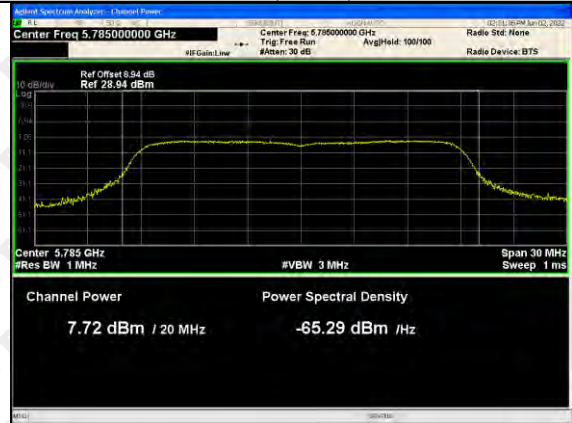


802.11ac(VH20)-5825

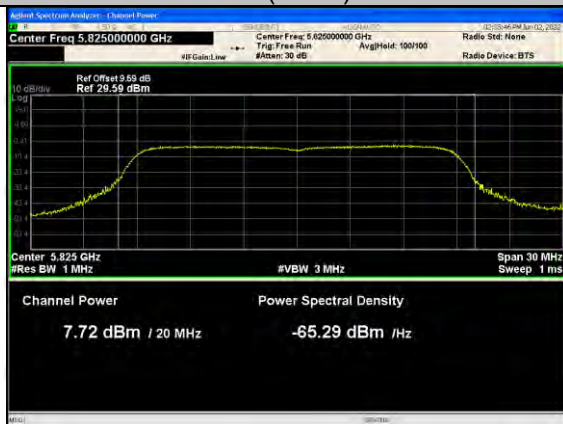


802.11ac(VH40)-5755

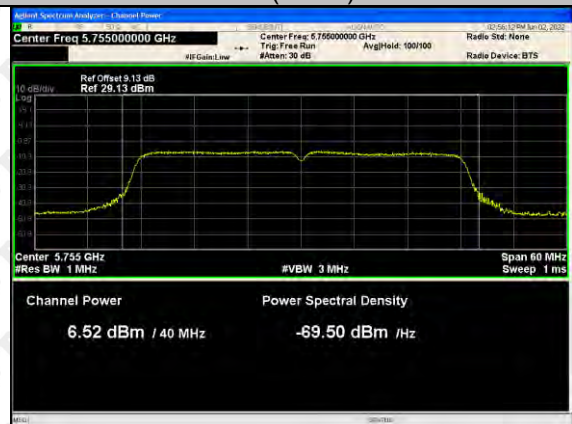

802.11ac(VH40)-5795

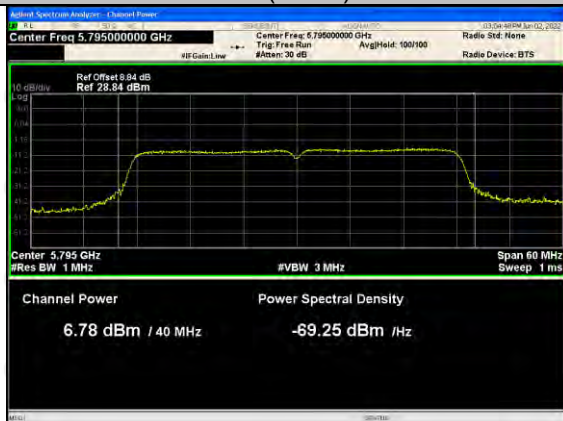


802.11ac(VH80)-5775

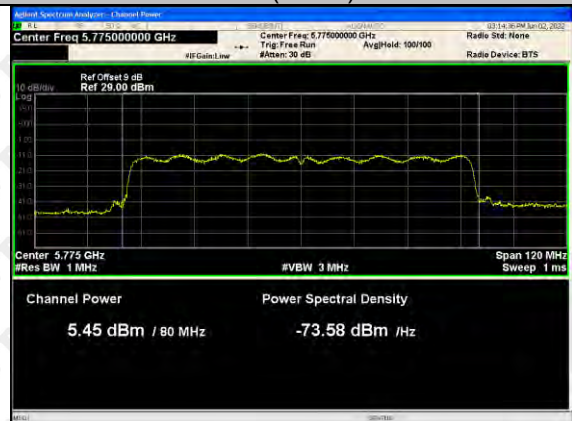

10. EMISSION BANDWIDTH& OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

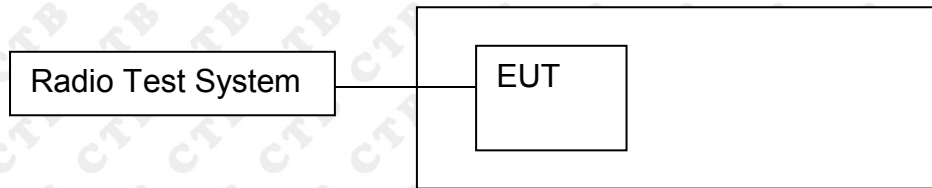

10.2 Limits

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

10.3 Test Procedure

According to KDB789033 D02v02r01 sectionE, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725–5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 kHz for the band 5.725–5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- Detector = Peak.

- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

D. 99% Occupied Bandwidth

The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. Measurement of the 99% occupied bandwidth is *required* only as a condition for using the optional band-edge measurement techniques described in II.G.3.d). Measurements of 99% occupied bandwidth may also optionally be used in lieu of the EBW to define the minimum frequency range over which the 789033 D02 General UNII Test Procedures New Rules v02r01 Page 4 spectrum is integrated when measuring maximum conducted output power as described in II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with Section 15.407(a).

The following procedure shall be used for measuring (99%) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1% to 5% of the OBW
4. Set VBW $\geq 3 * \text{RBW}$
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99% power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99% power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

10.4 Test Results

Test mode ANT 1	Test Channel (MHz)	26dB Bandwidth (MHz)
802.11a	5180	20.922
	5200	20.792
	5240	20.596
802.11a20	5180	21.708
	5200	21.72
	5240	21.545
802.11a40	5190	41.375
	5230	41.169
802.11a80	5210	80.124
802.11n(HT20)	5180	21.261
	5200	21.544
	5240	21.502
802.11n(HT40)	5190	41.529
	5230	40.628


Test mode ANT 1	Test Channel (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
802.11a	5745	16.106	≥ 0.5
	5785	16.36	≥ 0.5
	5825	16.418	≥ 0.5
802.11a20	5745	16.347	≥ 0.5
	5785	17.306	≥ 0.5
	5825	16.961	≥ 0.5
802.11a40	5755	35.348	≥ 0.5
	5795	35.299	≥ 0.5
802.11a80	5775	75.296	≥ 0.5
802.11n(HT20)	5745	17.257	≥ 0.5
	5785	17.549	≥ 0.5
	5825	16.668	≥ 0.5
802.11n(HT40)	5755	35.202	≥ 0.5
	5795	35.436	≥ 0.5


Test mode ANT 2	Test Channel (MHz)	26dB Bandwidth (MHz)
802.11a	5180	21.386
	5200	21.277
	5240	21.111
802.11a20	5180	21.378
	5200	21.624
	5240	21.593
802.11a40	5190	40.737
	5230	41.382
802.11a80	5210	80.18
802.11n(HT20)	5180	21.381
	5200	21.747
	5240	21.091
802.11n(HT40)	5190	42.264
	5230	40.832

Test mode ANT 2	Test Channel (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
802.11a	5745	16.355	≥ 0.5
	5785	16.323	≥ 0.5
	5825	16.34	≥ 0.5
802.11a20	5745	17.306	≥ 0.5
	5785	17.268	≥ 0.5
	5825	17.029	≥ 0.5
802.11a40	5755	35.212	≥ 0.5
	5795	35.8	≥ 0.5
802.11a80	5775	75.324	≥ 0.5
802.11n(HT20)	5745	16.816	≥ 0.5
	5785	16.981	≥ 0.5
	5825	16.696	≥ 0.5
802.11n(HT40)	5755	35.567	≥ 0.5
	5795	35.398	≥ 0.5


Test Graph ANT 1

5180-5240MHz

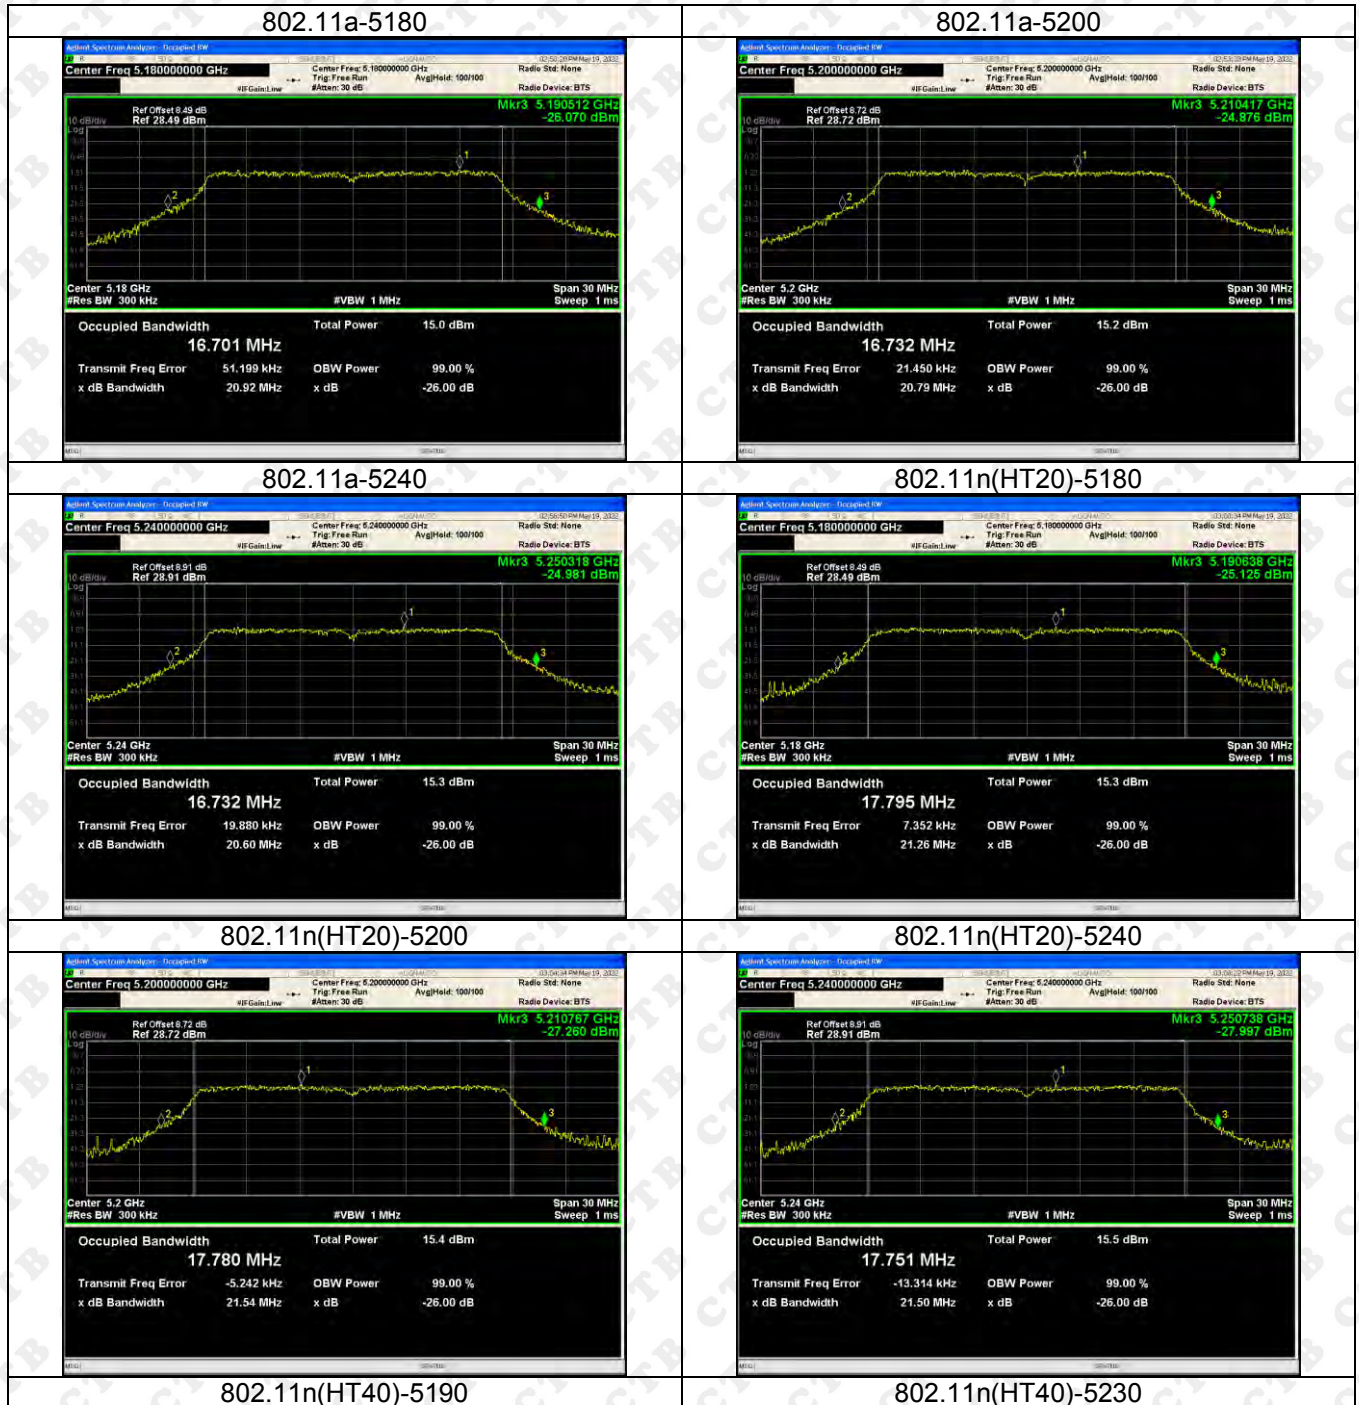


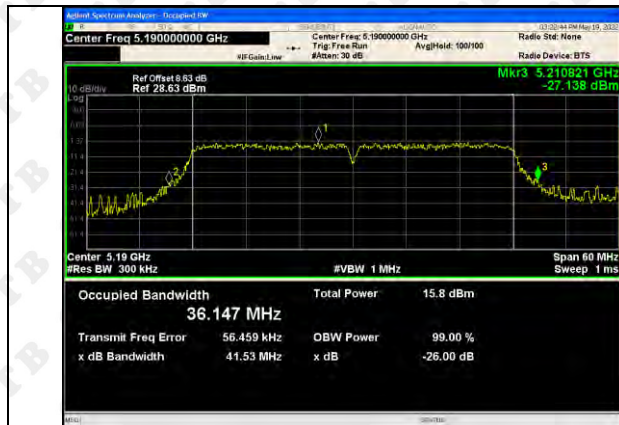


802.11ac(VH20)-5180

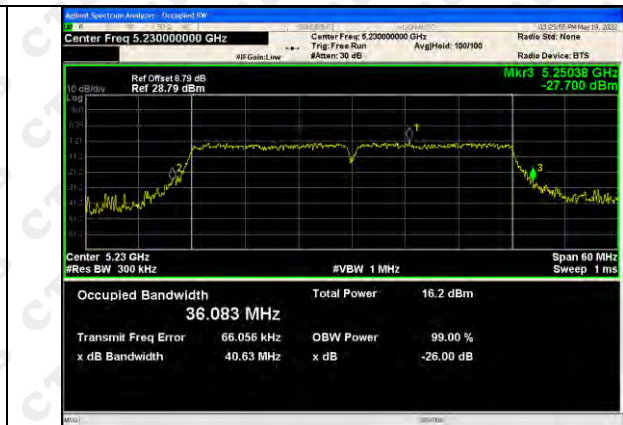


802.11ac(VH20)-5200

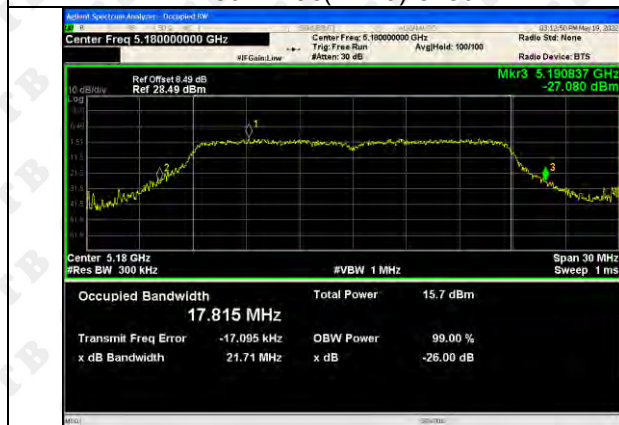


802.11ac(VH20)-5240

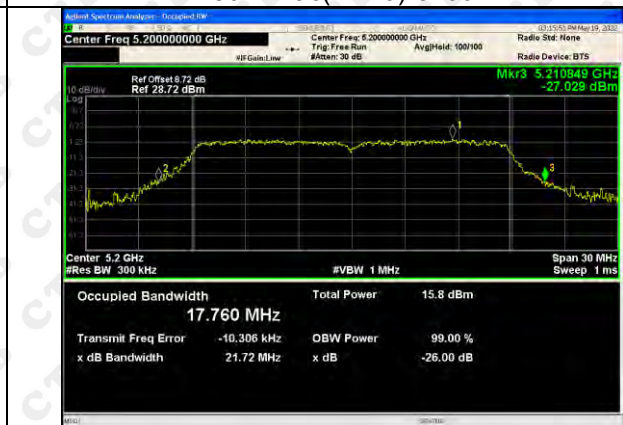



802.11ac(VH40)-5190

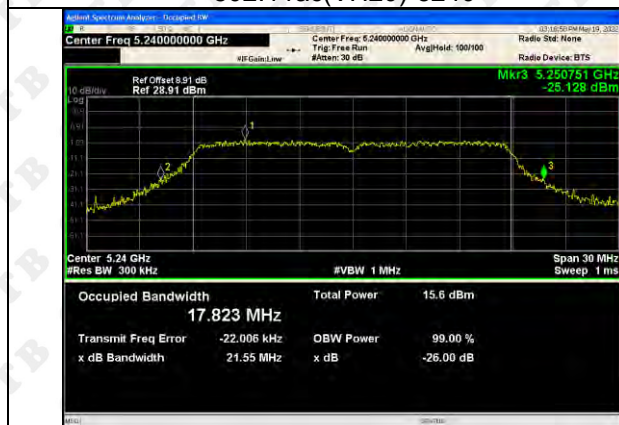

802.11ac(VH40)-5230

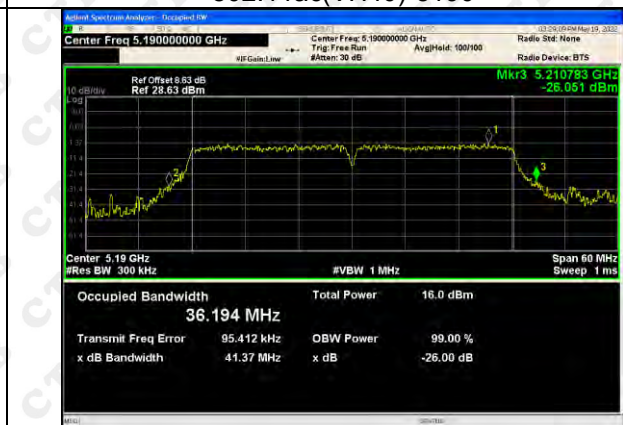

802.11ac(VH80)-5210

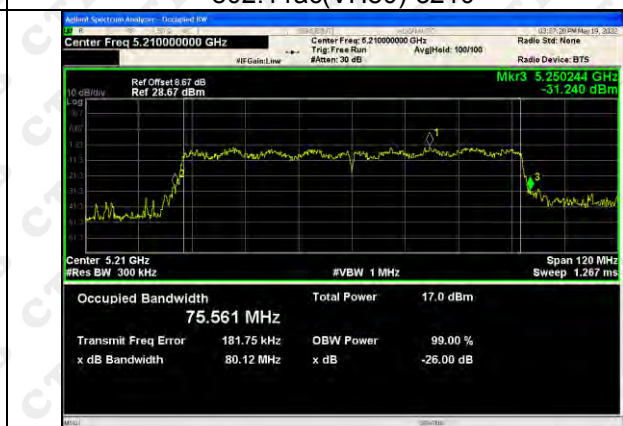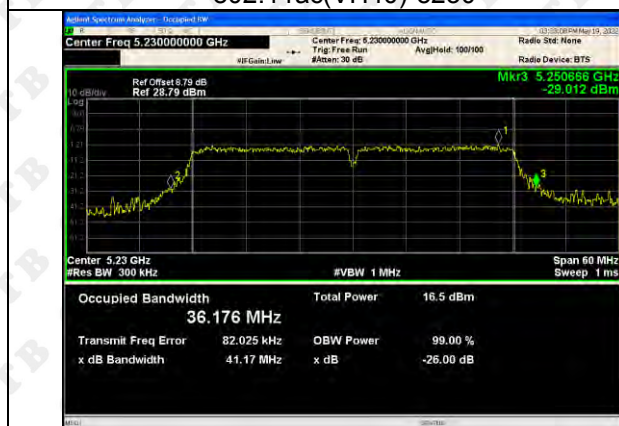

5745-5825MHz

802.11a-5745



802.11a-5785



802.11a-5825



802.11n(HT20)-5745



802.11n(HT20)-5785



802.11n(HT20)-5825



802.11n(HT40)-5755



802.11n(HT40)-5795



802.11ac(VH20)-5745



802.11ac(VH20)-5785



802.11ac(VH20)-5825




802.11ac(VH40)-5755



802.11ac(VH40)-5795



802.11ac(VH80)-5775

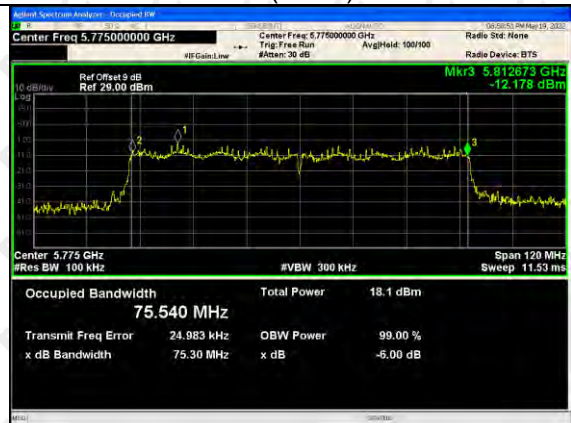

ANT 2

802.11a-5180



802.11a-5200



802.11a-5240



802.11n(HT20)-5180



802.11n(HT20)-5200



802.11n(HT20)-5240



802.11n(HT40)-5190



802.11n(HT40)-5230



802.11ac(VH20)-5180



802.11ac(VH20)-5200



802.11ac(VH20)-5240



802.11ac(VH40)-5190




802.11ac(VH40)-5230




802.11ac(VH80)-5210



802.11a-5745

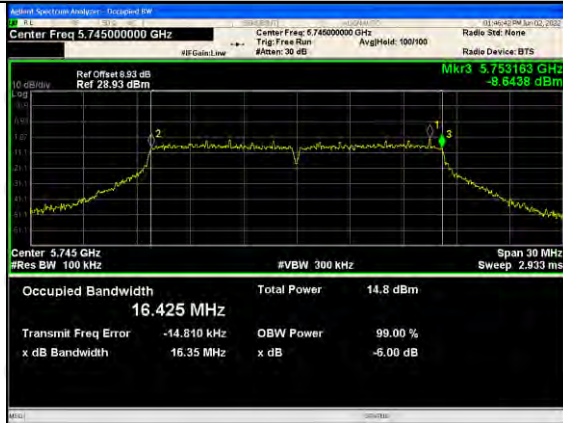

802.11a-5785

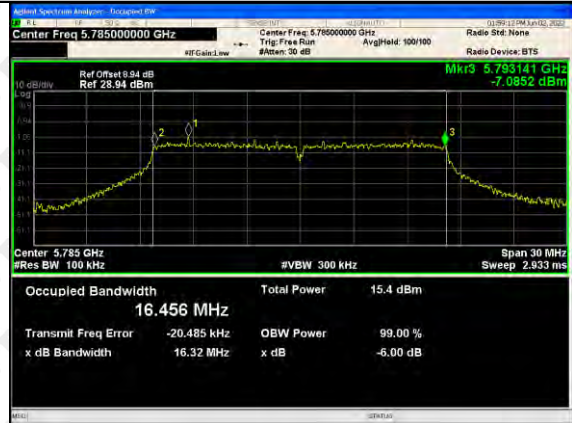

802.11a-5825



802.11n(HT20)-5745



802.11n(HT20)-5785



802.11n(HT20)-5825



802.11n(HT40)-5755







802.11n(HT40)-5795




802.11ac(VH20)-5745

802.11ac(VH20)-5785

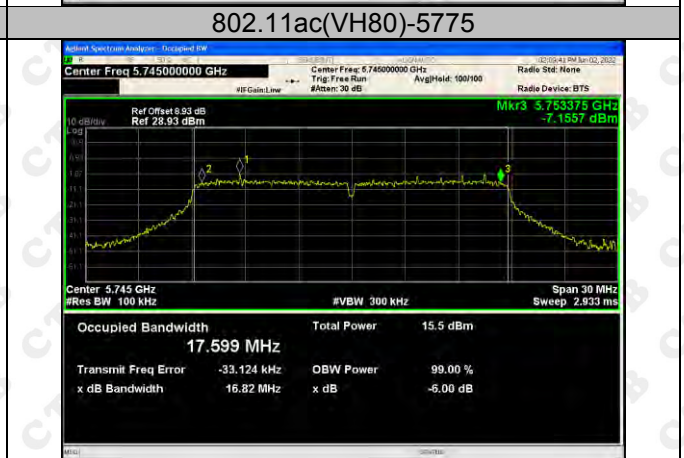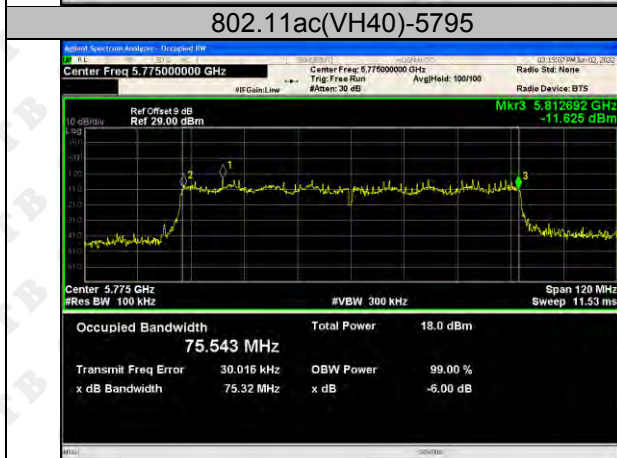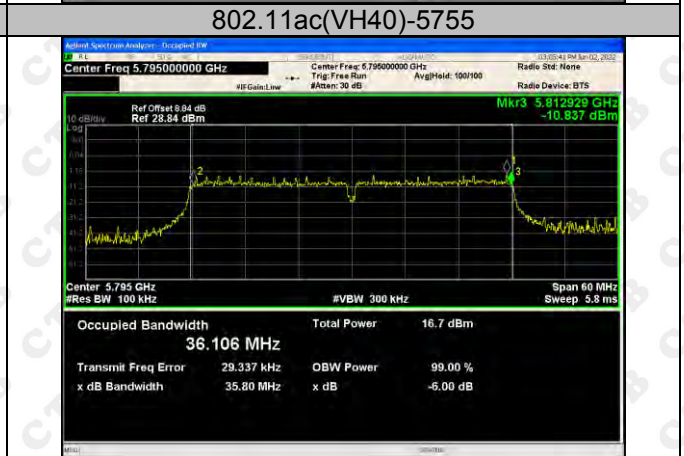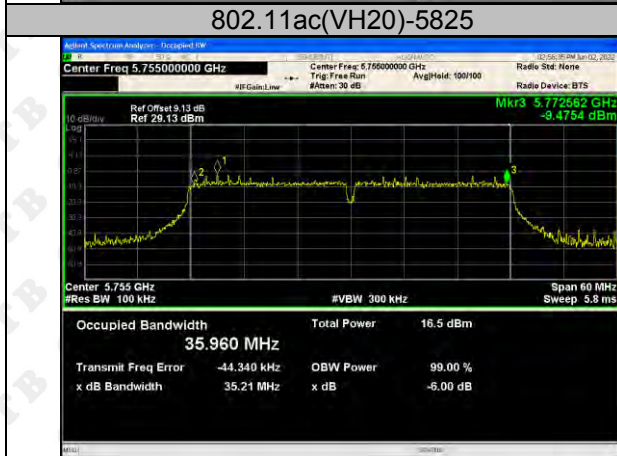

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

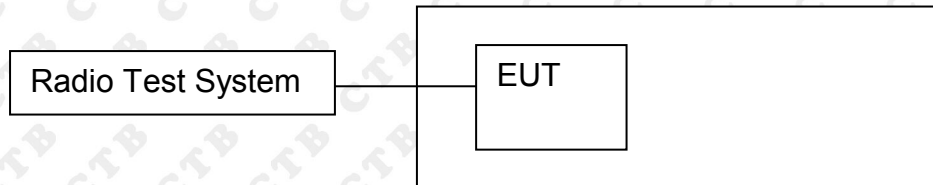

11.2 Limit

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

11.3 Test procedure

According to KDB789033 D02v02r01 sectionE, the following is the measurement procedure.

For devices operating in the bands 5.15–5.25 GHz, 5.25–5.35 GHz, and 5.47–5.725 GHz, the preceding procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in Section 15.407(a)(5). For devices operating in the band 5.725–5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth ($< 1 \text{ MHz}$, or $< 500 \text{ kHz}$) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

a) Set $\text{RBW} \geq 1/T$, where T is defined in II.B.1.a).

b) Set $VBW \geq 3 \text{ RBW}$.

c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500 \text{ kHz/RBW})$ to the measured result, whereas RBW ($< 500 \text{ kHz}$) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.

d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz/RBW})$ to the measured result, whereas RBW ($< 1 \text{ MHz}$) is the reduced resolution bandwidth of spectrum analyzer set during measurement.

e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the II.F.5.c) and II.F.5.d), since RBW=100 kHz is available on nearly all spectrum analyzers.


11.4 Test Result

ANT 1+ ANT 2

Test mode	Test Channel (MHz)	PSD [dBm/MHz] ANT 1	PSD [dBm/MHz] ANT 2	PSD [dBm/MHz] Total	Limit (dBm)	Result
802.11a	5180	3.91	3.99	6.960	11	Pass
	5200	3.784	3.564	6.686	11	Pass
	5240	3.928	5.171	7.604	11	Pass
802.11n(HT20)	5180	4.203	4.449	7.338	11	Pass
	5200	4.538	3.796	7.193	11	Pass
	5240	4.351	3.78	7.085	11	Pass
802.11n(HT40)	5190	1.359	1.389	4.384	11	Pass
	5230	2.752	2.036	5.419	11	Pass
802.11ac(VH20)	5210	0.877	0.31	3.613	11	Pass
	5180	3.552	4.03	6.808	11	Pass
	5200	3.987	3.505	6.763	11	Pass
802.11ac(VH40)	5240	3.967	4.128	7.059	11	Pass
	5190	1.212	2.638	6.960	11	Pass
802.11ac(VH80)	5230	1.684	4.197	6.686	11	Pass

Test mode	Test Channel (MHz)	PSD [dBm/500kHz] ANT 1	PSD [dBm/500kHz] ANT 2	PSD [dBm/500kHz] Total	Limit (dBm)	Result
802.11a	5745	0.864	0.716	3.801	30	Pass
	5785	1.247	1.934	4.614	30	Pass
	5825	2.313	1.32	4.855	30	Pass
802.11n(HT20)	5745	0.86	1.189	4.038	30	Pass
	5785	2.47	2.528	5.509	30	Pass
	5825	1.778	1.516	4.659	30	Pass
802.11n(HT40)	5755	0.136	-0.831	2.690	30	Pass
	5795	-0.436	-0.368	2.608	30	Pass
802.11ac(VH20)	5745	-2.174	-1.565	1.151	30	Pass
	5785	1.757	1.807	4.792	30	Pass
	5825	2.452	2.349	5.411	30	Pass
802.11ac(VH40)	5755	1.767	2	4.895	30	Pass
	5795	-1.262	-0.776	3.801	30	Pass
802.11ac(VH80)	5775	-0.454	-0.317	4.614	30	Pass

ANT 1

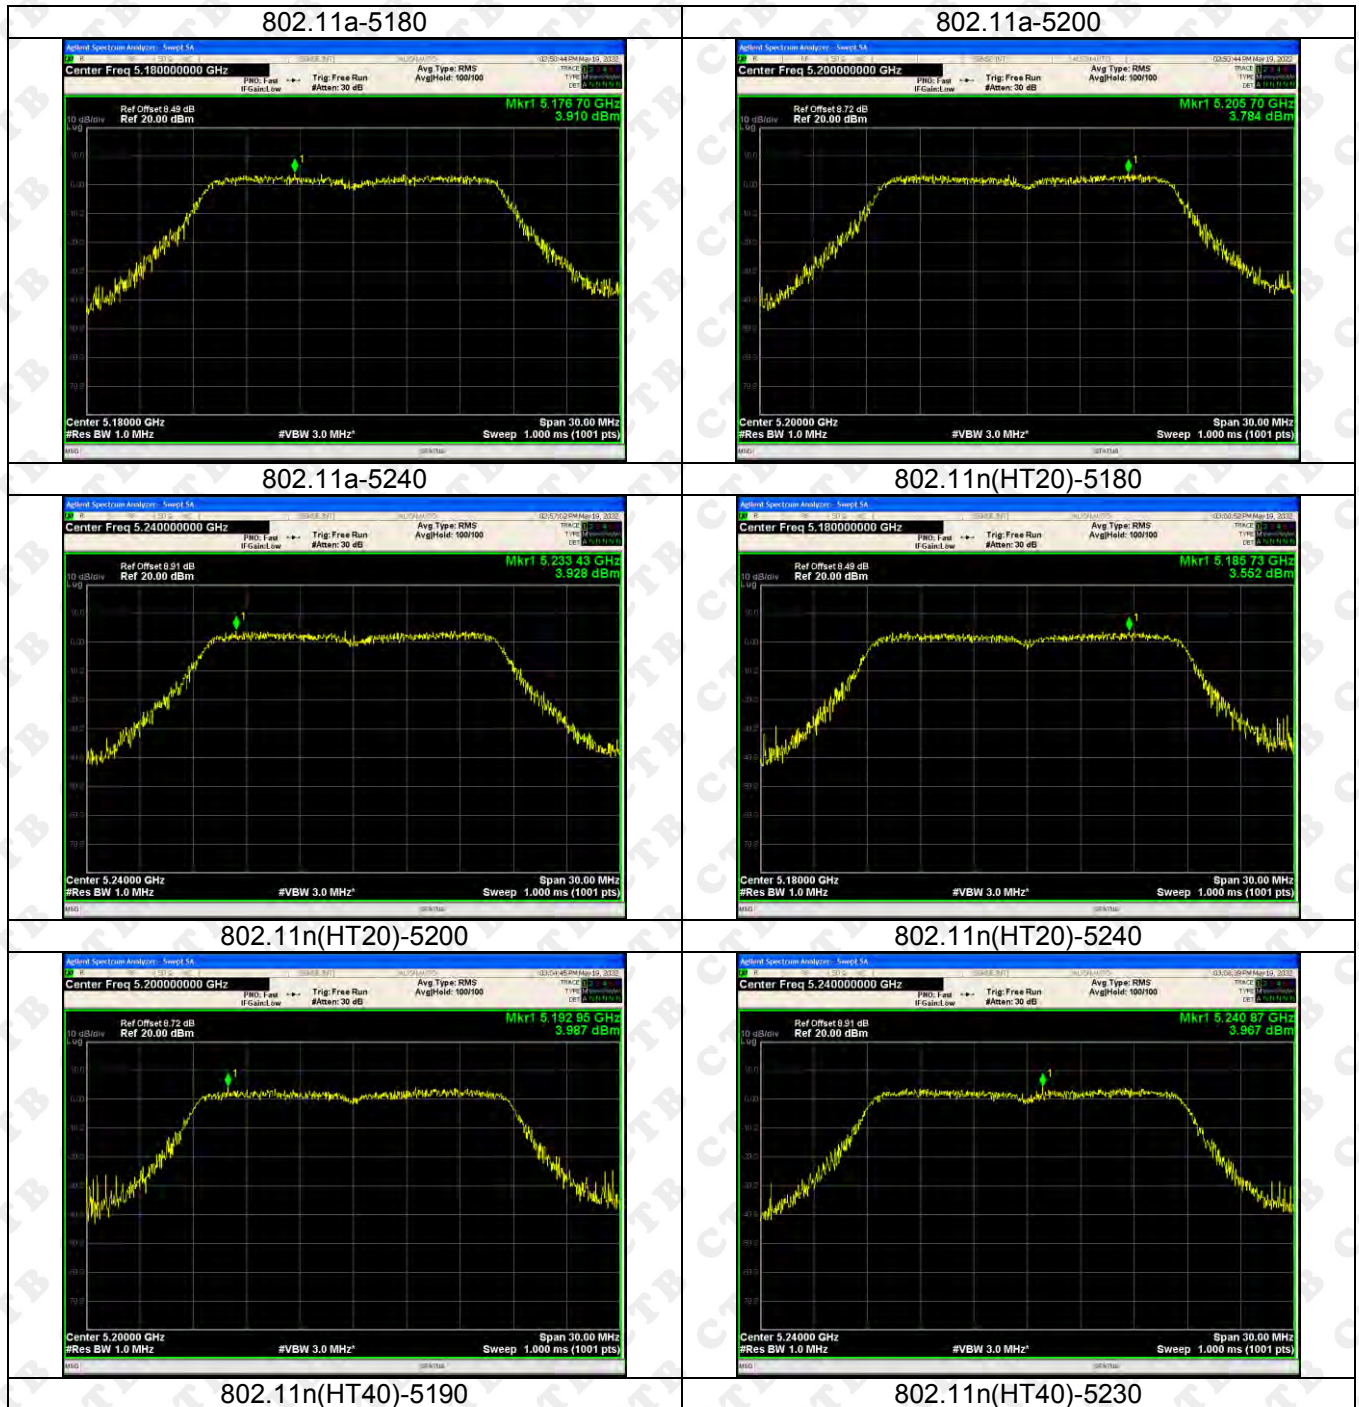



802.11ac(VH20)-5180



802.11ac(VH20)-5200



802.11ac(VH20)-5240



802.11ac(VH40)-5190




802.11ac(VH40)-5230



802.11ac(VH80)-5210



5745-5825MHz

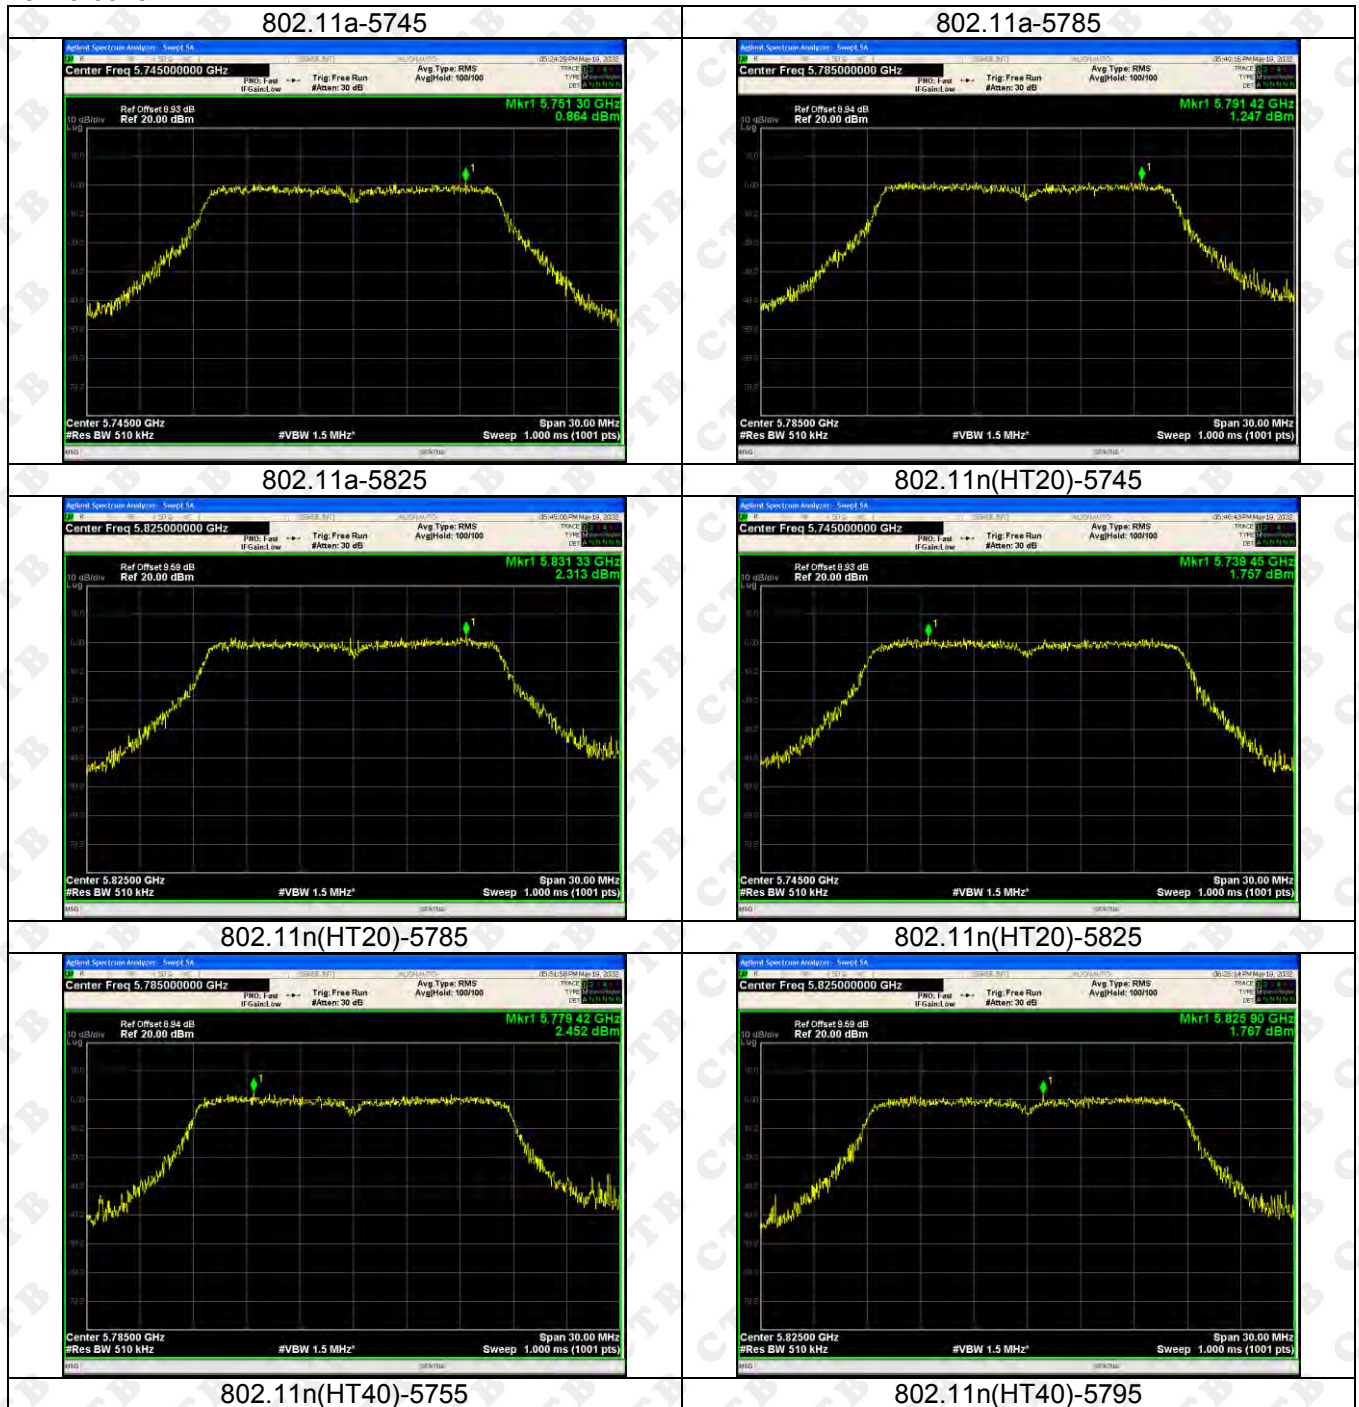



802.11ac(VH20)-5745



802.11ac(VH20)-5785



802.11ac(VH20)-5825



802.11ac(VH40)-5755




802.11ac(VH40)-5795




802.11ac(VH80)-5775



ANT 2

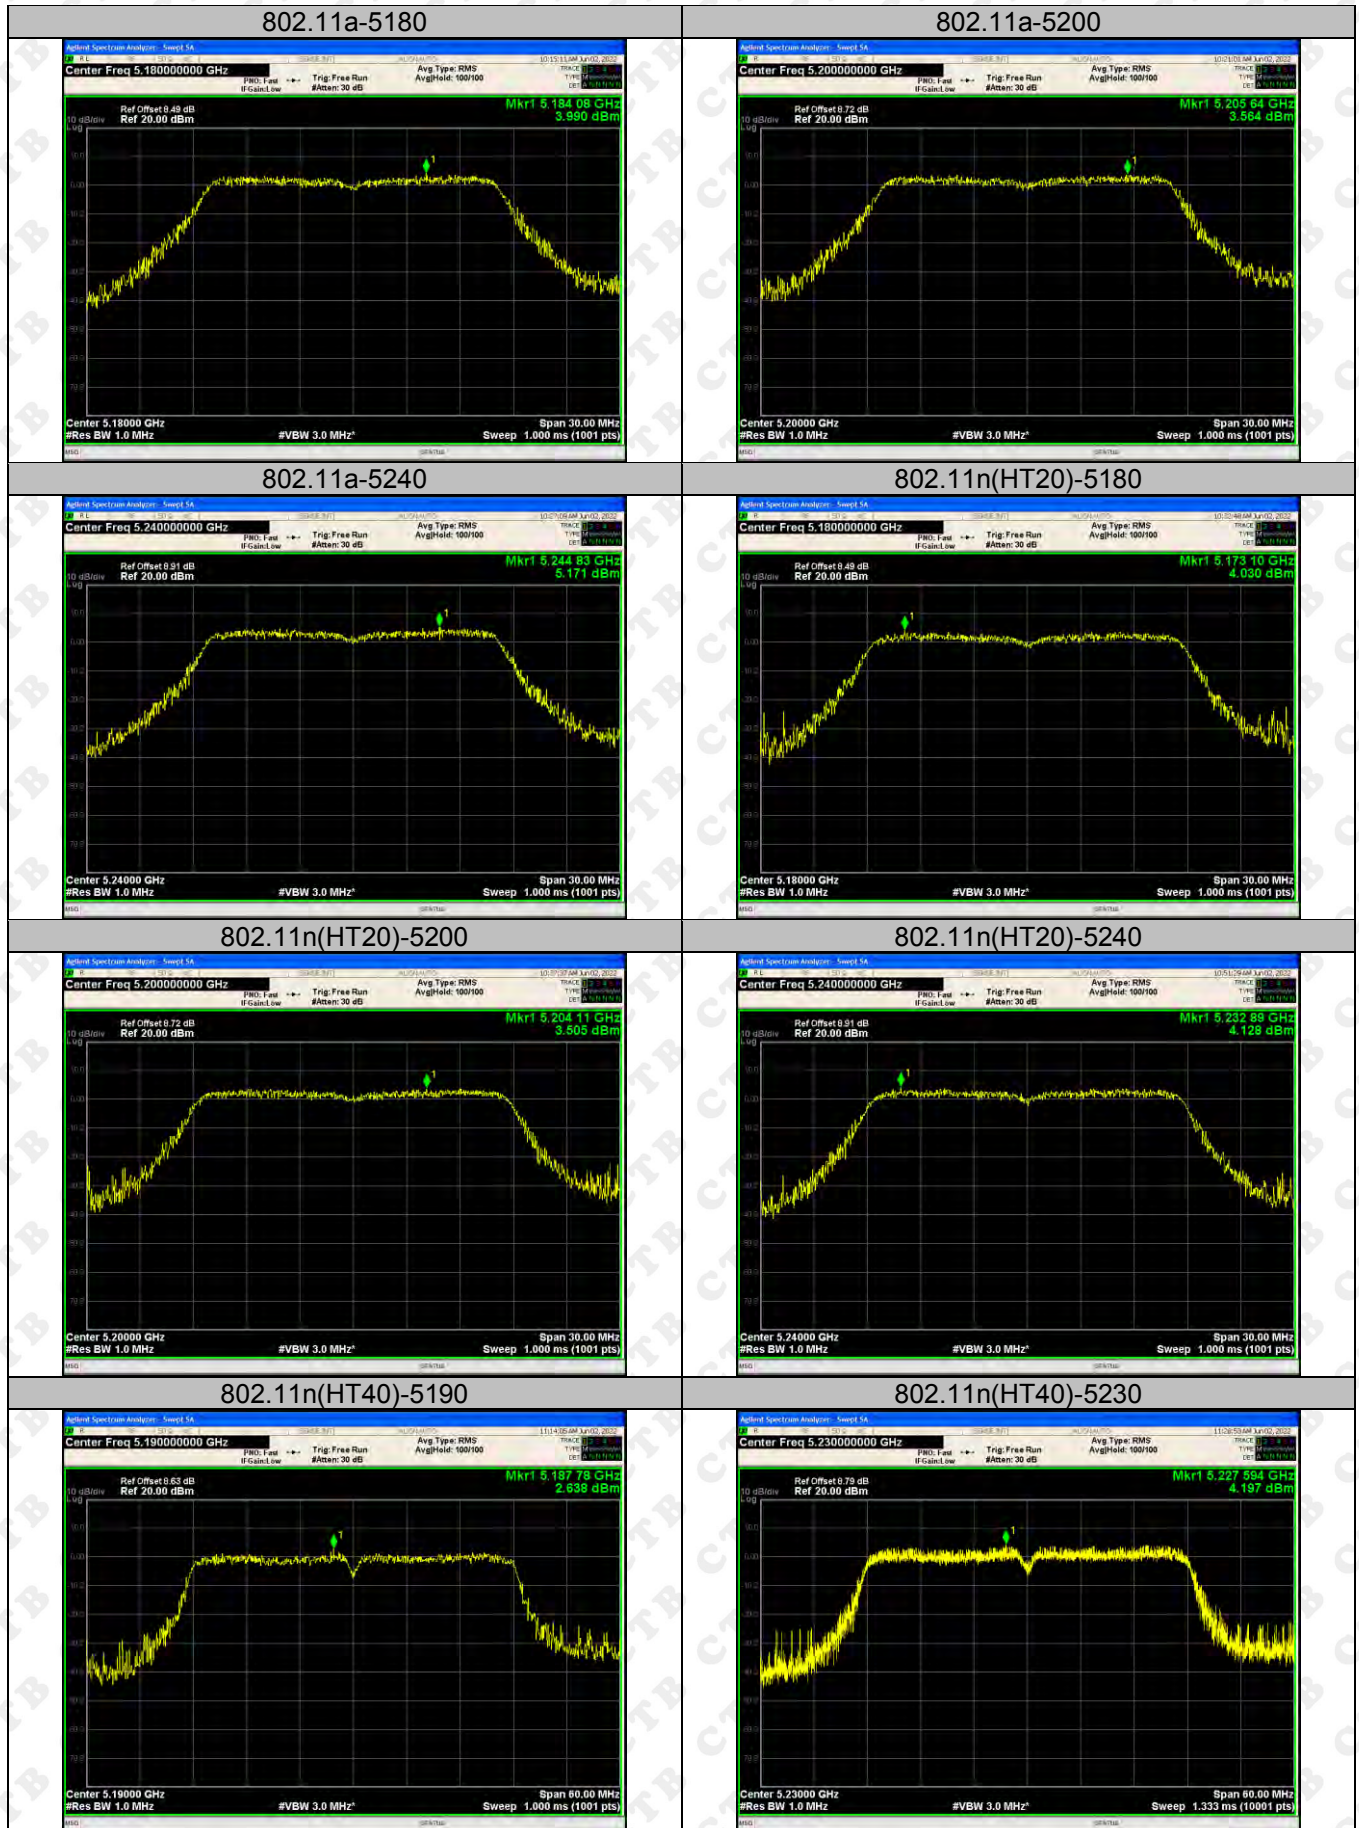

802.11ac(VH20)-5180

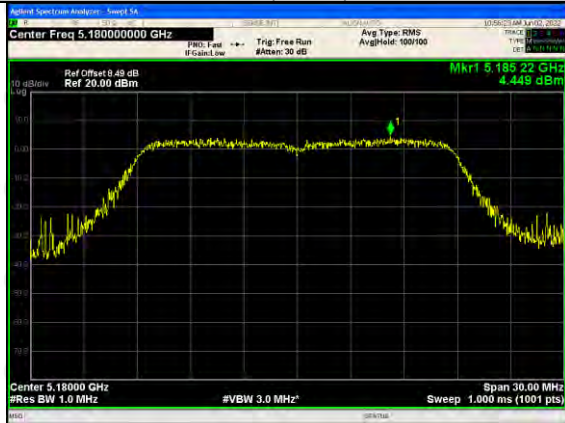

802.11ac(VH20)-5200



802.11ac(VH20)-5240



802.11ac(VH40)-5190



802.11ac(VH40)-5230



802.11ac(VH80)-5210



802.11a-5745



802.11a-5785



802.11a-5825



802.11n(HT20)-5745



802.11n(HT20)-5785



802.11n(HT20)-5825



802.11n(HT40)-5755



802.11n(HT40)-5795



802.11ac(VH20)-5745

802.11ac(VH20)-5785



802.11ac(VH20)-5825



802.11ac(VH40)-5755



802.11ac(VH80)-5795



802.11ac(VH20)-5755




802.11ac(VH40)-5775



802.11ac(VH80)-5775

12. FREQUENCY STABILITY

12.1 Block Diagram Of Test Setup

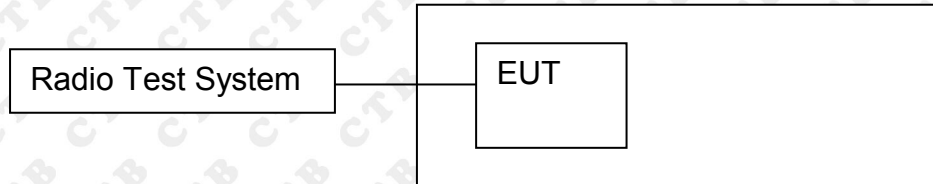

12.2 Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

12.3 Test procedure

1. The EUT was placed inside temperature chamber and powered and powered by nominal DC voltage.
2. Set EUT as normal operation.
3. Turn the EUT on and couple its output to spectrum.
4. Turn the EUT off and set the chamber to the highest temperature specified.
5. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT and measure the operating frequency.
6. Repeat step with the temperature chamber set to the lowest temperature.

12.4 Test Result

ANT 1+ANT 2:

TX Frequency (5180-5240MHz)

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5180.0556	5180	0.0556	10.7336
		V max (V)	138.00	5180.0323	5180	0.0323	6.2355
		V min (V)	102.00	5180.0246	5180	0.0246	4.7490
Limits				5150-5250 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5180.0054	5180	0.0054	1.0425
		T (°C)	-10	5180.0105	5180	0.0105	2.0270
		T (°C)	0	5180.0323	5180	0.0323	6.2355
		T (°C)	10	5180.0386	5180	0.0386	7.4517
		T (°C)	20	5180.0293	5180	0.0293	5.6564
		T (°C)	30	5180.0218	5180	0.0218	4.2085
		T (°C)	40	5180.0125	5180	0.0125	2.4131
		T (°C)	50	5180.0097	5180	0.0097	1.8726
		T (°C)	60	5180.0414	5180	0.0414	7.9923
		T (°C)	70	5180.0697	5180	0.0697	13.4556
Limits				5150-5250 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5200.0254	5200	0.0254	4.8846
		V max (V)	138.00	5200.0428	5200	0.0428	8.2308
		V min (V)	102.00	5200.0694	5200	0.0694	13.3462
Limits				5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5200.0633	5200	0.0633	12.1731
		T (°C)	-10	5200.0526	5200	0.0526	10.1154
		T (°C)	0	5200.0434	5200	0.0434	8.3462
		T (°C)	10	5200.0928	5200	0.0928	17.8462
		T (°C)	20	5200.0635	5200	0.0635	12.2115
		T (°C)	30	5200.0124	5200	0.0124	2.3846
		T (°C)	40	5200.0733	5200	0.0733	14.0962
		T (°C)	50	5200.0416	5200	0.0416	8.0000
		T (°C)	60	5200.0325	5200	0.0325	6.2500
		T (°C)	70	5200.0427	5200	0.0427	8.2115
Limits				5150-5250 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5240.0136	5240	0.0136	2.5954
		V max (V)	138.00	5240.0414	5240	0.0414	7.9008
		V min (V)	102.00	5240.0097	5240	0.0097	1.8511
Limits				5150-5250 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5240.0094	5240	0.0094	1.7939
		T (°C)	-10	5240.0035	5240	0.0035	0.6679
		T (°C)	0	5240.0144	5240	0.0144	2.7481
		T (°C)	10	5240.0856	5240	0.0856	16.3359
		T (°C)	20	5240.0114	5240	0.0114	2.1756
		T (°C)	30	5240.0125	5240	0.0125	2.3855
		T (°C)	40	5240.0063	5240	0.0063	1.2023
		T (°C)	50	5240.0076	5240	0.0076	1.4504
		T (°C)	60	5240.0053	5240	0.0053	1.0115
		T (°C)	70	5240.0105	5240	0.0105	2.0038
Limits				5150-5250 MHz			
Result				Complies			

TX Frequency(5745-5825MHz)
Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5745.00436	5745	0.00436	0.7581
		V max (V)	138.00	5745.00735	5745	0.00735	1.2786
		V min (V)	102.00	5745.00418	5745	0.00418	0.7270
Limits				5745-5850 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5745.00985	5745	0.00985	1.7150
		T (°C)	-10	5745.00311	5745	0.00311	0.5414
		T (°C)	0	5745.01051	5745	0.01051	1.8288
		T (°C)	10	5745.00772	5745	0.00772	1.3445
		T (°C)	20	5745.00742	5745	0.00742	1.2914
		T (°C)	30	5745.01346	5745	0.01346	2.3432
		T (°C)	40	5745.00058	5745	0.00058	0.1006
		T (°C)	50	5745.00674	5745	0.00674	1.1727
		T (°C)	60	5745.00924	5745	0.00924	1.6079
		T (°C)	70	5745.01325	5745	0.01325	2.3071
Limits				5725-5850 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5785.00846	5785	0.00846	1.4627
		V max (V)	138.00	5785.00284	5785	0.00284	0.4904
		V min (V)	102.00	5785.01246	5785	0.01246	2.1535
Limits				5725-5850 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5785.00679	5785	0.00679	1.1736
		T (°C)	-10	5785.00021	5785	0.00021	0.0361
		T (°C)	0	5785.00177	5785	0.00177	0.3060
		T (°C)	10	5785.01193	5785	0.01193	2.0627
		T (°C)	20	5785.00819	5785	0.00819	1.4159
		T (°C)	30	5785.00644	5785	0.00644	1.1135
		T (°C)	40	5785.00418	5785	0.00418	0.7219
		T (°C)	50	5785.01229	5785	0.01229	2.1242
		T (°C)	60	5785.00076	5785	0.00076	0.1311
		T (°C)	70	5785.00694	5785	0.00694	1.1995
Limits				5725-5850 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (° C)	20	V nom (V)	120.00	5825.01083	5825	0.01083	1.8584
		V max (V)	138.00	5825.00543	5825	0.00543	0.9314
		V min (V)	102.00	5825.00067	5825	0.00067	0.1146
Limits				5725-5850 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5825.01252	5825	0.01252	2.1490
		T (°C)	-10	5825.00400	5825	0.00400	0.6870
		T (°C)	0	5825.00456	5825	0.00456	0.7834
		T (°C)	10	5825.01316	5825	0.01316	2.2585
		T (°C)	20	5825.01193	5825	0.01193	2.0472
		T (°C)	30	5825.01204	5825	0.01204	2.0672
		T (°C)	40	5825.00118	5825	0.00118	0.2018
		T (°C)	50	5825.00895	5825	0.00895	1.5369
		T (°C)	60	5825.00598	5825	0.00598	1.0264
		T (°C)	70	5825.01276	5825	0.01276	2.1907
Limits				5725-5850 MHz			
Result				Complies			

13. OPERATION IN THE ABSENCE OF INFORMATION TO THE TRANSMIT

13.1 Requirement

15.407(c) requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signal ling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

13.2 Test Results

Operation in the absence of information to the transmit:

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of WLAN message transmitting from remote device and verify whether it shall reconnect. (manufacturer declare)

14. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:


The antenna is Internal antenna and no consideration of replacement. The best case gain of the antenna is 1.0dBi.

15. EUT PHOTOGRAPHS

EUT Photo 1




EUT Photo 2

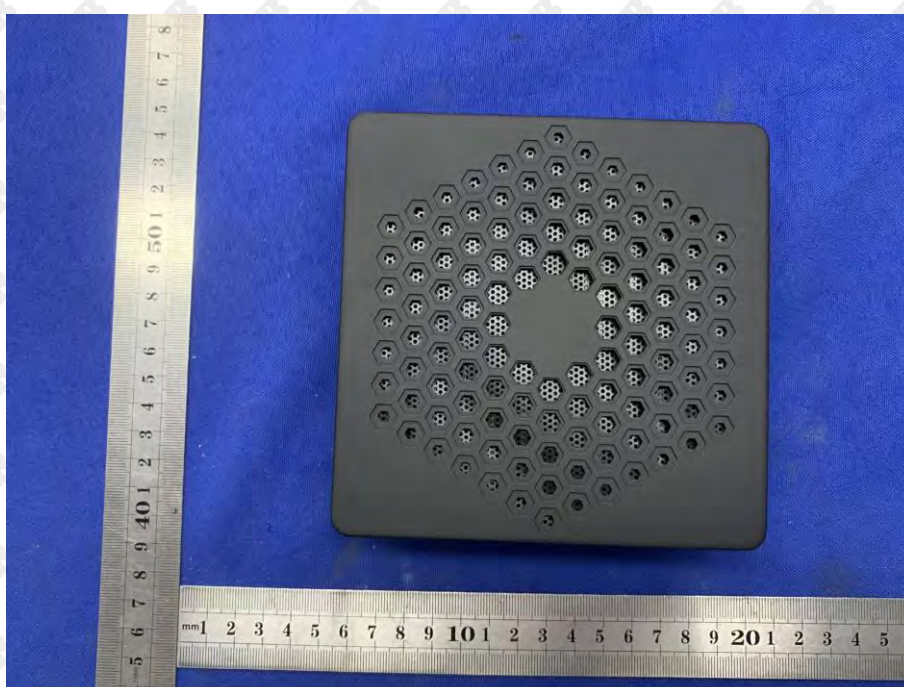

16. EUT TEST SETUP PHOTOGRAPHS

Spurious emissions

Below 1GHz

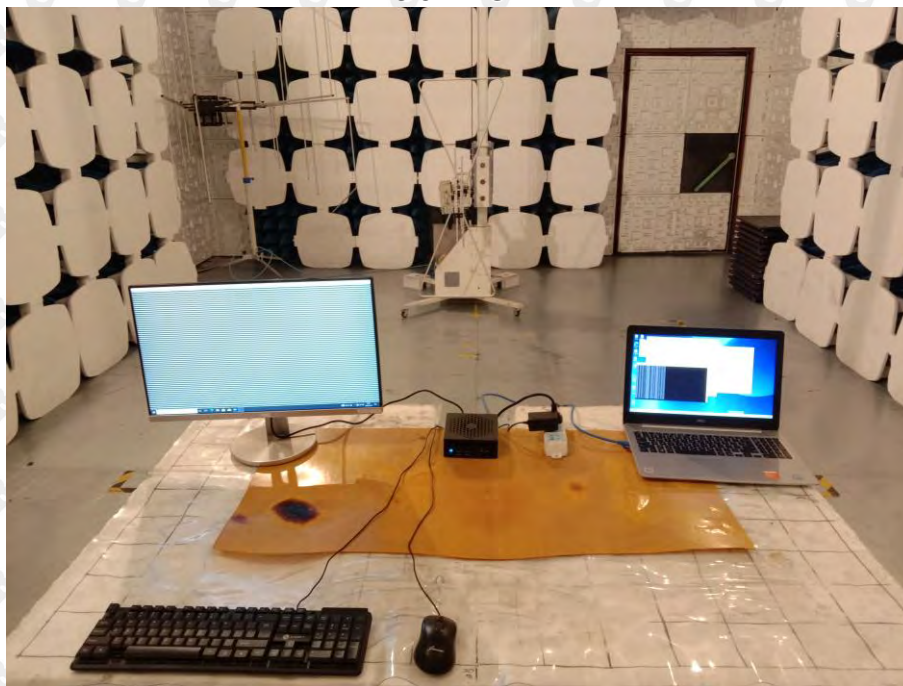

Above 1G



Conducted Emission



***** END OF REPORT *****