Mode	45	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_106/54 RU_5700MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	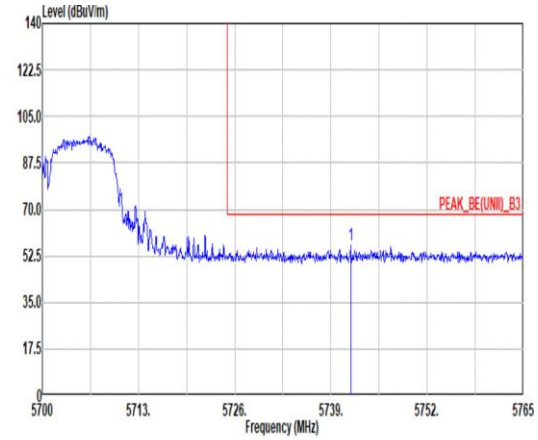 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5741.67 56.42 68.20 -11.78 44.88 33.77 11.18 33.41 0.00 118 66 PEAK	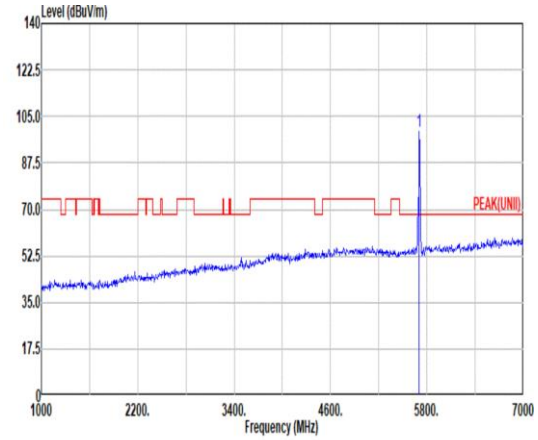 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 99.18 ------ ------ 87.73 33.62 11.20 33.37 0.00 118 66 PEAK
Avg	Blank	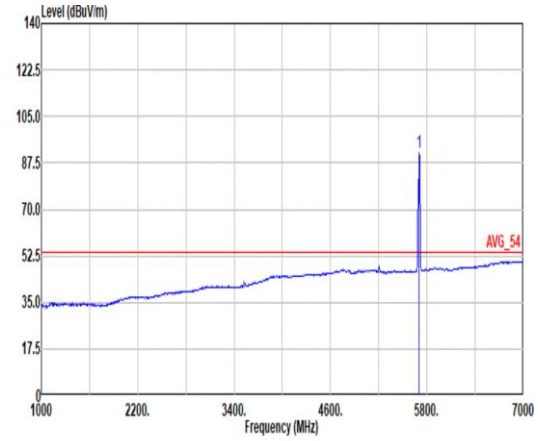 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 91.20 ------ ------ 79.75 33.62 11.20 33.37 0.00 118 66 AVERAGE

Mode	45	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_106/54 RU_5700MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	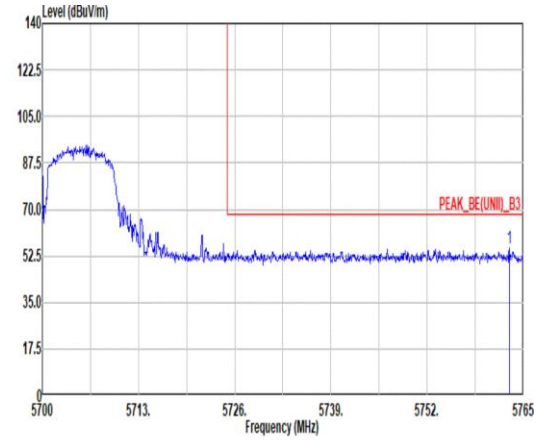 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5763.12 55.41 68.20 -12.79 43.82 33.85 11.17 33.43 0.00 200 82 PEAK	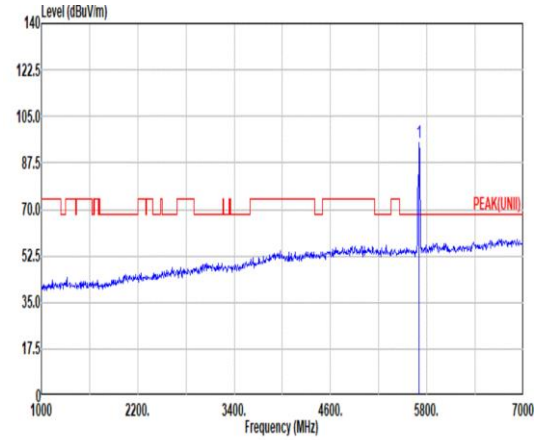 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 95.34 ------ ------ 83.89 33.62 11.20 33.37 0.00 200 82 PEAK
Avg	Blank	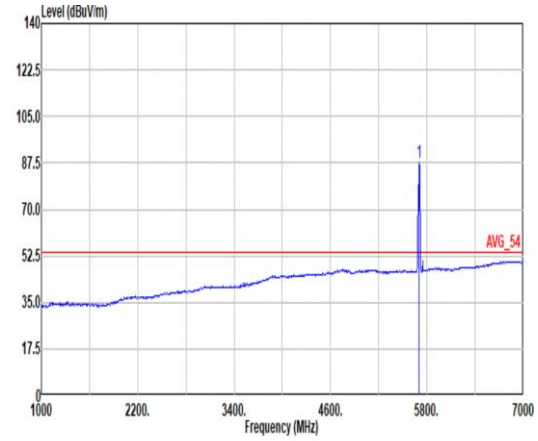 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 87.59 ------ ------ 76.14 33.62 11.20 33.37 0.00 200 82 AVERAGE

Mode	45	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_106/54 RU_5700MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	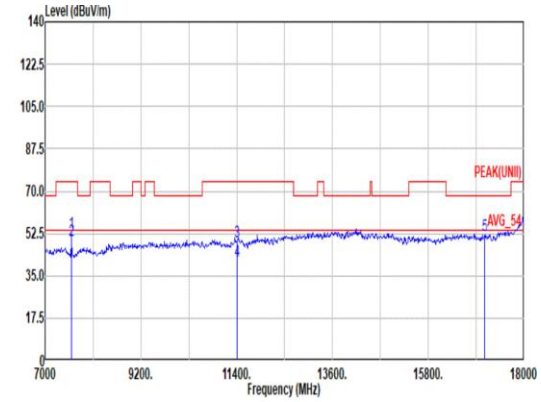 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7600.00 52.63 74.00 -21.37 67.41 36.41 14.51 66.24 0.54 297 300 Peak 2 7600.00 49.71 54.00 -4.29 64.49 36.41 14.51 66.24 0.54 297 300 Average 3 11400.00 49.29 74.00 -24.71 58.23 39.20 18.19 66.62 0.29 311 288 PEAK 4 11400.00 41.19 54.00 -12.81 50.13 39.20 18.19 66.62 0.29 311 288 Average 5 17100.00 51.95 68.20 -16.25 57.56 38.00 22.84 66.96 0.51 279 299 PEAK	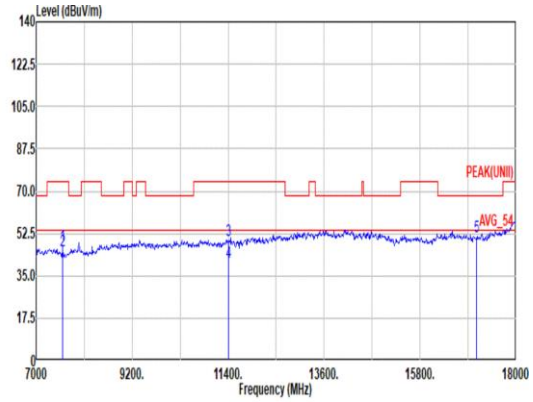 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7600.00 47.33 74.00 -26.67 62.11 36.41 14.51 66.24 0.54 111 148 Peak 2 7600.00 45.20 54.00 -8.80 59.98 36.41 14.51 66.24 0.54 111 148 Average 3 11400.00 49.63 74.00 -24.37 58.57 39.20 18.19 66.62 0.29 107 177 PEAK 4 11400.00 40.54 54.00 -13.46 49.48 39.20 18.19 66.62 0.29 107 177 Average 5 17100.00 51.30 68.20 -16.90 56.91 38.00 22.84 66.96 0.51 102 187 PEAK

Mode	45	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_106/54 RU_5700MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	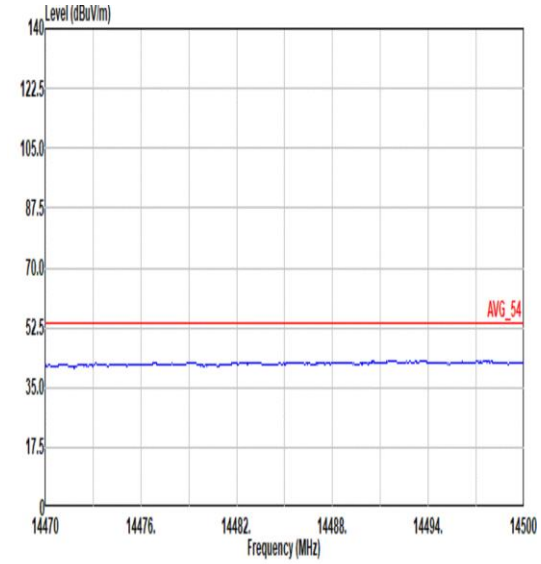 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL	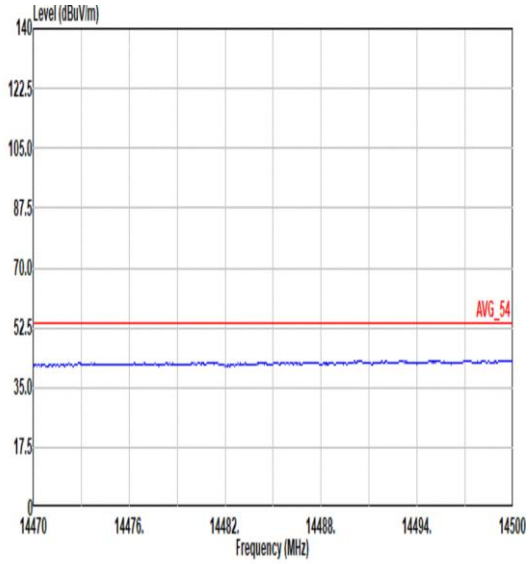 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL
17.7G ~18G Avg	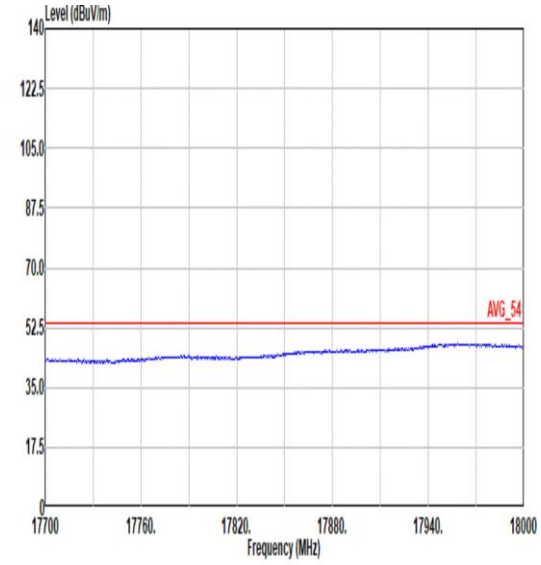 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL	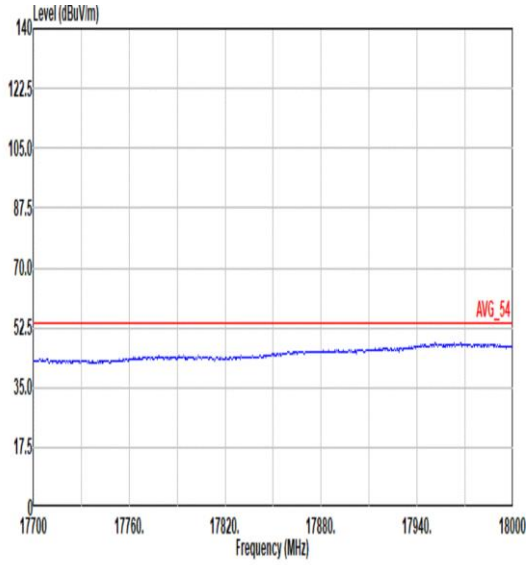 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL

Mode	46	
	SHF	
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_Full RU_5500MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak	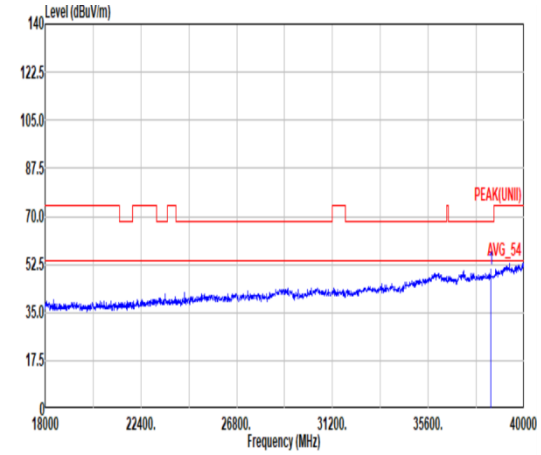 Site : 03CH12-HY Condition: PEAK(UNII) 1m SHF_00993_231124 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 38474.00 50.46 68.20 -17.74 35.27 43.61 33.14 52.02 -9.54 -- -- Peak	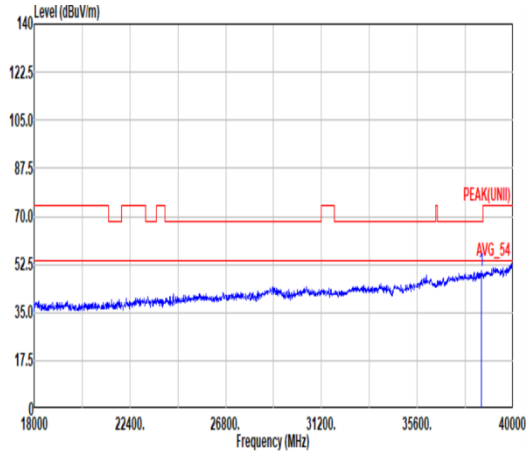 Site : 03CH12-HY Condition: PEAK(UNII) 1m SHF_00993_231124 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 38558.00 50.36 68.20 -17.84 35.05 43.40 33.33 51.88 -9.54 -- -- Peak
Avg	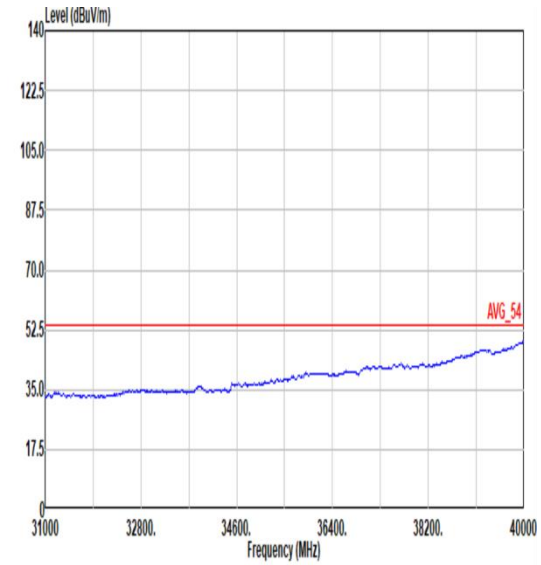 Site : 03CH12-HY Condition: AVG_54 1m SHF_00993_231124 HORIZONTAL	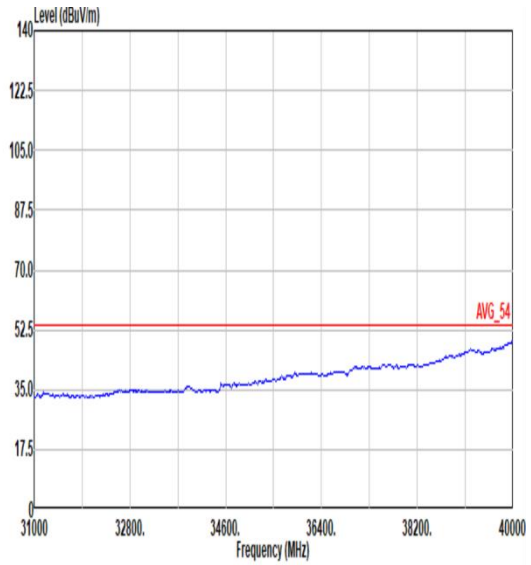 Site : 03CH12-HY Condition: AVG_54 1m SHF_00993_231124 VERTICAL

Mode	47	
	LF	
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_Full RU_5500MHz	
ANT	1	
Pol.	Horizontal	Vertical
QP/ Peak	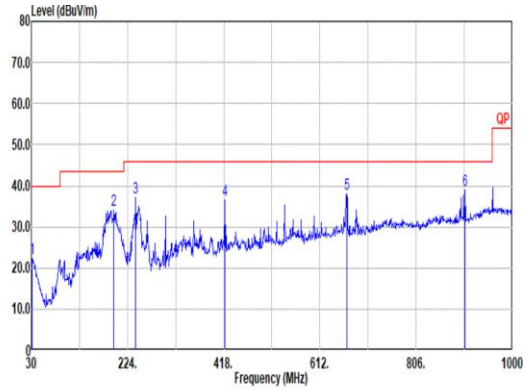 Site : 03CH12-HY Condition: QP 3m Bilog_37059_20231103 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 30.97 22.46 40.00 -17.54 26.68 24.41 1.09 29.77 0.05 -- -- Peak 2 196.84 34.04 43.50 -9.46 46.33 15.01 2.39 29.79 0.10 -- -- Peak 3 240.49 37.27 46.00 -8.73 46.94 17.35 2.56 29.69 0.11 -- -- Peak 4 420.91 36.52 46.00 -9.48 39.57 22.81 3.37 29.41 0.18 -- -- Peak 5 666.32 37.92 46.00 -8.08 35.97 26.56 4.18 29.06 0.27 -- -- Peak 6 904.94 38.86 46.00 -7.14 33.05 29.20 4.75 28.49 0.35 -- -- Peak	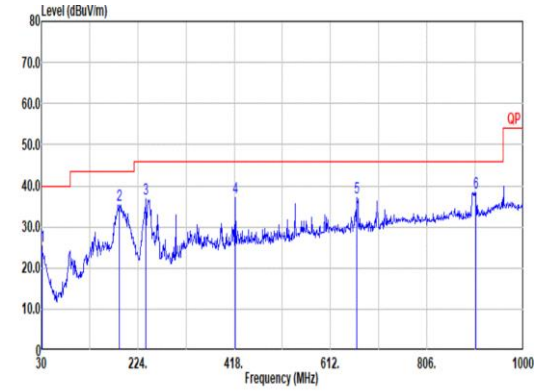 Site : 03CH12-HY Condition: QP 3m Bilog_37059_20231103 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 30.97 25.29 40.00 -14.71 29.51 24.41 1.09 29.77 0.05 -- -- Peak 2 187.14 35.34 43.50 -8.16 47.67 15.04 2.33 29.79 0.09 -- -- Peak 3 240.49 36.68 46.00 -9.32 46.35 17.35 2.56 29.69 0.11 -- -- Peak 4 420.91 37.16 46.00 -8.84 40.21 22.81 3.37 29.41 0.18 -- -- Peak 5 665.35 37.02 46.00 -8.98 35.08 26.57 4.17 29.07 0.27 -- -- Peak 6 903.97 38.30 46.00 -7.70 32.51 29.18 4.75 28.49 0.35 -- -- Peak

Mode	65	
	Band Edge	
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz	
ANT	2	
Pol.	Horizontal	Fundamental
Peak	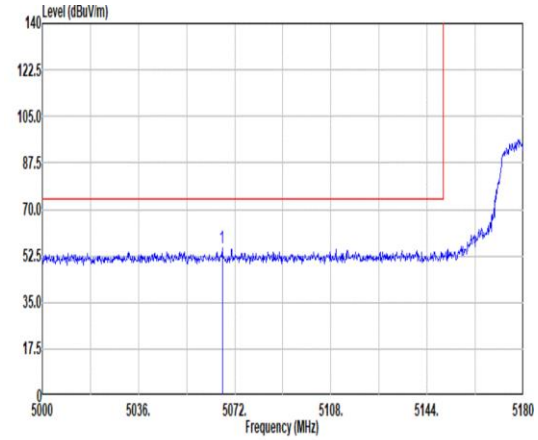 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5067.32 55.68 74.00 -18.32 44.96 33.20 10.54 33.02 0.00 124 119 PEAK	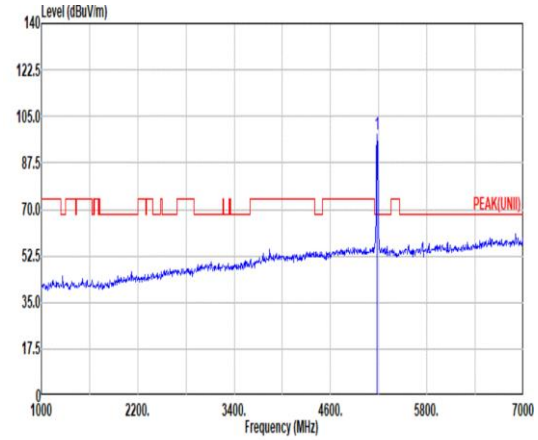 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 98.01 ------ ------ 86.94 33.35 10.78 33.06 0.00 124 119 PEAK
Avg	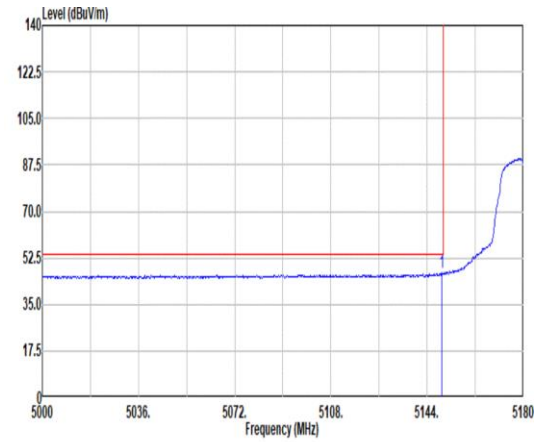 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.58 46.80 54.00 -7.20 35.73 33.40 10.72 33.05 0.00 124 119 AVERAGE	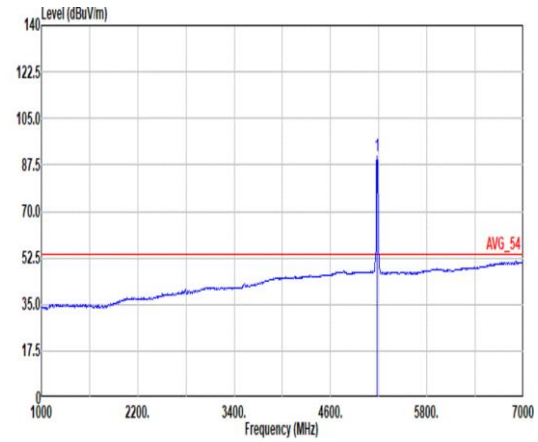 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 90.87 ------ ------ 79.80 33.34 10.79 33.06 0.00 124 119 AVERAGE

Mode	65	
	Band Edge	
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz	
ANT	2	
Pol.	Vertical	Fundamental
Peak	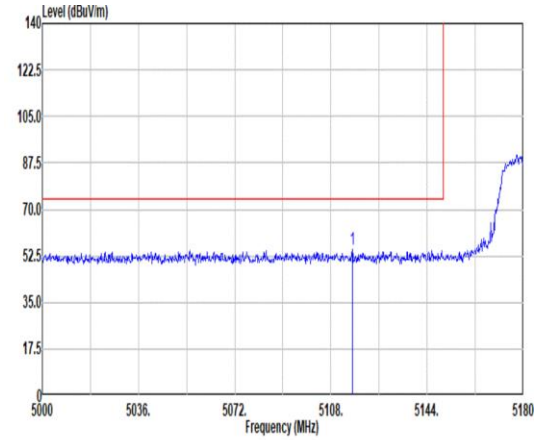 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5115.92 54.86 74.00 -19.14 43.99 33.26 10.65 33.04 0.00 285 94 PEAK	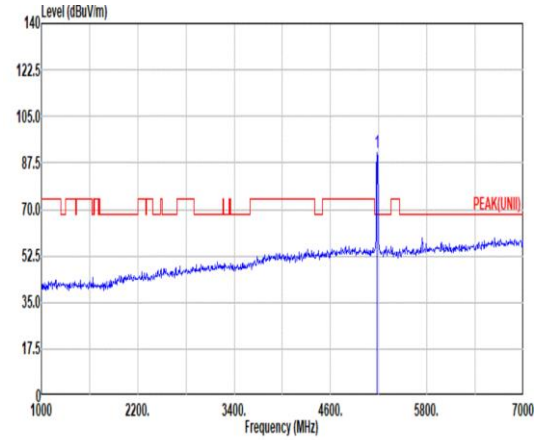 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 91.50 ------ ------ 80.43 33.34 10.79 33.06 0.00 285 94 PEAK
Avg	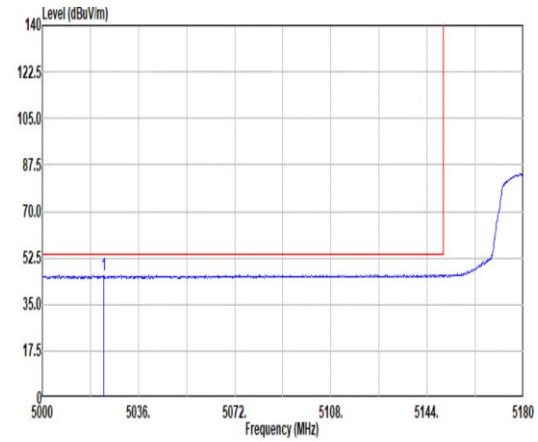 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5023.04 46.12 54.00 -7.88 35.38 33.31 10.44 33.01 0.00 285 94 AVERAGE	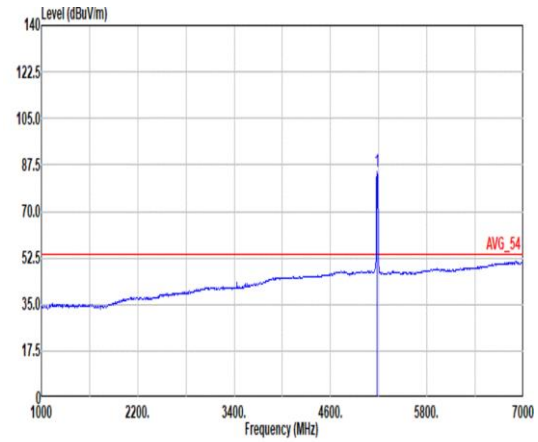 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 85.11 ------ ------ 74.04 33.35 10.78 33.06 0.00 285 94 AVERAGE

Mode	65	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz	
ANT	2	
Pol.	Horizontal	Vertical
Peak Avg	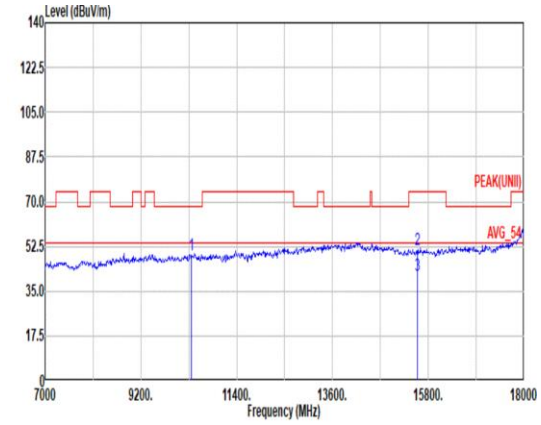 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10360.00 49.25 68.20 -18.95 60.71 38.72 17.20 67.63 0.25 -- -- Peak 2 15540.00 51.20 74.00 -22.80 57.87 38.32 21.90 67.27 0.38 156 63 PEAK 3 15540.00 41.26 54.00 -12.74 47.93 38.32 21.90 67.27 0.38 156 63 Average	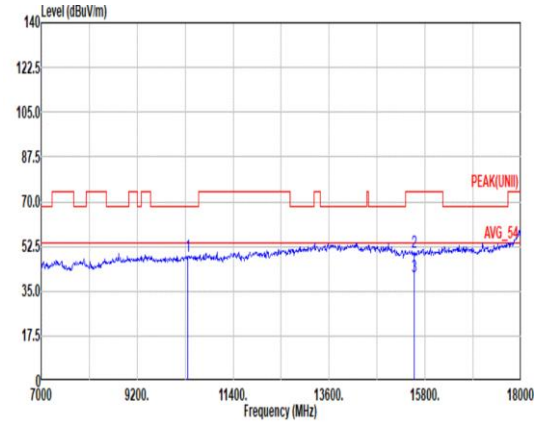 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10360.00 48.44 68.20 -19.76 59.90 38.72 17.20 67.63 0.25 -- -- Peak 2 15540.00 50.29 74.00 -23.71 56.96 38.32 21.90 67.27 0.38 205 118 PEAK 3 15540.00 40.46 54.00 -13.54 47.13 38.32 21.90 67.27 0.38 205 118 Average

Mode	65	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz	
ANT	2	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	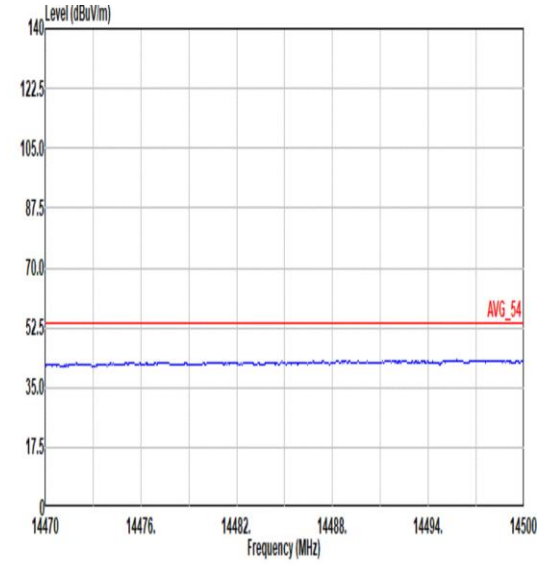 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL	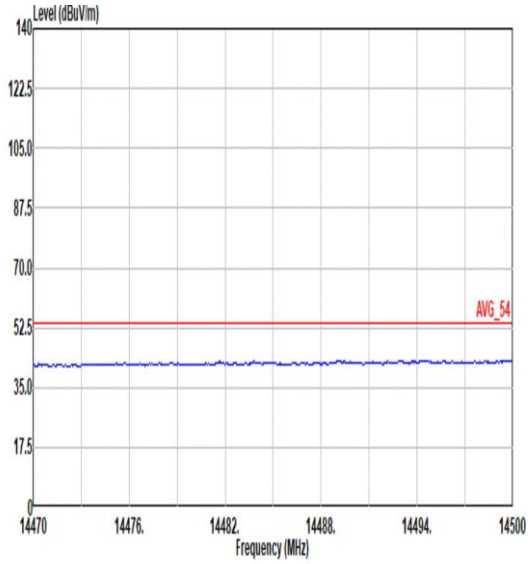 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL
17.7G ~18G Avg	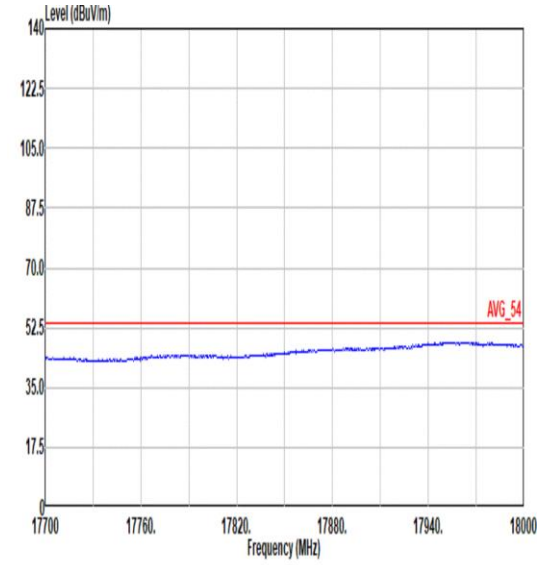 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL	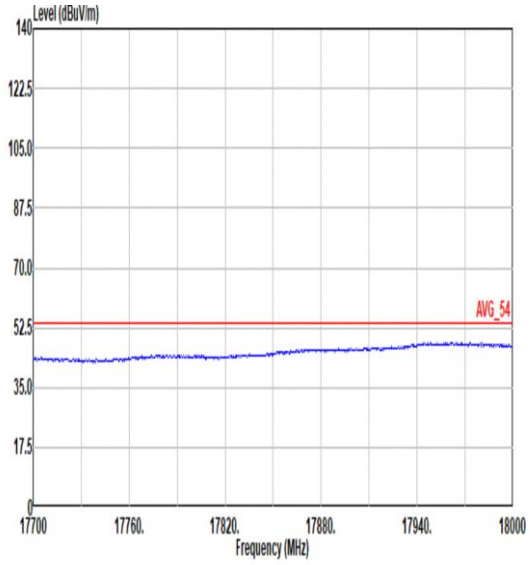 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL

Mode	66	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz	
ANT	2	
Pol.	Horizontal	Fundamental
Peak	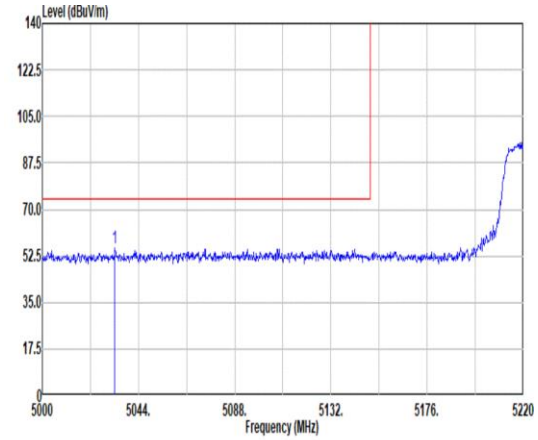 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5033.22 55.24 74.00 -18.76 44.52 33.27 10.46 33.01 0.00 124 117 PEAK	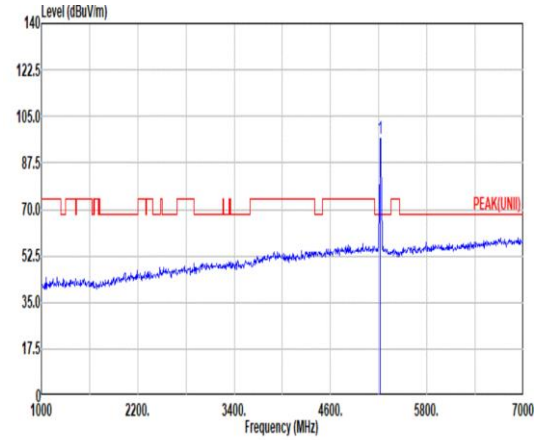 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5220.00 96.89 ------ ------ 85.75 33.25 10.97 33.08 0.00 124 117 PEAK
Avg	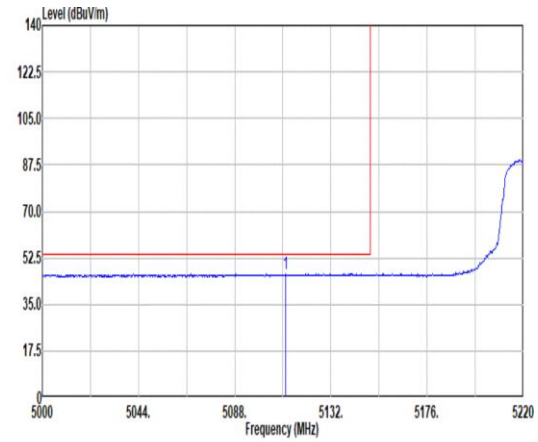 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5111.32 46.60 54.00 -7.40 35.76 33.25 10.63 33.04 0.00 124 117 AVERAGE	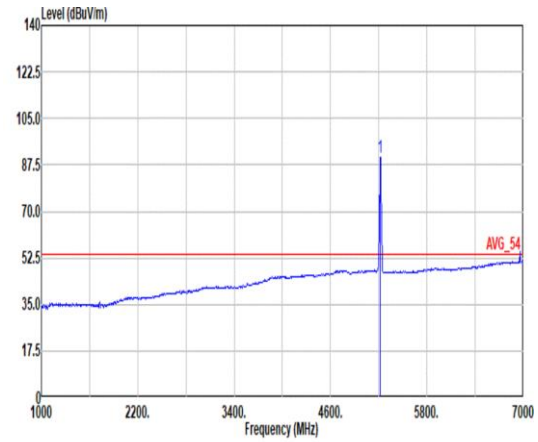 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5220.00 90.52 ------ ------ 79.40 33.26 10.93 33.07 0.00 124 117 AVERAGE

Mode	66	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz	
ANT	2	
Pol.	Horizontal	Fundamental
Peak	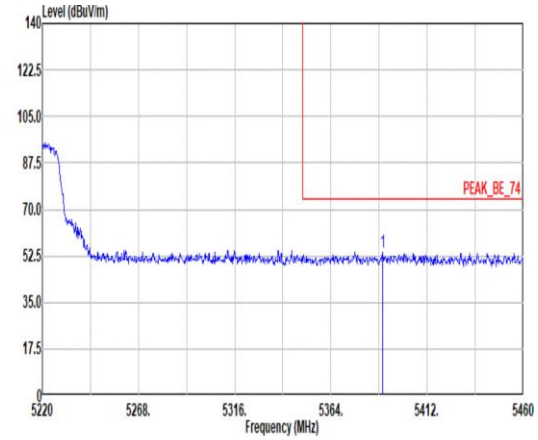 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5389.92 54.04 74.00 -19.96 42.25 33.02 11.90 33.13 0.00 124 117 PEAK	Blank
Avg	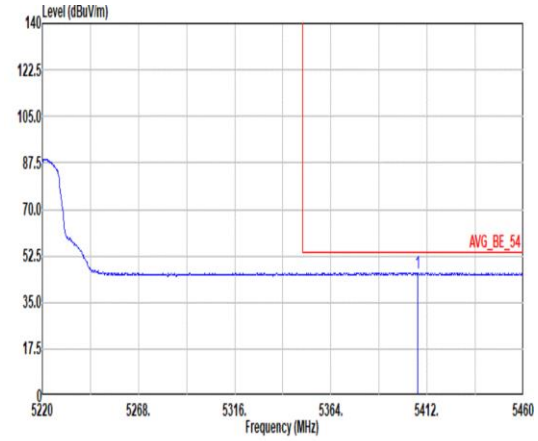 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5407.20 46.22 54.00 -7.78 34.44 33.00 11.92 33.14 0.00 124 117 AVERAGE	Blank

Mode	66	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz	
ANT	2	
Pol.	Vertical	Fundamental
Peak	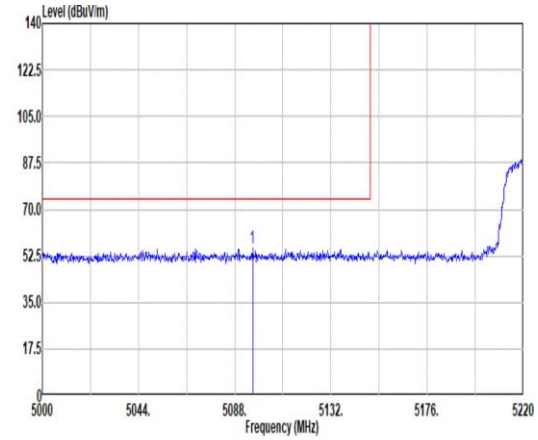 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5096.14 55.38 74.00 -18.62 44.61 33.20 10.60 33.03 0.00 100 129 PEAK	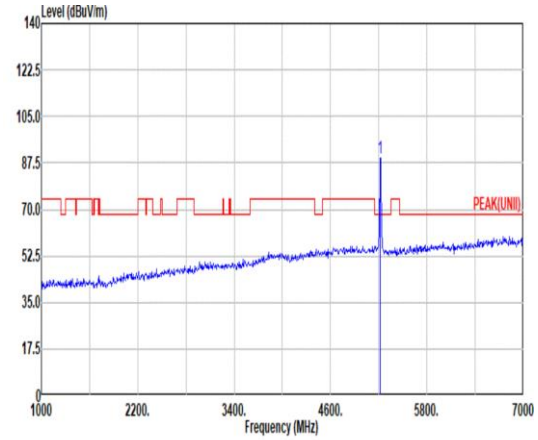 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5220.00 89.17 ------ ------ 78.05 33.26 10.93 33.07 0.00 100 129 PEAK
Avg	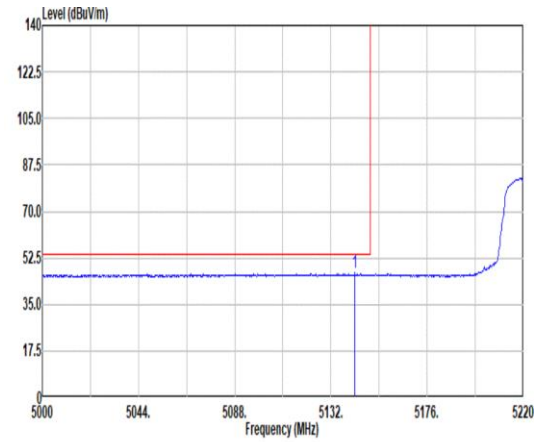 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5143.00 46.95 54.00 -7.05 35.93 33.37 10.70 33.05 0.00 100 129 AVERAGE	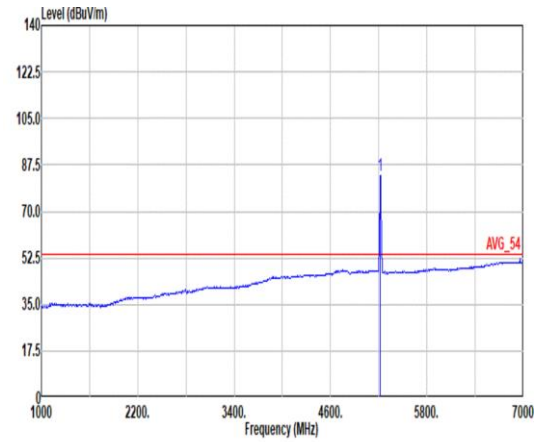 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5220.00 83.57 ------ ------ 72.45 33.26 10.93 33.07 0.00 100 129 AVERAGE

Mode	66	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz	
ANT	2	
Pol.	Vertical	Fundamental
Peak	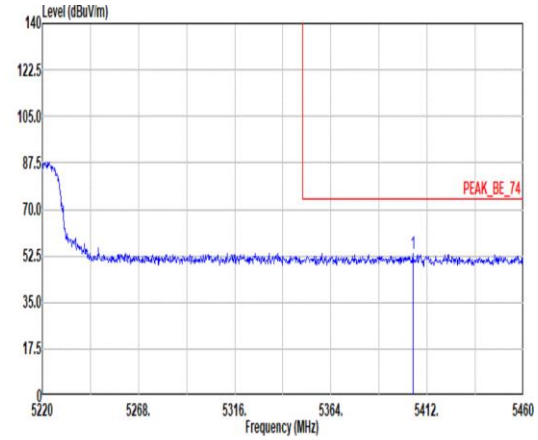 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5405.04 53.60 74.00 -20.40 41.81 33.00 11.93 33.14 0.00 100 129 PEAK	Blank
Avg	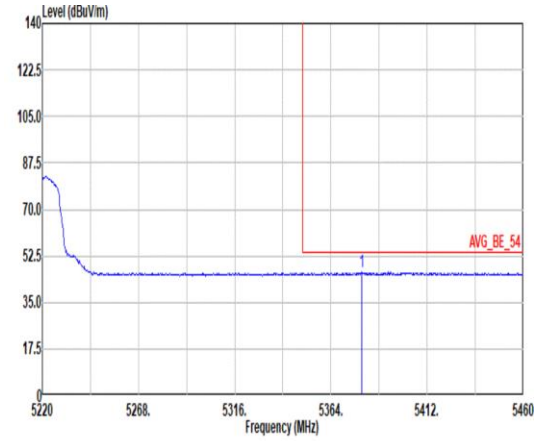 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5379.36 46.40 54.00 -7.60 34.65 33.04 11.84 33.13 0.00 100 129 AVERAGE	Blank

Mode	66	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz	
ANT	2	
Pol.	Horizontal	Vertical
Peak Avg	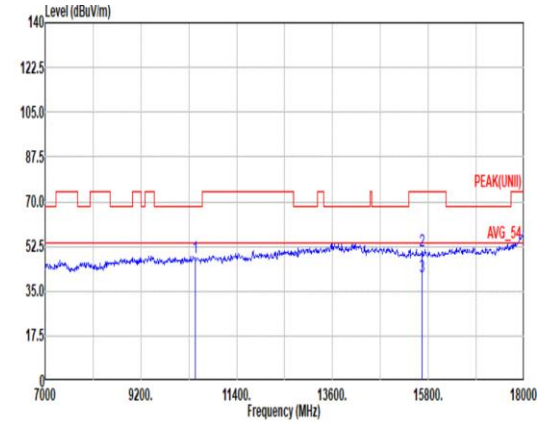 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10440.00 48.11 68.20 -20.09 59.48 38.72 17.18 67.52 0.25 -- -- PEAK 2 15660.00 50.55 74.00 -23.45 57.41 38.10 22.00 67.34 0.38 153 62 Peak 3 15660.00 40.71 54.00 -13.29 47.57 38.10 22.00 67.34 0.38 153 62 Average	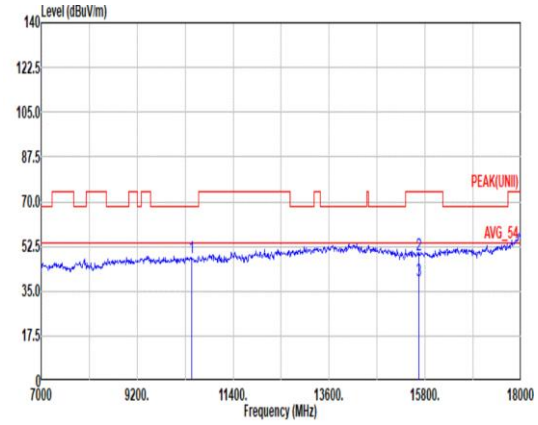 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10440.00 48.18 68.20 -20.02 59.55 38.72 17.18 67.52 0.25 -- -- PEAK 2 15660.00 49.21 74.00 -24.79 56.07 38.10 22.00 67.34 0.38 203 120 Peak 3 15660.00 39.33 54.00 -14.67 46.19 38.10 22.00 67.34 0.38 203 120 Average

Mode	66	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz	
ANT	2	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	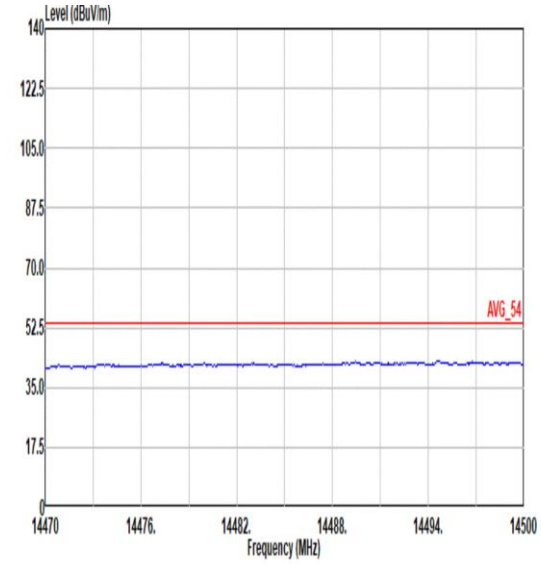 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL	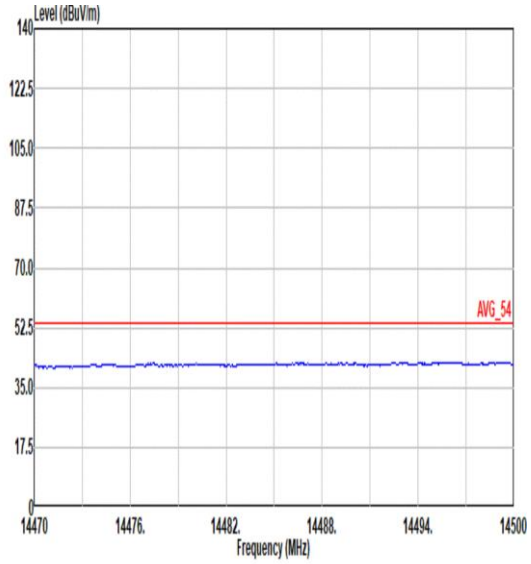 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL
17.7G ~18G Avg	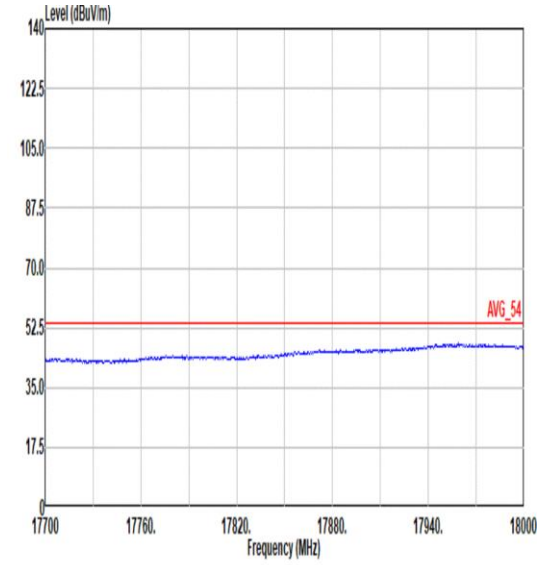 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL	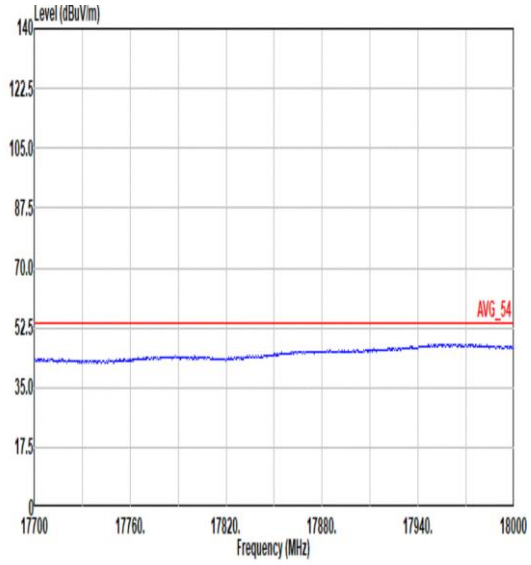 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL

Mode	67	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	2	
Pol.	Horizontal	Fundamental
Peak	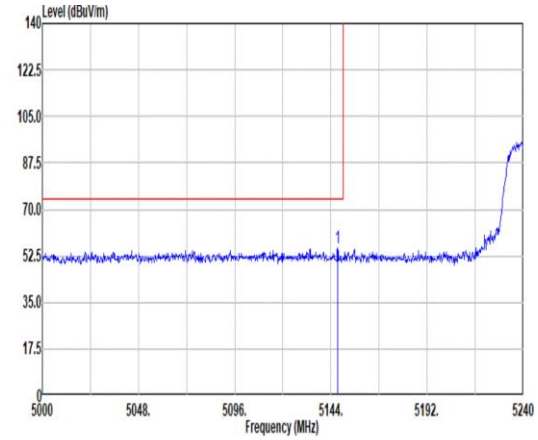 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5147.36 55.37 74.00 -18.63 44.32 33.39 10.71 33.05 0.00 100 116 PEAK	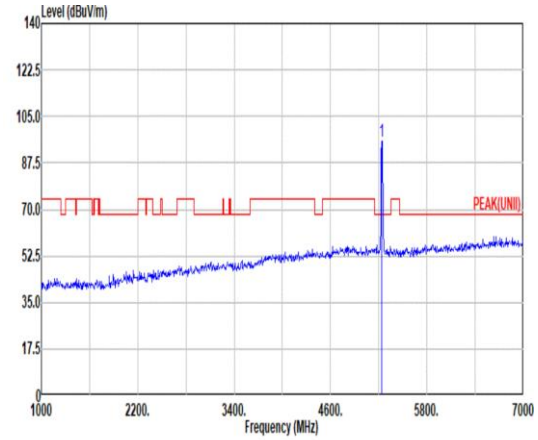 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5240.00 95.87 ------ ------ 84.66 33.22 11.07 33.08 0.00 100 116 PEAK
Avg	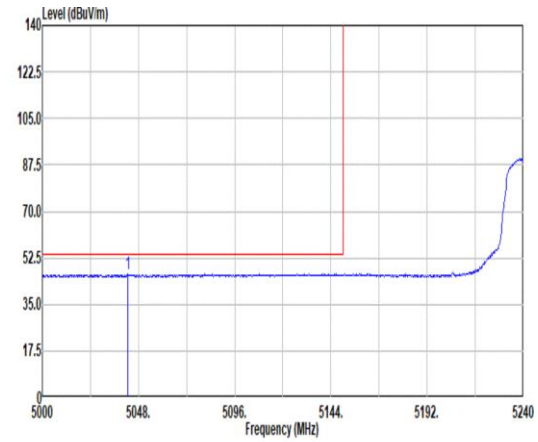 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5042.48 46.39 54.00 -7.61 35.69 33.23 10.48 33.01 0.00 100 116 AVERAGE	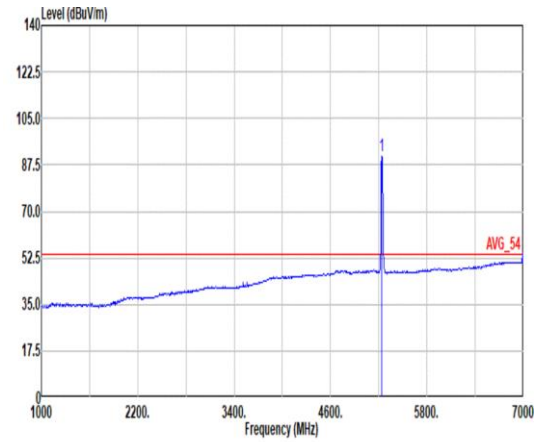 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5240.00 90.70 ------ ------ 79.52 33.23 11.03 33.08 0.00 100 116 AVERAGE

Mode	67	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	2	
Pol.	Horizontal	Fundamental
Peak	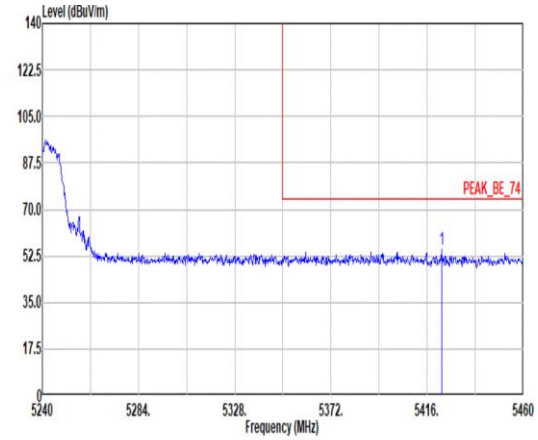 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5422.60 54.78 74.00 -19.22 43.09 33.00 11.83 33.14 0.00 100 116 PEAK	Blank
Avg	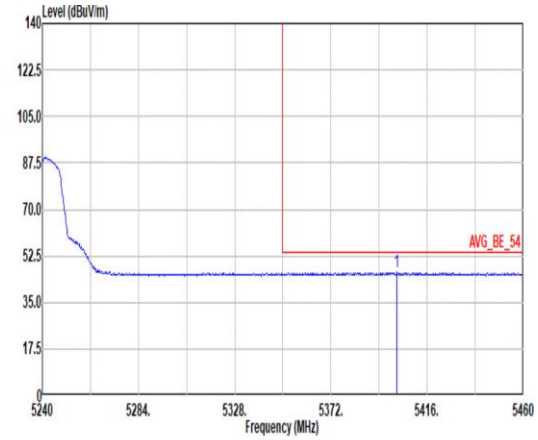 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5402.14 46.37 54.00 -7.63 34.56 33.00 11.95 33.14 0.00 100 116 AVERAGE	Blank

Mode	67	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	2	
Pol.	Vertical	Fundamental
Peak	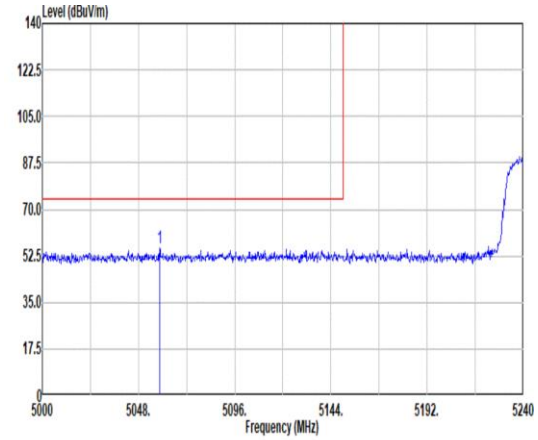 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5058.56 55.28 74.00 -18.72 44.58 33.20 10.52 33.02 0.00 105 126 PEAK	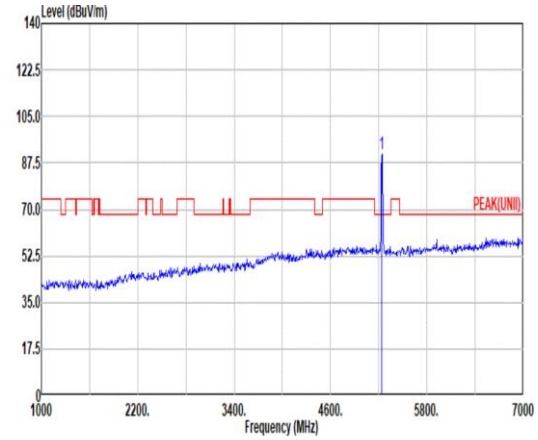 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5240.00 90.67 ------ ------ 79.46 33.22 11.07 33.08 0.00 105 126 PEAK
Avg	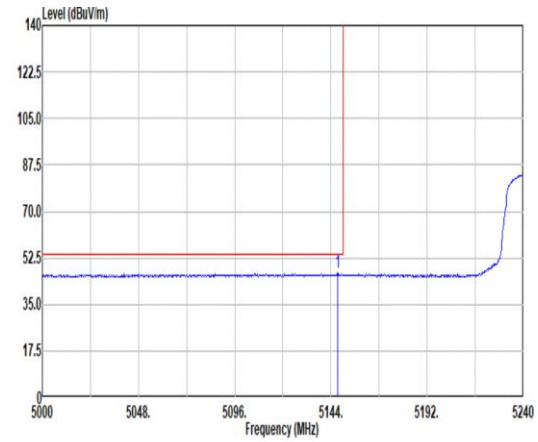 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5147.36 46.79 54.00 -7.21 35.74 33.39 10.71 33.05 0.00 105 126 AVERAGE	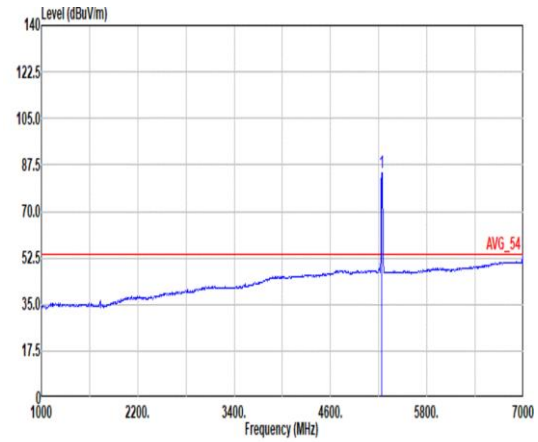 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5240.00 84.72 ------ ------ 73.51 33.22 11.07 33.08 0.00 105 126 AVERAGE

Mode	67	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	2	
Pol.	Vertical	Fundamental
Peak	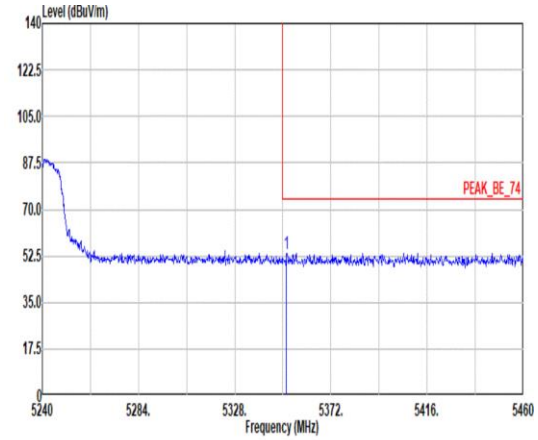 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.76 53.60 74.00 -20.40 41.93 33.10 11.69 33.12 0.00 105 126 PEAK	Blank
Avg	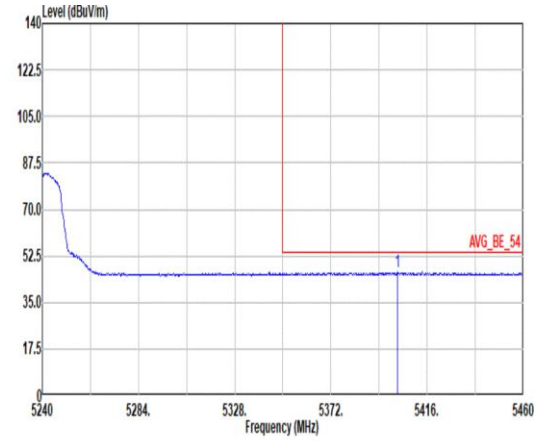 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5402.36 46.24 54.00 -7.76 34.43 33.00 11.95 33.14 0.00 105 126 AVERAGE	Blank

Mode	67	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	2	
Pol.	Horizontal	Vertical
Peak Avg	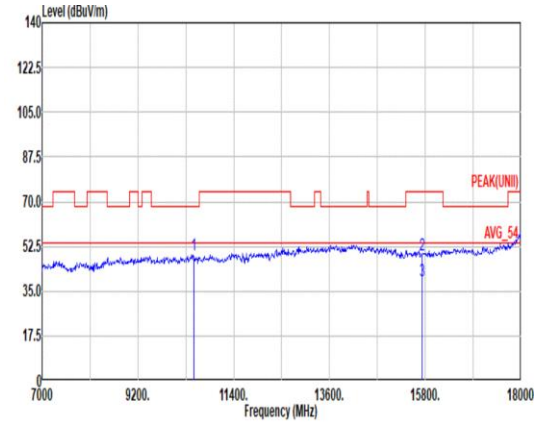 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10480.00 49.04 68.20 -19.16 60.44 38.64 17.17 67.46 0.25 -- -- PEAK 2 15720.00 49.03 74.00 -24.97 55.84 38.14 22.05 67.37 0.37 152 65 Peak 3 15720.00 39.29 54.00 -14.71 46.10 38.14 22.05 67.37 0.37 152 65 Average	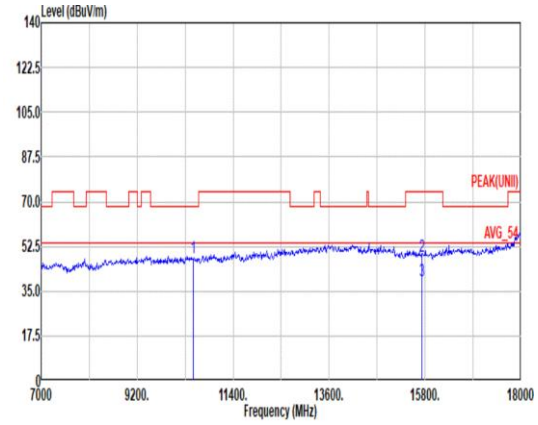 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10480.00 48.18 68.20 -20.02 59.58 38.64 17.17 67.46 0.25 -- -- PEAK 2 15720.00 48.82 74.00 -25.18 55.63 38.14 22.05 67.37 0.37 201 117 Peak 3 15720.00 38.93 54.00 -15.07 45.74 38.14 22.05 67.37 0.37 201 117 Average

Mode	67	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	2	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	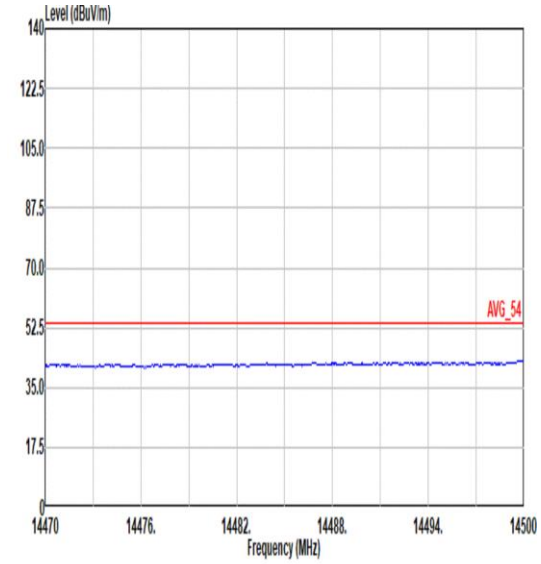 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL	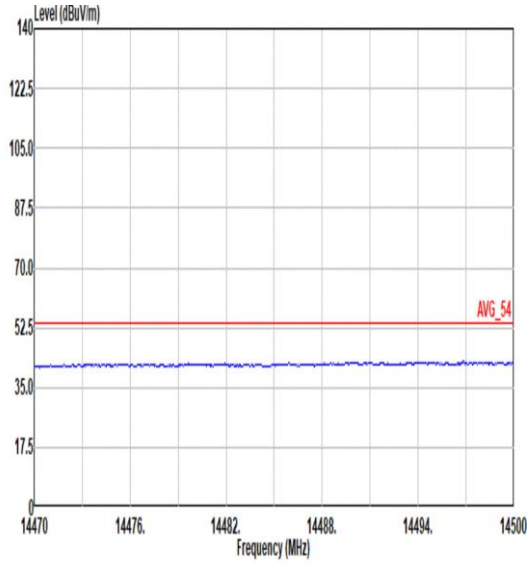 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL
17.7G ~18G Avg	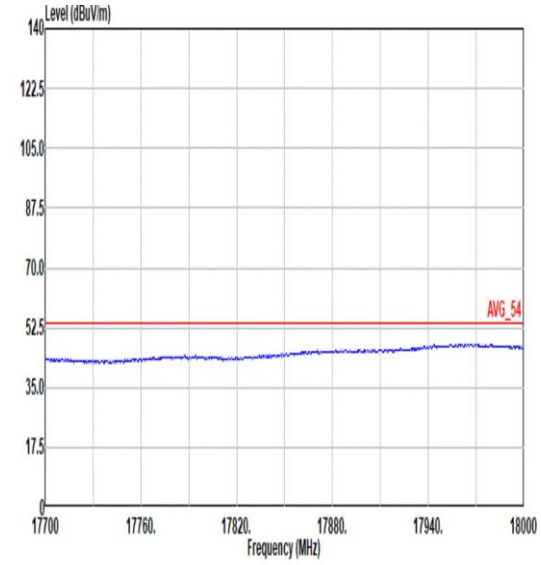 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL	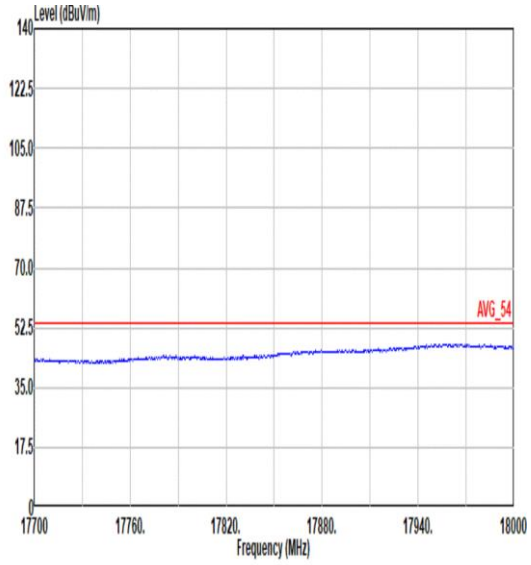 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL

Mode	68	
	Band Edge	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz	
ANT	2	
Pol.	Horizontal	Fundamental
Peak	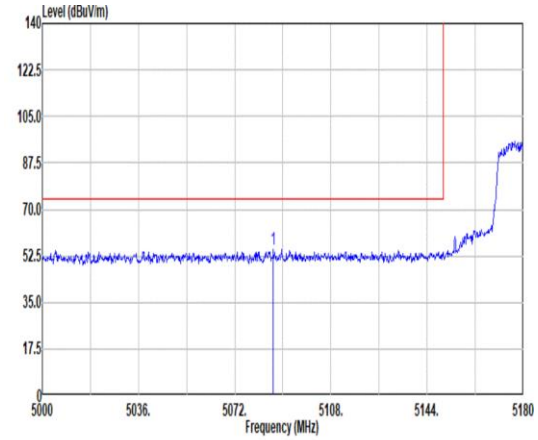 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5086.40 55.17 74.00 -18.83 44.42 33.20 10.58 33.03 0.00 101 116 PEAK	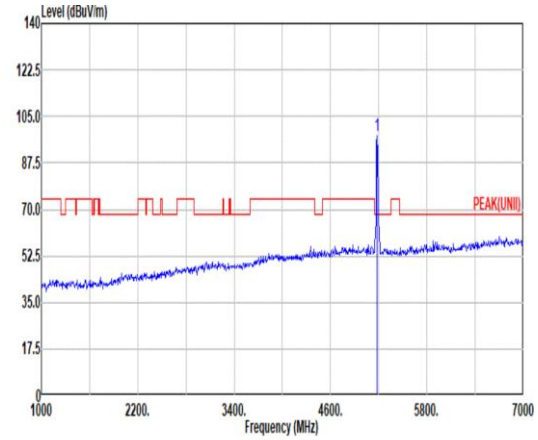 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 97.55 ------ ------ 86.48 33.35 10.78 33.06 0.00 101 116 PEAK
Avg	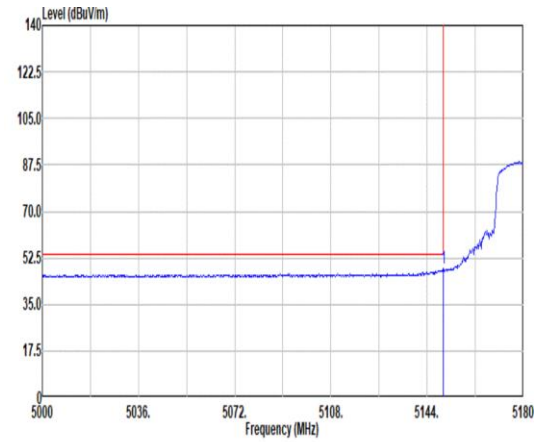 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.94 48.76 54.00 -5.24 37.69 33.40 10.72 33.05 0.00 101 116 AVERAGE	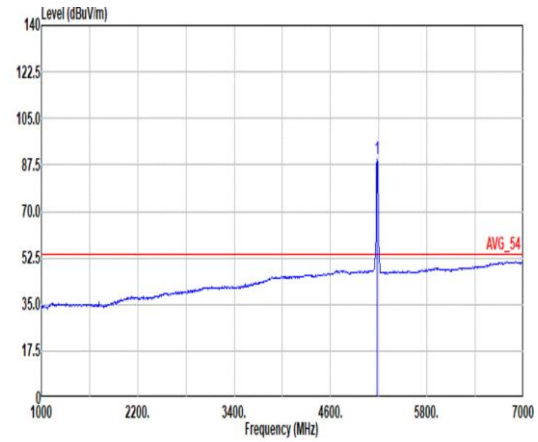 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 89.69 ------ ------ 78.62 33.35 10.78 33.06 0.00 101 116 AVERAGE

Mode	68	
	Band Edge	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz	
ANT	2	
Pol.	Vertical	Fundamental
Peak	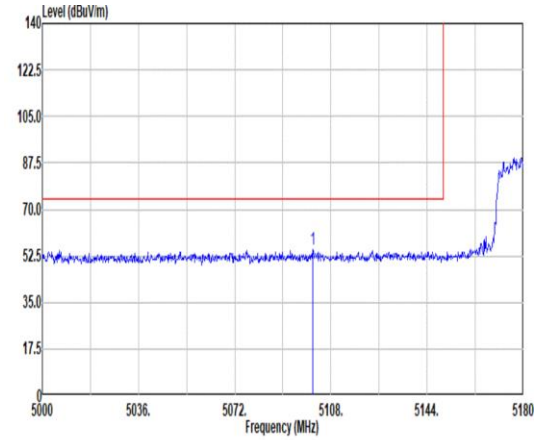 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5101.34 55.12 74.00 -18.88 44.33 33.21 10.61 33.03 0.00 100 126 PEAK	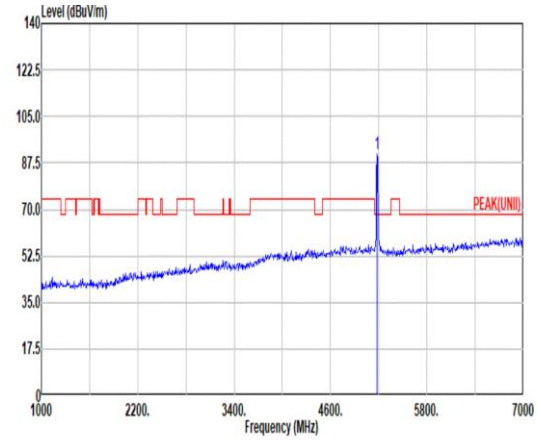 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 90.85 ------ ------ 79.78 33.34 10.79 33.06 0.00 100 126 PEAK
Avg	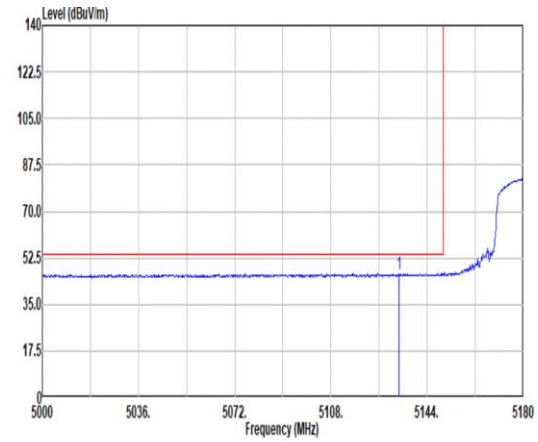 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5133.38 46.50 54.00 -7.50 35.54 33.33 10.68 33.05 0.00 100 126 AVERAGE	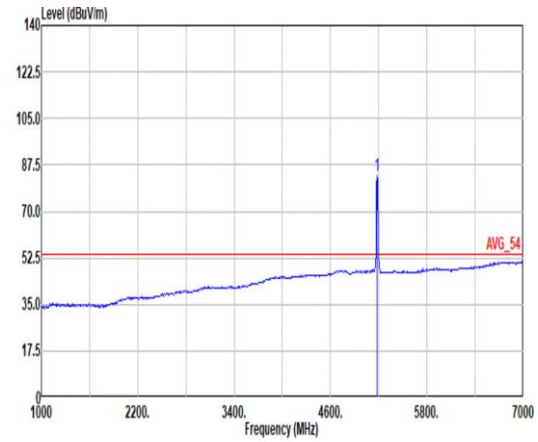 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 83.33 ------ ------ 72.26 33.34 10.79 33.06 0.00 100 126 AVERAGE

Mode	68	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz	
ANT	2	
Pol.	Horizontal	Vertical
Peak Avg	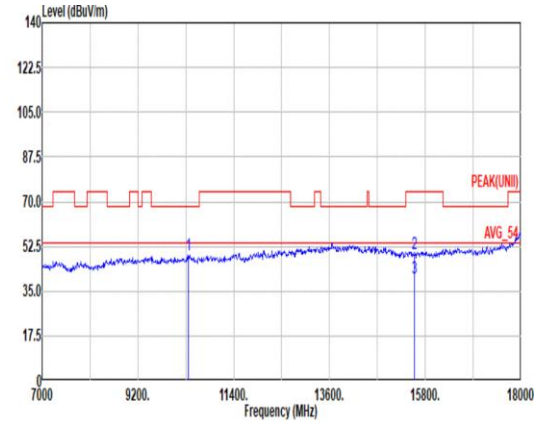 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10360.00 49.25 68.20 -18.95 60.71 38.72 17.20 67.63 0.25 -- -- PEAK 2 15540.00 49.64 74.00 -24.36 56.31 38.32 21.90 67.27 0.38 150 61 Peak 3 15540.00 39.90 54.00 -14.10 46.57 38.32 21.90 67.27 0.38 150 61 Average	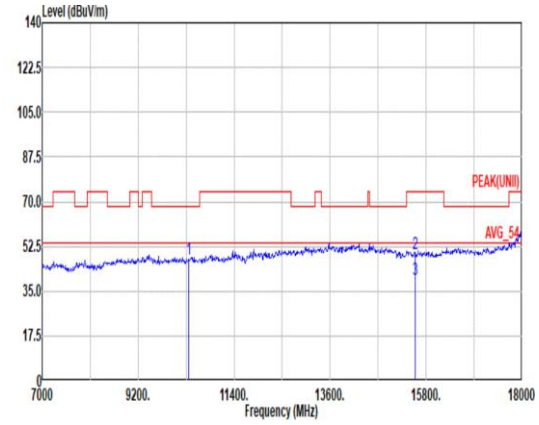 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10360.00 47.68 68.20 -20.52 59.14 38.72 17.20 67.63 0.25 -- -- PEAK 2 15540.00 49.44 74.00 -24.56 56.11 38.32 21.90 67.27 0.38 211 118 Peak 3 15540.00 39.67 54.00 -14.33 46.34 38.32 21.90 67.27 0.38 211 118 Average

Mode	68	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz	
ANT	2	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	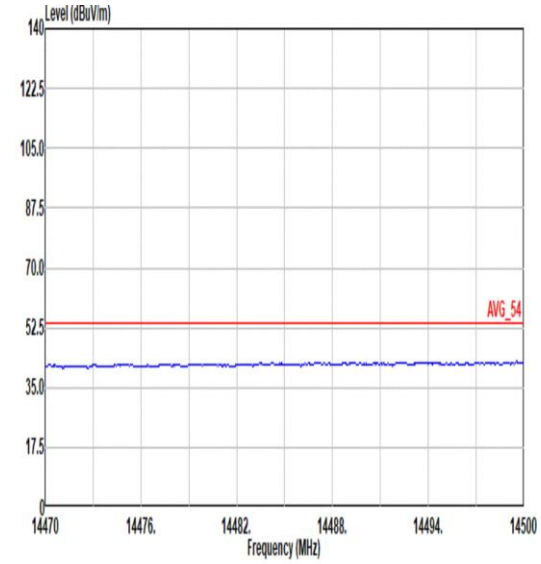 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL	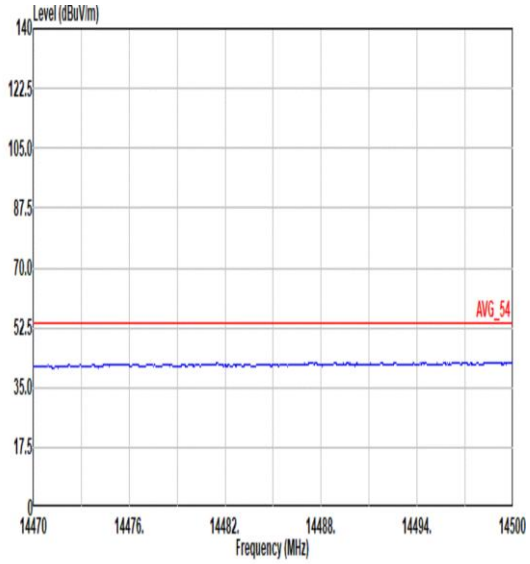 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL
17.7G ~18G Avg	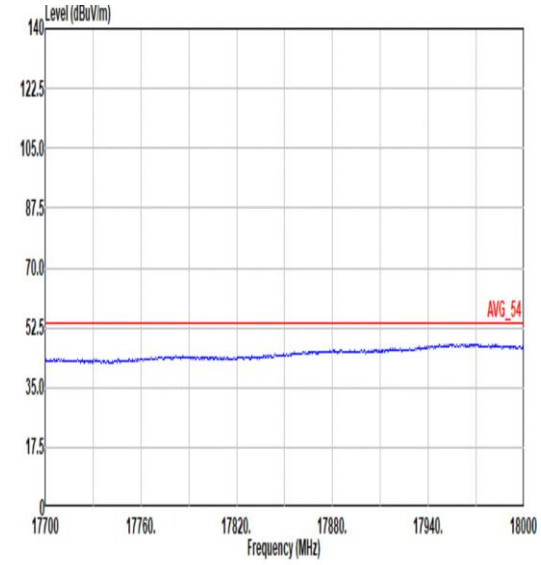 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL	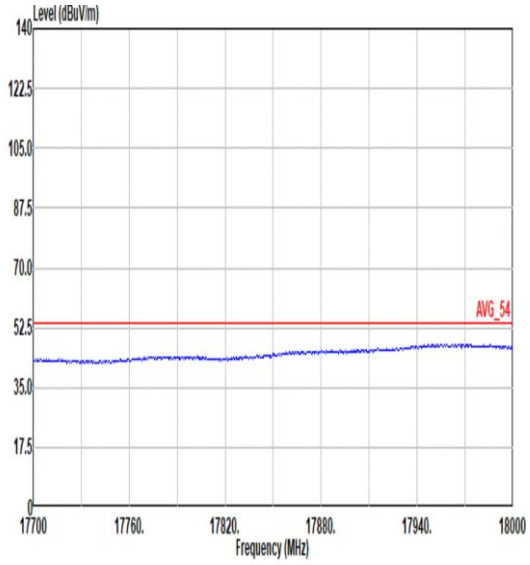 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL

Mode	69	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz	
ANT	2	
Pol.	Horizontal	Fundamental
Peak	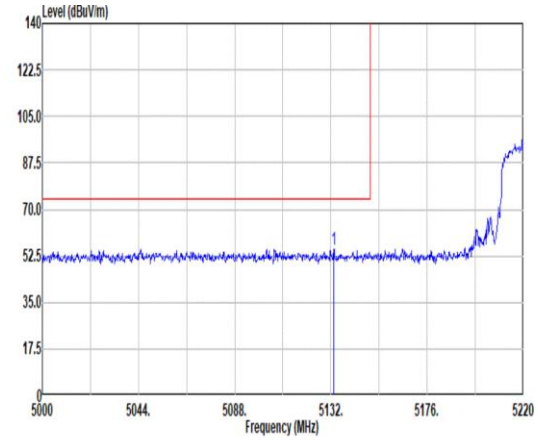 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5133.32 54.94 74.00 -19.06 43.98 33.33 10.68 33.05 0.00 100 118 PEAK	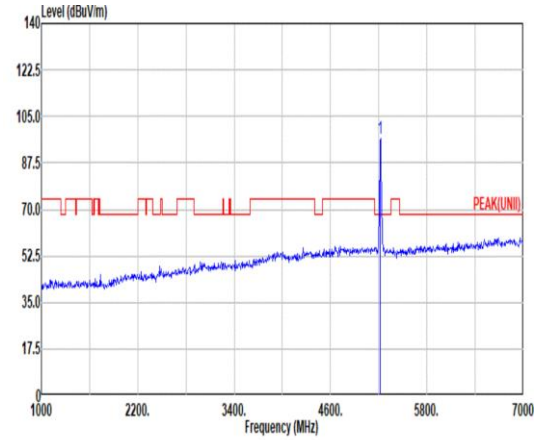 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5220.00 96.74 ------ ------ 85.60 33.25 10.97 33.08 0.00 100 118 PEAK
Avg	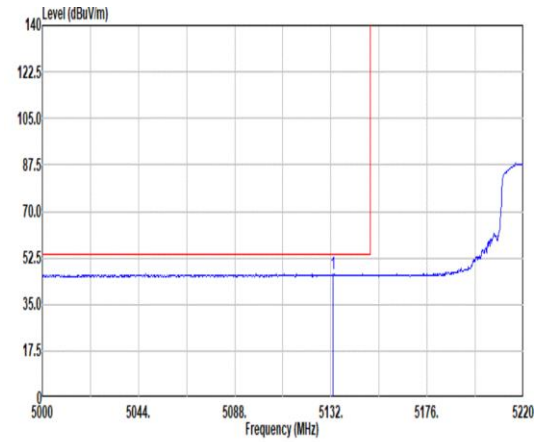 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5132.88 46.42 54.00 -7.58 35.46 33.33 10.68 33.05 0.00 100 118 AVERAGE	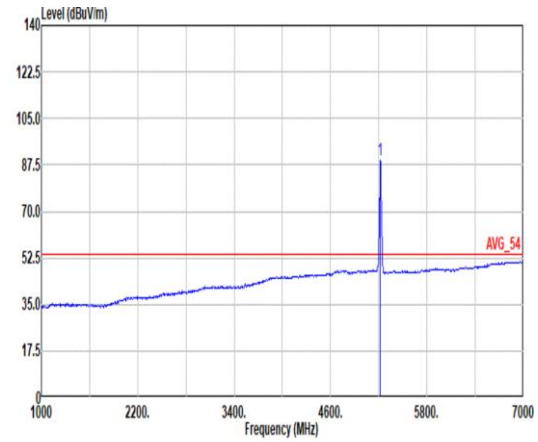 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5220.00 89.19 ------ ------ 78.07 33.26 10.93 33.07 0.00 100 118 AVERAGE

Mode	69	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz	
ANT	2	
Pol.	Horizontal	Fundamental
Peak	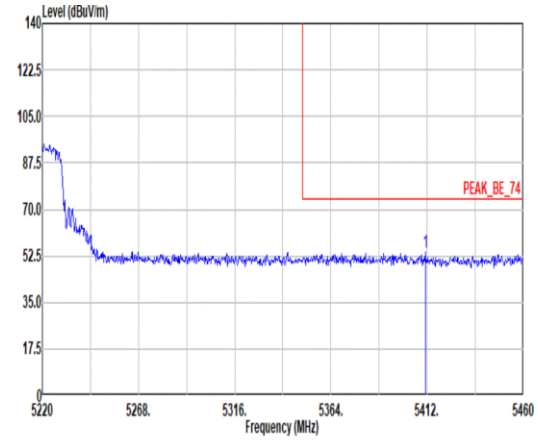 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5411.04 53.72 74.00 -20.28 41.96 33.00 11.90 33.14 0.00 100 118 PEAK	Blank
Avg	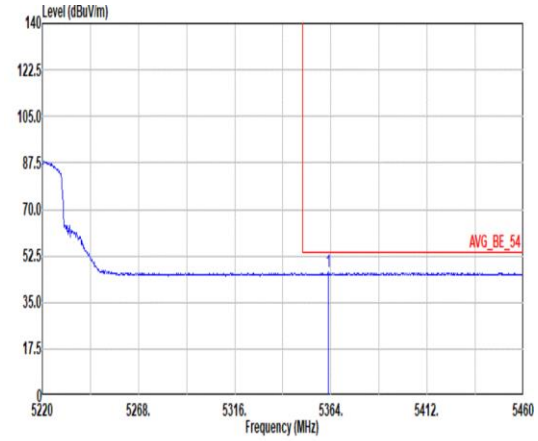 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5362.56 46.24 54.00 -7.76 34.54 33.07 11.75 33.12 0.00 100 118 AVERAGE	Blank

Mode	69	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz	
ANT	2	
Pol.	Vertical	Fundamental
Peak	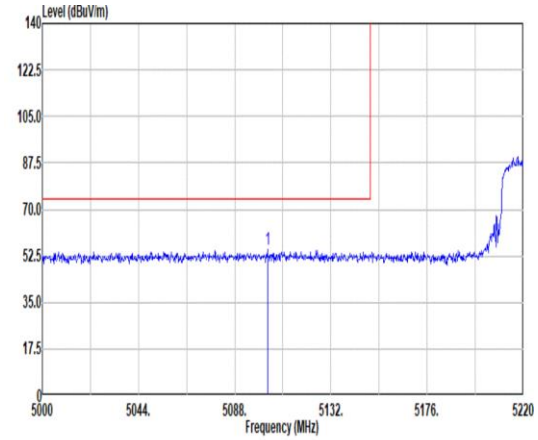 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5102.96 54.85 74.00 -19.15 44.06 33.21 10.62 33.04 0.00 113 124 PEAK	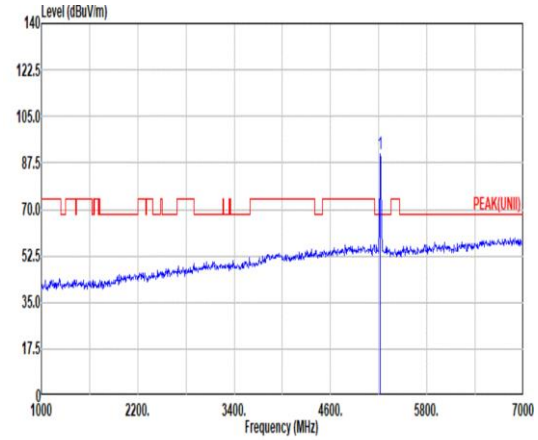 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5220.00 90.75 ------ ------ 79.63 33.26 10.93 33.07 0.00 113 124 PEAK
Avg	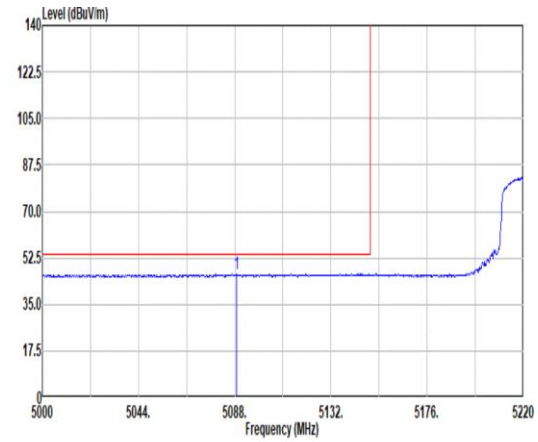 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5088.88 46.48 54.00 -7.52 35.72 33.20 10.59 33.03 0.00 113 124 AVERAGE	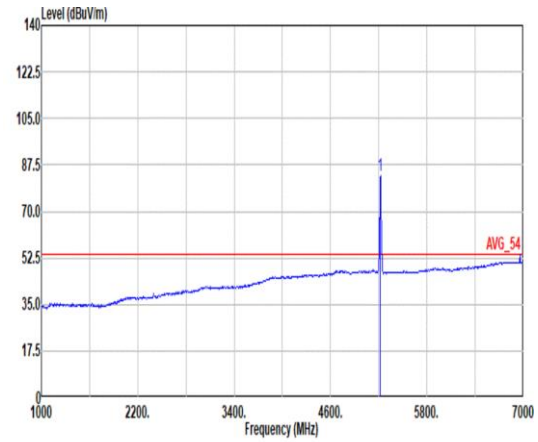 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5220.00 83.25 ------ ------ 72.11 33.25 10.97 33.08 0.00 113 124 AVERAGE

Mode	69	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz	
ANT	2	
Pol.	Vertical	Fundamental
Peak	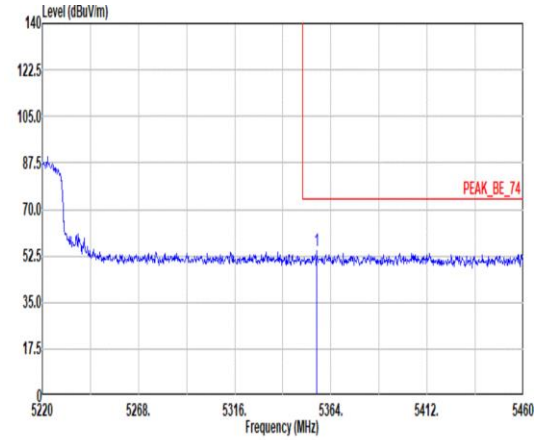 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5357.04 54.22 74.00 -19.78 42.53 33.09 11.72 33.12 0.00 113 124 PEAK	Blank
Avg	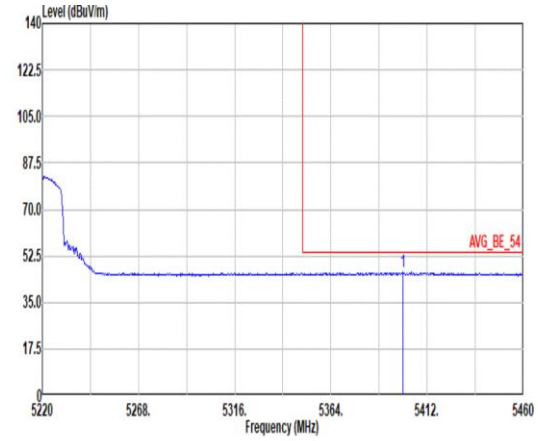 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5400.00 46.55 54.00 -7.45 34.73 33.00 11.96 33.14 0.00 113 124 AVERAGE	Blank

Mode	69	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz	
ANT	2	
Pol.	Horizontal	Vertical
Peak Avg	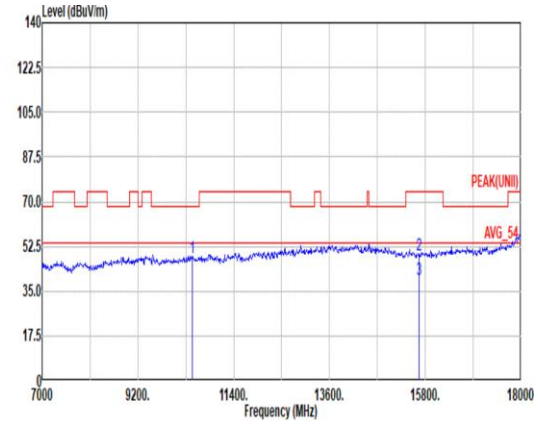 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10440.00 48.03 68.20 -20.17 59.40 38.72 17.18 67.52 0.25 -- -- PEAK 2 15660.00 49.31 74.00 -24.69 56.17 38.10 22.00 67.34 0.38 162 60 Peak 3 15660.00 39.38 54.00 -14.62 46.24 38.10 22.00 67.34 0.38 162 60 Average	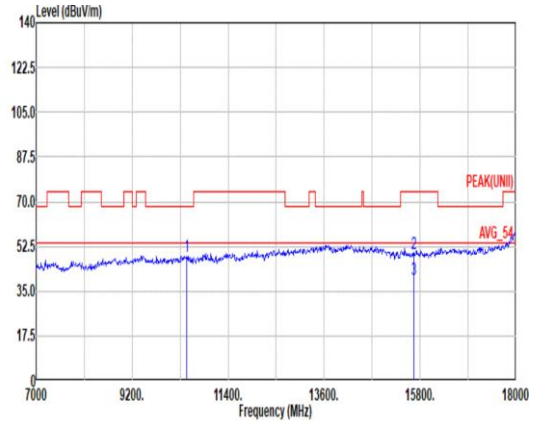 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10440.00 48.49 68.20 -19.71 59.86 38.72 17.18 67.52 0.25 -- -- PEAK 2 15660.00 49.52 74.00 -24.48 56.38 38.10 22.00 67.34 0.38 205 120 Peak 3 15660.00 39.73 54.00 -14.27 46.59 38.10 22.00 67.34 0.38 205 120 Average

Mode	69	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz	
ANT	2	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	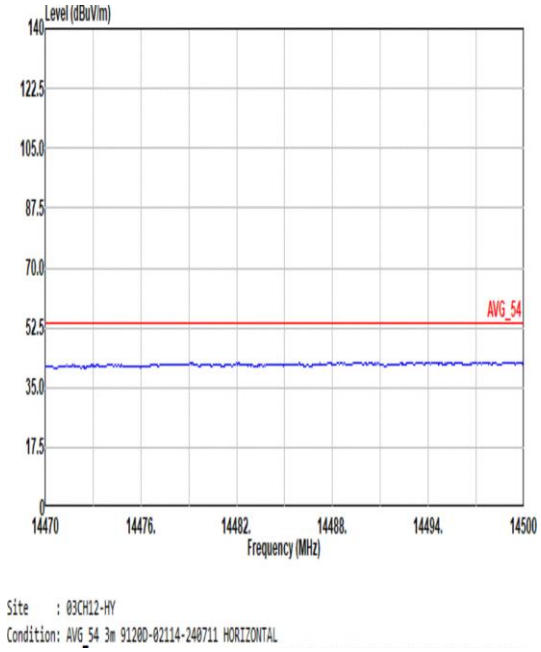	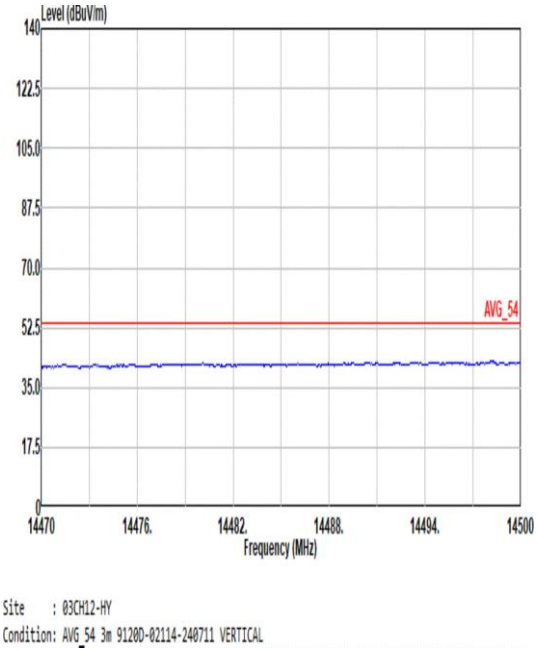
17.7G ~18G Avg	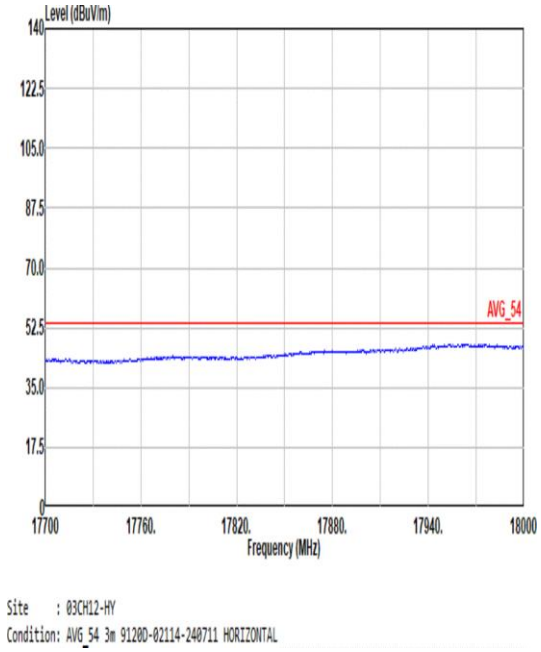	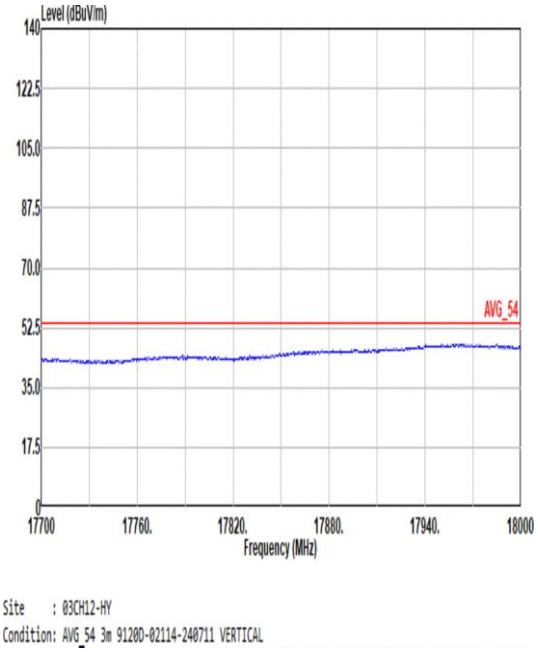

Mode	70	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz	
ANT	2	
Pol.	Horizontal	Fundamental
Peak	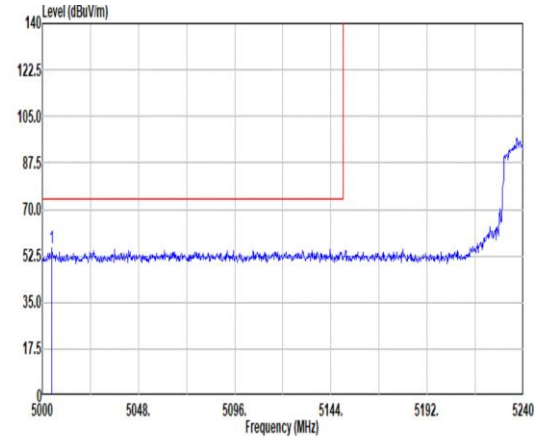 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5004.80 55.60 74.00 -18.40 44.82 33.38 10.40 33.00 0.00 111 117 PEAK	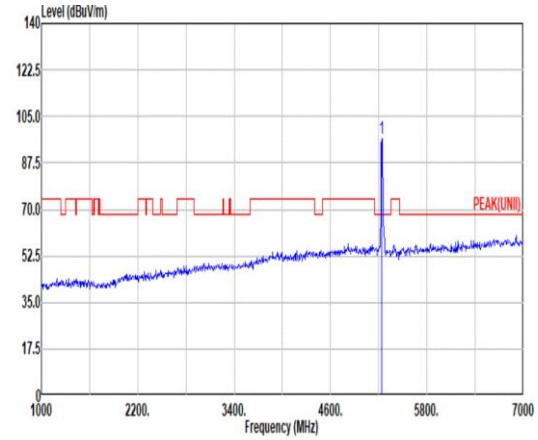 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5240.00 96.44 ------ ------ 85.23 33.22 11.07 33.08 0.00 111 117 PEAK
Avg	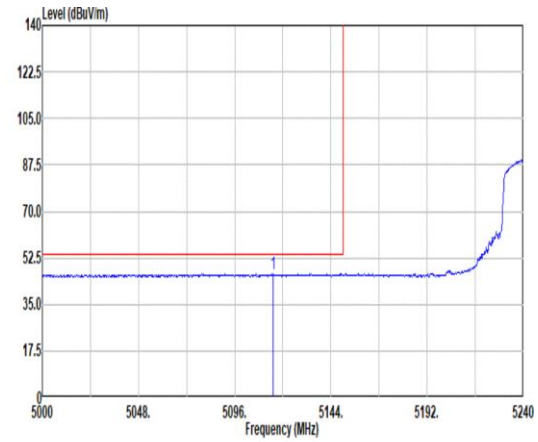 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5115.20 46.49 54.00 -7.51 35.63 33.26 10.64 33.04 0.00 111 117 AVERAGE	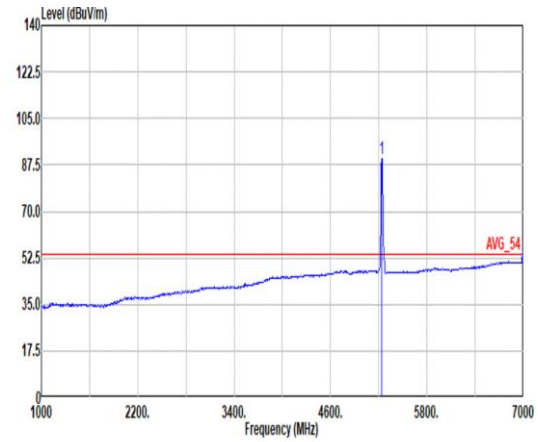 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5240.00 90.02 ------ ------ 78.84 33.23 11.03 33.08 0.00 111 117 AVERAGE

Mode	70	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz	
ANT	2	
Pol.	Horizontal	Fundamental
Peak	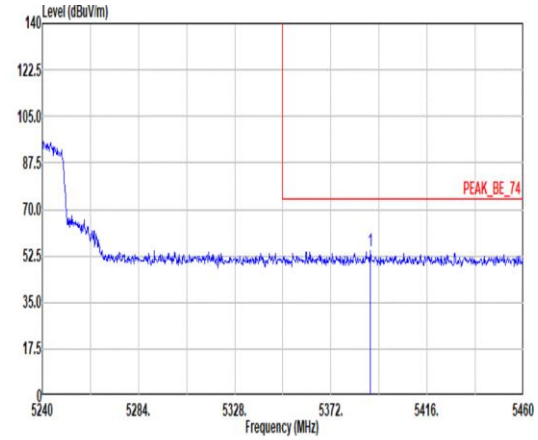 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5390.04 54.46 74.00 -19.54 42.67 33.02 11.90 33.13 0.00 111 117 PEAK	Blank
Avg	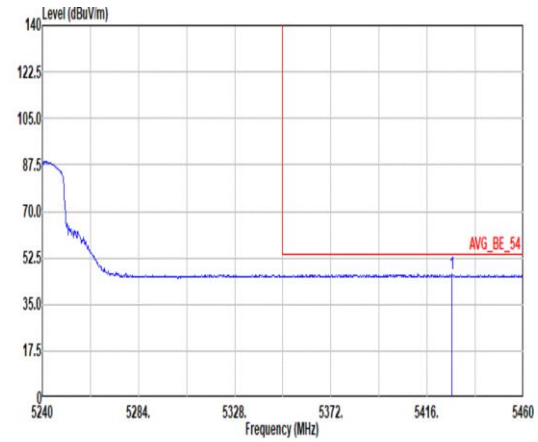 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5427.44 46.36 54.00 -7.64 34.70 33.00 11.81 33.15 0.00 111 117 AVERAGE	Blank

Mode	70	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz	
ANT	2	
Pol.	Vertical	Fundamental
Peak	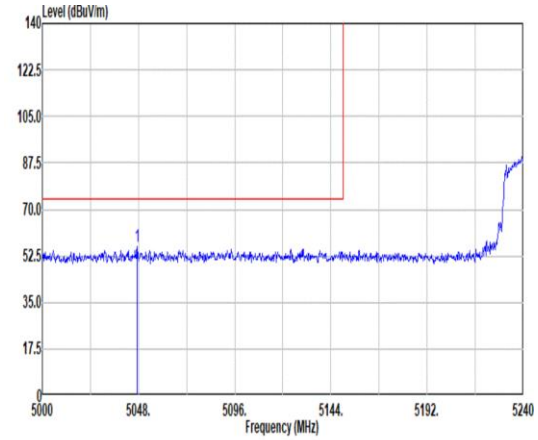 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5047.28 55.89 74.00 -18.11 45.21 33.21 10.49 33.02 0.00 100 128 PEAK	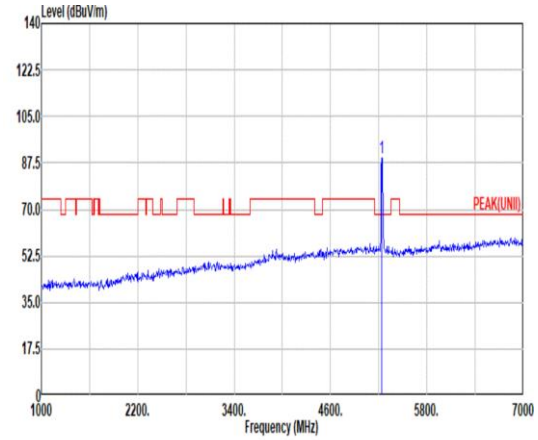 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5240.00 89.08 ------ ------ 77.87 33.22 11.07 33.08 0.00 100 128 PEAK
Avg	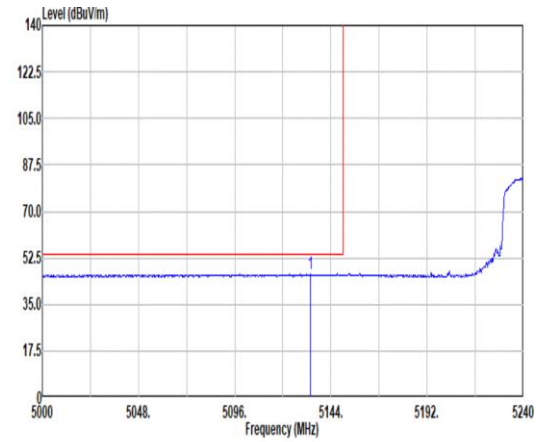 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5133.68 46.49 54.00 -7.51 35.53 33.33 10.68 33.05 0.00 100 128 AVERAGE	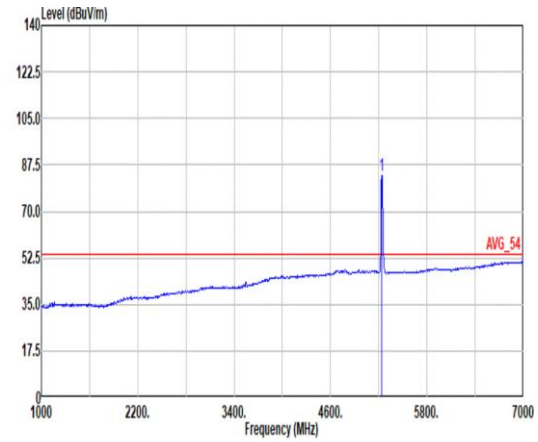 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5240.00 83.49 ------ ------ 72.31 33.23 11.03 33.08 0.00 100 128 AVERAGE

Mode	70	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz	
ANT	2	
Pol.	Vertical	Fundamental
Peak	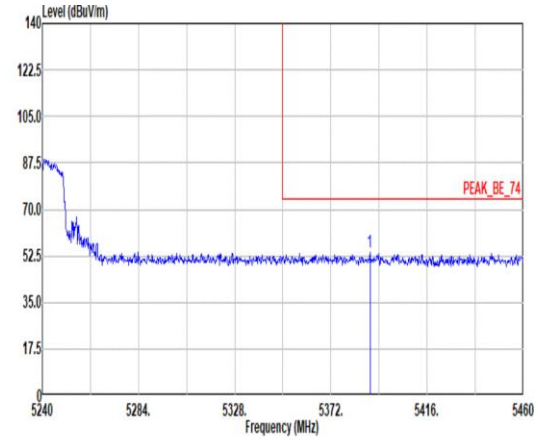 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5389.82 53.95 74.00 -20.05 42.16 33.02 11.90 33.13 0.00 100 128 PEAK	Blank
Avg	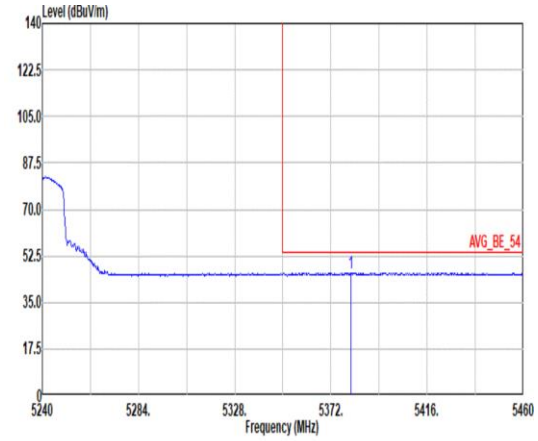 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5381.02 46.11 54.00 -7.89 34.35 33.04 11.85 33.13 0.00 100 128 AVERAGE	Blank

Mode	70	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz	
ANT	2	
Pol.	Horizontal	Vertical
Peak Avg	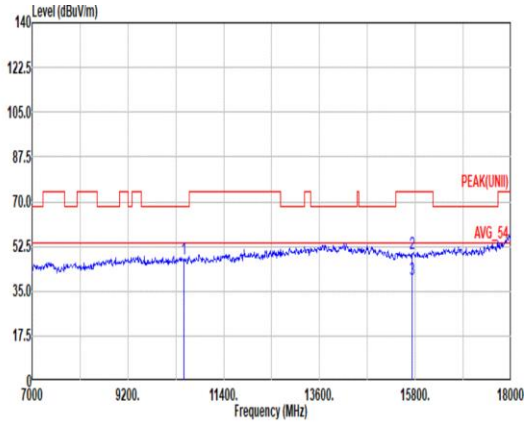 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10480.00 47.65 68.20 -20.55 59.05 38.64 17.17 67.46 0.25 -- -- PEAK 2 15720.00 49.45 74.00 -24.55 56.26 38.14 22.05 67.37 0.37 159 60 Peak 3 15720.00 39.58 54.00 -14.42 46.39 38.14 22.05 67.37 0.37 159 60 Average	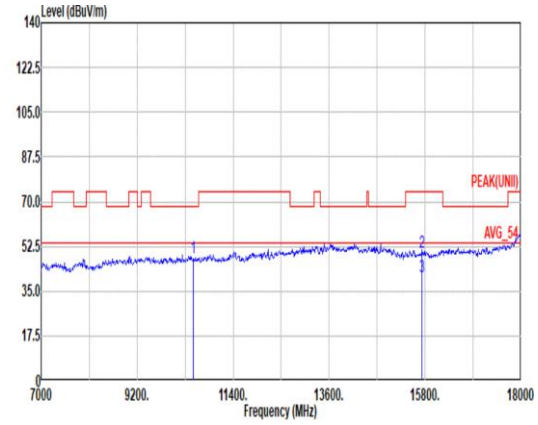 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10480.00 47.88 68.20 -20.32 59.28 38.64 17.17 67.46 0.25 -- -- PEAK 2 15720.00 50.28 74.00 -23.72 57.09 38.14 22.05 67.37 0.37 207 125 Peak 3 15720.00 40.42 54.00 -13.58 47.23 38.14 22.05 67.37 0.37 207 125 Average

Mode	70	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz	
ANT	2	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	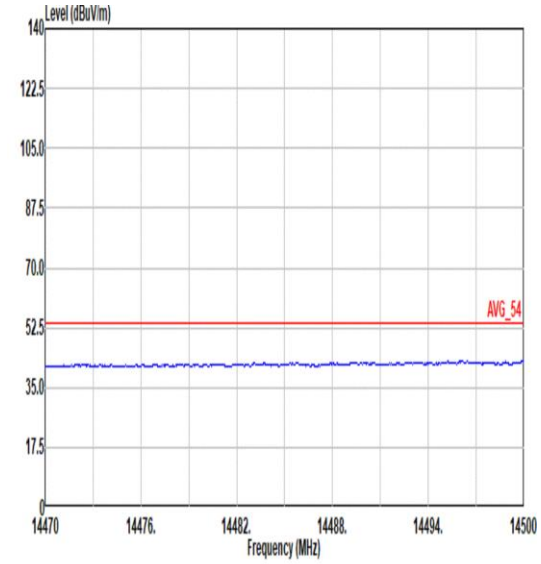 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL	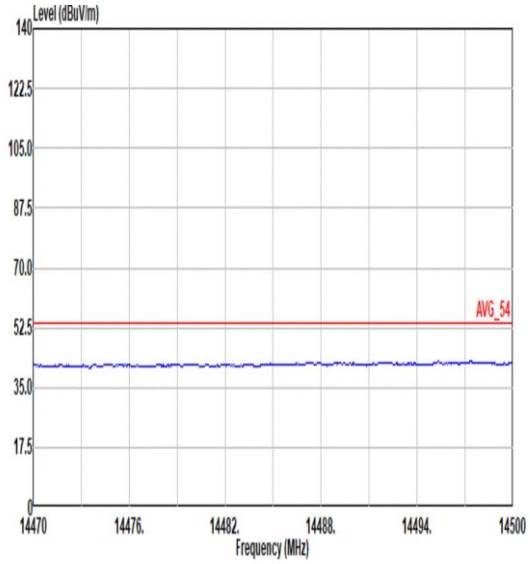 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL
17.7G ~18G Avg	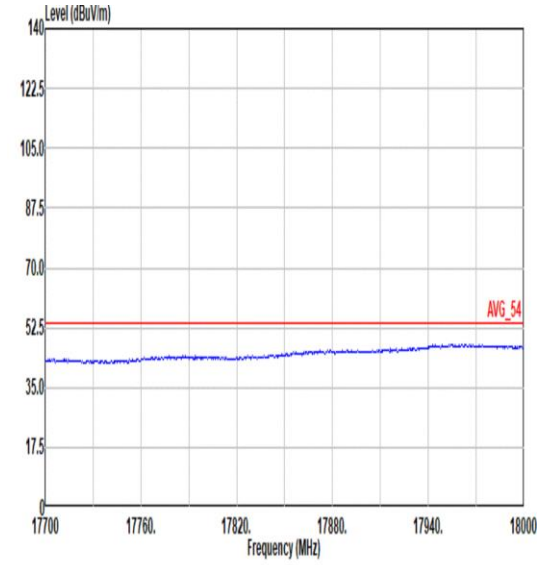 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL	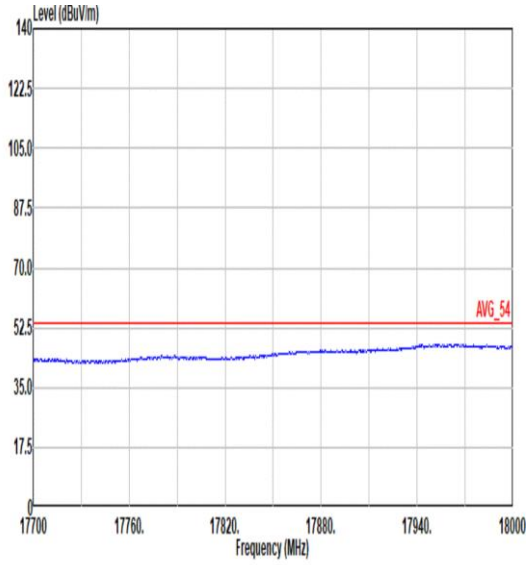 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL

Mode	71	
	Band Edge	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_26/0 RU_5180MHz	
ANT	2	
Pol.	Horizontal	Fundamental
Peak	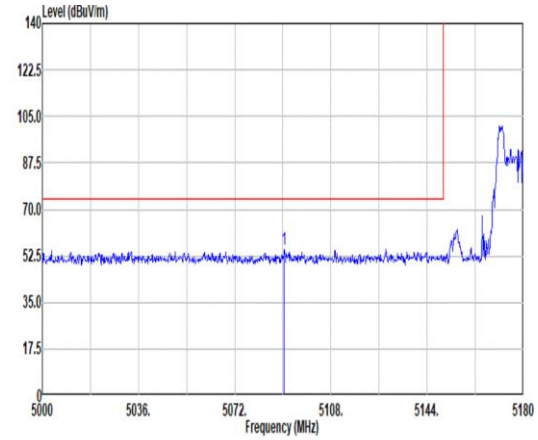 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5090.54 55.12 74.00 -18.88 44.36 33.20 10.59 33.03 0.00 101 108 PEAK	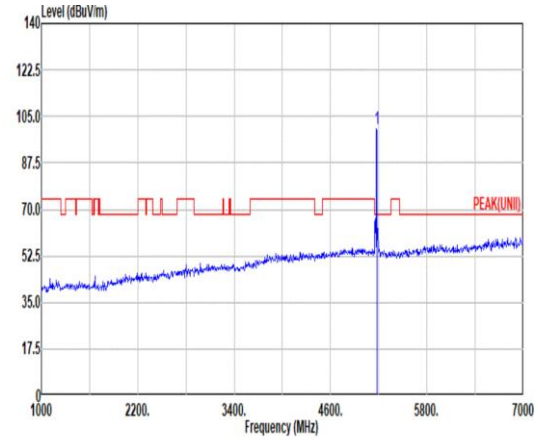 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 100.31 ------ ------ 89.25 33.36 10.76 33.06 0.00 101 108 PEAK
Avg	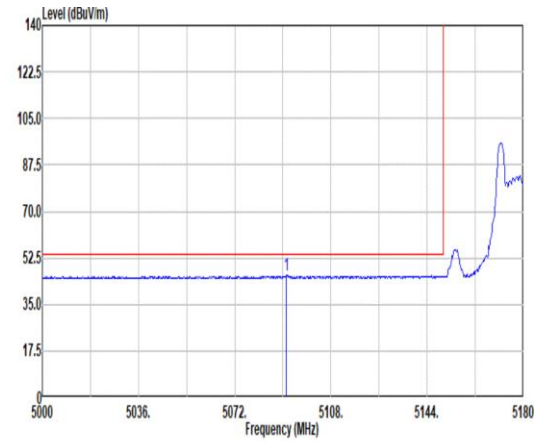 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5091.26 45.90 54.00 -8.10 35.14 33.20 10.59 33.03 0.00 101 108 AVERAGE	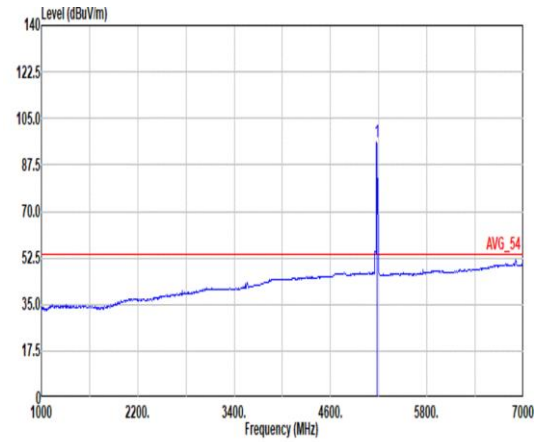 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 96.29 ------ ------ 85.23 33.36 10.76 33.06 0.00 101 108 AVERAGE

Mode	71	
	Band Edge	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_26/0 RU_5180MHz	
ANT	2	
Pol.	Vertical	Fundamental
Peak	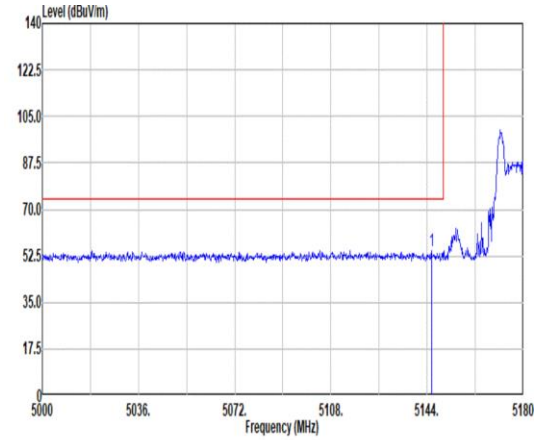 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5145.62 54.68 74.00 -19.32 43.64 33.38 10.71 33.05 0.00 305 87 PEAK	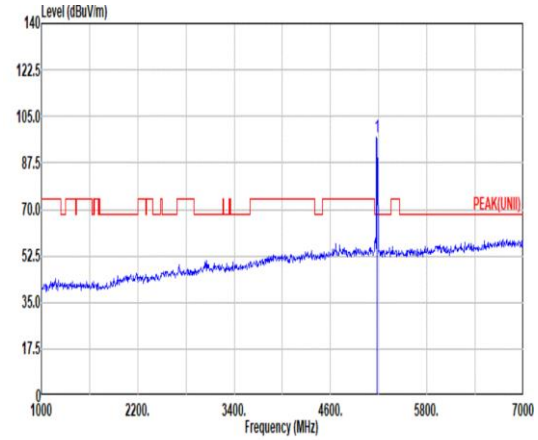 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 97.46 ------ ------ 86.40 33.36 10.76 33.06 0.00 305 87 PEAK
Avg	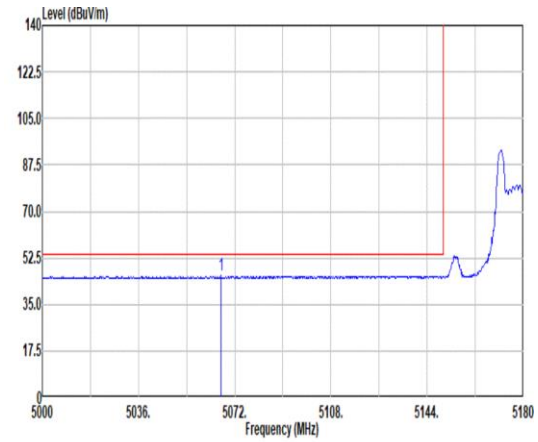 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5066.96 45.85 54.00 -8.15 35.13 33.20 10.54 33.02 0.00 305 87 AVERAGE	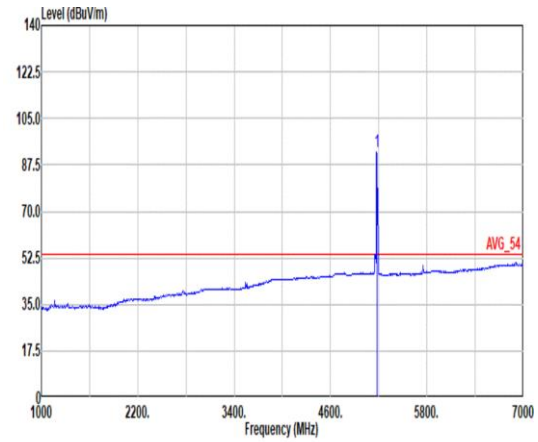 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 92.25 ------ ------ 81.19 33.36 10.76 33.06 0.00 305 87 AVERAGE

Mode	71	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_26/0 RU_5180MHz	
ANT	2	
Pol.	Horizontal	Vertical
Peak Avg	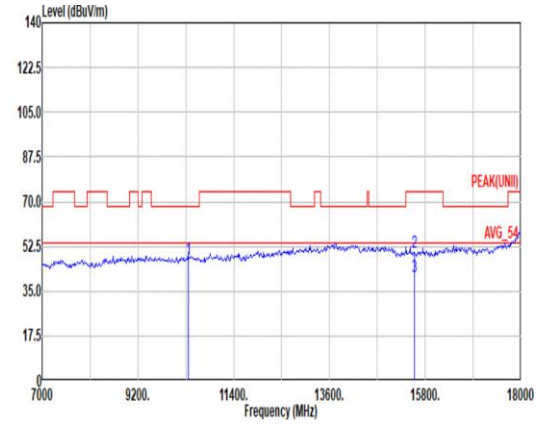 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10360.00 47.69 68.20 -20.51 59.15 38.72 17.20 67.63 0.25 -- -- Peak 2 15540.00 50.35 74.00 -23.65 57.02 38.32 21.90 67.27 0.38 130 75 Peak 3 15540.00 40.47 54.00 -13.53 47.14 38.32 21.90 67.27 0.38 130 75 Average	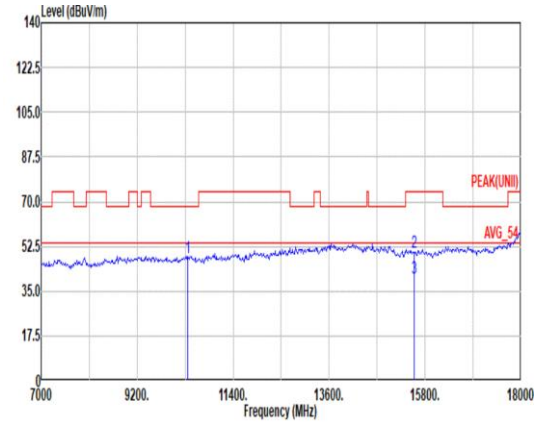 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10360.00 48.01 68.20 -20.19 59.47 38.72 17.20 67.63 0.25 -- -- Peak 2 15540.00 50.01 74.00 -23.99 56.68 38.32 21.90 67.27 0.38 210 133 Peak 3 15540.00 40.12 54.00 -13.88 46.79 38.32 21.90 67.27 0.38 210 133 Average