

FCC Part 15, Subpart B, Class B

TEST REPORT

HAOLIYUAN(SHENZHEN) ELECTRONIC CO., LTD

Mini 802.11ac Wireless USB Adapter

Test Model: 0611

Additional Model No.: Please Refer To Page 7

Prepared for : HAOLIYUAN(SHENZHEN) ELECTRONIC CO., LTD
Address : 4/F, Building7, District3, Cuigang industrial park, Rd
zhengfengnan, Fuyong,Baoan, Shenzhen

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : Room 101, 201, Building A and Room 301, Building C,
Juji Industrial Park, Yabianxueziwei, Shajing Street,
Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : Aug. 26, 2020
Number of tested samples : 1
Serial number : Prototype
Date of Test : Aug. 26, 2020 ~ Aug. 29, 2020
Date of Report : Sept. 01, 2020



FCC TEST REPORT
FCC Part 15, Subpart B, Class B**Report Reference No. : LCS200810326AE**

Date Of Issue : Sept. 01, 2020

Testing Laboratory Name : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address : Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure... : Full application of Harmonised standards ■
Partial application of Harmonised standards □
Other standard testing method □**Applicant's Name..... : HAOLIYUAN(SHENZHEN) ELECTRONIC CO., LTD**

Address : 4/F, Building7, District3, Cuigang industrial park, Rd zhengfengnan, Fuyong,Baoan, Shenzhen

Test Specification

Standard..... : FCC Part 15, Subpart B, Class B, ANSI C63.4 -2014

Test Report Form No..... : LCSEMC-1.0

TRF Originator..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF..... : Dated 2011-03

SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. All rights reserved.


This publication may be reproduced in whole or in part for non-commercial purposes as long as the SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. is acknowledged as copyright owner and source of the material. SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description. : Mini 802.11ac Wireless USB Adapter

Test Model : 0611

Trade Mark : N/A

Ratings : DC 5.0V

Result : Positive**Compiled by:**Emma Wang/ File
administrators**Supervised by:**

Jason Deng/ Technique principal

Approved by:

Gavin Liang/ Manager

FCC -- TEST REPORT

Test Report No. : LCS200810326AE

Sept. 01, 2020

Date of issue

Test Model : 0611

EUT..... : Mini 802.11ac Wireless USB Adapter

Applicant..... : HAOLIYUAN(SHENZHEN) ELECTRONIC CO., LTDAddress..... : 4/F, Building7, Districit3, Cuigang industrial park, Rd
zhengfengnan, Fuyong,Baoan, Shenzhen

Telephone..... : /

Fax..... : /

Manufacturer..... : HAOLIYUAN(SHENZHEN) ELECTRONIC CO., LTDAddress..... : 4/F, Building7, Districit3, Cuigang industrial park, Rd
zhengfengnan, Fuyong,Baoan, Shenzhen

Telephone..... : /

Fax..... : /

Factory..... : /

Address..... : /

Telephone..... : /

Fax..... : /

Test Result according to the standards on page 6: **Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Revision	Issue Date	Revisions	Revised By
000	Sept. 01, 2020	Initial Issue	Gavin Liang

TABLE OF CONTENTS

Test Report Description	Page
1. SUMMARY OF STANDARDS AND RESULTS	6
1.1. Description of Standards and Results	6
2. GENERAL INFORMATION	7
2.1. Description of Device (EUT)	7
2.2. Support equipment List	7
2.3. Description of Test Facility	7
2.4. Statement of the Measurement Uncertainty	8
2.5. Measurement Uncertainty	8
3. TEST RESULTS	9
3.1. POWER LINE CONDUCTED EMISSION MEASUREMENT	9
3.2. Radiated emission Measurement	12

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION			
Description of Test Item	Standard	Limits	Results
Conducted disturbance at mains terminals	FCC Part 15, Subpart B, Class B, ANSI C63.4 -2014	Class B	PASS
Radiated disturbance	FCC Part 15, Subpart B, Class B, ANSI C63.4 -2014	Class B	PASS
N/A is an abbreviation for Not Applicable.			

Test mode:

Mode 1	Working	Record
--------	---------	--------

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT : Mini 802.11ac Wireless USB Adapter

Trade Mark : N/A

Test Model : 0611

Model Lists : WU650S

Model declaration : PCB board, structure and internal of these model(s) are the same, So no additional models were tested.

Power Supply : DC 5.0V

Highest internal frequency (Fx)	Highest measured frequency
$F_x \leq 108 \text{ MHz}$	1 GHz
$108 \text{ MHz} < F_x \leq 500 \text{ MHz}$	2 GHz
$500 \text{ MHz} < F_x \leq 1 \text{ GHz}$	5 GHz
$F_x > 1 \text{ GHz}$	$5 \times F_x$ up to a maximum of 6 GHz

NOTE 1 For FM and TV broadcast receivers, Fx is determined from the highest frequency generated or used excluding the local oscillator and tuned frequencies.

Where Fx is unknown, the radiated emission measurements shall be performed up to 6 GHz.

2.2. Support equipment List

Name	Manufacturers	M/N	S/N
PC	Dell	OptiPlex 9020 MT	BCM943228HM4L

2.3. Description of Test Facility

Site Description
EMC Lab. : NVLAP Accreditation Code is 600167-0.
FCC Designation Number is CN5024.
CAB identifier is CN0071.
CNAS Registration Number is L4595.

2.4. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

2.5. Measurement Uncertainty

Test	Parameters	Expanded Uncertainty (U _{lab})	Expanded Uncertainty (U _{cispr})
Conducted Emission	Level accuracy (9kHz to 150kHz) (150kHz to 30MHz)	± 2.63 dB ± 2.35 dB	± 3.8 dB ± 3.4 dB
Power Disturbance	Level accuracy (30MHz to 300MHz)	± 2.90 dB	± 4.5 dB
Electromagnetic Radiated Emission (3-loop)	Level accuracy (9kHz to 30MHz)	± 3.60 dB	± 3.3 dB
Radiated Emission	Level accuracy (9kHz to 30MHz)	± 3.68 dB	N/A
Radiated Emission	Level accuracy (30MHz to 1000MHz)	± 3.48 dB	± 5.3 dB
Radiated Emission	Level accuracy (above 1000MHz)	± 3.90 dB	± 5.2 dB
Mains Harmonic	Voltage	$\pm 0.510\%$	N/A
Voltage Fluctuations & Flicker	Voltage	$\pm 0.510\%$	N/A
EMF		$\pm 21.59\%$	N/A

(1) Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus.

(2) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

3. TEST RESULTS


3.1. POWER LINE CONDUCTED EMISSION MEASUREMENT

3.1.1. Test Equipment

The following test equipments are used during the power line conducted measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI Test Software	EZ	EZ-EMC	/	N/A	N/A
2	EMI Test Receiver	R&S	ESPI	101840	2020-06-22	2021-06-21
3	Artificial Mains	R&S	ENV216	101288	2020-06-22	2021-06-21
4	10dB Attenuator	SCHWARZBEC K	MTS-IMP-136	261115-001-0032	2020-06-22	2021-06-21

3.1.2. Block Diagram of Test Setup

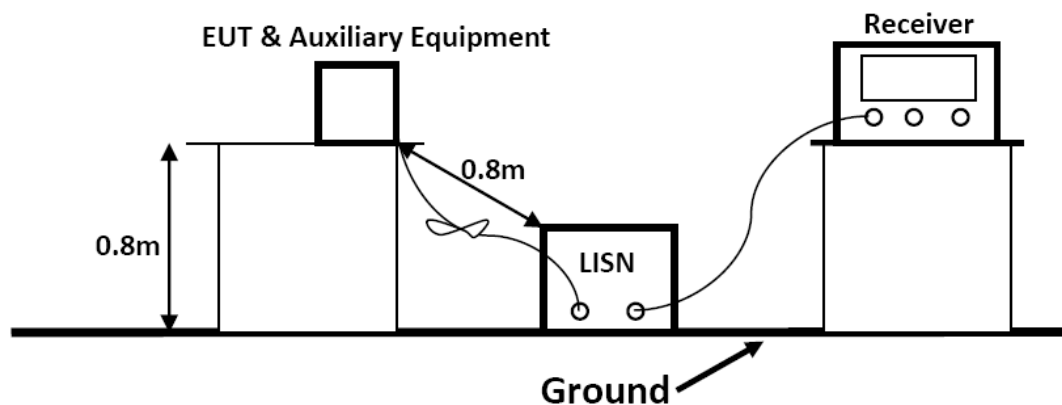

3.1.3. Test Standard

Power Line Conducted Emission Limits (Class B)

Frequency (MHz)			Limit (dB μ V)	
			Quasi-peak Level	Average Level
0.15	~	0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50	~	5.00	56.0	46.0
5.00	~	30.00	60.0	50.0

NOTE1-The lower limit shall apply at the transition frequencies.

NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

3.1.4. EUT Configuration on Test

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

3.1.5. Operating Condition of EUT

3.1.5.1. Setup the EUT as shown on Section 3.1.2

3.1.5.2. Turn on the power of all equipments.

3.1.5.3. Let the EUT work in measuring Mode 1 and measure it.

3.1.6. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC/ANSI C63.4-2014 on Conducted Emission Measurement.

The bandwidth of the test receiver is set at 9kHz.


The frequency range from 150kHz to 30MHz is investigated

3.1.7. Test Results

PASS.


The test result please refer to the next page.

Test Model	0611	Test Mode	Mode 1
Environmental Conditions	22.7°C, 53.7% RH	Test Engineer	Deh Xu
Pol	Line	Test Voltage	AC 120V/60Hz

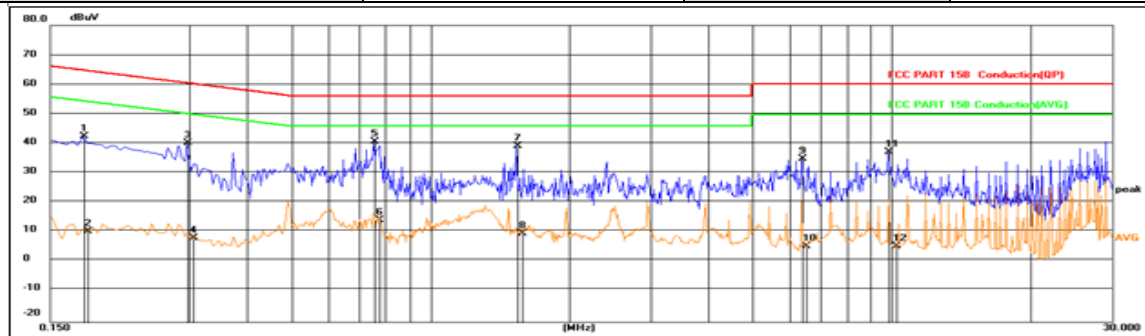

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1770	23.54	19.17	42.71	64.63	-21.92	QP
2	0.1815	-8.56	19.17	10.61	54.42	-43.81	AVG
3	0.2985	21.07	19.27	40.34	60.28	-19.94	QP
4	0.3051	-10.89	19.27	8.38	50.10	-41.72	AVG
5	0.7575	21.44	19.32	40.76	56.00	-15.24	QP
6	0.7711	-4.85	19.32	14.47	46.00	-31.53	AVG
7	1.5405	19.86	19.35	39.21	56.00	-16.79	QP
8	1.5809	-9.44	19.35	9.91	46.00	-36.09	AVG
9	6.4095	15.53	19.56	35.09	60.00	-24.91	QP
10	6.4904	-14.05	19.56	5.51	50.00	-44.49	AVG
11	9.8565	17.63	19.69	37.32	60.00	-22.68	QP
12	10.2120	-14.03	19.71	5.68	50.00	-44.32	AVG

Test Model	0611	Test Mode	Mode 1
Environmental Conditions	22.7°C, 53.7% RH	Test Engineer	Deh Xu
Pol	Neutral	Test Voltage	AC 120V/60Hz

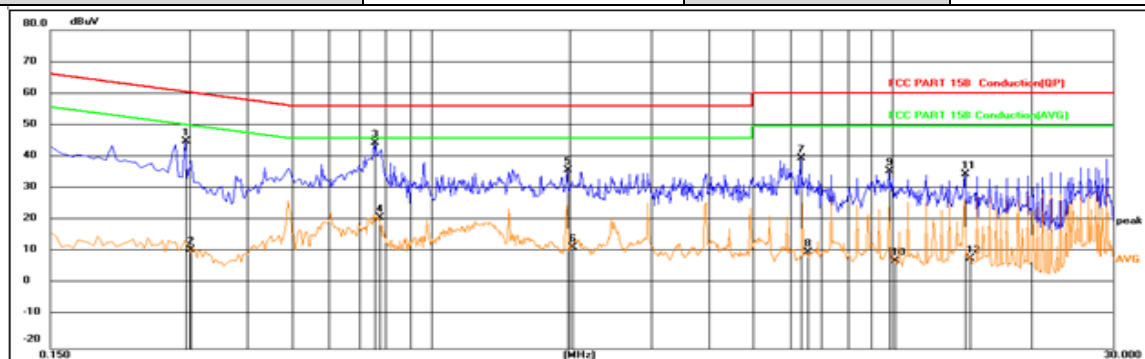

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.2940	25.78	19.27	45.05	60.41	-15.36	QP
2	0.3003	-8.10	19.27	11.17	50.23	-39.06	AVG
3	0.7575	25.38	19.32	44.70	56.00	-11.30	QP
4	0.7711	1.90	19.32	21.22	46.00	-24.78	AVG
5	1.9725	16.58	19.41	35.99	56.00	-20.01	QP
6	2.0264	-7.60	19.41	11.81	46.00	-34.19	AVG
7	6.3195	20.25	19.56	39.81	60.00	-20.19	QP
8	6.5265	-9.14	19.56	10.42	50.00	-39.58	AVG
9	9.8565	16.08	19.69	35.77	60.00	-24.23	QP
10	10.0725	-12.08	19.70	7.62	50.00	-42.38	AVG
11	14.2890	14.67	20.05	34.72	60.00	-25.28	QP
12	14.7480	-11.90	20.12	8.22	50.00	-41.78	AVG

Note: Pre-Scan all mode, Thus record worse case mode result in this report.


3.2. Radiated emission Measurement

3.2.1. Test Equipment


The following test equipments are used during the radiated emission measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI Test Software	EZ	EZ-EMC	/	N/A	N/A
2	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2020-06-22	2020-06-21
3	Positioning Controller	MF	MF7082	MF78020803	2020-06-22	2021-06-21
4	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2018-07-26	2021-07-25
5	Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1925	2018-07-02	2021-07-01
6	EMI Test Receiver	R&S	ESR 7	101181	2020-06-22	2021-06-21
7	RS SPECTRUM ANALYZER	R&S	FSP40	100503	2019-11-22	2020-11-21
8	Broadband Preamplifier	/	BP-01M18G	P190501	2020-06-22	2021-06-21
9	RF Cable-R03m	Jye Bao	RG142	CB021	2020-06-22	2021-06-21
10	RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	2020-06-22	2021-06-21

3.2.2. Block Diagram of Test Setup

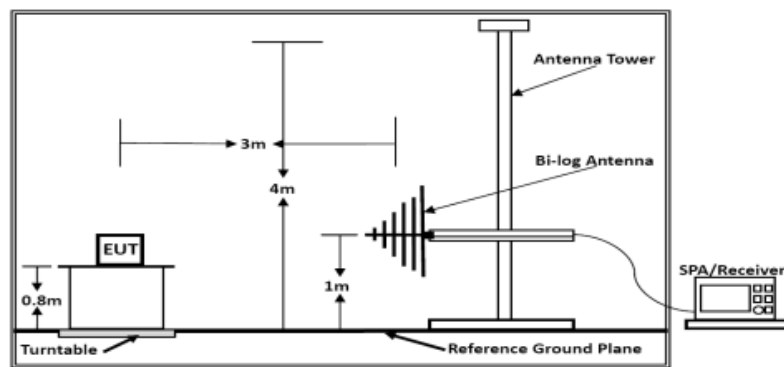

Below 1GHz

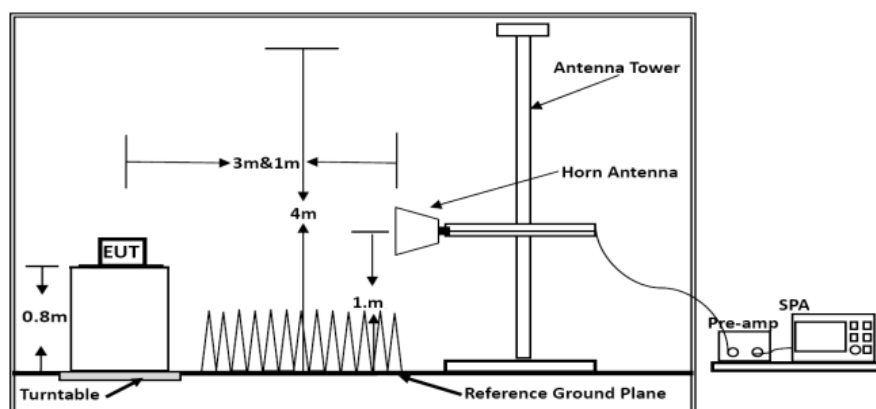

Above 1GHz

3.2.3. Radiated Emission Limit (Class B)

Limits for Radiated Disturbance Below 1GHz

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46
960 ~ 1000	3	500	54

Remark: (1) Emission level $(\text{dB})\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$
 (2) The smaller limit shall apply at the cross point between two frequency bands.
 (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

Limits for Radiated Emission Above 1GHz

Frequency (MHz)	Distance (Meters)	Peak Limit ($\text{dB}\mu\text{V/m}$)	Average Limit ($\text{dB}\mu\text{V/m}$)
Above 1000	3	74	54

***Note: The lower limit applies at the transition frequency.

3.2.4. EUT Configuration on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

3.2.5. Operating Condition of EUT

3.2.5.1. Setup the EUT as shown in Section 3.2.2.

3.2.5.2. Let the EUT work in test Mode 1 and measure it.

3.2.6. Test Procedure

EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated by-log antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2014 on radiated emission measurement.

The bandwidth of the EMI test receiver is set at 120kHz, 300kHz.


The frequency range from 30MHz to 1000MHz is checked.

3.2.7. Radiated Emission Noise Measurement Result

PASS.

The scanning waveforms please refer to the next page.


Test Model	0611	Test Mode	Mode 1
Environmental Conditions	22.1℃, 53.2% RH	Detector Function	Quasi-peak
Pol	Vertical	Distance	3m
Test Engineer	Deh Xu	Test Voltage	AC 120V/60Hz

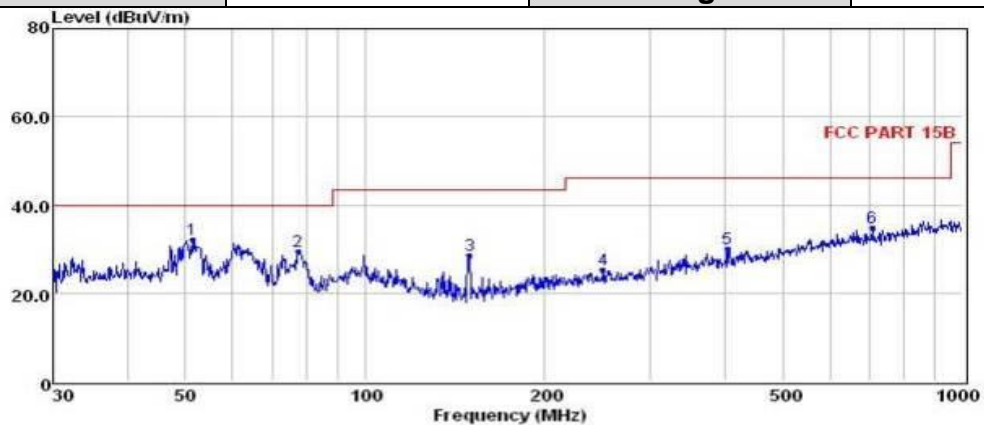

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	51.30	18.37	0.54	13.19	32.10	40.00	-7.90	QP
2	77.32	20.98	0.47	8.14	29.59	40.00	-10.41	QP
3	149.49	19.36	0.86	8.26	28.48	43.50	-15.02	QP
4	250.30	12.33	1.02	12.07	25.42	46.00	-20.58	QP
5	404.67	13.58	1.32	15.16	30.06	46.00	-15.94	QP
6	706.70	14.19	1.60	18.89	34.68	46.00	-11.32	QP

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20db below the official limit are not reported

Test Model	0611	Test Mode	Mode 1
Environmental Conditions	22.1℃, 53.2% RH	Detector Function	peak, AV
Pol	Horizontal	Distance	3m
Test Engineer	Deh Xu	Test Voltage	AC 120V/60Hz

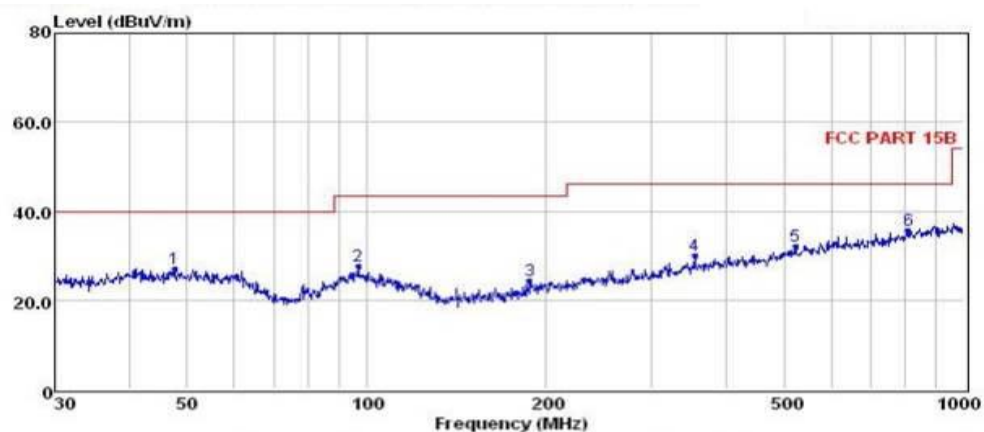


	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	47.66	13.27	0.35	13.39	27.01	40.00	-12.99	QP
2	96.77	14.13	0.58	12.95	27.66	43.50	-15.84	QP
3	187.75	12.98	0.98	10.36	24.32	43.50	-19.18	QP
4	354.18	14.57	1.15	14.34	30.06	46.00	-15.94	QP
5	522.72	13.79	1.31	17.00	32.10	46.00	-13.90	QP
6	810.27	13.88	1.71	20.17	35.76	46.00	-10.24	QP

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20db below the official limit are not reported


Note: Pre-Scan all mode, Thus record worse case mode result in this report.

Test Model	0611	Test Mode	Mode 1
Environmental Conditions	24.2℃, 54.3% RH	Detector Function	peak, AV
Pol	Vertical	Distance	3m
Test Engineer	Deh Xu	Test Voltage	AC 120V/60Hz

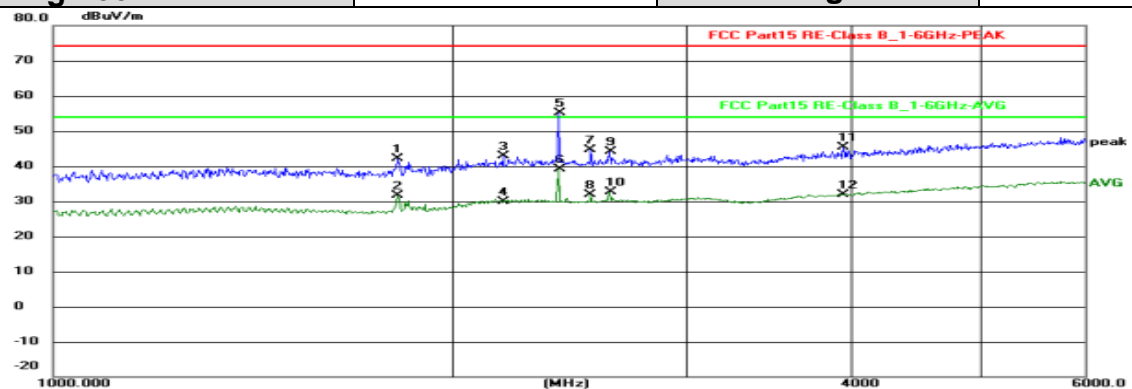

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1819.292	56.18	-14.03	42.15	74.00	-31.85	peak
2	1819.292	45.74	-14.03	31.71	54.00	-22.29	AVG
3	2184.107	53.99	-11.21	42.78	74.00	-31.22	peak
4	2184.107	41.18	-11.21	29.97	54.00	-24.03	AVG
5	2405.992	66.41	-11.20	55.21	74.00	-18.79	peak
6	2405.992	50.35	-11.20	39.15	54.00	-14.85	AVG
7	2543.412	55.66	-11.05	44.61	74.00	-29.39	peak
8	2543.412	42.96	-11.05	31.91	54.00	-22.09	AVG
9	2626.779	55.04	-10.85	44.19	74.00	-29.81	peak
10	2626.779	43.47	-10.85	32.62	54.00	-21.38	AVG
11	3945.153	53.36	-8.10	45.26	74.00	-28.74	peak
12	3945.153	39.99	-8.10	31.89	54.00	-22.11	AVG

Test Model	0611	Test Mode	Mode 1
Environmental Conditions	24.2℃, 54.3% RH	Detector Function	Quasi-peak
Pol	Horizontal	Distance	3m
Test Engineer	Deh Xu	Test Voltage	AC 120V/60Hz

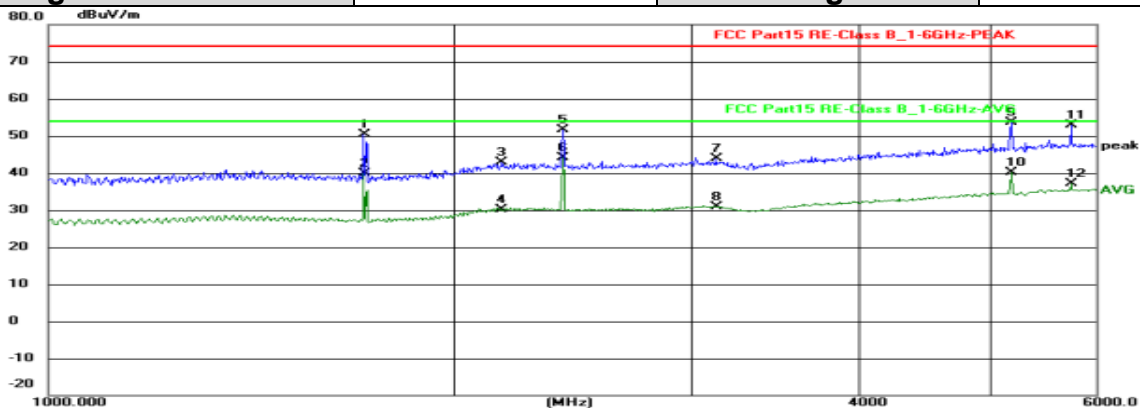

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1714.840	64.87	-14.37	50.50	74.00	-23.50	peak
2	1714.840	54.32	-14.37	39.95	54.00	-14.05	AVG
3	2172.398	54.16	-11.29	42.87	74.00	-31.13	peak
4	2172.398	41.51	-11.29	30.22	54.00	-23.78	AVG
5	2410.306	62.85	-11.20	51.65	74.00	-22.35	peak
6	2410.306	55.39	-11.20	44.19	54.00	-9.81	AVG
7	3130.995	53.75	-9.90	43.85	74.00	-30.15	peak
8	3130.995	40.90	-9.90	31.00	54.00	-23.00	AVG
9	5189.446	59.69	-6.06	53.63	74.00	-20.37	peak
10	5189.446	46.27	-6.06	40.21	54.00	-13.79	AVG
11	5747.456	58.26	-5.34	52.92	74.00	-21.08	peak
12	5747.456	42.51	-5.34	37.17	54.00	-16.83	AVG

Note: Pre-Scan all mode, Thus record worse case mode result in this report.

-----THE END OF TEST REPORT-----