



FCC RF Test Report

APPLICANT : Huawei Technologies Co., Ltd.
EQUIPMENT : Smartphone
BRAND NAME : HUAWEI
MODEL NAME : LYA-L29, LYA-L09
FCC ID : QISLYA-LX9
STANDARD : FCC Part 15 Subpart E §15.407

The product was received on Aug. 02, 2018 and testing was completed on Sep. 07, 2018. We, Sporton International (Shenzhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Shenzhen) Inc., the test report shall not be reproduced except in full.



Approved by: Eric Shih / Manager

Sporton International (Shenzhen) Inc.

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan Shenzhen City
Guangdong Province 518055 China**



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	6
1.5 Modification of EUT	7
1.6 Testing Location	8
1.7 Applicable Standards	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Carrier Frequency and Channel	9
2.2 Test Mode.....	10
2.3 Connection Diagram of Test System	11
2.4 Support Unit used in test configuration and system.....	11
2.5 EUT Operation Test Setup	12
2.6 Measurement Results Explanation Example	12
3 TEST RESULT.....	13
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement.....	13
3.2 Maximum Conducted Output Power Measurement	16
3.3 Power Spectral Density Measurement.....	17
3.4 Unwanted Emissions Measurement.....	20
3.5 AC Conducted Emission Measurement	24
3.6 Automatically Discontinue Transmission.....	26
3.7 Antenna Requirements.....	27
4 LIST OF MEASURING EQUIPMENT.....	28
5 UNCERTAINTY OF EVALUATION.....	29
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. RADIATED SPURIOUS EMISSION PLOTS	
APPENDIX E. DUTY CYCLE PLOTS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR880204B	Rev. 01	Initial issue of report	Sep. 11, 2018



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB, 26dB and 99% Occupied Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 9.64 dB at 17235.000 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 8.40 dB at 0.680 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

1.2 Manufacturer

Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smartphone
Brand Name	HUAWEI
Model Name	LYA-L29, LYA-L09
FCC ID	QISLYA-LX9
EUT supports Radios application	GSM/WCDMA/HSPA/LTE/NFC/GNSS/WPC WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 Bluetooth BR/EDR/LE
HW Version	HL2LAYAM
SW Version	9.0.0.82(C432E82R1P7)
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification			
Tx/Rx Channel Frequency Range	5745 MHz ~ 5825 MHz		
Maximum Output Power	MIMO <Ant. 1 + 2> 802.11a : 12.78 dBm / 0.0190 W 802.11n HT20 : 11.79 dBm / 0.0151 W 802.11n HT40 : 12.04 dBm / 0.0160 W 802.11ac VHT20: 11.74 dBm / 0.0149 W 802.11ac VHT40: 11.96 dBm / 0.0157 W 802.11ac VHT80: 10.00 dBm / 0.0100 W		
99% Occupied Bandwidth	MIMO <Ant. 1> 802.11a : 17.98 MHz 802.11n HT20 : 18.78 MHz 802.11n HT40 : 36.56 MHz 802.11ac VHT20 : 18.38 MHz 802.11ac VHT40 : 36.46 MHz 802.11ac VHT80 : 75.28 MHz MIMO <Ant. 2> 802.11a : 18.58 MHz 802.11n HT20 : 18.53 MHz 802.11n HT40 : 36.66 MHz 802.11ac VHT20 : 18.53 MHz 802.11ac VHT40 : 36.86 MHz 802.11ac VHT80 : 75.28 MHz		
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)		
Antenna Type / Gain	Ant. 1: IFA Antenna with gain -0.06 dBi Ant. 2: IFA Antenna with gain -3.79 dBi		
Antenna Function Description		Ant. 1	Ant. 2
	802.11 a/n/ac MIMO	V	V

Accessories Information				
AC Adapter 1	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-100400A00
	Manufacturer	Huawei Technologies Co., Ltd.		
	Power Rating	I/P: 100 - 240 Vac~50/60Hz, 1.2 A; O/P: 5V === 2A or 9V=== 2A or 10V=== 4A		
AC Adapter 2	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-100400U00
	Manufacturer	Huawei Technologies Co., Ltd.		
	Power Rating	I/P: 100 - 240 Vac~50/60Hz, 1.2 A; O/P: 5V === 2A or 9V=== 2A or 10V=== 4A		
AC Adapter 3	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-100400E00
	Manufacturer	Huawei Technologies Co., Ltd.		
	Power Rating	I/P: 100 - 240 Vac~50/60Hz, 1.2 A; O/P: 5V === 2A or 9V=== 2A or 10V=== 4A		
AC Adapter 4	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-100400B00
	Manufacturer	Huawei Technologies Co., Ltd.		
	Power Rating	I/P: 100 - 240 Vac~50/60Hz, 1.2 A; O/P: 5V === 2A or 9V=== 2A or 10V=== 4A		
Battery 1	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HB486486ECW
	Power Rating	Nominal Voltage: ===+3.82Vdc Charging Voltage: ===+4.4V Rated Capacity: 4100mAh	Type	Li-ion Polymer
Battery 2	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HB486486ECW
	Power Rating	Nominal Voltage: ===+3.82Vdc Charging Voltage: ===+4.4V Rated Capacity: 4100mAh	Type	Li-ion Polymer
Battery 3	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HB486486ECW
	Power Rating	Nominal Voltage: ===+3.82Vdc Charging Voltage: ===+4.4V Rated Capacity: 4100mAh	Type	Li-ion Polymer
Earphone 1	Brand Name	Jiangxi Lianchuang Hongsheng Electronic Co., Ltd.		
	Model Name	MEND1632B729003	Number	22040325
Earphone 2	Brand Name	GoerTek Inc.		
	Model Name	Windy-S	Number	22040325
Earphone 3	Brand Name	Boluo County Quancheng Electronic Co., Ltd.		
	Model Name	1331-3301-6001-TC-088	Number	22040325
Earphone 4	Brand Name	Boluo County Quancheng Electronic Co., Ltd.		
	Model Name	630276	Number	N/A

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International (Shenzhen) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600156-0) and the FCC designation No. are CN5018 and CN5019.

Test Site	Sporton International (Shenzhen) Inc.		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan Shenzhen City Guangdong Province 518055 China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595		
Test Site No.	Sporton Site No.		FCC Test Firm Registration No.
	TH01-SZ	CO01-SZ	337463

Test Site	Sporton International (Shenzhen) Inc.		
Test Site Location	No. 3 Bldg the third floor of south, Shahe River west, Fengzeyuan Warehouse, Nanshan District Shenzhen City Guangdong Province 518055 China TEL: +86-755-3320-2398		
Test Site No.	Sporton Site No.		FCC Test Firm Registration No.
	03CH01-SZ		577730

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart E
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


MIMO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0

AC Conducted Emission	Mode 1 : GSM850 Idle + WLAN (5GHz) Link + Bluetooth Link + wireless charger + Earphone + SIM 1
	Mode 2 : GSM850 Idle + WLAN (5GHz) Link + Bluetooth Link + Smart phone (USB Cable Charging from Adapter) charger to EUT + Earphone + SIM 2
	Mode 3 : GSM850 Idle + WLAN (5GHz) Link + Bluetooth Link + USB Cable Charging from Adapter + SIM 2
Remark: 1. The worst case of conducted emission is mode 2; only the test data of it was reported. 2. For Radiated Test Cases, The tests were performed with USB Cable 1.	

Ch. #		Band IV : 5725-5850 MHz			
		802.11a	802.11n HT20	802.11n HT40	802.11ac VHT80
L	Low	149	149	151	-
M	Middle	157	157	-	155
H	High	165	165	159	-

2.3 Connection Diagram of Test System

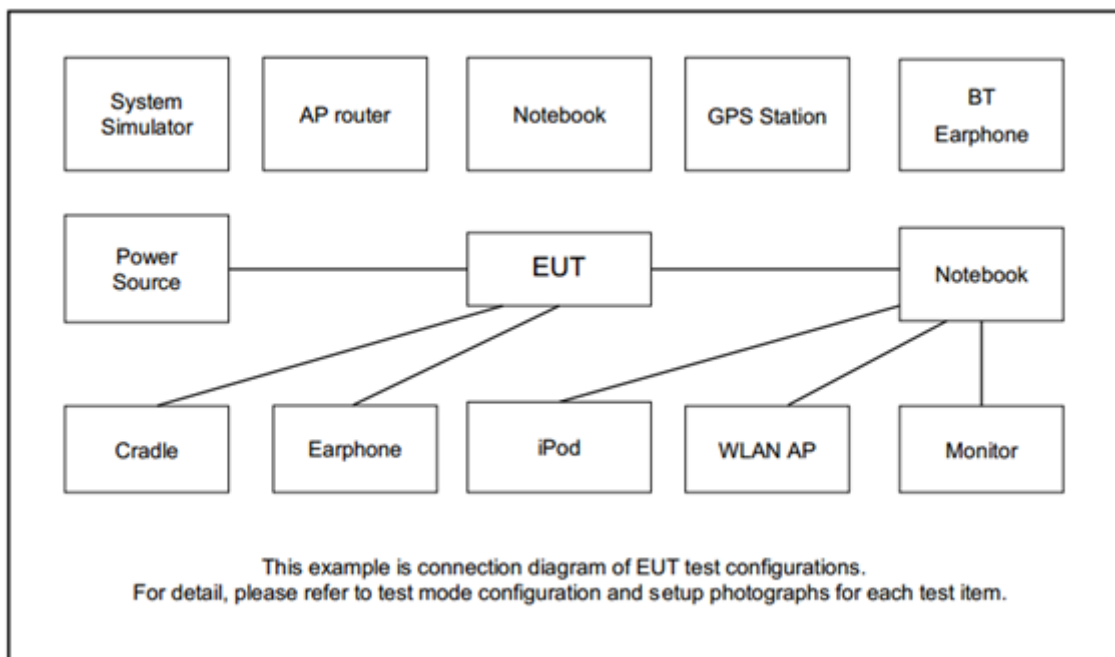

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
3.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
4.	Notebook	Lenovo	E540	FCC DoC	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m
5.	SD Card	N/A	MicroSD HC	FCC DoC	N/A	N/A
6.	wireless charger	samsuang	EP-NG920	FCC DoC	N/A	N/A



2.5 EUT Operation Test Setup

The RF test items, utility “adb” was installed in EUT which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.


3.1.4 Test Setup

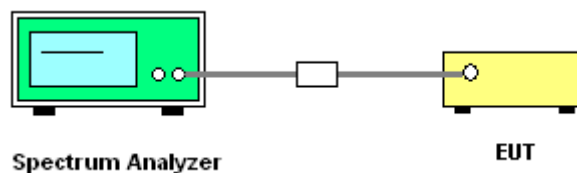

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

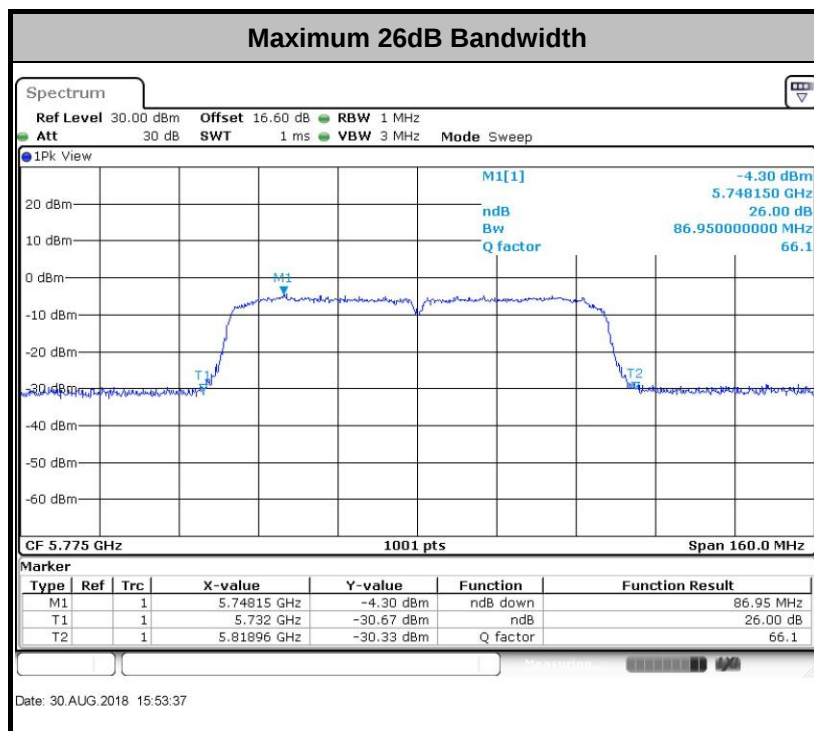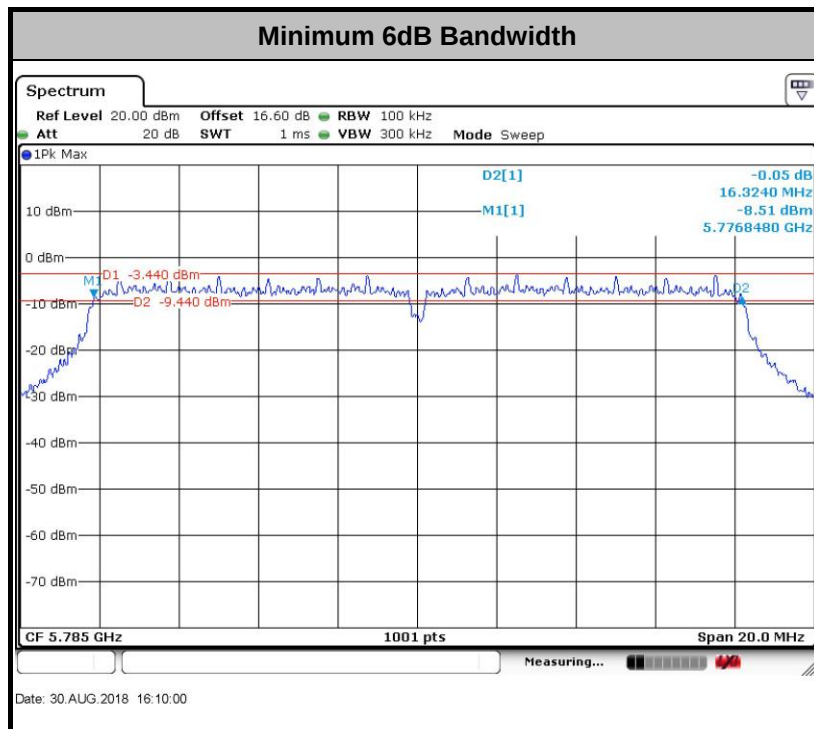

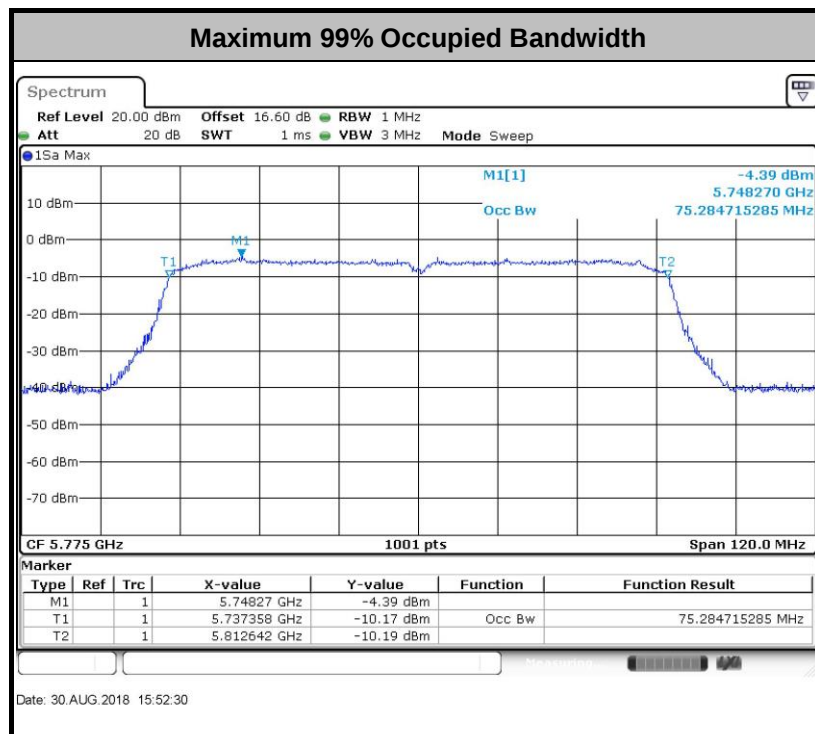

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

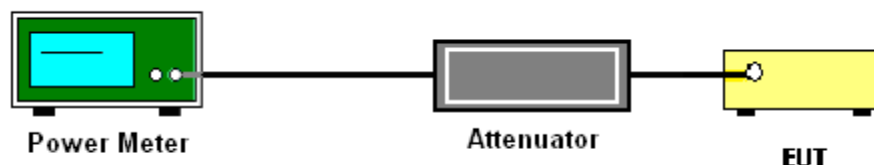

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz.
- Set VBW $\geq$ 1 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (c): Measure and add $10 \log(N_{\text{ANT}})$ dB.

With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity $10 \log(N_{\text{ANT}})$ dB is added to each spectrum value before comparing to the emission limit. The addition of $10 \log(N_{\text{ANT}})$ dB serves to apportion the emission limit among the N_{ANT} outputs so that each output is permitted to contribute no more than $1/N_{\text{ANT}}^{\text{th}}$ of the PSD limit.



3.3.4 Test Setup

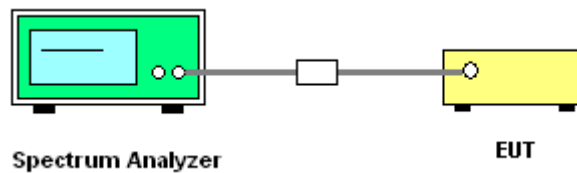



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

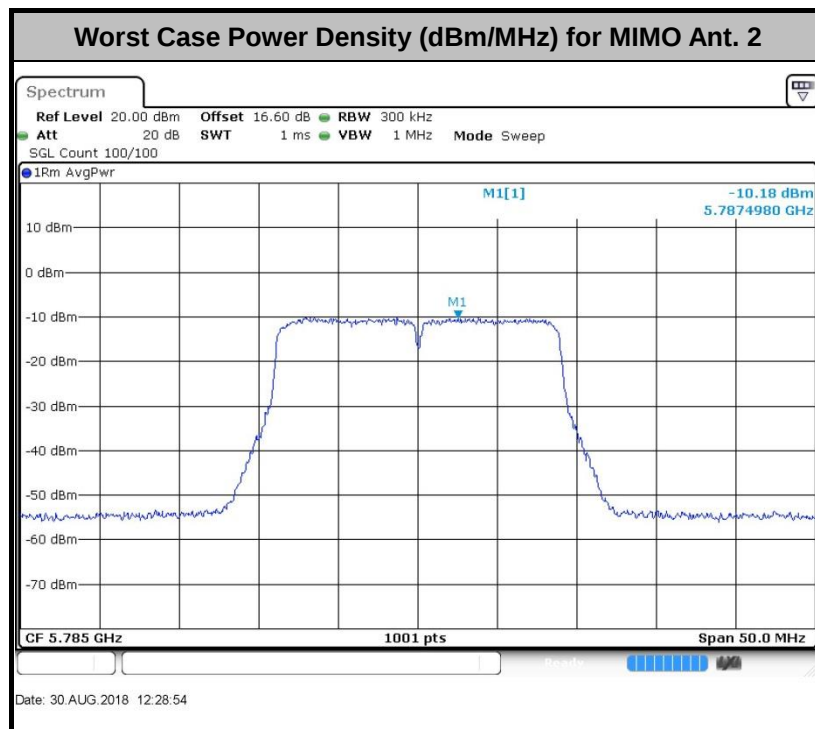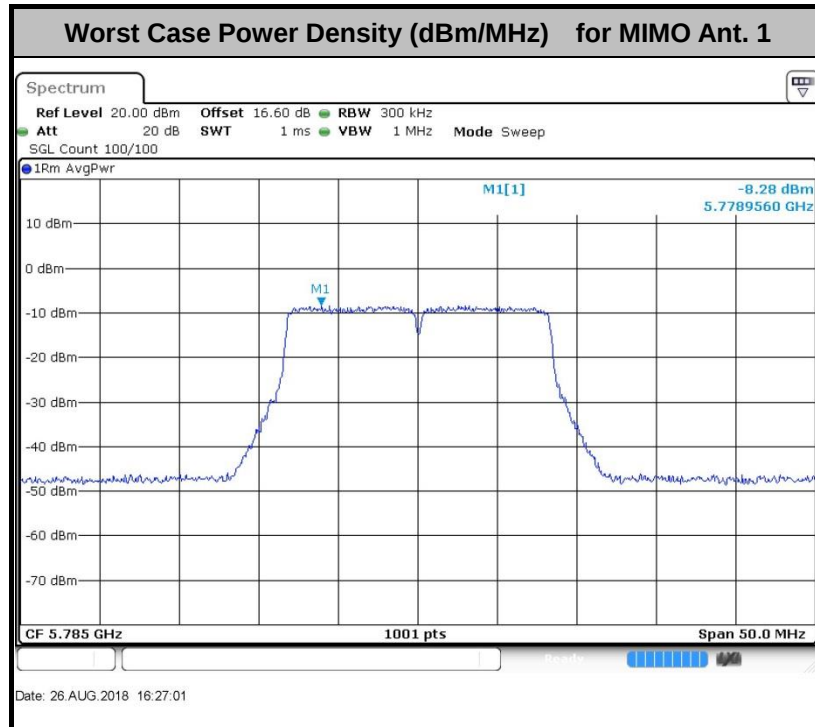

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log(d_{\text{Meas}}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup

For radiated emissions below 30MHz

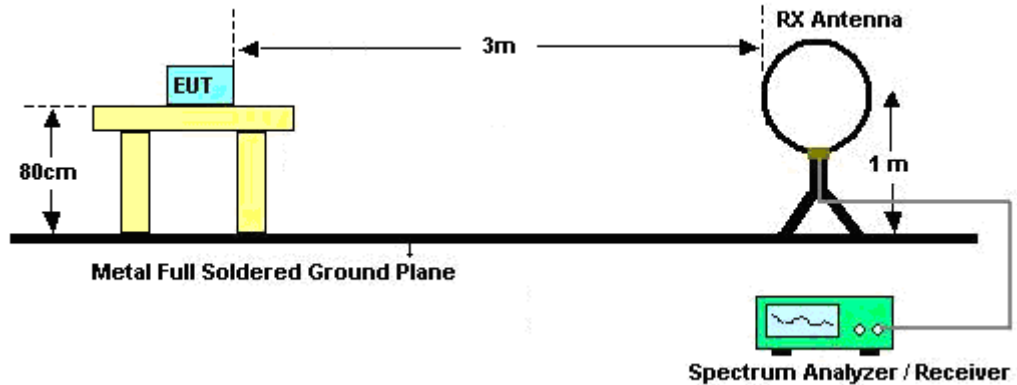

For radiated emissions from 30MHz to 1GHz

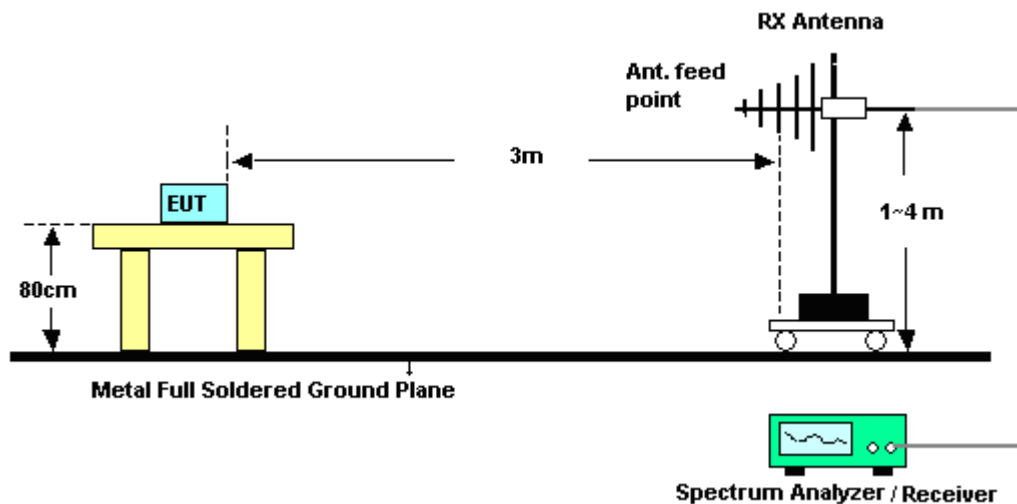

For radiated emissions above 1GHz



3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C and D.

3.4.7 Duty Cycle

Please refer to Appendix E.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

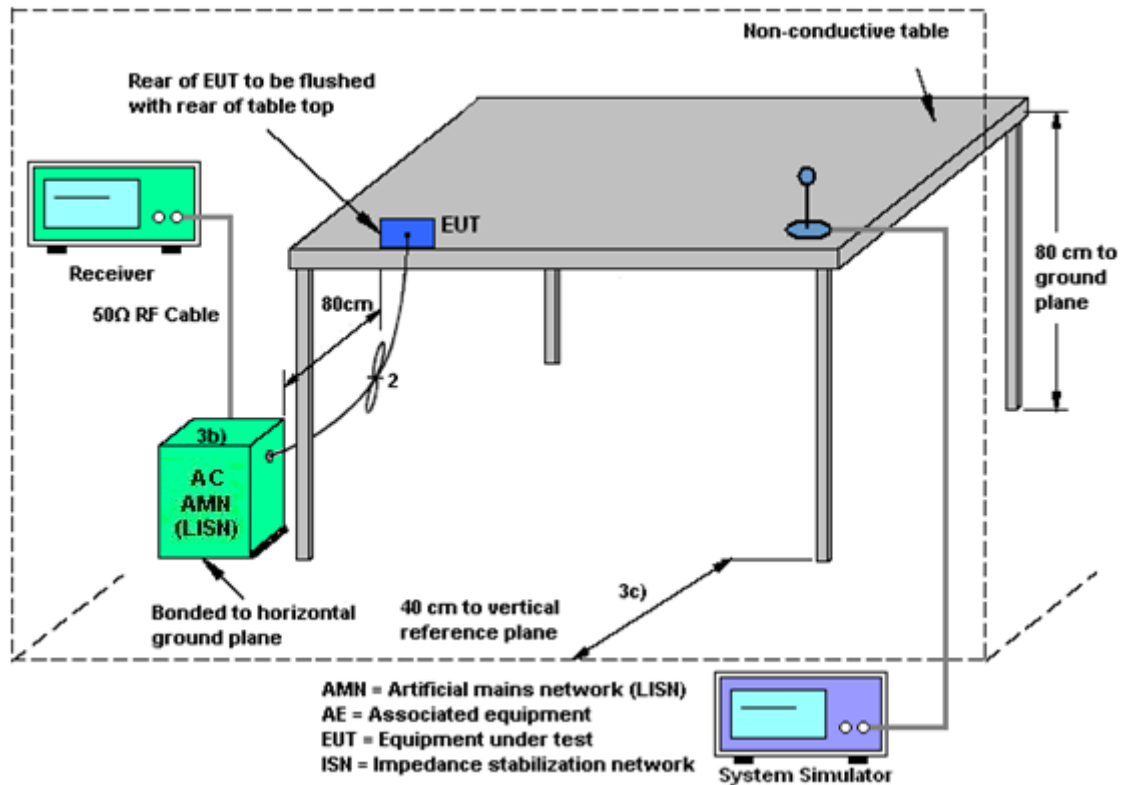

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 19, 2018	Aug. 08, 2018~ Sep. 07, 2018	Apr. 18, 2019	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1207253	30MHz~40GHz	Dec. 26, 2017	Aug. 08, 2018~ Sep. 07, 2018	Dec. 25, 2018	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Dec. 26, 2017	Aug. 08, 2018~ Sep. 07, 2018	Dec. 25, 2018	Conducted (TH01-SZ)
DC Power Supply	GWINSTEK	AnritsuGPS-3030D	EM882636	Max 30V	Apr. 19, 2018	Aug. 08, 2018~ Sep. 07, 2018	Apr. 18, 2019	Conducted (TH01-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Dec. 26, 2017	Aug. 16, 2018	Dec. 25, 2018	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Dec. 26, 2017	Aug. 16, 2018	Dec. 25, 2018	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	MessTec	3816/2SH	00103892	9kHz~30MHz	Nov. 01, 2017	Aug. 16, 2018	Oct. 31, 2018	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 18, 2018	Aug. 16, 2018	Jul. 17, 2019	Conduction (CO01-SZ)
Pulse Limiter (RF Cable)	SCHWARZBECK MESS-ELEKTRONIK	VTSD9561-FN	9561-FN00294	150kHz~30MHz	Oct. 18, 2017	Aug. 16, 2018	Oct. 17, 2018	Conduction (CO01-SZ)
Radio communication analyzer	Anritsu	MT8820C	6201432833	GSM/WCDMA/LTE	Dec. 28, 2017	Aug. 16, 2018	Dec. 27, 2019	Conduction (CO01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Apr. 19, 2018	Aug. 16, 2018 ~ Aug. 28, 2018	Apr. 18, 2019	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May 14, 2018	Aug. 16, 2018 ~ Aug. 28, 2018	May13, 2019	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz-2GHz	Apr. 19, 2018	Aug. 16, 2018 ~ Aug. 28, 2018	Apr. 18, 2019	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS Lindgren	3117	119436	1GHz~18GHz	Jul. 28, 2018	Aug. 16, 2018 ~ Aug. 28, 2018	Jul. 27, 2019	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Mar. 30, 2018	Aug. 16, 2018 ~ Aug. 28, 2018	Mar. 29, 2019	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 19, 2018	Aug. 16, 2018 ~ Aug. 28, 2018	Apr.18, 2019	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1707137	1GHz~18GHz	Oct. 19, 2017	Aug. 16, 2018 ~ Aug. 28, 2018	Oct. 18, 2018	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270104	0.5GHz~26.5GHz	Oct. 19, 2017	Aug. 16, 2018 ~ Aug. 28, 2018	Oct. 18, 2018	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 30, 2018	Aug. 16, 2018 ~ Aug. 28, 2018	Jul. 30, 2019	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Aug. 16, 2018 ~ Aug. 28, 2018	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Aug. 16, 2018 ~ Aug. 28, 2018	NCR	Radiation (03CH01-SZ)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.6
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.8
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.3
---	-----

Appendix A. Conducted Test Results

Test Engineer:	Shuai Qian	Temperature:	21~25	°C
Test Date:	2018/8/8 ~ 2018/9/7	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

Band IV													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	149	5745	17.98	18.53	22.38	22.38	16.34	16.34	0.5		Pass
11a	6Mbps	2	157	5785	17.83	18.58	22.53	22.43	16.34	16.32	0.5		Pass
11a	6Mbps	2	165	5825	17.68	18.48	21.88	22.33	16.34	16.32	0.5		Pass
HT20	MCS0	2	149	5745	18.78	18.53	22.78	22.33	17.54	17.28	0.5		Pass
HT20	MCS0	2	157	5785	18.38	18.48	21.93	22.33	17.54	17.30	0.5		Pass
HT20	MCS0	2	165	5825	18.38	18.43	21.93	22.18	17.56	17.28	0.5		Pass
HT40	MCS0	2	151	5755	36.56	36.66	42.44	42.62	35.68	35.80	0.5		Pass
HT40	MCS0	2	159	5795	36.46	36.56	42.53	43.34	35.68	35.80	0.5		Pass
VHT20	MCS0	2	149	5745	18.38	18.43	21.83	22.43	17.54	17.30	0.5		Pass
VHT20	MCS0	2	157	5785	18.33	18.53	21.98	22.38	17.54	17.32	0.5		Pass
VHT20	MCS0	2	165	5825	18.33	18.38	21.78	22.28	17.56	17.30	0.5		Pass
VHT40	MCS0	2	151	5755	36.26	36.56	41.99	43.16	35.45	35.80	0.5		Pass
VHT40	MCS0	2	159	5795	36.46	36.86	42.26	43.61	35.68	35.80	0.5		Pass
VHT80	MCS0	2	155	5775	75.28	75.28	86.95	85.99	75.05	75.13	0.5		Pass

TEST RESULTS DATA
Average Power Table


Band IV															
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)			Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	149	5745	0.06	0.05	9.81	9.05	12.46	30.00		-0.06		Pass	
11a	6Mbps	2	157	5785	0.06	0.05	10.02	9.36	12.72	30.00		-0.06		Pass	
11a	6Mbps	2	165	5825	0.06	0.05	10.15	9.35	12.78	30.00		-0.06		Pass	
HT20	MCS0	2	149	5745	0.13	0.14	8.81	8.12	11.49	30.00		-0.06		Pass	
HT20	MCS0	2	157	5785	0.13	0.14	8.94	8.19	11.60	30.00		-0.06		Pass	
HT20	MCS0	2	165	5825	0.13	0.14	9.21	8.30	11.79	30.00		-0.06		Pass	
HT40	MCS0	2	151	5755	0.11	0.25	8.97	8.90	11.95	30.00		-0.06		Pass	
HT40	MCS0	2	159	5795	0.11	0.25	9.00	9.05	12.04	30.00		-0.06		Pass	
VHT20	MCS0	2	149	5745	0.06	0.07	8.86	7.77	11.36	30.00		-0.06		Pass	
VHT20	MCS0	2	157	5785	0.06	0.07	8.89	8.44	11.68	30.00		-0.06		Pass	
VHT20	MCS0	2	165	5825	0.06	0.07	9.11	8.31	11.74	30.00		-0.06		Pass	
VHT40	MCS0	2	151	5755	0.12	0.12	8.88	8.65	11.78	30.00		-0.06		Pass	
VHT40	MCS0	2	159	5795	0.12	0.12	9.15	8.74	11.96	30.00		-0.06		Pass	
VHT80	MCS0	2	155	5775	0.26	0.24	6.77	7.19	10.00	30.00		-0.06		Pass	

TEST RESULTS DATA
Power Spectral Density

Band IV																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	149	5745	0.06	0.05	2.22				-3.00	30.00		1.28		Pass
11a	6Mbps	2	157	5785	0.06	0.05	2.22				-2.99	30.00		1.28		Pass
11a	6Mbps	2	165	5825	0.06	0.05	2.22				-3.24	30.00		1.28		Pass
HT20	MCS0	2	149	5745	0.13	0.14	2.22				-4.51	30.00		1.28		Pass
HT20	MCS0	2	157	5785	0.13	0.14	2.22				-4.69	30.00		1.28		Pass
HT20	MCS0	2	165	5825	0.13	0.14	2.22				-4.27	30.00		1.28		Pass
HT40	MCS0	2	151	5755	0.11	0.25	2.22				-7.48	30.00		1.28		Pass
HT40	MCS0	2	159	5795	0.11	0.25	2.22				-7.06	30.00		1.28		Pass
VHT20	MCS0	2	149	5745	0.06	0.07	2.22				-4.71	30.00		1.28		Pass
VHT20	MCS0	2	157	5785	0.06	0.07	2.22				-4.68	30.00		1.28		Pass
VHT20	MCS0	2	165	5825	0.06	0.07	2.22				-4.33	30.00		1.28		Pass
VHT40	MCS0	2	151	5755	0.12	0.12	2.22				-7.19	30.00		1.28		Pass
VHT40	MCS0	2	159	5795	0.12	0.12	2.22				-6.88	30.00		1.28		Pass
VHT80	MCS0	2	155	5775	0.26	0.24	2.22				-12.66	30.00		1.28		Pass




Appendix B. AC Conducted Emission Test Results

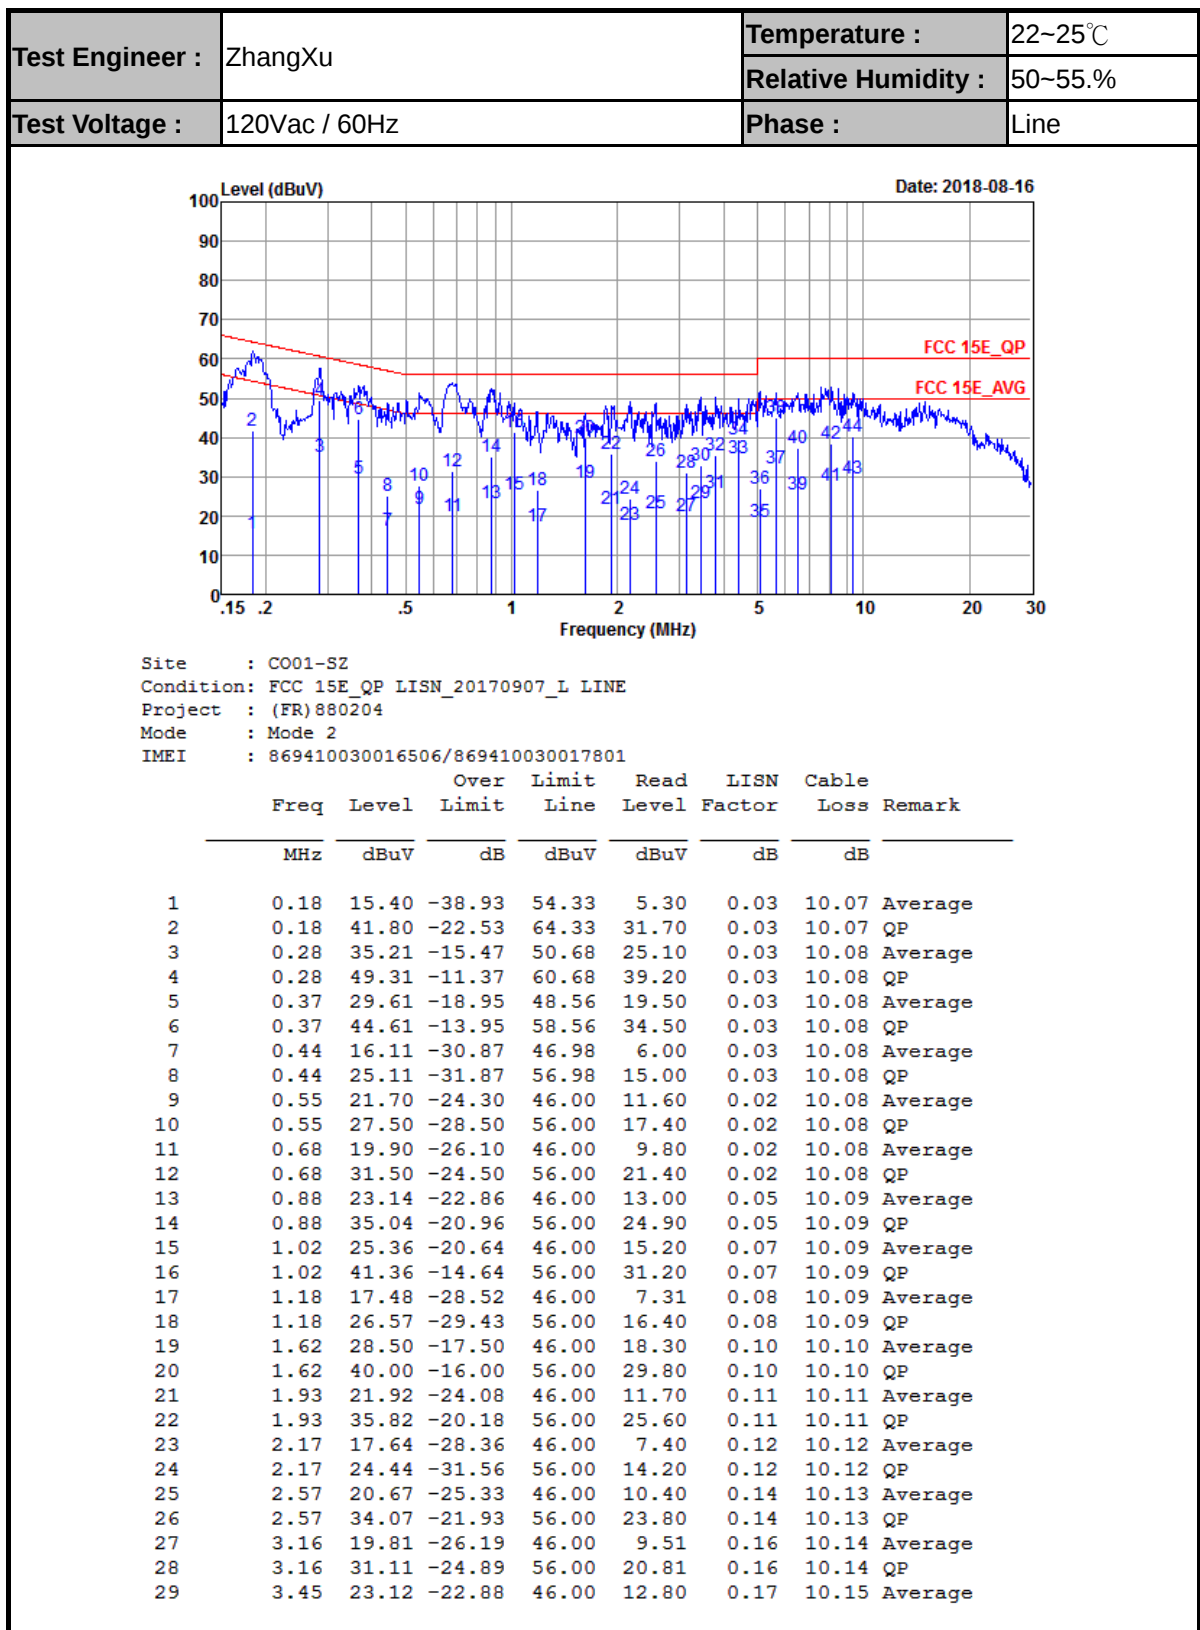




Test Engineer :	ZhangXu	Temperature :	22~25℃
		Relative Humidity :	50~55.%
Test Voltage :	120Vac / 60Hz	Phase :	Line

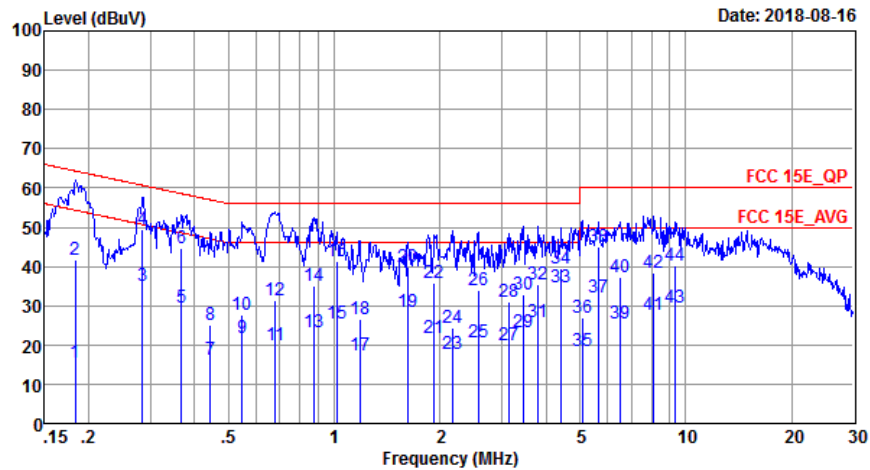


Site : C001-SZ
Condition: FCC 15E_QP LISN_20170907_L LINE
Project : (FR)880204
Mode : Mode 2
IMEI : 869410030016506/869410030017801

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
30	3.45	33.02	-22.98	56.00	22.70	0.17	10.15	QP
31	3.80	25.73	-20.27	46.00	15.40	0.17	10.16	Average
32	3.80	35.43	-20.57	56.00	25.10	0.17	10.16	QP
33 *	4.43	34.76	-11.24	46.00	24.40	0.18	10.18	Average
34	4.43	39.66	-16.34	56.00	29.30	0.18	10.18	QP
35	5.08	18.38	-31.62	50.00	8.00	0.19	10.19	Average
36	5.08	27.08	-32.92	60.00	16.70	0.19	10.19	QP
37	5.62	32.21	-17.79	50.00	21.80	0.20	10.21	Average
38	5.62	45.11	-14.89	60.00	34.70	0.20	10.21	QP
39	6.49	25.56	-24.44	50.00	15.11	0.22	10.23	Average
40	6.49	37.36	-22.64	60.00	26.91	0.22	10.23	QP
41	8.11	27.77	-22.23	50.00	17.21	0.28	10.28	Average
42	8.11	38.47	-21.53	60.00	27.91	0.28	10.28	QP
43	9.35	29.35	-20.65	50.00	18.70	0.33	10.32	Average
44	9.35	40.15	-19.85	60.00	29.50	0.33	10.32	QP

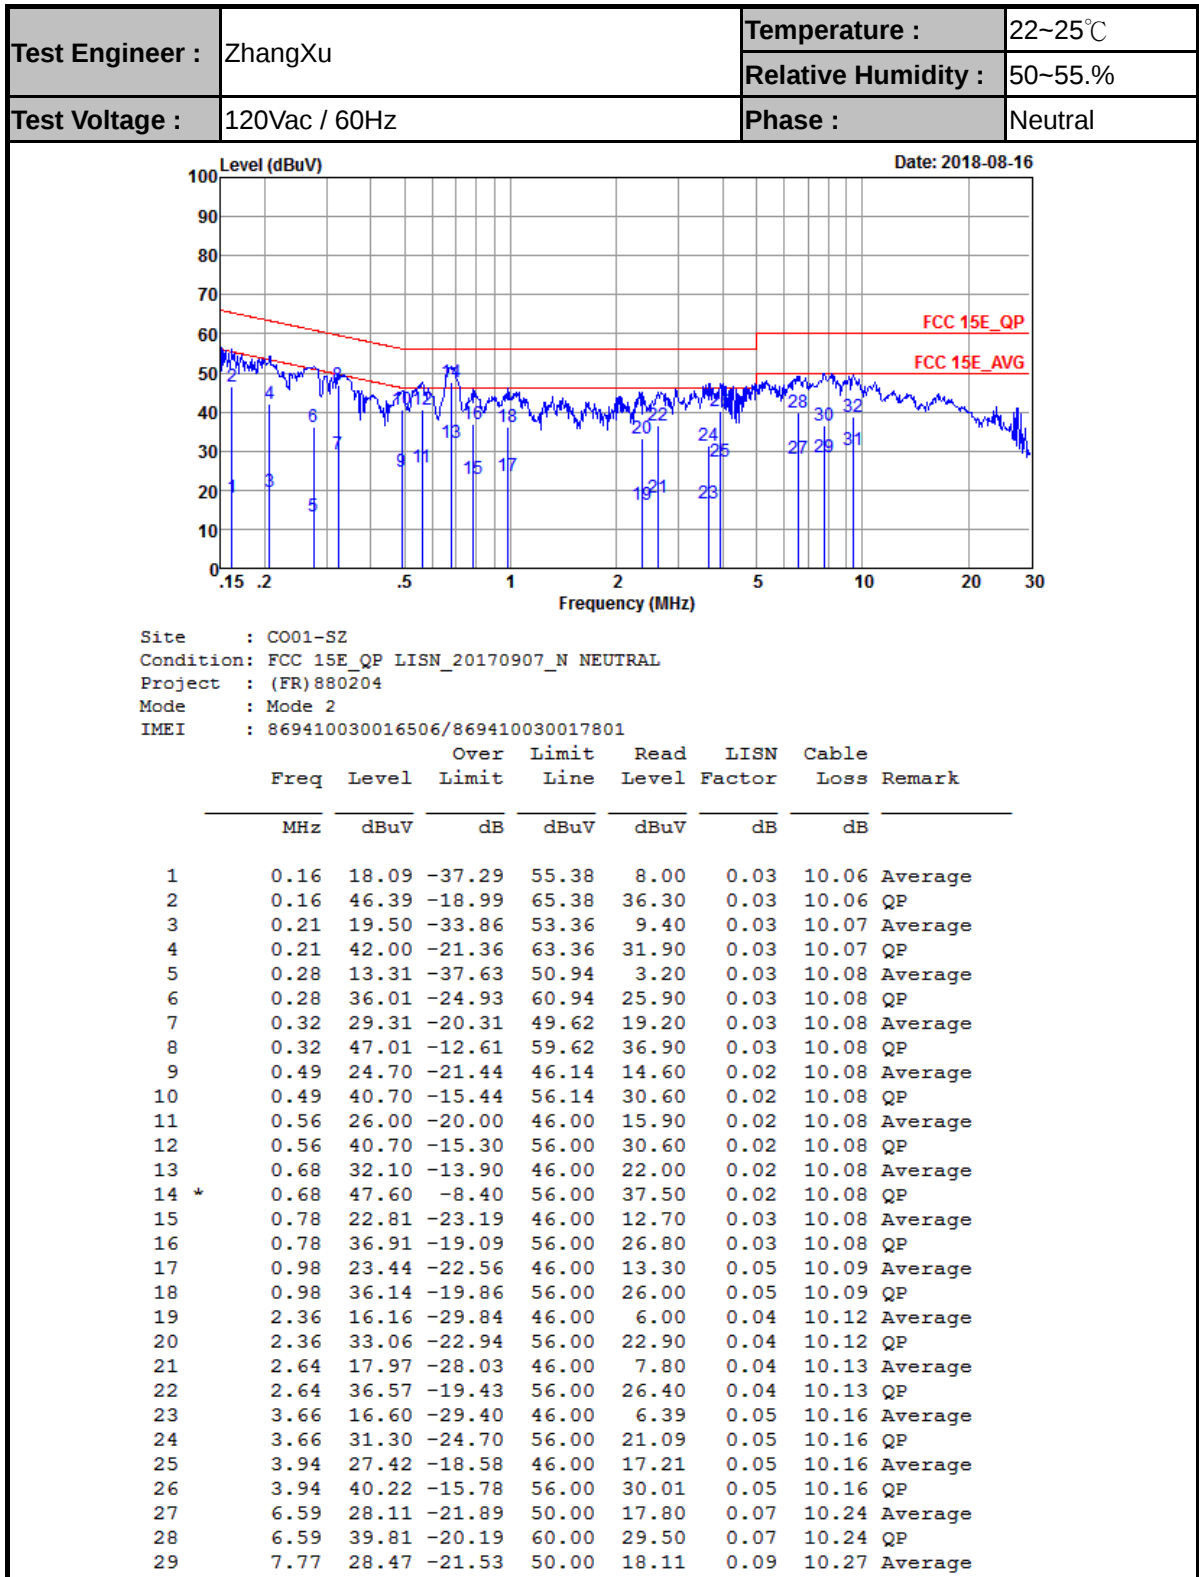



Test Engineer :	ZhangXu	Temperature :	22~25℃
		Relative Humidity :	50~55.%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

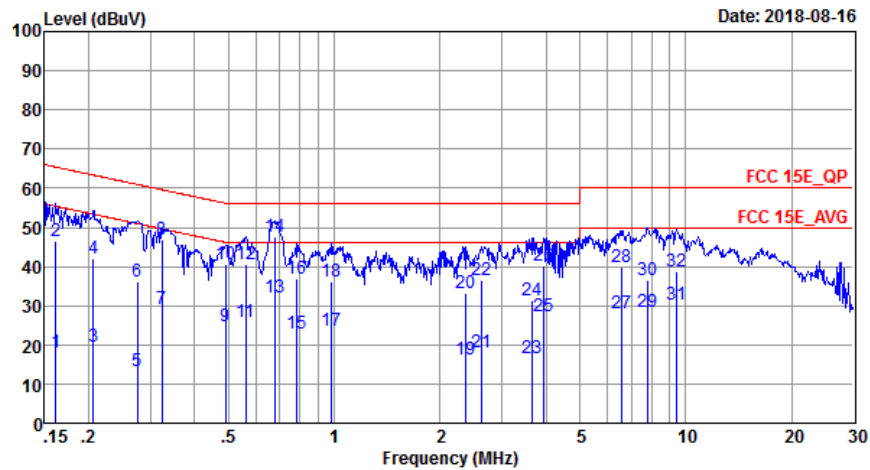

Site : C001-SZ
Condition: FCC 15E_QP LISN_20170907_N NEUTRAL
Project : (FR)880204
Mode : Mode 2
IMEI : 869410030016506/869410030017801

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
30	7.77	36.67	-23.33	60.00	26.31	0.09	10.27	QP
31	9.45	30.27	-19.73	50.00	19.80	0.15	10.32	Average
32	9.45	38.67	-21.33	60.00	28.20	0.15	10.32	QP



Appendix C. Radiated Spurious Emission

Test Engineer :	Xiaoshi Tan	Temperature :	24~25°C
		Relative Humidity :	48~49%

Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 149 5745MHz		5614.6	51.52	-16.68	68.2	38.07	34.46	12.09	33.1	100	40	P	H
		5670.8	52.31	-31.32	83.63	38.56	34.48	12.37	33.1	100	40	P	H
		5716	51.1	-58.58	109.68	37.22	34.47	12.51	33.1	100	40	P	H
		5721.6	51.23	-63.22	114.45	37.36	34.46	12.51	33.1	100	40	P	H
	*	5745	92.69	-	-	78.69	34.45	12.65	33.1	100	40	P	H
	*	5745	87.27	-	-	73.27	34.45	12.65	33.1	100	40	A	H
													H
													H
		5618.4	50.76	-17.44	68.2	37.29	34.48	12.09	33.1	229	44	P	V
		5693.2	52.1	-48.09	100.19	38.35	34.48	12.37	33.1	229	44	P	V
		5700.6	51.66	-53.71	105.37	37.78	34.47	12.51	33.1	229	44	P	V
		5722.6	59.46	-57.27	116.73	45.59	34.46	12.51	33.1	229	44	P	V
	*	5740	97.41	-	-	83.41	34.45	12.65	33.1	229	44	P	V
	*	5745	91.44	-	-	77.44	34.45	12.65	33.1	229	44	A	V
													V
													V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 157 5785MHz		5616	51.05	-17.15	68.2	37.58	34.48	12.09	33.1	119	36	P	H
		5685.6	51.2	-43.38	94.58	37.45	34.48	12.37	33.1	119	36	P	H
		5716.4	50.89	-58.9	109.79	37.01	34.47	12.51	33.1	119	36	P	H
		5724	50.48	-69.44	119.92	36.61	34.46	12.51	33.1	119	36	P	H
	*	5785	93.33	-	-	79.2	34.44	12.79	33.1	119	36	P	H
	*	5785	86.69	-	-	72.56	34.44	12.79	33.1	119	36	A	H
		5851.4	50.44	-68.57	119.01	36.25	34.41	12.88	33.1	119	36	P	H
		5874.6	51.53	-53.78	105.31	37.25	34.41	12.97	33.1	119	36	P	H
		5889	51.75	-43.06	94.81	37.46	34.42	12.97	33.1	119	36	P	H
		5942.6	52.11	-16.09	68.2	37.61	34.46	13.14	33.1	119	36	P	H
													H
													H
		5637.2	51.59	-16.61	68.2	37.96	34.5	12.23	33.1	225	39	P	V
		5681.2	53.71	-37.62	91.33	39.96	34.48	12.37	33.1	225	39	P	V
		5701.6	50.88	-54.77	105.65	37	34.47	12.51	33.1	225	39	P	V
		5722.6	51.55	-65.18	116.73	37.68	34.46	12.51	33.1	225	39	P	V
	*	5785	97.54	-	-	83.41	34.44	12.79	33.1	225	39	P	V
	*	5785	91.48	-	-	77.35	34.44	12.79	33.1	225	39	A	V
		5850	49.82	-72.38	122.2	35.63	34.41	12.88	33.1	225	39	P	V
		5874.2	51.15	-54.27	105.42	36.87	34.41	12.97	33.1	225	39	P	V
		5920.8	51.74	-19.56	71.3	37.35	34.44	13.05	33.1	225	39	P	V
		5926	51.27	-16.93	68.2	36.87	34.45	13.05	33.1	225	39	P	V
													V
													V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 165 5825MHz	*	5825	91.76	-	-	77.56	34.42	12.88	33.1	119	41	P	H
	*	5825	86.09	-	-	71.89	34.42	12.88	33.1	119	41	A	H
		5851	51.36	-68.56	119.92	37.17	34.41	12.88	33.1	119	41	P	H
		5875	52.36	-52.84	105.2	38.08	34.41	12.97	33.1	119	41	P	H
		5909	52.42	-27.59	80.01	38.03	34.44	13.05	33.1	119	41	P	H
		5939	51.51	-16.69	68.2	37.01	34.46	13.14	33.1	119	41	P	H
													H
													H
	*	5825	97.23	-	-	83.03	34.42	12.88	33.1	211	14	P	V
	*	5825	91.07	-	-	76.87	34.42	12.88	33.1	211	14	A	V
		5855	51.3	-59.5	110.8	37.12	34.4	12.88	33.1	211	14	P	V
		5859.8	51.78	-57.67	109.45	37.51	34.4	12.97	33.1	211	14	P	V
		5899.2	51.85	-35.4	87.25	37.48	34.42	13.05	33.1	211	14	P	V
		5941.2	52.47	-15.73	68.2	37.97	34.46	13.14	33.1	211	14	P	V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		11490	52.4	-21.6	74	55.19	37.69	14.88	55.36	147	78	P	H
		11490	43.33	-10.67	54	46.12	37.69	14.88	55.36	147	78	A	H
		17235	58.56	-9.64	68.2	53.12	43.89	18.04	56.49	170	341	P	H
													H
		11490	51.43	-22.57	74	54.22	37.69	14.88	55.36	160	360	P	V
		11490	43.66	-10.34	54	46.45	37.69	14.88	55.36	160	360	A	V
		17235	57.36	-10.84	68.2	51.92	43.89	18.04	56.49	170	360	P	V
													V
802.11a CH 157 5785MHz		11570	52.33	-21.67	74	54.86	37.81	14.9	55.24	173	94	P	H
		11570	43.33	-10.67	54	45.86	37.81	14.9	55.24	173	94	A	H
		17355	57.6	-10.6	68.2	52.47	43.53	18.18	56.58	189	185	P	H
													H
		11570	52.46	-21.54	74	54.99	37.81	14.9	55.24	175	198	P	V
		11570	43.52	-10.48	54	46.05	37.81	14.9	55.24	175	198	A	V
		17355	57.87	-10.33	68.2	52.74	43.53	18.18	56.58	189	185	P	V
													V
802.11a CH 165 5825MHz		11650	52.25	-21.75	74	54.54	37.92	14.92	55.13	154	314	P	H
		11650	43.73	-10.27	54	46.02	37.92	14.92	55.13	154	314	A	H
		17475	56.54	-11.66	68.2	51.73	43.18	18.31	56.68	142	157	P	H
													H
		11650	52.57	-21.43	74	54.86	37.92	14.92	55.13	145	347	P	V
		11650	43.66	-10.34	54	45.95	37.92	14.92	55.13	145	347	A	V
		17475	57.94	-10.26	68.2	53.13	43.18	18.31	56.68	150	360	P	V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		5637	51.51	-16.69	68.2	37.88	34.5	12.23	33.1	129	39	P	H
		5657.8	52.06	-21.93	73.99	38.44	34.49	12.23	33.1	129	39	P	H
		5701.2	50.63	-54.91	105.54	36.75	34.47	12.51	33.1	129	39	P	H
		5722.4	49.97	-66.3	116.27	36.1	34.46	12.51	33.1	129	39	P	H
	*	5745	92.18	-	-	78.18	34.45	12.65	33.1	129	39	P	H
	*	5745	85.09	-	-	71.09	34.45	12.65	33.1	129	39	A	H
													H
													H
		5646	51.85	-16.35	68.2	38.22	34.5	12.23	33.1	207	38	P	V
		5691.8	51.37	-47.78	99.15	37.62	34.48	12.37	33.1	207	38	P	V
		5709.4	51.58	-56.25	107.83	37.7	34.47	12.51	33.1	207	38	P	V
		5722.8	51.05	-66.13	117.18	37.18	34.46	12.51	33.1	207	38	P	V
	*	5745	96.71	-	-	82.71	34.45	12.65	33.1	207	38	P	V
	*	5745	90.57	-	-	76.57	34.45	12.65	33.1	207	38	A	V
													V
													V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 157 5785MHz		5631.4	52.85	-15.35	68.2	39.24	34.48	12.23	33.1	115	47	P	H
		5692.2	53.01	-46.44	99.45	39.26	34.48	12.37	33.1	115	47	P	H
		5712.6	51.73	-57	108.73	37.85	34.47	12.51	33.1	115	47	P	H
		5724.4	50.65	-70.18	120.83	36.78	34.46	12.51	33.1	115	47	P	H
	*	5785	91.31	-	-	77.18	34.44	12.79	33.1	115	47	P	H
	*	5785	84.22	-	-	70.09	34.44	12.79	33.1	115	47	A	H
		5853	50.27	-65.09	115.36	36.08	34.41	12.88	33.1	115	47	P	H
		5862.6	51.03	-57.64	108.67	36.76	34.4	12.97	33.1	115	47	P	H
		5905.2	51.53	-31.28	82.81	37.14	34.44	13.05	33.1	115	47	P	H
		5932	52.16	-16.04	68.2	37.76	34.45	13.05	33.1	115	47	P	H
													H
													H
		5617.8	51.56	-16.64	68.2	38.09	34.48	12.09	33.1	203	17	P	V
		5672.2	52.02	-32.65	84.67	38.27	34.48	12.37	33.1	203	17	P	V
		5703.8	50.89	-55.38	106.27	37.01	34.47	12.51	33.1	203	17	P	V
		5720.2	51.02	-60.24	111.26	37.15	34.46	12.51	33.1	203	17	P	V
	*	5785	97.03	-	-	82.9	34.44	12.79	33.1	203	17	P	V
	*	5785	89.39	-	-	75.26	34.44	12.79	33.1	203	17	A	V
		5850.2	51.66	-70.08	121.74	37.47	34.41	12.88	33.1	203	17	P	V
		5860.6	52.46	-56.77	109.23	38.19	34.4	12.97	33.1	203	17	P	V
		5884	51.42	-47.1	98.52	37.14	34.41	12.97	33.1	203	17	P	V
		5946	53.42	-14.78	68.2	38.92	34.46	13.14	33.1	203	17	P	V
													V
													V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 165 5825MHz	*	5825	92.74	-	-	78.54	34.42	12.88	33.1	133	39	P	H
	*	5825	84.76	-	-	70.56	34.42	12.88	33.1	133	39	A	H
		5851.4	50.41	-68.6	119.01	36.22	34.41	12.88	33.1	133	39	P	H
		5873.6	50.89	-54.7	105.59	36.61	34.41	12.97	33.1	133	39	P	H
		5890.2	51.79	-42.13	93.92	37.5	34.42	12.97	33.1	133	39	P	H
		5930.4	52.63	-15.57	68.2	38.23	34.45	13.05	33.1	133	39	P	H
													H
													H
	*	5825	96.39	-	-	82.19	34.42	12.88	33.1	210	32	P	V
	*	5825	89.05	-	-	74.85	34.42	12.88	33.1	210	32	A	V
		5850	52.97	-69.23	122.2	38.78	34.41	12.88	33.1	210	32	P	V
		5860	51.84	-57.56	109.4	37.57	34.4	12.97	33.1	210	32	P	V
		5893.6	52.15	-39.25	91.4	37.86	34.42	12.97	33.1	210	32	P	V
		5946	51.9	-16.3	68.2	37.4	34.46	13.14	33.1	210	32	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		11490	51.62	-22.38	74	54.41	37.69	14.88	55.36	158	314	P	H
		11490	44.06	-9.94	54	46.85	37.69	14.88	55.36	158	314	A	H
		17235	57.86	-10.34	68.2	52.42	43.89	18.04	56.49	170	312	P	H
													H
		11490	51.44	-22.56	74	54.23	37.69	14.88	55.36	160	360	P	V
		11490	43.57	-10.43	54	46.36	37.69	14.88	55.36	160	360	A	V
		17235	57.73	-10.47	68.2	52.29	43.89	18.04	56.49	196	360	P	V
													V
802.11n HT20 CH 157 5785MHz		11570	52.14	-21.86	74	54.67	37.81	14.9	55.24	172	198	P	H
		11570	43.35	-10.65	54	45.88	37.81	14.9	55.24	172	198	A	H
		17355	57.93	-10.27	68.2	52.8	43.53	18.18	56.58	189	65	P	H
													H
		11570	52.86	-21.14	74	55.39	37.81	14.9	55.24	175	198	P	V
		11570	43.81	-10.19	54	46.34	37.81	14.9	55.24	175	198	A	V
		17355	57.88	-10.32	68.2	52.75	43.53	18.18	56.58	189	185	P	V
													V
802.11n HT20 CH 165 5825MHz		11650	52.29	-21.71	74	54.58	37.92	14.92	55.13	174	38	P	H
		11650	43.69	-10.31	54	45.98	37.92	14.92	55.13	174	38	A	H
		17475	56.96	-11.24	68.2	52.15	43.18	18.31	56.68	178	36	P	H
													H
		11650	53.03	-20.97	74	55.32	37.92	14.92	55.13	156	347	P	V
		11650	43.78	-10.22	54	46.07	37.92	14.92	55.13	156	347	A	V
		17475	56.63	-11.57	68.2	51.82	43.18	18.31	56.68	174	45	P	V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		5612.4	50.8	-17.4	68.2	37.35	34.46	12.09	33.1	138	37	P	H
		5656.4	51.76	-21.19	72.95	38.14	34.49	12.23	33.1	138	37	P	H
		5710.4	52.46	-55.65	108.11	38.58	34.47	12.51	33.1	138	37	P	H
		5723.6	52	-67.01	119.01	38.13	34.46	12.51	33.1	138	37	P	H
	*	5755	88.54	-	-	74.54	34.45	12.65	33.1	138	37	P	H
	*	5755	81.85	-	-	67.85	34.45	12.65	33.1	138	37	A	H
		5850.2	51.63	-70.11	121.74	37.44	34.41	12.88	33.1	138	37	P	H
		5856.4	50.71	-59.7	110.41	36.44	34.4	12.97	33.1	138	37	P	H
		5877.6	52.92	-50.35	103.27	38.64	34.41	12.97	33.1	138	37	P	H
		5949	51.46	-16.74	68.2	36.96	34.46	13.14	33.1	138	37	P	H
													H
													H
		5600.8	51.35	-16.85	68.2	37.9	34.46	12.09	33.1	214	9	P	V
		5698.2	52.79	-51.08	103.87	39.04	34.48	12.37	33.1	214	9	P	V
		5718.2	51.81	-58.49	110.3	37.94	34.46	12.51	33.1	214	9	P	V
		5725	54.12	-68.08	122.2	40.25	34.46	12.51	33.1	214	9	P	V
	*	5755	93.38	-	-	79.38	34.45	12.65	33.1	214	9	P	V
	*	5755	86.15	-	-	72.15	34.45	12.65	33.1	214	9	A	V
		5852.8	49.97	-65.85	115.82	35.78	34.41	12.88	33.1	214	9	P	V
		5865.2	51.45	-56.49	107.94	37.18	34.4	12.97	33.1	214	9	P	V
		5885	52.78	-44.99	97.77	38.5	34.41	12.97	33.1	214	9	P	V
		5935.4	51.86	-16.34	68.2	37.37	34.45	13.14	33.1	214	9	P	V
													V
													V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 159 5795MHz		5644.4	50.83	-17.37	68.2	37.2	34.5	12.23	33.1	144	41	P	H
		5651.6	51.66	-17.73	69.39	38.04	34.49	12.23	33.1	144	41	P	H
		5717.8	50.66	-59.52	110.18	36.79	34.46	12.51	33.1	144	41	P	H
		5722.6	51.68	-65.05	116.73	37.81	34.46	12.51	33.1	144	41	P	H
	*	5795	88.64	-	-	74.52	34.43	12.79	33.1	144	41	P	H
	*	5795	80.65	-	-	66.53	34.43	12.79	33.1	144	41	A	H
		5853.4	49.9	-64.55	114.45	35.71	34.41	12.88	33.1	144	41	P	H
		5867.2	51.83	-55.55	107.38	37.56	34.4	12.97	33.1	144	41	P	H
		5915	51.83	-23.74	75.57	37.44	34.44	13.05	33.1	144	41	P	H
		5945.4	51	-17.2	68.2	36.5	34.46	13.14	33.1	144	41	P	H
													H
													H
		5638.6	51.49	-16.71	68.2	37.86	34.5	12.23	33.1	227	27	P	V
		5684.4	51.59	-42.1	93.69	37.84	34.48	12.37	33.1	227	27	P	V
		5707	51.09	-56.07	107.16	37.21	34.47	12.51	33.1	227	27	P	V
		5722	50.09	-65.27	115.36	36.22	34.46	12.51	33.1	227	27	P	V
	*	5795	91.81	-	-	77.69	34.43	12.79	33.1	227	27	P	V
	*	5795	85.16	-	-	71.04	34.43	12.79	33.1	227	27	A	V
		5852.8	50.38	-65.44	115.82	36.19	34.41	12.88	33.1	227	27	P	V
		5859.4	51.75	-57.82	109.57	37.48	34.4	12.97	33.1	227	27	P	V
		5877.8	51.8	-51.32	103.12	37.52	34.41	12.97	33.1	227	27	P	V
		5941	51.95	-16.25	68.2	37.45	34.46	13.14	33.1	227	27	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		11510	51.48	-22.52	74	54.24	37.7	14.88	55.34	179	45	P	H
		11510	43.69	-10.31	54	46.45	37.7	14.88	55.34	179	45	A	H
		17265	57.49	-10.71	68.2	52.13	43.79	18.09	56.52	170	147	P	H
													H
		11510	51.9	-22.1	74	54.66	37.7	14.88	55.34	175	63	P	V
		11510	43.44	-10.56	54	46.2	37.7	14.88	55.34	175	63	A	V
		17265	57.85	-10.35	68.2	52.49	43.79	18.09	56.52	170	360	P	V
													V
802.11n HT40 CH 159 5795MHz		11590	52.6	-21.4	74	55.06	37.84	14.91	55.21	208	275	P	H
		11590	43.32	-10.68	54	45.78	37.84	14.91	55.21	208	275	A	H
		17385	55.38	-12.82	68.2	50.34	43.43	18.22	56.61	150	200	P	H
													H
		11590	53.44	-20.56	74	55.9	37.84	14.91	55.21	139	248	P	V
		11590	43.22	-10.78	54	45.68	37.84	14.91	55.21	139	248	A	V
		17385	54.72	-13.48	68.2	49.68	43.43	18.22	56.61	150	200	P	V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		5611.8	51.98	-16.22	68.2	38.53	34.46	12.09	33.1	165	34	P	H
		5689	51.1	-45.99	97.09	37.35	34.48	12.37	33.1	165	34	P	H
		5719.4	51.58	-59.05	110.63	37.71	34.46	12.51	33.1	165	34	P	H
		5724.6	51.02	-70.27	121.29	37.15	34.46	12.51	33.1	165	34	P	H
	*	5775	84.91	-	-	70.92	34.44	12.65	33.1	165	34	P	H
	*	5775	79.45	-	-	65.46	34.44	12.65	33.1	165	34	A	H
		5851.8	50.68	-67.42	118.1	36.49	34.41	12.88	33.1	165	34	P	H
		5869.2	51.76	-55.06	106.82	37.49	34.4	12.97	33.1	165	34	P	H
		5882.8	52.05	-47.36	99.41	37.77	34.41	12.97	33.1	165	34	P	H
		5948	51.36	-16.84	68.2	36.86	34.46	13.14	33.1	165	34	P	H
													H
													H
		5601.2	51.38	-16.82	68.2	37.93	34.46	12.09	33.1	240	24	P	V
		5662.2	51.69	-25.57	77.26	37.93	34.49	12.37	33.1	240	24	P	V
		5713.4	52.02	-56.93	108.95	38.14	34.47	12.51	33.1	240	24	P	V
		5724.2	51.31	-69.07	120.38	37.44	34.46	12.51	33.1	240	24	P	V
	*	5775	88.94	-	-	74.95	34.44	12.65	33.1	240	24	P	V
	*	5775	82.25	-	-	68.26	34.44	12.65	33.1	240	24	A	V
		5854.2	51.85	-60.77	112.62	37.67	34.4	12.88	33.1	240	24	P	V
		5858.2	51.26	-58.64	109.9	36.99	34.4	12.97	33.1	240	24	P	V
		5879.4	53.01	-48.92	101.93	38.73	34.41	12.97	33.1	240	24	P	V
		5926.2	51.37	-16.83	68.2	36.97	34.45	13.05	33.1	240	24	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		11550	53.16	-20.84	74	55.74	37.78	14.9	55.26	219	282	P	H
		11550	44.08	-9.92	54	46.66	37.78	14.9	55.26	219	282	A	H
		17325	56.87	-11.33	68.2	51.62	43.63	18.18	56.56	170	360	P	H
													H
		11550	52.78	-21.22	74	55.36	37.78	14.9	55.26	165	243	P	V
		11550	43.94	-10.06	54	46.52	37.78	14.9	55.26	165	243	A	V
		17325	57.13	-11.07	68.2	51.88	43.63	18.18	56.56	170	360	P	V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

5GHz WIFI 802.11n HT20 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
5GHz 802.11n HT20 LF		30	25.15	-14.85	40	32.22	24.3	0.23	31.6	-	-	P	H
		97.9	27.46	-16.04	43.5	41.77	16.36	0.83	31.5	-	-	P	H
		174.53	21.43	-22.07	43.5	35.84	15.43	1.45	31.29	-	-	P	H
		413.15	25.09	-20.91	46	31.81	21.94	2.44	31.1	-	-	P	H
		709.97	30.2	-15.8	46	32.9	25.21	3.31	31.22	-	-	P	H
		881.66	31.26	-14.74	46	32.18	26.61	3.77	31.3	120	131	P	H
													H
													H
													H
													H
													H
													H
		30	26.59	-13.41	40	33.66	24.3	0.23	31.6	150	147	P	V
		96.93	25.36	-18.14	43.5	39.91	16.14	0.81	31.5	-	-	P	V
		176.47	25.48	-18.02	43.5	39.96	15.35	1.46	31.29	-	-	P	V
		477.17	26.58	-19.42	46	31.95	23.08	2.65	31.1	-	-	P	V
		647.89	28.4	-17.6	46	31.57	24.89	3.14	31.2	-	-	P	V
		956.35	30.35	-15.65	46	30.65	27.04	3.98	31.32	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Xiaoshi Tan	Temperature :	24~25°C
		Relative Humidity :	48~49%

Note symbol

-L	Low channel location
-R	High channel location

Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1+2	Horizontal	Fundamental
Peak	Date: 1 Level (dBuV/m) Site : 83CH01-SZ Condition : PEAK_8E(B4)_16-24 3m HF_ANT(1117)_119436 HORIZONTAL Project : 88804 Mode : Mode 32 SWE : 805410010016450/805410010017793 Plane : V with Accessory (adapter+usb cable) Data Rate : 6M	Date: 2 Level (dBuV/m) Site : 83CH01-SZ Condition : PEAK(FUN1) 3m HF_ANT(1117)_119436 HORIZONTAL Project : 88804 Mode : Mode 32 SWE : 805410010016450/805410010017793 Plane : V with Accessory (adapter+usb cable) Data Rate : 6M



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1+2	Vertical	Fundamental
Peak	Date: 3 Level (dBm/Vm) Date: 2018-08-17 PEAK_BE(B4)_16-24 Site : 030W01-52 Condition : PEAK_BE(B4)_16-24 3m HF_ANT(3117)_119436 VERTICAL Project : 808204 Mode : 32 IMEI : 0504108030816498/0504108030817793 Plane : V with Accessory (adapter+usb cable) Data Rate : 6M	Date: 4 Level (dBm/Vm) Date: 2018-08-19 PEAK(UM1) Site : 030W01-52 Condition : PEAK(UM1) 3m HF_ANT(3117)_119436 VERTICAL Project : 808204 Mode : 32 IMEI : 0504108030816498/0504108030817793 Plane : V with Accessory (adapter+usb cable) Data Rate : 6M



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1+2	Horizontal	Fundamental
Peak	Date: 1 Level (dBuV/m) PEAK_05(B4)_16-24 Date: 2018.08.17 Site : 83CM01-S2 Condition : PEAK_05(B4)_16-24 3m HF_ANT(3117)_119436 HORIZONTAL Project : 888004 Mode : 33 IMEI : 869410030816458/869410030817793 Plane : V with Accessory (adapter+usb cable) Data Rate : 6M	Date: 2 Level (dBuV/m) PEAK_05(B4)_16-24 Date: 2018.08.17 Site : 83CM01-S2 Condition : PEAK_05(B4)_16-24 3m HF_ANT(3117)_119436 HORIZONTAL Project : 888004 Mode : 33 IMEI : 869410030816458/869410030817793 Plane : V with Accessory (adapter+usb cable) Data Rate : 6M
Peak	Date: 3 Level (dBuV/m) PEAK_05(B4)_16-24 Date: 2018.08.17 Site : 83CM01-S2 Condition : PEAK_05(B4)_16-24 3m HF_ANT(3117)_119436 HORIZONTAL Project : 888004 Mode : 33 IMEI : 869410030816458/869410030817793 Plane : V with Accessory (adapter+usb cable) Data Rate : 6M	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1+2	Vertical	Fundamental
Peak	Date: 4 Level (dBuV/m) Date: 2018.08.17 PEAK_05(B4)_16-24 Site : 83CM01-SZ Condition : PEAK_05(B4)_16-24 3m HF_ANT(3117)_119436 VERTICAL Project : 8880204 Mode : 33 IMEI : 869410030816458/869410030817793 Plane : V with Accessory (adapter+usb cable) Data Rate : 6M	Date: 5 Level (dBuV/m) Date: 2018.08.17 PEAK_06(B4)_16-24 Site : 83CM01-SZ Condition : PEAK_06(B4)_16-24 3m HF_ANT(3117)_119436 VERTICAL Project : 8880204 Mode : 33 IMEI : 869410030816458/869410030817793 Plane : V with Accessory (adapter+usb cable) Data Rate : 6M
Peak	Date: 6 Level (dBuV/m) Date: 2018.08.17 PEAK_06(B4)_16-24 Site : 83CM01-SZ Condition : PEAK_06(B4)_16-24 3m HF_ANT(3117)_119436 VERTICAL Project : 8880204 Mode : 33 IMEI : 869410030816458/869410030817793 Plane : V with Accessory (adapter+usb cable) Data Rate : 6M	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1+2	Horizontal	Fundamental
Peak	Date: 2 Level (dBuV/m) Frequency (MHz) Site : 030W01-52 Condition : PEAK_0E(B4)_16-24 3m HF_ANT(3117)_119436 HORIZONTAL Project : 808204 Mode : 3d IMEI : 0504100000016498/0504100000017793 Plane : V with Accessory (adapter+usb cable) Data Rate : 6M	Date: 1 Level (dBuV/m) Frequency (MHz) Site : 030W01-52 Condition : PEAK_0E(B4)_16-24 3m HF_ANT(3117)_119436 HORIZONTAL Project : 808204 Mode : 3d IMEI : 0504100000016498/0504100000017793 Plane : V with Accessory (adapter+usb cable) Data Rate : 6M



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1+2	Vertical	Fundamental
Peak	Date: 4 Level (dBuV/m) Frequency (MHz) Site : 030W01-52 Condition : PEAK_0E(B4)_16-24 3m HF_ANT(3117)_119436 VERTICAL Project : 808204 Mode : Mode 34 IMEI : 0504108030816498/0504108030817793 Plane : V with Accessory (adapter+usb cable) Data Rate : 6M	Date: 3 Level (dBuV/m) Frequency (MHz) Site : 030W01-52 Condition : PEAK_0E(B4)_16-24 3m HF_ANT(3117)_119436 VERTICAL Project : 808204 Mode : Mode 34 IMEI : 0504108030816498/0504108030817793 Plane : V with Accessory (adapter+usb cable) Data Rate : 6M






Band 4 5725~5850MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1+2	Horizontal	Fundamental
Peak	Date: 1 Level (dBm/10m) Date: 2018-08-17 PEAK_RE(84_15.22) Site : 83CH01-SZ Condition : PSEF_RJ(84)_16-24 3m HP_ANT(3117)_119436 HORIZONTAL Project : 888204 Node : Node 15 IMEI : 869410010016498/869410010017793 Plane : Y with Accessory (adapter+usb cable) Data Rate : MCS8	Date: 2 Level (dBm/10m) Date: 2018-08-17 PEAKUM(8) AVG_54 Site : 83CH01-SZ Condition : PSEF_RJ(84)_16-24 3m HP_ANT(3117)_119436 HORIZONTAL Project : 888204 Node : Node 15 IMEI : 869410010016498/869410010017793 Plane : Y with Accessory (adapter+usb cable) Data Rate : MCS8



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1+2	Vertical	Fundamental
Peak	Vertical Date: 3 Level (dBm/Vm) Date: 2018.08.17 PEAK_BE(B4)_16-24 Site : 030W01-52 Condition : PEAK_BE(B4)_16-24 3m HF_ANT(3117)_119436 VERTICAL Project : 8080M4 Mode : Mode 35 IMEI : 0504108030816498/0504108030817793 Plane : V with Accessory (adapter+usb cable) Data Rate : MCS8	Fundamental Date: 4 Level (dBm/Vm) Date: 2018.08.17 PEAK(UM1) Site : 030W01-52 Condition : PEAK(UM1) 3m HF_ANT(3117)_119436 VERTICAL Project : 8080M4 Mode : Mode 35 IMEI : 0504108030816498/0504108030817793 Plane : V with Accessory (adapter+usb cable) Data Rate : MCS8

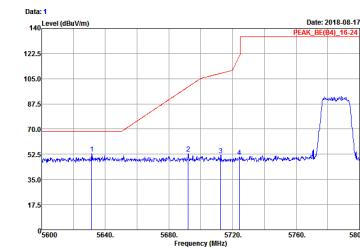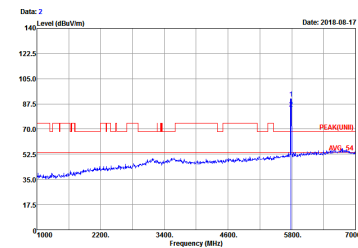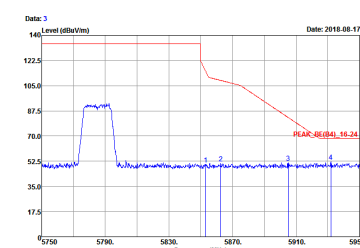WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1+2	Horizontal	Fundamental
Peak	 Date: 1 Level (dBm/100kHz) Date: 2018.08.17 PEAK_0E(B4)_16-24 Site : 830M01-S2 Condition : PEAK_0E(B4)_16-24 3m HF_ANT(3117)_119436 HORIZONTAL Project : 888024 Mode : 36 IMEI : 869410030016458/869410030017793 Plane : V with Accessory (adapter+usb cable) Data Rate : MCS8	 Date: 2 Level (dBm/100kHz) Date: 2018.08.17 PEAK_0E(B4)_16-24 Site : 830M01-S2 Condition : PEAK_0E(B4)_16-24 3m HF_ANT(3117)_119436 HORIZONTAL Project : 888024 Mode : 36 IMEI : 869410030016458/869410030017793 Plane : V with Accessory (adapter+usb cable) Data Rate : MCS8
	 Date: 3 Level (dBm/100kHz) Date: 2018.08.17 PEAK_0E(B4)_16-24 Site : 830M01-S2 Condition : PEAK_0E(B4)_16-24 3m HF_ANT(3117)_119436 HORIZONTAL Project : 888024 Mode : 36 IMEI : 869410030016458/869410030017793 Plane : V with Accessory (adapter+usb cable) Data Rate : MCS8	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1+2	Vertical	Fundamental
Peak	Date: 4 Level (dBm/Vm) Date: 2018.08.17 PEAK_0E(B4)_16-24 Site : 83CM1-52 Condition : PEAK_0E(B4)_16-24 3m HF_ANT(3117)_119436 VERTICAL Project : 888204 Mode : 36 IMEI : 869410030816458/869410030817793 Plane : V with Accessory (adapter+usb cable) Data Rate : MCS8	Date: 5 Level (dBm/Vm) Date: 2018.08.17 PEAK_0E(B4)_16-24 Site : 83CM1-52 Condition : PEAK_0E(B4)_16-24 3m HF_ANT(3117)_119436 VERTICAL Project : 888204 Mode : 36 IMEI : 869410030816458/869410030817793 Plane : V with Accessory (adapter+usb cable) Data Rate : MCS8
Peak	Date: 6 Level (dBm/Vm) Date: 2018.08.17 PEAK_0E(B4)_16-24 Site : 83CM1-52 Condition : PEAK_0E(B4)_16-24 3m HF_ANT(3117)_119436 VERTICAL Project : 888204 Mode : 36 IMEI : 869410030816458/869410030817793 Plane : V with Accessory (adapter+usb cable) Data Rate : MCS8	Left blank






WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1+2	Horizontal	Fundamental
Peak	Horizontal Date: 2 Level (dBm/Vm) Date: 2018-08-17 Site : 030W01-52 Condition : PEAK_802.11n_16-24 3m HF_ANT(3117)_119436 HORIZONTAL Project : 8080M4 Mode : Mode 37 IMEI : 05041000000000000000000000000000 Plane : V with Accessory (adapter+usb cable) Data Rate : MCS8	Fundamental Date: 1 Level (dBm/Vm) Date: 2018-08-17 Site : 030W01-52 Condition : PEAK_802.11n_16-24 3m HF_ANT(3117)_119436 HORIZONTAL Project : 8080M4 Mode : Mode 37 IMEI : 05041000000000000000000000000000 Plane : V with Accessory (adapter+usb cable) Data Rate : MCS8



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1+2	Vertical	Fundamental
Peak	Date: 4 Level (dBm/Vm) Frequency (MHz) Site : 030W01-52 Condition : PEAK_0E(B4)_16-24 3m HF_ANT(3117)_119436 VERTICAL Project : 8080M4 Mode : 37 IMEI : 0504100000016498/0504100000017793 Plane : V with Accessory (adapter+usb cable) Data Rate : MCS8	Date: 3 Level (dBm/Vm) Frequency (MHz) Site : 030W01-52 Condition : PEAK_0E(B4)_16-24 3m HF_ANT(3117)_119436 VERTICAL Project : 8080M4 Mode : 37 IMEI : 0504100000016498/0504100000017793 Plane : V with Accessory (adapter+usb cable) Data Rate : MCS8



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1+2	Horizontal	Fundamental
Peak	Date: 1 Level (dBuV/m) Date: 2018-08-17 PEAK_BE(B4)_16-24  Site : 83CH01-S2 Condition : PEAK_BE(B4)_16-24 3m HF_ANT(3117)_119436 HORIZONTAL Project : 888204 Mode : Mode 38 IMEI : 869410010016498/869410010017793 Plane : Y with Accessory (adapter+usb cable) Data Rate : MCS8	Date: 2 Level (dBuV/m) Date: 2018-08-17 PEAK(B4)_16-24 AVG_54  Site : 83CH01-S2 Condition : PEAK(B4)_16-24 3m HF_ANT(3117)_119436 HORIZONTAL Project : 888204 Mode : Mode 38 IMEI : 869410010016498/869410010017793 Plane : Y with Accessory (adapter+usb cable) Data Rate : MCS8
Peak	Date: 3 Level (dBuV/m) Date: 2018-08-17 PEAK_BE(B4)_16-24  Site : 83CH01-S2 Condition : PEAK_BE(B4)_16-24 3m HF_ANT(3117)_119436 HORIZONTAL Project : 888204 Mode : Mode 38 IMEI : 869410010016498/869410010017793 Plane : Y with Accessory (adapter+usb cable) Data Rate : MCS8	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1+2	Vertical	Fundamental
Peak	Date: 4 Level (dBuV/m) Date: 2018.08.17 PEAK_0E(B4)_16-24 Site : 83CM1-52 Condition : PEAK_0E(B4)_16-24 3m HF_ANT(3117)_119436 VERTICAL Project : 888204 Mode : Mode 38 IMEI : 869410030016458/869410030017793 Plane : V with Accessory (adapter+usb cable) Data Rate : MCS8	Date: 5 Level (dBuV/m) Date: 2018.08.17 PEAK_0E(B4)_16-24 Site : 83CM1-52 Condition : PEAK_0E(B4)_16-24 3m HF_ANT(3117)_119436 VERTICAL Project : 888204 Mode : Mode 38 IMEI : 869410030016458/869410030017793 Plane : V with Accessory (adapter+usb cable) Data Rate : MCS8
Peak	Date: 6 Level (dBuV/m) Date: 2018.08.17 PEAK_0E(B4)_16-24 Site : 83CM1-52 Condition : PEAK_0E(B4)_16-24 3m HF_ANT(3117)_119436 VERTICAL Project : 888204 Mode : Mode 38 IMEI : 869410030016458/869410030017793 Plane : V with Accessory (adapter+usb cable) Data Rate : MCS8	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1+2	Horizontal	Fundamental
Peak	Date: 1 Level (dBm/Vm) Date: 2018.08.17 PEAK_0E(B4)_16-24 Site : 83CM01-S2 Condition : PEAK_0E(B4)_16-24 3m HF_ANT(3117)_119436 HORIZONTAL Project : 888024 Mode : 39 IMEI : 869410030816458/869410030817793 Plane : V with Accessory (adapter+usb cable) Data Rate : MCS8	Date: 2 Level (dBm/Vm) Date: 2018.08.17 PEAK_0E(B4)_16-24 Site : 83CM01-S2 Condition : PEAK_0E(B4)_16-24 3m HF_ANT(3117)_119436 HORIZONTAL Project : 888024 Mode : 39 IMEI : 869410030816458/869410030817793 Plane : V with Accessory (adapter+usb cable) Data Rate : MCS8
	Date: 3 Level (dBm/Vm) Date: 2018.08.17 PEAK_0E(B4)_16-24 Site : 83CM01-S2 Condition : PEAK_0E(B4)_16-24 3m HF_ANT(3117)_119436 HORIZONTAL Project : 888024 Mode : 39 IMEI : 869410030816458/869410030817793 Plane : V with Accessory (adapter+usb cable) Data Rate : MCS8	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1+2	Vertical	Fundamental
Peak	Date: 4 Level (dBuV/m) Date: 2018.08.17 PEAK_0E(B4)_16-24 Site : 83CM1-52 Condition : PEAK_0E(B4)_16-24 3m HF_ANT(3117)_119436 VERTICAL Project : 888204 Mode : 39 IMEI : 859410030016458/859410030017793 Plane : V with Accessory (adapter+usb cable) Data Rate : MCS8	Date: 5 Level (dBuV/m) Date: 2018.08.17 PEAK_0E(B4)_16-24 Site : 83CM1-52 Condition : PEAK_0E(B4)_16-24 3m HF_ANT(3117)_119436 VERTICAL Project : 888204 Mode : 39 IMEI : 859410030016458/859410030017793 Plane : V with Accessory (adapter+usb cable) Data Rate : MCS8
	Date: 6 Level (dBuV/m) Date: 2018.08.17 PEAK_0E(B4)_16-24 Site : 83CM1-52 Condition : PEAK_0E(B4)_16-24 3m HF_ANT(3117)_119436 VERTICAL Project : 888204 Mode : 39 IMEI : 859410030016458/859410030017793 Plane : V with Accessory (adapter+usb cable) Data Rate : MCS8	Left blank



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1+2	Horizontal	Fundamental
Peak	Graph 1: Horizontal spectrum plot showing Level (dBuV/m) vs Frequency (MHz). The plot shows a signal peaking at approximately 5775 MHz. The peak level is labeled as PEAK_16(84)_16-24. Site : 83C801-SZ Condition : PSCAR_802.11ac_16-24 3m HF_ANT(3117)_119436 HORIZONTAL Project : 888204 Node : 888204 IMEI : 869410010016498/869410010017793 Plane : Y with Accessory (adapter+usb cable) Data Rate : MCS8	Graph 2: Fundamental spectrum plot showing Level (dBuV/m) vs Frequency (MHz). The plot shows a signal peaking at approximately 5775 MHz. The peak level is labeled as PEAK_16(84)_16-24. Site : 83C801-SZ Condition : PSCAR_802.11ac_16-24 3m HF_ANT(3117)_119436 HORIZONTAL Project : 888204 Node : 888204 IMEI : 869410010016498/869410010017793 Plane : Y with Accessory (adapter+usb cable) Data Rate : MCS8
Peak	Graph 3: Horizontal spectrum plot showing Level (dBuV/m) vs Frequency (MHz). The plot shows a signal peaking at approximately 5775 MHz. The peak level is labeled as PEAK_16(84)_16-24. Site : 83C801-SZ Condition : PSCAR_802.11ac_16-24 3m HF_ANT(3117)_119436 HORIZONTAL Project : 888204 Node : 888204 IMEI : 869410010016498/869410010017793 Plane : Y with Accessory (adapter+usb cable) Data Rate : MCS8	Left blank





WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1+2	Vertical	Fundamental
Peak	Date: 4 Level (dBuV/m) Date: 2018.08.17 Site : 83CM01-S2 Condition : PEAK_05(B4_16-24) 3m HF_ANT(3117_119436) VERTICAL Project : 8880204 Mode : 40 IMEI : 869410030016450/869410030017793 Plane : V with Accessory (adapter+usb cable) Data Rate : MCS8	Date: 5 Level (dBuV/m) Date: 2018.08.17 Site : 83CM01-S2 Condition : PEAK_05(B4_16-24) 3m HF_ANT(3117_119436) VERTICAL Project : 8880204 Mode : 40 IMEI : 869410030016450/869410030017793 Plane : V with Accessory (adapter+usb cable) Data Rate : MCS8
Peak	Date: 6 Level (dBuV/m) Date: 2018.08.17 Site : 83CM01-S2 Condition : PEAK_05(B4_16-24) 3m HF_ANT(3117_119436) VERTICAL Project : 8880204 Mode : 40 IMEI : 869410030016450/869410030017793 Plane : V with Accessory (adapter+usb cable) Data Rate : MCS8	Left blank



Band 4 - 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

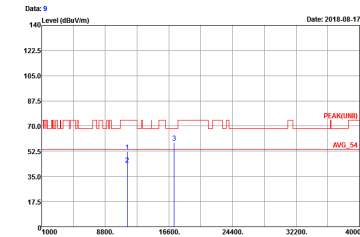WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH149 5745MHz	
1+2	Horizontal	Vertical
Peak Avg.	Date: 9  Site : 800M1-52 Condition : PEAK(UMI) 3m HF_ANT(3117)_119436 HORIZONTAL Project : 800M4 Mode : Mode 32 IMEI : 800410000000000/800410000000000/7793 Plane : Y with Accessory (adapter+usb cable) Data Rate : 6M	Date: 10  Site : 800M1-52 Condition : PEAK(UMI) 3m HF_ANT(3117)_119436 VERTICAL Project : 800M4 Mode : Mode 32 IMEI : 800410000000000/800410000000000/7793 Plane : Y with Accessory (adapter+usb cable) Data Rate : 6M





WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH157 5785MHz	
1+2	Horizontal	Vertical
Peak Avg.	Date: 19 Level (dBuV/m) Frequency (MHz) Site : 030W01-52 Condition : PEAK(UNI1) 3m HF_ANT(3117)_119436 HORIZONTAL Project : 8082M4 Mode : 33 IMEI : 8594138038016498/8594138038017793 Plane : V with Accessory (adapter+usb cable) Data Rate : 6M	Date: 12 Level (dBuV/m) Frequency (MHz) Site : 030W01-52 Condition : PEAK(UNI1) 3m HF_ANT(3117)_119436 VERTICAL Project : 8082M4 Mode : 33 IMEI : 8594138038016498/8594138038017793 Plane : V with Accessory (adapter+usb cable) Data Rate : 6M



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH165 5825MHz	
1+2	Horizontal	Vertical
Peak Avg.	Date: 9 Level (dBuV/m) Frequency (MHz) Site : 030W01-52 Condition : PEAK(UNI1) 3m HF_ANT(3117)_119436 HORIZONTAL Project : 8082M4 Mode : Mode 34 IMEI : 0504108030816498/0504108030817793 Plane : V with Accessory (adapter+usb cable) Data Rate : 6M	Date: 10 Level (dBuV/m) Frequency (MHz) Site : 030W01-52 Condition : PEAK(UNI1) 3m HF_ANT(3117)_119436 VERTICAL Project : 8082M4 Mode : Mode 34 IMEI : 0504108030816498/0504108030817793 Plane : V with Accessory (adapter+usb cable) Data Rate : 6M



Band 4 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

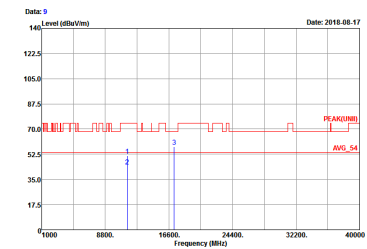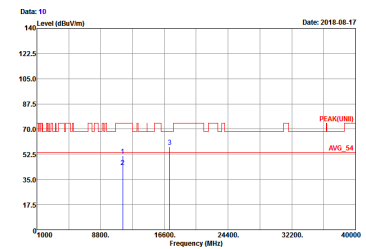WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1+2	Horizontal	Vertical
Peak Avg.	Date: 9 Level (dBu/Vm)  Frequency (MHz) Site : 83C801-SZ Condition : PSC(1001) 3m HF_ANT(3117)_119426 HORIZONTAL Project : 880204 Note : Mode 35 IMEI : 860410010016498/860410010017793 Plane : Y with Accessory (adapter+usb cable) Data Rate : MCS8	Date: 10 Level (dBu/Vm)  Frequency (MHz) Site : 83C801-SZ Condition : PSC(1001) 3m HF_ANT(3117)_119426 VERTICAL Project : 880204 Note : Mode 35 IMEI : 860410010016498/860410010017793 Plane : Y with Accessory (adapter+usb cable) Data Rate : MCS8





WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1+2	Horizontal	Vertical
Peak Avg.	Date: 19 Site : 030W01_52 Condition : PEAK(UM) 3m HF_ANT(3117)_119436 HORIZONTAL Project : 8080M Mode : Mode 36 IMEI : 0504108030816498/0504108030817793 Plane : V with Accessory (adapter+usb cable) Data Rate : MCS6	Date: 12 Site : 030W01_52 Condition : PEAK(UM) 3m HF_ANT(3117)_119436 VERTICAL Project : 8080M Mode : Mode 36 IMEI : 0504108030816498/0504108030817793 Plane : V with Accessory (adapter+usb cable) Data Rate : MCS6



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1+2	Horizontal	Vertical
Peak Avg.	Horizontal Level (dBuV/m) 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 1000 8800 16600 24400 32200 40000 Frequency (MHz) PEAK (UMI) Avg. 54 Site : 030W01-52 Condition : PEAK (UMI) 3m HF_ANT(3117)_119436 HORIZONTAL Product : 8080M Mode : Mode 37 IMEI : 0504100000016498/0504100000017793 Plane : V with Accessory (adapter+usb cable) Date Rate : MCS6	Vertical Level (dBuV/m) 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 1000 8800 16600 24400 32200 40000 Frequency (MHz) PEAK (UMI) Avg. 54 Site : 030W01-52 Condition : PEAK (UMI) 3m HF_ANT(3117)_119436 VERTICAL Product : 8080M Mode : Mode 37 IMEI : 0504100000016498/0504100000017793 Plane : V with Accessory (adapter+usb cable) Date Rate : MCS6



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

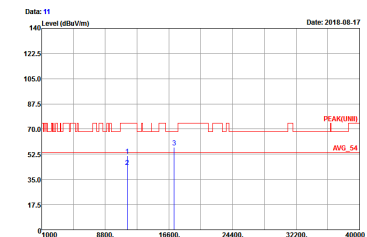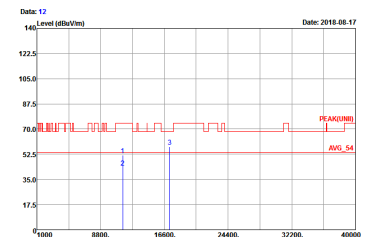WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1+2	Horizontal	Vertical
Peak Avg.	Data 11  Site : 83C801-SZ Condition : PSC(1001) 3m HF_ANT(3117)_119426 HORIZONTAL Project : 880204 Model : 38 IMEI : 860410010016498/860410010017793 Plane : Y with Accessory (adapter+usb cable) Data Rate : MCS8	Data 12  Site : 83C801-SZ Condition : PSC(1001) 3m HF_ANT(3117)_119426 VERTICAL Project : 880204 Model : 38 IMEI : 860410010016498/860410010017793 Plane : Y with Accessory (adapter+usb cable) Data Rate : MCS8



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1+2	Horizontal	Vertical
Peak Avg.	Date: 19 Site : 030W01-52 Condition : PEAK(UNI1) 3m HF_ANT(3117)_119436 HORIZONTAL Project : 8082M4 Mode : Mode 38 IMEI : 0504108030816498/0504108030817793 Plane : V with Accessory (adapter+usb cable) Data Rate : MCS6	Date: 12 Site : 030W01-52 Condition : PEAK(UNI1) 3m HF_ANT(3117)_119436 VERTICAL Project : 8082M4 Mode : Mode 38 IMEI : 0504108030816498/0504108030817793 Plane : V with Accessory (adapter+usb cable) Data Rate : MCS6



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1+2	Horizontal	Vertical
Peak Avg.	Data 11 Site : 83C801-SZ Condition : PSC1(0AC1) 3m HP_ANT(3117)_119426 HORIZONTAL Project : 888204 Note : Mode dB IMEI : 869410010016498/869410010017793 Plane : Y with Accessory (adapter+usb cable) Data Rate : MCS8	Data 12 Site : 83C801-SZ Condition : PSC1(0AC1) 3m HP_ANT(3117)_119436 VERTICAL Project : 888204 Note : Mode dB IMEI : 869410010016498/869410010017793 Plane : Y with Accessory (adapter+usb cable) Data Rate : MCS8




Emission below 1GHz
5GHz WIFI 802.11n HT20 (LF)


WIFI	5GHz 5725~5850MHz	
ANT	802.11n HT20 LF	
1+2	Horizontal	Vertical
QP / Peak	Data: 1 Site : 802.11n-52 Condition : FCC CLASS-B 3m LF_ANT(35487)_6 HORIZONTAL Project : 88804A Mode : Mode 36 IMEI : 800410001000100/80041000100017793 Plane : Y with Accessory (adapter+usb cable) Data Rate : MCS8	Data: 2 Site : 802.11n-52 Condition : FCC CLASS-B 3m LF_ANT(35487)_6 VERTICAL Project : 88804A Mode : Mode 36 IMEI : 800410001000100/80041000100017793 Plane : Y with Accessory (adapter+usb cable) Data Rate : MCS8

Appendix E. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting	Duty Factor(dB)
1+2	802.11a for antenna 1	98.59	2.73	0.37	10Hz	0.06
1+2	802.11a for antenna 2	98.80	2.73	0.37	10Hz	0.05
1+2	5GHz 802.11n HT20 for antenna 1	96.95	1.29	0.77	1KHz	0.13
1+2	5GHz 802.11n HT20 for antenna 2	96.74	1.29	0.77	1KHz	0.14
1+2	5GHz 802.11n HT40 for antenna 1	97.44	0.66	1.51	3KHz	0.11
1+2	5GHz 802.11n HT40 for antenna 2	94.47	0.64	1.55	3KHz	0.25
1+2	5GHz 802.11ac VHT20 for antenna 1	98.65	2.55	0.39	10Hz	0.06
1+2	5GHz 802.11ac VHT20 for antenna 2	98.33	2.56	0.39	10Hz	0.07
1+2	5GHz 802.11ac VHT40 for antenna 1	97.29	1.25	0.80	1KHz	0.12
1+2	5GHz 802.11ac VHT40 for antenna 2	97.29	1.25	0.80	1KHz	0.12
1+2	5GHz 802.11ac VHT80 for antenna 1	94.10	0.60	1.66	3KHz	0.26
1+2	5GHz 802.11ac VHT80 for antenna 2	94.53	0.60	1.66	3KHz	0.24

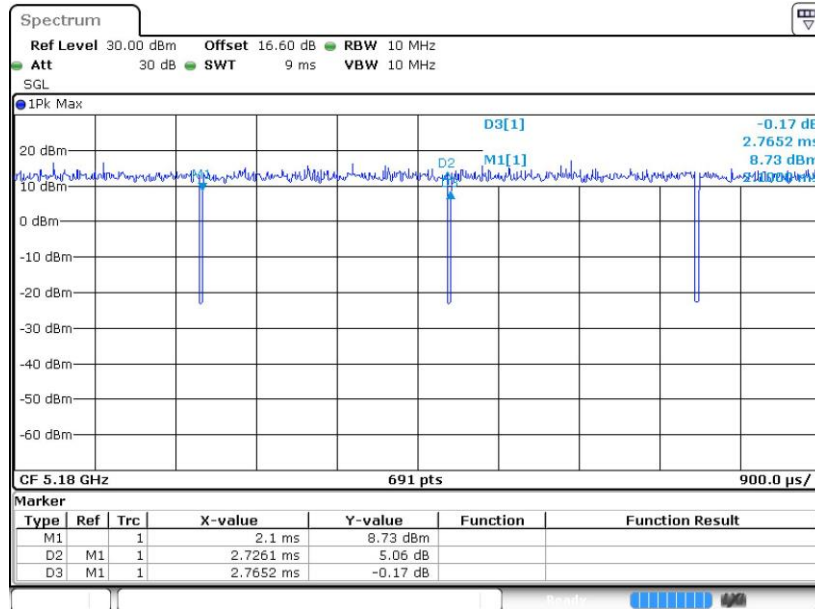MIMO <Ant. 1>
802.11a


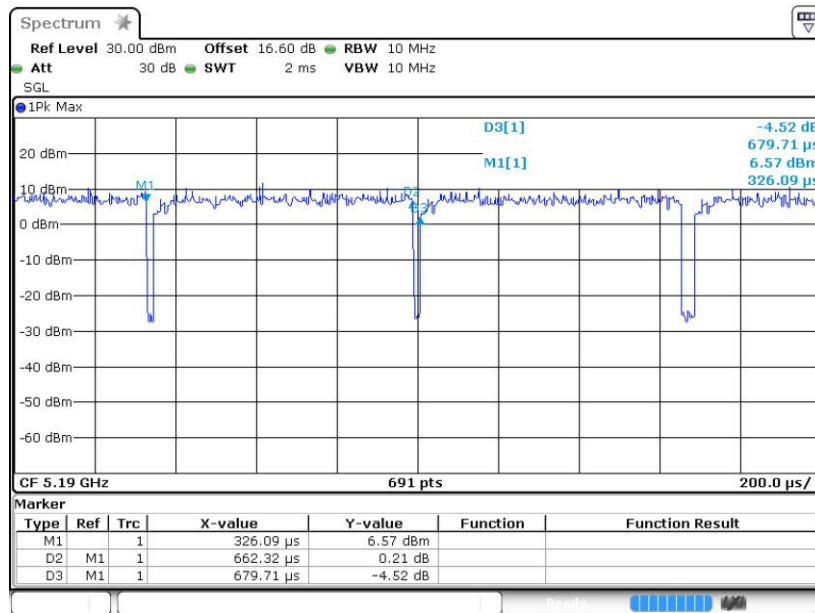
Date: 8.AUG.2018 19:30:34

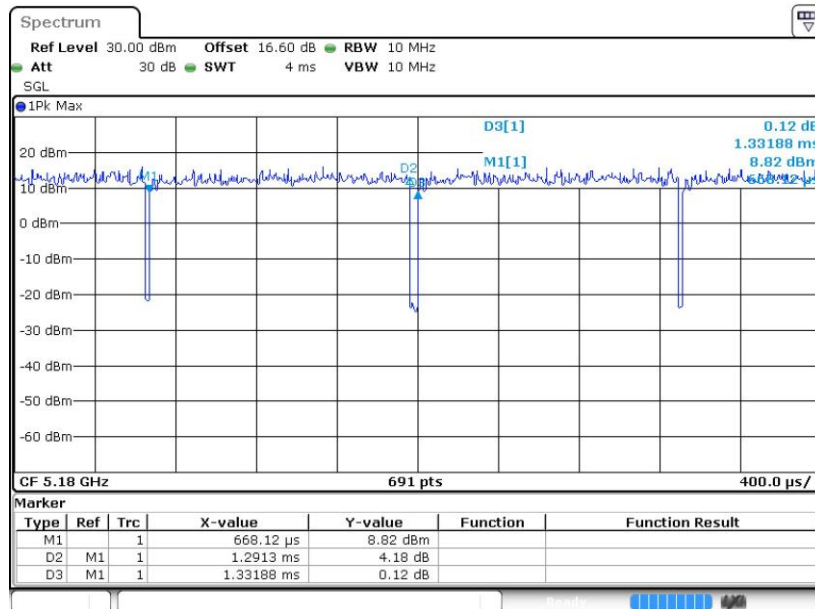802.11n HT20


Date: 8.AUG.2018 20:02:13




802.11n HT40



Date: 8.AUG.2018 20:09:17


802.11ac VHT20

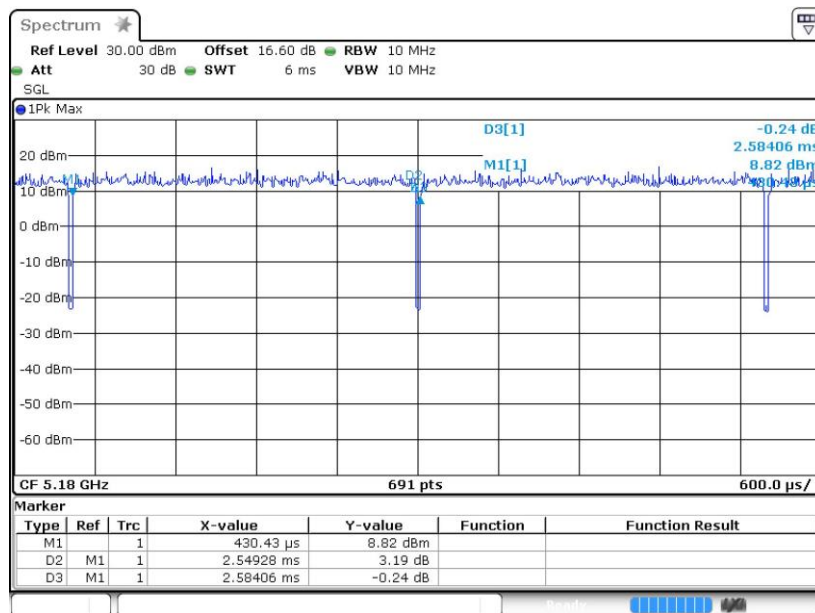

Date: 8.AUG.2018 20:16:43




802.11ac VHT40

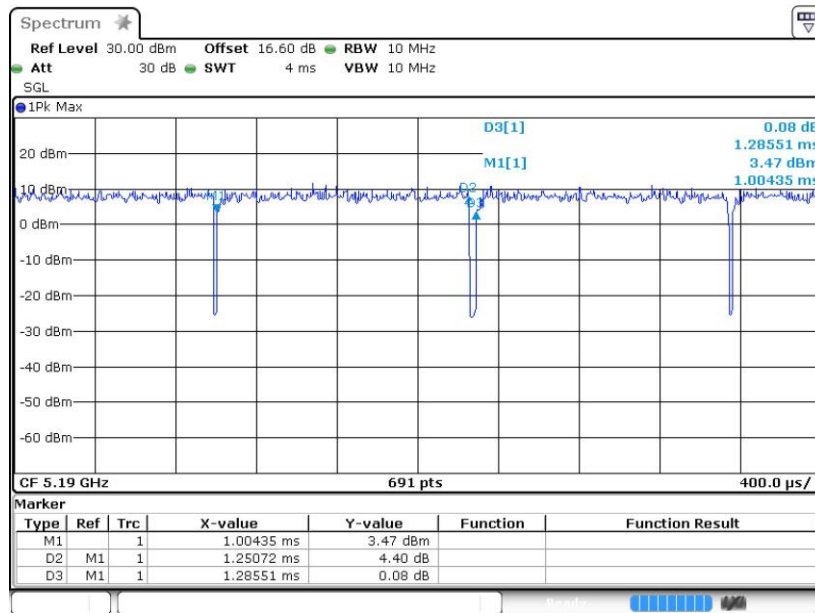

Date: 8.AUG.2018 20:23:55


802.11ac VHT80

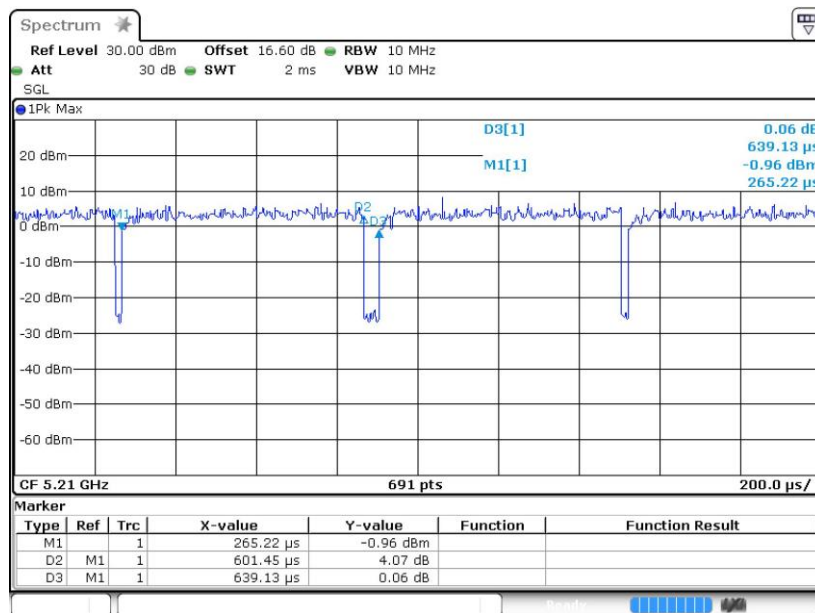

Date: 8.AUG.2018 20:30:00


MIMO <Ant. 2>

802.11a

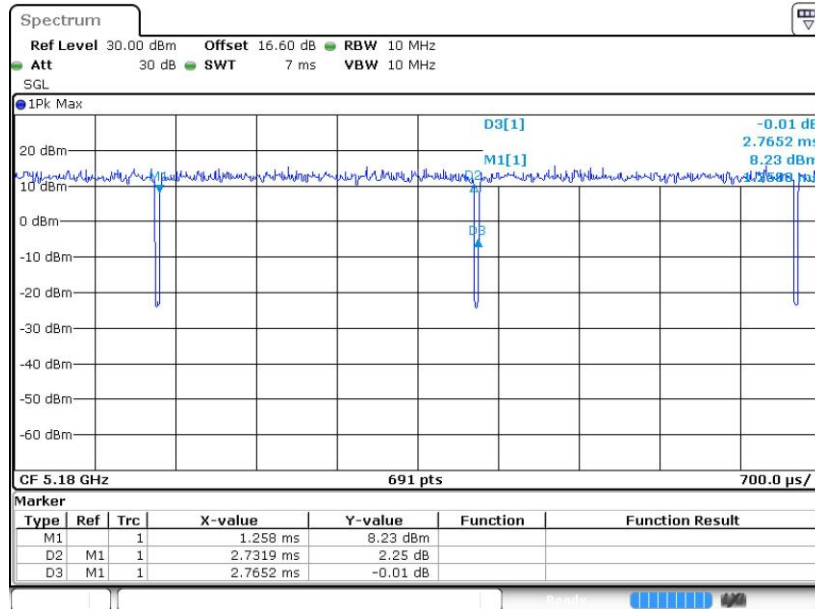

Date: 8.AUG.2018 21:11:18


802.11n HT20

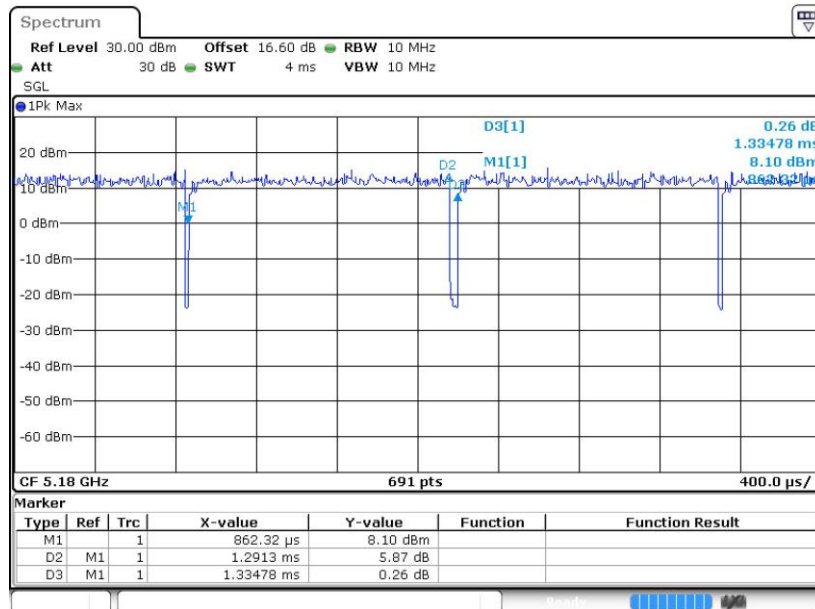

Date: 8.AUG.2018 21:06:54




802.11n HT40

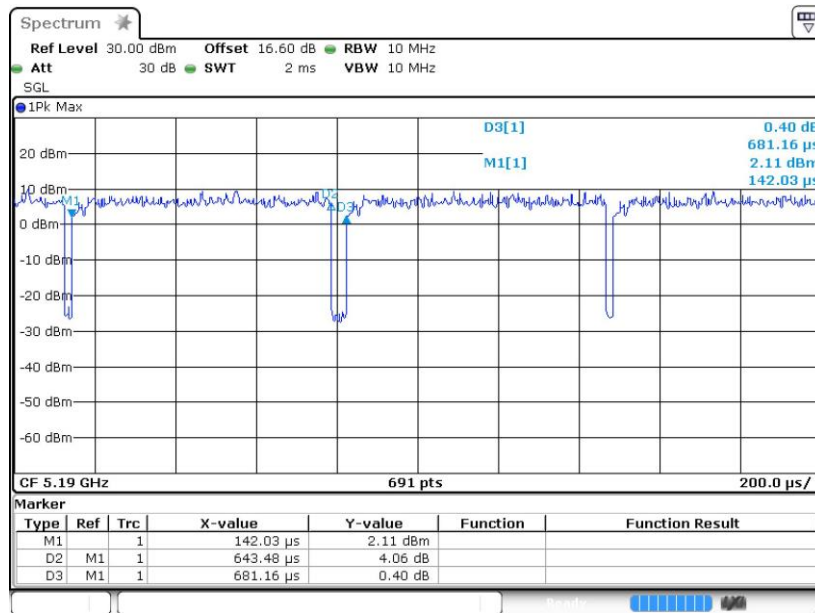

Date: 8.AUG.2018 21:15:56


802.11ac VHT20

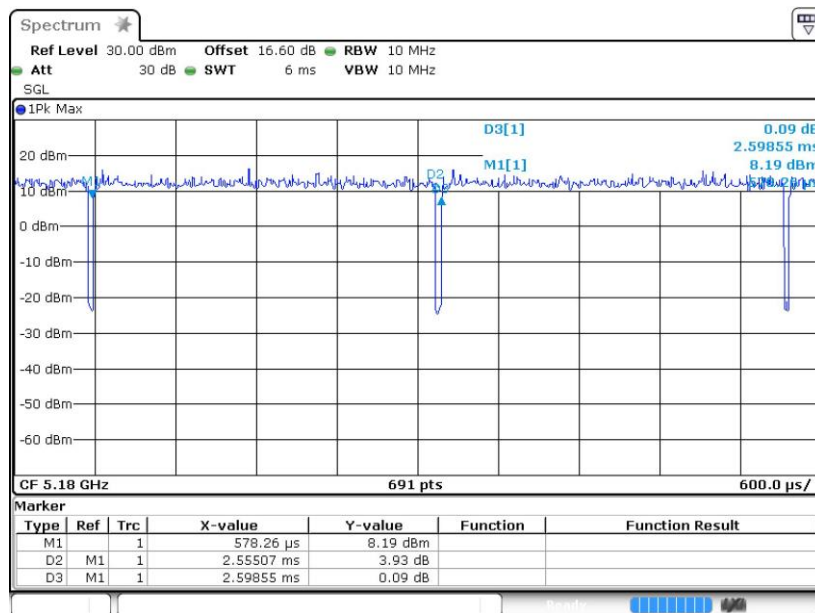

Date: 8.AUG.2018 20:44:17




802.11ac VHT40

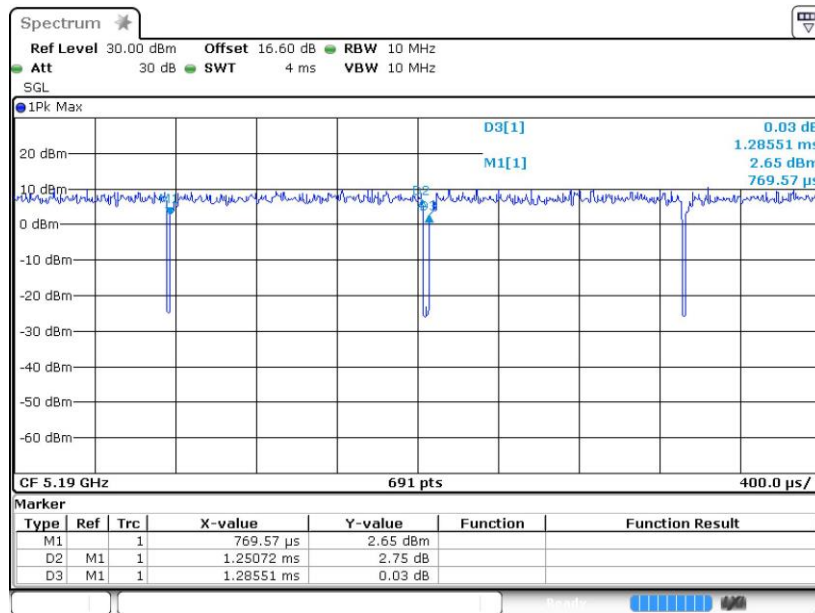

Date: 8.AUG.2018 20:38:49

802.11ac VHT80

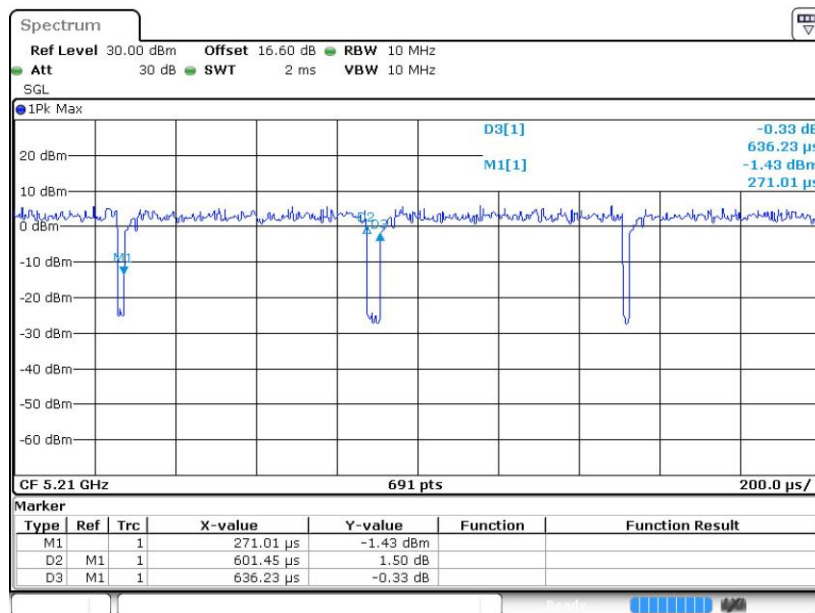

Date: 8.AUG.2018 20:34:02