



Product Service

Choose certainty.
Add value.

November 9, 2018

Page 1 of 66

Prüfbericht / Test Report

Nr. / No. TR-80452-29570-03 (Edition 3)

Applicant: Endress + Hauser SE + Co. KG
Type of equipment: K-Band Tank Level Probing Radar
Type designation: FMR10, FMR20
Order No.: 50009123
Test standards: FCC Code of Federal Regulations,
CFR 47, Part 15,
Sections 15.205, 15.207 and 15.209

Industry Canada Radio Standards Specifications
RSS-211 Issue 1, Sections 5.1 and 5.3
RSS-GEN Issue 4, Sections 8.8, 8.9 and 8.10 (Category I Equipment)

Note:

The test data of this report is related only to the individual item which has been tested. This report shall not be reproduced except in full extent without the written approval of the testing laboratory.

Table of Contents

1	Description of the Equipment Under Test (EUT)	3
2	Administrative Data	4
3	Identification of the Test Laboratory	5
4	Summary	6
5	Operation Mode and Configuration of EUT	7
6	Measurement Procedures	8
6.1	Bandwidth Measurements.....	8
6.2	Conducted AC Powerline Emission	9
6.3	Radiated Emission Measurement 9 kHz to 30 MHz.....	11
6.4	Radiated Emission in Fully or Semi Anechoic Room	13
6.5	Radiated Emission at Alternative Test Site	16
7	Photographs Taken During Testing.....	18
8	Test Results	23
8.1	Occupied Bandwidth	25
8.2	Designation of Emissions.....	28
8.3	Conducted Powerline Emission Measurement 150 kHz to 30 MHz	29
8.4	Radiated Emission Measurement 9 kHz to 30 MHz.....	32
8.5	Radiated Emission Measurement 30 MHz to 100 GHz.....	35
8.6	Leakage outside the container	51
8.7	RF Exposure Requirement.....	54
8.8	Exposure of Humans to RF Fields	55
9	Referenced Regulations	59
10	Test Equipment List with Calibration Data.....	61
11	Measurement Uncertainty	62
12	Revision History	66

1 Description of the Equipment Under Test (EUT)

General data of EUT

Type designation ¹ :	FMR10, FMR20
Parts ² :	
Serial number(s):	FMR10: N5001B0117A, FMR20: N500160117A
Manufacturer:	Endress + Hauser SE + Co. KG
Type of equipment:	K-Band Tank Level Probing Radar
Version:	FW: 01.00.00, Dev.Rev.: 1
FCC ID:	LCGFMR2XKT
Industry Canada ID:	2519A-2KT
Additional parts/accessories:	

Technical data of EUT

Application frequency range:	24.05 GHz - 29 GHz
Frequency range:	24.05 GHz – 26 GHz
Operating frequency:	25 GHz
Type of modulation:	Unmodulated Pulse Emission
Pulse train:	---
Pulse width:	---
Number of RF-channels:	1
Channel spacing:	N/A
Designation of emissions ³ :	2G50P0X
Type of antenna:	Integrated
Size/length of antenna:	N/A
Connection of antenna:	<input type="checkbox"/> detachable <input checked="" type="checkbox"/> not detachable
Type of power supply:	DC supply
Specifications for power supply:	nominal voltage: 24 V

¹ Type designation of the system if EUT consists of more than one part.

² Type designations of the parts of the system, if applicable.

³ Also known as "Class of Emission".

2 Administrative Data

Application details

Applicant (full address):	Endress + Hauser SE + Co. KG Hauptstraße 1 79689 Maulburg Germany
Contact person:	Mr. Ralf Reimelt
Order number:	50009123 (Agent is Zühlke AG, Wiesenstrasse 10a, CH 8952 Schlieren)
Receipt of EUT:	2018-09-18
Date(s) of test:	2018-09-18 to 2018-09-28
Note(s):	

Report details

Report number:	TR-80452-29570-03
Edition:	3
Issue date:	2018-11-09

3 Identification of the Test Laboratory

Details of the Test Laboratory

Company name:	TÜV SÜD Product Service GmbH
Address:	Aeussere Fruehlingstrasse 45 D-94315 Straubing Germany
Laboratory accreditation:	DAkkS Registration No. D-PL-11321-11-02
Laboratory recognition:	Registration No. BNetzA-CAB-16/21-15
Industry Canada test site registration:	3050A-2
Contact person:	Mr. Markus Biberger
	Phone: +49 9421 5522-0 Fax: +49 9421 5522-99

4 Summary

Summary of test results

The tested sample complies with the requirements set forth in the

Code of Federal Regulations CFR 47, Part 15, Sections 15.205, 15.207 and 15.209

of the Federal Communication Commission (FCC) and the



Radio Standards Specifications

RSS-211 Issue 1, Sections 5.1 and 5.3

RSS-GEN Issue 4, Sections 8.8, 8.9 and 8.10 (Category I Equipment)

of Industry Canada (IC).

Die Prüfergebnisse beziehen sich ausschließlich auf das zur Prüfung vorgestellte Prüfmuster. Ohne schriftliche Genehmigung des Prüflabors darf der Prüfbericht auszugsweise nicht vervielfältigt werden. *The test results relate only to the individual item which has been tested. Without the written approval of the test laboratory this report may not be reproduced in extracts.*

Datum / Date	Geprüft von / Tested by	Freigabe durch / Checked by	Prüfergebnis / Test Result
2018-11-09	 Martin Steindl Responsible for testing	 Matthias Stumpe Reviewer	<input checked="" type="checkbox"/> Erfüllt / Passed <input type="checkbox"/> Nicht erfüllt / Not passed

5 Operation Mode and Configuration of EUT

Operation Mode(s)

Transmitting continuously

Configuration(s) of EUT

The EUT was mounted in a metal tank

List of ports and cables

<i>Port</i>	<i>Description</i>	<i>Classification⁴</i>	<i>Cable type</i>	<i>Cable length</i>
1	DC supply	dc power	Unshielded	2 m

List of devices connected to EUT

<i>Item</i>	<i>Description</i>	<i>Type Designation</i>	<i>Serial no. or ID</i>	<i>Manufacturer</i>
1	AC/DC convertor	LOGO! Power 24 V		Siemens

List of support devices

<i>Item</i>	<i>Description</i>	<i>Type Designation</i>	<i>Serial no. or ID</i>	<i>Manufacturer</i>
1	Metal Dummy Tank Ø 750 x 500w	---	---	H. Bachl

⁴ Ports shall be classified as ac power, dc power or signal/control port

6 Measurement Procedures

6.1 Bandwidth Measurements

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 2, section 2.202(a) CFR 47 Part 15, section 15.215(c) IC RSS-Gen Issue 4, section 6.6 IC RSS-211 Issue 1, section 5.3 ANSI C63.10, section 6.9.1
Guide:	ANSI C63.10 / IC RSS-Gen Issue 4, section 6.6
Measurement setup:	<input type="checkbox"/> Conducted: See below <input checked="" type="checkbox"/> Radiated: Radiated Emission in Fully or Semi Anechoic Room (6.4)
<p>If antenna is detachable bandwidth measurements shall be performed at the antenna connector (conducted measurement) when the transmitter is adjusted in accordance with the tune-up procedure, if applicable. The RF output terminals are connected to a spectrum analyzer. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The electrical characteristics of the radio frequency load attached to the output terminals shall be stated, if applicable.</p> <p>If radiated measurements are performed the same test setups and instruments are used as with radiated emission measurements for the appropriate frequency range.</p> <p>The analyzer settings are specified by the test description of the appropriate test record(s).</p>	

6.2 Conducted AC Powerline Emission

Measurement Procedure:

Rules and specifications: CFR 47 Part 15, section 15.207
 IC RSS-GEN Issue 4, section 8.8

Guide: ANSI C63.10 / CISPR 22


Conducted emission tests in the frequency range 150 kHz to 30 MHz are performed using Line Impedance Stabilization Networks (LISNs). To simplify testing with quasi-peak and average detector the following procedure is used:

First the whole spectrum of emission caused by the equipment under test (EUT) is recorded with detector set to peak using CISPR bandwidth of 10 kHz. After that all emission levels having less margin than 10 dB to or exceeding the average limit are retested with detector set to quasi-peak.

If average limit is kept with quasi-peak levels no additional scan with average detector is necessary. In cases of emission levels between quasi-peak and average limit an additional scan with detector set to average is performed.

According to ANSI C63.10, section 6.2.5, testing of intentional radiators with detachable antenna shall be performed using a suitable dummy load connected to the antenna output terminals. Otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended.

Testing with dummy load may be necessary to distinguish (unintentional) conducted emissions on the supply lines from (intentional) emissions radiated by the antenna and coupling directly to supply lines and/or LISN. Usage of dummy load has to be stated in the appropriate test record(s) and notes should be added to clarify the test setup.

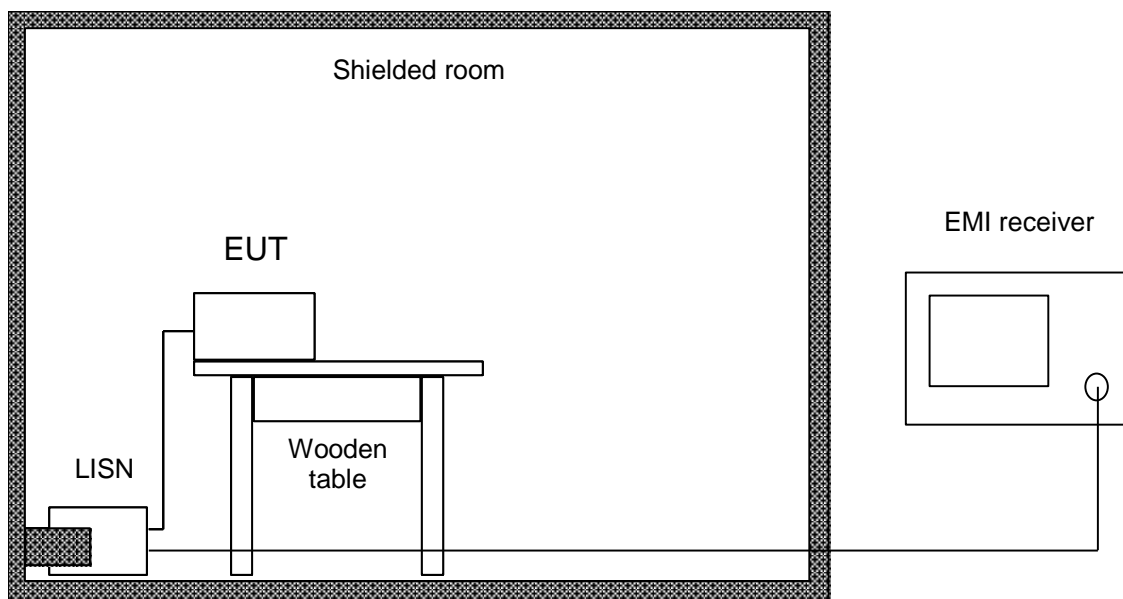

Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/> Test receiver	ESU8	2044	100232	Rohde & Schwarz
<input type="checkbox"/> V-network	ESH 3-Z5	1059	894785/005	Rohde & Schwarz
<input type="checkbox"/> V-network	ESH 3-Z5	1218	830952/025	Rohde & Schwarz
<input checked="" type="checkbox"/> Artificial mains network	ESH 2-Z5	1536	842966/004	Rohde & Schwarz
<input checked="" type="checkbox"/> Microwave cable	FB293C1080005050	2157	72110-02	Rosenberger Micro-Coax
<input type="checkbox"/> Coax cable	RG214 N/N 5m	1188	---	Senton
<input type="checkbox"/> Shielded room	No. 1	1451	---	Albatross
<input type="checkbox"/> Shielded room	No. 4	1454	3FD 100 544	Euroshield
<input checked="" type="checkbox"/> Shielded room	No. 9	21083	---	Albatross
<input checked="" type="checkbox"/> Measurement Software	EMC32_K1 V9.26.01	2230	100281	Rohde & Schwarz

6.3 Radiated Emission Measurement 9 kHz to 30 MHz

Measurement Procedure:

Rules and specifications: CFR 47 Part 15, sections 15.205 and 15.209
IC RSS-GEN Issue 4, sections 8.9 and 8.10
IC RSS-211 Issue 1, section 5.3

Guide: ANSI C63.4

Radiated emission in the frequency range 9 kHz to 30 MHz is measured using an active loop antenna. First the whole spectrum of emission caused by the equipment is recorded at a distance of 3 meters in a fully or semi anechoic room with the detector of the spectrum analyzer or EMI receiver set to peak. This configuration is also used for recording the spectrum of intentional radiators.


Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.

EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

If worst case emission of the EUT cannot be recorded with EUT in standard position and loop antenna in vertical polarization the EUT (or the radiating part of the EUT) is rotated by 90 degrees instead of changing the loop antenna to horizontal polarization. This procedure is selected to minimize the influence of the environment (e.g. effects caused by the floor especially with longer distances).

Final measurement is performed at a test distance D of 30 meters using an open field test site. In case the regulation requires testing at other distances, the result is extrapolated by either making measurements at an additional distance D of 10 meters to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). In cases of very low emissions measurements are performed at shorter distances and results are extrapolated to the required distance. The provisions of CFR 47 Part 15 sections 15.31(d) and (f)(2) apply. According to CFR 47 Part 15 section 15.209(d) final measurement is performed with detector function set to quasi-peak except for the frequency bands 9 to 90 kHz and 110 to 490 kHz where, for non-pulsed operation, average detector is employed.

If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.

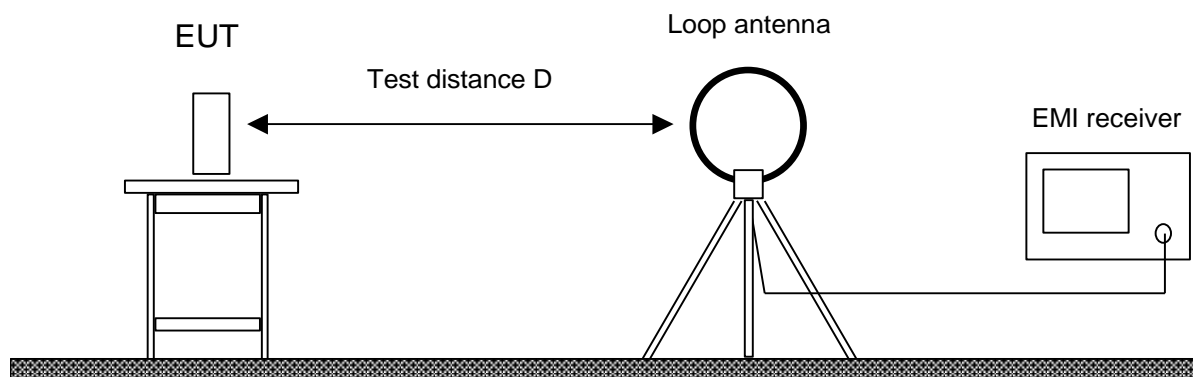

Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input type="checkbox"/> Spectrum analyzer	FSP30	1666	100036	Rohde & Schwarz
<input checked="" type="checkbox"/> EMI test receiver	ESW26	28268	101315	Rohde & Schwarz
<input type="checkbox"/> Test receiver	ESHS 10	1028	860043/016	Rohde & Schwarz
<input type="checkbox"/> EMI test receiver	ESU8	2044	100232	Rohde & Schwarz
<input type="checkbox"/> Preamplifier Cabin no. 2	CPA9231A	1716	3557	Schaffner
<input checked="" type="checkbox"/> Loop antenna	HFH2-Z2	1016	882964/1	Rohde & Schwarz
<input type="checkbox"/> Microwave cable Cabin no. 2	UFA210A-FG	1681	23516	Rosenberger Micro-Coax
<input type="checkbox"/> Microwave cable Cabin no. 2	KKSF1040016	2020	289854/4	Huber + Suhner
<input type="checkbox"/> Microwave cable Cabin no. 2	FA210AF020000000	2060	64566-2	Rosenberger Micro-Coax
<input type="checkbox"/> Microwave cable Cabin no. 8	EF393	2053	---	Albatross Projects
<input type="checkbox"/> Microwave cable Cabin no. 8	FB293C1050005050	2054	63834-1	Rosenberger Micro-Coax
<input type="checkbox"/> Microwave cable Cabin no. 8	FB293C1080005050	2055	63833-1	Rosenberger Micro-Coax
<input type="checkbox"/> Microwave cable Cabin no. 8	LCF12-50	2057	P1.3.9	RFS
<input type="checkbox"/> Microwave cable Cabin no. 8	LCF12-50	2057	P1.4.12	RFS
<input checked="" type="checkbox"/> Microwave cable Cabin no. 8	LCF12-50	2057	P1.6.19	RFS
<input type="checkbox"/> Microwave cable Cabin no. 8	FA210AF040005050G	2127	72061-01	Rosenberger Micro-Coax
<input type="checkbox"/> Microwave cable Cabin no. 8	FA210AF04000505G	2056	64567-01	Rosenberger Micro-Coax
<input checked="" type="checkbox"/> Microwave cable Cabin no. 8	FA210AF04000505	2068	64610-1	Rosenberger Micro-Coax
<input type="checkbox"/> Fully anechoic room	No. 2	1452	---	Albatross
<input type="checkbox"/> Semi anechoic room	No. 3	1453	---	Siemens
<input checked="" type="checkbox"/> Semi anechoic room	No. 8	2057	---	Albatross
<input checked="" type="checkbox"/> Measurement Software	EMC32_K8 V9.25.00	1852	100016	Rohde & Schwarz

6.4 Radiated Emission in Fully or Semi Anechoic Room

Measurement Procedure:

Rules and specifications:	CFR 47 Part 15, section 15.209 IC RSS-GEN Issue 4, section 8.9 IC RSS-211 Issue 1, section 5.3
---------------------------	--

Guide:	ANSI C63.4
--------	------------

Radiated emission in fully or semi anechoic room is measured in the frequency range from 30 MHz to the maximum frequency as specified in CFR 47 Part 15 section 15.33.

Measurements are made in both the horizontal and vertical planes of polarization using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 100 kHz (below 1 GHz) or 1 MHz (above 1 GHz).

Testing up to 1 GHz is performed with a linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna"). For testing above 1 GHz horn antennas are used.

All tests below 8.2 GHz are performed at a test distance D of 3 meters. For higher frequencies the test distance may be reduced (e.g. to 1 meter) due to the sensitivity of the measuring instrument(s) and the test results are calculated according to CFR 47 Part 15 section 15.31(f)(1) using an extrapolation factor of 20 dB/decade. If required, preamplifiers are used for the whole frequency range. Special care is taken to avoid overload, using appropriate attenuators and filters, if necessary.


If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.

Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.

During testing the EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

Radiated Emissions above 1 GHz were performed with the antenna tilted to the direction of the EUT.

For final testing below 1 GHz a semi anechoic room complying with the NSA requirements of ANSI C63.4 respectively ANSI C63.10 for alternative test sites is used (see 6.5). If prescans are recorded in fully anechoic room they are indicated appropriately.

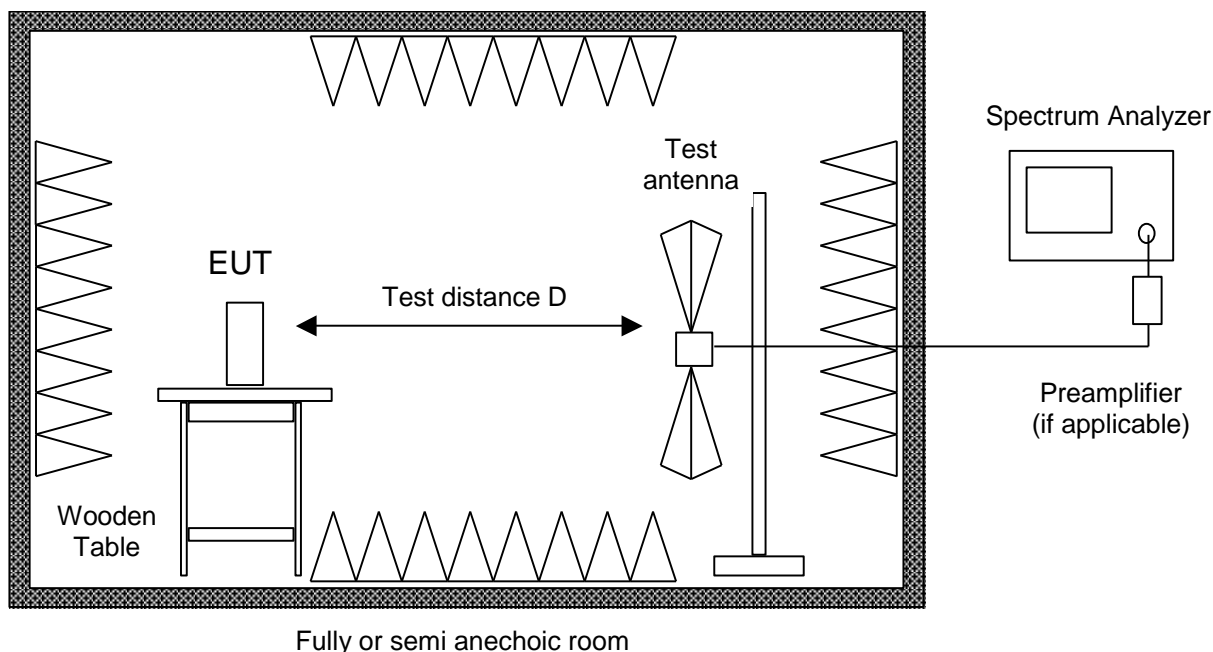

Test instruments used:

Type		Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/>	Spectrum analyzer	FSP30	1666	100036	Rohde & Schwarz
<input checked="" type="checkbox"/>	Spectrum analyzer	FSV40	2364	101448	Rohde & Schwarz
<input checked="" type="checkbox"/>	EMI test receiver	ESW26	28268	101315	Rohde & Schwarz
<input type="checkbox"/>	EMI test receiver	Cabin no. 3 ESPI7	2010	101018	Rohde & Schwarz
<input type="checkbox"/>	EMI test receiver	ESU8	2044	100232	Rohde & Schwarz
<input checked="" type="checkbox"/>	EMI test receiver	ESW26	28268	101315	Rohde & Schwarz
<input checked="" type="checkbox"/>	External Waveguide Mixer	FS-Z60	25849	100177	Rohde & Schwarz
<input checked="" type="checkbox"/>	External Waveguide Mixer	FS-Z90	25850	101610	Rohde & Schwarz
<input checked="" type="checkbox"/>	External Waveguide Mixer	FS-Z110	25851	101464	Rohde & Schwarz
<input type="checkbox"/>	External Waveguide Mixer	FS-Z170	22553	100953	Rohde & Schwarz
<input type="checkbox"/>	External Waveguide Mixer	FS-Z220	25854	100965	Rohde & Schwarz
<input type="checkbox"/>	External Waveguide Mixer	FS-Z325	25855	100922	Rohde & Schwarz
<input type="checkbox"/>	Trilog antenna	Cabin no. 2 VULB 9163	1802	9163-214	Schwarzbeck
<input type="checkbox"/>	Trilog antenna	Cabin no. 3 VULB 9163	1722	9163-188	Schwarzbeck
<input checked="" type="checkbox"/>	Trilog antenna	Cabin no. 8 VULB 9163	2058	9163-408	Schwarzbeck
<input type="checkbox"/>	Trilog antenna	Cabin no. 2 VULB 9162	2256	9162-048	Schwarzbeck

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/> Horn antenna	HF907	2073	100154	Rohde & Schwarz
<input type="checkbox"/> Horn antenna	3160-03	1010	9112-1003	EMCO
<input type="checkbox"/> Horn antenna	3160-04	1011	9112-1001	EMCO
<input type="checkbox"/> Horn antenna	3160-05	1012	9112-1001	EMCO
<input type="checkbox"/> Horn antenna	3160-06	1013	9112-1001	EMCO
<input checked="" type="checkbox"/> Horn antenna	3160-07	1014	9112-1008	EMCO
<input checked="" type="checkbox"/> Horn antenna	3160-08	1015	9112-1002	EMCO
<input checked="" type="checkbox"/> Horn antenna	3160-09	1265	9403-1025	EMCO
<input checked="" type="checkbox"/> Horn antenna	3160-10	1575	399185	EMCO
<input checked="" type="checkbox"/> Horn antenna	24240-20	19946	157845	FLANN
<input type="checkbox"/> Horn antenna	25240-20	27898	249763	FLANN
<input type="checkbox"/> Horn antenna	27240-20	27899	244048	FLANN
<input type="checkbox"/> Microwave cable Cabin no. 2	UFA210A-FG	1681	23516	Rosenberger Micro-Coax
<input type="checkbox"/> Microwave cable Cabin no. 2	KKSF1040016	2020	289854/4	Huber + Suhner
<input type="checkbox"/> Microwave cable Cabin no. 2	FA210AF020000000	2060	64566-2	Rosenberger Micro-Coax
<input type="checkbox"/> Microwave cable Cabin no. 8	EF393	2053	---	Albatross Projects
<input type="checkbox"/> Microwave cable Cabin no. 8	FB293C1050005050	2054	63834-1	Rosenberger Micro-Coax
<input type="checkbox"/> Microwave cable Cabin no. 8	FB293C1080005050	2055	63833-1	Rosenberger Micro-Coax
<input type="checkbox"/> Microwave cable Cabin no. 8	LCF12-50	2057	P1.3.9	RFS
<input checked="" type="checkbox"/> Microwave cable Cabin no. 8	LCF12-50	2057	P1.4.12	RFS
<input type="checkbox"/> Microwave cable Cabin no. 8	LCF12-50	2057	P1.6.19	RFS
<input type="checkbox"/> Microwave cable Cabin no. 8	FA210AF040005050G	2127	72061-01	Rosenberger Micro-Coax
<input type="checkbox"/> Microwave cable Cabin no. 8	FA210AF04000505G	2056	64567-01	Rosenberger Micro-Coax
<input checked="" type="checkbox"/> Microwave cable Cabin no. 8	FA210AF04000505	2068	64610-1	Rosenberger Micro-Coax
<input type="checkbox"/> Fully anechoic room	No. 2	1452	---	Albatross
<input checked="" type="checkbox"/> Semi anechoic room	No. 8	2057	---	Albatross
<input type="checkbox"/> Measurement Software	EMC32_K2 V9.25.00	2033	100003	Rohde & Schwarz
<input checked="" type="checkbox"/> Measurement Software	EMC32_K8 V9.25.00	1852	100016	Rohde & Schwarz

6.5 Radiated Emission at Alternative Test Site

Measurement Procedure:

Rules and specifications:	CFR 47 Part 15, section 15.209 IC RSS-GEN Issue 4, section 8.9 IC RSS-211 Issue 1, section 5.3
---------------------------	--

Guide:	ANSI C63.10
--------	-------------

Radiated emission in the frequency range 30 MHz to 1 GHz is measured within a semi-anechoic room with groundplane complying with the NSA requirements of ANSI C63.4 respectively ANSI C63.10 for alternative test sites. A linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna") is used. The measurement bandwidth of the test receiver is set to 120 kHz with quasi-peak detector selected.

If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.

Hand-held or body-worn devices are tested in the position producing the highest emission relative to the limit as verified by prescans in fully anechoic room.

If no prescan in a fully anechoic room is used first a peak scan is performed in four positions to get the whole spectrum of emission caused by EUT with the measuring antenna raised and lowered from 1 to 4 m to find table position, antenna height and antenna polarization for the maximum emission levels.

Data reduction is applied to these results to select those levels having less margin than 10 dB to or exceeding the limit using subranges and limited number of maximums. Further maximization is following.


With detector of the test receiver set to quasi-peak final measurements are performed immediately after frequency zoom (for drifting disturbances) and maximum adjustment.

Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

In cases where prescans in a fully anechoic room are taken (e. g. if EUT is operating for a short time only or battery is discharged quickly) final measurements with quasi-peak detector are performed manually at frequencies indicated by prescan with EUT rotating all around and receiving antenna raising and lowering within 1 meter to 4 meters to find the maximum levels of emission.

Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

For measuring emissions of intentional radiators and receivers a test distance D of 3 meters is selected. Testing of unintentional radiators is performed at a distance of 10 meters. If limits specified for 3 meters shall be used for measurements performed at 10 meters distance the limits are calculated according to CFR 47 Part 15 section 15.31(d) and (f)(1) using an inverse linear-distance extrapolation factor of 20 dB/decade.

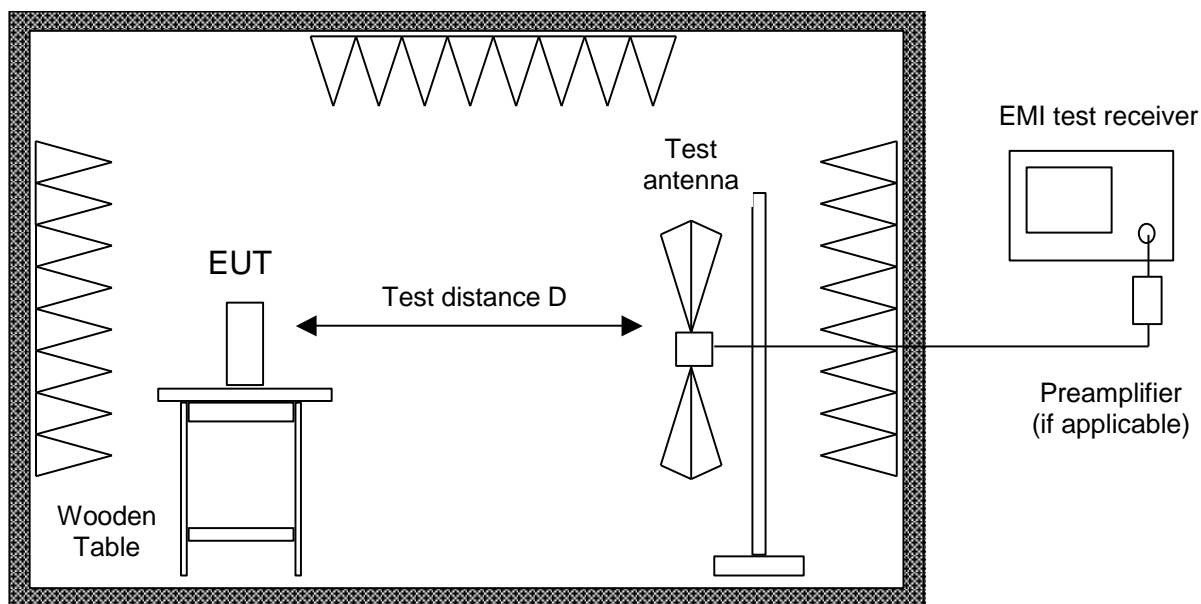

Alternate test site (semi anechoic room)

Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input type="checkbox"/> EMI test receiver	ESU8	2044	100232	Rohde & Schwarz
<input checked="" type="checkbox"/> EMI test receiver	ESW26	28268	101315	Rohde & Schwarz
<input checked="" type="checkbox"/> Trilog antenna Cabin no. 8	VULB 9163	2058	9163-408	Schwarzbeck
<input checked="" type="checkbox"/> Microwave cable Cabin no. 8	EF393	2053	---	Albatross Projects
<input type="checkbox"/> Microwave cable Cabin no. 8	LCF12-50	2057	P1.6.19	RFS
<input checked="" type="checkbox"/> Microwave cable Cabin no. 8	LCF12-50	2057	P1.3.9	RFS
<input type="checkbox"/> Microwave cable Cabin no. 8	FA210AF04000505	2068	64610-1	Rosenberger Micro-Coax
<input type="checkbox"/> Microwave cable Cabin no. 8	FA210AF040005050G	2127	72061-01	Rosenberger Micro-Coax
<input checked="" type="checkbox"/> Semi anechoic room	No. 8	2057	---	Albatross
<input checked="" type="checkbox"/> Measurement Software	EMC32_K8 V9.25.00	1852	100016	Rohde & Schwarz

7 Photographs Taken During Testing



Test setup for conducted AC powerline emission measurement





Test setup for radiated emission measurement 9 kHz – 30 MHz



Test setup for radiated emission measurement (fully anechoic room)

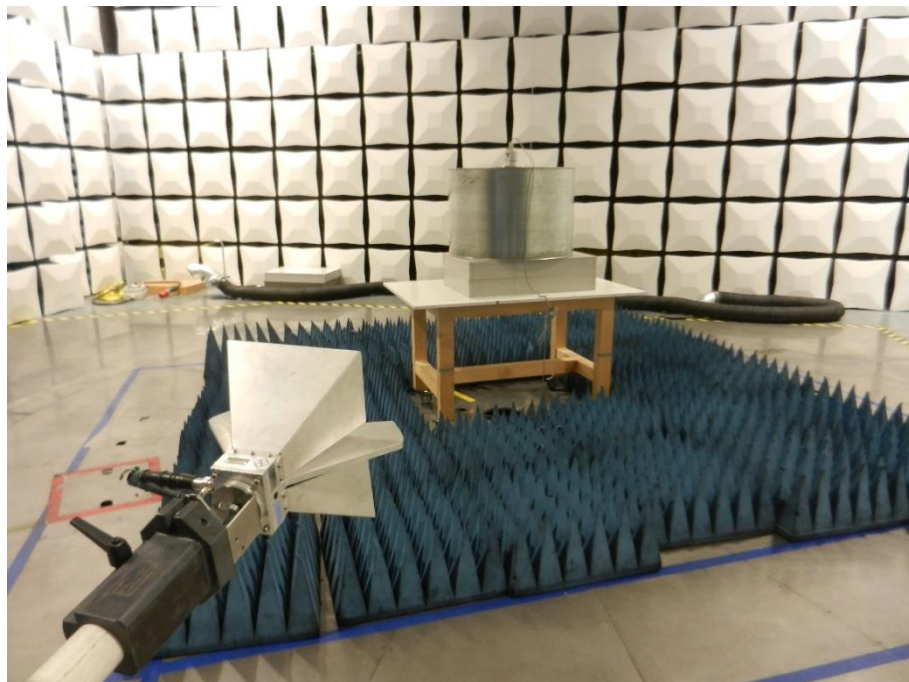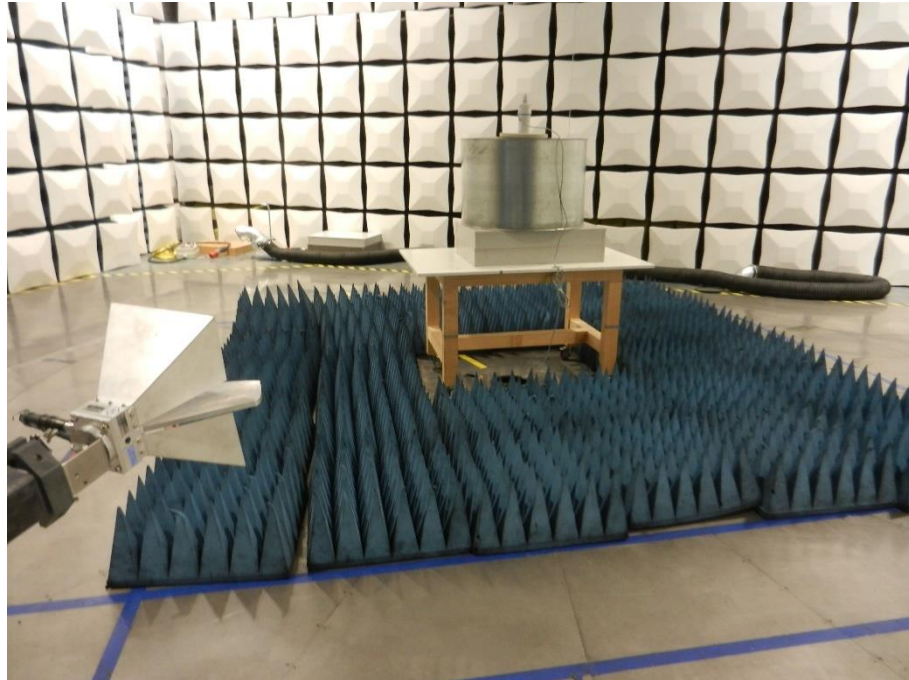

Test setup for radiated emission measurement (alternate test site)

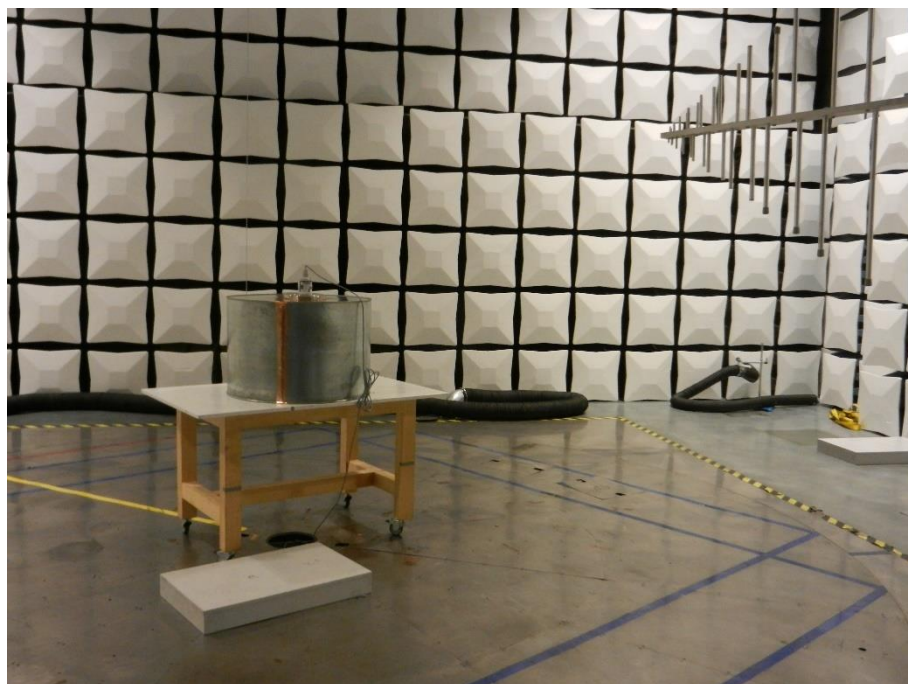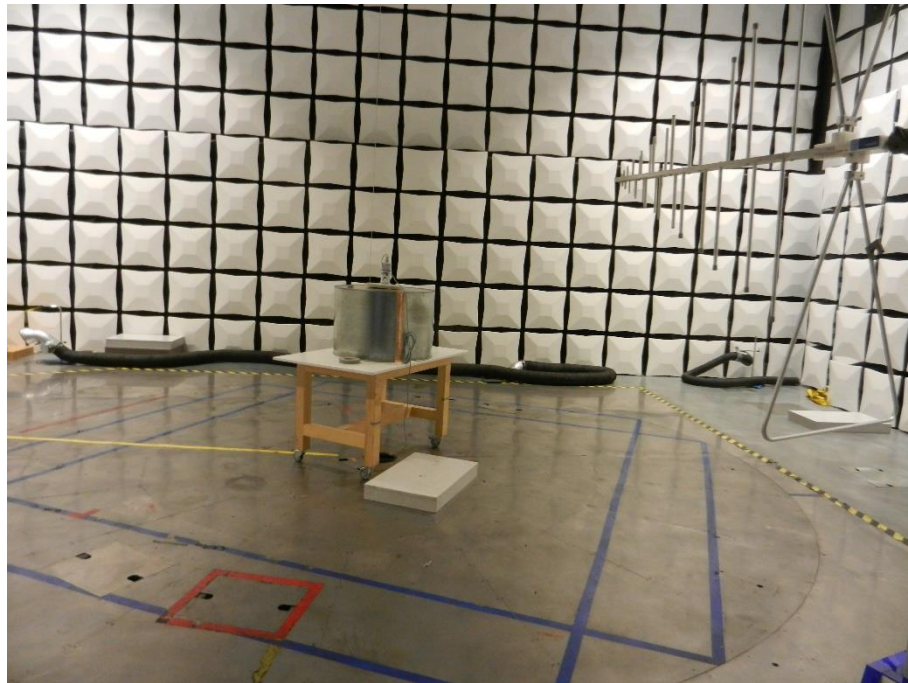

8 Test Results

FCC CFR 47 Parts 1, 2 and 15			
Section(s)	Test	Page	Result
1.1307(b)(1)	RF Exposure Requirement	54	Test passed
2.1046(a)	Conducted output power	---	Not applicable
2.201, 2.202	Class of emission	28	Calculated
15.205(a)	Restricted bands of operation	--- ⁵	Test passed
15.207	Conducted AC powerline emission 150 kHz to 30 MHz	29	Test passed
15.205(b) 15.209	Radiated emission 9 kHz to 30 MHz	32	Test passed
15.205(b) 15.209	Radiated emission 30 MHz to 100 GHz	35	Test passed

⁵ See "Radiated emissions".

IC RSS-GEN Issue 4

Section(s)	Test	Page	Result
6.12	Transmitter output power (conducted)	---	Not applicable
9	Designation of emissions	28	Calculated
6.10	Pulsed operation	---	Not applicable
8.8	Transmitter AC power lines conducted emissions 150 kHz to 30 MHz	29	Test passed
8.10	Restricted bands and unwanted emission frequencies	--- ⁶	Test passed
6.4, 6.13, 8.9	Unwanted emissions 9 kHz to 30 MHz	32	Test passed
6.4, 6.13, 8.9	Unwanted emissions 30 MHz to 100 GHz	35	Test passed
3.2	Exposure of Humans to RF Fields	55	Exempted from SAR and RF evaluation

IC RSS-211 Issue 1

Section(s)	Test	Page	Result
5.1 (a)	Minimum Emission Bandwidth	25	Test passed
5.1 (d)	Unwanted emissions 9 kHz to 30 MHz	32	Test passed
5.1 (d)	Unwanted emissions 30 MHz to 100 GHz	35	Test passed
5.2 (a)	Maximum half-power beamwidth	---	Not applicable
5.2 (b)	Average Emission	---	Not applicable
5.2 (b)	Side Lobe Gain	---	Not applicable
5.3 (b)	Maximum Average EIRP Outside the Tank Enclosure	51	Test passed

⁶ See "Unwanted emissions".


8.1 Occupied Bandwidth

Rules and specifications:	IC RSS-211 Issue 1, section 5.1(a)
Guide:	IC RSS-Gen Issue 4, section 6.6
Limit	The minimum fundamental emission bandwidth in the -10 dBc points shall be 50 MHz.
Measurement procedure:	Bandwidth Measurements (6.1)

Comment:	
Date of test:	2018-09-18
Test site:	Fully anechoic room, cabin no. 2


Test Result:	Test passed
--------------	-------------

Occupied Bandwidth (-10 dB) EUT FMR10:

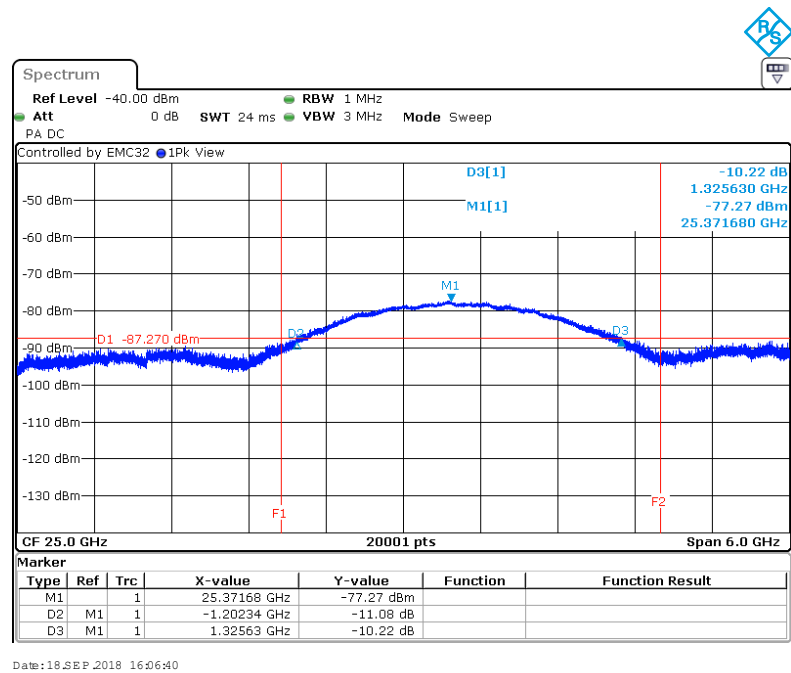

Occupied Bandwidth (-10 dB):	2.528 GHz
Limit:	> 50 MHz

Occupied Bandwidth (-10 dB) EUT FMR20:

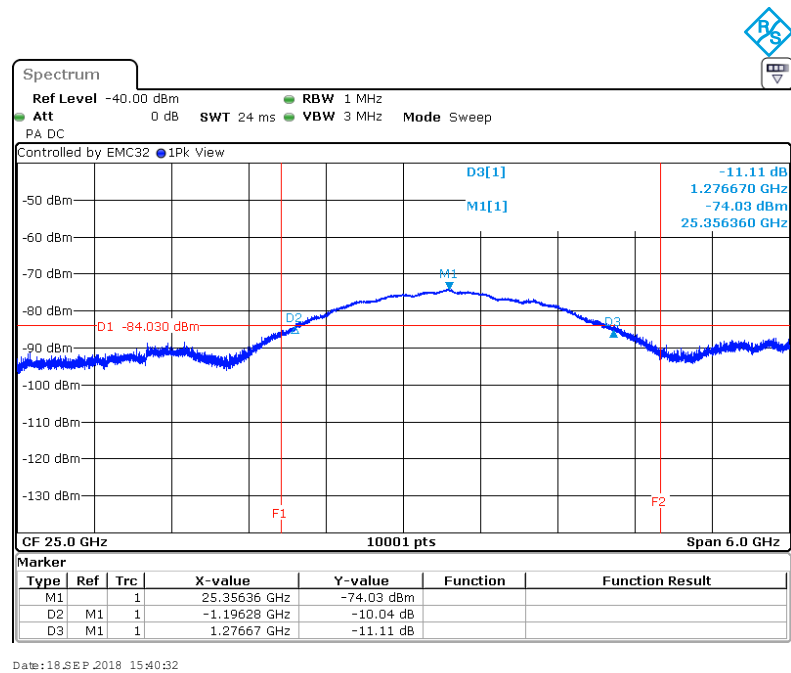

Occupied Bandwidth (-10 dB):	2.473 GHz
Limit:	50 MHz

8.2 Designation of Emissions

Rules and specifications:	CFR 47 Part 2, sections 2.201 and 2.202 IC RSS-Gen Issue 4, section 9
Guide:	ANSI C63.10 / TRC-43

Type of modulation:	Unmodulated pulse emission
---------------------	----------------------------

Designation of Emissions:	2G50P0X
---------------------------	----------------

8.3 Conducted Powerline Emission Measurement 150 kHz to 30 MHz

Rules and specifications:	CFR 47 Part 15, section 15.207 IC RSS-GEN Issue 4, section 8.8		
Guide:	ANSI C63.10 / CISPR 22		
Limit:	Frequency of Emission (MHz)	Conducted Limit (dBµV)	
		Quasi-peak	Average
	0.15 - 0.5	66 to 56	56 to 46
	0.5 - 5	56	46
	5 - 30	60	50
Measurement procedure:	Conducted AC Powerline Emission (6.2)		


Comment:	The test was performed with the FMR10, only
Date of test:	2018-09-26
Test site:	Shielded room, cabin no. 9

Test Result:	Test passed
--------------	-------------

Sample calculation of final values:

$$\text{Final Value (dBµV)} = \text{Reading Value (dBµV)} + \text{Correction Factor (dB)}$$


Tested on: L1

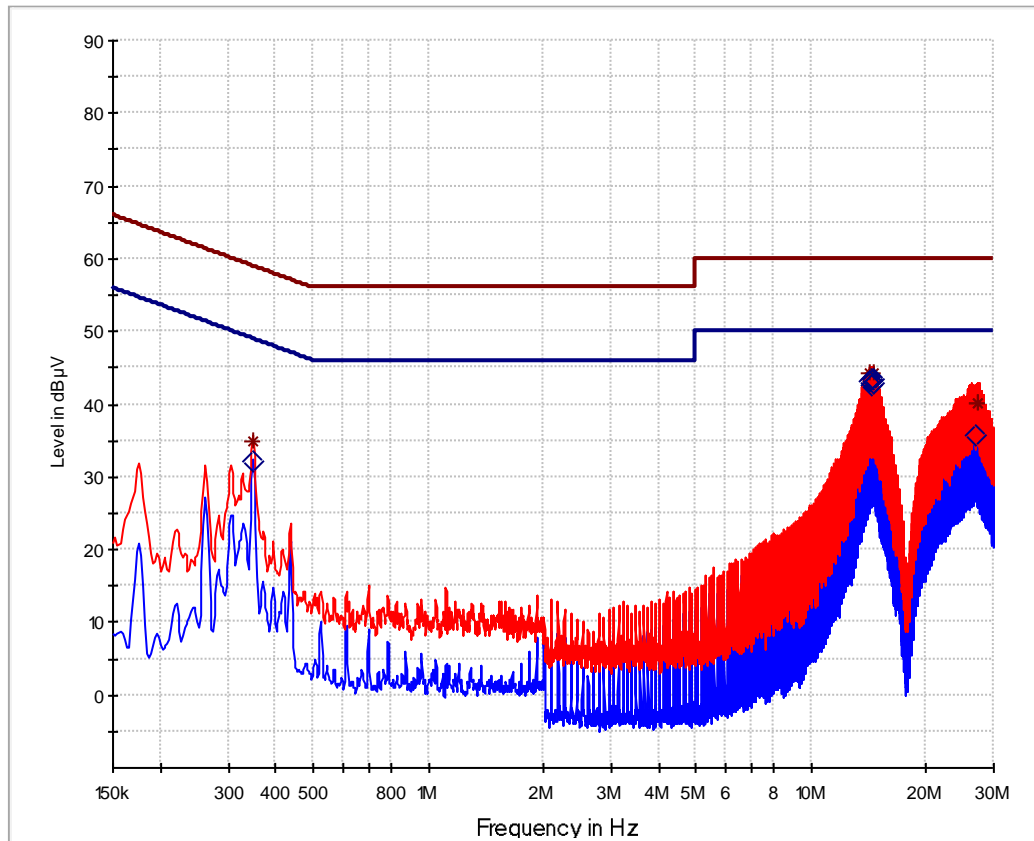

— Preview Result 2-AVG
— FCC 15.207 AV
— Preview Result 1-PK+
* Final Result QP K
— FCC 15.207 QP
◇ Final Result AVG

Frequency MHz	QuasiPeak dBµV	Average dBµV	Limit dBµV	Margin dB	Meas. Time ms	Bandwidth kHz	Corr. dB
0.348000		32.2	49.0	16.9	1000	9	0.0
0.348000	34.8		59.0	24.2	1000	9	0.0
14.223750		43.1	50.0	6.9	1000	9	0.3
14.223750	44.2		60.0	15.8	1000	9	0.3
14.311500		42.8	50.0	7.3	1000	9	0.3
14.397000		43.5	50.0	6.5	1000	9	0.3
14.484750	44.3		60.0	15.7	1000	9	0.3
14.484750		43.4	50.0	6.6	1000	9	0.3
14.572500		42.9	50.0	7.1	1000	9	0.3
27.030750		35.7	50.0	14.3	1000	9	0.4
27.118500	40.2		60.0	19.9	1000	9	0.4
27.379500	40.1		60.0	19.9	1000	9	0.4

Tested on: N

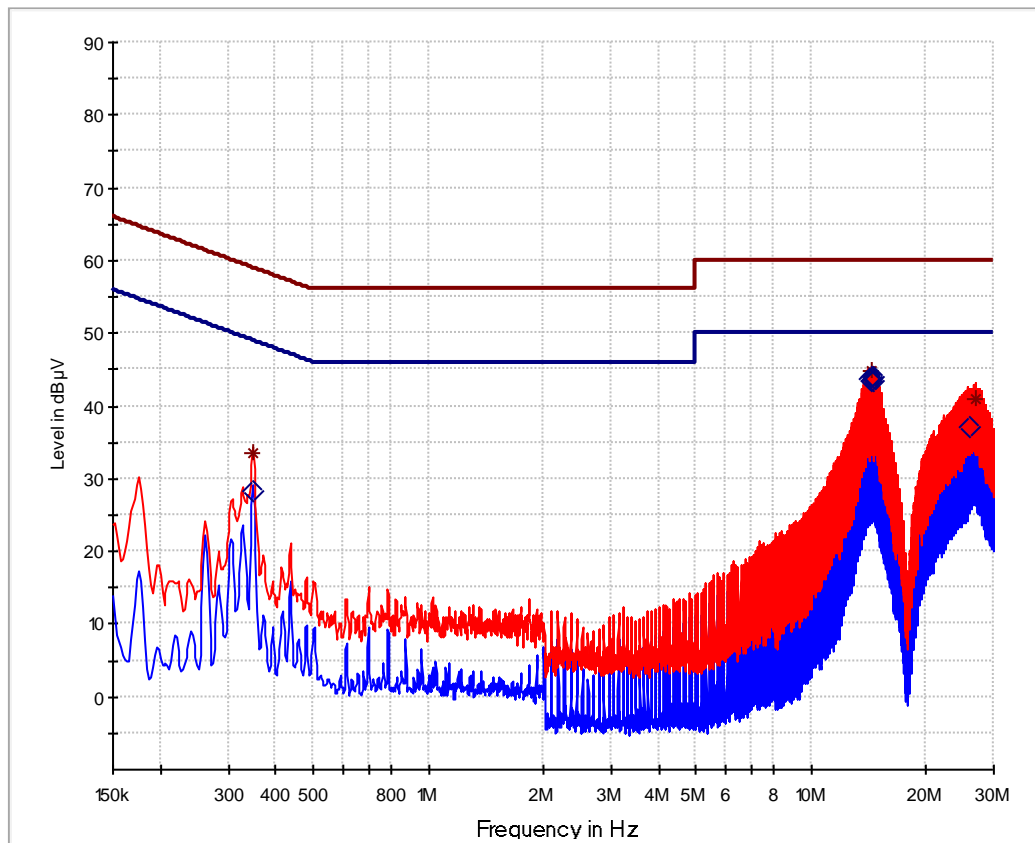

— Preview Result 2-AVG
— FCC 15.207 AV
— Preview Result 1-PK+
* Final_Result QP K
— FCC 15.207 QP
◇ Final_Result AVG

Frequency MHz	QuasiPeak dBµV	Average dBµV	Limit dBµ	Margin dB	Meas. Time ms	Bandwidth kHz	Corr. dB
0.348000		28.3	49.0	20.7	1000	9	0.0
0.348000	33.4		59.0	25.6	1000	9	0.0
14.221500		43.7	50.0	6.3	1000	9	0.3
14.309250		43.4	50.0	6.6	1000	9	0.3
14.394750		44.1	50.0	5.9	1000	9	0.3
14.394750	44.8		60.0	15.2	1000	9	0.3
14.482500		44.0	50.0	6.0	1000	9	0.3
14.570250		43.6	50.0	6.4	1000	9	0.3
26.065500		37.2	50.0	12.8	1000	9	0.3
26.934000	41.1		60.0	19.0	1000	9	0.4

8.4 Radiated Emission Measurement 9 kHz to 30 MHz

Rules and specifications:	CFR 47 Part 15, sections 15.205 and 15.209 IC RSS-GEN Issue 4, sections 8.9 and 8.10			
Guide:	ANSI C63.10			
Limit:	Frequency of Emission (MHz)	Field Strength ($\mu\text{V/m}$)	Field Strength ($\text{dB}\mu\text{V/m}$)	Measurement Distance d (meters)
	0.009 - 0.490	$2400/F(\text{kHz})$	$67.6 - 20 \cdot \log(F(\text{kHz}))$	300
	0.490 - 1.705	$24000/F(\text{kHz})$	$87.6 - 20 \cdot \log(F(\text{kHz}))$	30
	1.705 - 30.000	30	29.5	30
Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.				
Measurement procedure:	Radiated Emission Measurement 9 kHz to 30 MHz (6.3)			

Comment:	
Date of test:	2018-04-09
Test site:	Semi-anechoic room, cabin no. 8

Test Result:	Test passed
--------------	-------------

Sample calculation of final values:


$$\text{Extrapolation Factor (dB)} = (\text{Log}(d) - \text{Log}(d_1)) \cdot \text{Extrapolation Factor (dB/decade)}$$

$$\text{Final Value (dB}\mu\text{V/m)} = \text{Reading Value } d_1 \text{ (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} \\ + \text{Extrapolation Factor (dB)} + \text{Pulse Train Correction (dB)}$$

Note: Extrapolation factor (dB) and final value ($\text{dB}\mu\text{V/m}$) are relating to distance d.


Plots for EUT FMR10

Extrapolation factor: -40 dB/decade										
Frequency (MHz)	Detector	Distance		Reading Value (dBµV)	Correction Factor (dB/m)	Extrapolation Factor (dB)	Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
d1 (m)	d (m)									
1.72500	Quasi-Peak	10	30	5.3	20.0	-19.1		6.2	29.5	23.4

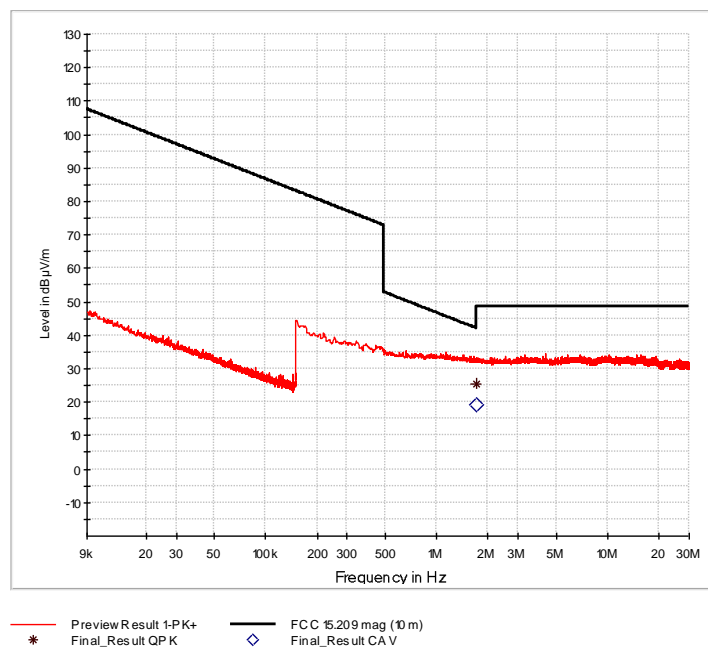

Plots for EUT FMR20

Extrapolation factor: -40 dB/decade										
Frequency (MHz)	Detector	Distance		Reading Value (dBµV)	Correction Factor (dB/m)	Extrapolation Factor (dB)	Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
d1 (m)	d (m)									
1.66200	Quasi-Peak	10	30	5.2	20.0	-19.1		6.2	23.2	17.0

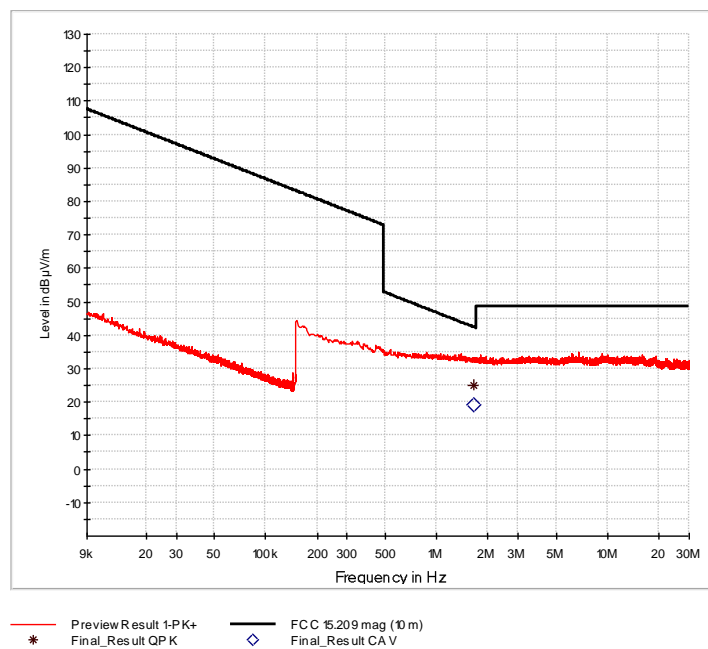

8.5 Radiated Emission Measurement 30 MHz to 100 GHz

Rules and specifications:	CFR 47 Part 15, section 15.209 IC RSS-GEN Issue 4, section 8.9		
Guide:	ANSI C63.10		
Limit:	Frequency of Emission (MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)
	30 - 88	100	40.0
	88 - 216	150	43.5
	216 - 960	200	46.0
	Above 960	500	54.0
Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.			
Measurement procedures:	Radiated Emission in Fully or Semi Anechoic Room (6.4) Radiated Emission at Alternative Test Site (6.5)		

Comment:			
Date of test:	2018-03-27 to 2018-04-23		
Test site:	Semi-anechoic room, cabin no. 8		
Test distance:	Frequencies ≤ 8.2 GHz:	3 m	
	Frequencies > 8.2 GHz, ≤ 18 GHz:	1 m	
	Frequencies > 18 GHz, ≤ 60 GHz:	0.5 m	
	Frequencies > 60 GHz, ≤ 90 GHz:	0.25 m	
	Frequencies > 90 GHz:	0.1 m	


Test Result:	Test passed
--------------	-------------

Sample calculation of final values:


$$\text{Final Value (dBµV/m)} = \text{Reading Value (dBµV)} + \text{Correction Factor (dB/m)} + \text{Pulse Train Correction (dB)}$$

Plots for EUT FMR10


Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading (dBµV)	Correction Factor (dB/m)	Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
339.236	vertical	Peak	35.4	-17.4		18.0	46.0	28.0
435.072	vertical	Peak	40.6	-15.5		25.1	46.0	20.9
449.760	vertical	Quasi-Peak	11.1	18.4		29.5	46.0	16.5
685.705	vertical	Quasi-Peak	7.4	22.4		29.8	46.0	16.2
700.464	vertical	Peak	34.9	-11.5		23.4	46.0	22.6
862.648	vertical	Peak	38.6	-9.8		28.8	46.0	17.2
870.020	vertical	Peak	38.3	-9.7		28.6	46.0	17.4
877.392	vertical	Peak	40.5	-9.6		30.9	46.0	15.1
884.764	vertical	Peak	37.4	-9.6		27.8	46.0	18.2
892.330	vertical	Peak	39.8	-9.6		30.2	46.0	15.8
899.508	vertical	Peak	37.5	-9.5		28.0	46.0	18.0
906.880	vertical	Peak	38.6	-9.3		29.3	46.0	16.7
914.446	vertical	Peak	36.4	-9.2		27.2	46.0	18.8
921.818	vertical	Peak	36.4	-9.2		27.2	46.0	18.8
943.934	vertical	Peak	36.1	-8.8		27.2	46.0	18.8
958.500	vertical	Quasi-Peak	9.1	25.7		34.8	46.0	11.2

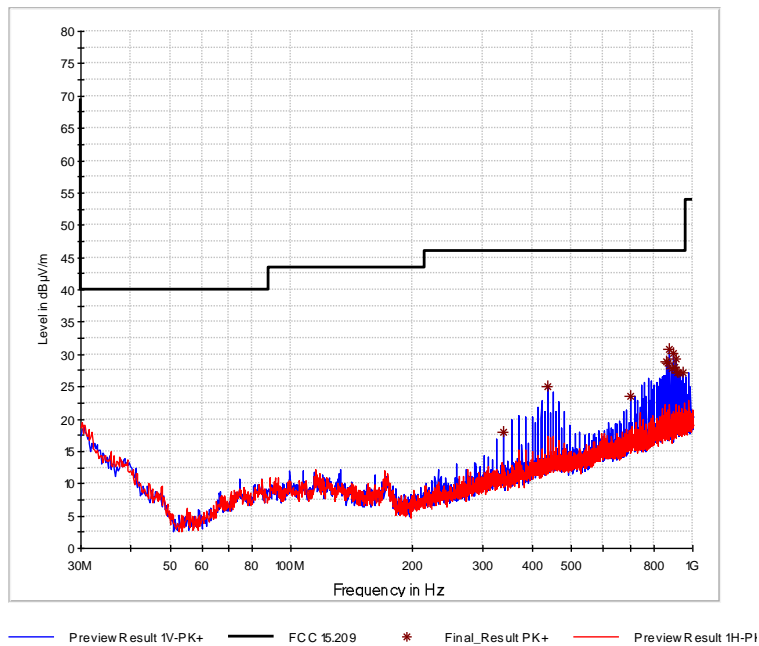

Prescan 30 MHz – 1 GHz

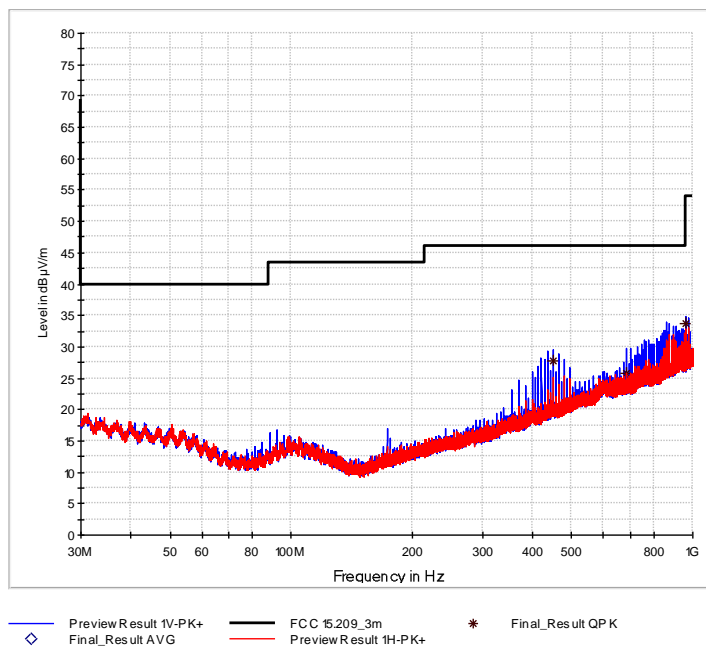


Final measurement 30 MHz – 1 GHz

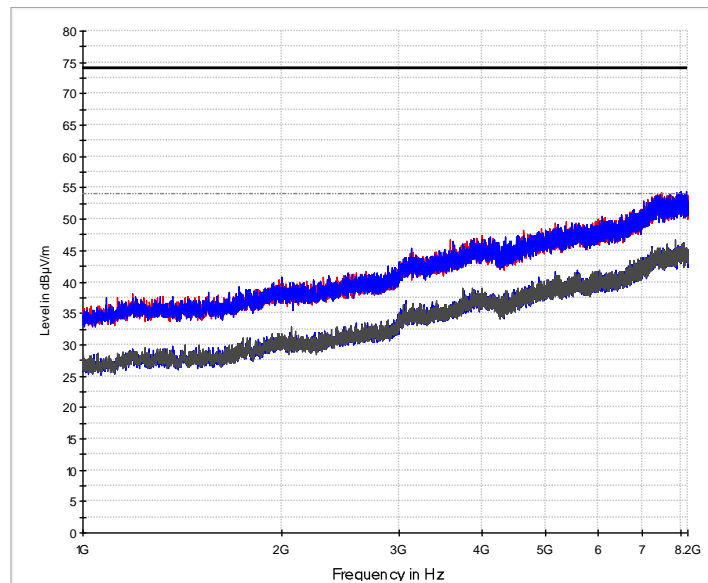


Preview Result 2H-AVG Preview Result 1H-PK+ Preview Result 2V-AVG
Preview Result 1V-PK+ FCC 15.209 PK FCC 15.209 AV

Prescan 1 GHz – 8 GHz

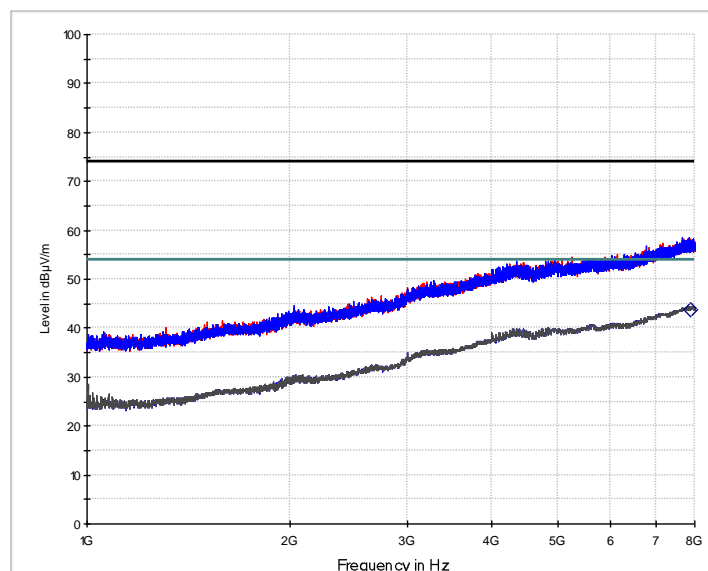


Preview Result 2H-AVG Preview Result 1H-PK+ Preview Result 2V-AVG
Preview Result 1V-PK+ FCC 15.209 3 m PK FCC 15.209 3 m AV
* Final Result PK+ ♦ Final Result CAV


Final measurement 1 GHz – 8 GHz

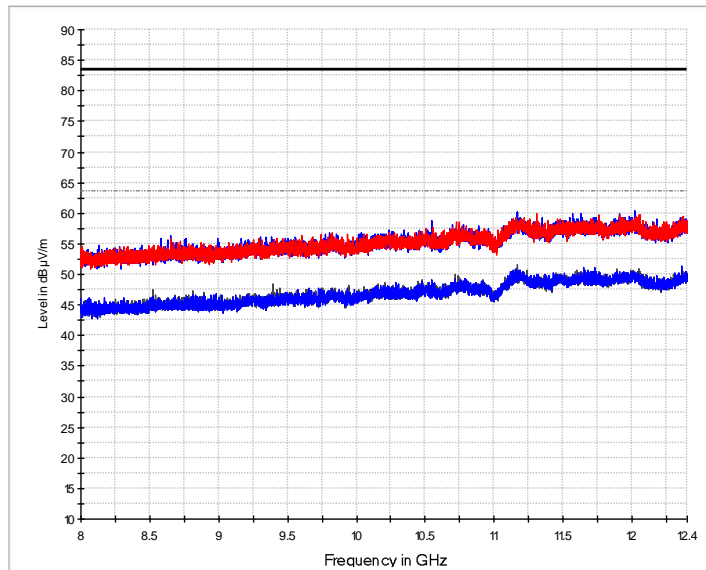


Preview Result 2V-AVG
 Preview Result 1H-PK+
 Final Result PK+
 Preview Result 1V-PK+
 FCC 15.209 (1m) PK
 Final Result AVG
 Preview Result 2H-AVG
 FCC 15.209 (1m) AV

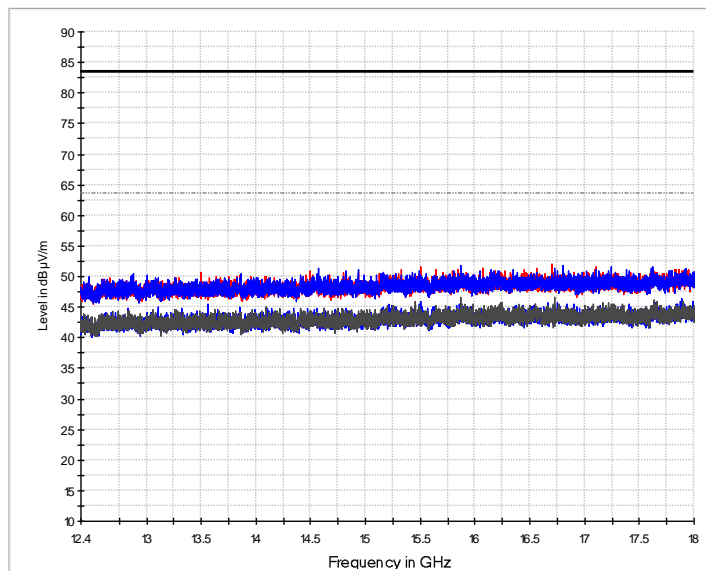



Preview Result 2H-AVG
 Preview Result 1H-PK+
 Final Result PK+
 Preview Result 1V-PK+
 FCC 15.209 (1m) PK
 Final Result AVG
 Preview Result 2V-AVG
 FCC 15.209 (1m) AV

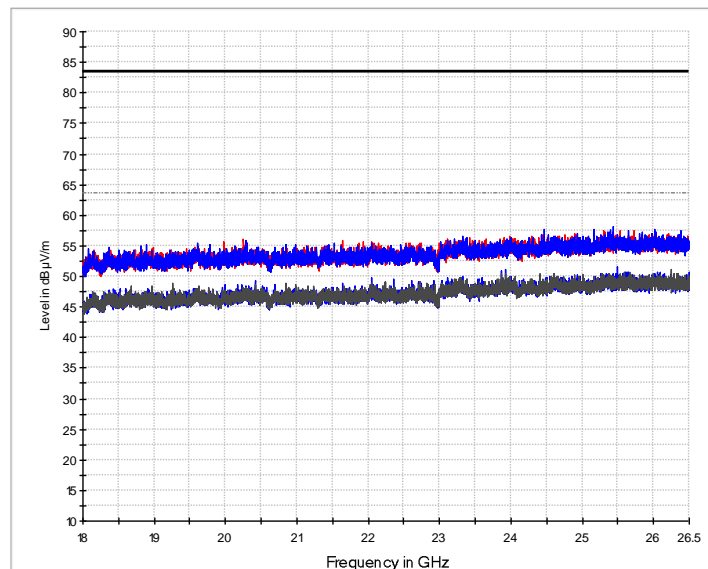


Preview Result 2H-AVG
 Preview Result 1V-PK+
 Preview Result 2V-AVG
 Preview Result 1H-PK+
 FCC 5.209 (1m) PK
 FCC 5.209 (1m) AV
 Final Result PK+
 Final Result AVG

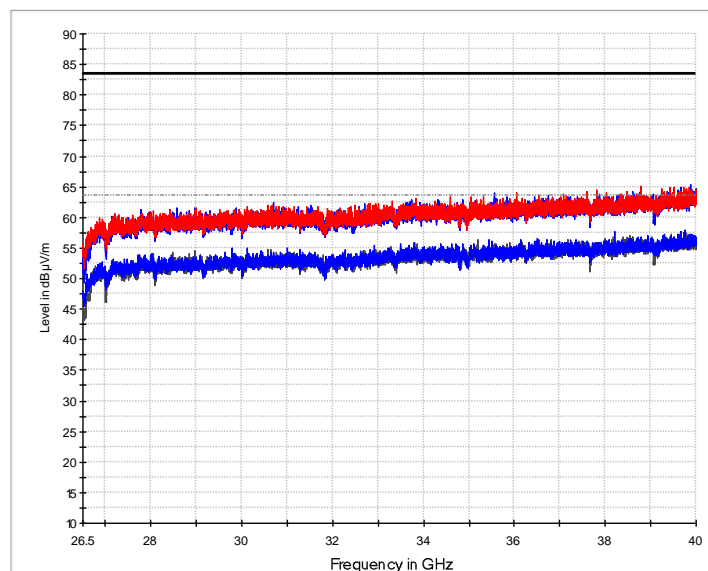


Preview Result 2V-AVG
 Preview Result 1V-PK+
 Preview Result 2H-AVG
 Preview Result 1H-PK+
 FCC 5.209 (1m) PK
 FCC 5.209 (1m) AV
 Final Result PK+
 Final Result AVG

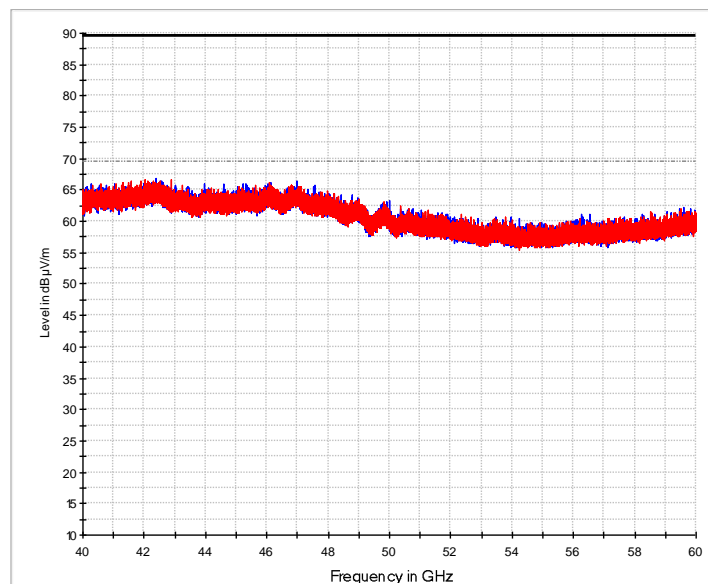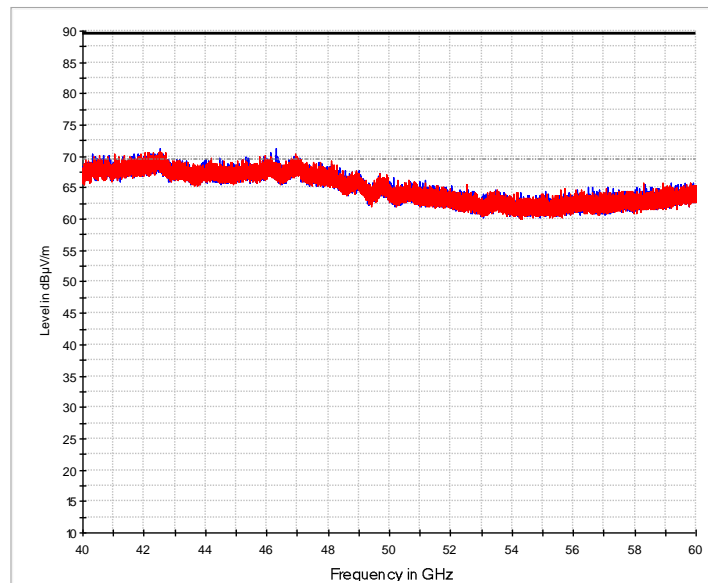


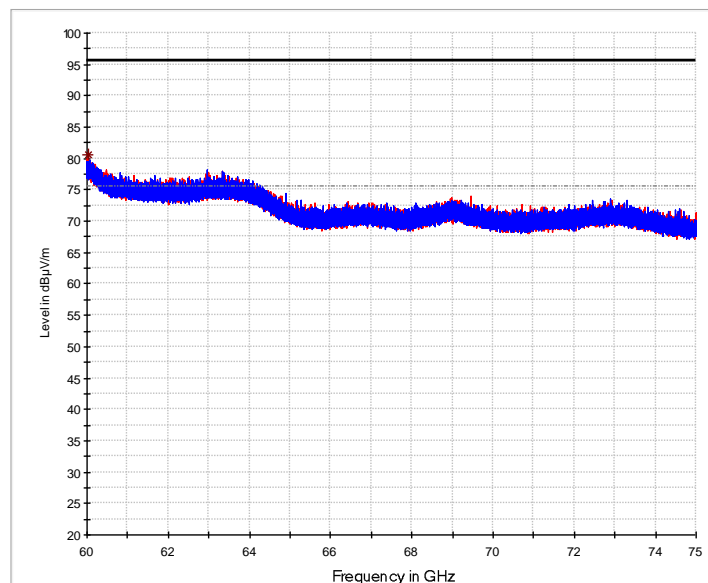


— Preview Result 1H-PK+ — Preview Result 1V-PK+ — FCC 15.209 (0.25m) PK
- - - - - FCC 15.209 (0.25m) AV * MaxPeak-PK+

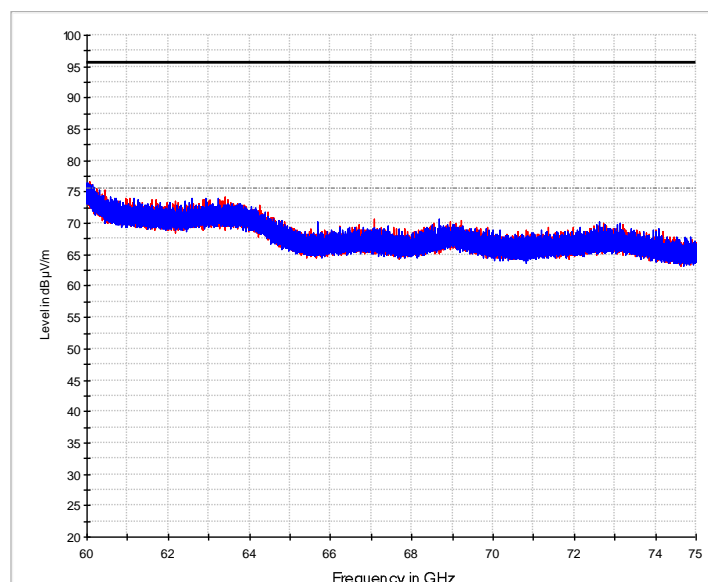

— Preview Result 1H-AVG — Preview Result 1V-AVG
— FCC 15.209 (0.25m) PK - - - - - FCC 15.209 (0.25m) AV

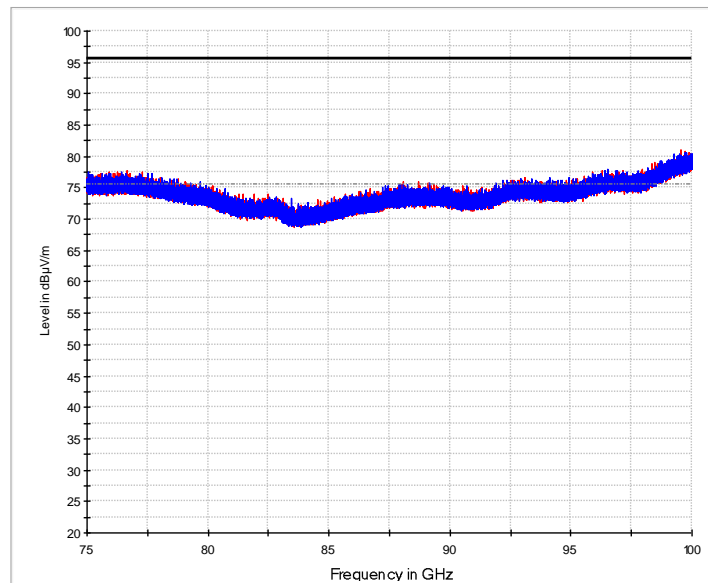


Preview Result 1H-PK+ Preview Result 1V-PK+
FCC 15.209 (0.25m) PK FCC 15.209 (0.25m) AV

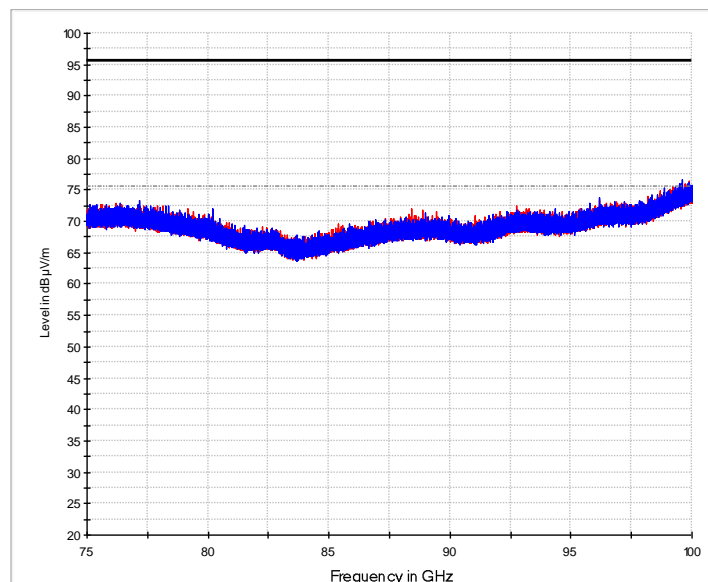


Preview Result 1H-AVG Preview Result 1V-AVG FCC 15.209 (0.25m) PK
FCC 15.209 (0.25m) AV * Final Result AVG

Plots for EUT FMR20



Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading (dBμV)	Correction Factor (dB/m)	Pulse Train Correction (dB)	Final Value (dBμV/m)	Limit (dBμV/m)	Margin (dB)
147.564	vertical	Peak	36.2	-19.8		16.3	43.5	27.2
213.912	horizontal	Peak	37.1	-20.4		16.8	43.5	26.7
339.236	vertical	Peak	41.8	-17.4		24.4	46.0	21.6
449.622	vertical	Peak	40.6	-15.1		25.5	46.0	20.5
449.760	vertical	Quasi-Peak	11.1	18.4		29.5	46.0	16.5
685.705	vertical	Quasi-Peak	7.4	22.4		29.8	46.0	16.2
700.464	vertical	Peak	39.1	-11.5		27.6	46.0	18.4
715.208	vertical	Peak	40.0	-11.5		28.5	46.0	17.5
840.532	vertical	Peak	39.8	-10.0		29.8	46.0	16.2
855.276	vertical	Peak	39.3	-9.7		29.6	46.0	16.4
870.020	vertical	Peak	39.0	-9.7		29.3	46.0	16.7
884.764	vertical	Peak	39.1	-9.6		29.6	46.0	16.4
899.508	vertical	Peak	38.1	-9.5		28.6	46.0	17.4
914.446	vertical	Peak	38.9	-9.2		29.7	46.0	16.3
928.996	vertical	Peak	38.6	-9.1		29.5	46.0	16.5
943.934	vertical	Peak	38.4	-8.8		29.6	46.0	16.4
958.500	vertical	Quasi-Peak	9.1	25.7		34.8	46.0	11.2
958.678	vertical	Peak	36.9	-8.7		28.2	46.0	17.8

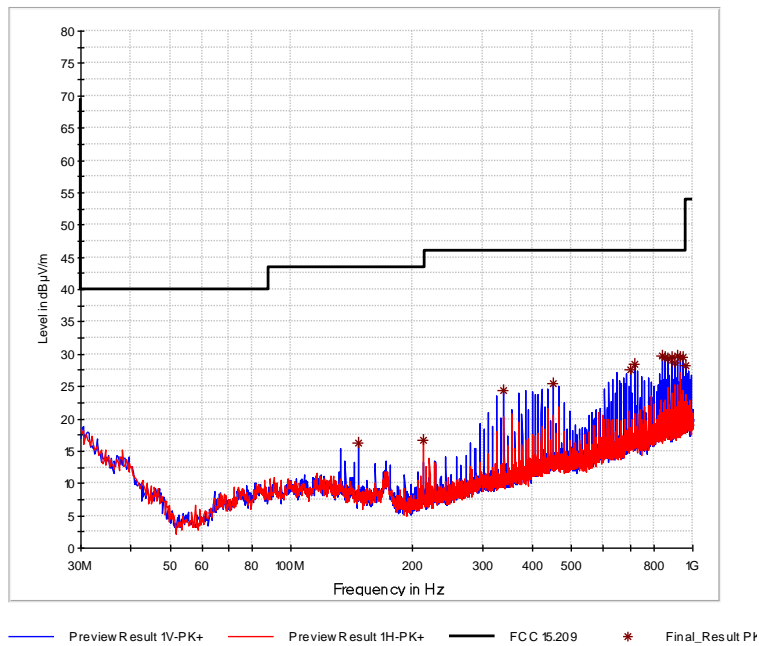


Prescan 30 MHz – 1 GHz

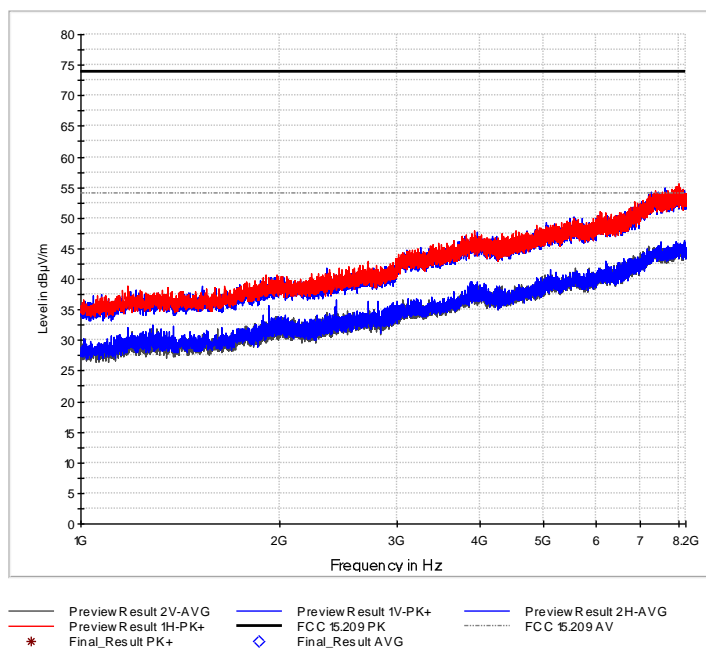


Prescan 1 GHz – 8 GHz

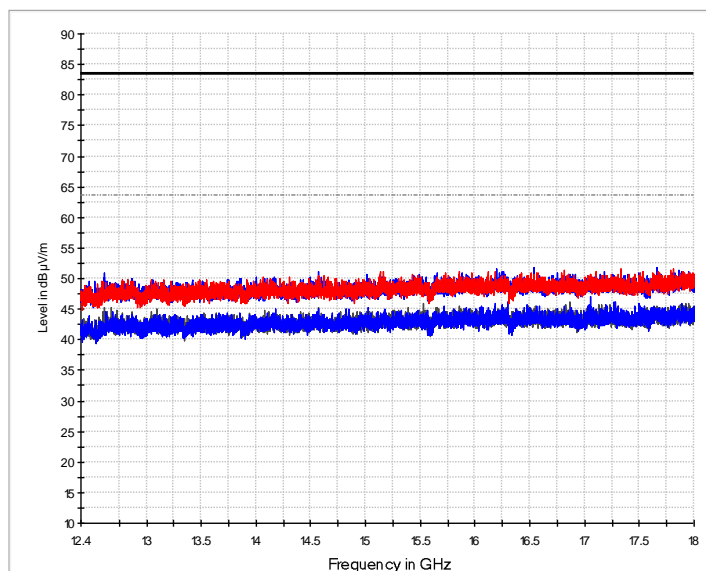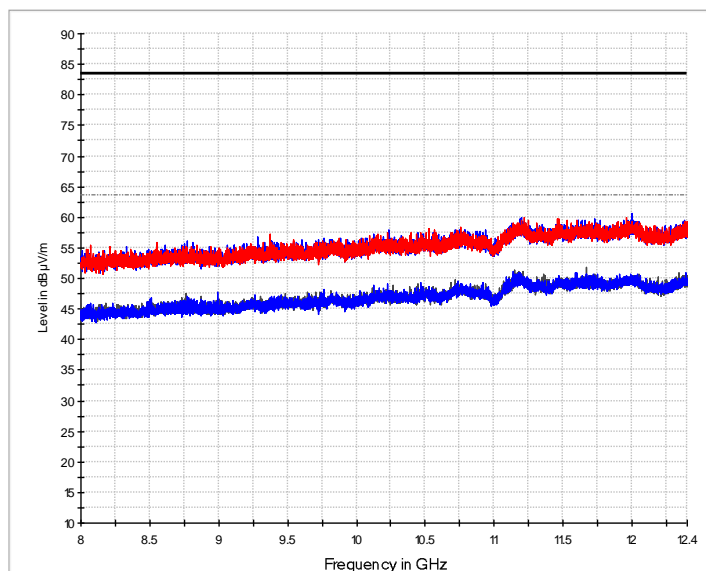


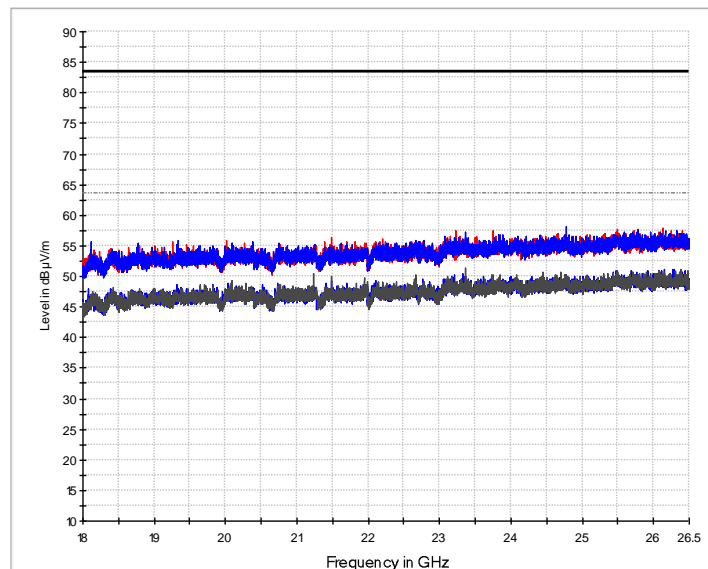


Preview Result 2H-AVG
 Preview Result 1V-PK+
 Preview Result 1H-PK+
 FCC 5.209 (1m) PK
 FCC 5.209 (1m) AV
 Final Result PK+
 Final Result AVG

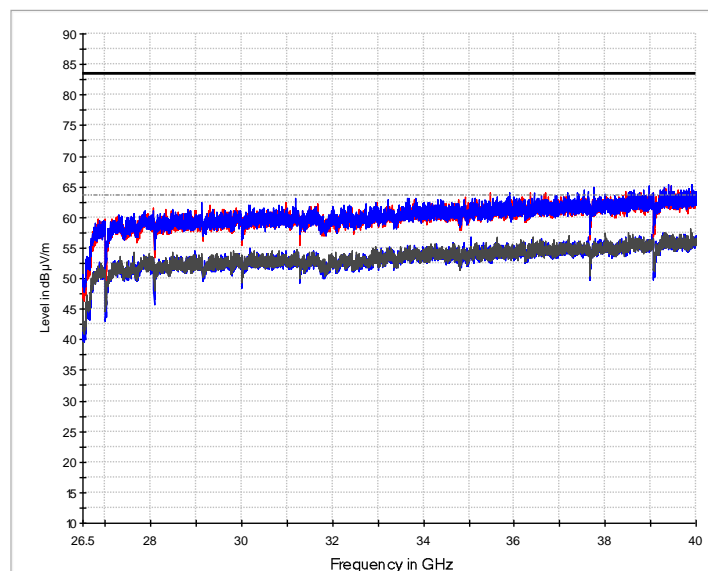


Preview Result 2H-AVG
 Preview Result 1V-PK+
 Preview Result 1H-PK+
 FCC 5.209 (1m) PK
 FCC 5.209 (1m) AV
 Final Result PK+
 Final Result AVG

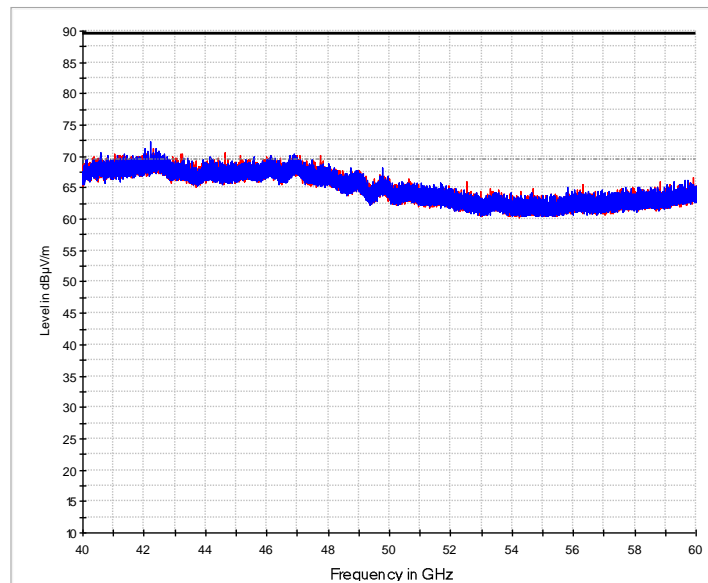


— Preview Result 1H-PK+ — Preview Result 1V-PK+
— FCC 15.209 (0.5m) PK - - - - - FCC 15.209 (0.5m) AV

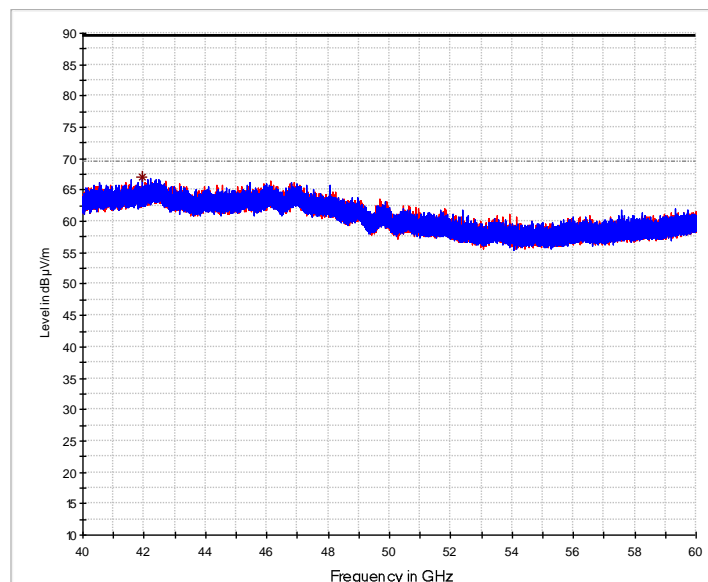


— Preview Result 1H-AVG — Preview Result 1V-AVG — FCC 15.209 (0.5m) PK
- - - - - FCC 15.209 (0.5m) AV * Final_Result AVG

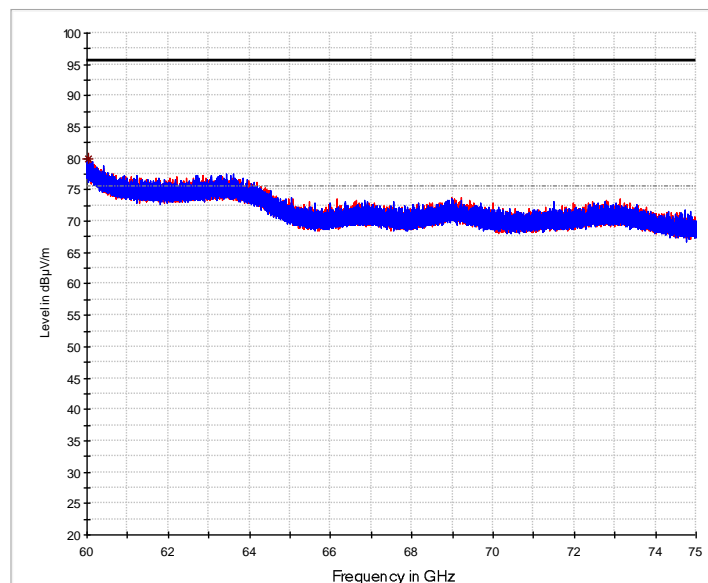


Preview Result 1H-PK+ Preview Result 1V-PK+ FCC 15.209 (0.25m) PK
FCC 15.209 (0.25m) AV * Final Result PK+

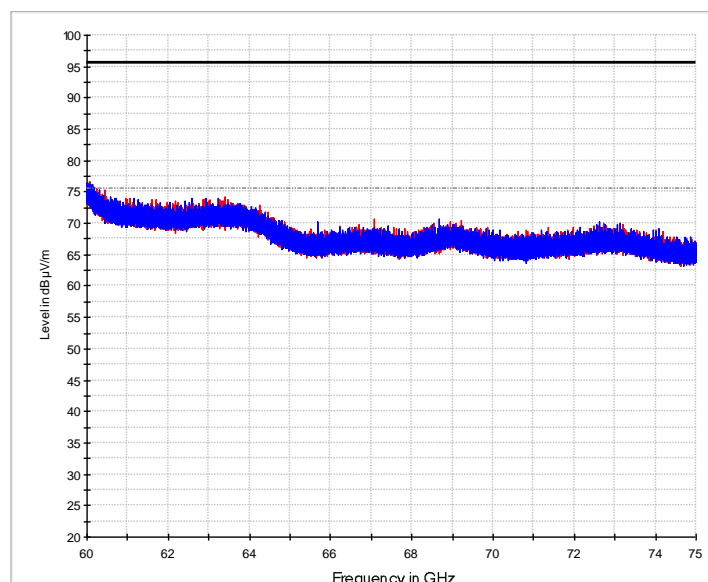

Preview Result 1H-AVG Preview Result 1V-AVG
FCC 15.209 (0.25m) PK FCC 15.209 (0.25m) AV

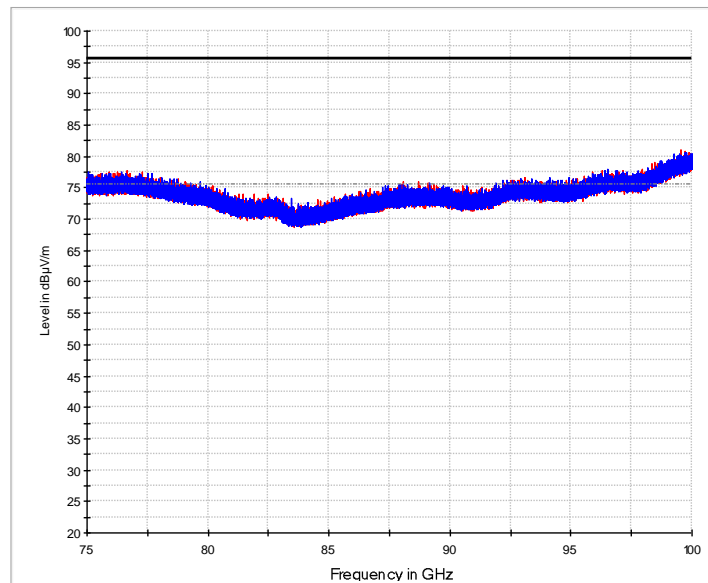

Preview Result 1H-PK+ Preview Result 1V-PK+
FCC 15.209 (0.25m) PK FCC 15.209 (0.25m) AV

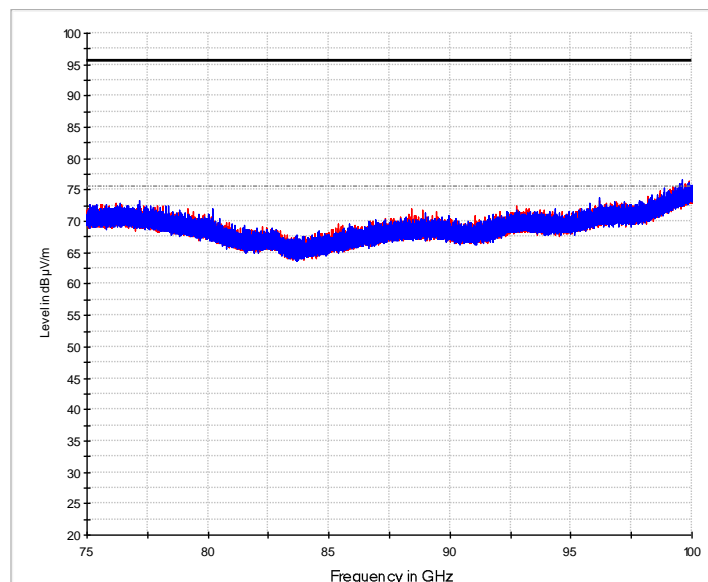

Preview Result 1H-AVG Preview Result 1V-AVG FCC 15.209 (0.25m) PK
FCC 15.209 (0.25m) AV * Final Result AVG



8.6 Leakage outside the container

Rules and specifications:	IC RSS-211 Issue 1, section 5.3 (b)	
Guide:	ANSI C63.10 ETSI EN 302 372	
Limit:	Frequency Band (GHz)	Maximum Average EIRP (in dBm/MHz) Outside Tank Enclosure Structure Inside the Operating Frequency Band
	5.65 – 8.50	-41.3
	8.50 – 10.55	-41.3
	24.05 – 29.00	-41.3
	75 – 85	-41.3
Measurement procedures:	Radiated Emission in Fully or Semi Anechoic Room (6.4) Radiated Emission at Alternative Test Site (6.5)	


Comment:	
Date of test:	2018-03-27 to 2018-04-23
Test site:	Semi-anechoic room, cabin no. 8
Test distance:	0.5 m

Test Result:	Test passed
--------------	-------------


Test result for EUT FMR10

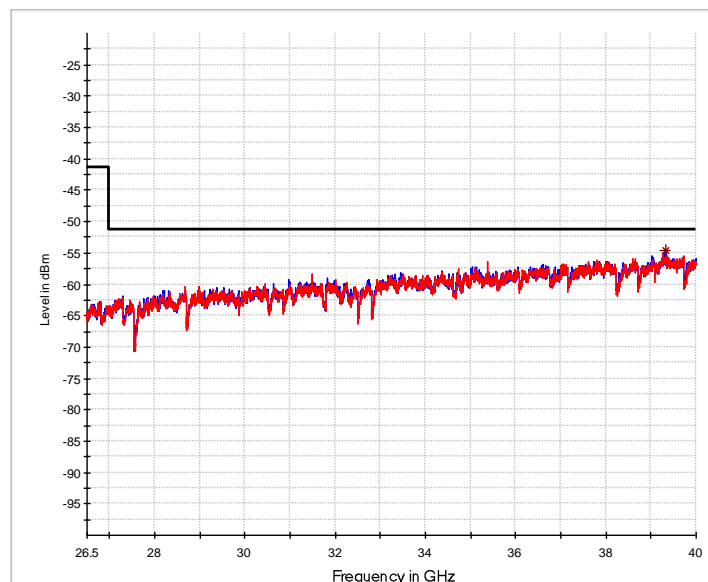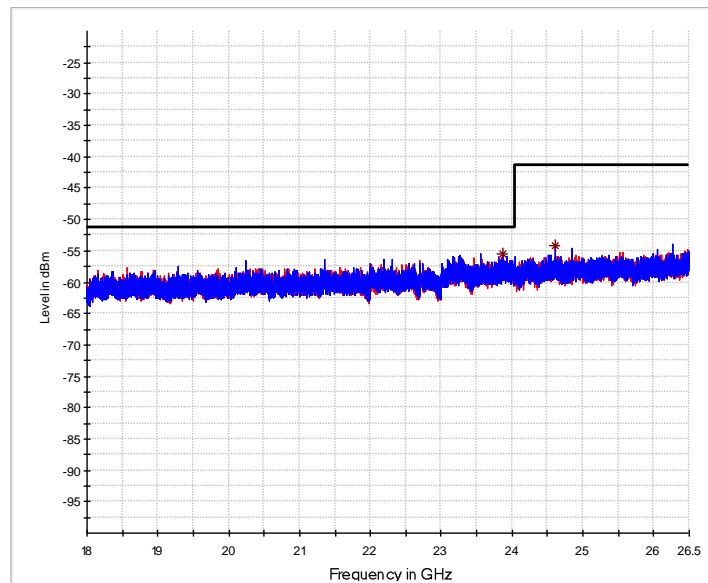

Test result for EUT FMR20

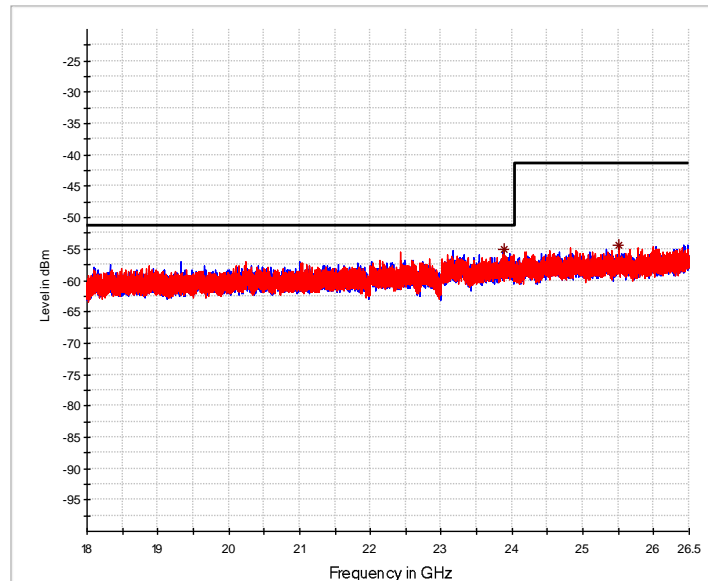

— Preview Result 1V-RMS — Preview Result 1H-RMS
— EN 302 372 26GHz * Final Result RMS

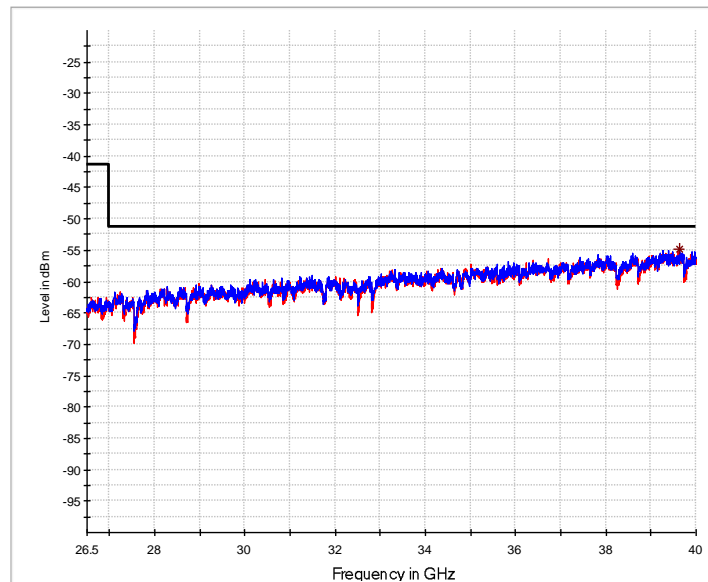

— Preview Result 1H-RMS — Preview Result 1V-RMS
— EN 302 372 26GHz * Final Result RMS

8.7 RF Exposure Requirement

Rules and specifications:	CFR 47 Part 1, section 1.1307(b)(1)				
Guide:	OET Bulletin 65, Edition 97-01				
Limits	Limits for general population / uncontrolled exposure:				
	<i>Frequency Range (MHz)</i>	<i>Electric Field Strength (V/m)</i>	<i>Magnetic Field Strength (A/m)</i>	<i>Power Density (mW/cm²)</i>	<i>Averaging Time (min)</i>
	0.3 – 1.34	614	1.63	100 *	30
	1.34 – 30	824/f	2.19 / f	180 / f *	30
	30 – 300	27.5	0.073	0.2	30
	300 – 1500	---	---	f / 1500	30
	1500 - 100000	---	---	1.0	30
	f = Frequency in MHz				
	* Plane wave equivalent power density				

<i>EUT</i>	<i>EIRP_{PK,1 MHz} (dBm)</i>	<i>EIRP_{PK,1 MHz} (μW)</i>
FMR10	-19.0	12.59
FMR20	-10.0	100.0

Prediction: ⁷	$S = PG / (4 \pi R^2)$
Where:	<p>S: Power density</p> <p>P: Power input into antenna</p> <p>G: Power gain of the antenna relative to an isotropic radiator</p> <p>R: Distance to the center of radiation of the antenna</p>
Maximum output power:	P = 0.1 mW
Antenna gain:	G: Not applicable
Prediction distance	R = 5 mm
Power density at 20 cm:	S = 0.03 mW/cm ²
Limit	S _{lim} = 1.0 mW/cm ²

Test Result:	Test passed
--------------	-------------

⁷ MPE Prediction of MPE according to equation from page 19 of OET Bulletin 65, Ed. 97-01

8.8 Exposure of Humans to RF Fields

Rules and specifications:	IC RSS-Gen Issue 4, section 3.2
Guide:	IC RSS-102 Issue 5, section 2.5

Exposure of Humans to RF Fields	Applicable	Declared by applicant	Measured	Exemption									
The antenna is													
<input type="checkbox"/> detachable													
<p>The conducted output power (CP in watts) is measured at the antenna connector:</p> <p style="text-align: center;">$CP = \dots\dots\dots \text{W}$</p> <p>The effective isotropic radiated power (EIRP in watts) is calculated using</p> <p><input type="checkbox"/> the numerical antenna gain: $G = \dots\dots\dots$</p> <p style="text-align: center;">$EIRP = G \cdot CP \Rightarrow EIRP = \dots\dots\dots \text{W}$</p> <p><input type="checkbox"/> the field strength⁸ in V/m: $FS = \dots\dots\dots \text{V/m}$</p> <p style="text-align: center;">$EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = \dots\dots\dots \text{W}$</p> <p>with:</p> <p>Distance between the antennas in m: $D = \dots\dots\dots \text{m}$</p>			<input type="checkbox"/>										
<input checked="" type="checkbox"/> not detachable													
<p>A field strength measurement is used to determine the effective isotropic radiated power (EIRP in watts) given by⁸:</p> <table border="0" style="width: 100%;"> <thead> <tr> <th style="text-align: left;"><i>EUT</i></th> <th style="text-align: left;"><i>EIRP_{PK,1 MHz}</i> (dBm)</th> <th style="text-align: left;"><i>EIRP_{PK,1 MHz}</i> (μW)</th> </tr> </thead> <tbody> <tr> <td>FMR10</td> <td>-19.0</td> <td>12.59</td> </tr> <tr> <td>FMR20</td> <td>-10.0</td> <td>100.0</td> </tr> </tbody> </table>	<i>EUT</i>	<i>EIRP_{PK,1 MHz}</i> (dBm)	<i>EIRP_{PK,1 MHz}</i> (μW)	FMR10	-19.0	12.59	FMR20	-10.0	100.0			<input checked="" type="checkbox"/>	
<i>EUT</i>	<i>EIRP_{PK,1 MHz}</i> (dBm)	<i>EIRP_{PK,1 MHz}</i> (μW)											
FMR10	-19.0	12.59											
FMR20	-10.0	100.0											
Selection of output power													
<p>The output power TP is the higher of the conducted or effective isotropic radiated power (e.i.r.p.):</p> <p style="text-align: center;">$TP = 0.1 \text{ mW}$</p>													

⁸ The conversion formula is valid only for properly matched antennas. In other cases the transmitter output power may have to be measured by a terminated measurement when applying the exemption clauses. If an open area test site is used for field strength measurement, the effect due to the metal ground reflecting plane should be subtracted from the maximum field strength value in order to reference it to free space, before calculating TP.

Exposure of Humans to RF Fields (continued)	Applicable	Declared by applicant	Measured	Exemption
Separation distance between the user and the transmitting device is				
<input checked="" type="checkbox"/> less than or equal to 20 cm		<input checked="" type="checkbox"/>		
<input type="checkbox"/> greater than 20 cm				
Transmitting device is				
<input type="checkbox"/> in the vicinity of the human head		<input type="checkbox"/>		
<input type="checkbox"/> body-worn				

SAR evaluation

SAR evaluation is required if the separation distance between the user and/or bystander and the antenna and/or radiating element of the device is less than or equal to 20 cm, except when the device operates at or below the applicable output power level (adjusted for tune-up tolerance) for the specified separation distance defined in the table.

For controlled use devices where the 8 W/kg for 1 gram of tissue applies, the exemption limits for routine evaluation in the table are multiplied by a factor of 5. For limb-worn devices where the 10 gram value applies, the exemption limits for routine evaluation in the table are multiplied by a factor of 2.5. If the operating frequency of the device is between two frequencies located in the table, linear interpolation shall be applied for the applicable separation distance. For test separation distance less than 5 mm, the exemption limits for a separation distance of 5 mm can be applied to determine if a routine evaluation is required.

For medical implants devices, the exemption limit for routine evaluation is set at 1 mW. The output power of a medical implants device is defined as the higher of the conducted or e.i.r.p to determine whether the device is exempt from the SAR evaluation.

Frequency (MHz)	Exemption limits (mW) ⁹ at separation distance of									
	≤5 mm	10 mm	15 mm	20 mm	25 mm	30 mm	35 mm	40 mm	45 mm	≥50 mm
≤300 ¹⁰	71	101	132	162	193	223	254	284	315	345
450	52	70	88	106	123	141	159	177	195	213
835	17	30	42	55	67	80	92	105	117	130
1900	7	10	18	34	60	99	153	225	316	431
2450	4	7	15	30	52	83	123	173	235	309
3500	2	6	16	32	55	86	124	170	225	290
5800	1	6	15	27	41	56	71	85	97	106

Carrier frequency:	f	=	24.05 GHz – 29 GHz				
Distance:	d	=	5 mm				
Transmitter output power:	TP	=	0.1 mW				
Limit:	TP_{limit}	=	1 mW				<input checked="" type="checkbox"/>
<input type="checkbox"/> SAR evaluation is documented in test report no.							

⁹ The exemption limit in the table are based on measurements and simulations on half-wave dipole antennas at separation distances of 5 mm to 25 mm from a flat phantom, providing a SAR value of approximately 0.4 W/kg for 1 g of tissue. For low frequencies (300 MHz to 835 MHz), the exemption limits are derived from a linear fit. For high frequencies (1900 MHz and above), the exemption limits are derived from a third order polynomial fit.

¹⁰ Transmitters operating between 3 kHz and 10 MHz, meeting the exemption from routine SAR evaluation, shall demonstrate compliance to the instantaneous limits in IC RSS-102, issue 5, section 4.

Exposure of Humans to RF Fields (continued)	Applicable	Declared by applicant	Measured	Exemption
RF exposure evaluation				
<p>RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:</p> <p><input type="checkbox"/> below 20 MHz¹¹ and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 1 W (adjusted for tune-up tolerance).</p> <p><input type="checkbox"/> between 3 kHz and 10 MHz exposure limits apply as following:</p> <p><input type="checkbox"/> In a uncontrolled environment the basic restriction for the instantaneous internal electric field strength is equal to or less than $2.7 \cdot 10^{-4} f \text{ V/m}_{\text{rms}}$ at any part of the body where f is in Hz. The instantaneous RF field strength is equal or less than 83 V/m_{rms} and equal or less than 90 A/m_{rms}.</p> <p><input type="checkbox"/> In a controlled environment the basic restriction for the instantaneous internal electric field strength is equal to or less than $1.35 \cdot 10^{-4} f \text{ V/m}_{\text{rms}}$ at any part of the body where f is in Hz. The instantaneous RF field strength is equal or less than 170 V/m_{rms} and equal or less than 180 A/m_{rms}.</p> <p><input type="checkbox"/> at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $4,49/f^{0.5} \text{ W}$ (adjusted for tune-up tolerance, where f is in MHz).</p> <p><input type="checkbox"/> at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance).</p> <p><input type="checkbox"/> at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $1.31 \cdot 10^{-2} f^{0.6834} \text{ W}$ (adjusted for tune-up tolerance), where f is in MHz.</p> <p><input type="checkbox"/> at or above 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 5 W (adjusted for tune-up tolerance).</p> <p>In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.</p>				
<p>Carrier frequency: f =</p> <p>Transmitter output power: TP =</p> <p>Limit: TP_{limit} =</p>				<input type="checkbox"/>
<input type="checkbox"/> RF exposure evaluation is documented in test report no.				

Test Result:

Test passed

¹¹ Transmitters operating between 3 kHz and 10 MHz, meeting the exemption from routine RF Exposure evaluation, shall demonstrate compliance to the instantaneous limits in IC RSS-102, issue 5, section 4.

9 Referenced Regulations

All tests were performed with reference to the following regulations and standards:

<input checked="" type="checkbox"/>	CFR 47 Part 2	Code of Federal Regulations Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)	October 1, 2017
<input checked="" type="checkbox"/>	CFR 47 Part 15	Code of Federal Regulations Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)	October 1, 2017
<input type="checkbox"/>	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	June 13, 2014 (published on June 20, 2014)
<input checked="" type="checkbox"/>	ANSI C63.10	American national Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	June 27, 2013 (published on September 13, 2013)
<input checked="" type="checkbox"/>	RSS-Gen	Radio Standards Specification RSS-Gen Issue 4 containing General Requirements for Compliance of Radio Apparatus, published by Industry Canada	November 2014
<input checked="" type="checkbox"/>	RSS-210	Radio Standards Specification RSS-210 Issue 9 for Licence-Exempt Radio Apparatus: Category I Equipment, published by Industry Canada	August 2016
<input type="checkbox"/>	RSS-310	Radio Standards Specification RSS-310 Issue 3 for Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category II Equipment, published by Industry Canada	December 2010
<input checked="" type="checkbox"/>	RSS-102	Radio Standards Specification RSS-102 Issue 5: Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), published by Industry Canada	March 2015
<input type="checkbox"/>	ICES-003	Interference-Causing Equipment Standard ICES-003 Issue 6: Information Technology Equipment (Including Digital Apparatus) – Limits and methods of measurement, published by Industry Canada	January 2016
<input checked="" type="checkbox"/>	CISPR 22	Third Edition of the International Special Committee on Radio Interference (CISPR), Pub. 22, "Information Technology Equipment – Radio Disturbance Characteristics – Limits and Methods of Measurement"	1997
<input type="checkbox"/>	CAN/CSA CISPR 22-10	Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement (Adopted IEC CISPR 22:2008, sixth edition, 2008-09)	2010



TRC-43

Designation of Emissions, Class of Station and Nature of Service, published by Industry Canada

November 2012

10 Test Equipment List with Calibration Data

Type	Inv.-No.	Type Designation	Serial Number	Manufacturer	Calibration Organization	Last Calibration	Next Calibration
EMI test receiver	2044	ESU8	100232	Rohde & Schwarz	Rohde & Schwarz	12-2017	12-2018
EMI test receiver	28268	ESW26	101315	Rohde & Schwarz	Rohde & Schwarz	05-2018	05-2019
Spectrum analyser	1666	FSP30	100063	Rohde & Schwarz	Rohde & Schwarz	08-2017	08-2019
Spectrum analyser	2364	FSV40	101448	Rohde & Schwarz	Rohde & Schwarz	01-2018	01-2019
V-network	1059	ESH3-Z5	894785/005	Rohde & Schwarz	Rohde & Schwarz	10-2016	10-2019
Double ridged horn antenna	2073	HF907	100154	Rohde & Schwarz	Rohde & Schwarz	06-2017	06-2019
Horn antenna	1014	3160-07	9112-1008	EMCO Elektronik	See note 3		
Horn antenna	1015	3160-08	9112-1002	EMCO Elektronik	See note 3		
Horn antenna	1265	3160-09	9403-1025 (931941-010)	EMCO Elektronik	See note 3		
Horn antenna	1575	3160-10	399185	EMCO Elektronik	See note 3		
Horn antenna	2086	24240-20	157845	Flann	See note 3		
Horn antenna	27898	25240-20	249763	Flann	See note 3		
Horn antenna	27899	27240-20	244048	Flann	See note 3		
Loop antenna	1016	HFH2-Z2	882964/0001	Rohde & Schwarz	Rohde & Schwarz	07-2016	07-2019
TRILOG Broadband Antenna	2058	VULB 9163	9163-408	Schwarzbeck	Rohde & Schwarz	07-2016	07-2019
Waveguide mixer	25849	FS-Z60	100177	Rohde & Schwarz	Rohde & Schwarz	04-2017	04-2020
Waveguide mixer	25850	FS-Z90	101610	Rohde & Schwarz	Rohde & Schwarz	12-2016	12-2019
Waveguide mixer	25851	FS-Z110	101464	Rohde & Schwarz	Rohde & Schwarz	11-2016	11-2019

Note 1: No calibration required.

Note 2: Not calibrated separately but with the whole test system when recording calibration data.

Note 3: No calibration required. Devices are checked before use.

Note 4: No calibration required. Devices are checked by calibrated equipment during test.

11 Measurement Uncertainty

Radio Testing			
Test	k_p	Expanded Uncertainty	Note
Occupied Bandwidth	2.0	$\pm 1.14 \%$	2
RF-Frequency error	1.96	$\pm 1 \cdot 10^{-7}$	7
RF-Power, conducted carrier	2	$\pm 0.079 \text{ dB}$	2
RF-Power uncertainty for given BER	1.96	$+0.94 \text{ dB}$ -1.05	7
RF power, conducted, spurious emissions	1.96	$+1.4 \text{ dB}$ -1.6 dB	7
RF power, radiated			
25 MHz – 4 GHz	1.96	$+3.6 \text{ dB}$ / -5.2 dB	8
1 GHz – 18 GHz	1.96	$+3.8 \text{ dB}$ / -5.6 dB	8
18 GHz – 26.5 GHz	1.96	$+3.4 \text{ dB}$ / -4.5 dB	8
40 GHz – 170 GHz	1.96	$+4.2 \text{ dB}$ / -7.1 dB	8
Spectral Power Density, conducted	2.0	$\pm 0.53 \text{ dB}$	2
Maximum frequency deviation			
300 Hz – 6 kHz	2	$\pm 2.89 \%$	2
6 kHz – 25 kHz	2	$\pm 0.2 \text{ dB}$	2
Maximum frequency deviation for FM	2	$\pm 2.89 \%$	2
Adjacent channel power 25 MHz – 1 GHz	2	$\pm 2.31 \%$	2
Temperature	2	$\pm 0.39 \text{ K}$	4
(Relative) Humidity	2	$\pm 2.28 \%$	2
DC- and low frequency AC voltage			
DC voltage	2	$\pm 0.01 \%$	2
AC voltage up to 1 kHz	2	$\pm 1.2 \%$	2
Time	2	$\pm 0.6 \%$	2

Radio Interference Emission Testing			
Test	k_p	Expanded Uncertainty	Note
Conducted Voltage Emission			
9 kHz to 150 kHz (50Ω/50μH AMN)	2	± 3.8 dB	1
150 kHz to 30 MHz (50Ω/50μH AMN)	2	± 3.4 dB	1
100 kHz to 200 MHz (50Ω/5μH AMN)	2	± 3.6 dB	1
Discontinuous Conducted Emission			
9 kHz to 150 kHz (50Ω/50μH AMN)	2	± 3.8 dB	1
150 kHz to 30 MHz (50Ω/50μH AMN)	2	± 3.4 dB	1
Conducted Current Emission			
9 kHz to 200 MHz	2	± 3.5 dB	1
Magnetic Fieldstrength			
9 kHz to 30 MHz (with loop antenna)	2	± 3.9 dB	1
9 kHz to 30 MHz (large-loop antenna 2 m)	2	± 3.5 dB	1
Radiated Emission			
Test distance 1 m (ALSE)			
9 kHz to 150 kHz	2	± 4.6 dB	1
150 kHz to 30 MHz	2	± 4.1 dB	1
30 MHz to 200 MHz	2	± 5.2 dB	1
200 MHz to 2 GHz	2	± 4.4 dB	1
2 GHz to 3 GHz	2	± 4.6 dB	1
Test distance 3 m			
30 MHz to 300 MHz	2	± 4.9 dB	1
300 MHz to 1 GHz	2	± 5.0 dB	1
1 GHz to 6 GHz	2	± 4.6 dB	1
Test distance 10 m			
30 MHz to 300 MHz	2	± 4.9 dB	1
300 MHz to 1 GHz	2	± 4.9 dB	1

Radio Interference Emission Testing (continued)			
Test	k_p	Expanded Uncertainty	Note
Radio Interference Power			
30 MHz to 300 MHz	2	± 3.5 dB	1
Harmonic Current Emissions			4
Voltage Changes, Voltage Fluctuations and Flicker			4

Immunity Testing			
Test	k_p	Expanded Uncertainty	Note
Electrostatic Discharges			4
Radiated RF-Field			
Pre-calibrated field level	2	+32.2 / -24.3 %	5
Dynamic feedback field level	2.05	+21.2 / -17.5 %	3
Electrical Fast Transients (EFT) / Bursts			4
Surges			4
Conducted Disturbances, induced by RF-Fields			
via CDN	2	+15.1 / -13.1 %	6
via EM clamp	2	+42.6 / -29.9 %	6
via current clamp	2	+43.9 / -30.5 %	6
Power Frequency Magnetic Field	2	+20.7 / -17.1 %	2
Pulse Magnetic Field			4
Voltage Dips, Short Interruptions and Voltage Variations			4
Oscillatory Waves			4
Conducted Low Frequency Disturbances			
Voltage setting	2	± 0.9 %	2
Frequency setting	2	± 0.1 %	2
Electrical Transient Transmission in Road Vehicles			4

Note 1:

The expanded uncertainty reported according to CISPR 16-4-2:2003-11 is based on a standard uncertainty multiplied by a coverage factor of $k_p = 2$, providing a level of confidence of $p = 95.45\%$

Note 2:

The expanded uncertainty reported according to UKAS Lab 34 (Edition 1, 2002-08) is based on a standard uncertainty multiplied by a coverage factor of $k_p = 2$, providing a level of confidence of $p = 95.45\%$

Note 3:

The expanded uncertainty reported according to UKAS Lab 34 (Edition 1, 2002-08) is based on a standard uncertainty multiplied by a coverage factor of $k_p = 2.05$, providing a level of confidence of $p = 95.45\%$

Note 4:

It has been demonstrated that the used test equipment meets the specified requirements in the standard with at least a 95% confidence.

Note 5:

The expanded uncertainty reported according to IEC 61000-4-3 is based on a standard uncertainty multiplied by a coverage factor of $k_p = 2$, providing a level of confidence of $p = 95.45\%$

Note 6:

The expanded uncertainty reported according to IEC 61000-4-6 is based on a standard uncertainty multiplied by a coverage factor of $k_p = 2$, providing a level of confidence of $p = 95.45\%$

Note 7:

The expanded uncertainty reported according ETSI TR 100 028 V1.4.1 (all parts) to is based on a standard uncertainty multiplied by a coverage factor of $k_p = 1.96$, providing a level of confidence of $p = 95.45\%$

Note 8:

The expanded uncertainty reported according to ETSI TR 102 273 V1.2.1 (all parts) is based on a standard uncertainty multiplied by a coverage factor of $k_p = 1.96$, providing a level of confidence of $p = 95.45\%$

12 Revision History

Revision History			
<i>Edition</i>	<i>Date</i>	<i>Issued by</i>	<i>Modifications</i>
1	2018-11-09	M. Steindl	First Edition
2	2018-11-07	M. Steindl	Changed applicant to Endress + Hauser SE + Co. KG
3	2018-11-09	M. Steindl	Changed manufacturer to Endress + Hauser SE + Co. KG