



FCC RADIO TEST REPORT

FCC ID : N7NRC71A
Equipment : Radio Module
Brand Name : Sierra Wireless
Model Name : RC7110
Applicant : Sierra Wireless, ULC
13811 Wireless Way, Richmond, BC V6V 3A4 Canada
Manufacturer : Sierra Wireless, ULC
13811 Wireless Way, Richmond, BC V6V 3A4 Canada
Standard : FCC 47 CFR Part 2, 24(E), 27

The product was received on Aug. 23, 2023 and testing was performed from Sep. 14, 2023 to Dec. 13, 2023. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	6
1.1 Product Feature of Equipment Under Test.....	6
1.2 Modification of EUT	6
1.3 Testing Location	6
1.4 Applicable Standards.....	7
2 Test Configuration of Equipment Under Test	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System.....	10
2.3 Support Unit used in test configuration and system	10
2.4 Measurement Results Explanation Example.....	10
2.5 Frequency List of Low/Middle/High Channels	11
3 Conducted Test Items.....	13
3.1 Measuring Instruments	13
3.2 Conducted Output Power and ERP/EIRP	14
3.3 Peak-to-Average Ratio	15
3.4 Occupied Bandwidth.....	16
3.5 Conducted Band Edge	17
3.6 Conducted Spurious Emission	19
3.7 Frequency Stability	20
4 Radiated Test Items	21
4.1 Measuring Instruments	21
4.2 Radiated Spurious Emission Measurement	23
5 List of Measuring Equipment.....	24
6 Measurement Uncertainty	25
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FG380222	01	Initial issue of report	Feb. 21, 2024
FG380222	02	Add ERP/EIRP test data, revise section 1.1 and section 2.1 This report is an updated version, replacing the report issued on Feb. 21, 2024.	Feb. 29, 2024



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
	§27.50 (b)(10) §27.50 (c)(10) §27.1507(a)	Effective Radiated Power (Band 12) (Band 13) (Band 8)	Pass	-
	§24.232 (c)	Equivalent Isotropic Radiated Power (Band 2)		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (Band 4) (Band 66)		
3.3	§24.232 (d) §27.50 (d)(5) §27.1507 (d)	Peak-to-Average Ratio	Pass	-
3.4	§2.1049 §27.1506	Occupied Bandwidth	Reporting only	-
3.5	§2.1051 §24.238 (a) §27.53 (c)(2)(4) §27.53 (g) §27.53 (h) §27.1509 (a)	Conducted Band Edge Measurement (Band 2) (Band 4) (Band 12) (Band 13) (Band 66) (Band 8)	Pass	-
3.6	§2.1051 §24.238 (a) §27.53 (c)(2) §27.53 (g) §27.53 (h) §27.1509 (a)	Conducted Spurious Emission (Band 2) (Band 4) (Band 12) (Band 13) (Band 66) (Band 8)	Pass	-
			Pass	-
3.7	§2.1055 §24.235 §27.54	Frequency Stability Temperature & Voltage	Pass	-
4.2	§2.1053 §24.238 (a) §27.53 (c)(2) §27.53 (f) §27.53 (g) §27.53 (h) §27.1509 (a)	Radiated Spurious Emission (Band 2) (Band 4) (Band 12) (Band 13) (Band 66) (Band 8)	Pass	21.65 dB under the limit at 1564.00 MHz

**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Danny Lee

Report Producer: Clio Lo



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature
General Specs LTE.

Remark:

1. The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.
2. Maximum allow antenna Gain: refer MPE Report FA380222.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH03-HY
Test Engineer	Cotty Hsu
Temperature (°C)	22.4~23.8
Relative Humidity (%)	52.3~54.5

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH15-HY (TAF Code: 3786)
Test Engineer	Kent Wu, Quentin Liu and Bigshow Wang
Temperature (°C)	17~22
Relative Humidity (%)	45~55
Remark	The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786



1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 24(E), 27
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168

D01 Power Meas. License Digital Systems v03r01 with maximum output power.


For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and only the worst case emissions were reported in this report..

Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	8	v	v	-	-	-	-	v	v	v	v	v	v	v	v
	12	v	v	v	v	-	-	v	v	v	v	v	v	v	v
	13	-	-	v	v	-	-	v	v	v	v	v	v	v	v
	66	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	2						v	v	v			v		v	
	4	Covered by LTE Band 66													
	8		v	-	-	-	-	v	v			v		v	
	12				v	-	-	v	v			v		v	
	13	-	-		v	-	-	v	v			v		v	
	66						v	v	v			v		v	
26dB and 99% Bandwidth	2	v	v	v	v	v	v	v	v			v		v	
	4	Covered by LTE Band 66													
	8	v	v	-	-	-	-	v	v			v		v	
	12	v	v	v	v	-	-	v	v			v		v	
	13	-	-	v	v	-	-	v	v			v		v	
	66	v	v	v	v	v	v	v	v			v		v	
Conducted Band Edge	2	v	v	v	v	v	v	v	v	v		v	v		v
	4	Covered by LTE Band 66													
	8	v	v	-	-	-	-	v	v	v		v	v	v	v
	12	v	v	v	v	-	-	v	v	v		v	v		v
	13	-	-	v	v	-	-	v	v	v		v	v		v
	66	v	v	v	v	v	v	v	v	v		v	v		v



Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Conducted Spurious Emission	2	v	v	v	v	v	v	v		v			v	v	v
	4	Covered by LTE Band 66													
	8	v	v	-	-	-	-	v		v			v	v	v
	12	v	v	v	v	-	-	v		v			v	v	v
	13	-	-	v	v	-	-	v		v			v	v	v
	66	v	v	v	v	v	v	v		v			v	v	v
Frequency Stability	2				v			v				v		v	
	4	Covered by LTE Band 66													
	8		v	-	-	-	-	v				v		v	
	12				v	-	-	v				v		v	
	13	-	-		v	-	-	v				v		v	
	66				v			v				v		v	
E.R.P / E.I.R.P	2	v	v	v	v	v	v	v	v	Max. Power					
	4	v	v	v	v	v	v	v	v						
	8	v	v	-	-	-	-	v	v						
	12	v	v	v	v	-	-	v	v						
	13	-	-	v	v	-	-	v	v						
	66	v	v	v	v	v	v	v	v						
Radiated Spurious Emission	2	Worst Case											v	v	v
	4	Covered by LTE Band 66													
	8	Worst Case											v	v	v
	12	Worst Case											v	v	v
	13	Worst Case											v	v	v
	66	Worst Case											v	v	v
Remark	1. The mark “v “ means that this configuration is chosen for testing 2. The mark “-“ means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. Wider operating range bandwidth covers narrower one when the power is higher or the same. 5. Evaluated all the transmitter signal and reporting worst-case configuration among all modulation types.														

2.2 Connection Diagram of Test System

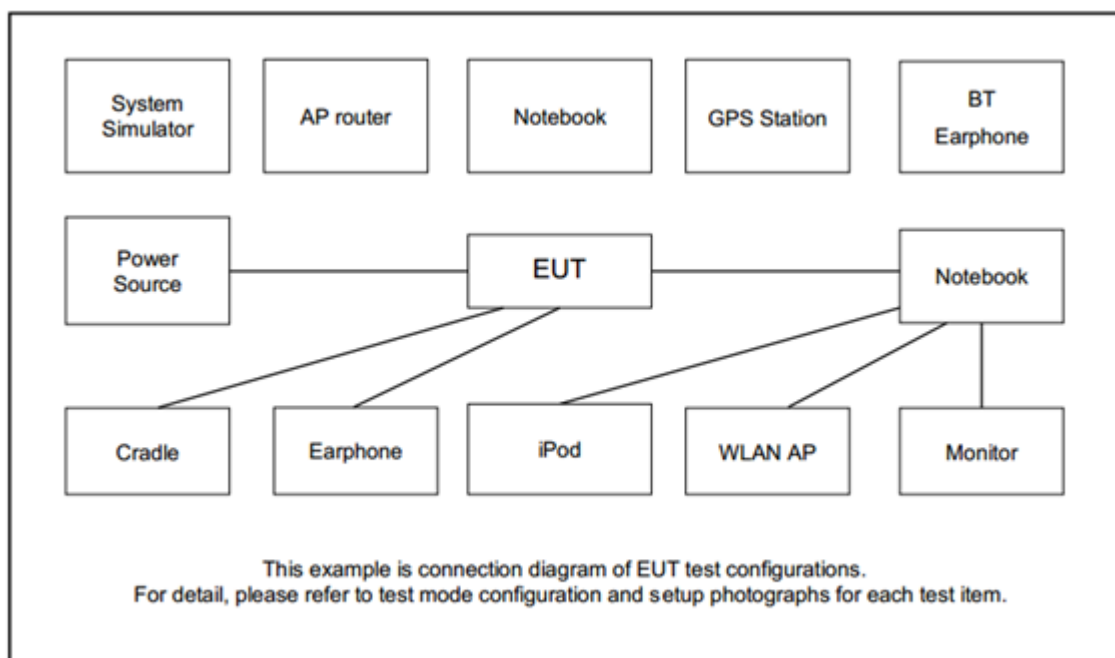

2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
2.	Notebook	Dell	Latitude3400	FCC DoC	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m
3.	Fixture	Sierra Wireless	RC DevKit	N/A	N/A	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

$$= 4.2 + 10 = 14.2 \text{ (dB)}$$



2.5 Frequency List of Low/Middle/High Channels

LTE Band 2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	18700	18900	19100
	Frequency	1860	1880	1900
15	Channel	18675	18900	19125
	Frequency	1857.5	1880	1902.5
10	Channel	18650	18900	19150
	Frequency	1855	1880	1905
5	Channel	18625	18900	19175
	Frequency	1852.5	1880	1907.5
3	Channel	18615	18900	19185
	Frequency	1851.5	1880	1908.5
1.4	Channel	18607	18900	19193
	Frequency	1850.7	1880	1909.3

LTE Band 4 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20050	20175	20300
	Frequency	1720	1732.5	1745
15	Channel	20025	20175	20325
	Frequency	1717.5	1732.5	1747.5
10	Channel	20000	20175	20350
	Frequency	1715	1732.5	1750
5	Channel	19975	20175	20375
	Frequency	1712.5	1732.5	1752.5
3	Channel	19965	20175	20385
	Frequency	1711.5	1732.5	1753.5
1.4	Channel	19957	20175	20393
	Frequency	1710.7	1732.5	1754.3

LTE Band 8 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
3	Channel	-	21640	-
	Frequency	-	899.0	-
1.4	Channel	21632	21640	21648
	Frequency	898.2	899.0	899.8



LTE Band 12 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	23060	23095	23130
	Frequency	704	707.5	711
5	Channel	23035	23095	23155
	Frequency	701.5	707.5	713.5
3	Channel	23025	23095	23165
	Frequency	700.5	707.5	714.5
1.4	Channel	23017	23095	23173
	Frequency	699.7	707.5	715.3

LTE Band 13 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	23230	-
	Frequency	-	782	-
5	Channel	23205	23230	23255
	Frequency	779.5	782	784.5

LTE Band 66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	132072	132322	132572
	Frequency	1720	1745	1770
15	Channel	132047	132322	132597
	Frequency	1717.5	1745	1772.5
10	Channel	132022	132322	132622
	Frequency	1715	1745	1775
5	Channel	131997	132322	132647
	Frequency	1712.5	1745	1777.5
3	Channel	131987	132322	132657
	Frequency	1711.5	1745	1778.5
1.4	Channel	131979	132322	132665
	Frequency	1710.7	1745	1779.3

3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup

3.1.2 Conducted Output Power



3.1.3 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

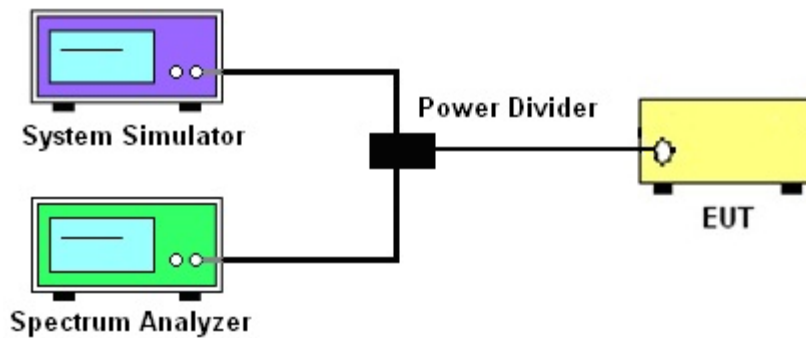

3.1.4 Frequency Stability



3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 3 Watts for LTE Band 8, Band 12, Band 13

The EIRP of mobile transmitters must not exceed 2 Watts for LTE Band 2

The EIRP of mobile transmitters must not exceed 1 Watts for LTE Band 4, Band 66

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.



3.4 Occupied Bandwidth

3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (c)

For operations in the 776-788 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100 kHz bandwidth. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed. In addition, the power of any unwanted emissions in any 6.25 kHz bandwidth for all frequencies between 763-775 MHz and 793-806 MHz shall be attenuated below the transmitter power, P (dBW), by at least $65 + 10 \log_{10} p(\text{watts})$, dB, for mobile and portable equipment.

27.53 (g)

For operations in the 600MHz band and 698-746 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100 kHz bandwidth. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

27.53 (h)

For operations in the 1710 – 1755 MHz band, 1755-1780 MHz, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.1509 (a)

For operations in the 897.5 - 900.5 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100kHz bandwidth. However, in the 100kHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.



3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW $\geq$ 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
5. Set spectrum analyzer with RMS detector.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. Checked that all the results comply with the emission limit line.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The conducted spurious emission for the whole frequency range was taken.
4. Make the measurement with the spectrum analyzer's RBW = 100 kHz if the authorized frequency band/block is at or below 1 GHz and 1 MHz if the authorized frequency band/block is above 1 GHz, VBW = 3 * RBW.
5. Set spectrum analyzer with RMS detector.
6. Taking the record of maximum spurious emission.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at 20±5° C and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.1.1 Test Setup


For radiated test below 30MHz

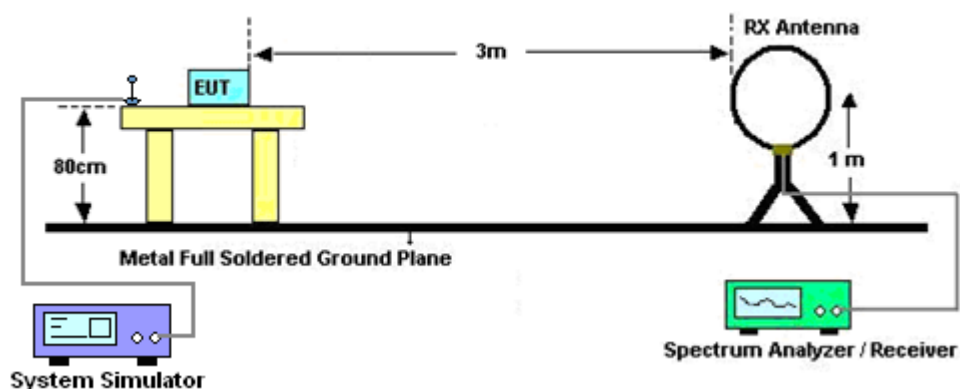


For radiated test from 30MHz to 1GHz

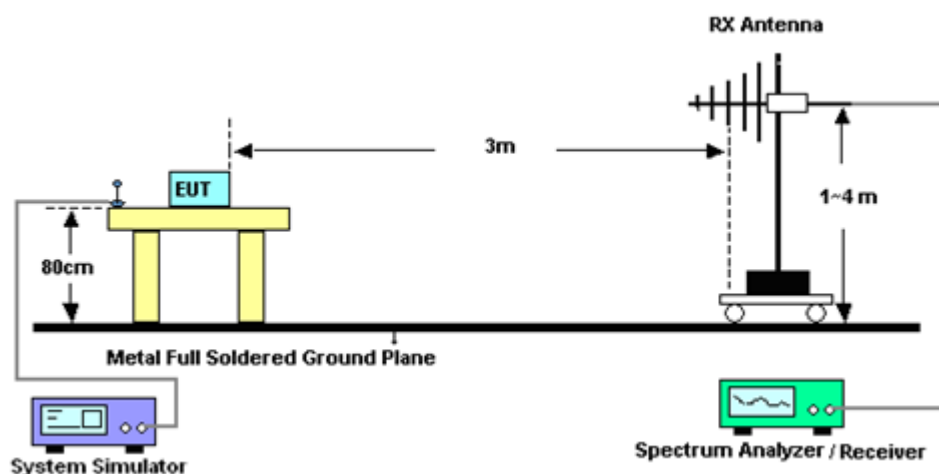

For radiated test from 1GHz to 18GHz

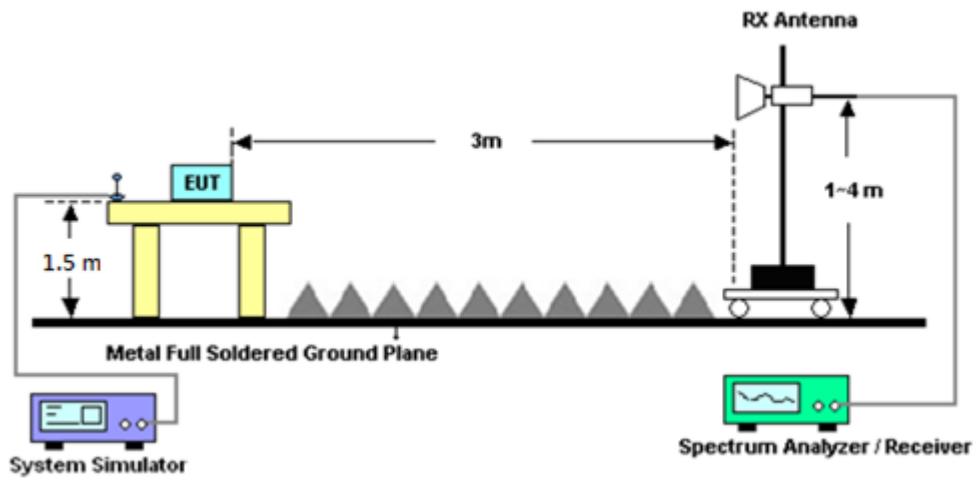

For radiated test above 18GHz

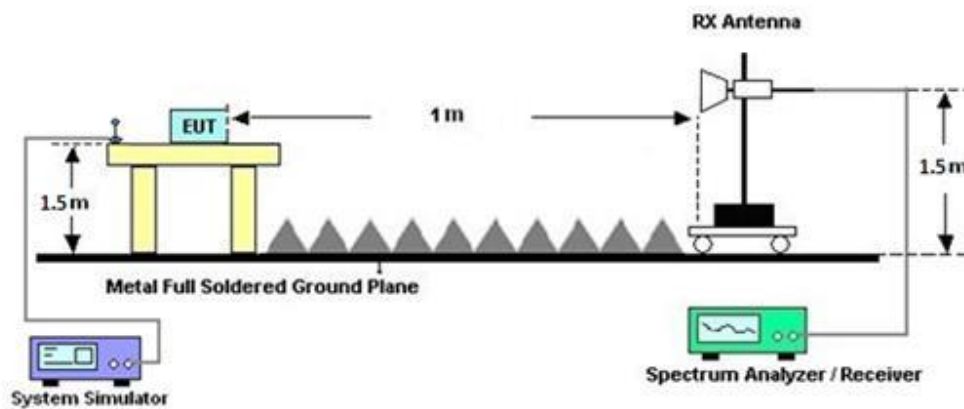

4.1.2 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



4.2 Radiated Spurious Emission Measurement

4.2.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For LTE Band 13

For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI C63.26-2015 section 5.5.4 Radiated measurement using the field strength method.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. To convert spectrum reading E(dBuV/m) to EIRP(dBm)
$$\text{EIRP(dBm)} = \text{Level (dBuV/m)} + 20\log(d) - 104.77$$
, where d is the distance at which field strength limit is specified in the rules
7.
$$\text{Field Strength Level (dBm)} = \text{Spectrum Reading (dBm)} + \text{Antenna Factor} + \text{Cable Loss} + \text{Read Level} - \text{Preamp Factor}.$$
8.
$$\text{ERP (dBm)} = \text{EIRP (dBm)} - 2.15$$
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 12, 2023	Sep. 14, 2023~ Dec. 13, 2023	Sep. 11, 2024	Radiation (03CH15-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N -06	40103 & 07	30MHz~1GHz	Apr. 23, 2023	Sep. 14, 2023~ Dec. 13, 2023	Apr. 22, 2024	Radiation (03CH15-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-02294	1GHz~18GHz	Jun. 30, 2023	Sep. 14, 2023~ Dec. 13, 2023	Jun. 29, 2024	Radiation (03CH15-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	1225	18GHz~40GHz	Jul. 10, 2023	Sep. 14, 2023~ Dec. 13, 2023	Jul. 09, 2024	Radiation (03CH15-HY)
Amplifier	SONOMA	310N	363440	9kHz~1GHz	Dec. 26, 2022	Sep. 14, 2023~ Dec. 13, 2023	Dec. 25, 2023	Radiation (03CH15-HY)
Amplifier	EMEC	EM1G18G	060837	1GHz~18GHz	Feb. 16, 2023	Sep. 14, 2023~ Dec. 13, 2023	Feb. 15, 2024	Radiation (03CH15-HY)
Preamplifier	EM Electronics	EM01G18G	060802	1GHz~18GHz	Mar. 03, 2023	Sep. 14, 2023~ Dec. 13, 2023	Mar. 02, 2024	Radiation (03CH15-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	Jun. 27, 2023	Sep. 14, 2023~ Dec. 13, 2023	Jun. 26, 2024	Radiation (03CH15-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY53290045	20MHz~8.4GHz	Oct. 06, 2023	Sep. 14, 2023~ Dec. 13, 2023	Oct. 05, 2024	Radiation (03CH15-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200485	10Hz~44GHz	May 20, 2023	Sep. 14, 2023~ Dec. 13, 2023	May 19, 2024	Radiation (03CH15-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Sep. 14, 2023~ Dec. 13, 2023	N/A	Radiation (03CH15-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Sep. 14, 2023~ Dec. 13, 2023	N/A	Radiation (03CH15-HY)
Software	Audix	E3 6.2009-8-24(k 5)	RK-000451	N/A	N/A	Sep. 14, 2023~ Dec. 13, 2023	N/A	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104, 102E	MY582185/4, 519228/2,80 3950/2	30MHz~18G	Jun. 13, 2023	Sep. 14, 2023~ Dec. 13, 2023	Jun. 12, 2024	Radiation (03CH15-HY)
Radio Communication Analyzer	Anritsu	MT8821C	6262025353	LTE FDD/TDD LTE-2CC DLCA/ULCA	Oct. 13, 2022	Sep. 18, 2023~ Sep. 19, 2023	Oct. 12, 2023	Conducted (TH03-HY)
Radio Communication Analyzer	Anritsu	MT8821C	6262025353	LTE FDD/TDD LTE-2CC DLCA/ULCA	Oct. 03, 2023	Dec. 08, 2023	Oct. 02, 2024	Conducted (TH03-HY)
Thermal Chamber	ESPEC	SH-641	92013720	-40℃ ~90℃	Sep. 04, 2023	Sep. 18, 2023~ Dec. 08, 2023	Sep. 03, 2024	Conducted (TH03-HY)
DC Power Supply	GW Instek	GPP-2323	GES906037	0V~64V : 0A~6A	Dec. 29, 2022	Sep. 18, 2023~ Sep. 19, 2023	Dec. 28, 2023	Conducted (TH03-HY)
DC Power Supply	GW Instek	GPP-2323	GES906037	0V~64V : 0A~6A	Nov. 28, 2023	Dec. 08, 2023	Nov. 27, 2024	Conducted (TH03-HY)
Coupler	Warison	20dB 25W SMA Directional Coupler	#B	1-18GHz	Jan. 06, 2023	Sep. 18, 2023~ Dec. 08, 2023	Jan. 05, 2024	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101905	10Hz~40GHz	Jul. 14, 2023	Sep. 18, 2023~ Dec. 08, 2023	Jul. 13, 2024	Conducted (TH03-HY)



6 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.27 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.72 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.12 dB
---	---------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power & ERP/EIRP)

LTE Band 2 Maximum Average Power [dBm] (GT - LC = 9 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	Maximum Output Power (dBm)	Maximum Output Power (W)
20	1	0	QPSK	23.95	23.93	23.95	32.96	1.9770
20	1	49		23.89	23.89	23.61		
20	1	99		23.96	23.88	23.75		
20	50	0		23.00	22.86	22.88		
20	50	24		22.89	22.84	22.88		
20	50	50		22.83	22.88	22.80		
20	100	0		22.85	22.90	22.93		
20	1	0	16-QAM	22.99	22.86	22.84	32.10	1.6218
20	1	13		22.85	22.95	22.94		
20	1	26		22.47	22.99	22.94		
20	12	0		22.84	23.03	23.01		
20	12	7		22.86	23.03	22.96		
20	12	15		22.85	23.10	22.85		
20	27	0		21.88	21.89	21.80		
Limit	EIRP < 2W			Result			Pass	

LTE Band 2 Maximum Average Power [dBm] (GT - LC = 9 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	Maximum Output Power (dBm)	Maximum Output Power (W)
15	1	0	QPSK	23.95	23.92	23.84	32.95	1.9724
15	1	37		23.78	23.76	23.60		
15	1	74		23.89	23.95	23.69		
15	36	0		22.92	22.81	22.80		
15	36	20		22.84	22.76	22.76		
15	36	39		22.89	22.75	22.72		
15	75	0		22.84	22.80	22.79		
15	1	0	16-QAM	22.98	22.88	22.97	32.07	1.6106
15	1	13		22.84	22.98	22.83		
15	1	26		22.89	22.85	22.70		
15	12	0		22.91	23.05	22.79		
15	12	7		22.96	23.07	22.70		
15	12	15		22.95	23.07	22.61		
15	27	0		21.95	21.96	21.91		
Limit	EIRP < 2W			Result			Pass	



LTE Band 2 Maximum Average Power [dBm] (GT - LC = 9 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	Maximum Output Power (dBm)	Maximum Output Power (W)
10	1	0	QPSK	23.85	23.88	23.67	32.95	1.9724
10	1	25		23.95	23.73	23.72		
10	1	49		23.85	23.74	23.79		
10	25	0		22.88	22.78	22.76		
10	25	12		22.91	22.63	22.72		
10	25	25		22.97	22.75	22.69		
10	50	0		22.92	22.66	22.73		
10	1	0	16-QAM	22.84	22.92	22.78	31.97	1.5740
10	1	13		22.78	22.92	22.73		
10	1	26		22.89	22.95	22.68		
10	12	0		22.84	22.97	22.63		
10	12	7		22.86	22.92	22.66		
10	12	15		22.87	22.84	22.66		
10	27	0		21.97	21.98	21.67		
Limit	EIRP < 2W			Result			Pass	

LTE Band 2 Maximum Average Power [dBm] (GT - LC = 9 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	Maximum Output Power (dBm)	Maximum Output Power (W)
5	1	0	QPSK	23.90	23.76	23.79	32.93	1.9634
5	1	12		23.93	23.69	23.91		
5	1	24		23.71	23.79	23.86		
5	12	0		22.76	22.74	22.94		
5	12	7		22.80	22.59	22.96		
5	12	13		22.81	22.65	22.92		
5	25	0		22.80	22.61	22.92		
5	1	0	16-QAM	22.95	22.75	22.96	31.97	1.5740
5	1	12		22.89	22.74	22.96		
5	1	24		22.93	22.77	22.97		
5	12	0		21.86	21.95	21.96		
5	12	7		21.89	21.91	21.94		
5	12	13		21.96	21.95	21.99		
5	25	0		21.92	21.94	21.98		
Limit	EIRP < 2W			Result			Pass	



LTE Band 2 Maximum Average Power [dBm] (GT - LC = 9 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	Maximum Output Power (dBm)	Maximum Output Power (W)
3	1	0	QPSK	23.66	23.66	23.74	32.90	1.9498
3	1	8		23.90	23.76	23.78		
3	1	14		23.74	23.64	23.64		
3	8	0		22.99	22.88	22.83		
3	8	4		22.84	22.91	22.84		
3	8	7		22.89	22.78	22.78		
3	15	0		22.99	22.76	22.78		
3	1	0	16-QAM	22.96	22.81	22.80	31.96	1.5704
3	1	8		22.84	22.95	22.96		
3	1	14		22.69	22.92	22.73		
3	8	0		21.86	21.82	21.93		
3	8	4		21.84	21.84	21.96		
3	8	7		21.89	21.83	21.91		
3	15	0		21.88	21.79	21.84		
Limit	EIRP < 2W			Result			Pass	

LTE Band 2 Maximum Average Power [dBm] (GT - LC = 9 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	Maximum Output Power (dBm)	Maximum Output Power (W)
1.4	1	0	QPSK	23.72	23.66	23.74	32.87	1.9364
1.4	1	3		23.83	23.72	23.79		
1.4	1	5		23.82	23.72	23.85		
1.4	3	0		23.81	23.69	23.85		
1.4	3	1		23.82	23.70	23.87		
1.4	3	3		23.81	23.75	23.86		
1.4	6	0		22.97	22.87	22.90		
1.4	1	0	16-QAM	22.94	22.91	22.98	32.00	1.5849
1.4	1	3		22.92	22.93	22.98		
1.4	1	5		22.93	23.00	22.97		
1.4	3	0		22.95	22.74	22.85		
1.4	3	1		22.94	22.69	22.84		
1.4	3	3		22.91	22.65	22.70		
1.4	6	0		21.89	21.85	21.94		
Limit	EIRP < 2W			Result			Pass	



LTE Band 4 Maximum Average Power [dBm] (GT - LC = 6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	Maximum Output Power (dBm)	Maximum Output Power (W)
20	1	0	QPSK	23.71	23.69	23.82	29.96	0.9908
20	1	49		23.62	23.85	23.94		
20	1	99		23.93	23.95	23.96		
20	50	0		22.66	22.85	22.91		
20	50	24		22.69	22.93	22.91		
20	50	50		22.79	22.94	22.93		
20	100	0		22.73	22.93	22.89		
20	1	0	16-QAM	22.87	22.91	22.91	28.97	0.7889
20	1	13		22.85	22.88	22.94		
20	1	26		22.68	22.97	22.97		
20	12	0		22.68	22.80	22.90		
20	12	7		22.63	22.81	22.88		
20	12	15		22.60	22.82	22.92		
20	27	0		21.88	21.94	21.95		
Limit	EIRP < 1W			Result			Pass	

LTE Band 4 Maximum Average Power [dBm] (GT - LC = 6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	Maximum Output Power (dBm)	Maximum Output Power (W)
15	1	0	QPSK	23.72	23.63	23.56	29.95	0.9886
15	1	37		23.56	23.79	23.73		
15	1	74		23.75	23.95	23.77		
15	36	0		22.88	22.88	22.92		
15	36	20		22.87	22.97	22.94		
15	36	39		22.77	22.95	22.96		
15	75	0		22.90	22.94	22.91		
15	1	0	16-QAM	22.94	22.89	22.82	28.96	0.7870
15	1	13		22.94	22.96	22.93		
15	1	26		22.87	22.92	22.94		
15	12	0		22.79	22.72	22.70		
15	12	7		22.76	22.87	22.79		
15	12	15		22.73	22.77	22.88		
15	27	0		21.90	21.99	21.92		
Limit	EIRP < 1W			Result			Pass	



LTE Band 4 Maximum Average Power [dBm] (GT - LC = 6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	Maximum Output Power (dBm)	Maximum Output Power (W)
10	1	0	QPSK	23.77	23.73	23.71	29.86	0.9683
10	1	25		23.66	23.76	23.74		
10	1	49		23.69	23.86	23.70		
10	25	0		22.81	22.80	22.94		
10	25	12		22.79	22.84	22.96		
10	25	25		22.78	22.88	22.95		
10	50	0		22.79	22.85	22.97		
10	1	0	16-QAM	22.89	22.85	22.97	28.97	0.7889
10	1	13		22.94	22.91	22.95		
10	1	26		22.94	22.96	22.92		
10	12	0		22.83	22.78	22.94		
10	12	7		22.77	22.84	22.96		
10	12	15		22.71	22.81	22.95		
10	27	0		21.93	21.94	21.82		
Limit	EIRP < 1W			Result			Pass	

LTE Band 4 Maximum Average Power [dBm] (GT - LC = 6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	Maximum Output Power (dBm)	Maximum Output Power (W)
5	1	0	QPSK	23.66	23.74	23.66	29.75	0.9441
5	1	12		23.55	23.71	23.55		
5	1	24		23.50	23.75	23.60		
5	12	0		22.69	22.75	22.72		
5	12	7		22.64	22.76	22.70		
5	12	13		22.62	22.79	22.71		
5	25	0		22.65	22.77	22.71		
5	1	0	16-QAM	22.90	22.96	22.93	28.96	0.7870
5	1	12		22.76	22.87	22.86		
5	1	24		22.80	22.92	22.90		
5	12	0		21.81	21.85	21.84		
5	12	7		21.76	21.86	21.84		
5	12	13		21.75	21.91	21.86		
5	25	0		21.79	21.88	21.86		
Limit	EIRP < 1W			Result			Pass	



LTE Band 4 Maximum Average Power [dBm] (GT - LC = 6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	Maximum Output Power (dBm)	Maximum Output Power (W)
3	1	0	QPSK	23.36	23.52	23.36	29.67	0.9268
3	1	8		23.48	23.67	23.47		
3	1	14		23.27	23.45	23.36		
3	8	0		22.53	22.63	22.57		
3	8	4		22.57	22.68	22.61		
3	8	7		22.54	22.67	22.57		
3	15	0		22.51	22.61	22.56		
3	1	0	16-QAM	22.59	22.71	22.58	28.95	0.7852
3	1	8		22.72	22.95	22.83		
3	1	14		22.57	22.75	22.68		
3	8	0		21.67	21.78	21.73		
3	8	4		21.75	21.83	21.78		
3	8	7		21.72	21.80	21.74		
3	15	0		21.64	21.75	21.68		
Limit	EIRP < 1W			Result			Pass	

LTE Band 4 Maximum Average Power [dBm] (GT - LC = 6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	Maximum Output Power (dBm)	Maximum Output Power (W)
1.4	1	0	QPSK	23.40	23.61	23.43	29.76	0.9462
1.4	1	3		23.43	23.64	23.46		
1.4	1	5		23.41	23.62	23.42		
1.4	3	0		23.43	23.64	23.45		
1.4	3	1		23.44	23.64	23.45		
1.4	3	3		23.42	23.76	23.45		
1.4	6	0		22.50	22.78	22.55		
1.4	1	0	16-QAM	22.58	22.82	22.71	28.92	0.7798
1.4	1	3		22.69	22.86	22.81		
1.4	1	5		22.75	22.92	22.68		
1.4	3	0		22.43	22.68	22.48		
1.4	3	1		22.47	22.60	22.50		
1.4	3	3		22.48	22.67	22.54		
1.4	6	0		21.72	21.87	21.77		
Limit	EIRP < 1W			Result			Pass	



LTE Band 8 Maximum Average Power [dBm] (GT - LC = 10.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	Maximum Output Power (dBm)	Maximum Output Power (W)
3	1	0	QPSK	-	23.48	-	32.03	1.5959
3	1	8		-	23.68	-		
3	1	14		-	23.54	-		
3	8	0		-	23.59	-		
3	8	4		-	22.74	-		
3	8	7		-	22.40	-		
3	15	0		-	22.71	-		
3	1	0	16-QAM	-	22.53	-	31.25	1.3335
3	1	8		-	22.90	-		
3	1	14		-	22.60	-		
3	8	0		-	21.79	-		
3	8	4		-	21.93	-		
3	8	7		-	21.83	-		
3	15	0		-	21.47	-		
Limit	ERP < 3W			Result			Pass	

LTE Band 8 Maximum Average Power [dBm] (GT - LC = 10.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	Maximum Output Power (dBm)	Maximum Output Power (W)
1.4	1	0	QPSK	23.65	23.31	23.50	32.09	1.6181
1.4	1	3		23.73	23.31	23.35		
1.4	1	5		23.55	23.58	23.61		
1.4	3	0		23.26	23.44	23.56		
1.4	3	1		23.38	23.51	23.65		
1.4	3	3		23.74	23.55	23.53		
1.4	6	0		22.65	22.52	22.55		
1.4	1	0	16-QAM	22.86	22.72	22.88	31.44	1.3932
1.4	1	3		22.81	23.02	23.09		
1.4	1	5		22.95	22.64	22.95		
1.4	3	0		22.80	22.63	22.89		
1.4	3	1		22.51	22.49	22.70		
1.4	3	3		22.63	22.42	22.74		
1.4	6	0		21.53	21.74	21.78		
Limit	ERP < 3W			Result			Pass	



LTE Band 12 Maximum Average Power [dBm] (GT - LC = 6.6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	Maximum Output Power (dBm)	Maximum Output Power (W)
10	1	0	QPSK	23.50	23.63	23.69	28.29	0.6745
10	1	25		23.69	23.59	23.61		
10	1	49		23.84	23.57	23.65		
10	25	0		22.92	22.84	22.77		
10	25	12		22.93	22.77	22.78		
10	25	25		22.92	22.72	22.86		
10	50	0		22.92	22.81	22.83		
10	1	0	16-QAM	22.74	22.96	22.91	27.44	0.5546
10	1	13		22.88	22.99	22.68		
10	1	26		22.94	22.83	22.88		
10	12	0		22.80	22.82	22.78		
10	12	7		22.86	22.81	22.67		
10	12	15		22.82	22.77	22.67		
10	27	0		21.87	21.91	21.77		
Limit	ERP < 3W			Result			Pass	

LTE Band 12 Maximum Average Power [dBm] (GT - LC = 6.6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	Maximum Output Power (dBm)	Maximum Output Power (W)
5	1	0	QPSK	23.39	23.65	23.60	28.11	0.6471
5	1	12		23.57	23.58	23.66		
5	1	24		23.59	23.37	23.52		
5	12	0		22.62	22.82	22.80		
5	12	7		22.69	22.77	22.84		
5	12	13		22.68	22.68	22.79		
5	25	0		22.65	22.75	22.80		
5	1	0	16-QAM	22.50	22.92	22.93	27.38	0.5470
5	1	12		22.83	22.84	22.92		
5	1	24		22.80	22.70	22.87		
5	12	0		21.71	21.92	21.83		
5	12	7		21.80	21.88	21.90		
5	12	13		21.77	21.77	21.86		
5	25	0		21.78	21.83	21.86		
Limit	ERP < 3W			Result			Pass	



LTE Band 12 Maximum Average Power [dBm] (GT - LC = 6.6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	Maximum Output Power (dBm)	Maximum Output Power (W)
3	1	0	QPSK	23.23	23.57	23.49	28.02	0.6339
3	1	8		23.52	23.56	23.44		
3	1	14		23.43	23.24	23.28		
3	8	0		22.48	22.76	22.71		
3	8	4		22.55	22.76	22.67		
3	8	7		22.54	22.71	22.64		
3	15	0		22.49	22.71	22.64		
3	1	0	16-QAM	22.36	22.79	22.71	27.33	0.5408
3	1	8		22.69	22.88	22.70		
3	1	14		22.61	22.53	22.65		
3	8	0		21.61	21.88	21.82		
3	8	4		21.67	21.88	21.78		
3	8	7		21.63	21.82	21.74		
3	15	0		21.58	21.80	21.74		
Limit	ERP < 3W			Result			Pass	

LTE Band 12 Maximum Average Power [dBm] (GT - LC = 6.6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	Maximum Output Power (dBm)	Maximum Output Power (W)
1.4	1	0	QPSK	23.58	23.45	23.40	28.19	0.6592
1.4	1	3		23.70	23.48	23.48		
1.4	1	5		23.74	23.45	23.39		
1.4	3	0		23.60	23.48	23.42		
1.4	3	1		23.64	23.49	23.44		
1.4	3	3		23.71	23.50	23.44		
1.4	6	0		22.61	22.68	22.60		
1.4	1	0	16-QAM	22.48	22.76	22.66	27.25	0.5309
1.4	1	3		22.70	22.80	22.78		
1.4	1	5		22.68	22.74	22.64		
1.4	3	0		22.46	22.57	22.54		
1.4	3	1		22.49	22.64	22.56		
1.4	3	3		22.50	22.60	22.55		
1.4	6	0		21.64	21.83	21.72		
Limit	ERP < 3W			Result			Pass	



LTE Band 13 Maximum Average Power [dBm] (GT - LC = 6.9 dB)									
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	Maximum Output Power (dBm)	Maximum Output Power (W)	
10	1	0	QPSK	-	23.81	-	28.69	0.7396	
10	1	25			23.87				
10	1	49			23.94				
10	25	0			22.92				
10	25	12			22.96				
10	25	25			22.80				
10	50	0	22.84						
10	1	0	16-QAM		22.82		-	27.70	0.5888
10	1	13			22.89				
10	1	26			22.95				
10	12	0			22.61				
10	12	7			22.72				
10	12	15			22.83				
10	27	0			21.95				
Limit	ERP < 3W			Result			Pass		

LTE Band 13 Maximum Average Power [dBm] (GT - LC = 6.9 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	Maximum Output Power (dBm)	Maximum Output Power (W)
5	1	0	QPSK	23.61	23.91	23.92	28.69	0.7396
5	1	12		23.73	23.89	23.85		
5	1	24		23.94	23.81	23.89		
5	12	0		23.00	22.91	22.94		
5	12	7		22.99	22.96	22.95		
5	12	13		22.94	22.97	22.96		
5	25	0		22.85	22.92	22.93		
5	1	0	16-QAM	22.87	22.98	22.94	27.73	0.5929
5	1	12		22.94	22.94	22.91		
5	1	24		22.89	22.96	22.91		
5	12	0		21.76	21.87	21.95		
5	12	7		21.73	21.97	21.86		
5	12	13		21.78	21.95	21.79		
5	25	0		21.79	21.91	21.92		
Limit	ERP < 3W			Result			Pass	



LTE Band 66 Maximum Average Power [dBm] (GT - LC = 6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	Maximum Output Power (dBm)	Maximum Output Power (W)
20	1	0	QPSK	23.84	23.84	23.73	29.96	0.9908
20	1	49		23.74	23.93	23.89		
20	1	99		23.94	23.82	23.96		
20	50	0		22.87	22.87	22.96		
20	50	24		22.84	22.96	22.96		
20	50	50		22.91	22.96	22.96		
20	100	0		22.91	22.98	22.98		
20	1	0	16-QAM	22.95	22.83	22.83	28.99	0.7925
20	1	13		22.94	22.94	22.84		
20	1	26		22.95	22.99	22.99		
20	12	0		22.92	22.82	22.88		
20	12	7		22.95	22.83	22.89		
20	12	15		22.88	22.84	22.94		
20	27	0		21.95	21.86	21.96		
Limit	EIRP < 1W			Result			Pass	

LTE Band 66 Maximum Average Power [dBm] (GT - LC = 6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	Maximum Output Power (dBm)	Maximum Output Power (W)
15	1	0	QPSK	23.71	23.85	23.80	29.96	0.9908
15	1	37		23.64	23.87	23.94		
15	1	74		23.79	23.96	23.95		
15	36	0		22.91	22.87	22.87		
15	36	20		22.88	22.94	23.00		
15	36	39		22.87	22.98	22.94		
15	75	0		22.82	22.96	22.96		
15	1	0	16-QAM	22.94	22.89	22.89	28.97	0.7889
15	1	13		22.93	22.93	22.93		
15	1	26		22.97	22.94	22.94		
15	12	0		22.79	22.96	22.76		
15	12	7		22.82	22.89	22.69		
15	12	15		22.82	22.94	22.74		
15	27	0		21.95	21.96	21.92		
Limit	EIRP < 1W			Result			Pass	



LTE Band 66 Maximum Average Power [dBm] (GT - LC = 6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	Maximum Output Power (dBm)	Maximum Output Power (W)
10	1	0	QPSK	23.71	23.70	23.50	29.90	0.9772
10	1	25		23.64	23.85	23.65		
10	1	49		23.56	23.90	23.70		
10	25	0		22.77	22.99	22.79		
10	25	12		22.74	22.86	22.86		
10	25	25		22.67	22.92	22.92		
10	50	0		22.75	22.86	22.86		
10	1	0	16-QAM	22.96	22.87	22.87	28.98	0.7907
10	1	13		22.94	22.89	22.86		
10	1	26		22.82	22.94	22.94		
10	12	0		22.76	22.91	22.71		
10	12	7		22.78	22.98	22.78		
10	12	15		22.73	22.95	22.82		
10	27	0		21.92	21.96	21.86		
Limit	EIRP < 1W			Result			Pass	

LTE Band 66 Maximum Average Power [dBm] (GT - LC = 6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	Maximum Output Power (dBm)	Maximum Output Power (W)
5	1	0	QPSK	23.72	23.77	23.88	29.88	0.9727
5	1	12		23.70	23.77	23.83		
5	1	24		23.71	23.83	23.86		
5	12	0		22.84	22.98	22.96		
5	12	7		22.84	22.99	22.81		
5	12	13		22.85	22.83	22.95		
5	25	0		22.81	22.81	22.98		
5	1	0	16-QAM	22.96	22.99	22.96	28.99	0.7925
5	1	12		22.94	22.89	22.81		
5	1	24		22.96	22.99	22.95		
5	12	0		21.83	22.12	22.41		
5	12	7		21.84	22.11	22.28		
5	12	13		21.84	22.14	22.24		
5	25	0		21.84	21.96	21.86		
Limit	EIRP < 1W			Result			Pass	



LTE Band 66 Maximum Average Power [dBm] (GT - LC = 6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	Maximum Output Power (dBm)	Maximum Output Power (W)
3	1	0	QPSK	23.42	23.61	23.83	29.83	0.9616
3	1	8		23.59	23.75	23.83		
3	1	14		23.52	23.56	23.64		
3	8	0		22.64	22.86	22.91		
3	8	4		22.71	22.91	22.86		
3	8	7		22.65	22.91	22.97		
3	15	0		22.64	22.87	22.98		
3	1	0	16-QAM	22.63	22.98	22.94	29.00	0.7943
3	1	8		22.93	22.98	22.94		
3	1	14		22.76	23.00	22.89		
3	8	0		21.69	22.03	22.18		
3	8	4		21.76	22.07	22.16		
3	8	7		21.74	22.06	22.09		
3	15	0		21.67	21.89	21.86		
Limit	EIRP < 1W			Result			Pass	


LTE Band 66 Maximum Average Power [dBm] (GT - LC = 6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	Maximum Output Power (dBm)	Maximum Output Power (W)
1.4	1	0	QPSK	23.47	23.67	23.76	29.93	0.9840
1.4	1	3		23.65	23.71	23.72		
1.4	1	5		23.60	23.70	23.74		
1.4	3	0		23.61	23.68	23.75		
1.4	3	1		23.63	23.70	23.74		
1.4	3	3		23.65	23.74	23.93		
1.4	6	0		22.77	22.89	22.95		
1.4	1	0	16-QAM	22.86	22.96	22.91	28.96	0.7870
1.4	1	3		22.88	22.84	22.93		
1.4	1	5		22.82	22.87	22.92		
1.4	3	0		22.56	22.82	22.86		
1.4	3	1		22.59	22.81	22.87		
1.4	3	3		22.61	22.92	22.84		
1.4	6	0		21.75	21.88	21.76		
Limit	EIRP < 1W			Result			Pass	



LTE Band 2


Peak-to-Average Ratio

Mode	LTE Band 2 / 20MHz		
Mod.	QPSK	16QAM	Limit: 13dB
RB Size	Full RB	27 RB	Result
Middle CH	4.43	4.90	PASS

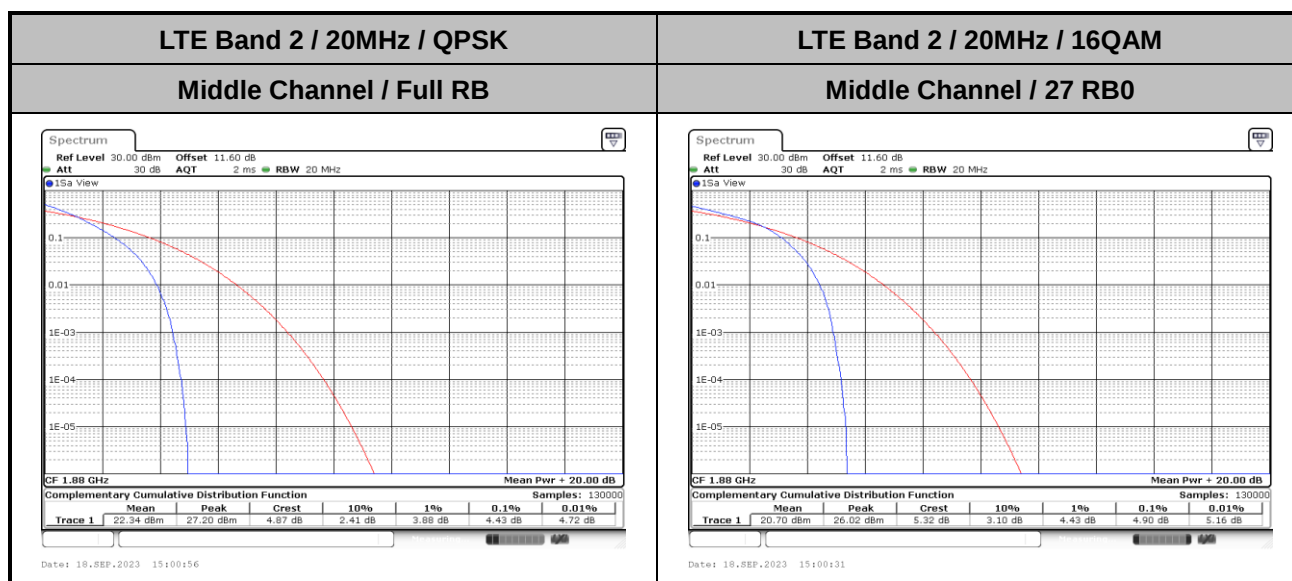

**26dB Bandwidth**

Mode	LTE Band 2 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	1.27	1.27	3.06	3.11	4.90	4.97	9.77	5.51	14.69	6.02	18.90	5.95

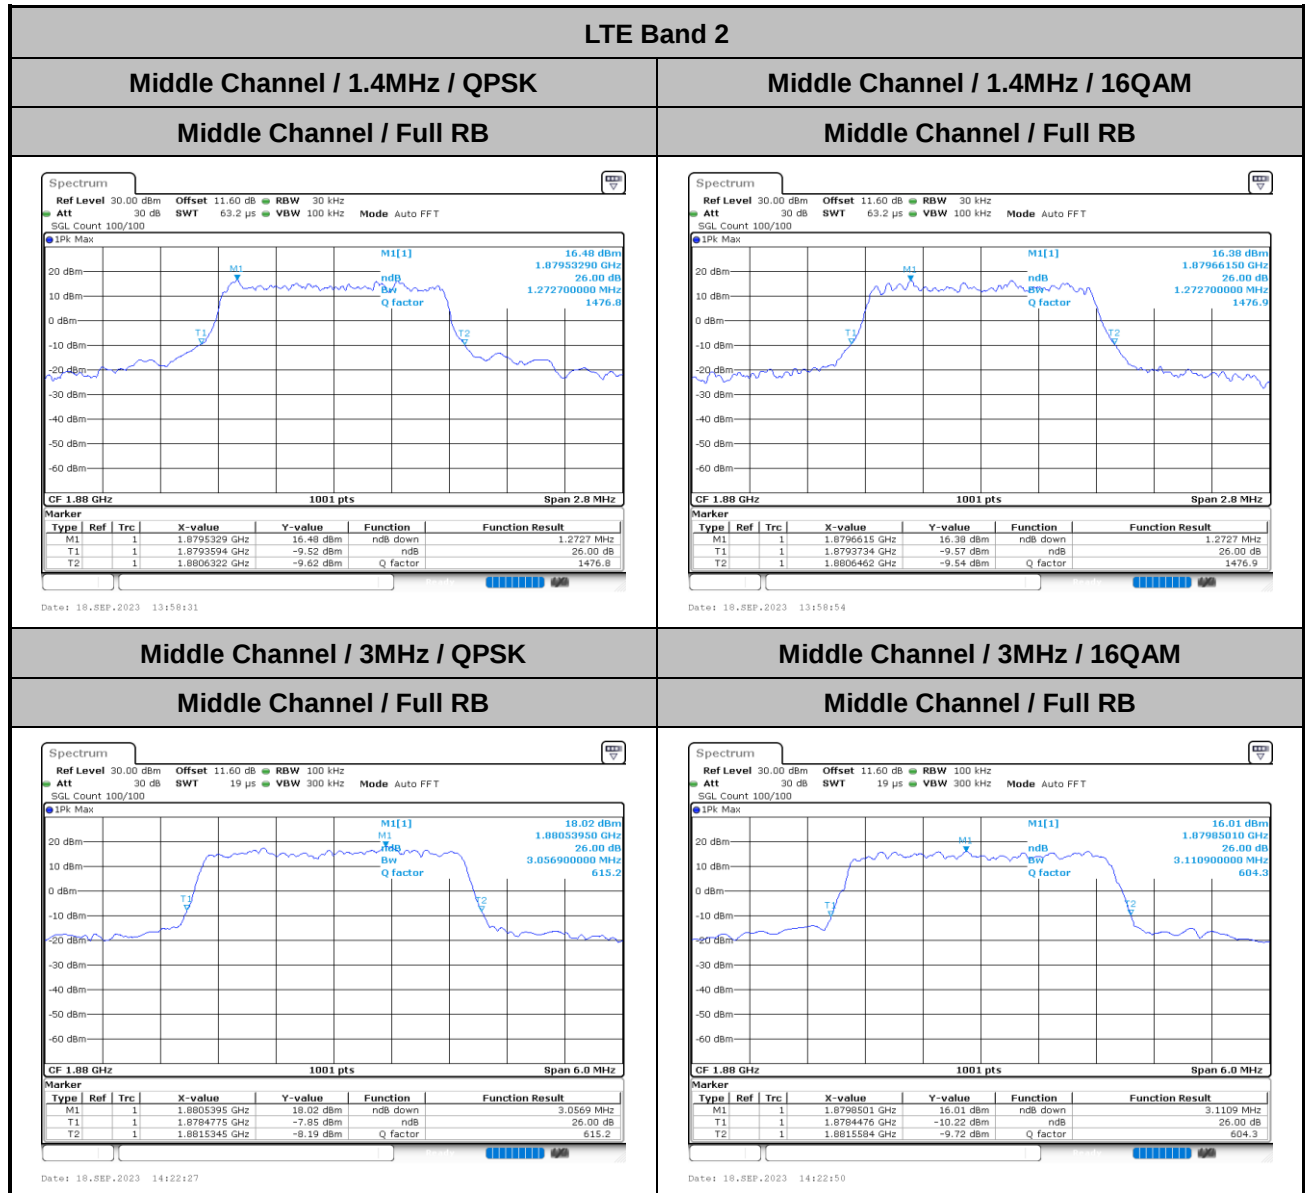




LTE Band 2


Middle Channel / 5MHz / QPSK

Middle Channel / Full RB

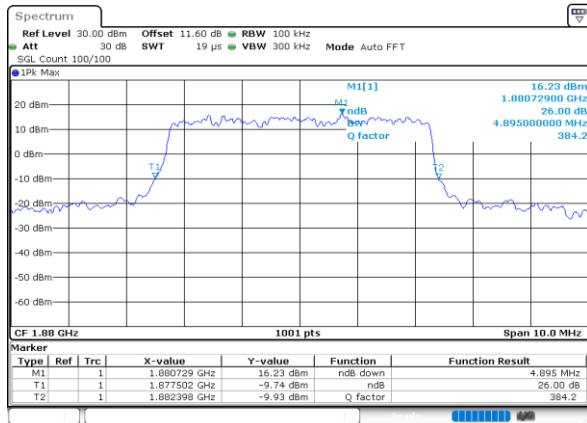


Middle Channel / 5MHz / 16QAM

Middle Channel / Full RB

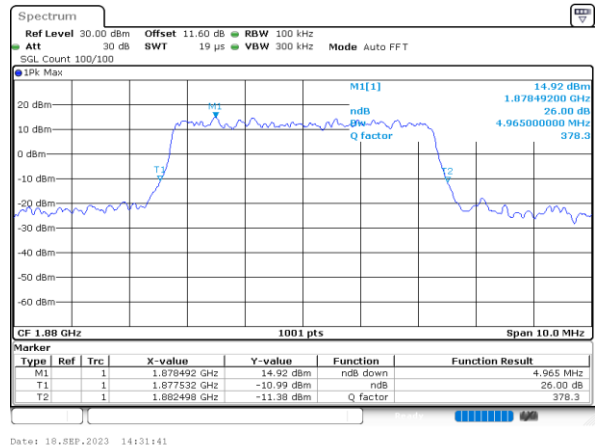


Middle Channel / 10MHz / QPSK

Middle Channel / Full RB

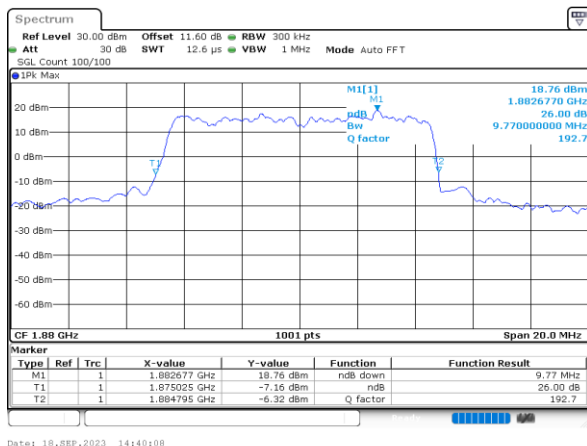

Middle Channel / 10MHz / 16QAM

Middle Channel / Full RB

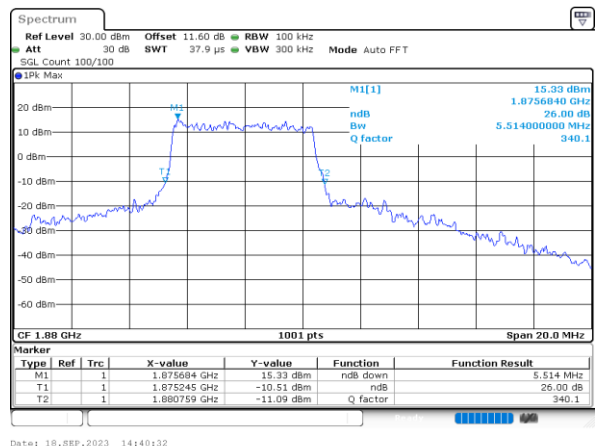




LTE Band 2


Middle Channel / 15MHz / QPSK

Middle Channel / Full RB

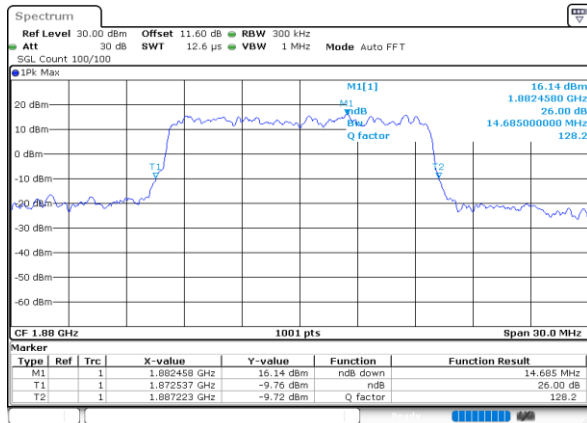


Middle Channel / 15MHz / 16QAM

Middle Channel / 27 RB0

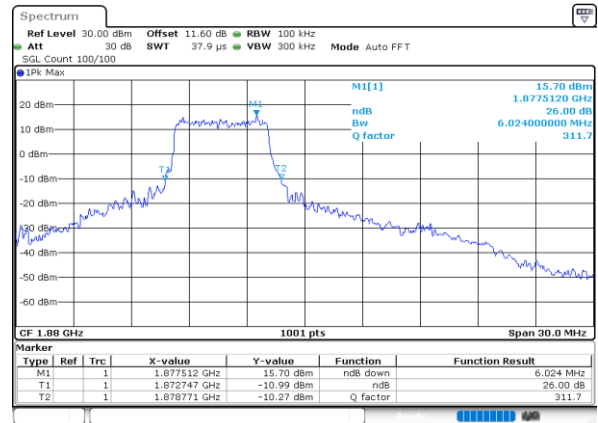


Middle Channel / 20MHz / QPSK

Middle Channel / Full RB

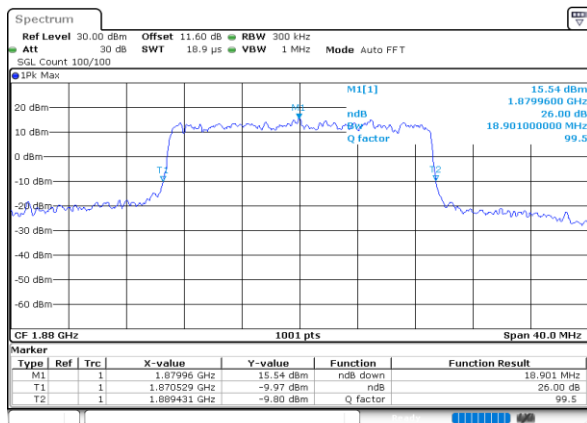

Middle Channel / 20MHz / 16QAM


Middle Channel / 27 RB0

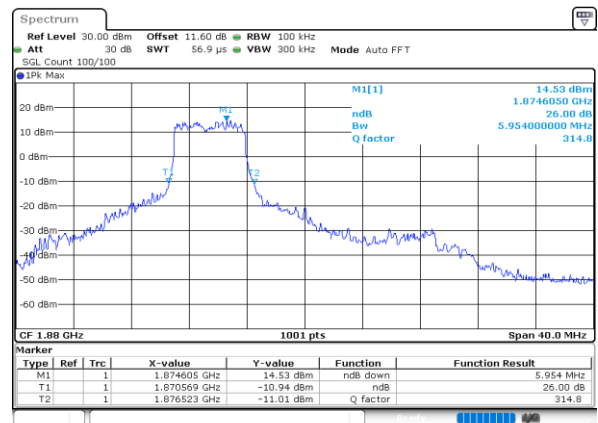



Occupied Bandwidth

Mode	LTE Band 2 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	1.09	1.11	2.72	2.73	4.49	4.49	9.07	4.88	13.49	4.92	17.86	4.96

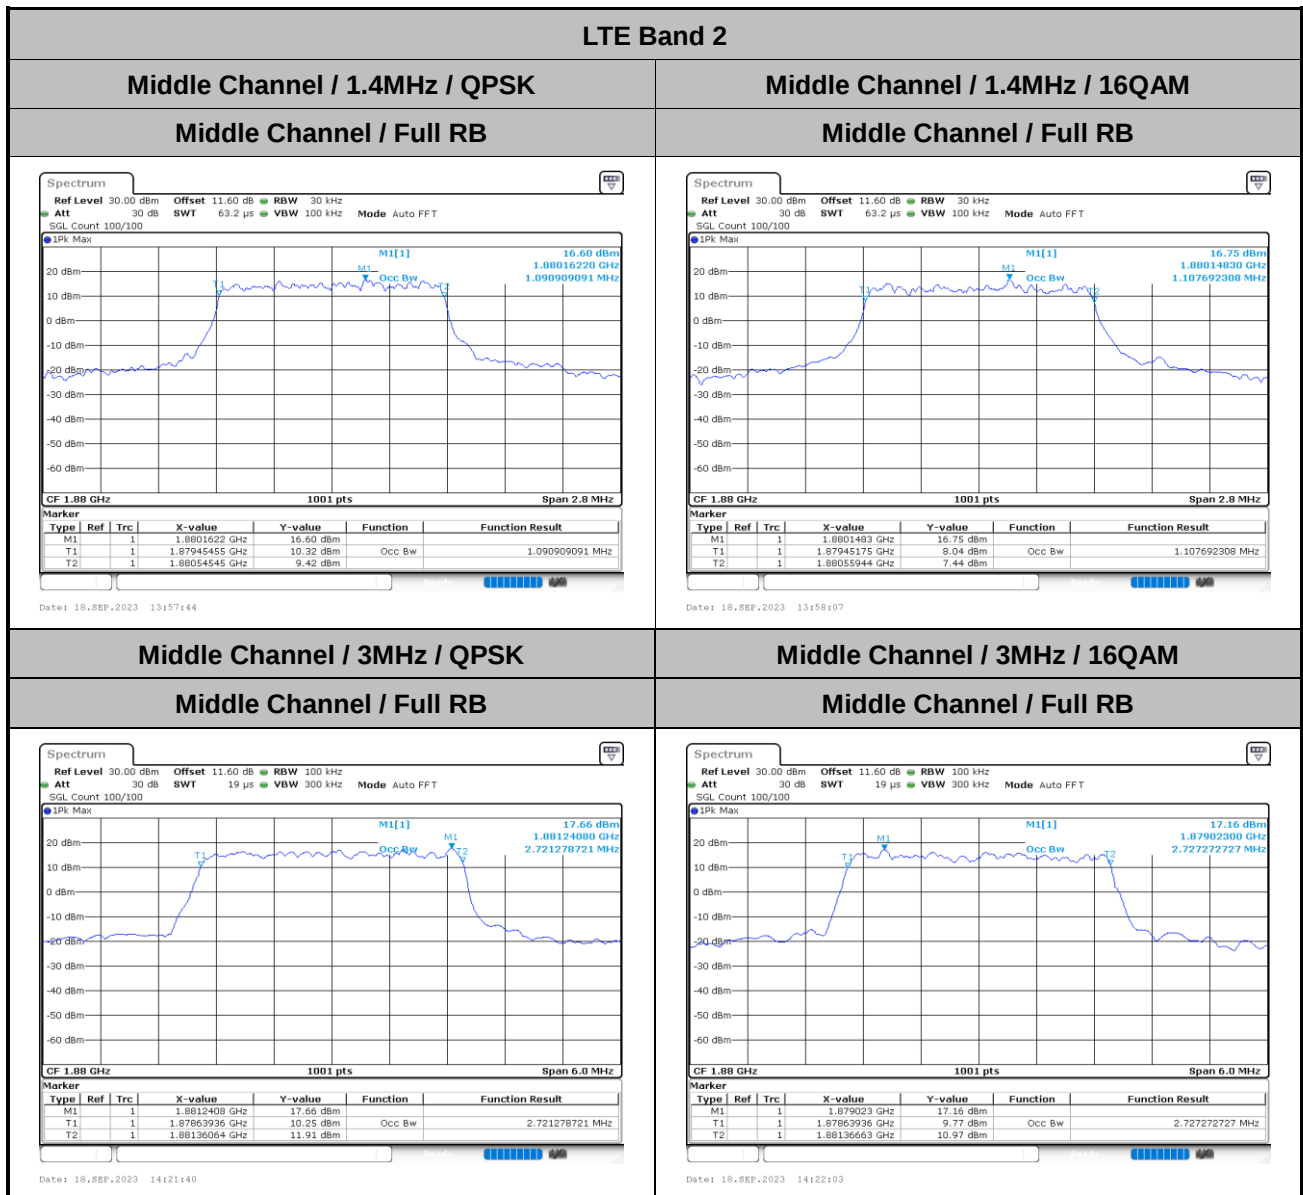




LTE Band 2


Middle Channel / 5MHz / QPSK

Middle Channel / Full RB

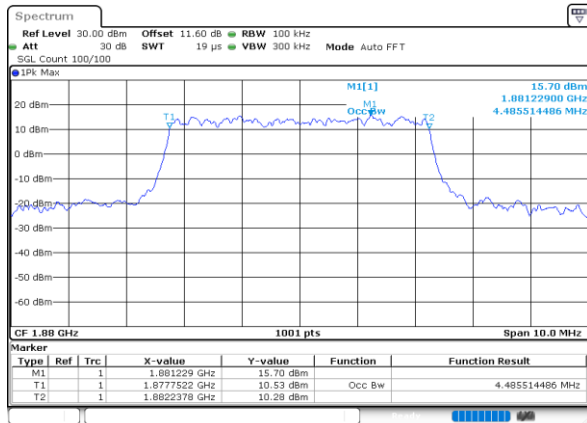


Middle Channel / 5MHz / 16QAM

Middle Channel / Full RB

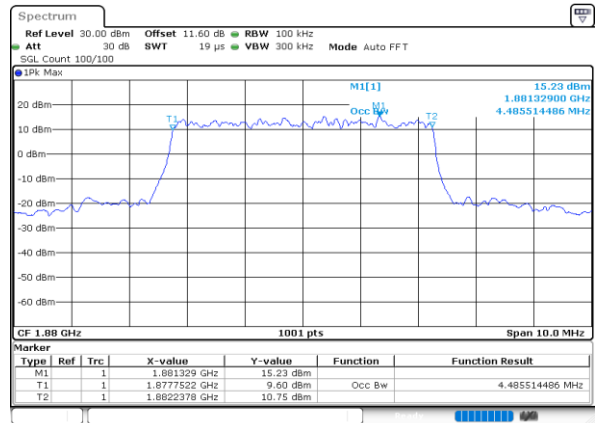


Middle Channel / 10MHz / QPSK

Middle Channel / Full RB

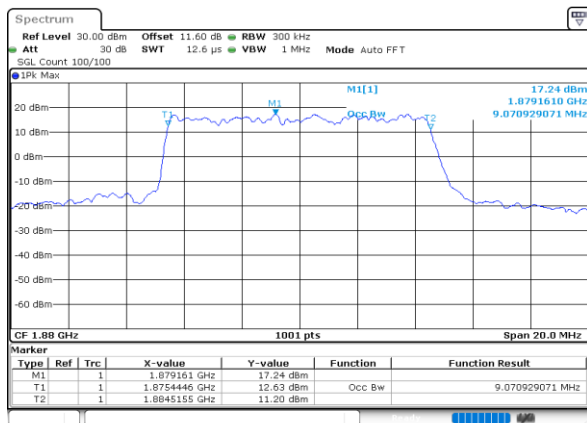

Middle Channel / 10MHz / 16QAM

Middle Channel / 27 RB0

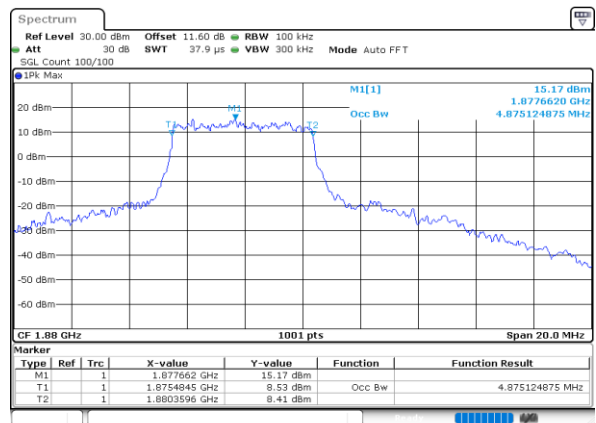





LTE Band 2

Middle Channel / 15MHz / QPSK

Middle Channel / 15MHz / 16QAM

Middle Channel / Full RB

Middle Channel / 27 RB0

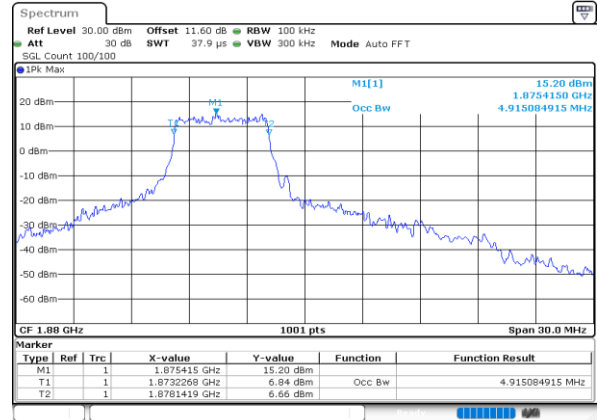
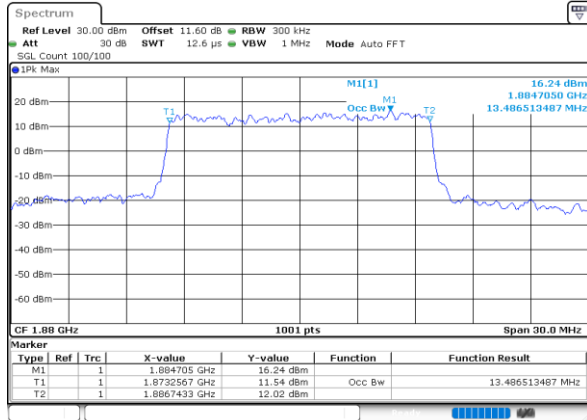


Middle Channel / 20MHz / QPSK

Middle Channel / 20MHz / 16QAM

Middle Channel / Full RB

Middle Channel / 27 RB0

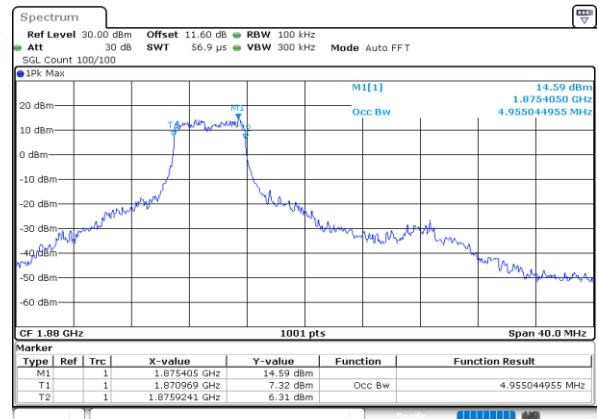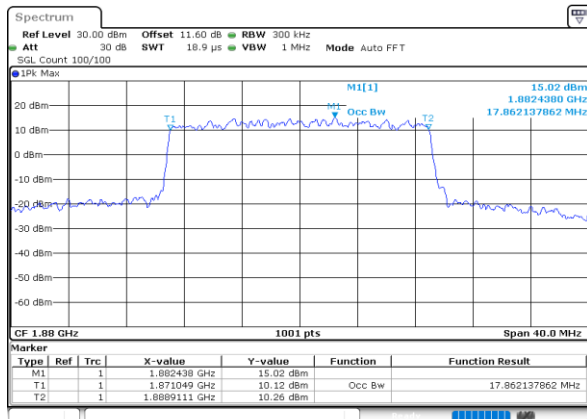




Conducted Band Edge

LTE Band 2 / 1.4MHz / QPSK


Lowest Band Edge / 1RB0

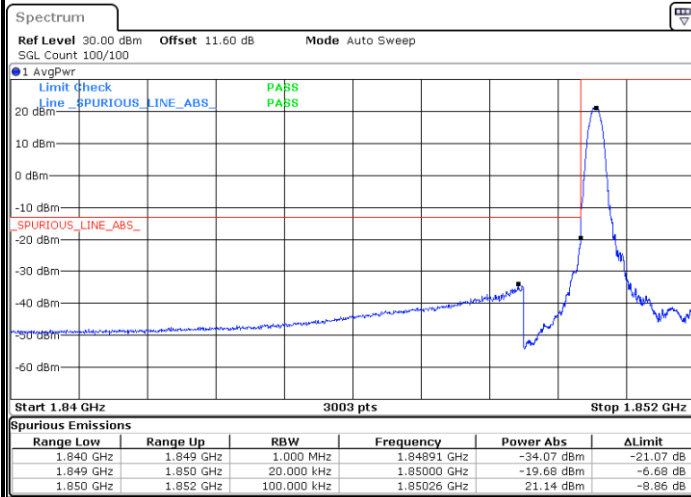


Highest Band Edge / 1RBmax



Lowest Band Edge / Full RB

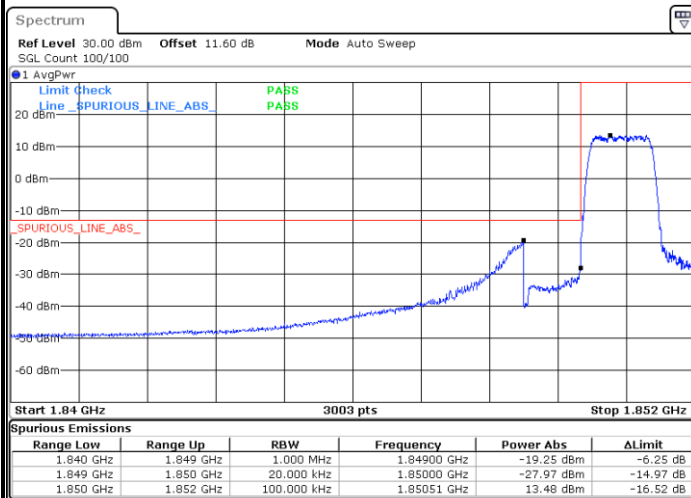

Highest Band Edge / Full RB


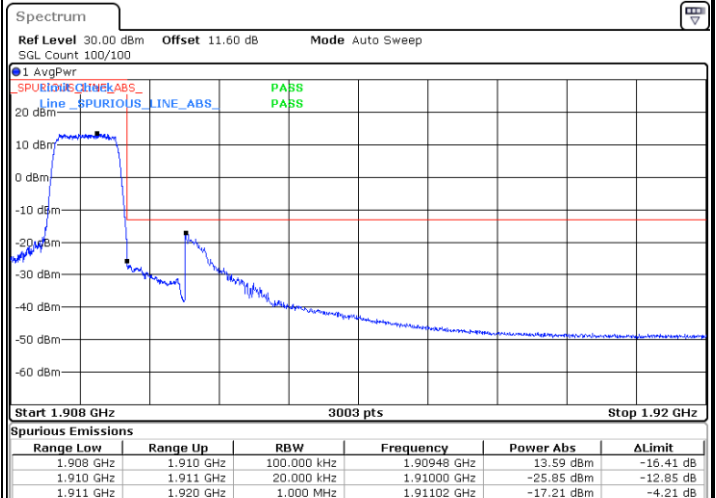




LTE Band 2 / 1.4MHz / 16QAM



Lowest Band Edge / 1 RB0

Highest Band Edge / 1 RBmax

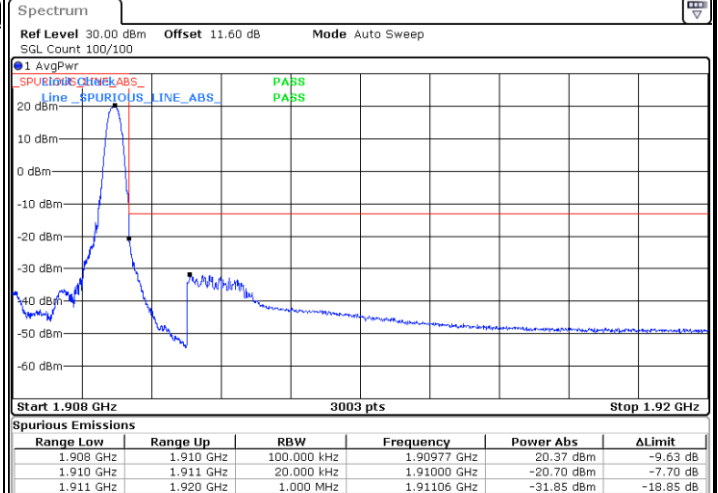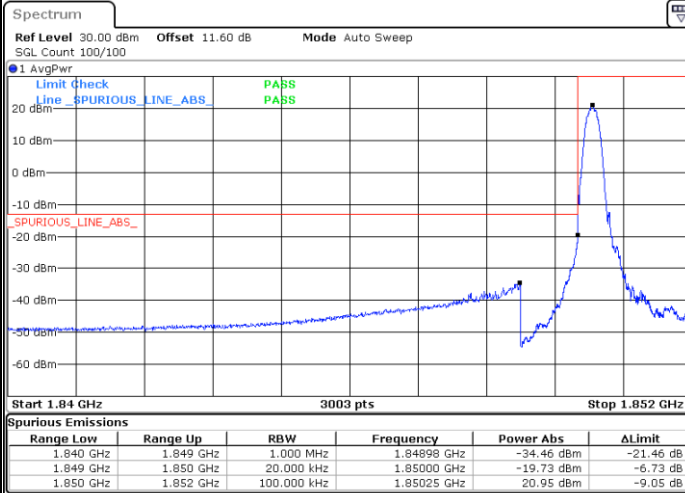

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

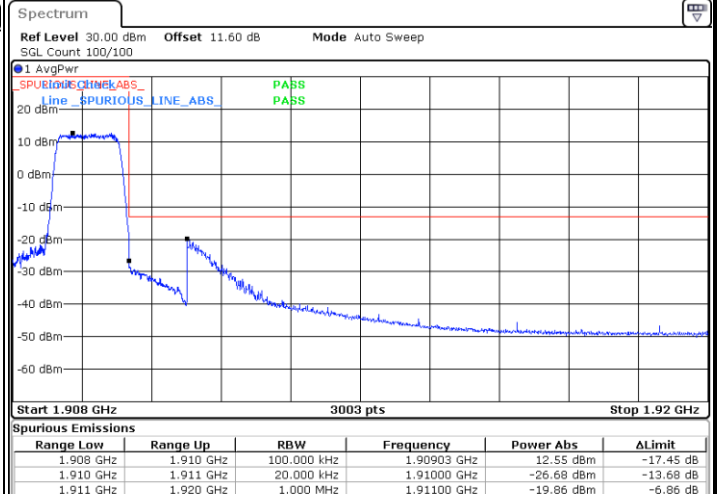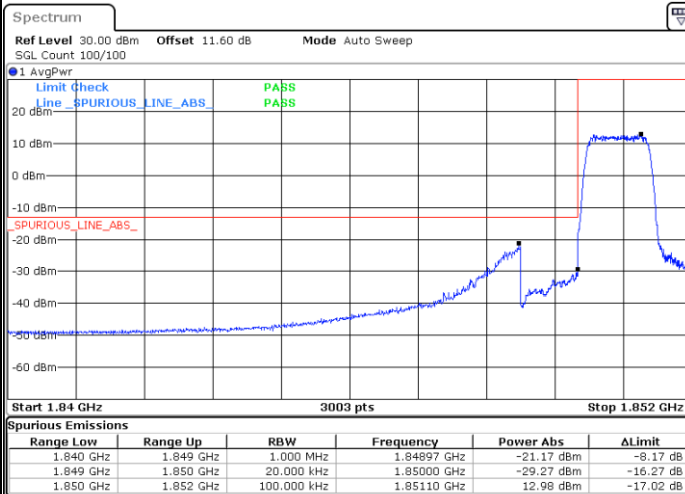




LTE Band 2 / 3MHz / QPSK

Lowest Band Edge / Full RB



Highest Band Edge / Full RB

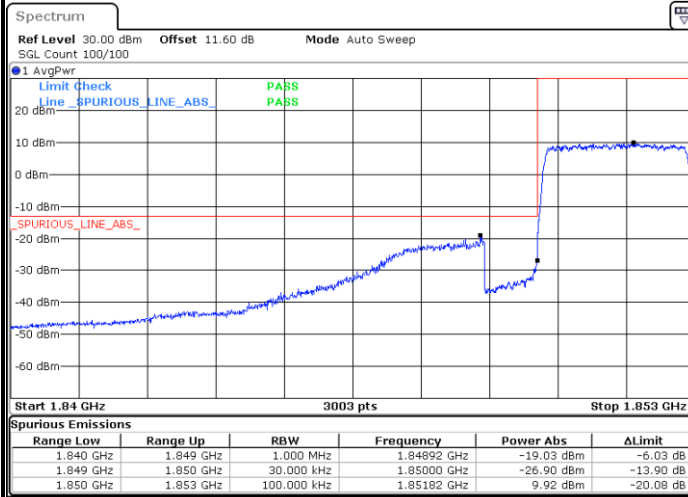

LTE Band 2 / 3MHz / 16QAM

Lowest Band Edge / Full RB


Highest Band Edge / Full RB

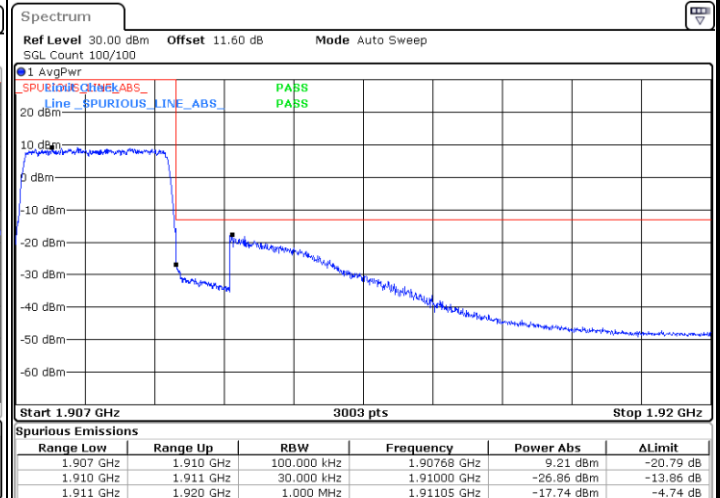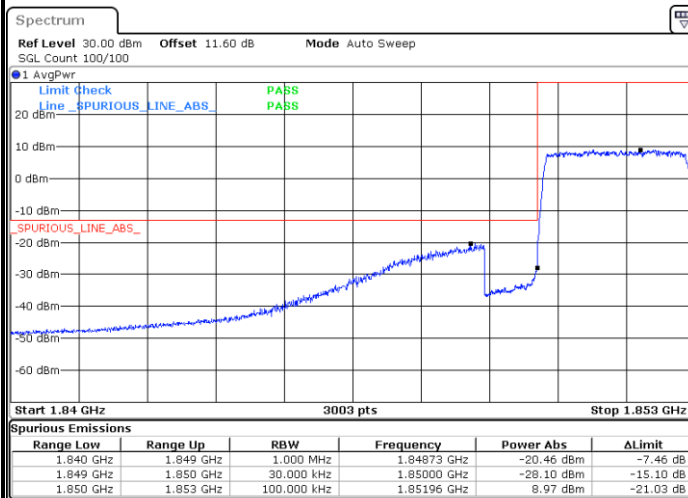




LTE Band 2 / 5MHz / QPSK

Lowest Band Edge / Full RB

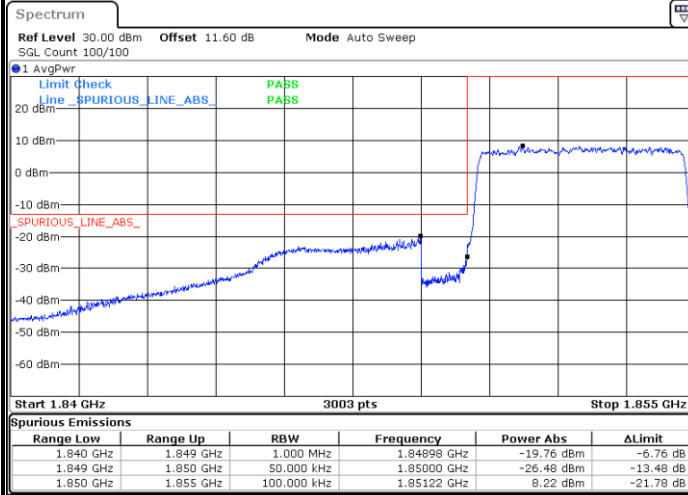


Highest Band Edge / Full RB

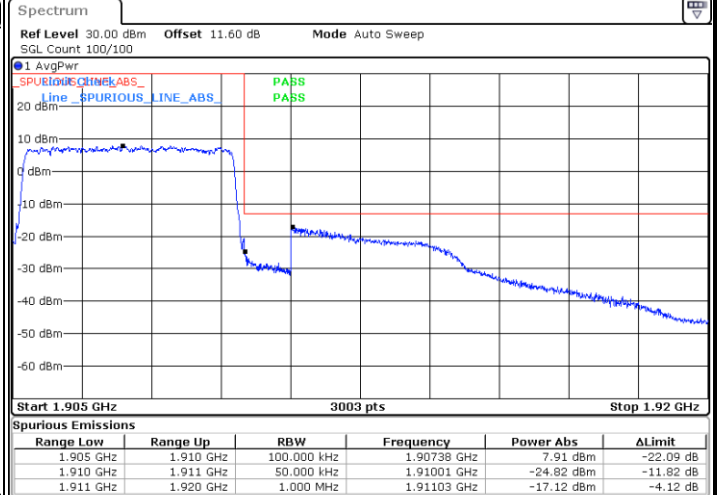


LTE Band 2 / 5MHz / 16QAM

Lowest Band Edge / Full RB

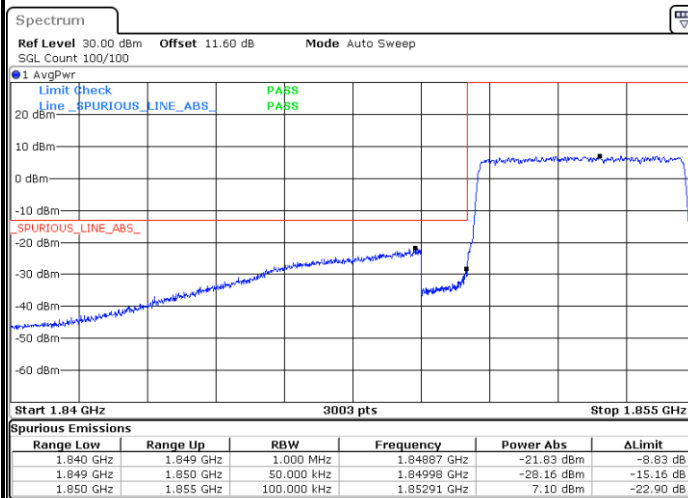


Highest Band Edge / Full RB

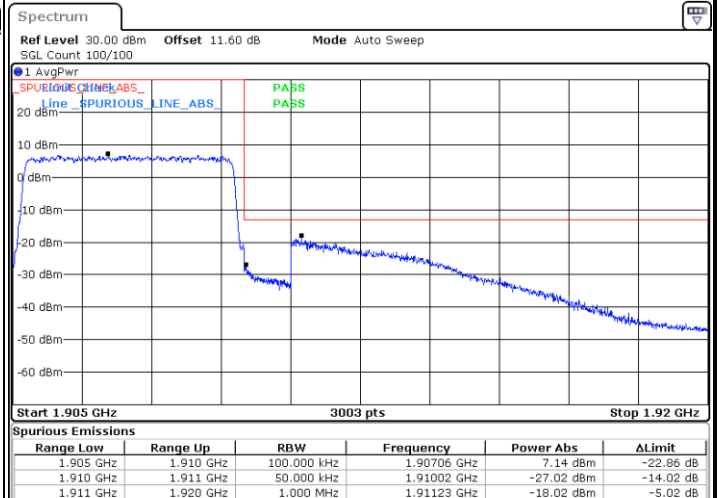




LTE Band 2 / 10MHz / QPSK

Lowest Band Edge / Full RB

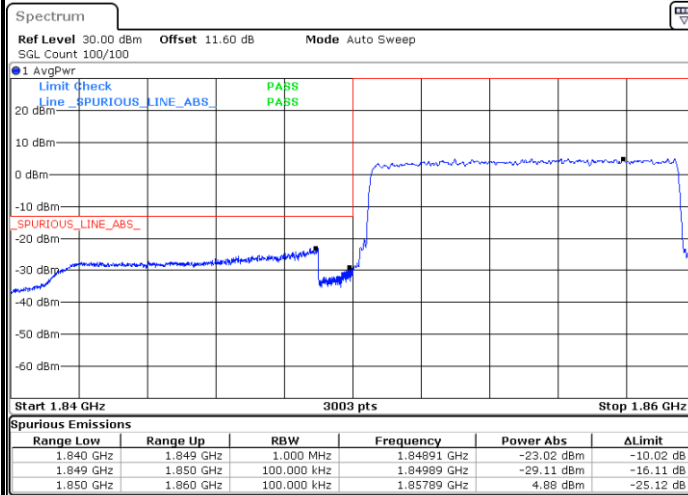


Highest Band Edge / Full RB

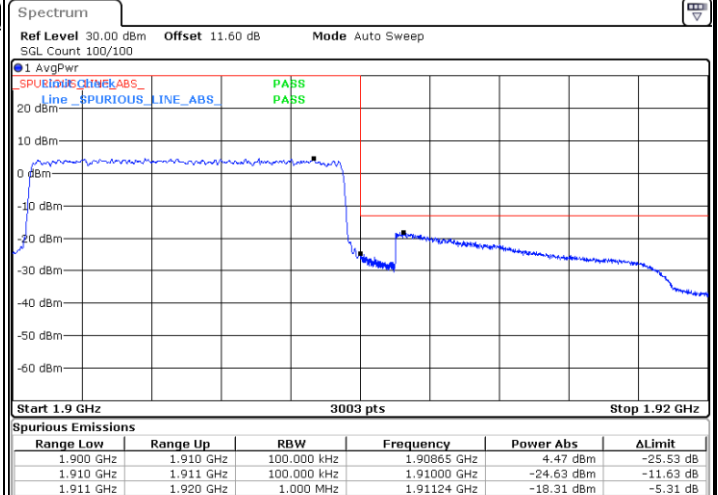


LTE Band 2 / 10MHz / 16QAM

Lowest Band Edge / 27 RB0

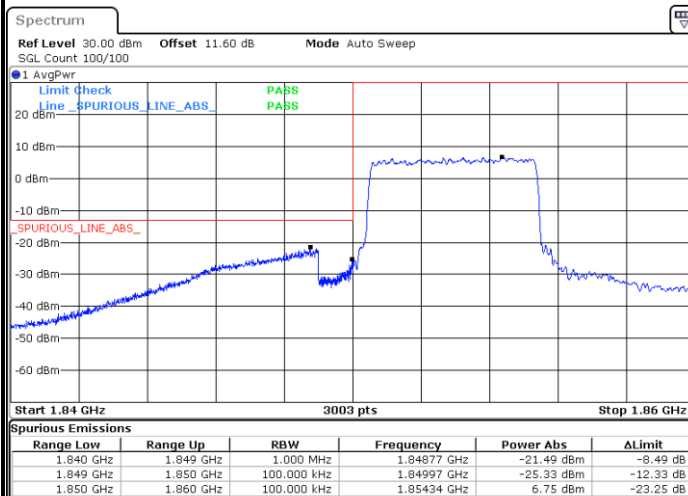


Highest Band Edge / 27 RBmax

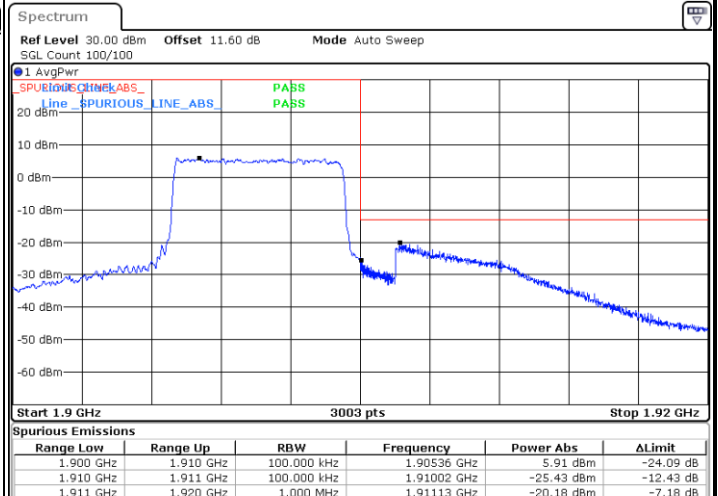




LTE Band 2 / 15MHz / QPSK

Lowest Band Edge / Full RB

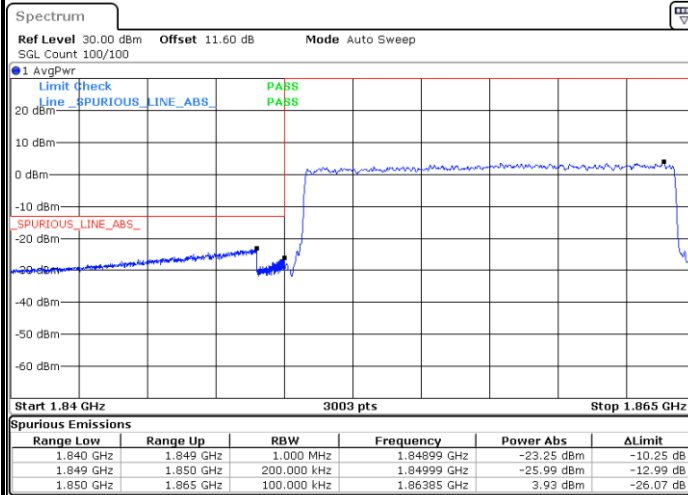


Highest Band Edge / Full RB

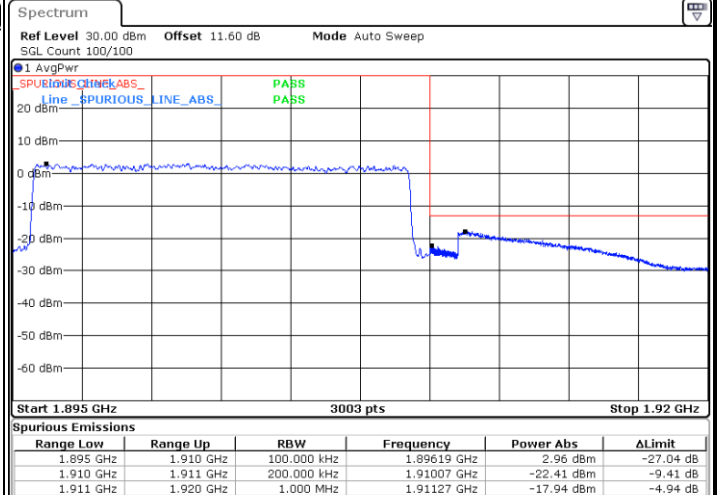


LTE Band 2 / 15MHz / 16QAM

Lowest Band Edge / 27 RB0

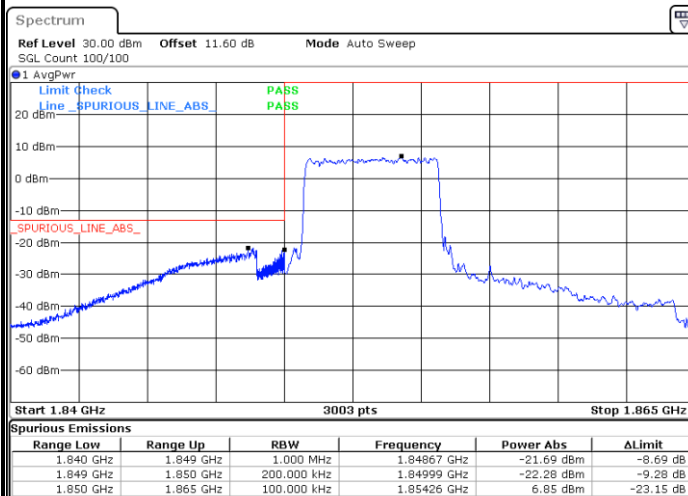

Highest Band Edge / 27 RBmax

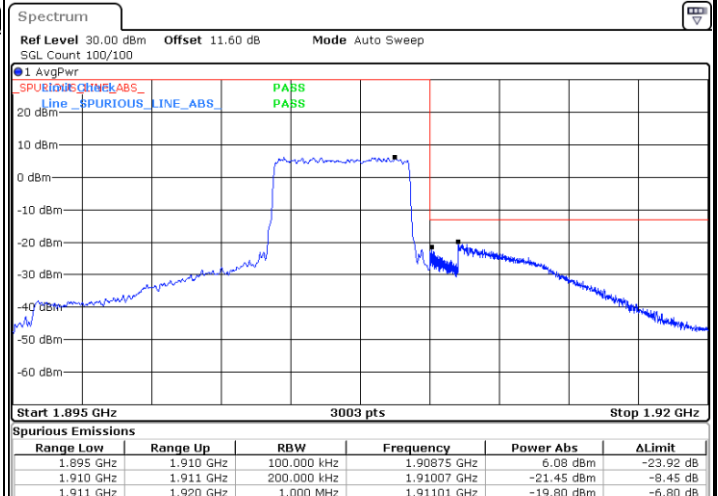





LTE Band 2 / 20MHz / QPSK

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

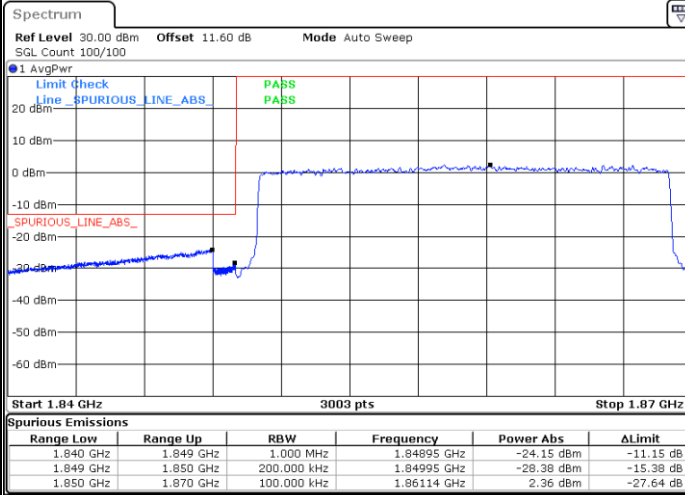

Date: 18.SEP.2023 14:55:47

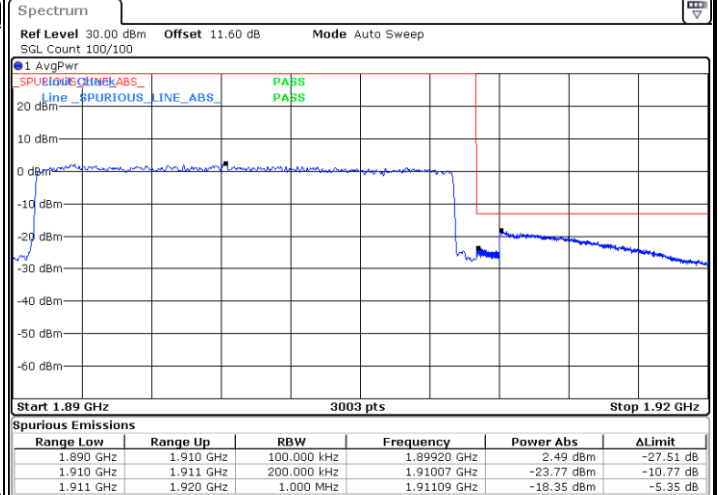


Date: 18.SEP.2023 14:59:11


LTE Band 2 / 20MHz / 16QAM

Lowest Band Edge / 27 RB0

Highest Band Edge / 27 RBmax

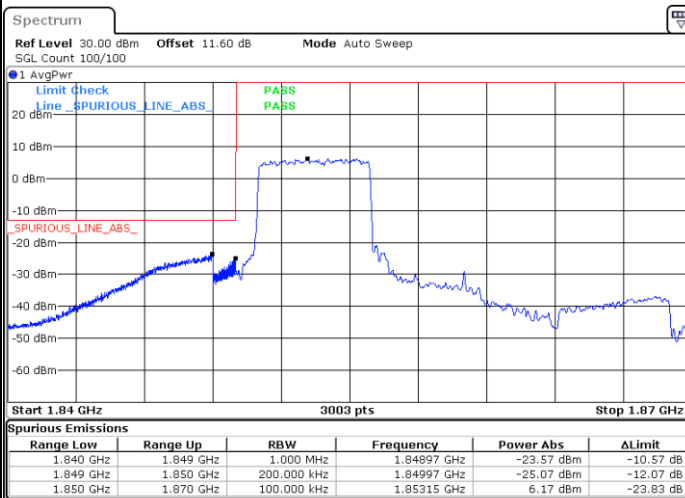

Date: 18.SEP.2023 14:56:41

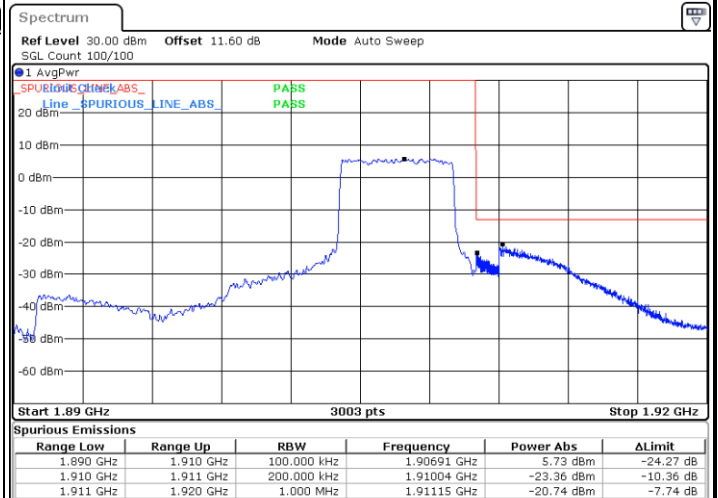


Date: 18.SEP.2023 15:00:05



Conducted Spurious Emission


LTE Band 2 / 1.4MHz

Lowest Channel / QPSK

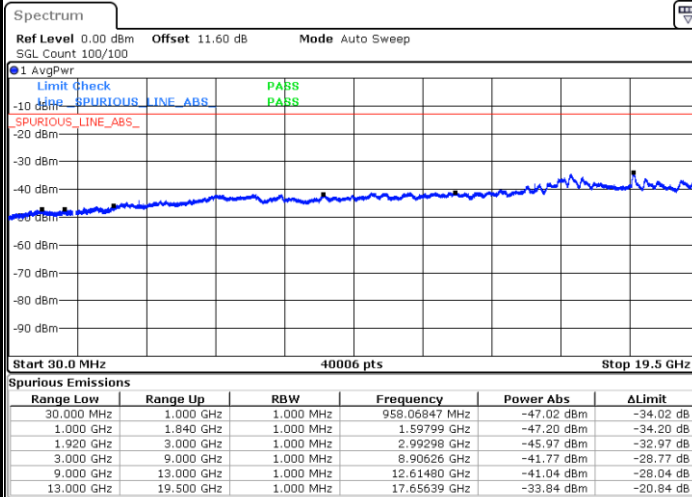


Date: 18.SEP.2023 13:57:19

Middle Channel / QPSK

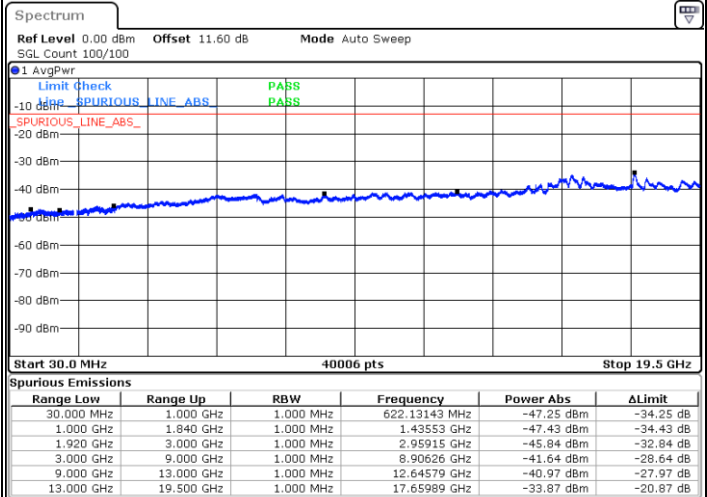

Date: 18.SEP.2023 14:00:06

Highest Channel / QPSK

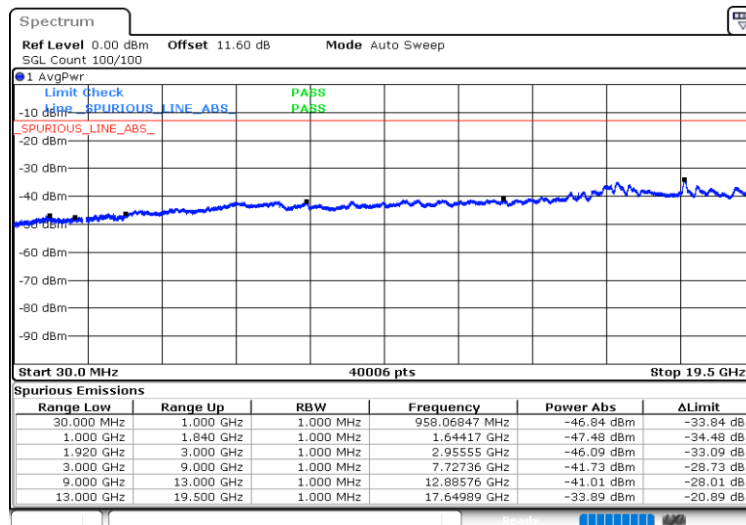


Date: 18.SEP.2023 14:06:17




LTE Band 2 / 3MHz

Lowest Channel / QPSK

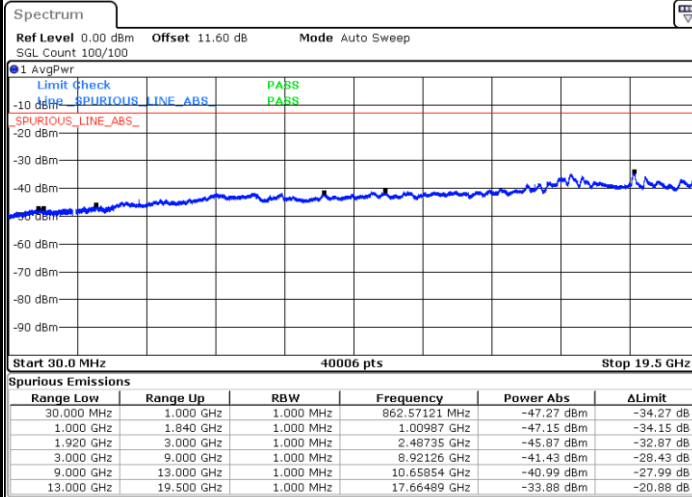


Date: 18.SEP.2023 14:24:03

Middle Channel / QPSK

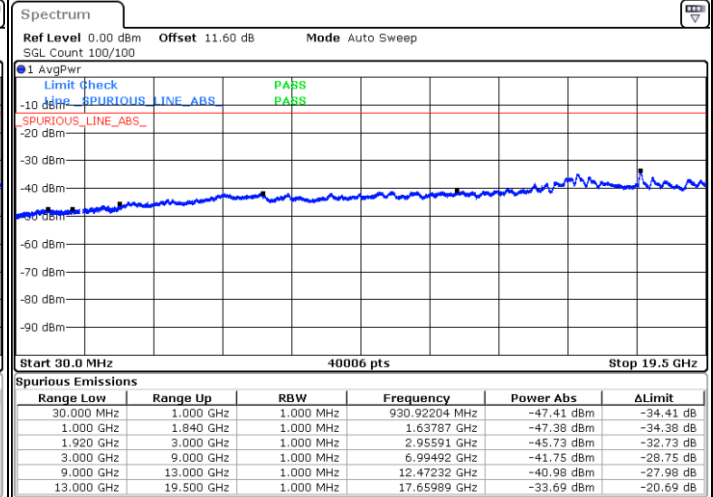

Date: 18.SEP.2023 14:25:15

Highest Channel / QPSK

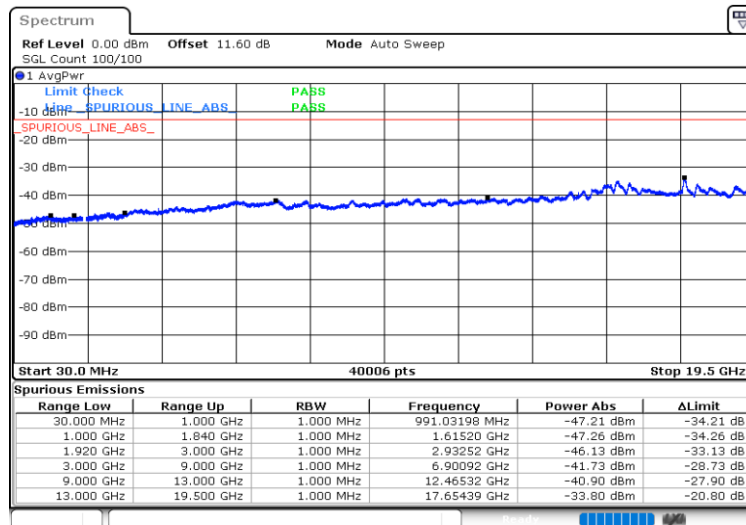


Date: 18.SEP.2023 14:26:28




LTE Band 2 / 5MHz

Lowest Channel / QPSK

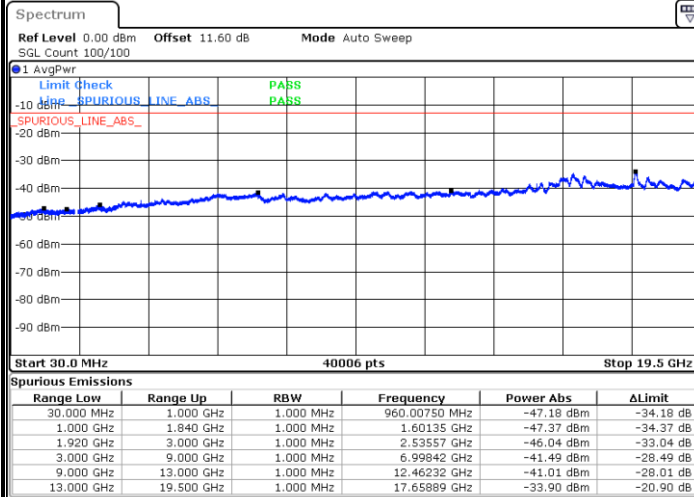


Date: 18.SEP.2023 14:34:42

Middle Channel / QPSK

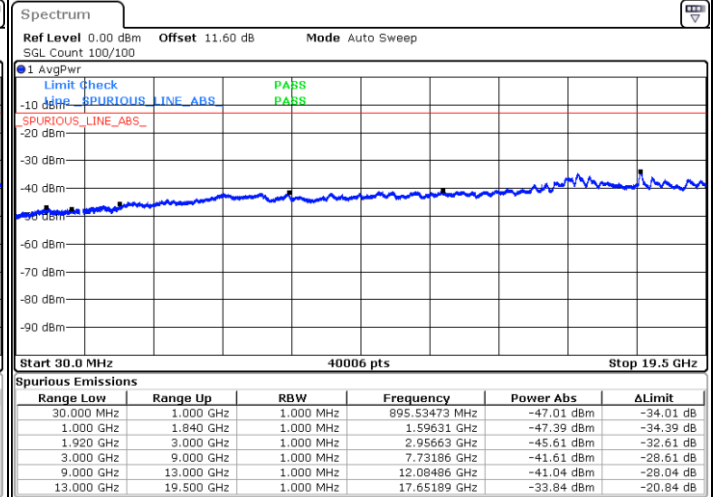

Date: 18.SEP.2023 14:35:54

Highest Channel / QPSK

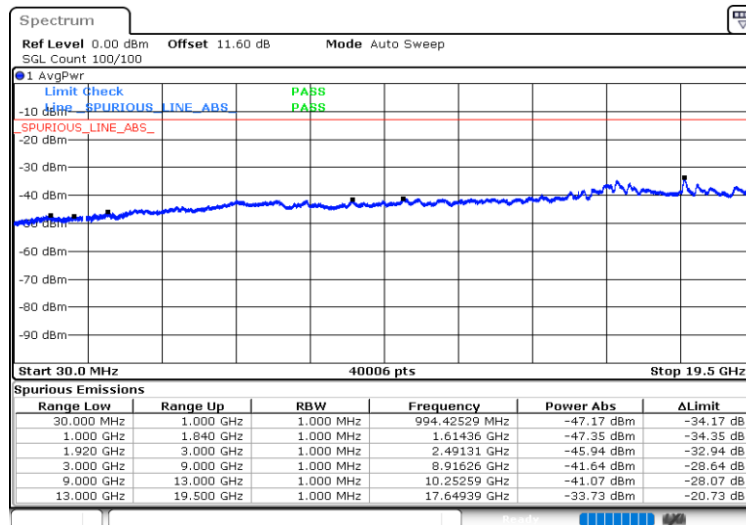


Date: 18.SEP.2023 14:37:07




LTE Band 2 / 10MHz

Lowest Channel / QPSK

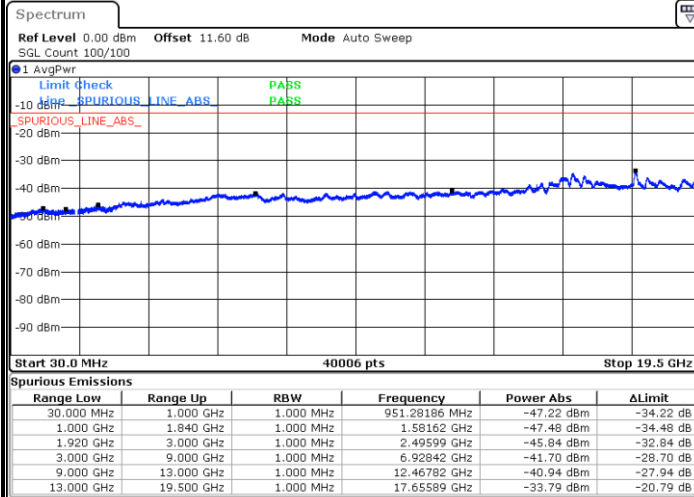


Date: 18.SEP.2023 14:41:45

Middle Channel / QPSK

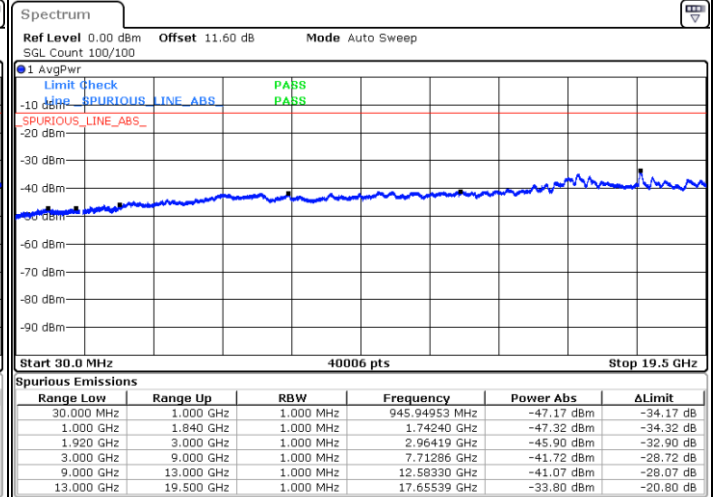

Date: 18.SEP.2023 14:42:57

Highest Channel / QPSK

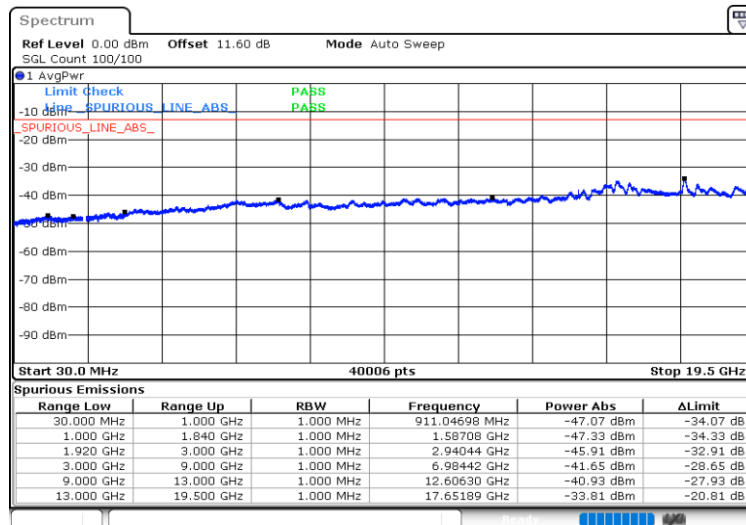


Date: 18.SEP.2023 14:44:10




LTE Band 2 / 15MHz


Lowest Channel / QPSK

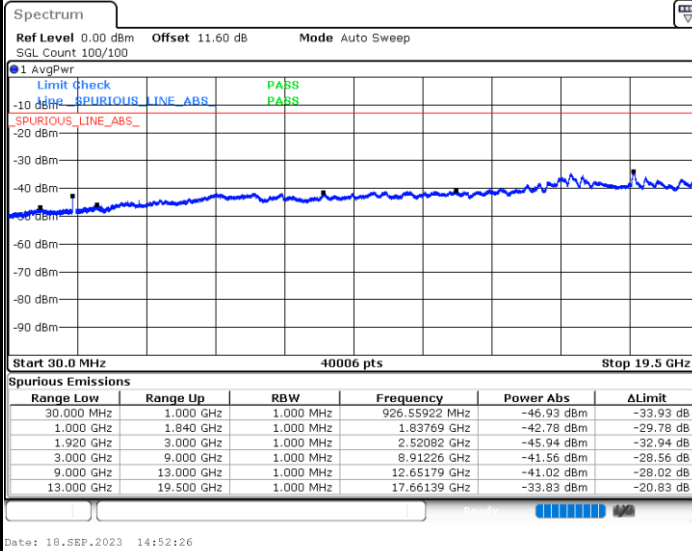

Middle Channel / QPSK

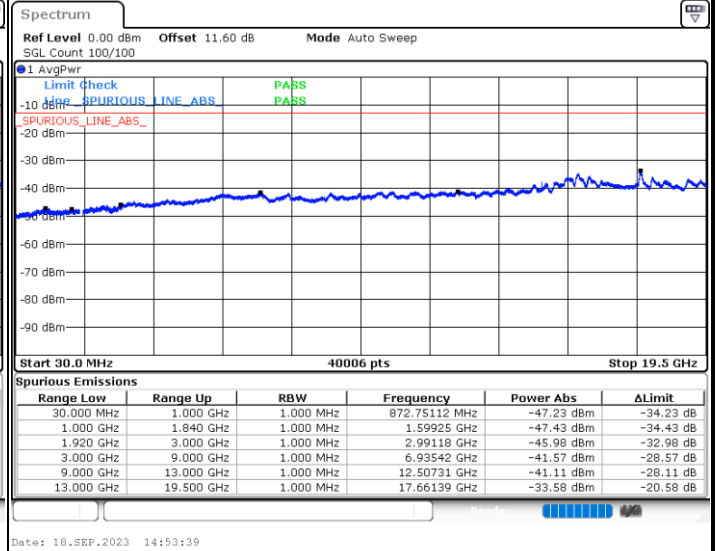


Highest Channel / QPSK

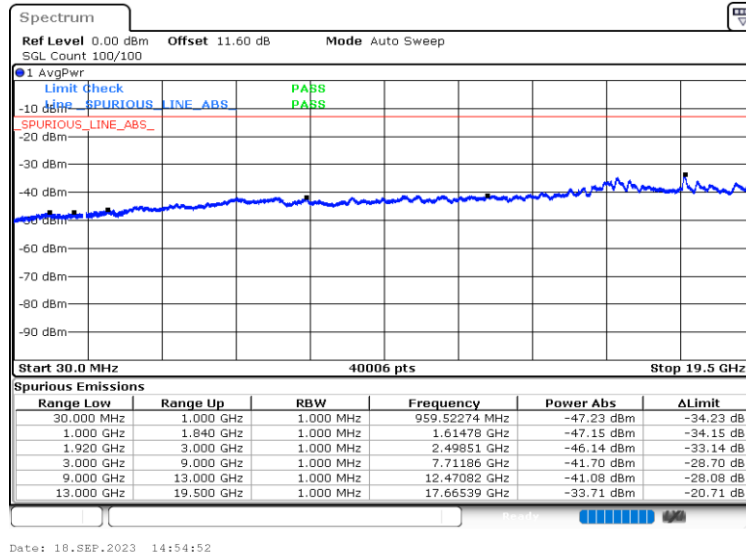




LTE Band 2 / 20MHz

Lowest Channel / QPSK

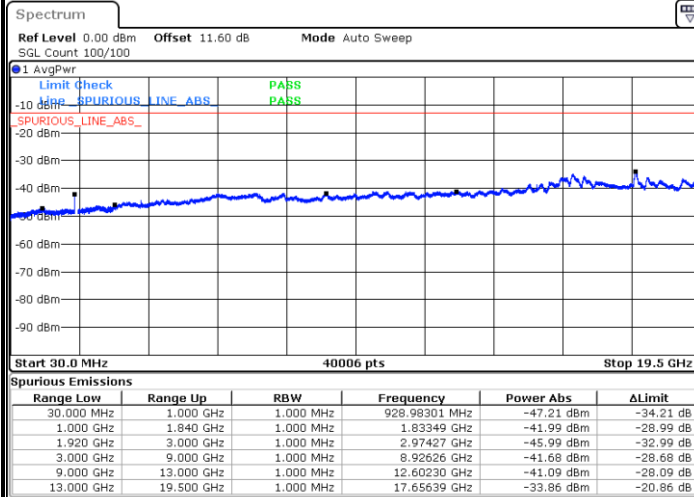


Date: 18.SEP.2023 15:02:09

Middle Channel / QPSK

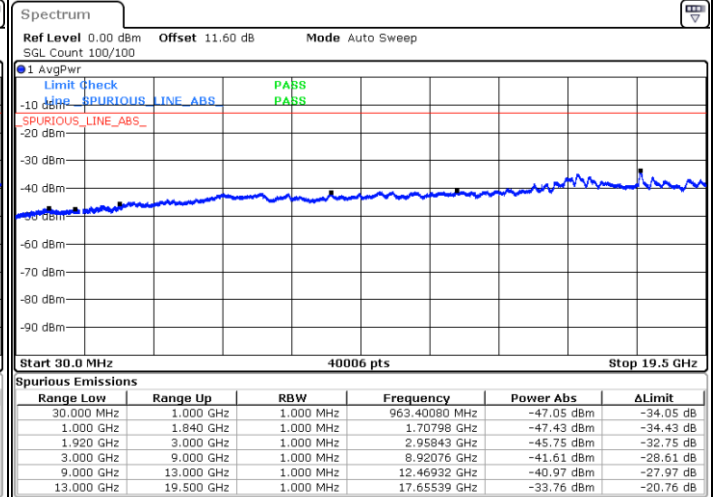

Date: 18.SEP.2023 15:03:21

Highest Channel / QPSK

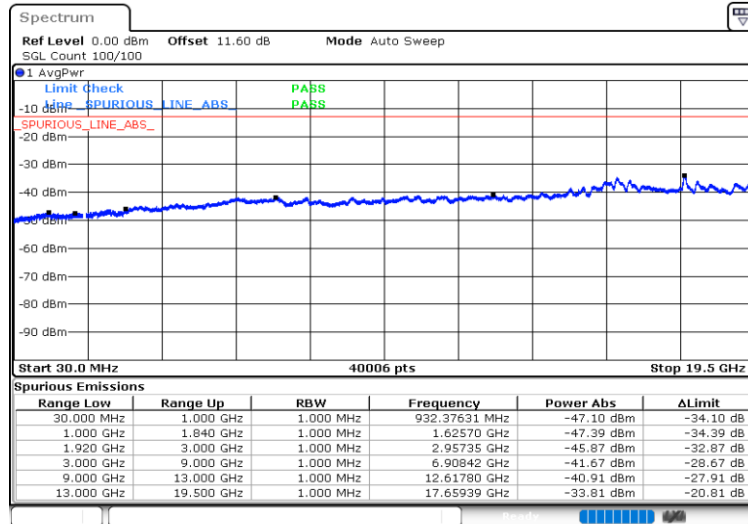

Date: 18.SEP.2023 15:04:34

Frequency Stability

Test Conditions		LTE Band 2 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0000	PASS
40	Normal Voltage	0.0014	
30	Normal Voltage	0.0059	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0009	
0	Normal Voltage	0.0079	
-10	Normal Voltage	0.0041	
-20	Normal Voltage	0.0007	
-30	Normal Voltage	0.0019	
20	Maximum Voltage	0.0008	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0077	

Note:


1. Normal Voltage = 3.7 V. ; Battery End Point (BEP) = 3.4 V. ; Maximum Voltage = 4.4 V.
2. The frequency fundamental emissions stay within the authorized frequency block.



LTE Band 8





Peak-to-Average Ratio

Mode	LTE Band 8 / 3MHz		
Mod.	QPSK	16QAM	Limit: 13dB
RB Size	Full RB	Full RB	Result
Middle CH	5.36	6.09	PASS

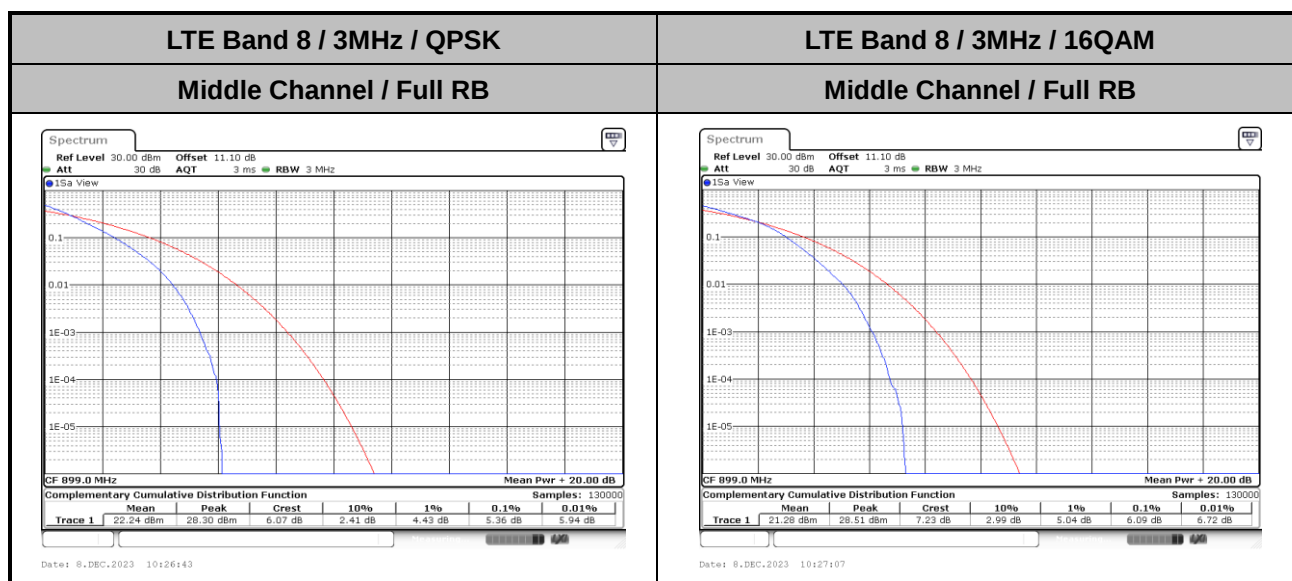

**26dB Bandwidth**

Mode	LTE Band 8 : 26dB BW(MHz)			
BW	1.4MHz		3MHz	
Mod.	QPSK	16QAM	QPSK	16QAM
Middle CH	1.30	1.28	3.06	2.99

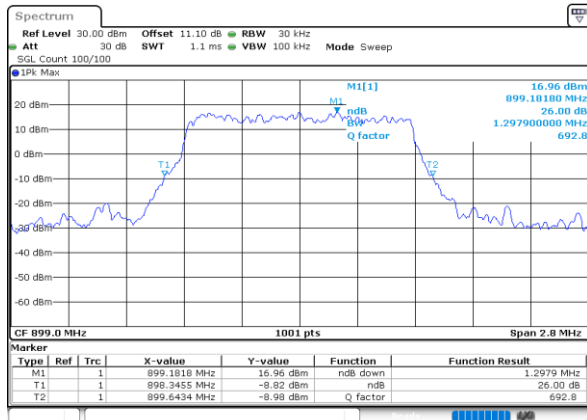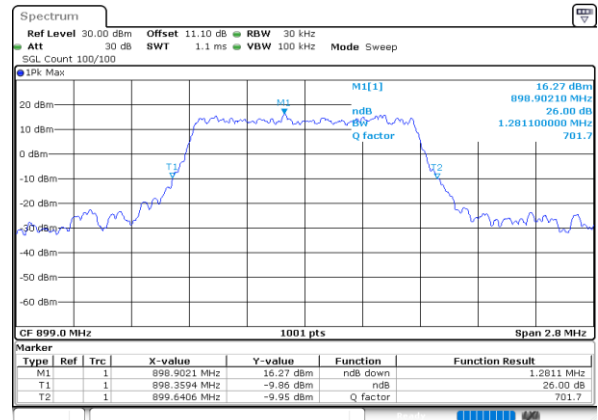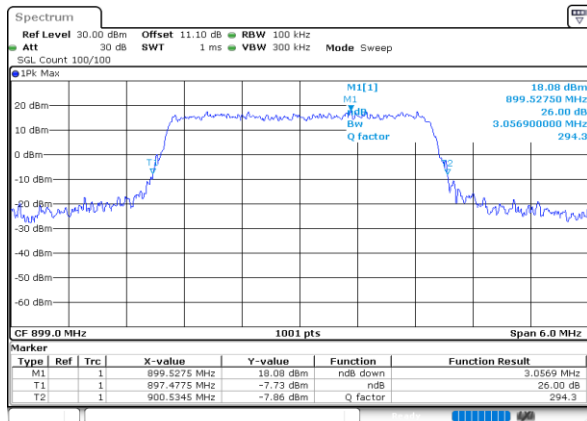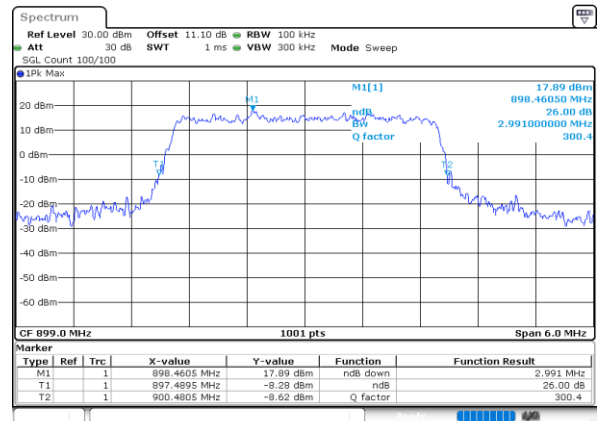LTE Band 8**Middle Channel / 1.4MHz / QPSK****Middle Channel / 1.4MHz / 16QAM****Middle Channel / 3MHz / QPSK****Middle Channel / 3MHz / 16QAM**




Occupied Bandwidth


Mode	LTE Band 8 : 99%OBW(MHz)			
BW	1.4MHz		3MHz	
Mod.	QPSK	16QAM	QPSK	16QAM
Middle CH	1.09	1.10	2.73	2.72

LTE Band 8


Middle Channel / 1.4MHz / QPSK

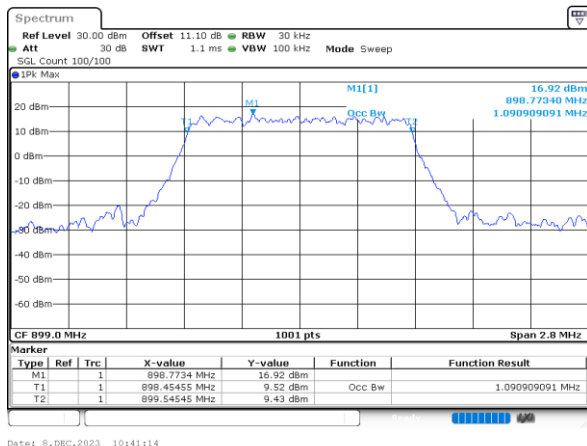


Middle Channel / 1.4MHz / 16QAM

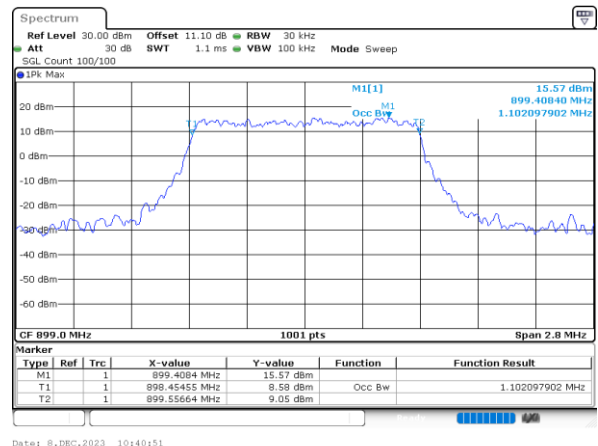

Middle Channel / 3MHz / QPSK

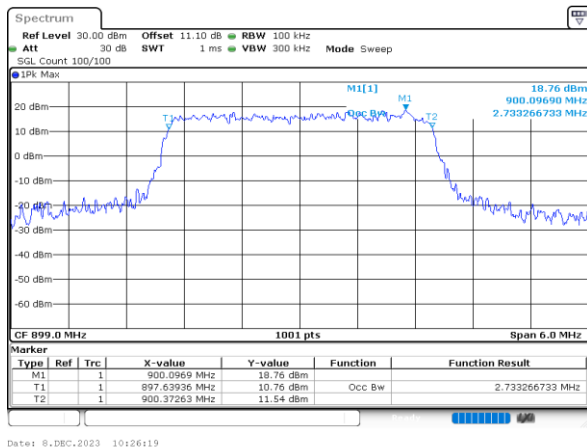

Middle Channel / 3MHz / 16QAM

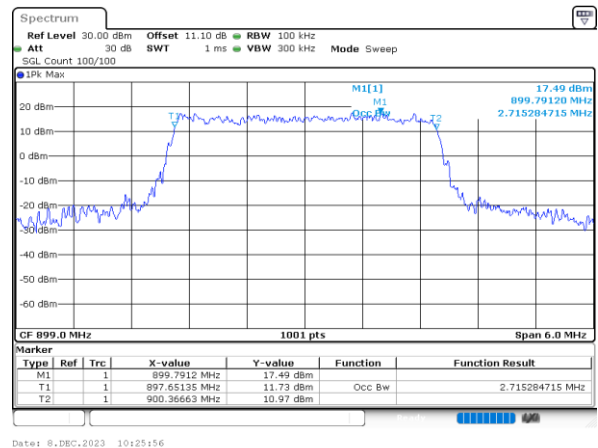




Conducted Band Edge

LTE Band 8 / 1.4MHz / QPSK

Lowest Band Edge / 1RB0

Highest Band Edge / 1RB Max

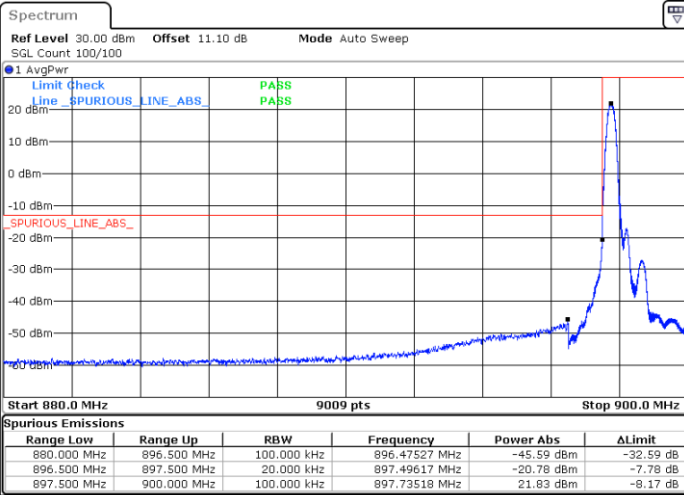


Date: 8.DEC.2023 10:35:15




Date: 8.DEC.2023 10:38:43

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

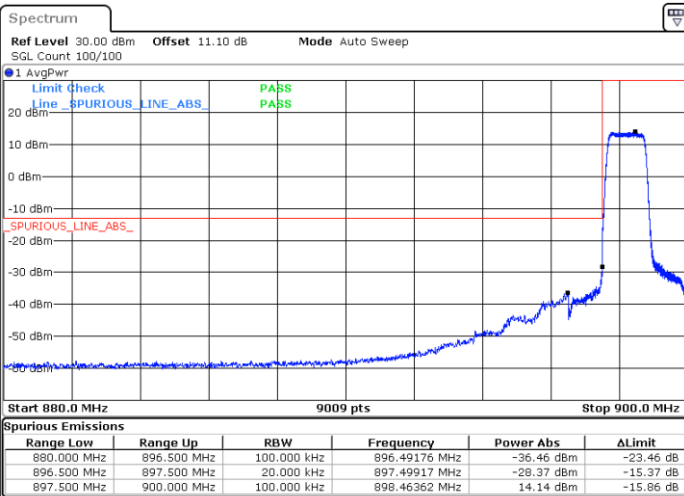

Date: 8.DEC.2023 10:36:07

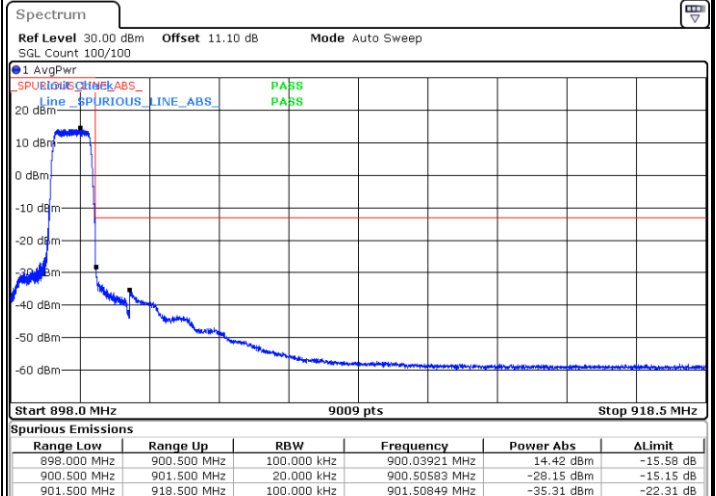


Date: 8.DEC.2023 10:39:36



LTE Band 8 / 1.4MHz / 16QAM



Lowest Band Edge / 1 RB0

Highest Band Edge / 1 RBmax

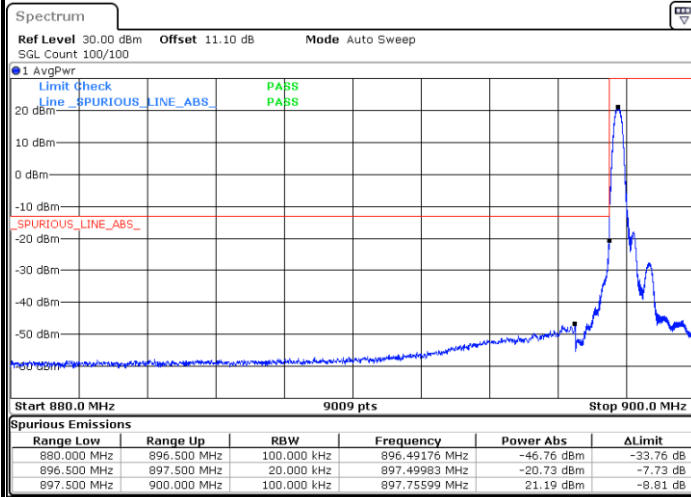

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

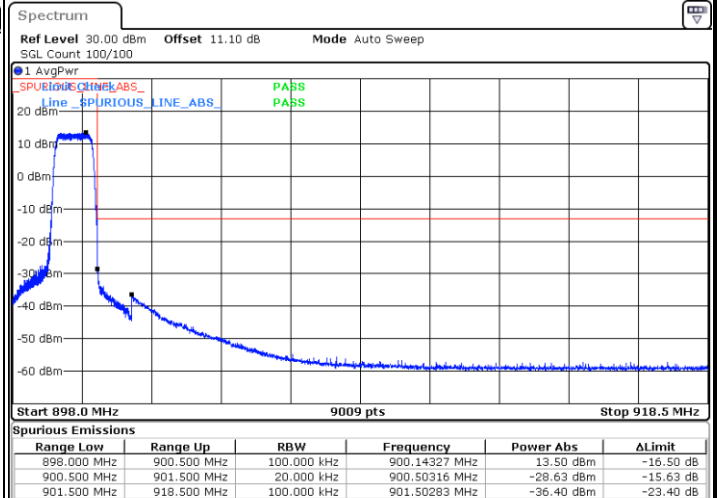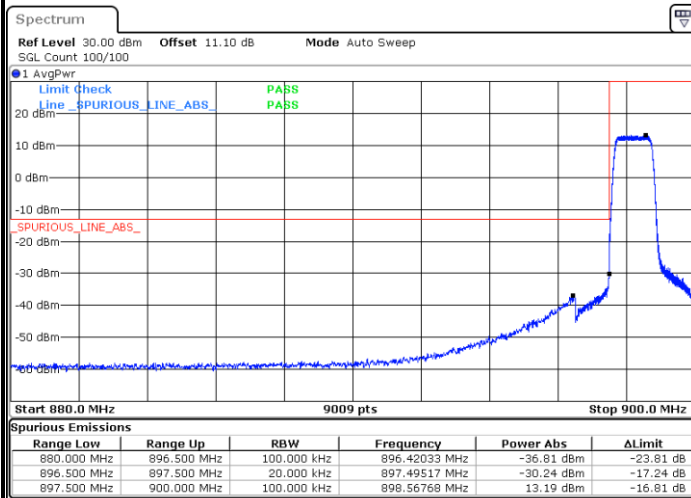





LTE Band 8 / 3MHz / QPSK

Middle Band Edge / 1 RB0

Middle Channel Band Edge / 1 RBmax

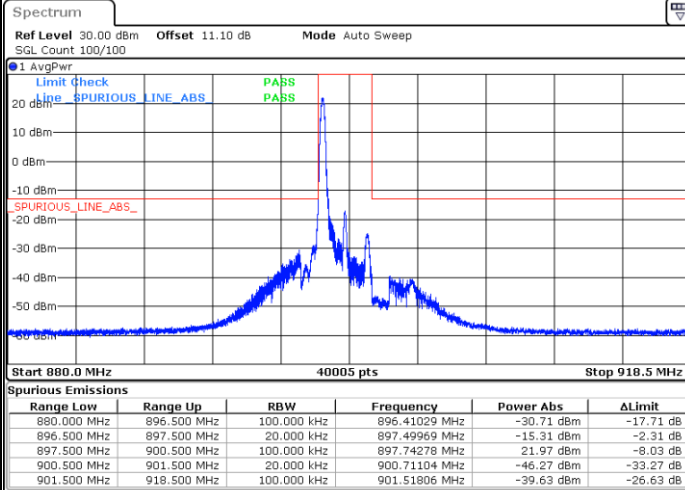


Date: 8.DEC.2023 10:29:10

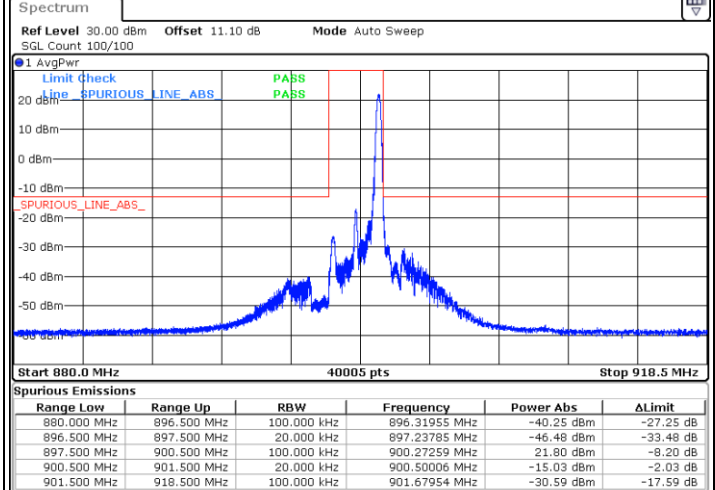

Date: 8.DEC.2023 10:31:46

Middle Channel Band Edge / Full RB

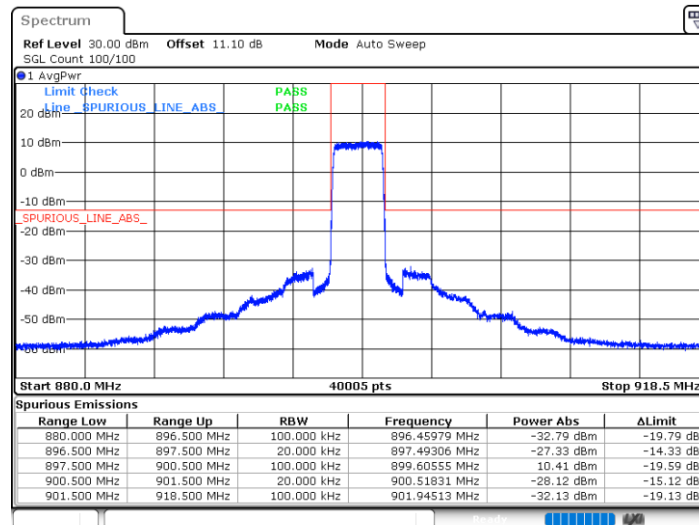

Date: 8.DEC.2023 10:32:38