

Conducted test results

No.1-6579/23-01-45_TR1-A201-R01

October 25, 2023

Test Standard(s)	FCC 15.247 - NI
	FCC 15.247, ISED RSS247 - NI

This document is electronically signed and valid without handwritten signature.
Public keys for verification of the electronic signatures can be requested at the testing laboratory.

Authorized

Michael Dorongovski
Lab Manager
Radio Labs

Table of Content

FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 b mode	5
FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 b mode	8
FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 b mode	11
FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 b mode	14
FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 b mode	17
FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 b mode	20
FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 g mode	23
FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 g mode	26
FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 g mode	29
FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 g mode	32
FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 g mode	35
FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 g mode	38
FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 n-HT20 mode	41
FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 n-HT20 mode	44
FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 n-HT20 mode	47
FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 n-HT20 mode	50
FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 n-HT20 mode	51
FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 n-HT20 mode	54
FCC 15.247 # Avg psd DTS ~ WLAN2G4 b mode	57
FCC 15.247 # Avg psd DTS ~ WLAN2G4 b mode	60
FCC 15.247 # Avg psd DTS ~ WLAN2G4 b mode	63
FCC 15.247 # Avg psd DTS ~ WLAN2G4 b mode	66
FCC 15.247 # Avg psd DTS ~ WLAN2G4 b mode	69
FCC 15.247 # Avg psd DTS ~ WLAN2G4 b mode	72
FCC 15.247 # Avg psd DTS ~ WLAN2G4 g mode	75
FCC 15.247 # Avg psd DTS ~ WLAN2G4 g mode	78
FCC 15.247 # Avg psd DTS ~ WLAN2G4 g mode	81
FCC 15.247 # Avg psd DTS ~ WLAN2G4 g mode	84
FCC 15.247 # Avg psd DTS ~ WLAN2G4 g mode	87
FCC 15.247 # Avg psd DTS ~ WLAN2G4 g mode	90
FCC 15.247 # Avg psd DTS ~ WLAN2G4 n-HT20 mode	93
FCC 15.247 # Avg psd DTS ~ WLAN2G4 n-HT20 mode	96
FCC 15.247 # Avg psd DTS ~ WLAN2G4 n-HT20 mode	99
FCC 15.247 # Avg psd DTS ~ WLAN2G4 n-HT20 mode	102
FCC 15.247 # Avg psd DTS ~ WLAN2G4 n-HT20 mode	105
FCC 15.247 # Avg psd DTS ~ WLAN2G4 n-HT20 mode	108
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode	111
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode	113
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode	115
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode	117
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode	119

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode	121
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode	123
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode	125
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode	127
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode	129
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode	131
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode	133
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode	135
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode	137
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode	139
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode	141
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode	143
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode	145
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode	147
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode	151
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode	155
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode	159
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode	163
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode	167
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode	171
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode	175
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode	179
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode	183
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode	187
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode	191
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode	195
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode	199
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode	203
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode	207
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode	211
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode	215
FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 b mode	219
FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 b mode	222
FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 b mode	225
FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 b mode	228
FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 b mode	231
FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 b mode	234
FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 g mode	237
FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 g mode	240
FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 g mode	243
FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 g mode	246
FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 g mode	249
FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 g mode	252
FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 n-HT20 mode	255

FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 n-HT20 mode	258
FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 n-HT20 mode	261
FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 n-HT20 mode	264
FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 n-HT20 mode	267
FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 n-HT20 mode	270

FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 b mode

References

TC start	16.10.2023 13:45:48
Ambit temp [°C] humidity [rel%]	26.1 30
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.9.2.2.2 or .4
Description	FCC 15.247 Avg output power SA DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	10.47	dBm	INFO
Ref. Frequency	---	---	2413.200	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg output power SA DTS

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	20.47 13.85 25
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	500 100 160 SWE

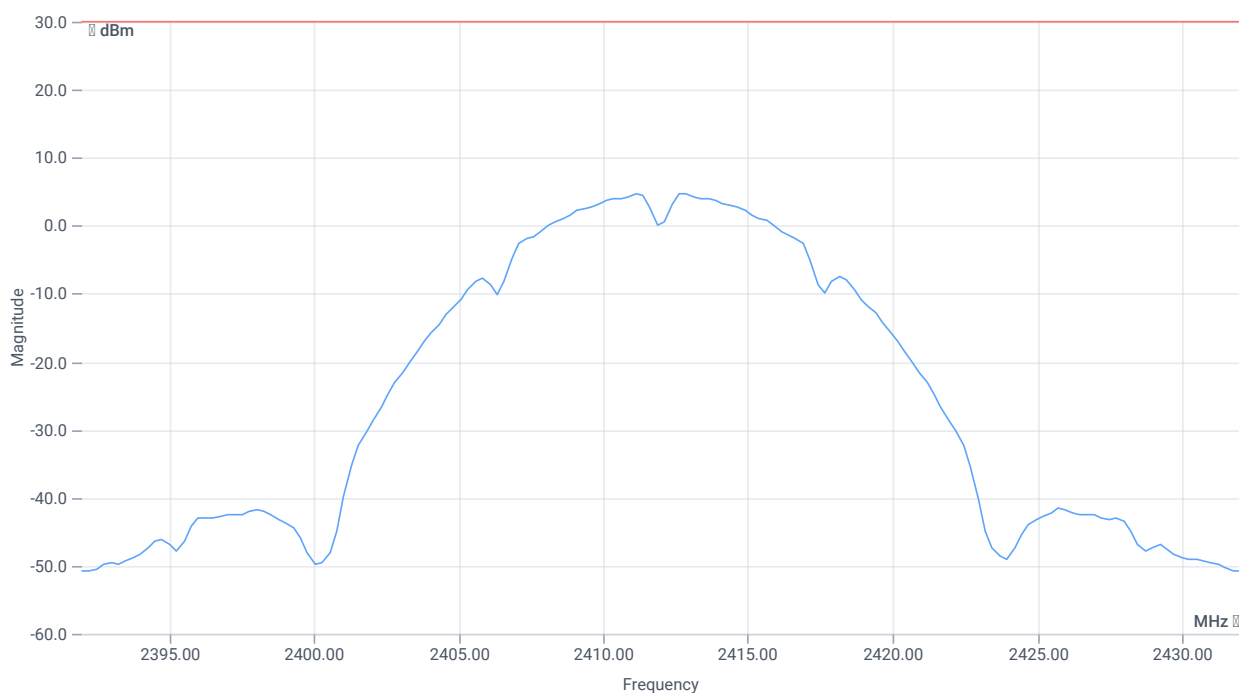

Avg output power SA DTS

RESULT (Channel power method)

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg output power uncorrected	---	---	15.26	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg power DC corrected	---	30	15.26	dBm	PASS

Verdict

PASS

FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 b mode

References

TC start	16.10.2023 13:56:02
Ambit temp [°C] humidity [rel%]	26.4 30
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.9.2.2.2 or .4
Description	FCC 15.247 Avg output power SA DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	11.14	dBm	INFO
Ref. Frequency	---	---	2413.100	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg output power SA DTS

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	21.14 13.85 25
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	500 100 160 SWE

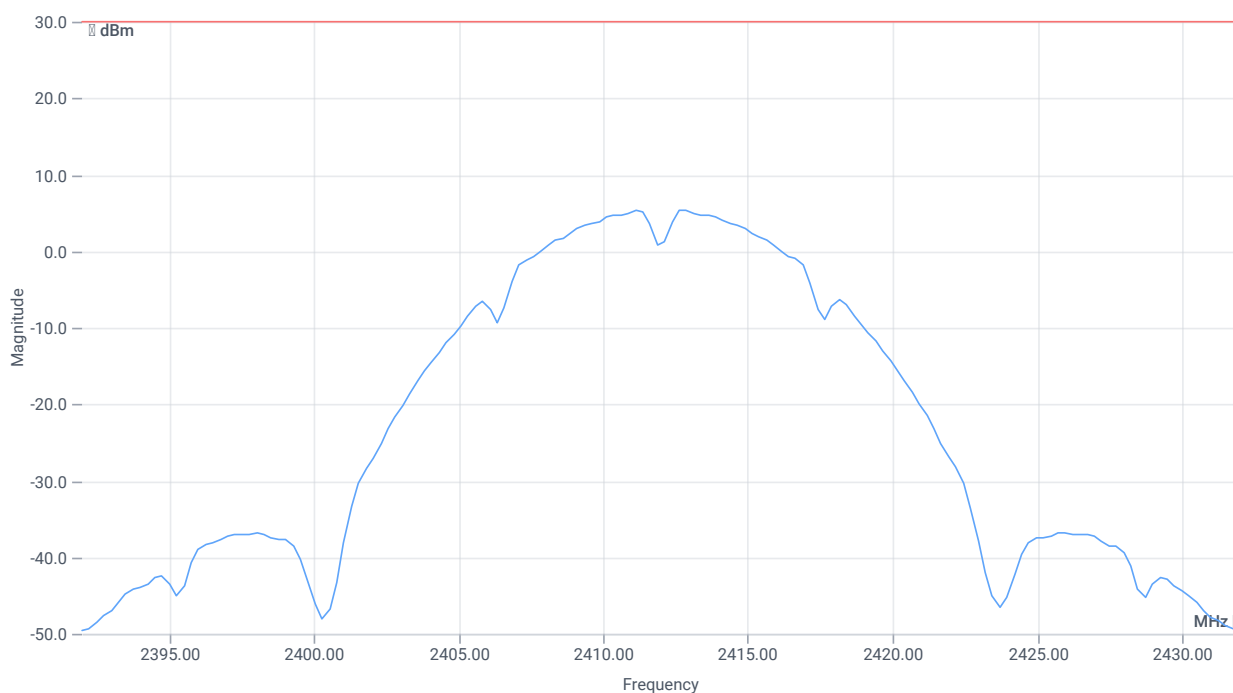

Avg output power SA DTS

RESULT (Channel power method)

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg output power uncorrected	---	---	15.95	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg power DC corrected	---	30	15.95	dBm	PASS

Verdict

PASS

FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 b mode

References

TC start	16.10.2023 14:15:33
Ambit temp [°C] humidity [rel%]	27.0 30
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.9.2.2.2 or .4
Description	FCC 15.247 Avg output power SA DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	10.88	dBm	INFO
Ref. Frequency	---	---	2438.200	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg output power SA DTS

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	20.88 14.01 25
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	500 100 160 SWE

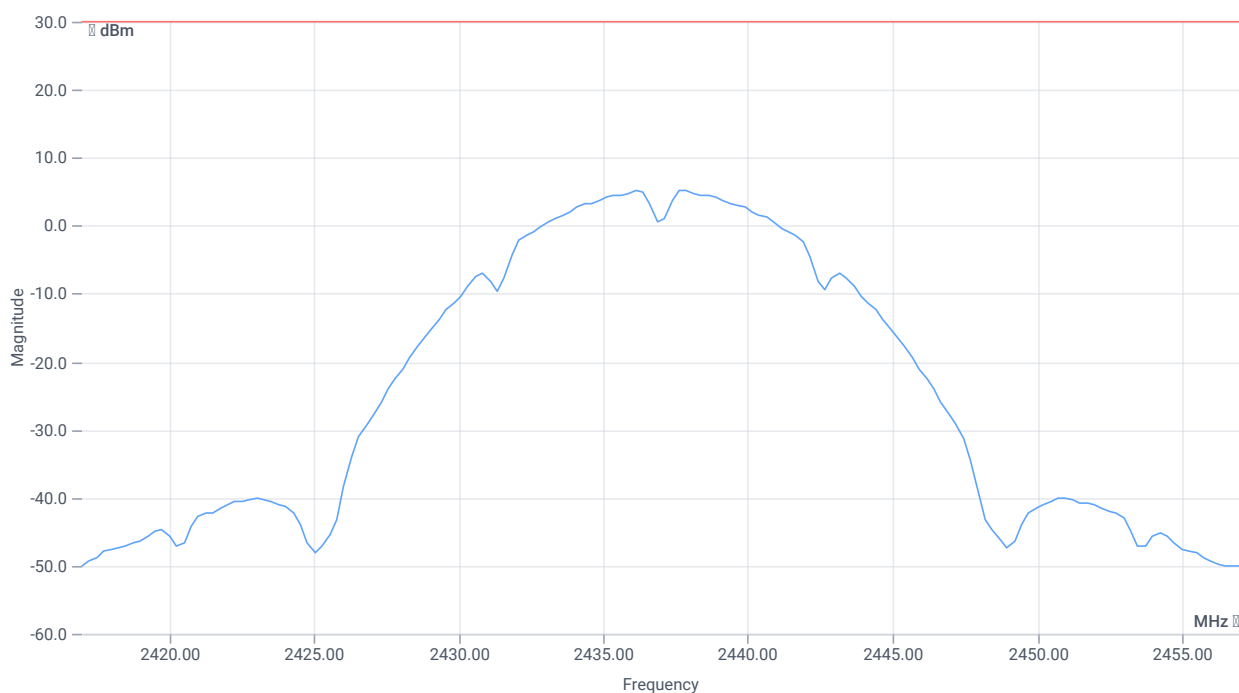

Avg output power SA DTS

RESULT (Channel power method)

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg output power uncorrected	---	---	15.72	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg power DC corrected	---	30	15.72	dBm	PASS

Verdict

PASS

FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 b mode

References

TC start	16.10.2023 14:25:45
Ambit temp [°C] humidity [rel%]	27.1 29
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.9.2.2.2 or .4
Description	FCC 15.247 Avg output power SA DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	11.76	dBm	INFO
Ref. Frequency	---	---	2438.100	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg output power SA DTS

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	21.76 14.01 25
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	500 100 160 SWE

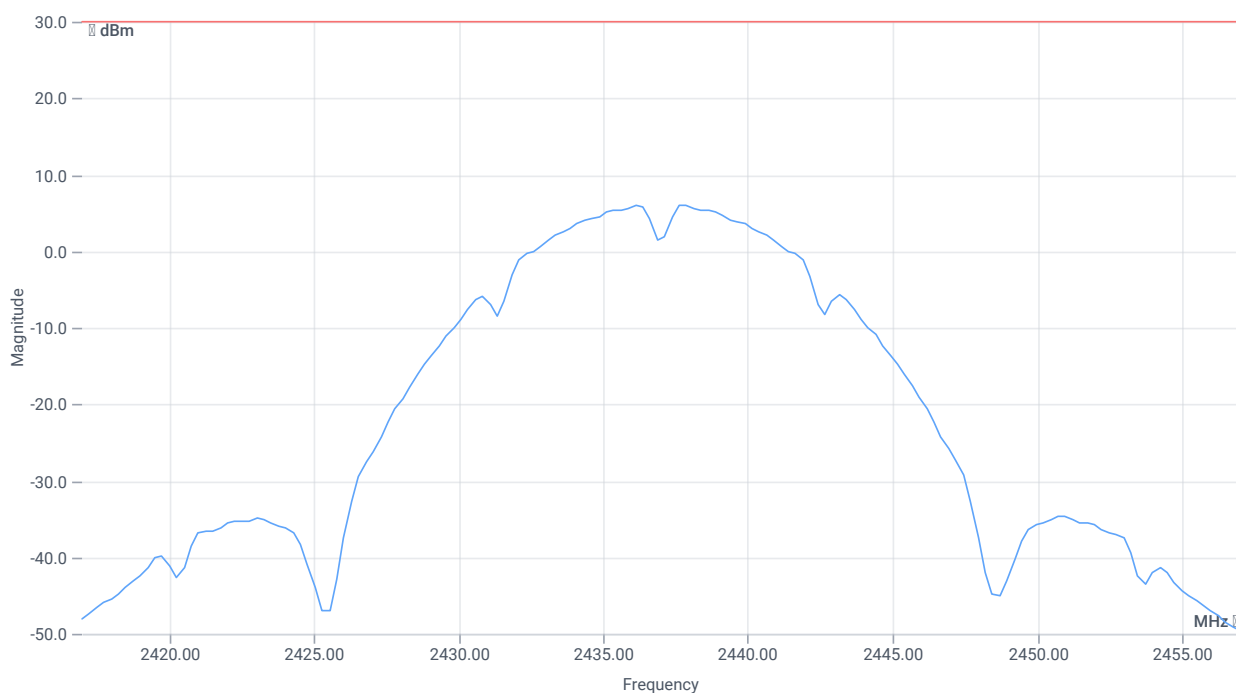

Avg output power SA DTS

RESULT (Channel power method)

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg output power uncorrected	---	---	16.62	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg power DC corrected	---	30	16.62	dBm	PASS

Verdict

PASS

FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 b mode

References

TC start	16.10.2023 14:36:26
Ambit temp [°C] humidity [rel%]	27.3 28
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.9.2.2.2 or .4
Description	FCC 15.247 Avg output power SA DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	11.70	dBm	INFO
Ref. Frequency	---	---	2463.200	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg output power SA DTS

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	21.70 14.14 25
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	500 100 160 SWE

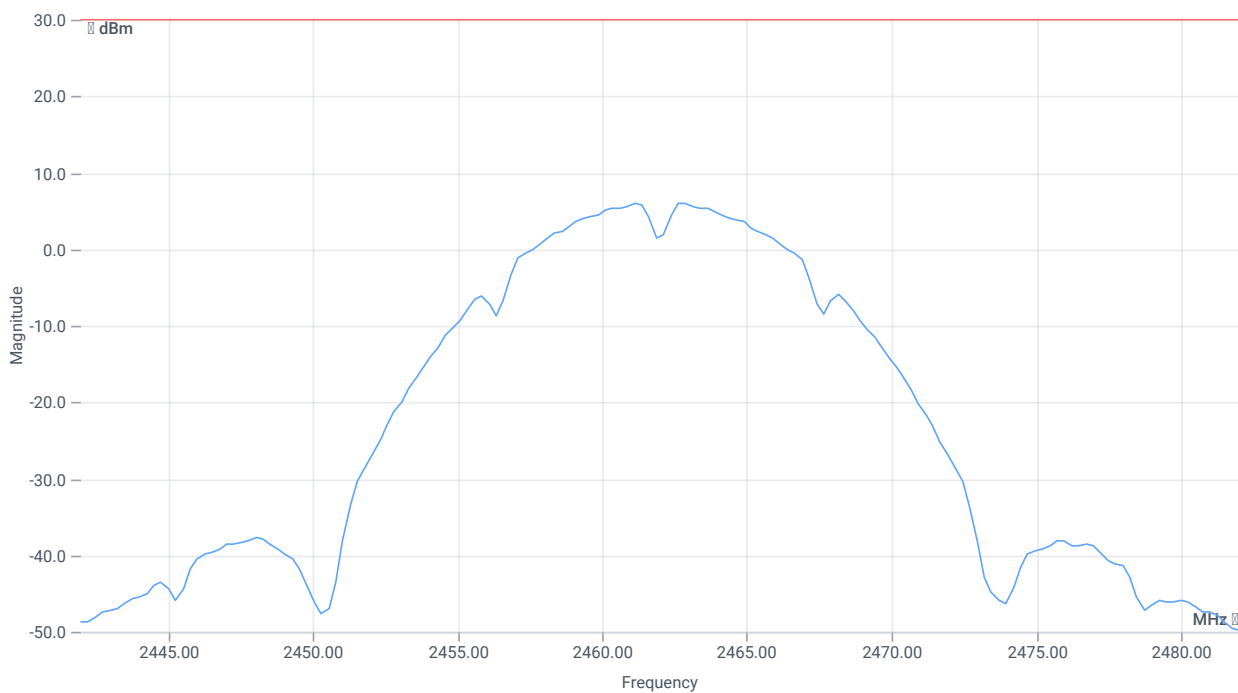

Avg output power SA DTS

RESULT (Channel power method)

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg output power uncorrected	---	---	16.57	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg power DC corrected	---	30	16.57	dBm	PASS

Verdict

PASS

FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 b mode

References

TC start	16.10.2023 14:46:37
Ambit temp [°C] humidity [rel%]	27.5 28
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.9.2.2.2 or .4
Description	FCC 15.247 Avg output power SA DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	12.00	dBm	INFO
Ref. Frequency	---	---	2460.800	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg output power SA DTS

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	22.00 14.14 25
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	500 100 160 SWE

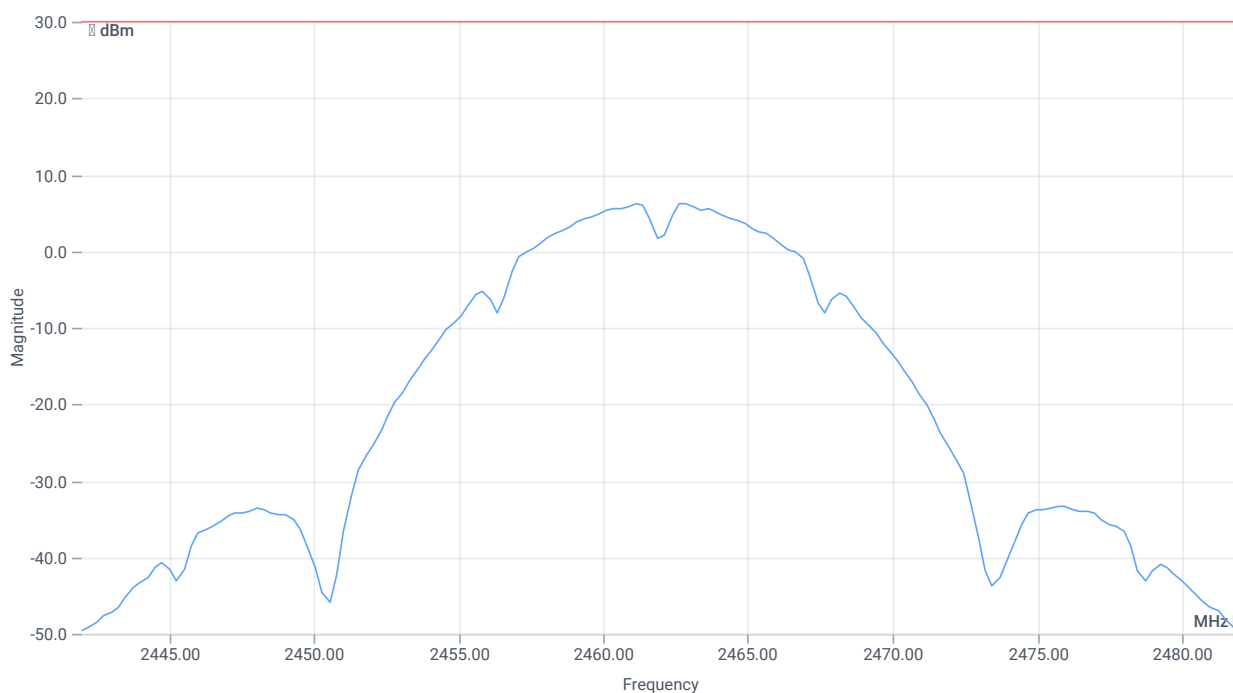

Avg output power SA DTS

RESULT (Channel power method)

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg output power uncorrected	---	---	16.84	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg power DC corrected	---	30	16.84	dBm	PASS

Verdict

PASS

FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 g mode

References

TC start	16.10.2023 14:57:41
Ambit temp [°C] humidity [rel%]	27.4 27
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.9.2.2.2 or .4
Description	FCC 15.247 Avg output power SA DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	8.68	dBm	INFO
Ref. Frequency	---	---	2411.200	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg output power SA DTS

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.68 13.85 20
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	500 100 160 SWE

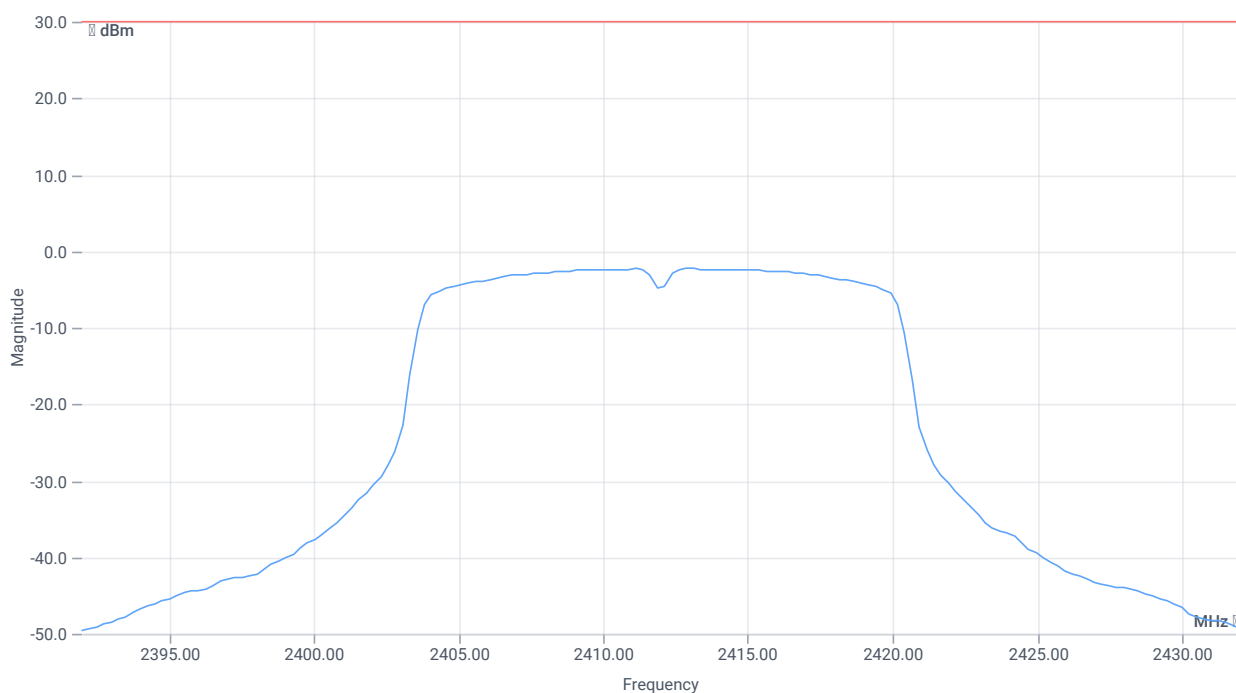

Avg output power SA DTS

RESULT (Channel power method)

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg output power uncorrected	---	---	11.75	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg power DC corrected	---	30	11.75	dBm	PASS

Verdict

PASS

FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 g mode

References

TC start	16.10.2023 15:07:54
Ambit temp [°C] humidity [rel%]	27.4 27
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.9.2.2.2 or .4
Description	FCC 15.247 Avg output power SA DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.92	dBm	INFO
Ref. Frequency	---	---	2409.600	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg output power SA DTS

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.92 13.85 25
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	500 100 160 SWE

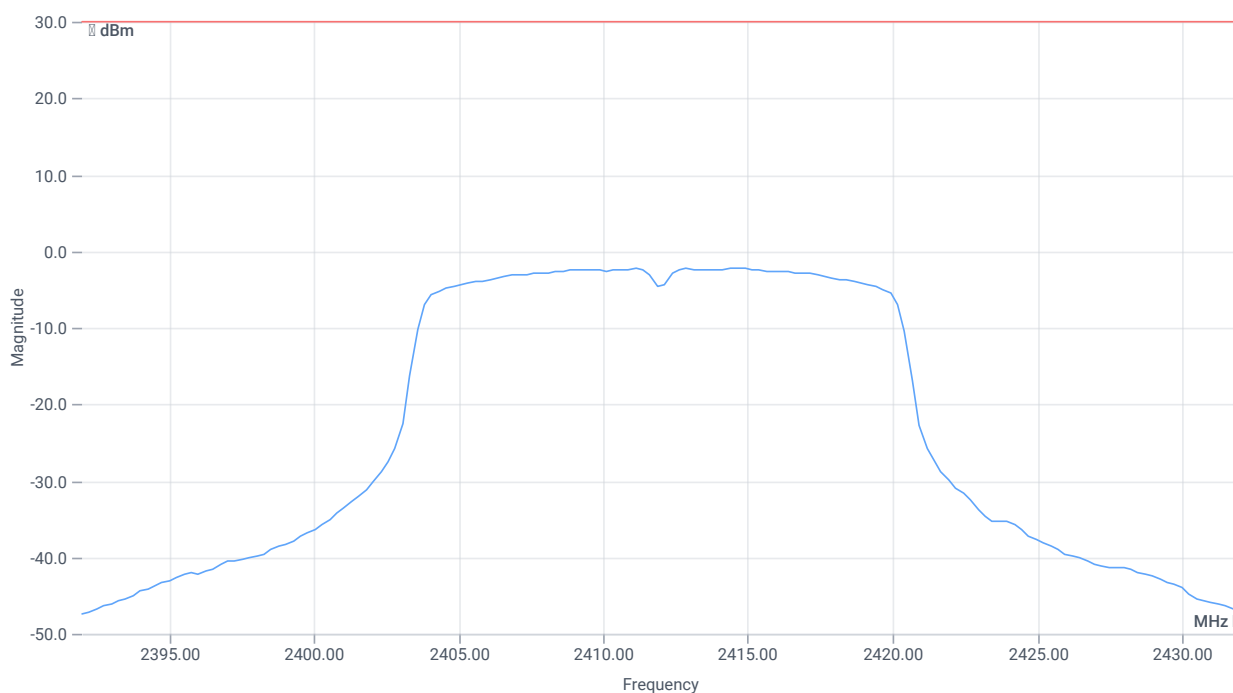

Avg output power SA DTS

RESULT (Channel power method)

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg output power uncorrected	---	---	11.75	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg power DC corrected	---	30	11.75	dBm	PASS

Verdict

PASS

FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 g mode

References

TC start	16.10.2023 15:26:44
Ambit temp [°C] humidity [rel%]	27.7 28
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.9.2.2.2 or .4
Description	FCC 15.247 Avg output power SA DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.54	dBm	INFO
Ref. Frequency	---	---	2439.900	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg output power SA DTS

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.54 14.01 20
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	500 100 160 SWE

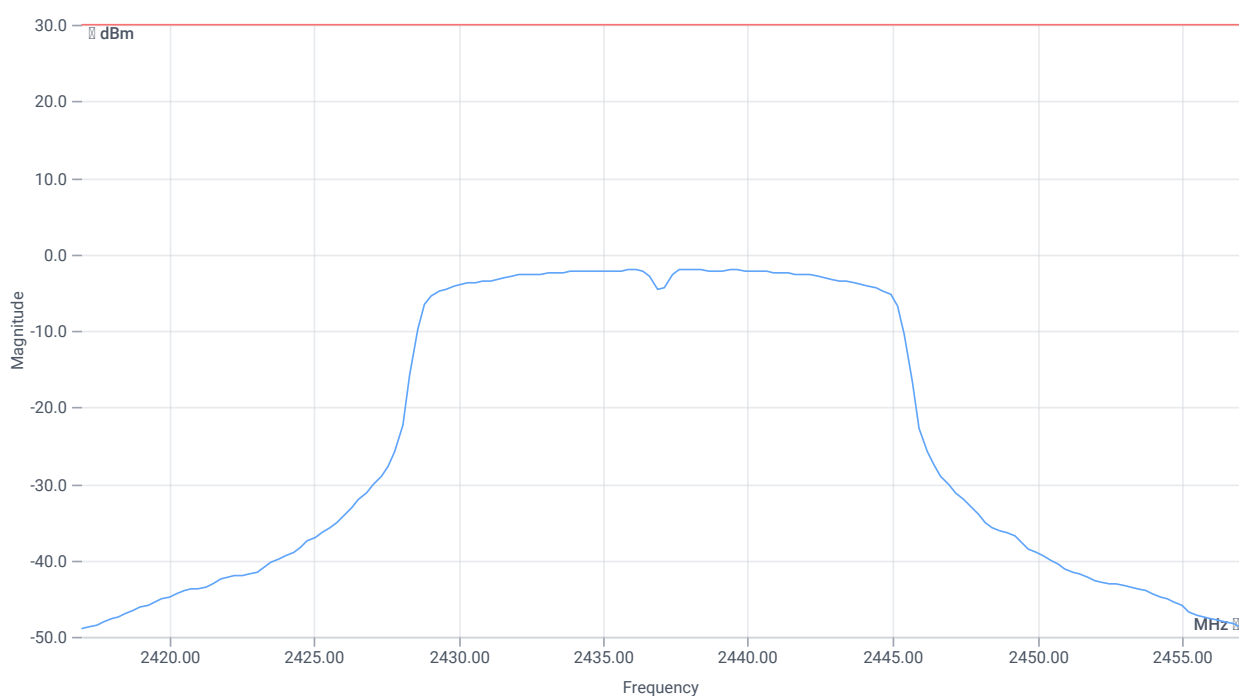

Avg output power SA DTS

RESULT (Channel power method)

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg output power uncorrected	---	---	12.01	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg power DC corrected	---	30	12.01	dBm	PASS

Verdict

PASS

FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 g mode

References

TC start	16.10.2023 15:36:55
Ambit temp [°C] humidity [rel%]	27.9 28
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.9.2.2.2 or .4
Description	FCC 15.247 Avg output power SA DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.67	dBm	INFO
Ref. Frequency	---	---	2432.800	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg output power SA DTS

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.67 14.01 20
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	500 100 160 SWE

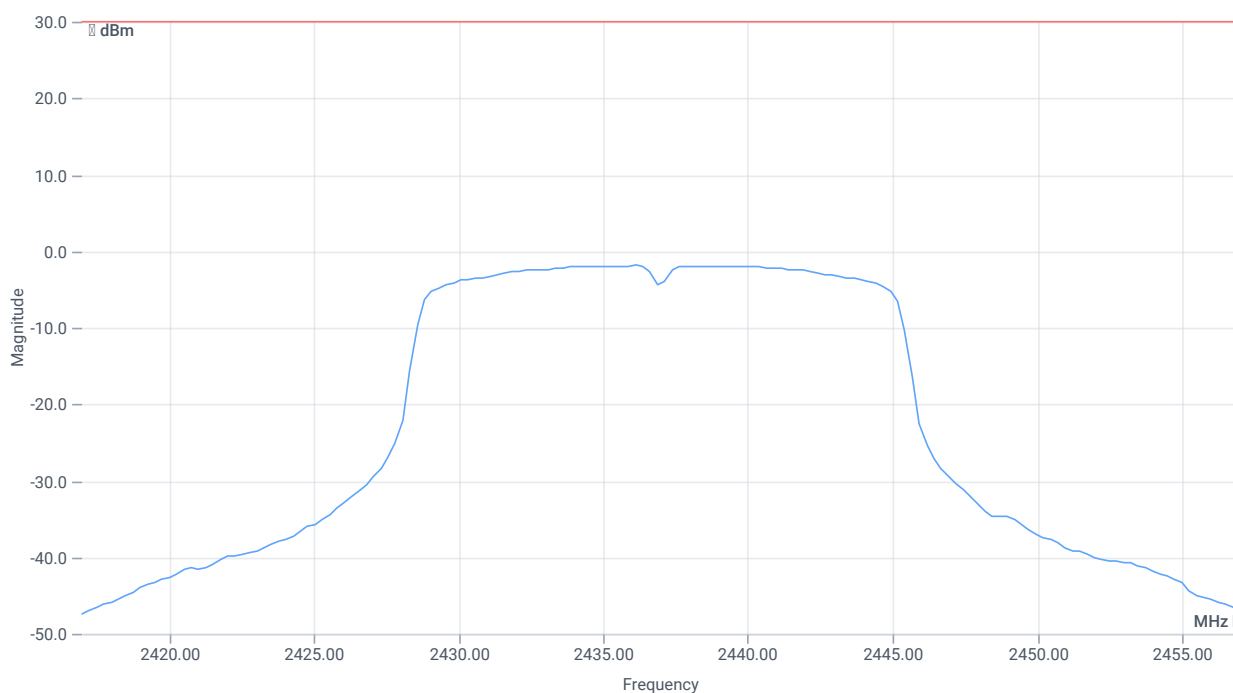

Avg output power SA DTS

RESULT (Channel power method)

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg output power uncorrected	---	---	12.17	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg power DC corrected	---	30	12.17	dBm	PASS

Verdict

PASS

FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 g mode

References

TC start	16.10.2023 15:47:36
Ambit temp [°C] humidity [rel%]	27.8 26
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.9.2.2.2 or .4
Description	FCC 15.247 Avg output power SA DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	10.21	dBm	INFO
Ref. Frequency	---	---	2464.600	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg output power SA DTS

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	20.21 14.14 25
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	500 100 160 SWE

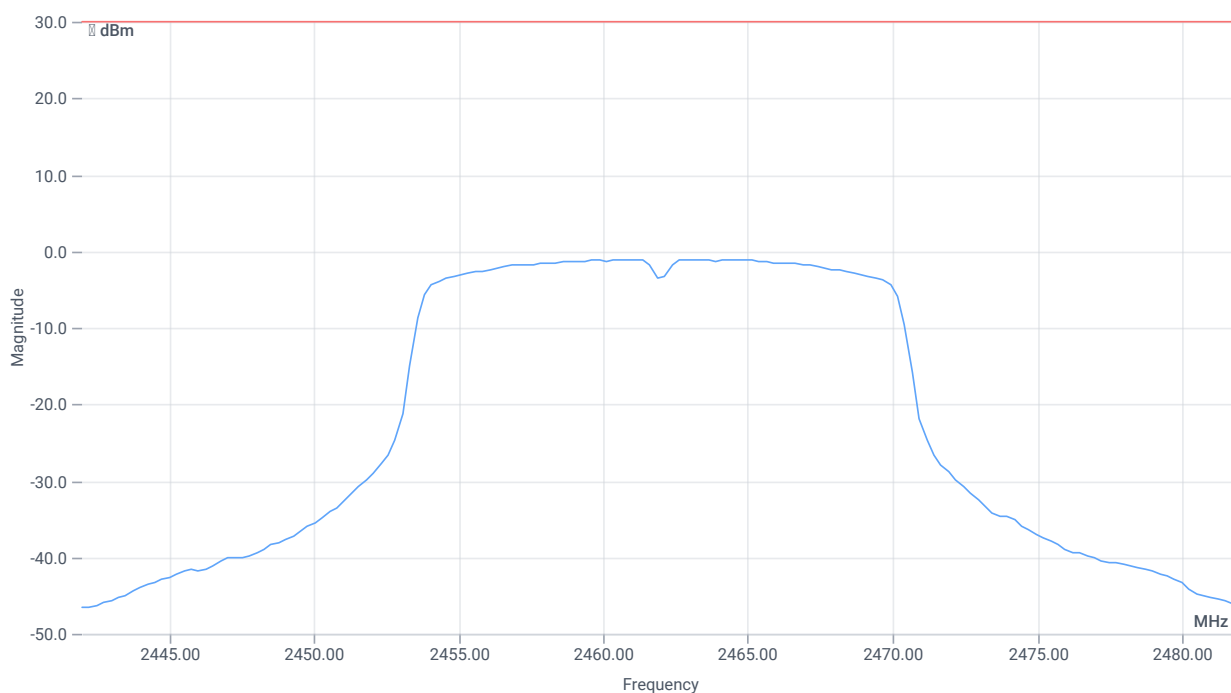

Avg output power SA DTS

RESULT (Channel power method)

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg output power uncorrected	---	---	12.96	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg power DC corrected	---	30	12.96	dBm	PASS

Verdict

PASS

FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 g mode

References

TC start	16.10.2023 15:57:47
Ambit temp [°C] humidity [rel%]	27.3 26
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.9.2.2.2 or .4
Description	FCC 15.247 Avg output power SA DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	10.42	dBm	INFO
Ref. Frequency	---	---	2459.800	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg output power SA DTS

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	20.42 14.14 25
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	500 100 160 SWE

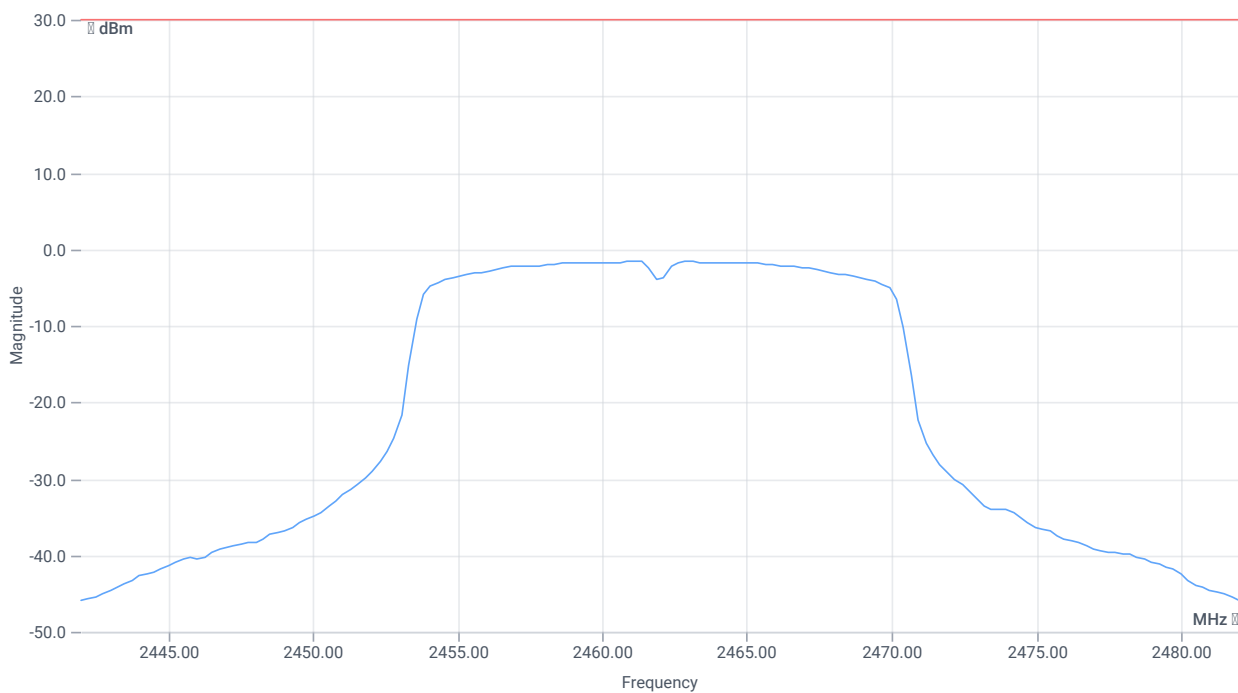

Avg output power SA DTS

RESULT (Channel power method)

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg output power uncorrected	---	---	12.44	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg power DC corrected	---	30	12.44	dBm	PASS

Verdict

PASS

FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 n-HT20 mode

References

TC start	16.10.2023 16:11:23
Ambit temp [°C] humidity [rel%]	27.3 27
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.9.2.2.2 or .4
Description	FCC 15.247 Avg output power SA DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.77	dBm	INFO
Ref. Frequency	---	---	2415.300	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg output power SA DTS

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.77 13.85 20
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	500 100 160 SWE

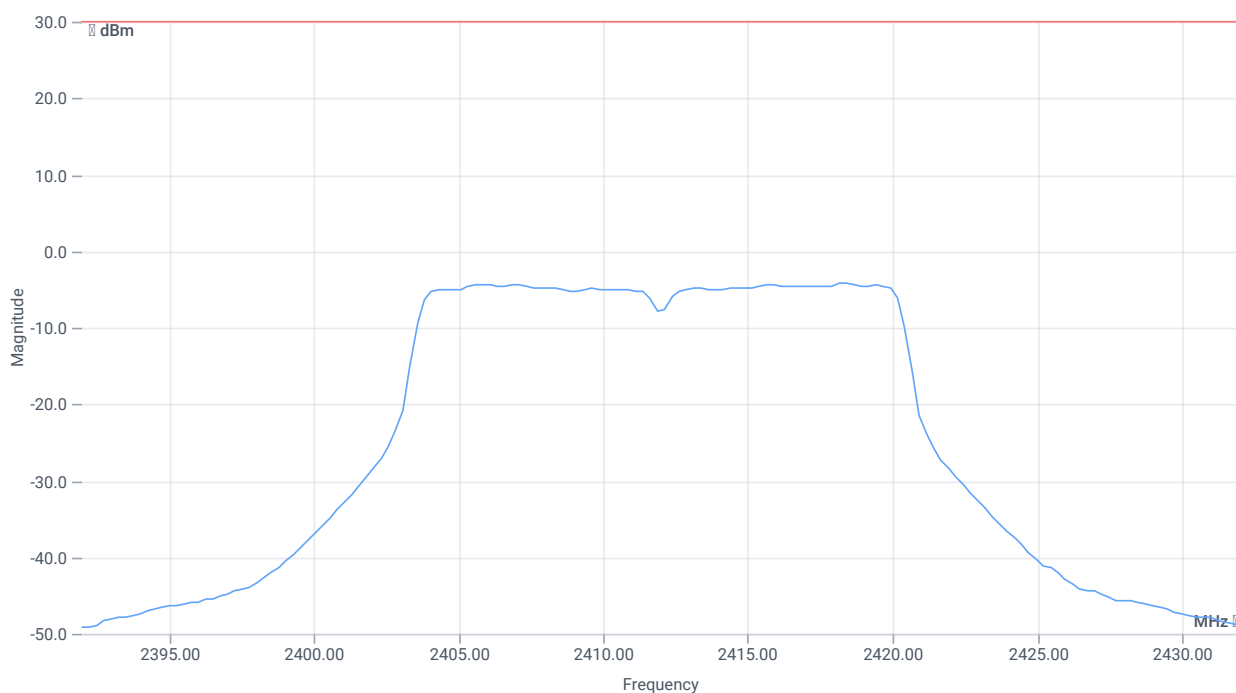

Avg output power SA DTS

RESULT (Channel power method)

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg output power uncorrected	---	---	10.08	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg power DC corrected	---	30	10.08	dBm	PASS

Verdict

PASS

FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 n-HT20 mode

References

TC start	16.10.2023 16:21:36
Ambit temp [°C] humidity [rel%]	27.5 27
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.9.2.2.2 or .4
Description	FCC 15.247 Avg output power SA DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.29	dBm	INFO
Ref. Frequency	---	---	2417.000	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg output power SA DTS

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.29 13.85 20
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	500 100 160 SWE

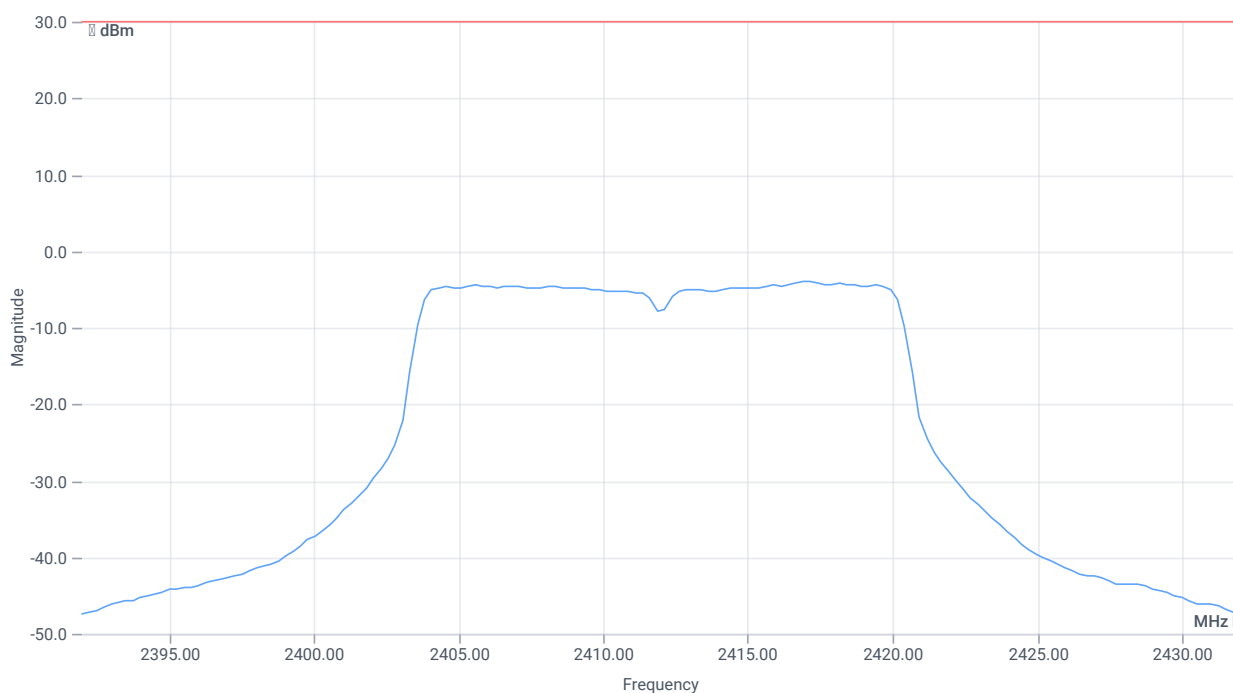

Avg output power SA DTS

RESULT (Channel power method)

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg output power uncorrected	---	---	10.11	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg power DC corrected	---	30	10.11	dBm	PASS

Verdict
PASS

FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 n-HT20 mode

References

TC start	16.10.2023 16:32:22
Ambit temp [°C] humidity [rel%]	27.7 27
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.9.2.2.2 or .4
Description	FCC 15.247 Avg output power SA DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.66	dBm	INFO
Ref. Frequency	---	---	2440.200	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg output power SA DTS

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.66 14.01 20
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	500 100 160 SWE

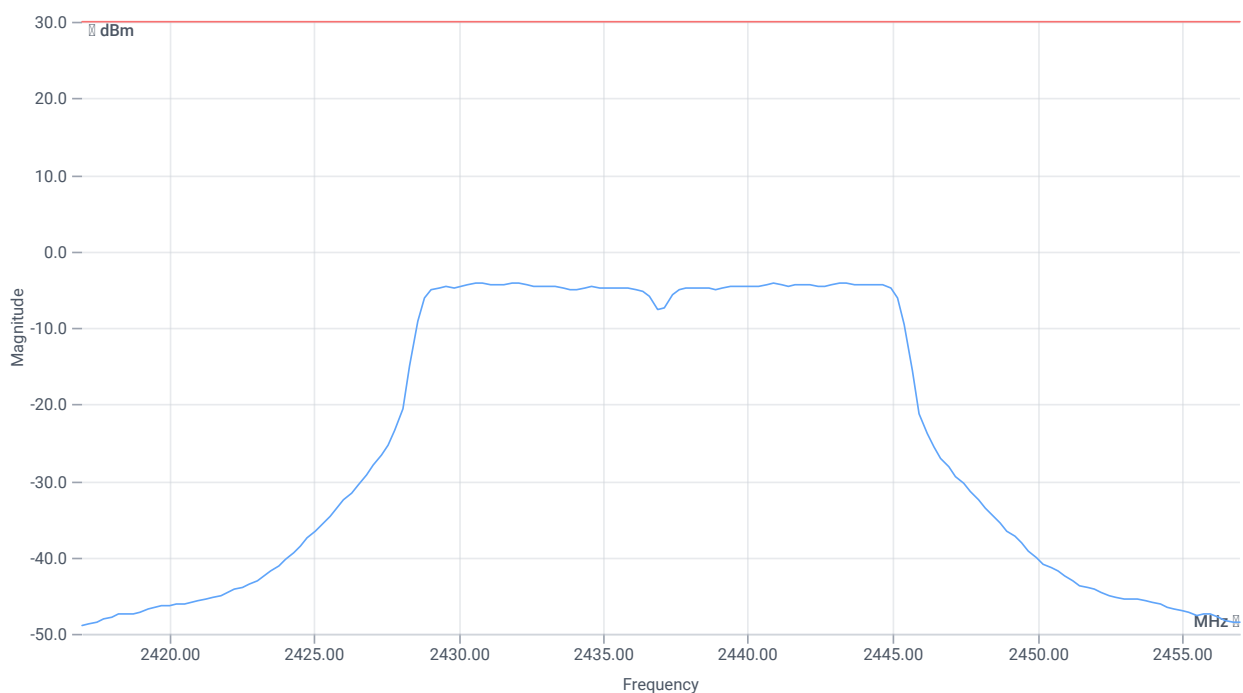

Avg output power SA DTS

RESULT (Channel power method)

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg output power uncorrected	---	---	10.25	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg power DC corrected	---	30	10.25	dBm	PASS

Verdict

PASS

FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 n-HT20 mode

References

TC start	16.10.2023 16:42:35
Ambit temp [°C] humidity [rel%]	27.8 26
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.9.2.2.2 or .4
Description	FCC 15.247 Avg output power SA DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Verdict

PASS

FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 n-HT20 mode

References

TC start	16.10.2023 16:52:01
Ambit temp [°C] humidity [rel%]	27.9 26
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.9.2.2.2 or .4
Description	FCC 15.247 Avg output power SA DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.83	dBm	INFO
Ref. Frequency	---	---	2458.800	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg output power SA DTS

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.83 14.14 20
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	500 100 160 SWE

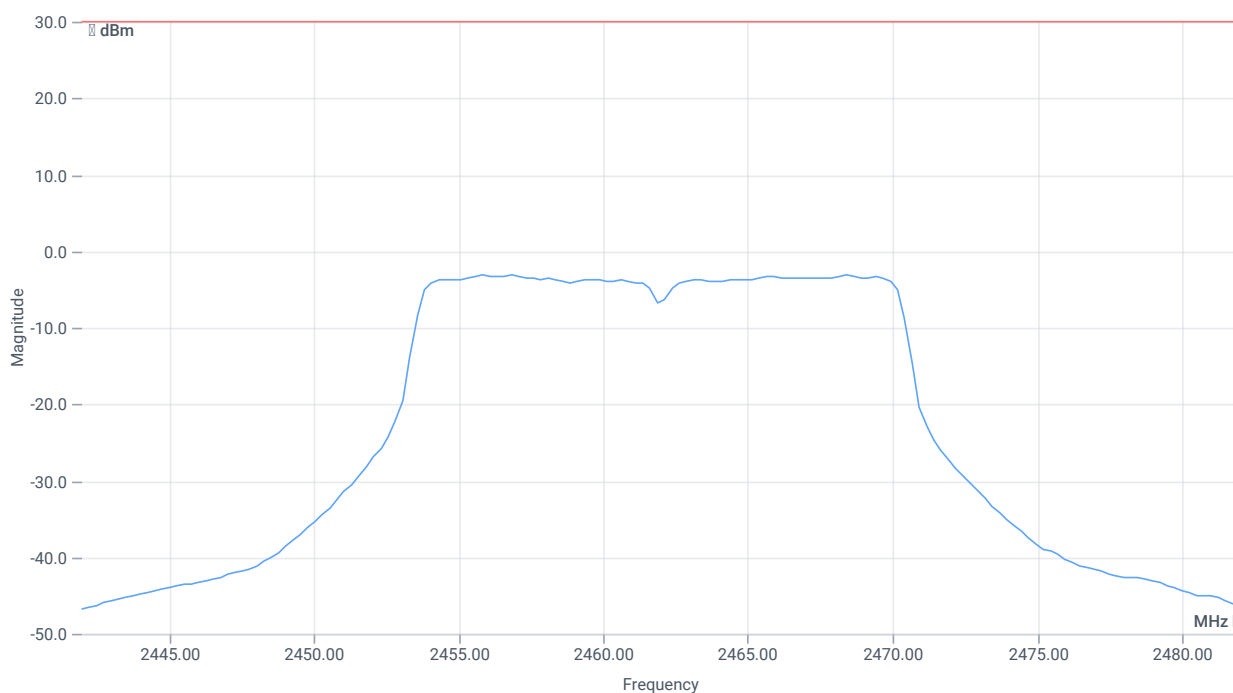

Avg output power SA DTS

RESULT (Channel power method)

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg output power uncorrected	---	---	11.21	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg power DC corrected	---	30	11.21	dBm	PASS

Verdict

PASS

FCC 15.247 # Avg output power SA DTS ~ WLAN2G4 n-HT20 mode

References

TC start	16.10.2023 17:02:13
Ambit temp [°C] humidity [rel%]	28.1 27
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.9.2.2.2 or .4
Description	FCC 15.247 Avg output power SA DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.70	dBm	INFO
Ref. Frequency	---	---	2456.410	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg output power SA DTS

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.70 14.14 20
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	500 100 160 SWE

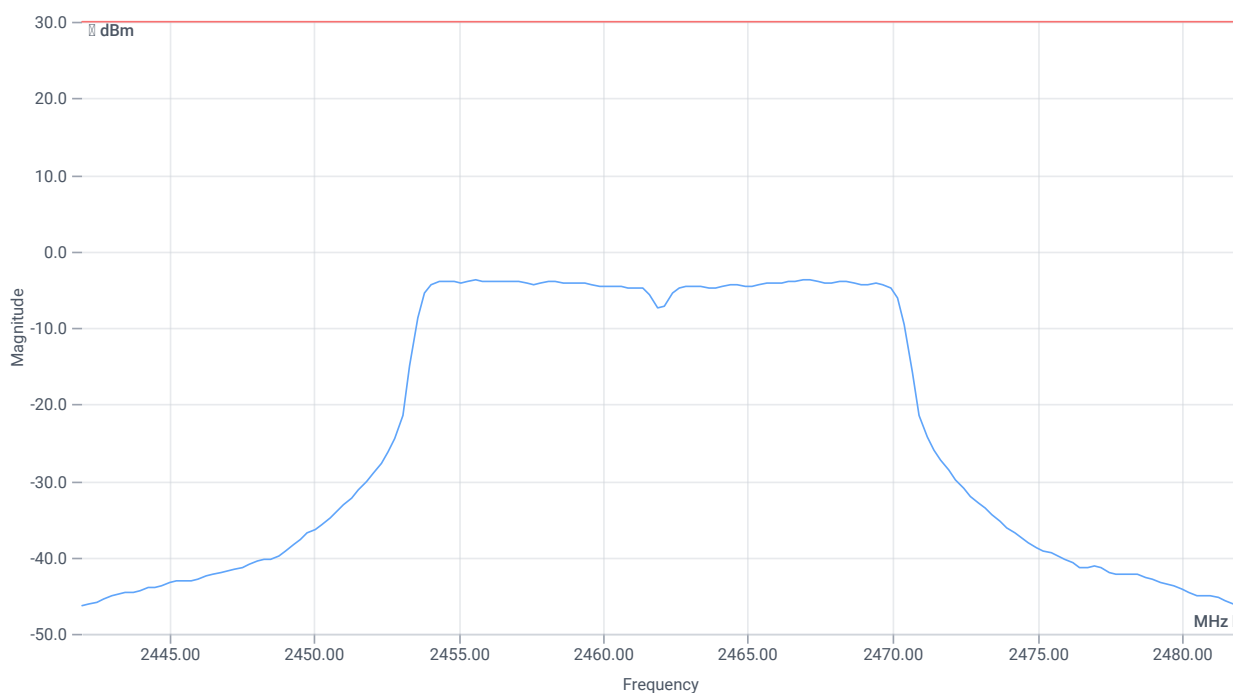

Avg output power SA DTS

RESULT (Channel power method)

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg output power uncorrected	---	---	10.57	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg power DC corrected	---	30	10.57	dBm	PASS

Verdict

PASS

FCC 15.247 # Avg psd DTS ~ WLAN2G4 b mode

References

TC start	16.10.2023 13:37:24
Ambit temp [°C] humidity [rel%]	25.9 31
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.10.5 or.3
Description	FCC 15.247 Avg psd DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	10.51	dBm	INFO
Ref. Frequency	---	---	2413.100	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg. psd

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.51 13.85 20
Start [MHz] Stop [MHz]	2397.000 2427.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	334 100 1001 SWE

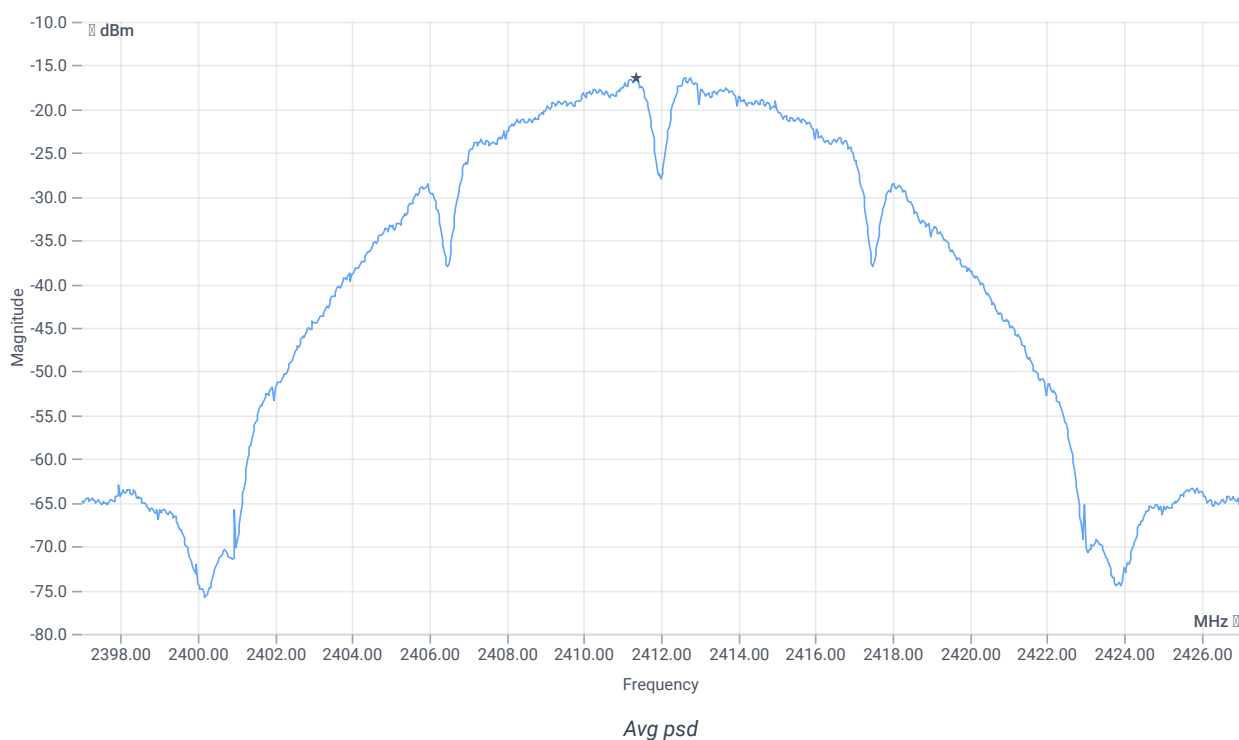

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg psd uncorrected	---	---	-16.48	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg psd DC corrected	---	8	-16.48	dBm/3kHz	PASS

Verdict

PASS

FCC 15.247 # Avg psd DTS ~ WLAN2G4 b mode

References

TC start	16.10.2023 13:47:37
Ambit temp [°C] humidity [rel%]	26.2 30
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.10.5 or.3
Description	FCC 15.247 Avg psd DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	11.15	dBm	INFO
Ref. Frequency	---	---	2413.200	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg. psd

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.15 13.85 20
Start [MHz] Stop [MHz]	2397.000 2427.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	334 100 1001 SWE

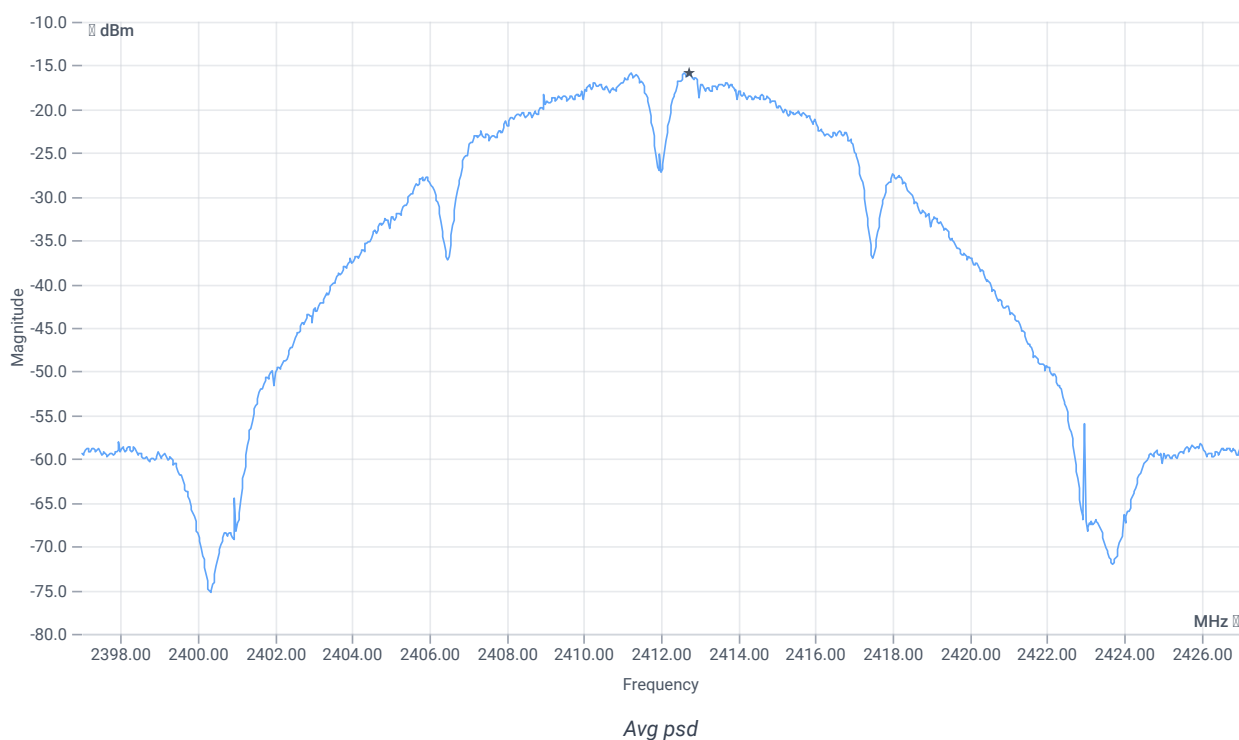

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg psd uncorrected	---	---	-15.91	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg psd DC corrected	---	8	-15.91	dBm/3kHz	PASS

Verdict

PASS

FCC 15.247 # Avg psd DTS ~ WLAN2G4 b mode

References

TC start	16.10.2023 14:05:16
Ambit temp [°C] humidity [rel%]	26.7 30
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.10.5 or.3
Description	FCC 15.247 Avg psd DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	11.29	dBm	INFO
Ref. Frequency	---	---	2438.200	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg. psd

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.29 14.01 20
Start [MHz] Stop [MHz]	2422.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	334 100 1001 SWE

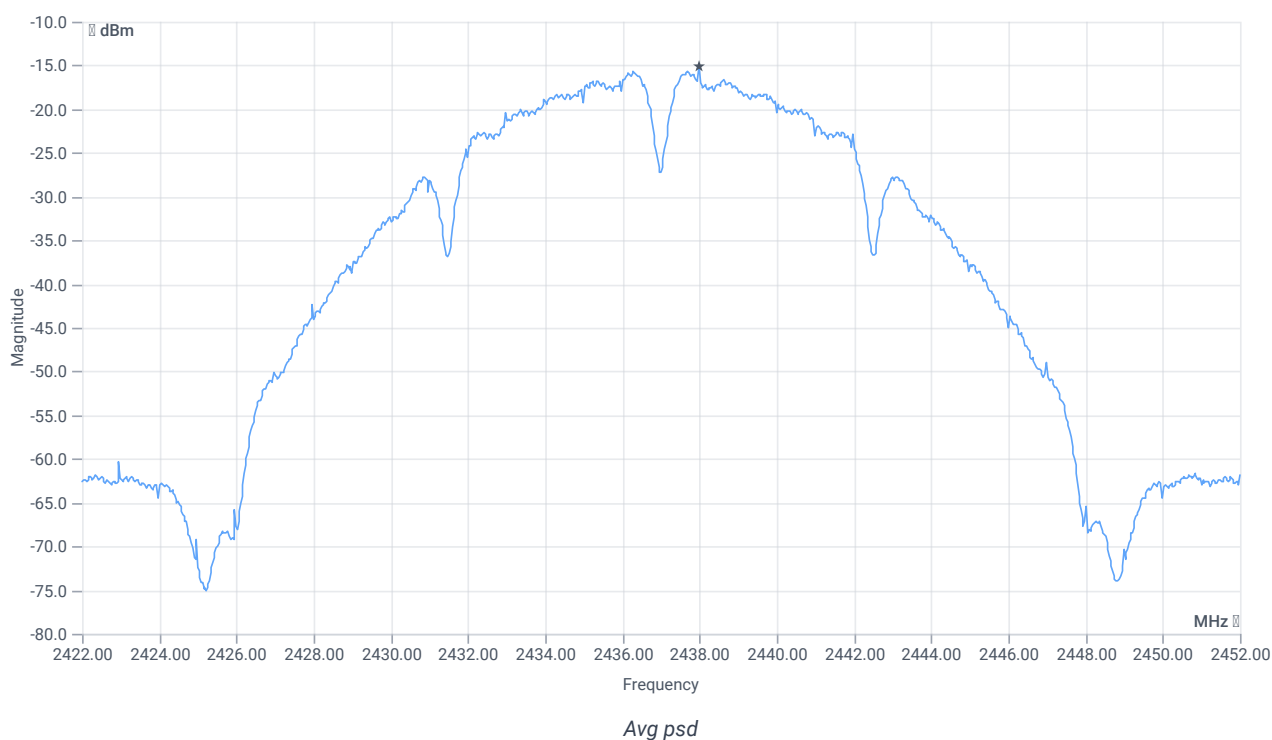

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg psd uncorrected	---	---	-15.18	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg psd DC corrected	---	8	-15.18	dBm/3kHz	PASS

Verdict

PASS

FCC 15.247 # Avg psd DTS ~ WLAN2G4 b mode

References

TC start	16.10.2023 14:17:21
Ambit temp [°C] humidity [rel%]	27.1 30
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.10.5 or.3
Description	FCC 15.247 Avg psd DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	11.70	dBm	INFO
Ref. Frequency	---	---	2438.200	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg. psd

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.70 14.01 20
Start [MHz] Stop [MHz]	2422.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	334 100 1001 SWE

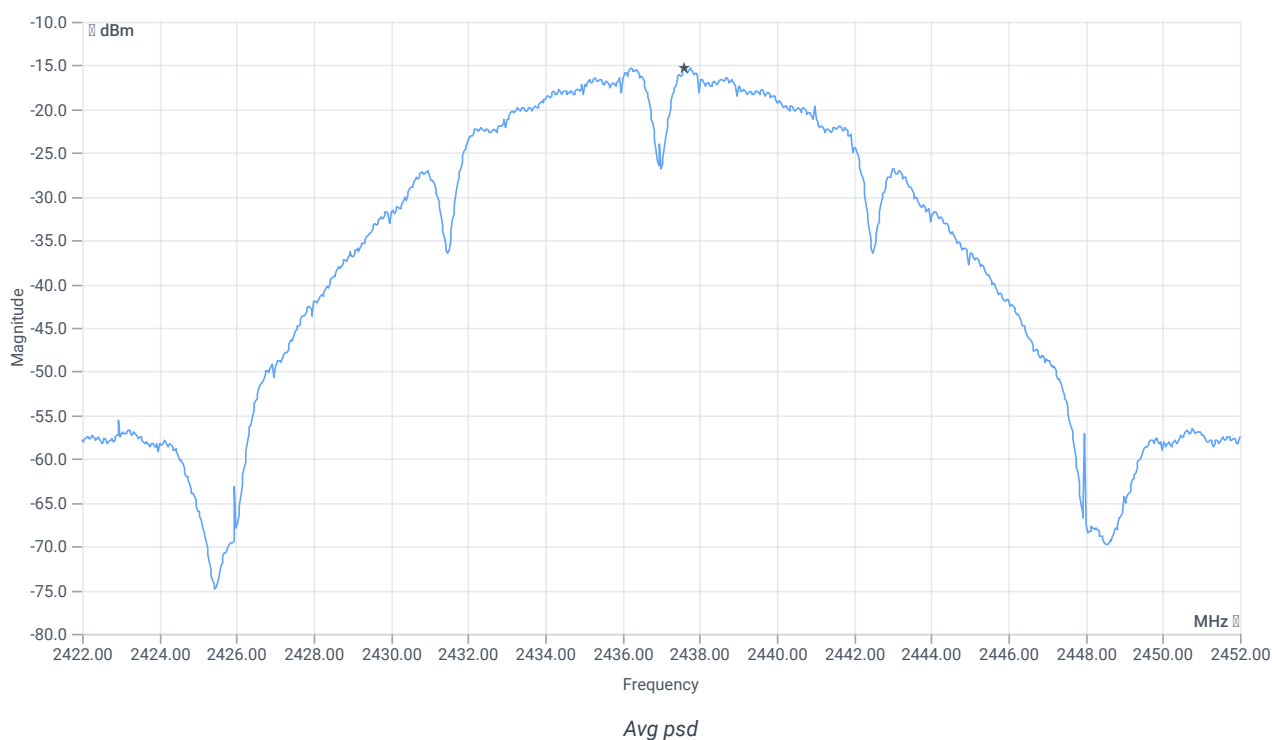

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg psd uncorrected	---	---	-15.27	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg psd DC corrected	---	8	-15.27	dBm/3kHz	PASS

Verdict

PASS

FCC 15.247 # Avg psd DTS ~ WLAN2G4 b mode

References

TC start	16.10.2023 14:28:01
Ambit temp [°C] humidity [rel%]	27.0 28
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.10.5 or.3
Description	FCC 15.247 Avg psd DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	11.73	dBm	INFO
Ref. Frequency	---	---	2460.800	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg. psd

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.73 14.14 20
Start [MHz] Stop [MHz]	2447.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	334 100 1001 SWE

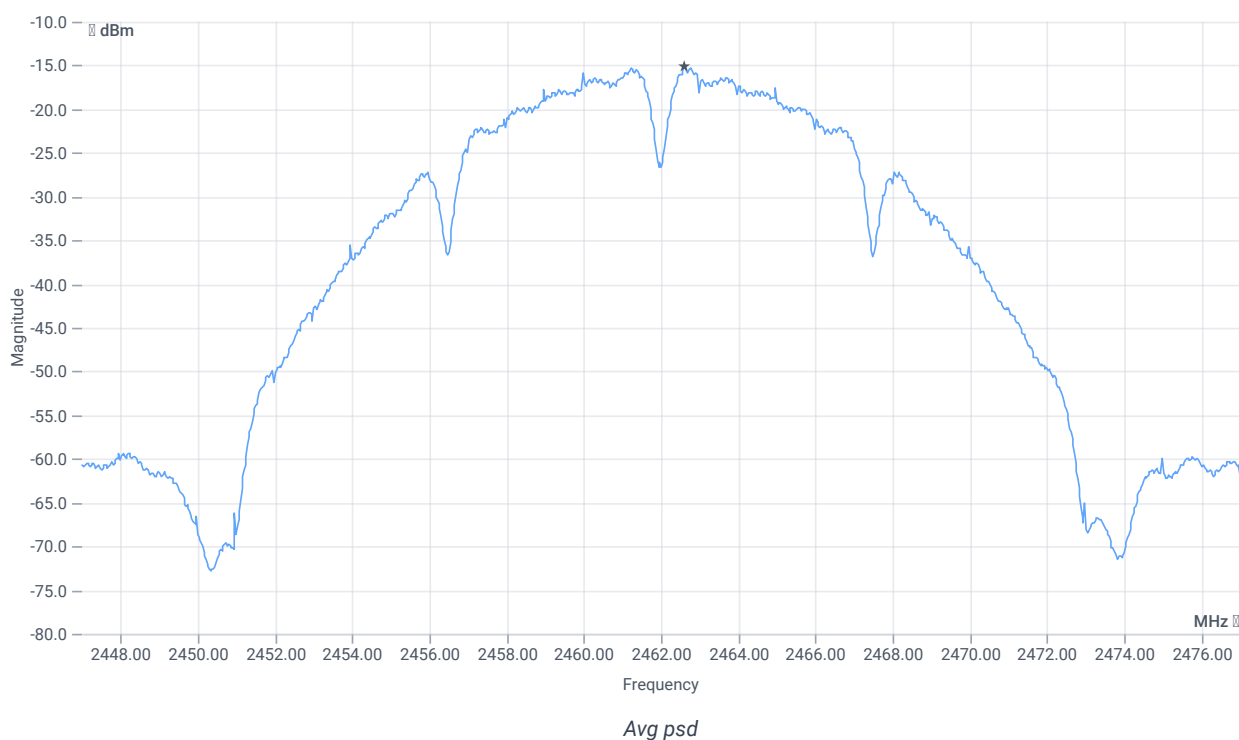

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg psd uncorrected	---	---	-15.16	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg psd DC corrected	---	8	-15.16	dBm/3kHz	PASS

Verdict

PASS

FCC 15.247 # Avg psd DTS ~ WLAN2G4 b mode

References

TC start	16.10.2023 14:38:13
Ambit temp [°C] humidity [rel%]	27.3 28
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.10.5 or.3
Description	FCC 15.247 Avg psd DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	11.97	dBm	INFO
Ref. Frequency	---	---	2460.800	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg. psd

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.97 14.14 20
Start [MHz] Stop [MHz]	2447.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	334 100 1001 SWE

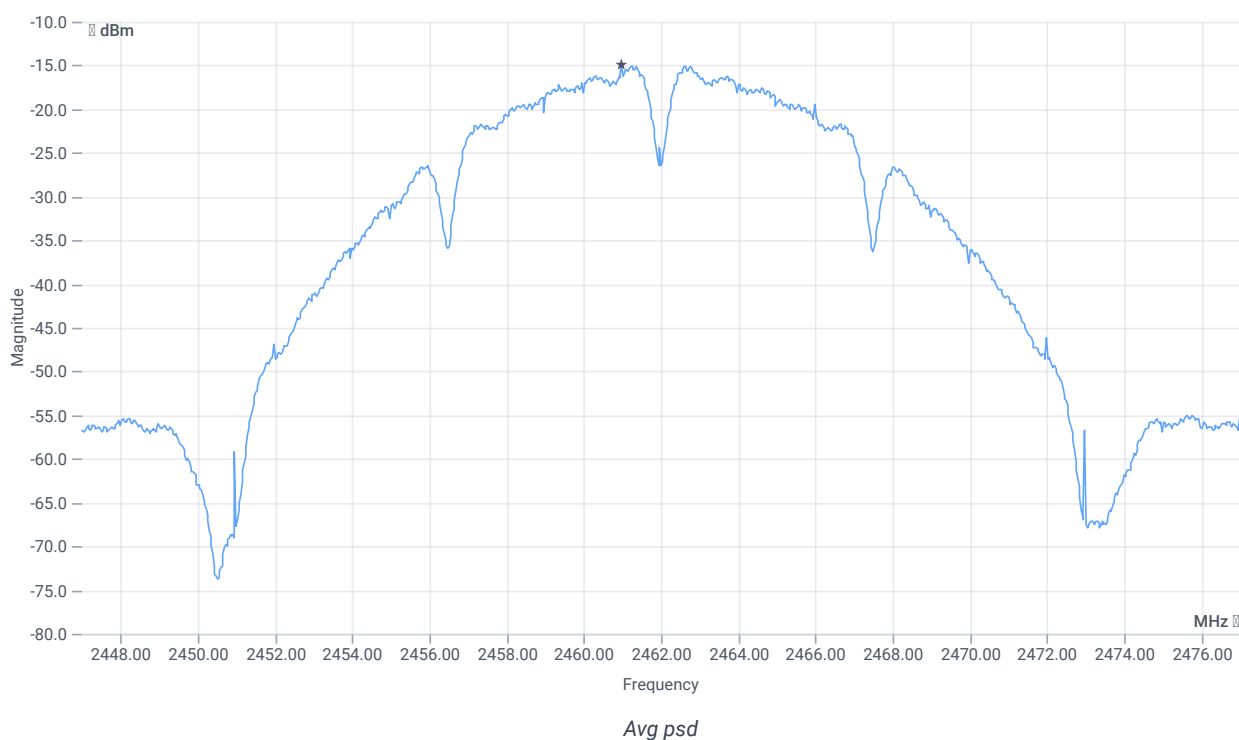

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg psd uncorrected	---	---	-14.95	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg psd DC corrected	---	8	-14.95	dBm/3kHz	PASS

Verdict

PASS

FCC 15.247 # Avg psd DTS ~ WLAN2G4 g mode

References

TC start	16.10.2023 14:49:18
Ambit temp [°C] humidity [rel%]	27.5 28
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.10.5 or.3
Description	FCC 15.247 Avg psd DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.15	dBm	INFO
Ref. Frequency	---	---	2413.300	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg. psd

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.15 13.85 20
Start [MHz] Stop [MHz]	2397.000 2427.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	334 100 1001 SWE

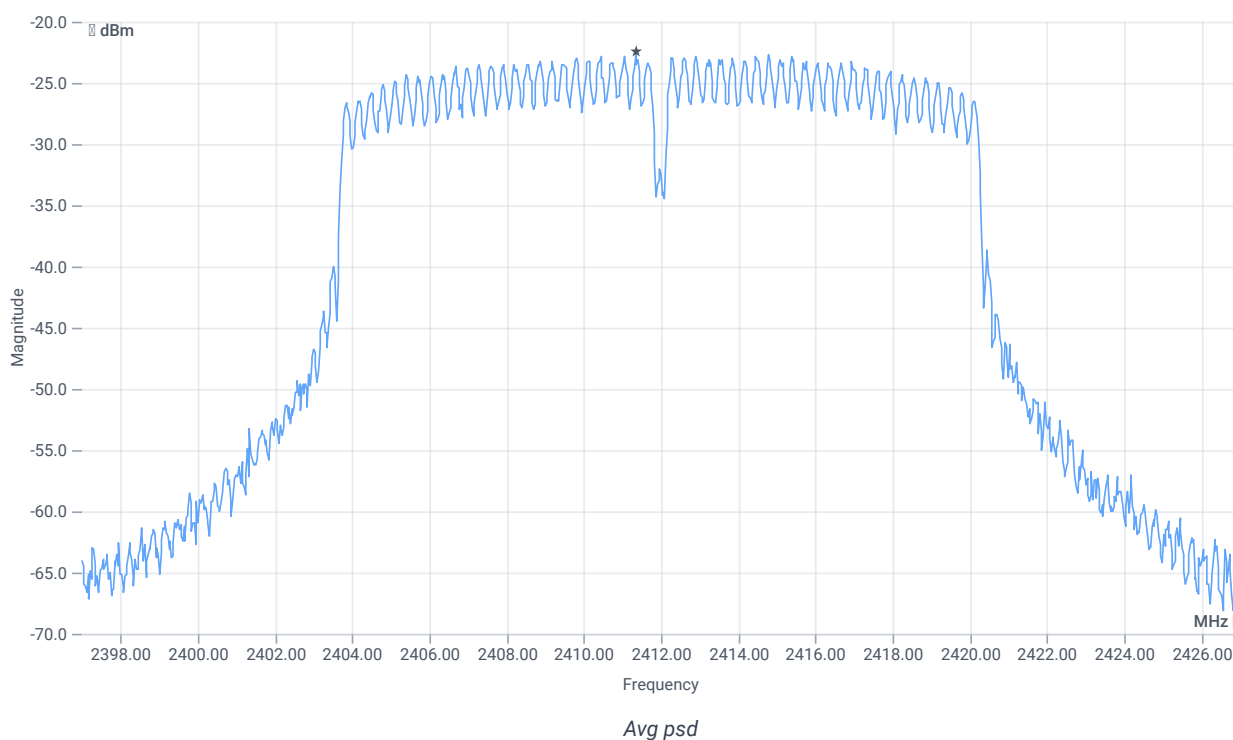

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg psd uncorrected	---	---	-22.43	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg psd DC corrected	---	8	-22.43	dBm/3kHz	PASS

Verdict

PASS

FCC 15.247 # Avg psd DTS ~ WLAN2G4 g mode

References

TC start	16.10.2023 14:59:30
Ambit temp [°C] humidity [rel%]	27.3 27
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.10.5 or.3
Description	FCC 15.247 Avg psd DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.78	dBm	INFO
Ref. Frequency	---	---	2414.000	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg. psd

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.78 13.85 20
Start [MHz] Stop [MHz]	2397.000 2427.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	334 100 1001 SWE

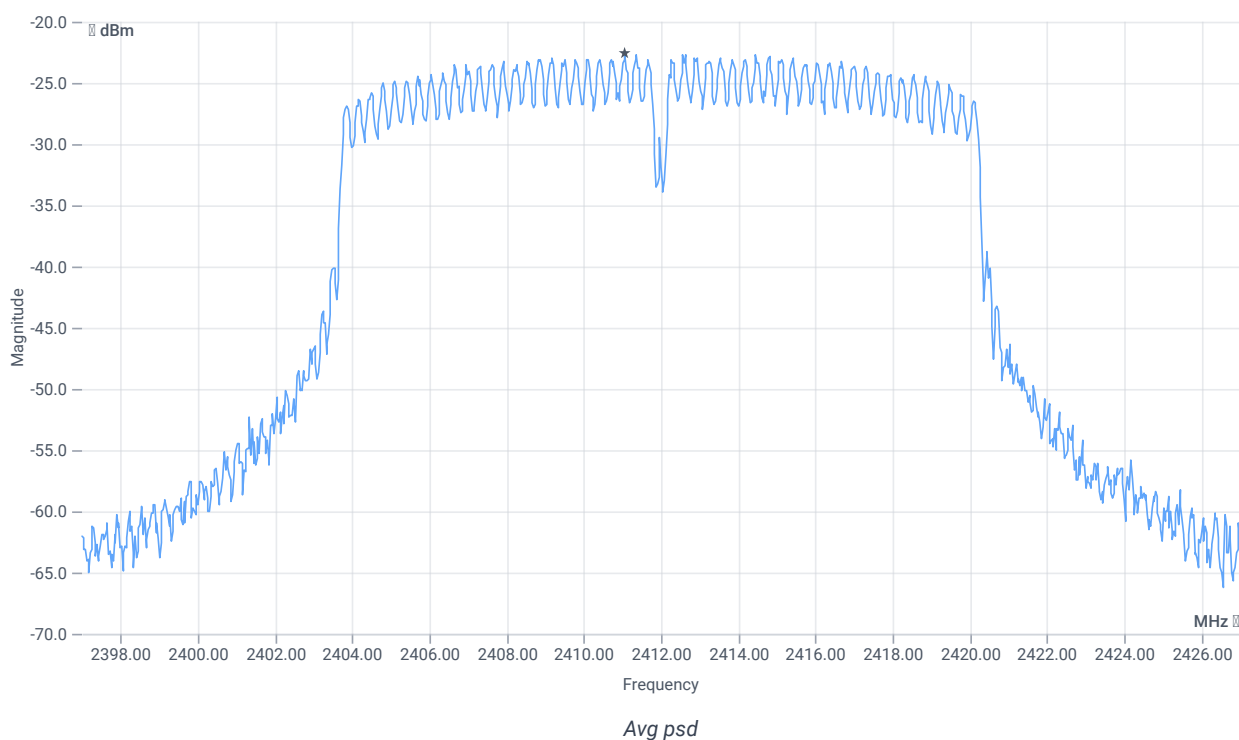

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg psd uncorrected	---	---	-22.52	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg psd DC corrected	---	8	-22.52	dBm/3kHz	PASS

Verdict

PASS

FCC 15.247 # Avg psd DTS ~ WLAN2G4 g mode

References

TC start	16.10.2023 15:18:18
Ambit temp [°C] humidity [rel%]	27.5 28
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.10.5 or.3
Description	FCC 15.247 Avg psd DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	8.86	dBm	INFO
Ref. Frequency	---	---	2436.100	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg. psd

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.86 14.01 15
Start [MHz] Stop [MHz]	2422.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	334 100 1001 SWE

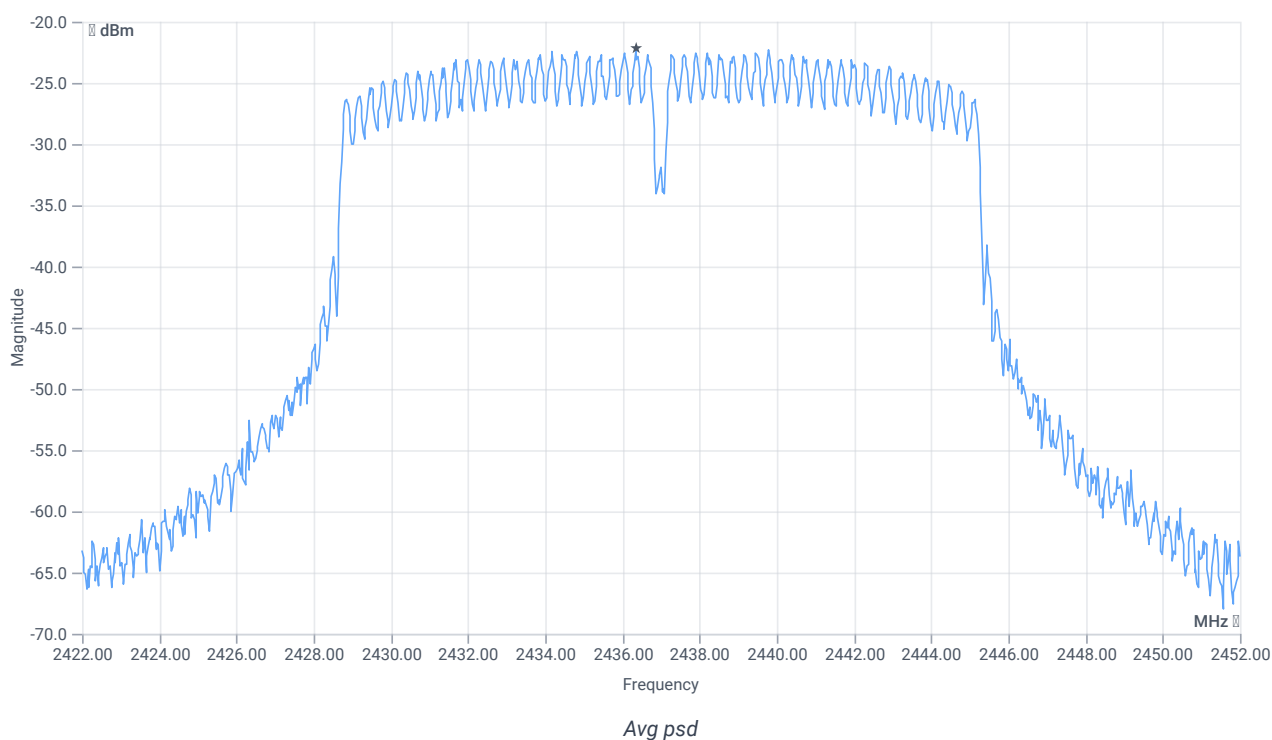

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg psd uncorrected	---	---	-22.12	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg psd DC corrected	---	8	-22.12	dBm/3kHz	PASS

Verdict

PASS

FCC 15.247 # Avg psd DTS ~ WLAN2G4 g mode

References

TC start	16.10.2023 15:28:31
Ambit temp [°C] humidity [rel%]	27.8 28
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.10.5 or.3
Description	FCC 15.247 Avg psd DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	10.73	dBm	INFO
Ref. Frequency	---	---	2439.600	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg. psd

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.73 14.01 20
Start [MHz] Stop [MHz]	2422.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	334 100 1001 SWE

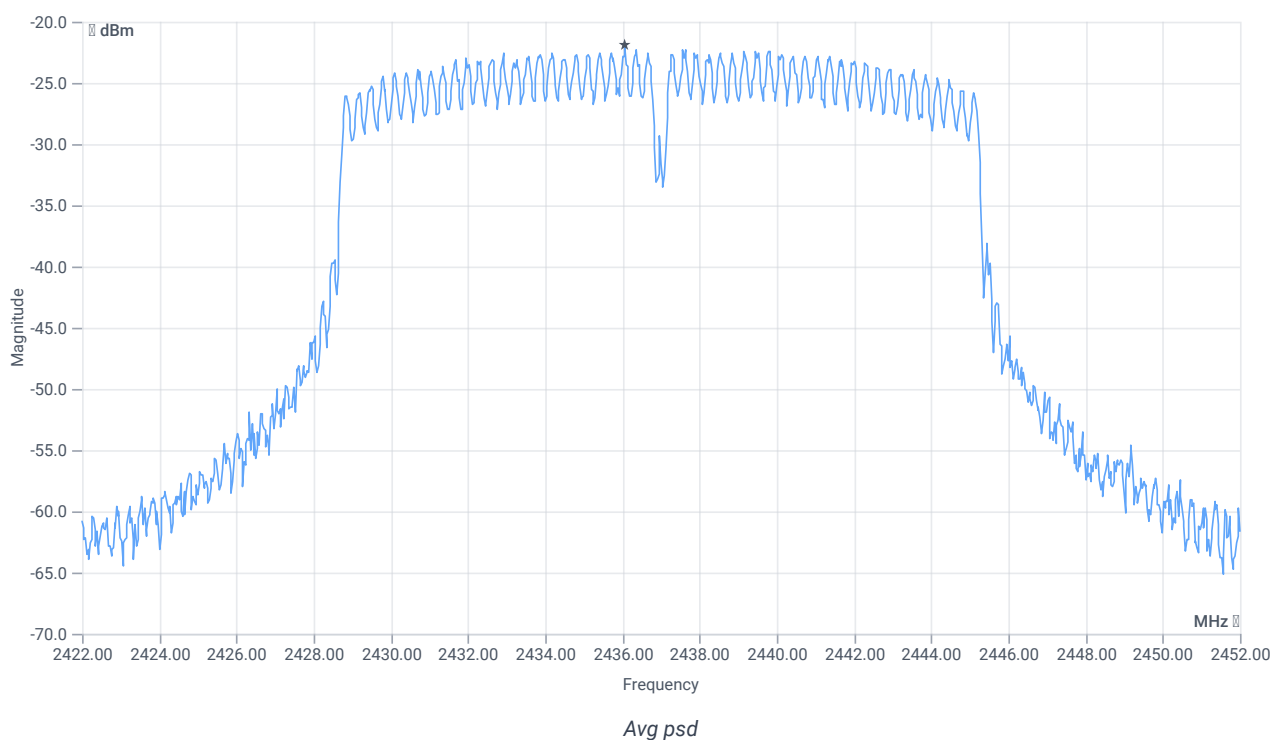

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg psd uncorrected	---	---	-21.93	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg psd DC corrected	---	8	-21.93	dBm/3kHz	PASS

Verdict

PASS

FCC 15.247 # Avg psd DTS ~ WLAN2G4 g mode

References

TC start	16.10.2023 15:39:11
Ambit temp [°C] humidity [rel%]	28.0 28
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.10.5 or.3
Description	FCC 15.247 Avg psd DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	10.29	dBm	INFO
Ref. Frequency	---	---	2464.900	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg. psd

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.29 14.14 20
Start [MHz] Stop [MHz]	2447.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	334 100 1001 SWE

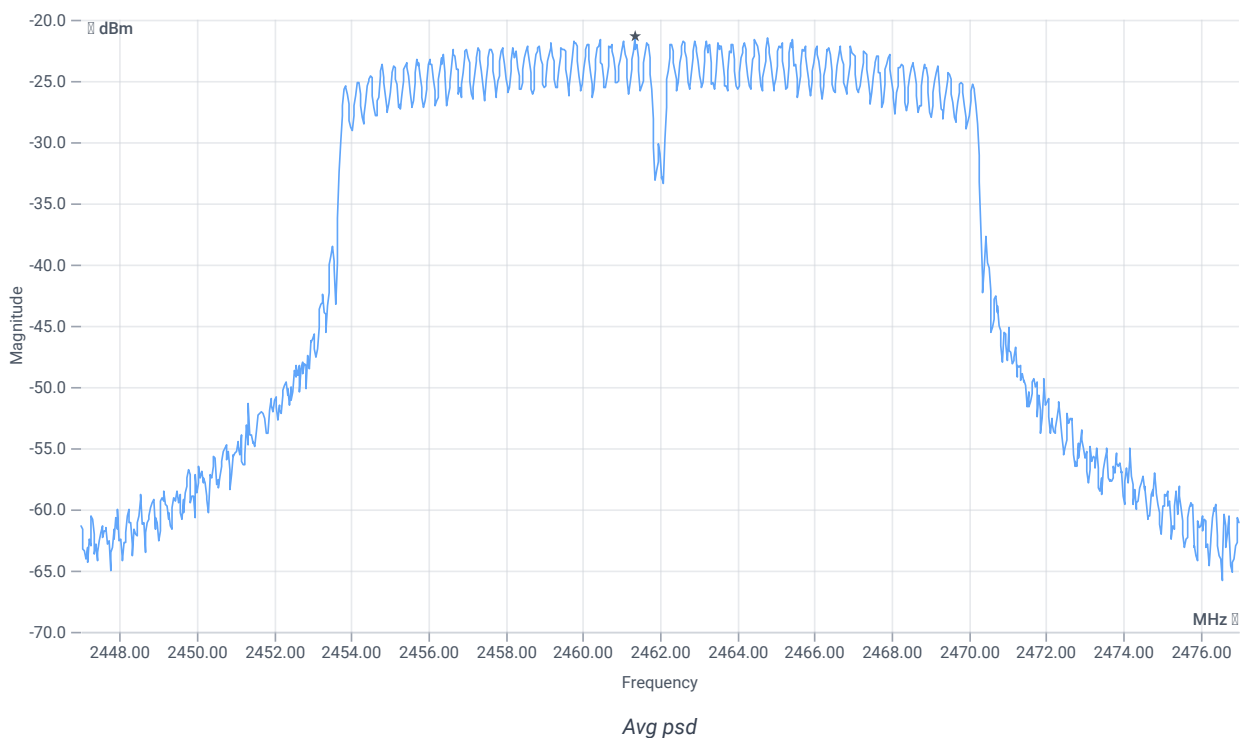

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg psd uncorrected	---	---	-21.35	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg psd DC corrected	---	8	-21.35	dBm/3kHz	PASS

Verdict

PASS

FCC 15.247 # Avg psd DTS ~ WLAN2G4 g mode

References

TC start	16.10.2023 15:49:22
Ambit temp [°C] humidity [rel%]	27.7 26
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.10.5 or.3
Description	FCC 15.247 Avg psd DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.68	dBm	INFO
Ref. Frequency	---	---	2464.900	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg. psd

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.68 14.14 20
Start [MHz] Stop [MHz]	2447.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	334 100 1001 SWE

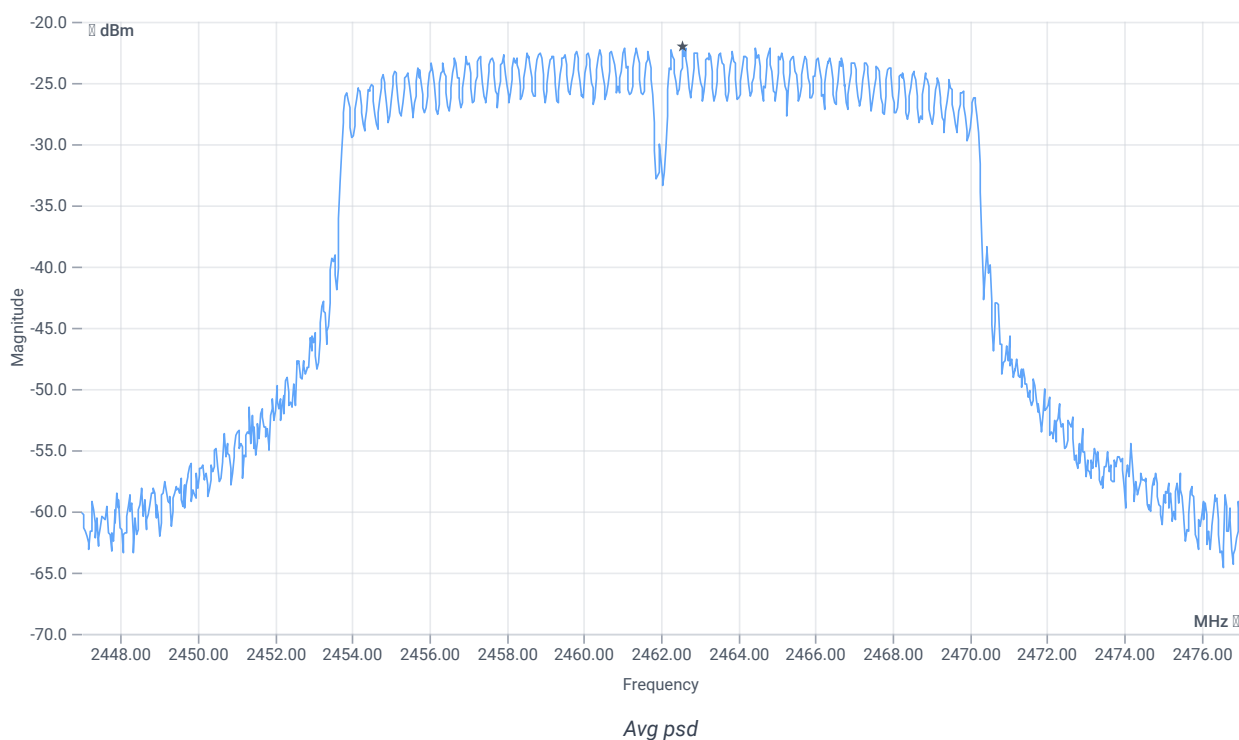

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg psd uncorrected	---	---	-22.03	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg psd DC corrected	---	8	-22.03	dBm/3kHz	PASS

Verdict

PASS

FCC 15.247 # Avg psd DTS ~ WLAN2G4 n-HT20 mode

References

TC start	16.10.2023 16:02:59
Ambit temp [°C] humidity [rel%]	27.2 26
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.10.5 or.3
Description	FCC 15.247 Avg psd DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	8.82	dBm	INFO
Ref. Frequency	---	---	2404.610	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg. psd

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.82 13.85 15
Start [MHz] Stop [MHz]	2397.000 2427.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	334 100 1001 SWE

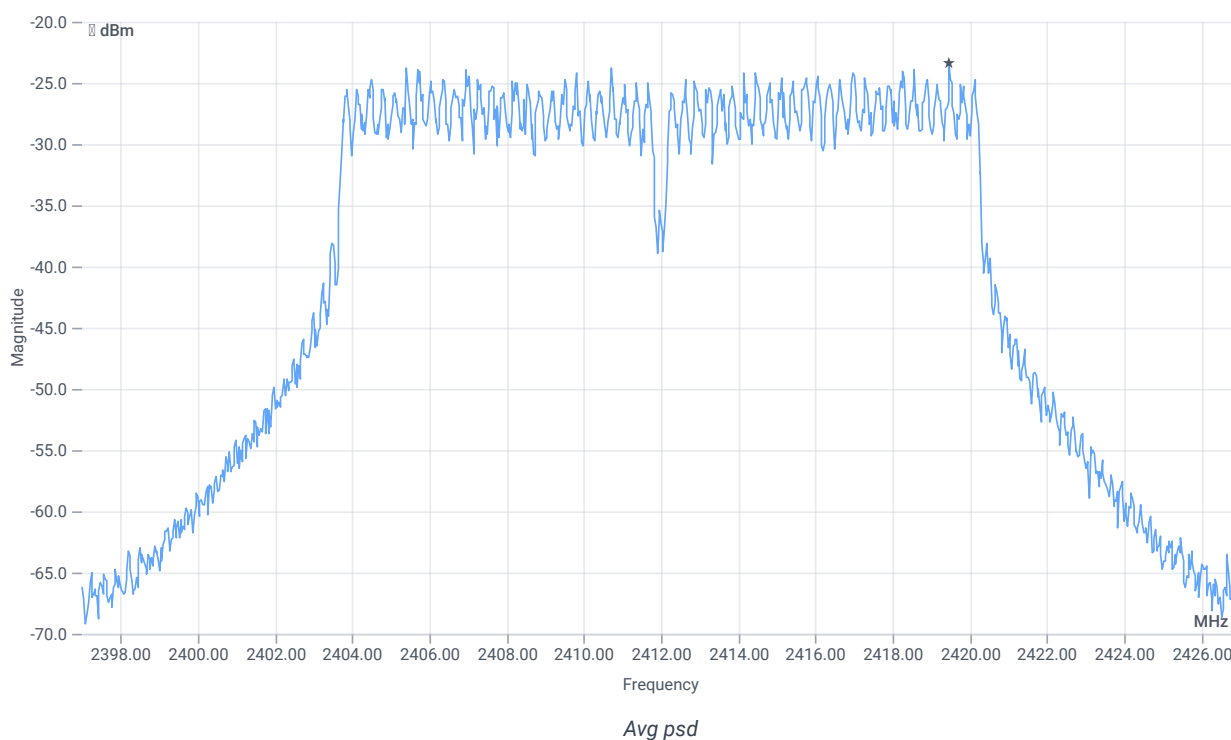

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg psd uncorrected	---	---	-23.39	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg psd DC corrected	---	8	-23.39	dBm/3kHz	PASS

Verdict

PASS

FCC 15.247 # Avg psd DTS ~ WLAN2G4 n-HT20 mode

References

TC start	16.10.2023 16:13:11
Ambit temp [°C] humidity [rel%]	27.3 27
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.10.5 or.3
Description	FCC 15.247 Avg psd DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.29	dBm	INFO
Ref. Frequency	---	---	2416.900	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg. psd

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.29 13.85 20
Start [MHz] Stop [MHz]	2397.000 2427.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	334 100 1001 SWE

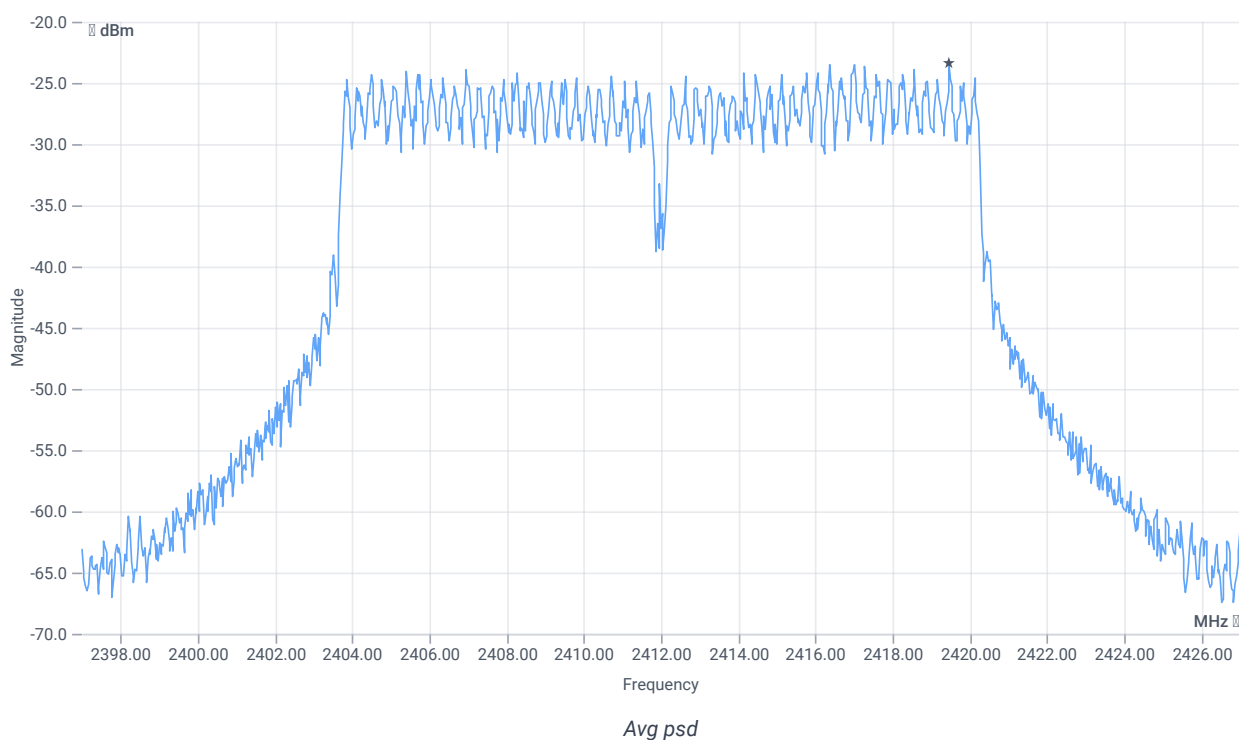

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg psd uncorrected	---	---	-23.42	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg psd DC corrected	---	8	-23.42	dBm/3kHz	PASS

Verdict

PASS

FCC 15.247 # Avg psd DTS ~ WLAN2G4 n-HT20 mode

References

TC start	16.10.2023 16:23:57
Ambit temp [°C] humidity [rel%]	27.6 27
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.10.5 or.3
Description	FCC 15.247 Avg psd DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.55	dBm	INFO
Ref. Frequency	---	---	2431.510	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg. psd

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.55 14.01 20
Start [MHz] Stop [MHz]	2422.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	334 100 1001 SWE

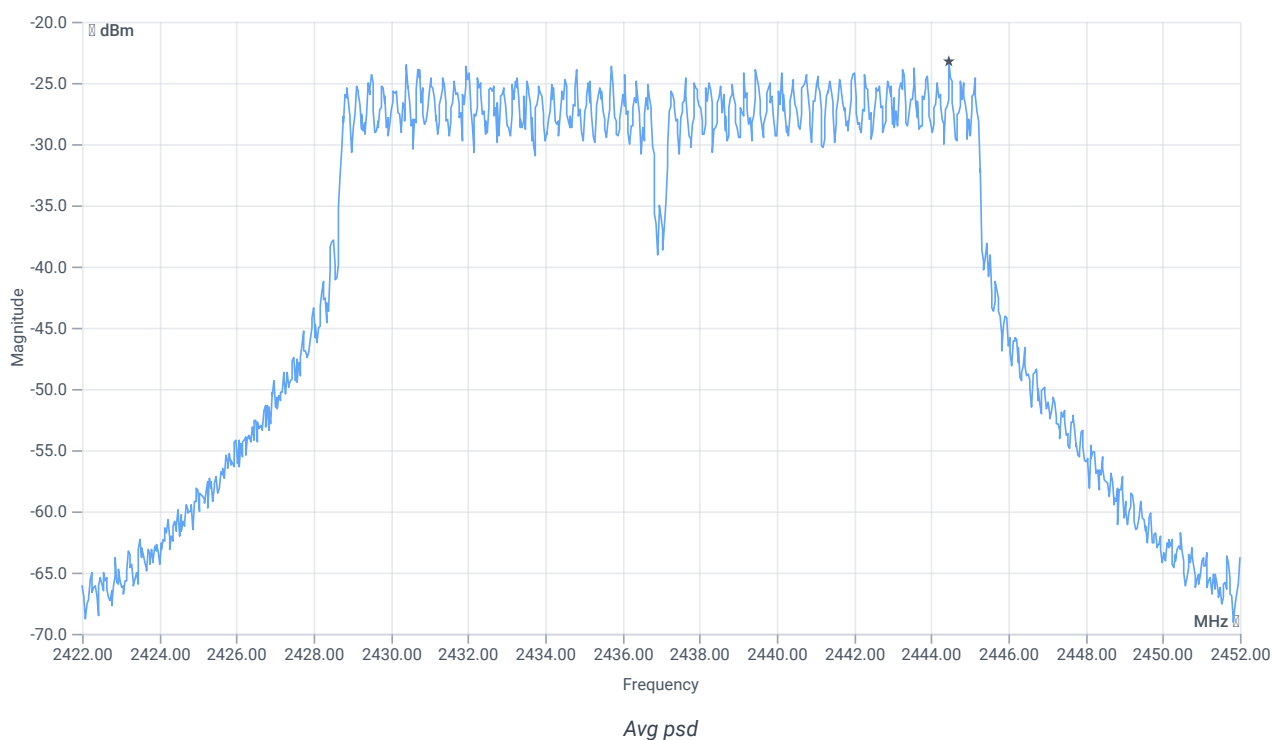

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg psd uncorrected	---	---	-23.25	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg psd DC corrected	---	8	-23.25	dBm/3kHz	PASS

Verdict

PASS

FCC 15.247 # Avg psd DTS ~ WLAN2G4 n-HT20 mode

References

TC start	16.10.2023 16:34:08
Ambit temp [°C] humidity [rel%]	27.8 27
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.10.5 or.3
Description	FCC 15.247 Avg psd DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.20	dBm	INFO
Ref. Frequency	---	---	2431.710	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg. psd

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.20 14.01 20
Start [MHz] Stop [MHz]	2422.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	334 100 1001 SWE

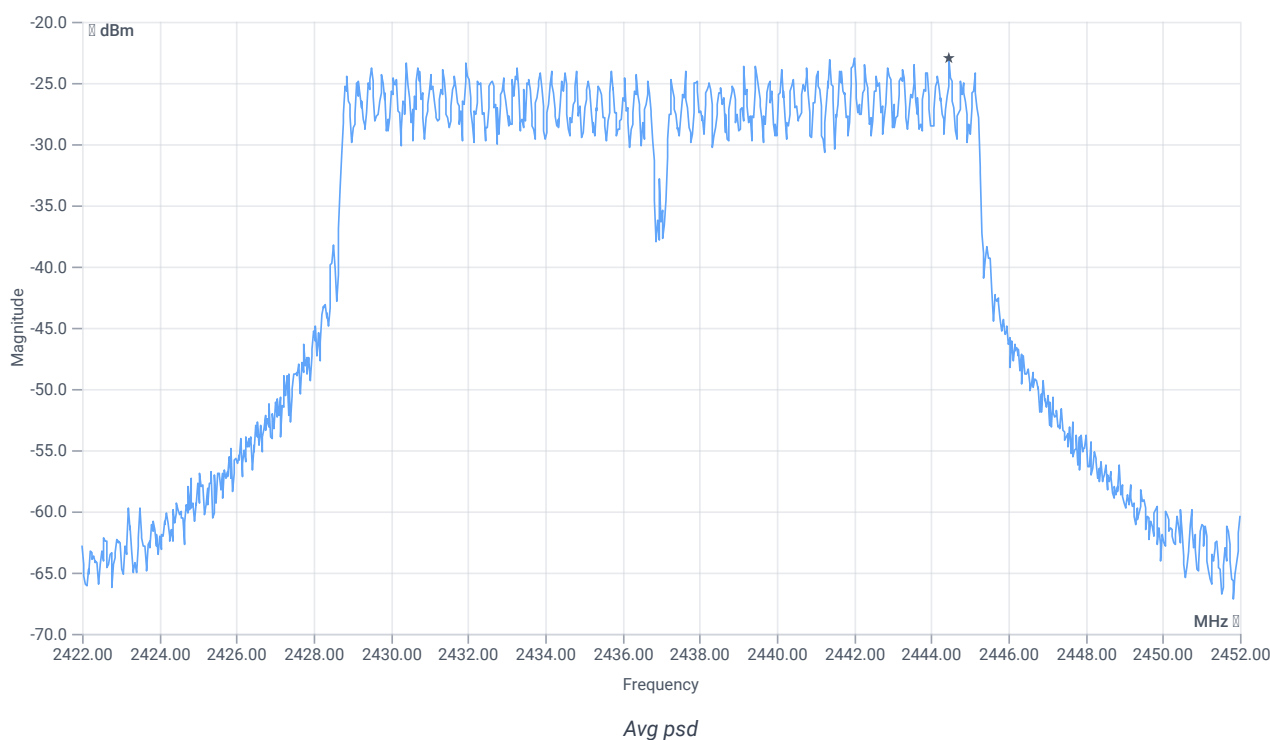

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg psd uncorrected	---	---	-22.92	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg psd DC corrected	---	8	-22.92	dBm/3kHz	PASS

Verdict

PASS

FCC 15.247 # Avg psd DTS ~ WLAN2G4 n-HT20 mode

References

TC start	16.10.2023 16:43:38
Ambit temp [°C] humidity [rel%]	27.8 26
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.10.5 or.3
Description	FCC 15.247 Avg psd DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	10.47	dBm	INFO
Ref. Frequency	---	---	2467.390	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg. psd

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.47 14.14 20
Start [MHz] Stop [MHz]	2447.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	334 100 1001 SWE

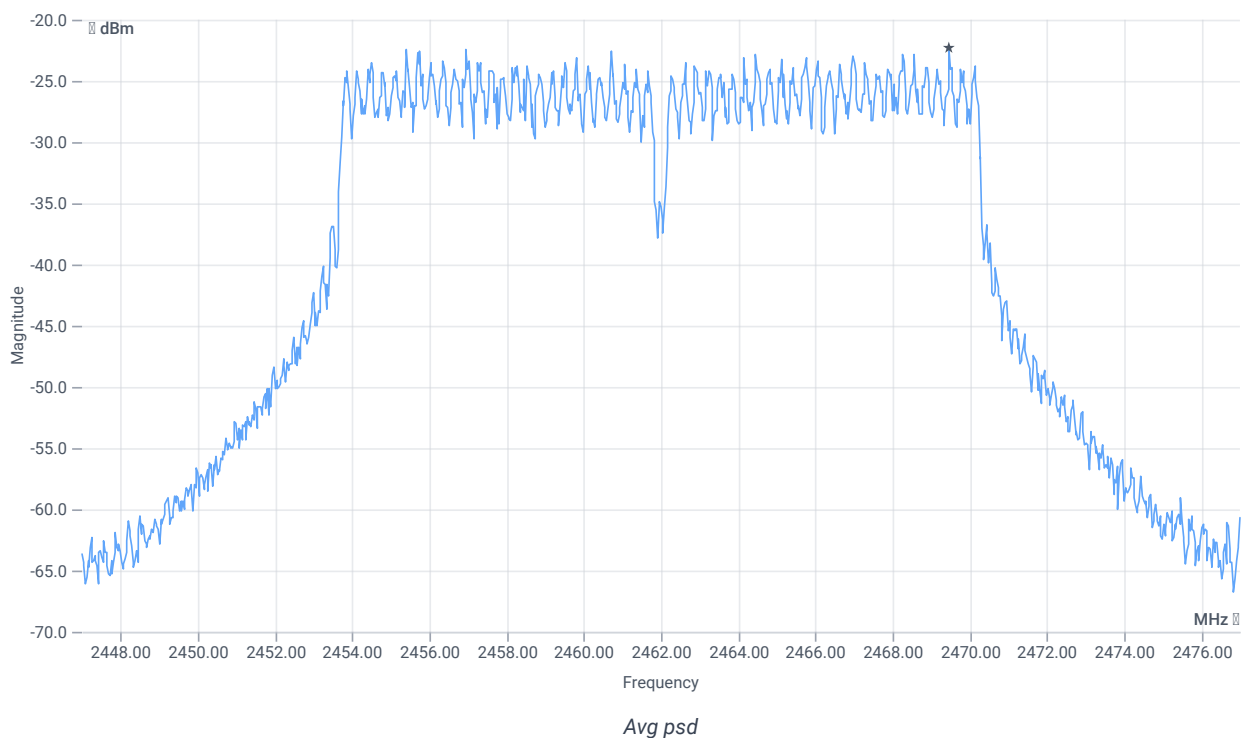

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg psd uncorrected	---	---	-22.36	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg psd DC corrected	---	8	-22.36	dBm/3kHz	PASS

Verdict

PASS

FCC 15.247 # Avg psd DTS ~ WLAN2G4 n-HT20 mode

References

TC start	16.10.2023 16:53:48
Ambit temp [°C] humidity [rel%]	28.0 26
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	ANSI C63.10-2013 Chapter 11.10.5 or.3
Description	FCC 15.247 Avg psd DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.79	dBm	INFO
Ref. Frequency	---	---	2466.900	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Avg. psd

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.79 14.14 20
Start [MHz] Stop [MHz]	2447.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	RMS AVER
Sweep: time [ms] count points per Section type	334 100 1001 SWE

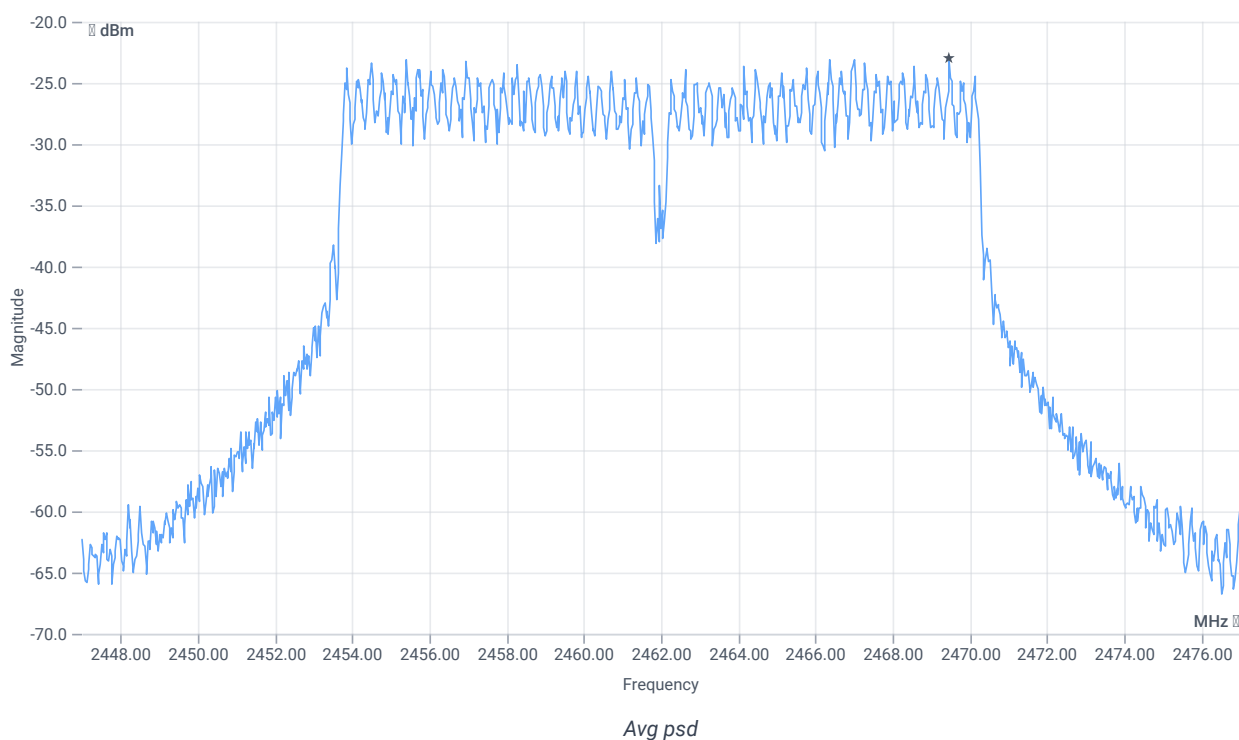

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Avg psd uncorrected	---	---	-22.96	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
Avg psd DC corrected	---	8	-22.96	dBm/3kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode

References

TC start	16.10.2023 13:36:49
Ambit temp [°C] humidity [rel%]	25.8 31
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2412 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	10.49	dBm	INFO
Ref. Frequency	---	---	2413.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.49 13.85 20
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

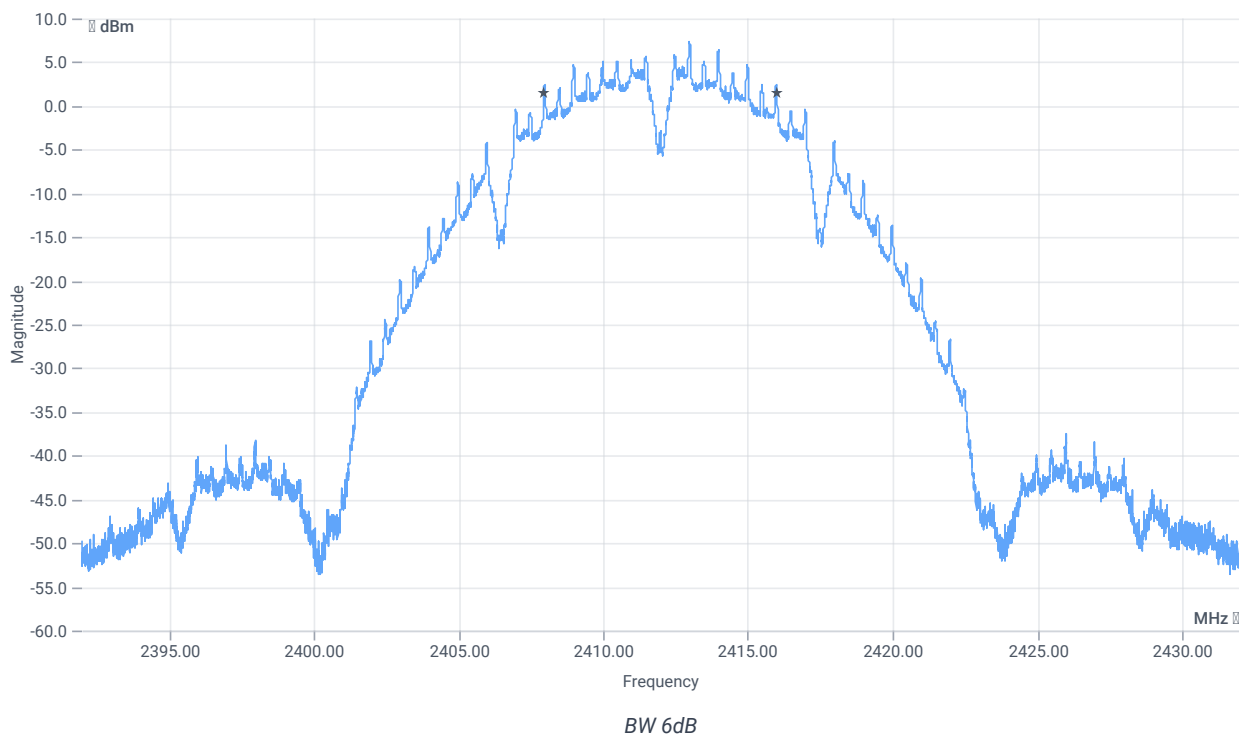

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	---	8060	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode

References

TC start	16.10.2023 13:47:02
Ambit temp [°C] humidity [rel%]	26.1 30
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2412 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	11.17	dBm	INFO
Ref. Frequency	---	---	2413.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.17 13.85 20
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

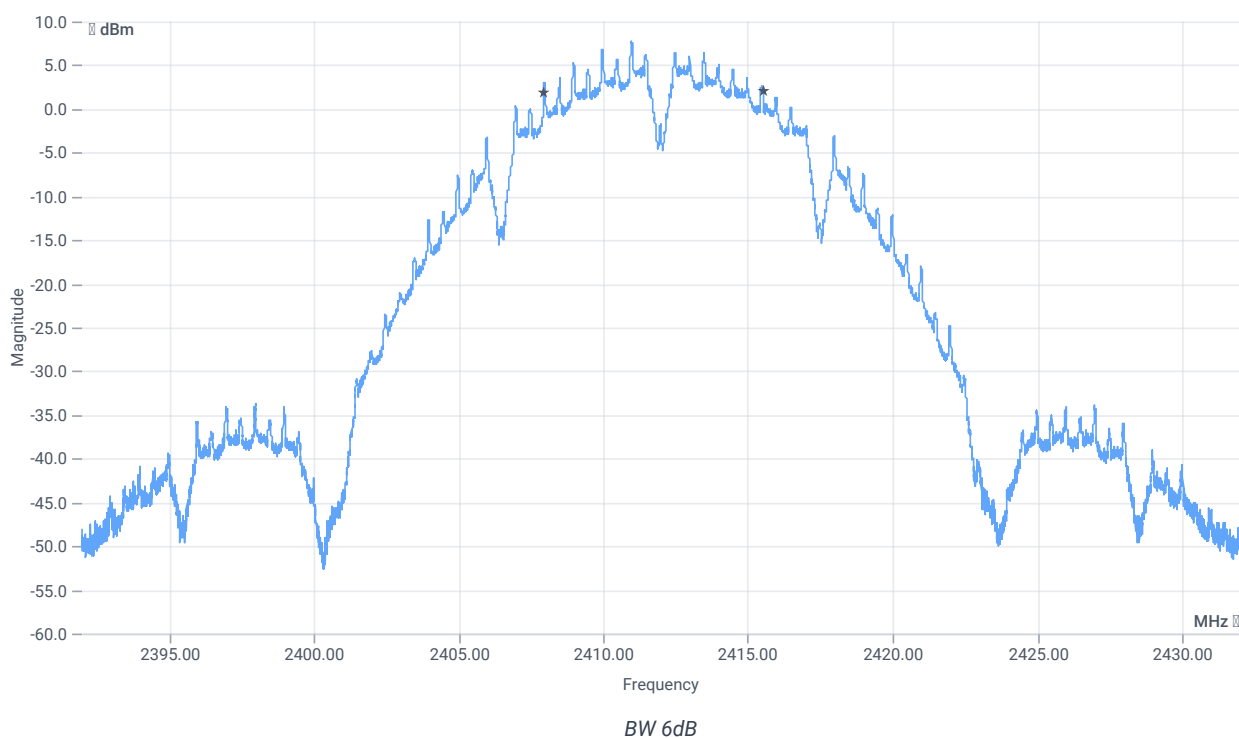

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	---	7572	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode

References

TC start	16.10.2023 14:04:43
Ambit temp [°C] humidity [rel%]	26.6 30
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2437 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	11.31	dBm	INFO
Ref. Frequency	---	---	2438.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.31 14.01 20
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

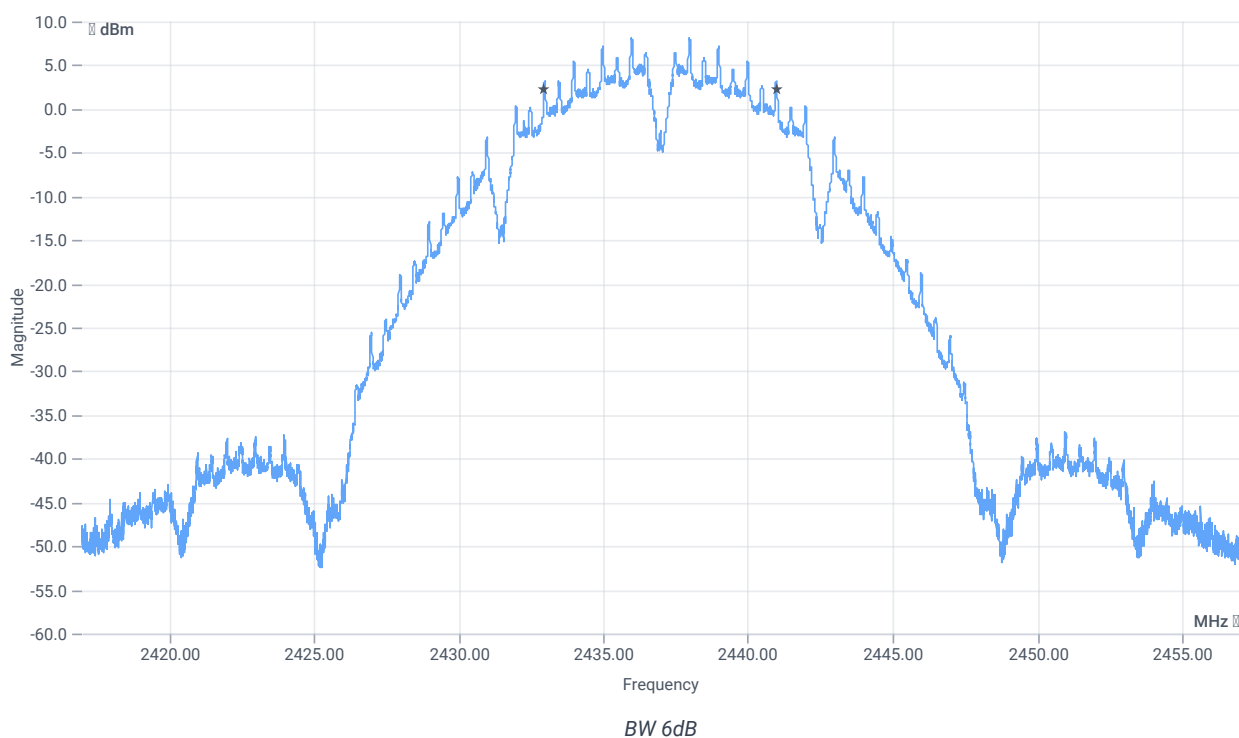

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	---	8060	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode

References

TC start	16.10.2023 14:16:47
Ambit temp [°C] humidity [rel%]	27.1 29
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2437 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	11.76	dBm	INFO
Ref. Frequency	---	---	2438.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.76 14.01 20
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

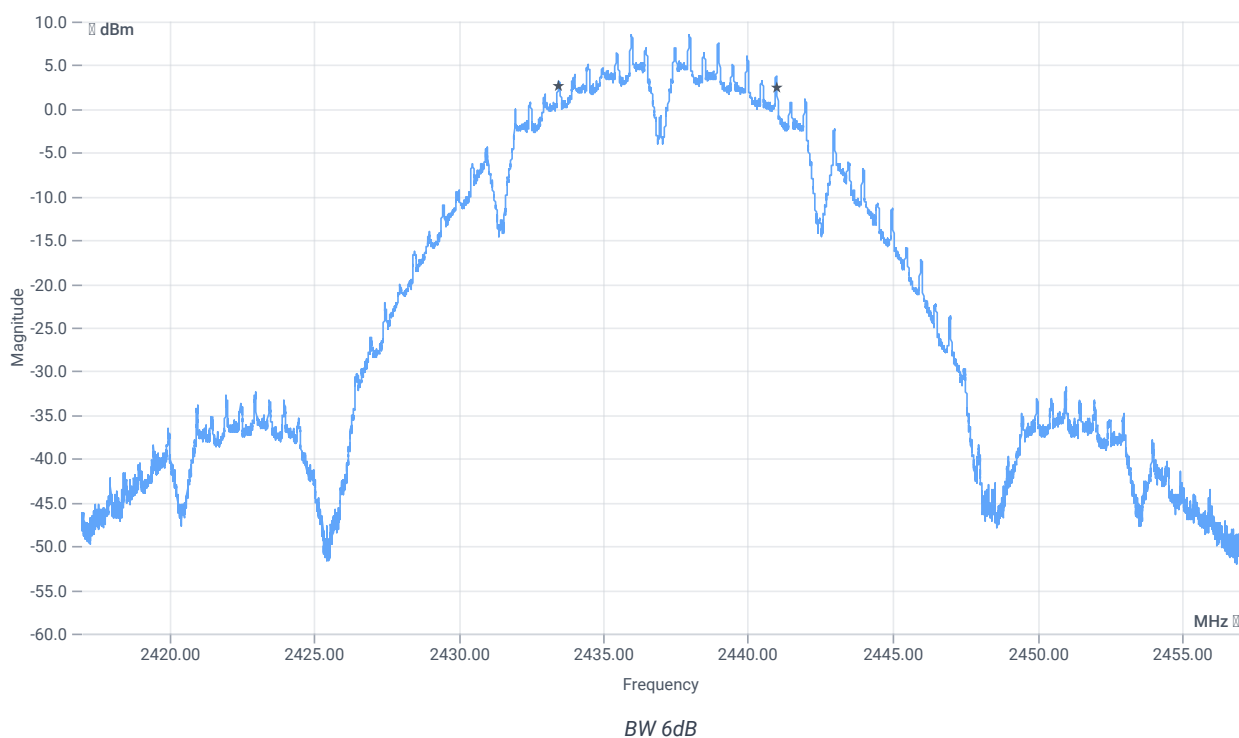

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	---	7572	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode

References

TC start	16.10.2023 14:27:25
Ambit temp [°C] humidity [rel%]	27.0 28
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2462 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	11.74	dBm	INFO
Ref. Frequency	---	---	2460.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.74 14.14 20
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

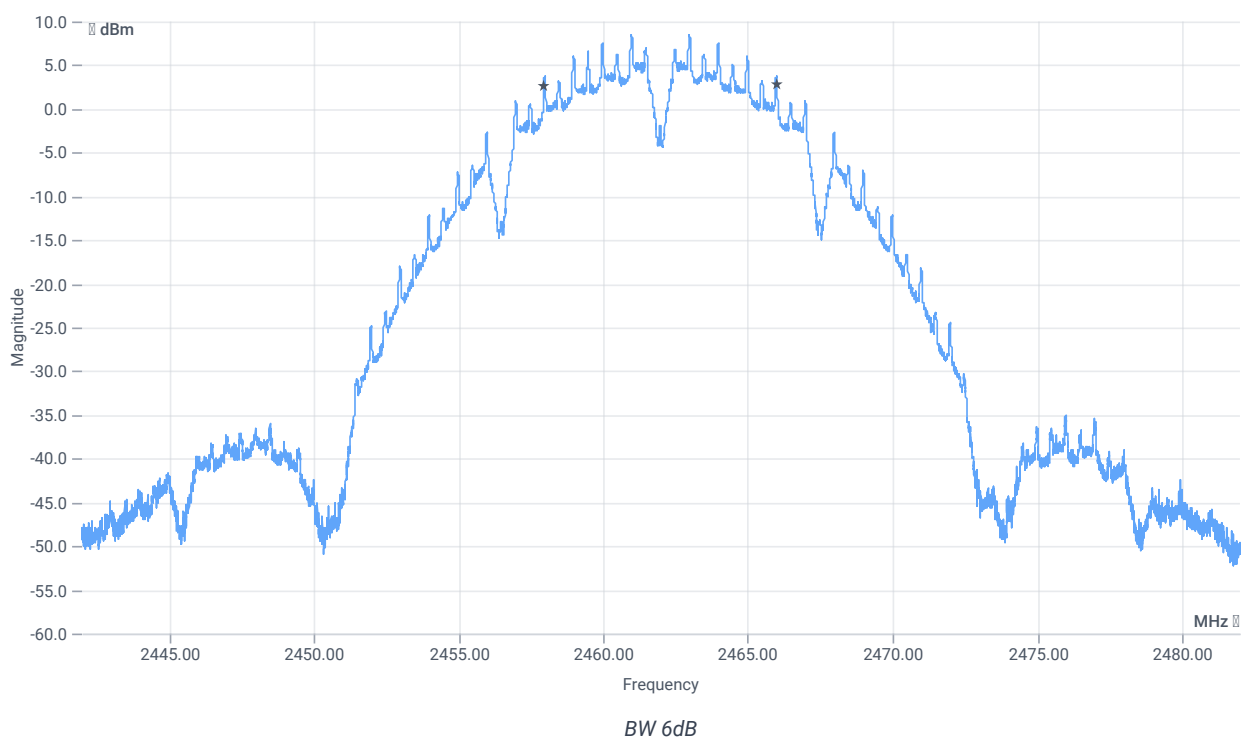

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	---	8064	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode

References

TC start	16.10.2023 14:37:39
Ambit temp [°C] humidity [rel%]	27.3 28
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2462 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	12.03	dBm	INFO
Ref. Frequency	---	---	2460.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.03 14.14 20
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

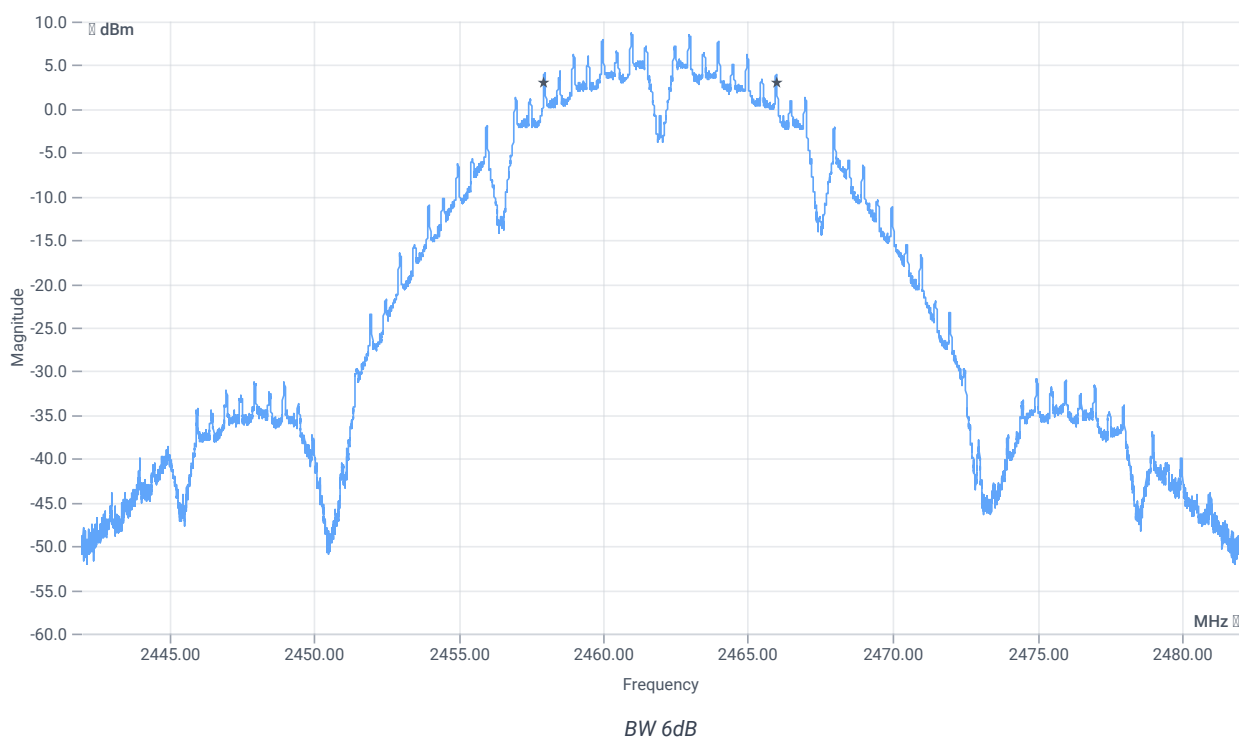

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	---	8064	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode

References

TC start	16.10.2023 14:48:43
Ambit temp [°C] humidity [rel%]	27.6 28
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2412 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.07	dBm	INFO
Ref. Frequency	---	---	2414.900	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.07 13.85 20
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

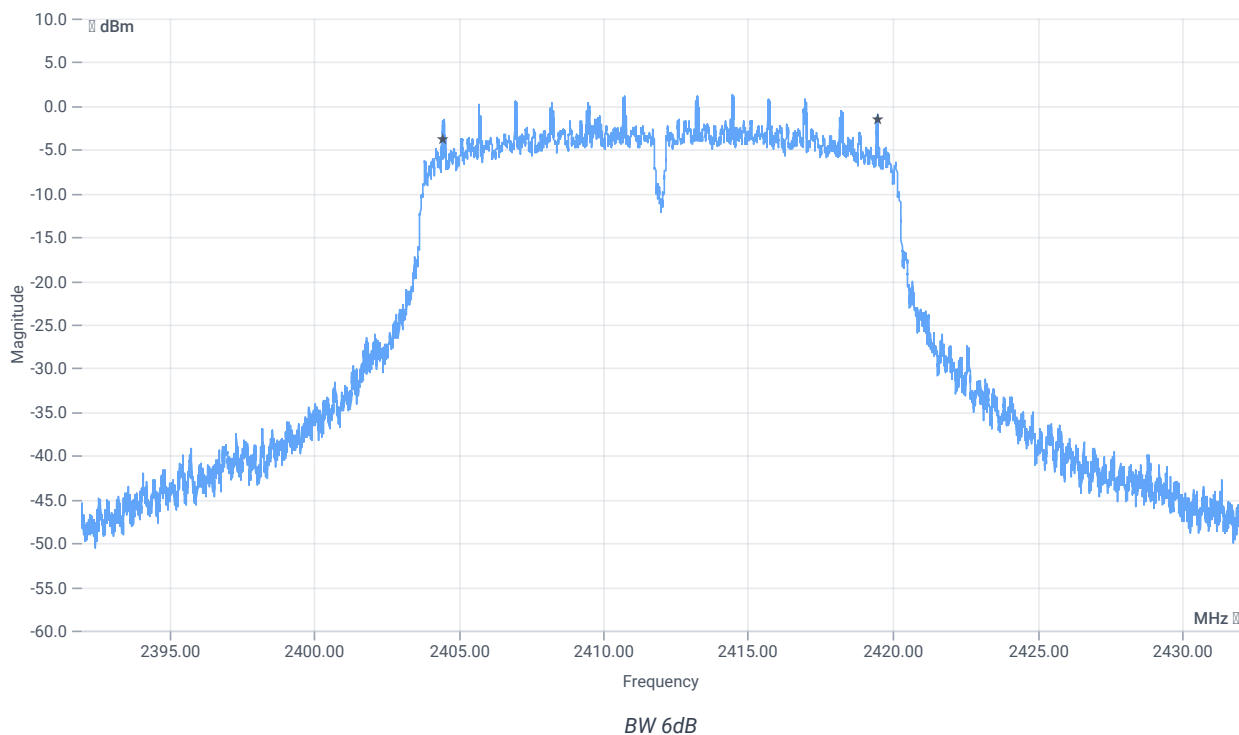

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	---	15076	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode

References

TC start	16.10.2023 14:58:55
Ambit temp [°C] humidity [rel%]	27.4 27
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2412 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.91	dBm	INFO
Ref. Frequency	---	---	2414.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.91 13.85 20
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

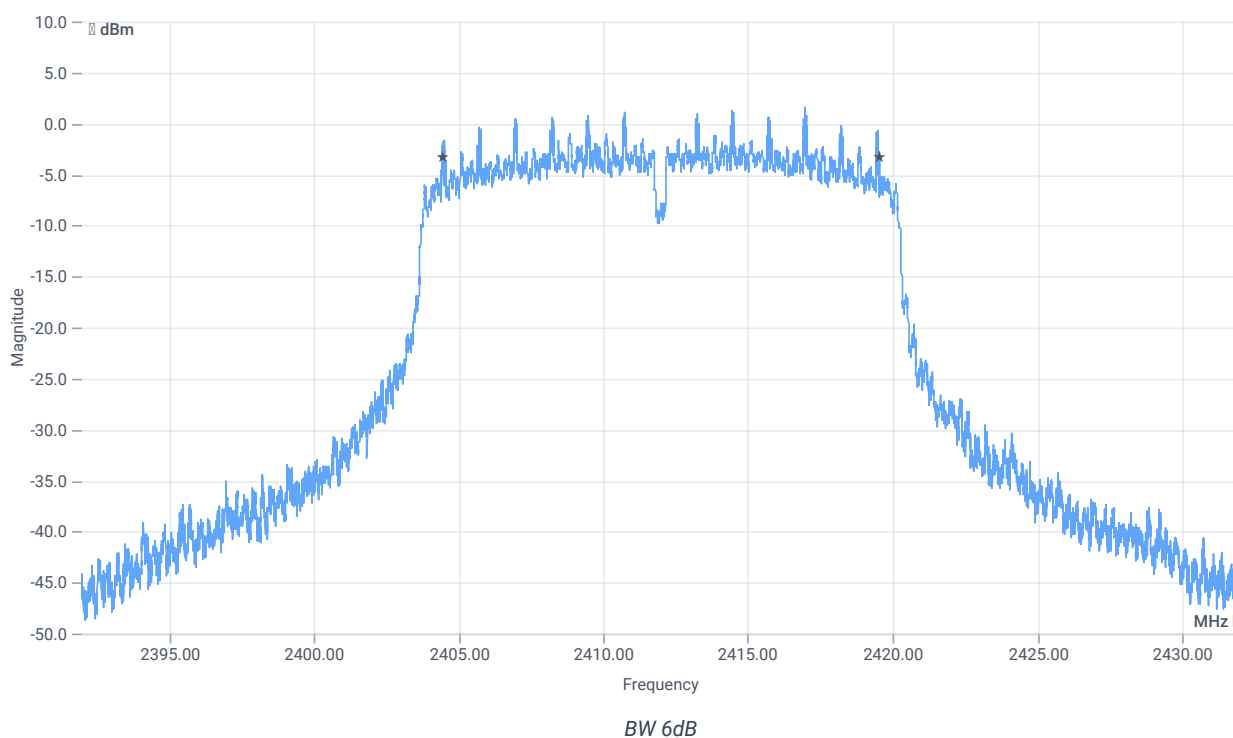

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	---	15100	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode

References

TC start	16.10.2023 15:17:45
Ambit temp [°C] humidity [rel%]	27.5 28
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2437 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.44	dBm	INFO
Ref. Frequency	---	---	2439.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.44 14.01 20
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

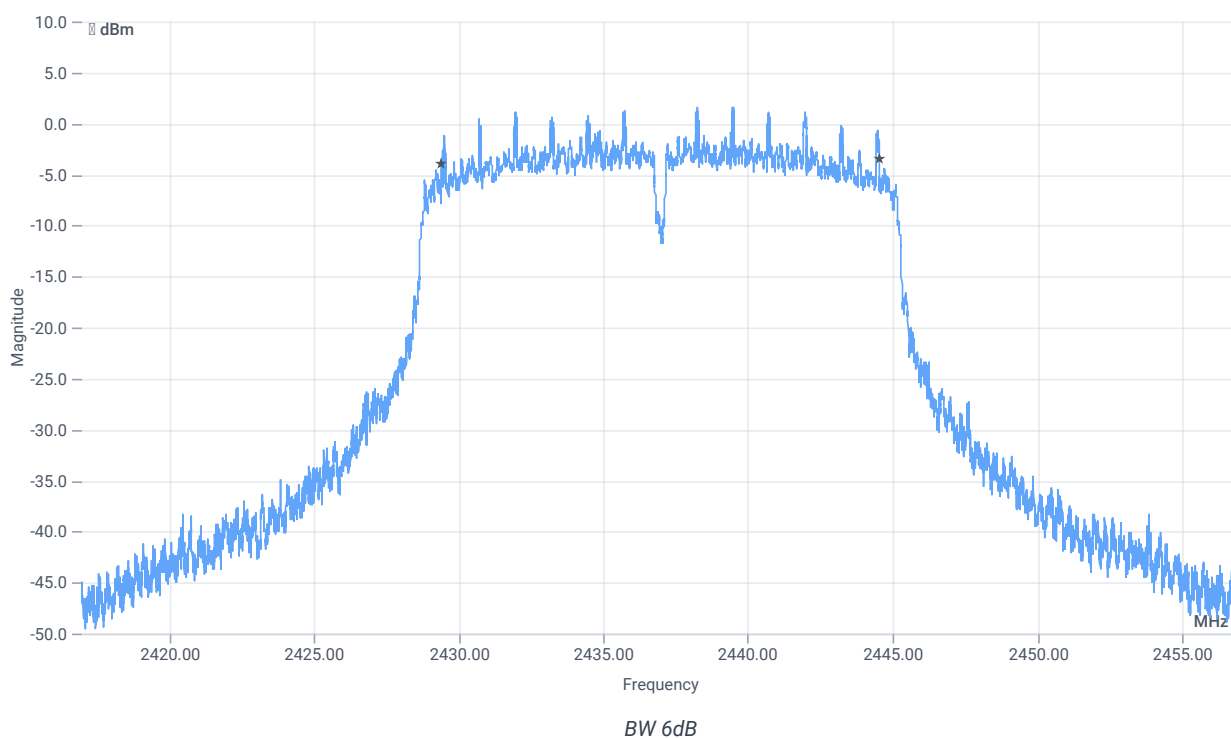

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	---	15116	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode

References

TC start	16.10.2023 15:27:57
Ambit temp [°C] humidity [rel%]	27.7 28
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2437 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.82	dBm	INFO
Ref. Frequency	---	---	2432.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.82 14.01 20
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

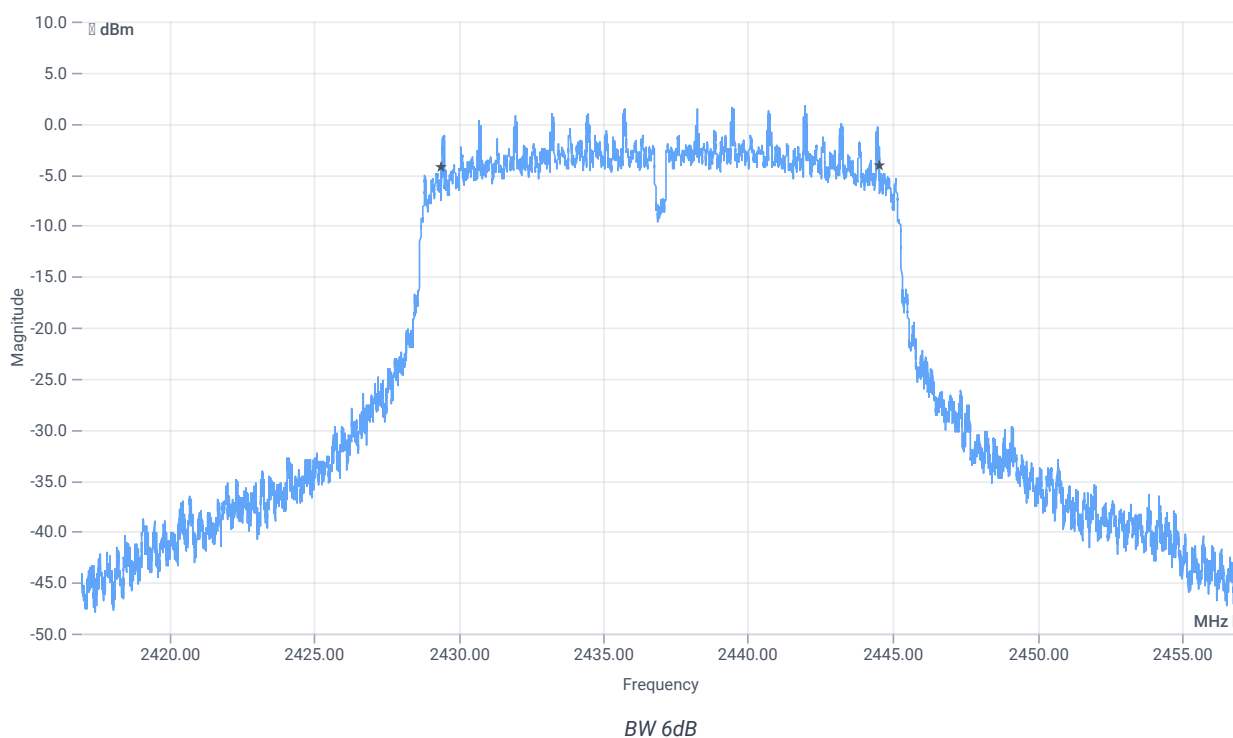

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	---	15128	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode

References

TC start	16.10.2023 15:38:35
Ambit temp [°C] humidity [rel%]	28.0 28
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2462 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.93	dBm	INFO
Ref. Frequency	---	---	2458.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.93 14.14 20
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

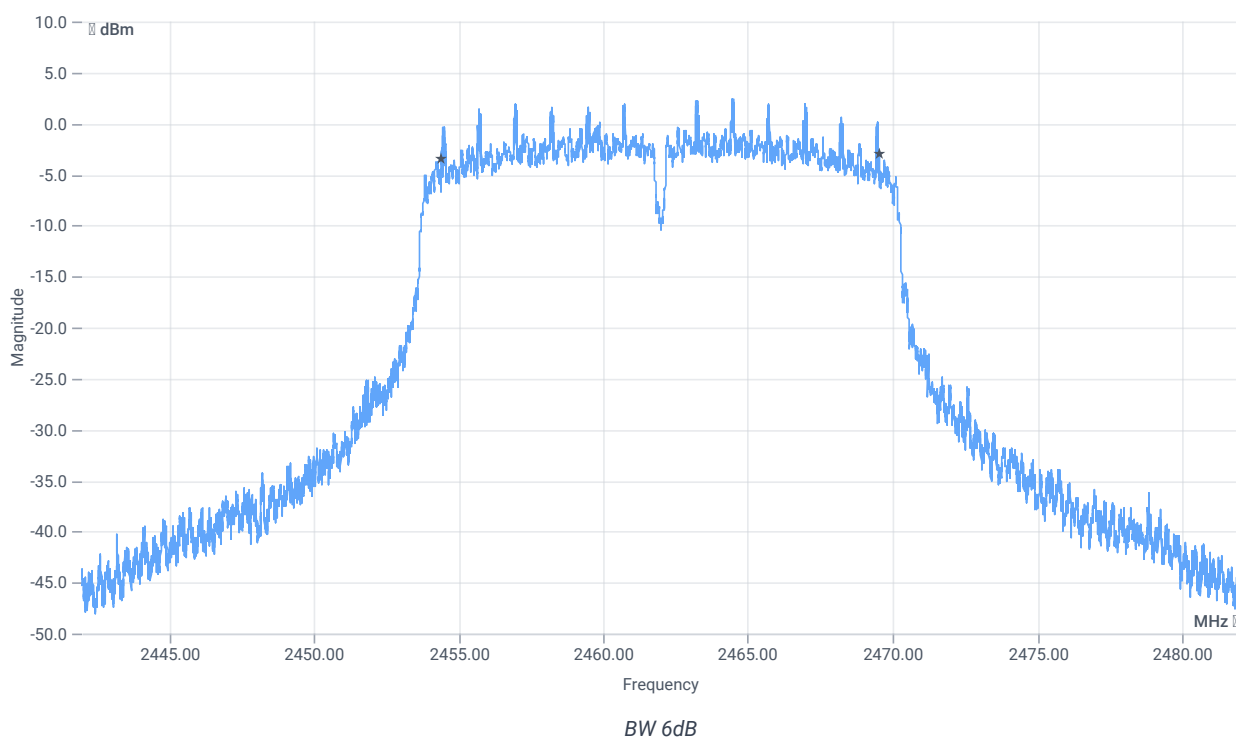

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	---	15128	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode

References

TC start	16.10.2023 15:48:49
Ambit temp [°C] humidity [rel%]	27.8 26
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2462 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	10.05	dBm	INFO
Ref. Frequency	---	---	2459.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.05 14.14 20
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

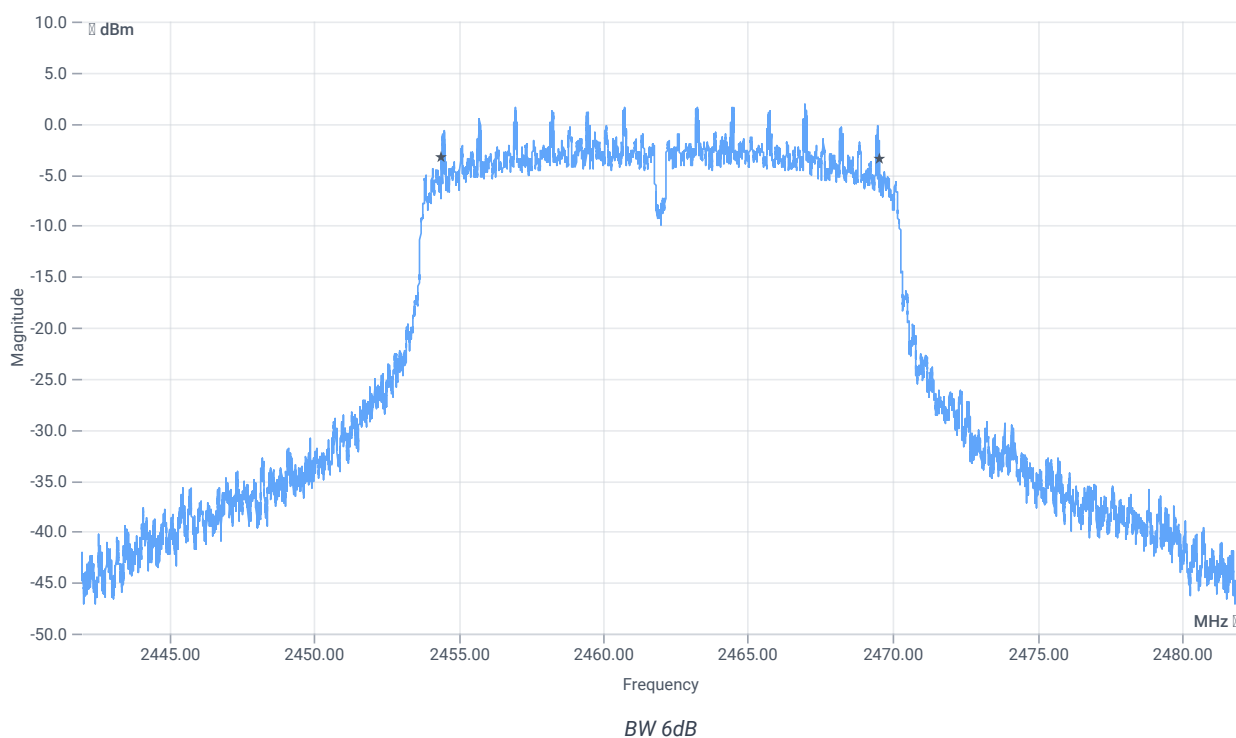

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	---	15116	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode

References

TC start	16.10.2023 16:02:24
Ambit temp [°C] humidity [rel%]	27.2 26
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2412 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	8.58	dBm	INFO
Ref. Frequency	---	---	2416.900	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.58 13.85 15
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

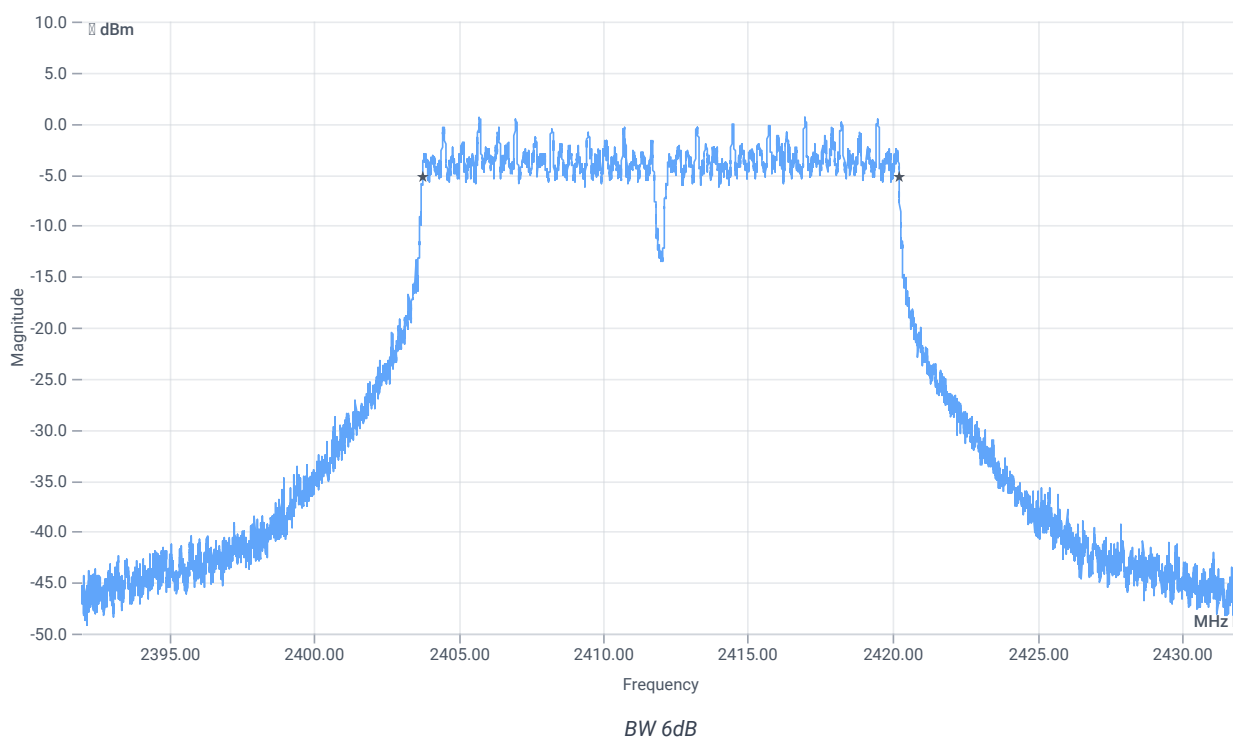

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	---	16468	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode

References

TC start	16.10.2023 16:12:36
Ambit temp [°C] humidity [rel%]	27.3 27
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2412 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.22	dBm	INFO
Ref. Frequency	---	---	2418.890	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.22 13.85 20
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

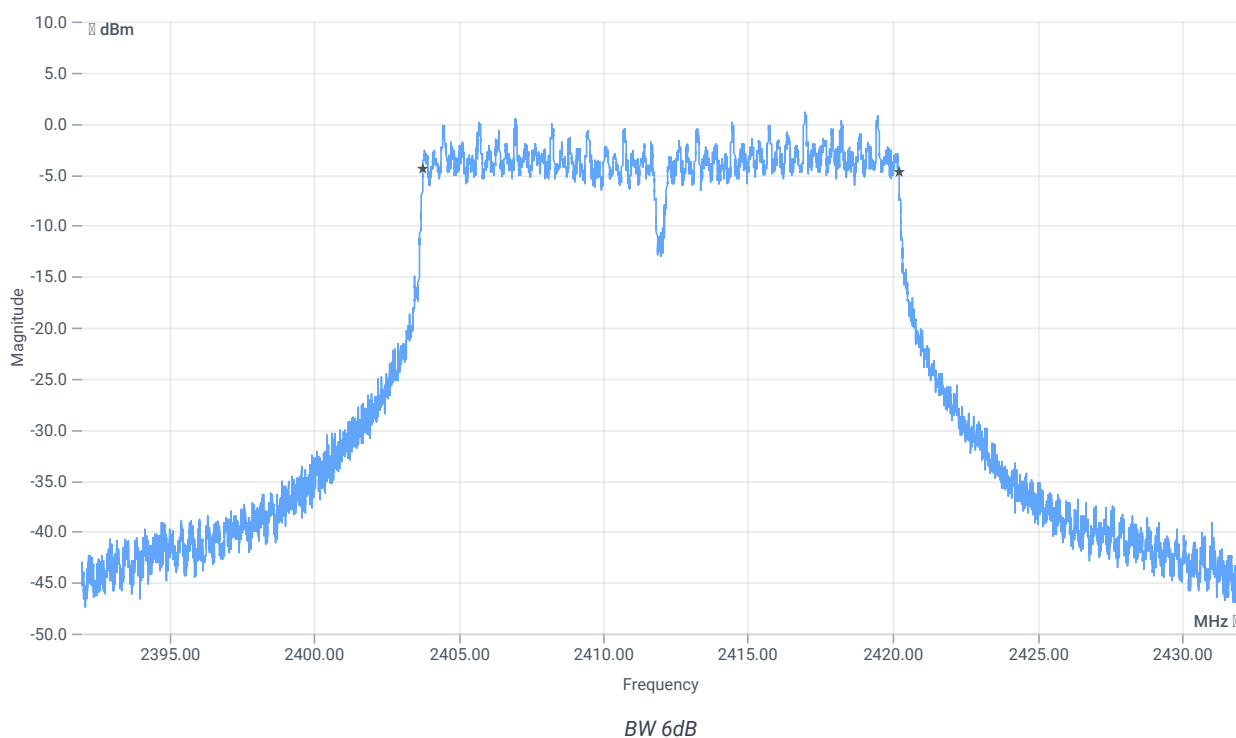

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	---	16428	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode

References

TC start	16.10.2023 16:23:22
Ambit temp [°C] humidity [rel%]	27.6 27
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2437 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.32	dBm	INFO
Ref. Frequency	---	---	2442.590	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.32 14.01 20
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

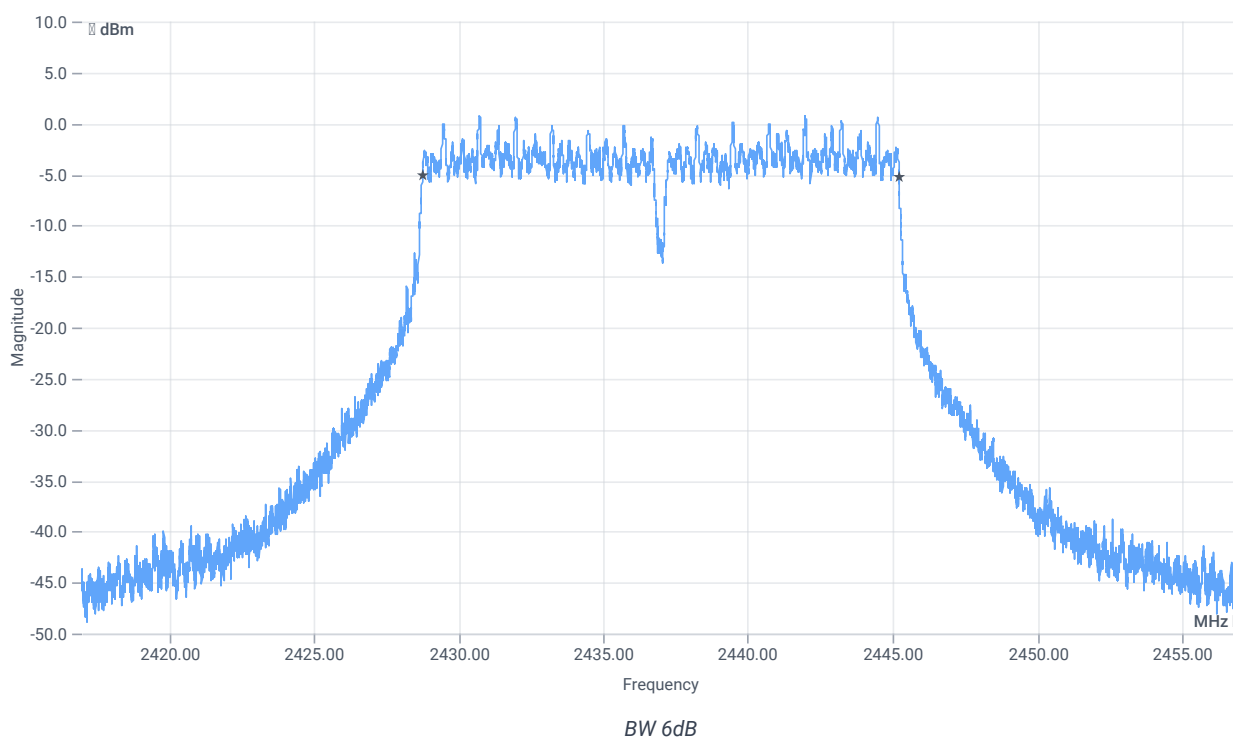

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	---	16472	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode

References

TC start	16.10.2023 16:33:35
Ambit temp [°C] humidity [rel%]	27.8 27
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2437 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.06	dBm	INFO
Ref. Frequency	---	---	2431.210	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.06 14.01 20
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

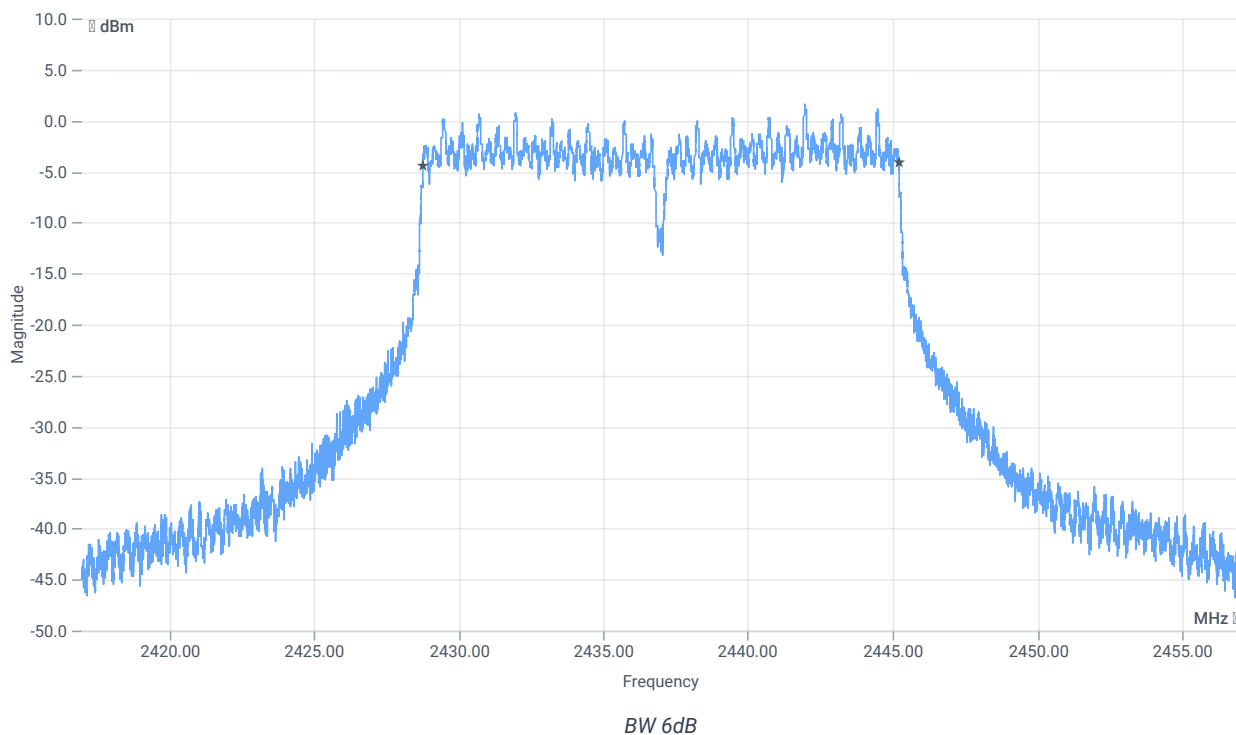

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	---	16452	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode

References

TC start	16.10.2023 16:43:04
Ambit temp [°C] humidity [rel%]	27.8 26
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2462 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.63	dBm	INFO
Ref. Frequency	---	---	2458.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.63 14.14 20
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

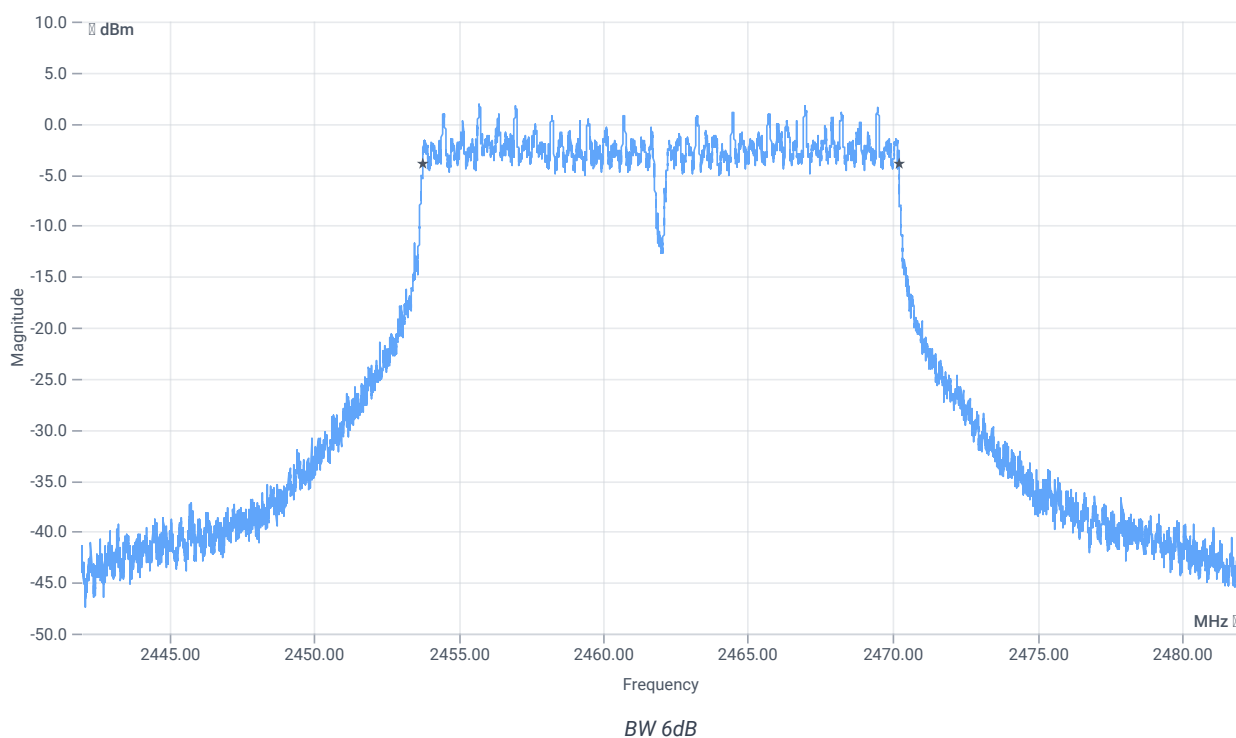

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	---	16468	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode

References

TC start	16.10.2023 16:53:14
Ambit temp [°C] humidity [rel%]	28.0 27
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2462 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.59	dBm	INFO
Ref. Frequency	---	---	2456.710	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.59 14.14 20
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

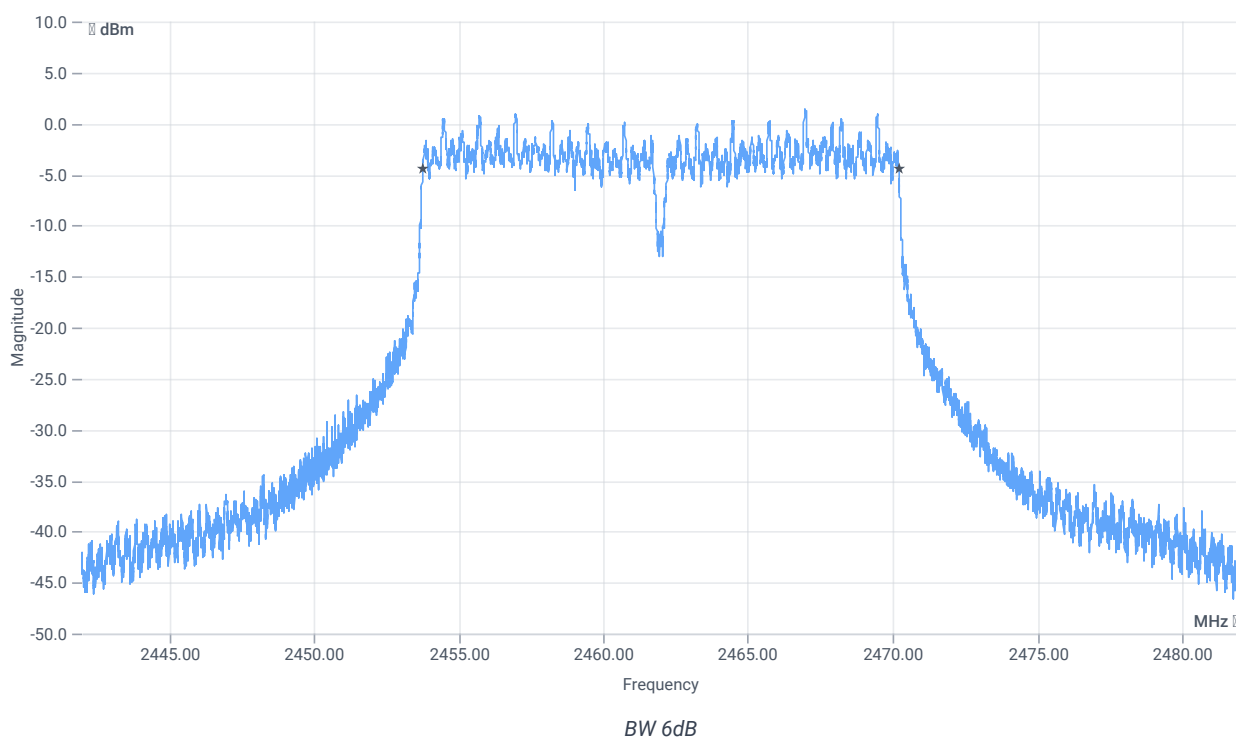

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	---	16440	kHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode

References

TC start	16.10.2023 13:38:27
Ambit temp [°C] humidity [rel%]	25.9 31
System version	4.6.2.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2412 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	10.46	dBm	INFO
Ref. Frequency	---	---	2413.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.46 13.85 20
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

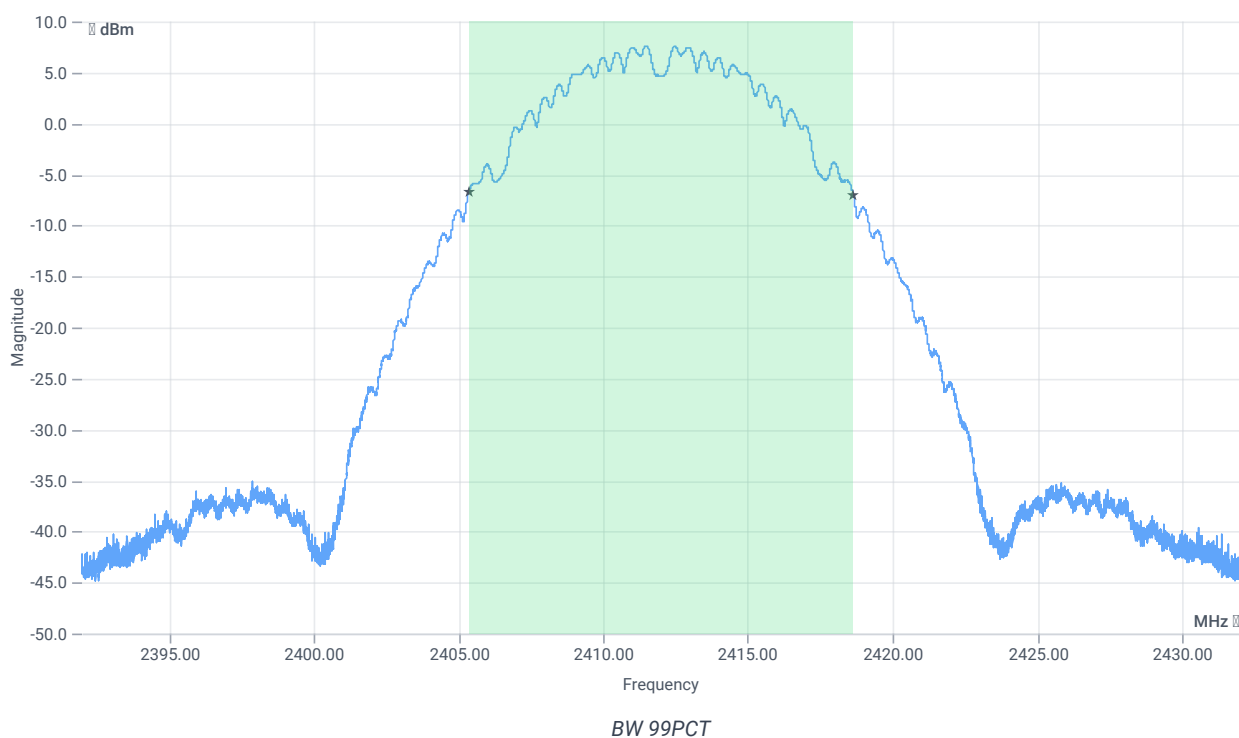


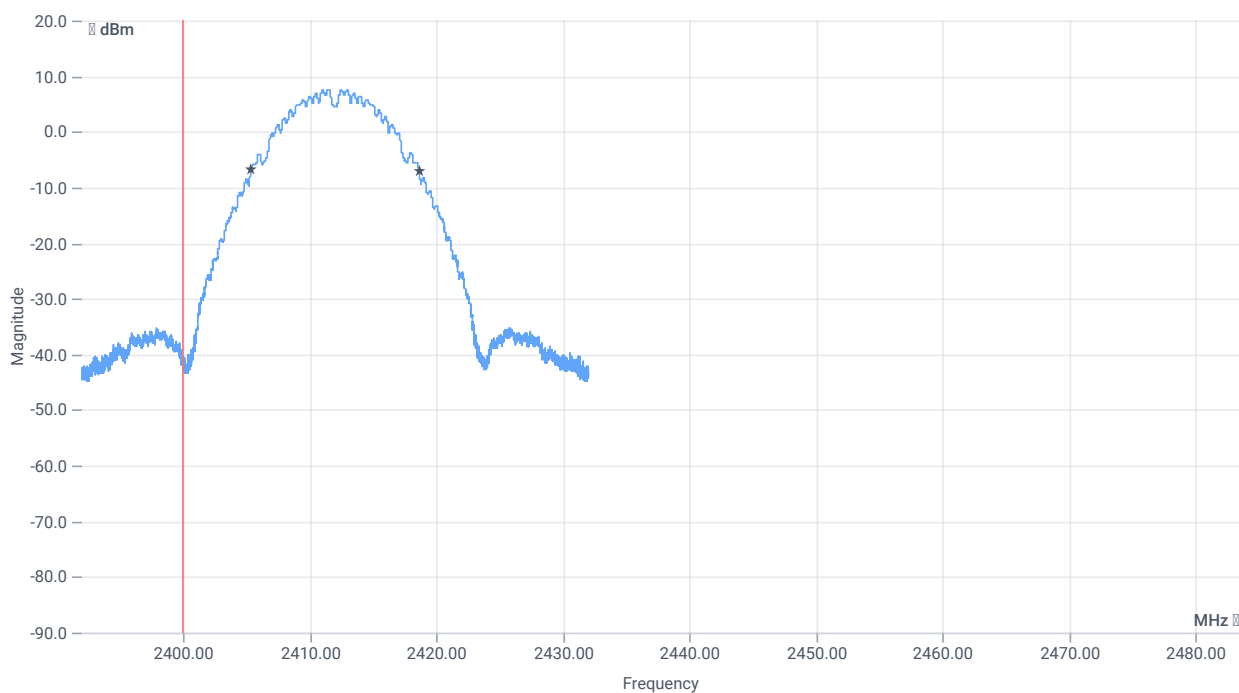


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	13283.000	kHz	INFO
T1 99%	2400.000000	---	2405.3647	MHz	PASS
T2 99%	---	2483.500000	2418.6473	MHz	PASS

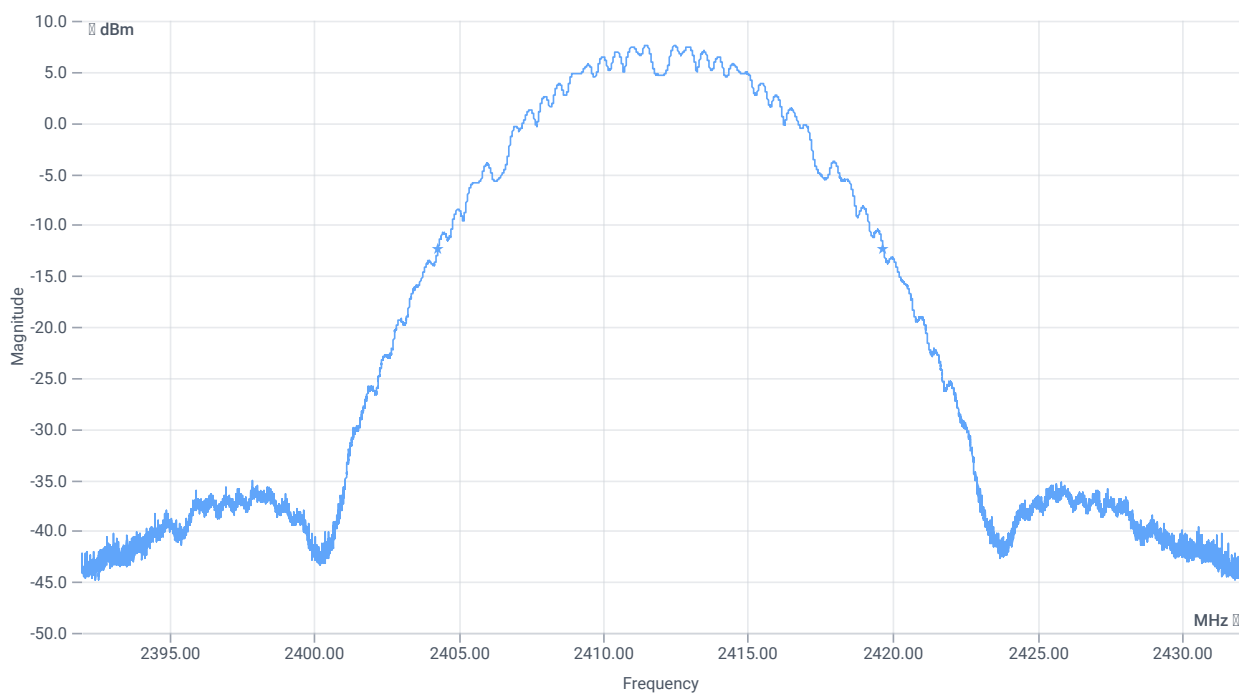

BW 20dB

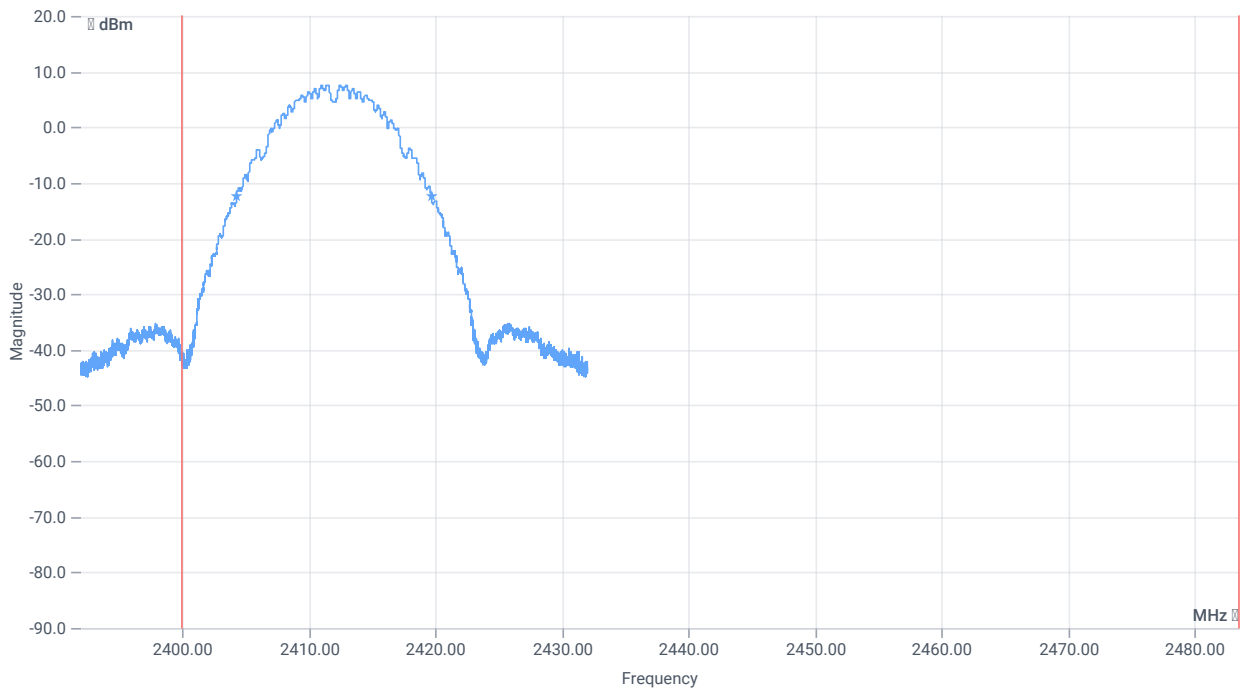

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	15384	kHz	INFO
T1 20dB	2400.000000	---	2404.3000	MHz	PASS
T2 20dB	---	2483.500000	2419.6840	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode

References

TC start	16.10.2023 13:48:41
Ambit temp [°C] humidity [rel%]	26.2 30
System version	4.6.2.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2412 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	11.19	dBm	INFO
Ref. Frequency	---	---	2412.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.19 13.85 20
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

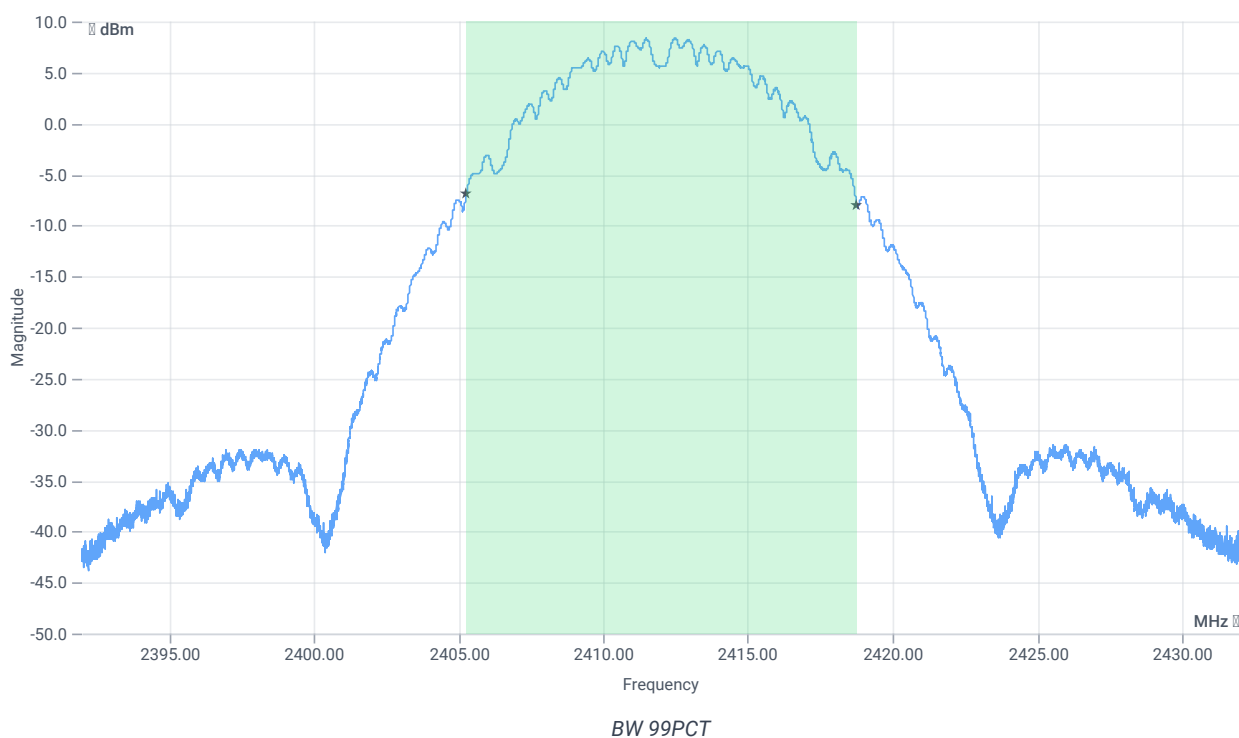


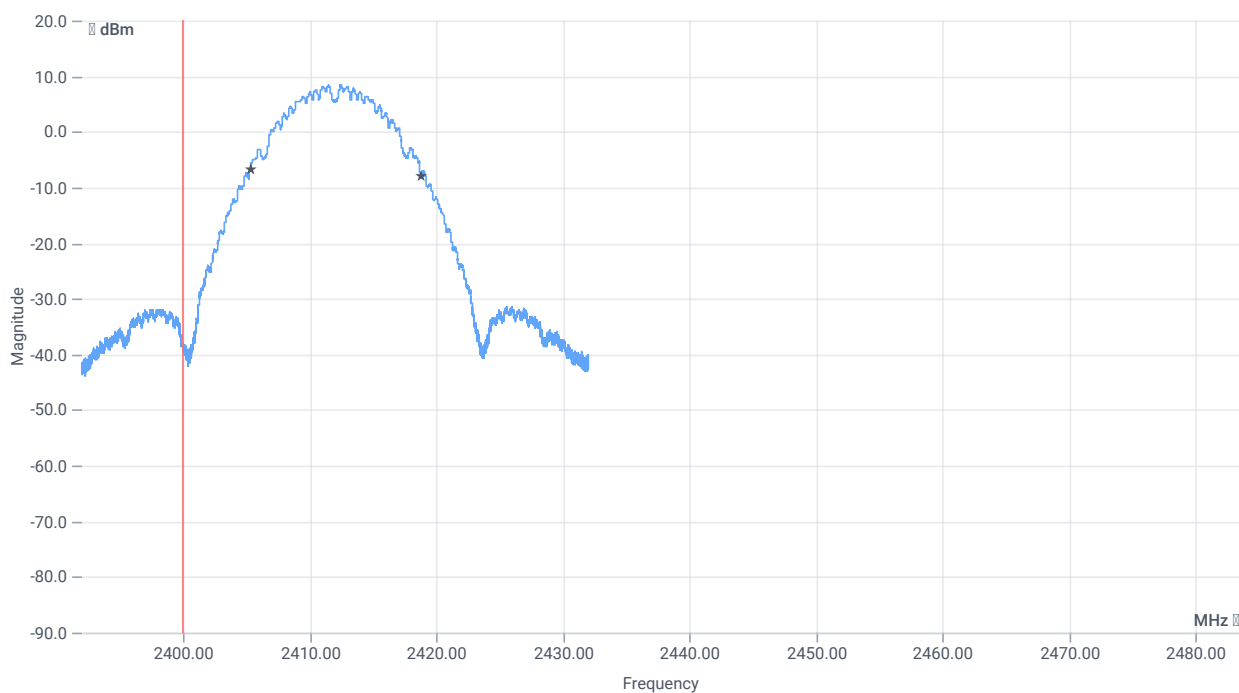


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	13479.000	kHz	INFO
T1 99%	2400.000000	---	2405.2807	MHz	PASS
T2 99%	---	2483.500000	2418.7593	MHz	PASS

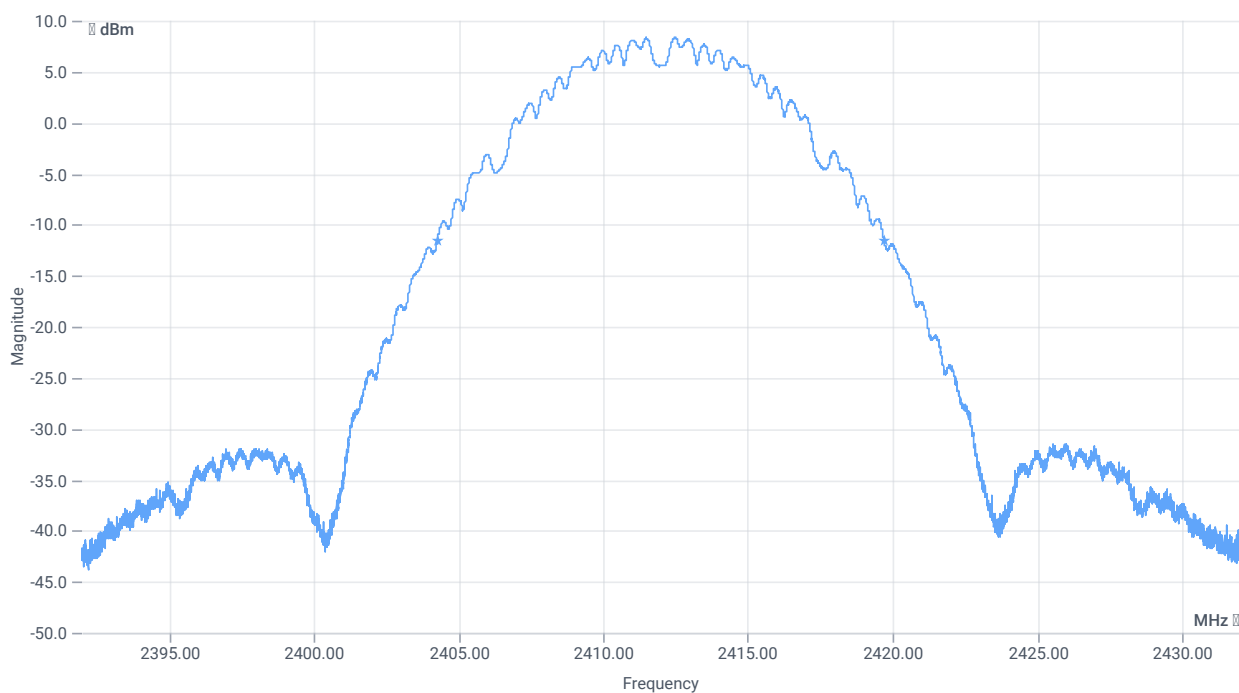

BW 20dB

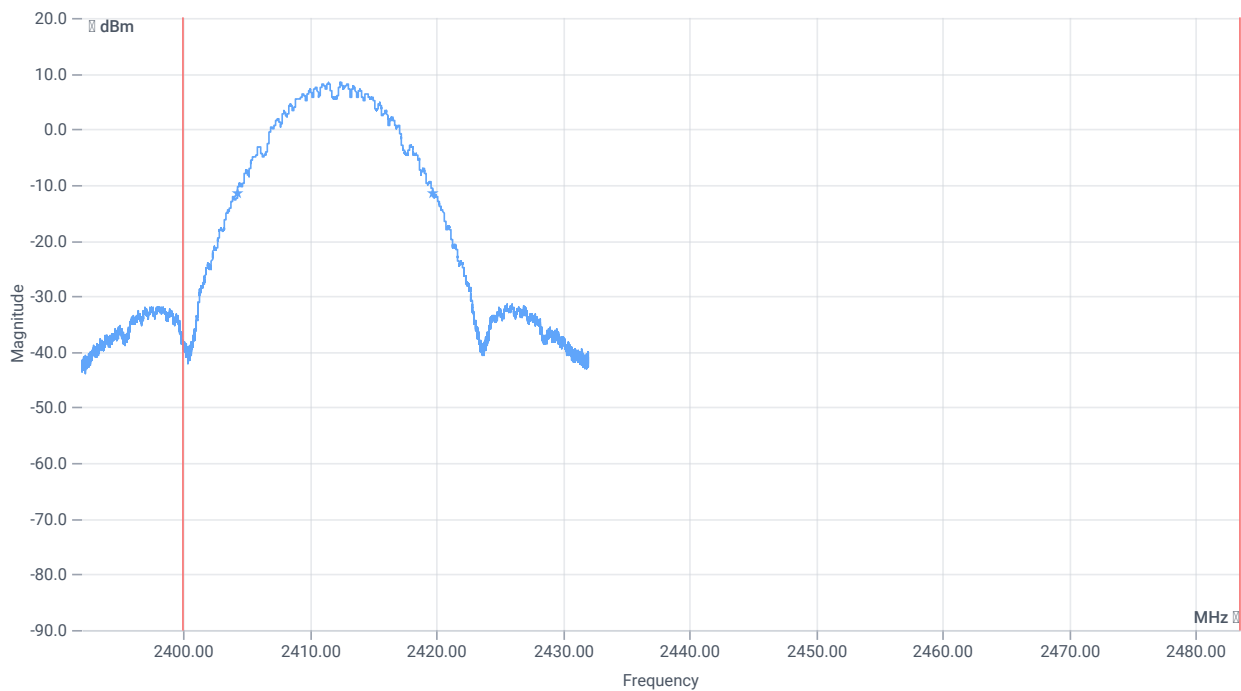

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	15436	kHz	INFO
T1 20dB	2400.000000	---	2404.2720	MHz	PASS
T2 20dB	---	2483.500000	2419.7080	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode

References

TC start	16.10.2023 14:06:18
Ambit temp [°C] humidity [rel%]	26.7 30
System version	4.6.2.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2437 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	11.31	dBm	INFO
Ref. Frequency	---	---	2438.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.31 14.01 20
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

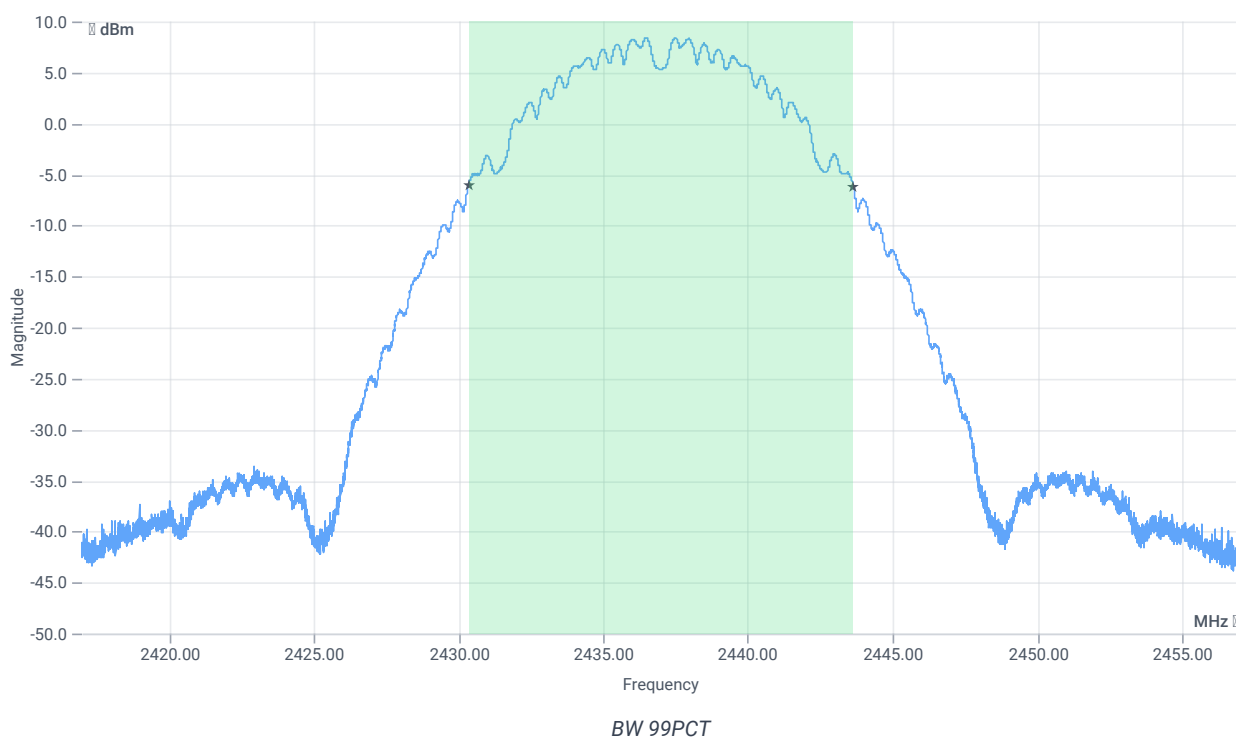


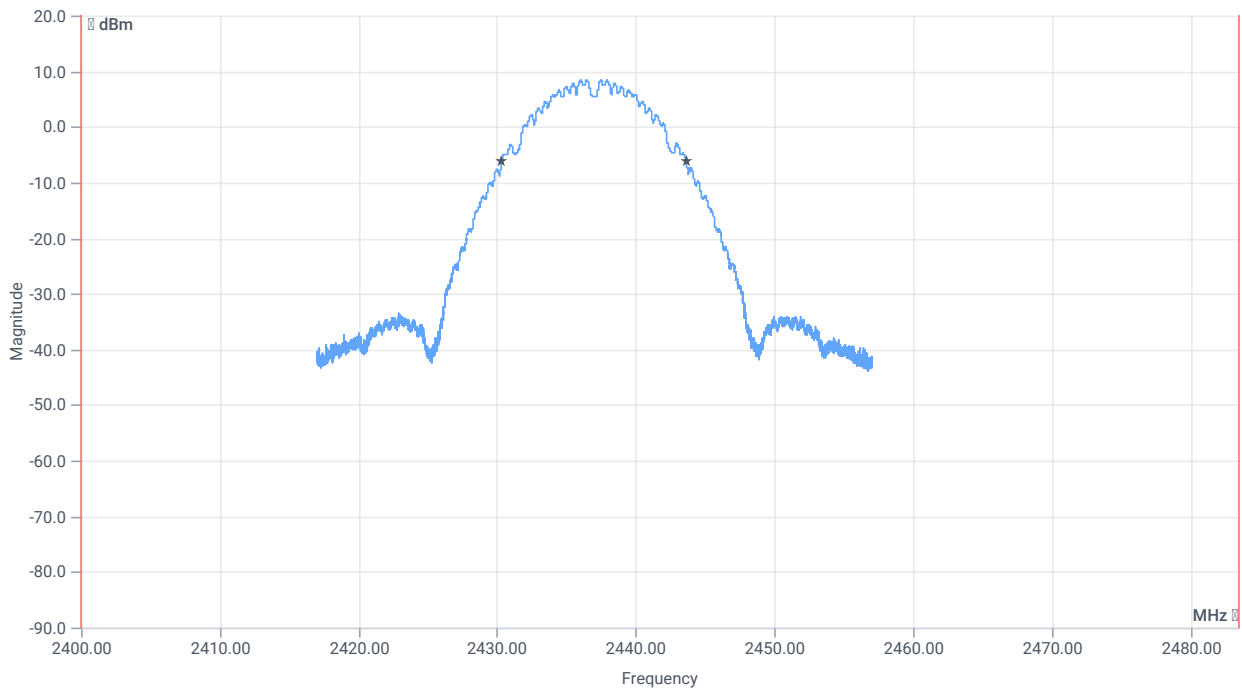


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	13299.000	kHz	INFO
T1 99%	2400.000000	---	2430.3487	MHz	PASS
T2 99%	---	2483.500000	2443.6473	MHz	PASS

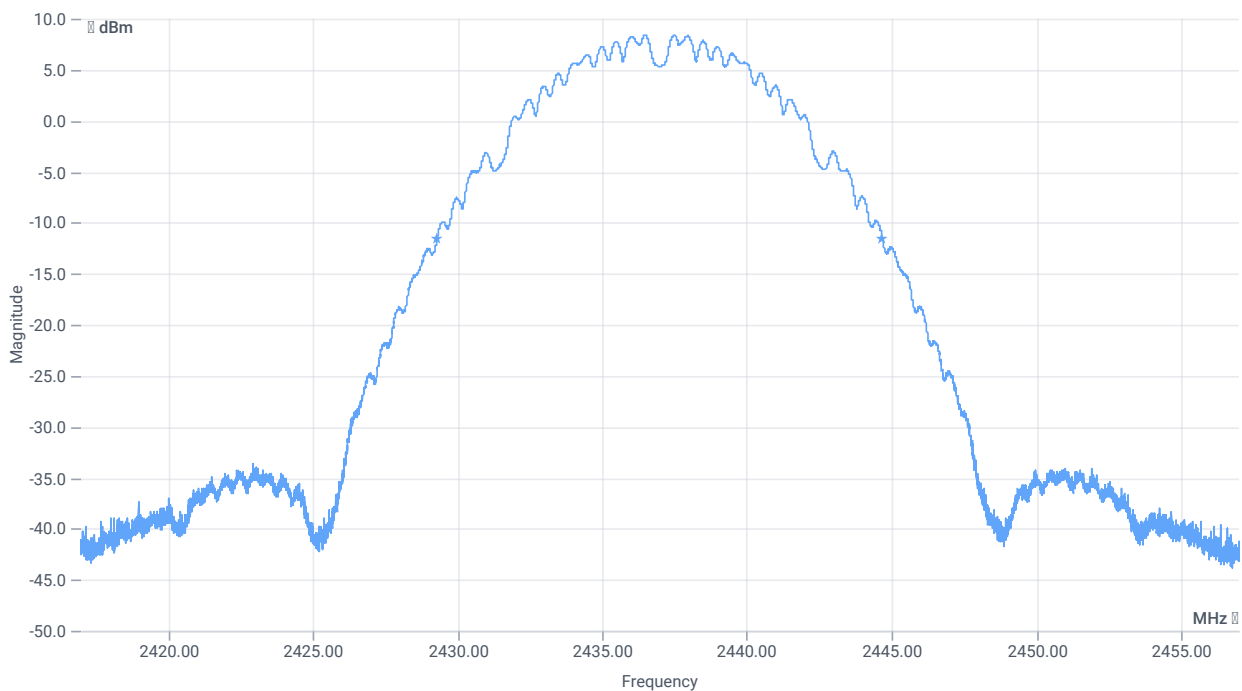

BW 20dB

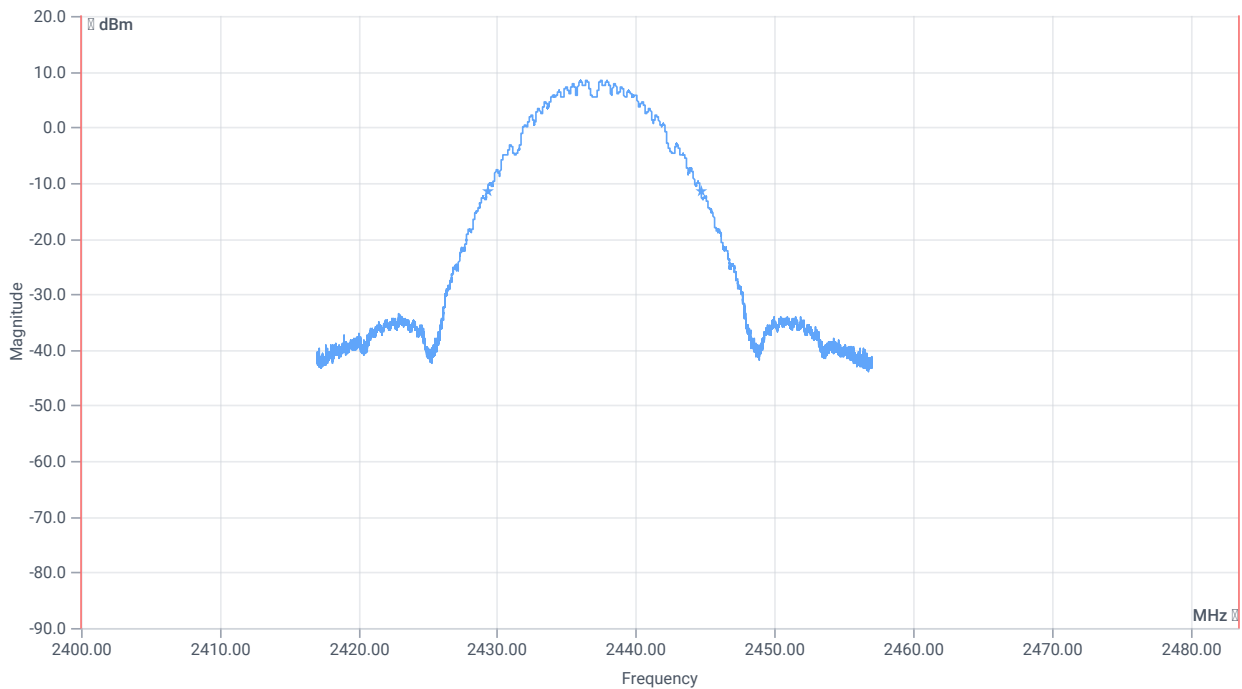

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	15384	kHz	INFO
T1 20dB	2400.000000	---	2429.3000	MHz	PASS
T2 20dB	---	2483.500000	2444.6840	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode

References

TC start	16.10.2023 14:18:24
Ambit temp [°C] humidity [rel%]	27.1 30
System version	4.6.2.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2437 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	11.72	dBm	INFO
Ref. Frequency	---	---	2438.100	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.72 14.01 20
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

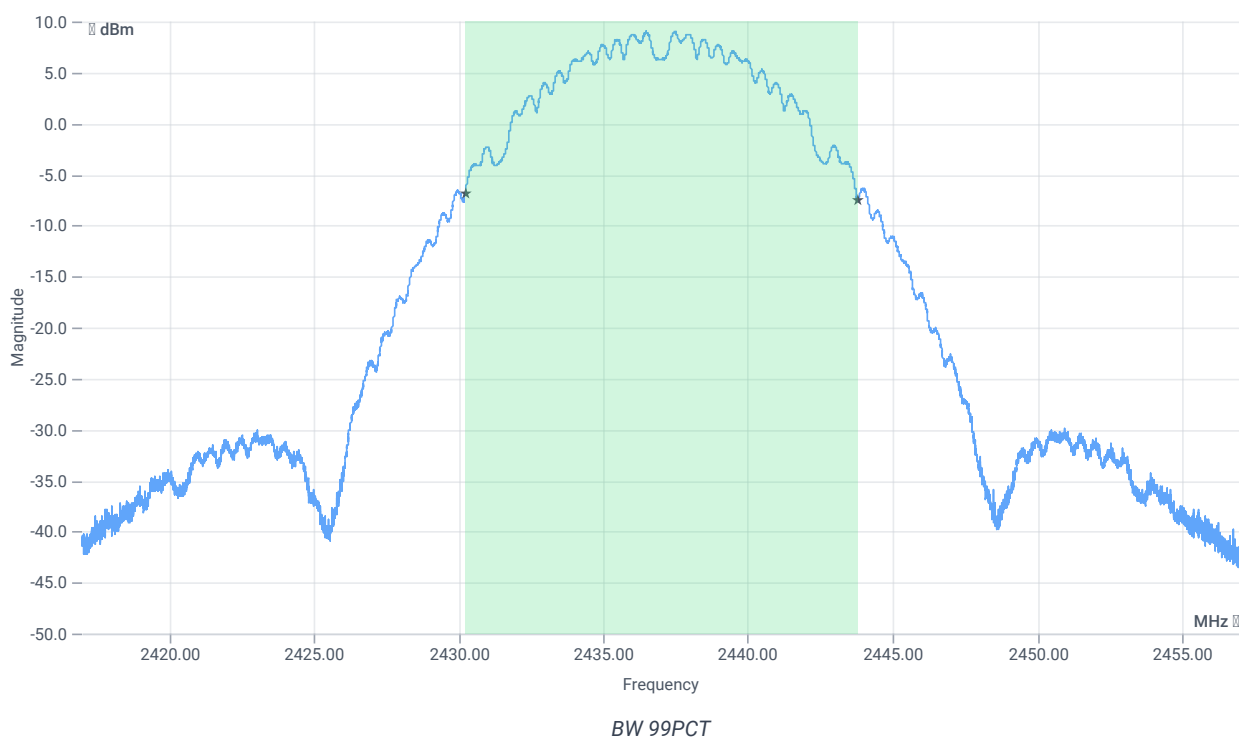


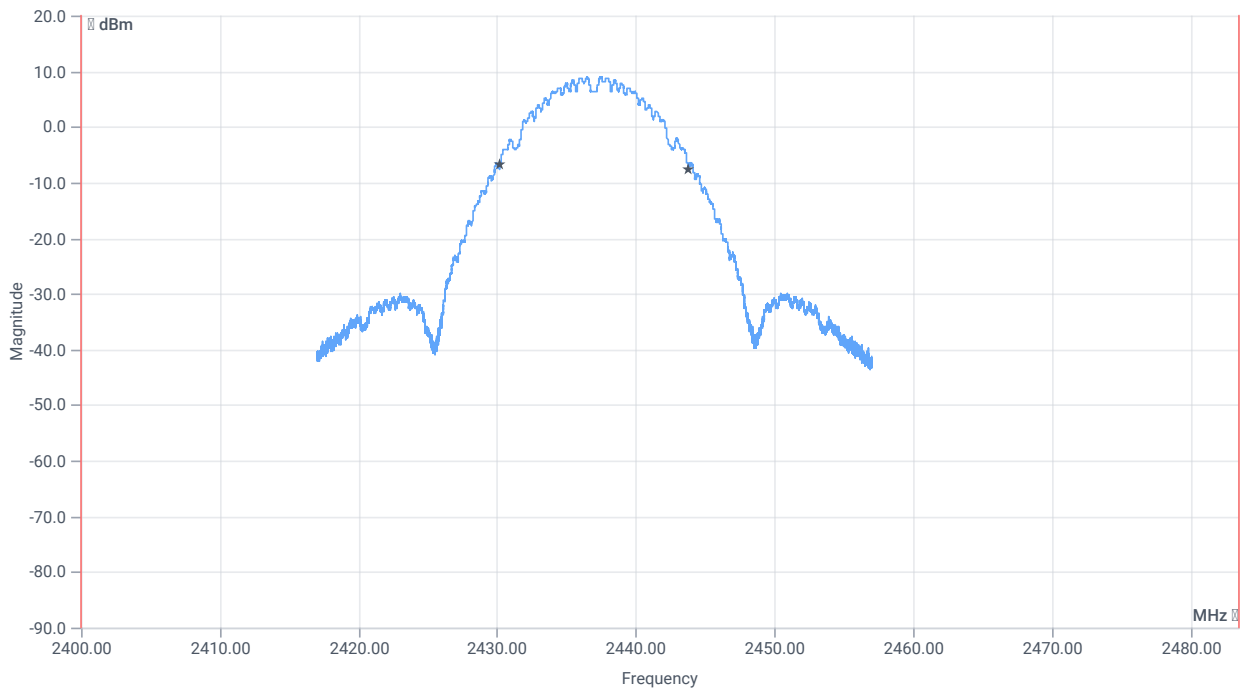


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	13563.000	kHz	INFO
T1 99%	2400.000000	---	2430.2327	MHz	PASS
T2 99%	---	2483.500000	2443.7953	MHz	PASS

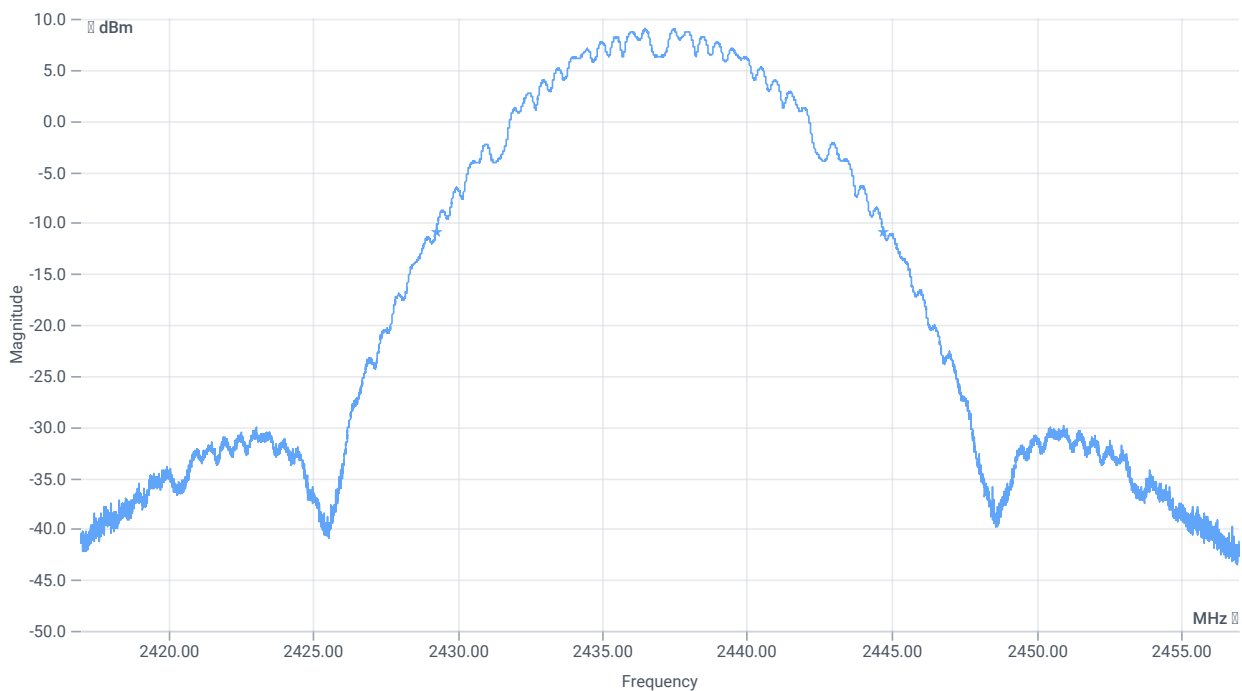

BW 20dB

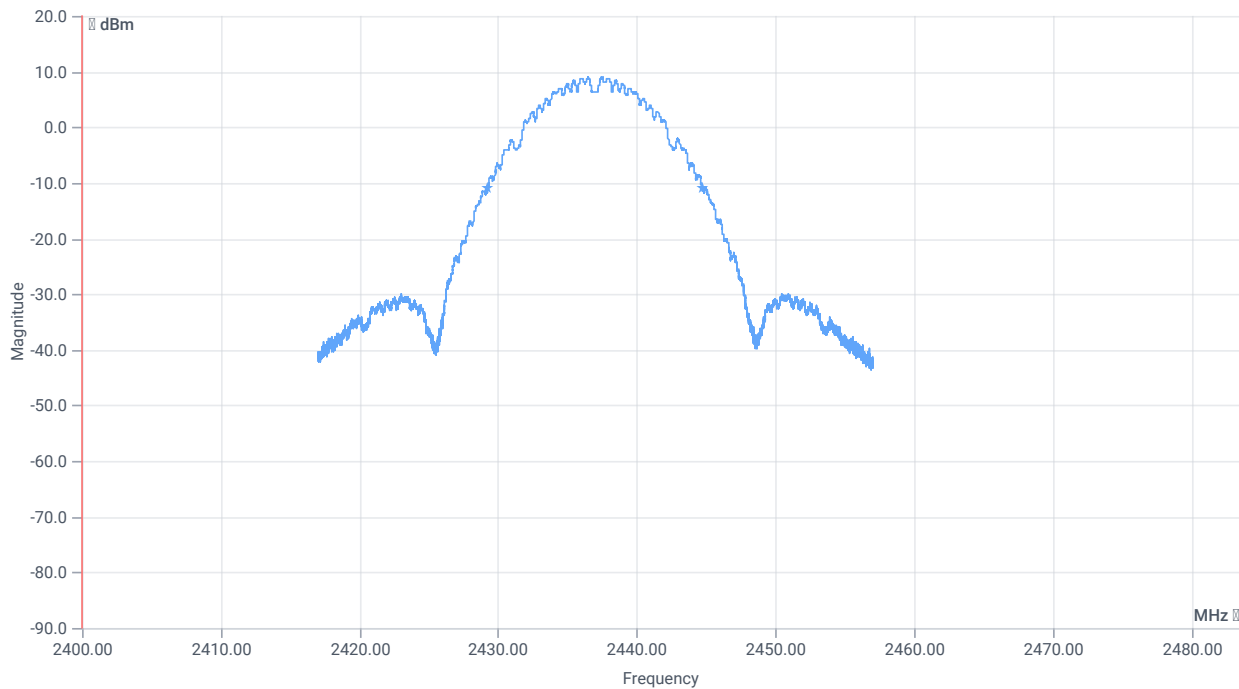

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	15452	kHz	INFO
T1 20dB	2400.000000	---	2429.2640	MHz	PASS
T2 20dB	---	2483.500000	2444.7160	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode

References

TC start	16.10.2023 14:29:02
Ambit temp [°C] humidity [rel%]	27.1 28
System version	4.6.2.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2462 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	11.70	dBm	INFO
Ref. Frequency	---	---	2460.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.70 14.14 20
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

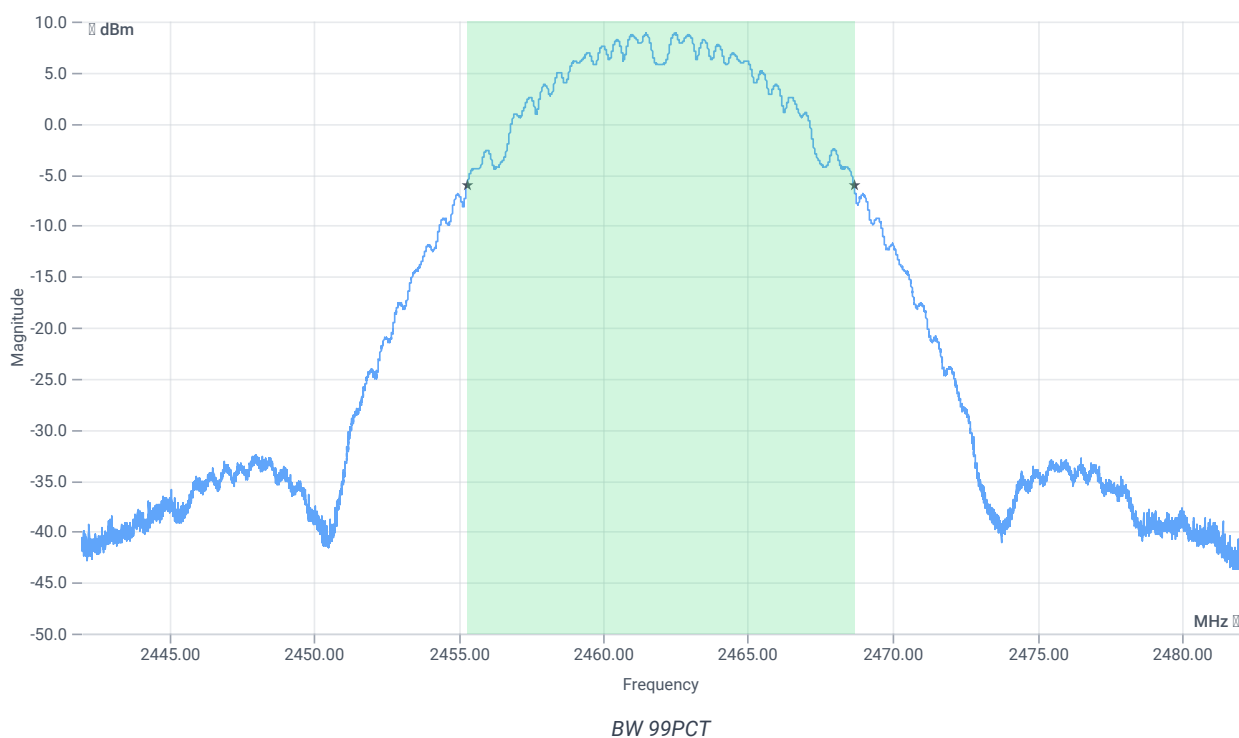


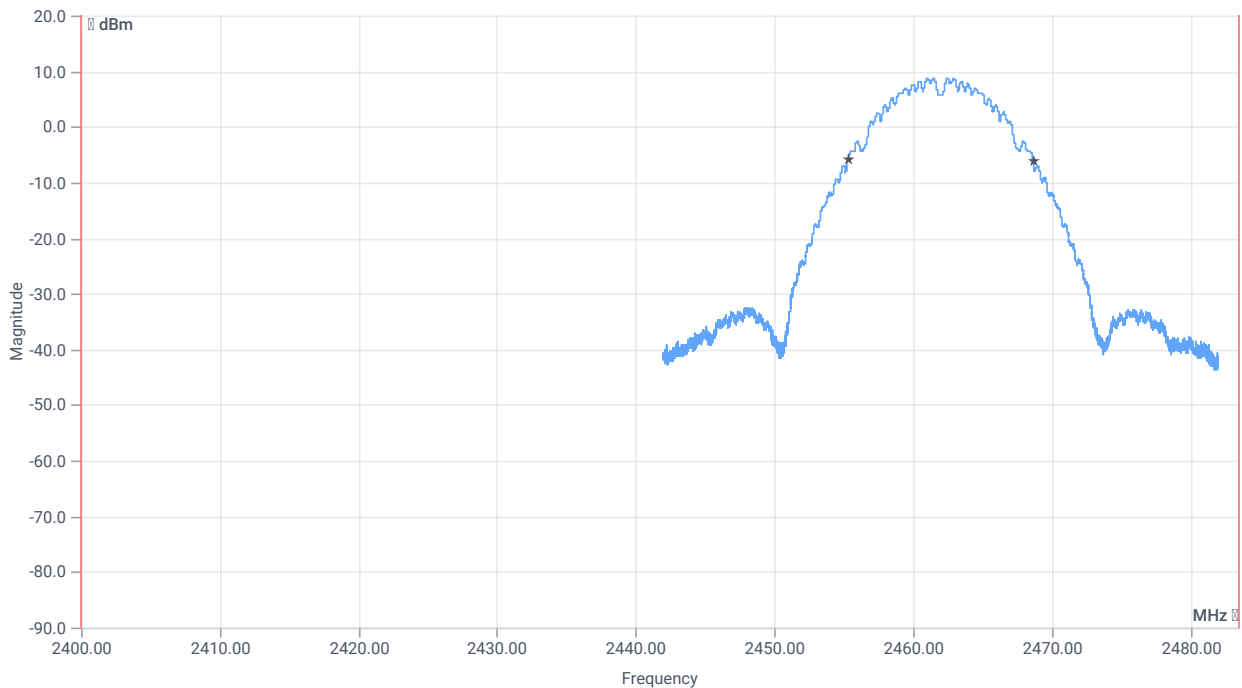


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	13367.000	kHz	INFO
T1 99%	2400.000000	---	2455.3047	MHz	PASS
T2 99%	---	2483.500000	2468.6713	MHz	PASS

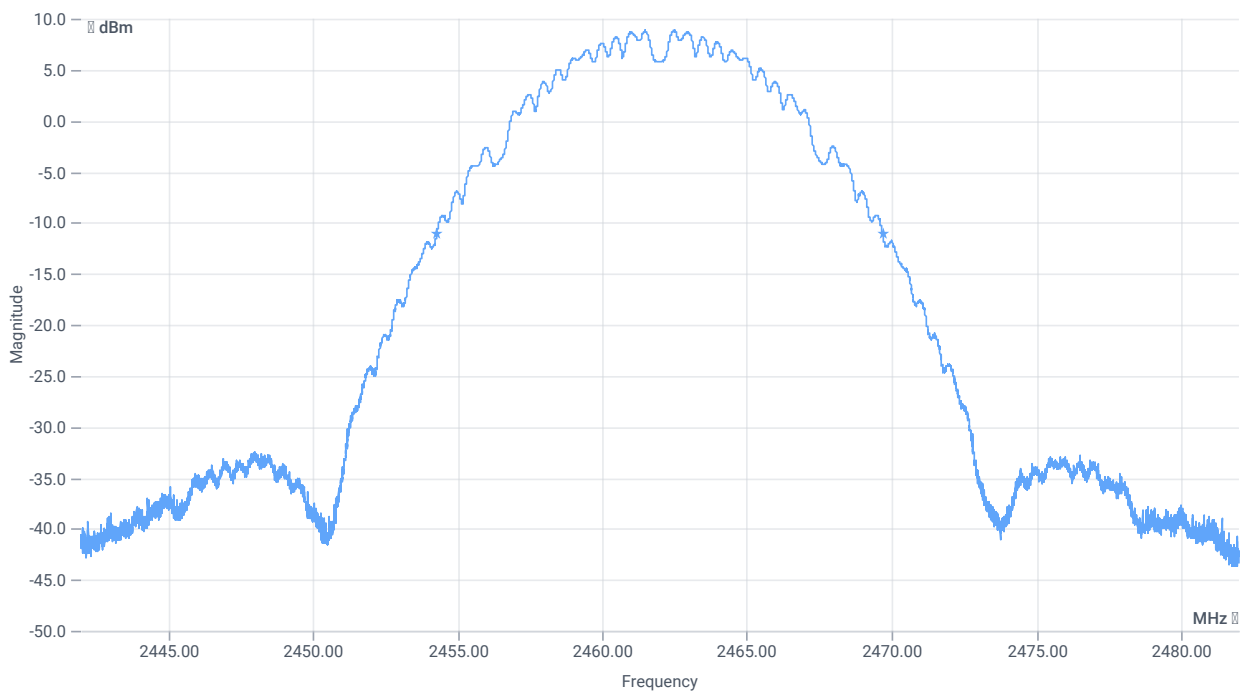

BW 20dB

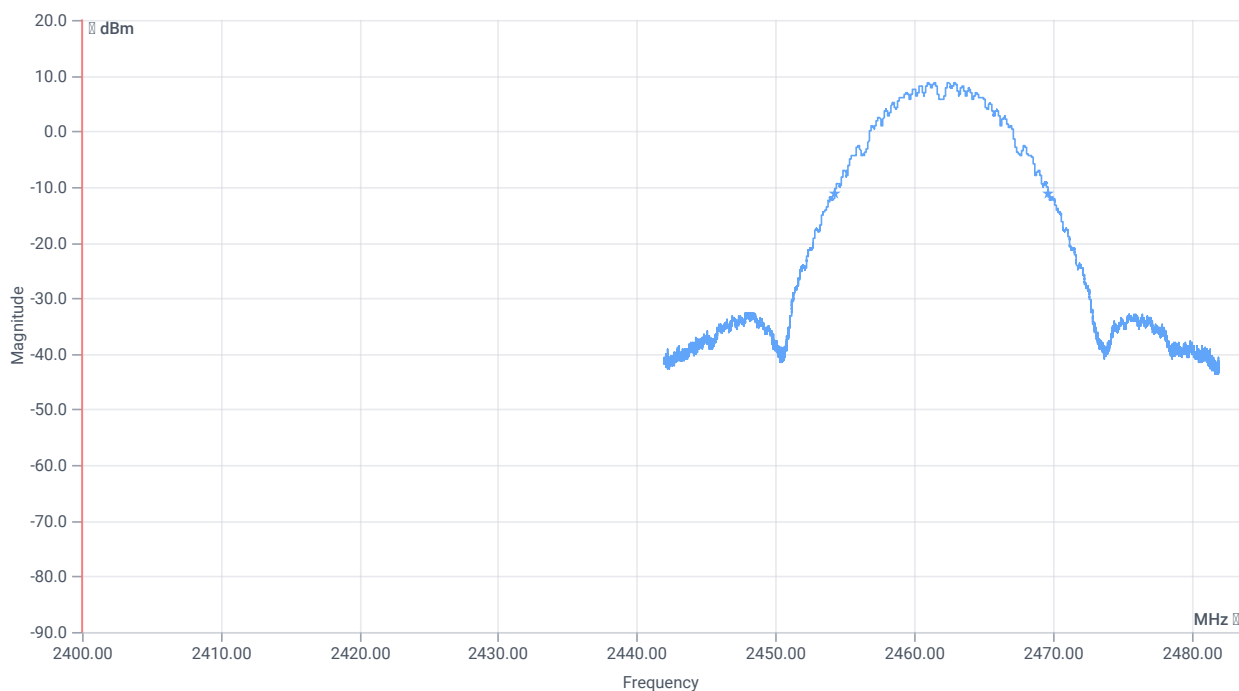

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	15408	kHz	INFO
T1 20dB	2400.000000	---	2454.2800	MHz	PASS
T2 20dB	---	2483.500000	2469.6880	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode

References

TC start	16.10.2023 14:39:16
Ambit temp [°C] humidity [rel%]	27.3 29
System version	4.6.2.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2462 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	12.00	dBm	INFO
Ref. Frequency	---	---	2460.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.00 14.14 20
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

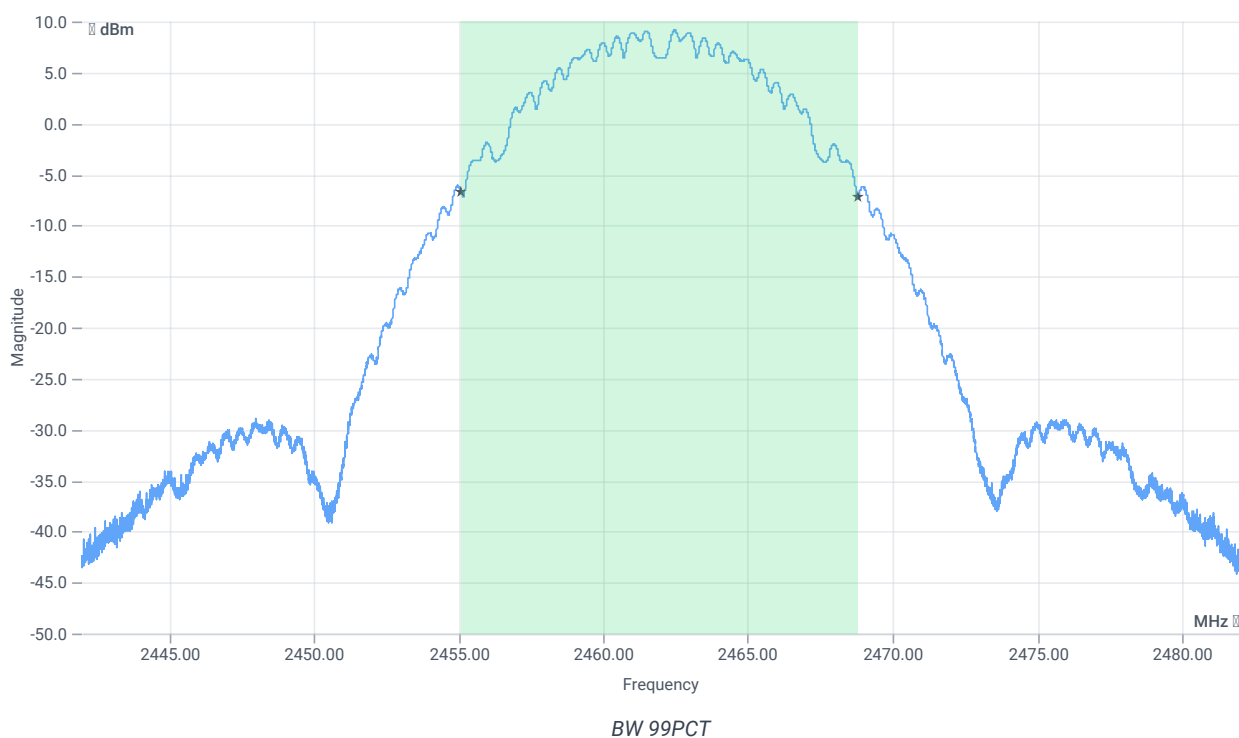


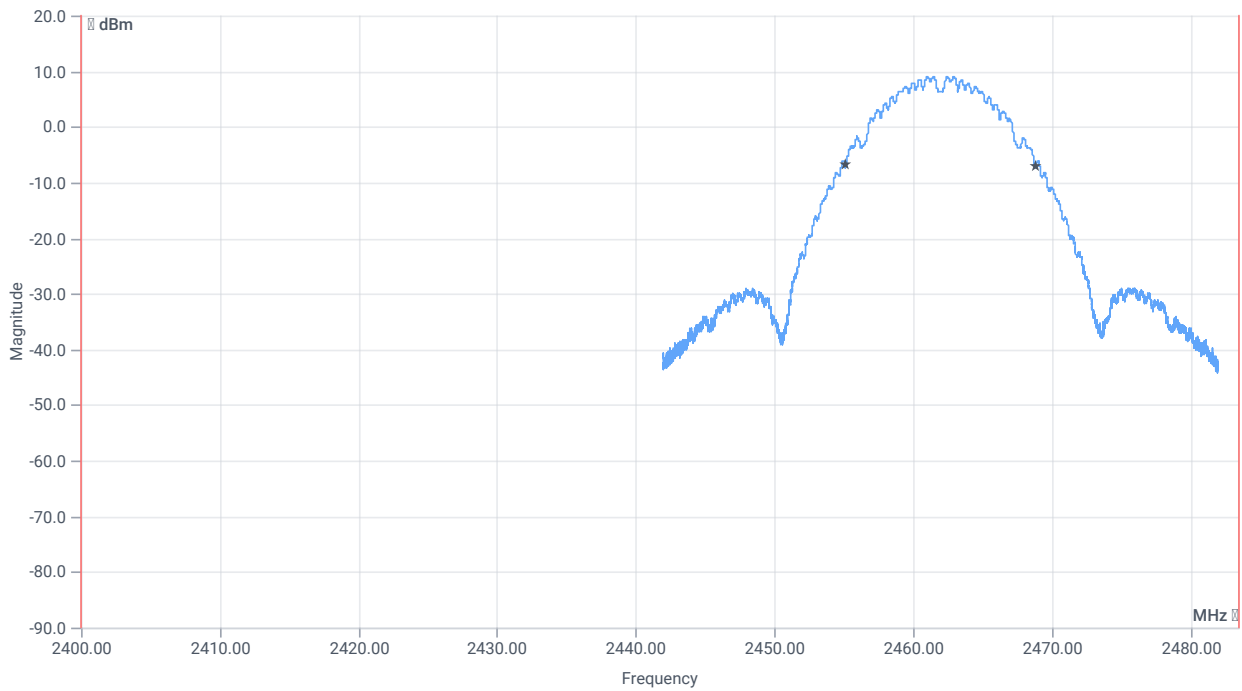


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	13711.000	kHz	INFO
T1 99%	2400.000000	---	2455.1127	MHz	PASS
T2 99%	---	2483.500000	2468.8233	MHz	PASS

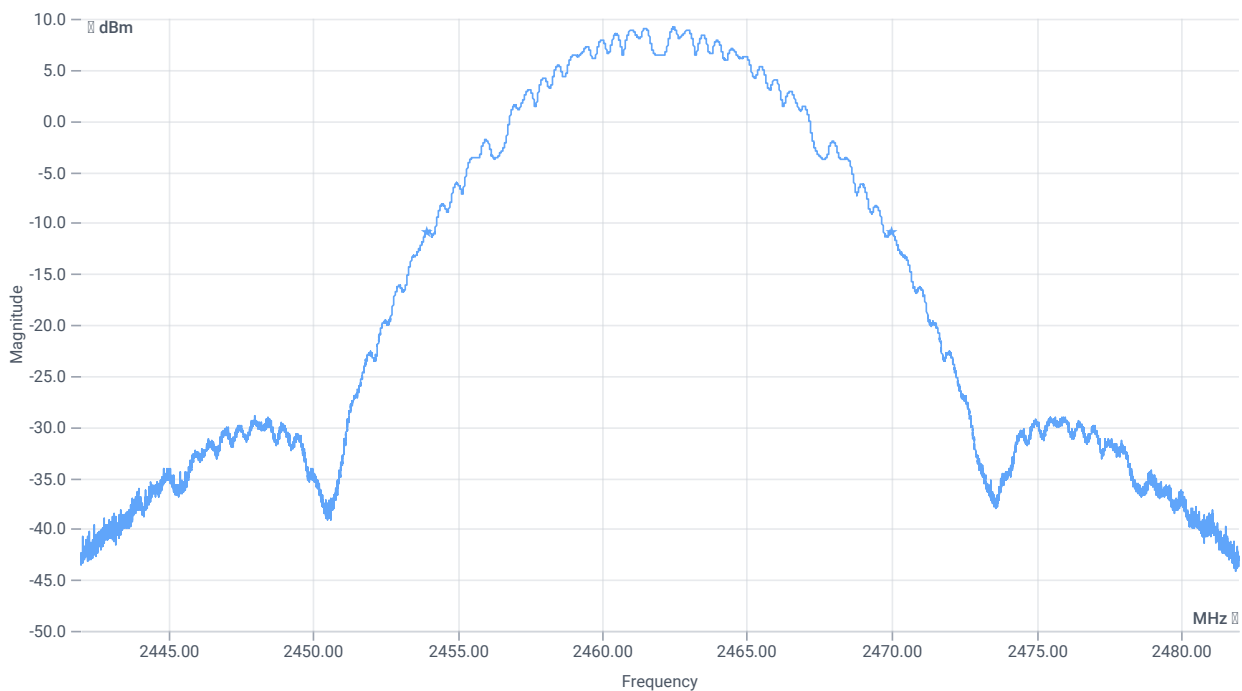

BW 20dB

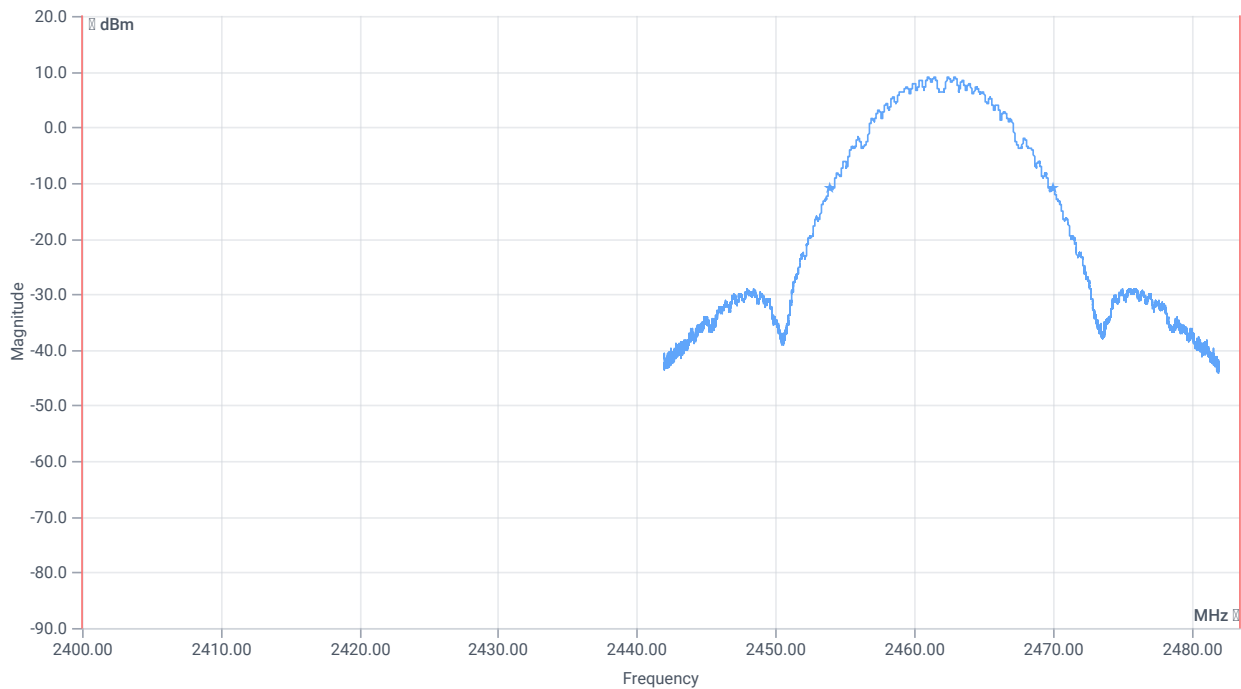

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	16072	kHz	INFO
T1 20dB	2400.000000	---	2453.9320	MHz	PASS
T2 20dB	---	2483.500000	2470.0040	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode

References

TC start	16.10.2023 14:50:19
Ambit temp [°C] humidity [rel%]	27.6 28
System version	4.6.2.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2412 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	8.87	dBm	INFO
Ref. Frequency	---	---	2414.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.87 13.85 20
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

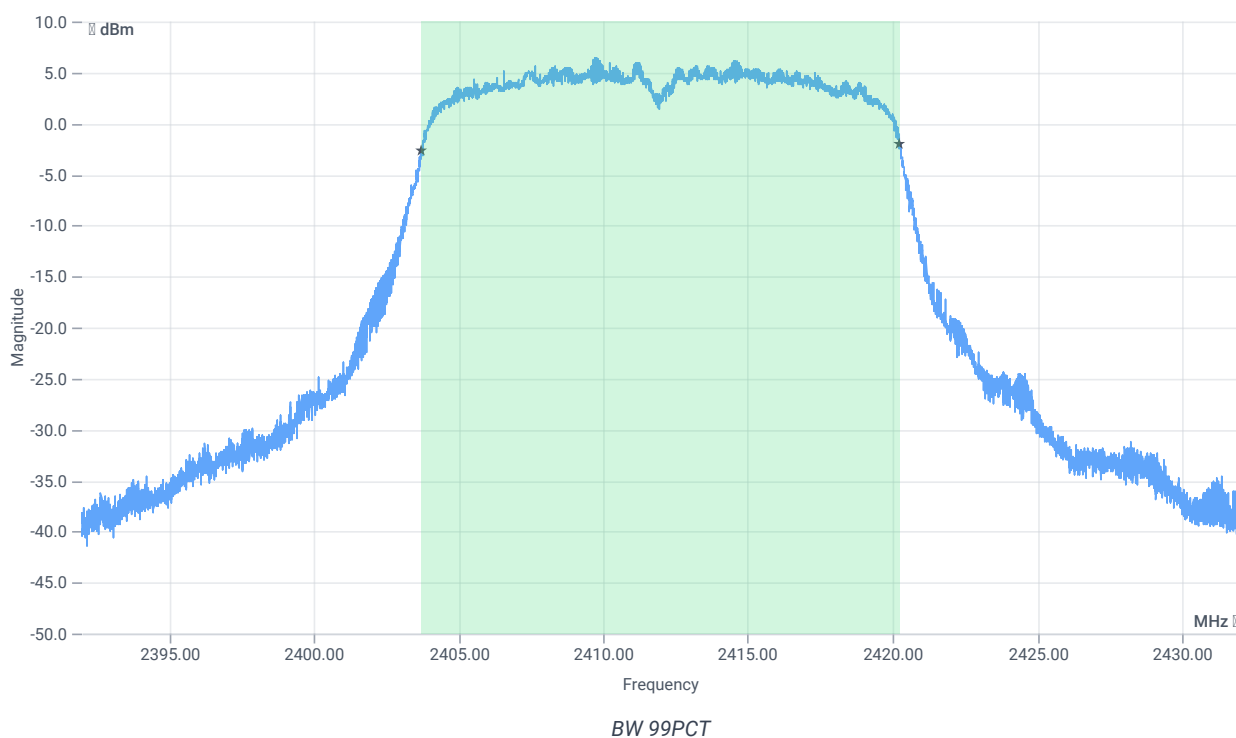


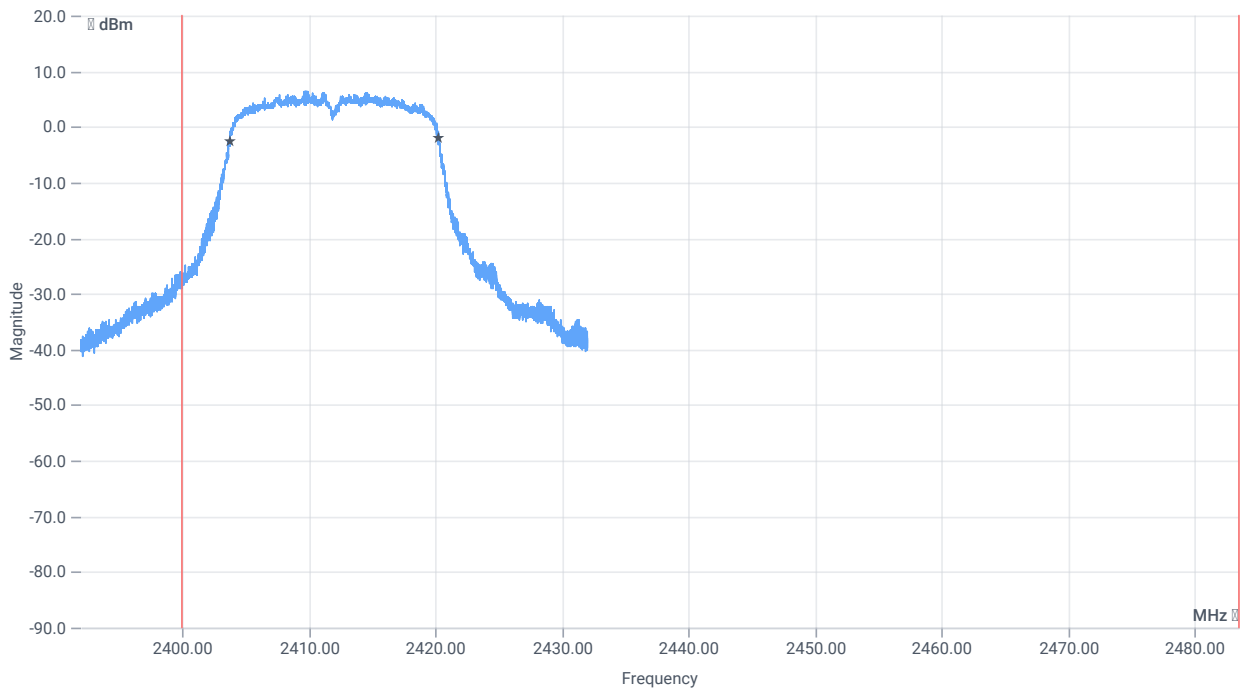


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16494.000	kHz	INFO
T1 99%	2400.000000	---	2403.7368	MHz	PASS
T2 99%	---	2483.500000	2420.2312	MHz	PASS

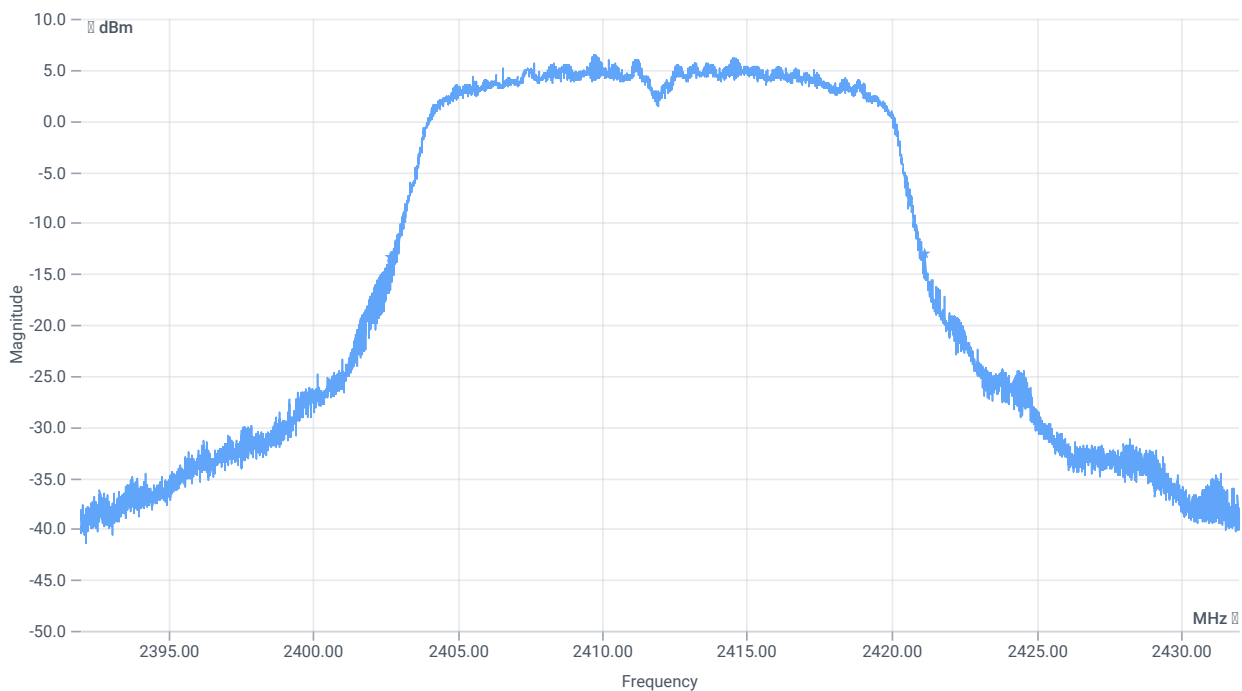

BW 20dB

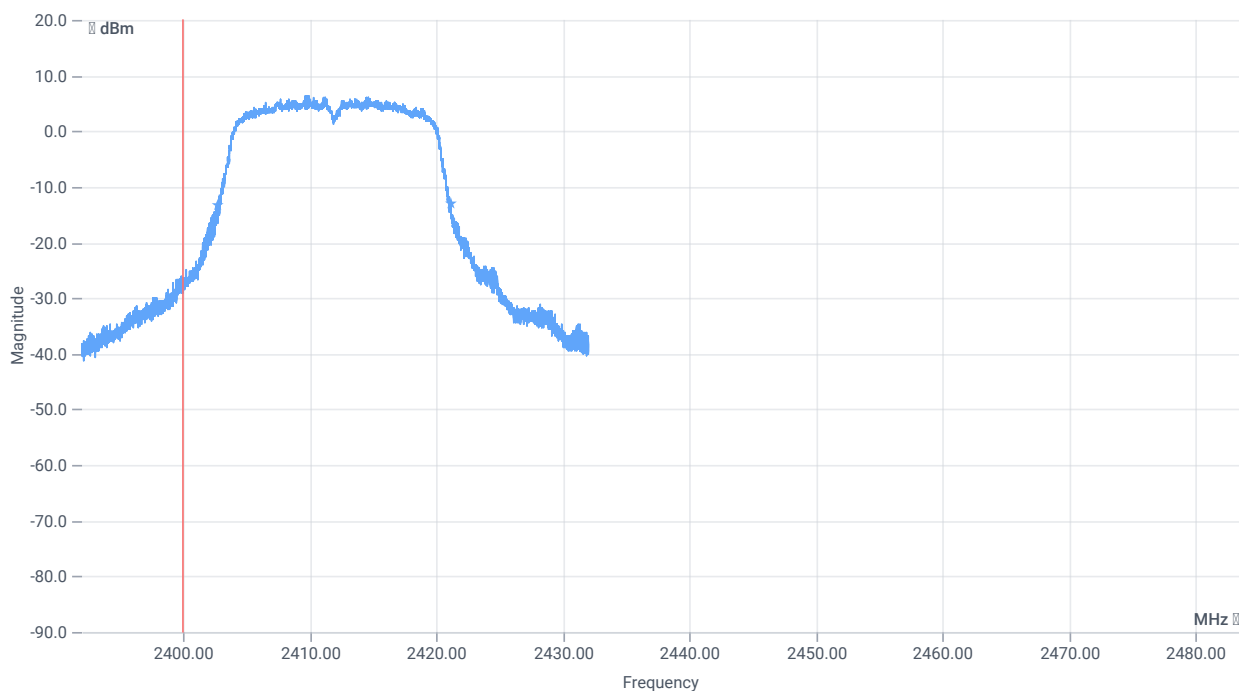

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	18472	kHz	INFO
T1 20dB	2400.000000	---	2402.6960	MHz	PASS
T2 20dB	---	2483.500000	2421.1680	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode

References

TC start	16.10.2023 15:00:33
Ambit temp [°C] humidity [rel%]	27.3 27
System version	4.6.2.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2412 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.43	dBm	INFO
Ref. Frequency	---	---	2414.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.43 13.85 20
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

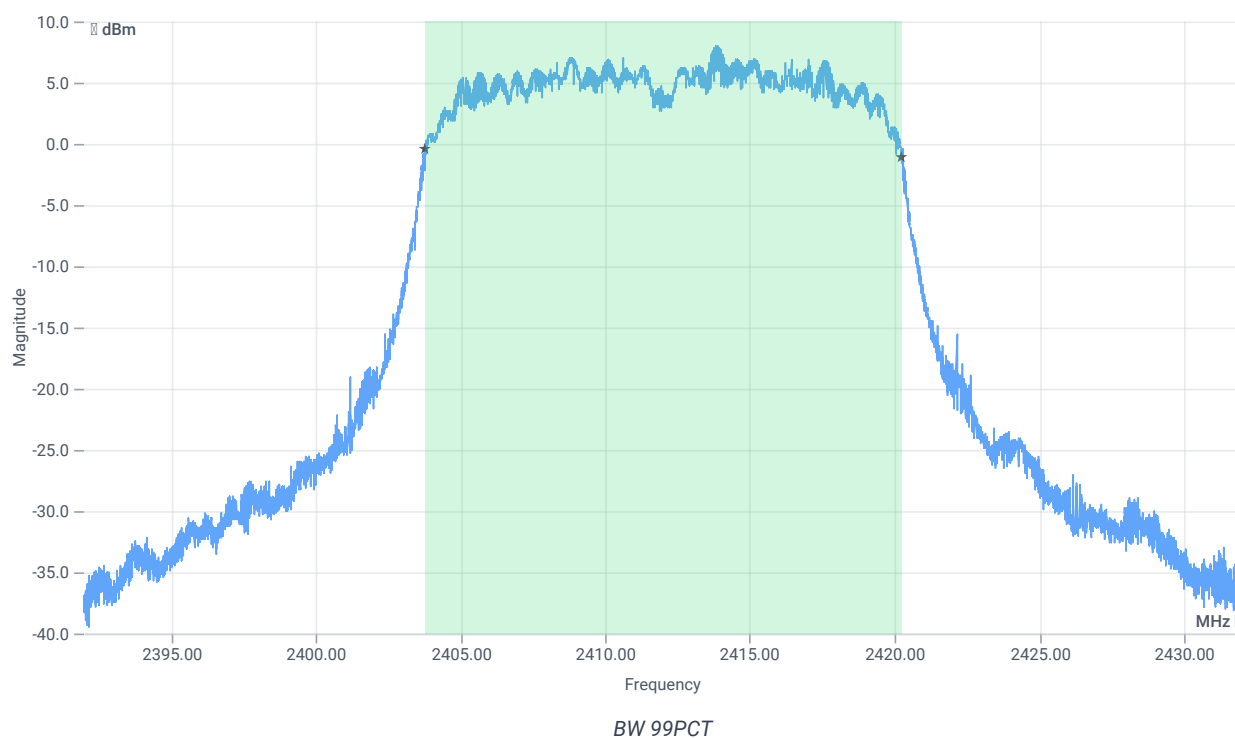


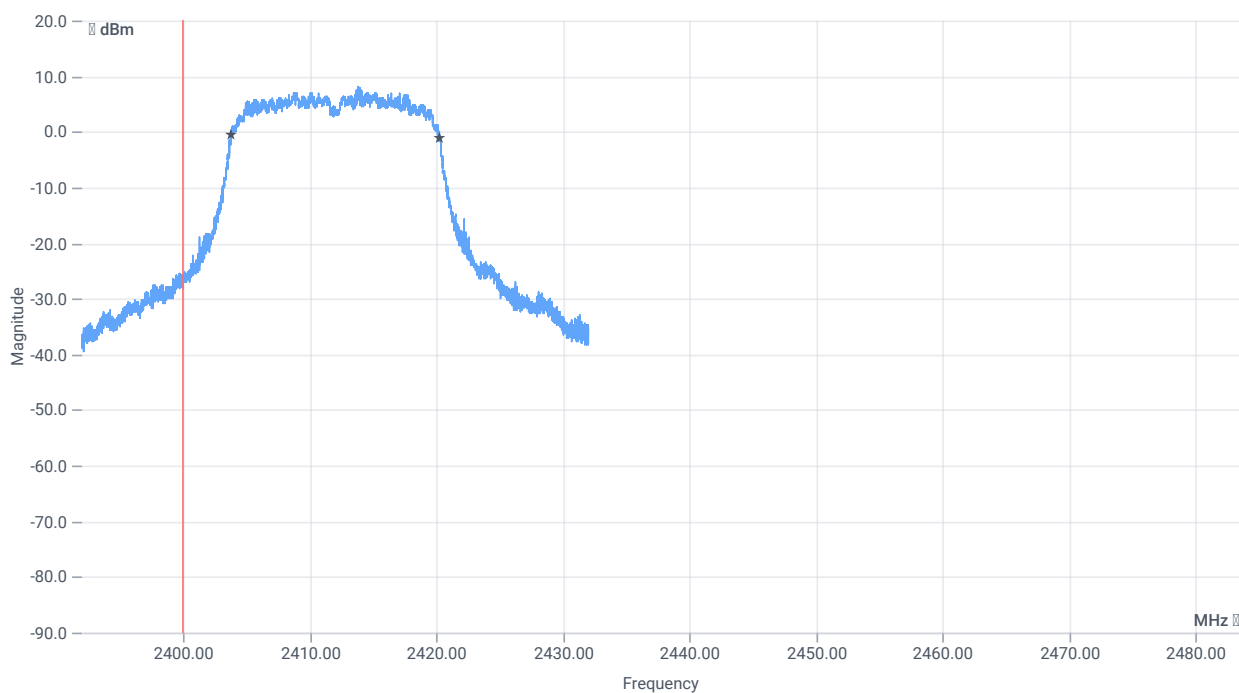


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16438.000	kHz	INFO
T1 99%	2400.000000	---	2403.7768	MHz	PASS
T2 99%	---	2483.500000	2420.2152	MHz	PASS

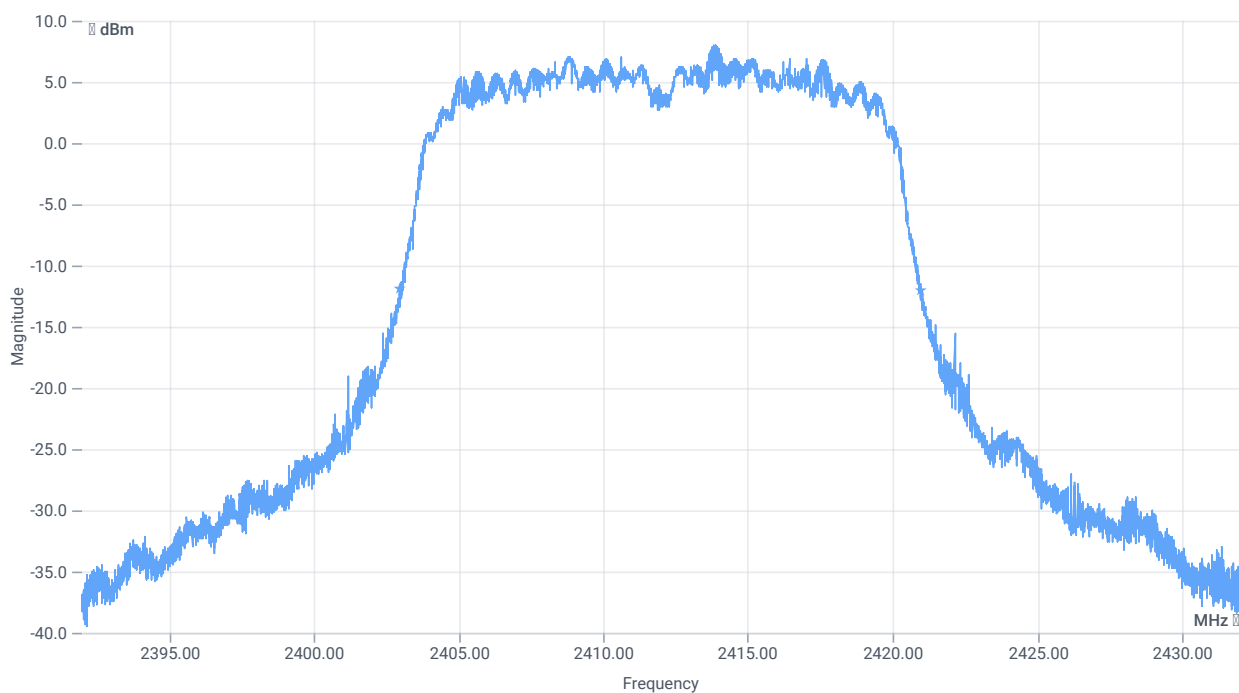

BW 20dB

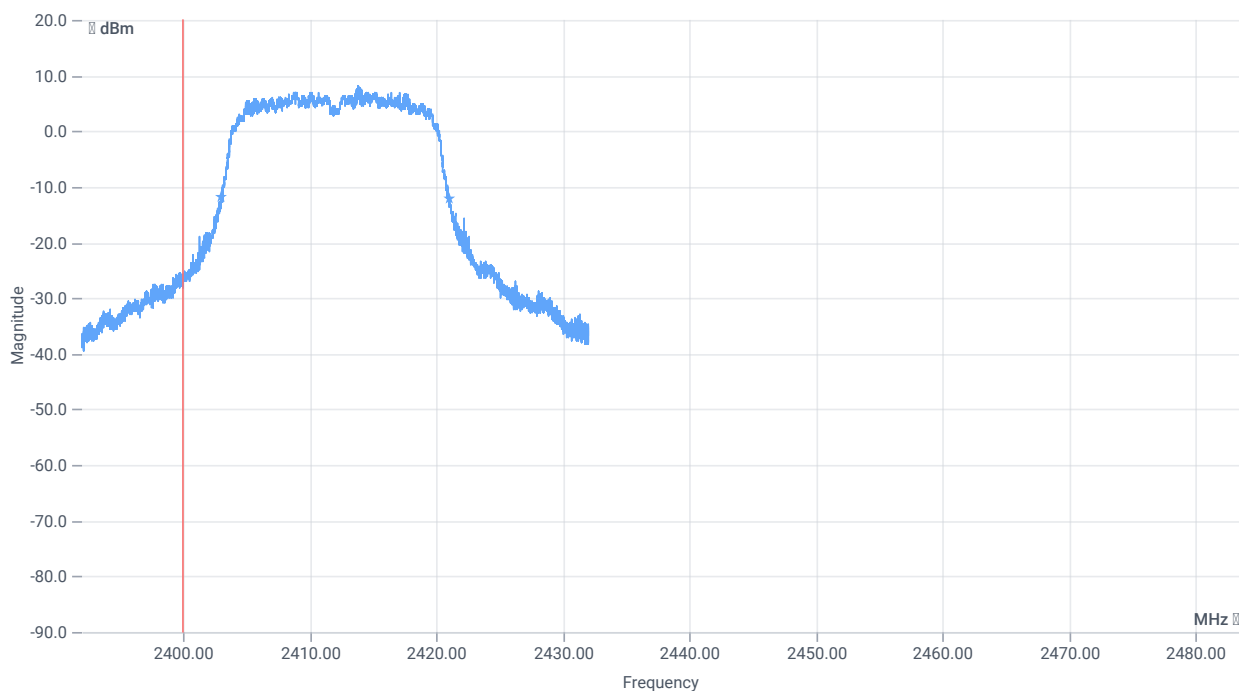

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	17996	kHz	INFO
T1 20dB	2400.000000	---	2402.9840	MHz	PASS
T2 20dB	---	2483.500000	2420.9800	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode

References

TC start	16.10.2023 15:19:19
Ambit temp [°C] humidity [rel%]	27.5 28
System version	4.6.2.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2437 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.60	dBm	INFO
Ref. Frequency	---	---	2434.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.60 14.01 20
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

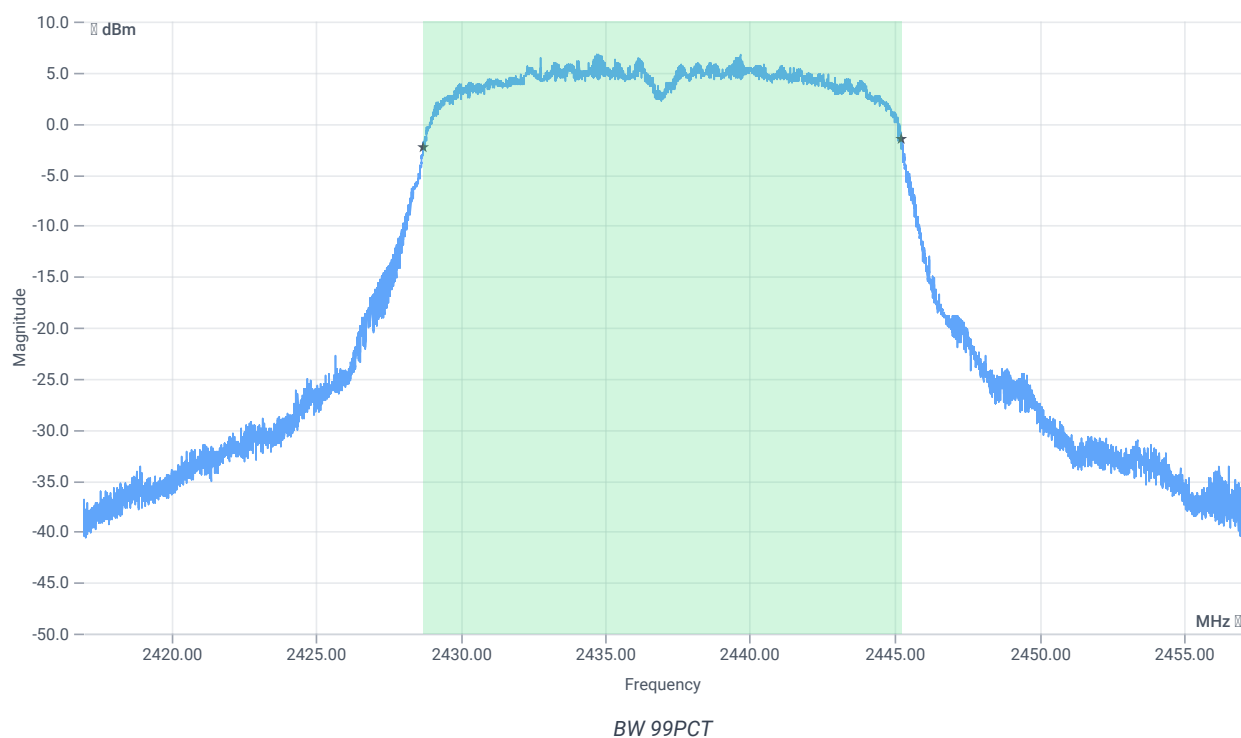


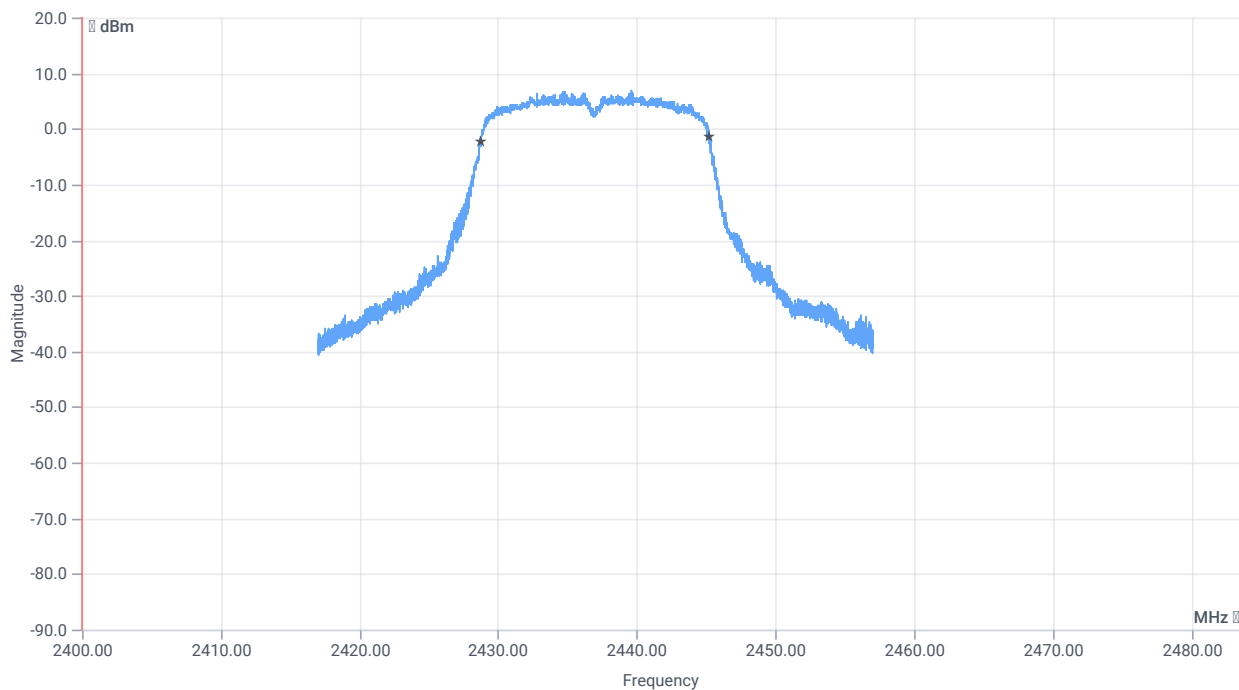


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16490.000	kHz	INFO
T1 99%	2400.000000	---	2428.7368	MHz	PASS
T2 99%	---	2483.500000	2445.2272	MHz	PASS

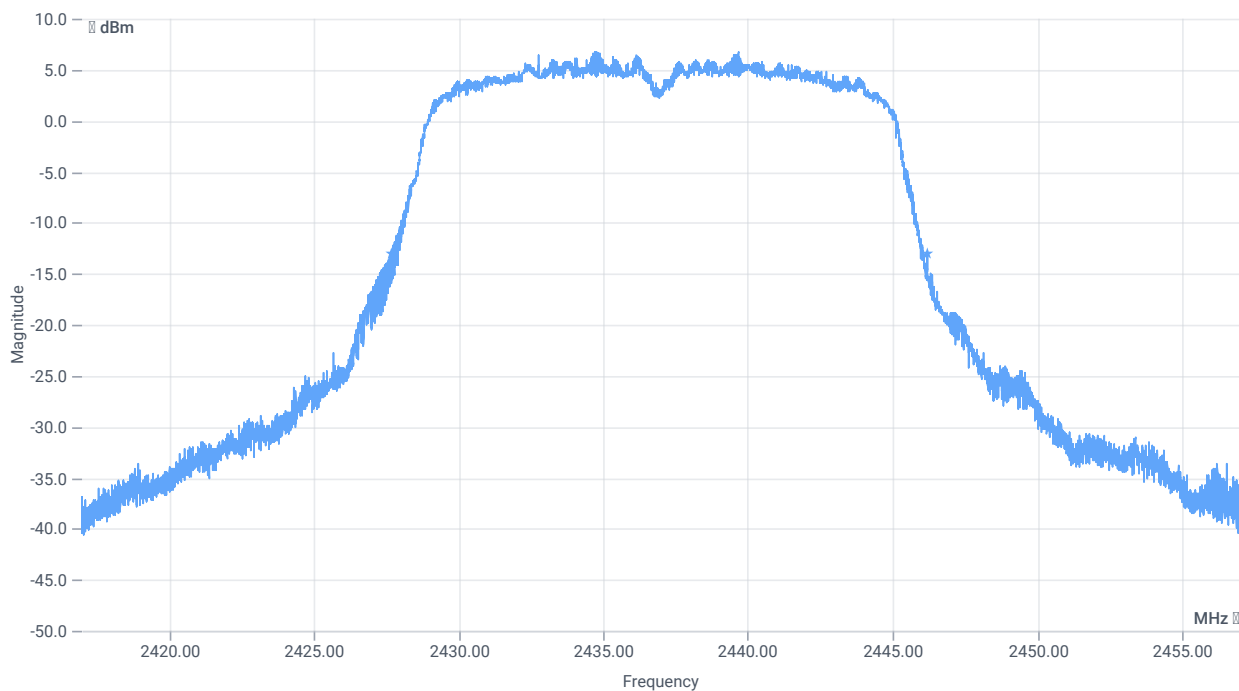

BW 20dB

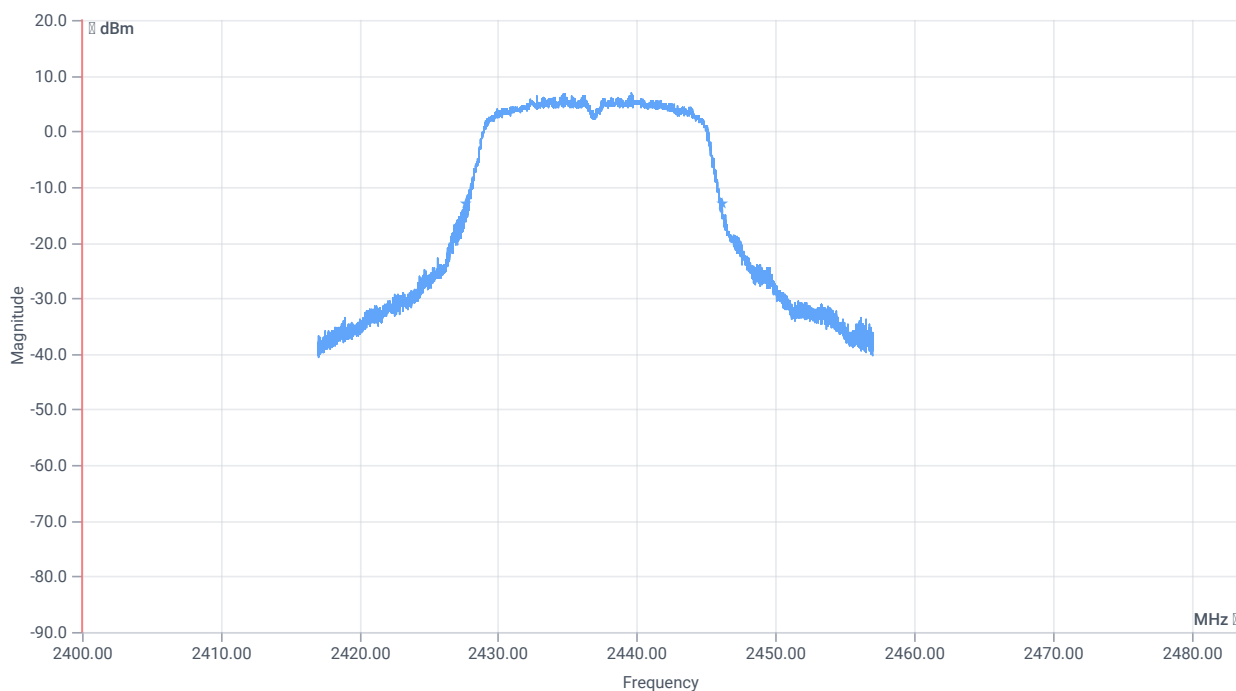

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	18520	kHz	INFO
T1 20dB	2400.000000	---	2427.6680	MHz	PASS
T2 20dB	---	2483.500000	2446.1880	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode

References

TC start	16.10.2023 15:29:34
Ambit temp [°C] humidity [rel%]	27.8 28
System version	4.6.2.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2437 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.81	dBm	INFO
Ref. Frequency	---	---	2433.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.81 14.01 20
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

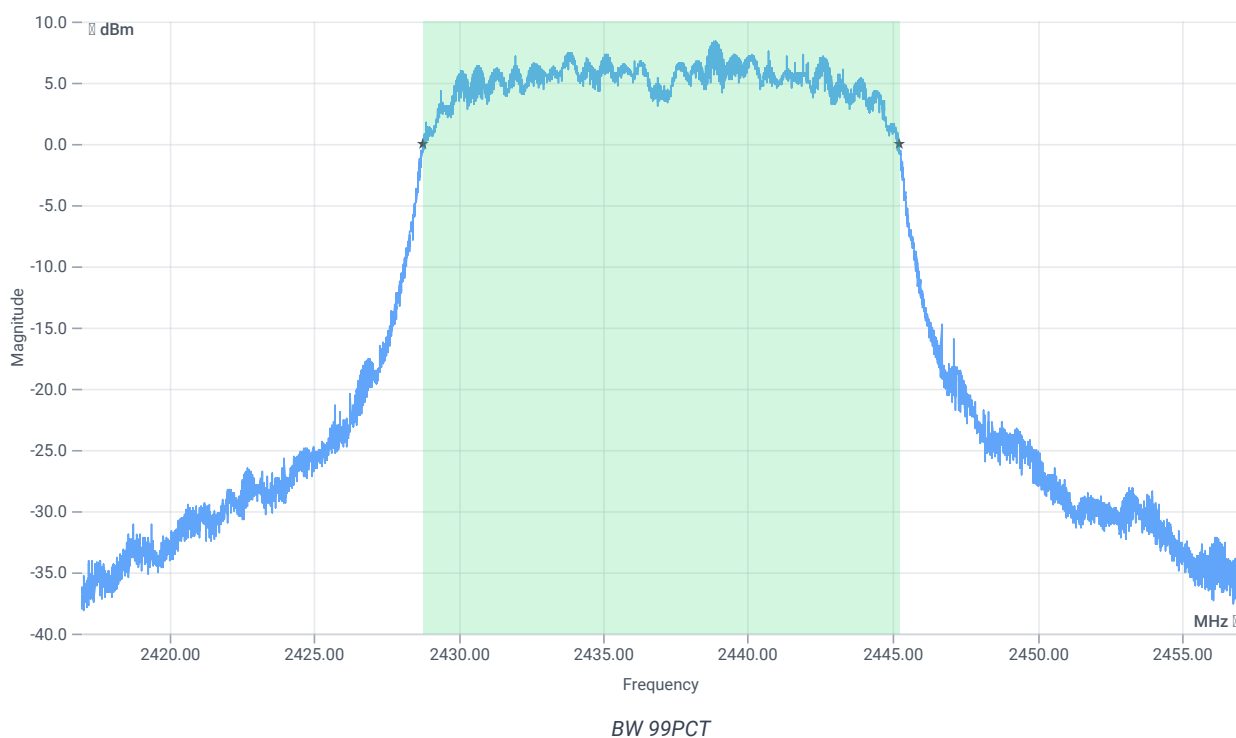


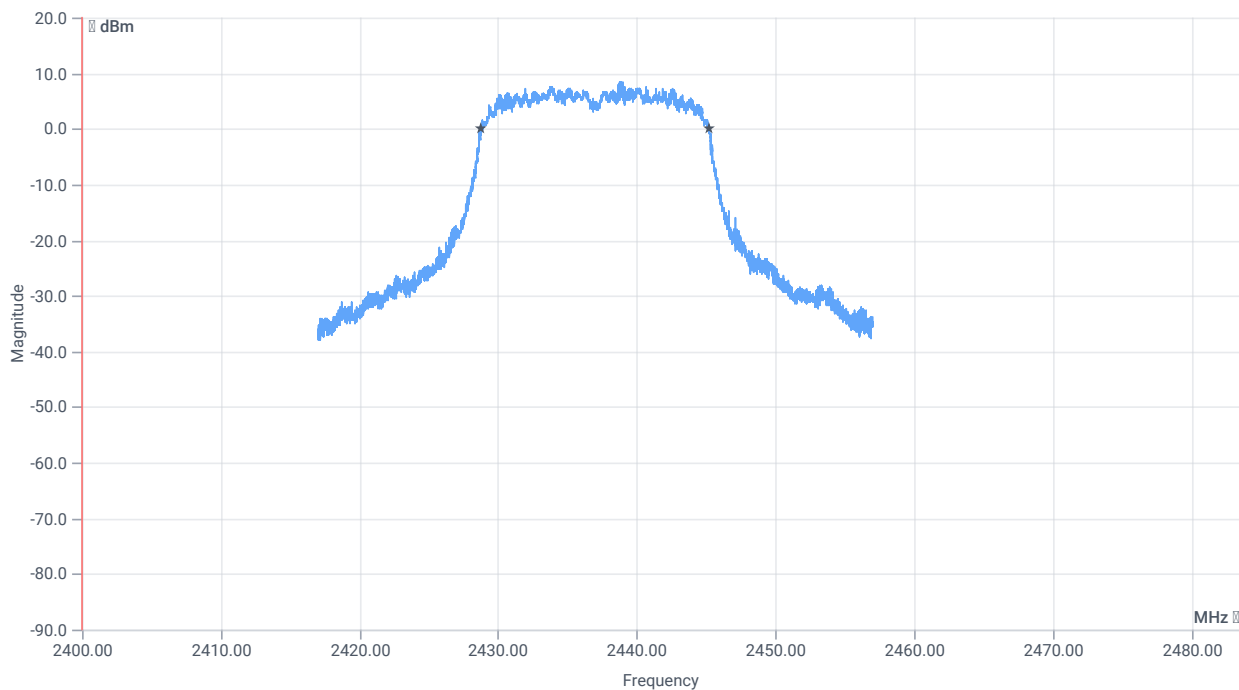


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16442.000	kHz	INFO
T1 99%	2400.000000	---	2428.7688	MHz	PASS
T2 99%	---	2483.500000	2445.2112	MHz	PASS

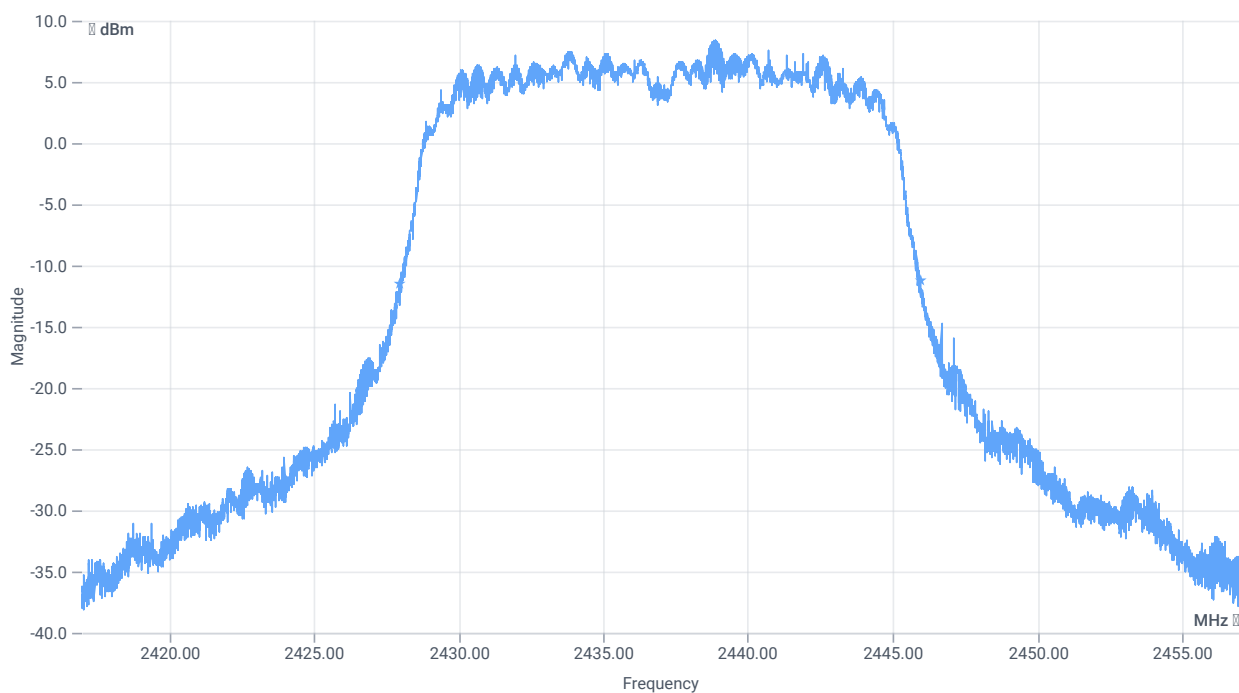

BW 20dB

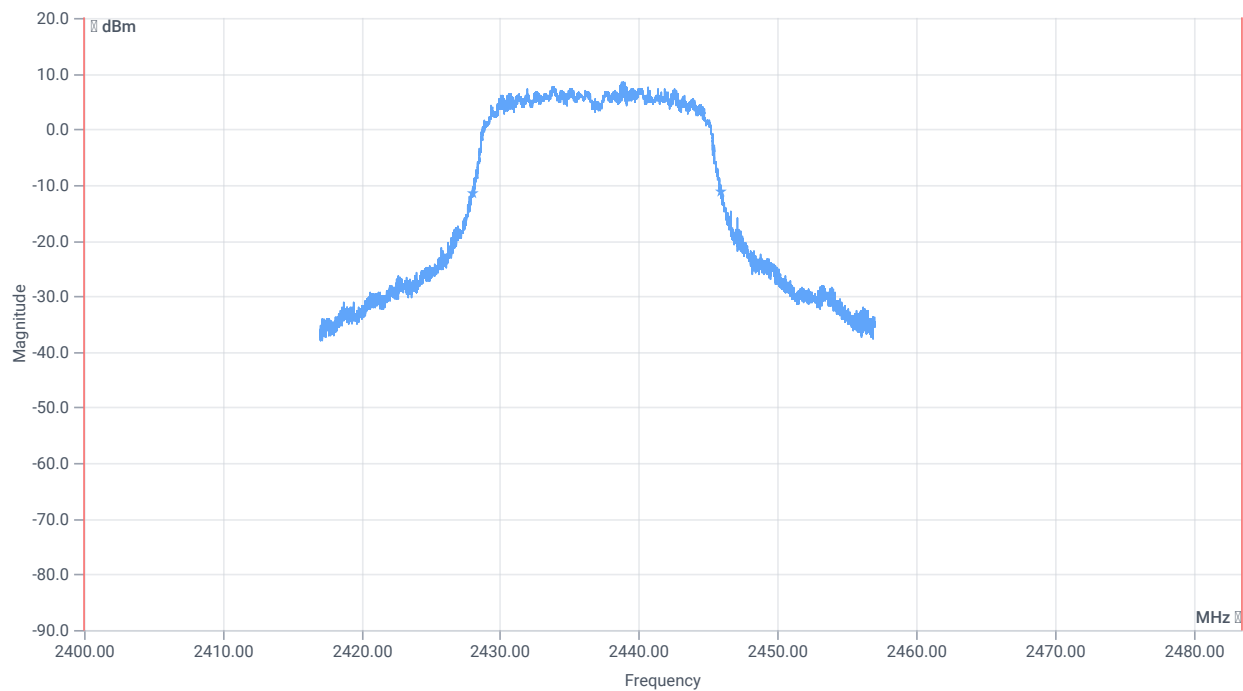

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	17980	kHz	INFO
T1 20dB	2400.000000	---	2427.9800	MHz	PASS
T2 20dB	---	2483.500000	2445.9600	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode

References

TC start	16.10.2023 15:40:12
Ambit temp [°C] humidity [rel%]	28.0 27
System version	4.6.2.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2462 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	10.05	dBm	INFO
Ref. Frequency	---	---	2459.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.05 14.14 20
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

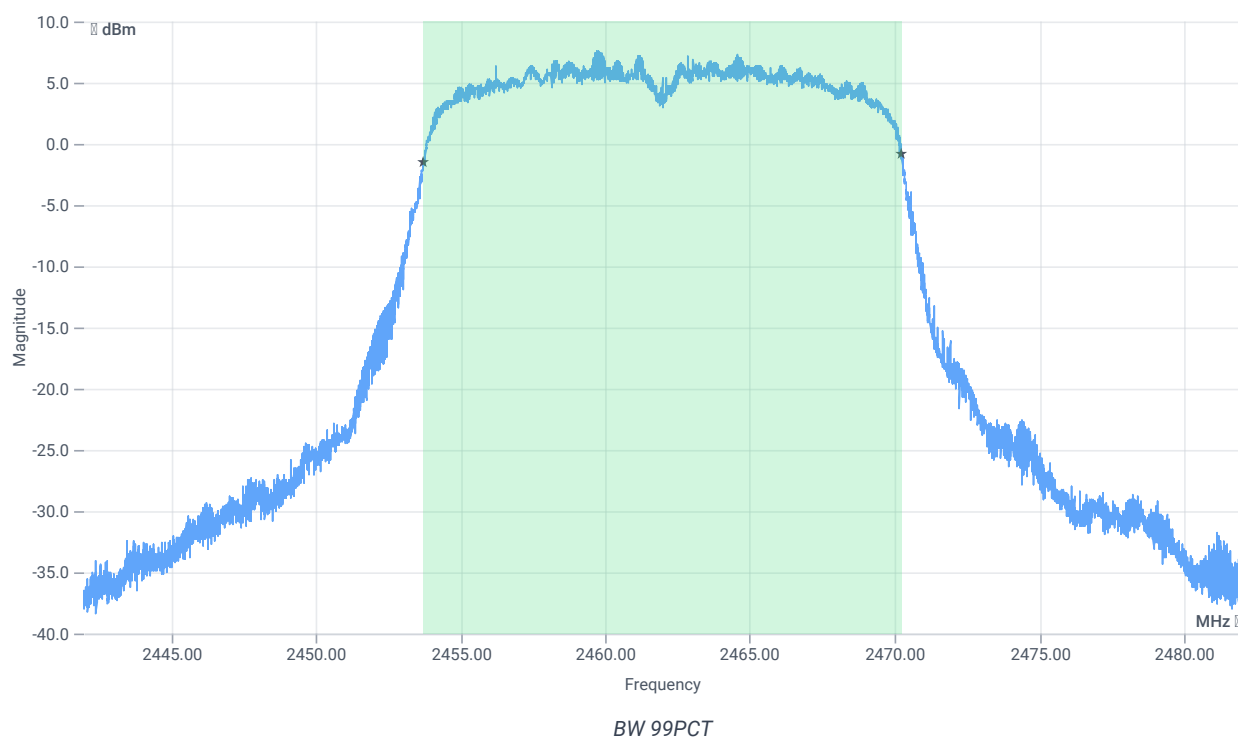


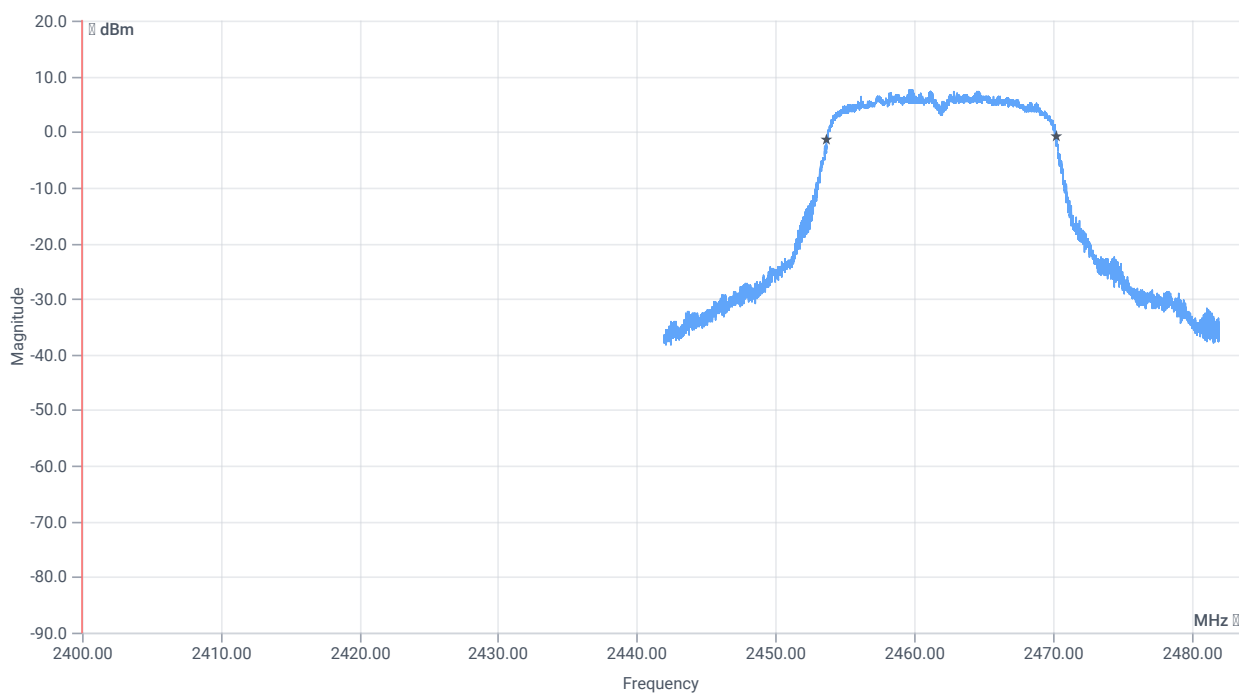


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16514.000	kHz	INFO
T1 99%	2400.000000	---	2453.7208	MHz	PASS
T2 99%	---	2483.500000	2470.2352	MHz	PASS

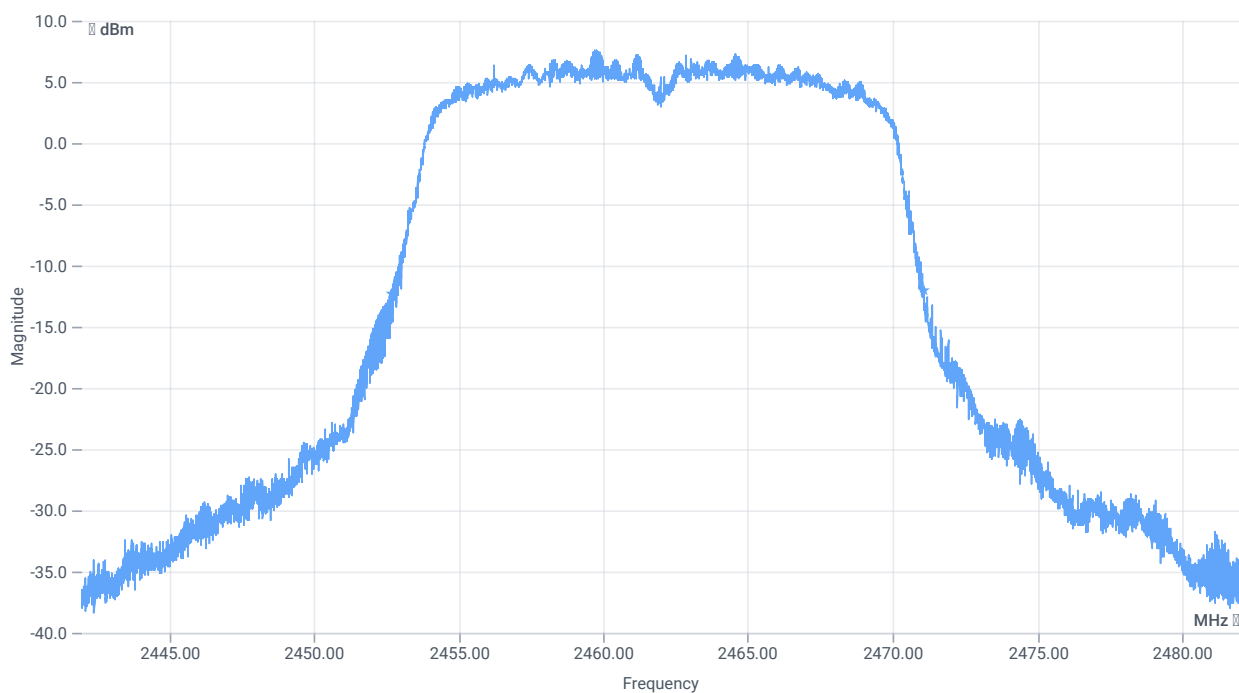

BW 20dB

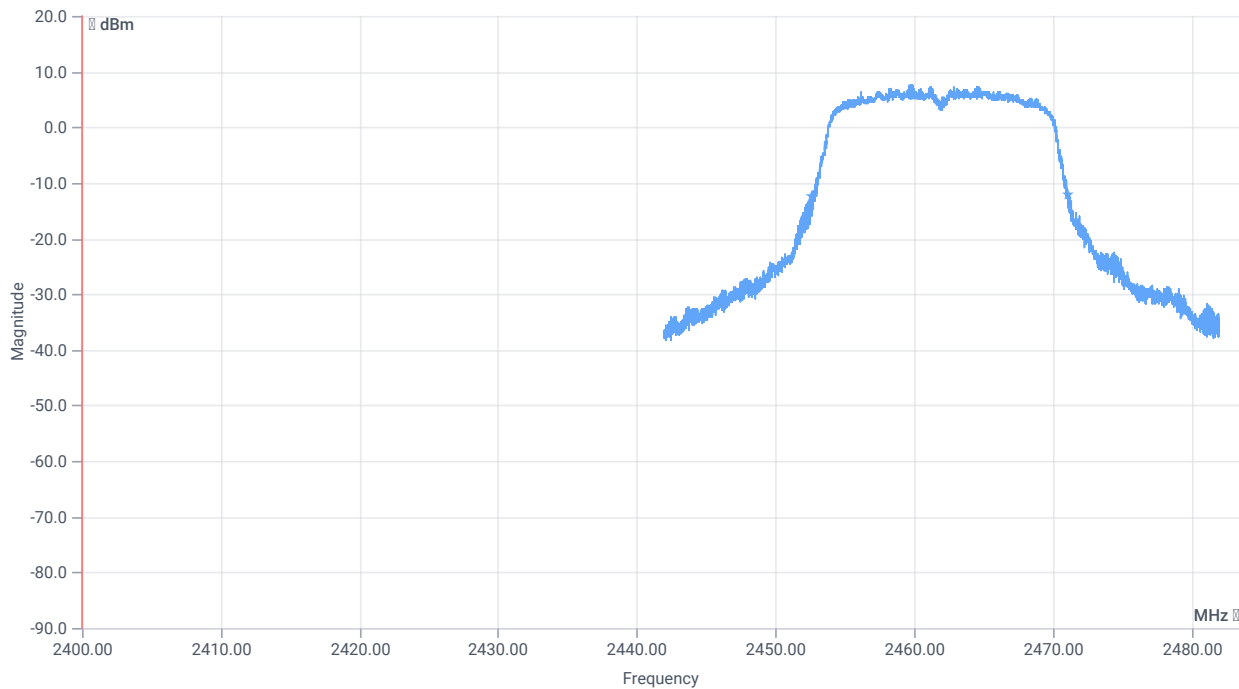

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	18408	kHz	INFO
T1 20dB	2400.000000	---	2452.6640	MHz	PASS
T2 20dB	---	2483.500000	2471.0720	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode

References

TC start	16.10.2023 15:50:26
Ambit temp [°C] humidity [rel%]	27.7 26
System version	4.6.2.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2462 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.93	dBm	INFO
Ref. Frequency	---	---	2463.900	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.93 14.14 20
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

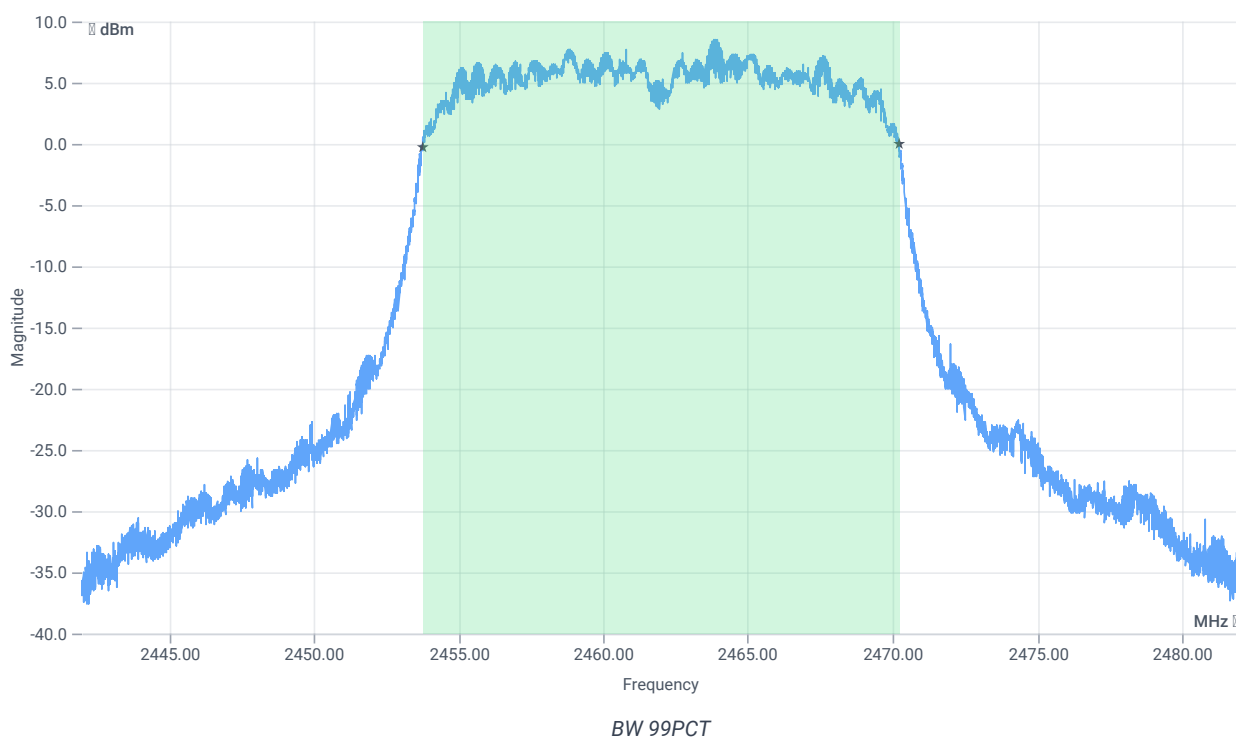


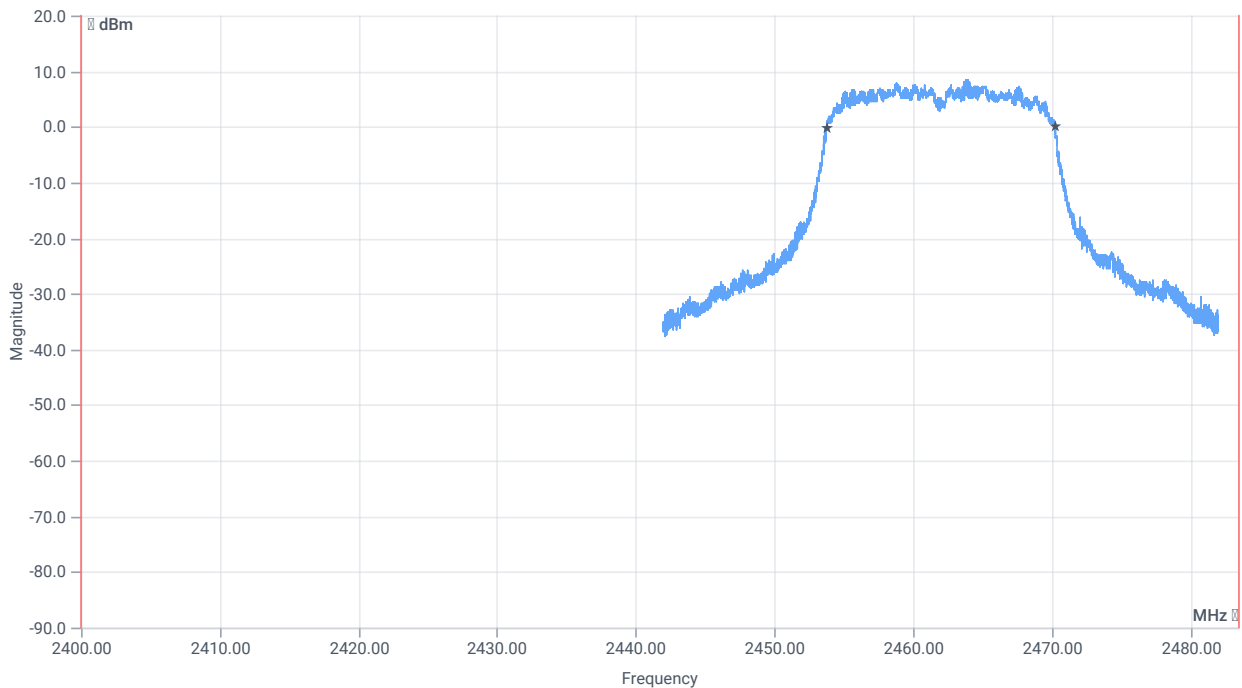


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16442.000	kHz	INFO
T1 99%	2400.000000	---	2453.7608	MHz	PASS
T2 99%	---	2483.500000	2470.2032	MHz	PASS

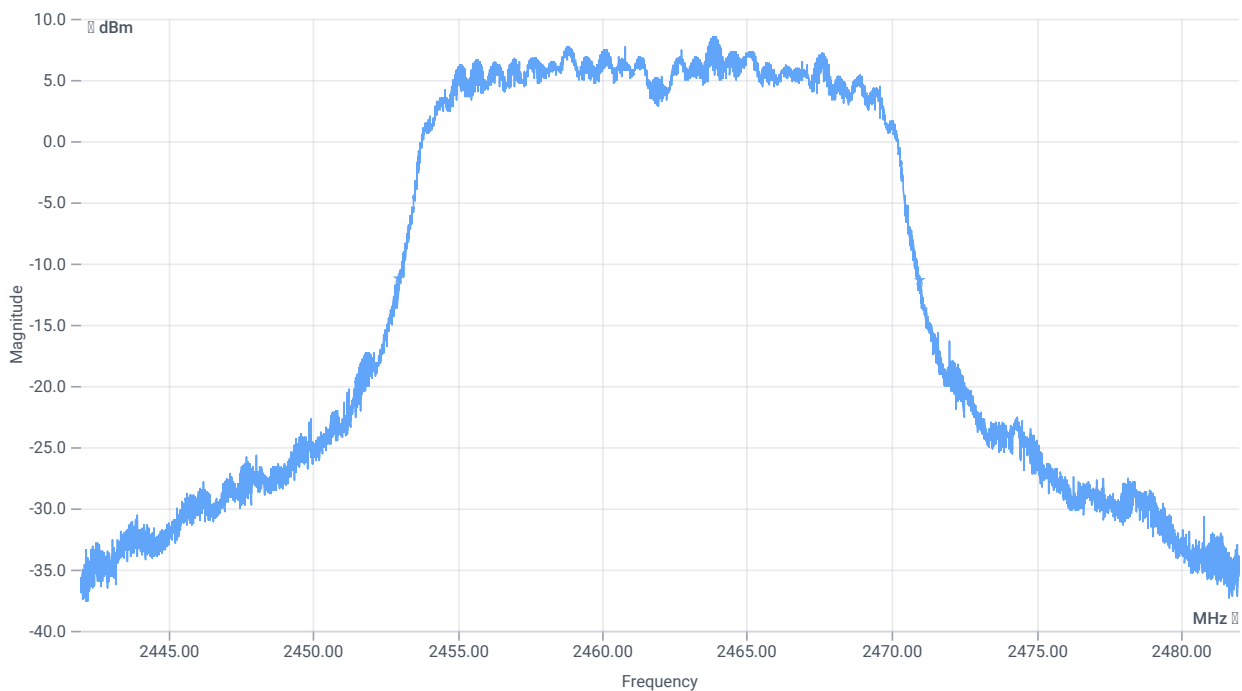

BW 20dB

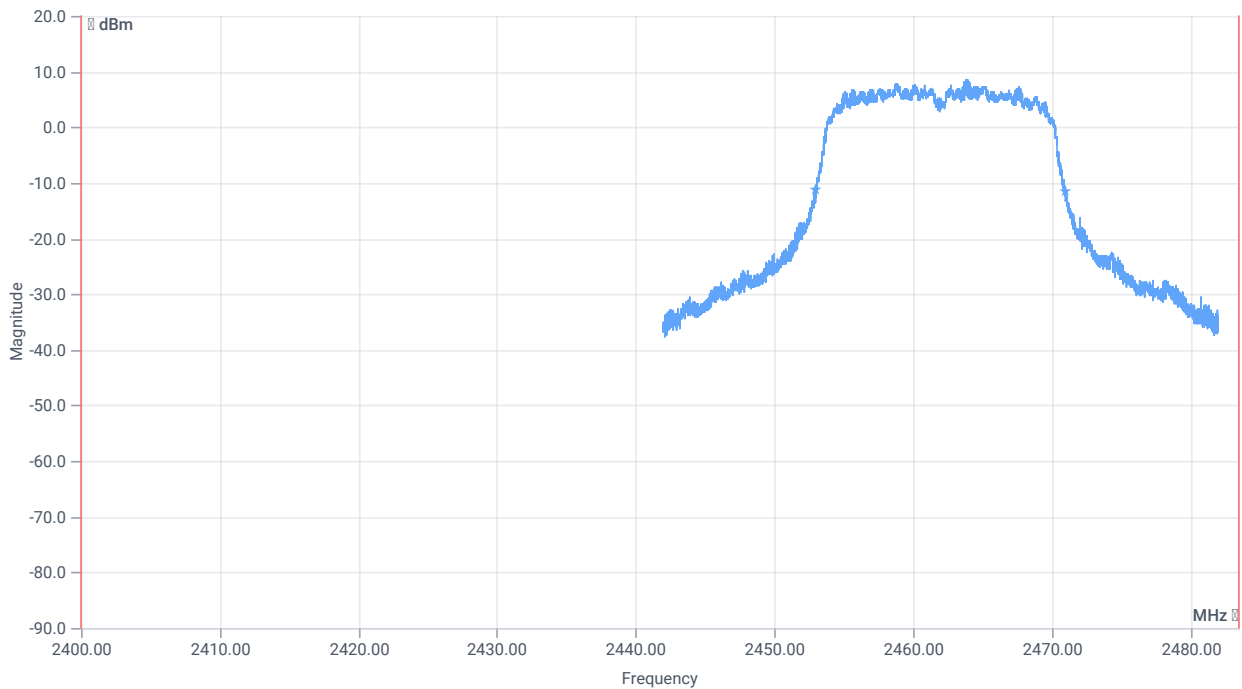

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	18008	kHz	INFO
T1 20dB	2400.000000	---	2452.9720	MHz	PASS
T2 20dB	---	2483.500000	2470.9800	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode

References

TC start	16.10.2023 16:04:00
Ambit temp [°C] humidity [rel%]	27.1 26
System version	4.6.2.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2412 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.03	dBm	INFO
Ref. Frequency	---	---	2406.610	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.03 13.85 20
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

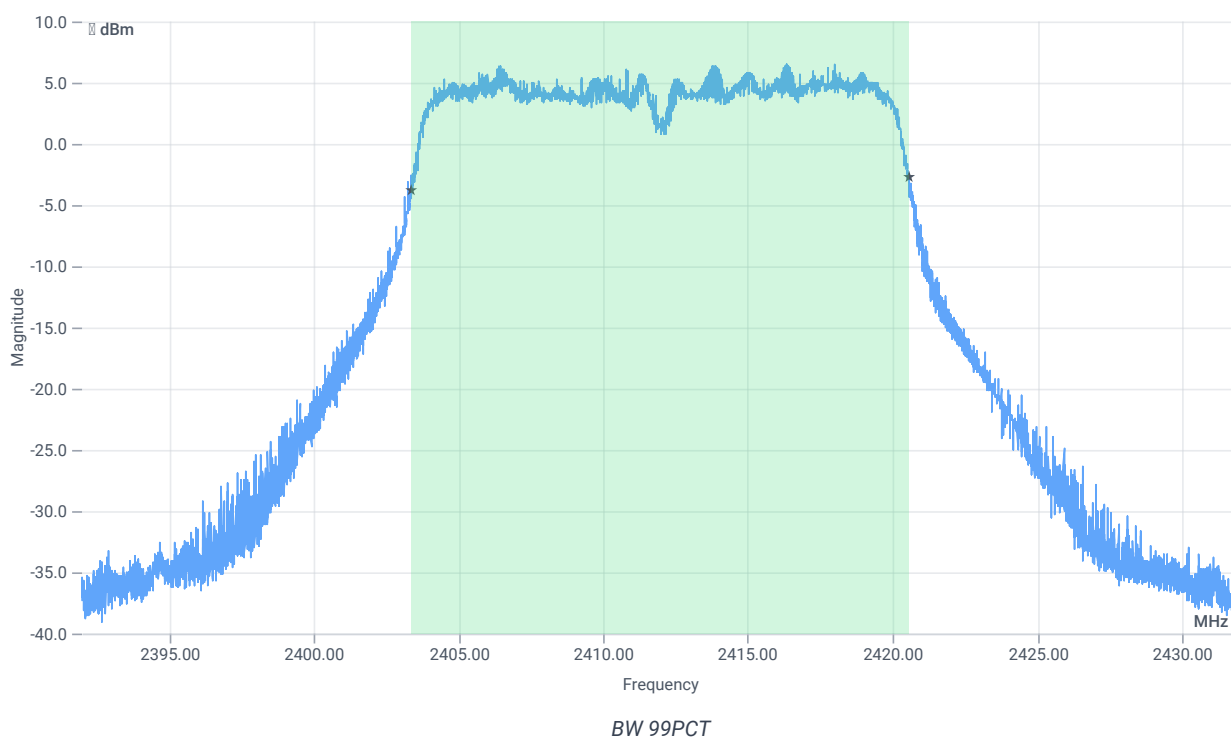


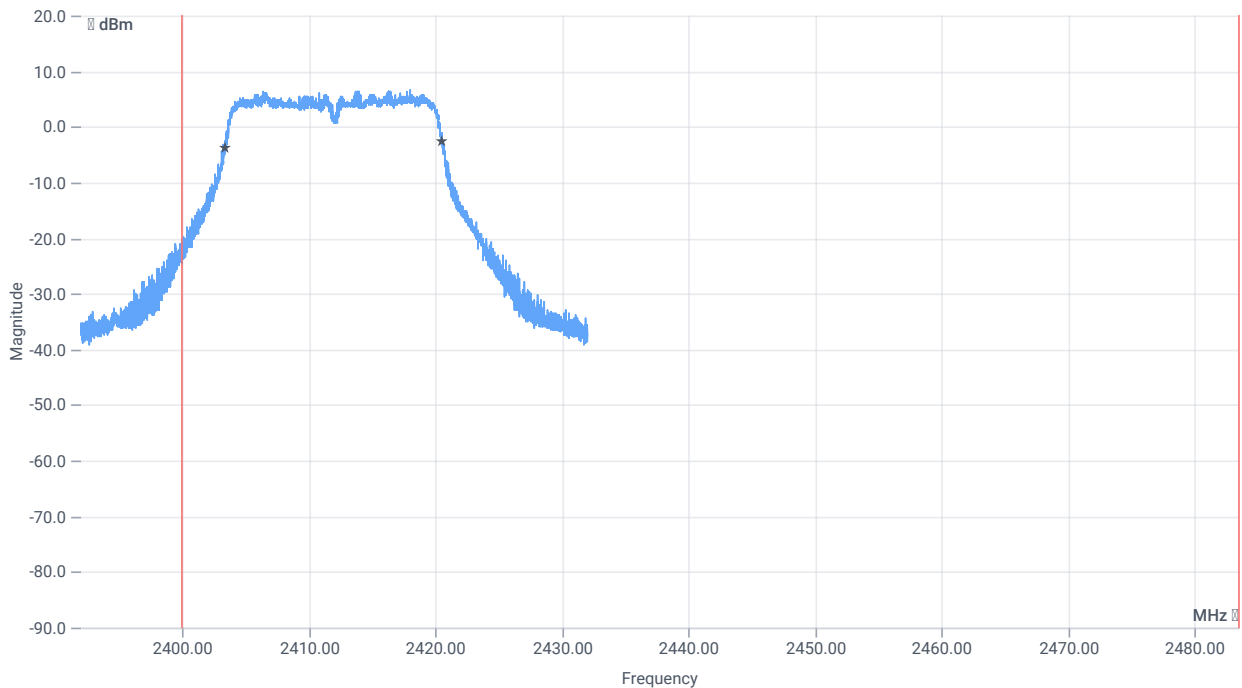


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17170.000	kHz	INFO
T1 99%	2400.000000	---	2403.3849	MHz	PASS
T2 99%	---	2483.500000	2420.5551	MHz	PASS

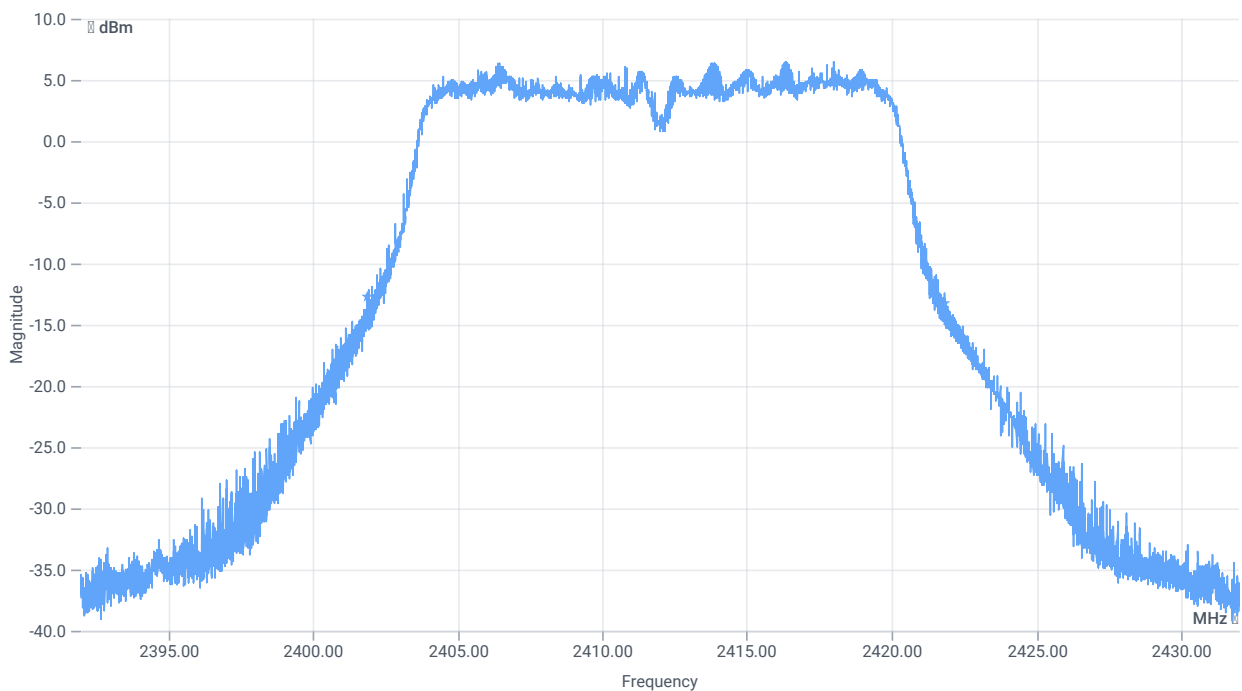

BW 20dB

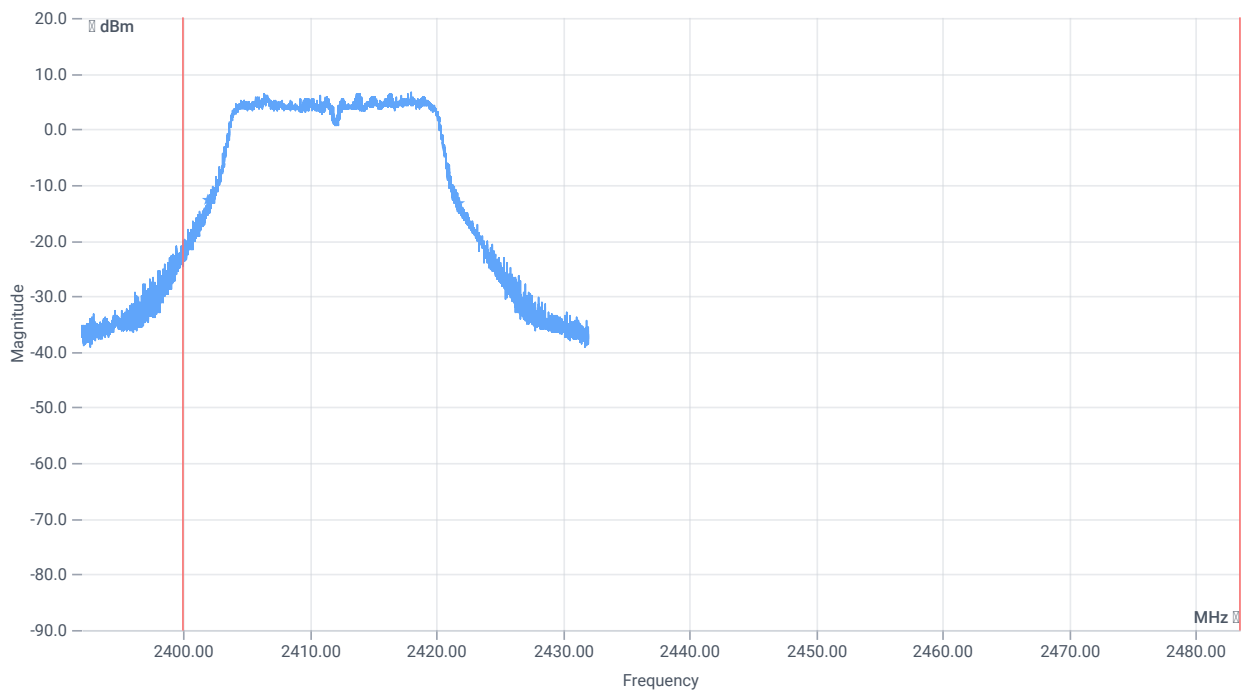

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	19912	kHz	INFO
T1 20DB	2400.000000	---	2401.9080	MHz	PASS
T2 20dB	---	2483.500000	2421.8200	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode

References

TC start	16.10.2023 16:14:14
Ambit temp [°C] humidity [rel%]	27.3 27
System version	4.6.2.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2412 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.28	dBm	INFO
Ref. Frequency	---	---	2416.900	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.28 13.85 20
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

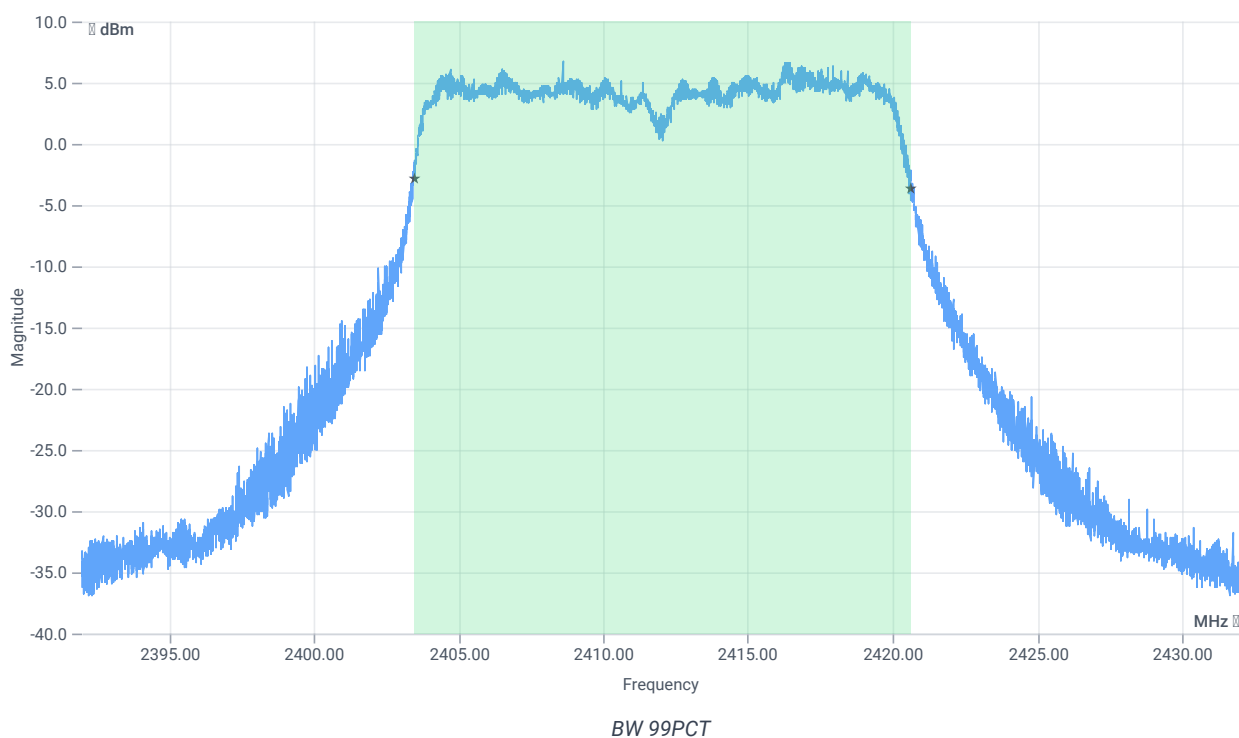


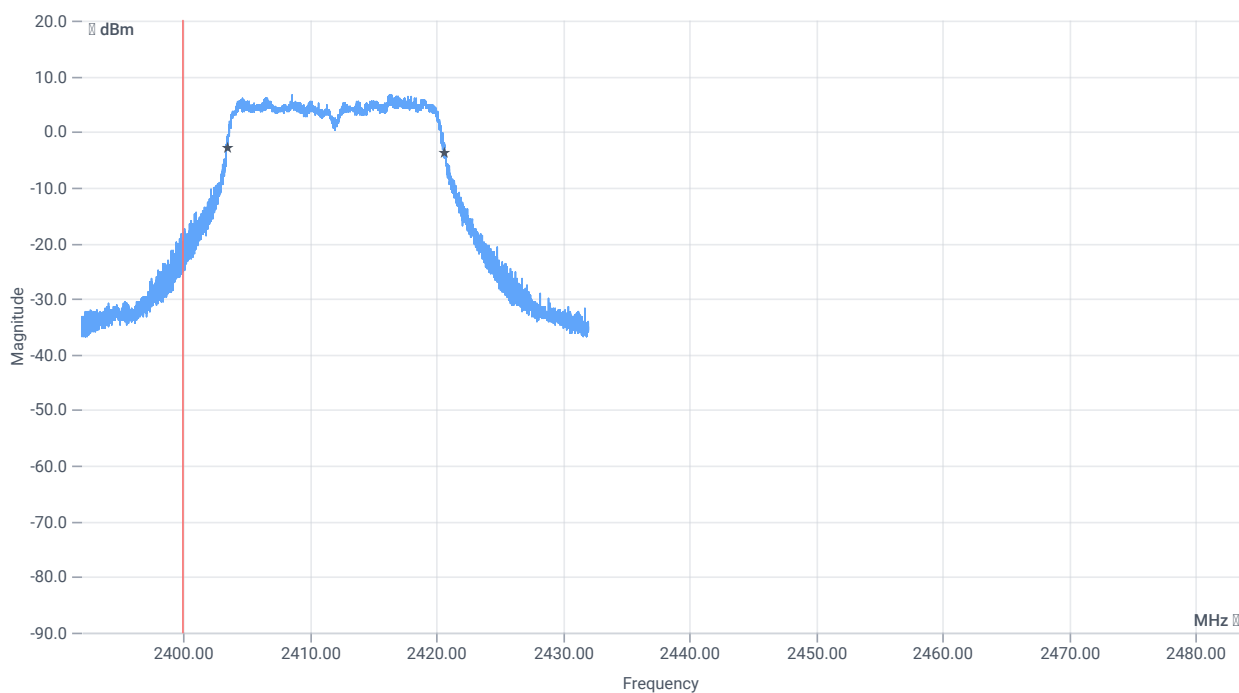


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17162.000	kHz	INFO
T1 99%	2400.000000	---	2403.4689	MHz	PASS
T2 99%	---	2483.500000	2420.6311	MHz	PASS

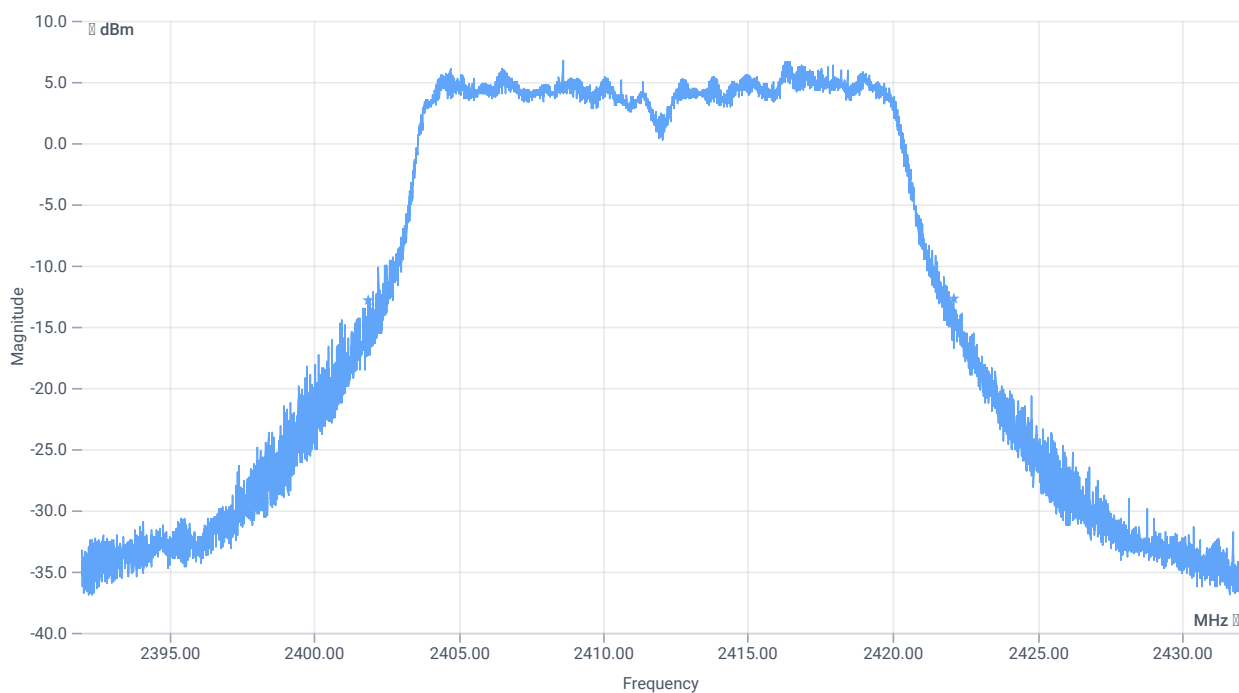

BW 20dB

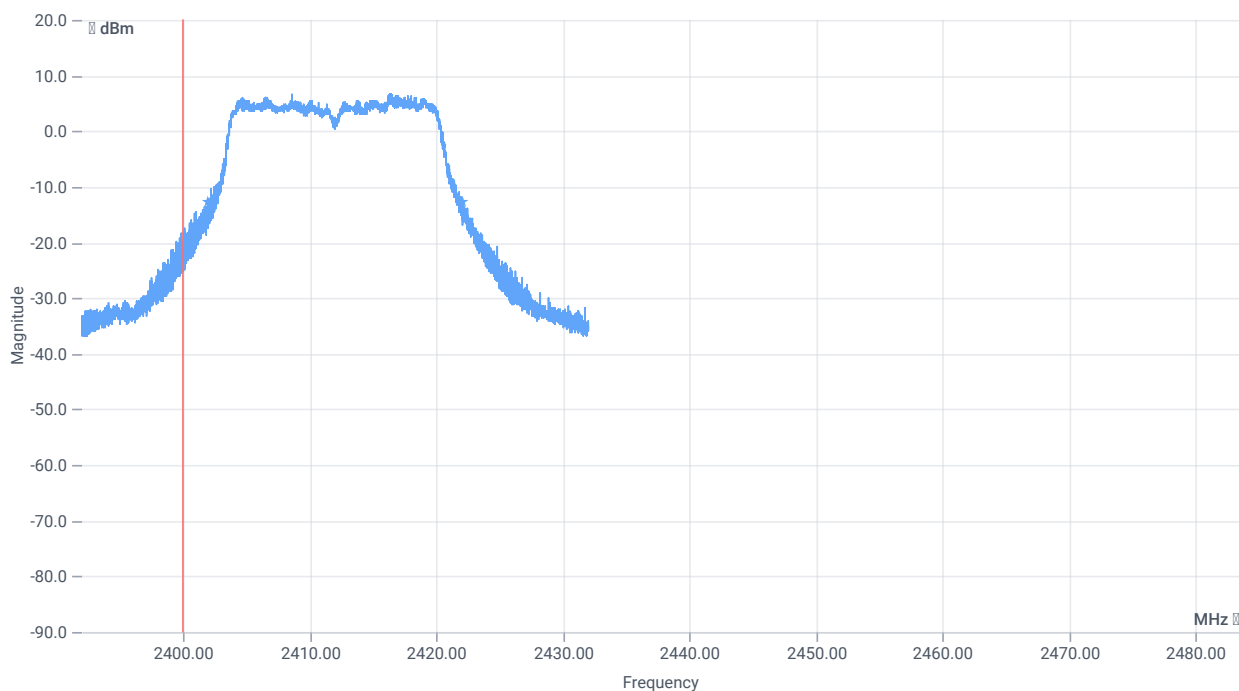

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	20180	kHz	INFO
T1 20dB	2400.000000	---	2401.9080	MHz	PASS
T2 20dB	---	2483.500000	2422.0880	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode

References

TC start	16.10.2023 16:24:58
Ambit temp [°C] humidity [rel%]	27.6 28
System version	4.6.2.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2437 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.01	dBm	INFO
Ref. Frequency	---	---	2439.900	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.01 14.01 15
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

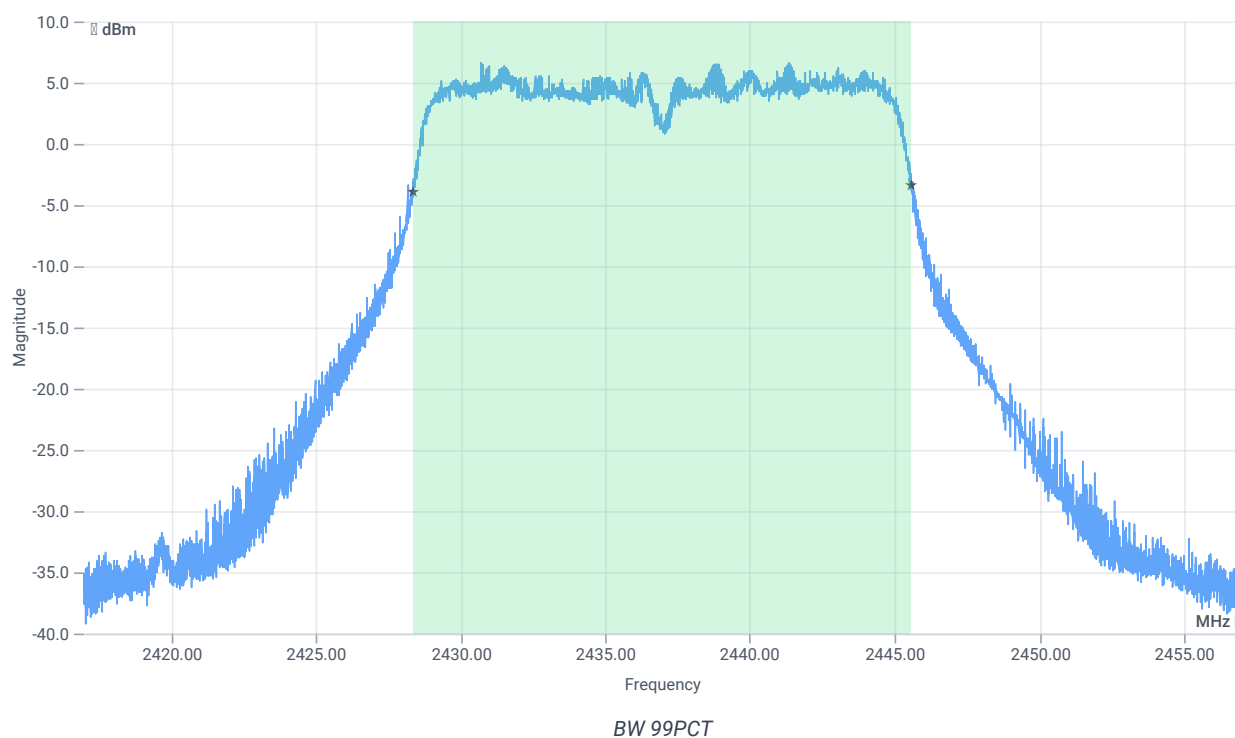


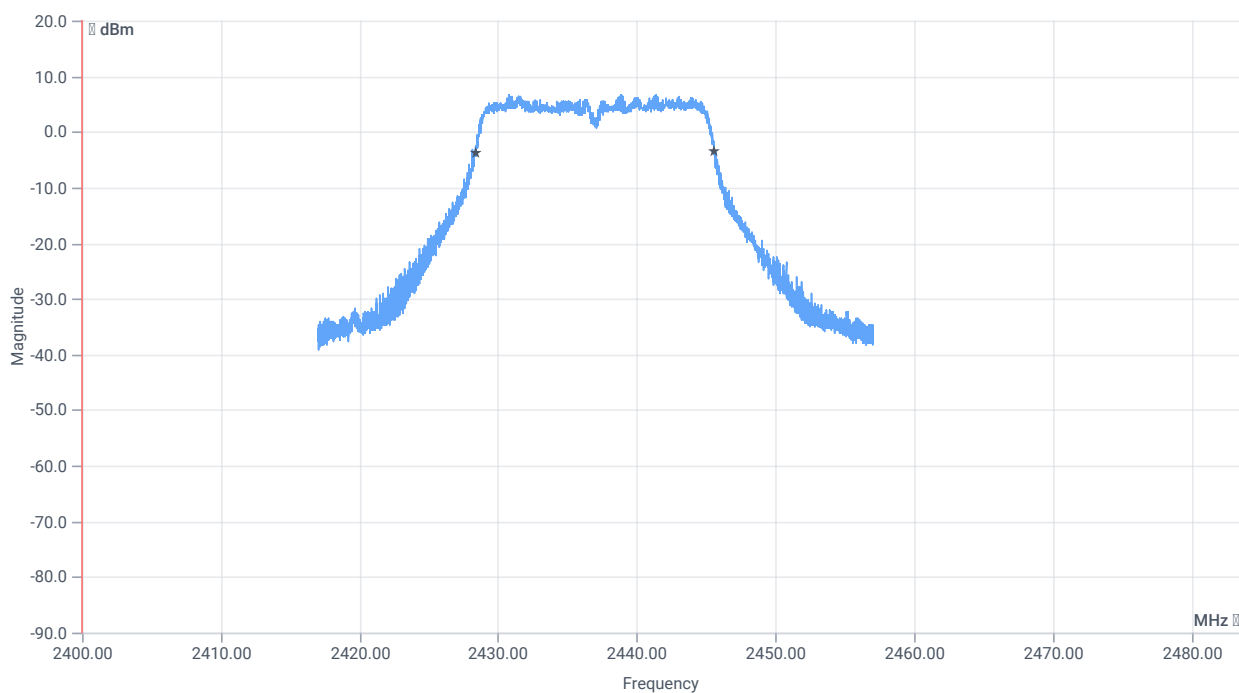


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17174.000	kHz	INFO
T1 99%	2400.000000	---	2428.3729	MHz	PASS
T2 99%	---	2483.500000	2445.5471	MHz	PASS

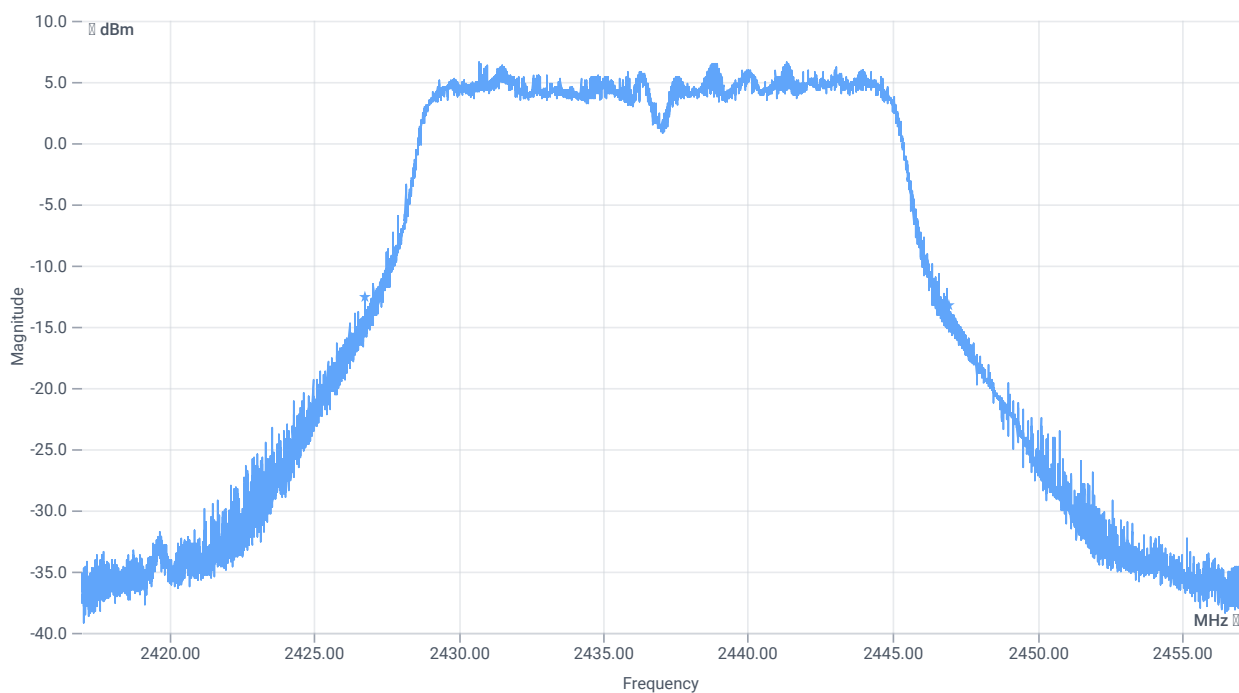

BW 20dB

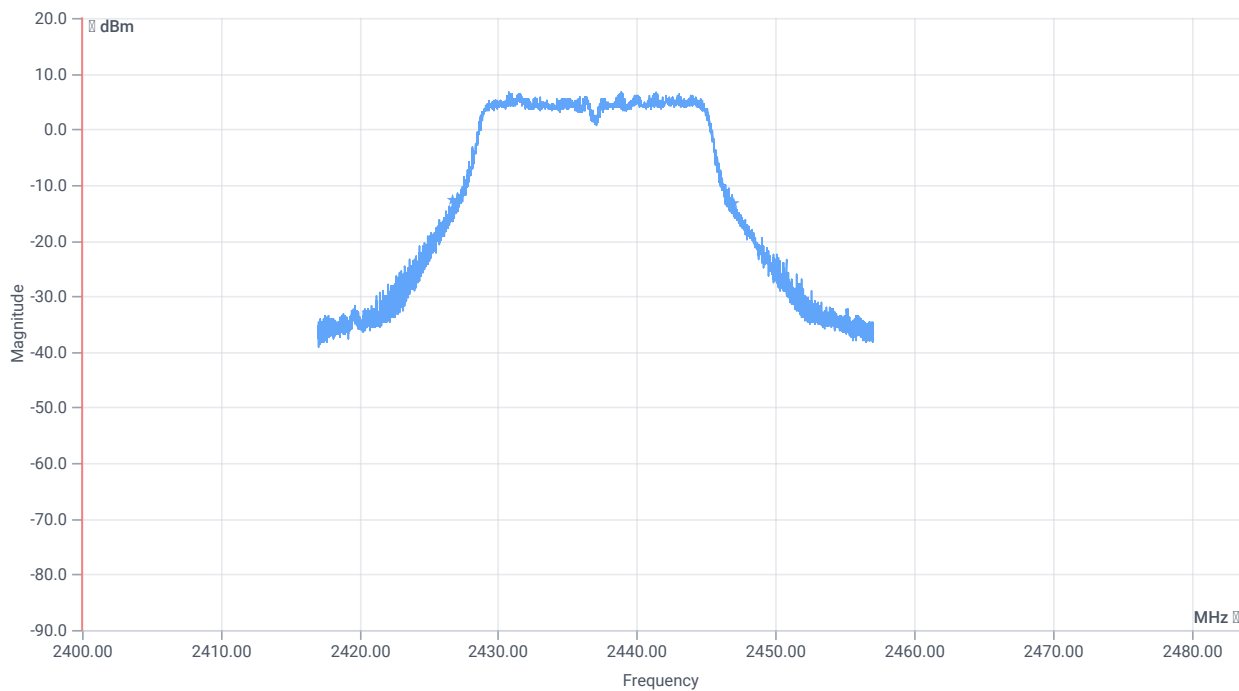

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	20180	kHz	INFO
T1 20dB	2400.000000	---	2426.7680	MHz	PASS
T2 20dB	---	2483.500000	2446.9480	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode

References

TC start	16.10.2023 16:35:11
Ambit temp [°C] humidity [rel%]	27.8 27
System version	4.6.2.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2437 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.15	dBm	INFO
Ref. Frequency	---	---	2433.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.15 14.01 20
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

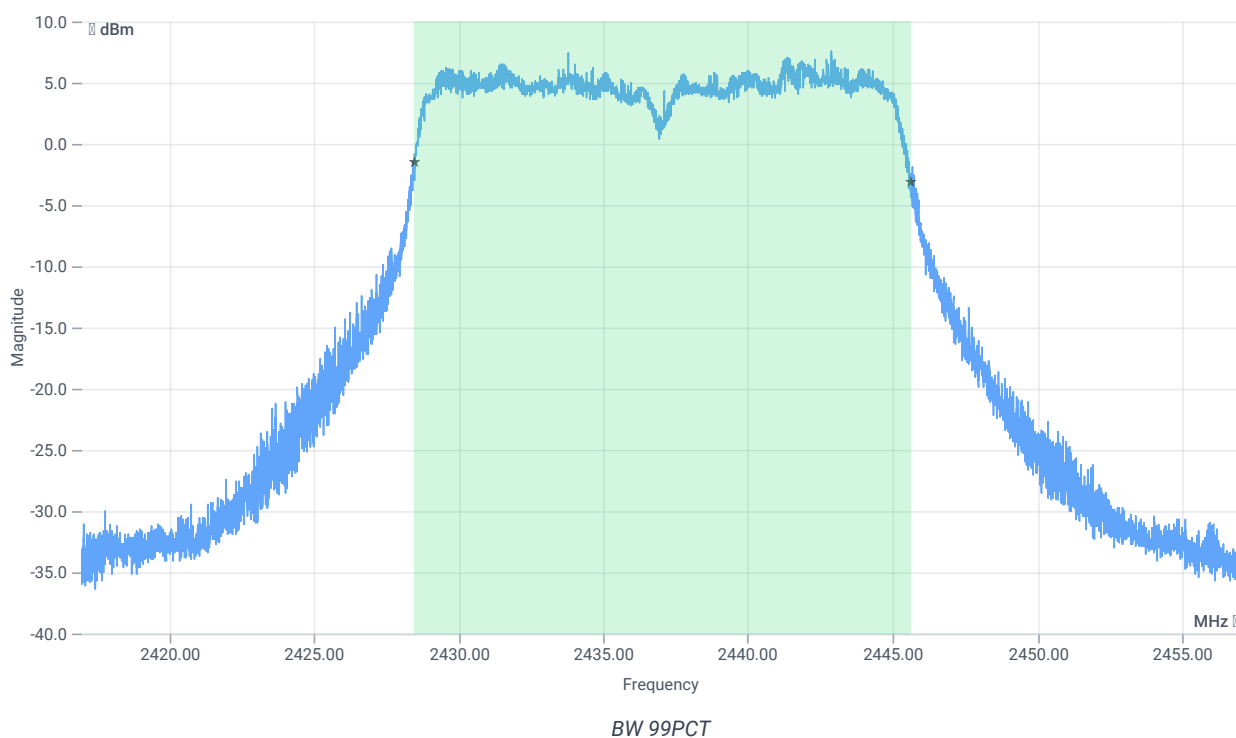


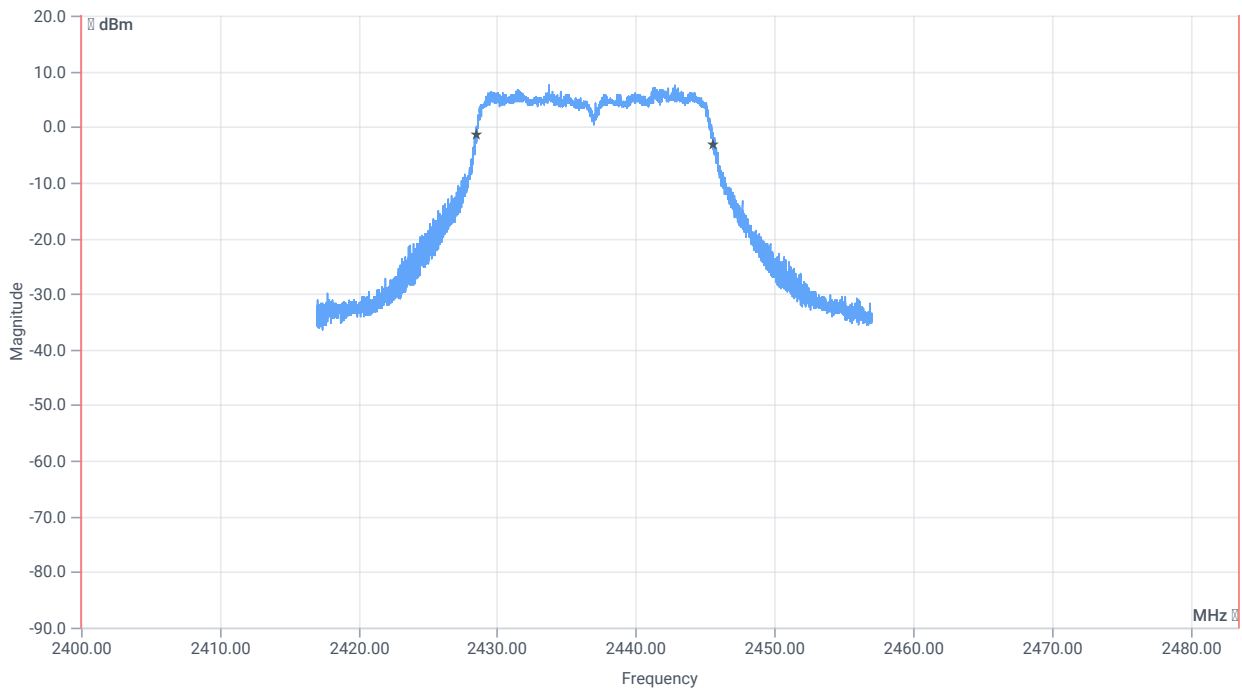


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17158.000	kHz	INFO
T1 99%	2400.000000	---	2428.4649	MHz	PASS
T2 99%	---	2483.500000	2445.6231	MHz	PASS

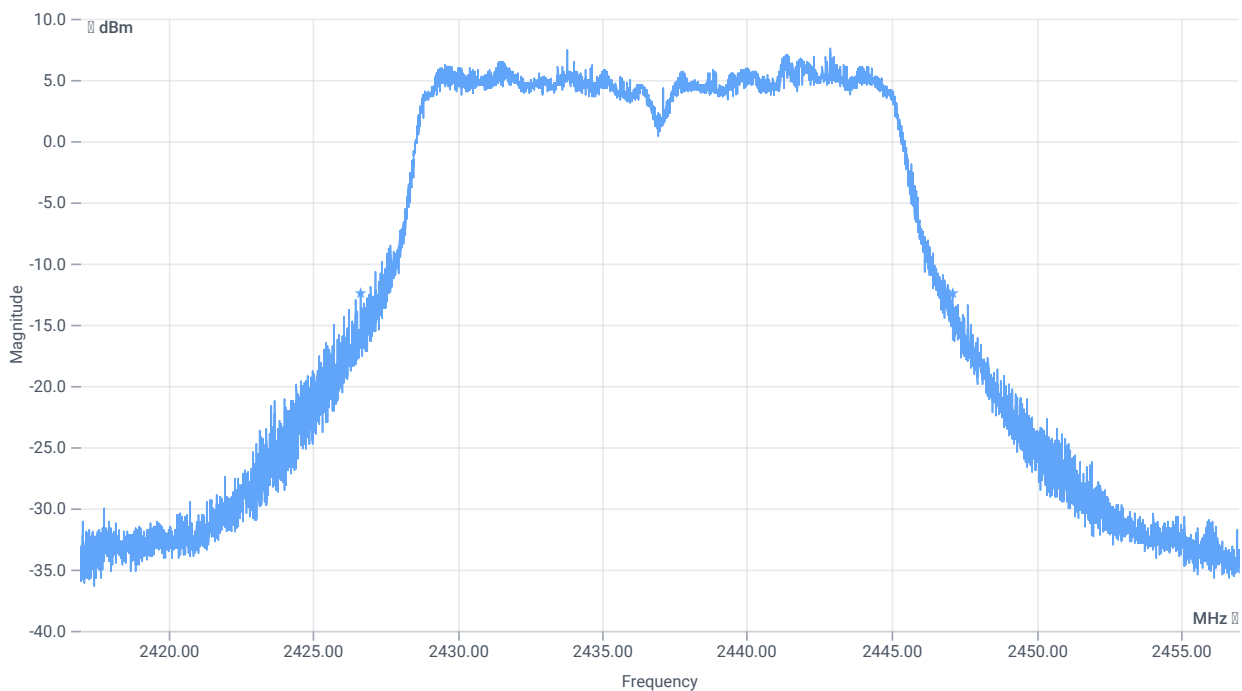

BW 20dB

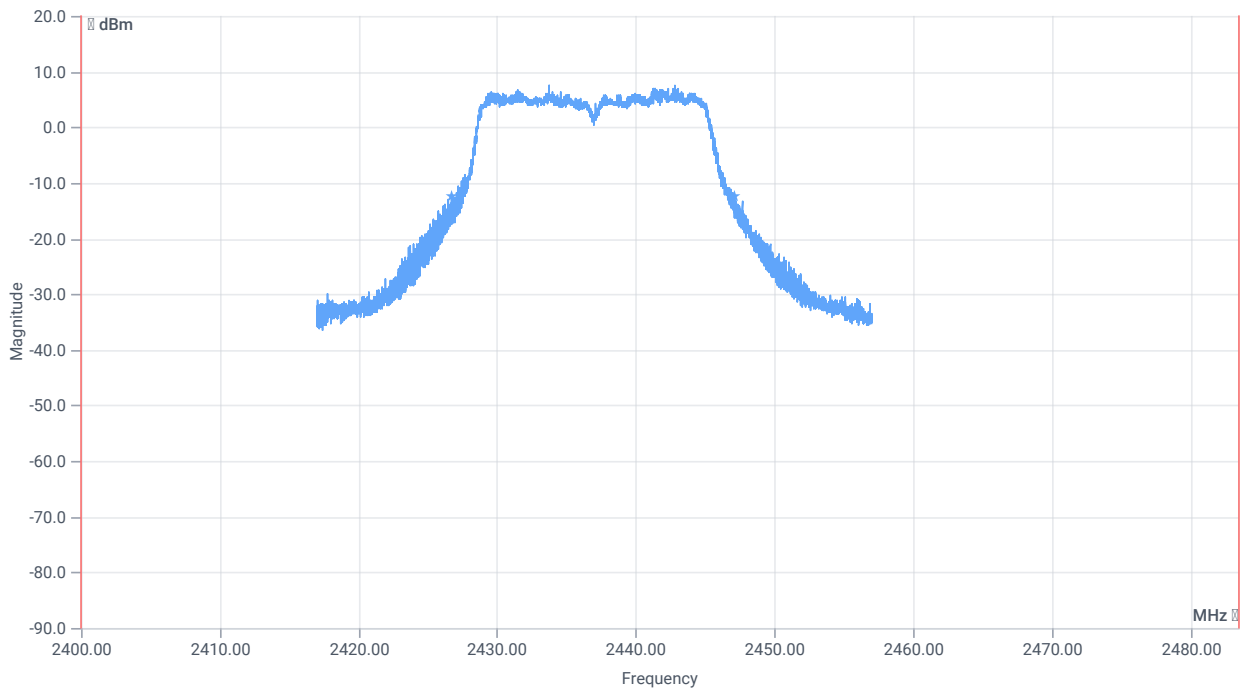

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	20412	kHz	INFO
T1 20dB	2400.000000	---	2426.6760	MHz	PASS
T2 20dB	---	2483.500000	2447.0880	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode

References

TC start	16.10.2023 16:44:41
Ambit temp [°C] humidity [rel%]	27.8 27
System version	4.6.2.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2462 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	10.39	dBm	INFO
Ref. Frequency	---	---	2466.900	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.39 14.14 20
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

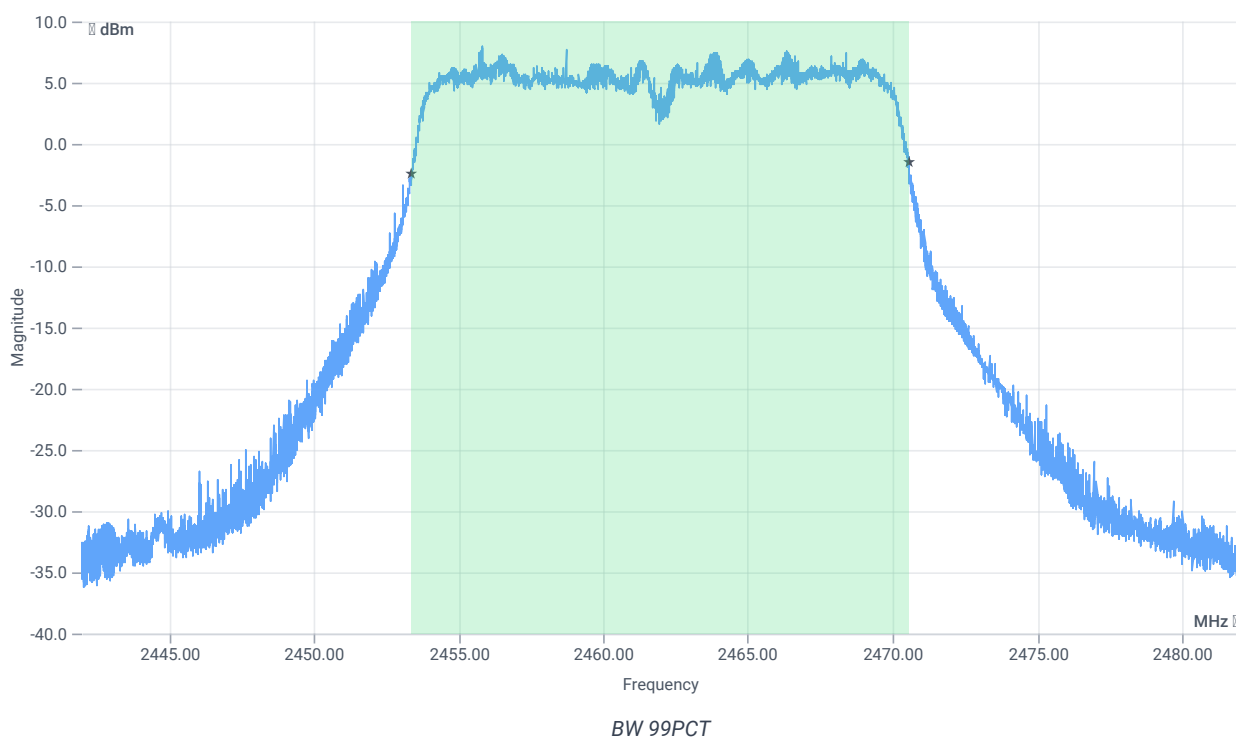


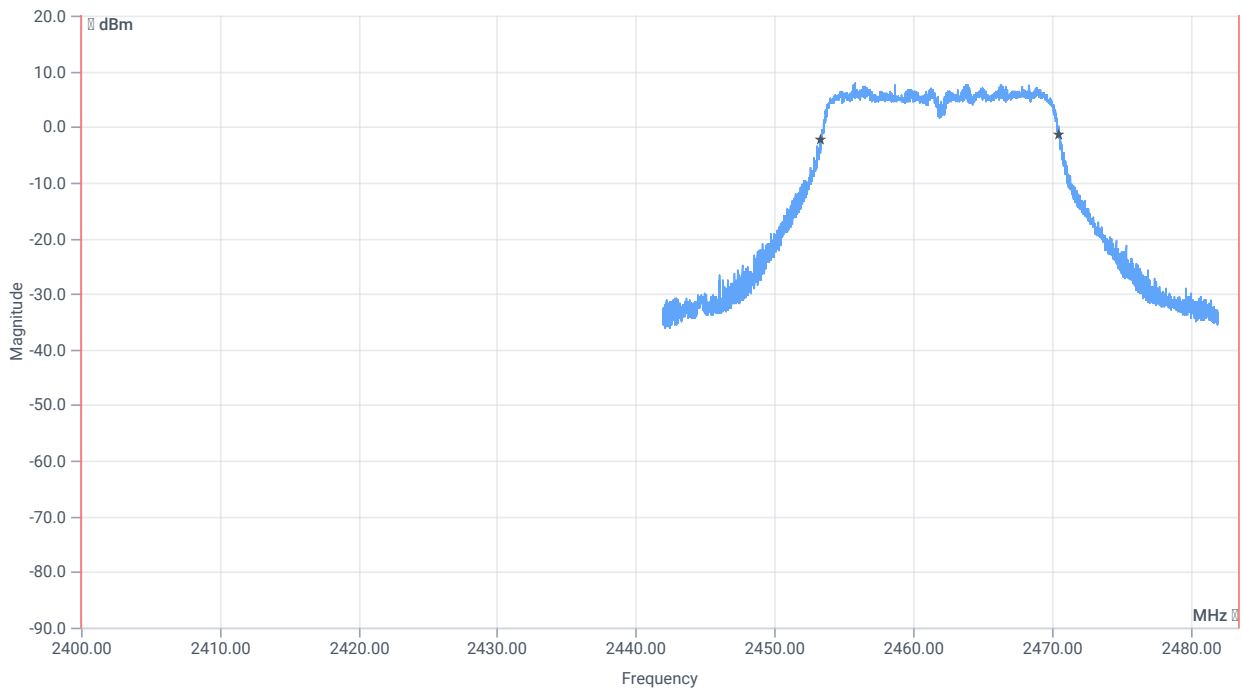


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17182.000	kHz	INFO
T1 99%	2400.000000	---	2453.3689	MHz	PASS
T2 99%	---	2483.500000	2470.5511	MHz	PASS

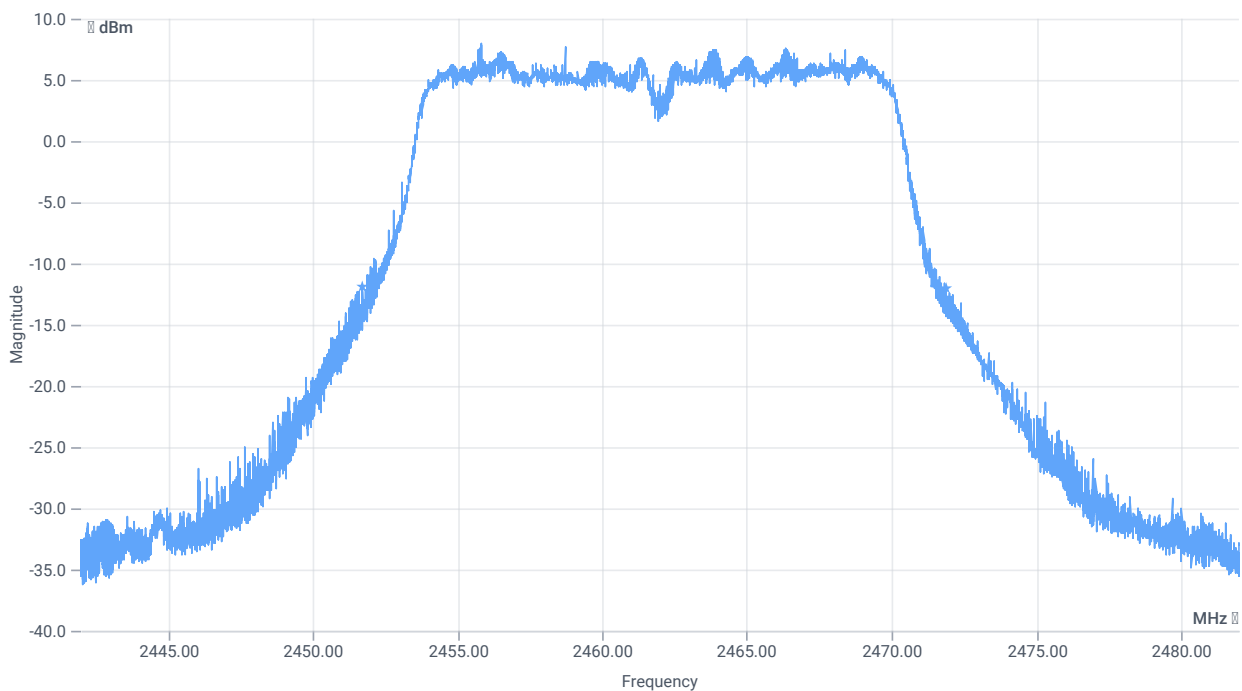

BW 20dB

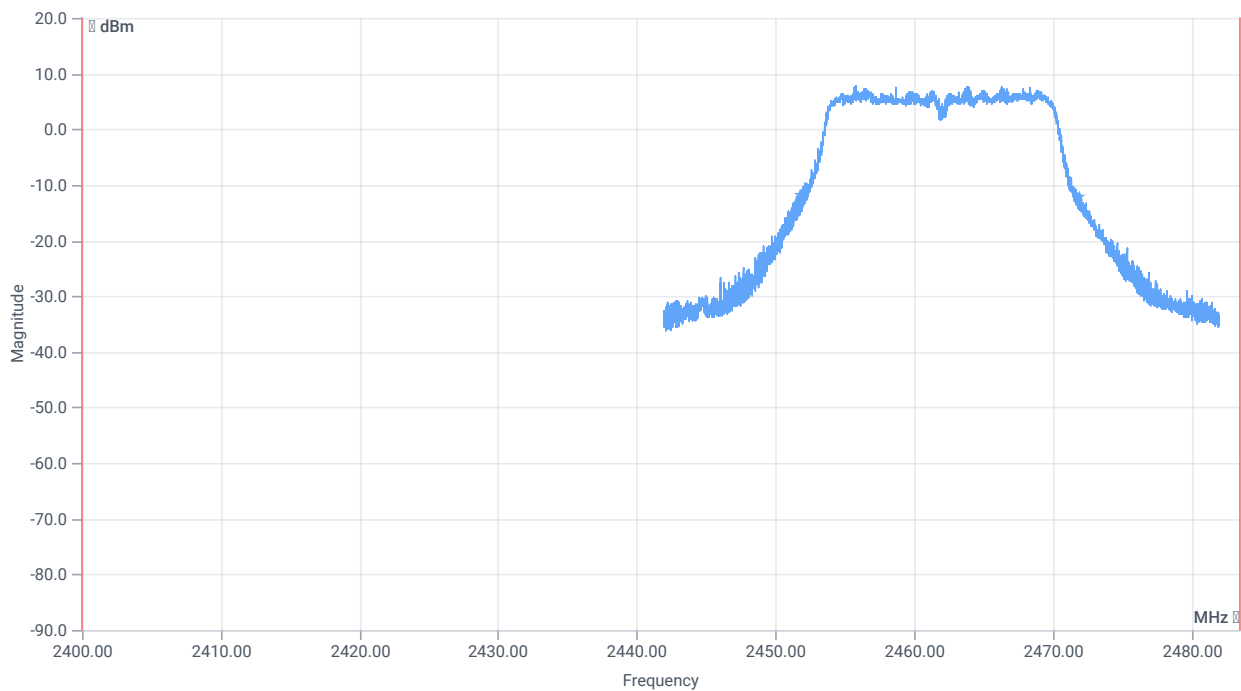

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	20132	kHz	INFO
T1 20dB	2400.000000	---	2451.7400	MHz	PASS
T2 20dB	---	2483.500000	2471.8720	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode

References

TC start	16.10.2023 16:54:51
Ambit temp [°C] humidity [rel%]	28.0 27
System version	4.6.2.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2462 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.58	dBm	INFO
Ref. Frequency	---	---	2458.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.58 14.14 20
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

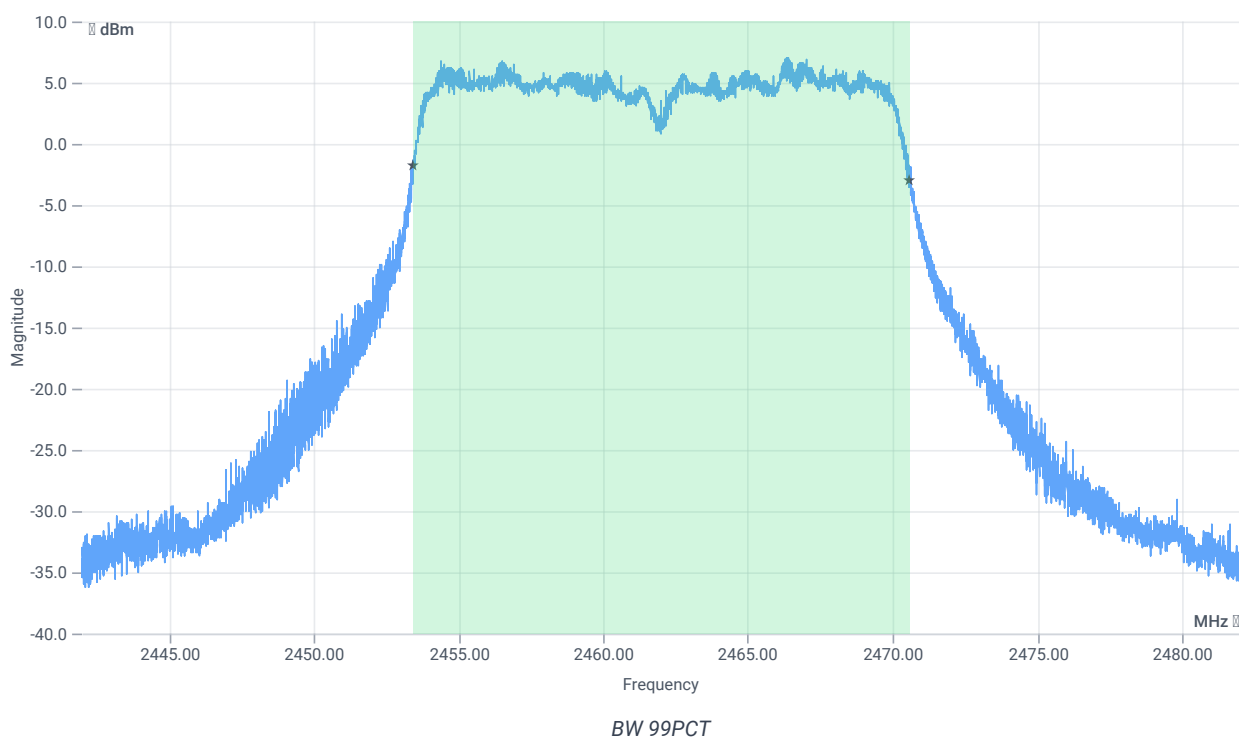


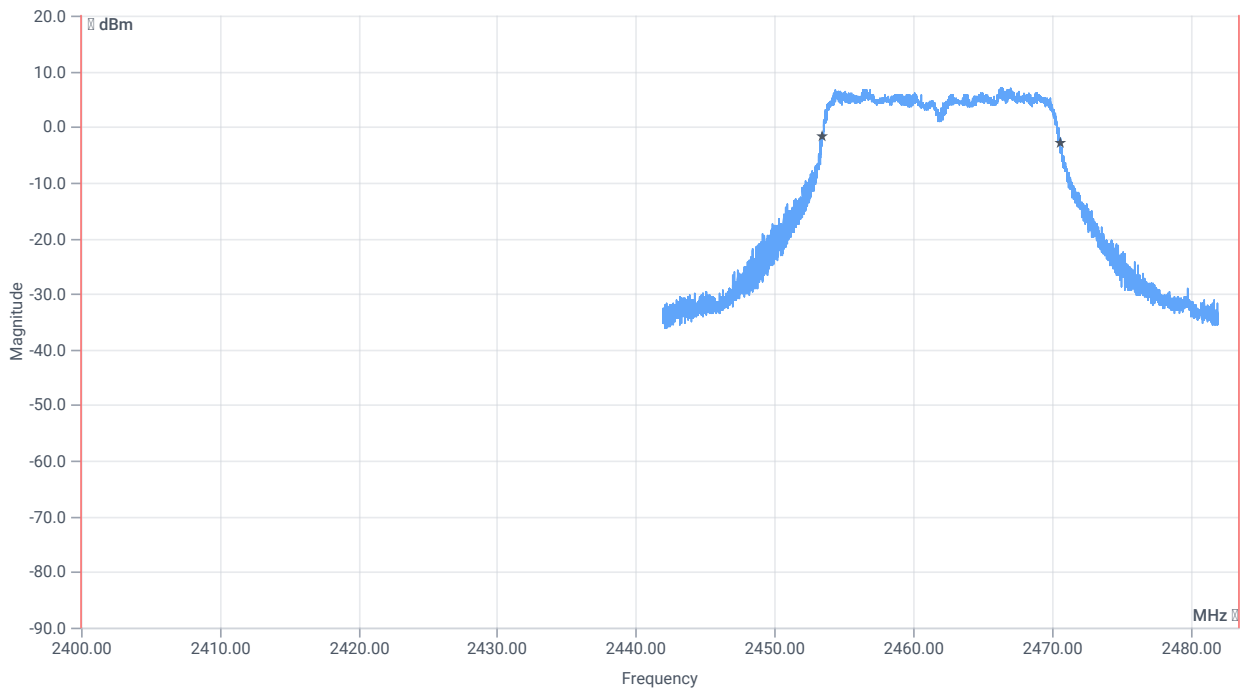


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17158.000	kHz	INFO
T1 99%	2400.000000	---	2453.4369	MHz	PASS
T2 99%	---	2483.500000	2470.5951	MHz	PASS

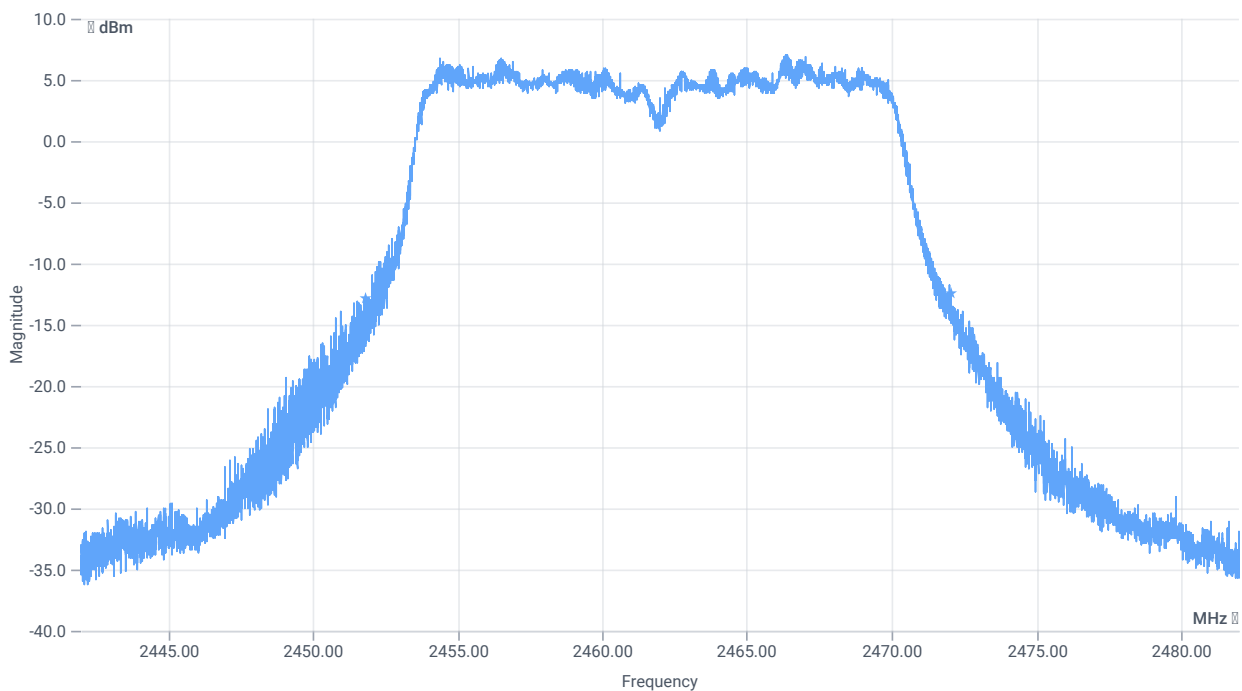

BW 20dB

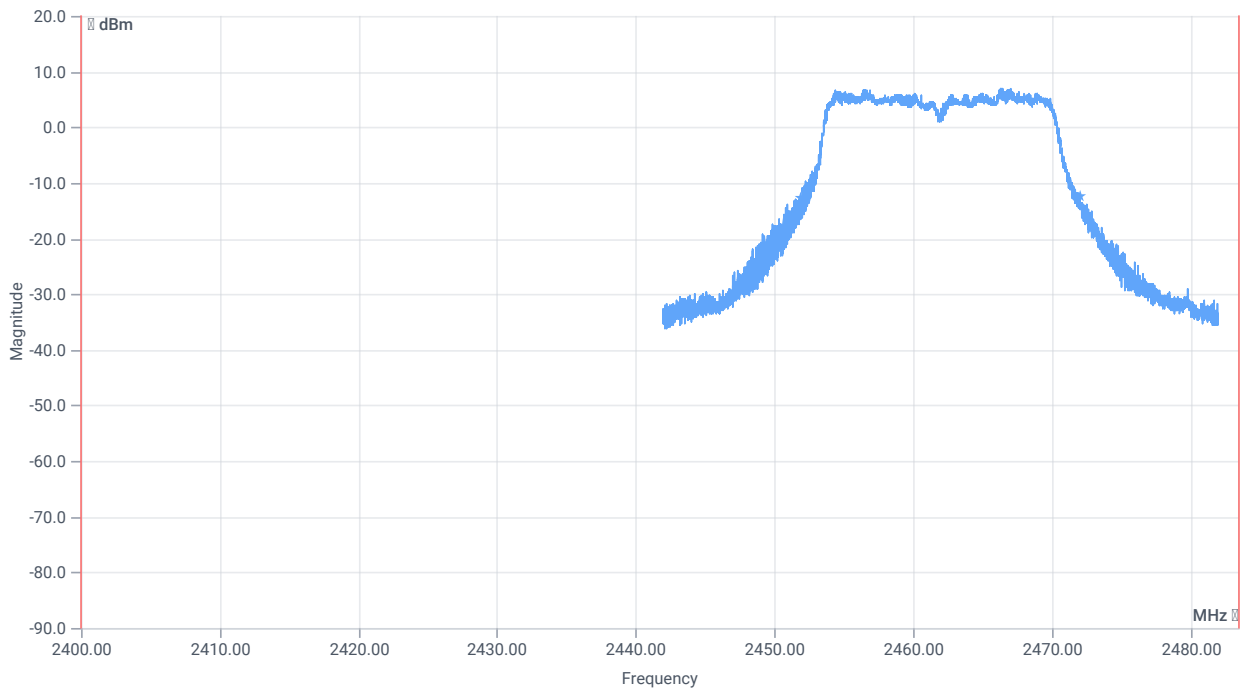

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	20196	kHz	INFO
T1 20dB	2400.000000	---	2451.8360	MHz	PASS
T2 20dB	---	2483.500000	2472.0320	MHz	PASS

Verdict

PASS

FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 b mode

References

TC start	16.10.2023 13:39:04
Ambit temp [°C] humidity [rel%]	25.9 31
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted 30dBc DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer


Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	10.45	dBm	INFO
Ref. Frequency	---	---	2413.100	MHz	INFO

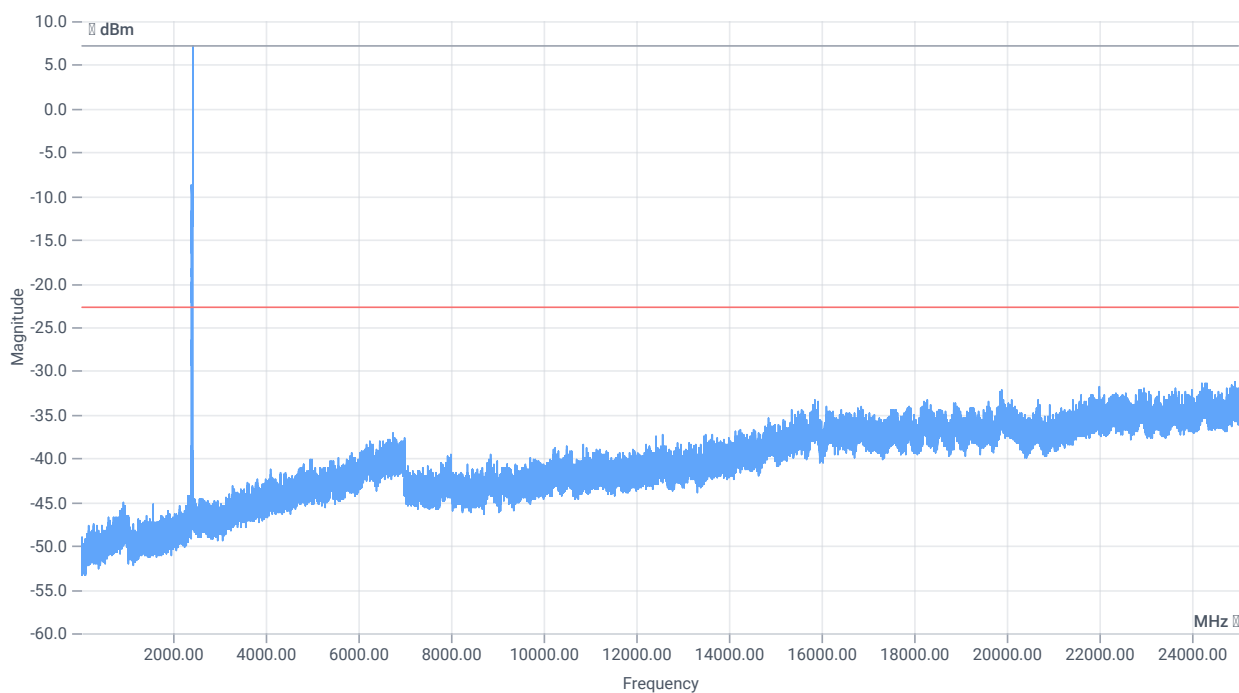

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.45 0 30
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE

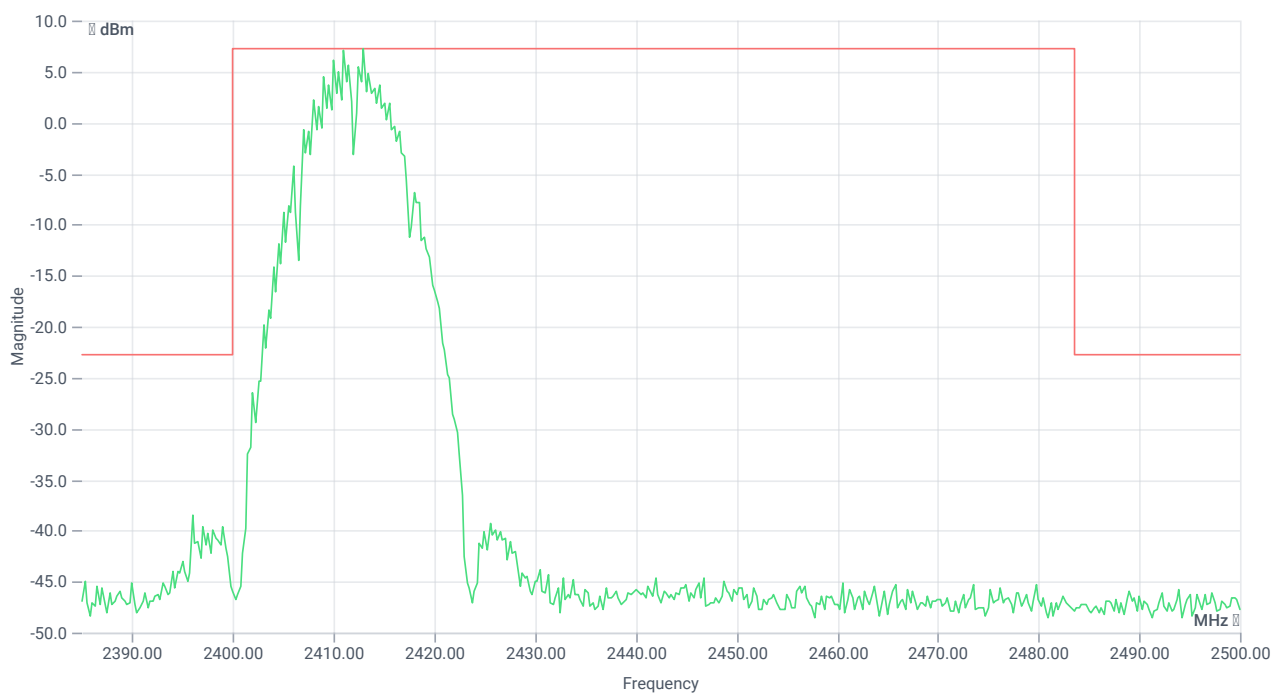

TX emissions band zoomed

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2413.00 MHz	---	---	7.19	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 24920.75 MHz	0	---	8.51	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 b mode

References

TC start	16.10.2023 13:49:18
Ambit temp [°C] humidity [rel%]	26.2 30
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted 30dBc DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer


Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	11.15	dBm	INFO
Ref. Frequency	---	---	2413.200	MHz	INFO

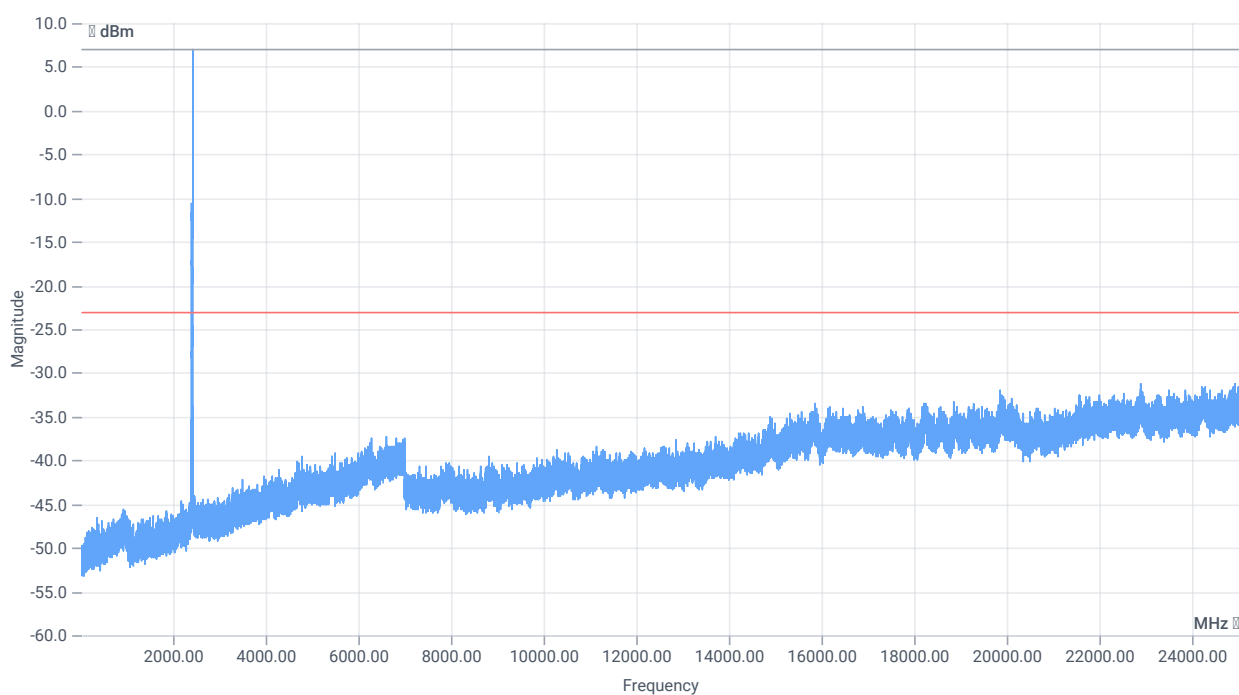

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.15 0 30
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE

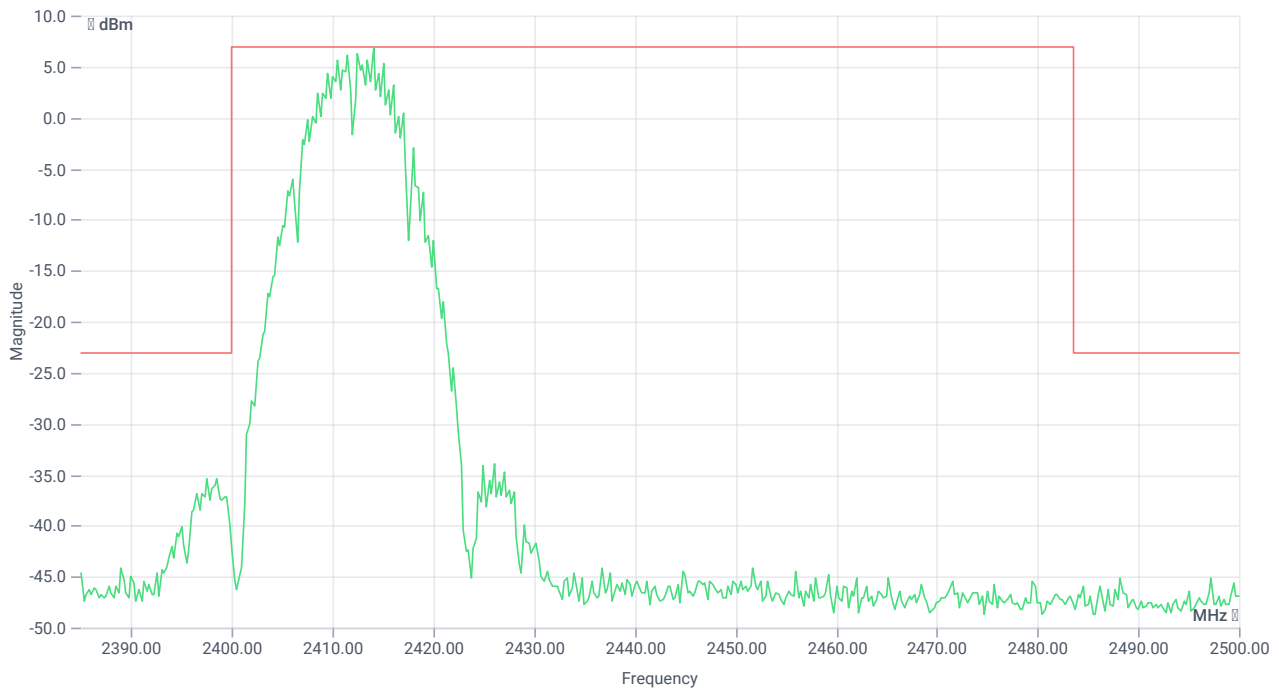

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2414.00 MHz	---	---	6.92	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 30 MHz	0	---	-149.01	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 b mode

References

TC start	16.10.2023 14:08:50
Ambit temp [°C] humidity [rel%]	26.8 30
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted 30dBc DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer


Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	10.90	dBm	INFO
Ref. Frequency	---	---	2438.200	MHz	INFO

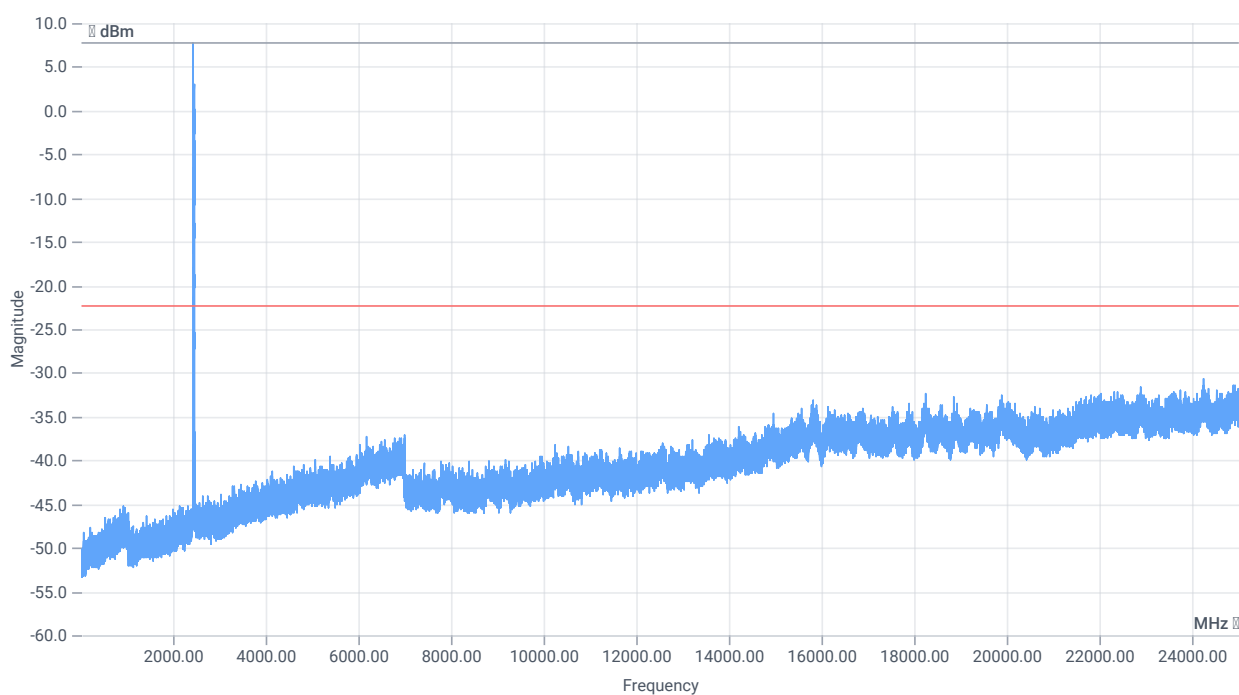

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.90 0 30
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE



TX emissions band zoomed

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2438.00 MHz	---	---	7.68	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 24242.25 MHz	0	---	8.38	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 b mode

References

TC start	16.10.2023 14:19:01
Ambit temp [°C] humidity [rel%]	27.0 29
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted 30dBc DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer


Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	11.71	dBm	INFO
Ref. Frequency	---	---	2438.200	MHz	INFO

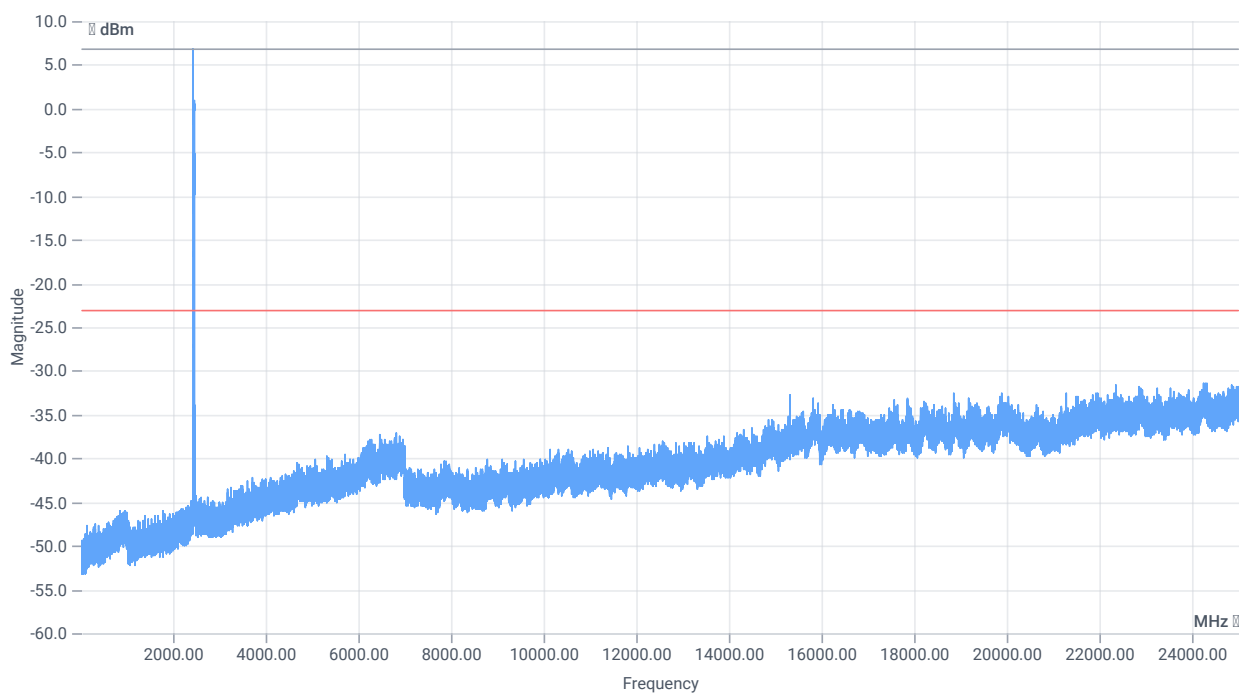

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.71 0 30
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE



TX emissions band zoomed

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2437.50 MHz	---	---	6.83	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 24260.5 MHz	0	---	8.29	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 b mode

References

TC start	16.10.2023 14:29:41
Ambit temp [°C] humidity [rel%]	27.1 28
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted 30dBc DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer


Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	11.72	dBm	INFO
Ref. Frequency	---	---	2460.800	MHz	INFO

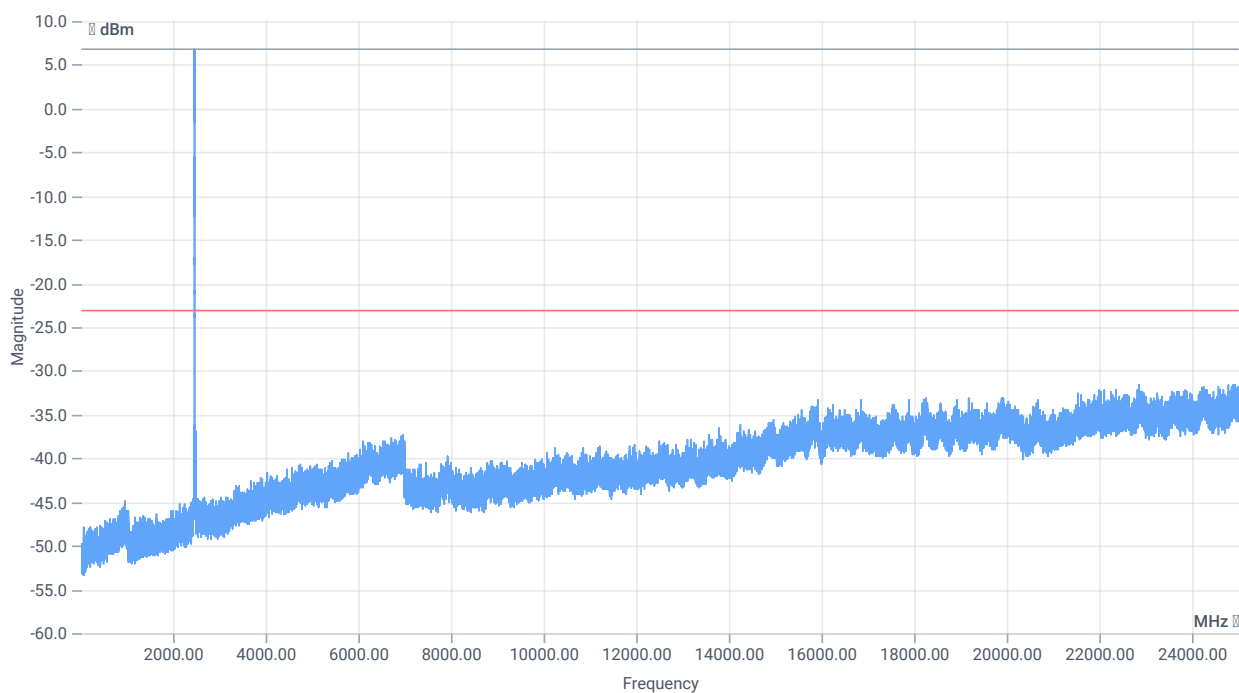

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.72 0 30
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE

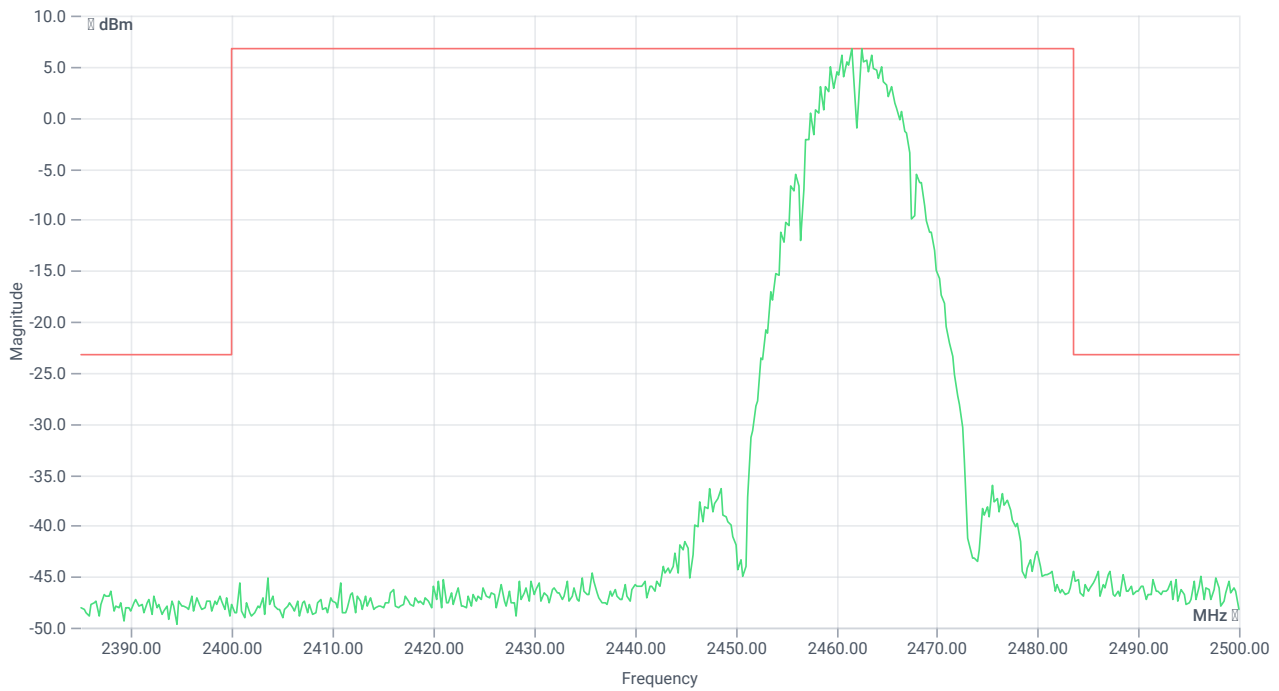

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2462.50 MHz	---	---	6.83	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 22852.5 MHz	0	---	8.37	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 b mode

References

TC start	16.10.2023 14:39:53
Ambit temp [°C] humidity [rel%]	27.4 28
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted 30dBc DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer


Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	11.98	dBm	INFO
Ref. Frequency	---	---	2460.800	MHz	INFO

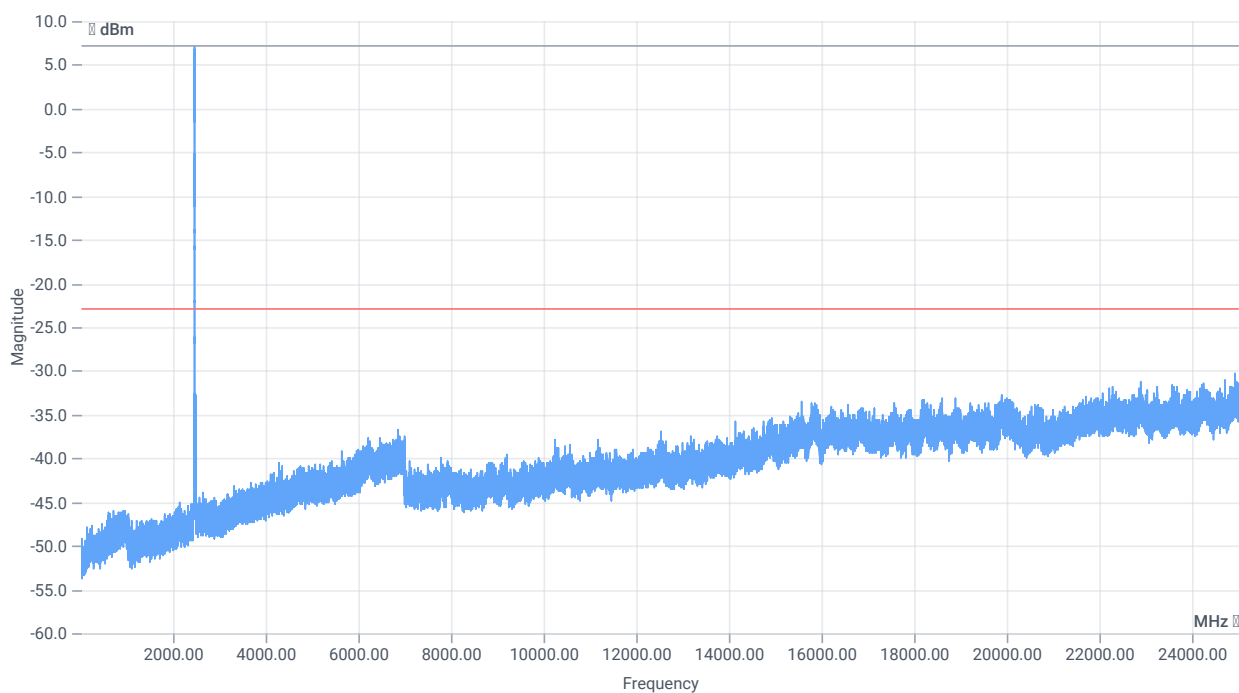

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.98 0 30
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE

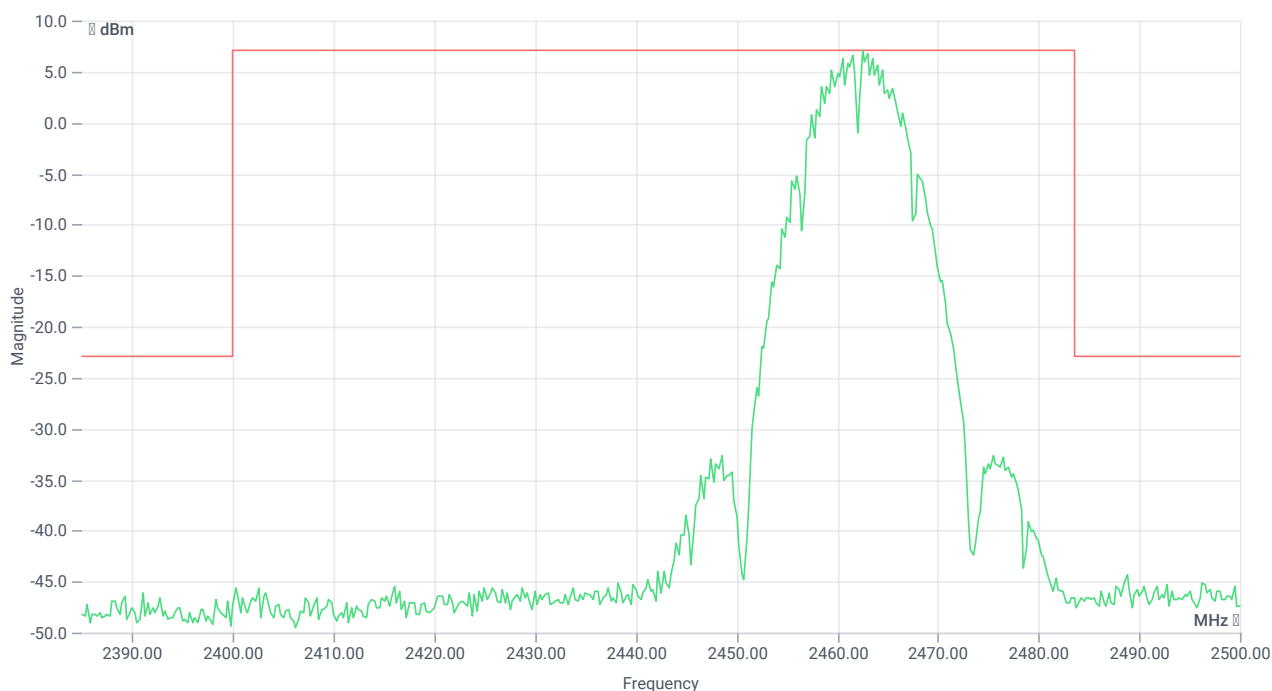

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2462.50 MHz	---	---	7.07	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 24913.25 MHz	0	---	7.41	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 g mode

References

TC start	16.10.2023 14:50:58
Ambit temp [°C] humidity [rel%]	27.6 28
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted 30dBc DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer


Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	8.69	dBm	INFO
Ref. Frequency	---	---	2410.400	MHz	INFO

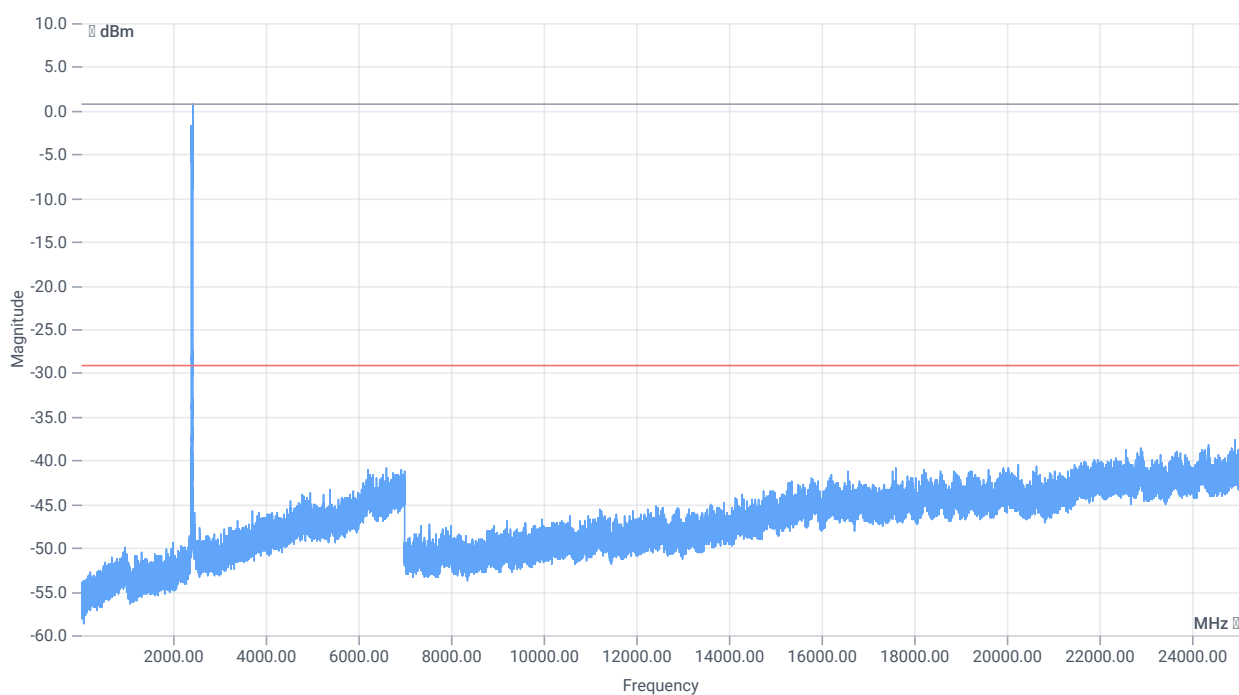

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.69 0 25
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE

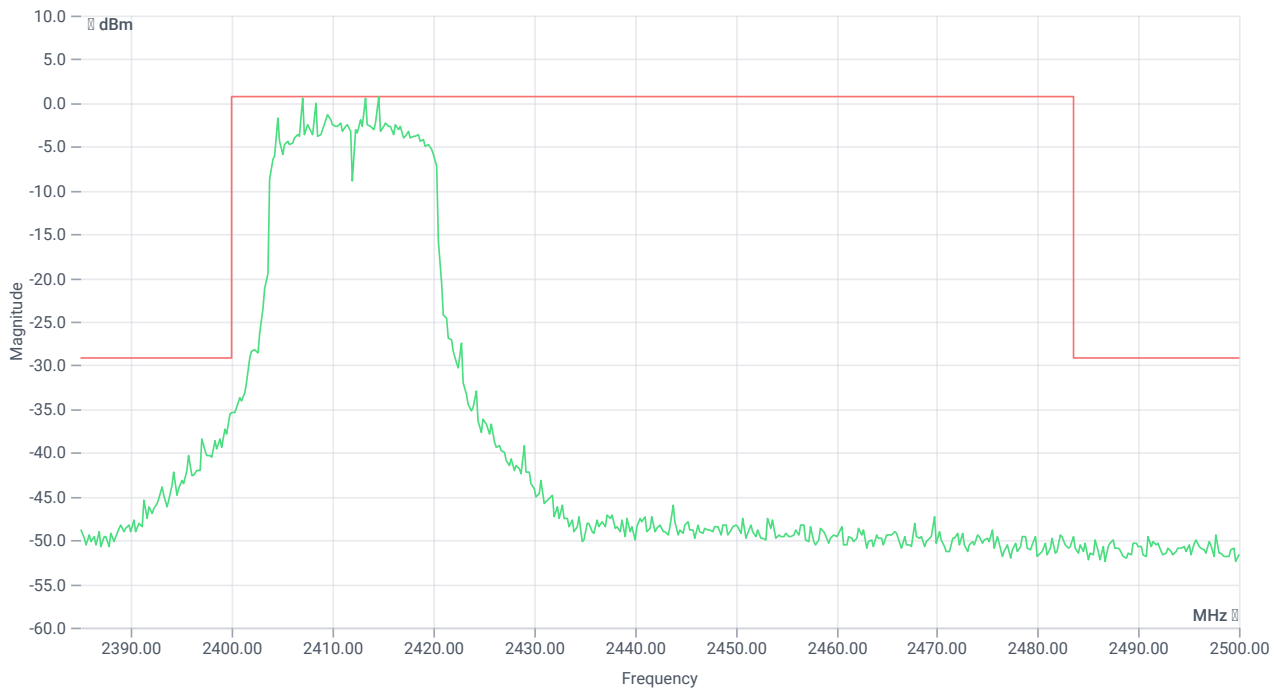

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2414.50 MHz	---	---	0.81	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 2399.75 MHz	0	---	6.44	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 g mode

References

TC start	16.10.2023 15:01:11
Ambit temp [°C] humidity [rel%]	27.2 27
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted 30dBc DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer


Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2412 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	10.36	dBm	INFO
Ref. Frequency	---	---	2414.600	MHz	INFO

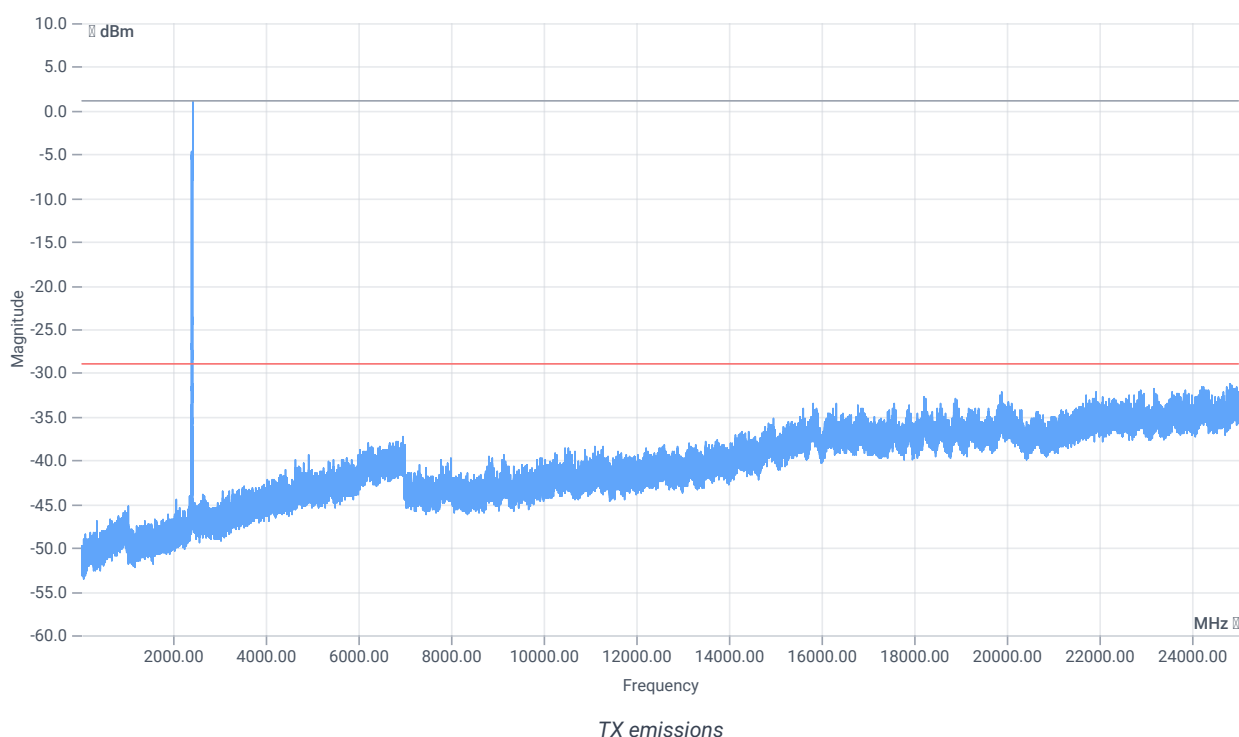

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.36 0 30
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE

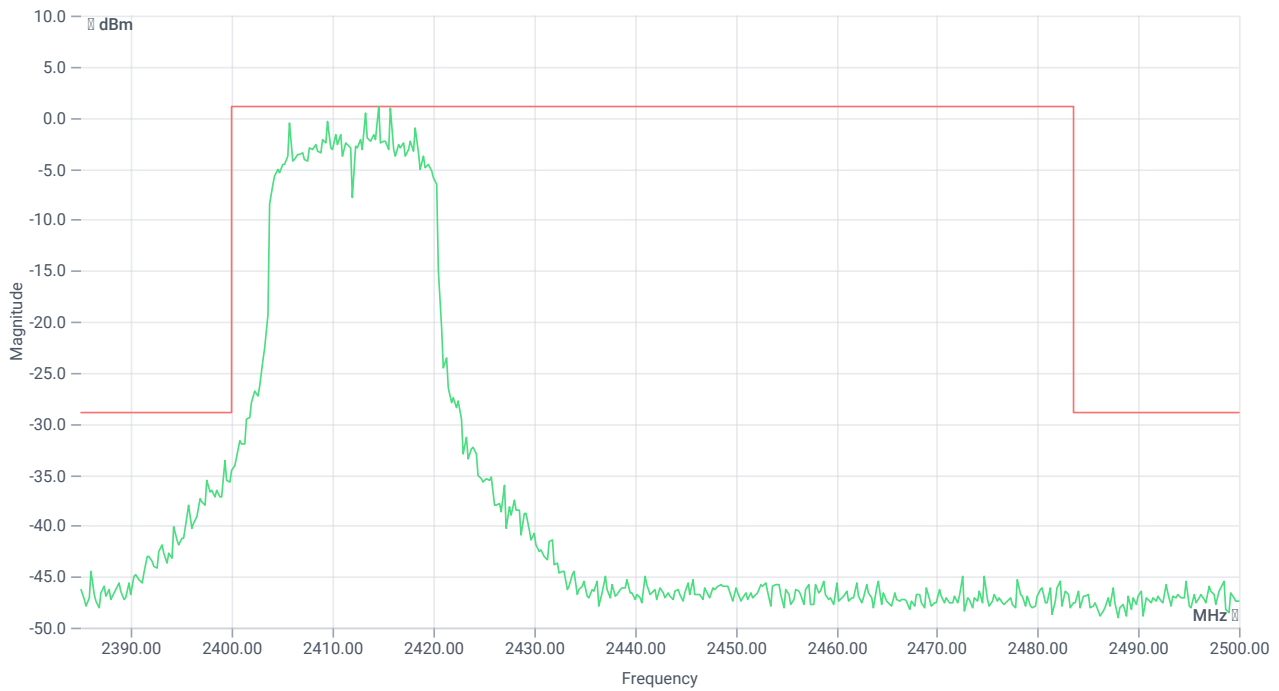

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2414.50 MHz	---	---	1.03	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 24803.25 MHz	0	---	2.3	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 g mode

References

TC start	16.10.2023 15:19:59
Ambit temp [°C] humidity [rel%]	27.5 28
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted 30dBc DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer


Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.15	dBm	INFO
Ref. Frequency	---	---	2434.400	MHz	INFO

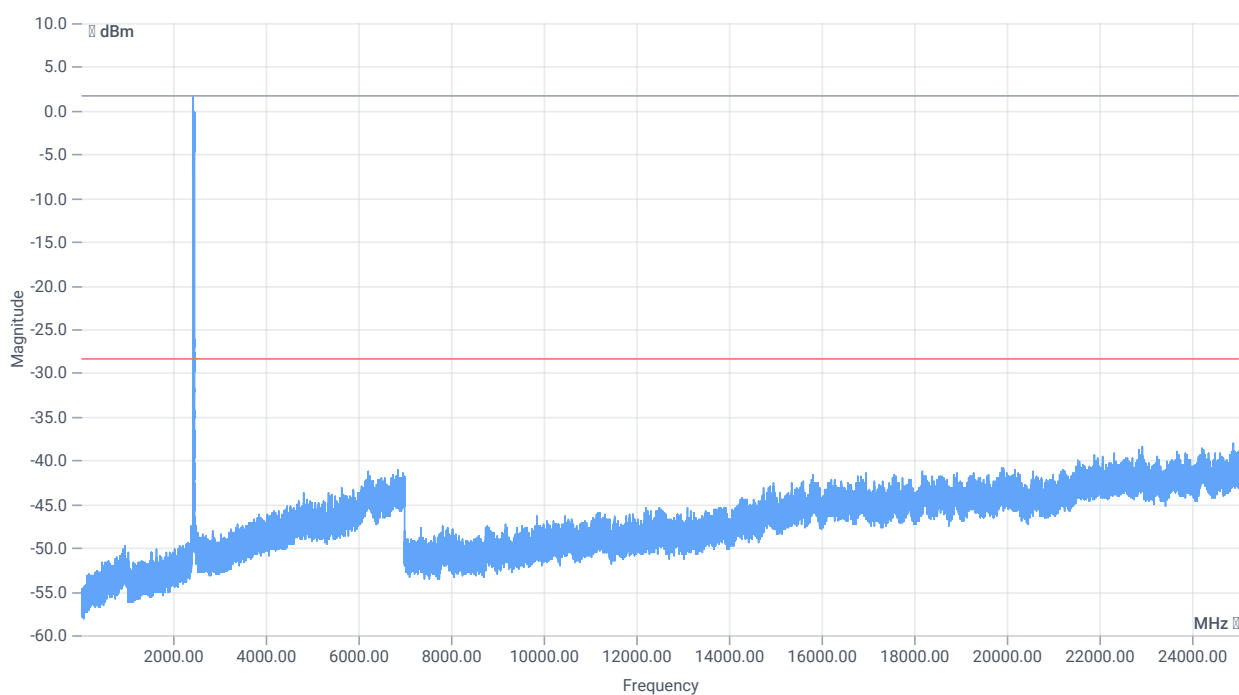

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.15 0 25
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE

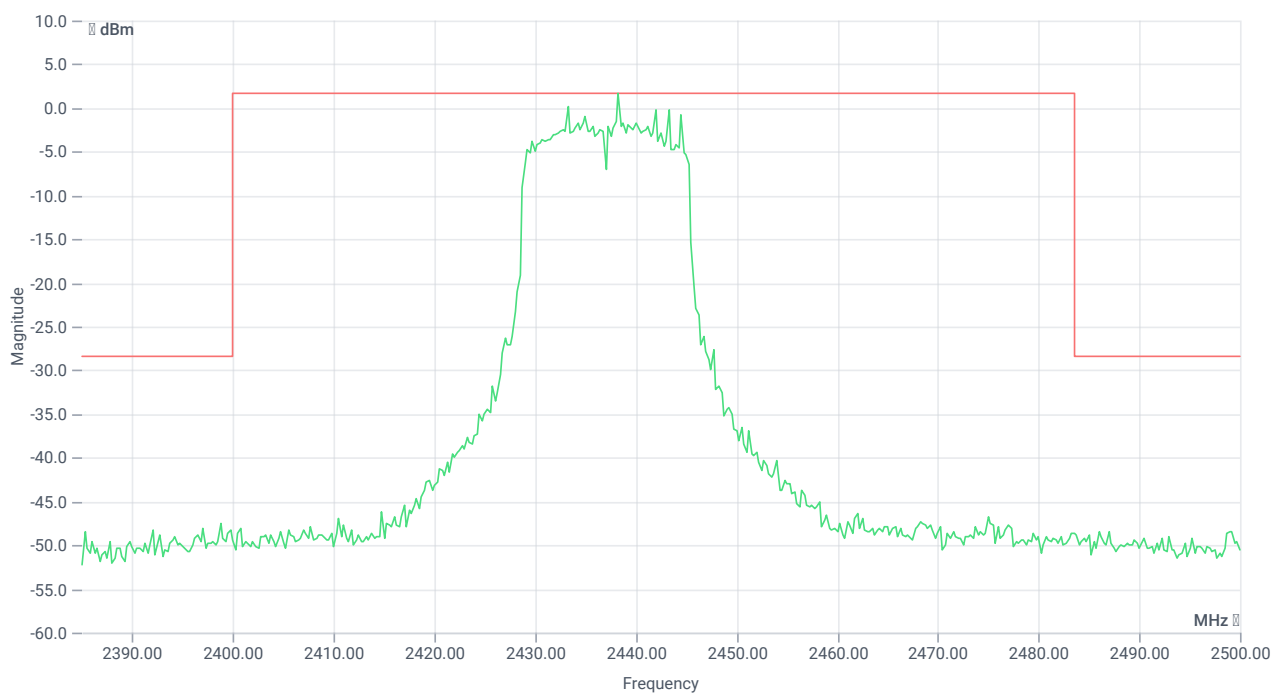

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2438.25 MHz	---	---	1.61	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 24900.25 MHz	0	---	9.75	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 g mode

References

TC start	16.10.2023 15:30:11
Ambit temp [°C] humidity [rel%]	27.8 28
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted 30dBc DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer


Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	10.26	dBm	INFO
Ref. Frequency	---	---	2439.000	MHz	INFO

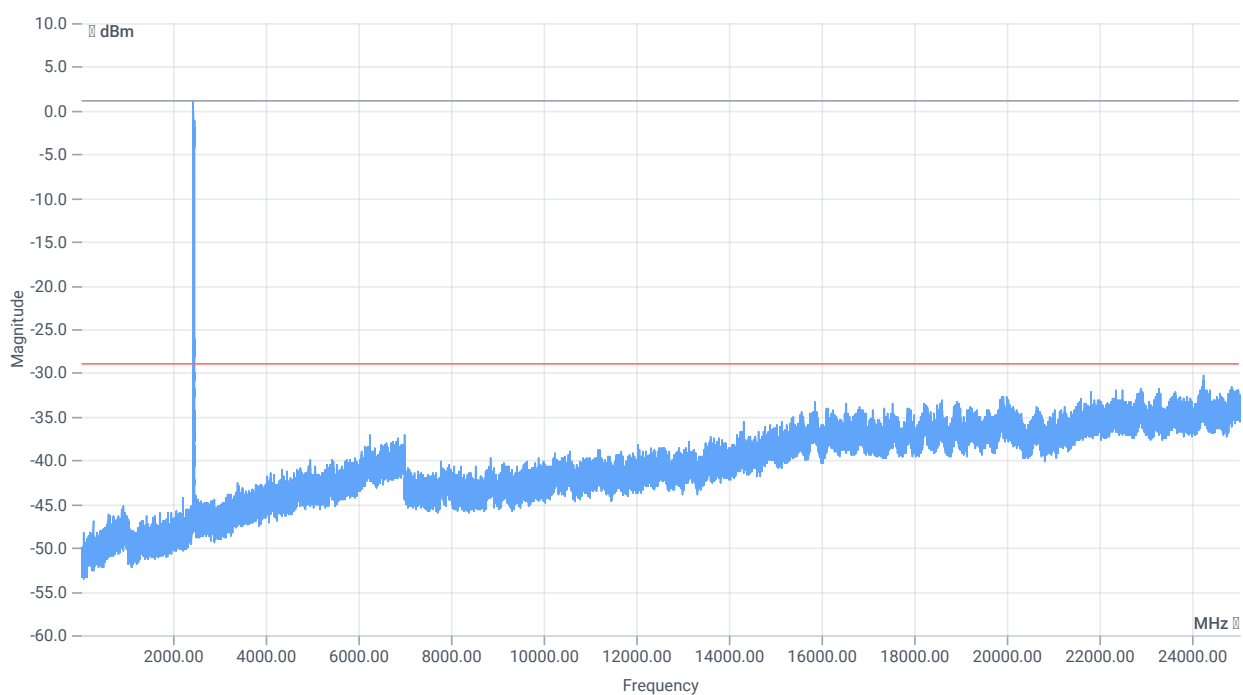

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.26 0 30
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE



RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2440.75 MHz	---	---	1.04	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 24242 MHz	0	---	1.28	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 g mode

References

TC start	16.10.2023 15:40:52
Ambit temp [°C] humidity [rel%]	28.0 28
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted 30dBc DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer


Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	10.08	dBm	INFO
Ref. Frequency	---	---	2459.200	MHz	INFO

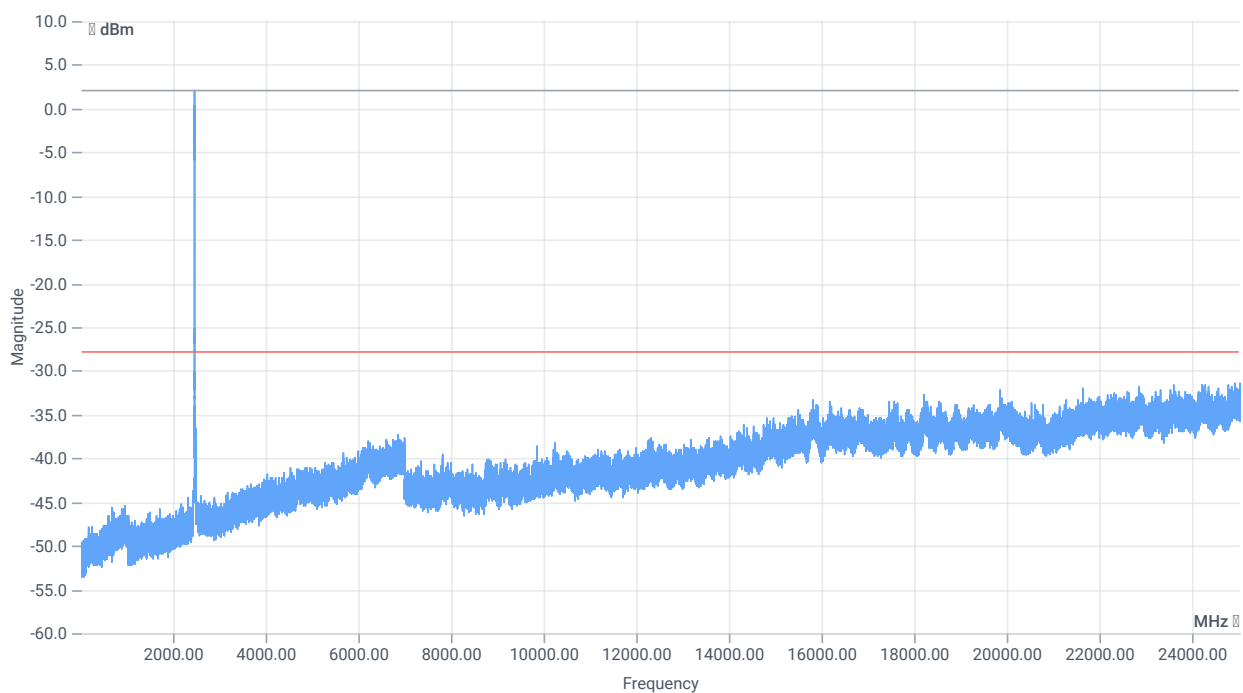

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.08 0 30
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE

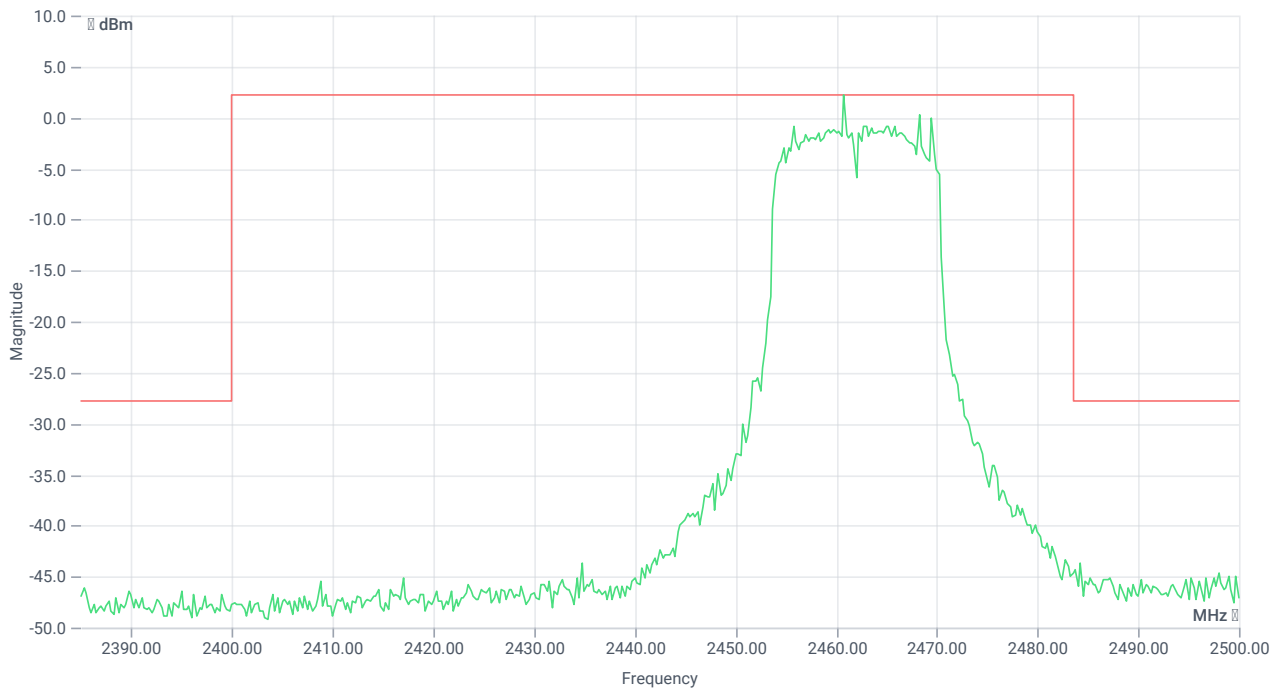

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2460.75 MHz	---	---	2.14	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 24930 MHz	0	---	3.57	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 g mode

References

TC start	16.10.2023 15:51:03
Ambit temp [°C] humidity [rel%]	27.6 26
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted 30dBc DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer


Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	10.42	dBm	INFO
Ref. Frequency	---	---	2464.800	MHz	INFO

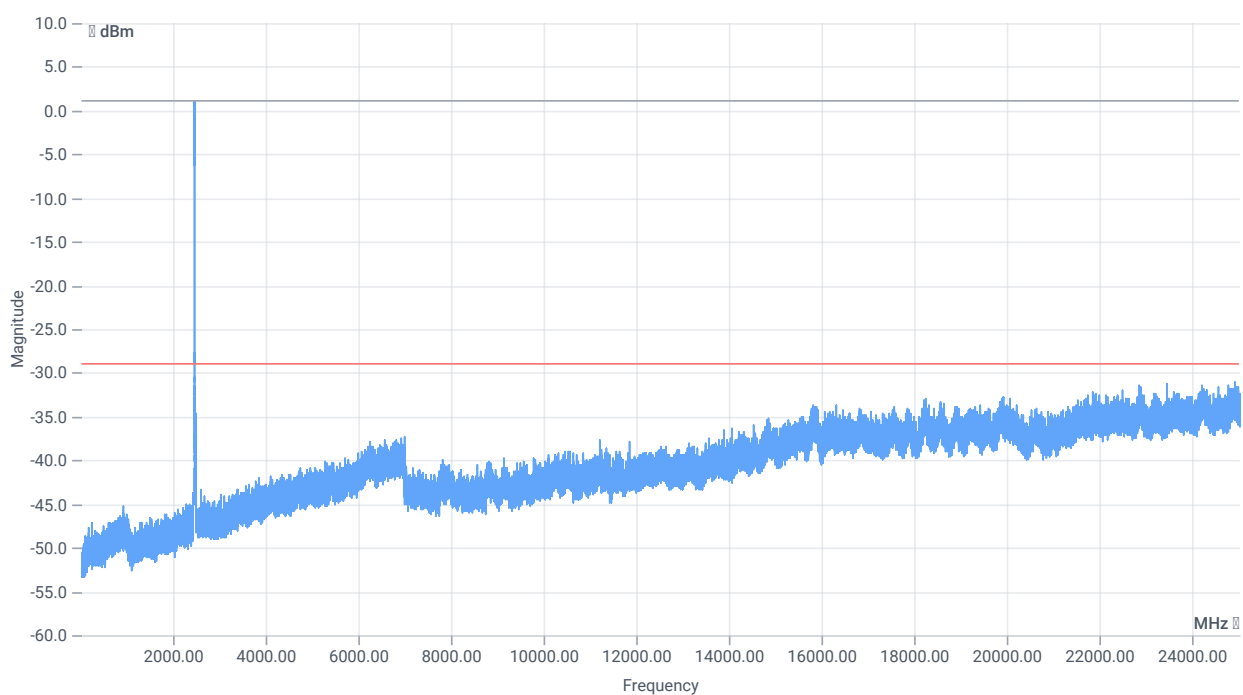

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.42 0 30
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE

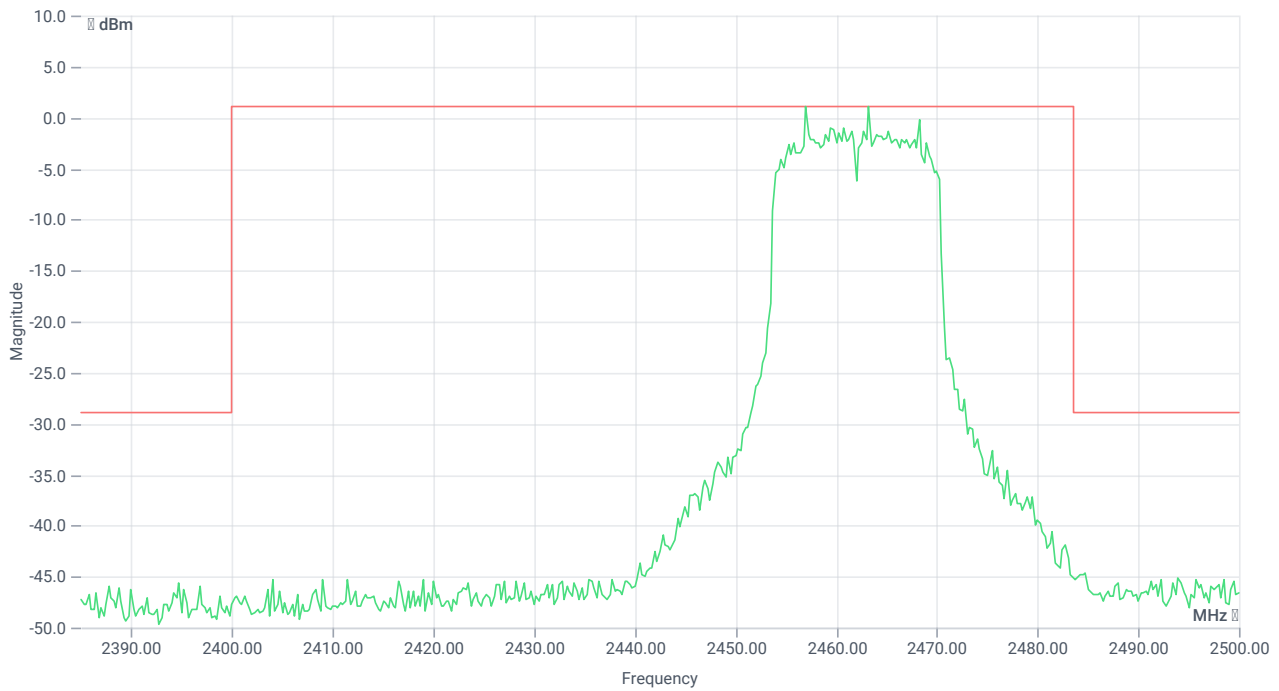

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2463.25 MHz	---	---	1.07	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 30 MHz	0	---	-149.03	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 n-HT20 mode

References

TC start	16.10.2023 16:04:39
Ambit temp [°C] humidity [rel%]	27.0 26
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted 30dBc DTS DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer


Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	8.98	dBm	INFO
Ref. Frequency	---	---	2408.800	MHz	INFO

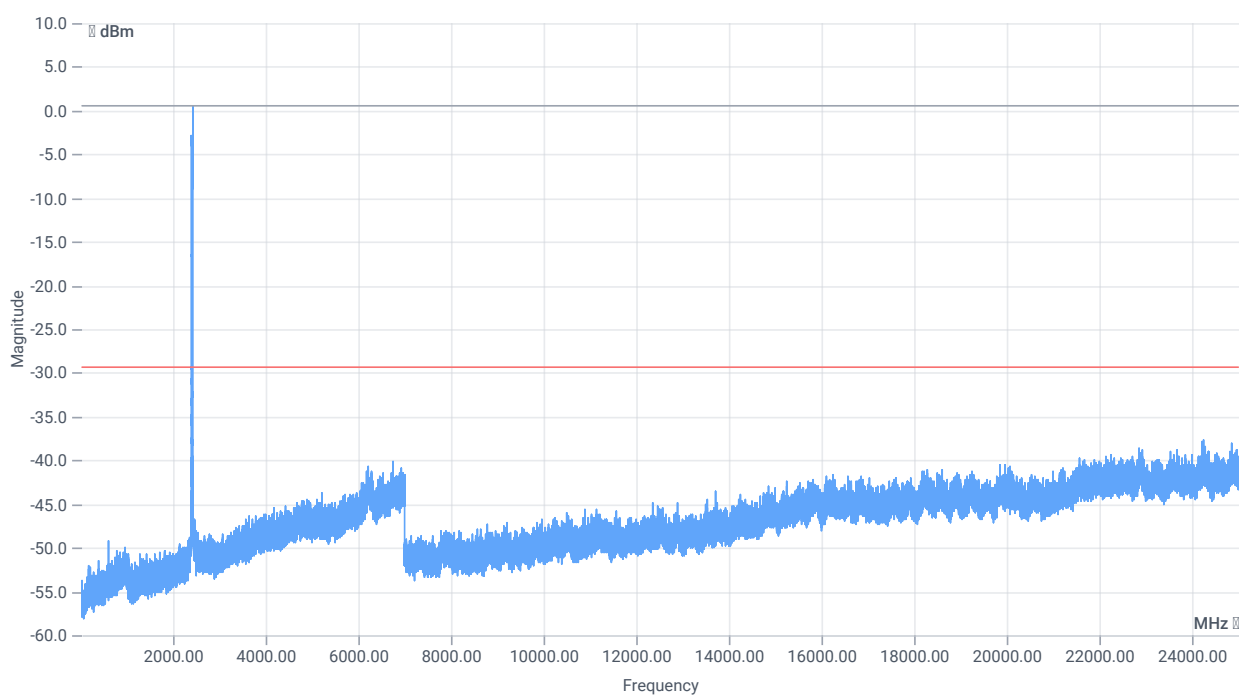

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.98 0 25
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE

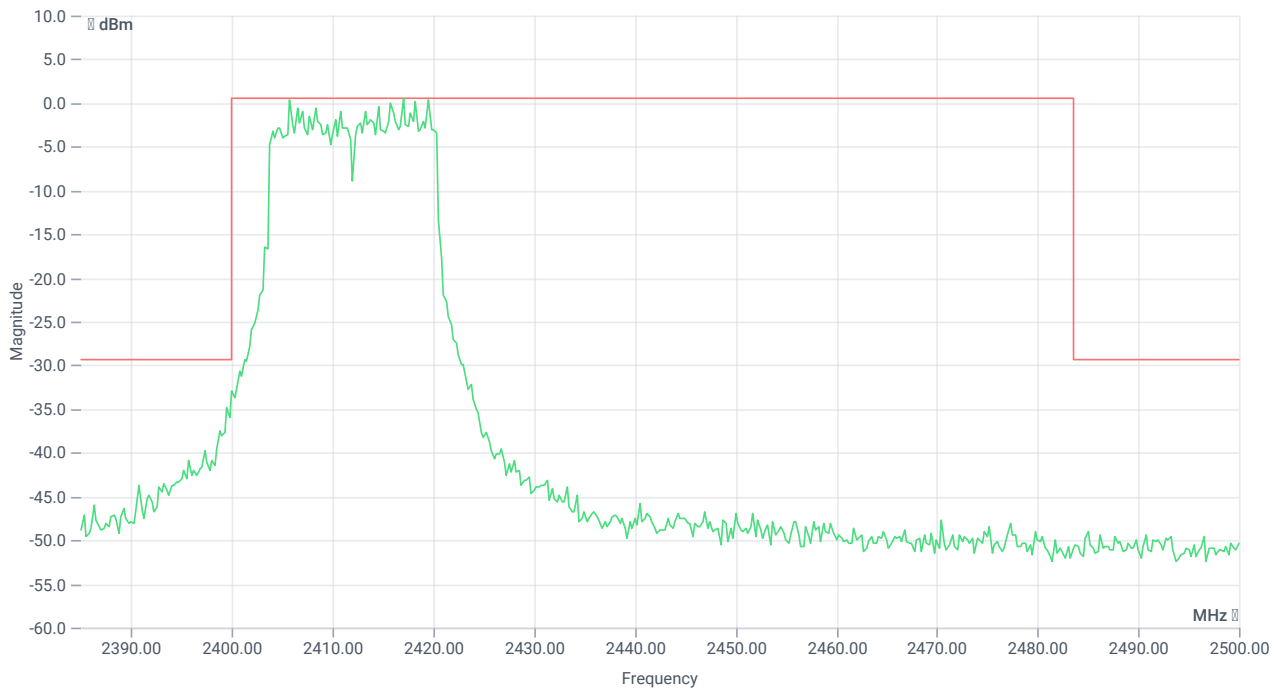

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2417.00 MHz	---	---	0.61	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 2399.5 MHz	0	---	5.48	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 n-HT20 mode

References

TC start	16.10.2023 16:14:52
Ambit temp [°C] humidity [rel%]	27.3 27
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted 30dBc DTS DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer


Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.35	dBm	INFO
Ref. Frequency	---	---	2416.900	MHz	INFO

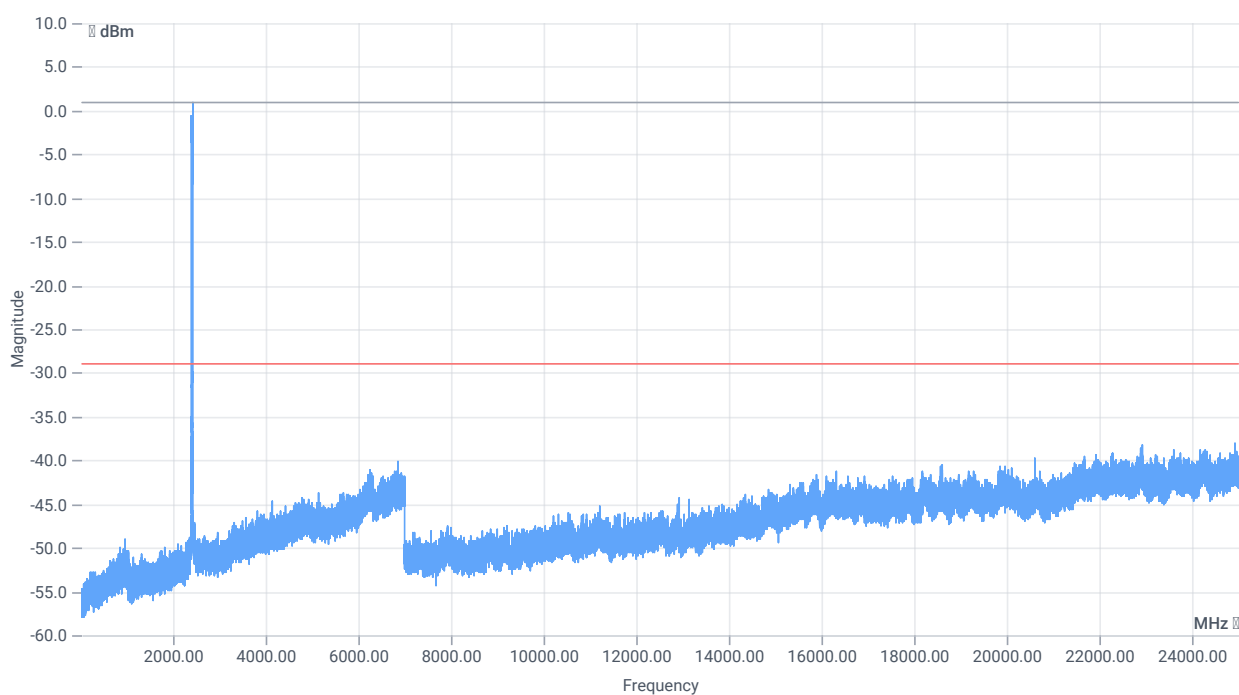

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.35 0 25
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE

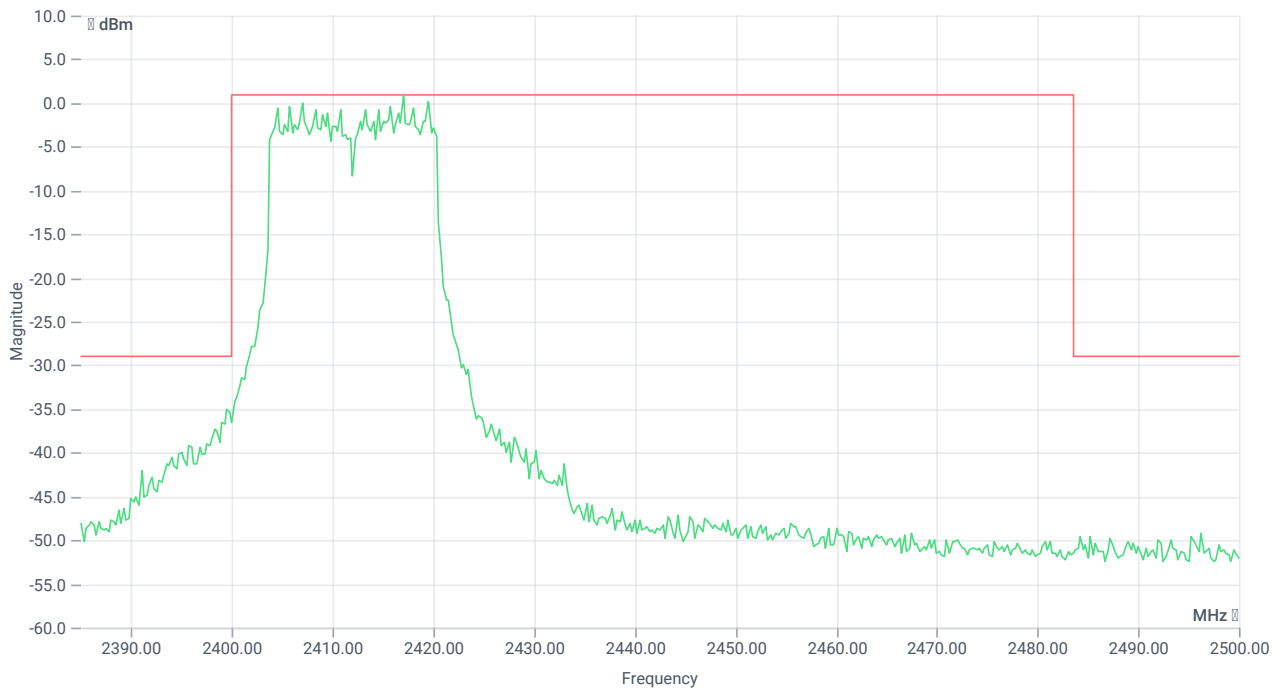

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2417.00 MHz	---	---	1.01	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 30 MHz	0	---	-144.07	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 n-HT20 mode

References

TC start	16.10.2023 16:25:37
Ambit temp [°C] humidity [rel%]	27.6 27
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted 30dBc DTS DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer


Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	8.85	dBm	INFO
Ref. Frequency	---	---	2431.710	MHz	INFO

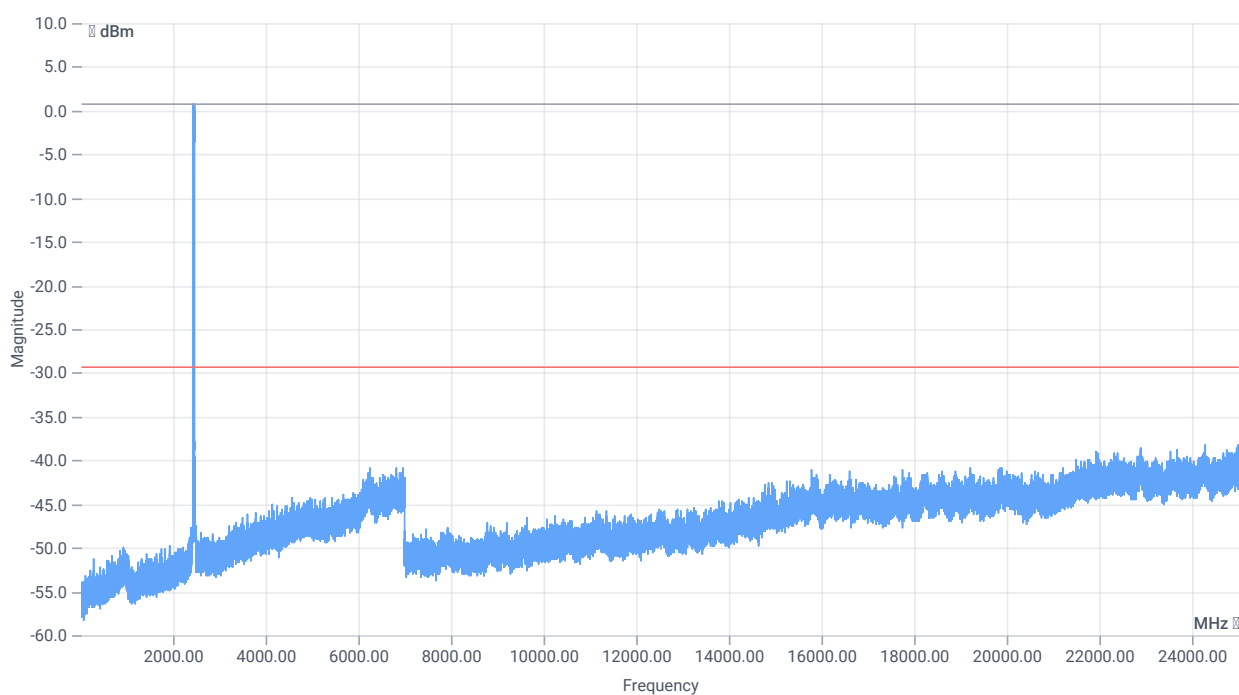

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.85 0 25
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE

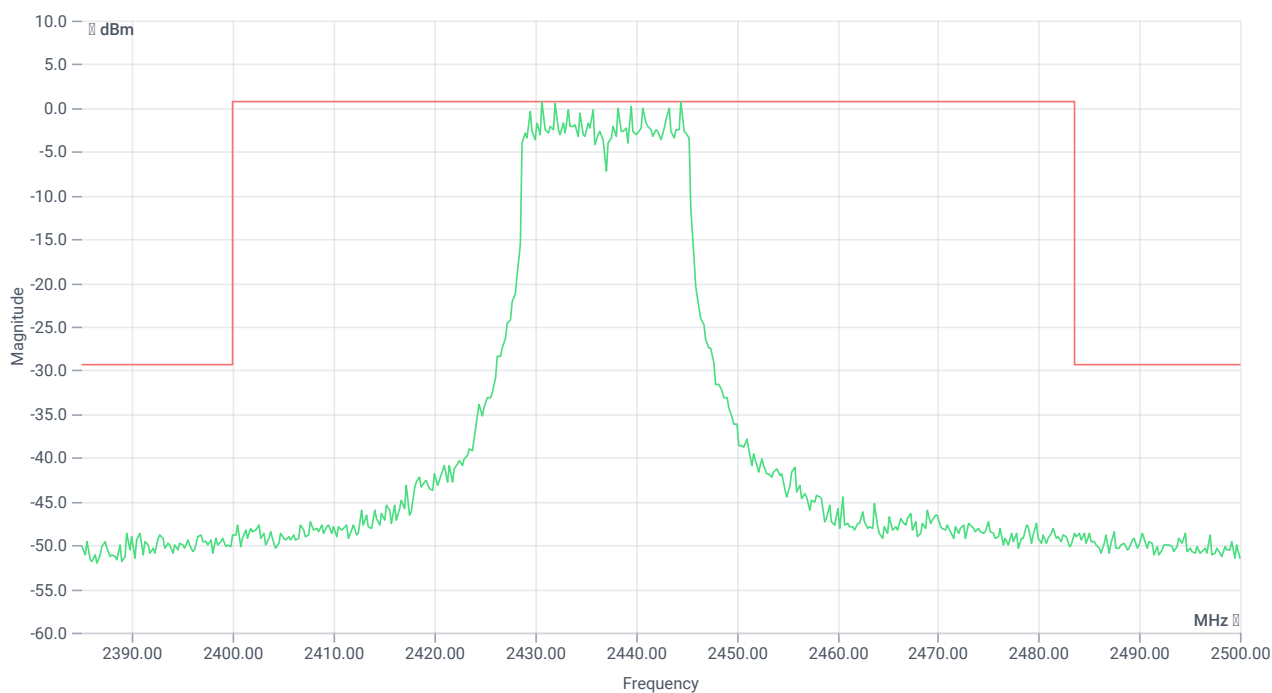

TX emissions band zoomed

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2430.75 MHz	---	---	0.73	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 24264.75 MHz	0	---	9	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 n-HT20 mode

References

TC start	16.10.2023 16:35:49
Ambit temp [°C] humidity [rel%]	27.8 27
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted 30dBc DTS DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer


Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.62	dBm	INFO
Ref. Frequency	---	---	2442.000	MHz	INFO

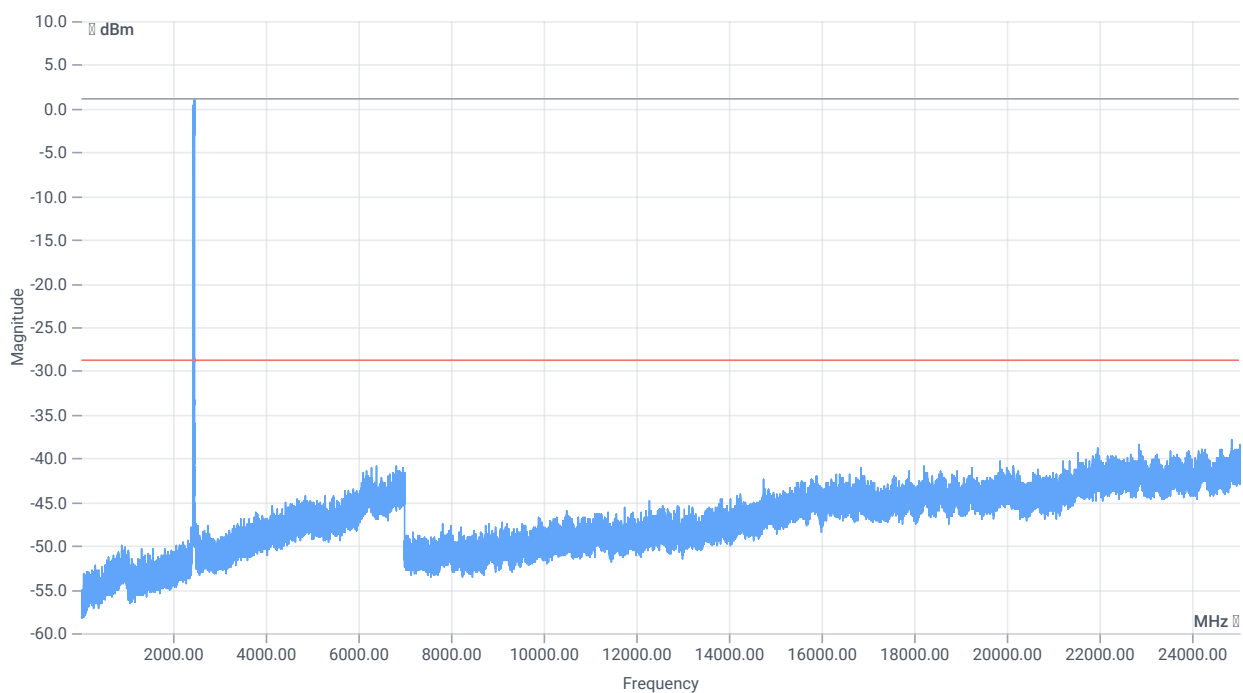

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.62 0 25
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE

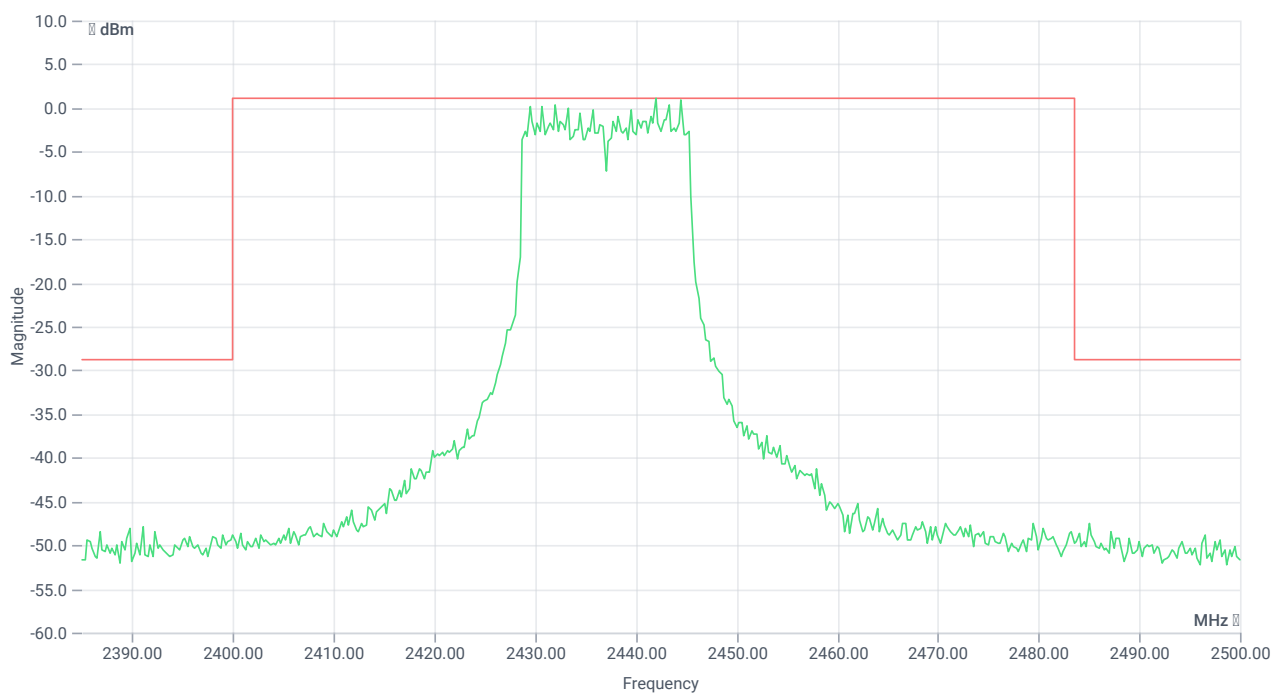

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2442.00 MHz	---	---	1.13	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 24860.5 MHz	0	---	9.08	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 n-HT20 mode

References

TC start	16.10.2023 16:45:18
Ambit temp [°C] humidity [rel%]	27.8 26
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted 30dBc DTS DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer


Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	10.40	dBm	INFO
Ref. Frequency	---	---	2467.290	MHz	INFO

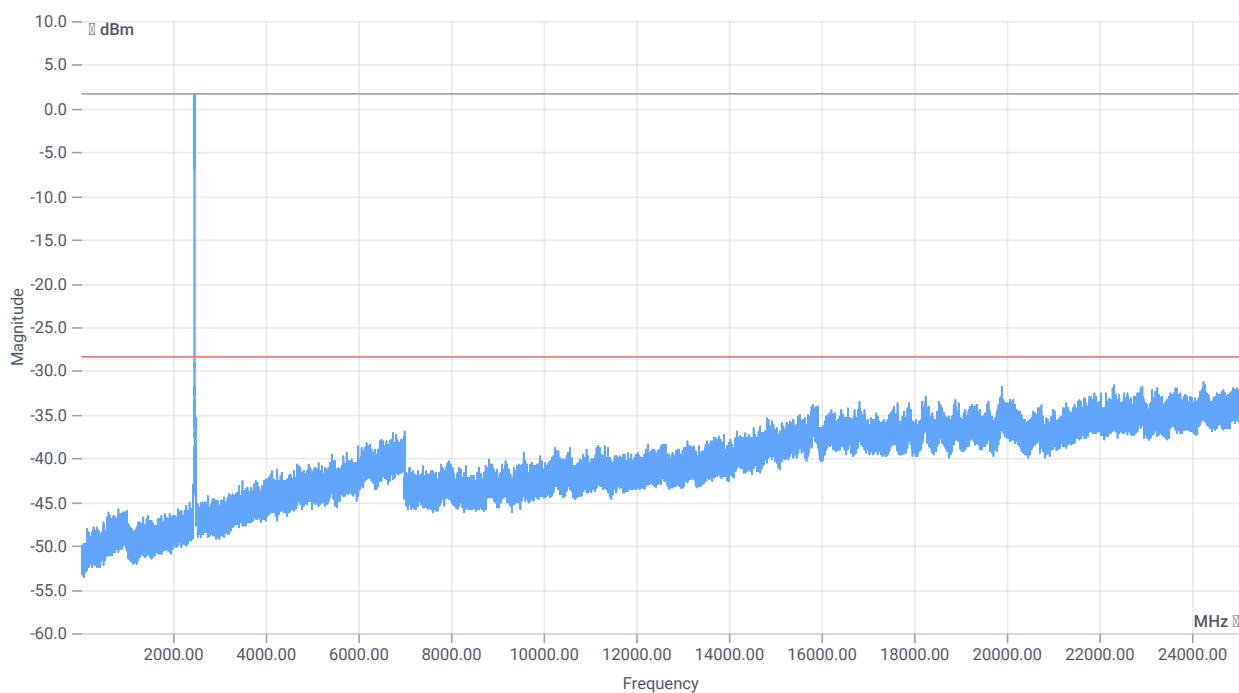

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.40 0 30
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE

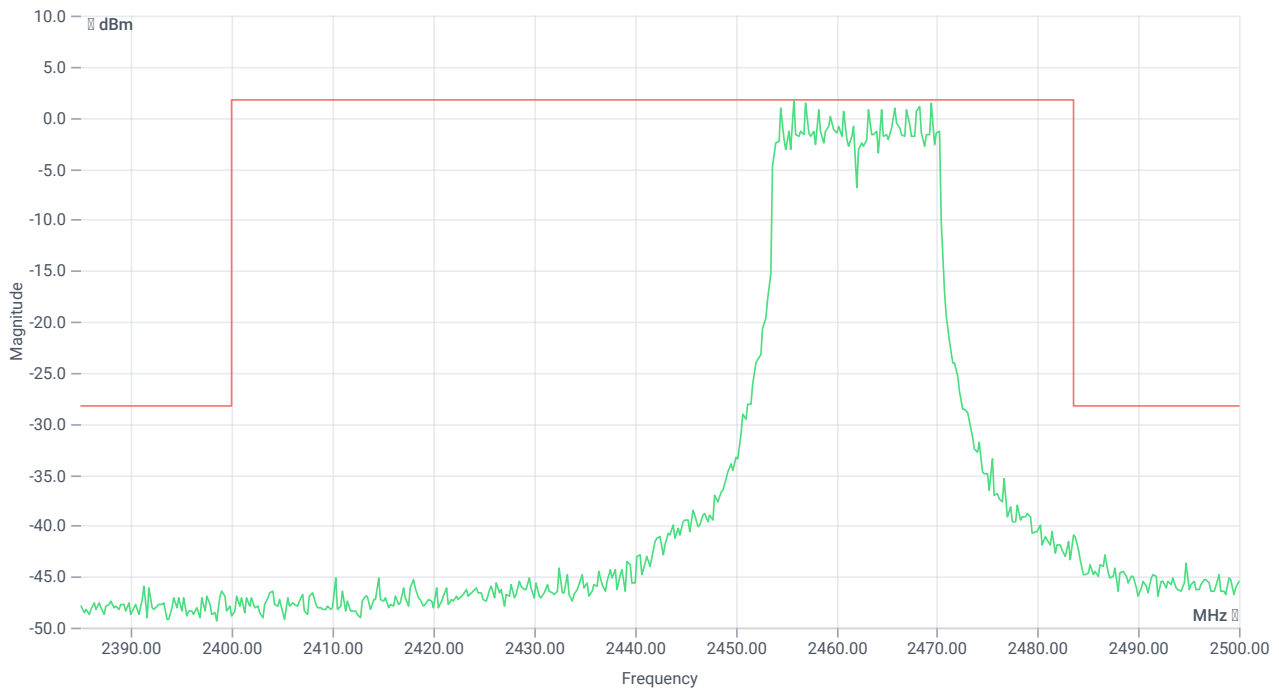

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2455.75 MHz	---	---	1.66	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 24229.5 MHz	0	---	2.83	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 30dBc ~ WLAN2G4 n-HT20 mode

References

TC start	16.10.2023 16:55:29
Ambit temp [°C] humidity [rel%]	28.0 27
System version	4.6.2.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted 30dBc DTS DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	2
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer


Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	9.83	dBm	INFO
Ref. Frequency	---	---	2456.610	MHz	INFO

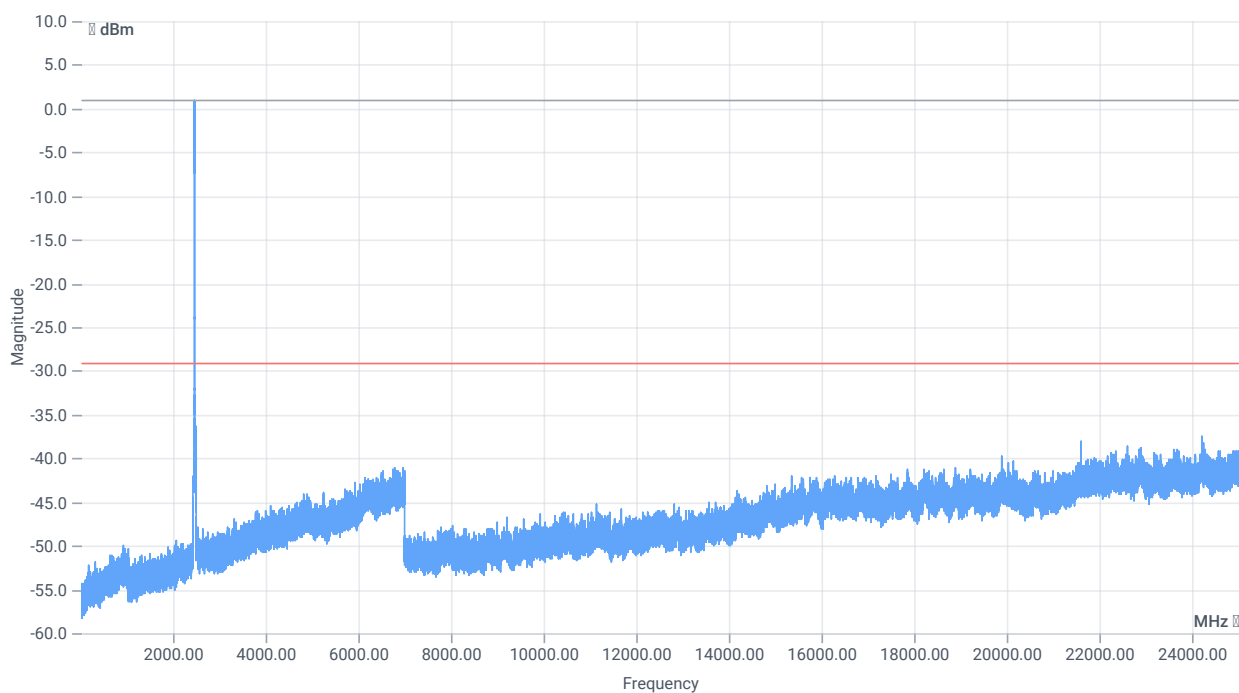

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.83 0 25
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE

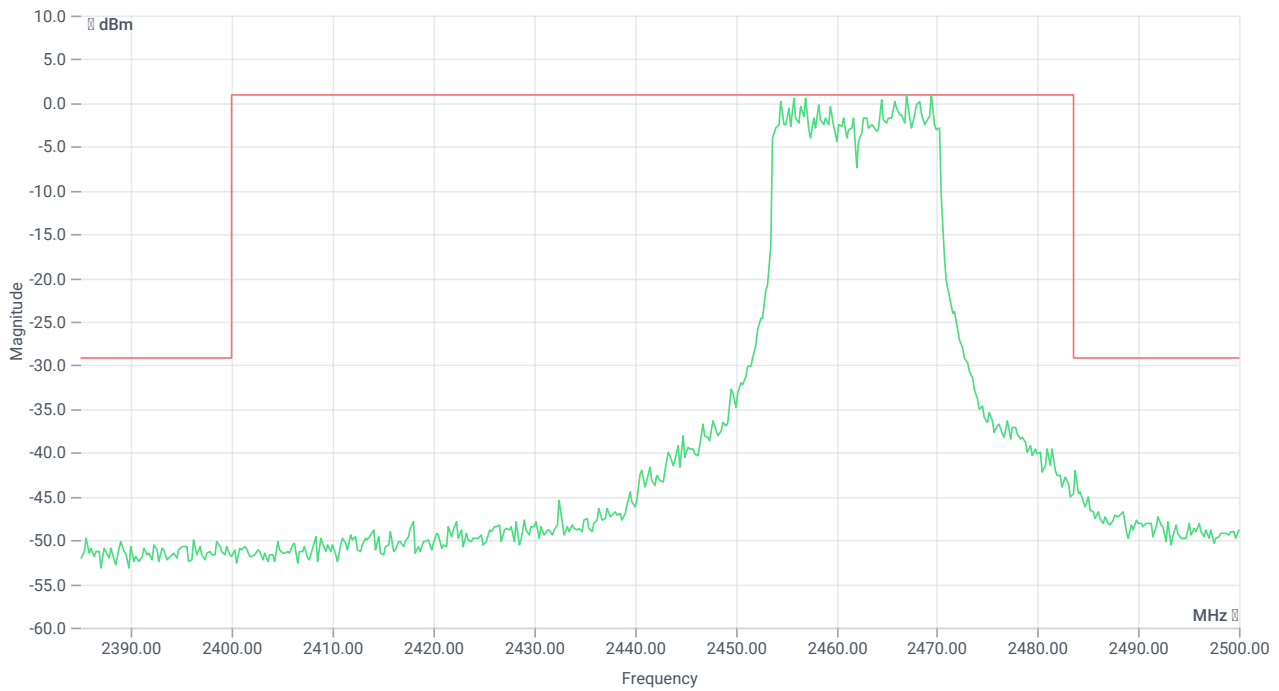

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2467.00 MHz	---	---	0.93	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 2422.75 MHz	0	---	8.4	dB	INFO

Verdict

PASS

- END OF DOCUMENT -