

TEST REPORT



Certification # 1367-01

Laboratory ID

PRODUCT SAFETY ENGINEERING, INC.
12955 Bellamy Brothers Boulevard
Dade City, Florida 33525 USA
PH (352) 588-2209 FX (352) 588-2544

Submitter ID

Checkpoint Systems Inc.
101 Wolf Drive
Thorofare, NJ 08086

Report Issue Date: 13 JUL 04
Sample S/N: NA

Test Report Number: 04F266B
Model Designation: Strata EX Plus / GX
Plus / SX Plus / WX
Plus / PX Plus

Sample Receipt Date: 23 MAR 04

Product Description: Electronic
Surveillance
Detection System

Sample Test Date: see data sheets

Marketing Approval _____

Description of non-standard test method or test practice: *None*

Estimated Measurement Uncertainty: *Not Applicable*

Special limitations of use: *None*

Traceability: *reference standards of measurement have been calibrated by a competent body using standards traceable to the NIST.*

According to testing performed at Product Safety Engineering, Inc., the above-mentioned unit is in compliance with the electromagnetic compatibility requirements defined in regulations indicated on page (3) of the test report. The test results contained herein relate only to the model(s) identified above. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Project Engineer, I hereby declare that the equipment tested as specified above conforms to the requirements indicated on page (3) of the test report.

Signature David Foerstner Name David Foerstner

Title Engineering Group Leader Date 13 JUL 04

Reviewed by: John E. Hale Date 13 JUL 04
Approved Signatory

This report may only be reproduced in full with written permission from Product Safety Engineering, Inc.

Test Report Number 04F266B

Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525
Tel (352) 588-2209 Fax (352) 588-2544

DIRECTORY - EMISSIONS

		Page(s)
A)	Documentation	
	Test report	1 - 10
	Directory	2
	Test Regulations	3
	General Remarks & Average calculation	10
	Test-setups (Photos)	11 - 18
B)	Test data	
	Conducted emissions	10/150 kHz - 30 MHz
	Radiated emissions	10 kHz - 30 MHz
	Radiated emissions	30 MHz - 1000 MHz
	Interference power	30 MHz - 300 MHz
	Equivalent Radiated emissions	1 GHz - 18 GHz
	Antenna Disturbance Voltage	30 MHz - 1,000 MHz
C)	Appendix A (Data)	
	Test Equipment Calibration Information	A2
	Radiated emissions (fundamental)	A3
	Radiated emissions (unintentional)	A4 - A5
	Conducted emissions	A6 - A14
	Bandwidth Plot	A15 - A16
	Antenna current	A17
	FCC Letter	A18
D)	Appendix B (Configuration)	
	System Under Test Description	B2
	FCC Letter	B3
E)	Appendix C (Sample Calculation)	
	Measurement Protocol	C1 - C2

Test Report Number 04F266B

EMISSIONS TEST REGULATIONS :

The emissions tests were performed according to following regulations:

- ☐ - EN 50081-1 : 1992
- ☐ - EN 50081-2 : 1995

- ☐ - EN 55011 : 1998 / A1:1999
- ☐ - Group 1
- ☐ - Class A
- ☐ - Group 2
- ☐ - Class B

- ☐ - EN 55013 : 1990 / A12:1994 / A13:1996 / A14:1999

- ☐ - EN 55014 -1: 2001
- ☐ - Household appliances and similar
- ☐ - Portable tools
- ☐ - Semiconductor devices

- ☐ - EN 55022 : 1998
- ☐ - Class A
- ☐ - Class B

- ☐ -AS/NZS 3548:1995
- ☐ - Class A
- ☐ - Class B

- - ICES-003
- - Class A
- ☐ - Class B

- ☐ - CNS 13438
- ☐ - Class A
- ☐ - Class B

- ☐ - VCCI : 1999
- ☐ - Class A
- ☐ - Class B

- - FCC Part 15
- - Class A
- ☐ - Class B

- - Certification (as intentional radiator)
- - Verification (as unintentional radiator)
- ☐ - Declaration of Conformity

- - RSS-210

Test Report Number 04F266B

Environmental conditions during testing:

	LAB	OATS
Temperature: *	_____	: _____
Relative Humidity: **	_____	: _____

* The ambient temperature during the testing was within the range of (50° - 104° F) unless indicted above.

** The humidity levels during the testing was within the range of (10% - 90%) relative humidity unless indicated above.

Power supply system : 115 Volts 60 Hz SINGLE phase

Sign Explanations:

- ☐ - not applicable
- ☒ - applicable

Test Report Number 04F266B

Emissions Test Conditions: CONDUCTED EMISSIONS (Interference Voltage)

The *CONDUCTED EMISSIONS (INTERFERENCE VOLTAGE)* measurements were performed at the following test location:

☐ - Test not applicable

- ☐ - Darby Test Site (Open Area Test Site)
- ☒ - Darby Laboratory

Test equipment used :

Model Number	Manufacturer	Description	Serial Number
<input checked="" type="checkbox"/> - 8028-50	Solar	50 Ω LISN	829012, 829022
<input checked="" type="checkbox"/> - 3825/2	Solar	50 Ω LISN	924840
<input checked="" type="checkbox"/> - EMC-30	Electro-Metrics	EMI Receiver	191
<input type="checkbox"/> - 8566B	Hewlett-Packard	Spectrum Analyzer	2421A00526
<input type="checkbox"/> - 85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
<input type="checkbox"/> - 85662A	Hewlett Packard	Analyzer Display	2403A07352
<input type="checkbox"/> - 8028-50	Solar	50 Ω LISN	903725, 903726
<input type="checkbox"/> - FCC-TLISN-T4	Fisher Custom Com.	Telecom ISN	20072

Emissions Test Conditions: RADIATED EMISSIONS (Magnetic Field)

The *RADIATED EMISSIONS (MAGNETIC FIELD)* measurements were performed at the following test location:

- ☒ - Darby Test Site (Open Area Test Site)
- ☐ -
- ☐ -

at a test distance of :

- ☐ - 3 meters
- ☒ - 30 meters

☐ - Test not applicable

Test equipment used :

Model Number	Manufacturer	Description	Serial Number
<input type="checkbox"/> - 96005	Eaton	Log Periodic Antenna	1099
<input type="checkbox"/> - BIA-25	Electro-Metrics	Biconical Antenna	4283
<input checked="" type="checkbox"/> - 8566B	Hewlett-Packard	Spectrum Analyzer	2421A00526
<input checked="" type="checkbox"/> - 85662A	Hewlett-Packard	Analyzer Display	2403A07352
<input checked="" type="checkbox"/> - 85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
<input type="checkbox"/> - ALR-30M	Electro-Metrics	Loop Antenna	824
<input type="checkbox"/> - 8447D	Hewlett Packard	Preamplifier	2944A06832
<input type="checkbox"/> - EMC-30	Electro-Metrics	EMI Receiver	191
<input checked="" type="checkbox"/> - ALA-130/A	Antenna Research	Loop Antenna	106

Test Report Number 04F266B

Emissions Test Conditions: RADIATED EMISSIONS (Electric Field)

The *RADIATED EMISSIONS (ELECTRIC FIELD)* measurements, in the frequency range of 30 MHz-1000 MHz, were tested in a horizontal and vertical polarization at the following test location :

☐ - Test not applicable

- - Darby Site (Open Area Test Site)
- ☐ - Darby Lab
- ☐ -

at a test distance of :

- ☐ - 3 meters
- - 10 meters
- ☐ - 30 meters

Test equipment used :

	Model Number	Manufacturer	Description	Serial Number
■ -	LPA30	eElectro-Metrics	Log Periodic Antenna	2280
■ -	BIA-30	Electro-Metrics	Biconical Antenna	3852
■ -	8566B	Hewlett-Packard	Spectrum Analyzer	2421A00526
■ -	85662A	Hewlett-Packard	Analyzer Display	2403A07352
■ -	85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
■ -	8447D	Hewlett-Packard	Preamplifier (26dB)	2944A06832
<input type="checkbox"/> -	EMC-30	Electro-Metrics	EMI Receiver	191
<input type="checkbox"/> -	8568B	Hewlett Packard	Spectrum Analyzer	2407A03213
<input type="checkbox"/> -	85650A	Hewlett Packard	Quasi-Peak Adapter	2043A00358
<input type="checkbox"/> -	85662A	Hewlett Packard	Analyzer Display	2340A05806
<input type="checkbox"/> -	96005	Eaton	Log Periodic	1099
<input type="checkbox"/> -	BIA 25	Electro-Metrics	Biconical Antenna	4283

Emissions Test Conditions): INTERFERENCE POWER

The *INTERFERENCE POWER* measurements were performed by using the absorbing clamp on the mains and interface cables in the frequency range 30 MHz - 300 MHz at the following test location :

■ - Test not applicable

- ☐ - Darby Lab
- ☐ -

Test equipment used :

	Model Number	Manufacturer	Description	Serial Number
<input type="checkbox"/> -	MDS-21	Rhode&Schwarz	Absorbing Clamp	8608447020
<input type="checkbox"/> -	8566B	Hewlett-Packard	Spectrum Analyzer	2421A00526
<input type="checkbox"/> -	85662A	Hewlett-Packard	Analyzer Display	2403A07352
<input type="checkbox"/> -	85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
<input type="checkbox"/> -	8447D	Hewlett-Packard	Amplifier (26 dB)	2944A06832
<input type="checkbox"/> -	EMC-30	Electro-Metrics	EMI Receiver	191

Test Report Number 04F266B

The *EQUIVALENT RADIATED EMISSIONS* measurements in the frequency range GHz - GHz
were performed in a horizontal and vertical polarization at the following test location :

- ☐ - Darby Test Site (Open Area Test Site)
- ☐ -
- ☐ -
- ☐ -

at a test distance of:

- ☐ - 1 meters
- ☐ - 3 meters
- ☐ - 10 meters

■ - Test not applicable

Test equipment used :

	Model Number	Manufacturer	Description	Serial Number
<input type="checkbox"/> -	8566B	Hewlett-Packard	Spectrum Analyzer	2421A00526
<input type="checkbox"/> -	85662A	Hewlett-Packard	Analyzer Display	2403A07352
<input type="checkbox"/> -	85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
<input type="checkbox"/> -	8449B	Hewlett-Packard	Preamplifier	3008A00320
<input type="checkbox"/> -	3115	Electro-Mechanics	Double Ridge Guide Horn	3810

The *ANTENNA TERMINAL DISTURBANCE VOLTAGE* in the frequency range 30 MHz - 1,000 MHz were performed.

- ☐ - Darby Test Site (Open Area Test Site)
- ☐ - Laboratory
- ☐ -
- ☐ -

■ - Test not applicable

	Model Number	Manufacturer	Description	Serial Number
<input type="checkbox"/> -	2F9-3C4-3C5	Wavecom	UHF PAL TV Modulator	185879
<input type="checkbox"/> -	2F1-3C4-3C5	Wavecom	VHF PAL TV Modulator	157728
<input type="checkbox"/> -	A-8000	IFR	Spectrum Analyzer	1306
<input type="checkbox"/> -	8648B	Hewlett-Packard	Signal Generator	3623A01433
<input type="checkbox"/> -	8648B	Hewlett-Packard	Signal Generator	3623A01477
<input type="checkbox"/> -	LMV-182A	Leader	RMS Milli-Voltmeter	8010091
<input type="checkbox"/> -	3202	Krhon-Hite	Active filter	5899
<input type="checkbox"/> -	FMT115	Leaming	FM Modulator	NONE
<input type="checkbox"/> -	371	UDT	Optical power meter	06657
<input type="checkbox"/> -	TSG95	Tektronix	PAL video / Audio generator	B028883
<input type="checkbox"/> -				

Test Report Number 04F266B

Equipment Under Test (EUT) Test Operation Mode - Emission tests :

The device under test was operated under the following conditions during emissions testing:

- ☐ - Standby
- ☐ - Test program (H - Pattern)
- ☐ - Test program (color bar)
- ☐ - Test program (customer specific)
- ☐ - Practice operation
- ☒ - Normal Operating Mode
- ☐ -

Configuration of the device under test:

- ☒ - See System Under Test Information in Appendix B

Rationale for EUT setup / configuration:

ANSI C63.4-2001

Test Report Number 04F266B

Emission Test Results:

Conducted emissions 150 kHz - 30 MHz

The requirements are ☒ - MET ☐ - NOT MET
Minimum limit margin 3.0 dB at 7.45 MHz
Remarks: Power supply WW425 - Line side

Radiated emissions (magnetic field) 10 kHz - 30 MHz

The requirements are ☒ - MET ☐ - NOT MET
Minimum limit margin 0.1 dB at 10.0 MHz
Remarks: Model Strata EX Plus

Radiated emissions (electric field) 30 MHz - 1000 MHz

The requirements are ☒ - MET ☐ - NOT MET
Minimum limit margin 2.7 dB at 86.9 MHz
Remarks: Model Strata SX Plus

Interference Power at the mains and interface cables 30 MHz - 300 MHz

The requirements are ☐ - MET ☐ - NOT MET
Minimum limit margin dB at MHz
Remarks:

Radiated emissions GHz - GHz

The requirements are ☐ - MET ☐ - NOT MET
Minimum limit margin dB at GHz
Remarks:

Antenna Terminal Disturbance Voltage 30 MHz - 1,000 MHz

The requirements are ☐ - MET ☐ - NOT MET
Minimum limit margin dB at MHz
Remarks:

Test Report Number 04F266B

GENERAL REMARKS: Per client instructions and agreement with FCC, for measurement of the fundamental and harmonic emissions in the band 1.705 MHz to 10 MHz, a 20 dB reduction from the true peak is to be compared to the limits of 100 uV/meter (40 dBuV/meter) at 30 meters. The EUT is to be modulated as normally installed. True peak is the point at which the analyzer bandwidth is adjusted for minimum pulse desensitization. A copy of the correspondence between Checkpoint and the FCC is attached in Appendix A for reference. Measurement of the fundamental (7.4 - 8.9) MHz and (8.9 - 10.0) MHz were performed by setting the spectrum analyzer to "max-hold", peak detector, a 300 kHz bandwidth, and a span from 7 - 11.0 MHz. A resolution bandwidth of 300 kHz was used because increasing the bandwidth above 300 kHz did not increase the detected peak of the fundamental.

AVERAGE CALCULATION: The control signals are timed for (64) six microsecond bursts at a (100 Hz rate. During the antenna's cycle, the system performs two "blasts" which are called a "bin". A bin consists of two noise cycles and two blast cycles. A "blast" is a transmit cycle followed by a receive cycle. During the noise cycle, the system does not transmit but only receives ambient noise. This allows the system to establish the baseline noise level of the environment for later comparison. The system then transmits or "pulses" the field and then receives or "listens" for an echo of a target signal.

The overall duty cycle for the transmitter operation is (3.84%).

$(2 \text{ antennas} * 16 \text{ bins} * 2 \text{ blasts per bin} * 6 \text{ usec}) = 384 \text{ usec}$

$384 / \text{frame rate (100) Hz (10 milliseconds)} = 0.0384$

Average correction = $(20 * \text{Log}_{10} (\text{Duty Cycle})) = -28.31 \text{ dB}$

** Maximum allowed adjustment for duty cycle = 20 dB so that is what we applied to the peak readings to adjust for average detection.

SUMMARY:

The requirements according to the technical regulations are

■ - met

□ - **not** met.

The device under test does

■ - fulfill the general approval requirements mentioned on page 3.

□ - **not** fulfill the general approval requirements mentioned on page 3.

Testing Start Date 03/24/2004

Testing End Date: 03/25/2004

- PRODUCT SAFETY ENGINEERING INC -Test-setup photo(s):

Test Report Number 04F266B

Test-setup photo(s):
Conducted emission 450/150 kHz - 30 MHz



Test Report Number 04F266B

Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525
Tel (352) 588-2209 Fax (352) 588-2544

Page 11 of 18

Test-setup photo(s):
Radiated emission 30 MHz - 1000 MHz



Test Report Number 04F266B

Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525
Tel (352) 588-2209 Fax (352) 588-2544

Test-setup photo(s):
Conducted emission 450/150 kHz - 30 MHz



Test Report Number 04F266B

Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525
Tel (352) 588-2209 Fax (352) 588-2544

Test-setup photo(s):
Radiated emission 30 MHz - 1000 MHz



Test Report Number 04F266B

Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525
Tel (352) 588-2209 Fax (352) 588-2544

Test-setup photo(s):
Conducted emission 450/150 kHz - 30 MHz



Test Report Number 04F266B

Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525
Tel (352) 588-2209 Fax (352) 588-2544

Page 15 of 18

Test-setup photo(s):
Radiated emission 30 MHz - 1000 MHz



Test Report Number 04F266B

Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525
Tel (352) 588-2209 Fax (352) 588-2544

Page 16 of 18

Test-setup photo(s):

Conducted emission 450/150 kHz - 30 MHz

Test Report Number 04F266B

Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525
Tel (352) 588-2209 Fax (352) 588-2544

Page 17 of 18

Test-setup photo(s):
Radiated emission 30 MHz - 1000 MHz



Test Report Number 04F266B

Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525
Tel (352) 588-2209 Fax (352) 588-2544

Page 18 of 18

APPENDIX

A

Test Equipment Calibration Information & Test Data Sheets

TEST EQUIPMENT CALIBRATION INFORMATION

Manufacturer	Model	Description	Serial Number	Cal Due
Hewlett Packard	8566B	Spectrum Analyzer	2421A00526	08/14/04
Hewlett Packard	85662A	Display	2403A07352	08/14/04
Hewlett Packard	85650A	Quasi-Peak Adapter	2043A00209	08/14/04
Hewlett Packard	8447D	Preamplifier 0.1 - 1,000 MHz	2944A06832	12/10/04
Hewlett Packard	8568B	Spectrum Analyzer	2407A03213	08/14/04
Hewlett Packard	85662A	Display	2340A05806	08/14/04
Hewlett Packard	85650A	Quasi-Peak Adapter	2043A00358	08/14/04
Hewlett Packard	8447D	Preamplifier 0.1 - 1,000 MHz	2944A06901	08/14/04
Hewlett Packard	8447D	Preamplifier 0.1 - 1,000 MHz	1937A03247	07/17/04
Hewlett Packard	8449B	Preamplifier 1 - 26.5 GHz	3008A00320	12/02/04
Hewlett Packard	8648B	Signal Generator	3443U00312	05/04/05
Hewlett Packard	8672A	Signal Generator	2211A02426	10/17/04
Eaton	96005	Log Periodic Antenna	1099	02/05/05
Electro-Metrics	LPA 30	Log Periodic Antenna	2280	01/12/05
Electro-Metrics	BIA 30	Biconical Antenna	3852	01/13/05
Electro-Metrics	BIA 25	Biconical Antenna	4283	02/04/05
Electro-Mechanics	3115	Double Ridge Guide Ant.	3810	11/25/05
Electro-Metrics	ALR30M	Magnetic Loop Antenna	824	01/12/05
Solar	8012	LISN	924840	12/24/04
Solar	8028	LISN	829012/809022	12/12/04
Solar	8028	LISN	903725/903726	12/01/04
Schwartzbeck	MDS-21	Absorbing Clamp	02581	09/18/04
Leader	LFG1310	Function Generator	8060233	05/04/05
IFR Systems	A-8000	Spectrum Analyzer	1306	12/08/04
Electro-Metrics	EMC-30	EMI Receiver	191	05/04/05
Antenna Research	ALA-130/A	Loop Antenna	106	03/14/05
Radio Shack	63-867	Temp/Hygrometer	N/A	05/04/05
Radio Shack	63-867A	Temp/Hygrometer	N/A	05/04/05

**Radiated Emissions Measurements
Intentional Radiator
Fundamental
Per 15.223**

Model EX Plus (Operating at (8.9 - 10.0) MHz)

Freq. (MHz)	Amplitude (dBuV) Peak	Antenna Correction Factor	Cable Loss	Amplitude (dBuV/m) Peak	Average Correction Factor (dB)	Field Strength (dBuV/m)	FCC Limit dBuV/m	Delta Limit (dB)
8.7	65.0	-5.9	0.5	59.6	-20	39.6	40.0	0.4
9.4	64.2	-5.1	0.5	59.6	-20	39.6	40.0	0.4
10.0	63.9	-4.5	0.5	59.9	-20	39.9	40.0	0.1

Model EX Plus (Operating at (7.4 - 8.9) MHz)

Freq. (MHz)	Amplitude (dBuV) Peak	Antenna Correction Factor	Cable Loss	Amplitude (dBuV/m) Peak	Average Correction Factor (dB)	Field Strength (dBuV/m)	FCC Limit dBuV/m	Delta Limit (dB)
7.4	65.2	-6.8	0.5	58.9	-20	38.9	40.0	1.1
8.2	65.1	-6.3	0.5	59.3	-20	39.3	40.0	0.7
8.9	63.8	-5.6	0.5	58.7	-20	38.7	40.0	0.3

Model WX Plus (Operating at (7.4 - 8.9) MHz)

Freq. (MHz)	Amplitude (dBuV) Peak	Antenna Correction Factor	Cable Loss	Amplitude (dBuV/m) Peak	Average Correction Factor (dB)	Field Strength (dBuV/m)	FCC Limit dBuV/m	Delta Limit (dB)
7.5	63.5	-6.8	0.5	57.2	-20	37.2	40.0	2.8
8.6	64.8	-6.0	0.5	59.3	-20	39.3	40.0	0.7
8.9	64.9	-5.6	0.5	59.8	-20	39.8	40.0	0.2

Model SX Plus (Operating at (7.4 - 8.9) MHz)

Freq. (MHz)	Amplitude (dBuV) Peak	Antenna Correction Factor	Cable Loss	Amplitude (dBuV/m) Peak	Average Correction Factor (dB)	Field Strength (dBuV/m)	FCC Limit dBuV/m	Delta Limit (dB)
7.5	65.4	-6.8	0.5	59.1	-20	39.1	40.0	0.9
8.1	64.8	-6.3	0.5	59.0	-20	39.0	40.0	1.0
8.7	65.2	-5.9	0.5	59.8	-20	39.8	40.0	0.2

Model GX Plus (Operating at (7.4 - 8.9) MHz)

Freq. (MHz)	Amplitude (dBuV) Peak	Antenna Correction Factor	Cable Loss	Amplitude (dBuV/m) Peak	Average Correction Factor (dB)	Field Strength (dBuV/m)	FCC Limit dBuV/m	Delta Limit (dB)
7.5	65.1	-6.8	0.5	58.8	-20	38.8	40.0	1.2
8.2	65.0	-6.3	0.5	59.2	-20	39.2	40.0	0.8
8.9	64.5	-5.6	0.5	59.4	-20	39.4	40.0	0.6

Measurements were all performed at a distance of (30) meters. Average correction factor reflects adjustment in amplitude based on calculated effect of duty cycle. (See duty cycle calculation)

Measurements were also performed up to the tenth harmonic and no emissions were observed.

Operation in Restricted Bands per 15.205:

The Direct Digital Synthesizer (DDS) generates a sequence of (16) discrete frequencies. The transmitter is not capable of hopping into, or operating in, the restricted bands and therefore, complies with the restriction. The tuning table attached to the theory of operation defines each possible operating frequency.

The restricted frequency bands (per FCC Part 15.205) in the operating frequency band of the EUT are as follows:

2.1735 - 2.1905 MHz

8.291 - 8.294 MHz

8.362 - 8.366 MHz

8.37625 - 8.38675 MHz

8.41425 - 8.41475 MHz

**Radiated Emissions Measurements
(30 - 1,000) MHz
Unintentional Radiator
Per 15.109**

PRODUCT EMISSIONS

PRODUCT SAFETY ENGINEERING

PRODUCT SAFETY ENGINEERING

Data File: STRATA EX FCC-A 3-31-2004

No	EMISSION	SPEC	MEASUREMENTS			POL	SITE		CORR	COMMENTS
	FREQUENCY MHz	LIMIT dBuV/m	ABS	dLIM dB	MODE		HGT cm	AZM deg		
1	119.95	43.5	23.6	-19.9	PK	V	100	1		
2	127.26	43.5	23.3	-20.2	PK	V	100	180		
3	135.70	43.5	22.5	-21.0	PK	V	100	270		
4	200.037	43.5	30.5	-13.0	PK	V	100	45		Mkr @ 199.8 MHz
5	218.756	46.4	24.6	-21.8	PK	V	100	45		
6	224.978	46.4	27.6	-18.8	PK	V	100	135		
7	231.235	46.4	28.0	-18.4	PK	V	100	225		
8	399.991	46.4	31.1	-15.3	QP	V	100	315		
9	450.018	46.4	28.0	-18.4	PK	V	100	45		
10	599.967	46.4	31.1	-15.3	PK	V	100	135		
11	675.240	46.4	31.8	-14.6	PK	V	100	135		
12	700.024	46.4	30.6	-15.8	PK	V	100	135		
13	899.987	46.4	35.6	-10.8	QP	V	100	315		

PRODUCT EMISSIONS

RODUCT SAFETY ENGINEERING

PRODUCT SAFETY ENGINEERING

Data File: STRATA WX FCC-A 3-31-2004

No	EMISSION	SPEC	MEASUREMENTS			SITE			CORR	COMMENTS
	FREQUENCY MHz	LIMIT dBuV/m	ABS	dLIM dB	MODE	POL	HGT cm	AZM deg	FACTOR dB	
1	31.28	39.0	14.0	-25.0	PK	V	100	90		
2	68.82	39.0	13.9	-25.1	PK	V	100	90		
3	200.040	43.5	30.7	-12.8	PK	V	100	1		Mkr @ 199.8 MHz
4	218.756	46.4	24.1	-22.3	PK	H	200	315		
5	224.988	46.4	25.5	-20.9	PK	V	100	1		
6	231.239	46.4	26.1	-20.3	PK	V	100	1		
7	399.996	46.4	25.8	-20.6	PK	V	100	1		
8	450.028	46.4	36.7	-9.7	PK	H	200	315		
9	600.001	46.4	26.9	-19.5	PK	V	100	1		
10	675.254	46.4	30.5	-15.9	PK	V	100	1		
11	700.037	46.4	29.2	-17.2	PK	V	100	180		
12	899.995	46.4	37.8	-8.6	QP	H	200	45		

PRODUCT EMISSIONS

PRODUCT SAFETY ENGINEERING

PRODUCT SAFETY ENGINEERING

Data File: STRATA SX FCC-A 4-1-04 W/ FERRITE

No	EMISSION	SPEC LIMIT	MEASUREMENTS			POL	SITE		CORR FACTOR	COMMENTS
	FREQUENCY MHz		ABS	dLIM	MODE		HGT	AZM		
			dBuV/m	dB			cm	deg	dB	
1	78.296	39.0	34.3	-4.7	QP	H	200	315	-20.6	
2	86.974	39.0	36.3	-2.7	QP	V	100	180	-19.7	
3	199.996	43.5	31.0	-12.5	PK	V	100	1	-9.	Mkr @ 200.1 MHz
4	200.003	43.5	31.0	-12.5	PK	V	100	45	-13.2	Mkr @ 199.9 MHz
5	218.757	46.4	28.9	-17.5	PK	V	100	45	-13.2	
6	249.205	46.4	24.6	-21.8	PK	H	200	1	-13.2	
7	268.739	46.4	26.6	-19.8	PK	V	100	45	-12.2	
8	281.260	46.4	30.6	-15.8	PK	V	100	45	-11.5	
9	399.991	46.4	30.1	-16.3	PK	V	100	45	-9.9	
10	406.274	46.4	26.6	-19.9	PK	V	100	45	-9.8	
11	424.979	46.4	31.4	-15.0	PK	V	100	45	-9.3	
12	900.005	46.4	34.7	-11.7	QP	V	100	315	-1.	

**Conducted Emissions Measurements
(0.150 - 30) MHz
Intentional Radiator
Per 15.207**


Product Safety Engineering

CHECKPOINT

Date : 04/20/04 Time : 14:52:33.39
 Technician : JACK GARNER Test Equip. : EMC-30
 Test Method : EN55022 CLASS B Test Number : 1
 Equipment : STRATA MX+M/GLDBTEK Sensor Loc. : LINE
 Mode of Op. : NORMAL Sensor Pol. :
 Serial No. : 77025800C2031403150 Ext. Atten. : 0 dB
 Comment : 120 VAC / 60 HZ WITH IMX04 FILTERED LINE CORD

EMC-30 SETTINGS
 Detector QuasiPeak
 Bandwidth CISPR
 Dump/Dwell IN/A
 RF Atten. 10 dB
 IF Atten. 10 dB

SPECS
 1) CISPR 22 Quasi Peak
 2) CISPR 22 AVG
 3)
 4)

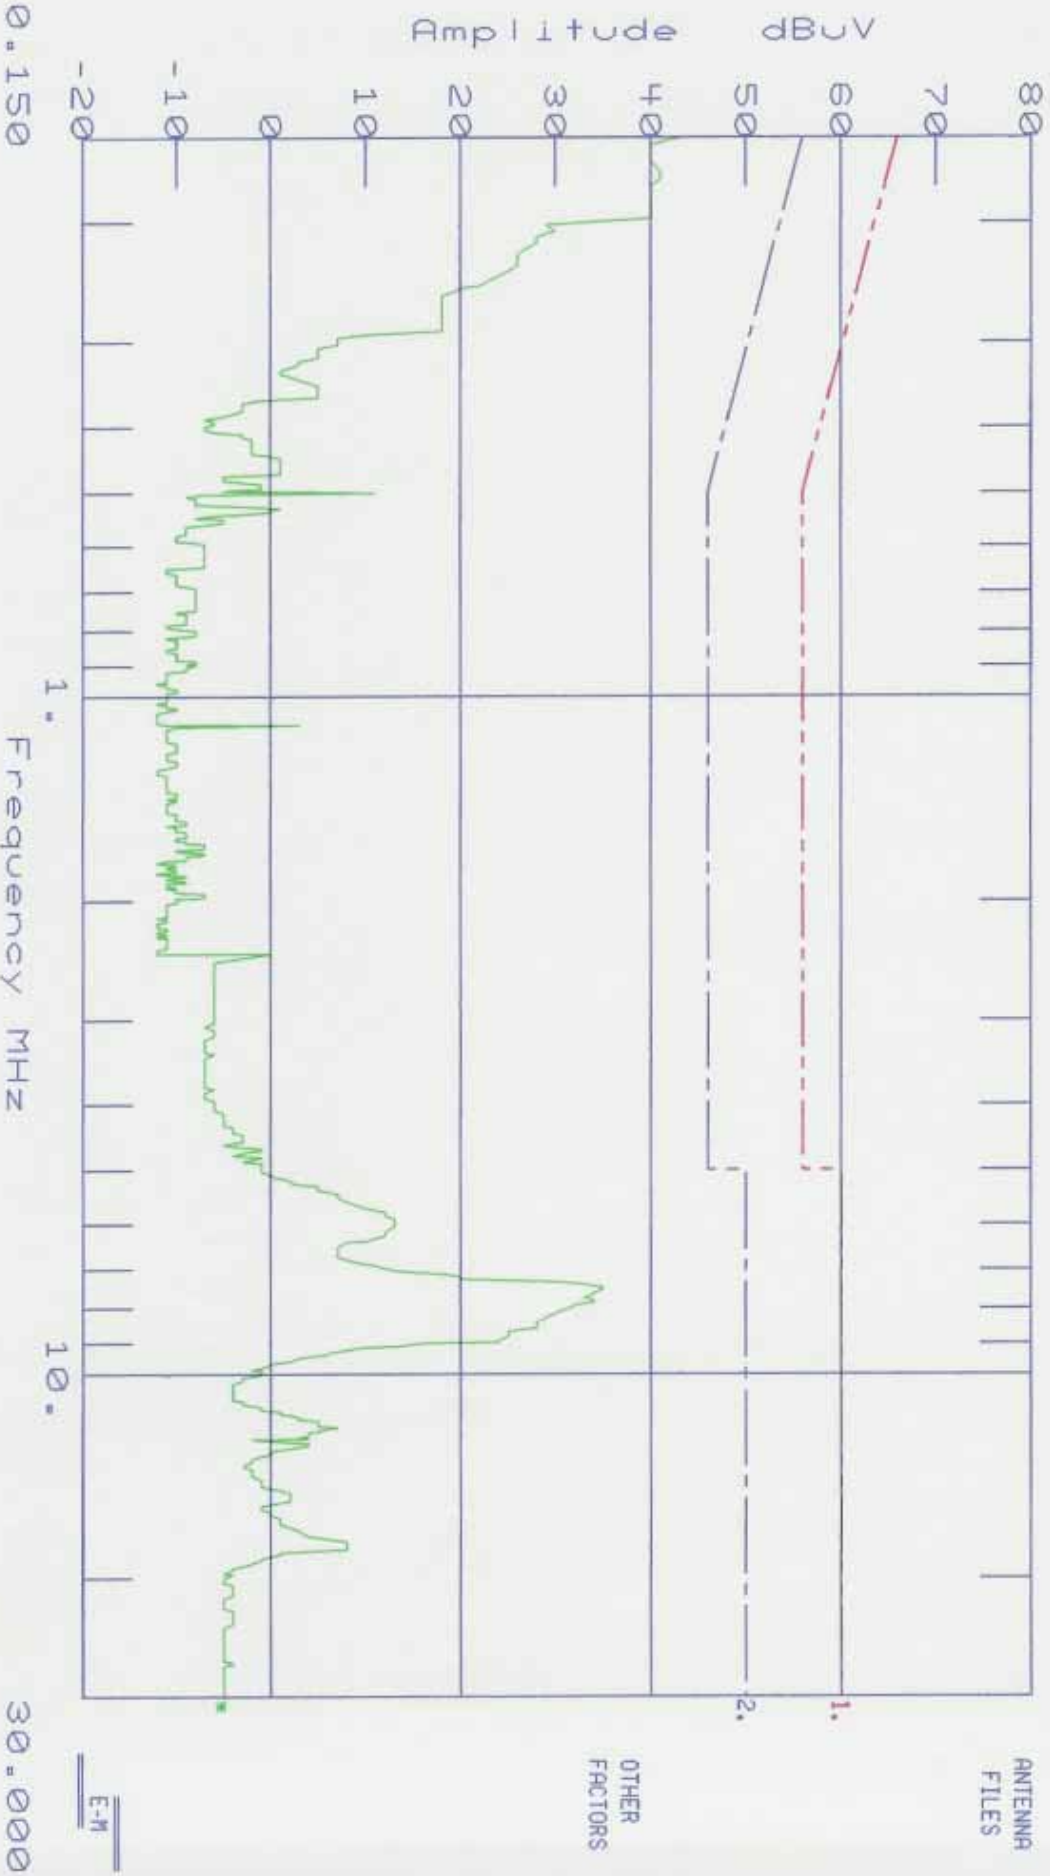

..... FILE :Z66_A_L.D30
Amplitude Units : dBuV

Threshold -15 dB

PAGE 1
Freq.(MHz)
0.1500

Freq(MHz)	Amp	C22BQP.S30 vs Spec(dB)	C22BAVG.S30 vs Spec(dB)
0.1500	43.0		-13.000 *
0.1689	41.0		-14.014 *
0.1730	41.0		-13.815 *
0.1770	40.0		-14.625 *
0.1812	40.0		-14.430 *
0.1854	40.0		-14.240 *
0.1892	40.0		-14.072 *
0.1933	40.0		-13.894 *
0.1975	40.0		-13.715 *
7.4457	35.0		-15.000 *
7.5063	35.0		-15.000 *


Product Safety Engineering

CHECKPOINT

Date : 04/20/04 Time : 15:13:57.17
 Technician : JACK GARNER Test Equip. : EMC-30
 Test Method : EN55022 CLASS B Test Number : 1
 Equipment : STRATA MX+H/GLOBALTEK Sensor Loc. : NEUTRAL
 Mode of Op. : NORMAL Sensor Pol. :
 Serial No. : 77025800C2031403150 Ext. Atten. : 0 dB
 Comment : 120 VAC / 60 HZ WITH IMX04 FILTERED LINE CORD

EMC-30 SETTINGS
 Detector QuasiPeak
 Bandwidth CISPR
 Dump/Dwell N/A
 RF Atten. 10 dB
 IF Atten. 10 dB

SPECS
 1) CISPR 22 Quasi Peak
 2) CISPR 22 AVG
 3)
 4)

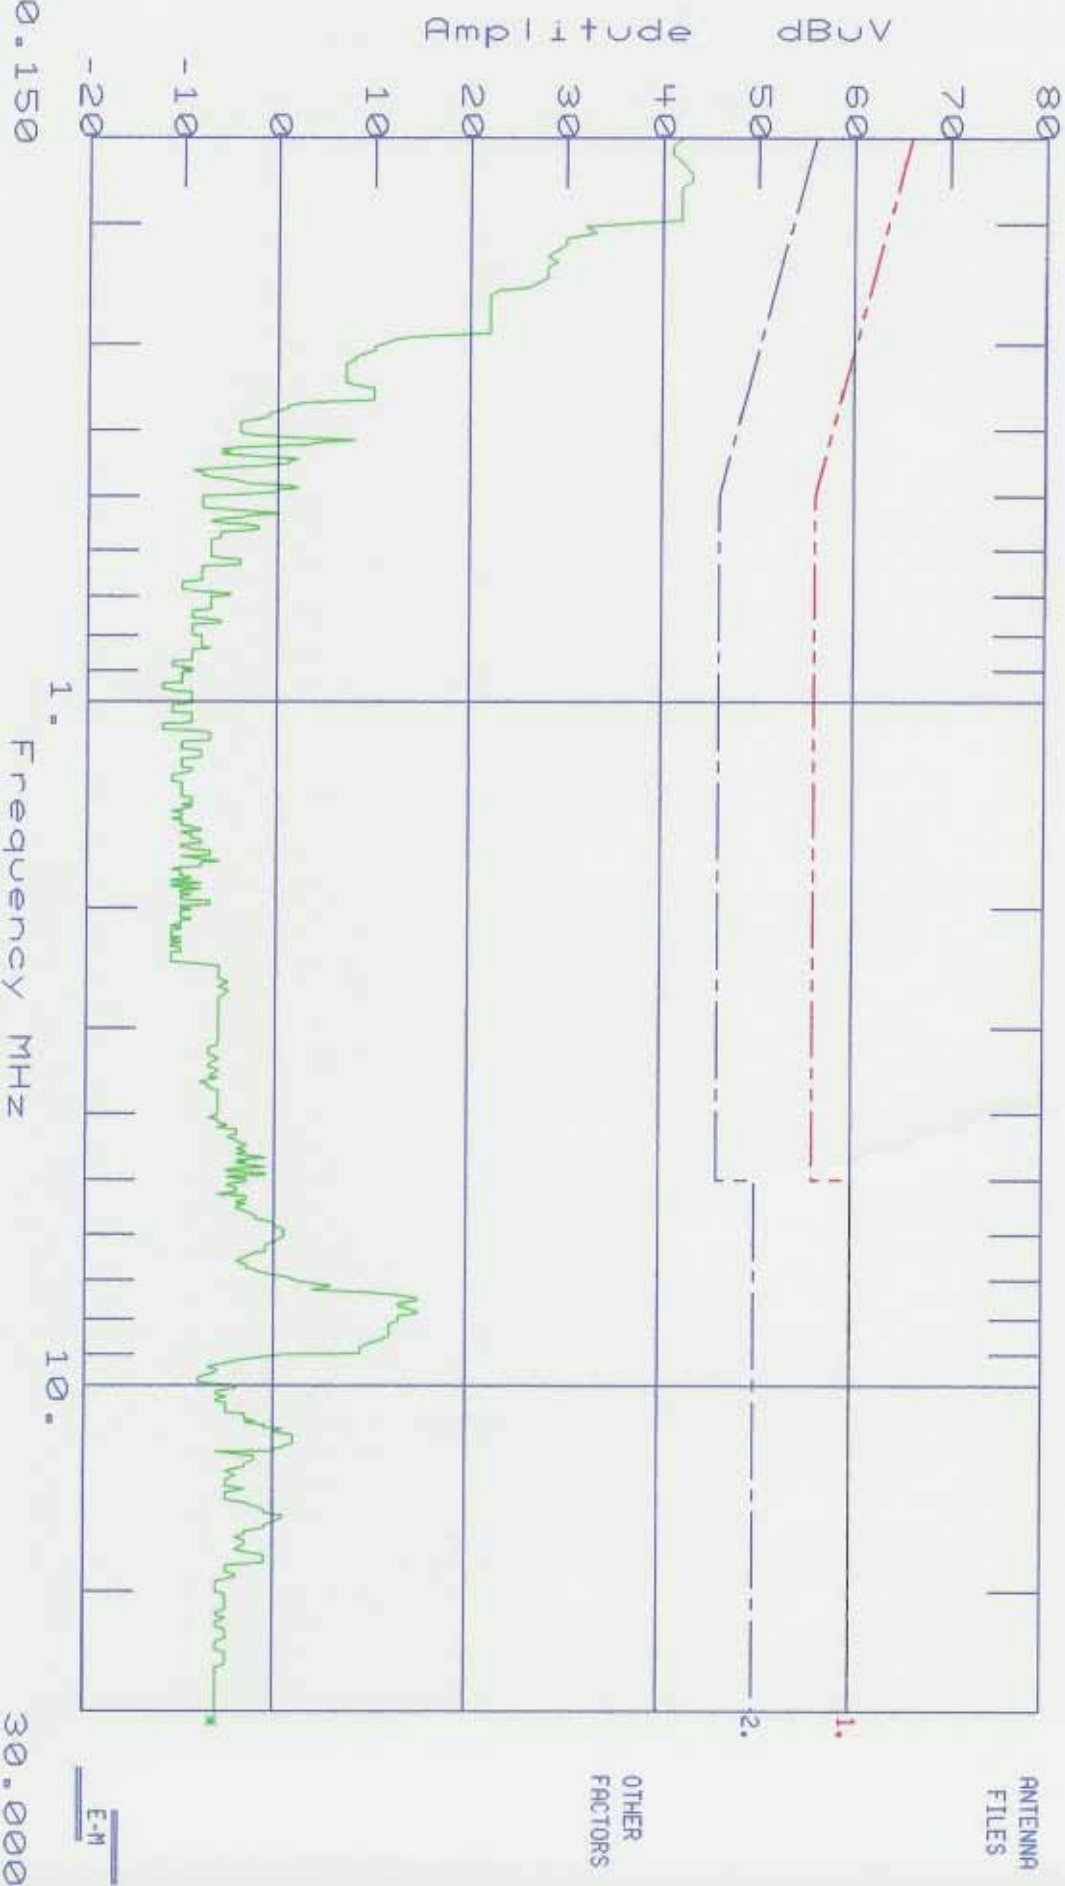

TEST TITLE:CHECKPOINT
DATA FILE :266_A_N.D30
Amplitude Units : dBuV

Threshold -15 dB

PAGE 1
Freq.(MHz)
0.1500

Freq(MHz)	Amp	C22BQP.S30 vs Spec(dB)	C22BAVG.S30 vs Spec(dB)
0.1500	42.0		-14.000 *
0.1542	41.0		-14.771 *
0.1583	41.0		-14.553 *
0.1625	42.0		-13.335 *
0.1689	43.0		-12.014 *
0.1730	43.0		-11.815 *
0.1770	42.0		-12.625 *
0.1812	42.0		-12.430 *
0.1854	42.0		-12.240 *
0.1892	42.0		-12.072 *
0.1933	42.0		-11.894 *
0.1975	42.0		-11.715 *


Product Safety Engineering

CHECKPOINT

Date : 04/20/04 Time : 13:22:35.04
 Technician : JACK GARNER Test Equip. : EMC-30
 Test Method : EN55022 CLASS B Test Number : 1
 Equipment : STRATA SX+ W/M4425 Sensor Loc. : LINE
 Mode of Op. : NORMAL Sensor Pol. :
 Serial No. : 991888000911030033 Ext. Atten. : 0 dB
 Comment : 120 VAC / 60 HZ WITH IMX04 FILTERED LINE CORD

EMC-30 SETTINGS
 Detector QuasiPeak
 Bandwidth CISPR
 Dump/Dwell N/A
 RF Atten. 10 dB
 IF Atten. 10 dB

SPECS
 1) CISPR 22 Quasi Peak
 2) CISPR 22 AVG
 3)
 4)

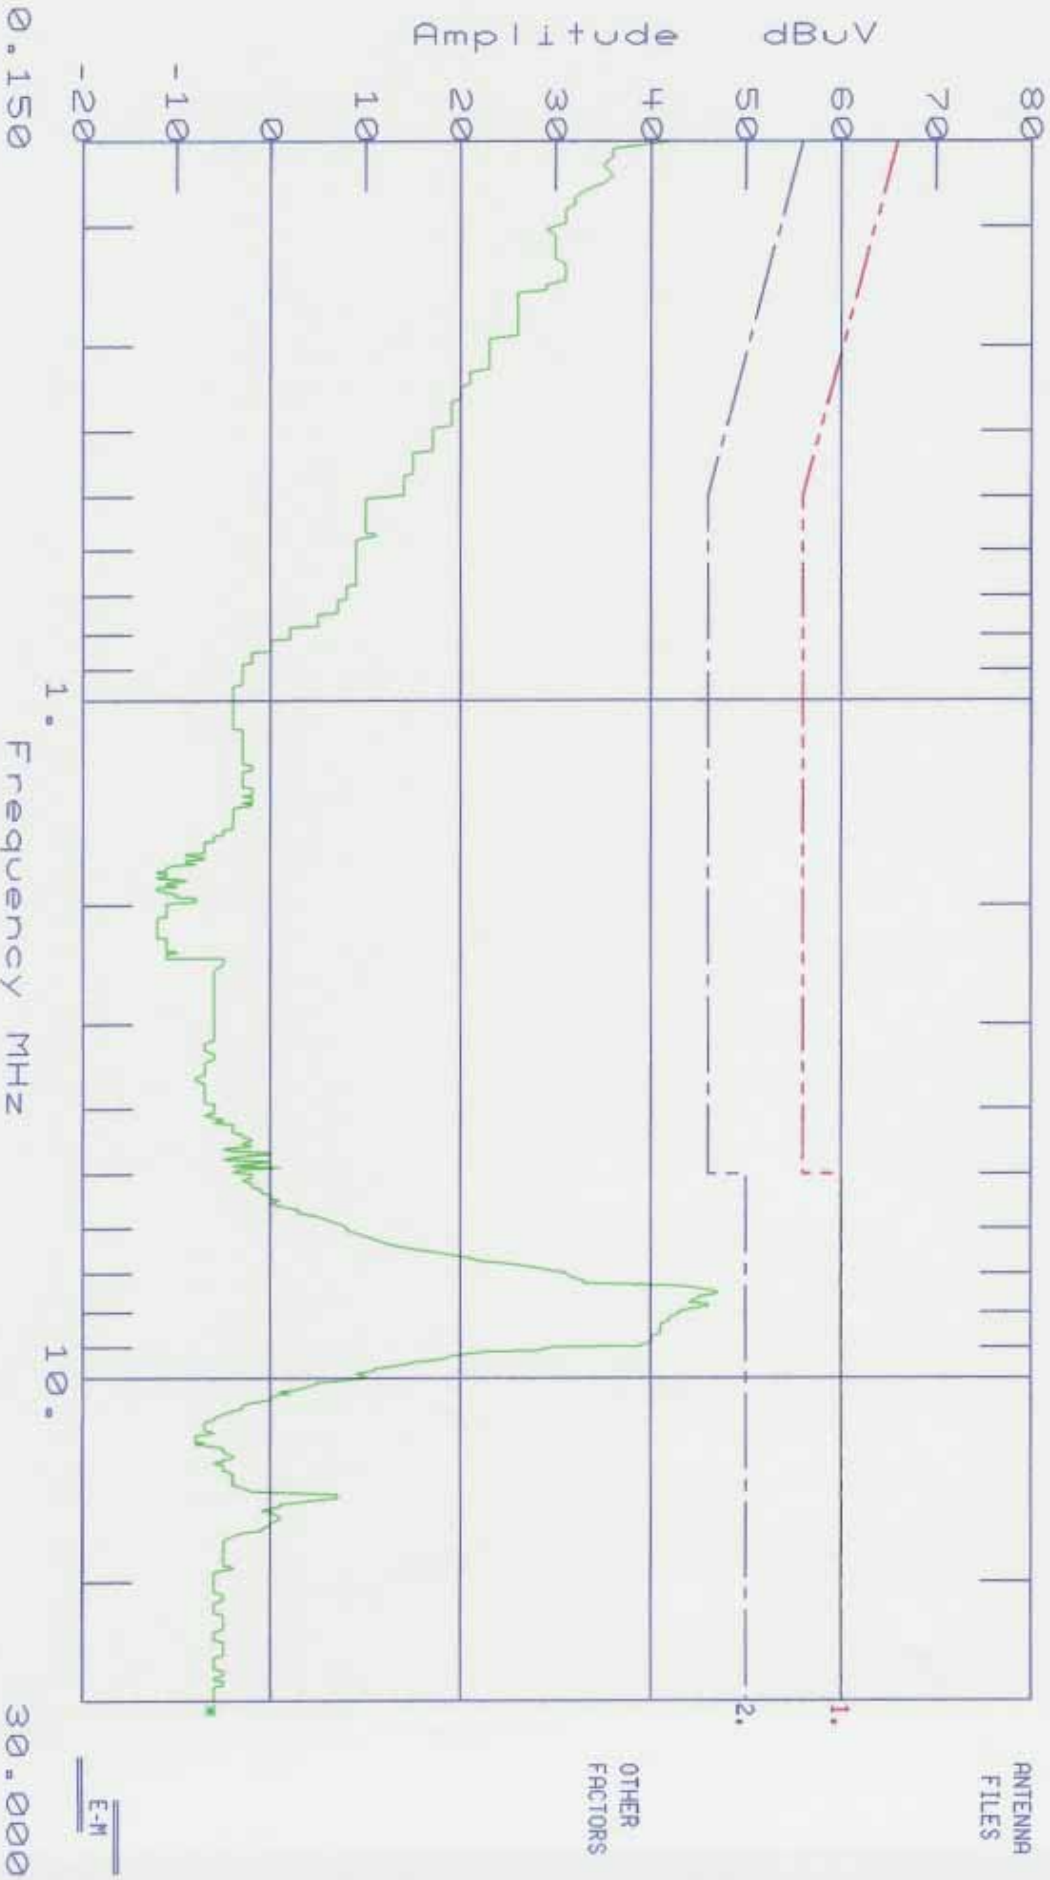

TEST TITLE:CHECKPOINT
DATA FILE :266_B_L.D30
Amplitude Units : dBuV

Threshold -15 dB

PAGE 1
Freq.(MHz)
0.1500


Freq(MHz)	Amp	C22BQP.S30 vs Spec(dB)	C22BAVG.S30 vs Spec(dB)
0.1500	42.0		-14.000 *
7.3111	43.0		-7.000 *
7.3784	45.0	-15.000 *	-5.000 *
7.4457	47.0	-13.000 *	-3.000 *
7.5063	47.0	-13.000 *	-3.000 *
7.5803	45.0	-15.000 *	-5.000 *
7.6140	45.0	-15.000 *	-5.000 *
7.7149	44.0		-6.000 *
7.7822	46.0	-14.000 *	-4.000 *
7.8294	46.0	-14.000 *	-4.000 *
7.9135	44.0		-6.000 *
7.9842	43.0		-7.000 *
8.0447	43.0		-7.000 *
8.1188	42.0		-8.000 *
8.1862	42.0		-8.000 *
8.2333	42.0		-8.000 *
8.3208	41.0		-9.000 *
8.3881	41.0		-9.000 *
8.4553	41.0		-9.000 *
8.5226	41.0		-9.000 *
8.5832	41.0		-9.000 *
8.6572	40.0		-10.000 *
8.7245	40.0		-10.000 *
8.7918	40.0		-10.000 *
8.8557	40.0		-10.000 *
8.9230	39.0		-11.000 *
8.9701	39.0		-11.000 *

Product Safety Engineering

CHECKPOINT

Date : 03/26/04 Time : 10:33:20.69
 Technician : JACK GARNER Test Equip. : EMC-30
 Test Method : EN55022 CLASS B Test Number : 1
 Equipment : STRATA SX+ 4/44425 Sensor Loc. : NEUTRAL
 Mode of Op. : NORMAL Sensor Pol. :
 Serial No. : 99188800911030033 Ext. Atten. : 0 dB
 Comment : 120 VAC / 60 HZ WITH IMX04 FILTERED LINE CORD

EMC-30 SETTINGS
 Detector QuasiPeak
 Bandwidth CISPR
 Dump/DwellIN/A
 RF Atten. 10 dB
 IF Atten. 10 dB
 SPECS
 1) CISPR 22 Quasi Peak
 2) CISPR 22 AVG
 3)
 4)

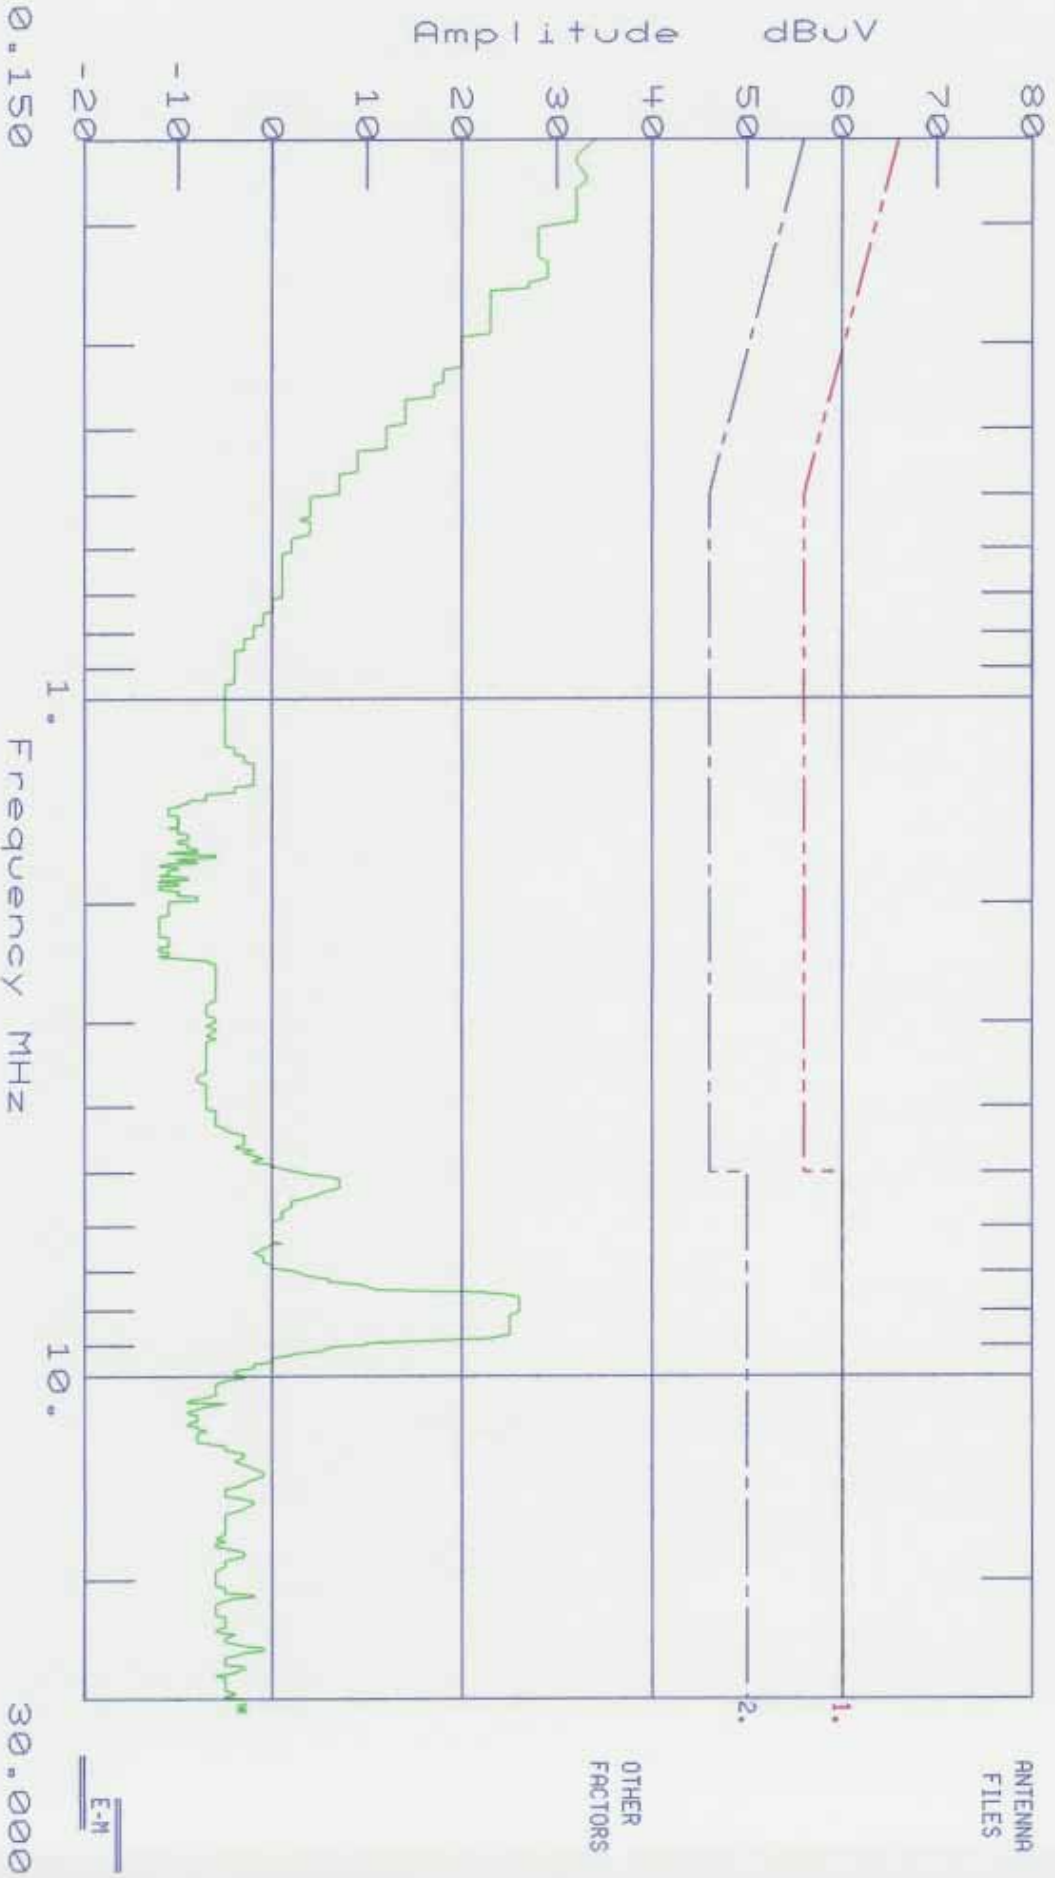

Freq(MHz)	Amp	C22BQP.S30 vs Spec(dB)	C22BAVG.S30 vs Spec(dB)
0.1500	34.0		-22.000 *
0.1542	33.0		-22.771 *
0.1583	32.0		-23.553 *
0.1625	32.0		-23.335 *
0.1689	33.0		-22.014 *
0.1730	33.0		-21.815 *
0.1770	32.0		-22.625 *
0.1812	32.0		-22.430 *
0.1854	32.0		-22.240 *
0.1892	32.0		-22.072 *
0.1933	32.0		-21.894 *
0.1975	32.0		-21.715 *
0.2187	28.0		-24.868 *
0.2228	28.0		-24.714 *
0.2274	29.0		-23.544 *
0.2316	29.0		-23.392 *
0.2357	29.0		-23.246 *
0.2395	29.0		-23.114 *
0.2437	27.0		-24.969 *
0.2478	27.0		-24.831 *
7.5803	25.0		-25.000 *
7.6476	26.0		-24.000 *
7.7149	26.0		-24.000 *
7.7822	26.0		-24.000 *
7.8495	26.0		-24.000 *
7.9169	26.0		-24.000 *
7.9842	26.0		-24.000 *
8.0447	26.0		-24.000 *
8.1188	25.0		-25.000 *
8.1862	25.0		-25.000 *
8.2535	25.0		-25.000 *
8.3208	25.0		-25.000 *
8.3881	25.0		-25.000 *
8.4553	25.0		-25.000 *
8.5226	25.0		-25.000 *
8.5832	25.0		-25.000 *
8.6572	25.0		-25.000 *
8.6908	25.0		-25.000 *


Product Safety Engineering

CHECKPOINT

Date : 04/20/04 Time : 14:34:26.31
 Technician : JACK GARNER Test Equip. : EMC-30
 Test Method : EN55022 CLASS B Test Number : 1
 Equipment : STRATA EX+ W/MW224 Sensor Loc. : LINE
 Mode of Op. : NORMAL Sensor Pol. :
 Serial No. : 222-00234-A Ext. Atten. : 0 dB
 Comment : 120 VAC / 60 HZ WITH IMX04 FILTERED LINE CORD

EMC-30 SETTINGS
 Detector QuasiPeak
 Bandwidth CISPR
 Dump/Dwell N/A
 RF Atten. 10 dB
 IF Atten. 10 dB

SPECS
 1) CISPR 22 Quasi Peak
 2) CISPR 22 AVG
 3)
 4)

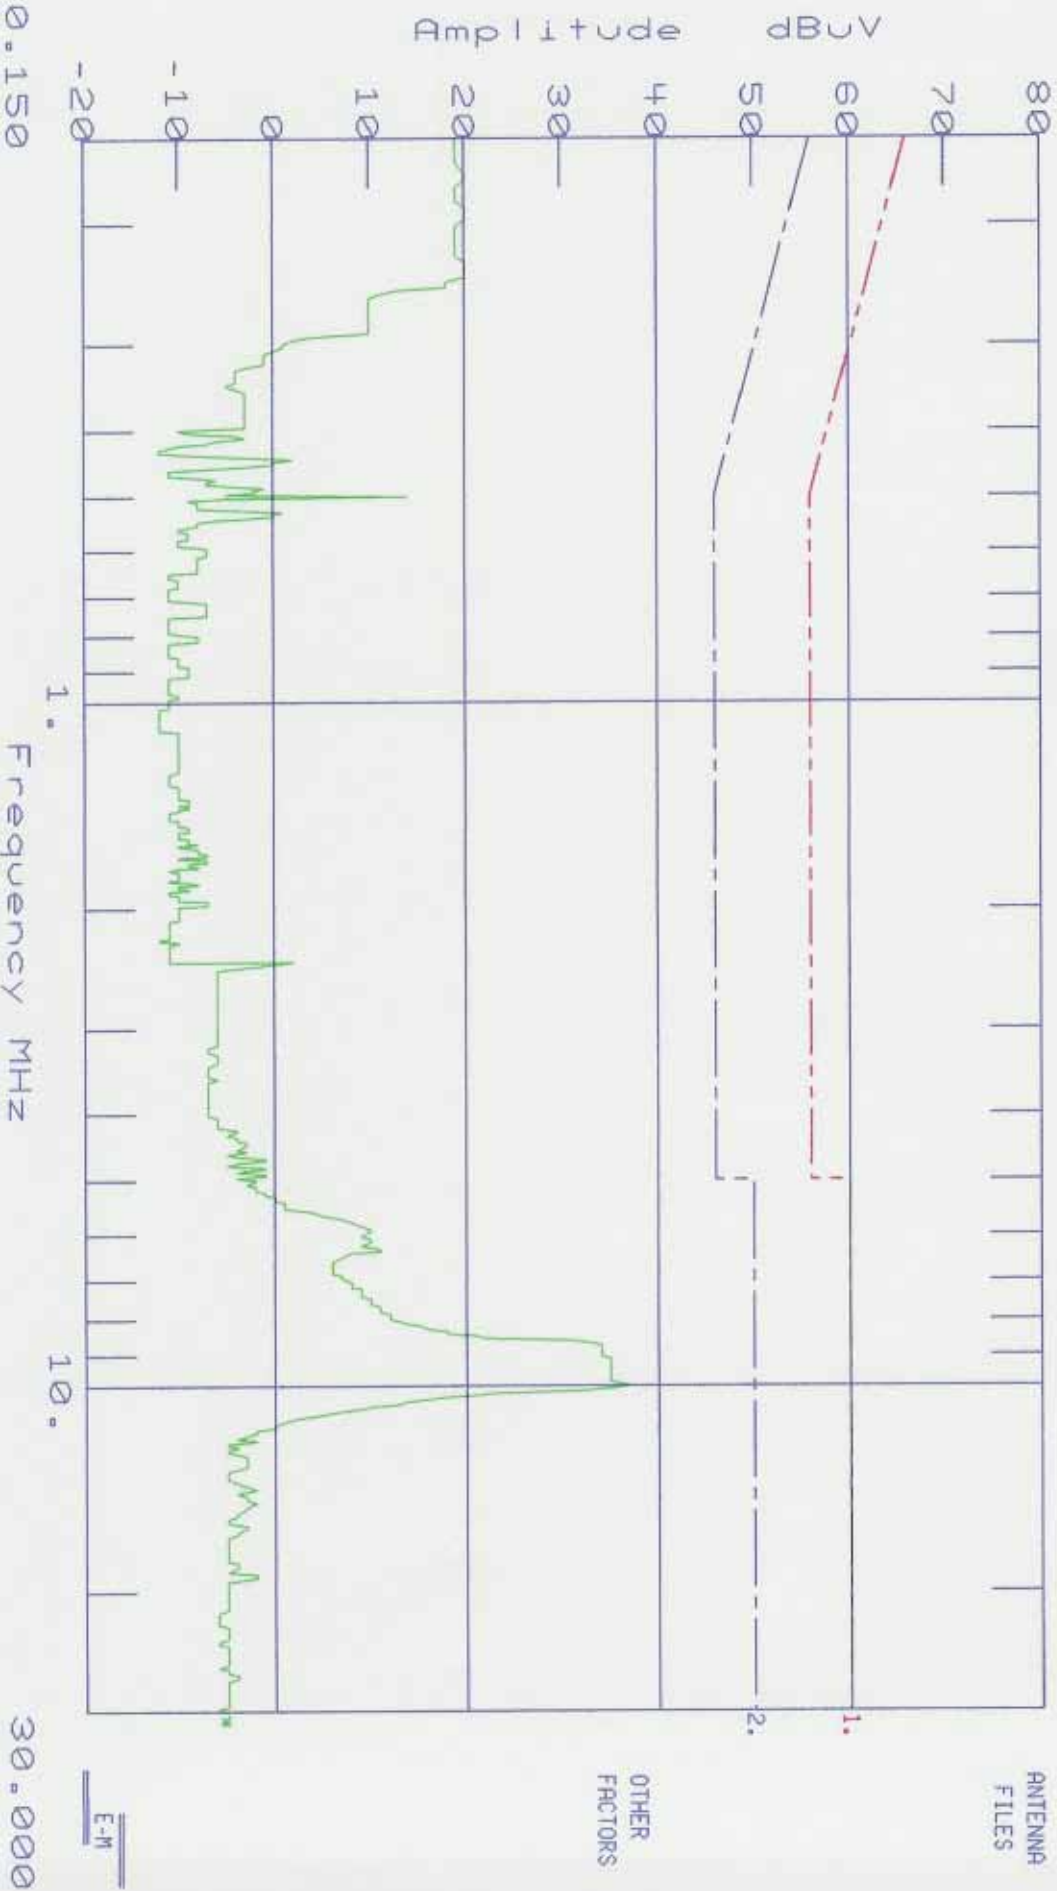

ANTENNA
FILES

OTHER
FACTORS

E-M

TEST TITLE:CHECKPOINT	PAGE 1
DATA FILE :266_C_L.D30	Freq.(MHz)
Amplitude Units : dBuV	Threshold -20 dB
	0.1500

Freq(MHz)	Amp	C22BQP.S30 vs Spec(dB)	C22BAVG.S30 vs Spec(dB)
8.5832	31.0		-19.000 *
8.6572	33.0		-17.000 *
8.7245	34.0		-16.000 *
8.7918	34.0		-16.000 *
8.8557	34.0		-16.000 *
8.9230	34.0		-16.000 *
8.9903	34.0		-16.000 *
9.0573	34.0		-16.000 *
9.1245	35.0		-15.000 *
9.1916	35.0		-15.000 *
9.2587	35.0		-15.000 *
9.3259	35.0		-15.000 *
9.3930	35.0		-15.000 *
9.4601	35.0		-15.000 *
9.5273	35.0		-15.000 *
9.5944	35.0		-15.000 *
9.6615	35.0		-15.000 *
9.7220	35.0		-15.000 *
9.7958	35.0		-15.000 *
9.8629	35.0		-15.000 *
9.9303	36.0		-14.000 *
9.9706	37.0		-13.000 *
10.0445	36.0		-14.000 *
10.1318	33.0		-17.000 *
10.1520	33.0		-17.000 *


Product Safety Engineering

CHECKPOINT

Date : 04/20/04
 Technician : JACK GARNER
 Test Method : EN55022 CLASS B
 Equipment : STRATA EX+ W/WH224
 Mode of Op. : NORMAL
 Serial No. : 222-00234-A
 Time : 13:41:08.16
 Test Equip. : EMC-30
 Test Number : 1
 Sensor Loc. : NEUTRAL
 Sensor Pol. :
 Ext. Atten. : 0 dB
 Comment : 120 VAC / 60 HZ WITH IMX04 FILTERED LINE CORD

EMC-30 SETTINGS
 Detector QuasiPeak
 Bandwidth CISPR
 Dump/Dwell N/A
 RF Atten. 10 dB
 IF Atten. 10 dB

SPECS
 1) CISPR 22 Quasi Peak
 2) CISPR 22 AVG
 3)
 4)

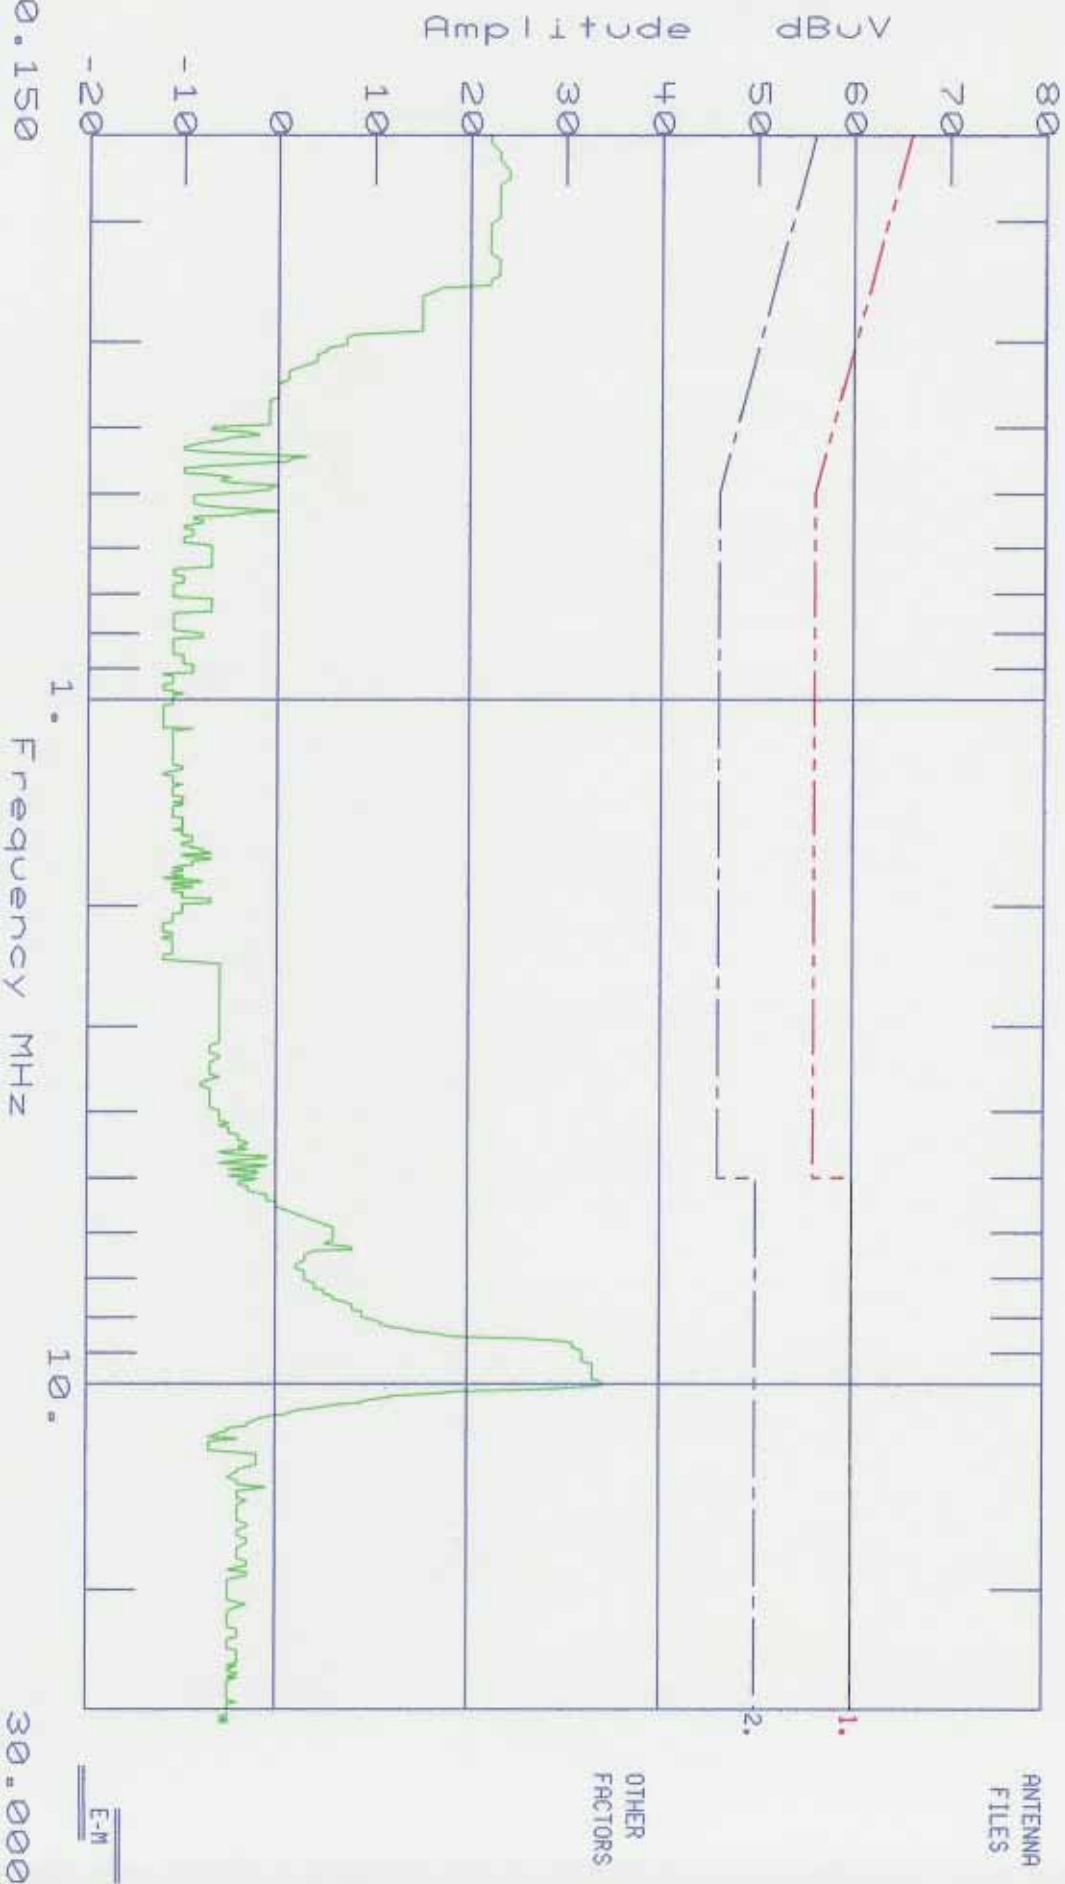

TEST TITLE:CHECKPOINT	PAGE 1
DATA FILE :266_C_N.D30	Freq.(MHz)
Amplitude Units : dBuV	Threshold -20 dB
	0.1500

Freq(MHz)	Amp	C22BQP.S30 vs Spec(dB)	C22BAVG.S30 vs Spec(dB)
8.6572	30.0		-20.000 *
8.7245	31.0		-19.000 *
8.7918	31.0		-19.000 *
8.8557	31.0		-19.000 *
8.9230	32.0		-18.000 *
8.9903	32.0		-18.000 *
9.0573	32.0		-18.000 *
9.1245	32.0		-18.000 *
9.1916	32.0		-18.000 *
9.2587	32.0		-18.000 *
9.3259	33.0		-17.000 *
9.3930	33.0		-17.000 *
9.4601	33.0		-17.000 *
9.5273	33.0		-17.000 *
9.5944	33.0		-17.000 *
9.6615	33.0		-17.000 *
9.7220	33.0		-17.000 *
9.7958	33.0		-17.000 *
9.8294	33.0		-17.000 *
9.9303	34.0		-16.000 *
9.9975	34.0		-16.000 *
10.0445	34.0		-16.000 *
10.1318	30.0		-20.000 *
10.1520	30.0		-20.000 *

Bandwidth Plot

A Plot of the operating bandwidth was taken by placing the measuring antenna close to the EUT, setting a spectrum analyzer to (5) dB/div, RBW= 300 kHz, VBW= 1 MHz, span = (7.4 - 8.9) MHz and (8.9 - 10.0) MHz, peak detection and max hold. The plots are shown of the following pages.

The plots confirm the transmitter bandwidth exceeds (10%) [820 kHz] of the center frequency of (8.2) MHz and [950 kHz] of the center frequency of (9.5) MHz, therefore the limit is (100) uV/meter at (30) meters.

PRODUCT SAFETY ENGINEERING
REF 117.0 dBμV ATTN 20 dB

MKR 7.603 MHz
87.00 dBμV

10 dB/

POS PK

PRODUCT SAFETY ENGINEERING
*
OPEN AREA TEST SITE

START PK 7.4-8.9

DL
86.9
dBμV



START 6.28 MHz
RES BW 300 KHz
VBW 1 MHz
STOP 10.09 MHz
SWP 100 msec

PRODUCT SAFETY ENGINEERING
REF 112.0 dBμV ATTEN 30 dB

MKR 8.264 MHz
START Sx 74-89 101.90 dBμV


5 dB/

POS PK

PRODUCT SAFETY ENGINEERING
OPEN AREA TEST SITE

DL
8.264 MHz
105.6
101.90 dBμV

MARKER

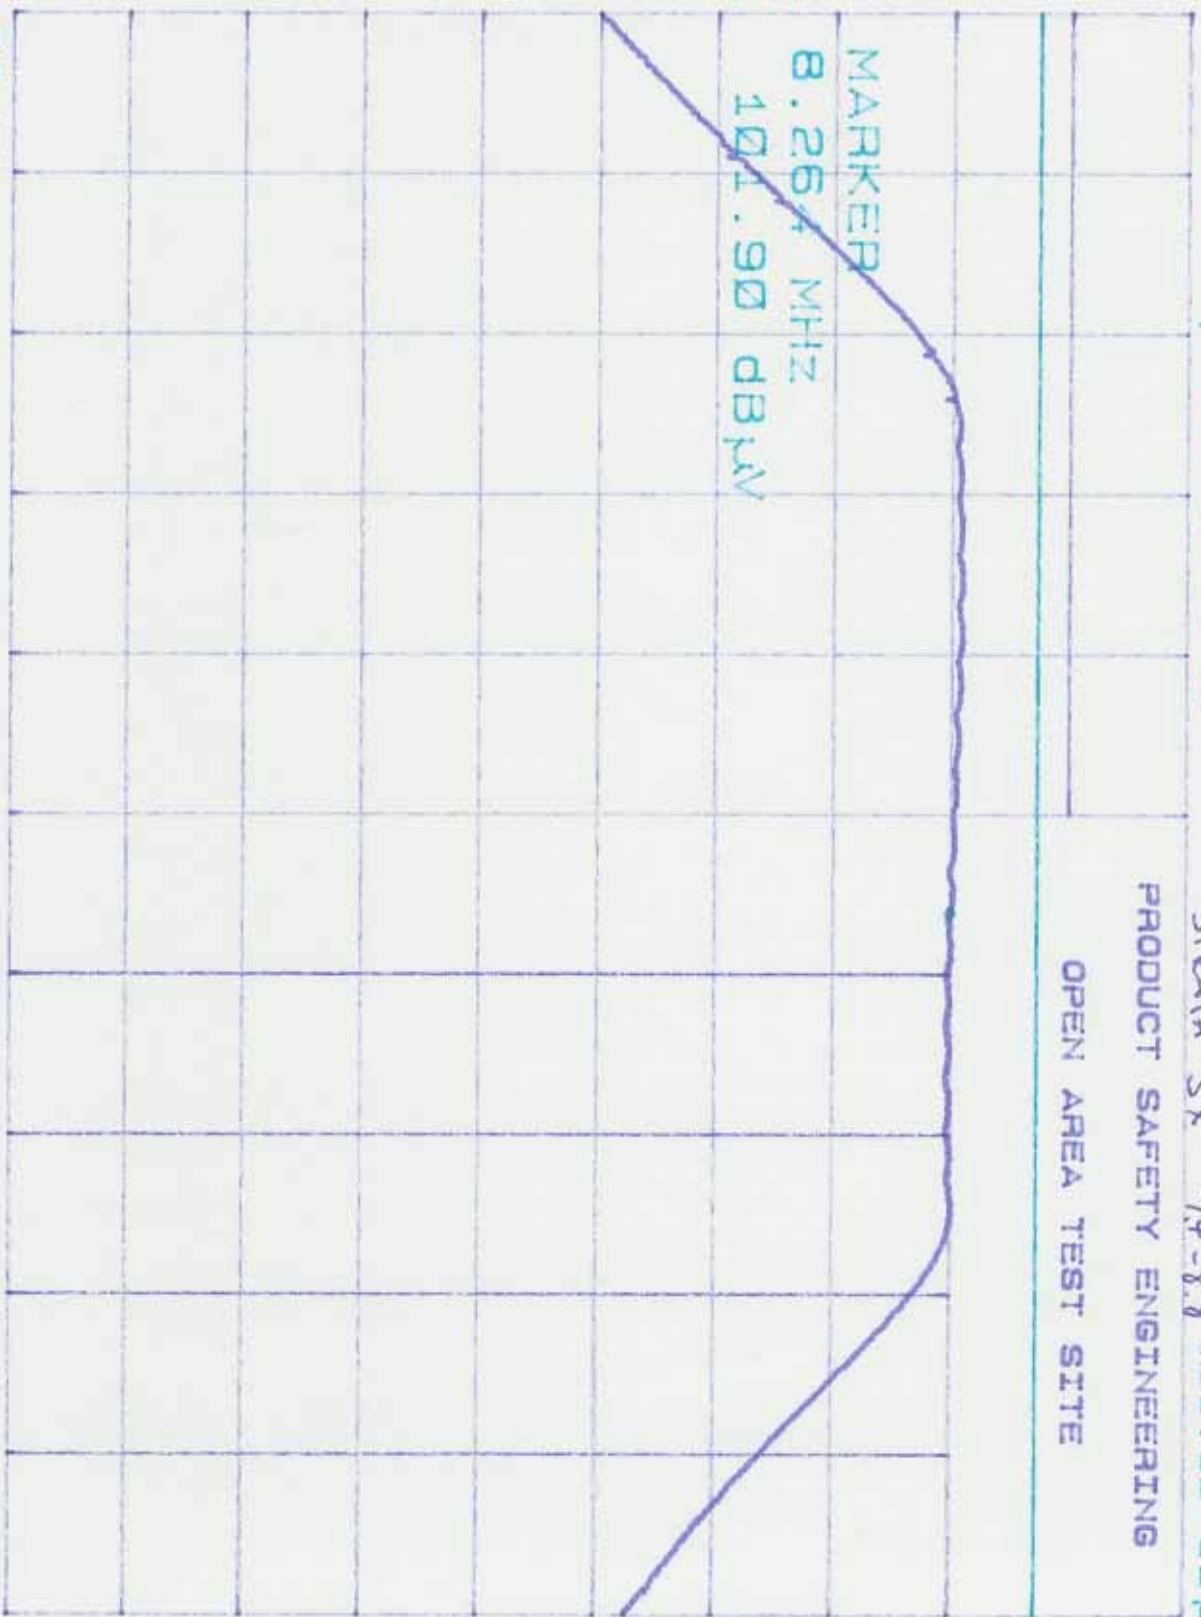

START 7.00 MHz
RES BW 300 KHz
VBW 1 MHz
STOP 9.24 MHz
SWP 20.0 sec

7/2

PRODUCT SAFETY ENGINEERING
REF 120.5 dBV ATTN 30 dB

STEATA EX 8.9-14.0


5 dB

POS PK

PRODUCT SAFETY ENGINEERING

OPEN AREA TEST SITE

DL
44.4
dBV

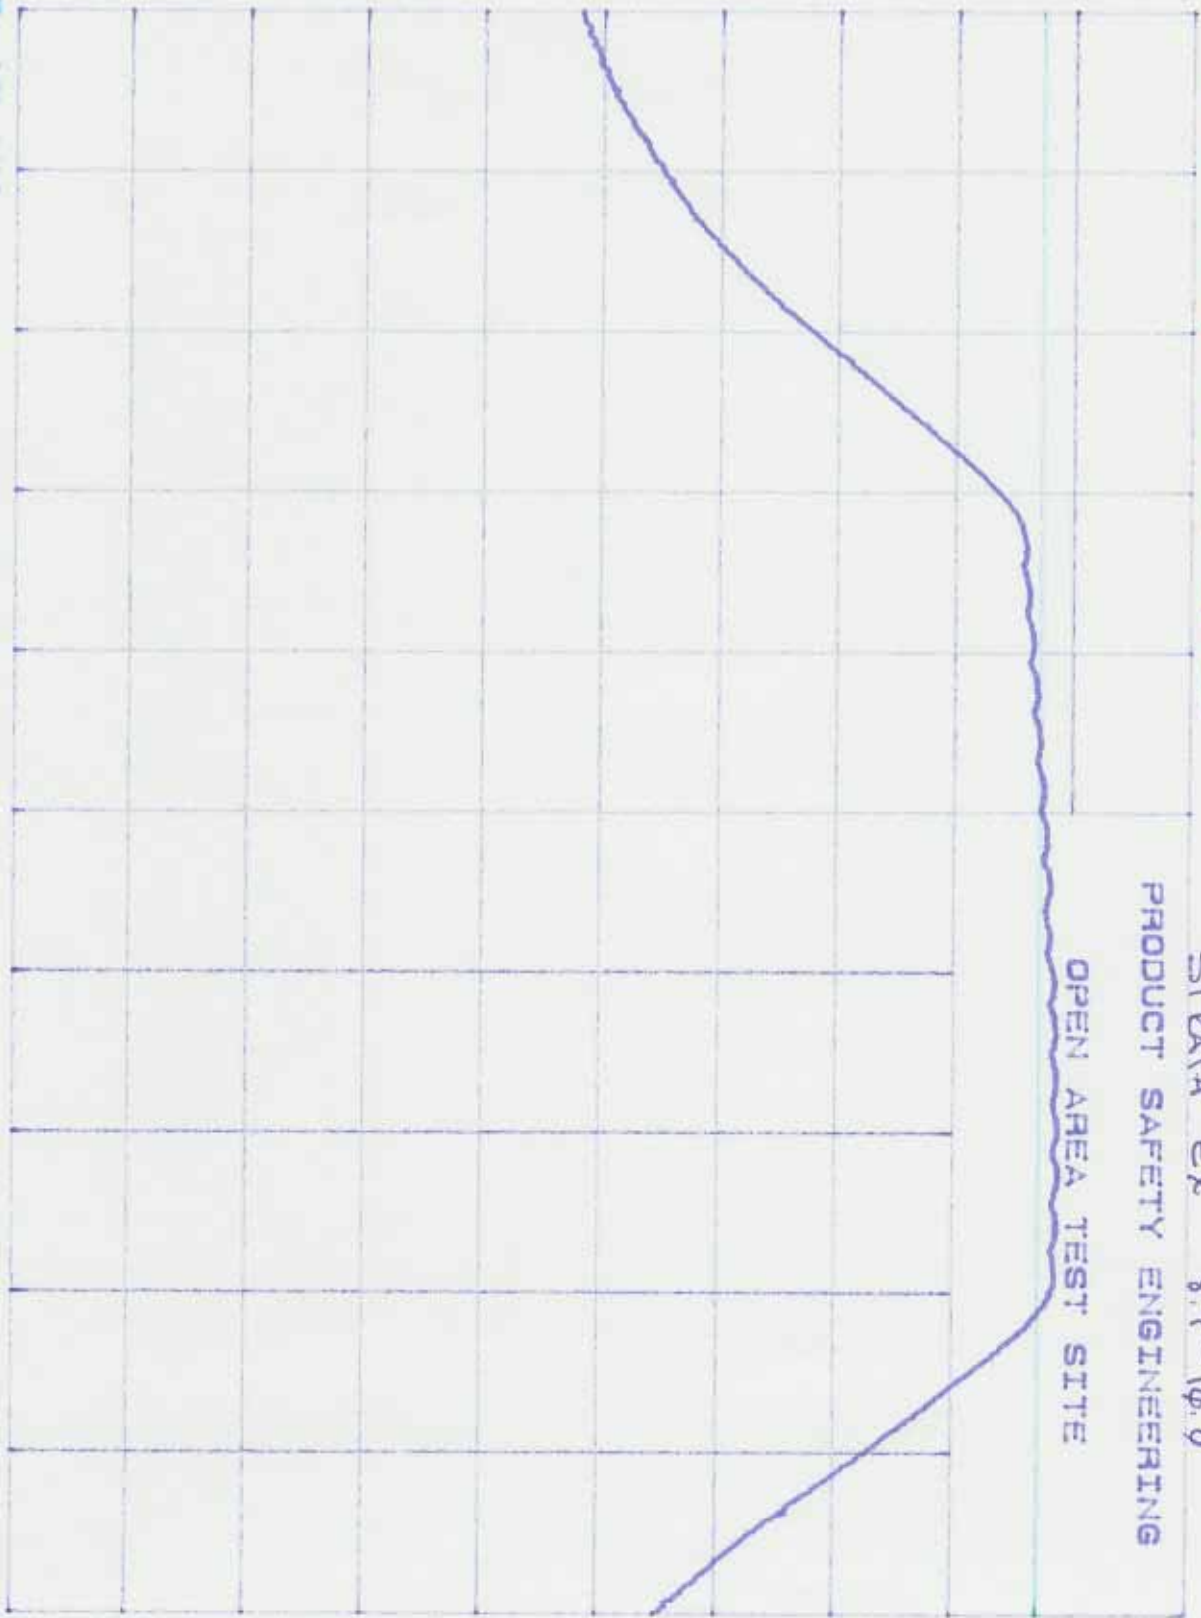

CENTER 9.45 MHz
RES BW 300 kHz
VIEW 2 MHz
SPAN 2.85 MHz
SWP 20.0 sec

h/p

PRODUCT SAFETY ENGINEERING
REF 117.0 dBμV ATTN 20 dB

MKR 8.860 MHz
90.90 dBμV

10 dB/

POS PK


PRODUCT SAFETY ENGINEERING

OPEN AREA TEST SITE

STCATA WX 74-8.9

DL
91.0
dBμV

SWEEP TIME
10.0 sec

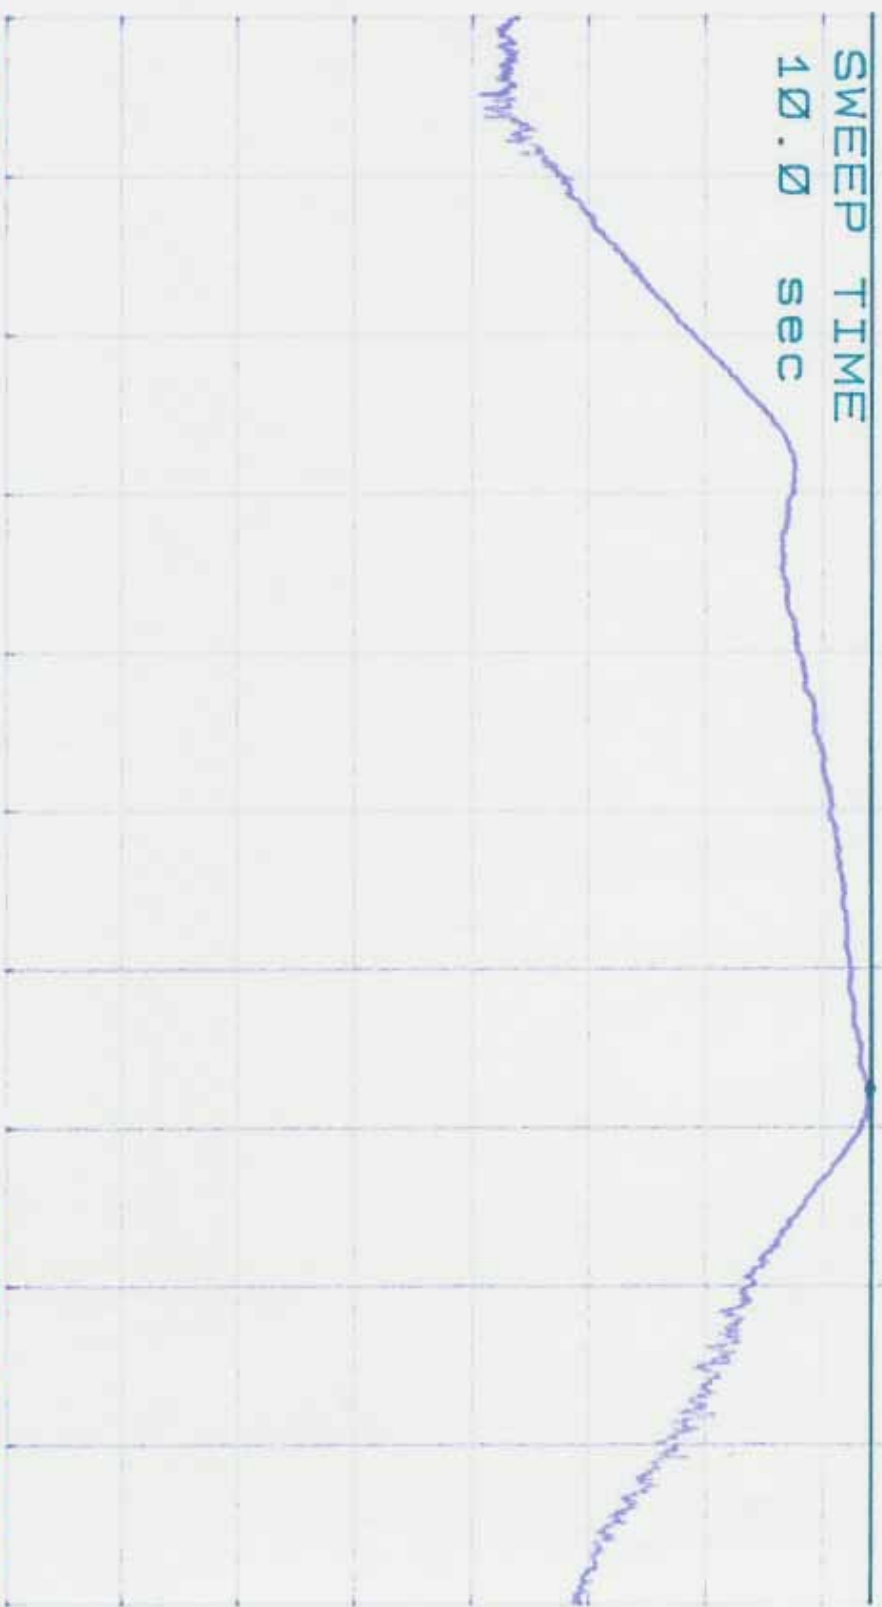

START 6.28 MHz

RES BW 300 KHz

VBW 1 MHz

STOP 10.09 MHz
SWP 10.0 sec

A28

Antenna Current

Antenna	PDA Setting	Frequency Range	TX1 Current mA	TX2 Current mA
EX	25 / 21	8.9 - 10.0	890	525
EX	21 / 18	7.4 - 8.9	570	530
GX	21 / 19	7.4 - 8.9	850	820
SX	28 / 31	7.4 - 8.9	1125	1500
WX	19 / 27	7.4 - 8.9	1310	700
PX	24 / 22	7.4 - 8.9	1040	765

APPENDIX

B

System Under Test Description

Description of System under Test

The Strata consists of a Checkpoint model 4022 printed wiring board and (5) antenna configuration; EX Plus, GX Plus, WX Plus, SX Plus and PX Plus. The system receives power from an external DC power supply. The EUT was tested using (3) different power supplies; Globtek model GT-255024D-R, Deltron models WW 424 and WW 224. The filtered AC power cord, Eupen Kabelwerk model IMX 04, was used during the testing. The 24V DC power in of the EUT uses a (3) pin plug (only 2 cabled) which is (1) meter long, shielded and the shield is terminated at power supply end only.

The following unterminated cables were attached:

All the PDA units:

J9 Synch port 4 pin plug to unterminated.

J10 Synch port 4 pin plug to unterminated.

J13 COMM OUT 6 pin plug to unterminated.

J14 COMM IN 6 pin plug to unterminated.

All cables shielded but shields were not connected

MAR 13 '97 10:50 TO: 012105223396
JUL 26 '96 15:19 TO: 012013443689

FROM: CHECKPOINT SYSTEMS INC
FROM: CHECKPOINT SYSTEM INC

7-035 P. 02/02 --C71
7-031 P. 01/02 F-074



CHECKPOINT SYSTEMS, INC. FACSIMILE TRANSMISSION COVER

To: F.C.C. Lab

Date: 7/26/96

Attention: Mr. Ed Gibbons

Fax To: (201) 344-3030

No. of Pages: 3
(Incl. Cover)

From: Mr. Gregory E. Sleet
CHECKPOINT SYSTEMS, INC.
101 WOLF DRIVE, P.O. BOX 184
THOROFARE, N.J. 08066

Telephone: (609) 384-3339 Direct
Toll Free: (800) 257-5540 Ext. 2339
Fax No.: (609) 384-2366

PRIVACY AND CONFIDENTIALITY NOTICE

USERS OF FACSIMILE TRANSMISSIONS ARE ADVISED THAT BY THE NATURE OF THE TRANSMISSION, THE INFORMATION CONTAINED HEREIN IS ATTORNEY PRIVILEGED AND CONFIDENTIAL INFORMATION. IF THE READER OF THIS FACSIMILE TRANSMISSION IS NOT THE INTENDED RECIPIENT, OR THE EMPLOYEE OR AGENT RESPONSIBLE TO DELIVER IT TO THE INTENDED RECIPIENT, YOU ARE HEREBY NOTIFIED THAT ANY DISSEMINATION, DISTRIBUTION OR COPYING OF THIS FACSIMILE TRANSMISSION IS STRICTLY PROHIBITED. IF YOU HAVE RECEIVED THIS FACSIMILE TRANSMISSION IN ERROR OR ARE NOT SURE WHETHER IT IS PRIVILEGED, PLEASE IMMEDIATELY NOTIFY US BY TELEPHONE, AND DESTROY ALL COPIES AND RETURN THE ORIGINAL FACSIMILE TRANSMISSION TO US AT THE ADDRESS ABOVE VIA THE U.S. POSTAL SERVICE AT OUR EXPENSE. THANK YOU.

Dear Mr. Gibbons:

Following up on our recent phone conversations, please confirm and if necessary correct our understanding of the points discussed below. Based on the details of our fax dated 7/3/96:

- ✓ • Our pulsed emissions will be treated as frequency hopping, where the bandwidth will be considered the spectrum contained between the lowest and highest carrier frequency we pulse.
- ✓ • A simple ratio of the maximum single retransmitted band infringed upon divided by the bandwidth of our fundamental emission must be less than 1% to satisfy section 15.205 of the rules.
in the band 1.765-10 MHz
- • For fundamental and harmonic emissions ~~between 1.765-10 MHz~~, a 20 dB reduction from the true peak is to be compared to the limits of 100uV/meter ~~and 300uV/meter respectively~~ at 30 meters. The unit is modulated as normally installed. True peak refers to the point at which the analyzer bandwidth is adjusted for minimum pulse desensitization.
emissions outside the 1.765-10 MHz band
- • For ~~harmonics between 1.765-10 MHz~~ CISPR quasi-peak measurements will be made with the unit modulating as normally installed. Based on the bandwidth plot, care must be given to measure multiples of the worst case emission points. Limits are as specified in section 15.209.
- ✓ • Conducted emissions remain as specified in part 15 of the rules.

Ed Gibbons
8/2/96

APPENDIX

C

Measurement Protocol

The test methodology followed during the collection of the data included within this technical report was ANSI C63.4:1992.

The EUT was powered with (120) VAC / (60) Hz during the collection of data included within.

The data is compared to the FCC Part 15 Class A limits.

The "EMI" instrumentation is capable of calculating the final emission level based on the following formula:

Level at the receiver (dB μ V) + Antenna Correction Factor (dB/M) + Cable Loss (dB) - Preamp Gain (dB) = Actual Level in dB μ V/M.

The sample calculation below is based on the actual test data collected:

Observed Level		51.7	dB μ V	
ACF	+	9.6	dB/M	
Cable Loss	+	1.0	dB	
Preamp Gain	-	<u>26.0</u>	dB	
Actual Level		36.3	dB μ V/M	@ 86.9 MHz

Please have a company official review this report and sign.
