

## 7. SPURIOUS EMISSION

### 7.1 CONDUCTED SPURIOUS EMISSION

#### 7.1.1 MEASUREMENT METHOD

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

**The minimum permissible attenuation level of any spurious emission is  $43 + \log_{10}(P[\text{Watts}])$ , where P is the transmitter power in Watts.**

Test Procedure Used


KDB 971168 v02r01 – Section 6.0

#### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to at least  $10 \times$  the fundamental frequency (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = max hold
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

#### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

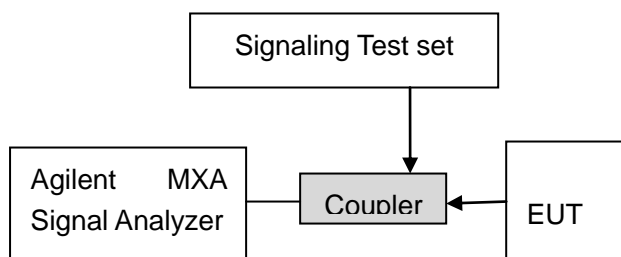

#### Test Instrument & Measurement Setup

shall be attenuated below the transmitter power (P, in Watts) by at least  $43 + 10\log(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

### **Test Note**

Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1 GHz and 1 MHz or greater for frequencies greater than 1 GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

### **7.1.2 MEASUREMENT RESULT**

**PLEASE REFER TO:** APPENDIX A TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION

**Note:** 1. No emission found in standby or receive mode, no recording in this report.


## 7.2 Radiated Spurious Emission

### 7.2.1. MEASUREMENT PROCEDURE


1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.

## 7.2.2. TEST SETUP


### Radiated Emission Test-Setup Frequency Below 30MHz

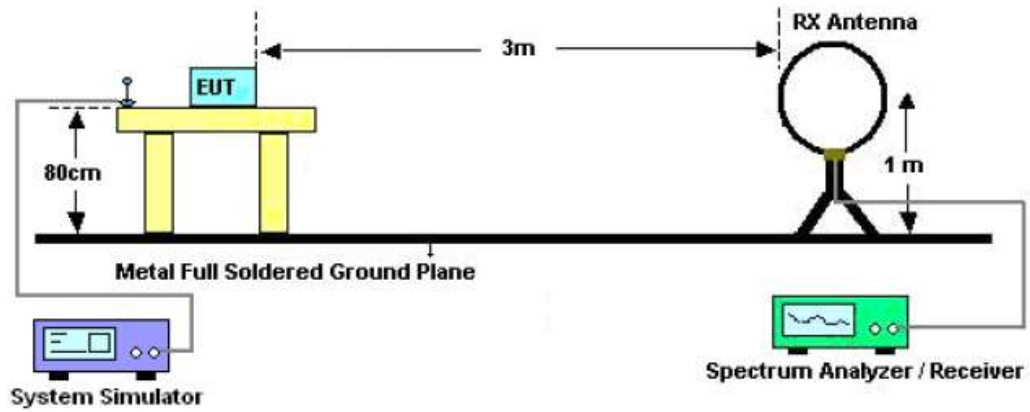

### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

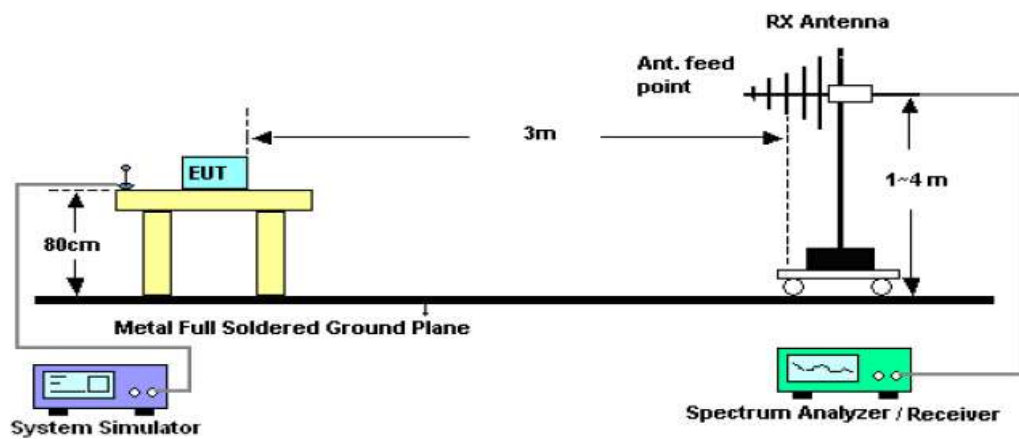

### RADIATED EMISSION TEST SETUP ABOVE 1000MHz

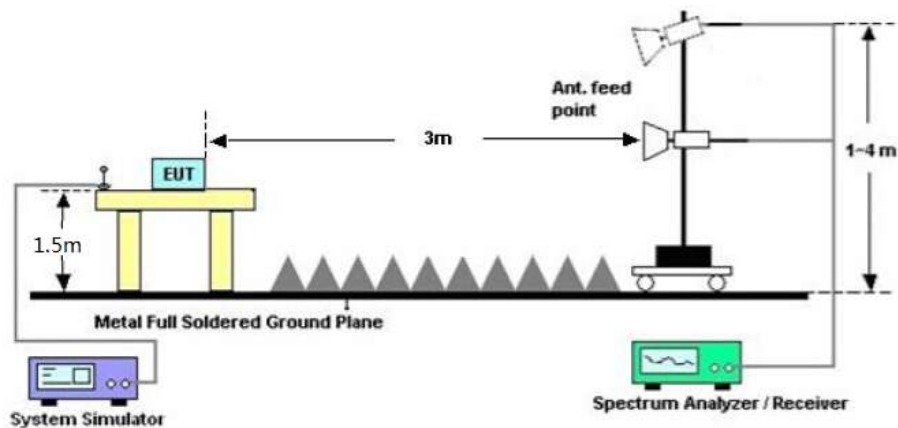

### 7.2.3 PROVISIONS APPLICABLE

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power ( $P$ , in Watts) by at least  $43 + 10\log(P)$  dB. The specification that emissions shall be attenuated below the transmitter power ( $P$ ) by at least  $43 + 10\log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

**Note:** Only record the worst condition of each test mode:

### 7.2.3 MEASUREMENT RESULT

#### LTE Band 2 Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3720	-45.87	V	10.06	2.52	-38.33	-13	-25.33
3720	-46.49	H	10.06	2.52	-38.95	-13	-25.95
257.2	-51.33	V	6.7	0.24	-44.87	-13	-31.87
640.2	-48.40	H	6.5	0.39	-42.29	-13	-29.29

#### Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3760	-46.78	V	10.06	2.52	-39.24	-13	-26.24
3760	-46.58	H	10.06	2.52	-39.04	-13	-26.04
256.9	-55.62	V	6.7	0.24	-49.16	-13	-36.16
639.8	-48.58	H	6.5	0.39	-42.47	-13	-29.47

#### High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3800	-48.32	V	10.06	2.52	-40.78	-13	-27.78
3800	-48.24	H	10.06	2.52	-40.70	-13	-27.70
254.6	-55.07	V	6.7	0.24	-48.61	-13	-35.61
639.4	-48.16	H	6.5	0.39	-42.05	-13	-29.05

**LTE Band 4**  
**Low channel**

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3440	-48.19	V	10.06	2.52	-40.65	-13	-27.65
3440	-46.73	H	10.06	2.52	-39.19	-13	-26.19
257.4	-54.88	V	6.7	0.24	-48.42	-13	-35.42
640.2	-51.51	H	6.5	0.39	-45.40	-13	-32.40

**Middle channel**

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3465	-48.39	V	10.06	2.52	-40.85	-13	-27.85
3465	-47.70	H	10.06	2.52	-40.16	-13	-27.16
256.9	-54.91	V	6.7	0.24	-48.45	-13	-35.45
639.8	-49.33	H	6.5	0.39	-43.22	-13	-30.22

**High channel**

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3490	-48.45	V	10.06	2.52	-40.91	-13	-27.91
3490	-45.43	H	10.06	2.52	-37.89	-13	-24.89
254.6	-53.42	V	6.7	0.24	-46.96	-13	-33.96
639.4	-47.85	H	6.5	0.39	-41.74	-13	-28.74

**LTE Band 5**  
**Low channel**

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1658	-49.00	V	10.72	1.65	-39.93	-13	-26.93
1658	-44.46	H	10.72	1.65	-35.39	-13	-22.39
255.2	-52.94	V	6.7	0.24	-46.48	-13	-33.48
641.1	-49.26	H	6.5	0.39	-43.15	-13	-30.15

**Middle channel**

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1673	-48.89	V	10.72	1.65	-39.82	-13	-26.82
1673	-48.25	H	10.72	1.65	-39.18	-13	-26.18
254.5	-56.71	V	6.7	0.24	-50.25	-13	-37.25
640.2	-51.12	H	6.5	0.39	-45.01	-13	-32.01

**High channel**

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1688	-47.25	V	10.72	1.65	-38.18	-13	-25.18
1688	-47.53	H	10.72	1.65	-38.46	-13	-25.46
254.2	-53.84	V	6.7	0.24	-47.38	-13	-34.38
640.8	-51.78	H	6.5	0.39	-45.67	-13	-32.67



**LTE Band 7**  
**Low channel**

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
5020	-46.34	V	9.32	3.29	-40.31	-13	-27.31
5020	-47.50	H	9.32	3.29	-41.47	-13	-28.47
257.1	-52.52	V	6.7	0.24	-46.06	-13	-33.06
640.4	-49.22	H	6.5	0.39	-43.11	-13	-30.11

**Middle channel**

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
5070	-47.65	V	9.32	3.29	-41.62	-13	-28.62
5070	-47.03	H	9.32	3.29	-41.00	-13	-28.00
257.3	-57.32	V	6.7	0.24	-50.86	-13	-37.86
640.5	-49.18	H	6.5	0.39	-43.07	-13	-30.07

**High channel**

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
5120	-49.67	V	9.32	3.29	-43.64	-13	-30.64
5120	-49.29	H	9.32	3.29	-43.26	-13	-30.26
256.3	-55.16	V	6.7	0.24	-48.70	-13	-35.70
641.2	-48.51	H	6.5	0.39	-42.40	-13	-29.40

**LTE Band 17**  
**Low channel**

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1418	-48.82	V	10.72	1.65	-39.75	-13	-26.75
1418	-46.09	H	10.72	1.65	-37.02	-13	-24.02
253.8	-53.10	V	6.7	0.24	-46.64	-13	-33.64
640.5	-53.97	H	6.5	0.39	-47.86	-13	-34.86

**Middle channel**

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1420	-47.46	V	10.72	1.65	-38.39	-13	-25.39
1420	-47.74	H	10.72	1.65	-38.67	-13	-25.67
253.8	-53.83	V	6.7	0.24	-47.37	-13	-34.37
639.7	-49.95	H	6.5	0.39	-43.84	-13	-30.84

**High channel**

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1422	-49.72	V	10.72	1.65	-40.65	-13	-27.65
1422	-46.42	H	10.72	1.65	-37.35	-13	-24.35
254.5	-50.82	V	6.7	0.24	-44.36	-13	-31.36
639.4	-49.42	H	6.5	0.39	-43.31	-13	-30.31

- Note:** 1. EUT Field Strength (dBm) = Reading (Signal generator) + Antenna Gain (substitution antenna) - Cable loss (From Signal Generator to substitution antenna).  
2. Below 30MHz no Spurious found and the QPSK modes is the worst condition.

## 8. FREQUENCY STABILITY

### 8.1 MEASUREMENT METHOD

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

- 1 , Measure the carrier frequency at room temperature.
- 2 , Subject the EUT to overnight soak at -10°C.  
 , With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on channel 20175 for LTE band 4 measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 3 , Repeat the above measurements at 10°C increments from -10°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 4 , Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
- 5 , Subject the EUT to overnight soak at +50°C.
- 6 , With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 7 , Repeat the above measurements at 10°C increments from +50°C to -10°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 8 , At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

### 8.2 PROVISIONS APPLICABLE

#### 8.2.1 For Hand carried battery powered equipment

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-C-2004. The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency. For Part 24 and Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

### 8.2.2 For equipment powered by primary supply voltage

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### 8.3 MEASUREMENT RESULT (WORST)

#### LTE Band 2

Middle Channel, $f_0 = 1880$ MHz				
Temperature (°C)	Power Supplied	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	-3.75	-0.001994	$\pm 2.5$
0		-1.26	-0.000670	$\pm 2.5$
10		-2.69	-0.001431	$\pm 2.5$
20		-5.72	-0.003044	$\pm 2.5$
30		-2.89	-0.001537	$\pm 2.5$
40		-3.26	-0.001735	$\pm 2.5$
50		-1.85	-0.000982	$\pm 2.5$
55		1.12	0.000594	$\pm 2.5$
25	4.2	-15.81	-0.008408	$\pm 2.5$
	3.5	-1.79	-0.000951	$\pm 2.5$

#### LTE Band 4

Middle Channel, $f_0 = 1732.5$ MHz				
Temperature (°C)	Power Supplied	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	-3.05	-0.001759	$\pm 2.5$
0		3.00	0.001734	$\pm 2.5$
10		1.57	0.000908	$\pm 2.5$
20		0.37	0.000215	$\pm 2.5$
30		-0.69	-0.000396	$\pm 2.5$
40		-5.04	-0.002906	$\pm 2.5$
50		-2.42	-0.001395	$\pm 2.5$
55		-2.20	-0.001272	$\pm 2.5$

- 25	4.2	7.77	0.004484	$\pm 2.5$
	3.5	9.98	0.005763	$\pm 2.5$

#### LLTE Band 5

Middle Channel, fo = 836.5 MHz				
Temperature (°C)	Power Supplied	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	0.11	0.000137	$\pm 2.5$
0		0.14	0.000171	$\pm 2.5$
10		0.83	0.000992	$\pm 2.5$
20		0.06	0.000068	$\pm 2.5$
30		-0.86	-0.001026	$\pm 2.5$
40		3.08	0.003677	$\pm 2.5$
50		2.13	0.002548	$\pm 2.5$
55		-2.07	-0.002480	$\pm 2.5$
- 25	4.2	-8.84	-0.010569	$\pm 2.5$
	3.5	1.43	0.001710	$\pm 2.5$

#### LTE Band 7

Middle Channel, fo = 2535 MHz				
Temperature (°C)	Power Supplied	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	-0.90	-0.000356	$\pm 2.5$
0		6.08	0.002398	$\pm 2.5$
10		3.19	0.001258	$\pm 2.5$
20		2.73	0.001078	$\pm 2.5$
30		0.30	0.000119	$\pm 2.5$
40		3.09	0.001219	$\pm 2.5$
50		0.29	0.000113	$\pm 2.5$
55		1.37	0.000542	$\pm 2.5$
25	4.2	-11.43	-0.004509	$\pm 2.5$
	3.5	5.84	0.002302	$\pm 2.5$

**LTE Band 17**

Middle Channel, $f_0 = 710$ MHz				
Temperature (°C)	Power Supplied	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	2.86	0.004030	$\pm 2.5$
0		1.04	0.001471	$\pm 2.5$
10		0.51	0.000725	$\pm 2.5$
20		-0.73	-0.001028	$\pm 2.5$
30		-0.63	-0.000887	$\pm 2.5$
40		2.26	0.003183	$\pm 2.5$
50		-0.11	-0.000161	$\pm 2.5$
55		-2.63	-0.003707	$\pm 2.5$
25	4.2	-10.06	-0.014164	$\pm 2.5$
	3.5	2.17	0.003063	$\pm 2.5$

Note: The EUT doesn't work below -10°C

## 9. OCCUPIED BANDWIDTH

### 9.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

### 9.2 PROVISIONS APPLICABLE

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

### 9.3 MEASUREMENT RESULT

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### LTE Band 2

##### Channel Bandwidth: 1.4 MHz

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	6	0	1.0774	PASS
	MCH	6	0	1.0806	PASS
	HCH	6	0	1.0816	PASS
16QAM	LCH	6	0	1.0799	PASS
	MCH	6	0	1.0817	PASS
	HCH	6	0	1.0802	PASS

##### Channel Bandwidth: 3 MHz

Channel Bandwidth: 3 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	15	0	2.6835	PASS
	MCH	15	0	2.6862	PASS
	HCH	15	0	2.6915	PASS
16QAM	LCH	15	0	2.6847	PASS
	MCH	15	0	2.6863	PASS
	HCH	15	0	2.6898	PASS

##### Channel Bandwidth: 5 MHz

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		

QPSK	LCH	25	0	4.4833	PASS
	MCH	25	0	4.4874	PASS
	HCH	25	0	4.4928	PASS
16QAM	LCH	25	0	4.4820	PASS
	MCH	25	0	4.4827	PASS
	HCH	25	0	4.4987	PASS

**Channel Bandwidth: 10 MHz**

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	50	0	8.9347	PASS
	MCH	50	0	8.9538	PASS
	HCH	50	0	8.9597	PASS
16QAM	LCH	50	0	8.9421	PASS
	MCH	50	0	8.9381	PASS
	HCH	50	0	8.9525	PASS

**Channel Bandwidth: 15 MHz**

Channel Bandwidth: 15 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	75	0	13.416	PASS
	MCH	75	0	13.460	PASS
	HCH	75	0	13.469	PASS
16QAM	LCH	75	0	13.400	PASS
	MCH	75	0	13.426	PASS
	HCH	75	0	13.437	PASS

**Channel Bandwidth: 20 MHz**

Channel Bandwidth: 20 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	100	0	17.872	PASS
	MCH	100	0	17.899	PASS
	HCH	100	0	17.879	PASS
16QAM	LCH	100	0	17.865	PASS
	MCH	100	0	17.895	PASS
	HCH	100	0	17.879	PASS



### LTE Band 4

#### Channel Bandwidth: 1.4 MHz

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	6	0	1.0787	PASS
	MCH	6	0	1.0762	PASS
	HCH	6	0	1.0789	PASS
16QAM	LCH	6	0	1.0826	PASS
	MCH	6	0	1.0800	PASS
	HCH	6	0	1.0777	PASS

#### Channel Bandwidth: 3 MHz

Channel Bandwidth: 3 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	15	0	2.6787	PASS
	MCH	15	0	2.6859	PASS
	HCH	15	0	2.6853	PASS
16QAM	LCH	15	0	2.6851	PASS
	MCH	15	0	2.6791	PASS
	HCH	15	0	2.6889	PASS

#### Channel Bandwidth: 5 MHz

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	25	0	4.4814	PASS
	MCH	25	0	4.4820	PASS
	HCH	25	0	4.4846	PASS
16QAM	LCH	25	0	4.4824	PASS
	MCH	25	0	4.4737	PASS
	HCH	25	0	4.4882	PASS

#### Channel Bandwidth: 10 MHz

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	50	0	8.9340	PASS

16QAM	MCH	50	0	8.9403	PASS
	HCH	50	0	8.9303	PASS
	LCH	50	0	8.9285	PASS
	MCH	50	0	8.9270	PASS
	HCH	50	0	8.9433	PASS

**Channel Bandwidth: 15 MHz**

Channel Bandwidth: 15 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	75	0	13.411	PASS
	MCH	75	0	13.403	PASS
	HCH	75	0	13.384	PASS
16QAM	LCH	75	0	13.418	PASS
	MCH	75	0	13.410	PASS
	HCH	75	0	13.387	PASS

**Channel Bandwidth: 20 MHz**

Channel Bandwidth: 20 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	100	0	17.877	PASS
	MCH	100	0	17.853	PASS
	HCH	100	0	17.809	PASS
16QAM	LCH	100	0	17.892	PASS
	MCH	100	0	17.851	PASS
	HCH	100	0	17.811	PASS

**LTE Band 5**

**Channel Bandwidth: 1.4 MHz**

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	6	0	1.0753	PASS
	MCH	6	0	1.0755	PASS
	HCH	6	0	1.0769	PASS
16QAM	LCH	6	0	1.0813	PASS
	MCH	6	0	1.0789	PASS
	HCH	6	0	1.0776	PASS

**Channel Bandwidth: 3 MHz**

Channel Bandwidth: 3 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	15	0	2.6862	PASS
	MCH	15	0	2.6844	PASS
	HCH	15	0	2.6832	PASS
16QAM	LCH	15	0	2.6836	PASS
	MCH	15	0	2.6825	PASS
	HCH	15	0	2.6833	PASS

**Channel Bandwidth: 5 MHz**

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	25	0	4.4852	PASS
	MCH	25	0	4.4859	PASS
	HCH	25	0	4.4759	PASS
16QAM	LCH	25	0	4.4810	PASS
	MCH	25	0	4.4783	PASS
	HCH	25	0	4.4826	PASS

**Channel Bandwidth: 10 MHz**

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	50	0	8.9486	PASS
	MCH	50	0	8.9509	PASS
	HCH	50	0	8.9378	PASS
16QAM	LCH	50	0	8.9377	PASS
	MCH	50	0	8.9495	PASS
	HCH	50	0	8.9454	PASS

**LTE Band 7**  
**Channel Bandwidth: 5 MHz**

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	25	0	4.4904	PASS
	MCH	25	0	4.4889	PASS
	HCH	25	0	4.4868	PASS
16QAM	LCH	25	0	4.4810	PASS
	MCH	25	0	4.4932	PASS
	HCH	25	0	4.4850	PASS

**Channel Bandwidth: 10 MHz**

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	50	0	8.9538	PASS
	MCH	50	0	8.9653	PASS
	HCH	50	0	8.9395	PASS
16QAM	LCH	50	0	8.9469	PASS
	MCH	50	0	8.9536	PASS
	HCH	50	0	8.9460	PASS

**Channel Bandwidth: 15 MHz**

Channel Bandwidth: 15 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	75	0	13.425	PASS
	MCH	75	0	13.456	PASS
	HCH	75	0	13.422	PASS
16QAM	LCH	75	0	13.436	PASS
	MCH	75	0	13.437	PASS
	HCH	75	0	13.413	PASS

**Channel Bandwidth: 20 MHz**

Channel Bandwidth: 20 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	100	0	17.889	PASS
	MCH	100	0	17.898	PASS
	HCH	100	0	17.863	PASS
16QAM	LCH	100	0	17.896	PASS

	MCH	100	0	17.895	PASS
	HCH	100	0	17.859	PASS

### LTE Band 17

#### Channel Bandwidth: 5 MHz

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	25	0	4.4852	PASS
	MCH	25	0	4.4881	PASS
	HCH	25	0	4.4747	PASS
16QAM	LCH	25	0	4.4805	PASS
	MCH	25	0	4.4947	PASS
	HCH	25	0	4.4688	PASS

#### Channel Bandwidth: 10 MHz

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	50	0	8.9864	PASS
	MCH	50	0	8.9706	PASS
	HCH	50	0	8.9235	PASS
16QAM	LCH	50	0	8.9888	PASS
	MCH	50	0	8.9724	PASS
	HCH	50	0	8.9472	PASS

Note: Please refers to Appendix B for compliance test plots for Occupied Bandwidth (99%)

## 10. EMISSION BANDWIDTH

### 10.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

### 10.2 PROVISIONS APPLICABLE

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

### 10.3 MEASUREMENT RESULT

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### LTE Band 2

##### Channel Bandwidth: 1.4 MHz

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	6	0	1.222	PASS
	MCH	6	0	1.281	PASS
	HCH	6	0	1.354	PASS
16QAM	LCH	6	0	1.230	PASS
	MCH	6	0	1.254	PASS
	HCH	6	0	1.229	PASS

##### Channel Bandwidth: 3 MHz

Channel Bandwidth: 3 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	15	0	2.855	PASS
	MCH	15	0	2.921	PASS
	HCH	15	0	3.254	PASS
16QAM	LCH	15	0	2.856	PASS
	MCH	15	0	2.884	PASS
	HCH	15	0	2.878	PASS

##### Channel Bandwidth: 5 MHz

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		

QPSK	LCH	25	0	4.851	PASS
	MCH	25	0	4.888	PASS
	HCH	25	0	6.061	PASS
16QAM	LCH	25	0	4.822	PASS
	MCH	25	0	4.927	PASS
	HCH	25	0	4.966	PASS

**Channel Bandwidth: 10 MHz**

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	50	0	9.543	PASS
	MCH	50	0	9.724	PASS
	HCH	50	0	11.83	PASS
16QAM	LCH	50	0	9.496	PASS
	MCH	50	0	9.549	PASS
	HCH	50	0	9.524	PASS

**Channel Bandwidth: 15 MHz**

Channel Bandwidth: 15 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	75	0	14.06	PASS
	MCH	75	0	21.40	PASS
	HCH	75	0	21.40	PASS
16QAM	LCH	75	0	14.10	PASS
	MCH	75	0	17.66	PASS
	HCH	75	0	16.75	PASS

**Channel Bandwidth: 20 MHz**

Channel Bandwidth: 20 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	100	0	18.74	PASS
	MCH	100	0	19.15	PASS
	HCH	100	0	18.88	PASS
16QAM	LCH	100	0	18.64	PASS
	MCH	100	0	18.74	PASS
	HCH	100	0	18.72	PASS

#### LTE Band 4

##### Channel Bandwidth: 1.4 MHz

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	6	0	1.231	PASS
	MCH	6	0	1.211	PASS
	HCH	6	0	1.224	PASS
16QAM	LCH	6	0	1.224	PASS
	MCH	6	0	1.224	PASS
	HCH	6	0	1.227	PASS

##### Channel Bandwidth: 3 MHz

Channel Bandwidth: 3 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	15	0	2.879	PASS
	MCH	15	0	2.861	PASS
	HCH	15	0	2.881	PASS
16QAM	LCH	15	0	2.872	PASS
	MCH	15	0	2.877	PASS
	HCH	15	0	2.871	PASS

##### Channel Bandwidth: 5 MHz

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	25	0	4.804	PASS
	MCH	25	0	4.801	PASS
	HCH	25	0	4.859	PASS
16QAM	LCH	25	0	4.875	PASS
	MCH	25	0	4.796	PASS
	HCH	25	0	4.860	PASS

##### Channel Bandwidth: 10 MHz

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	50	0	9.446	PASS
	MCH	50	0	9.436	PASS



	HCH	50	0	9.389	PASS
16QAM	LCH	50	0	9.517	PASS
	MCH	50	0	9.462	PASS
	HCH	50	0	9.457	PASS

**Channel Bandwidth: 15 MHz**

Channel Bandwidth: 15 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	75	0	14.15	PASS
	MCH	75	0	14.04	PASS
	HCH	75	0	14.06	PASS
16QAM	LCH	75	0	14.05	PASS
	MCH	75	0	14.00	PASS
	HCH	75	0	14.00	PASS

**Channel Bandwidth: 20 MHz**

Channel Bandwidth: 20 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	100	0	18.64	PASS
	MCH	100	0	18.58	PASS
	HCH	100	0	18.63	PASS
16QAM	LCH	100	0	18.56	PASS
	MCH	100	0	18.64	PASS
	HCH	100	0	18.54	PASS

**LTE Band 5**

**Channel Bandwidth: 1.4 MHz**

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	6	0	1.220	PASS
	MCH	6	0	1.200	PASS
	HCH	6	0	1.225	PASS
16QAM	LCH	6	0	1.234	PASS
	MCH	6	0	1.210	PASS
	HCH	6	0	1.213	PASS

**Channel Bandwidth: 3 MHz**

Channel Bandwidth: 3 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	15	0	2.868	PASS
	MCH	15	0	2.877	PASS
	HCH	15	0	2.890	PASS
16QAM	LCH	15	0	2.845	PASS
	MCH	15	0	2.879	PASS
	HCH	15	0	2.873	PASS

**Channel Bandwidth: 5 MHz**

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	25	0	4.835	PASS
	MCH	25	0	4.820	PASS
	HCH	25	0	4.806	PASS
16QAM	LCH	25	0	4.820	PASS
	MCH	25	0	4.870	PASS
	HCH	25	0	4.765	PASS

**Channel Bandwidth: 10 MHz**

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	50	0	9.469	PASS
	MCH	50	0	9.487	PASS
	HCH	50	0	9.393	PASS
16QAM	LCH	50	0	9.538	PASS
	MCH	50	0	9.482	PASS
	HCH	50	0	9.464	PASS

**LTE Band 7**

**Channel Bandwidth: 5 MHz**

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth(MHz)	Verdict
		Size	Offset		

QPSK	LCH	25	0	4.885	PASS
	MCH	25	0	5.013	PASS
	HCH	25	0	4.861	PASS
16QAM	LCH	25	0	4.844	PASS
	MCH	25	0	4.876	PASS
	HCH	25	0	4.868	PASS

**Channel Bandwidth: 10 MHz**

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	50	0	9.508	PASS
	MCH	50	0	9.828	PASS
	HCH	50	0	9.603	PASS
16QAM	LCH	50	0	9.585	PASS
	MCH	50	0	9.598	PASS
	HCH	50	0	9.476	PASS

**Channel Bandwidth: 15 MHz**

Channel Bandwidth: 15 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	75	0	14.13	PASS
	MCH	75	0	21.71	PASS
	HCH	75	0	14.29	PASS
16QAM	LCH	75	0	14.13	PASS
	MCH	75	0	17.81	PASS
	HCH	75	0	14.13	PASS

**Channel Bandwidth: 20 MHz**

Channel Bandwidth: 20 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	100	0	18.82	PASS
	MCH	100	0	19.26	PASS
	HCH	100	0	18.74	PASS
16QAM	LCH	100	0	18.64	PASS
	MCH	100	0	18.83	PASS
	HCH	100	0	18.68	PASS

**LTE Band 17**

**Channel Bandwidth: 5 MHz**

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	25	0	4.839	PASS
	MCH	25	0	4.843	PASS
	HCH	25	0	4.797	PASS
16QAM	LCH	25	0	4.831	PASS
	MCH	25	0	4.805	PASS
	HCH	25	0	4.811	PASS

**Channel Bandwidth: 10 MHz**

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	50	0	9.545	PASS
	MCH	50	0	9.541	PASS
	HCH	50	0	9.399	PASS
16QAM	LCH	50	0	9.506	PASS
	MCH	50	0	9.391	PASS
	HCH	50	0	9.383	PASS

Note: Please refers to Appendix B for compliance test plots for emission bandwidth (-26dBc)

## **11. BAND EDGE**

### **11.1 MEASUREMENT METHOD**

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

### **11.2 PROVISIONS APPLICABLE**

As Specified in FCC rules of §2.1051 §24.238(a) §27.53(e) §27.53(g)

KDB 971168 v02r01 – Section 6.0


### **11.3 MEASUREMENT RESULT**


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequency. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


The minimum permissible attenuation level of any spurious emission is  $43 + \log_{10}(P[\text{Watts}])$ , where P is the transmitter power in Watts.

Please refers to Appendix III for compliance test plots for band edge

APPENDIX A  
TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION  
LTE BAND 2

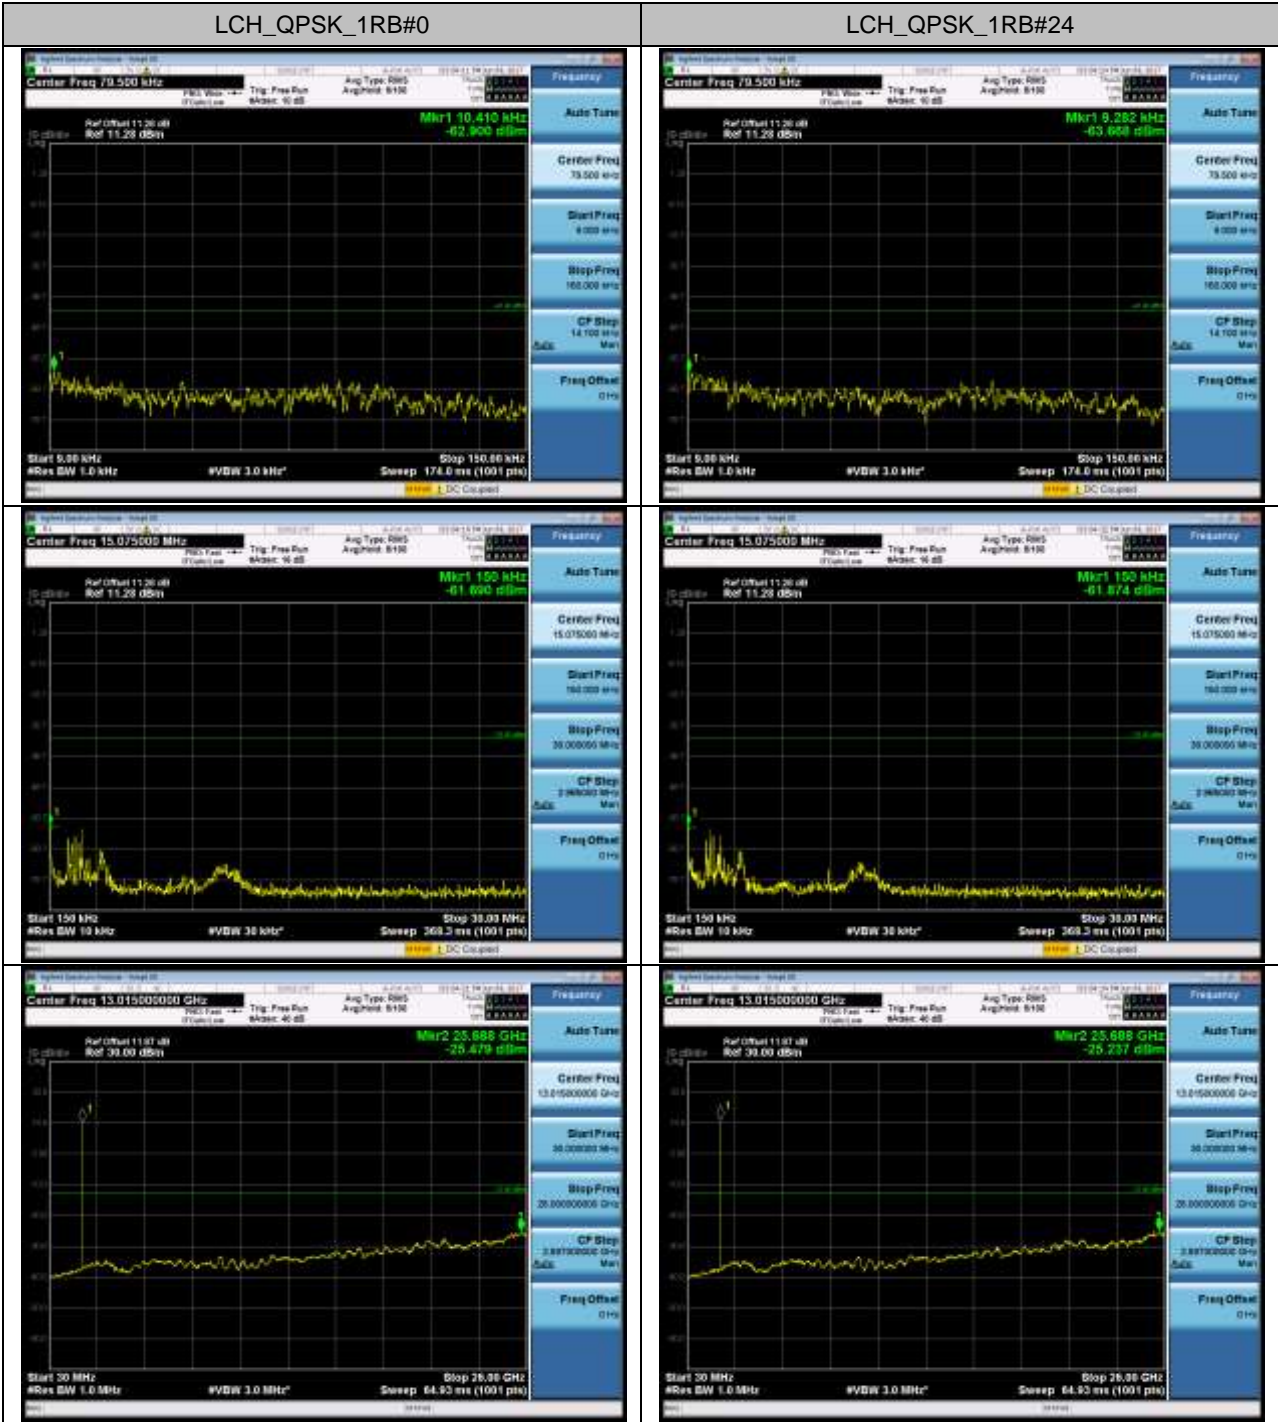


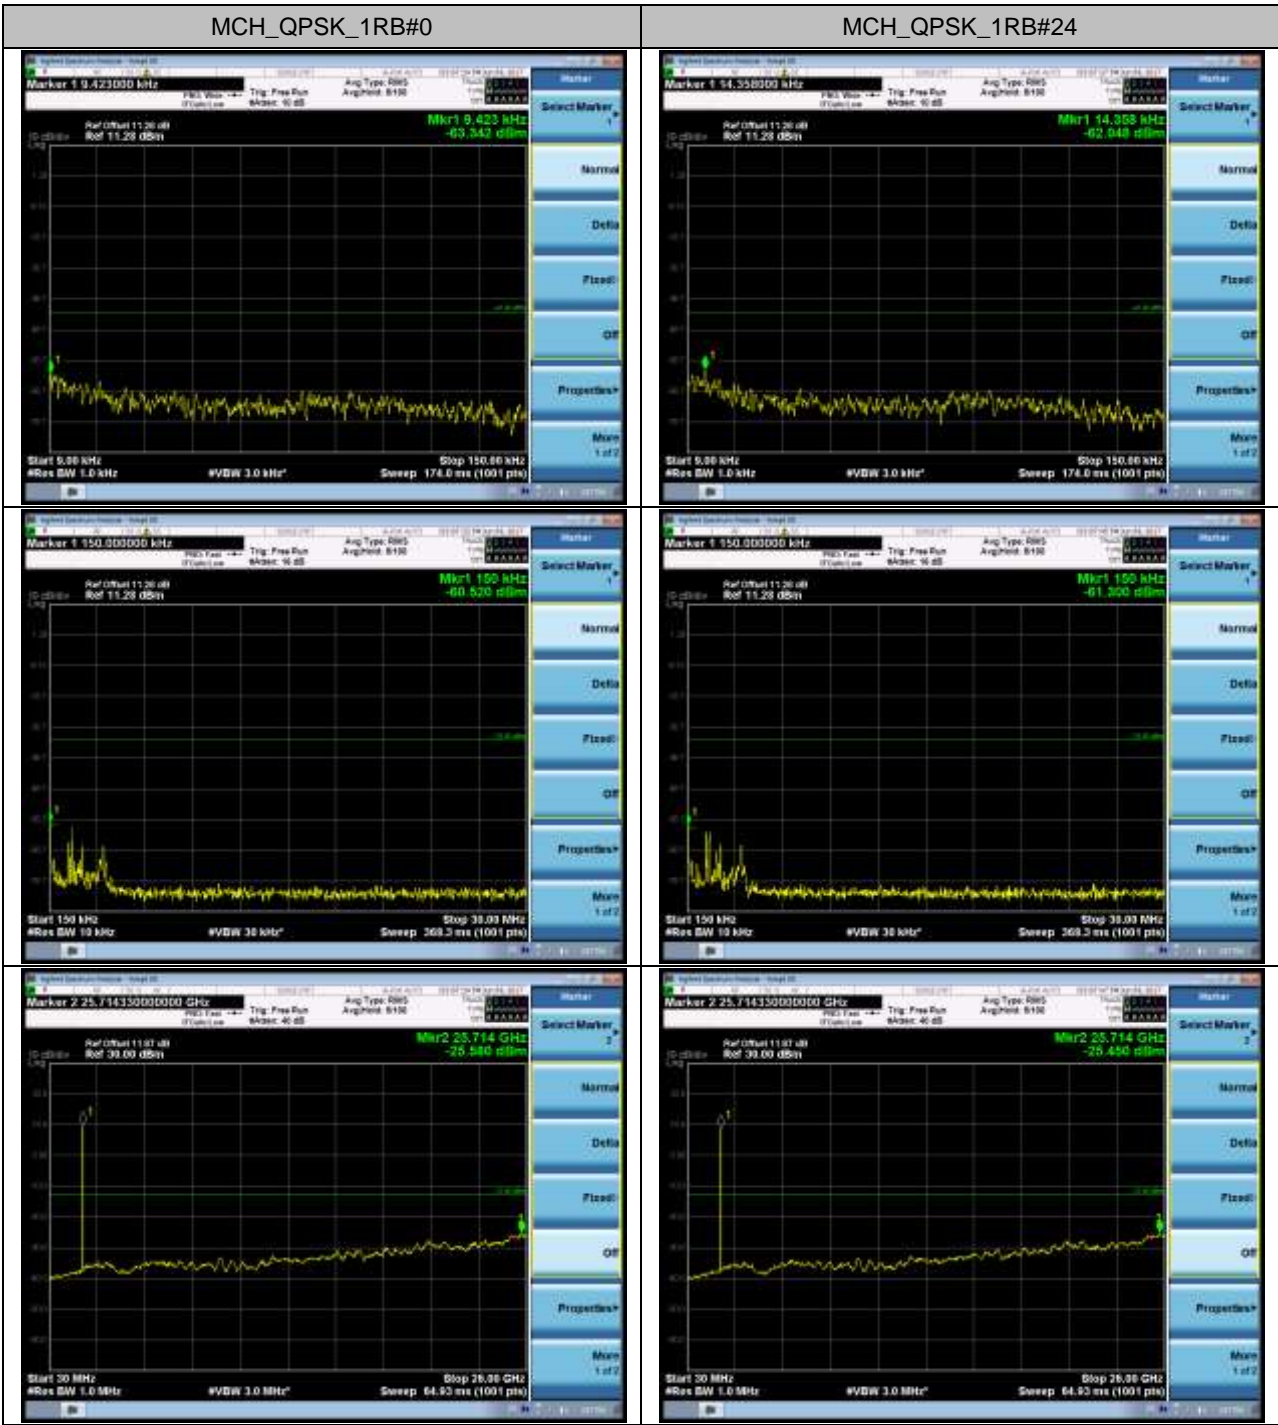


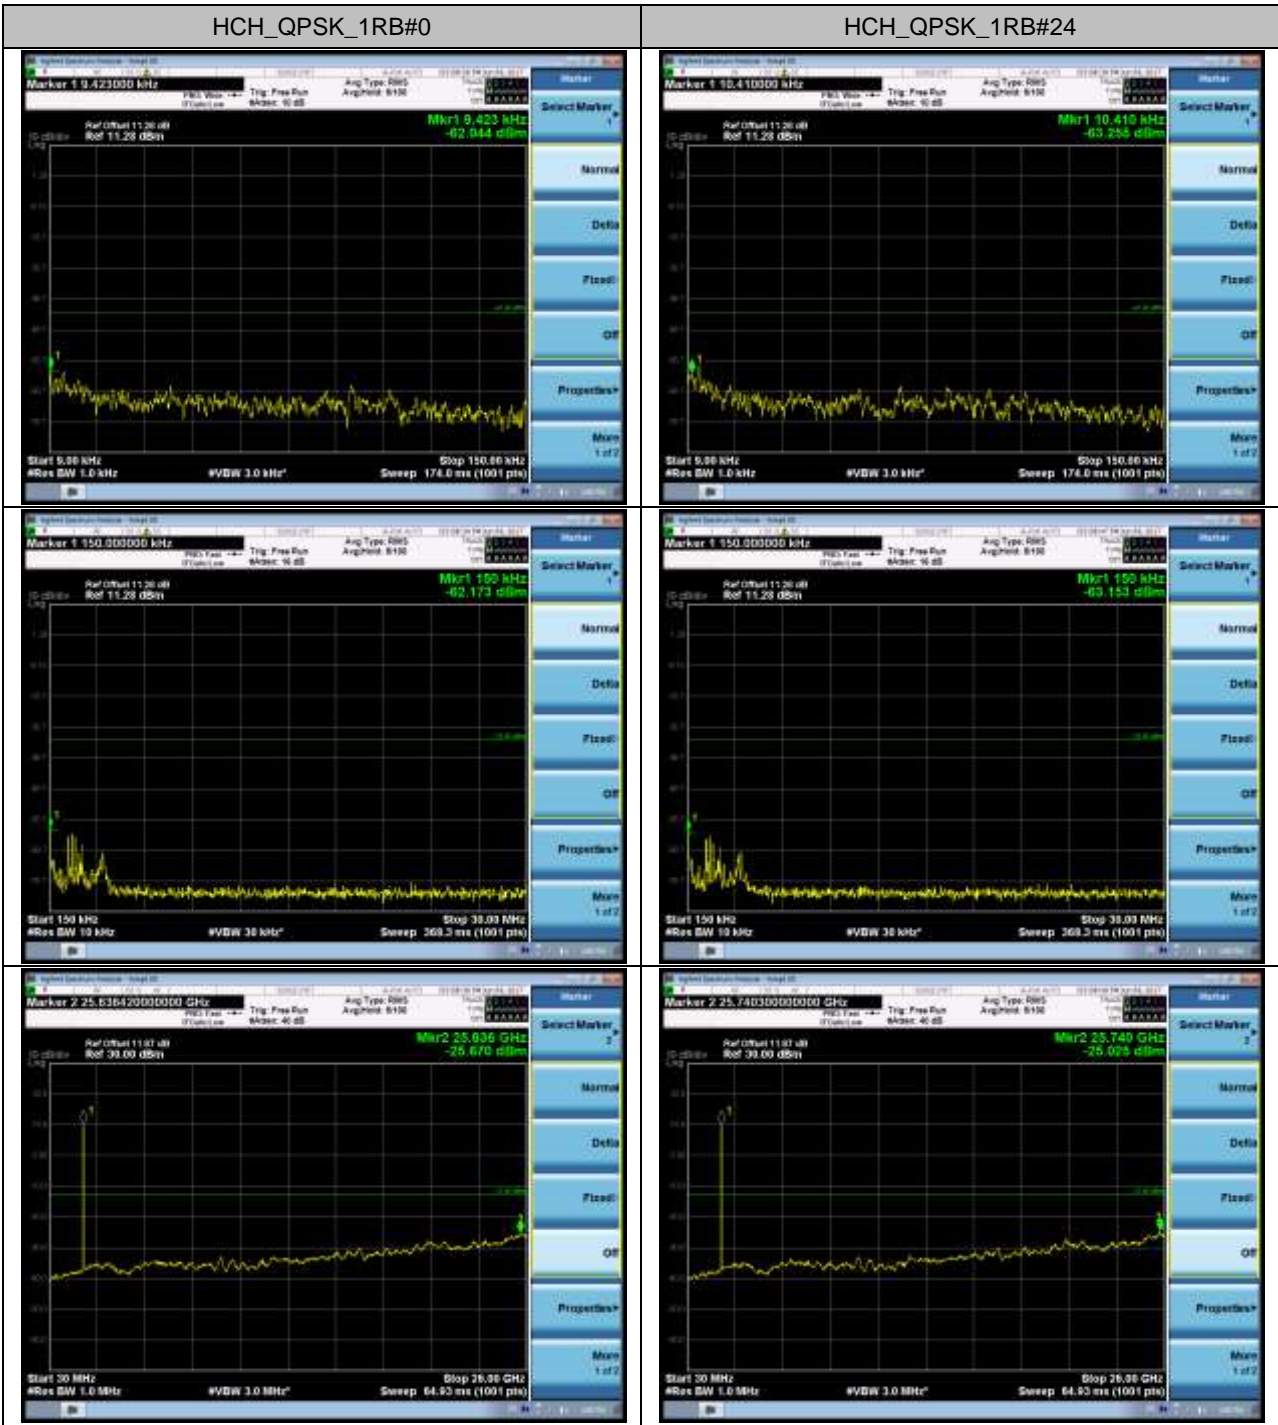





LTE BAND 4

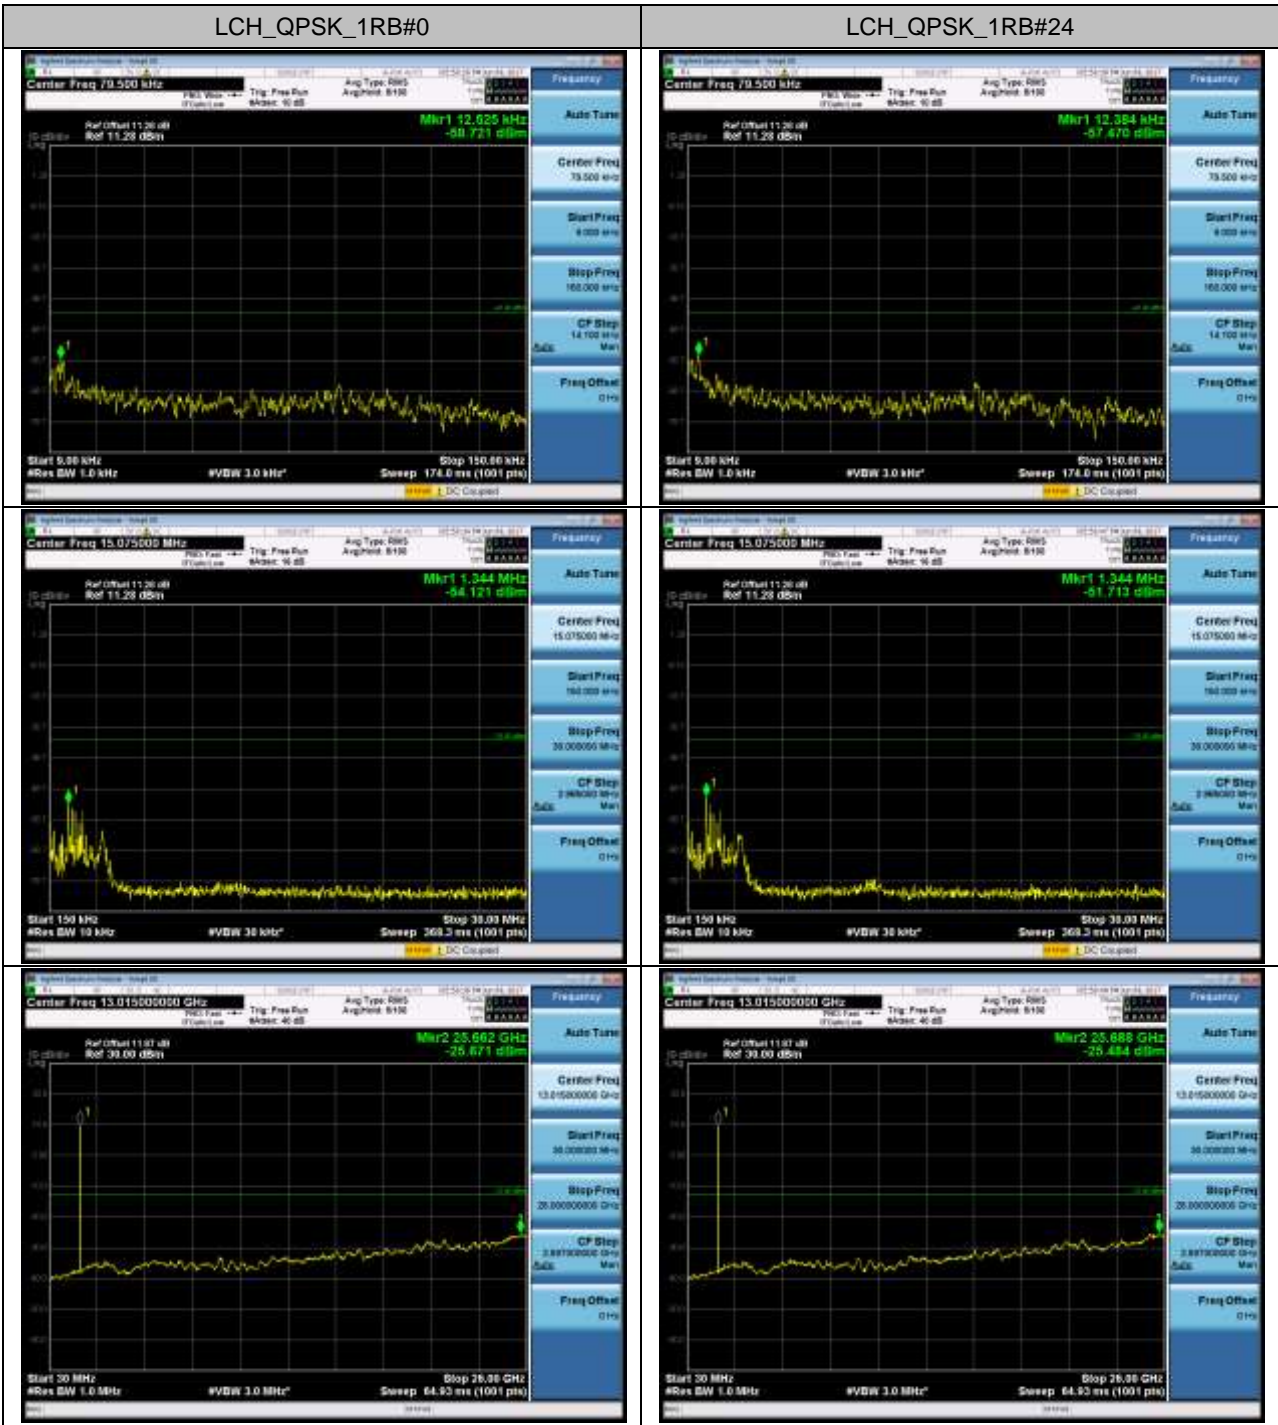


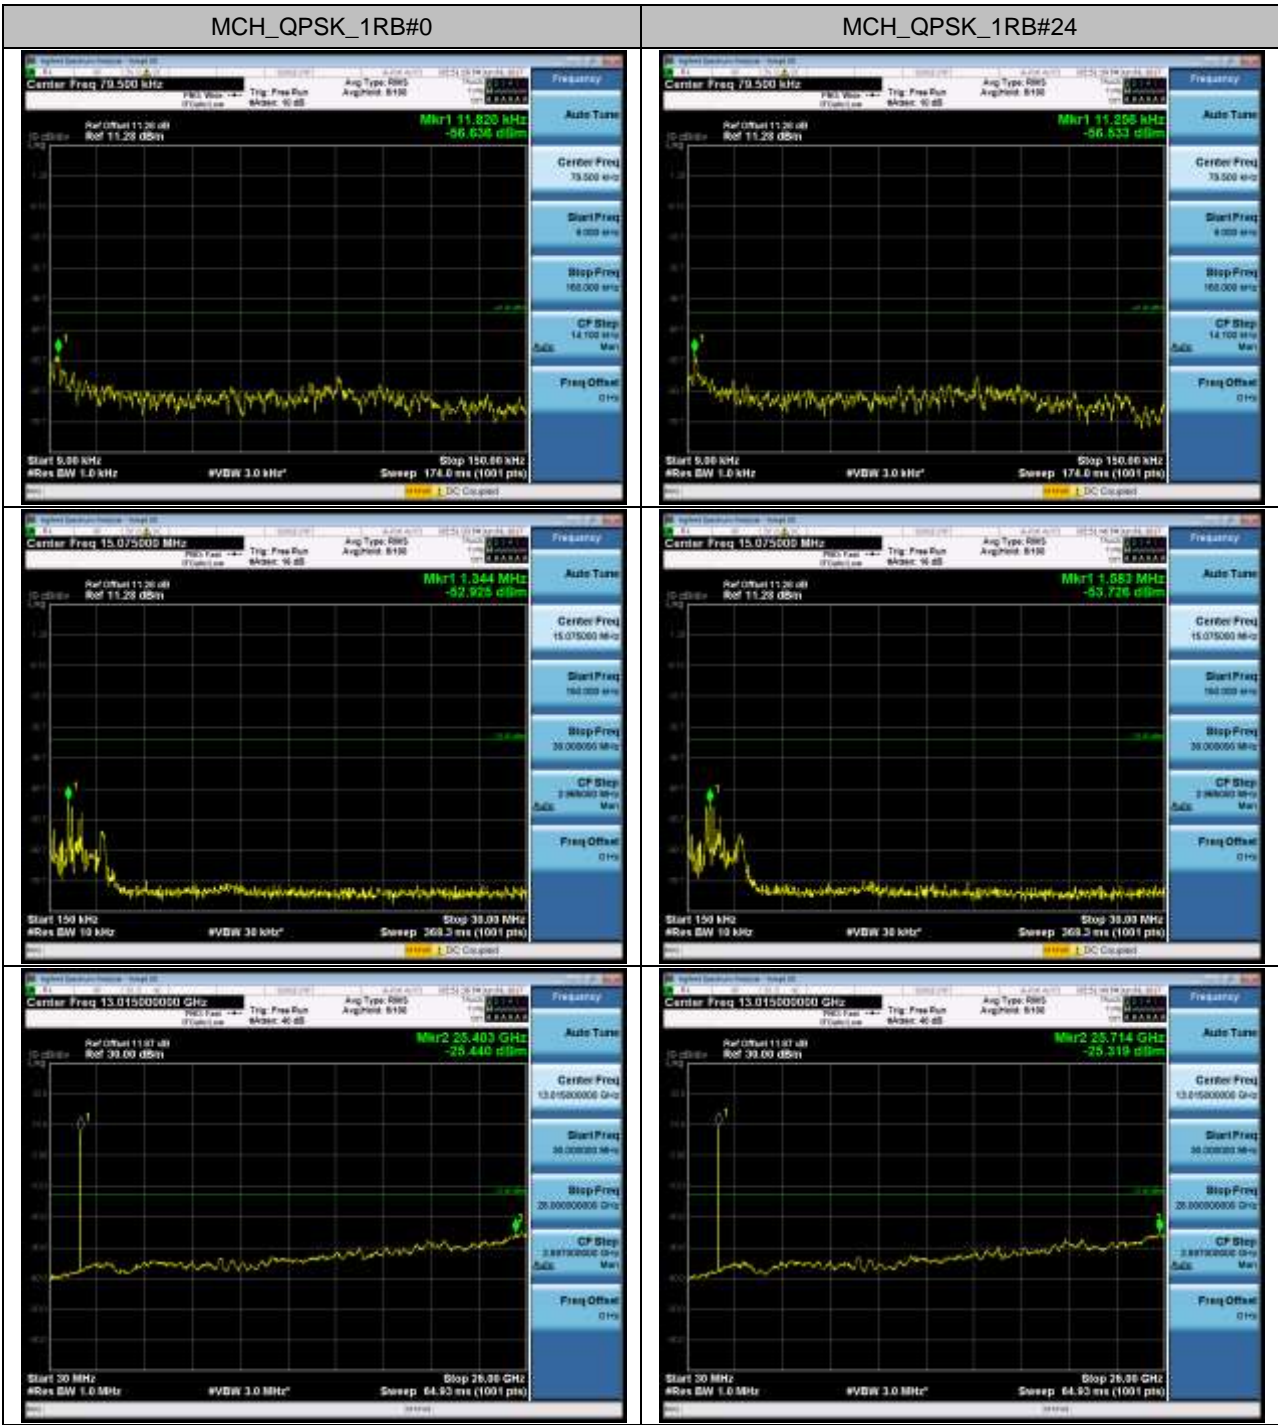

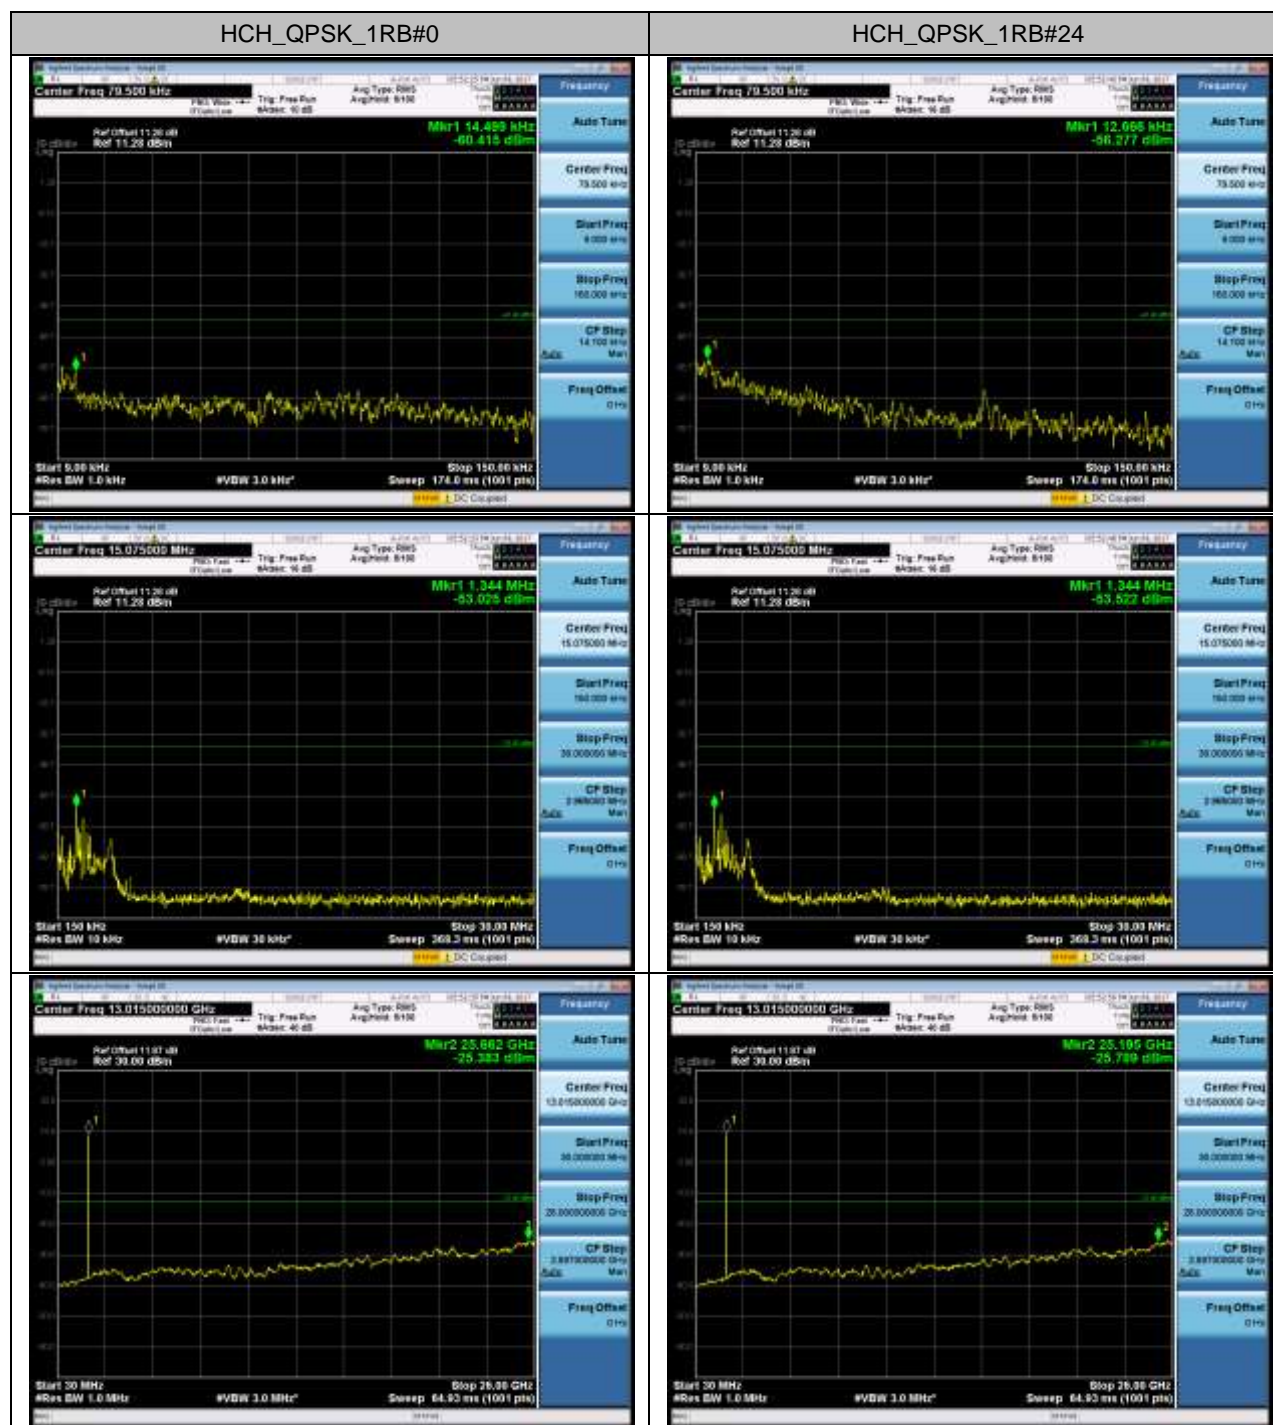


LTE BAND 5

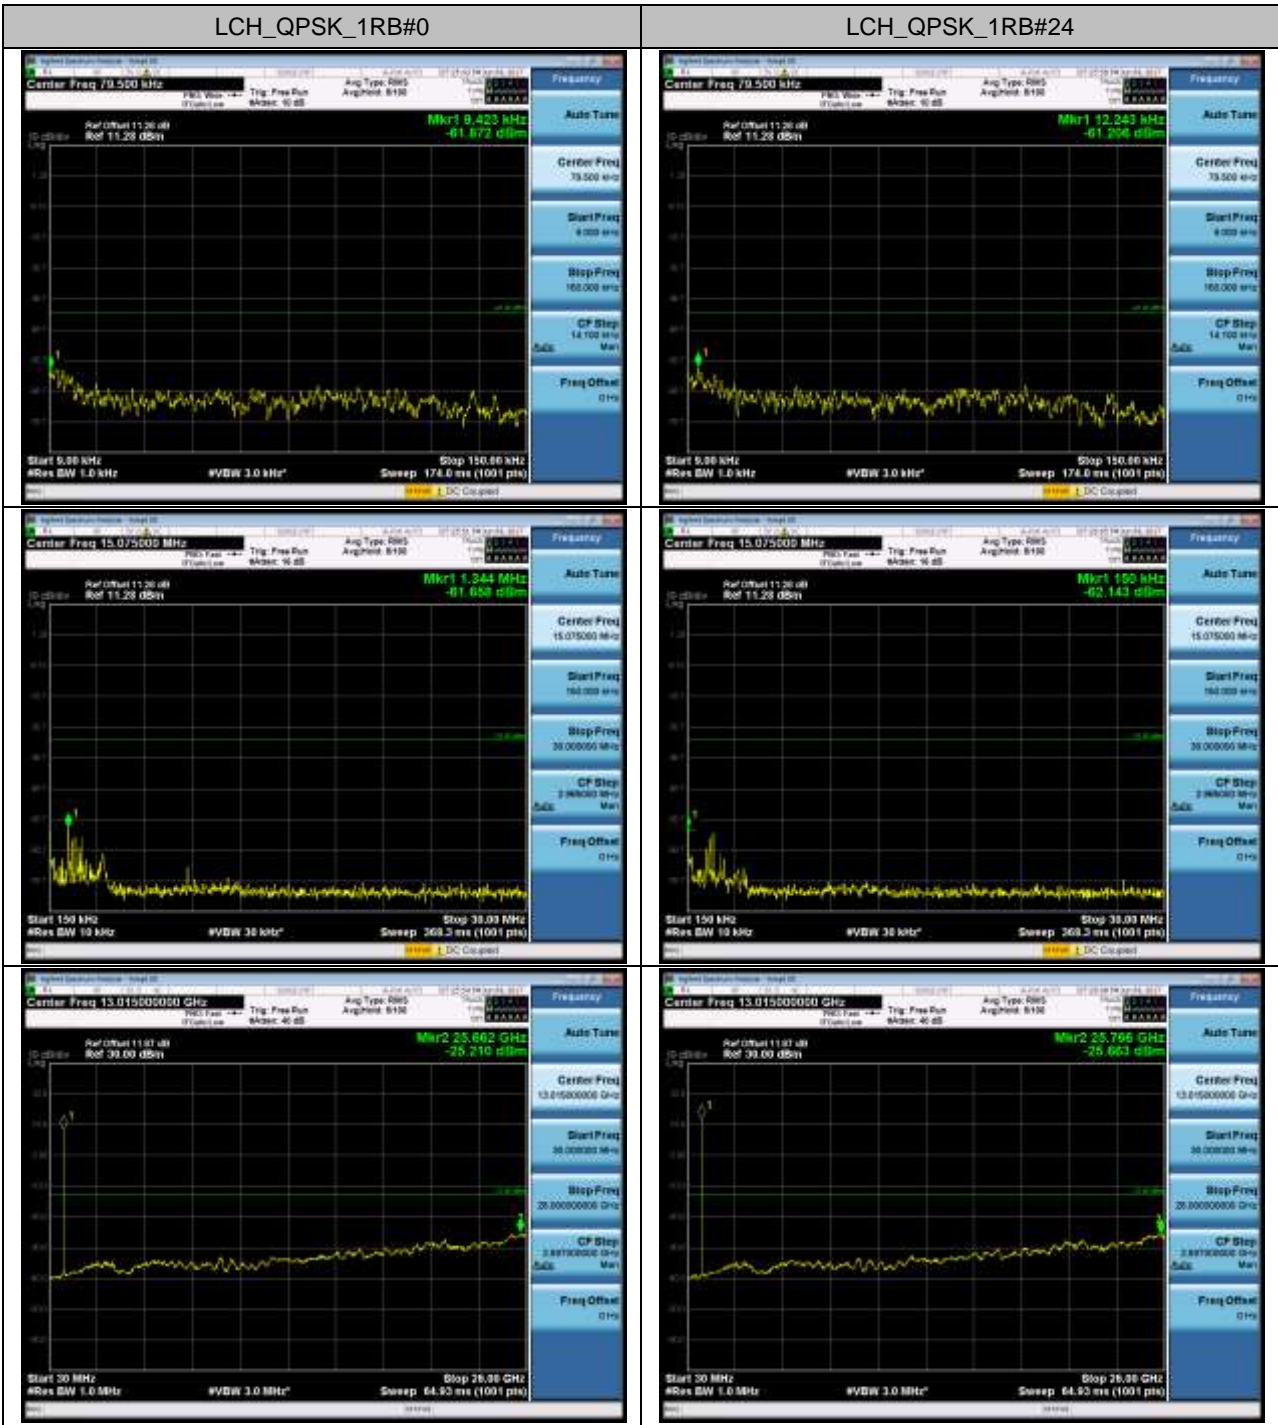


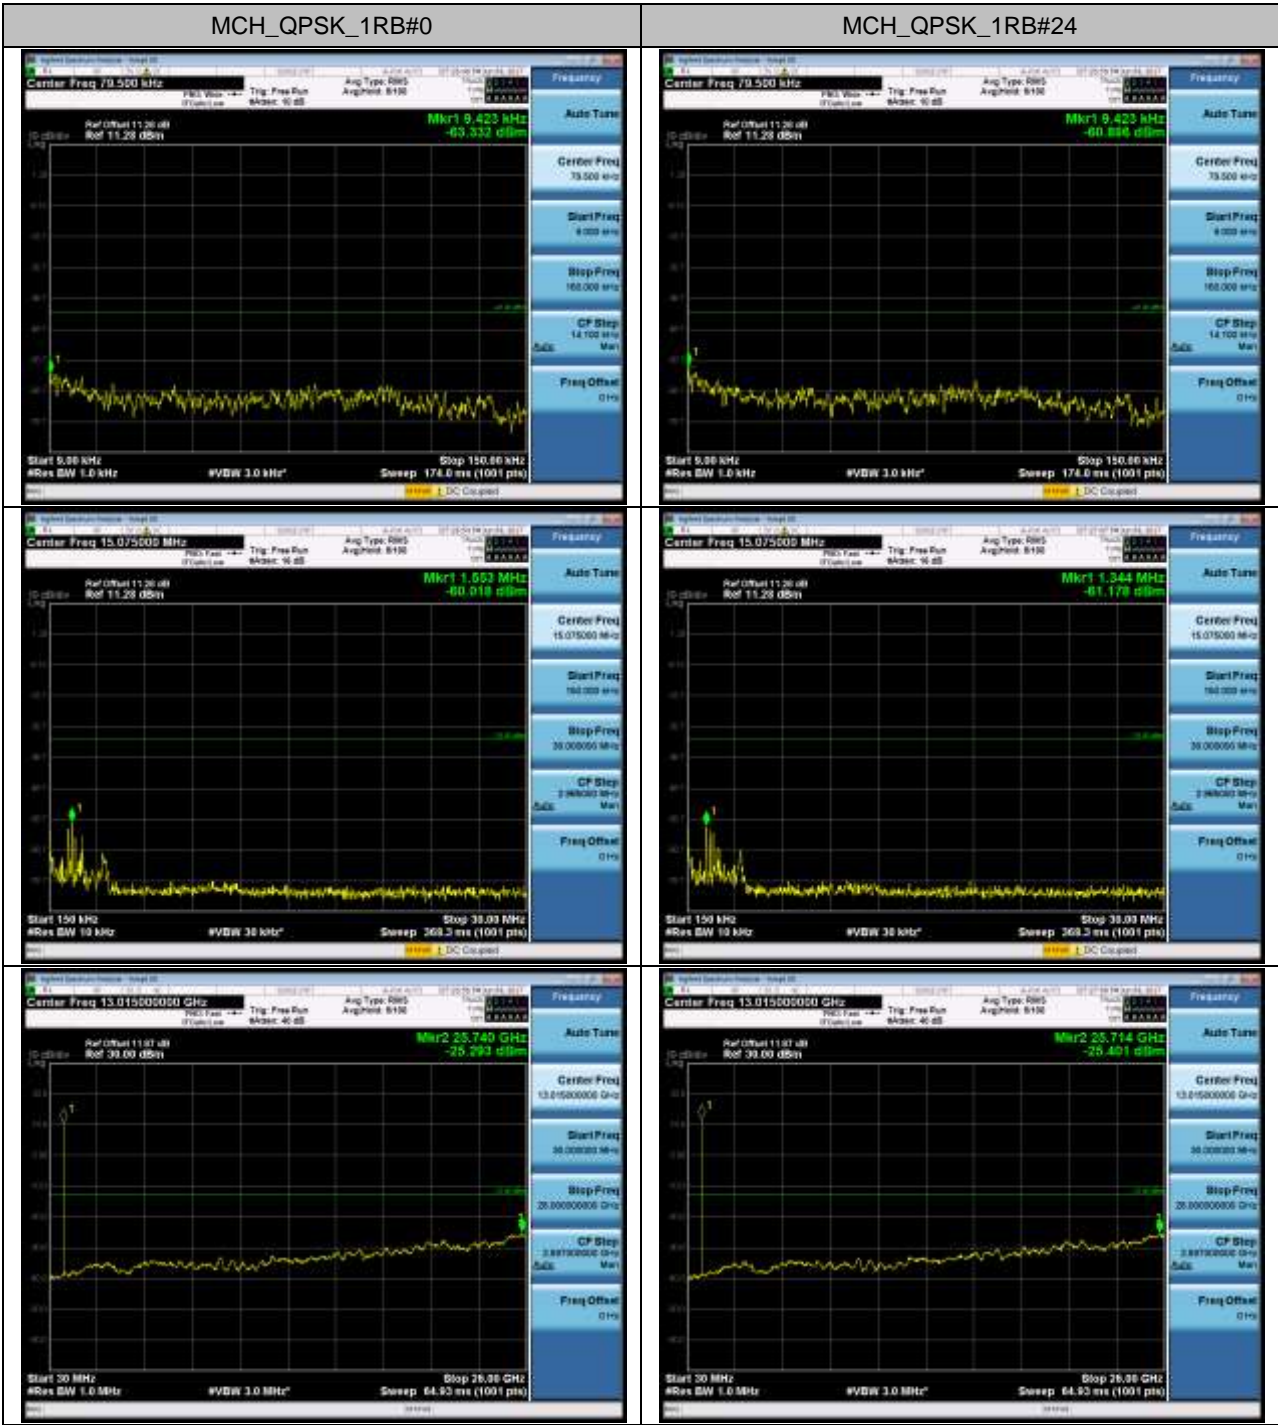




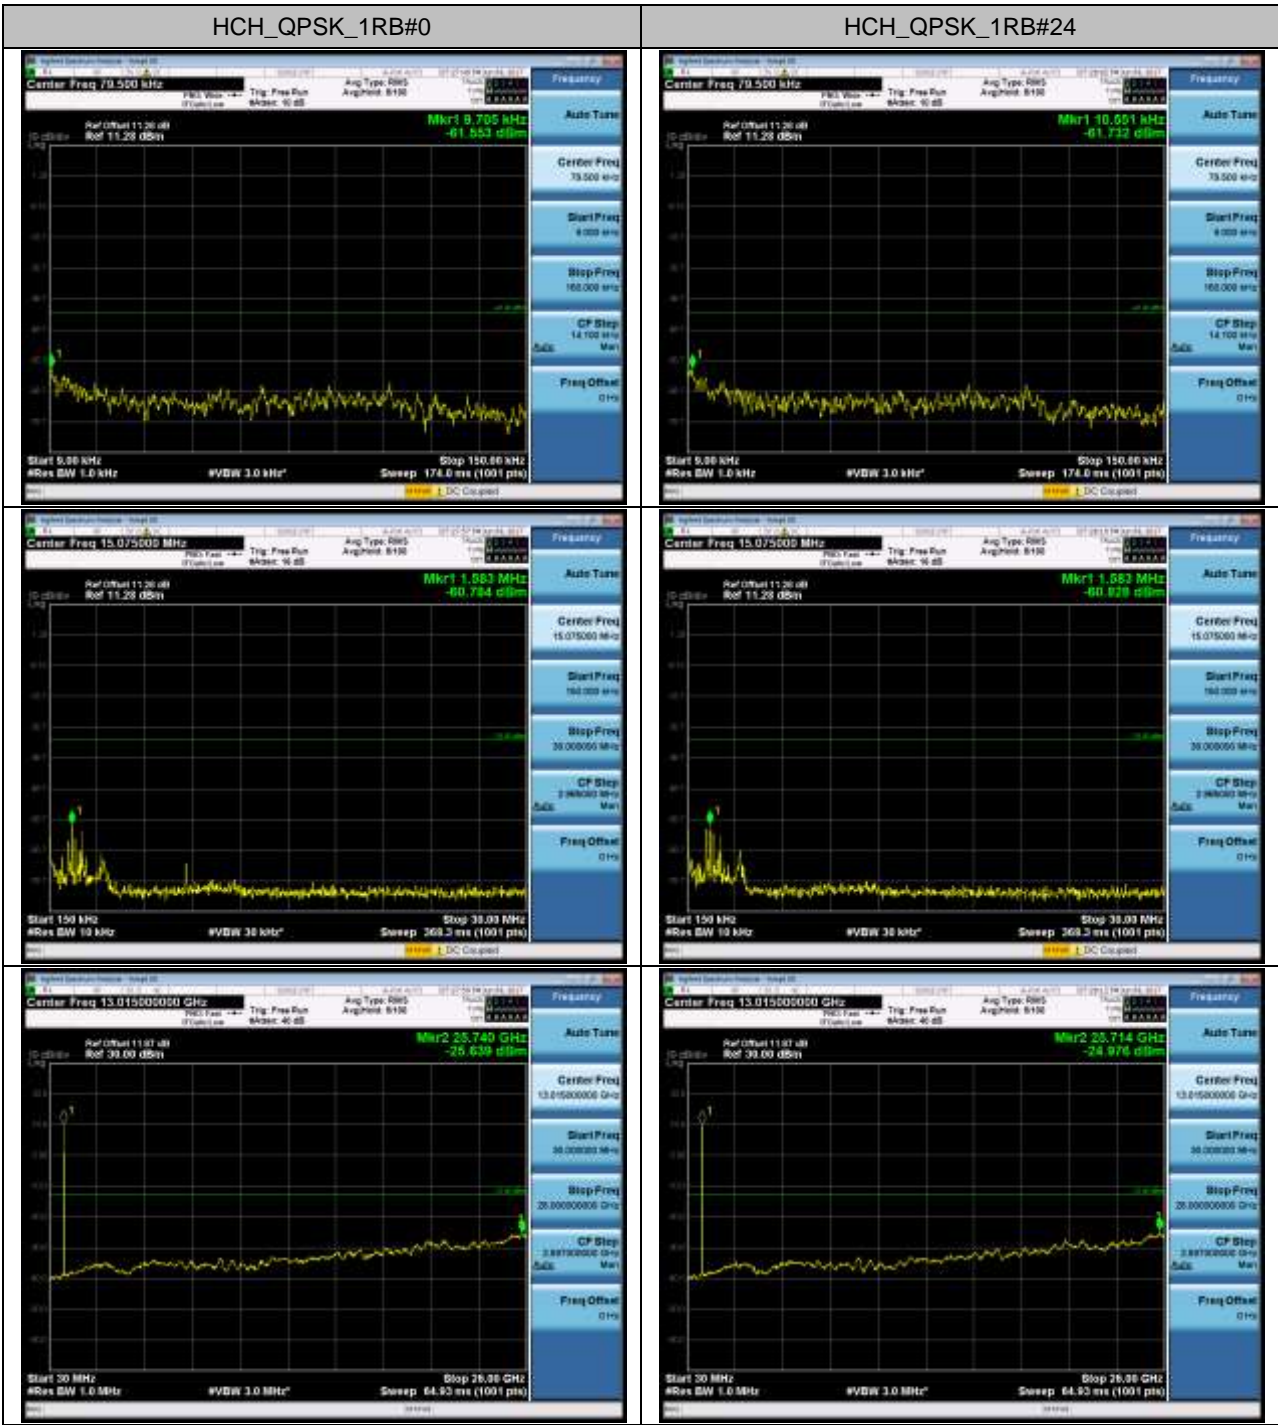


LTE BAND 7

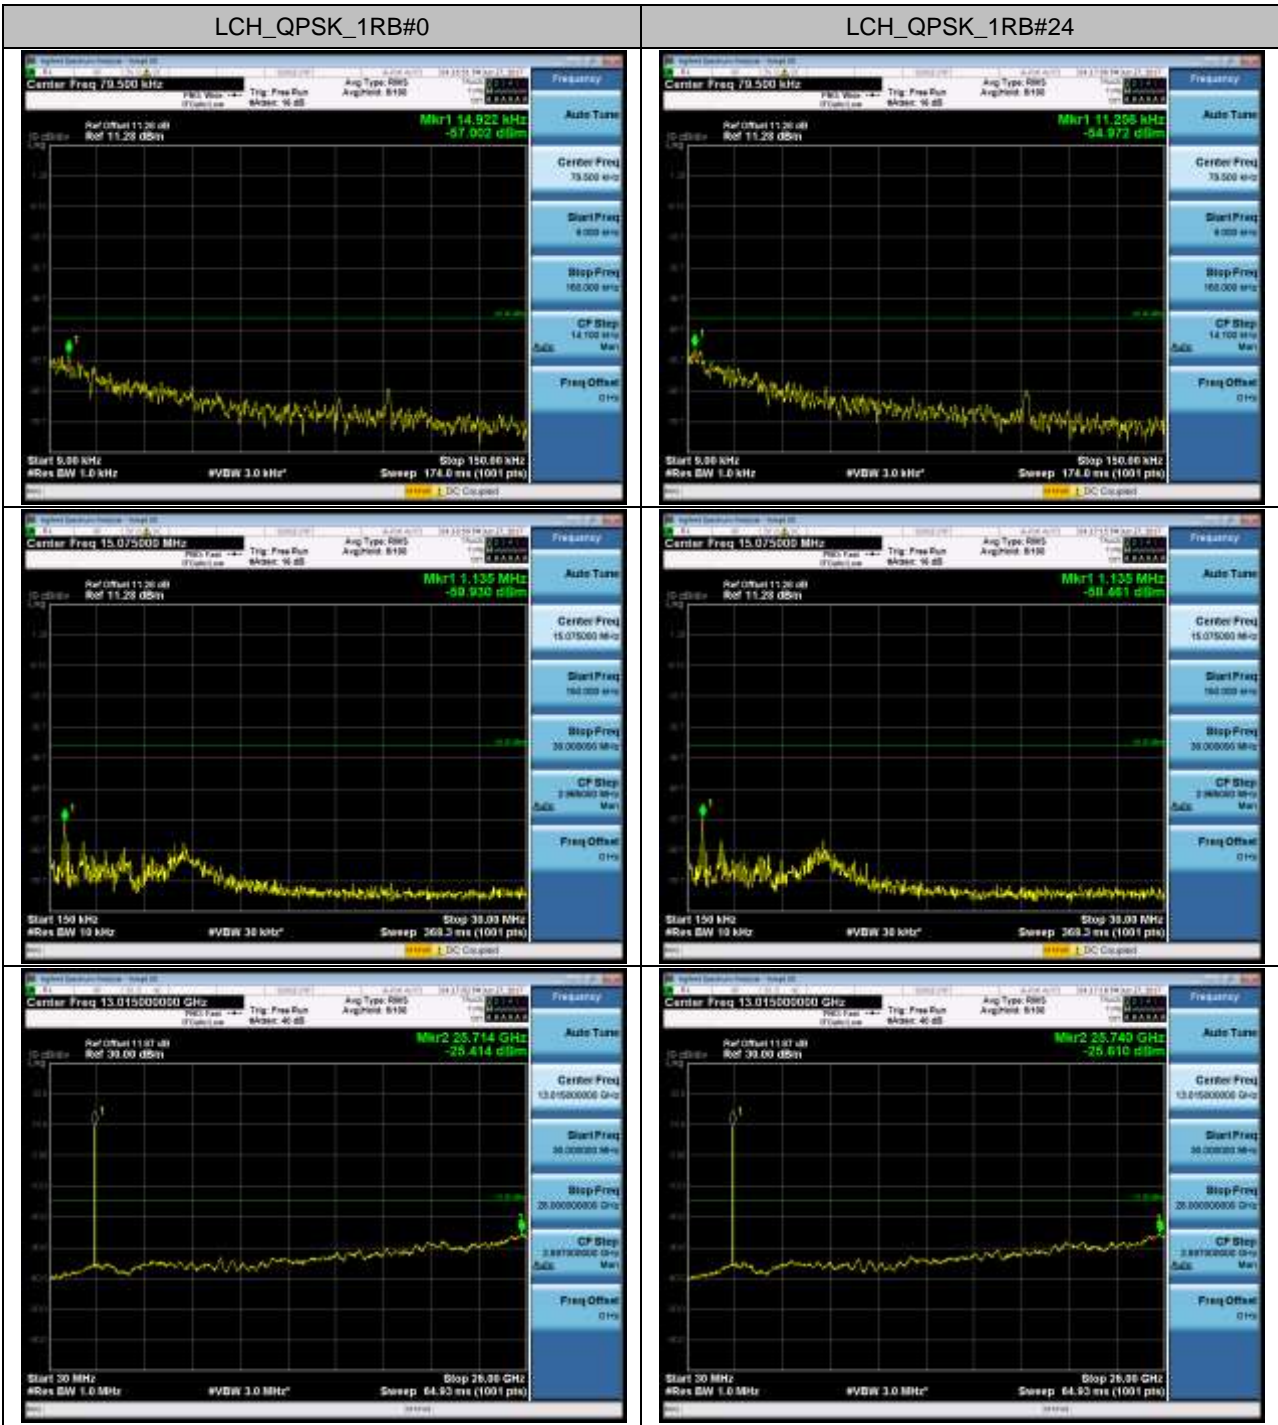

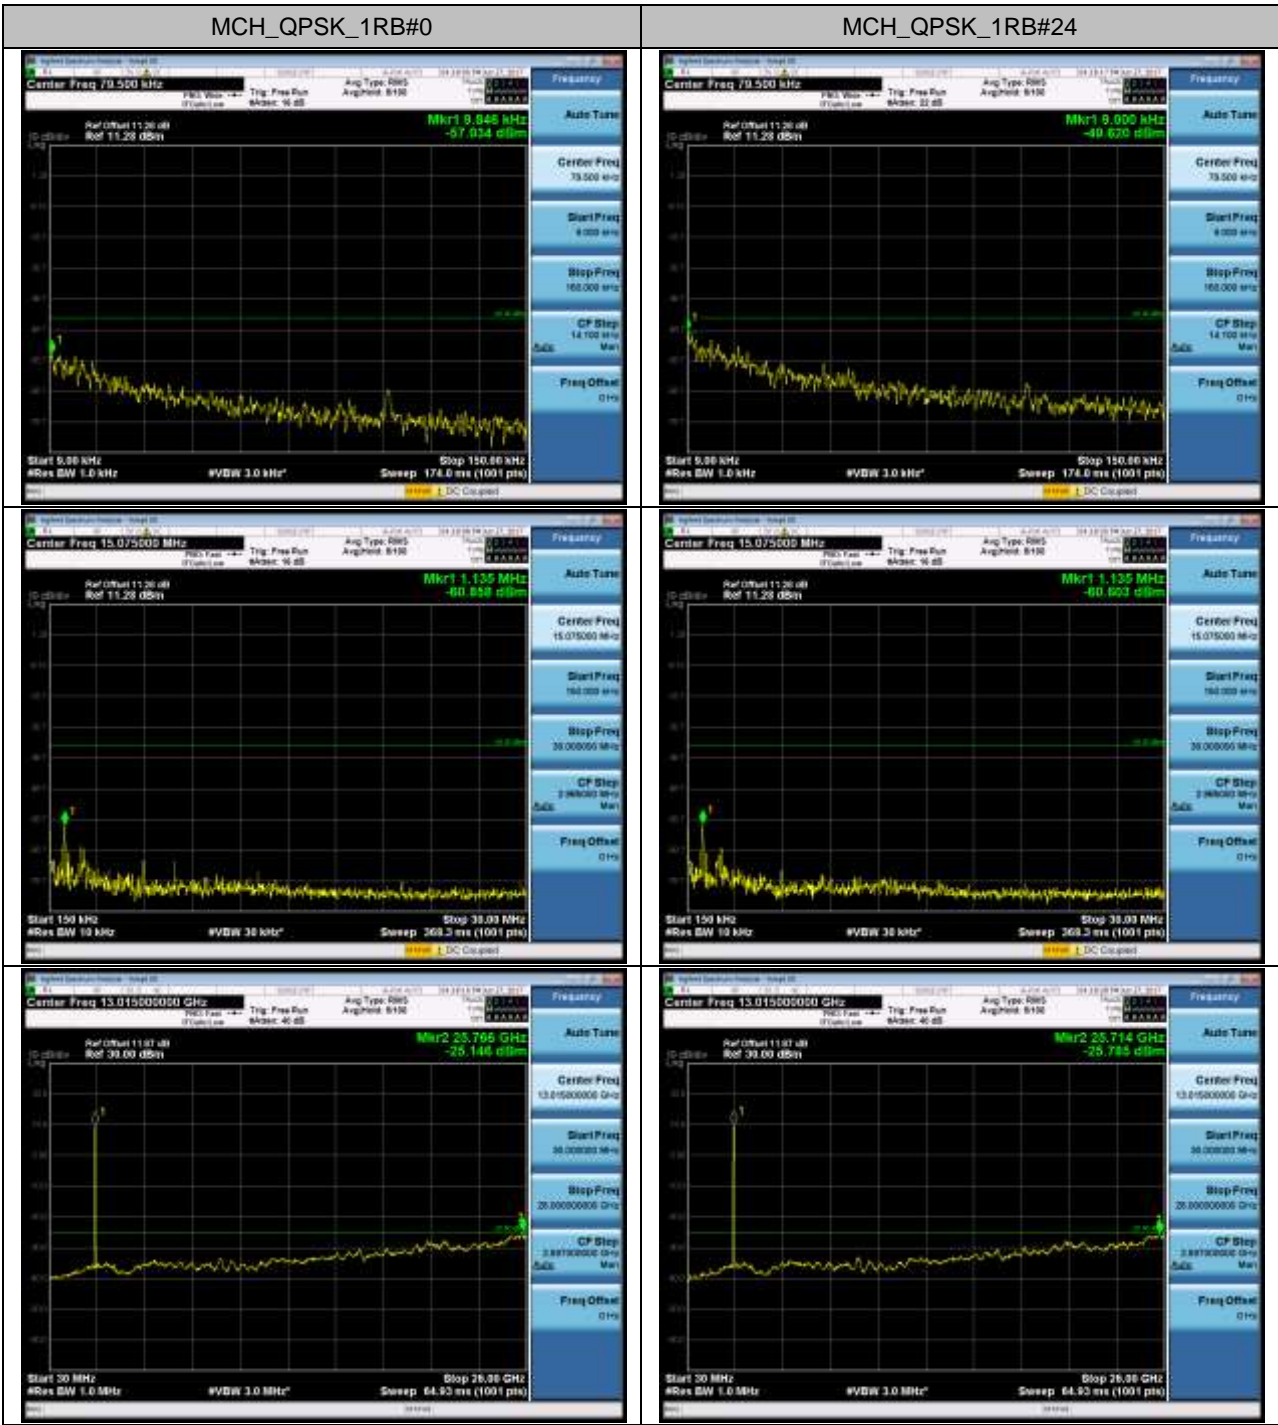



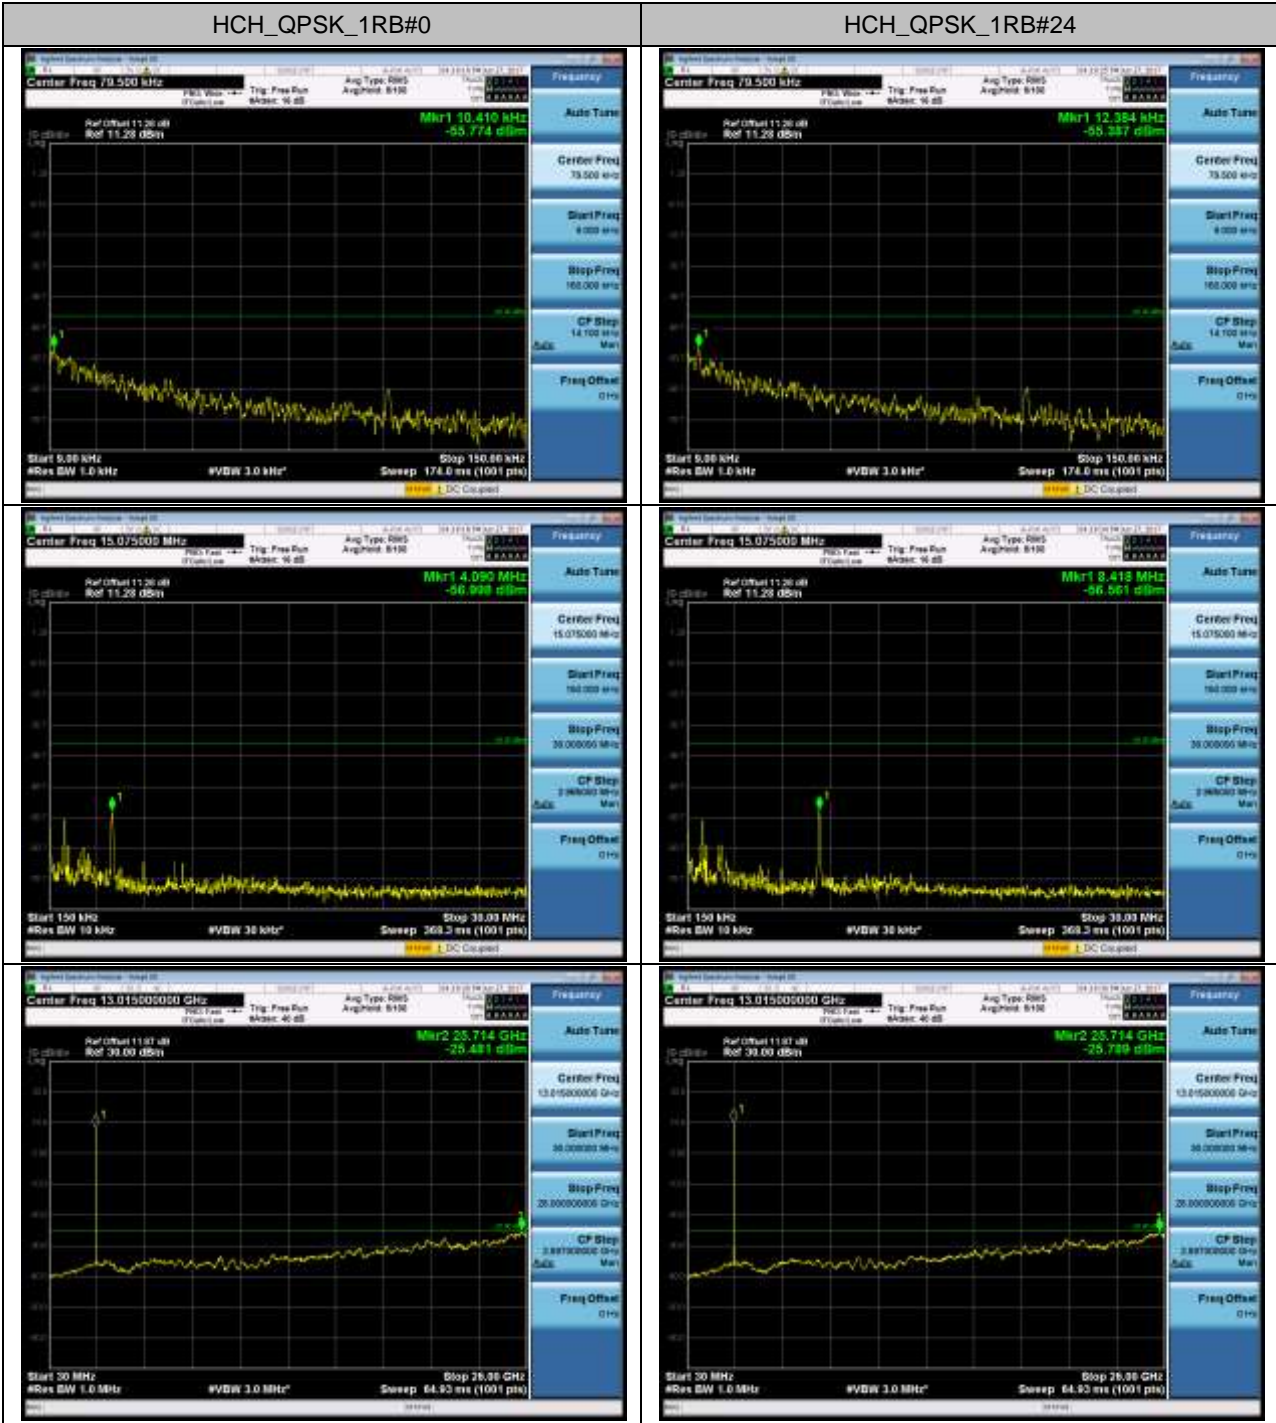

Center Freq 15.075000 MHz

Center Freq 15.075000 MHz

Ref Offset 11.26 dB

Ref 11.28 dBm

Mkr1 4.090 MHz

-56.980 dBm

Auto Tune

Center Freq 15.075000 MHz

Start Freq 100.000 MHz

Stop Freq 30.000000 MHz

CP Stop 3.960000 MHz

Freq Offset 0 Hz

Start 150 kHz

Res BW 10 kHz

VBW 30 kHz

Sweep 269.2 ms (1001 pts)

Stop 30.00 MHz

1 DC Coupled

Center Freq 15.075000 MHz

Center Freq 13.01500000 GHz

Center Freq 13.01500000 GHz

Ref Offset 11.01 dB

Ref 39.00 dBm

Mkr2 25.714 GHz

-25.481 dBm

Auto Tune

Center Freq 13.01500000 GHz

Start Freq 30.000000 MHz

Stop Freq 20.00000000 GHz

CP Stop 3.88700000 GHz

Freq Offset 0 Hz

Start 30 MHz

Res BW 1.0 MHz

VBW 3.0 MHz


Sweep 64.93 ms (1001 pts)

Stop 20.00 GHz

1 DC Coupled

Center Freq 13.01500000 GHz

LTE BAND 17

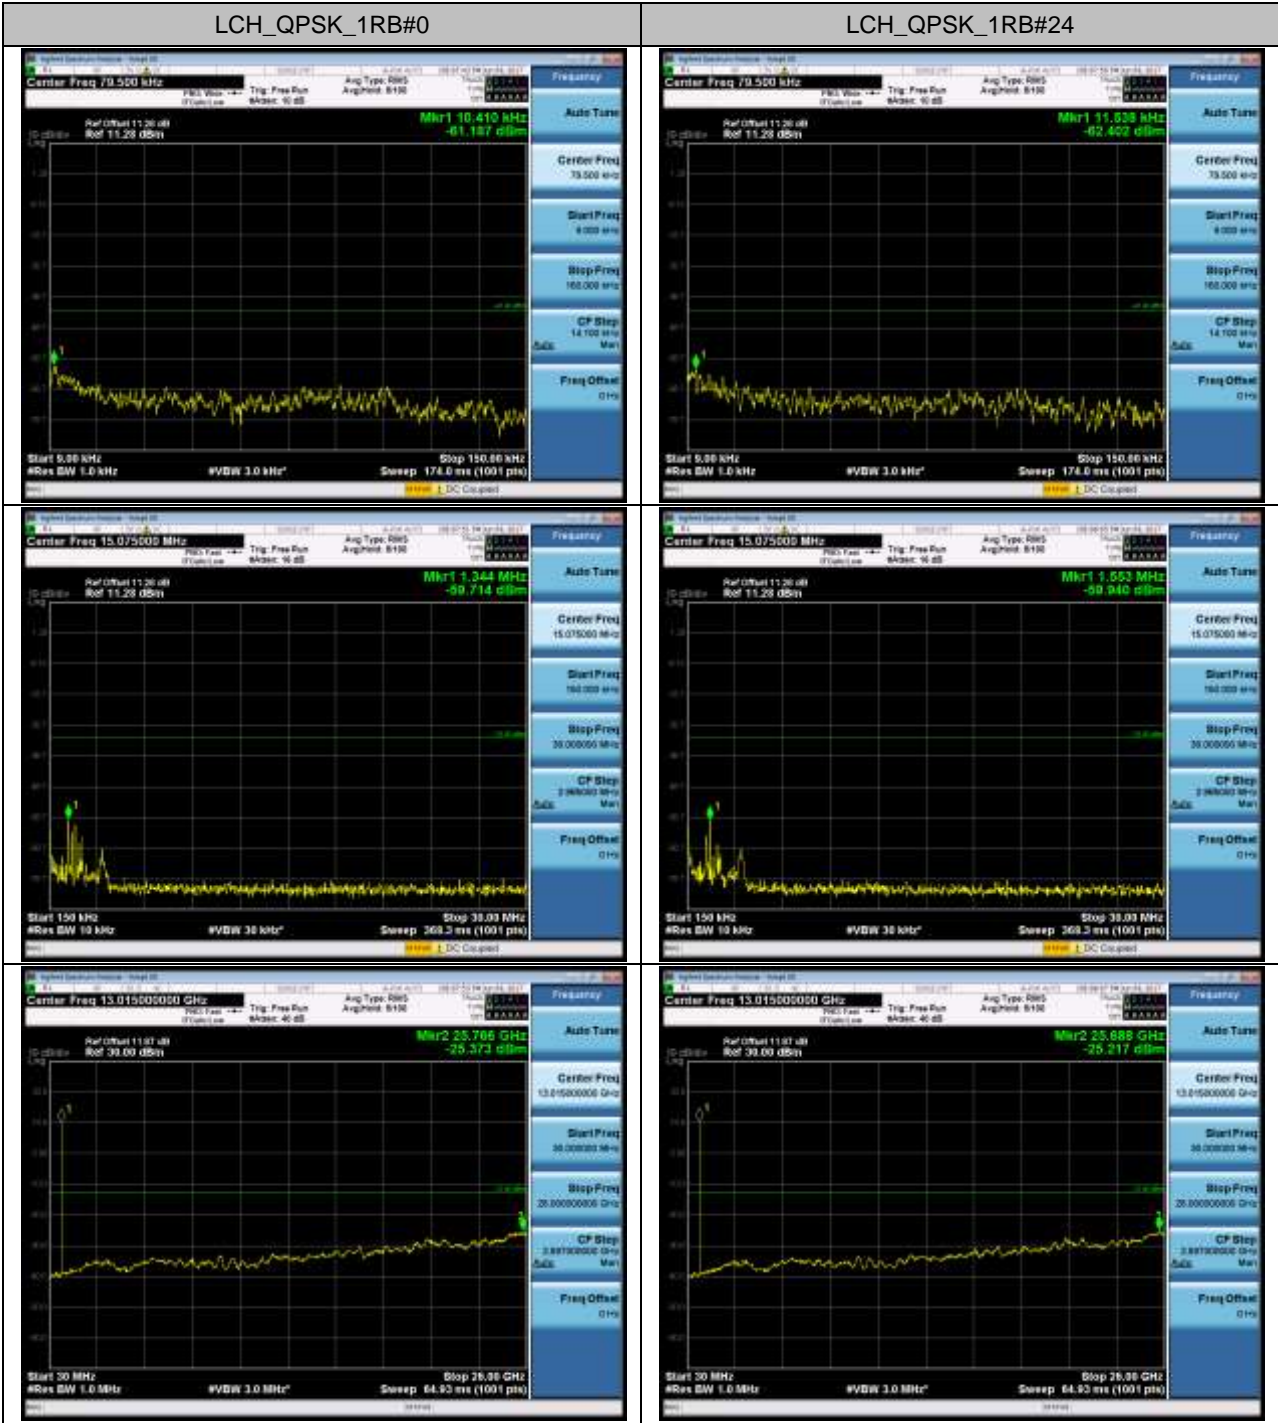

LCH\_QPSK\_1RB#0

Center Freq 15.075000 MHz  
Ref Offset 11.28 dB  
Ref 11.28 dBm  
Mkr1 1.344 MHz  
-39.714 dBm  
Start 150 kHz  
#Res BW 10 kHz  
#VBW 38 kHz  
Sweep 268.2 ms (1001 pts)  
Stop 30.00 MHz

LCH\_QPSK\_1RB#24

LCH\_QPSK\_1RB#0

Center Freq 13.01500000 GHz  
Ref Offset 11.01 dB  
Ref 11.01 dBm  
Mkr2 25.766 GHz  
-25.373 dBm  
Start 30 MHz  
#Res BW 1.0 MHz  
#VBW 3.0 MHz  
Sweep 64.93 ms (1001 pts)  
Stop 26.86 GHz

LCH\_QPSK\_1RB#24

