

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C AND ISED RSS-210 REQUIREMENT

	OF
Applicant:	Honeywell International Inc.
	9680 Old Bailes Road, Fort Mill, SC 29707, USA
Product Name:	Vehicle Mount Computer
Brand Name:	Honeywell
Model No.:	VM1A-L0N
Model Difference:	N/A
Report Number:	ER/2018/90028
FCC ID	HD5-VM1AL0N
IC:	1693B-VM1AL0N
FCC Rule Part	Part 15.225
IC Rule:	RSS-210 issue 9 Annex B B.6 Nov. 2017
Issue Date:	Oct. 05, 2018
Date of Test:	Sep. 12, 2018 ~ Oct. 02, 2018
Date of EUT Received:	Sep. 04, 2018

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.225 and ISED RSS-210.

The test results of this report relate only to the tested sample identified in this report.

Tested By:

Louis Chen / Sr. Engineer

CHUN-, CHIZEH, CH

Approved By:

CHUN-CHIEH CHEN / Asst. Supervisor





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Revision History

Report Number	Revision	Description	Effected Page	Issue Date	Revised By
ER/2018/90028	Rev.00	Initial creation of document	All	Oct. 05, 2018	Elle Chang

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

(新子方分前の) しんぼうち 未住す 初気 くない 見見 ご 同可したい ほぼ 留の人 う 本様 音 未足 や (1) 雪 回 手 つ ・ か う 町 内板 を This document is issued by the Company subject to is General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Table of Contents

1	GENERAL INFORMATION	. 4
2	SYSTEM TEST CONFIGURATION	. 6
3	SUMMARY OF TEST RESULTS	10
4	DESCRIPTION OF TEST MODES	10
5	MEASUREMENT UNCERTAINTY	11
6	CONDUCTED EMISSIONS TEST	12
7	RADIATED TEST ITEMS	15
8	FREQUENCY TOLERANCE	28
9	20 dB & 99% OCCUPIED BANDWIDTH MEASUREMENT	32
10	ANTENNA REQUIREMENT	34

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部分複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exconerate parties to a transaction for exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



GENERAL INFORMATION 1

1.1 Product Description

General:

Product Name:	Vehicle Mount Computer			
Brand Name:	Honeywe	Honeywell		
Model No.:	VM1A-L0	VM1A-L0N		
Model Difference:	N/A	N/A		
Product HW/SW version:	VM1AL0N / 85.00.00-0322			
Radio HW/SW version:	V1.0 / V5.1.1.28U			
	10.8Vdc from Rechargeable Li-ion Battery or 15Vdc from A Adapter.			
Power Supply:	Battery:	Model No.: 163176-0001 Rev C / OVT310L1R00 C, Supplier: TOTEX		
	Adapter:	Model No.: GT-46600-6015-T3, Supplier: GlobTek, Inc.		

NFC:

1			
	Operating Frequency	13.56MHz	
	Transmit Power	123dBuV/m at 3m.	
	Number of Channels	1	
	Antenna Type	Loop Antenna	
	Modulation Type	ASK	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部分複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exconerate parties to a transaction for exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



1.2 Test Methodology

FCC Part 15, Supbpart C §15.225 FCC Part 15, Subpart C §15.225 RSS-210 issue 9 Annex B B.6 Nov. 2017 RSS-Gen. issue 5 Apr. 2018 ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards..

1.3 Test Facility

SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803 (TAF code 0513)

FCC Registration Number and Designation number are: 509634 / TW0001

Canada Registration Number: 4620A-4

1.4 Special Accessories

AC Adapter is used while the test is conducted and there is no other accessory attached. This is the worst case condition.

1.5 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



2 SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. the Tx frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz,. The CISPR Quasi-Peak and Average detector mode is employed according to §15.107. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m above the reference ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



2.4 Limitation

(1) Conducted Emission

According to FCC Part 15.207(a) & RSS-Gen section 8.8 Conducted Emission Limits is as following.

Frequency range		Limits IB (uV)
MHz	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Note	apply at the transition fraguencies	

1. The lower limit shall apply at the transition frequencies

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

⁽²⁾ Radiated Emission

- a. The field strength of any emission within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- b. Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- c. Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- d. The field strength of any emissions appearing outside of the 13.110-14.010 MHz shall not exceed the general radiated emission limits in section 15.209 as below.

Frequency (MHz)	Field strength µV/m	Distance (m)	Field strength at 3m dBµV/m
1.705-30	30	30	69.54
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Remark 1. Emission level in dBuV/m=20 log (uV/m)

- 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
- Distance extrapolation factor = 40 log (required distance/ test distance) (dB);
- 4. The measurement was undertaken in closer distance at 3m, where extrapolation factor is offset to convert the limit of the measurement. Ex.20*log(30)+40*log(30/3) = 69.54dBuV/m
- 5. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of §15.205.
- 6. The general radiated emission limits in §15.209 apply for the spurious emission generate from UE, except for the fundamental emission where the respective section specifies otherwise.

⁽³⁾ Frequency Tolerance

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



2.5 Configuration of Tested System

Fig. 2-1 Emission test set up configuration




Table 2-1 Equipment Used in Tested System

lte m	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	NFC Test software	N/A	N/A	N/A	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms</u> and <u>conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> <u>e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



3 SUMMARY OF TEST RESULTS

FCC Rules	IC Rules	Description Of Test	Result
§15.207	RSS-Gen § 8.8	AC Power Line Conducted Emission	Compliant
§15.225 (a)-(d)	RSS210 Annex B B.6	Radiated Emission	Compliant
§15.209	RSS-Gen § 8.9	Radiated Emission Limits, general requirement	Compliant
§15.225 (e)	RSS-Gen § 8.11	Frequency Stability	Compliant
§2.1049 §15.215 (c)	RSS-Gen § 6.7	20 dB & 99% OCCUPIED BANDWIDTH	Compliant
§15.203	RSS-Gen § 6.8	Antenna Requirement	Compliant

4 DESCRIPTION OF TEST MODES

4.1 The Worst Test Modes and Channel Details

- 1. The EUT stay in continuous transmission mode.
- 2. The frequency 13.56 MHz is the default channel to test, where it is the only manipulative channel as this application supports.
- 3. Only one configuration is supported/applicable as follows.

	RADIATED EMISSION TEST			
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	
NFC	1	1	ASK	
	FREQUENCY STABILITY			
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	
NFC	1 1 AS		ASK	
	20dB BANDWIDTH			
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	
NFC	1	1	ASK	

The field strength of spurious radiation emission was measured as EUT stand-up position (H, E1 mode) and lie down position (E2 mode) for NFC Transmitter for channel the worst case E2 position was reported.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

(新子方分 300) 「し根告認未僅利為(30, (本)) 資 (1) 何可以後31) 僅新留30, (* 本報告末留本(2) 可省 回行 (* 大)) 可加後者。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms</u> and <u>conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SGS Taiwan Ltd.</u> No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan 24803/新北市五股區新北產業園區五工路134號



MEASUREMENT UNCERTAINTY 5

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Frequency Stability	+/- 123.36 Hz
20 dB OCCUPIED BANDWIDTH	+/- 123.36 Hz
Temperature	+/- 0.8 °C
Humidity	+/- 4.7 %
DC / AC Power Source	DC= +/- 1%, AC=+/- 0.2%

Radiated Spurious Emission:

Ļ	9kHz - 30MHz: +/- 2.3dB
Measurement uncertainty	30MHz - 180MHz: +/- 3.37dB
(Polarization : Vertical)	180MHz -417MHz: +/- 3.19dB
	0.417GHz-1GHz: +/- 3.19dB

	9kHz - 30MHz: +/- 2.3dB
Measurement uncertainty	30MHz - 167MHz: +/- 4.22dB
(Polarization : Horizontal)	167MHz -500MHz: +/- 3.44dB
	0.5GHz-1GHz: +/- 3.39dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留卽天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's ole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unalwell and offenders may be prosecuted to the fullest extent of the law.




6 CONDUCTED EMISSIONS TEST

6.1 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Sweep frequency starting from 150 kHz to 30 MHz for phase L1.
- 4. Repeating the measurement as lists above for phase neutral.

6.2 Test SET-UP (Block Diagram of Configuration)

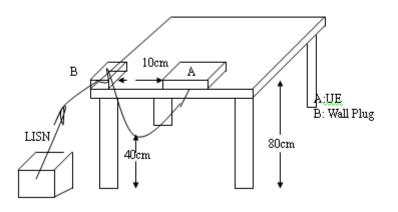

6.3 Measurement Equipment Used:

Conducted Emission Test Site								
EQUIPMENT	MFR	LAST	CAL DUE.					
TYPE		NUMBER	NUMBER	CAL.				
EMI Test Receiver	R&S	ESCI7	100335	02/02/2018	02/01/2019			
LISN	SCHWARZBE CK	NSLK 8127	8127-649	05/18/2018	05/17/2019			

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



6.4 Measurement Result:

AC POWER LINE CONDUCTED EMISSION TEST DATA

	IVIOC		peratio	on moc	le			les	t By:	Jerry	
Lin Mo	nit: FC0 ode: Op	eration	oom 3 Conducti -46600-60			Phase Power		L1 201/60Hz		Temperature: 25 () Humidity: 85 %	e.
_	0.140	03/02/14			Cond	ducted	Emissi	on	1 7440		
	File	:Data		1	Data :#1		Date	2018/10/	t Tim	e: 上午 11:28:20	
	80.0	dBu∀									
	-										
	_					_	-		FCC Class B	Conduction(QP)	
		-								and and a second second	
	114	1	AL-M	Ŵ¥ х	A LOS ALLERS	million	Anna		CC CIONE D C	Conduction(AVG)	
	0.0	1		0.5	ſ	(MHz)		5		30.000	
	0.150		Reading	Correct	Measure-	Notati		5		30.000	
No.	- C C -	Freq.	Reading Level		Measure- ment	(MHz) Limit	Över	5		30.000	
	0.150 Mk.		Reading	Correct		Notati	Over d8	5 Detector	Comment	38.000	
	0.150	Freq.	Reading Level	Correct Factor	ment	Limit			Comment	30.000	
	0.150 Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	ment dBuV	Limit dBuV	dB	Detector	Comment	38.000	
1	0.150 Mk.	Freq. MHz 0.4460	Reading Level dBuV 50.90	Correct Factor dB 0.04	ment dBuV 50.94	Limit dBuV 56,95	d8 -6.01	Detector QP	Comment	30.000	
1	0.150 Mk.	Freq. MHz 0.4460 0.4460	Reading Level dBuV 50.90 39.50	Correct Factor dB 0.04 0.04	ment dBuV 50.94 39.54	Limit dBuV 56.95 46.95	d8 -6.01 -7.41	Detector QP AVG	Comment	30.000	
1 2 3	0.150 Mk.	Freq. MHz 0.4460 0.4460 0.5220	Reading Level dBuV 50.90 39.50 49.30	Correct Factor dB 0.04 0.04 0.04	ment dBuV 50.94 39.54 49.34	Limit dBuV 56.95 46.95 56.00	dB -6.01 -7.41 -6.66	Detector QP AVG QP	Comment	30.000	
1 2 3 4 5	0.150 Mk.	Freq. MHz 0.4460 0.4460 0.5220 0.5220 0.6220	Reading Level dBuV 50.90 39.50 49.30 34.00 48.50	Correct Factor dB 0.04 0.04 0.04 0.04 0.04	ment dBuV 50.94 39.54 49.34 34.04 48.54	Limit dBuV 56.95 46.95 56.00 46.00 56.00	d8 -6.01 -7.41 -6.66 -11.96 -7.46	Detector QP AVG QP AVG QP	Comment	38.000	
1 2 3 4 5 6	0.150 Mk.	Freq. MHz 0.4460 0.5220 0.5220 0.6220 0.6220	Reading Level dBuV 50.90 39.50 49.30 34.00 48.50 37.10	Correct Factor dB 0.04 0.04 0.04 0.04 0.04 0.04	ment dBuV 50.94 39.54 49.34 34.04 48.54 37.14	Limit dBuV 56.95 46.95 56.00 46.00 56.00 46.00	dB -6.01 -7.41 -6.66 -11.96 -7.46 -8.86	Detector QP AVG QP AVG QP AVG	Comment	38.000	
1 2 3 4 5 6 7	0.150 Mk.	Freq. MHz 0.4460 0.5220 0.5220 0.6220 0.6220 0.6220 0.7740	Reading Level dBuV 50.90 39.50 49.30 34.00 48.50 37.10 47.50	Correct Factor dB 0.04 0.04 0.04 0.04 0.04 0.04 0.04	ment dBuV 50.94 39.54 49.34 34.04 48.54 37.14 47.55	Limit dBuV 56.95 46.95 56.00 46.00 56.00 46.00 56.00	d8 -6.01 -7.41 -6.66 -11.96 -7.46 -8.86 -8.45	Detector QP AVG QP AVG QP AVG QP	Comment	30.000	
1 2 3 4 5 6 7 8	0.150 Mk.	Freq. MHz 0.4460 0.5220 0.5220 0.6220 0.6220 0.6220 0.7740	Reading Level dBuV 50.90 39.50 49.30 34.00 48.50 37.10 47.50 36.10	Correct Factor dB 0.04 0.04 0.04 0.04 0.04 0.04 0.05 0.05	ment dBuV 50.94 39.54 49.34 34.04 48.54 37.14 47.55 36.15	Limit dBuV 56.95 46.95 56.00 46.00 56.00 46.00 56.00 46.00	d8 -6.01 -7.41 -6.66 -11.96 -7.46 -8.86 -8.45 -9.85	Detector QP AVG QP AVG QP AVG QP AVG	Comment	30.000	
1 2 3 4 5 6 7 8 9	0.150 Mk.	Freq. MHz 0.4460 0.5220 0.5220 0.6220 0.6220 0.6220 0.7740 1.9860	Reading Level dBuV 50.90 39.50 49.30 34.00 48.50 37.10 47.50 36.10 46.80	Correct Factor dB 0.04 0.04 0.04 0.04 0.04 0.04 0.04 0.0	ment dBuV 50.94 39.54 49.34 34.04 48.54 37.14 47.55 36.15 46.86	Limit dBuV 56.95 46.95 56.00 46.00 56.00 46.00 56.00 46.00 56.00	d8 -6.01 -7.41 -6.66 -11.96 -7.46 -8.86 -8.85 -9.85 -9.85 -9.14	Detector QP AVG QP AVG QP AVG QP AVG QP	Comment	30.000	
1 2 3 4 5 6 7 8 9 10	0.150 Mk.	Freq. MHz 0.4460 0.5220 0.5220 0.6220 0.6220 0.6220 0.7740 0.7740 1.9860 1.9860	Reading Level dBuV 50.90 39.50 49.30 34.00 48.50 37.10 47.50 36.10 46.80 37.20	Correct Factor dB 0.04 0.04 0.04 0.04 0.04 0.04 0.04 0.0	ment dBuV 50.94 39.54 49.34 34.04 48.54 37.14 47.55 36.15 46.86 37.26	Limit dBuV 56.95 46.95 56.00 46.00 56.00 46.00 56.00 46.00 56.00 46.00	d8 -6.01 -7.41 -6.66 -11.96 -7.46 -8.86 -8.86 -8.45 -9.85 -9.14 -8.74	Detector QP AVG QP AVG QP AVG QP AVG QP AVG	Comment	30.000	
1 2 3 4 5 6 7 8 9	0.150 Mk.	Freq. MHz 0.4460 0.5220 0.5220 0.6220 0.6220 0.6220 0.7740 1.9860	Reading Level dBuV 50.90 39.50 49.30 34.00 48.50 37.10 47.50 36.10 46.80	Correct Factor dB 0.04 0.04 0.04 0.04 0.04 0.04 0.04 0.0	ment dBuV 50.94 39.54 49.34 34.04 48.54 37.14 47.55 36.15 46.86	Limit dBuV 56.95 46.95 56.00 46.00 56.00 46.00 56.00 46.00 56.00	d8 -6.01 -7.41 -6.66 -11.96 -7.46 -8.86 -8.85 -9.85 -9.85 -9.14	Detector QP AVG QP AVG QP AVG QP AVG QP	Comment	30.000	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



10

11

12

1.9860

2,7140

2.7140

37.20

45.80

38.00

0.06

0.09

0.09

37.26

45.89

38.09

46.00

56.00

46.00

-8.74

-10.11

-7.91

AVG

QP

AVG

Temperature: 25 0 Site Conduction Room Phase: L1 AC 120V/60Hz Limit: FCC Class B Conduction(QP) Power: Humidity: 85 % Mode: Operation Note: Adapter: GT-46600-6015-T3 Conducted Emission Date: 2018/10/1 File :Data Data #1 Time: 上午 11:28:20 80.0 dBuV FCC Class B Conduction(OP) Marin Marina FCC Class 8 Co AVG 0.0 0.150 30.000 0.5 (MHz) 5 Reading Correct Measure-Limit Over No. Mk. Freq. Level Factor ment dBuV dB dBuV dBuV dB MHz Detector Comment 1 . 0.4460 50.90 0.04 50.94 56.95 -6.01 OP 2 0.4460 39.50 0.04 39.54 46.95 -7,41 AVG 3 0.5220 49.30 0.04 49.34 56.00 -6.66 QP 4 0.5220 34.00 0.04 34.04 46.00 -11.96 AVG 5 0.6220 56.00 QP 48.50 0.04 48.54 -7.46 6 0.6220 37.10 0.04 37.14 46.00 -8.86 AVG 7 0.7740 47.50 0.05 47.55 56.00 -8.45 QP 8 0.7740 36.10 0.05 36.15 46.00 -9.85 AVG 9 1.9860 56.00 QP 46.80 0.06 46.86 -9.14

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




7 RADIATED TEST ITEMS

7.1 Measurement Procedure


- 1. Configure the EUT according to ANSI C63.10.
- 2. The EUT was placed on a turn table which is 0.8m above ground plane and been measured in the frequency range between 0.009MHz to 30MHz and 30MHz to 1GHz.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7. Repeat above procedures until all default test channel measured were complete.

7.2 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

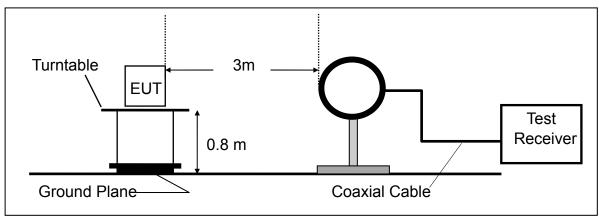

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

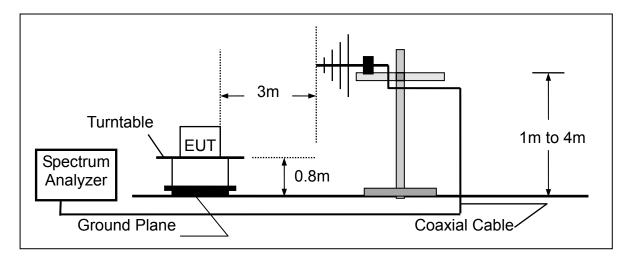

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. [No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



7.3 Measurement Equipment Used:

	SGS 966 Chamber No.C								
Name of Equipment	Manufacturer	Manufacturer Model Serial Number		Calibration Date	Calibration Due				
Bi-log Antenna	SCHWAZBEC K	VULB9168	378	12/29/2017	12/28/2018				
Loop Antenna	ETS.LINDGR EN	6502	148045	09/25/2018	09/24/2019				
3m Site NSA	SGS	966 chamber	N/A	01/02/2018	01/01/2019				
Spectrum Analyzer	Agilent	E4446A	MY51100003	05/15/2018	05/14/2019				
EMI Test Receiver	R&S	ESCI7	100335	02/02/2018	02/01/2019				
Pre-Amplifier	HP	8447D	2944A07676	01/02/2018	01/01/2019				
Low Loss Cable	Huber Suhner	966_RX	9	01/02/2018	01/01/2019				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部分複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exconerate parties to a transaction for exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



7.4 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

7.5 Field Strength of Fundamental Emission

7.5.1 FCC Applicable standard

Rules and specifiactions	CFR 47 Part 15 section 15.225(a)-(d)				
Frequency of Emission	Field Strength	Field Strength	Field Strength		
(MHz)	(µV/m)at 30m	(dBµV/m)at 30m	(dBµV/m)at 3m		
1.705~13.110	30	29.5	69.5		
13.110~13.410	106	40.5	80.5		
13.410~13.553	334	50.5	90.47		
13.553~13.567	15848	84	124		
13.567~13.710	334	50.5	90.47		
13.710~14.010	106	40.5	80.5		
14.010~30.00	30	29.5	69.5		

Field strength of fundamental emissions limit:

The field strength of fundamental emissions shall not exceed 15848 micorvolts/meter at 30 meters. The Limit is converted to 124.00dBuV/m by offsetting the distance extrapolation factor as measurement distance is taken place at 3 meters.

Distance extrapolation = $40 \times \log(30/3) = 40 \text{ dB}$

30m to 3m

Distance extrapolation = 40 *log (30/3) = 40 dB Limit is re-adjusted in terms of limit taken in 3m = 20 *log (15848 uV/m) + 40 = 124.00dBuV/m

30m to 10m

Distance extrapolation = 40 *log (30/10) = 19.08 dB Limit is re-adjusted in terms of limit taken in 3m = 20 *log (15848 uV/m) + 19.08 = 103.08dBuV/m

10m to 3m

Distance extrapolation = 40 *log (10/3) = 20.92 dB Limit is re-adjusted in terms of limit taken in 3m = 20 *log (15848 uV/m) + 20.92 = 104.92dBuV/m

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. [No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新t市五股區新北產業園區五工路134號



7.5.2 ISED Applicable standard

Radiated Mask for RSS 210 Annex B B6

- (a) 15.848 millivolts/m (84 dB μ V/m) at 30 m, within the band 13.553-13.567 MHz.
- (b) 334 microvolts/m (50.5 dBµV/m) at 30 m, within the bands 13.410-13.553 MHz and 13.567-13.710 MHz.
- (c) 106 microvolts/m (40.5 dB μ V/m) at 30 m, within the bands 13.110-13.410 MHz and 13.710-14.010 MHz.
- (d) RSS-Gen general field strength limits for frequencies outside the band 13.110-14.010 MHz.

Distance extrapolation = 40 *log (30/3) = 40 dB

Limit is re-adjusted in terms of limit taken in 3m for the following frequency segment of the interest:

- a) 20 *log (15848uV/m) + 40dB = 124.00dBuV/m
- b) 20 *log(334uV/m) + 40dB = 90.47dBuV/m
- c) 20*log(106uV/m) + 40dB = 80.50dBuV/m

Note:

- 1. Emission level in dBuV/m=20 log (μ V/m)
- 2. Distance extrapolation factor = 40 log (required distance/ test distance) (dB)
- 3. The lower limit shall apply at the transition frequencies.
- 4. The measurement was undertaken in closer distance below 30MHz at 10m and 3m and above 30MHz at 3m, where extrapolation factor is offset to convert the limit of the measurement.
- 5. KDB 414788 D01 OATS and 3m semi-anechoic chamber Justification: Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. OATS and 3m SAC chamber testing had been performed and 3m SAC measured test result is the worst case test result.
- 6. Emission level in dBuV/m=20 log (µV/m)
- 7. Distance extrapolation factor = 40 log (required distance/ test distance) (dB)
- 8. The lower limit shall apply at the transition frequencies.
- 9. The measurement was undertaken in closer distance at 3m, where extrapolation factor is offset to convert the limit of the measurement.

Actual FS(dB μ V/m) = Spectrum. Reading level(dB μ V) + Factor(dB) Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. [No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新 th 节 五 股 區 新 北 產 業 園 區 五 工 路 134號



7.6 Field Strength of Fundamental Emission Measurement Result

Operation Band	:NFC	Test Date	:2018-10-02
Fundamental Frequency	:13.56 MHz	Temp./Humi.	:21 deg_C / 62 RH
Operation Mode	:MAIN	Engineer	:Wei
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

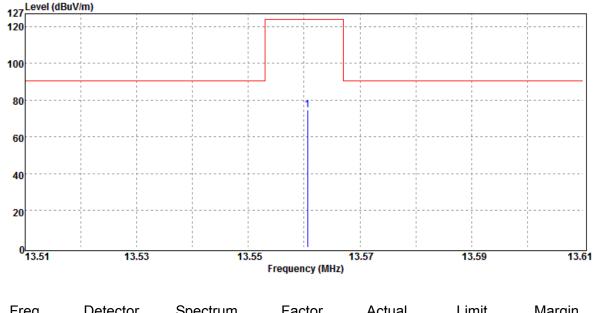

⊢req.	Detector	Spectrum	Factor	Actual	Limit	wargin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	
13.56	Peak	62.99	11.52	74.51	123.90	-49.39	


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms</u> and <u>conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> <u>e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Operation Band	:NFC	Test Date	:2018-10-02
Fundamental Frequency	:13.56 MHz	Temp./Humi.	:21 deg C / 62 RH
Operation Mode	:MAIN	Engineer	:Wei
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	

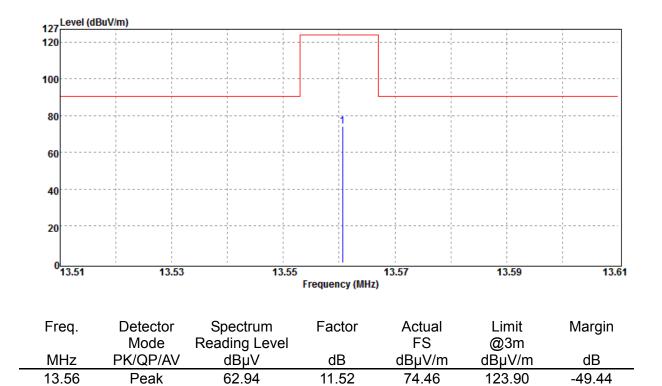

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms</u> and <u>conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> <u>e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



7.6.1 Radiated Mask

Operation Band:NFCFundamental Frequency:13.56 MHzOperation Mode:MASKEUT Pol.:E2 Plane

Test Date:2018-10-02Temp./Humi.:21 deg_C / 62 RHEngineer:WeiMeasurement Antenna Pol.:VERTICAL

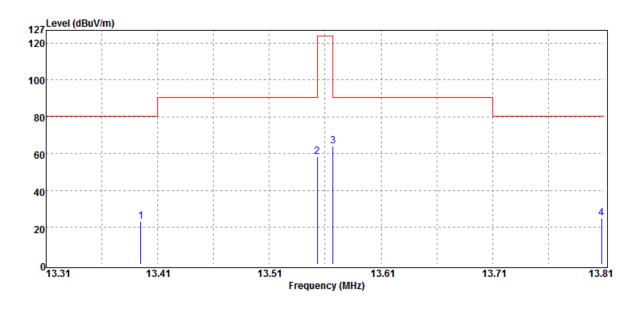

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
13.40	Peak	11.64	11.52	23.16	80.50	-57.34
13.55	Peak	46.94	11.52	58.46	90.47	-32.01
13.57	Peak	52.50	11.52	64.02	90.47	-26.45
13.81	Peak	13.54	11.53	25.07	80.50	-55.43


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms</u> and <u>conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> <u>e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is salvised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Operation Band	:NFC	Test Date	:2018-10-02
Fundamental Frequency	:13.56 MHz	Temp./Humi.	:21 deg_C / 62 RH
Operation Mode	:MASK	Engineer	:Wei
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

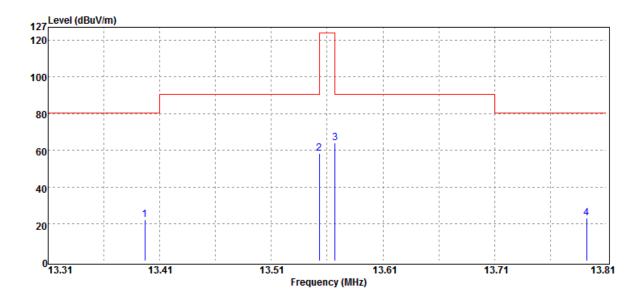

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
13.40	Peak	10.78	11.52	22.30	80.50	-58.20
13.55	Peak	46.95	11.52	58.47	90.47	-32.00
13.57	Peak	52.45	11.52	63.97	90.47	-26.50
13.79	Peak	11.92	11.53	23.45	80.50	-57.05

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



7.7 Radiated Emission Measurement

7.7.1 Standard Applicable

The field strength of any emission which appear outside of 13.553~13.567MHz Band shall not exceed the general radiated emissions limits.

Frequency (MHz)	Field strength (μV/m)	Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

1. Emission level in dB μ V/m=20 log (μ V/m)

- 2. Distance extrapolation factor = 40 log (required distance/ test distance) (dB)
- 3. 20*log(30uV/m) + 40dB = 69.54 dBuV/m
- 4. The lower limit shall apply at the transition frequencies.
- 5. The measurement was undertaken in closer distance at 3m, where extrapolation factor is offset to convert the limit of the measurement.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms</u> and <u>conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Operation Band	:NFC	Test Date	:2018-09-27
Fundamental Frequency	:13.56 MHz	Temp./Humi.	:21 deg C / 62 RH
Operation Mode	:Tx	Engineer	:Wei
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	

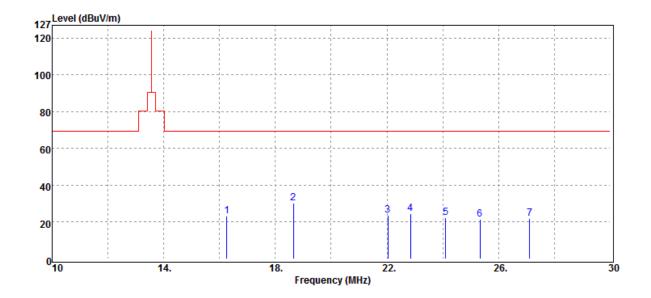


Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
16.26	Peak	11.89	11.58	23.47	69.54	-46.07
18.64	Peak	18.59	11.64	30.23	69.54	-39.31
22.04	Peak	12.77	11.11	23.88	69.54	-45.66
22.84	Peak	13.50	10.90	24.40	69.54	-45.14
24.10	Peak	11.81	10.60	22.41	69.54	-47.13
25.34	Peak	11.31	10.32	21.63	69.54	-47.91
27.12	Peak	12.18	9.94	22.12	69.54	-47.42

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



RH

Operation Band	:NFC	Test Date	:2018-09-27
Operation band		IESI Dale	.2010-09-27
Fundamental Frequency	:13.56 MHz	Temp./Humi.	:21 deg_C / 62 F
Operation Mode	:Tx	Engineer	:Wei
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

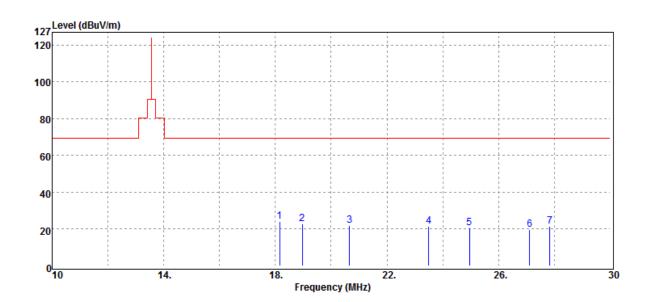


Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
18.16	Peak	12.33	11.63	23.96	69.54	-45.58
18.96	Peak	10.98	11.65	22.63	69.54	-46.91
20.66	Peak	10.58	11.48	22.06	69.54	-47.48
23.50	Peak	10.60	10.74	21.34	69.54	-48.20
24.96	Peak	10.25	10.40	20.65	69.54	-48.89
27.12	Peak	10.04	9.94	19.98	69.54	-49.56
27.84	Peak	11.96	9.79	21.75	69.54	-47.79

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Operation Band	:NFC	Test Date	:2018-09-27
Fundamental Frequency	:13.56 MHz	Temp./Humi.	:21 deg_C / 62 RH
Operation Mode	:Tx	Engineer	:Wei
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	

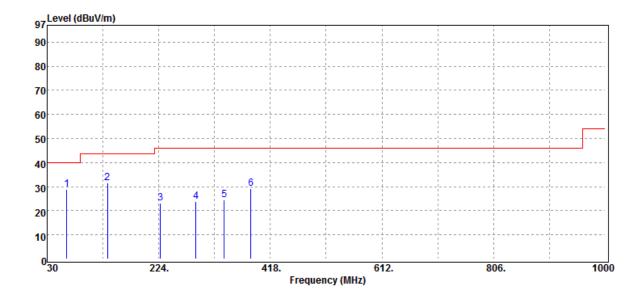


Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
63.95	Peak	37.67	-8.75	28.92	40.00	-11.08
134.76	Peak	40.02	-8.55	31.47	43.50	-12.03
226.91	Peak	31.83	-8.72	23.11	46.00	-22.89
288.99	Peak	29.64	-5.86	23.78	46.00	-22.22
337.49	Peak	29.44	-4.85	24.59	46.00	-21.41
384.05	Peak	32.94	-3.79	29.15	46.00	-16.85

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Operation Band	:NFC	Test Date	:2018-09-27
Fundamental Frequency	:13.56 MHz	Temp./Humi.	:21 deg_C / 62 RH
Operation Mode	:Tx	Engineer	:Wei
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

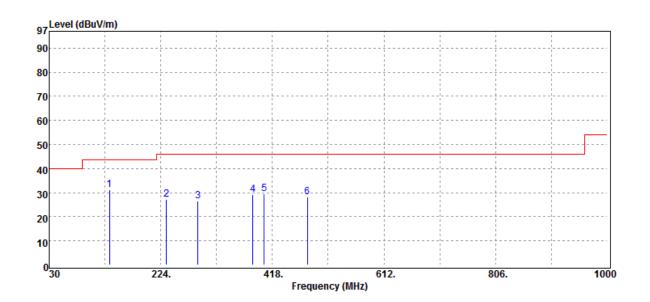

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
134.76	Peak	39.89	-8.55	31.34	43.50	-12.16
233.70	Peak	35.29	-8.24	27.05	46.00	-18.95
288.99	Peak	32.29	-5.86	26.43	46.00	-19.57
384.05	Peak	33.03	-3.79	29.24	46.00	-16.76
403.45	Peak	32.59	-3.07	29.52	46.00	-16.48
479.11	Peak	30.46	-2.10	28.36	46.00	-17.64

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



8 FREQUENCY TOLERANCE

8.1 Applicable Standard


The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Carrier frequency stability shall be maintained to $\pm 0.01\%$ (± 100 ppm). For licence-exempt radio apparatus, the frequency stability shall be measured at temperatures of -20° C (-4° F), $+20^{\circ}$ C ($+68^{\circ}$ F) and $+50^{\circ}$ C ($+122^{\circ}$ F).

8.2 Measurement Procedure

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Set EUT as normal operation
- Set SPA Center Frequency = fundamental frequency, RBW, VBW= 10kHz, Span =100kHz.
- 4. Set SPA Max hold. Mark peak.

8.3 Test SET-UP (Block Diagram of Configuration)

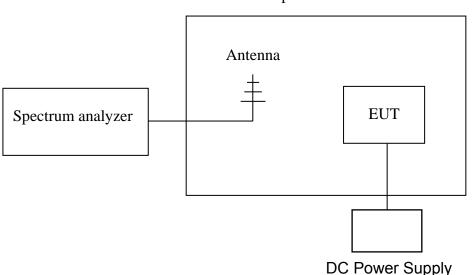

Temperature Chamber

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



8.4 Measurement Equipment Used:

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
Loop Antenna	ETS.LINDGREN	6502	148045	2017/09/26	2018/09/25		
EXA Spectrum Analyzer	Agilent	N9010A	MY57120290	2018/02/14	2019/02/13		
Temperature Chamber	TERCHY	MHG-120LF	911009	05/18/2018	05/17/2019		
Coaxial Cables	N/A	WK CE Cable	N/A	2018/01/02	2019/01/01		

8.5 Measurement Results

Startup:

A. Temperature Variation

Power Supply	Environment	Frequency	Delta (KHz)	Limit (KHz)
Vdc	Temperature ()	(MHz)		
12	-20	13.560004	0.00530	+/- 1.356
12	-10	13.560006	0.00360	+/- 1.356
12	0	13.560009	0.00060	+/- 1.356
12	10	13.559991	0.01790	+/- 1.356
12	20	13.560009	0.00000	+/- 1.356
12	30	13.559991	0.01790	+/- 1.356
12	40	13.559993	0.01590	+/- 1.356
12	50	13.560007	0.00250	+/- 1.356

B. Supply Voltage Variation

Power Supply	Environment	Frequency	Delta (KHz)	Limit (KHz)	
Vdc	Temperature ()	(MHz)		Limit (KHz)	
18	20	13.559993	0.01620	+/- 1.356	
12	20	13.560009	0.00000	+/- 1.356	
7	20	13.559993	0.01570	+/- 1.356	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



2 minutes:

A. Temperature Variation

Power Supply	Environment	Frequency	Delta (KHz) Limit (KHz	
Vdc	Temperature ()	(MHz)		
12	-20	13.559997	-0.00250	+/- 1.356
12	-10	13.560005	-0.01050	+/- 1.356
12	0	13.5599954	-0.00090	+/- 1.356
12	10	13.5599934	0.00110	+/- 1.356
12	20	13.5599945	0.00000	+/- 1.356
12	30	13.5599969	-0.00240	+/- 1.356
12	40	13.5600059	-0.01140	+/- 1.356
12	50	13.5599906	0.00390	+/- 1.356

B. Supply Voltage Variation

Power Supply	Environment	Frequency	Delta (KHz)	Limit (KHz)
Vdc	Temperature ()	(MHz)		
18	20	13.5599918	0.00270	+/- 1.356
12	20	13.5599945	0.00000	+/- 1.356
7	20	13.5599966	-0.00210	+/- 1.356

5 minutes:

A. Temperature Variation

Power Supply	Environment	Frequency	Delta (KHz)	Limit (KHz)
Vdc	Temperature ()	(MHz)		
12	-20	13.5600054	-0.00660	+/- 1.356
12	-10	13.560004	-0.00520	+/- 1.356
12	0	13.5599998	-0.00100	+/- 1.356
12	10	13.5600048	-0.00600	+/- 1.356
12	20	13.5599988	0.00000	+/- 1.356
12	30	13.56001	-0.01120	+/- 1.356
12	40	13.5599984	0.00040	+/- 1.356
12	50	13.5600044	-0.00560	+/- 1.356

B. Supply Voltage Variation

Power Supply	Environment	Frequency	Delta (KHz)	Limit (KHz)
Vdc	Temperature ()	(MHz)		
18	20	13.5600053	-0.00650	+/- 1.356
12	20	13.5599988	0.00000	+/- 1.356
7	20	13.5599986	0.00020	+/- 1.356

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部分複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exconerate parties to a transaction for exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



10 minutes:

A. Temperature Variation

Power Supply	Environment	Frequency	Delta (KHz) Limit (KHz	
Vdc	Temperature ()	(MHz)		
12	-20	13.5599949	0.00170	+/- 1.356
12	-10	13.5600066	-0.01000	+/- 1.356
12	0	13.5599999	-0.00330	+/- 1.356
12	10	13.5599962	0.00040	+/- 1.356
12	20	13.5599966	0.00000	+/- 1.356
12	30	13.5600059	-0.00930	+/- 1.356
12	40	13.5600075	-0.01090	+/- 1.356
12	50	13.5600045	-0.00790	+/- 1.356

B. Supply Voltage Variation

Power Supply	Environment	Frequency	Delta (KHz)	Limit (KHz)
Vdc	Temperature ()	(MHz)		
18	20	13.5600096	-0.01300	+/- 1.356
12	20	13.5599966	0.00000	+/- 1.356
7	20	13.5600047	-0.00810	+/- 1.356

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部分複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exconerate parties to a transaction for exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



9 20 dB & 99% OCCUPIED BANDWIDTH MEASUREMENT

9.1 Applicable Standard:

The 20 dB bandwidth shall be specified in operating frequency band.

9.2 Limit:

None

9.3 Test Set-up

Refer to section 8.3 in this report

9.4 Measurement Procedure

- 1. Placed the EUT on the testing table.
- 2. Set the EUT under transmission condition continuously at specific channel frequency.
- 3. The resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
- 4. Measured the spectrum width with power higher than 20dB below carrier.


9.5 Measurement Equipment Used:

Refer to section 8.4 in this report

9.6 Measurement Result

	Opration range	Frequency (MHz)	Limit (MHz)
20dB BW (kHz)	Low	13.55934	>13.11
2.71	High	13.56170	<14.01

-20dB Bandwidth

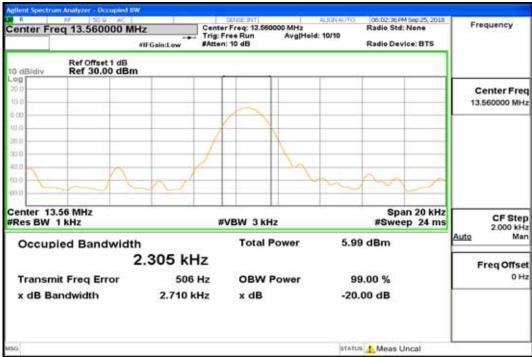


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms</u> and <u>conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> <u>e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Operation range low

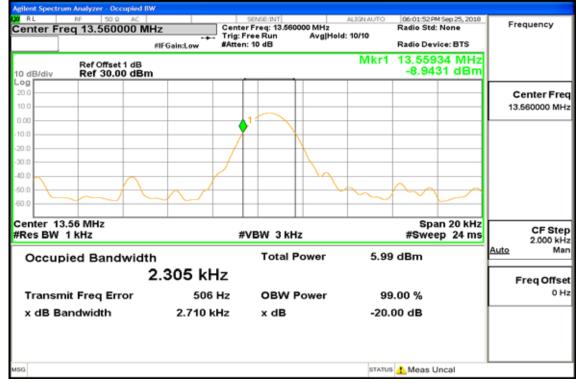

Operation range High

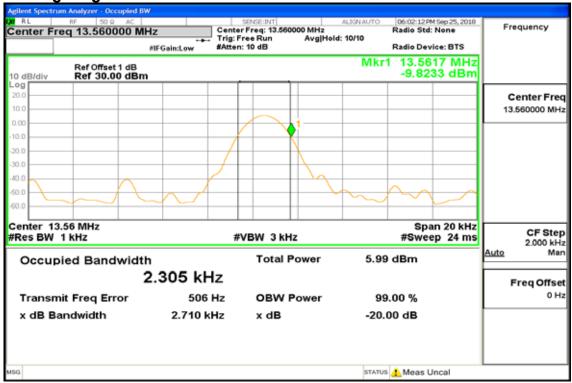

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



10 ANTENNA REQUIREMENT

10.1 Standard Applicable:

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

10.2 Antenna Connected Construction:

The antenna is designed with unique RF connector and no consideration of replacement. Please see EUT photo for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製