

S2000H BTS GSM 1900 : FCC Part 24 Class II Permissive Change Application

Reference : PCS/BTS/DJD/331
Version : 01.01/EN
Date : 14/06/1999

Ext. ref. :
Type : DQF
Product : S2000H
Cat : E
Status : A

Author : S. REMY

Documentalist : A.M. LE BERRE

Approved by : C. LEFEBVRE

Quality manager : G. CALLEWAERT

Abstract / Comments :

The document presents the FCC regulatory assessment achieved in order to introduce the following items into the S2000H BTS System :

- new design DRX
- new design LNA
- dual U-VGA
- splice box
- enhanced packaging

Distribution lists :

Full document : C. PIEDELOUP – L. PAGOT – D. COUDERC – S. REMY

DOCUMENT AMENDMENTS

VERSION	DATE	COMMENTS	AUTHOR
01.01/EN	14/06/1999	Document Creation	S. REMY

*This confidential document is the property of NORTEL MATRA CELLULAR and may not be copied or circulated without permission
Ce document confidentiel est la propriété de NORTEL MATRA CELLULAR et ne peut être reproduit ou communiqué sans autorisation*

PCS

<i>Reference :</i>	PCS/BTS/DJD/331
<i>Version :</i>	01.01/EN
<i>Date :</i>	14/06/1999

S2000H BTS GSM 1900 : FCC PART 24 CLASS II PERMISSIVE CHANGE APPLICATION

TABLE OF CONTENTS

1.	INTRODUCTION	1
1.1.	OBJECT	1
1.2.	SCOPE.....	1
2.	RELATED DOCUMENTS	1
2.1.	APPLICABLE DOCUMENTS	1
2.2.	REFERENCE DOCUMENTS	1
3.	ABBREVIATIONS & DEFINITIONS	1
3.1.	ABBREVIATIONS	1
3.2.	DEFINITIONS.....	1
4.	ONGOING COMPLIANCE.....	1
5.	DESCRIPTION OF APPARATUS	1
5.1.	THE BTS SYSTEM	1
5.2.	RF MANAGEMENT	1
5.3.	THE S2000H BTS	1
6.	DESCRIPTION OF APPLICATION	1
6.1.	NEW DESIGN DRX	1
6.2.	NEW DESIGN LNA	1
6.3.	DUAL U-VGA	1
6.4.	SPLICE BOX	1
6.5.	ENHANCED PACKAGING	1
7.	CONCLUSION.....	1
8.	EXHIBIT 1 : TESTS REPORT	1

This confidential document is the property of NORTEL MATRA CELLULAR and may not be copied or circulated without permission.
Ce document confidentiel est la propriété de NORTEL MATRA CELLULAR et ne peut être reproduit ou communiqué sans autorisation

8.1.	INTRODUCTION	1
8.2.	2.985 RF OUPUT POWER	1
8.2.1.	FCC REQUIREMENTS : PART 24.232	1
8.2.2.	TEST RESULTS	1
8.2.3.	TEST PROCEDURE	1
8.3.	2.989 OCCUPIED BANDWIDTH	1
8.3.1.	FCC REQUIREMENTS : PART 24.289	1
8.3.2.	TEST RESULTS	1
8.3.3.	TEST PROCEDURE	1
8.4.	2.991 SPURIOUS EMISSIONS AT ANTENNA TERMINALS	1
8.4.1.	FCC REQUIREMENTS : PART 24.238	1
8.4.2.	TEST RESULTS	1
8.4.3.	FIRST SET OF GRAPHS	1
8.4.4.	SECOND SET OF GRAPHS	1
8.4.5.	TEST PROCEDURE	1
8.5.	2.995 FREQUENCY STABILITY	1
8.5.1.	FCC REQUIREMENTS : PART 24.235	1
8.5.2.	TEST RESULTS	1
8.5.3.	TEST PROCEDURE	1
8.6.	MEASUREMENT EQUIPMENT LIST	1
9.	EXHIBIT 2 : EQUIPMENT LIST	1
10.	EXHIBIT 3 : SCHEMATICS	1
10.1.	NEW DESIGN DRX ASSEMBLY	1
10.2.	DRX RADIO POWER SUPPLY	1
10.3.	DRX LOGIC POWER SUPPLY	1
10.4.	LOGIC DRIVER / RECEIVER	1
10.5.	LOGIC DRIVER / RECEIVER MODULE	1
10.6.	RDRX-P-ND RADIO BOARD	1
10.7.	LNA PCS 1900 LOWCOST	1
10.8.	DUAL U-VGA DCS 1900	1
END OF DOCUMENT		46

END OF DOCUMENT

This confidential document is the property of NORTEL MATRA CELLULAR and may not be copied or circulated without permission.
Ce document confidentiel est la propriété de NORTEL MATRA CELLULAR et ne peut être reproduit ou communiqué sans autorisation

*This confidential document is the property of NORTEL MATRA CELLULAR and may not be copied or circulated without permission
Ce document confidentiel est la propriété de NORTEL MATRA CELLULAR et ne peut être reproduit ou communiqué sans autorisation*

**S2000H BTS GSM 1900 : FCC Part 24 Class II Permissive Change
Application**

Page 4/46

PCS/BTS/DJD/331

01.01/EN

14/06/1999

1. INTRODUCTION

1.1. OBJECT

The document presents the FCC regulatory assessment achieved in order to introduce the following items into the S2000H BTS System :

- new design DRX
- new design LNA
- dual U-VGA
- splice box
- enhanced packaging

These modifications have evaluated to be a class II permissive change to the original FCC Part 24 Type Accepted equipment, as described in FCC Part 2 rules :

2.1001 Changes in type accepted equipment.

- (a) *Equipment of the same type is defined for purposes of type acceptance as being equipment which is electrically and mechanically interchangeable and in addition will have the same basic tube or semiconductor lineup, frequency multiplication, basic frequency determining and stabilizing circuitry, basic modulator circuit and maximum power rating. Variations in electrical and mechanical construction, other than the items indicated above are permitted, provided the variation or change is made in compliance with the requirements of paragraphs (b), (c) and (d) of this section.*
- (b) *Two classes of permissive changes may be made in type accepted equipment without requiring a new application for and grant of type acceptance.*
 - (1) *A Class I permissive change includes those modifications in the equipment which do not change the equipment characteristics beyond the rated limits established by the manufacturer and accepted by the Commission when type acceptance is granted, and which do not change the type of equipment as defined in paragraph (a) of this section. No filing with the Commission is required for a Class I permissive change.*

- (2) *A Class II permissive change includes those modifications which bring the performance of the equipment outside the manufacturer's rated limits as originally filed but not below the minimum requirements of the applicable rules, and do not change the type of equipment as defined in paragraph (a) of this section. When a Class II permissive change is made by the grantee, he shall supply the Commission with complete information and results of tests of the characteristics affected by such change. The modified equipment shall not be marketed under the existing grant of type acceptance prior to acknowledgment by the Commission that the change is acceptable.*

1.2. SCOPE

The document applies to the S2000H BTS GSM 1900.

2. RELATED DOCUMENTS

2.1. APPLICABLE DOCUMENTS

- | | | |
|------|----------------|--|
| [A1] | CFR 47 Part 2 | Frequency allocations and radio treaty matters;
general rules and regulations |
| [A2] | CFR 47 Part 24 | Personal Computer Services |

2.2. REFERENCE DOCUMENTS

- | | | |
|------|-----------------|---|
| [R1] | PCS/BTS/DJD/325 | S2000H Program 98 step 3 radio tests report |
| [R2] | PCS/BTS/DJD/326 | S2000H Program 98 step 3 FCC Part 24
Frequency Stability test report |

3. ABBREVIATIONS & DEFINITIONS

3.1. ABBREVIATIONS

DRX	Driver Receiver Unit
BTS	Base Transceiver Station
GSM	Global System for Mobile Communications
LNA	Low Noise Amplifier
OMC	Operation and Maintenance Center
PA	Power Amplifier
TCU	Trans-Coding Unit
MSC	Mobile Switching Center
RF	Radio Frequency
SBCF	Small Base Common Function

3.2. DEFINITIONS

None

4. ONGOING COMPLIANCE

As part of the Nortel Engineering Change Process, the Product Integrity group reviews all product changes to the S2000H BTS System. These reviews include an assessment of the impact that the changes or additions will have to the ongoing EMC/Radio Compliance of the System. When required, Analysis and Testing are performed to ensure continued compliance of the System.

Below is a list of the type of changes which are flagged during the reviews of product changes :

- Device changes which impact the clock speed or rise time
- Routing changes which could affect the emission and/or immunity profile for a circuit pack
- Changes to Power Supplies (input/output filtering, switching frequency, etc.)
- Addition of new circuit pack (electronic sub-assembly) to the S2000H BTS system (potential change in emission and/or immunity profile)
- Re-configuration of existing S2000H BTS hardware (variants) which change the emission profile (additional units, new combinations of units, etc.)
- Changes to the physical design which could impact Radio and/or EMC performances
- Addition of new sub-systems (variants) to the S2000H BTS system

Where analysis of changes to the S2000H BTS system indicates that verification testing is required to confirm continued compliance, the details of the changes to the system, test configuration and rationale, test results, and conclusions are included in this document for review and approval by the FCC, when required.

The BTS software is released in a controlled batch release format. For each of these releases, there may or may not be hardware content. New features are introduced at these structured release dates.

New features can be both hardware and software, or just one of the two. For all releases with hardware content, the ongoing compliance process outlined in this section is applied. For releases with only software content, no radio, engineering, or testing is required.

The architecture of the BTS Family of Products is such that the communication links are defined by the hardware (e.g. the ABIS link remains at the same data bit rate regardless of the actual data being transported). As such, the changes to software features which are not accompanied by hardware upgrades do not have any impact on the radio performances of the BTS Family of Products.

During testing, care is taken to ensure "worst case" system operational states are addressed. This ensures that all applications available on the BTS Family Hardware have been evaluated. Until there are updates to the hardware, no further system testing is required.

5. DESCRIPTION OF APPARATUS

5.1. THE BTS SYSTEM

The Base Transceiver Station (BTS) provides the interface between the fixed network and the mobile stations which is a radio interface.

The radio interface carries signaling and speech/data channels using digitized and encoded signals modulated in GMSK in GSM 1900 MHz band for North American products.

Communication with the fixed network are enabled across a wire interface called the Abis interface. It connects the BTS to its Base Station Controller (BSC). The transmission of signaling, speech, and data channels is carried out on PCM link (also called ABIS interface).

The BTS configures its equipment, establishes, maintains and clears calls to and from mobile stations as directed by the Base Station Controller (BSC). The BTS organizes and manages radio-electric resources, supervises its own equipment and conducts stand-alone defense actions as and when required.

S2000H BTS GSM 1900 : FCC Part 24 Class II Permissive Change Application

14/06/1999

5.2. RF MANAGEMENT

Two frequency bands are allocated to the system as follows :

- downlink or “base to mobile” (TX part),
- uplink or “mobile to base” (RX part).

Both RX and TX bands are frequency divided into 200 kHz channels. Each channel is identified by an Absolute Radio Frequency Channel Number (ARFCN).

The first and the last channel on the edge of the bandwidth are not used for actual RF transmissions, and may be used for testing purposes.

All RF channels are time multiplexed according to the system fundamental TDMA frame, composed of up to eight time slots.

Each time slot is occupied by an RF burst. During the RF burst, the RF carrier may be modulated at a bit rate of 270 kb/s, using GMSK (Gaussian Minimum Shift Keying, with $BT = 0.3$) modulation.

In order to overcome propagation problems, the system uses slow frequency hopping techniques. The carrier frequency of each transmitter remains constant during each burst, and jumps randomly to any RF channel (over the full RF bandwidth) before transmitting the next burst.


The RF power generated by the transmitters is not constant: the peak power (defined as the r.m.s. power during the burst, excluding the leading and trailing edges) may be adjusted by the network operator for cell dimensioning and frequency reuse purpose.

In addition, the peak power may vary from one burst to the next one by 30 dB depending of the distance between the Base Transceiver Station and the mobiles.

The system may use voice activity detection (V.A.D.) and discontinuous transmission techniques (D.T.X.).

It is consequently impossible to predict, at each transmitter output, if a time slot will be actually used to transmit an RF burst, at which level, and how many carrier.

5.3. THE S2000H BTS

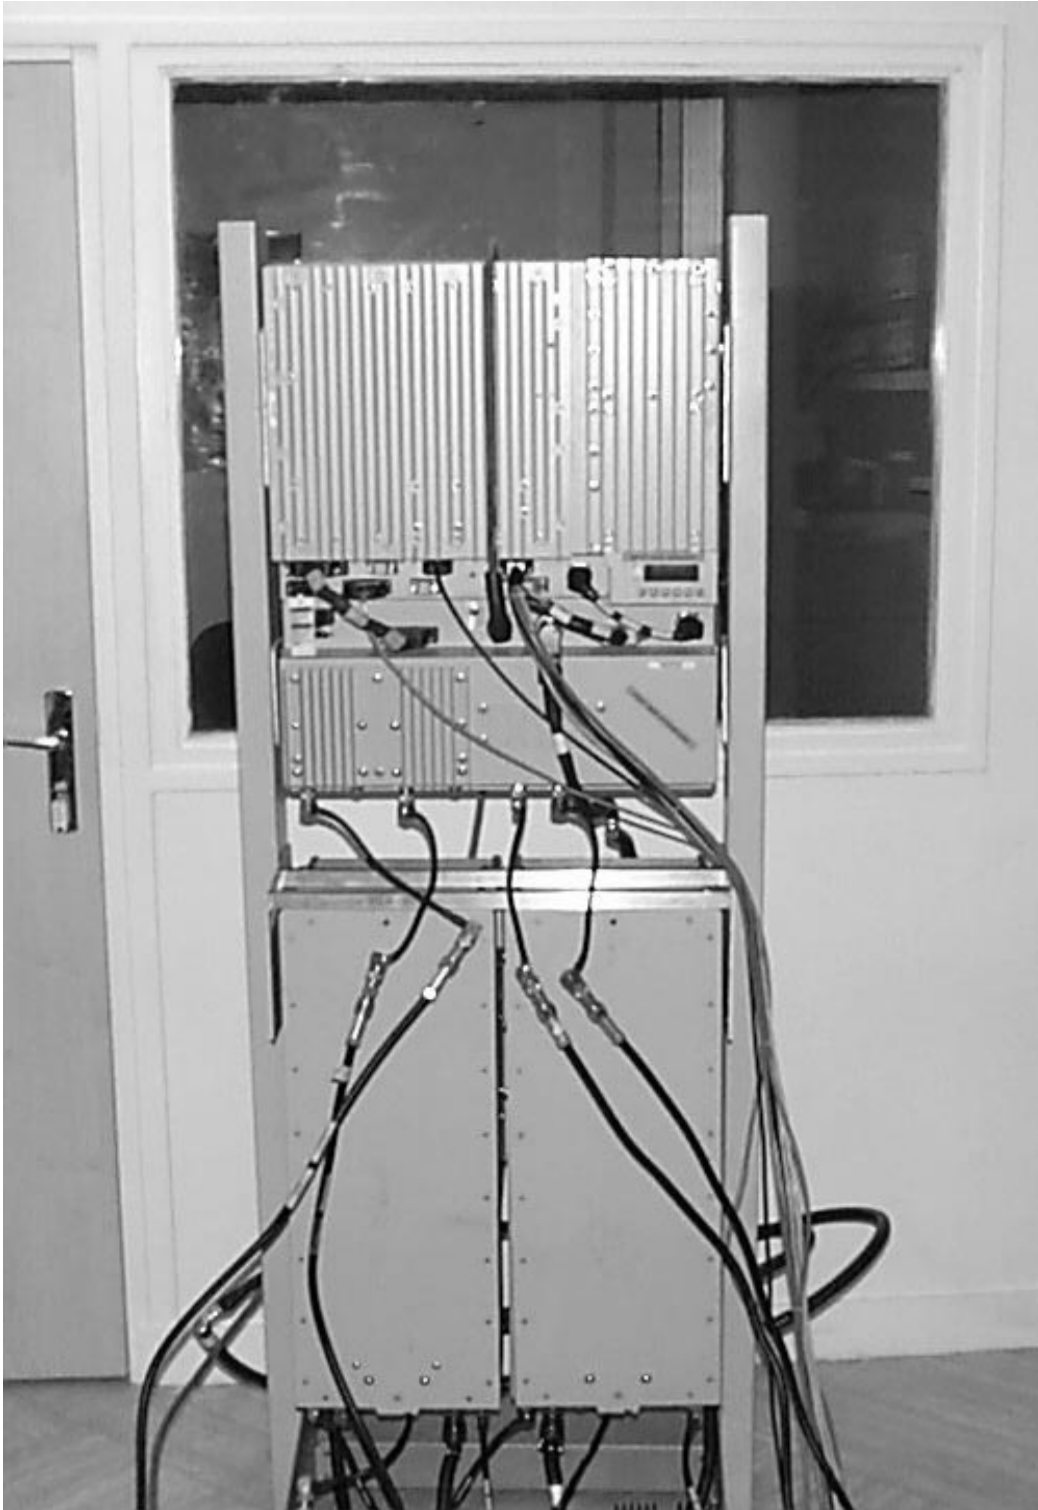

*This confidential document is the property of NORTEL MATRA CELLULAR and may not be copied or circulated without permission
Ce document confidentiel est la propriété de NORTEL MATRA CELLULAR et ne peut être reproduit ou communiqué sans autorisation*

The S2000 High Power BTS System is subdivided into six major areas :

- SBCF : this block is made of digital packs and provides management of the system as well as connection to the network
- DRX : it includes the whole set of functions necessary to handle a full TDMA frame including RF reception with diversity and RF transmission at low level
- PA : the necessary amplification for transmission is achieved by a PA
- Duplexer and LNA : the duplexer provides separation between transmit and receive paths
- PSU : the core PSU provides power for all modules of the BTS
- Miscellaneous optional devices

SBCF

The SBCF module is the heart of the S2000H&L BTS. As described, this printed circuit pack (PCP) is composed of two boards: the small main common functions (SMCF) or board and the small PCM interface (SPCMI) board. In the S2000H&L system, to ensure that the package size would be minimized, all SBCF Interconnect (ICO) functions have been integrated onto the SMCF board. Each of these boards is described below :

- the SMCF board contains the functions of concentration, synchronization and switching. The SMCF includes the MC68MH360 QUICC32 control processor , a high stability clock synchronization block, a digital 8 x 8 PCM cross-point switch matrix, and all interfacing functions with the DRX, T1/E1, alarms, debug and maintenance. Additionally, all digital interconnect within the S2000H&L BTS have been integrated into the SMCF board
- the SPCMI board provides two PCM backhaul interfaces for the S2000H&L BTS . Two different hardware versions of this board support the following backhauls: dual T1 (100 Ohm); and dual E1 (120 Ohm)

DRX

The DRX includes the whole set of functions necessary to handle a full TDMA frame including RF reception with MRC diversity and RF transmission at low level.

The necessary amplification for transmission is achieved by a separate Power Amplifier (PA).

The main functionalities supported by the DRX are the following :

- support of the Abis interface
- (Discontinuous) Transmission of GMSK modulation
- diversity reception
- RF Power control
- Equalization
- channel (de)coding, for full and half rate speech channels, and for data channels
- frequency hopping (RF and Baseband)
- ciphering (A5/1 and/or A5/2, according to authorized ciphering algorithms)
- local alarms management

The following functionalities are NOT SUPPORTED by the DRX :

- collocated speech transcoders
- statistical transmit diversity
- transmit diversity

The DRX is composed of four boards :

- a DRX logic board including a frame processor, TX logic (GMSK modulation) and a local time base
- a DRX radio board including a low power driver and a dual receiver
- two power supplies conversion boards

PA

The PA subassembly is designed as a stand alone unit, which may be used either inside the BTS, or remotely located outside the BTS. It is mounted in a closed metal housing fitted with a suitable heat sink and provided with RF coaxial and DC multiway connectors.

Furthermore the internal conception is done in such a way all the PA electronic circuits can be usable with no modification for MEU or SMART facet purposes if higher EIRP is required. The PA includes its own DC/DC converter.

The PA basic function consists in boosting the level of the GMSK modulated RF pulse, generated by the Tx driver (located in the DRx subassembly), up to the RF power level of the whole transmitter chain before the coupling stages.

The PA RF output power is measured with a built-in calibrated detector. The DRX receives this information from the PA (local or remote), and closes an ALC loop by acting on the driver, so that the RF power is levelled at the detector location.

As it can be used inside the BTS rack or remotely, the PA must include a micro controller in order to digitise some control signals.

The DRX and the PA amplifier are designed to take into account up to a maximum of 15 dB of cable losses for interconnection.

6. DESCRIPTION OF APPLICATION

6.1. NEW DESIGN DRX

In order to achieve some cost reduction, the S2000H BTS DRX has been redesigned. The general architecture remains unchanged but modifications have been achieved on the RF boards, leading thus to RF performances improvements.

In order to demonstrate ongoing compliance, the following tests have been performed :

- Frequency Stability with power supply and temperature variations
- Conducted Spurious Emissions
- Occupied bandwidth
- RF Output Power

6.2. NEW DESIGN LNA

In order to achieve some cost reduction, the S2000H BTS LNA has been redesigned.

In order to demonstrate ongoing compliance, the above tests have been performed.

6.3. DUAL U-VGA

A dual Universal Variable Gain Amplifier replacing the two U-VGAs (present in the Main Module of S2000 any packaging) is introduced in the Base Unit HP. It supports main and diversity receive paths for S11 and O2 configurations (same functionality as two U-VGAs). It is supplied by 8 VDC from the core PSU. No complementary testing is required since already performed on the classic U-VGA (the dual U-VGA simply includes two U-VGAs in the same package).

6.4. SPLICE BOX

The splice box has already been validated by FCC (file PI-00-16097) for the previous packaging. No additional test is required within the scope of enhanced packaging (please read next paragraph).

6.5. ENHANCED PACKAGING

In order to achieve some cost reduction and provide electromagnetic and environmental enclosure, the mechanical structure of the BTS changes to an enhanced packaging. All radio or functional modules are strictly the same between the two packaging.

Therefore, no additional testing is required to demonstrate compliance.

7. CONCLUSION

As demonstrated in Exhibit 1, the S2000H BTS including all the above listed modifications still complies with FCC Part 24 requirements.

8. EXHIBIT 1 : TESTS REPORT

8.1. INTRODUCTION

The following information is submitted for update of the type acceptance of a Broadband PCS Base Station for Northern Telecom Inc. in accordance with FCC Part 24, Subpart E and Part 2, Subpart J of the FCC Rules and Regulations. The measurement procedures were in accordance with the requirements of Part 2.999.

8.2. 2.985 RF OUPUT POWER

8.2.1. FCC REQUIREMENTS : PART 24.232


- (a) Base stations are limited to 1640 watts peak equivalent isotropically radiated power (e.i.r.p.) with an antenna height up to 300 meters HAAT. See 24.53 for HAAT calculation method. Base station antenna heights may exceed 300 meters with a corresponding reduction in power. In no case may the peak output power of a base station transmitter exceed 100 watts
- (b) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

8.2.2. TEST RESULTS

ARFCN	Frequency (MHz)	Measured RF Output Power (dBm)		Maximum Rated Power (dBm)	Limit (dBm)
		Ant 1	Ant 2		
513	1930.4	43.9	44.4	44.8	50
548	1937.4	44.2	44.2	44.8	50
585	1944.8	44.2	44.4	44.8	50
587	1945.2	44.2	44.4	44.8	50
598	1947.4	44.3	44.3	44.8	50
610	1949.8	44.4	44.5	44.8	50
612	1950.2	44.4	44.4	44.8	50
648	1957.4	44.3	44.3	44.8	50
685	1964.8	44.5	44.4	44.8	50
687	1965.2	44.5	44.4	44.8	50
698	1967.4	44.5	44.5	44.8	50
710	1969.8	44.5	44.4	44.8	50
712	1970.2	44.5	44.5	44.8	50
723	1972.4	44.6	44.6	44.8	50
735	1974.8	44.5	44.4	44.8	50
737	1975.2	44.6	44.5	44.8	50
773	1982.4	44.6	44.4	44.8	50
809	1989.6	44.6	44.5	44.8	50

8.2.3. TEST PROCEDURE

The following test bench is re-used for the other tests.

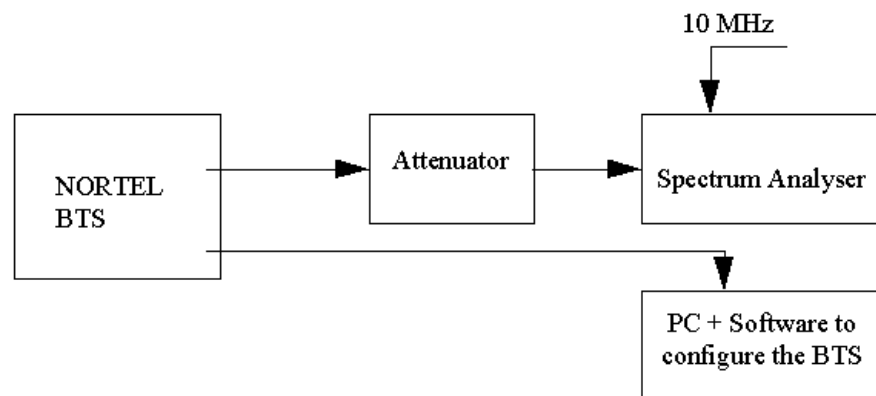

*This confidential document is the property of NORTEL MATRA CELLULAR and may not be copied or circulated without permission
Ce document confidentiel est la propriété de NORTEL MATRA CELLULAR et ne peut être reproduit ou communiqué sans autorisation*

The BTS was configured to transmit at maximum power (static level 0). Measurements were made at frequencies which are the bottom, middle and top of each of the licensed blocks.

The peak output power was measured using the spectrum analyzer which had the following settings :

Resolution Bandwidth	300 kHz
Video Bandwidth	1 MHz
Span	0 Hz
Reference Level	45 dBm
Reference Level Offset	corrected to account for cables and attenuator losses
Level Range	10 dB
Sweep Time	5 ms

8.3. 2.989 OCCUPIED BANDWIDTH


8.3.1. FCC REQUIREMENTS : PART 24.289

The occupied bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

8.3.2. TEST RESULTS

ARFCN	Frequency (MHz)	Measured Occupied Bandwidth (kHz)	
		Ant 1	Ant 2
512	1930.2	298.6	300.6
661	1960.0	304.6	308.6
810	1989.8	294.6	294.6

The maximum occupied bandwidth was found to be 308.6 kHz.

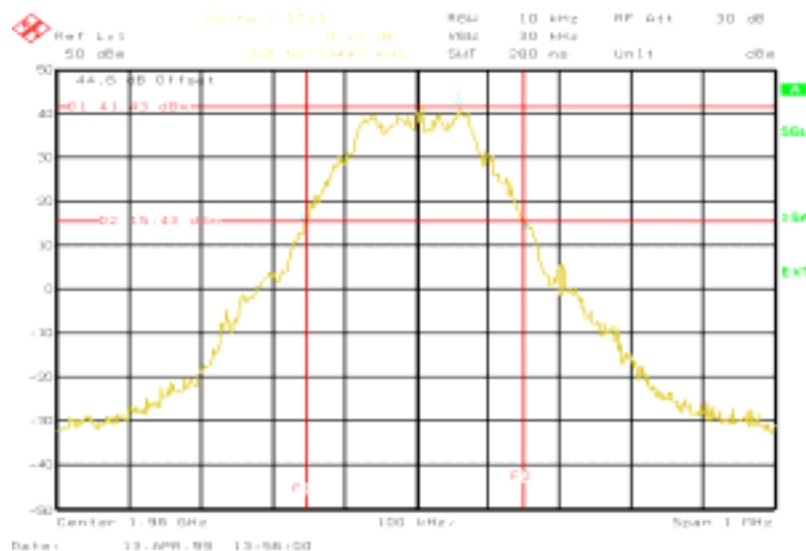

*This confidential document is the property of NORTEL MATRA CELLULAR and may not be copied or circulated without permission
Ce document confidentiel est la propriété de NORTEL MATRA CELLULAR et ne peut être reproduit ou communiqué sans autorisation*

8.3.3. TEST PROCEDURE

The BTS was configured to transmit at maximum power (static level 0). Measurements were made at frequencies which are the bottom, middle and top of each of the licensed blocks.

The occupied bandwidth was measured by determining the bandwidth out of which all emissions are attenuated at least 26 dB below the transmitter power.

The spectrum analyzer had the following settings :

Resolution Bandwidth	10 kHz
Video Bandwidth	30 kHz
Span	1 MHz
Reference Level	45 dBm
Reference Level Offset	corrected to account for cables and attenuator losses
Level Range	100 dB
Sweep Time	25 ms

8.4. 2.991 SPURIOUS EMISSIONS AT ANTENNA TERMINALS**8.4.1. FCC REQUIREMENTS : PART 24.238**

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
- (b) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurements of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

8.4.2. TEST RESULTS

The absolute level of each emission shall not be greater than -13 dBm (calculated from the output power $10 \log (P \text{ in mW}) - (43 + 10 \log (P \text{ in W}))$).

DRX 0

PCS Block	TCH Channel	Power config.	Margin at least of	Comments
A	512	Pmax-10dB	01.1 dBm	
A	513	Pmax	15.1 dBm	
A	584	Pmax	03.9 dBm	
A	585	Pmax-10dB	05.1 dBm	
D	587	Pmax-10dB	02.8 dBm	
D	588	Pmax	10.3 dBm	
D	609	Pmax	18.8 dBm	
D	610	Pmax-10dB	02.7 dBm	
B	612	Pmax-10dB	03.3 dBm	
B	613	Pmax	18.7 dBm	
B	684	Pmax	17.9 dBm	
B	685	Pmax-10dB	02.0 dBm	
E	687	Pmax-10dB	04.1 dBm	
E	688	Pmax	19.5 dBm	
E	709	Pmax	17.3 dBm	
E	710	Pmax-10dB	02.11dBm	
F	712	Pmax-10dB	04.4 dBm	
F	713	Pmax	20.2 dBm	
F	734	Pmax	19.3 dBm	
F	735	Pmax-10dB	02.1 dBm	
C	737	Pmax-10dB	03.8 dBm	
C	738	Pmax	19.6 dBm	
C	809	Pmax	19.4 dBm	
C	810	Pmax-10dB	02.2 dBm	

*This confidential document is the property of NORTEL MATRA CELLULAR and may not be copied or circulated without permission
Ce document confidentiel est la propriété de NORTEL MATRA CELLULAR et ne peut être reproduit ou communiqué sans autorisation*

DRX 1

PCS Block	TCH Channel	Power config.	Margin at least of	Comments
A	512	Pmax-10dB	03.3 dBm	
A	513	Pmax	12.6 dBm	
A	584	Pmax	20.1 dBm	
A	585	Pmax-10dB	05.0 dBm	
D	587	Pmax-10dB	02.9 dBm	
D	588	Pmax	21.7 dBm	
D	609	Pmax	20.1 dBm	
D	610	Pmax-10dB	03.8 dBm	
B	612	Pmax-10dB	00.9 dBm	See 8.4.3
B	613	Pmax	19.3 dBm	
B	684	Pmax	20.1 dBm	
B	685	Pmax-10dB	04.1 dBm	
E	687	Pmax-10dB	00.8 dBm	See 8.4.3
E	688	Pmax	20.3 dBm	
E	709	Pmax	19.6 dBm	
E	710	Pmax-10dB	04.1 dBm	
F	712	Pmax-10dB	03.1 dBm	
F	713	Pmax	20.9 dBm	
F	734	Pmax	24.5 dBm	
F	735	Pmax-10dB	04.0 dBm	
C	737	Pmax-10dB	02.9 dBm	
C	738	Pmax	23.1 dBm	
C	809	Pmax	21.8 dBm	
C	810	Pmax-10dB	03.0 dBm	See 8.4.4

*This confidential document is the property of NORTEL MATRA CELLULAR and may not be copied or circulated without permission
Ce document confidentiel est la propriété de NORTEL MATRA CELLULAR et ne peut être reproduit ou communiqué sans autorisation*

8.4.3. FIRST SET OF GRAPHS

*This confidential document is the property of NORTEL MATRA CELLULAR and may not be copied or circulated without permission
Ce document confidentiel est la propriété de NORTEL MATRA CELLULAR et ne peut être reproduit ou communiqué sans autorisation*

8.4.4. SECOND SET OF GRAPHS

*This confidential document is the property of NORTEL MATRA CELLULAR and may not be copied or circulated without permission
Ce document confidentiel est la propriété de NORTEL MATRA CELLULAR et ne peut être reproduit ou communiqué sans autorisation*

*This confidential document is the property of NORTEL MATRA CELLULAR and may not be copied or circulated without permission
Ce document confidentiel est la propriété de NORTEL MATRA CELLULAR et ne peut être reproduit ou communiqué sans autorisation*

**S2000H BTS GSM 1900 : FCC Part 24 Class II Permissive Change
Application**

Page 28/46

PCS/BTS/DJD/331

01.01/EN

14/06/1999

*This confidential document is the property of NORTEL MATRA CELLULAR and may not be copied or circulated without permission
Ce document confidentiel est la propriété de NORTEL MATRA CELLULAR et ne peut être reproduit ou communiqué sans autorisation*

**S2000H BTS GSM 1900 : FCC Part 24 Class II Permissive Change
Application**

Page 29/46

PCS/BTS/DJD/331

01.01/EN

14/06/1999

*This confidential document is the property of NORTEL MATRA CELLULAR and may not be copied or circulated without permission
Ce document confidentiel est la propriété de NORTEL MATRA CELLULAR et ne peut être reproduit ou communiqué sans autorisation*

**S2000H BTS GSM 1900 : FCC Part 24 Class II Permissive Change
Application**

Page 30/46

PCS/BTS/DJD/331

01.01/EN

14/06/1999

*This confidential document is the property of NORTEL MATRA CELLULAR and may not be copied or circulated without permission
Ce document confidentiel est la propriété de NORTEL MATRA CELLULAR et ne peut être reproduit ou communiqué sans autorisation*

**S2000H BTS GSM 1900 : FCC Part 24 Class II Permissive Change
Application**

Page 31/46

PCS/BTS/DJD/331

01.01/EN

14/06/1999

*This confidential document is the property of NORTEL MATRA CELLULAR and may not be copied or circulated without permission
Ce document confidentiel est la propriété de NORTEL MATRA CELLULAR et ne peut être reproduit ou communiqué sans autorisation*

**S2000H BTS GSM 1900 : FCC Part 24 Class II Permissive Change
Application**

Page 32/46

PCS/BTS/DJD/331

01.01/EN

14/06/1999

*This confidential document is the property of NORTEL MATRA CELLULAR and may not be copied or circulated without permission
Ce document confidentiel est la propriété de NORTEL MATRA CELLULAR et ne peut être reproduit ou communiqué sans autorisation*

**S2000H BTS GSM 1900 : FCC Part 24 Class II Permissive Change
Application**

Page 33/46

PCS/BTS/DJD/331

01.01/EN

14/06/1999

8.4.5. TEST PROCEDURE

For adjacent channels emissions, the BTS nominal carrier frequency was adjusted to each block edge channel. Channels 512 and 810 are those channels which are at the lower and upper edges of the PCS band respectively. The transmitter was set to operate to maximum power minus 12 dB.

For these measurements, the resolution bandwidth was of the spectrum analyzer was set to at least 1% of the emission bandwidth. In this case the emission bandwidth measured was 300.6 kHz. Therefore, the resolution bandwidth was set to 3 kHz.

The spectrum analyzer had the following settings :

Resolution Bandwidth	3 kHz
Video Bandwidth	10 kHz
Span	1 MHz
Reference Level	10 dBm
Reference Level Offset	corrected to account for cables and attenuator losses
Level Range	100 dB
Sweep Time	coupled

For all measurements, the BTS carrier frequency was adjusted to channel 810. The emissions were investigated up to the tenth harmonic of the fundamental emission (20GHz). The measured level of emissions was recorded and compared to -13 dBm limit.

8.5. 2.995 FREQUENCY STABILITY

8.5.1. FCC REQUIREMENTS : PART 24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

8.5.2. TEST RESULTS

The maximum deviation is more than sufficient to ensure the above statement. Therefore the S2000H BTS still complies with the requirements.

Configuration with AC/Telco Box

Ambient Temp.	Keyed-on-Time	Center Frequency Deviation (Hz)		
(°C)	(Min.)	V = 176.8 VAC	V = 220 VAC	V = 276 VAC
+ 50	0	22.47 Hz	24.21 Hz	17.50 Hz
+ 50	1	24.92 Hz	26.54 Hz	16.70 Hz
+ 50	2	18.73 Hz	18.40 Hz	23.18 Hz
+ 50	3	25.44 Hz	25.70 Hz	24.28 Hz
+ 50	4	26.47 Hz	24.54 Hz	25.76 Hz
+ 50	5	24.99 Hz	26.86 Hz	25.44 Hz
+ 50	6	-14.79 Hz	23.70 Hz	22.66 Hz
+ 50	7	24.86 Hz	20.86 Hz	16.92 Hz
+ 50	8	25.44 Hz	29.58 Hz	13.43 Hz
+ 50	9	27.44 Hz	24.60 Hz	27.38 Hz
+ 50	10	23.63 Hz	24.80 Hz	27.51 Hz
+ 40	0	-12.98 Hz	21.18 Hz	21.11 Hz
+ 40	1	-23.50 Hz	23.18 Hz	20.02 Hz
+ 40	2	-27.50 Hz	20.86 Hz	16.01 Hz
+ 40	3	-29.19 Hz	15.37 Hz	-12.20 Hz
+ 40	4	18.14 Hz	20.08 Hz	-14.27 Hz
+ 40	5	-27.38 Hz	-11.36 Hz	9.94 Hz
+ 40	6	-21.05 Hz	20.08 Hz	-11.95 Hz
+ 40	7	19.31 Hz	22.02 Hz	19.11 Hz
+ 40	8	-30.54 Hz	21.70 Hz	17.69 Hz
+ 40	9	20.15 Hz	20.86 Hz	17.95 Hz
+ 40	10	17.89 Hz	14.14 Hz	17.76 Hz
+ 30	0	10.01 Hz	24.92 Hz	18.12 Hz
+ 30	1	18.85 Hz	20.28 Hz	13.17 Hz
+ 30	2	29.32 Hz	12.53 Hz	13.69 Hz
+ 30	3	26.80 Hz	21.31 Hz	12.91 Hz
+ 30	4	22.28 Hz	16.92 Hz	16.27 Hz
+ 30	5	23.31 Hz	16.01 Hz	18.73 Hz
+ 30	6	27.06 Hz	14.53 Hz	13.75 Hz
+ 30	7	17.05 Hz	15.11 Hz	14.40 Hz
+ 30	8	14.92 Hz	17.31 Hz	20.99 Hz
+ 30	9	16.27 Hz	16.21 Hz	15.82 Hz
+ 30	10	21.89 Hz	15.88 Hz	13.30 Hz

*This confidential document is the property of NORTEL MATRA CELLULAR and may not be copied or circulated without permission
Ce document confidentiel est la propriété de NORTEL MATRA CELLULAR et ne peut être reproduit ou communiqué sans autorisation*

From +50°C to +20°C, the measurements have been made on the DRX 1 (the warmest one) and from +10°C to –30°C the measurements have been made on the DRX 0 (the coldest one).

Ambient Temp. (°C)	Keyed-on-Time (Min.)	Center Frequency Deviation (Hz)		
		V = 176.8 VAC	V = 220 VAC	V = 276 VAC
+ 20 (DRX 1 on)	0	18.92 Hz	18.21 Hz	20.02 Hz
+ 20 (DRX 1 on)	1	17.05 Hz	20.66 Hz	18.92 Hz
+ 20 (DRX 1 on)	2	17.50 Hz	16.27 Hz	19.50 Hz
+ 20 (DRX 1 on)	3	15.82 Hz	20.21 Hz	16.08 Hz
+ 20 (DRX 1 on)	4	22.66 Hz	20.08 Hz	22.73 Hz
+ 20 (DRX 1 on)	5	17.82 Hz	16.85 Hz	13.56 Hz
+ 20 (DRX 1 on)	6	14.66 Hz	19.18 Hz	-19.44 Hz
+ 20 (DRX 1 on)	7	20.79 Hz	17.50 Hz	-12.79 Hz
+ 20 (DRX 1 on)	8	-14.66 Hz	18.73 Hz	-13.50 Hz
+ 20 (DRX 1 on)	9	-14.72 Hz	18.98 Hz	14.46 Hz
+ 20 (DRX 1 on)	10	-13.11 Hz	17.43 Hz	18.27 Hz
+10(DRX 1 off)	0	12.85 Hz	9.69 Hz	-13.11 Hz
+10(DRX 1 off)	1	12.01 Hz	-13.69 Hz	14.21 Hz
+10(DRX 1 off)	2	15.05 Hz	-10.27 Hz	-14.01 Hz
+10(DRX 1 off)	3	12.20 Hz	10.98 Hz	16.85 Hz
+10(DRX 1 off)	4	14.85 Hz	-13.04 Hz	15.11 Hz
+10(DRX 1 off)	5	9.62 Hz	15.95 Hz	-13.69 Hz
+10(DRX 1 off)	6	13.69 Hz	16.85 Hz	15.05 Hz
+10(DRX 1 off)	7	17.05 Hz	22.02 Hz	12.98 Hz
+10(DRX 1 off)	8	14.53 Hz	20.21 Hz	17.18 Hz
+10(DRX 1 off)	9	11.95 Hz	20.92 Hz	11.88 Hz
+10(DRX 1 off)	10	12.01 Hz	12.79 Hz	-12.66 Hz
0	0	16.21 Hz	13.75 Hz	20.34 Hz
0	1	20.86 Hz	14.61 Hz	14.27 Hz
0	2	13.88 Hz	17.11 Hz	15.30 Hz
0	3	21.63 Hz	15.82 Hz	14.21 Hz
0	4	-17.82 Hz	12.79 Hz	12.66 Hz
0	5	-14.59 Hz	16.14 Hz	17.63 Hz
0	6	-13.95 Hz	-14.66 Hz	15.95 Hz
0	7	-13.43 Hz	-12.07 Hz	15.17 Hz
0	8	-16.34 Hz	-15.43 Hz	14.46 Hz
0	9	-19.57 Hz	-15.11 Hz	-16.14 Hz
0	10	-14.92 Hz	-16.72 Hz	-14.85 Hz

*This confidential document is the property of NORTEL MATRA CELLULAR and may not be copied or circulated without permission
Ce document confidentiel est la propriété de NORTEL MATRA CELLULAR et ne peut être reproduit ou communiqué sans autorisation*

Ambient Temp.	Keyed-on-Time	Center Frequency Deviation (Hz)		
(°C)	(Min.)	V = 176.8 VAC	V = 220 VAC	V = 276 VAC
-5 (without heater)	0	25.63 Hz	15.76 Hz	17.24 Hz
-5 (without heater)	1	19.95 Hz	15.05 Hz	14.53 Hz
-5 (without heater)	2	20.79 Hz	15.24 Hz	18.53 Hz
-5 (without heater)	3	23.96 Hz	12.72 Hz	11.82 Hz
-5 (without heater)	4	19.37 Hz	13.88 Hz	12.59 Hz
-5 (without heater)	5	24.15 Hz	28.54 Hz	15.43 Hz
-5 (without heater)	6	21.89 Hz	24.34 Hz	28.02 Hz
-5 (without heater)	7	18.73 Hz	24.54 Hz	28.67 Hz
-5 (without heater)	8	18.53 Hz	23.96 Hz	25.89 Hz
-5 (without heater)	9	18.60 Hz	30.99 Hz	23.12 Hz
-5 (without heater)	10	22.34 Hz	25.25 Hz	22.54 Hz
- 10 (with heater)	0	-12.46 Hz	13.50 Hz	16.01 Hz
- 10 (with heater)	1	-17.76Hz	15.37 Hz	20.28 Hz
- 10 (with heater)	2	-15.11 Hz	-14.40 Hz	22.15 Hz
- 10 (with heater)	3	-15.24 Hz	-16.66 Hz	-17.89 Hz
- 10 (with heater)	4	-12.27 Hz	-12.53 Hz	-12.33 Hz
- 10 (with heater)	5	13.82 Hz	-17.43 Hz	-10.78 Hz
- 10 (with heater)	6	17.11 Hz	-14.01 Hz	-16.98 Hz
- 10 (with heater)	7	16.14 Hz	-19.31 Hz	-17.63 Hz
- 10 (with heater)	8	14.72 Hz	25.70 Hz	-14.14 Hz
- 10 (with heater)	9	16.79 Hz	16.40 Hz	20.79 Hz
- 10 (with heater)	10	18.27 Hz	18.66 Hz	18.40 Hz
-20	0	14.01 Hz	-10.46 Hz	16.14 Hz
-20	1	13.75 Hz	11.75 Hz	13.04 Hz
-20	2	13.43 Hz	11.56 Hz	12.14 Hz
-20	3	12.59 Hz	10.72 Hz	13.24 Hz
-20	4	16.47 Hz	10.98 Hz	12.66 Hz
-20	5	18.40 Hz	13.62 Hz	10.78 Hz
-20	6	-15.30 Hz	10.78 Hz	12.27 Hz
-20	7	12.20 Hz	11.88 Hz	12.46 Hz
-20	8	12.72 Hz	13.24 Hz	11.62 Hz
-20	9	20.86 Hz	12.01 Hz	11.49 Hz
-20	10	-10.72 Hz	12.53 Hz	-11.95 Hz

*This confidential document is the property of NORTEL MATRA CELLULAR and may not be copied or circulated without permission
Ce document confidentiel est la propriété de NORTEL MATRA CELLULAR et ne peut être reproduit ou communiqué sans autorisation*

Ambient Temp.	Keyed-on-Time	Center Frequency Deviation (Hz)		
(°C)	(Min.)	V = 176.8 VAC	V = 220 VAC	V = 276 VAC
-30	0	24.02 Hz	15.22 Hz	14.46 Hz
-30	1	27.83 Hz	-14.44 Hz	16.66 Hz
-30	2	19.44 Hz	15.43 Hz	15.05 Hz
-30	3	18.53 Hz	16.79 Hz	20.02 Hz
-30	4	18.85 Hz	12.33 Hz	15.82 Hz
-30	5	22.86 Hz	13.56 Hz	17.95 Hz
-30	6	17.11 Hz	14.53 Hz	14.85 Hz
-30	7	25.76 Hz	14.40 Hz	18.08 Hz
-30	8	20.86 Hz	17.95 Hz	20.73 Hz
-30	9	18.76 Hz	12.66 Hz	18.08 Hz
-30	10	-12.20 Hz	15.05 Hz	20.40 Hz

The measurements have been made from +50°C to –5°C without heaters and from –10°C to –30°C with heaters. The heaters are off until –10°C.

*This confidential document is the property of NORTEL MATRA CELLULAR and may not be copied or circulated without permission
Ce document confidentiel est la propriété de NORTEL MATRA CELLULAR et ne peut être reproduit ou communiqué sans autorisation*

Configuration without AC/Telco Box

Ambient Temp. (°C)	Keyed-on-Time (Min.)	Center Frequency Deviation (Hz)		
		*V= 43.4 V DC	V = 48 V DC	V = 55.2 V DC
+ 50	0	14.33 Hz	18.16 Hz	16.92 Hz
+ 50	1	20.15 Hz	22.92 Hz	14.98 Hz
+ 50	2	15.56 Hz	20.92 Hz	19.44 Hz
+ 50	3	22.86 Hz	19.57 Hz	16.53 Hz
+ 50	4	28.54 Hz	15.50 Hz	15.05 Hz
+ 50	5	22.66 Hz	19.89 Hz	16.14 Hz
+ 50	6	26.28 Hz	17.69 Hz	22.60 Hz
+ 50	7	18.02 Hz	21.31 Hz	19.76 Hz
+ 50	8	-10.59 Hz	-10.14 Hz	17.11 Hz
+ 50	9	-10.53 Hz	-14.72 Hz	15.11 Hz
+ 50	10	10.20 Hz	09.88 Hz	14.66 Hz
+ 40	0	14.98 Hz	18.79 Hz	22.60 Hz
+ 40	1	12.07 Hz	11.04 Hz	21.24 Hz
+ 40	2	14.27 Hz	12.98 Hz	24.60 Hz
+ 40	3	15.88 Hz	13.43 Hz	23.83 Hz
+ 40	4	15.76 Hz	14.85 Hz	13.17 Hz
+ 40	5	14.79 Hz	13.24 Hz	-13.82 Hz
+ 40	6	22.15 Hz	16.98 Hz	11.49 Hz
+ 40	7	25.51 Hz	15.56 Hz	-14.01 Hz
+ 40	8	20.15 Hz	12.27 Hz	13.11 Hz
+ 40	9	24.66 Hz	-11.36 Hz	-10.07 Hz
+ 40	10	20.86 Hz	18.21 Hz	16.66 Hz
+ 30	0	15.17 Hz	17.50 Hz	16.85 Hz
+ 30	1	14.53 Hz	17.05 Hz	19.11 Hz
+ 30	2	16.89 Hz	21.18 Hz	19.57 Hz
+ 30	3	17.76 Hz	16.72 Hz	17.95 Hz
+ 30	4	20.73 Hz	24.41 Hz	23.83 Hz
+ 30	5	18.40 Hz	21.95 Hz	18.21 Hz
+ 30	6	20.86 Hz	14.92 Hz	18.98 Hz
+ 30	7	19.92 Hz	20.73 Hz	20.28 Hz
+ 30	8	17.63 Hz	19.05 Hz	21.24 Hz
+ 30	9	17.18 Hz	20.08 Hz	25.96 Hz
+ 30	10	19.82 Hz	19.82 Hz	18.21 Hz

* There is an under voltage shot down about 43 V DC

*This confidential document is the property of NORTEL MATRA CELLULAR and may not be copied or circulated without permission
Ce document confidentiel est la propriété de NORTEL MATRA CELLULAR et ne peut être reproduit ou communiqué sans autorisation*


Ambient Temp.	Keyed-on-Time	Center Frequency Deviation (Hz)		
(°C)	(Min.)	*V= 43.4 V DC	V = 48 V DC	V = 55.2 V DC
+ 20 (DRX 1 on)	0	24.34 Hz	26.93 Hz	23.44 Hz
+ 20 (DRX 1 on)	1	23.83 Hz	24.92 Hz	24.41 Hz
+ 20 (DRX 1 on)	2	25.38 Hz	23.96 Hz	21.63 Hz
+ 20 (DRX 1 on)	3	16.01 Hz	13.11 Hz	24.41 Hz
+ 20 (DRX 1 on)	4	14.01 Hz	-11.04 Hz	14.98 Hz
+ 20 (DRX 1 on)	5	14.48 Hz	13.11 Hz	12.72 Hz
+ 20 (DRX 1 on)	6	19.24 Hz	15.30 Hz	13.69 Hz
+ 20 (DRX 1 on)	7	16.72 Hz	18.27 Hz	13.11 Hz
+ 20 (DRX 1 on)	8	20.79 Hz	24.92 Hz	16.21 Hz
+ 20 (DRX 1 on)	9	24.92 Hz	26.41 Hz	19.18 Hz
+ 20 (DRX 1 on)	10	20.53 Hz	29.25 Hz	15.17 Hz
+10(DRX 1 off)	0	18.34 Hz	11.17 Hz	15.30 Hz
+10(DRX 1 off)	1	23.50 Hz	-11.36 Hz	15.56 Hz
+10(DRX 1 off)	2	19.11 Hz	12.66 Hz	10.72 Hz
+10(DRX 1 off)	3	16.34 Hz	11.11 Hz	12.66 Hz
+10(DRX 1 off)	4	14.59 Hz	11.69 Hz	17.43 Hz
+10(DRX 1 off)	5	13.50 Hz	12.01 Hz	14.08 Hz
+10(DRX 1 off)	6	11.24 Hz	11.95 Hz	13.75 Hz
+10(DRX 1 off)	7	12.40 Hz	08.27 Hz	-09.69 Hz
+10(DRX 1 off)	8	-11.24 Hz	-15.05 Hz	13.50 Hz
+10(DRX 1 off)	9	11.43 Hz	14.08 Hz	13.17 Hz
+10(DRX 1 off)	10	16.14 Hz	11.75 Hz	14.40 Hz
0	0	-22.21 Hz	-11.11 Hz	17.43 Hz
0	1	-16.85 Hz	-14.92 Hz	14.59 Hz
0	2	-11.50 Hz	-16.08 Hz	13.75 Hz
0	3	14.89 Hz	-17.11 Hz	-16.53 Hz
0	4	15.56 Hz	-16.47 Hz	-15.24 Hz
0	5	17.89 Hz	17.05 Hz	-21.11 Hz
0	6	20.08 Hz	16.40 Hz	-16.85 Hz
0	7	17.82 Hz	16.27 Hz	-21.18 Hz
0	8	18.60 Hz	13.43 Hz	17.50 Hz
0	9	16.08 Hz	13.11 Hz	17.63 Hz
0	10	13.82 Hz	15.95 Hz	15.05 Hz

*This confidential document is the property of NORTEL MATRA CELLULAR and may not be copied or circulated without permission
Ce document confidentiel est la propriété de NORTEL MATRA CELLULAR et ne peut être reproduit ou communiqué sans autorisation*

Ambient Temp.	Keyed-on-Time	Center Frequency Deviation (Hz)		
(°C)	(Min.)	*V= 43.4 V DC	V = 48 V DC	V = 55.2 V DC
-5°C	0	19.50 Hz	16.40 Hz	-14.40 Hz
-5°C	1	19.76 Hz	18.02 Hz	-15.82 Hz
-5°C	2	14.79 Hz	17.76 Hz	-13.17 Hz
-5°C	3	20.34 Hz	20.73 Hz	16.53 Hz
-5°C	4	18.08 Hz	22.66 Hz	20.60 Hz
-5°C	5	-12.60 Hz	15.82 Hz	16.69 Hz
-5°C	6	-12.59 Hz	20.99 Hz	18.47 Hz
-5°C	7	-16.69 Hz	16.72 Hz	17.05 Hz
-5°C	8	-10.33 Hz	17.05 Hz	13.82 Hz
-5°C	9	-10.53 Hz	11.36 Hz	17.89 Hz
-5°C	10	16.01 Hz	-14.53 Hz	17.76 Hz
- 10	0	15.37 Hz	12.14 Hz	18.34 Hz
- 10	1	22.02 Hz	15.17 Hz	18.98 Hz
- 10	2	18.73 Hz	-12.33 Hz	10.85 Hz
- 10	3	18.47 Hz	08.65 Hz	11.36 Hz
- 10	4	24.02 Hz	21.63 Hz	-11.56 Hz
- 10	5	18.85 Hz	22.28 Hz	-15.76 Hz
- 10	6	16.98 Hz	20.79 Hz	-09.81 Hz
- 10	7	18.21 Hz	19.76 Hz	15.82 Hz
- 10	8	14.98 Hz	19.50 Hz	14.82 Hz
- 10	9	15.50 Hz	18.40 Hz	20.02 Hz
- 10	10	-15.37 Hz	19.69 Hz	19.11 Hz
-20	0	75.75 Hz	63.41 Hz	61.92 Hz
-20	1	75.48 Hz	70.58 Hz	63.99 Hz
-20	2	75.68 Hz	67.28 Hz	65.48 Hz
-20	3	63.02 Hz	64.44 Hz	66.25 Hz
-20	4	65.93 Hz	70.60 Hz	72.26 Hz
-20	5	69.29 Hz	74.06 Hz	68.77 Hz
-20	6	61.47 Hz	72.77 Hz	69.93 Hz
-20	7	63.93 Hz	75.29 Hz	72.04 Hz
-20	8	60.50 Hz	76.32 Hz	72.26 Hz
-20	9	69.41 Hz	71.84 Hz	67.35 Hz
-20	10	64.54 Hz	78.84 Hz	66.90 Hz

*This confidential document is the property of NORTEL MATRA CELLULAR and may not be copied or circulated without permission
Ce document confidentiel est la propriété de NORTEL MATRA CELLULAR et ne peut être reproduit ou communiqué sans autorisation*

8.5.3. TEST PROCEDURE

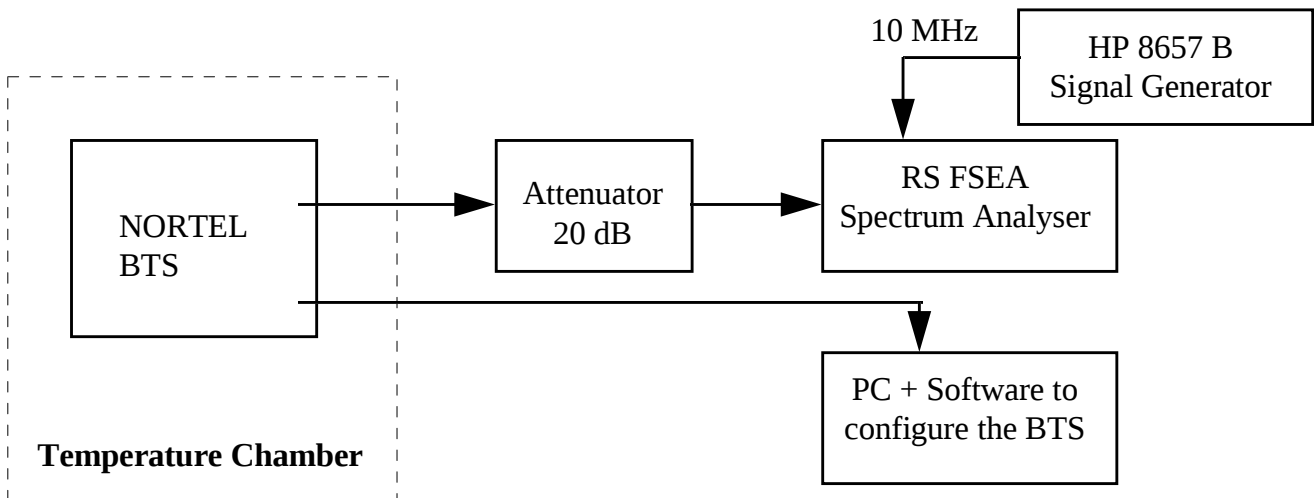

The BTS was configured to transmit at maximum power (static level 0). At each temperature, measurements were made with the primary supply voltage of the nominal value. At each of the above specified conditions, the maximum carrier frequency deviation was recorded from the time the transmitter was keyed-on for a period of ten minutes using a R&S FSEA spectrum analyzer.

8.6. MEASUREMENT EQUIPMENT LIST

Equipment Description	Manufacturer	Model No.	Serial No.
Spectrum Analyzer	R&S	FSEA	502384
Power Generator	HP	8657B	508462
Power Generator	HP	35120A	503258
DSA	W&G	15	511584
Multimeter	Lem Heme	240	21545
Multimeter	Wavetek	28 XT	24067
Programmable AC Source	Chroma	6590	515963
Programmable AC Source	California Instr.	-	502108
Power Generator DC	Xantrec	XKW8037	515929
Network Analyzer	HP	8719D	521768
Calibration Kit	HP	85054D	521769
Multimeter	HP	33401A	502656
Synthesizer / Function Generator	HP	3325A	500446
Spectrum Analyzer	R&S	FSEM	517751
Power meter	Gigatronics	8542C	515955
Power Sensor	Mode	80401A	511085
Power Generator	HP	3325A	521772

*This confidential document is the property of NORTEL MATRA CELLULAR and may not be copied or circulated without permission
Ce document confidentiel est la propriété de NORTEL MATRA CELLULAR et ne peut être reproduit ou communiqué sans autorisation*

9. EXHIBIT 2 : EQUIPMENT LIST

Description	Hardware code	Comment
Base Unit HP	NTQA25LA	230VAC protected with heaters S11 configuration
SBCF	NTQA2785	In Enhanced Packaging
PSU	NTQA2263 NTQA2612	In Enhanced Packaging (allows DC start) In Enhanced Packaging
DRX	NTQA29FA	New Design
PCBA MEU	NTQA2644 NTQA2645	
I&C	NTQA2287	In Enhanced Packaging
Dual U-VGA	NTQA2294	In Enhanced Packaging
HPRF Module	NTQA24AA	Remote HPRF Module with daisy data cable of 2 meters and DC data cable of 10 meters (protection for RF cables) S11 configuration
Filter	NTQA2617	Phase Device In HPRF Module
PA	NTQA2794	Spectrian In HPRF Module
Duplexer	NTQA2605	Phase Device In HPRF Module
LNA	NTQA2229	In HPRF Module
AC/Telco Box	NTQA26MA	

*This confidential document is the property of NORTEL MATRA CELLULAR and may not be copied or circulated without permission
Ce document confidentiel est la propriété de NORTEL MATRA CELLULAR et ne peut être reproduit ou communiqué sans autorisation*

10. EXHIBIT 3 : SCHEMATICS**10.1. NEW DESIGN DRX ASSEMBLY**

ADQA29FA (5 pages)

10.2. DRX RADIO POWER SUPPLY

CSQA0108 (2 pages) and ADQA0108 (3 pages)

10.3. DRX LOGIC POWER SUPPLY

DQA0106 (3 pages)

10.4. LOGIC DRIVER / RECEIVER

ADQA0143 (6 pages)

10.5. LOGIC DRIVER / RECEIVER MODULE

CSQA0143 (20 pages)

10.6. RDRX-P-ND RADIO BOARD

ADQA0145 (3 pages) and CSQA0145 (38 pages)

10.7. LNA PCS 1900 LOWCOST

CSQA2230 (2 pages)

10.8. DUAL U-VGA DCS 1900

CSQA2295 (5 pages)

œ END OF DOCUMENT œ

*This confidential document is the property of NORTEL MATRA CELLULAR and may not be copied or circulated without permission
Ce document confidentiel est la propriété de NORTEL MATRA CELLULAR et ne peut être reproduit ou communiqué sans autorisation*