



FCC Test Report

FOR:

Lyft, Inc.

Model Name

SIT-03-1-B

Product Description:

Location and connectivity module. Includes LTE, NFC, GNSS and RX-only Wi-Fi to enable ride sharing capabilities and unit tracking.

FCC ID: 2ASMPSIT031B

Per:

Title 47 CFR: FCC Part 27

REPORT #:

EMC_LYFTH_005_19001_FCC_27

DATE: 7/25/2019



A2LA Accredited

IC recognized #
3462B-2

CETECOM Inc.

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: + 1 (408) 586 6200 ♦ Fax: + 1 (408) 586 6299 ♦ E-mail: info@cetecom.com ♦ <http://www.cetecom.com>
CETECOM Inc. is a Delaware Corporation with Corporation number: 2905571

TABLE OF CONTENTS

1	ASSESSMENT	3
2	ADMINISTRATIVE DATA.....	4
2.1	IDENTIFICATION OF THE TESTING LABORATORY ISSUING THE EMC TEST REPORT	4
2.2	IDENTIFICATION OF THE CLIENT	4
2.3	IDENTIFICATION OF THE MANUFACTURER.....	4
3	EQUIPMENT UNDER TEST (EUT).....	5
3.1	EUT SPECIFICATIONS	5
3.2	EUT SAMPLE DETAILS.....	5
3.3	ACCESSORY EQUIPMENT	6
3.4	TEST SAMPLE CONFIGURATION	6
3.5	MODE OF OPERATION DETAILS.....	6
3.6	JUSTIFICATION FOR WORST CASE MODE OF OPERATION	6
4	SUBJECT OF INVESTIGATION.....	7
4.1	DATES OF TESTING:.....	7
4.2	MEASUREMENT UNCERTAINTY.....	7
4.3	ENVIRONMENTAL CONDITIONS DURING TESTING:	7
5	MEASUREMENT PROCEDURES.....	8
5.1	RADIATED MEASUREMENT	8
5.2	SAMPLE CALCULATIONS FOR FIELD STRENGTH MEASUREMENTS	10
6	MEASUREMENT RESULTS SUMMARY	11
6.1	FCC 27:.....	11
7	TEST RESULT DATA	12
7.1	ERP / EIRP.....	12
7.2	RADIATED SPURIOUS EMISSIONS	12
8	TEST SETUP PHOTOS.....	33
9	TEST EQUIPMENT AND ANCILLARIES USED FOR TESTING	33
10	REVISION HISTORY	33

1 Assessment

The following device as further described in section 3 of this report was evaluated for radiated spurious emissions in simultaneous transmission of cellular and NFC radios according to criteria specified in the Code of Federal Regulations Title 47 CFR: FCC Part 27.

Company	Description	Model #
Lyft, Inc.	Location and connectivity module. Includes LTE, NFC, GNSS and RX-only Wi-Fi to enable ride sharing capabilities and unit tracking.	SIT-03-1-B

No deficiencies were ascertained.

According to section 6 of this report, the overall result is PASS.

Responsible for Testing Laboratory:

7/25/2019	Compliance	Li, Cindy (Lab Manager)	
Date	Section	Name	Signature

Responsible for the Report:

7/25/2019	Compliance	Ghanma, Issa (EMC Engineer)	
Date	Section	Name	Signature

The test results of this test report relate exclusively to the test item specified in Section 3.

CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM Inc. USA.

2 Administrative Data

2.1 Identification of the Testing Laboratory Issuing the EMC Test Report

Company Name:	CETECOM Inc.
Department:	Compliance
Street Address:	411 Dixon Landing Road
City/Zip Code	Milpitas, CA 95035
Country	USA
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Lab Manager:	Li, Cindy
Responsible Project Leader:	Saman, Rami

2.2 Identification of the Client

Applicant's Name:	Lyft, Inc.
Street Address:	185 Berry St Suite 5000
City/Zip Code	San Francisco, CA 94107
Country	USA

2.3 Identification of the Manufacturer

Manufacturer's Name:	---Same as client-----
Manufacturers Address:	-----
City/Zip Code	-----
Country	-----

3 Equipment Under Test (EUT)

3.1 EUT Specifications

Brand:	Lyft
Marketing name:	Lyft Scooter Interface Module
Power Supply/ Rated Operating Voltage Range:	Low 30 VDC, Nominal 36 VDC, High 42 VDC
Operating Temperature Range:	Low -20° C, Nominal 25° C, High 50° C
Sample Revision	☐ Prototype Unit; ☐ Production Unit; ☒ Pre-Production
EUT Dimensions(mm):	180 x 75 x 40
Antenna Information as declared:	Primary RX/TX : Taoglas PCS.06.A 698 ~ 803 MHz: -0.21 dBi (Peak Gain) 1710 – 2155 MHz: 3.05 dBi (Peak Gain) Secondary RX: The secondary RX antenna connection is not used in this design.
Weight(grams):	250
EUT Diameter	☒ < 60 cm ☐ Other _____
Other Radios included in the device:	❖ NFC Module: • 13.56 MHz Transceiver (TRF7960ARHBT) • Model number: Lyft 8DT-03-1064 ❖ WLAN(Wi-Fi): 802.11 b/g/n (Receive only) • Module name: Stand-alone Wi-Fi • Model number: uBlox NINA-W132 • FCC ID: XPNINAW13 ❖ GPS: • Module name: uBlox M8 GNSS Antenna Module • Model number: SAM-M8Q

3.2 EUT Sample details

EUT #	S/N	HW Version	SW Version	Notes/Comments
1	971-288	1.1	1.1	Radiated Spurious Emissions

3.3 Accessory Equipment

AE #	Comments
1	❖ XP Power: o S/N :171002-00573 o MODEL : ACM36US36 o INPUT :100V – 240V~50/60Hz, 1.0A o OUTPUT :36 V ____ 1.0A

3.4 Test Sample Configuration

EUT Set-up #	Combination of AE used for test set up	Comments
1	EUT # 1 + AE # 1	-

3.5 Mode of Operation details

Mode of Operation	Description of Operating modes	Additional Information
Op. 1	LTE CAT-1 and NFC	Cellular was tested on Low, Mid, High Channels at the maximum power in a co-transmission mode. No special and/or AT commands were used. The cellular radio auto connects to the base station, and NFC radio was configured previously by the client to transmit continuously. The internal antenna was connected.

3.6 Justification for Worst Case Mode of Operation

During the testing process, the EUT was tested with transmitter sets on low, mid and high channels at the maximum power, 1 RB start at 24 and QPSK modulation; based on modular grant and certification reports, in simultaneous transmission with NFC.

For radiated measurements, all data in this report shows the worst case between horizontal and vertical antenna polarizations and for all orientations of the EUT.

4 Subject of Investigation

The objective of the evaluation conducted by CETECOM Inc. is to support a request for new equipment authorization under **FCC ID: 2ASMPSIT031B**

The pre-certified module to be integrated (Digi XBee Cellular LTE Cat 1 XBC-V1-UT-101) as described in Section 3, Radiated Spurious Emissions test was performed. Results have been checked to meet limits per Code of Federal Regulations Title 47 CFR: FCC Part 27.

The conducted module test data that can be obtained under **FCC Filing ID: RI7LE8866V1A** is applicable for the host described in section 3.

4.1 Dates of Testing:

07/17/2019 – 07/19/2019

4.2 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus, with 95% confidence interval (in dB delta to result), based on a coverage factor k=1.

Radiated measurement

9 kHz to 30MHz	±2.5 dB (Magnetic Loop Antenna)
30 MHz to 1000 MHz	±2.0 dB (Biconilog Antenna)
1 GHz to 40 GHz	±2.3 dB (Horn Antenna)

4.3 Environmental Conditions during Testing:

The following environmental conditions were maintained during the course of testing:

- Ambient Temperature: 20-25°C
- Relative humidity: 40-60%


Deviating test conditions are indicated at individual test description where applicable.



5 Measurement Procedures

Testing is performed according to the guidelines provided in FCC publication (KDB) 971168 D01 v03 – “Measurement Guidance for Certification of Licensed Digital Transmitters” and according to ANSI C63.26 as detailed below.

5.1 Radiated Measurement

- The exploratory measurement is accomplished by running a matrix of 16 sweeps over the required frequency range with R&S Test-SW EMC32 360° continuous measurement of the turntable, two orthogonal positions of the EUT and both antenna polarizations. This procedure exceeds the requirement of the above standards to cover the 3 orthogonal axis of the EUT. A max peak detector is utilized during the exploratory measurement. The Test-SW creates an overall maximum trace for all 12 sweeps and saves the settings for each point of this trace. The maximum trace is part of the test report.
- The 10 highest emissions are selected with an automatic algorithm of EMC32 searching for peaks in the noise floor and ensuring that broadband signals are not selected multiple times.
- The maxima are then put through the final measurement and again maximized in a 90deg range of the turntable, fine search in frequency domain and height scan between 1m and 4m.
- The above procedure is repeated for all possible ways of power supply to EUT and for all supported modulations.
- In case there are no emissions above noise floor level only the maximum trace is reported as described above.
- The results are split up into up to 4 frequency ranges due to antenna bandwidth restrictions. A magnetic loop is used from 9 kHz to 30 MHz, a Biconilog antenna is used from 30 MHz to 1 GHz, and two different horn antennas are used to cover frequencies up to 40 GHz.

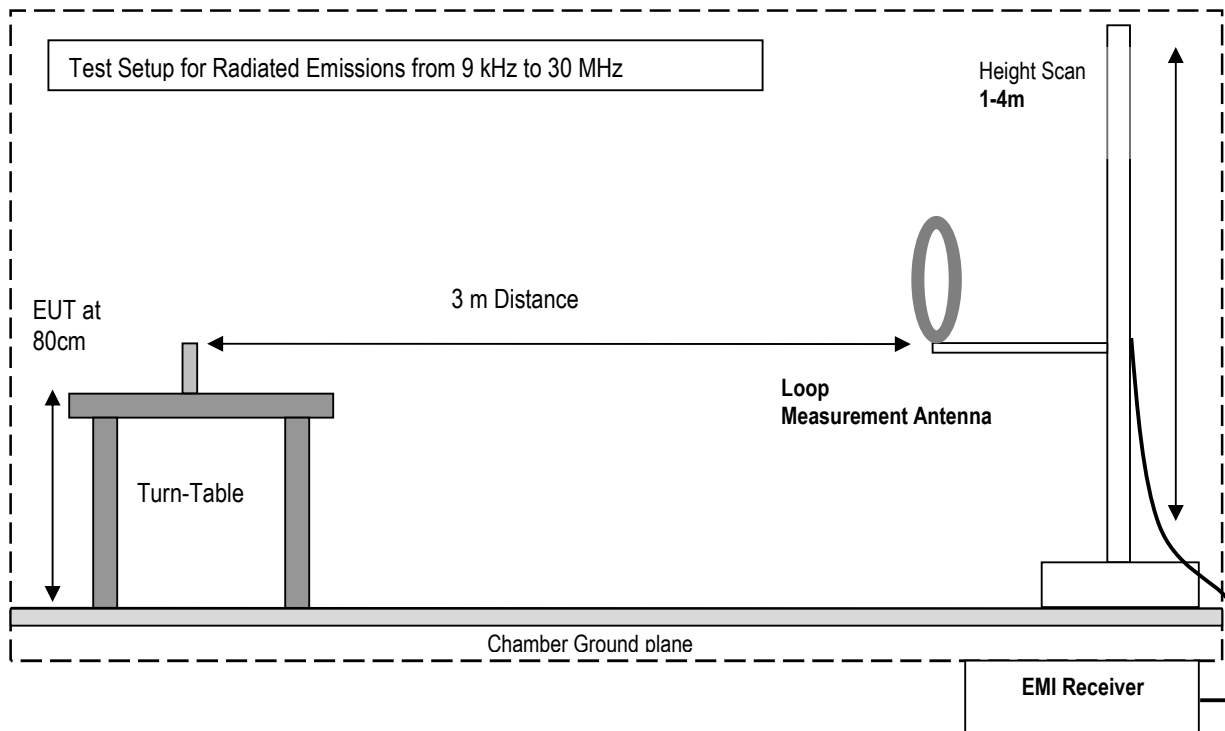

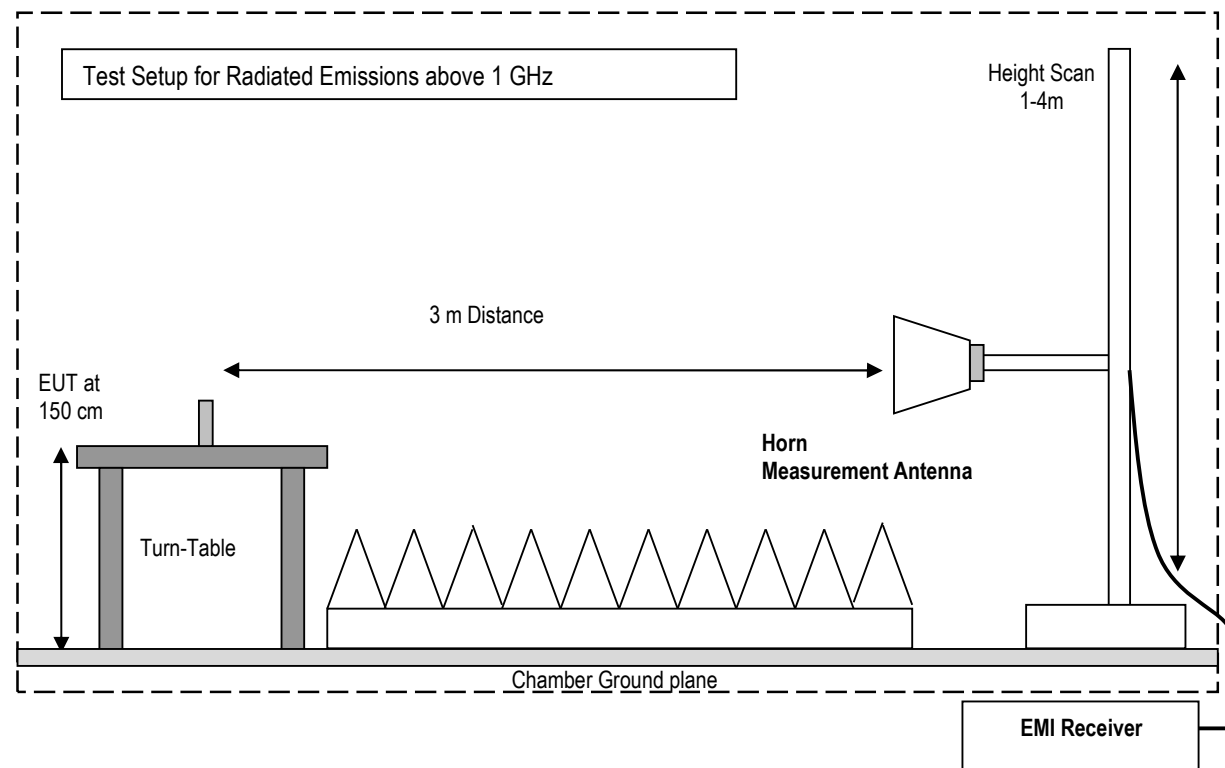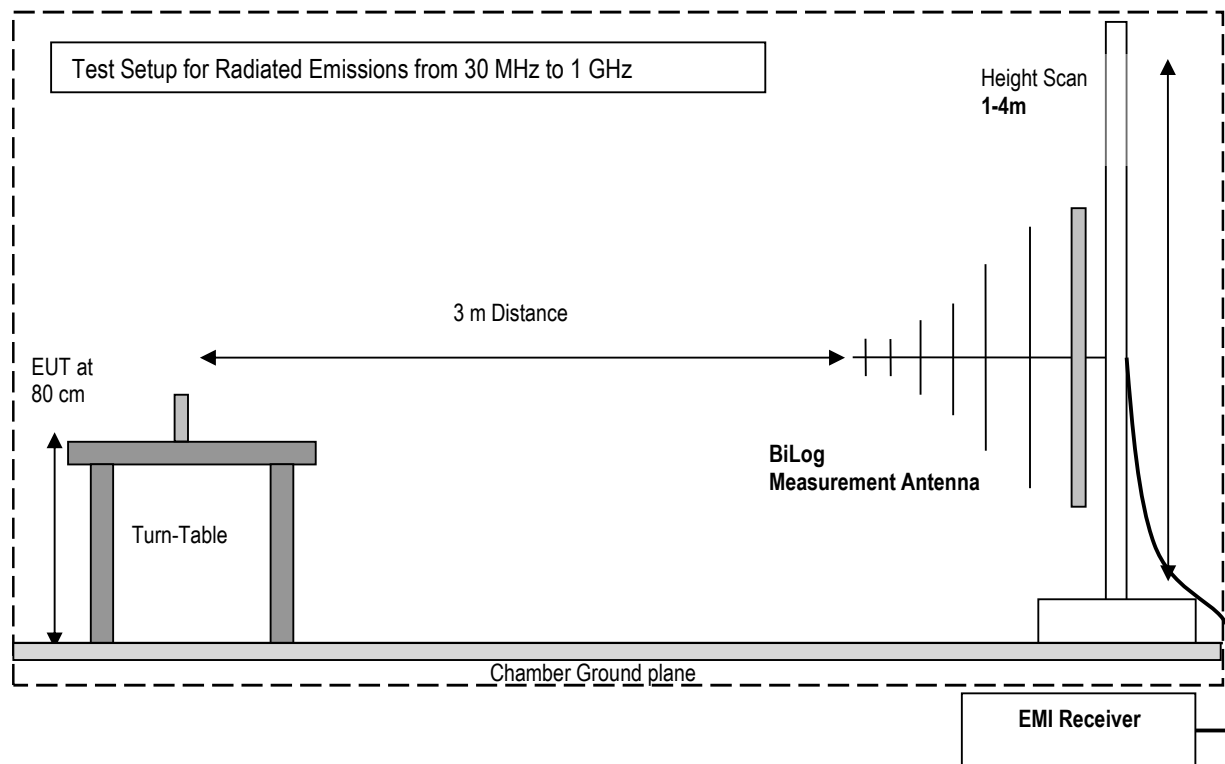

5.2 Sample Calculations for Field Strength Measurements

Field Strength is calculated from the Spectrum Analyzer/ Receiver readings, taking into account the following parameters:

- Measured reading in dB μ V
- Cable Loss between the receiving antenna and SA in dB and
- Antenna Factor in dB/m

All radiated measurement plots in this report are taken from a test SW that calculates the Field Strength based on the following equation:

$$FS \text{ (dB}\mu\text{V/m)} = \text{Measured Value on SA (dB}\mu\text{V)} - \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$$

Example:

Frequency (MHz)	Measured SA (dB μ V)	Cable Loss (dB)	Antenna Factor Correction (dB)	Field Strength Result (dB μ V/m)
1000	80.5	3.5	14	98.0

6 Measurement Results Summary

6.1 FCC 27:

Test Specification	Test Case	Temperature and Voltage Conditions	Mode	Pass	Fail	NA	NP	Result
§2.1046; §27.50 (d)	RF Output Power	Nominal	-	☐	☐	☐	■	Note 1 Note 2
§2.1055; §27.54	Frequency Stability	Nominal	-	☐	☐	☐	■	Note 1 Note 2
§2.1049; §27.53	Occupied Bandwidth	Nominal	-	☐	☐	☐	■	Note 1 Note 2
§2.1051; §27.53	Band Edge Compliance	Nominal	-	☐	☐	☐	■	Note 1 Note 2
§2.1051; §27.53	Conducted Spurious Emissions	Nominal	-	☐	☐	☐	■	Note 1 Note 2
§2.1053; §27.53(g); §27.53(h);	Radiated Spurious Emissions	Nominal	LTE CAT-1 and NFC (Co-TX)	■	☐	☐	☐	Complies

Note 1: NA= Not Applicable; NP= Not Performed.

Note 2: Leveraged from module certification Digi XBee Cellular LTE Cat 1 XBC-V1-UT-101 **FCC Filing ID: RI7LE8866V1A**

7 Test Result Data

7.1 ERP / EIRP

Module Name:	Digi XBee Cellular LTE Cat 1							
Model Number:	XBC-V1-UT-101							
FCC ID:	R17LE8866V1A							
Band	Frequency range (MHz)	Power (Watts)	Gain (dBi / Lin)	ERP (Watts)	EIRP (Watts)	Frequency Tolerance	Emission Designator	Type of modulation(s)
LTE 4	1710.0 – 1755.0	0.18155	3.05 / -	-	0.366	1.0 PM	4M57G7W	QPSK, 16-QAM
LTE 13	799.0 – 785.0	0.38726	-0.21 / 095	0.225	0.369	1.0 PM	4M52G7W	QPSK, 16-QAM

Note: ERP / EIRP are calculated from maximum power in grant of cellular module, adding the maximum gain of the utilized cellular antenna.

7.2 Radiated Spurious Emissions

7.2.1 Measurement according to FCC: CFR 47 Part 2.1053; CFR Part 27.53 utilizing KDB 971168 D01 Power Meas License Digital Systems v03, and according to ANSI C63.26 2017

Spectrum Analyzer Settings for FCC 27

Frequency Range	30MHz – 1 GHz	1 – 2.7 GHz	2.7 – 18 GHz	18 – 19.1 GHz
Resolution Bandwidth	100 kHz	1 MHz	1 MHz	1 MHz
Video Bandwidth	100 kHz	1 MHz	1 MHz	1 MHz
Detector	Peak	Peak	Peak	Peak
Trace Mode	Max Hold	Max Hold	Max Hold	Max Hold
Sweep Time	Auto	Auto	Auto	Auto

7.2.2 Limits:

- FCC Part 27.53 (g), and Part 27.53 (h)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB = (-13dBm)

7.2.3 Test conditions and setup:


Ambient Temperature (C)	EUT operating mode	Power Input
22	Op. 1	36v DC

7.2.4 Measurement Plots:

LTE Band 4

Plot # 1 Radiated Emissions: 30 MHz - 1 GHz


Channel: Low

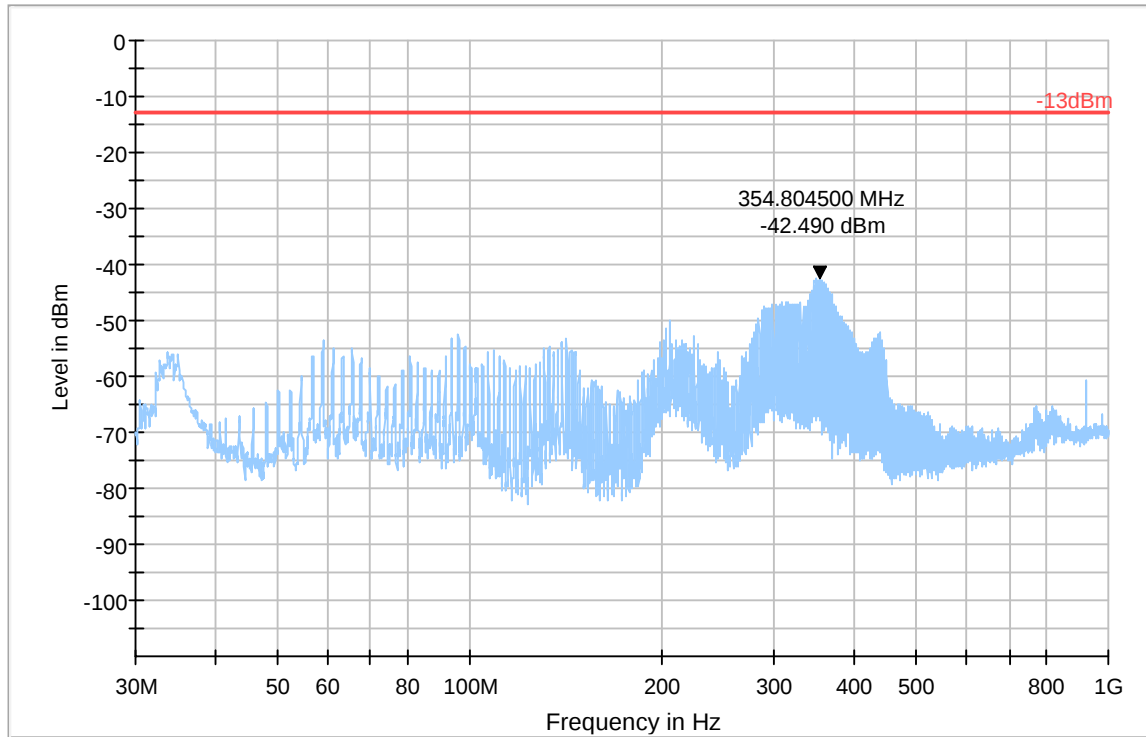

— Preview Result 1-PK+ * Critical_Freqs PK+ — -13dBm ◆ Final_Result RMS

Plot # 2 Radiated Emissions: 1 GHz - 3 GHz


Channel: Low

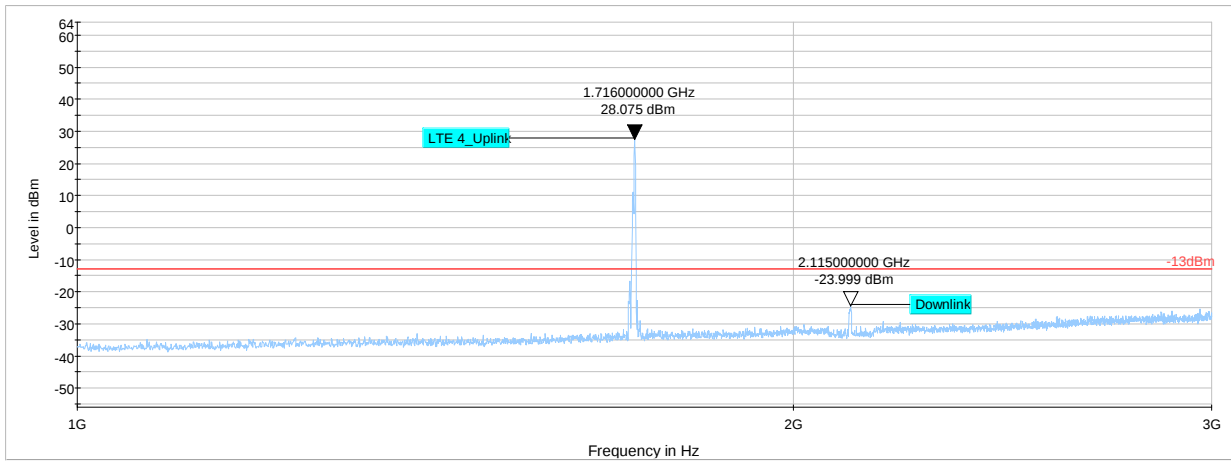

Preview Result 1-PK+ * Critical_Freqs PK+ -13dBm ♦ Final_Result RMS

Plot # 3 Radiated Emissions: 3 GHz - 18 GHz

Channel: Low

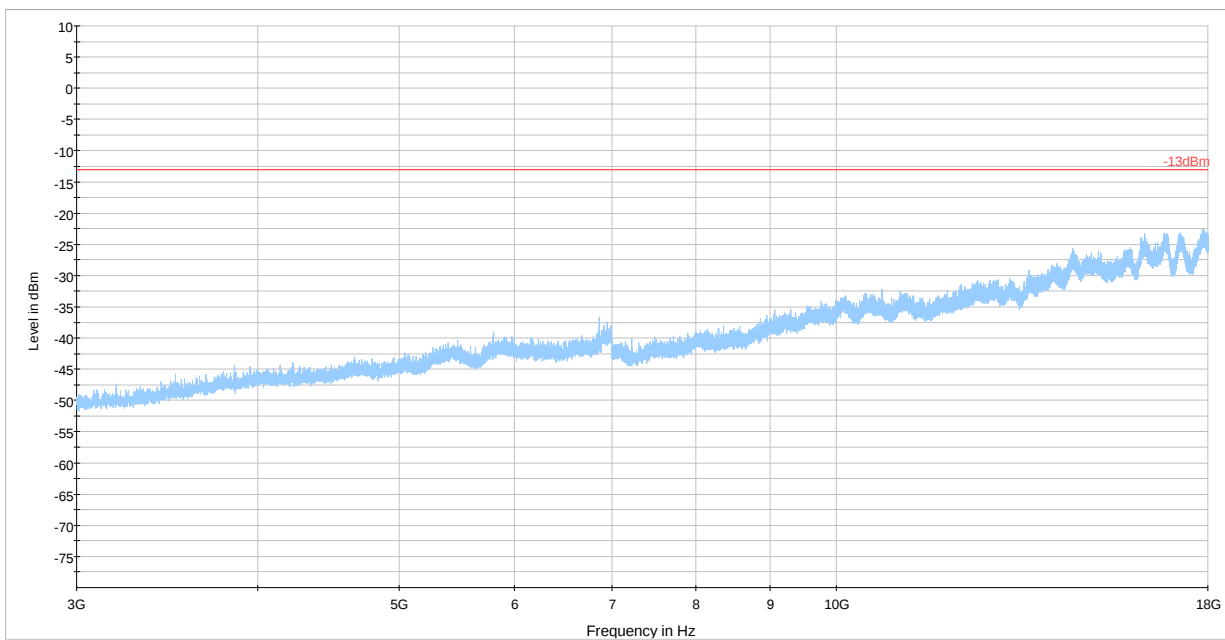


Preview Result 1-PK+ * Critical_Freqs PK+ -13dBm ♦ Final_Result RMS

Plot # 4 Radiated Emissions: 9 kHz - 30 MHz

Channel: Mid


Final Result

Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Comment
0.0092	-27.39	-13.00	14.39	100.0	0.100	138.0	H	38.0	-68.6	6:18:24 PM - 7/19/2019
0.0183	-34.44	-13.00	21.44	100.0	0.100	254.0	H	113.0	-73.6	6:24:41 PM - 7/19/2019
0.0301	-32.06	-13.00	19.06	100.0	0.100	107.0	H	260.0	-75.8	6:31:11 PM - 7/19/2019
0.0332	-35.53	-13.00	22.53	100.0	0.100	166.0	V	176.0	-76.2	6:21:29 PM - 7/19/2019
0.1018	-33.22	-13.00	20.22	100.0	0.100	100.0	H	206.0	-79.8	6:27:58 PM - 7/19/2019

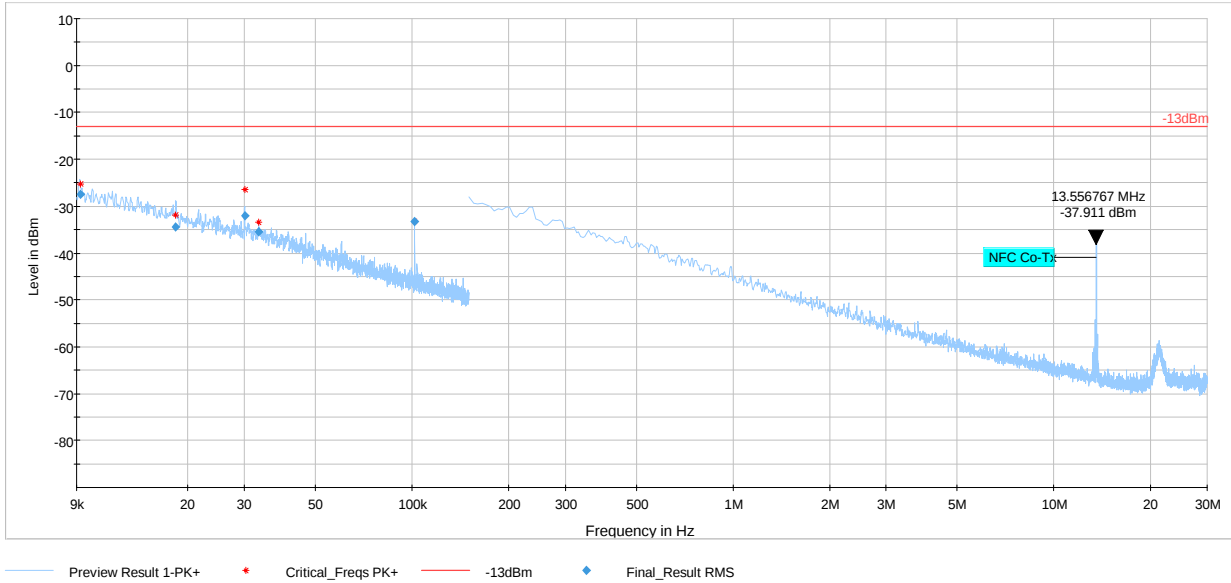


Plot # 5 Radiated Emissions: 30 MHz – 1GHz

Channel: Mid

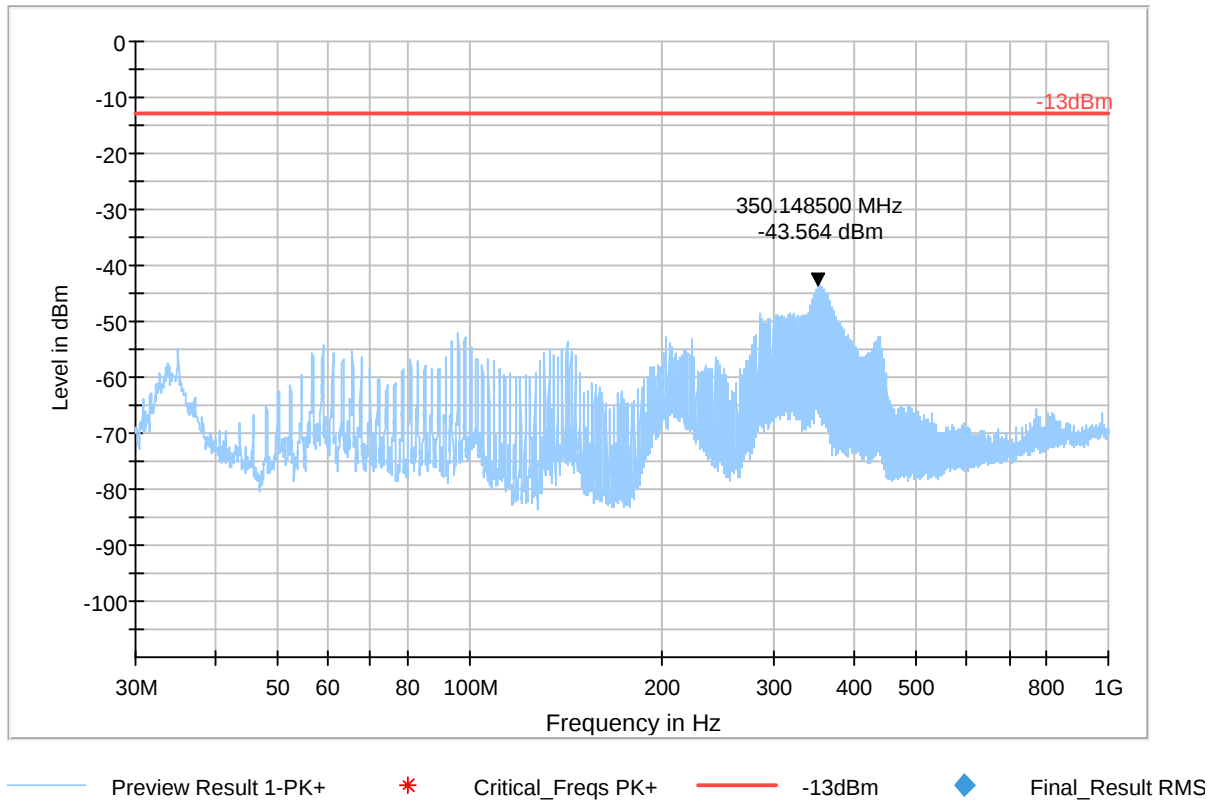


Plot # 6 Radiated Emissions: 1 GHz - 3 GHz

Channel: Mid

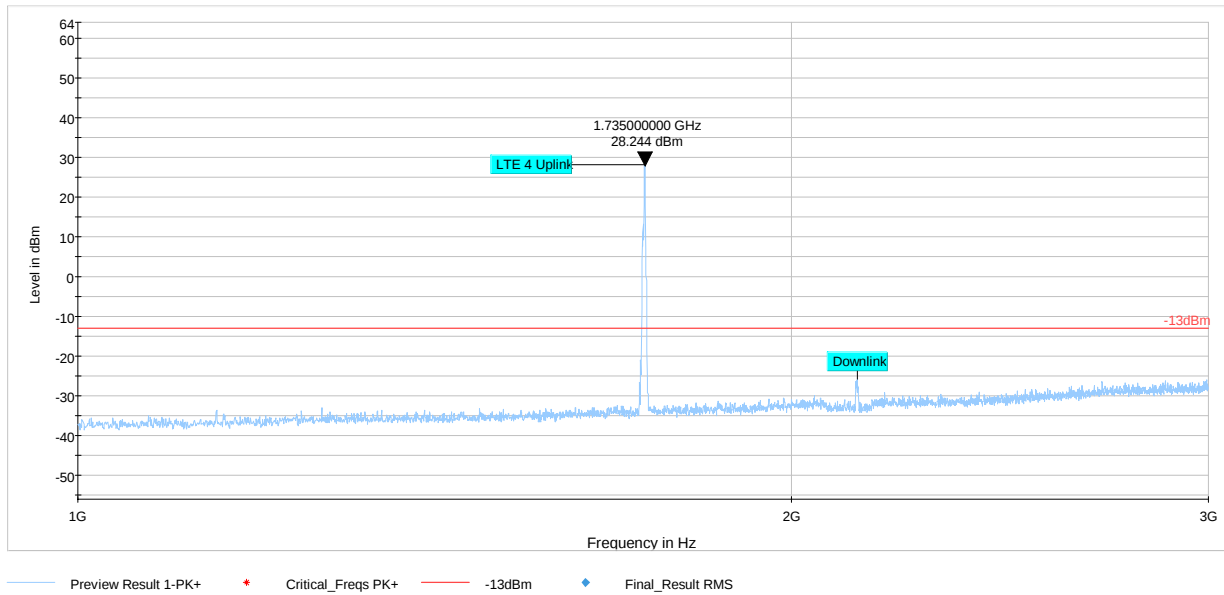

Plot # 7 Radiated Emissions: 3 GHz – 18 GHz


Channel: Mid

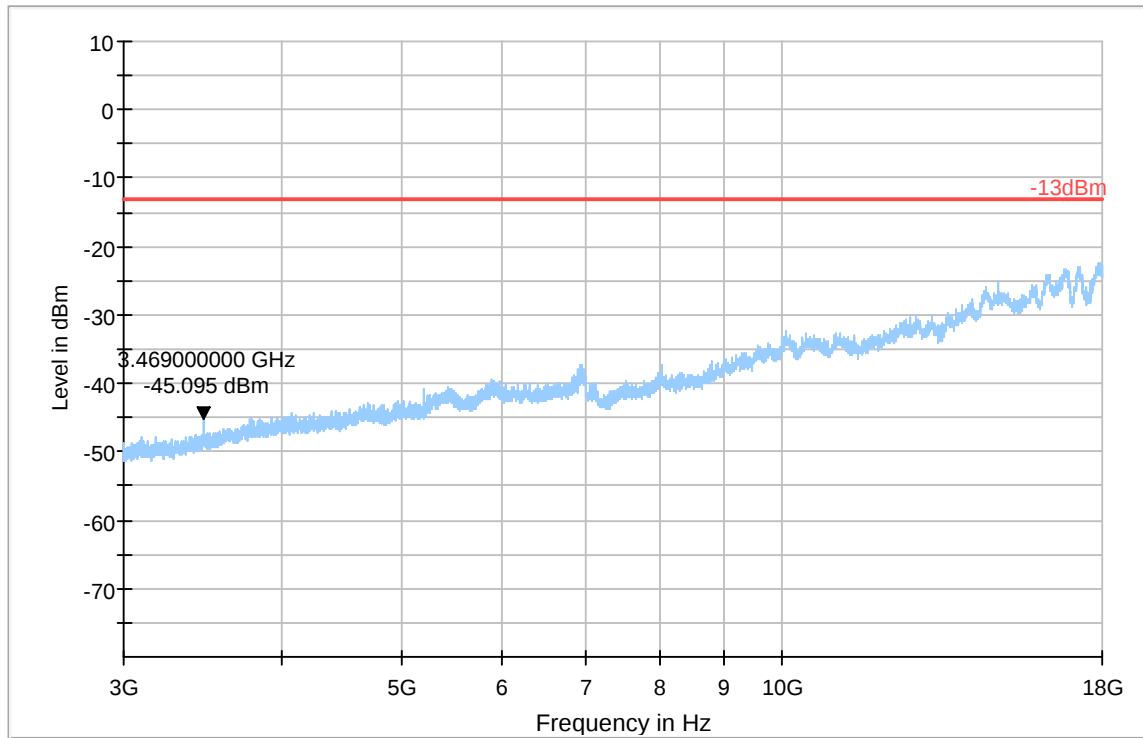

Preview Result 1-PK+ * Critical_Freqs PK+ -13dBm Final_Result RMS

Plot # 8 Radiated Emissions: 30 MHz - 1 GHz


Channel: High

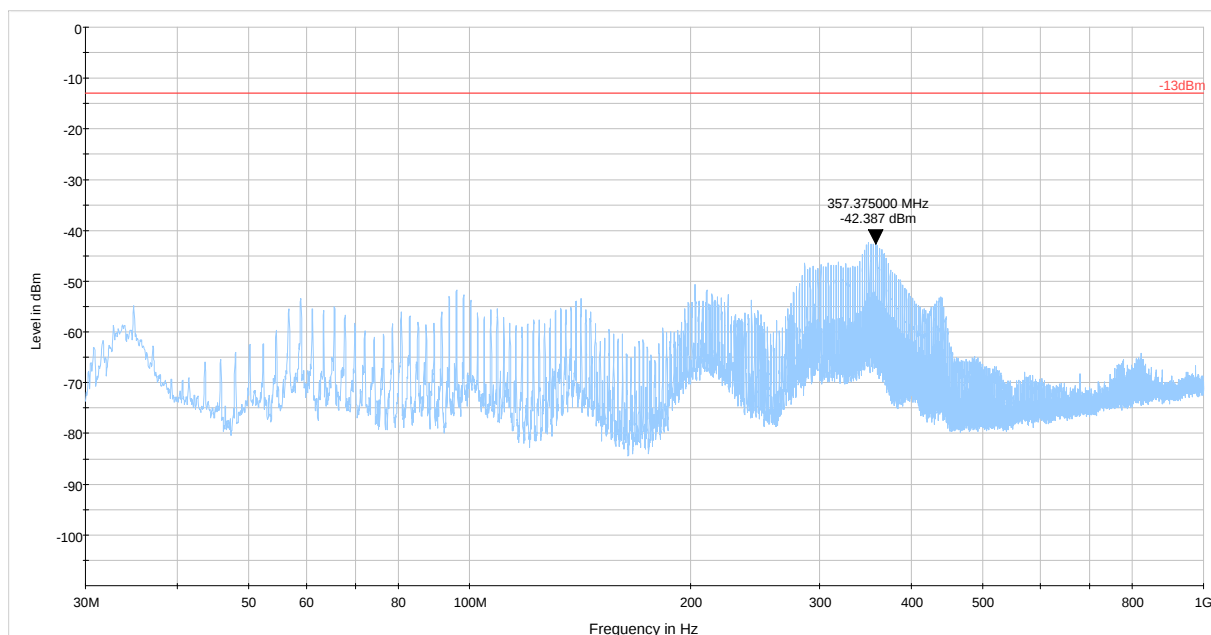

Preview Result 1-PK+ Critical_Freqs PK+ -13dBm Final_Result RMS

Plot # 9 Radiated Emissions: 1 GHz - 3 GHz


Channel: High

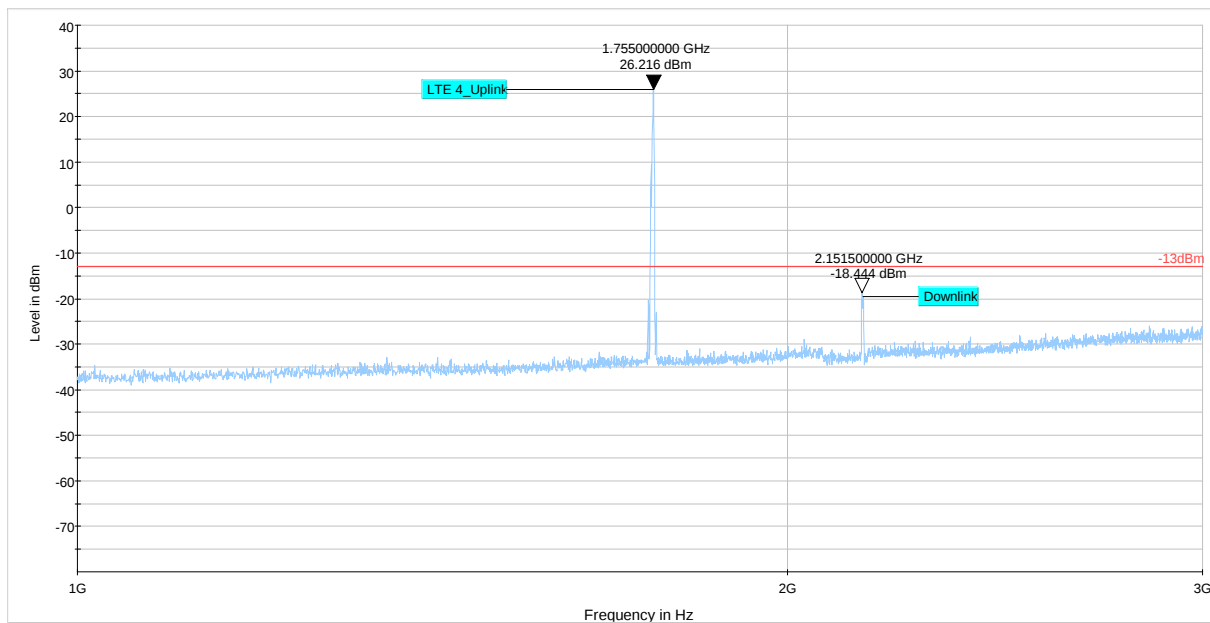

Preview Result 1-PK+ * Critical_Freqs PK+ -13dBm ◆ Final_Result RMS

Plot # 10 Radiated Emissions: 3 GHz - 18 GHz

Channel: High

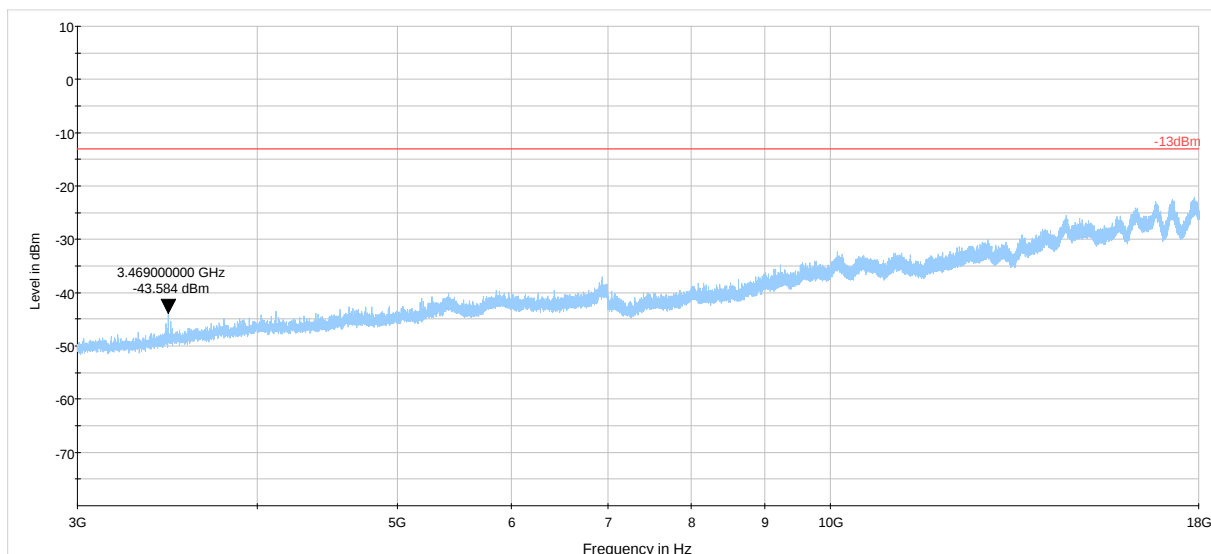


Preview Result 1-PK+ * Critical_Freqs PK+ -13dBm Final_Result RMS

LTE Band 13


Plot # 11 Radiated Emissions: 30 MHz - 1 GHz

Channel: Low

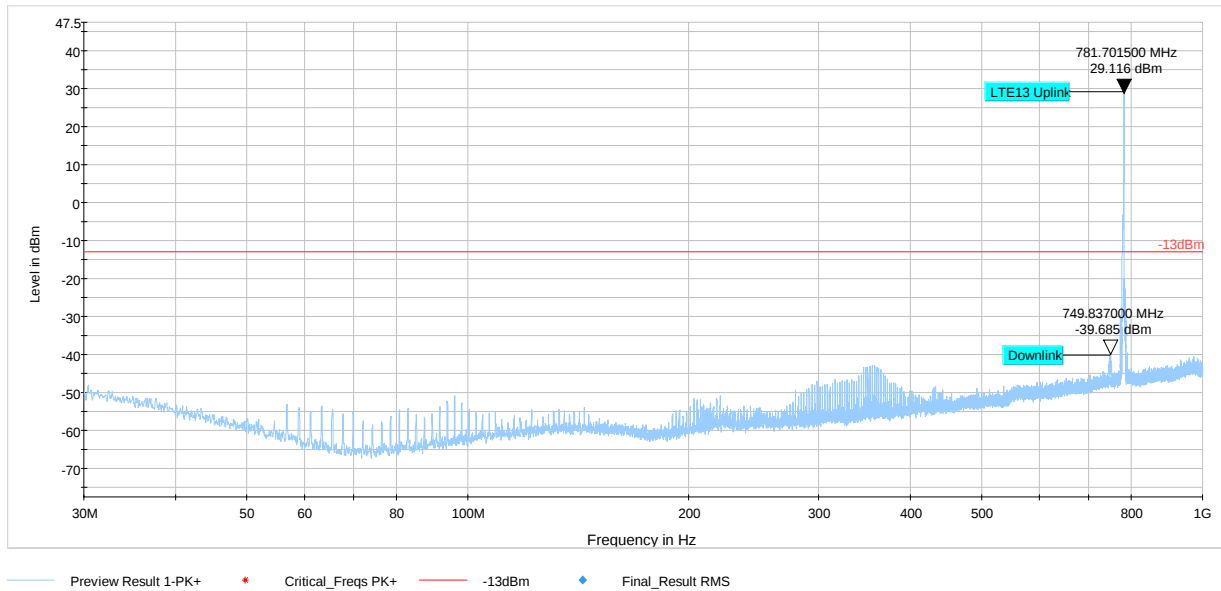

Plot # 12 Radiated Emissions: 1 GHz - 3 GHz

Channel: Low

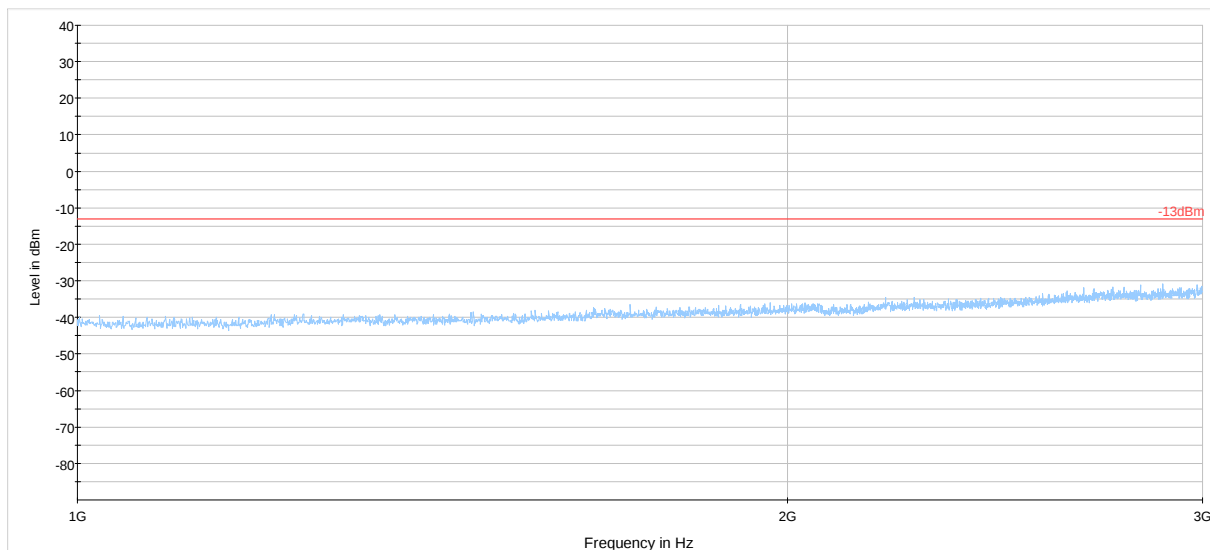


Plot # 13 Radiated Emissions: 3 GHz - 9 GHz

Channel: Low

Final Result

Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Comment
3128.738	-43.40	-13.00	30.40	500.0	1000.000	149.0	V	324.0	-104.5	2:06:15 PM - 7/18/2019

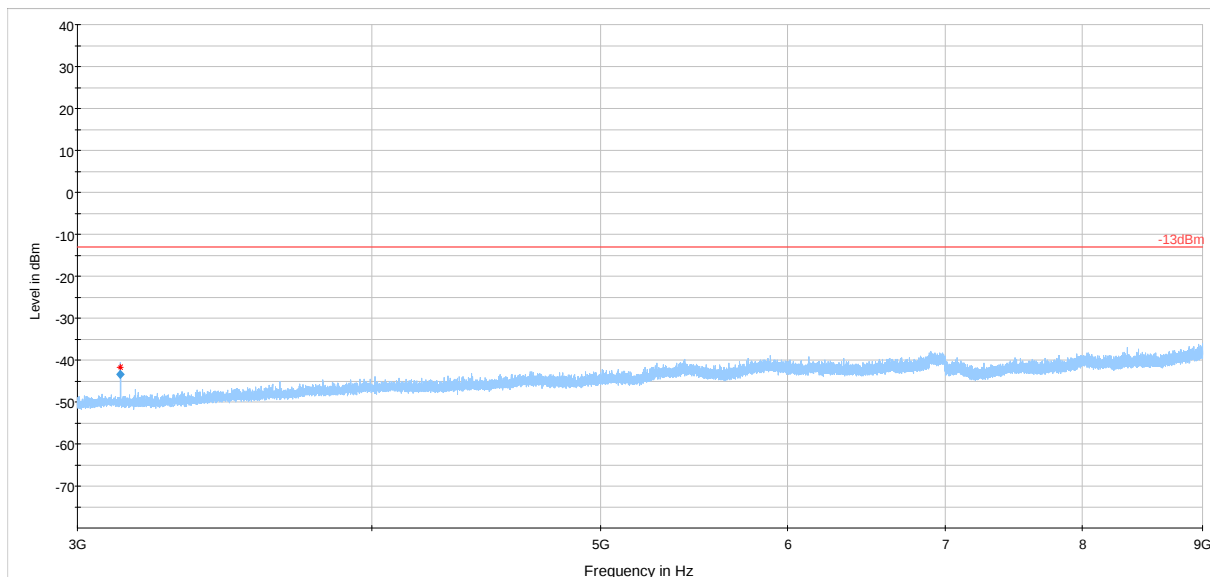


— Preview Result 1-PK+ * Critical_Freqs PK+ — -13dBm ◆ Final_Result RMS

Plot # 14 Radiated Emissions: 9 kHz - 30 MHz

Channel: Mid


Final Result

Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Comment
0.0102	-19.99	-13.00	6.99	100.0	0.100	113.0	H	80.0	-69.6	5:04:47 PM - 7/19/2019
0.0139	-22.65	-13.00	9.65	100.0	0.100	125.0	H	40.0	-71.4	5:07:52 PM - 7/19/2019
0.0169	-25.75	-13.00	12.75	100.0	0.100	107.0	H	73.0	-72.9	5:11:05 PM - 7/19/2019
0.0251	-27.09	-13.00	14.09	100.0	0.100	114.0	H	27.0	-75.1	5:14:13 PM - 7/19/2019
0.0274	-26.50	-13.00	13.50	100.0	0.100	124.0	H	34.0	-75.4	5:17:26 PM - 7/19/2019
0.0301	-25.46	-13.00	12.46	100.0	0.100	124.0	H	51.0	-75.8	5:20:23 PM - 7/19/2019
0.0706	-37.17	-13.00	24.17	100.0	0.100	100.0	H	50.0	-79.3	5:23:13 PM - 7/19/2019

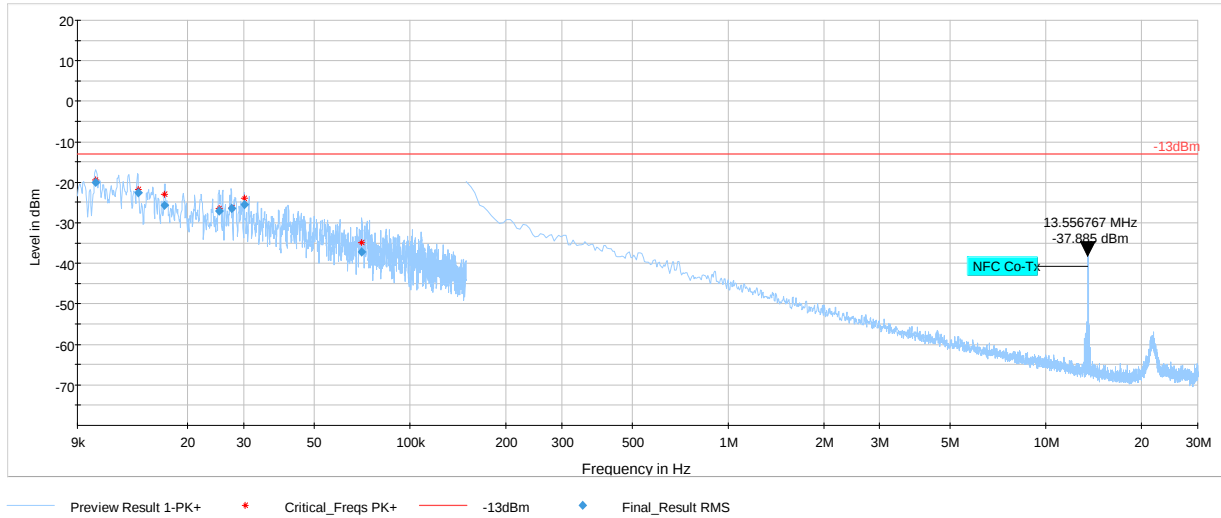


Plot # 15 Radiated Emissions: 30 MHz – 1 GHz

Channel: Mid

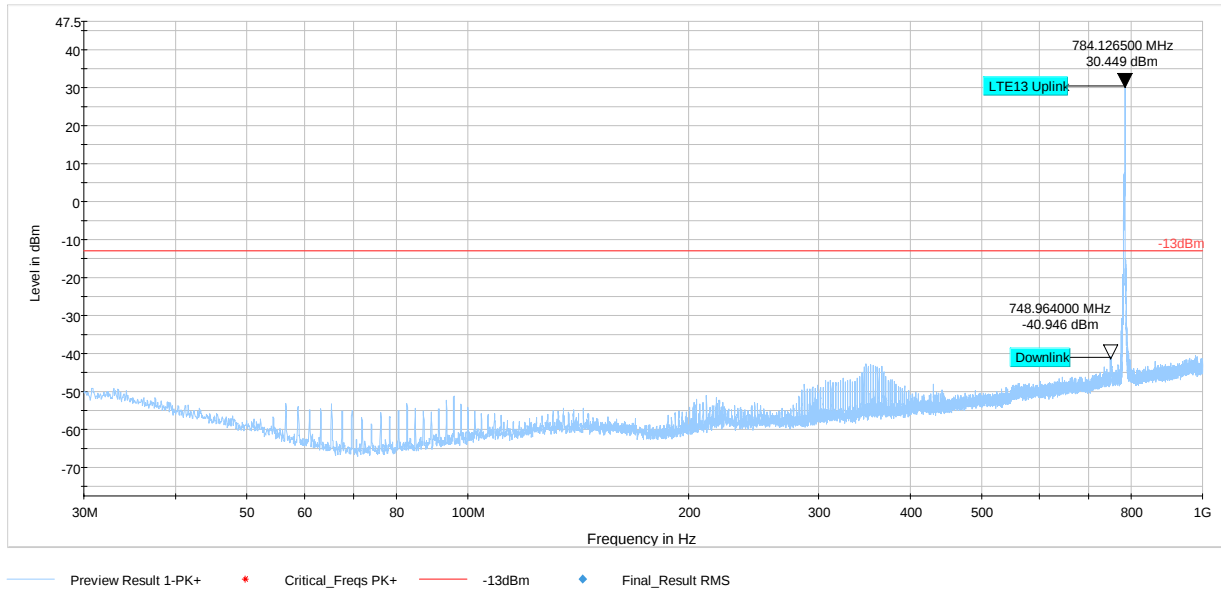

Plot # 16 Radiated Emissions: 1 GHz - 3 GHz

Channel: Mid

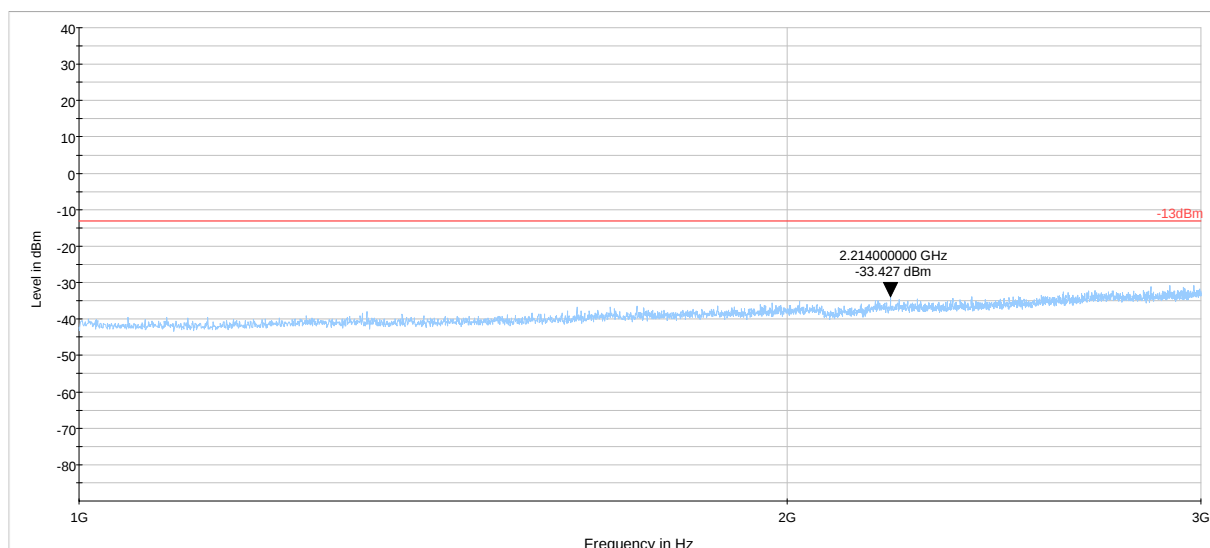


Preview Result 1-PK+ * Critical_Freqs PK+ -13dBm Final_Result RMS

Plot # 17 Radiated Emissions: 3 GHz – 9GHz

Channel: Mid

Final_Result


Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Comment
3136.654	-41.45	-13.00	28.45	500.0	1000.000	125.0	V	111.0	-104.5	2:17:14 PM - 7/18/2019

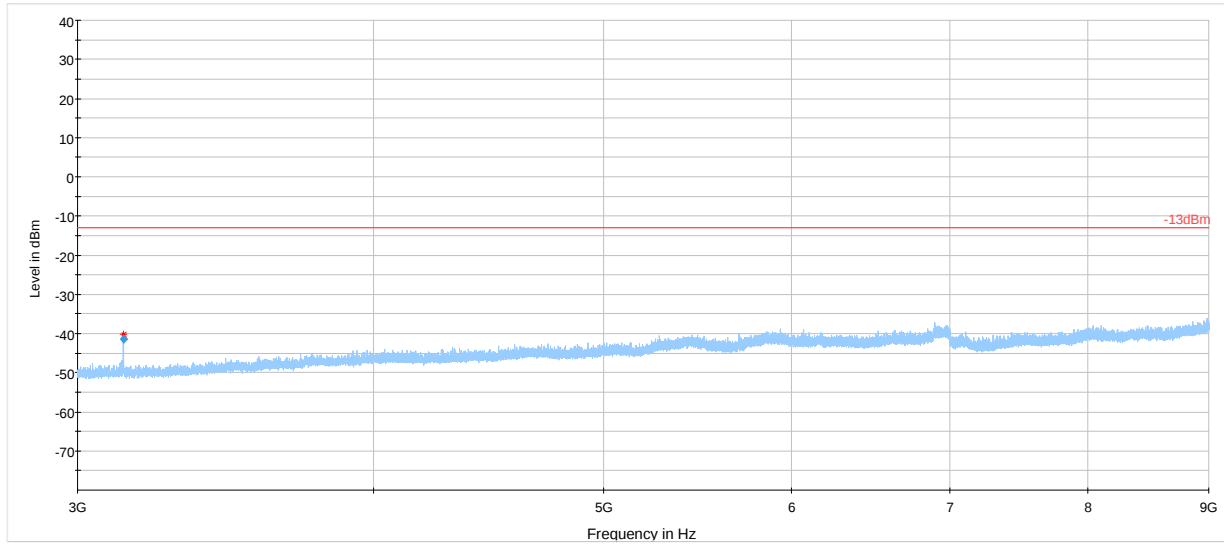

Preview Result 1-PK+ * Critical_Freqs PK+ -13dBm Final_Result RMS

Plot # 18 Radiated Emissions: 30 MHz - 1 GHz


Channel: High

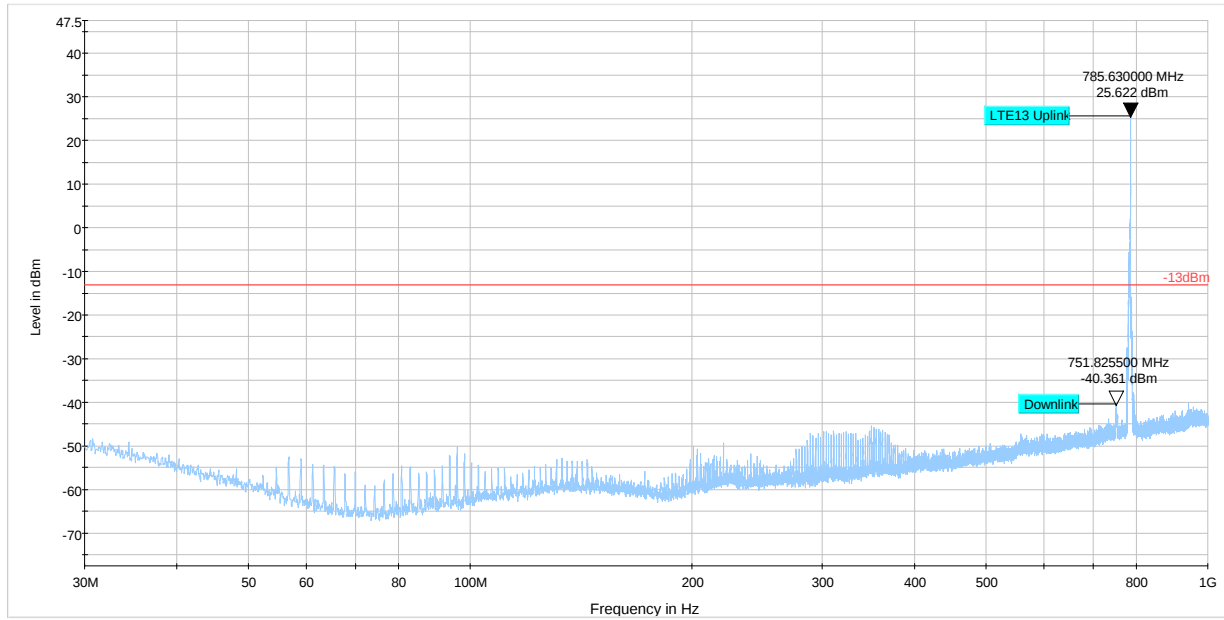

Preview Result 1-PK+ * Critical_Freqs PK+ -13dBm Final_Result RMS

Plot # 19 Radiated Emissions: 1 GHz - 3 GHz

Channel: High

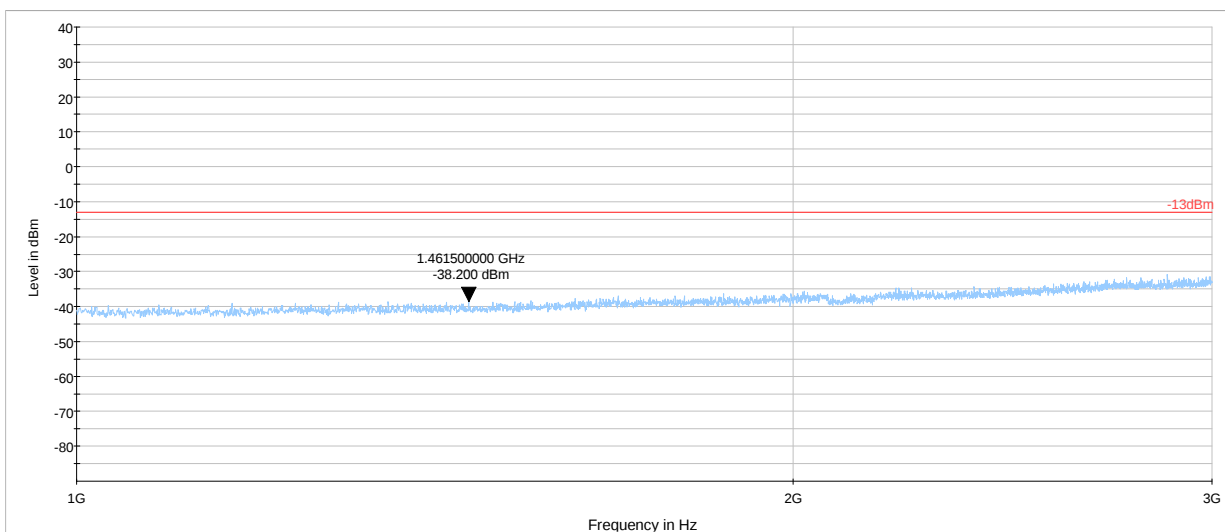


Plot # 20 Radiated Emissions: 3 GHz - 9 GHz

Channel: High

Final Result

Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Comment
3144.489	-40.16	-13.00	27.16	500.0	1000.000	154.0	V	273.0	-104.5	1:54:13 PM - 7/18/2019

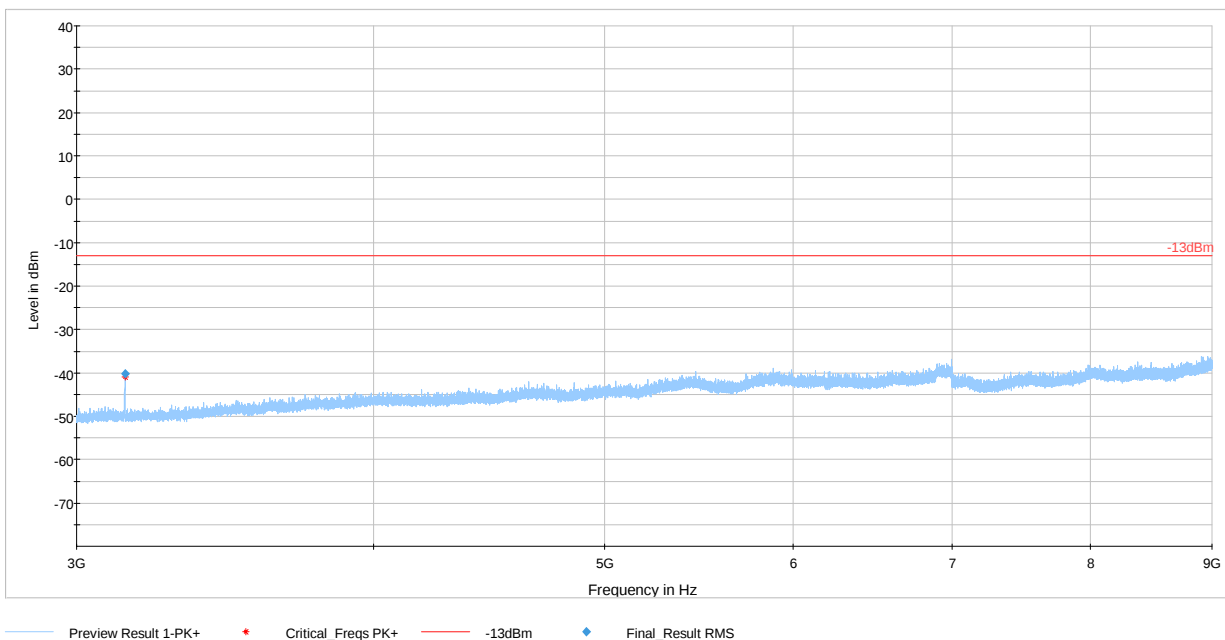

8 Test setup photos

Setup photos are included in supporting file name: "EMC_LYFTH_005_19001_FCC_Setup_Photos.pdf"

9 Test Equipment And Ancillaries Used For Testing

Equipment Type	Manufacturer	Model	Serial #	Calibration Cycle	Last Calibration Date
ACTIVE LOOP ANTENNA	ETS LINDGREN	6507	00161344	3 YEARS	10/26/2017
BILOG ANTENNA	TESEO	CBL 6141B	41106	3 YEARS	11/01/2017
HORN ANTENNA	ETS.LINDGREN	3115	00035111	3 YEARS	04/17/2019
HORN ANTENNA	ETS.LINDGREN	3117	00167061	3 YEARS	08/08/2017
SIGNAL ANALYZER	ROHDE&SCHWARZ	FSV 40	101022	3 YEARS	07/15/2019
VWR THERMOMETER	CONTROL COMPANY	36934-164	191871994	2 YEARS	01/10/2019

Note: Equipment used meets the measurement uncertainty requirements as required per applicable standards for 95% confidence levels.

Calibration due dates, unless defined specifically, falls on the last day of the month. Items indicated "N/A" for cal status either do not specifically require calibration or is internally characterized before use.

10 Revision History

Date	Report Name	Changes to report	Report prepared by
7/25/2019	EMC_LYFTH_005_19001_FCC_27	Initial Version	Issa Ghanma