


Part 1: 1GHz~6.5GHz

HARMONICS AND SPURIOUS EMISSIONS

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

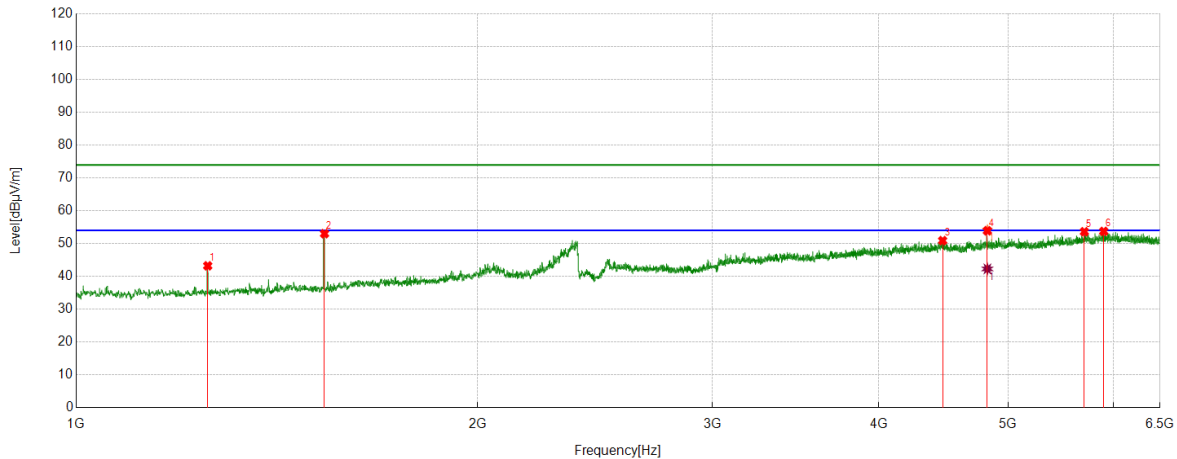

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	44.78	-1.57	43.21	74.00	-30.79	Horizontal
2	1535.6295	53.64	-0.62	53.02	74.00	-20.98	Horizontal
3	4465.4332	36.18	14.71	50.89	74.00	-23.11	Horizontal
4	4824.3530	38.22	15.67	53.89	74.00	-20.11	Horizontal
5	5703.7755	36.14	17.46	53.60	74.00	-20.40	Horizontal
6	5897.6747	35.77	17.95	53.72	74.00	-20.28	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4824.3530	26.60	15.67	42.27	54.00	-11.73	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

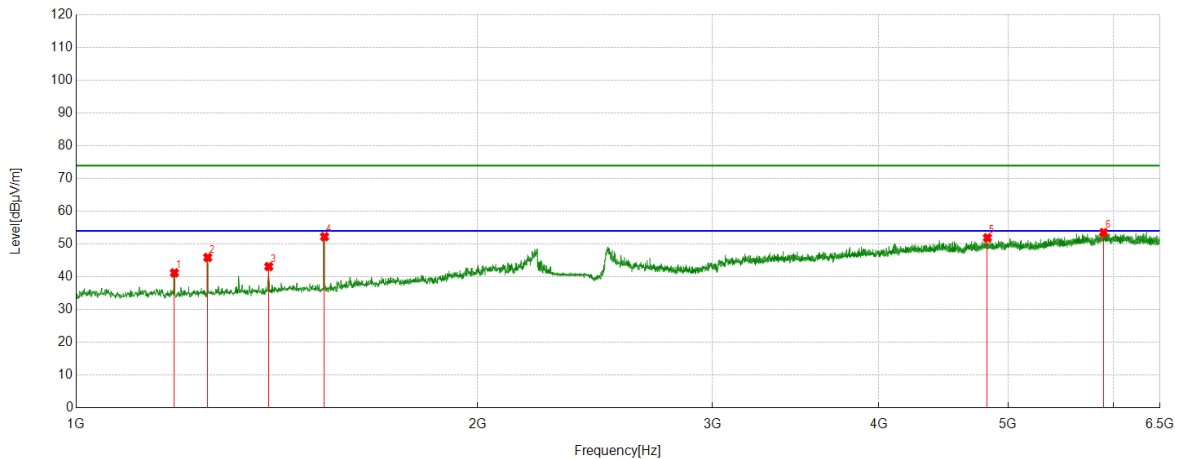


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1184.9606	43.18	-1.97	41.21	74.00	-32.79	Vertical
2	1255.0944	47.46	-1.57	45.89	74.00	-28.11	Vertical
3	1394.6743	44.48	-1.35	43.13	74.00	-30.87	Vertical
4	1535.6295	52.87	-0.62	52.25	74.00	-21.75	Vertical
5	4824.3530	36.25	15.67	51.92	74.00	-22.08	Vertical
6	5896.2995	35.56	17.95	53.51	74.00	-20.49	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS

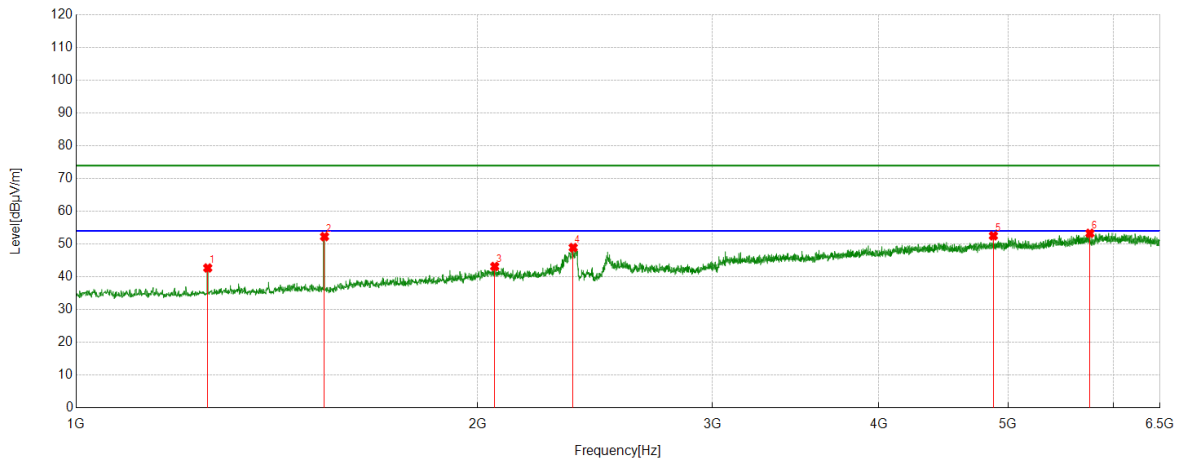


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	44.26	-1.57	42.69	74.00	-31.31	Horizontal
2	1535.6295	52.90	-0.62	52.28	74.00	-21.72	Horizontal
3	2060.2575	39.48	3.67	43.15	74.00	-30.85	Horizontal
4	2359.3574	44.13	4.78	48.91	74.00	-25.09	Horizontal
5	4874.5468	37.41	15.10	52.51	74.00	-21.49	Horizontal
6	5758.7823	35.32	17.97	53.29	74.00	-20.71	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS

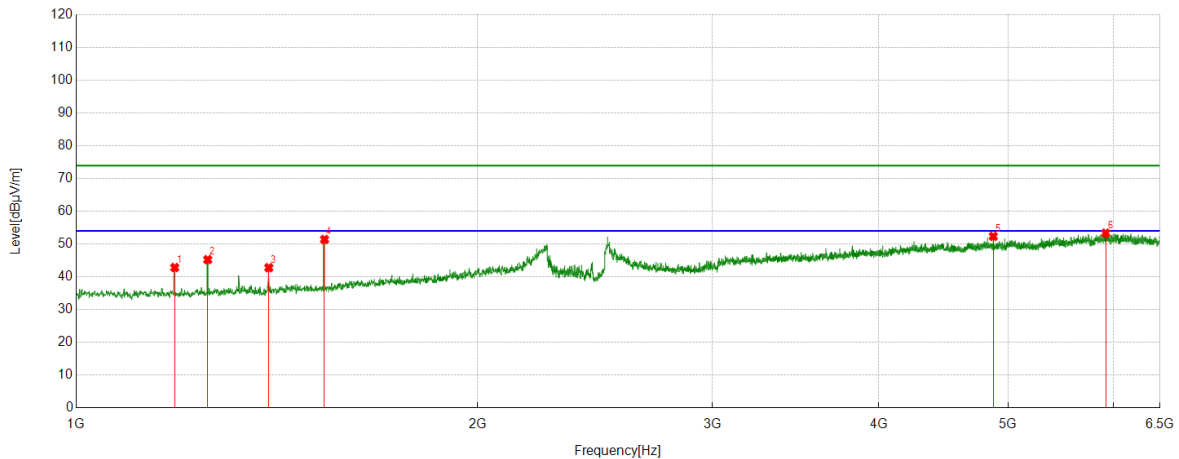


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1185.6482	44.83	-2.00	42.83	74.00	-31.17	Vertical
2	1255.0944	46.81	-1.57	45.24	74.00	-28.76	Vertical
3	1394.6743	44.13	-1.35	42.78	74.00	-31.22	Vertical
4	1535.6295	52.01	-0.62	51.39	74.00	-22.61	Vertical
5	4873.8592	37.27	15.08	52.35	74.00	-21.65	Vertical
6	5917.6147	34.77	18.57	53.34	74.00	-20.66	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

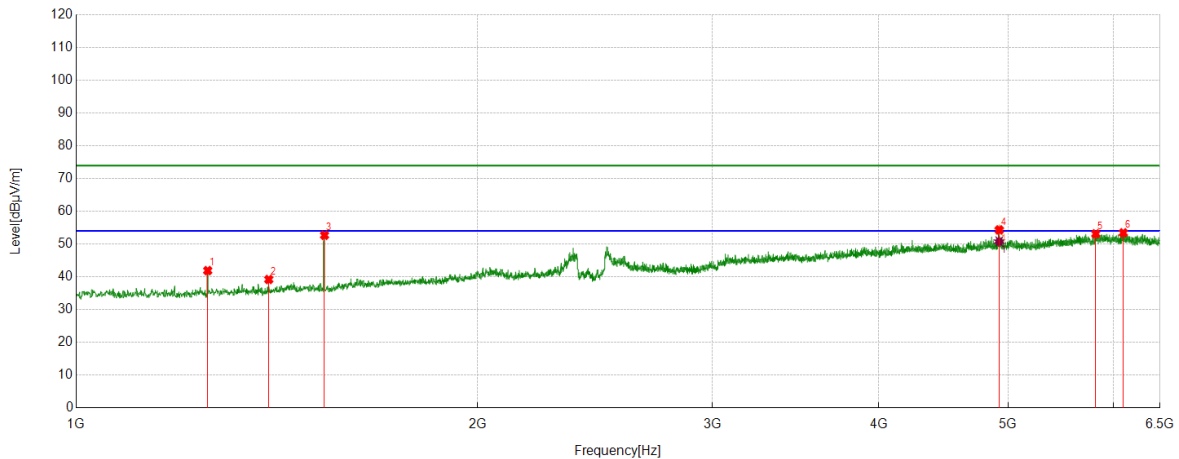

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	43.47	-1.57	41.90	74.00	-32.10	Horizontal
2	1394.6743	40.53	-1.35	39.18	74.00	-34.82	Horizontal
3	1535.6295	53.30	-0.62	52.68	74.00	-21.32	Horizontal
4	4924.0530	38.97	15.34	54.31	74.00	-19.69	Horizontal
5	5817.2272	34.63	18.50	53.13	74.00	-20.87	Horizontal
6	6100.5126	35.07	18.36	53.43	74.00	-20.57	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4924.0530	35.42	15.34	50.76	54.00	-3.24	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

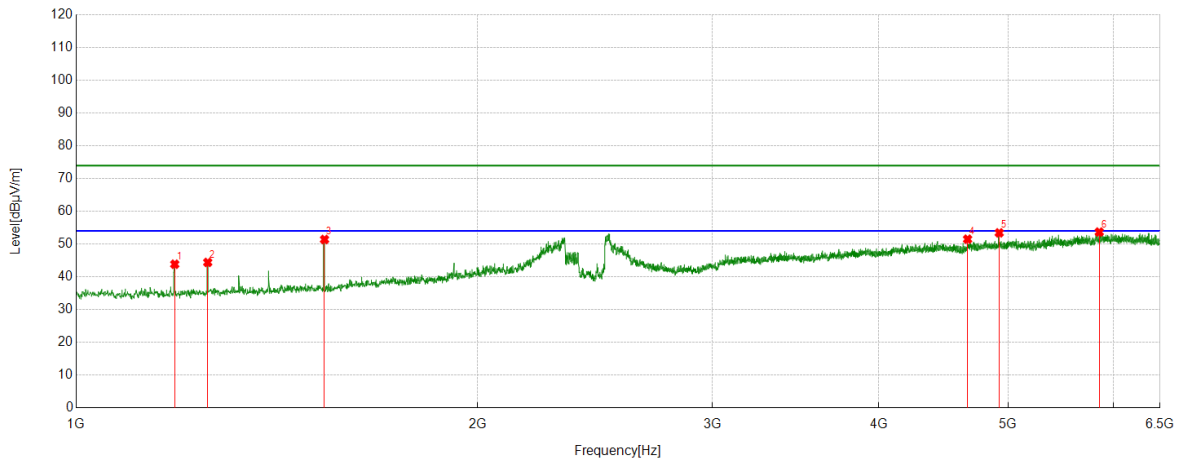


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1185.6482	45.84	-2.00	43.84	74.00	-30.16	Vertical
2	1255.0944	45.96	-1.57	44.39	74.00	-29.61	Vertical
3	1535.6295	52.01	-0.62	51.39	74.00	-22.61	Vertical
4	4662.0828	36.81	14.68	51.49	74.00	-22.51	Vertical
5	4924.0530	38.09	15.34	53.43	74.00	-20.57	Vertical
6	5852.2940	35.69	17.98	53.67	74.00	-20.33	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

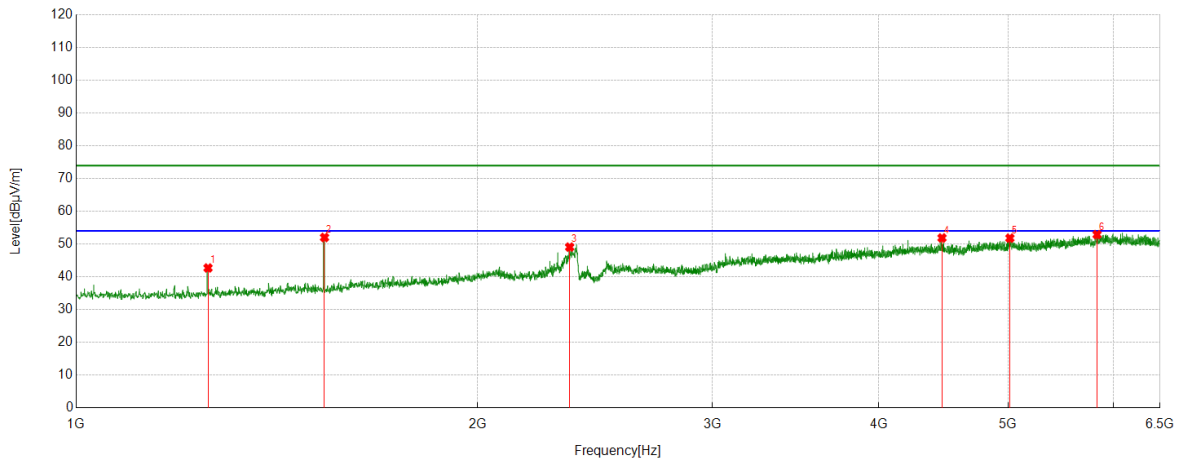


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.7820	44.26	-1.57	42.69	74.00	-31.31	Horizontal
2	1535.6295	52.64	-0.62	52.02	74.00	-21.98	Horizontal
3	2344.9181	44.19	4.88	49.07	74.00	-24.93	Horizontal
4	4460.6201	36.96	14.91	51.87	74.00	-22.13	Horizontal
5	5015.5019	36.36	15.45	51.81	74.00	-22.19	Horizontal
6	5830.2913	34.22	18.67	52.89	74.00	-21.11	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

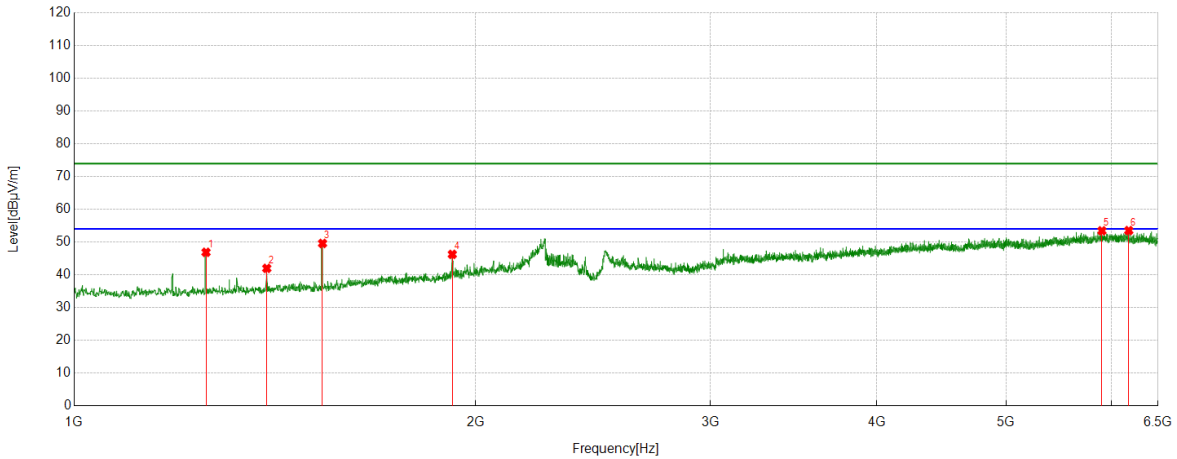


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.7820	48.44	-1.57	46.87	74.00	-27.13	Vertical
2	1394.6743	43.31	-1.35	41.96	74.00	-32.04	Vertical
3	1535.6295	50.20	-0.62	49.58	74.00	-24.42	Vertical
4	1921.3652	43.16	3.08	46.24	74.00	-27.76	Vertical
5	5899.7375	35.51	17.93	53.44	74.00	-20.56	Vertical
6	6179.5849	34.60	18.92	53.52	74.00	-20.48	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Horizontal	PASS

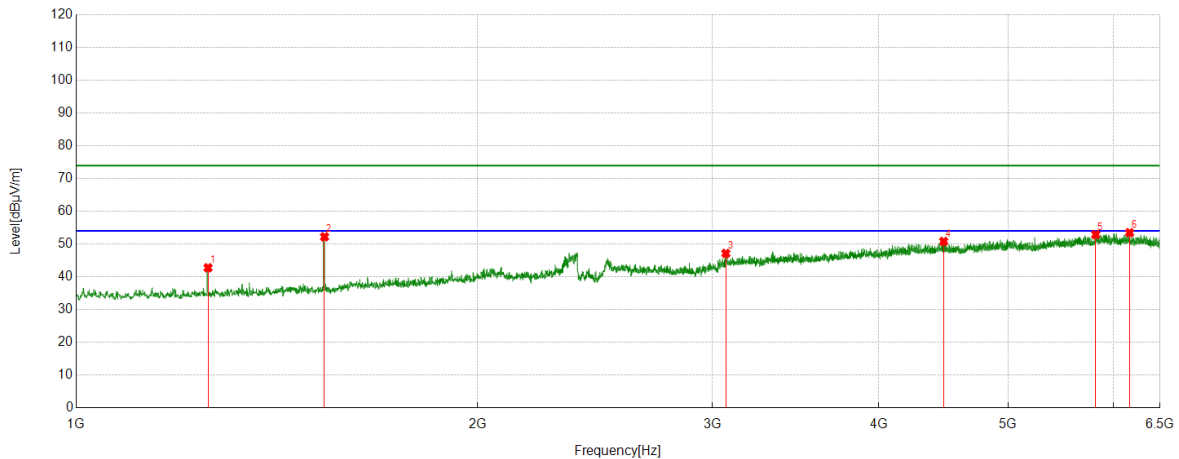


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.7820	44.33	-1.57	42.76	74.00	-31.24	Horizontal
2	1535.6295	52.84	-0.62	52.22	74.00	-21.78	Horizontal
3	3071.0089	37.94	9.20	47.14	74.00	-26.86	Horizontal
4	4473.6842	36.32	14.49	50.81	74.00	-23.19	Horizontal
5	5817.2272	34.39	18.50	52.89	74.00	-21.11	Horizontal
6	6167.2084	34.83	18.64	53.47	74.00	-20.53	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS

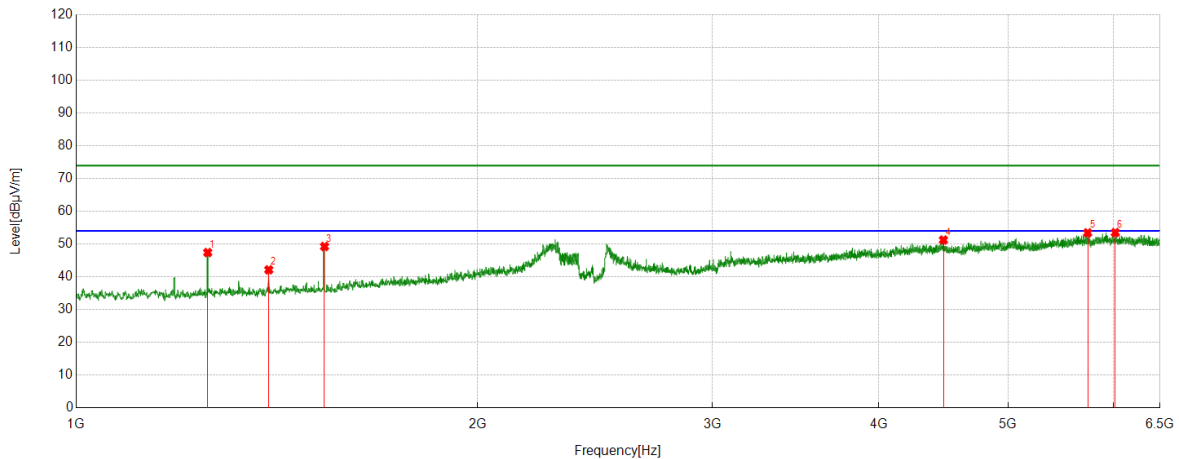


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	48.97	-1.57	47.40	74.00	-26.60	Vertical
2	1394.6743	43.48	-1.35	42.13	74.00	-31.87	Vertical
3	1535.6295	49.88	-0.62	49.26	74.00	-24.74	Vertical
4	4471.6215	36.72	14.51	51.23	74.00	-22.77	Vertical
5	5736.7796	35.75	17.68	53.43	74.00	-20.57	Vertical
6	6016.6271	35.48	18.02	53.50	74.00	-20.50	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

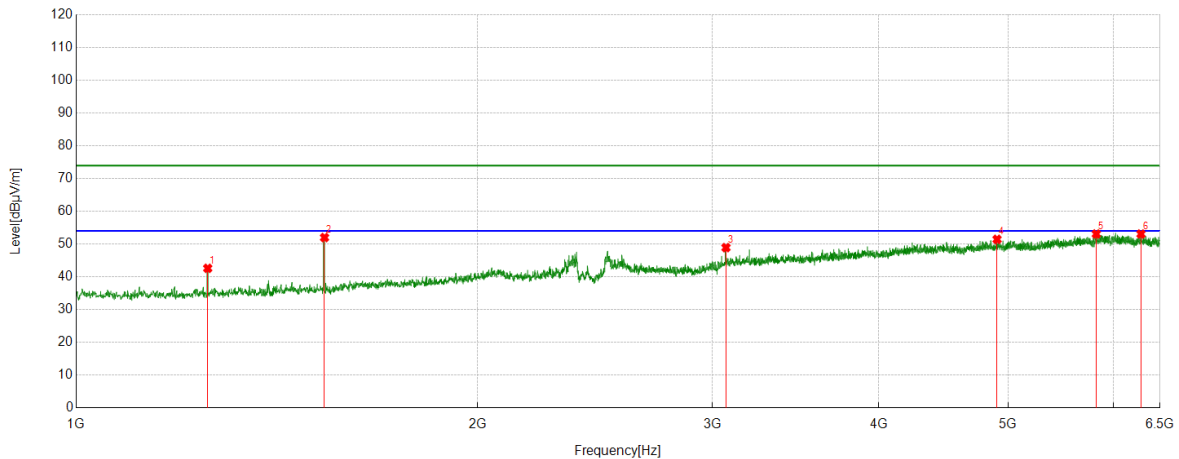


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	44.16	-1.57	42.59	74.00	-31.41	Horizontal
2	1535.6295	52.61	-0.62	51.99	74.00	-22.01	Horizontal
3	3071.6965	39.64	9.27	48.91	74.00	-25.09	Horizontal
4	4905.4882	36.15	15.29	51.44	74.00	-22.56	Horizontal
5	5822.7278	34.41	18.67	53.08	74.00	-20.92	Horizontal
6	6289.5987	34.45	18.62	53.07	74.00	-20.93	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

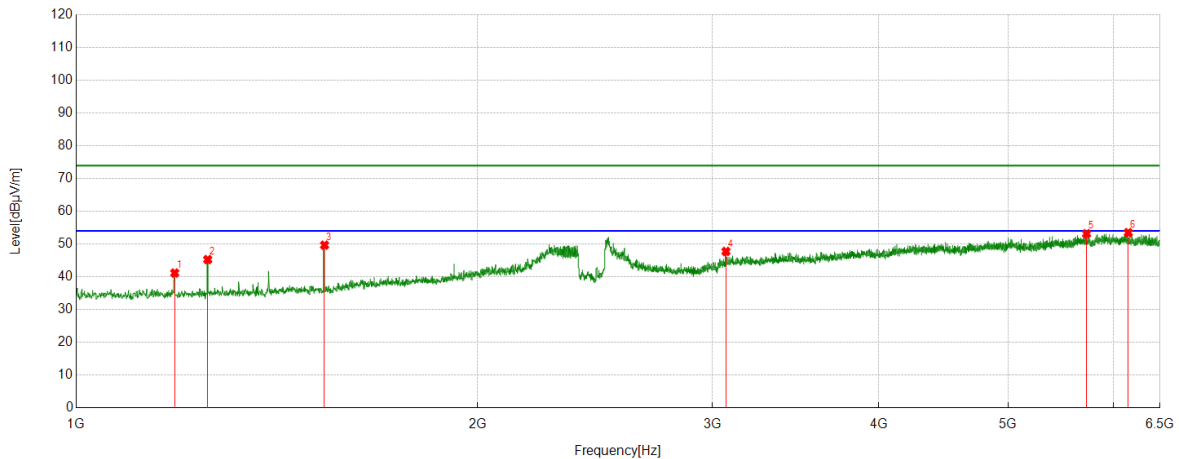


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1185.6482	43.15	-2.00	41.15	74.00	-32.85	Vertical
2	1255.0944	46.82	-1.57	45.25	74.00	-28.75	Vertical
3	1535.6295	50.27	-0.62	49.65	74.00	-24.35	Vertical
4	3071.6965	38.47	9.27	47.74	74.00	-26.26	Vertical
5	5725.7782	35.70	17.47	53.17	74.00	-20.83	Vertical
6	6152.7691	34.95	18.55	53.50	74.00	-20.50	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

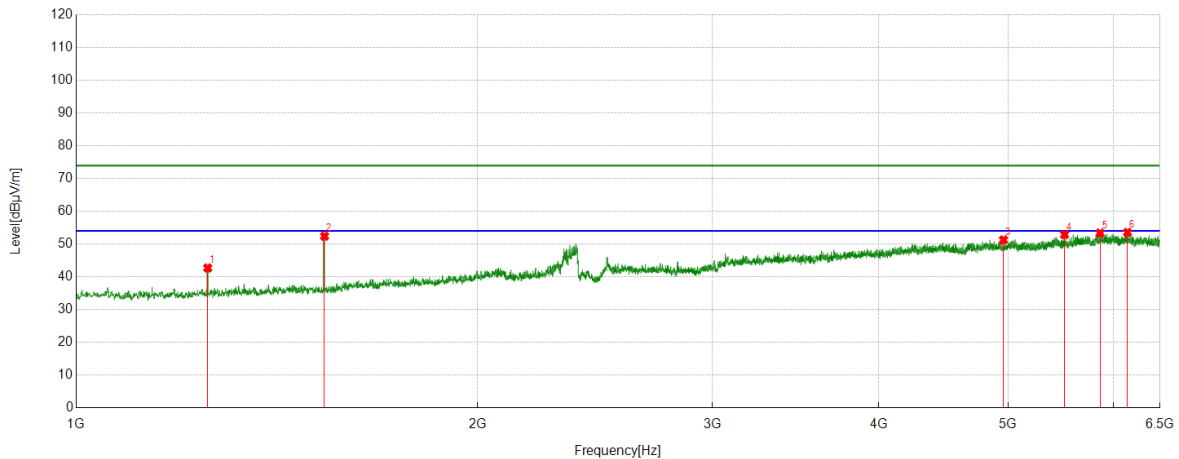


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	44.25	-1.57	42.68	74.00	-31.32	Horizontal
2	1535.6295	53.01	-0.62	52.39	74.00	-21.61	Horizontal
3	4960.4951	35.75	15.50	51.25	74.00	-22.75	Horizontal
4	5511.9390	36.08	16.81	52.89	74.00	-21.11	Horizontal
5	5860.5451	35.56	17.79	53.35	74.00	-20.65	Horizontal
6	6145.2057	35.12	18.43	53.55	74.00	-20.45	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

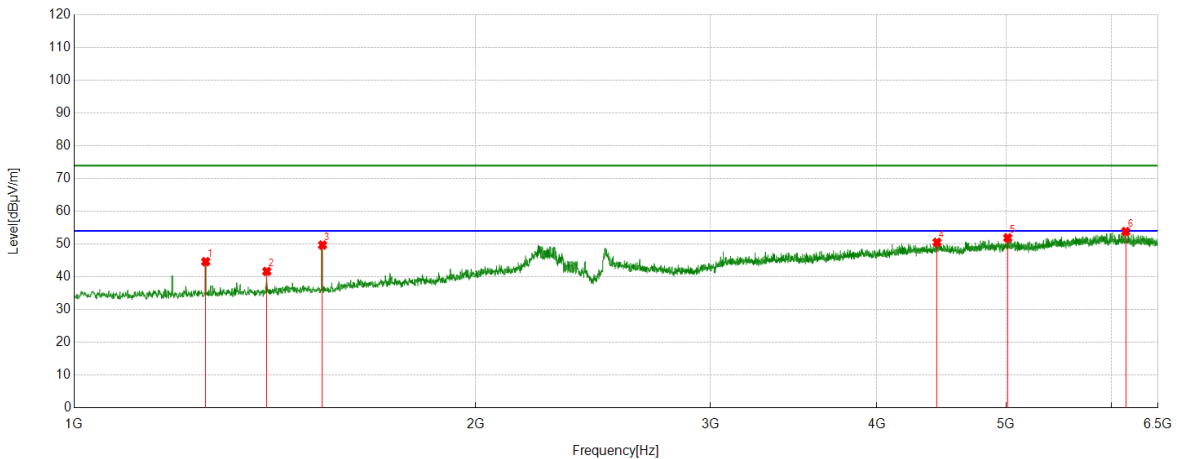


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	46.18	-1.57	44.61	74.00	-29.39	Vertical
2	1394.6743	42.99	-1.35	41.64	74.00	-32.36	Vertical
3	1535.6295	50.31	-0.62	49.69	74.00	-24.31	Vertical
4	4437.9297	35.97	14.56	50.53	74.00	-23.47	Vertical
5	5014.1268	36.46	15.43	51.89	74.00	-22.11	Vertical
6	6147.2684	35.34	18.48	53.82	74.00	-20.18	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Horizontal	PASS

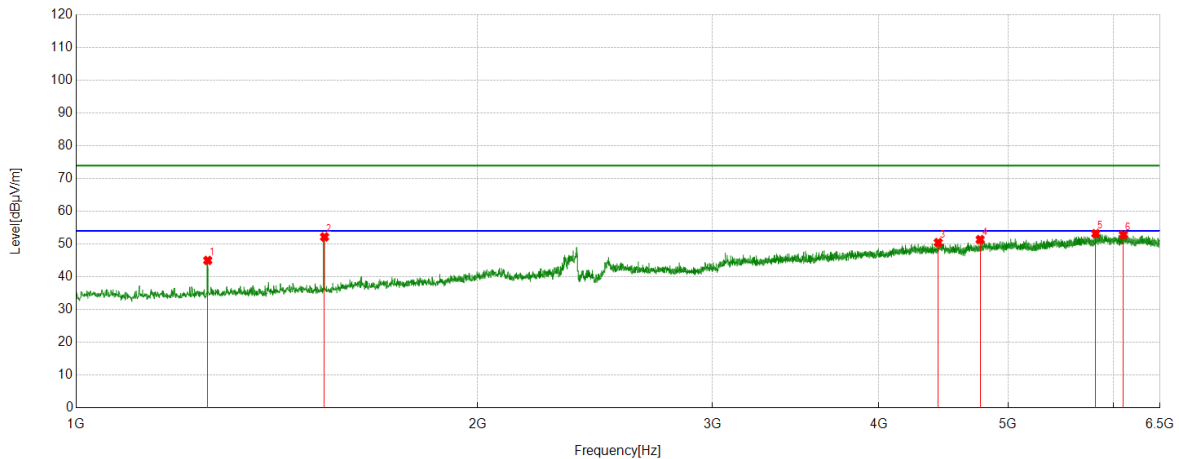


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1255.0944	46.57	-1.57	45.00	74.00	-29.00	Horizontal
2	1535.6295	52.80	-0.62	52.18	74.00	-21.82	Horizontal
3	4431.7415	36.43	14.02	50.45	74.00	-23.55	Horizontal
4	4764.5331	36.84	14.52	51.36	74.00	-22.64	Horizontal
5	5817.2272	34.67	18.50	53.17	74.00	-20.83	Horizontal
6	6101.2002	34.51	18.33	52.84	74.00	-21.16	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Vertical	PASS

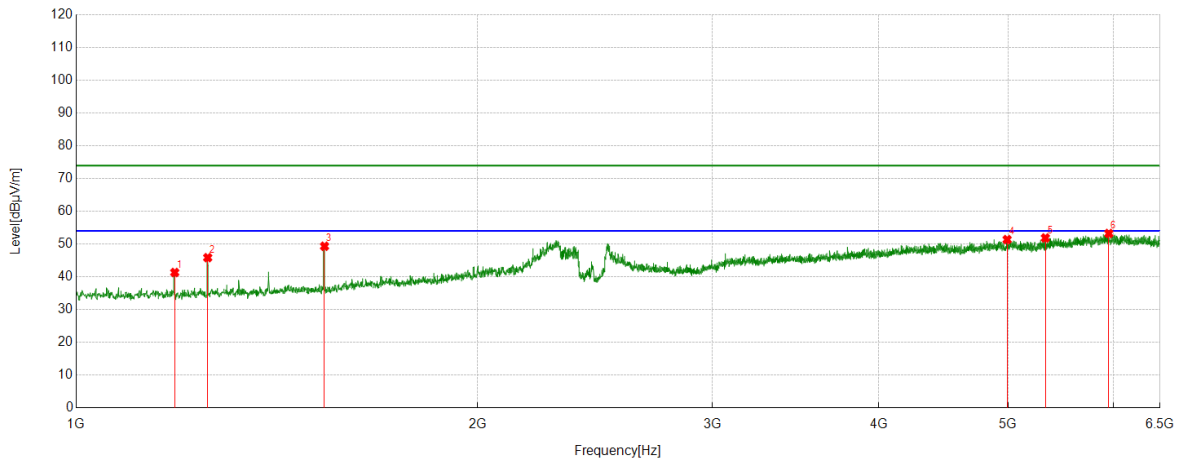


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1185.6482	43.31	-2.00	41.31	74.00	-32.69	Vertical
2	1255.0944	47.42	-1.57	45.85	74.00	-28.15	Vertical
3	1535.6295	49.95	-0.62	49.33	74.00	-24.67	Vertical
4	4991.4364	36.23	15.14	51.37	74.00	-22.63	Vertical
5	5332.4791	35.97	15.89	51.86	74.00	-22.14	Vertical
6	5949.9312	34.76	18.47	53.23	74.00	-20.77	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

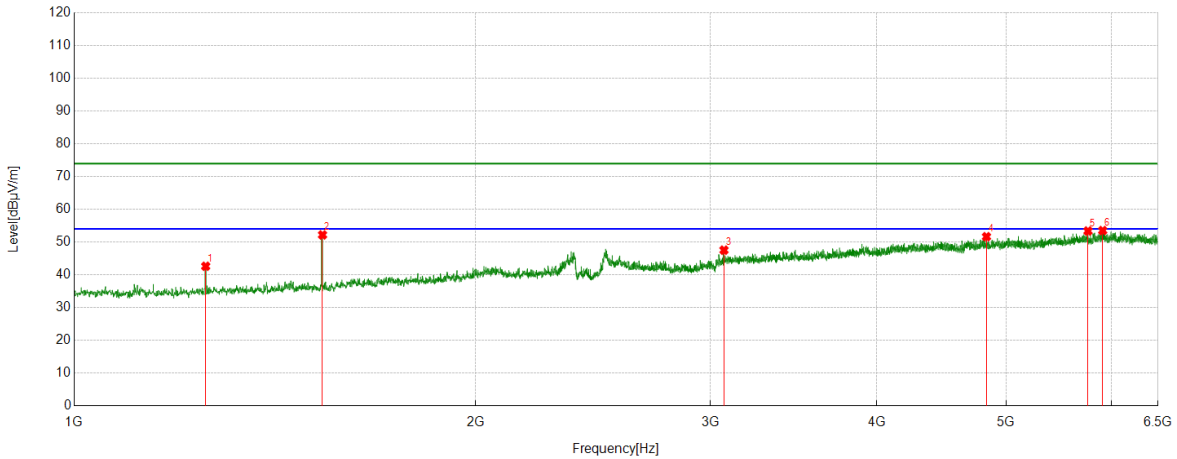


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	44.18	-1.57	42.61	74.00	-31.39	Horizontal
2	1535.6295	52.81	-0.62	52.19	74.00	-21.81	Horizontal
3	3071.6965	38.26	9.27	47.53	74.00	-26.47	Horizontal
4	4833.2917	36.29	15.35	51.64	74.00	-22.36	Horizontal
5	5759.4699	35.38	18.00	53.38	74.00	-20.62	Horizontal
6	5907.3009	35.41	18.11	53.52	74.00	-20.48	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

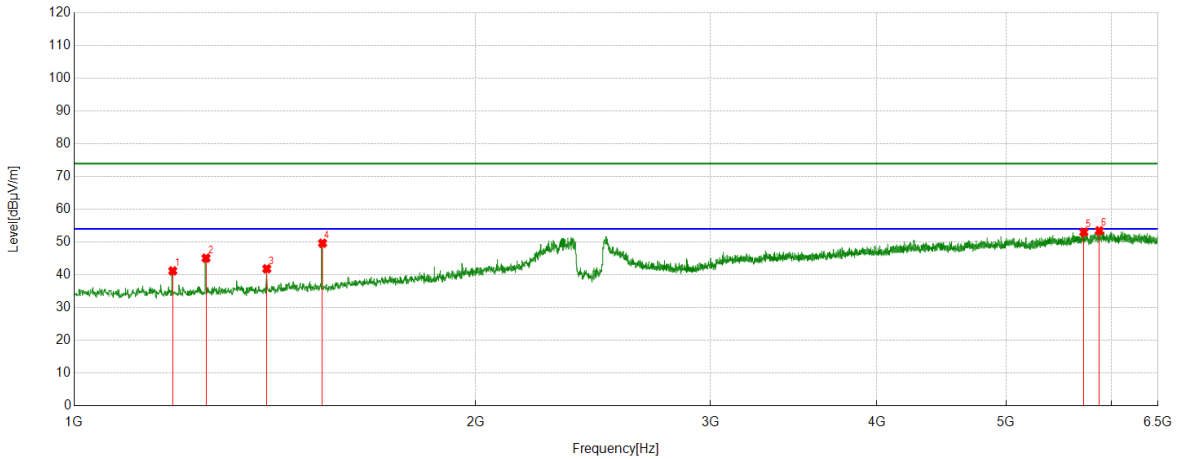


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1185.6482	43.19	-2.00	41.19	74.00	-32.81	Vertical
2	1255.7820	46.66	-1.57	45.09	74.00	-28.91	Vertical
3	1394.6743	43.18	-1.35	41.83	74.00	-32.17	Vertical
4	1535.6295	50.26	-0.62	49.64	74.00	-24.36	Vertical
5	5718.2148	35.43	17.63	53.06	74.00	-20.94	Vertical
6	5873.6092	35.65	17.82	53.47	74.00	-20.53	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS

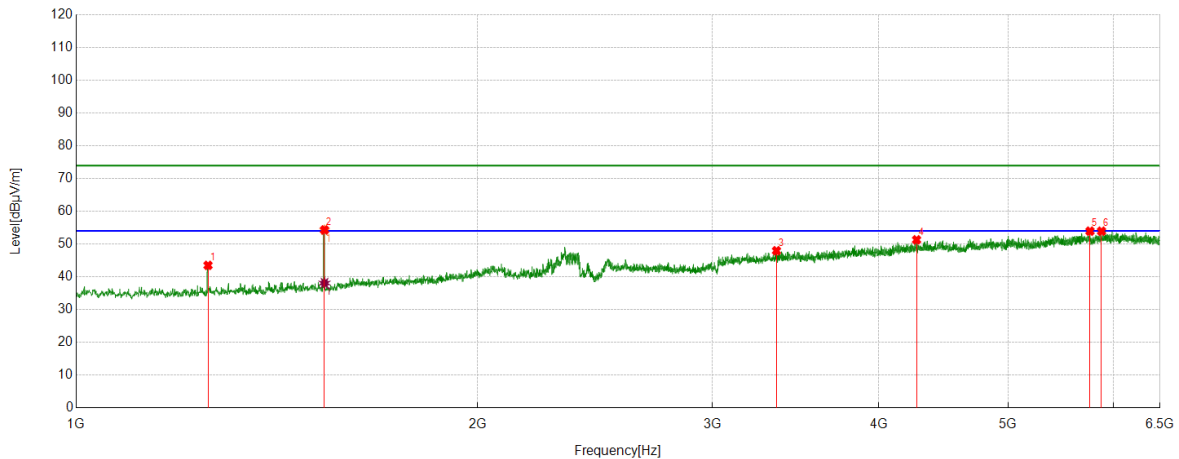

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.7820	45.06	-1.57	43.49	74.00	-30.51	Horizontal
2	1535.6295	54.93	-0.62	54.31	74.00	-19.69	Horizontal
3	3351.5439	37.59	10.36	47.95	74.00	-26.05	Horizontal
4	4268.7836	37.33	13.96	51.29	74.00	-22.71	Horizontal
5	5759.4699	35.94	18.00	53.94	74.00	-20.06	Horizontal
6	5874.9844	36.14	17.79	53.93	74.00	-20.07	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1535.6295	38.69	-0.62	38.07	54.00	-15.93	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS

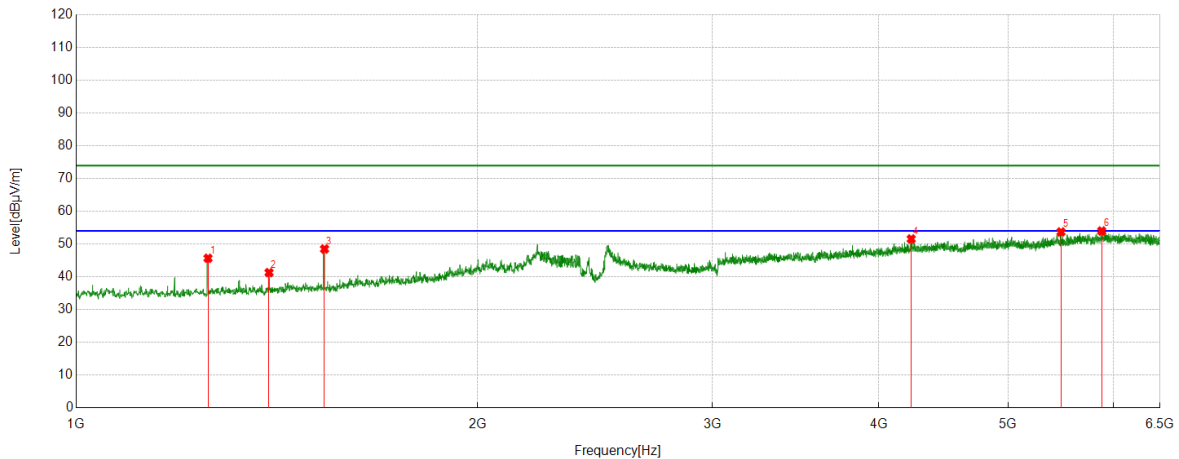


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.7820	47.23	-1.57	45.66	74.00	-28.34	Vertical
2	1395.3619	42.62	-1.35	41.27	74.00	-32.73	Vertical
3	1535.6295	49.11	-0.62	48.49	74.00	-25.51	Vertical
4	4229.5912	37.70	13.86	51.56	74.00	-22.44	Vertical
5	5478.2473	36.99	16.70	53.69	74.00	-20.31	Vertical
6	5877.0471	36.27	17.73	54.00	74.00	-20.00	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Horizontal	PASS

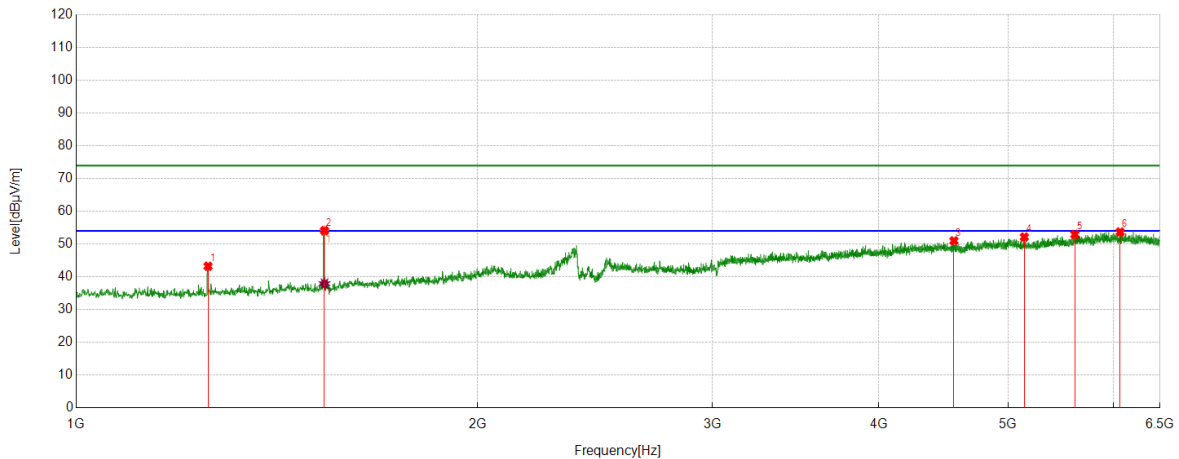

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.7820	44.79	-1.57	43.22	74.00	-30.78	Horizontal
2	1535.6295	54.71	-0.62	54.09	74.00	-19.91	Horizontal
3	4553.4442	36.99	13.99	50.98	74.00	-23.02	Horizontal
4	5142.0178	37.03	15.12	52.15	74.00	-21.85	Horizontal
5	5610.9514	35.45	17.49	52.94	74.00	-21.06	Horizontal
6	6067.5084	35.70	17.99	53.69	74.00	-20.31	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1535.6295	38.52	-0.62	37.90	54.00	-16.10	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Vertical	PASS

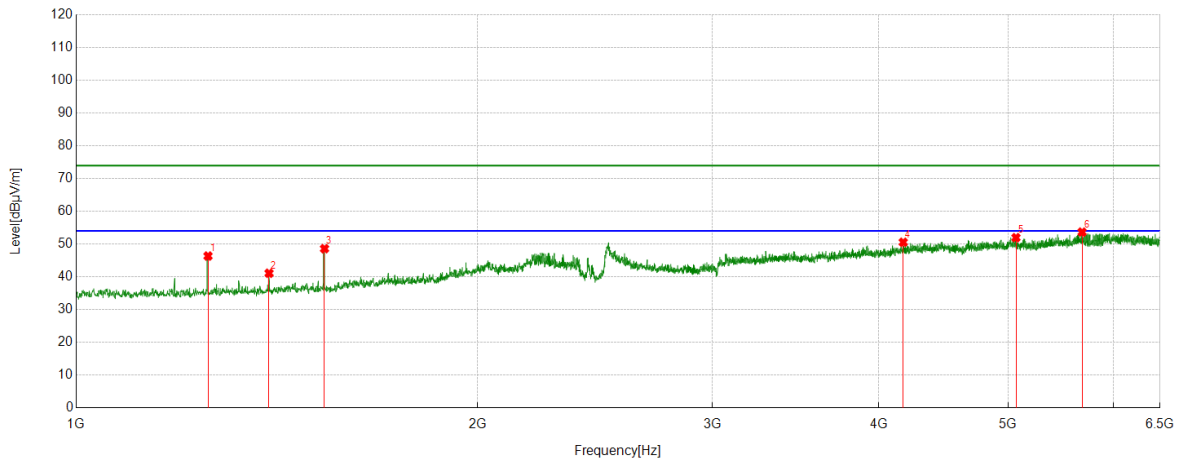


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.7820	47.91	-1.57	46.34	74.00	-27.66	Vertical
2	1395.3619	42.43	-1.35	41.08	74.00	-32.92	Vertical
3	1535.6295	49.21	-0.62	48.59	74.00	-25.41	Vertical
4	4171.8340	37.42	13.13	50.55	74.00	-23.45	Vertical
5	5068.4461	35.77	16.19	51.96	74.00	-22.04	Vertical
6	5681.0851	36.21	17.44	53.65	74.00	-20.35	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Horizontal	PASS

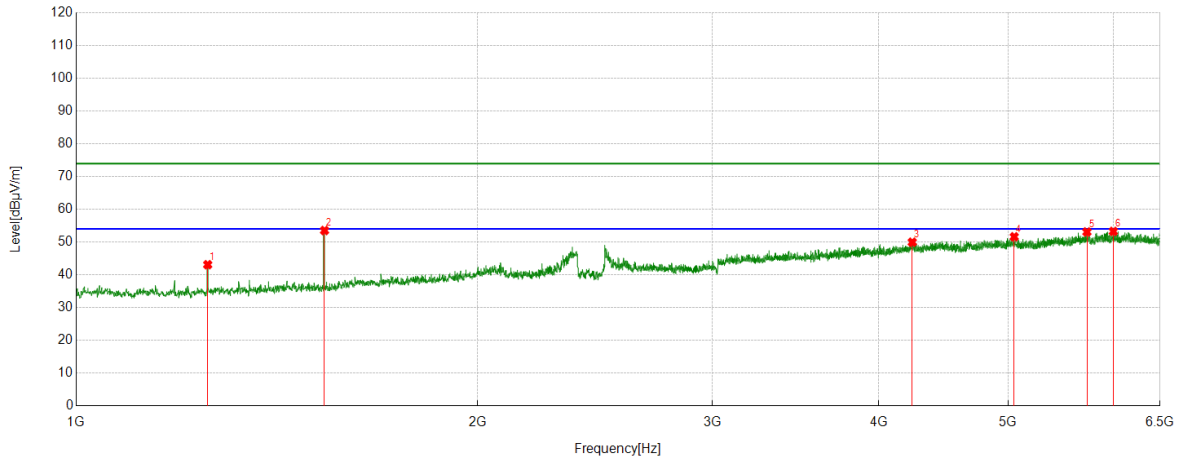


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	44.66	-1.57	43.09	74.00	-30.91	Horizontal
2	1535.6295	54.15	-0.62	53.53	74.00	-20.47	Horizontal
3	4237.1546	36.03	13.93	49.96	74.00	-24.04	Horizontal
4	5053.3192	35.61	16.00	51.61	74.00	-22.39	Horizontal
5	5729.2162	35.74	17.35	53.09	74.00	-20.91	Horizontal
6	5996.6871	34.99	18.27	53.26	74.00	-20.74	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Vertical	PASS

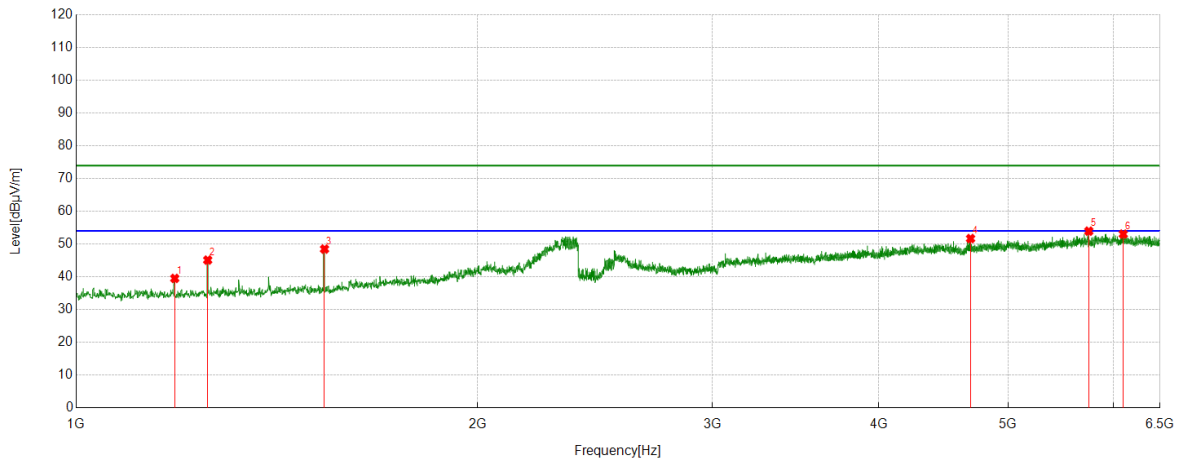


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1185.6482	41.50	-2.00	39.50	74.00	-34.50	Vertical
2	1255.0944	46.68	-1.57	45.11	74.00	-28.89	Vertical
3	1535.6295	49.09	-0.62	48.47	74.00	-25.53	Vertical
4	4686.1483	36.27	15.41	51.68	74.00	-22.32	Vertical
5	5747.7810	36.25	17.70	53.95	74.00	-20.05	Vertical
6	6099.8250	34.67	18.38	53.05	74.00	-20.95	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	LCH	Horizontal	PASS

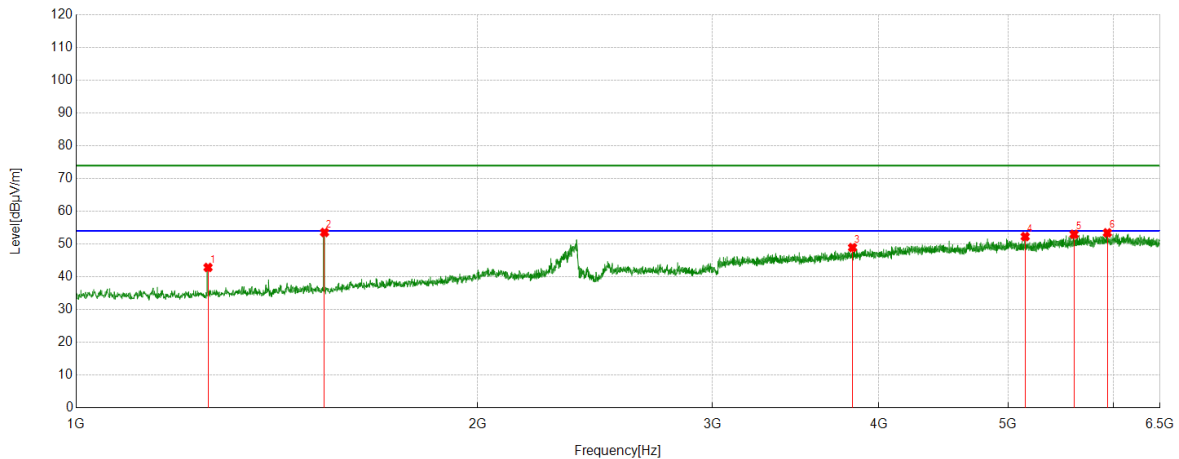


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.7820	44.42	-1.57	42.85	74.00	-31.15	Horizontal
2	1535.6295	54.17	-0.62	53.55	74.00	-20.45	Horizontal
3	3821.8527	36.62	12.29	48.91	74.00	-25.09	Horizontal
4	5149.5812	37.15	15.13	52.28	74.00	-21.72	Horizontal
5	5603.3879	35.49	17.49	52.98	74.00	-21.02	Horizontal
6	5934.8044	34.75	18.68	53.43	74.00	-20.57	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	LCH	Vertical	PASS

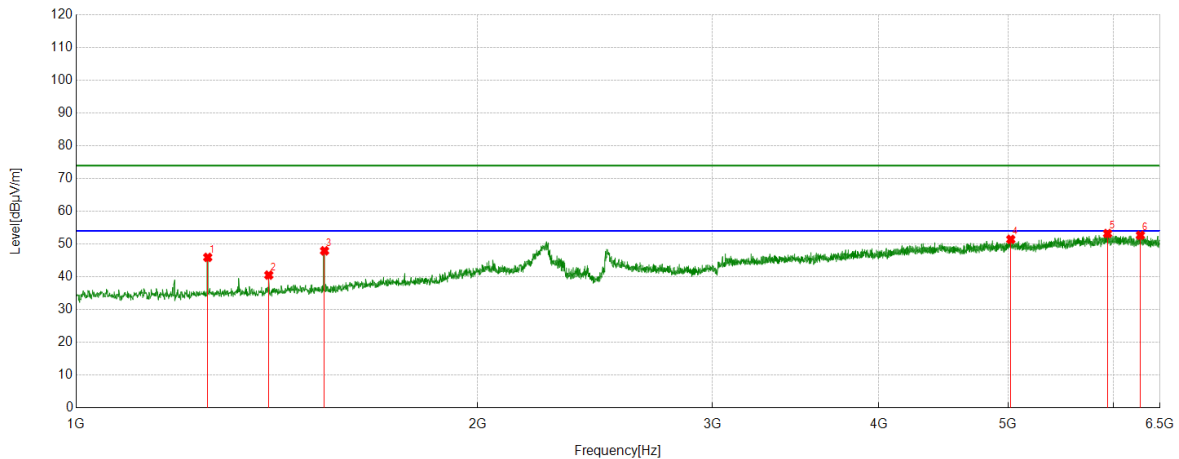


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	47.50	-1.57	45.93	74.00	-28.07	Vertical
2	1394.6743	41.86	-1.35	40.51	74.00	-33.49	Vertical
3	1535.6295	48.55	-0.62	47.93	74.00	-26.07	Vertical
4	5023.0654	35.83	15.60	51.43	74.00	-22.57	Vertical
5	5936.8671	34.63	18.58	53.21	74.00	-20.79	Vertical
6	6283.4104	34.04	18.65	52.69	74.00	-21.31	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	MCH	Horizontal	PASS

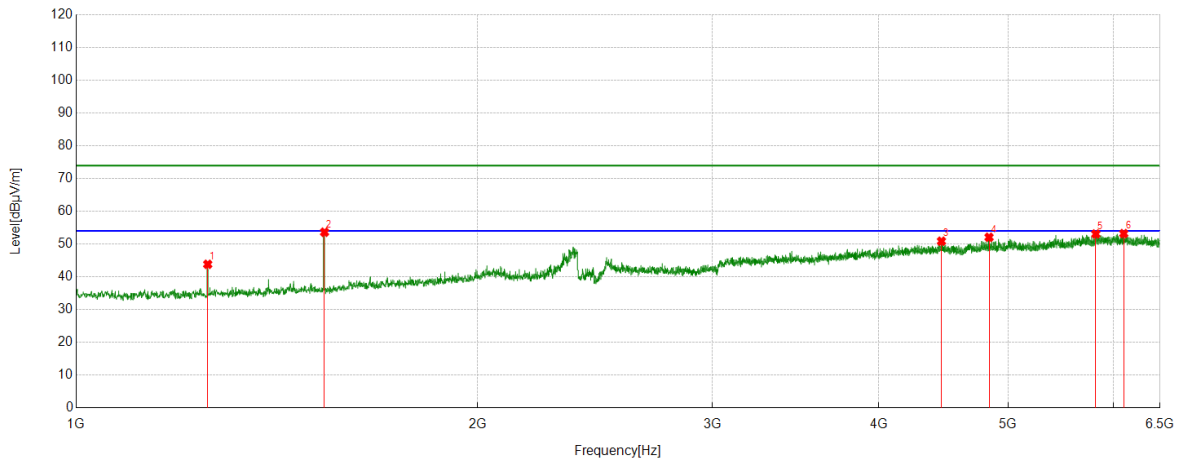


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	45.39	-1.57	43.82	74.00	-30.18	Horizontal
2	1535.6295	54.24	-0.62	53.62	74.00	-20.38	Horizontal
3	4456.4946	36.17	14.70	50.87	74.00	-23.13	Horizontal
4	4838.1048	36.67	15.40	52.07	74.00	-21.93	Horizontal
5	5817.9147	34.54	18.54	53.08	74.00	-20.92	Horizontal
6	6105.3257	35.05	18.15	53.20	74.00	-20.80	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	MCH	Vertical	PASS

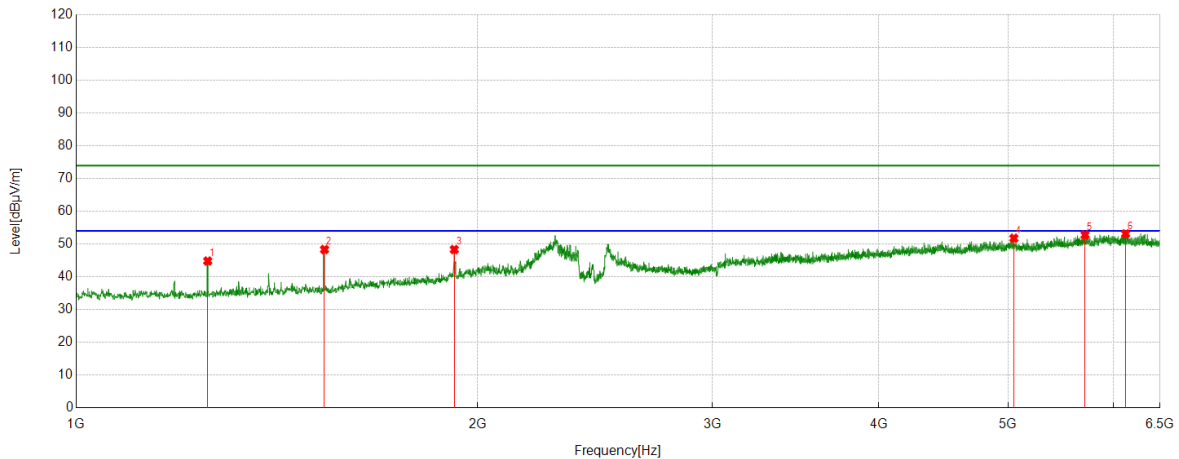


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	46.39	-1.57	44.82	74.00	-29.18	Vertical
2	1535.6295	48.95	-0.62	48.33	74.00	-25.67	Vertical
3	1921.3652	45.24	3.08	48.32	74.00	-25.68	Vertical
4	5049.8812	35.68	16.09	51.77	74.00	-22.23	Vertical
5	5710.6513	35.34	17.47	52.81	74.00	-21.19	Vertical
6	6125.2657	34.88	18.25	53.13	74.00	-20.87	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	HCH	Horizontal	PASS

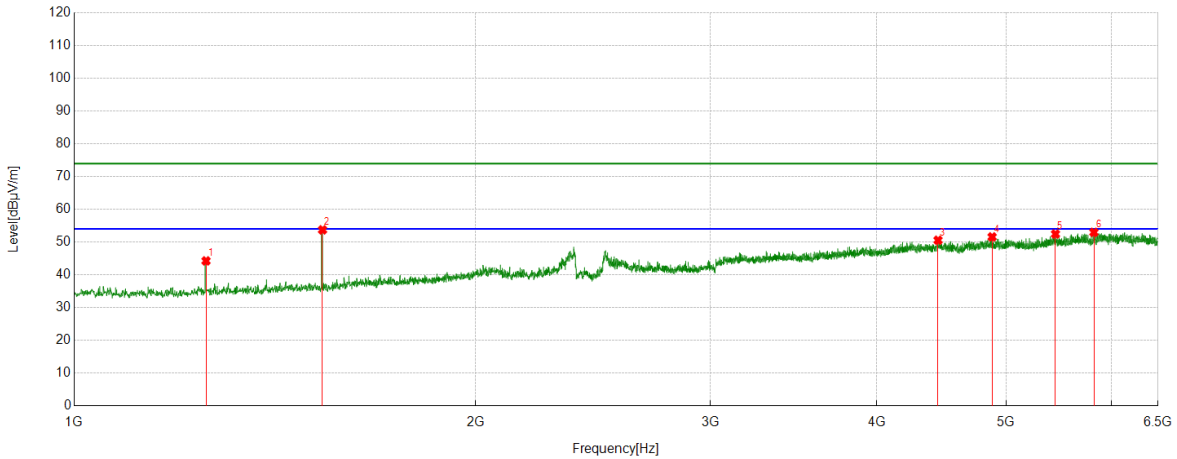


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.7820	45.81	-1.57	44.24	74.00	-29.76	Horizontal
2	1535.6295	54.35	-0.62	53.73	74.00	-20.27	Horizontal
3	4445.4932	36.10	14.46	50.56	74.00	-23.44	Horizontal
4	4880.7351	36.38	15.19	51.57	74.00	-22.43	Horizontal
5	5445.2432	34.99	17.47	52.46	74.00	-21.54	Horizontal
6	5818.6023	34.39	18.58	52.97	74.00	-21.03	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	HCH	Vertical	PASS

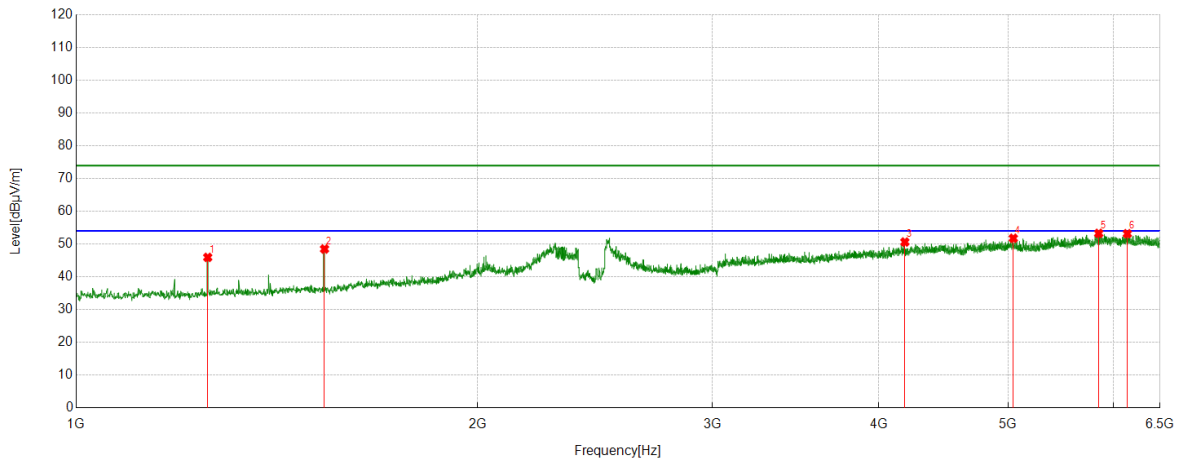


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	47.50	-1.57	45.93	74.00	-28.07	Vertical
2	1535.6295	49.11	-0.62	48.49	74.00	-25.51	Vertical
3	4183.5229	37.50	13.12	50.62	74.00	-23.38	Vertical
4	5045.0681	35.89	15.87	51.76	74.00	-22.24	Vertical
5	5846.7933	35.21	18.05	53.26	74.00	-20.74	Vertical
6	6143.1429	34.77	18.39	53.16	74.00	-20.84	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE40	LCH	Horizontal	PASS

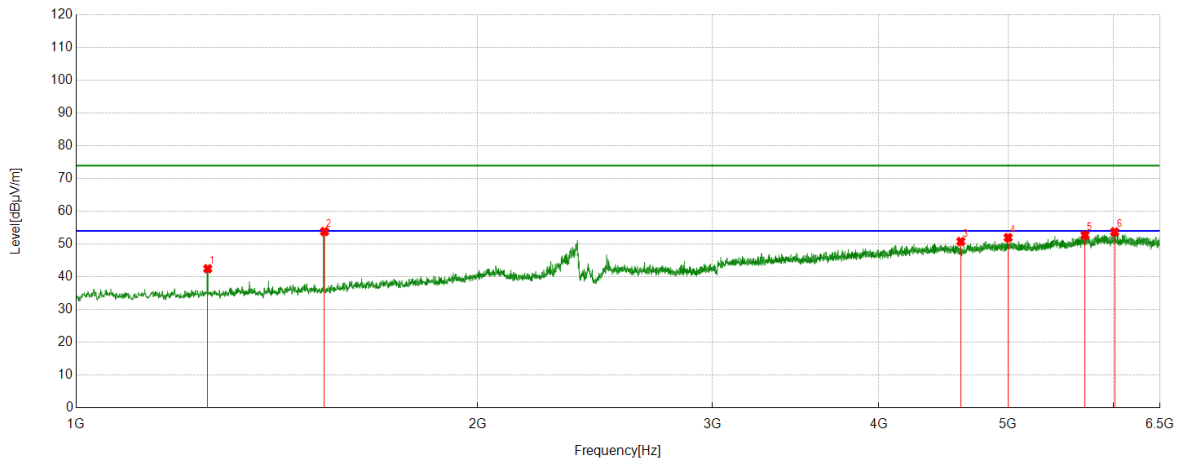


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	44.04	-1.57	42.47	74.00	-31.53	Horizontal
2	1535.6295	54.45	-0.62	53.83	74.00	-20.17	Horizontal
3	4608.4511	37.13	13.66	50.79	74.00	-23.21	Horizontal
4	5000.3750	36.67	15.30	51.97	74.00	-22.03	Horizontal
5	5709.9637	35.27	17.46	52.73	74.00	-21.27	Horizontal
6	6009.7512	35.59	18.14	53.73	74.00	-20.27	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE40	LCH	Vertical	PASS

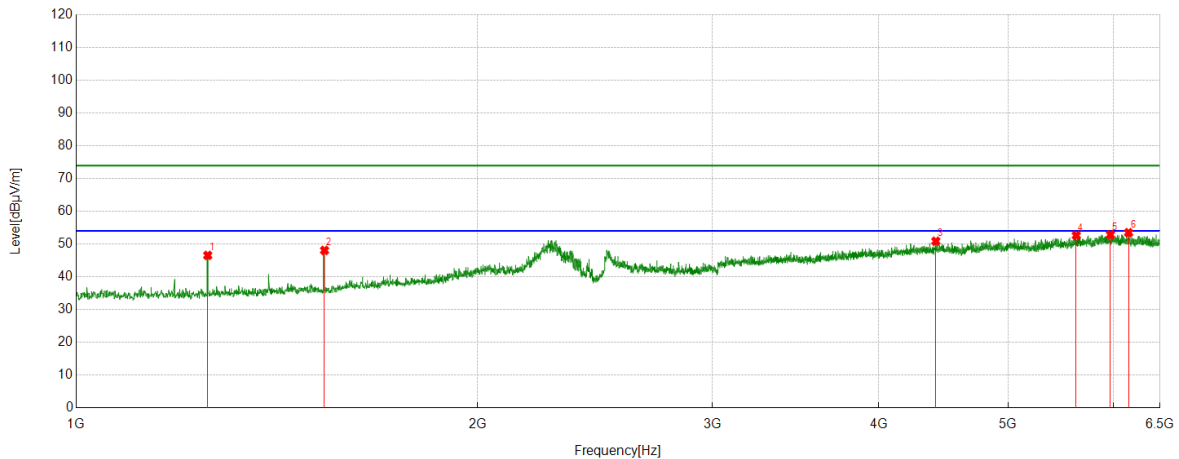


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	48.11	-1.57	46.54	74.00	-27.46	Vertical
2	1535.6295	48.69	-0.62	48.07	74.00	-25.93	Vertical
3	4413.1766	37.06	13.81	50.87	74.00	-23.13	Vertical
4	5624.7031	35.12	17.51	52.63	74.00	-21.37	Vertical
5	5966.4333	34.76	18.10	52.86	74.00	-21.14	Vertical
6	6156.2070	34.92	18.56	53.48	74.00	-20.52	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE40	MCH	Horizontal	PASS

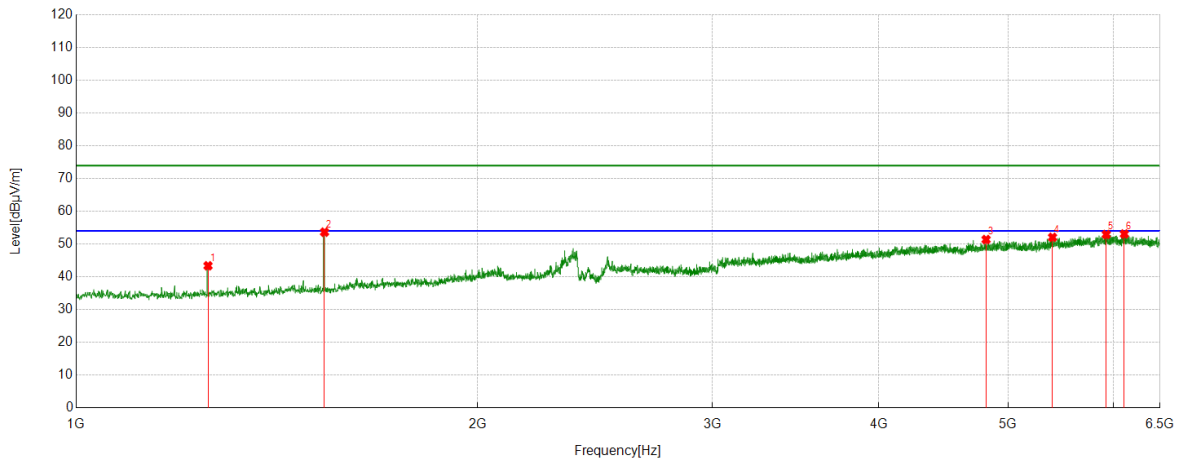


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.7820	44.93	-1.57	43.36	74.00	-30.64	Horizontal
2	1535.6295	54.26	-0.62	53.64	74.00	-20.36	Horizontal
3	4813.3517	35.90	15.48	51.38	74.00	-22.62	Horizontal
4	5398.4873	35.20	16.86	52.06	74.00	-21.94	Horizontal
5	5923.8030	34.14	18.78	52.92	74.00	-21.08	Horizontal
6	6111.5139	35.08	18.00	53.08	74.00	-20.92	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE40	MCH	Vertical	PASS

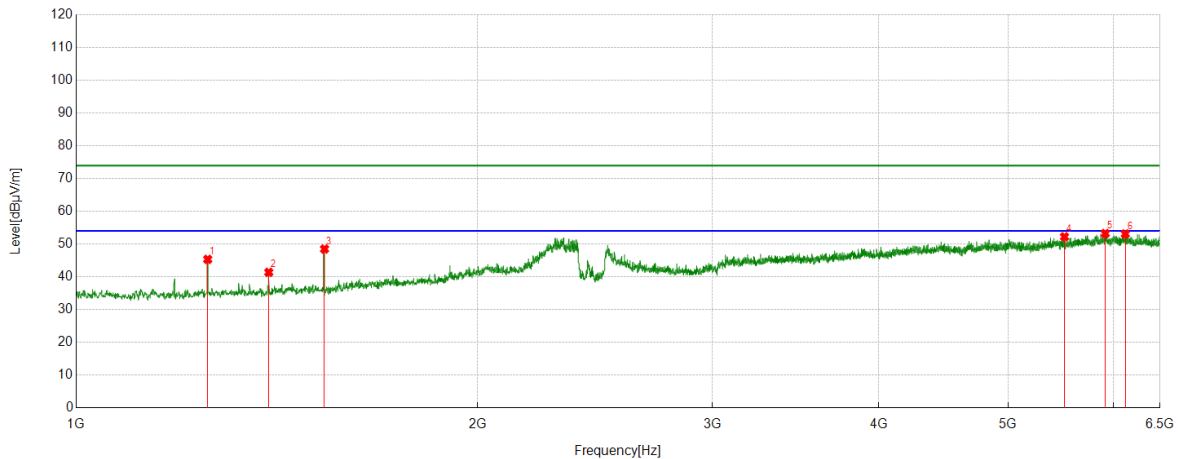


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	46.90	-1.57	45.33	74.00	-28.67	Vertical
2	1394.6743	42.71	-1.35	41.36	74.00	-32.64	Vertical
3	1535.6295	49.11	-0.62	48.49	74.00	-25.51	Vertical
4	5511.2514	35.40	16.82	52.22	74.00	-21.78	Vertical
5	5913.4892	34.86	18.36	53.22	74.00	-20.78	Vertical
6	6121.8277	34.85	18.26	53.11	74.00	-20.89	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE40	HCH	Horizontal	PASS

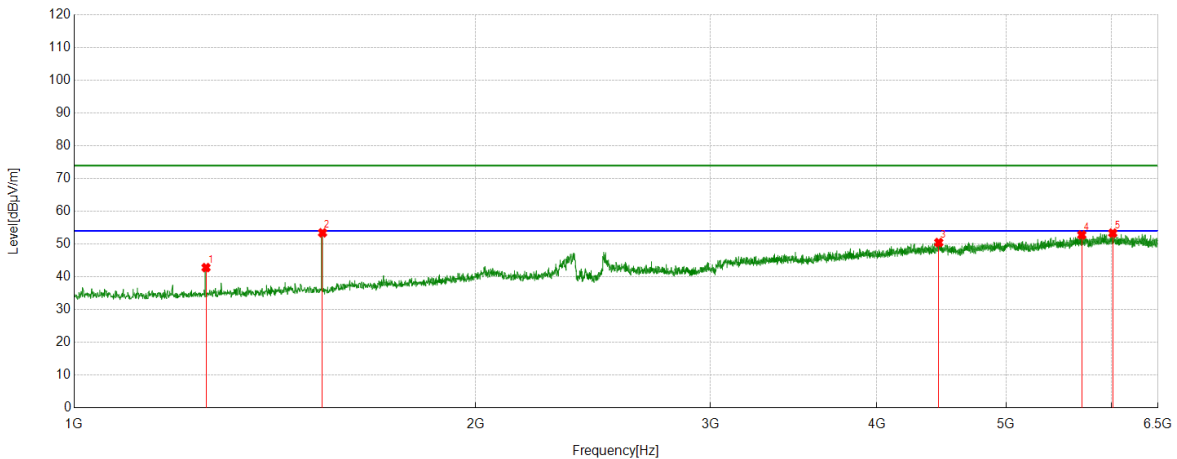

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1							Horizontal
2							Horizontal
3							Horizontal
4							Horizontal
5							Horizontal
6							Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1							Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE40	HCH	Vertical	PASS

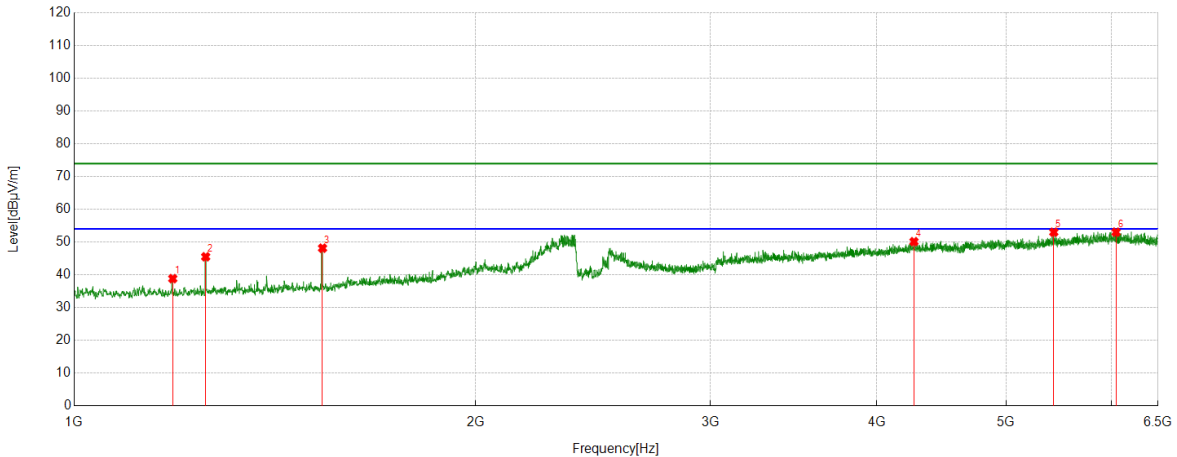

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1185.6482	40.83	-2.00	38.83	74.00	-35.17	Vertical
2	1255.0944	47.07	-1.57	45.50	74.00	-28.50	Vertical
3	1535.6295	48.75	-0.62	48.13	74.00	-25.87	Vertical
4	4264.6581	36.14	13.99	50.13	74.00	-23.87	Vertical
5	5429.4287	35.45	17.56	53.01	74.00	-20.99	Vertical
6	6045.5057	35.03	18.00	53.03	74.00	-20.97	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Part 2: 6.5GHz~18GHz

HARMONICS AND SPURIOUS EMISSIONS

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

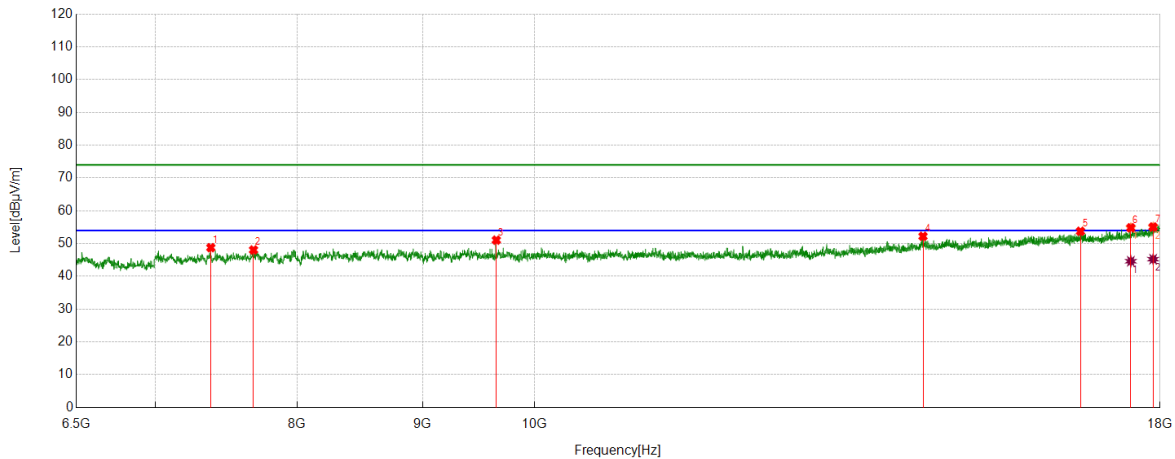

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7376.9846	44.52	4.23	48.75	74.00	-25.25	Horizontal
2	7678.8974	42.72	5.33	48.05	74.00	-25.95	Horizontal
3	9647.0809	44.65	6.39	51.04	74.00	-22.96	Horizontal
4	14405.8007	39.38	12.83	52.21	74.00	-21.79	Horizontal
5	16703.2129	37.78	15.96	53.74	74.00	-20.26	Horizontal
6	17512.6266	37.20	17.62	54.82	74.00	-19.18	Horizontal
7	17883.5479	35.83	19.23	55.06	74.00	-18.94	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17512.6266	26.98	17.62	44.60	54.00	-9.40	Horizontal
2	17883.5479	26.00	19.23	45.23	54.00	-8.77	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

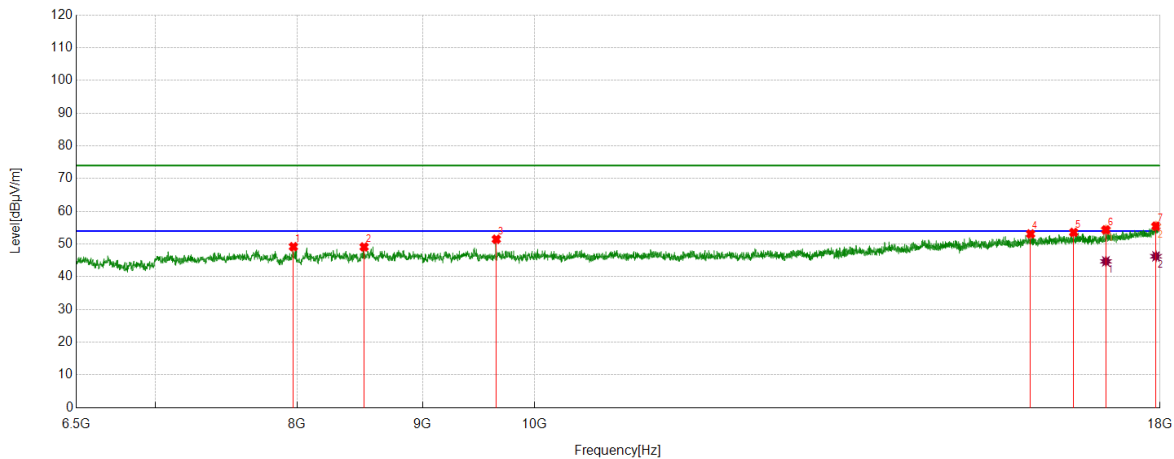

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7972.1840	43.80	5.39	49.19	74.00	-24.81	Vertical
2	8519.9400	42.58	6.54	49.12	74.00	-24.88	Vertical
3	9647.0809	45.08	6.39	51.47	74.00	-22.53	Vertical
4	15938.3673	38.56	14.54	53.10	74.00	-20.90	Vertical
5	16596.8246	37.59	15.97	53.56	74.00	-20.44	Vertical
6	17107.2009	37.96	16.38	54.34	74.00	-19.66	Vertical
7	17932.4291	36.08	19.39	55.47	74.00	-18.53	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17107.2009	28.33	16.38	44.71	54.00	-9.29	Vertical
2	17932.4291	26.87	19.39	46.26	54.00	-7.74	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS

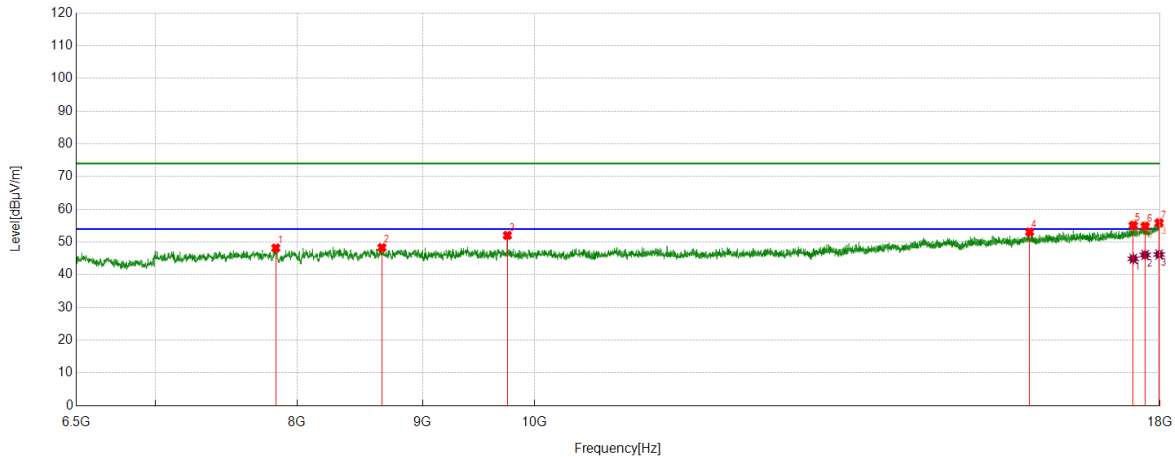

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7841.3552	42.81	5.36	48.17	74.00	-25.83	Horizontal
2	8663.7080	41.99	6.30	48.29	74.00	-25.71	Horizontal
3	9747.7185	45.56	6.48	52.04	74.00	-21.96	Horizontal
4	15923.9905	38.55	14.52	53.07	74.00	-20.93	Horizontal
5	17552.8816	37.35	17.75	55.10	74.00	-18.90	Horizontal
6	17749.8437	36.23	18.61	54.84	74.00	-19.16	Horizontal
7	17984.1855	36.06	19.80	55.86	74.00	-18.14	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17552.8816	27.13	17.75	44.88	54.00	-9.12	Horizontal
2	17749.8437	27.46	18.61	46.07	54.00	-7.93	Horizontal
3	17984.1855	26.40	19.80	46.20	54.00	-7.80	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS

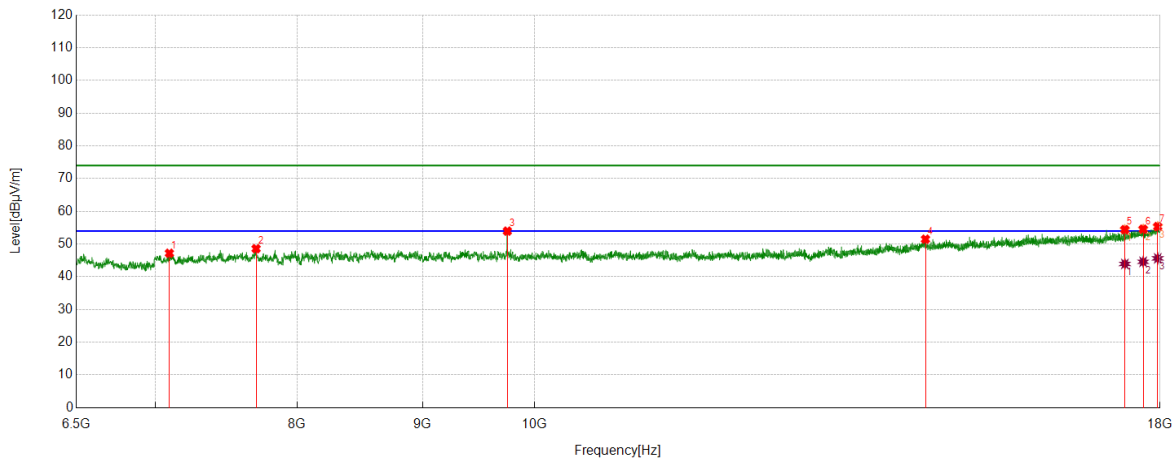

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7095.1994	43.32	3.87	47.19	74.00	-26.81	Vertical
2	7697.5872	43.08	5.50	48.58	74.00	-25.42	Vertical
3	9747.7185	47.47	6.48	53.95	74.00	-20.05	Vertical
4	14438.8674	38.61	12.87	51.48	74.00	-22.52	Vertical
5	17414.8644	37.02	17.39	54.41	74.00	-19.59	Vertical
6	17716.7771	36.11	18.44	54.55	74.00	-19.45	Vertical
7	17961.1826	35.72	19.63	55.35	74.00	-18.65	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17414.8644	26.54	17.39	43.93	54.00	-10.07	Vertical
2	17716.7771	26.14	18.44	44.58	54.00	-9.42	Vertical
3	17961.1826	26.00	19.63	45.63	54.00	-8.37	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

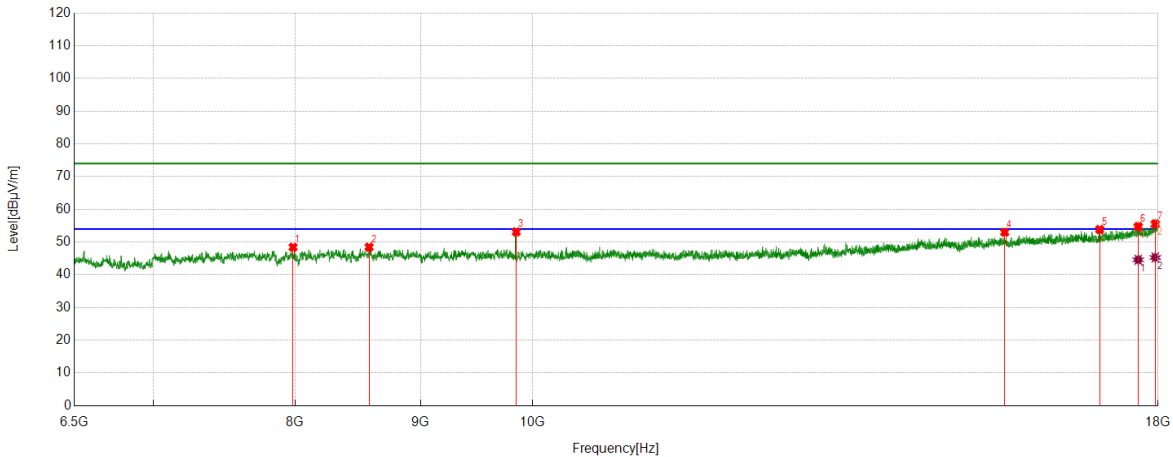

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7985.1231	42.92	5.49	48.41	74.00	-25.59	Horizontal
2	8576.0095	42.10	6.35	48.45	74.00	-25.55	Horizontal
3	9848.3560	46.60	6.51	53.11	74.00	-20.89	Horizontal
4	15584.6981	39.33	13.66	52.99	74.00	-21.01	Horizontal
5	17039.6300	37.56	16.26	53.82	74.00	-20.18	Horizontal
6	17667.8960	36.67	18.07	54.74	74.00	-19.26	Horizontal
7	17953.9942	36.03	19.54	55.57	74.00	-18.43	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17667.8960	26.52	18.07	44.59	54.00	-9.41	Horizontal
2	17953.9942	25.75	19.54	45.29	54.00	-8.71	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

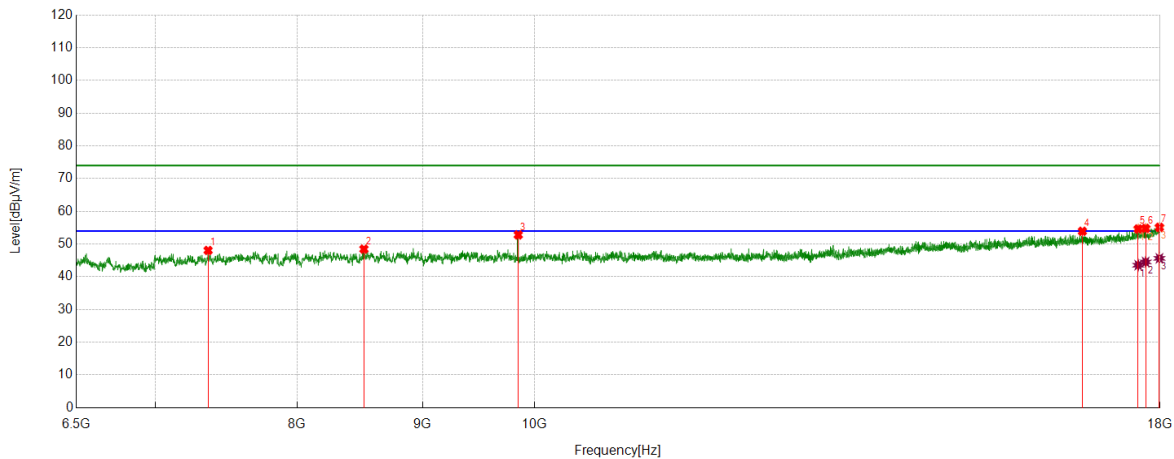

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7358.2948	43.90	4.15	48.05	74.00	-25.95	Vertical
2	8518.5023	42.01	6.44	48.45	74.00	-25.55	Vertical
3	9848.3560	46.29	6.51	52.80	74.00	-21.20	Vertical
4	16733.4042	37.84	16.07	53.91	74.00	-20.09	Vertical
5	17634.8294	36.60	18.02	54.62	74.00	-19.38	Vertical
6	17758.4698	36.28	18.51	54.79	74.00	-19.21	Vertical
7	17989.9362	35.31	19.80	55.11	74.00	-18.89	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17634.8294	25.52	18.02	43.54	54.00	-10.46	Vertical
2	17758.4698	26.02	18.51	44.53	54.00	-9.47	Vertical
3	17989.9362	25.84	19.80	45.64	54.00	-8.36	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

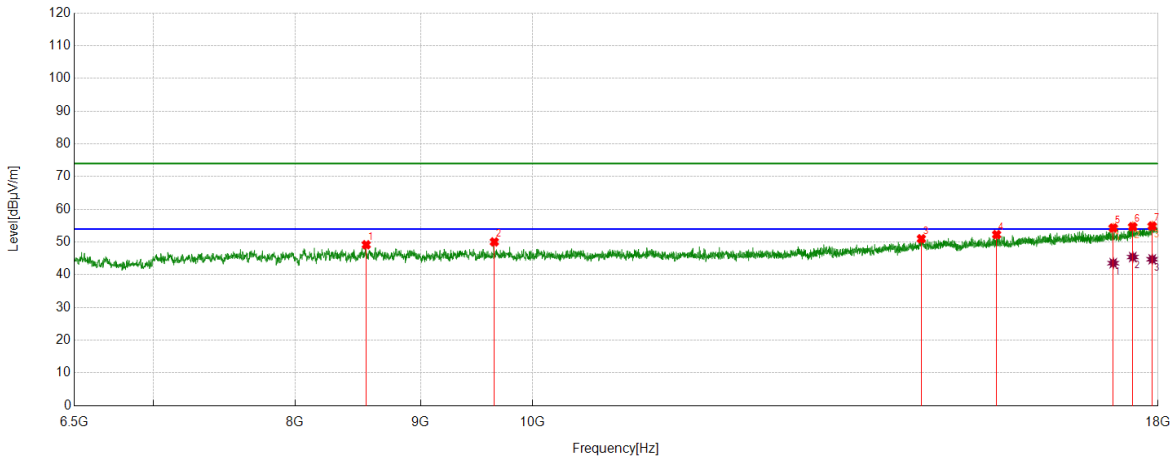

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8553.0066	42.83	6.34	49.17	74.00	-24.83	Horizontal
2	9647.0809	43.66	6.39	50.05	74.00	-23.95	Horizontal
3	14410.1138	38.11	12.89	51.00	74.00	-23.00	Horizontal
4	15466.8084	38.29	13.98	52.27	74.00	-21.73	Horizontal
5	17258.1573	37.48	16.82	54.30	74.00	-19.70	Horizontal
6	17577.3222	36.77	17.93	54.70	74.00	-19.30	Horizontal
7	17902.2378	35.70	19.20	54.90	74.00	-19.10	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17258.1573	26.73	16.82	43.55	54.00	-10.45	Horizontal
2	17577.3222	27.49	17.93	45.42	54.00	-8.58	Horizontal
3	17902.2378	25.53	19.20	44.73	54.00	-9.27	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

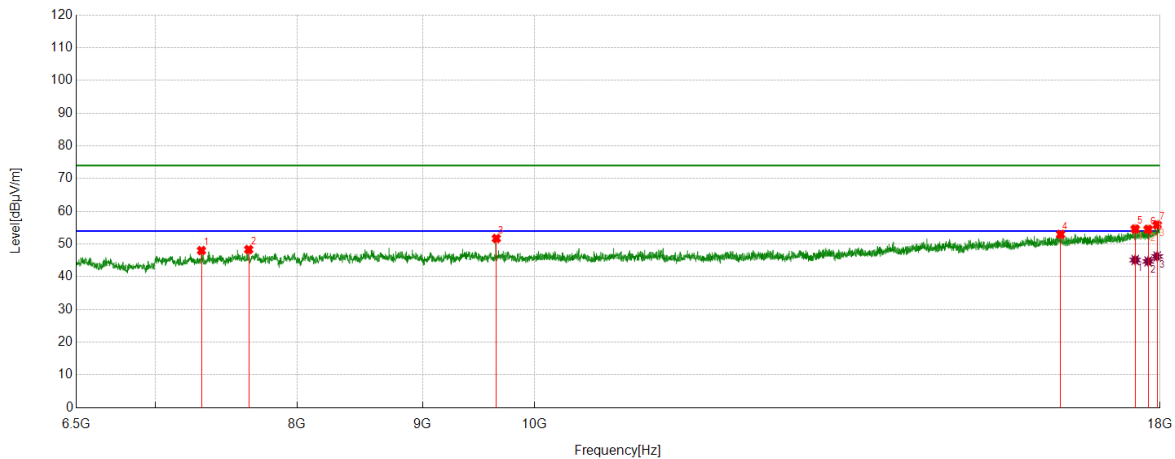

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7312.2890	44.16	3.85	48.01	74.00	-25.99	Vertical
2	7644.3930	43.04	5.28	48.32	74.00	-25.68	Vertical
3	9647.0809	45.32	6.39	51.71	74.00	-22.29	Vertical
4	16394.1118	37.97	15.00	52.97	74.00	-21.03	Vertical
5	17584.5106	36.62	17.99	54.61	74.00	-19.39	Vertical
6	17800.1625	35.67	18.84	54.51	74.00	-19.49	Vertical
7	17952.5566	36.36	19.53	55.89	74.00	-18.11	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17584.5106	27.14	17.99	45.13	54.00	-8.87	Vertical
2	17800.1625	25.86	18.84	44.70	54.00	-9.30	Vertical
3	17952.5566	26.67	19.53	46.20	54.00	-7.80	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Horizontal	PASS

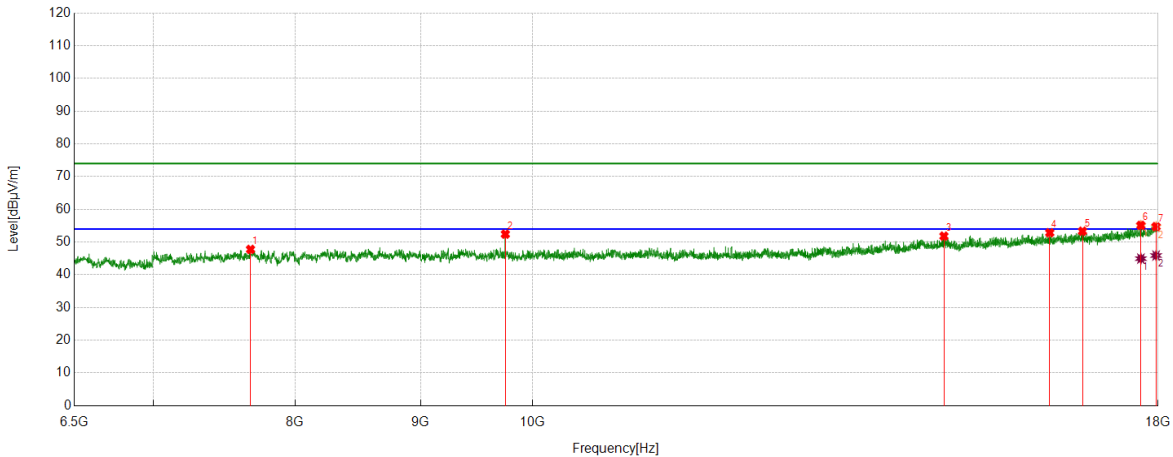

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7671.7090	42.52	5.23	47.75	74.00	-26.25	Horizontal
2	9747.7185	45.94	6.48	52.42	74.00	-21.58	Horizontal
3	14719.2149	38.99	12.82	51.81	74.00	-22.19	Horizontal
4	16258.9699	37.73	15.11	52.84	74.00	-21.16	Horizontal
5	16766.4708	37.29	16.02	53.31	74.00	-20.69	Horizontal
6	17712.4641	36.73	18.38	55.11	74.00	-18.89	Horizontal
7	17966.9334	35.09	19.63	54.72	74.00	-19.28	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17712.4641	26.56	18.38	44.94	54.00	-9.06	Horizontal
2	17966.9334	26.25	19.63	45.88	54.00	-8.12	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS

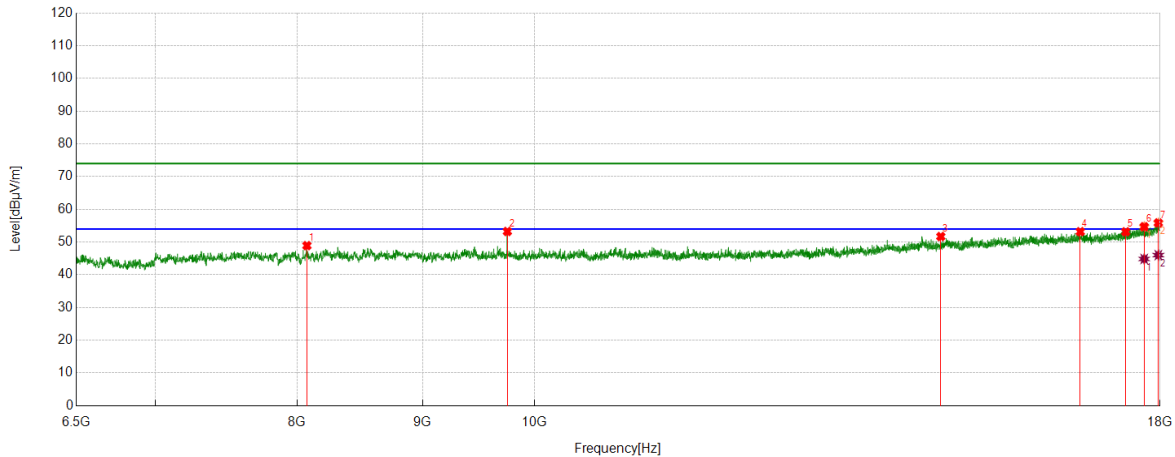

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8074.2593	43.31	5.60	48.91	74.00	-25.09	Vertical
2	9747.7185	46.75	6.48	53.23	74.00	-20.77	Vertical
3	14648.7686	38.92	12.77	51.69	74.00	-22.31	Vertical
4	16700.3375	37.11	16.06	53.17	74.00	-20.83	Vertical
5	17429.2412	35.58	17.56	53.14	74.00	-20.86	Vertical
6	17734.0293	36.15	18.54	54.69	74.00	-19.31	Vertical
7	17971.2464	36.20	19.65	55.85	74.00	-18.15	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17734.0293	26.30	18.54	44.84	54.00	-9.16	Vertical
2	17971.2464	26.35	19.65	46.00	54.00	-8.00	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

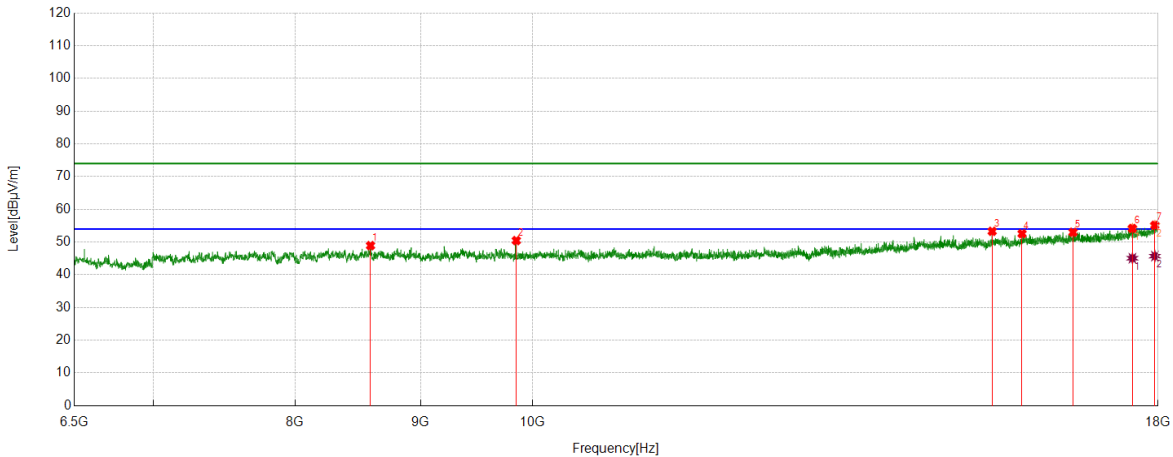

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8587.5109	42.87	6.04	48.91	74.00	-25.09	Horizontal
2	9848.3560	43.95	6.51	50.46	74.00	-23.54	Horizontal
3	15402.1128	39.61	13.67	53.28	74.00	-20.72	Horizontal
4	15840.6051	38.02	14.54	52.56	74.00	-21.44	Horizontal
5	16618.3898	37.09	15.90	52.99	74.00	-21.01	Horizontal
6	17571.5714	36.26	17.90	54.16	74.00	-19.84	Horizontal
7	17946.8059	35.65	19.48	55.13	74.00	-18.87	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17571.5714	27.16	17.90	45.06	54.00	-8.94	Horizontal
2	17946.8059	26.23	19.48	45.71	54.00	-8.29	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

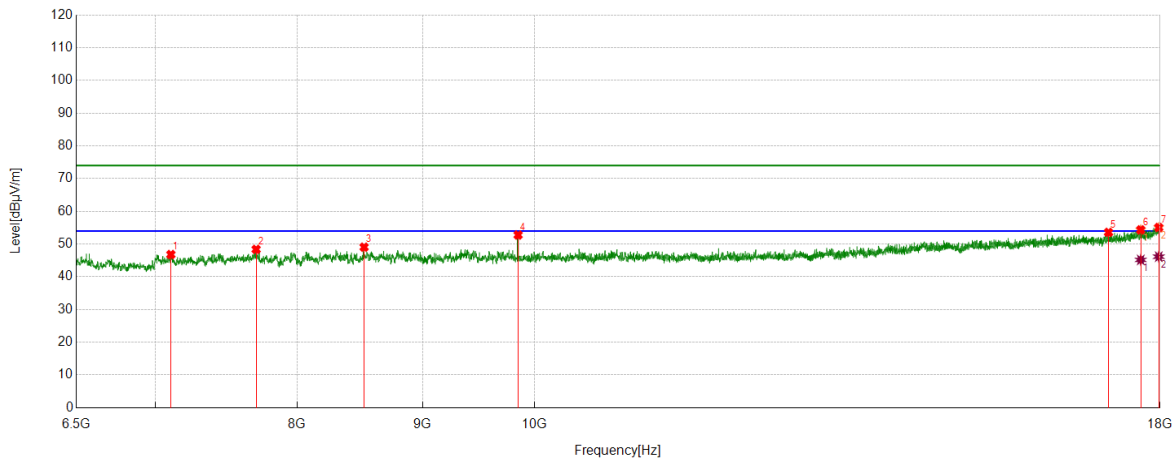

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7105.2632	42.91	3.89	46.80	74.00	-27.20	Vertical
2	7697.5872	42.88	5.50	48.38	74.00	-25.62	Vertical
3	8519.9400	42.51	6.54	49.05	74.00	-24.95	Vertical
4	9846.9184	46.29	6.48	52.77	74.00	-21.23	Vertical
5	17148.8936	37.12	16.45	53.57	74.00	-20.43	Vertical
6	17676.5221	36.24	18.10	54.34	74.00	-19.66	Vertical
7	17978.4348	35.27	19.79	55.06	74.00	-18.94	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17676.5221	27.06	18.10	45.16	54.00	-8.84	Vertical
2	17978.4348	26.35	19.79	46.14	54.00	-7.86	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

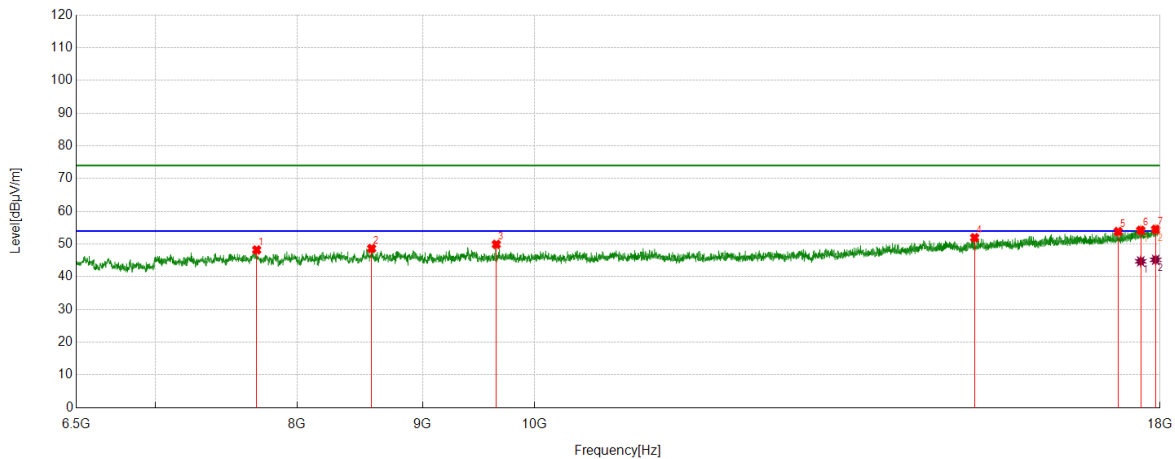

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7701.9002	42.67	5.54	48.21	74.00	-25.79	Horizontal
2	8580.3225	42.21	6.43	48.64	74.00	-25.36	Horizontal
3	9647.0809	43.52	6.39	49.91	74.00	-24.09	Horizontal
4	15121.7652	38.70	13.24	51.94	74.00	-22.06	Horizontal
5	17305.6007	36.81	17.01	53.82	74.00	-20.18	Horizontal
6	17676.5221	36.09	18.10	54.19	74.00	-19.81	Horizontal
7	17926.6783	35.12	19.37	54.49	74.00	-19.51	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17676.5221	26.62	18.10	44.72	54.00	-9.28	Horizontal
2	17926.6783	25.82	19.37	45.19	54.00	-8.81	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

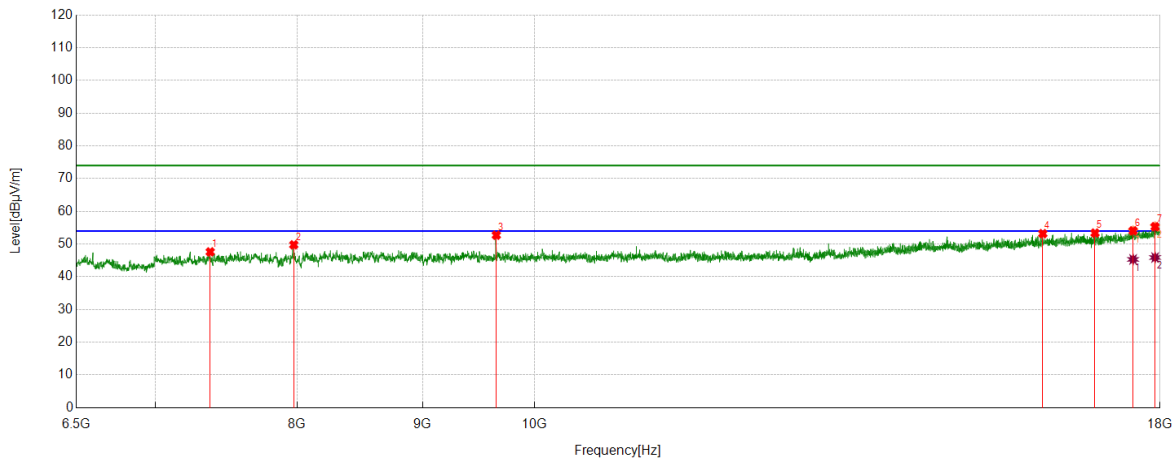

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7372.6716	43.32	4.29	47.61	74.00	-26.39	Vertical
2	7975.0594	44.39	5.38	49.77	74.00	-24.23	Vertical
3	9647.0809	46.32	6.39	52.71	74.00	-21.29	Vertical
4	16122.3903	38.33	14.84	53.17	74.00	-20.83	Vertical
5	16933.2417	37.31	16.05	53.36	74.00	-20.64	Vertical
6	17550.0063	36.31	17.74	54.05	74.00	-19.95	Vertical
7	17916.6146	35.99	19.32	55.31	74.00	-18.69	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17550.0063	27.57	17.74	45.31	54.00	-8.69	Vertical
2	17916.6146	26.56	19.32	45.88	54.00	-8.12	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Horizontal	PASS

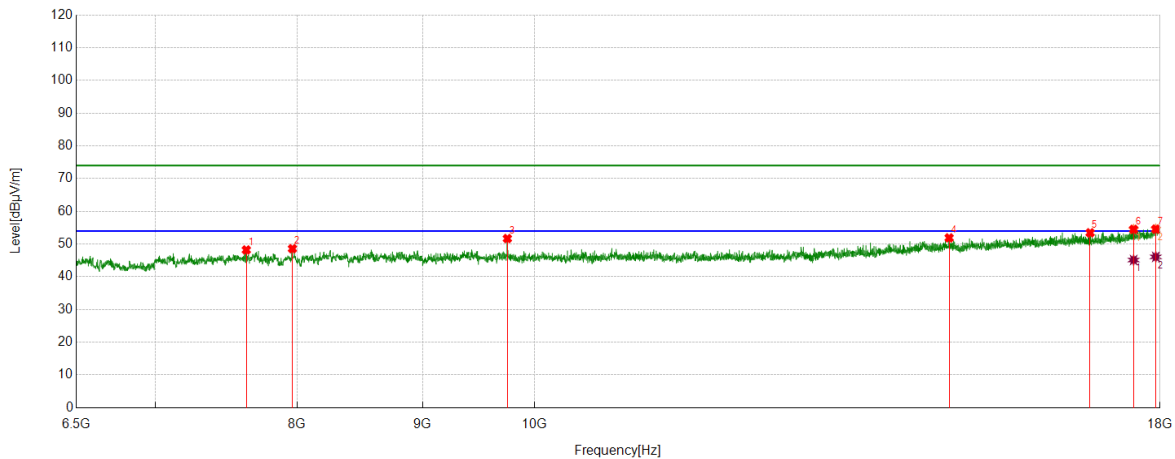

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7627.1409	43.02	5.18	48.20	74.00	-25.80	Horizontal
2	7964.9956	42.92	5.67	48.59	74.00	-25.41	Horizontal
3	9747.7185	45.20	6.48	51.68	74.00	-22.32	Horizontal
4	14763.7830	38.94	12.95	51.89	74.00	-22.11	Horizontal
5	16855.6070	37.18	16.26	53.44	74.00	-20.56	Horizontal
6	17558.6323	36.71	17.78	54.49	74.00	-19.51	Horizontal
7	17928.1160	35.21	19.36	54.57	74.00	-19.43	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17558.6323	27.34	17.78	45.12	54.00	-8.88	Horizontal
2	17928.1160	26.73	19.36	46.09	54.00	-7.91	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Vertical	PASS

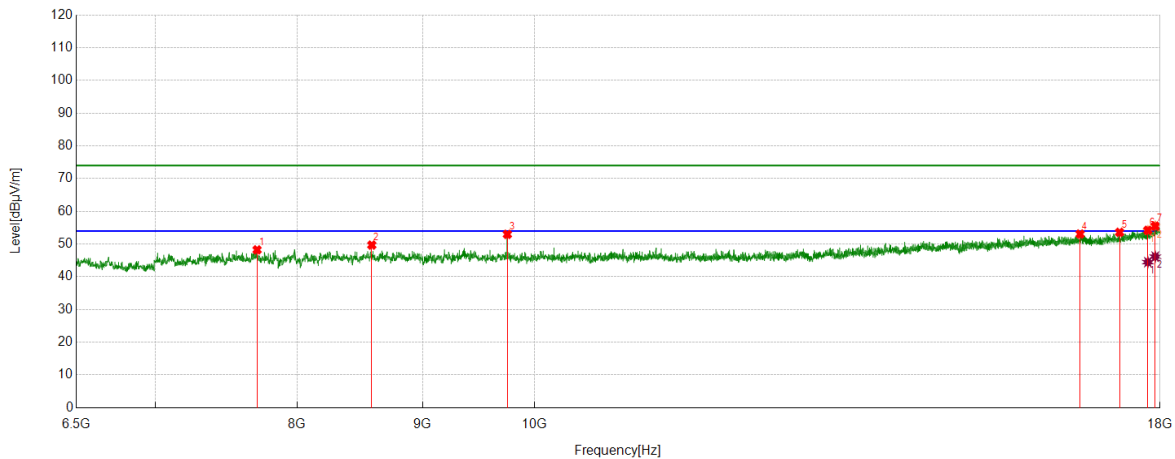

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7704.7756	42.83	5.40	48.23	74.00	-25.77	Vertical
2	8581.7602	43.34	6.35	49.69	74.00	-24.31	Vertical
3	9747.7185	46.50	6.48	52.98	74.00	-21.02	Vertical
4	16697.4622	37.08	15.98	53.06	74.00	-20.94	Vertical
5	17328.6036	36.48	17.10	53.58	74.00	-20.42	Vertical
6	17795.8495	35.43	18.78	54.21	74.00	-19.79	Vertical
7	17919.4899	36.14	19.36	55.50	74.00	-18.50	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17795.8495	25.69	18.78	44.47	54.00	-9.53	Vertical
2	17919.4899	26.80	19.36	46.16	54.00	-7.84	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

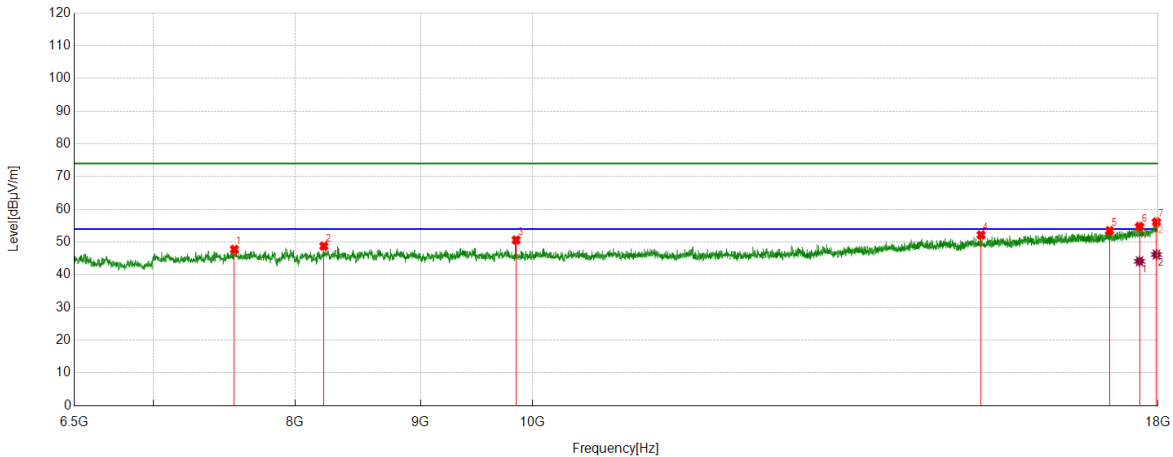

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7556.6946	43.26	4.50	47.76	74.00	-26.24	Horizontal
2	8219.4649	42.62	6.13	48.75	74.00	-25.25	Horizontal
3	9846.9184	44.16	6.48	50.64	74.00	-23.36	Horizontal
4	15242.5303	38.76	13.40	52.16	74.00	-21.84	Horizontal
5	17199.2124	36.89	16.59	53.48	74.00	-20.52	Horizontal
6	17689.4612	36.55	18.18	54.73	74.00	-19.27	Horizontal
7	17972.6841	36.47	19.68	56.15	74.00	-17.85	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17689.4612	25.94	18.18	44.12	54.00	-9.88	Horizontal
2	17972.6841	26.49	19.68	46.17	54.00	-7.83	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

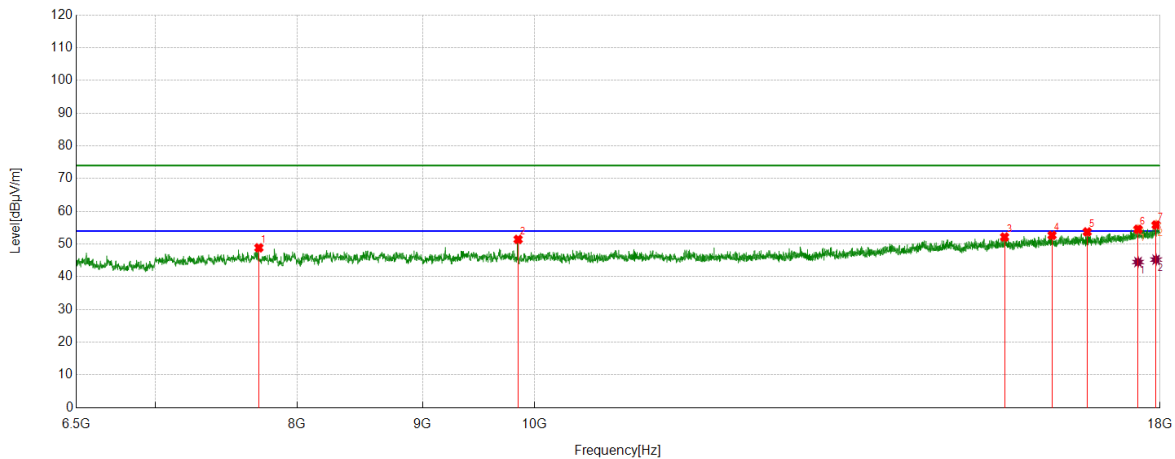

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7717.7147	43.75	5.10	48.85	74.00	-25.15	Vertical
2	9846.9184	44.94	6.48	51.42	74.00	-22.58	Vertical
3	15553.0691	38.43	13.72	52.15	74.00	-21.85	Vertical
4	16263.2829	37.59	15.08	52.67	74.00	-21.33	Vertical
5	16809.6012	37.37	16.35	53.72	74.00	-20.28	Vertical
6	17631.9540	36.48	18.04	54.52	74.00	-19.48	Vertical
7	17933.8667	36.43	19.40	55.83	74.00	-18.17	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17631.9540	26.47	18.04	44.51	54.00	-9.49	Vertical
2	17933.8667	25.84	19.40	45.24	54.00	-8.76	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS

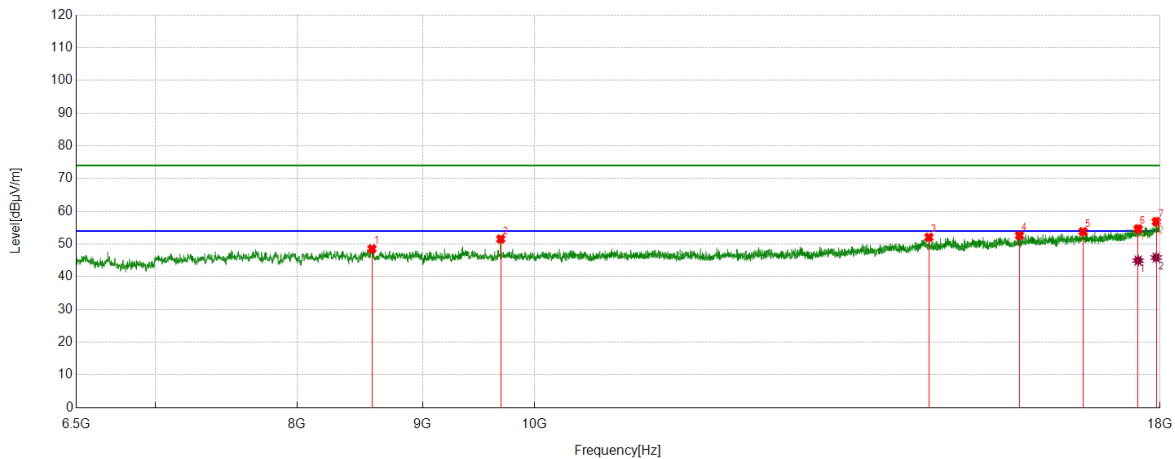

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8583.1979	42.27	6.27	48.54	74.00	-25.46	Horizontal
2	9687.3359	45.04	6.51	51.55	74.00	-22.45	Horizontal
3	14486.3108	39.24	12.84	52.08	74.00	-21.92	Horizontal
4	15773.0341	38.37	14.23	52.60	74.00	-21.40	Horizontal
5	16744.9056	37.67	16.14	53.81	74.00	-20.19	Horizontal
6	17633.3917	36.62	18.03	54.65	74.00	-19.35	Horizontal
7	17936.7421	37.45	19.42	56.87	74.00	-17.13	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17633.3917	26.92	18.03	44.95	54.00	-9.05	Horizontal
2	17936.7421	26.45	19.42	45.87	54.00	-8.13	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS

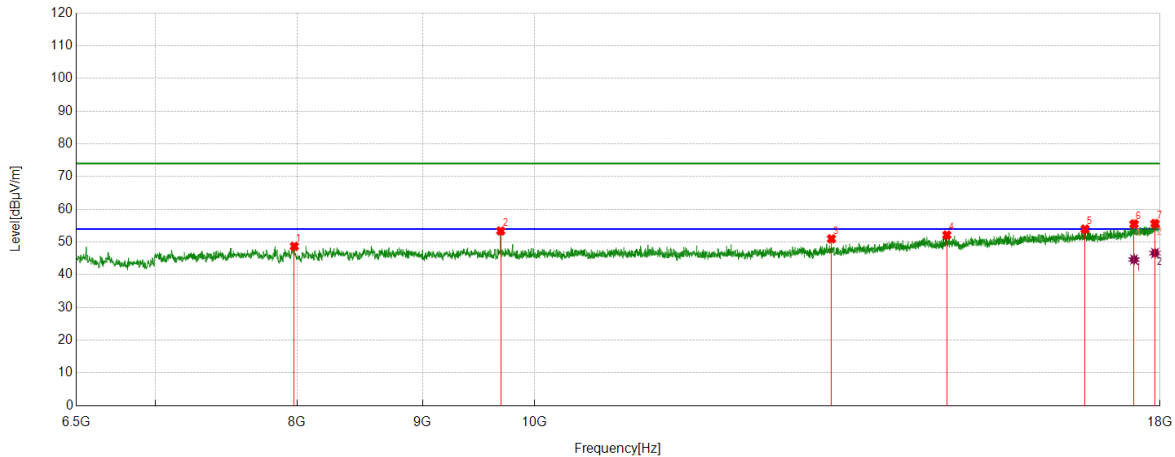

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7979.3724	43.34	5.36	48.70	74.00	-25.30	Vertical
2	9687.3359	46.88	6.51	53.39	74.00	-20.61	Vertical
3	13218.2773	40.98	10.00	50.98	74.00	-23.02	Vertical
4	14732.1540	39.33	12.81	52.14	74.00	-21.86	Vertical
5	16775.0969	37.81	16.16	53.97	74.00	-20.03	Vertical
6	17565.8207	37.67	17.85	55.52	74.00	-18.48	Vertical
7	17915.1769	36.32	19.31	55.63	74.00	-18.37	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17565.8207	26.80	17.85	44.65	54.00	-9.35	Vertical
2	17915.1769	27.32	19.31	46.63	54.00	-7.37	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Horizontal	PASS

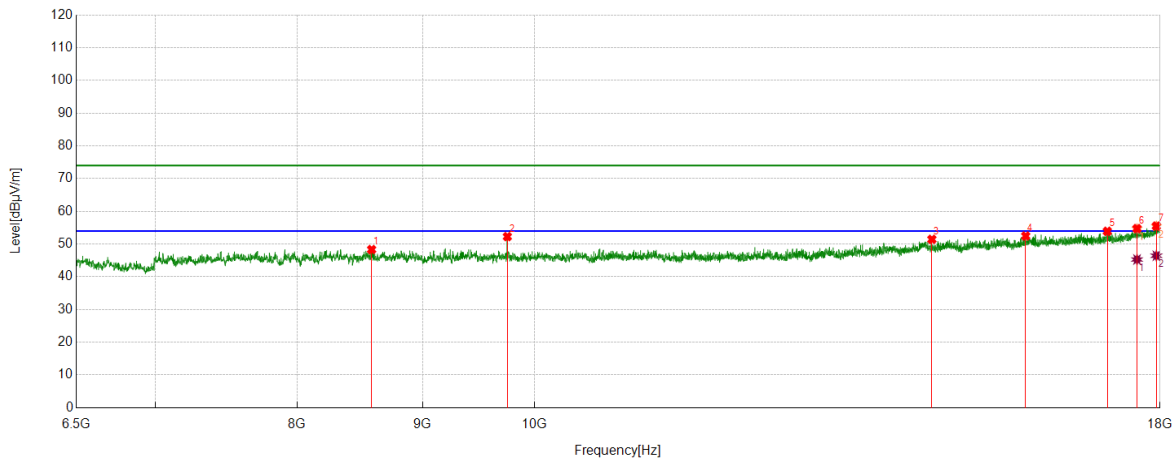

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8580.3225	41.89	6.43	48.32	74.00	-25.68	Horizontal
2	9747.7185	45.79	6.48	52.27	74.00	-21.73	Horizontal
3	14526.5658	38.73	12.71	51.44	74.00	-22.56	Horizontal
4	15865.0456	37.79	14.67	52.46	74.00	-21.54	Horizontal
5	17130.2038	37.28	16.62	53.90	74.00	-20.10	Horizontal
6	17614.7018	36.67	18.06	54.73	74.00	-19.27	Horizontal
7	17938.1798	36.07	19.43	55.50	74.00	-18.50	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17614.7018	27.22	18.06	45.28	54.00	-8.72	Horizontal
2	17938.1798	27.00	19.43	46.43	54.00	-7.57	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Vertical	PASS

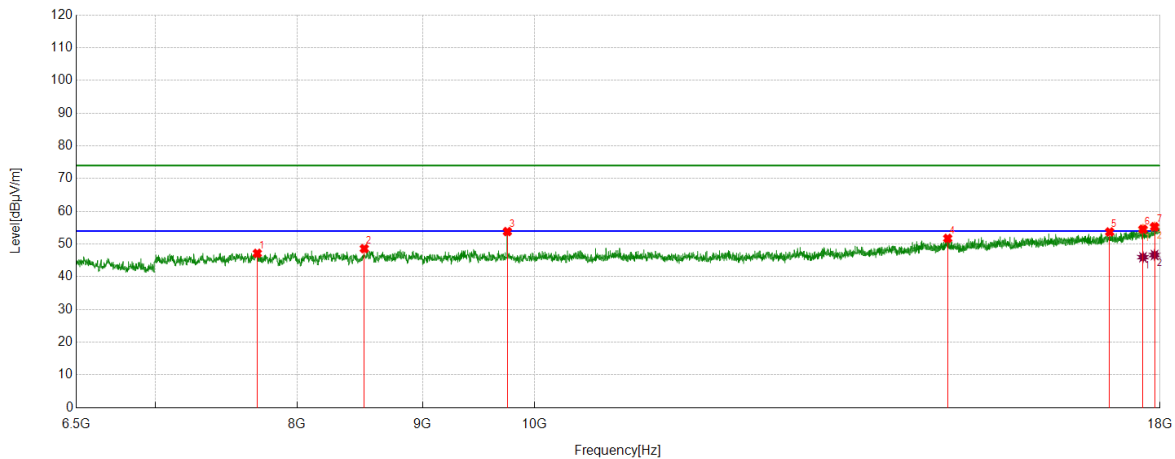

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7706.2133	41.82	5.34	47.16	74.00	-26.84	Vertical
2	8521.3777	42.13	6.47	48.60	74.00	-25.40	Vertical
3	9747.7185	47.33	6.48	53.81	74.00	-20.19	Vertical
4	14743.6555	38.84	12.89	51.73	74.00	-22.27	Vertical
5	17167.5834	37.23	16.47	53.70	74.00	-20.30	Vertical
6	17713.9017	36.13	18.41	54.54	74.00	-19.46	Vertical
7	17907.9885	36.05	19.23	55.28	74.00	-18.72	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17713.9017	27.58	18.41	45.99	54.00	-8.01	Vertical
2	17907.9885	27.42	19.23	46.65	54.00	-7.35	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Horizontal	PASS

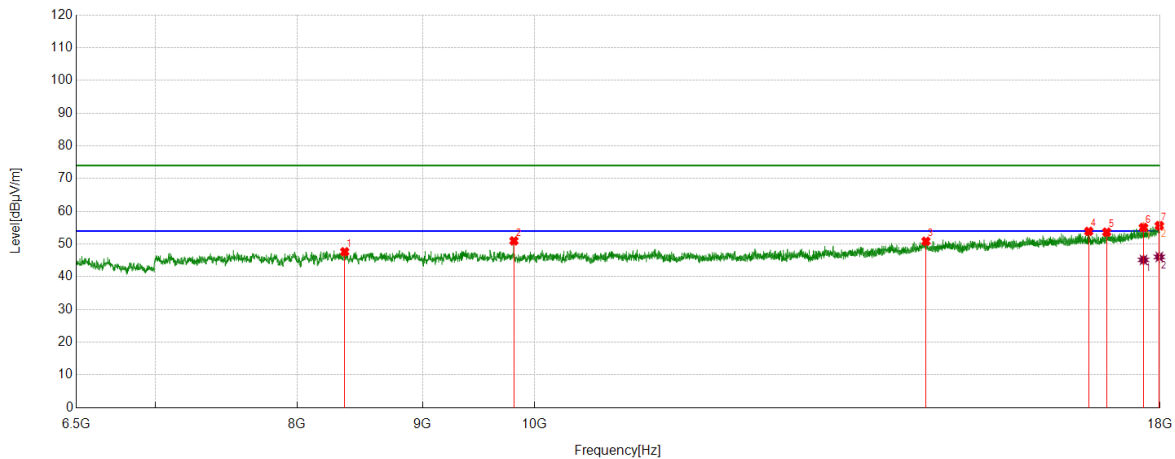

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8366.1083	41.84	5.81	47.65	74.00	-26.35	Horizontal
2	9808.1010	44.60	6.37	50.97	74.00	-23.03	Horizontal
3	14446.0558	37.95	12.91	50.86	74.00	-23.14	Horizontal
4	16834.0418	37.49	16.39	53.88	74.00	-20.12	Horizontal
5	17120.1400	37.18	16.45	53.63	74.00	-20.37	Horizontal
6	17722.5278	36.56	18.50	55.06	74.00	-18.94	Horizontal
7	17988.4986	35.83	19.81	55.64	74.00	-18.36	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17722.5278	26.66	18.50	45.16	54.00	-8.84	Horizontal
2	17988.4986	26.26	19.81	46.07	54.00	-7.93	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Vertical	PASS

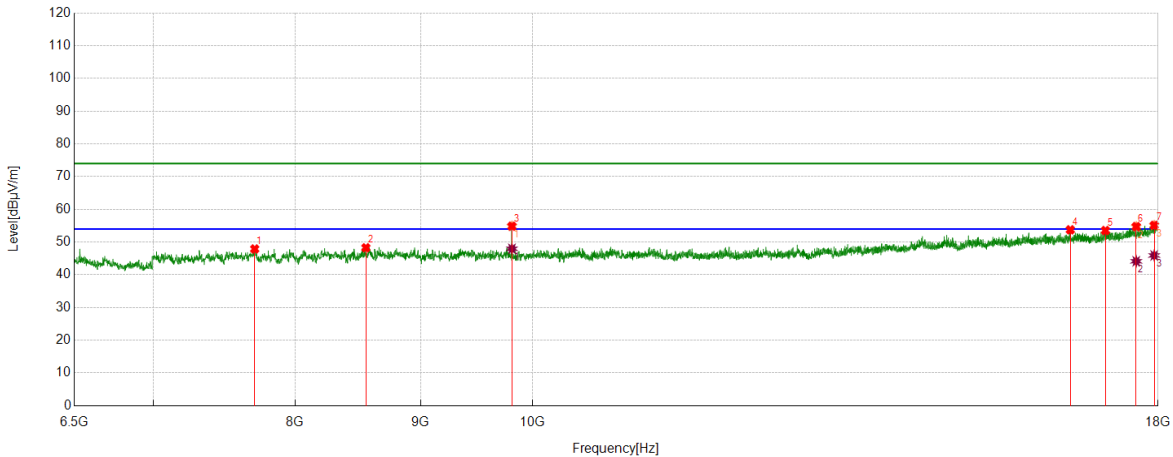

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7701.9002	42.35	5.54	47.89	74.00	-26.11	Vertical
2	8550.1313	41.74	6.51	48.25	74.00	-25.75	Vertical
3	9808.1010	48.47	6.37	54.84	74.00	-19.16	Vertical
4	16575.2594	37.89	15.85	53.74	74.00	-20.26	Vertical
5	17131.6415	36.93	16.59	53.52	74.00	-20.48	Vertical
6	17634.8294	36.71	18.02	54.73	74.00	-19.27	Vertical
7	17935.3044	35.69	19.42	55.11	74.00	-18.89	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	9808.1010	41.57	6.37	47.94	54.00	-6.06	Vertical
2	17634.8294	26.11	18.02	44.13	54.00	-9.87	Vertical
3	17935.3044	26.49	19.42	45.91	54.00	-8.09	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	LCH	Horizontal	PASS

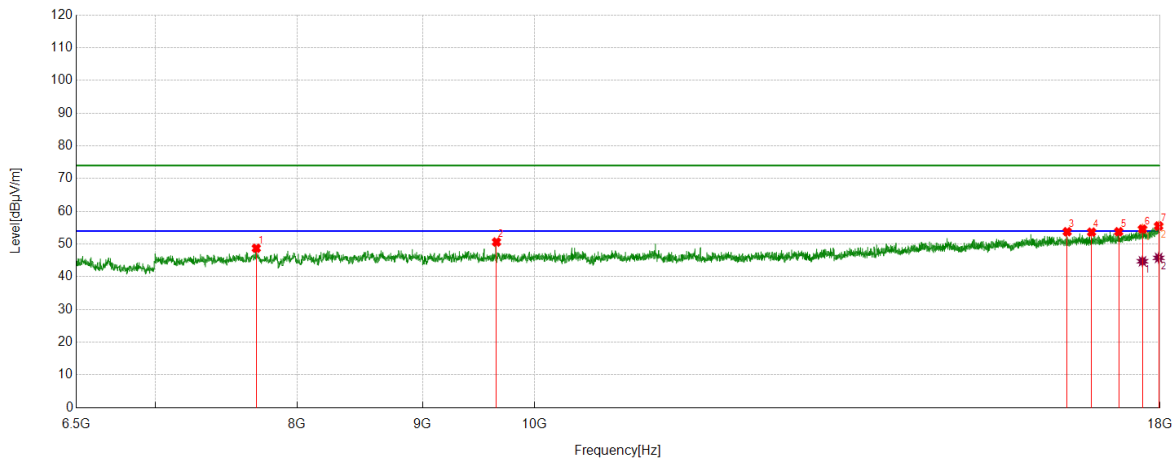

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7699.0249	43.14	5.57	48.71	74.00	-25.29	Horizontal
2	9648.5186	44.21	6.41	50.62	74.00	-23.38	Horizontal
3	16496.1870	37.97	15.79	53.76	74.00	-20.24	Horizontal
4	16878.6098	37.56	16.08	53.64	74.00	-20.36	Horizontal
5	17314.2268	36.76	17.01	53.77	74.00	-20.23	Horizontal
6	17705.2757	36.25	18.32	54.57	74.00	-19.43	Horizontal
7	17976.9971	35.77	19.75	55.52	74.00	-18.48	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17705.2757	26.41	18.32	44.73	54.00	-9.27	Horizontal
2	17976.9971	26.03	19.75	45.78	54.00	-8.22	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	LCH	Vertical	PASS

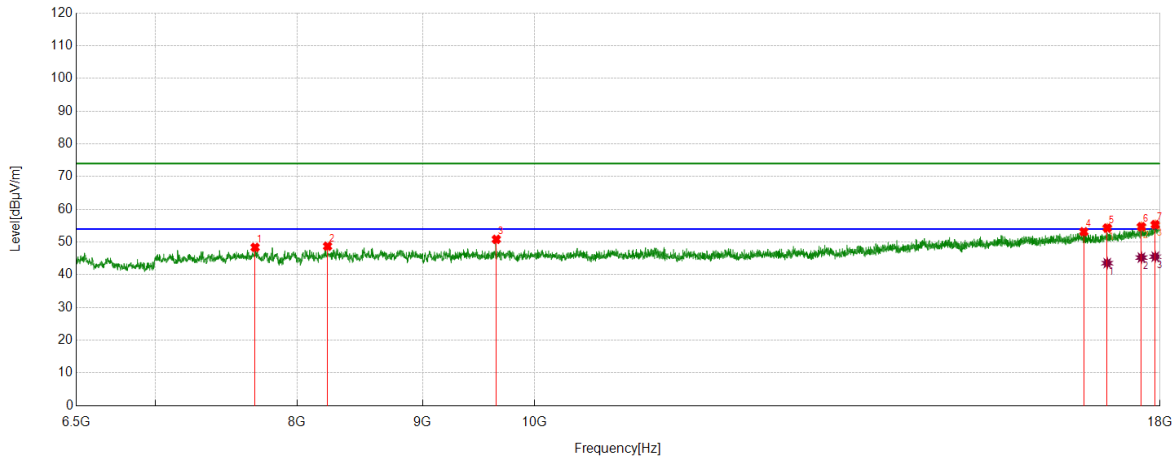

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7690.3988	43.23	5.14	48.37	74.00	-25.63	Vertical
2	8232.4041	42.70	6.02	48.72	74.00	-25.28	Vertical
3	9647.0809	44.44	6.39	50.83	74.00	-23.17	Vertical
4	16756.4071	36.97	16.18	53.15	74.00	-20.85	Vertical
5	17128.7661	37.68	16.61	54.29	74.00	-19.71	Vertical
6	17688.0235	36.52	18.17	54.69	74.00	-19.31	Vertical
7	17919.4899	35.97	19.36	55.33	74.00	-18.67	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17128.7661	26.95	16.61	43.56	54.00	-10.44	Vertical
2	17688.0235	27.08	18.17	45.25	54.00	-8.75	Vertical
3	17919.4899	26.17	19.36	45.53	54.00	-8.47	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	MCH	Horizontal	PASS

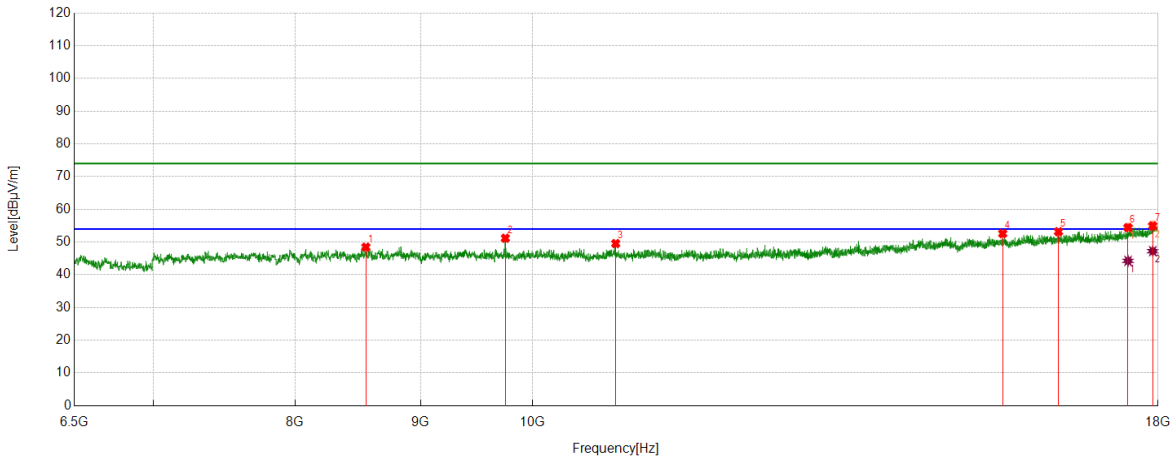

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8550.1313	41.93	6.51	48.44	74.00	-25.56	Horizontal
2	9747.7185	44.70	6.48	51.18	74.00	-22.82	Horizontal
3	10813.0391	42.65	6.89	49.54	74.00	-24.46	Horizontal
4	15555.9445	38.89	13.71	52.60	74.00	-21.40	Horizontal
5	16392.6741	38.18	15.00	53.18	74.00	-20.82	Horizontal
6	17499.6875	36.81	17.62	54.43	74.00	-19.57	Horizontal
7	17910.8639	35.72	19.26	54.98	74.00	-19.02	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17499.6875	26.64	17.62	44.26	54.00	-9.74	Horizontal
2	17910.8639	27.97	19.26	47.23	54.00	-6.77	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	MCH	Vertical	PASS

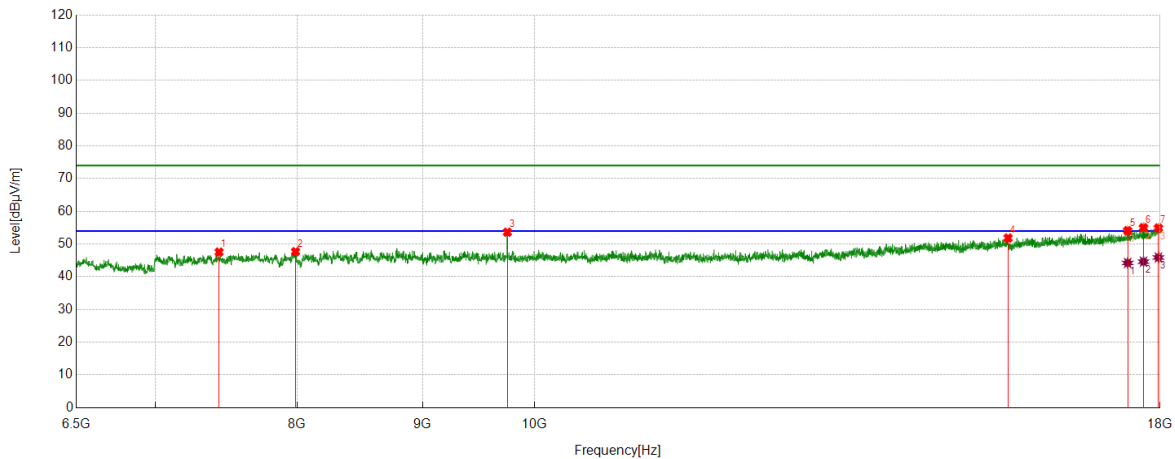

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7434.4918	43.32	4.23	47.55	74.00	-26.45	Vertical
2	7987.9985	42.11	5.56	47.67	74.00	-26.33	Vertical
3	9747.7185	47.14	6.48	53.62	74.00	-20.38	Vertical
4	15604.8256	38.20	13.65	51.85	74.00	-22.15	Vertical
5	17460.8701	36.46	17.62	54.08	74.00	-19.92	Vertical
6	17722.5278	36.50	18.50	55.00	74.00	-19.00	Vertical
7	17972.6841	35.23	19.68	54.91	74.00	-19.09	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17460.8701	26.60	17.62	44.22	54.00	-9.78	Vertical
2	17722.5278	26.12	18.50	44.62	54.00	-9.38	Vertical
3	17972.6841	26.21	19.68	45.89	54.00	-8.11	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	HCH	Horizontal	PASS

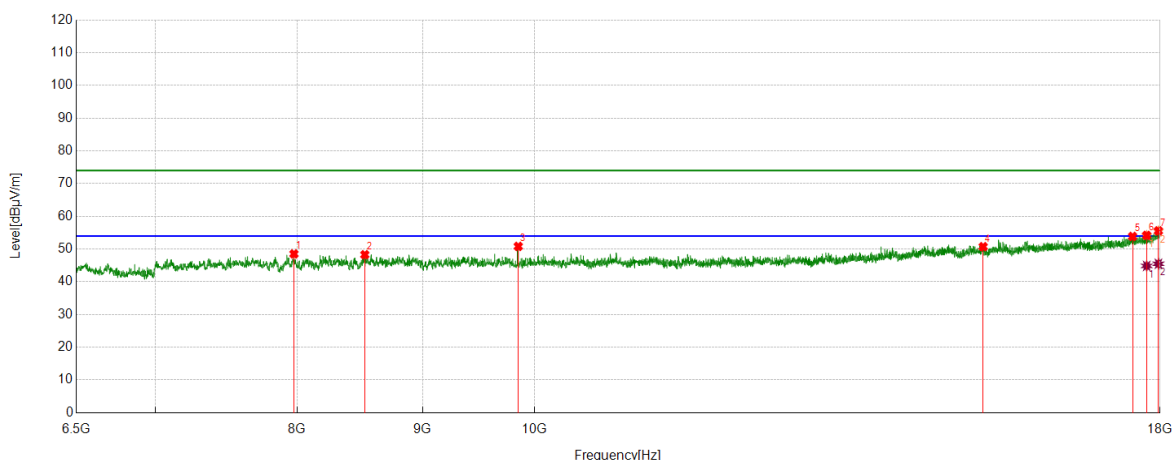

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7976.4971	43.15	5.37	48.52	74.00	-25.48	Horizontal
2	8525.6907	42.04	6.24	48.28	74.00	-25.72	Horizontal
3	9848.3560	44.31	6.51	50.82	74.00	-23.18	Horizontal
4	15243.9680	37.32	13.40	50.72	74.00	-23.28	Horizontal
5	17541.3802	36.16	17.70	53.86	74.00	-20.14	Horizontal
6	17775.7220	35.45	18.73	54.18	74.00	-19.82	Horizontal
7	17972.6841	35.87	19.68	55.55	74.00	-18.45	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17775.7220	26.12	18.73	44.85	54.00	-9.15	Horizontal
2	17972.6841	25.81	19.68	45.49	54.00	-8.51	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	HCH	Vertical	PASS

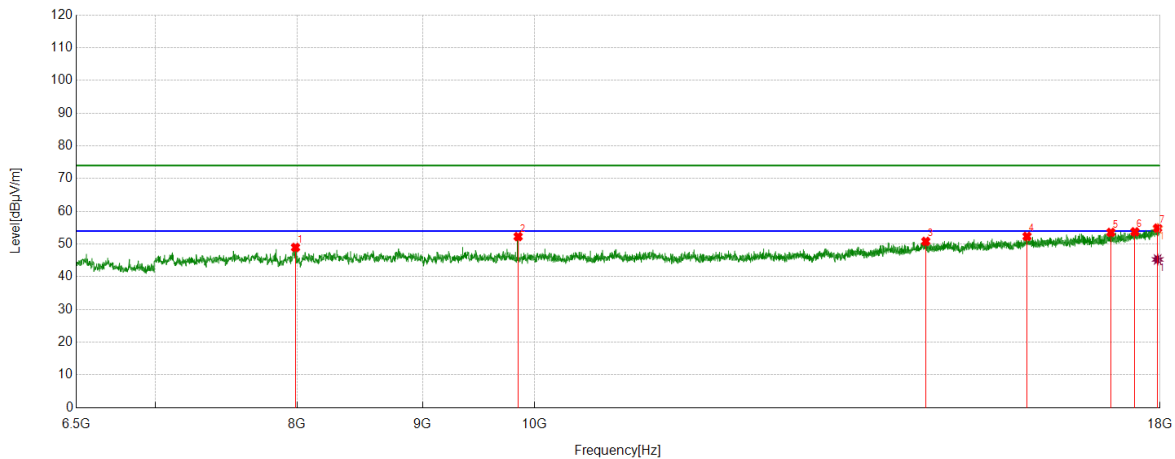

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7987.9985	43.40	5.56	48.96	74.00	-25.04	Vertical
2	9846.9184	45.80	6.48	52.28	74.00	-21.72	Vertical
3	14443.1804	37.93	12.89	50.82	74.00	-23.18	Vertical
4	15885.1731	37.70	14.64	52.34	74.00	-21.66	Vertical
5	17187.7110	36.96	16.60	53.56	74.00	-20.44	Vertical
6	17580.1975	35.79	17.95	53.74	74.00	-20.26	Vertical
7	17959.7450	35.25	19.63	54.88	74.00	-19.12	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17959.7450	25.66	19.63	45.29	54.00	-8.71	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE40	LCH	Horizontal	PASS

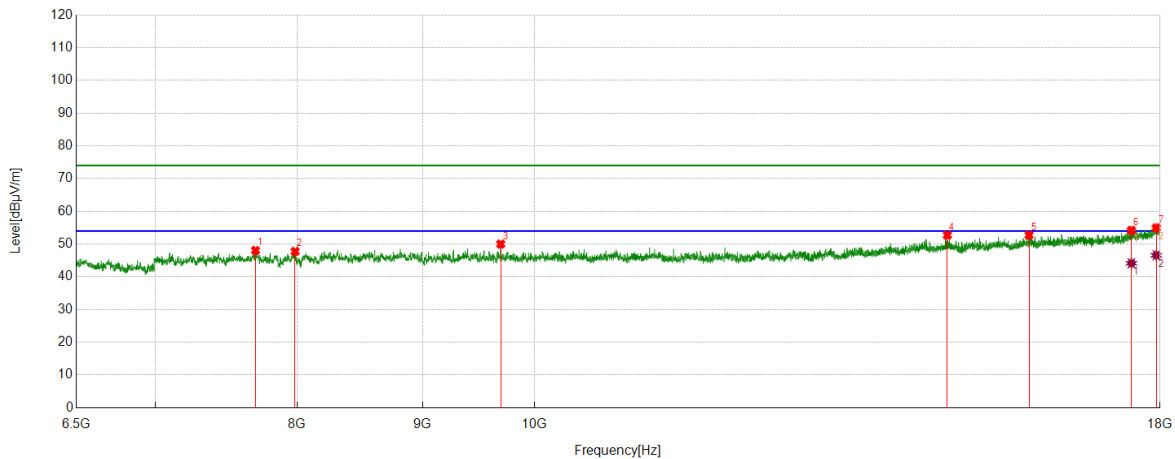

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7693.2742	42.77	5.28	48.05	74.00	-25.95	Horizontal
2	7985.1231	42.26	5.49	47.75	74.00	-26.25	Horizontal
3	9687.3359	43.49	6.51	50.00	74.00	-24.00	Horizontal
4	14739.3424	39.82	12.89	52.71	74.00	-21.29	Horizontal
5	15915.3644	38.18	14.53	52.71	74.00	-21.29	Horizontal
6	17522.6903	36.55	17.61	54.16	74.00	-19.84	Horizontal
7	17936.7421	35.52	19.42	54.94	74.00	-19.06	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17522.6903	26.52	17.61	44.13	54.00	-9.87	Horizontal
2	17936.7421	27.16	19.42	46.58	54.00	-7.42	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE40	LCH	Vertical	PASS

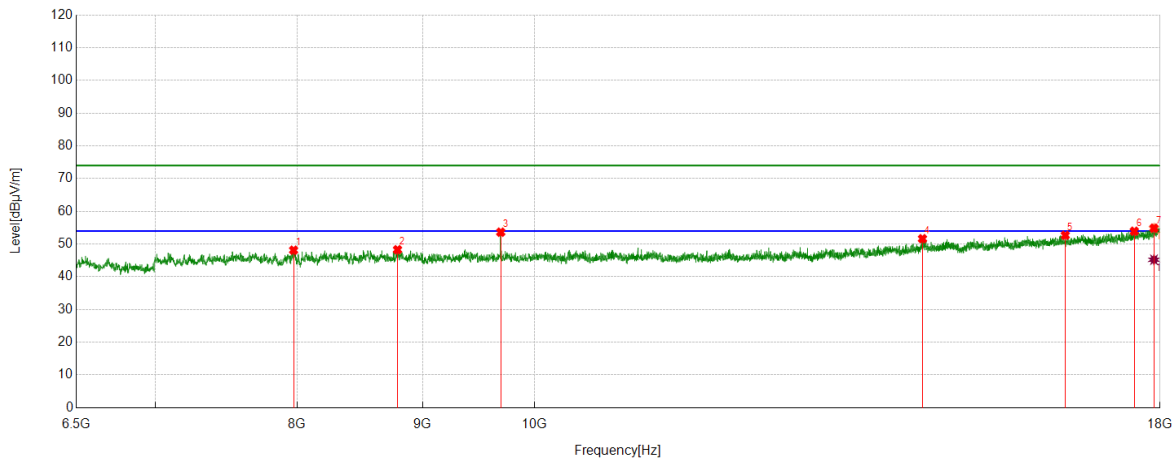

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7973.6217	42.73	5.39	48.12	74.00	-25.88	Vertical
2	8791.6615	42.04	6.23	48.27	74.00	-25.73	Vertical
3	9687.3359	47.12	6.51	53.63	74.00	-20.37	Vertical
4	14398.6123	38.89	12.74	51.63	74.00	-22.37	Vertical
5	16465.9957	36.91	15.76	52.67	74.00	-21.33	Vertical
6	17570.1338	36.02	17.90	53.92	74.00	-20.08	Vertical
7	17897.9247	35.65	19.20	54.85	74.00	-19.15	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17897.9247	26.01	19.20	45.21	54.00	-8.79	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.