

Test Plot 1#: GSM 850 Mid ANT1 Head Right Cheek

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic GPRS-2 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 42.58$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @836.6 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.531 W/kg


Zoom Scan (6x6x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.94 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.453 W/kg; SAR(10 g) = 0.277 W/kg

Maximum value of SAR (measured) = 0.550 W/kg

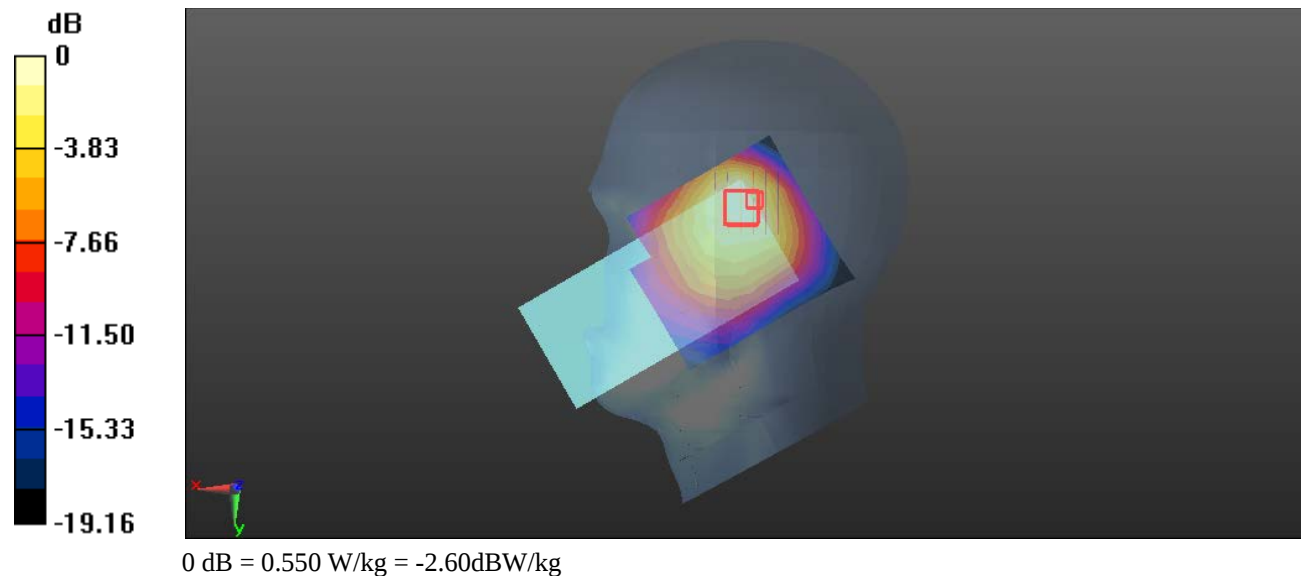

Test Plot 2#: GSM 850 Mid ANT1 Body Back

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic GPRS-2 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 42.58$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @836.6 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.166 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.868 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.264 W/kg

SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.084 W/kg

Maximum value of SAR (measured) = 0.159 W/kg

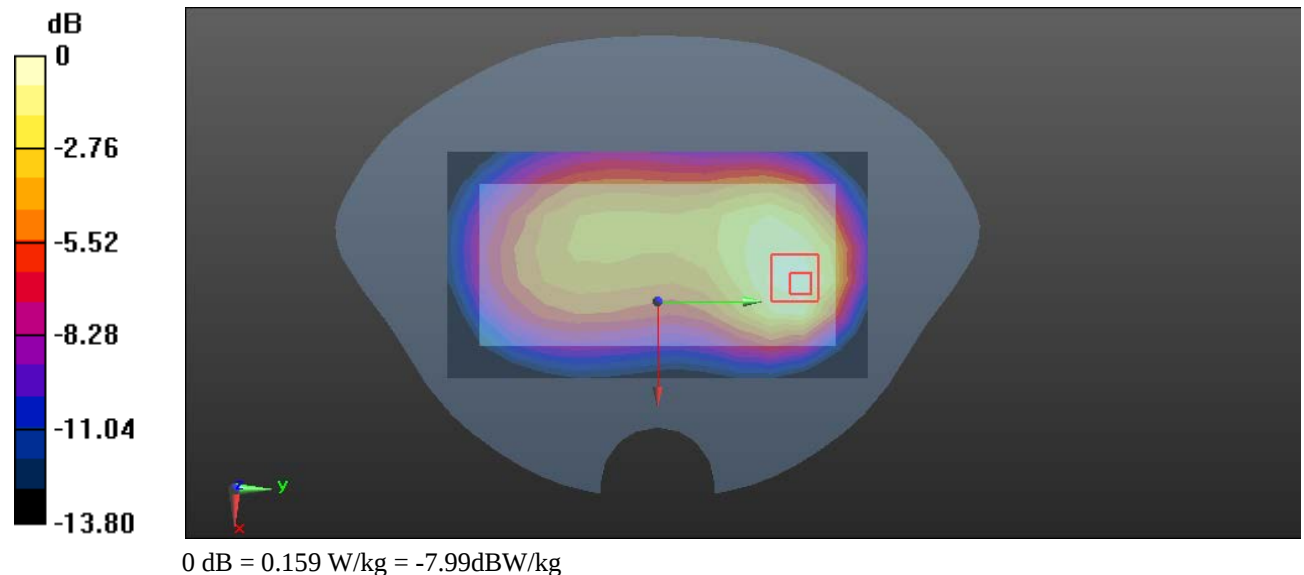

Test Plot 3#: GSM 850 Mid ANT2 Body Bottom

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic GPRS-2 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.914 \text{ S/m}$; $\epsilon_r = 42.58$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @836.6 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0281 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.082 V/m; Power Drift = 0.07dB

Peak SAR (extrapolated) = 0.0580 W/kg

SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.00727 W/kg

Maximum value of SAR (measured) = 0.0286 W/kg

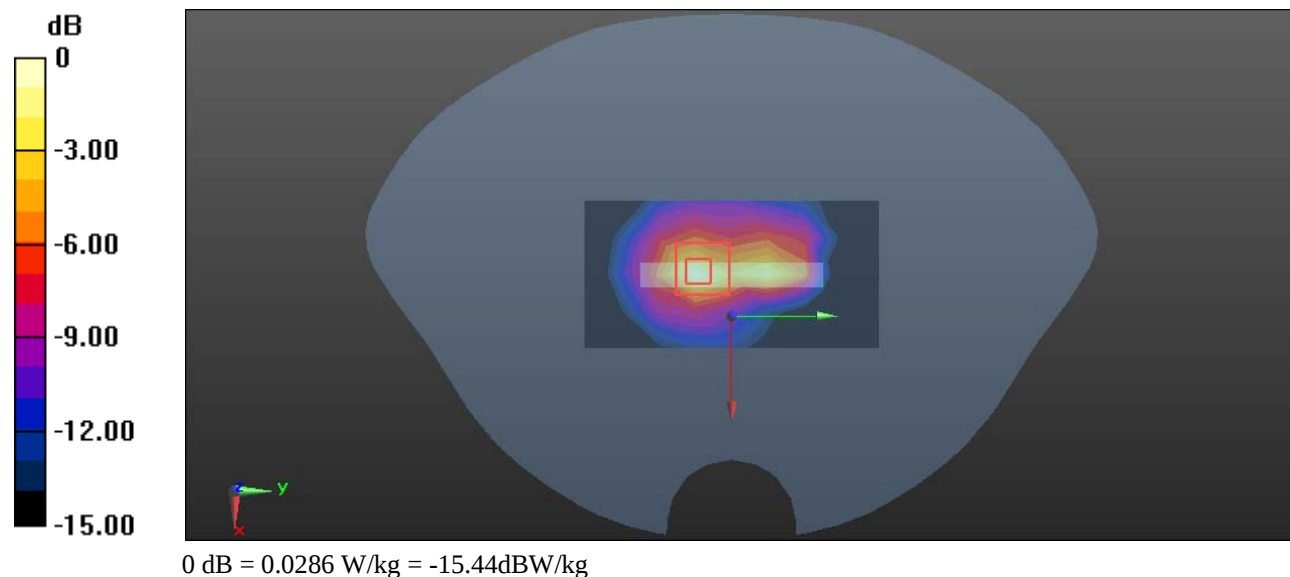

Test Plot 4#: PCS 1900 High ANT1 Head Right Tilt

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic GPRS-3 slots (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.66
Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.43 \text{ S/m}$; $\epsilon_r = 40.2$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @1909.8 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.28 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.60 V/m ; Power Drift = 0.10dB

Peak SAR (extrapolated) = 2.35 W/kg

SAR(1 g) = 1.07 W/kg ; SAR(10 g) = 0.507 W/kg

Maximum value of SAR (measured) = 1.46 W/kg

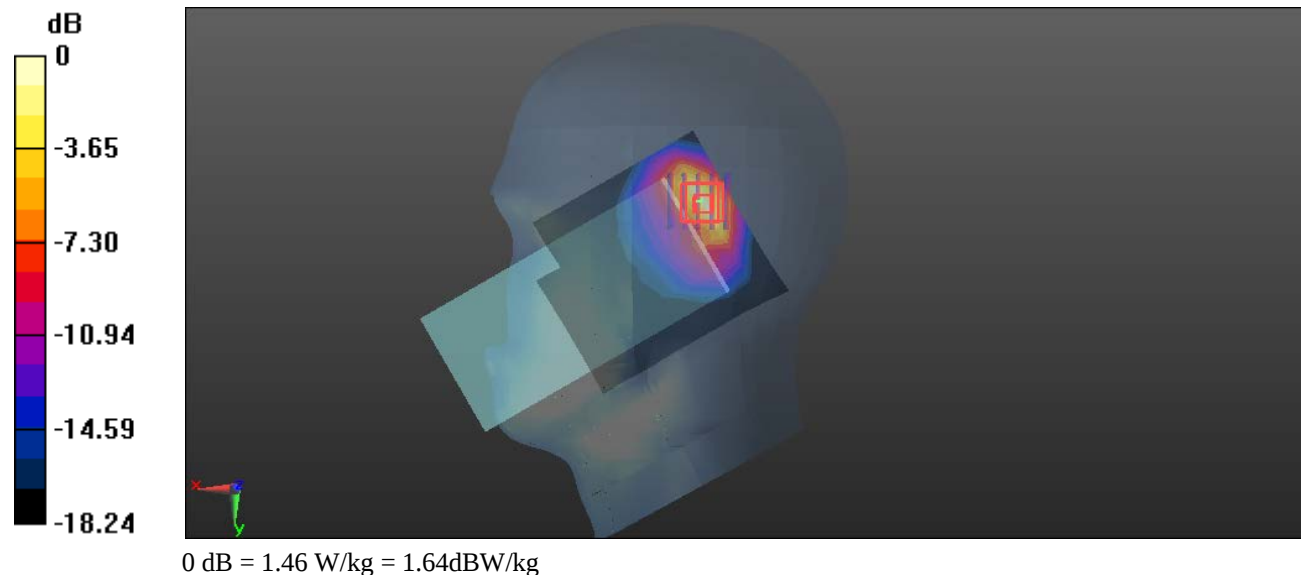

Test Plot 5#: PCS 1900 Mid ANT1 Body Top

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic GPRS-3 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2.66

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.406 \text{ S/m}$; $\epsilon_r = 40.674$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @1880 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.304 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.63 V/m ; Power Drift = 0.16dB

Peak SAR (extrapolated) = 0.706 W/kg

SAR(1 g) = 0.346 W/kg ; SAR(10 g) = 0.171 W/kg

Maximum value of SAR (measured) = 0.445 W/kg

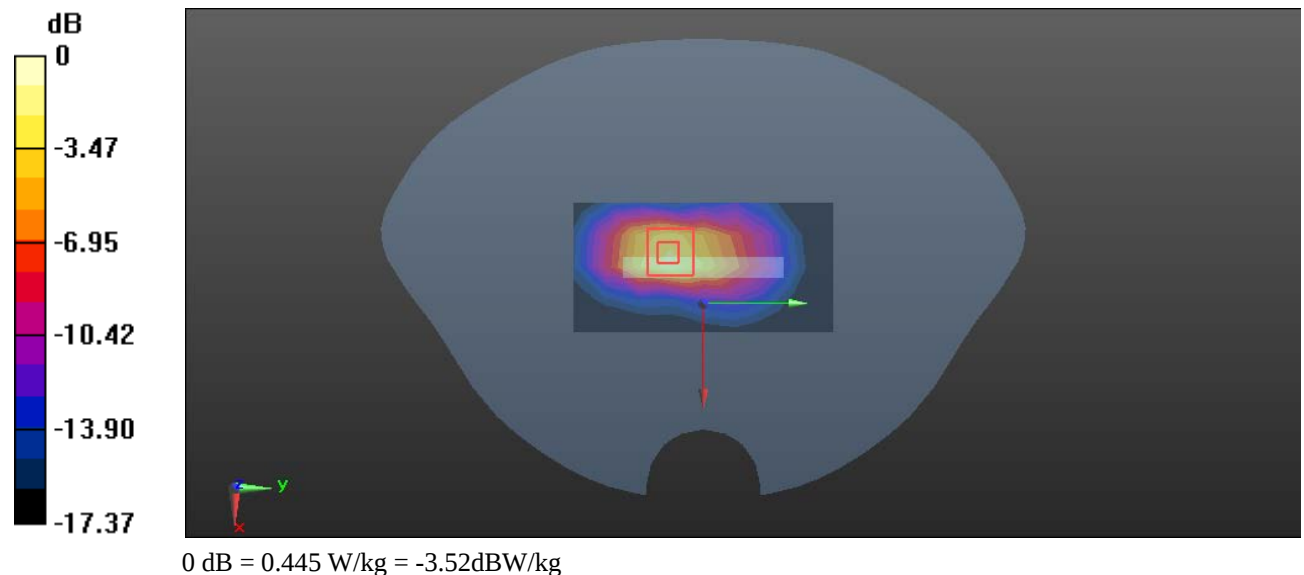

Test Plot 6#: PCS 1900 Mid ANT2 Head Left Cheek

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic GPRS-3 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2.66
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.406 \text{ S/m}$; $\epsilon_r = 40.674$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @1880 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0283 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 0 V/m ; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.0390 W/kg

SAR(1 g) = 0.025 W/kg ; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0287 W/kg

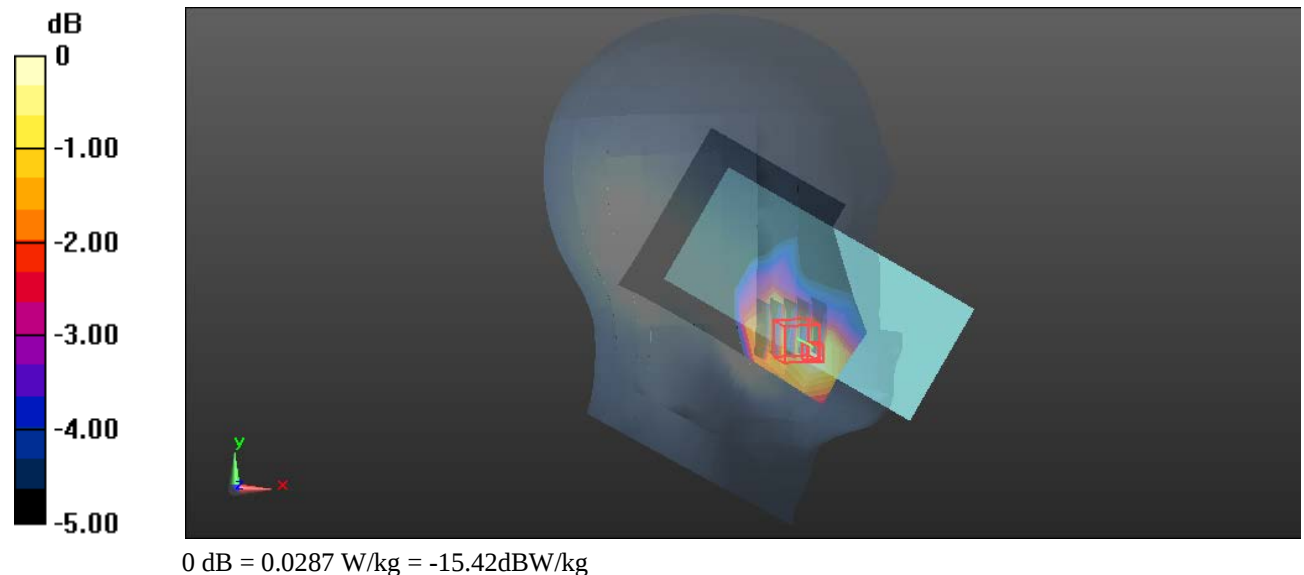

Test Plot 7#: PCS 1900 Mid ANT2 Body Back

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic GPRS-3 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2.66
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.406 \text{ S/m}$; $\epsilon_r = 40.674$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @1880 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.129 W/kg


Zoom Scan (7x6x7) /Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.101 V/m ; Power Drift = 0.14dB

Peak SAR (extrapolated) = 0.189 W/kg

SAR(1 g) = 0.111 W/kg ; SAR(10 g) = 0.066 W/kg

Maximum value of SAR (measured) = 0.129 W/kg

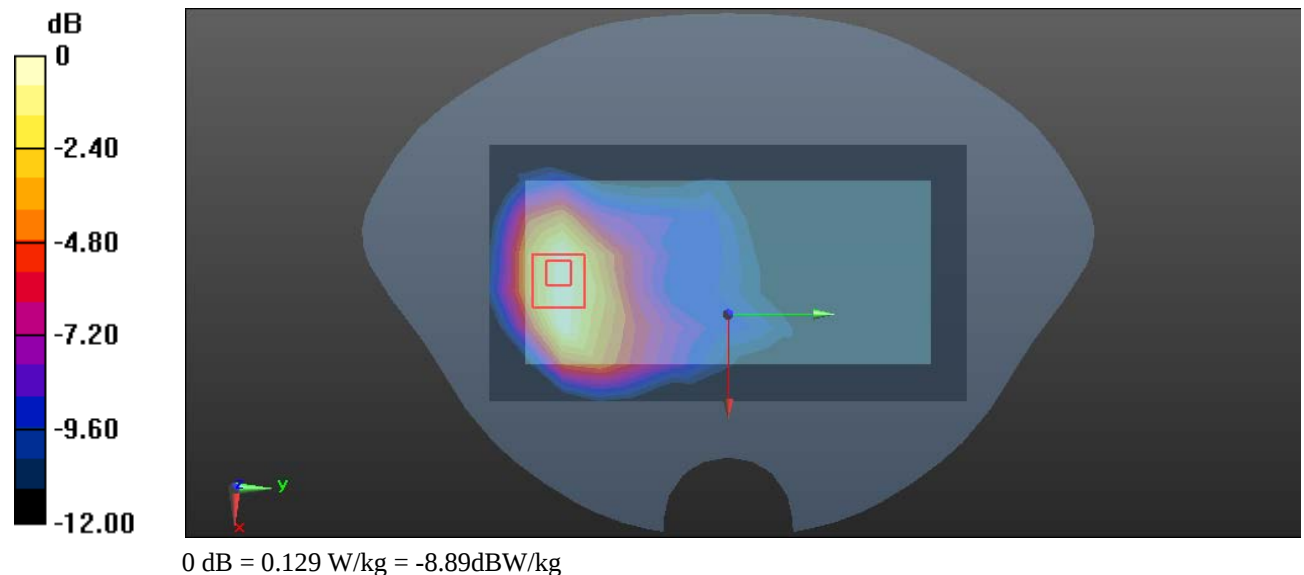

Test Plot 8#: WCDMA Band 2 Low ANT1 Head Right Tilt

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic WCDMA (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.393$ S/m; $\epsilon_r = 40.983$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @1852.4 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.12 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.40 V/m; Power Drift = 0.16dB

Peak SAR (extrapolated) = 1.96 W/kg

SAR(1 g) = 0.897 W/kg; SAR(10 g) = 0.426 W/kg

Maximum value of SAR (measured) = 1.22 W/kg

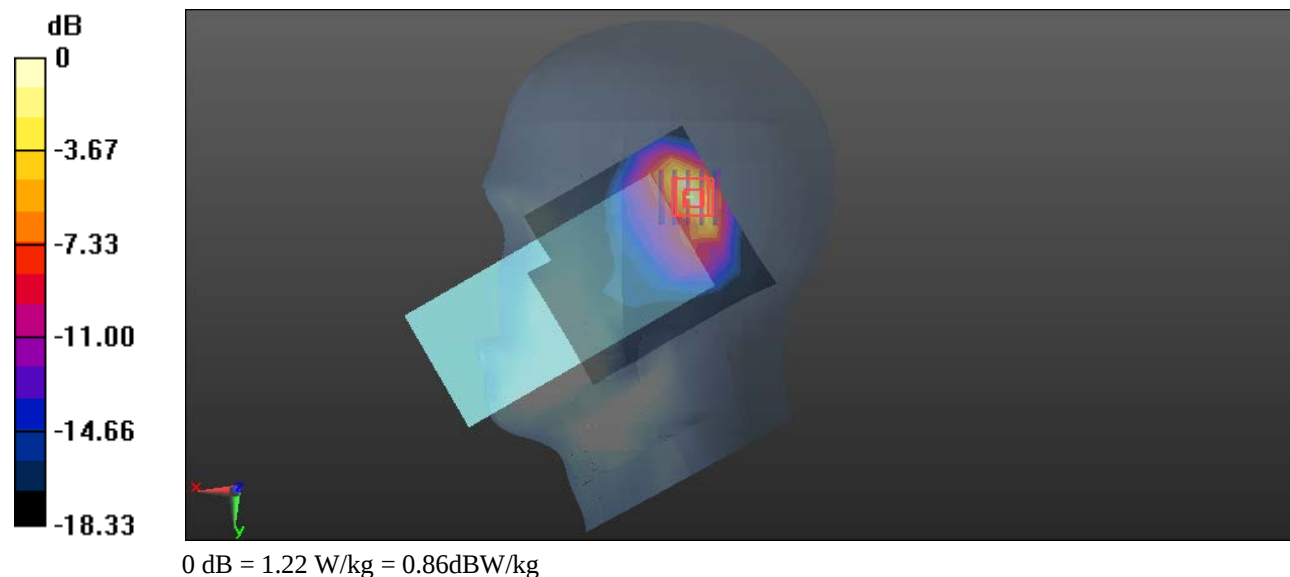

Test Plot 9#: WCDMA Band 2 Mid ANT1 Body Top

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.406 \text{ S/m}$; $\epsilon_r = 40.674$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @1880 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.388 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.07 V/m ; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.718 W/kg

SAR(1 g) = 0.357 W/kg ; SAR(10 g) = 0.178 W/kg

Maximum value of SAR (measured) = 0.460 W/kg

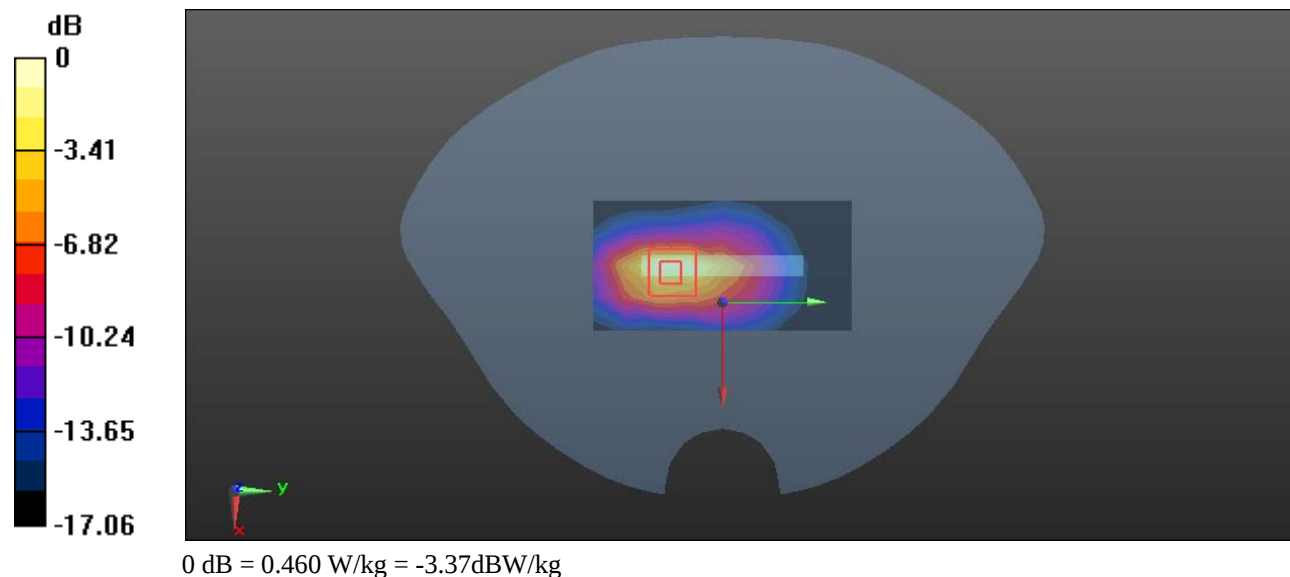

Test Plot 10#: WCDMA Band 2 Mid ANT2 Head Left Cheek

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.406$ S/m; $\epsilon_r = 40.674$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @1880 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0186 W/kg


Zoom Scan (6x6x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.087 V/m; Power Drift = 0.00dB

Peak SAR (extrapolated) = 0.0240 W/kg

SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.0196 W/kg

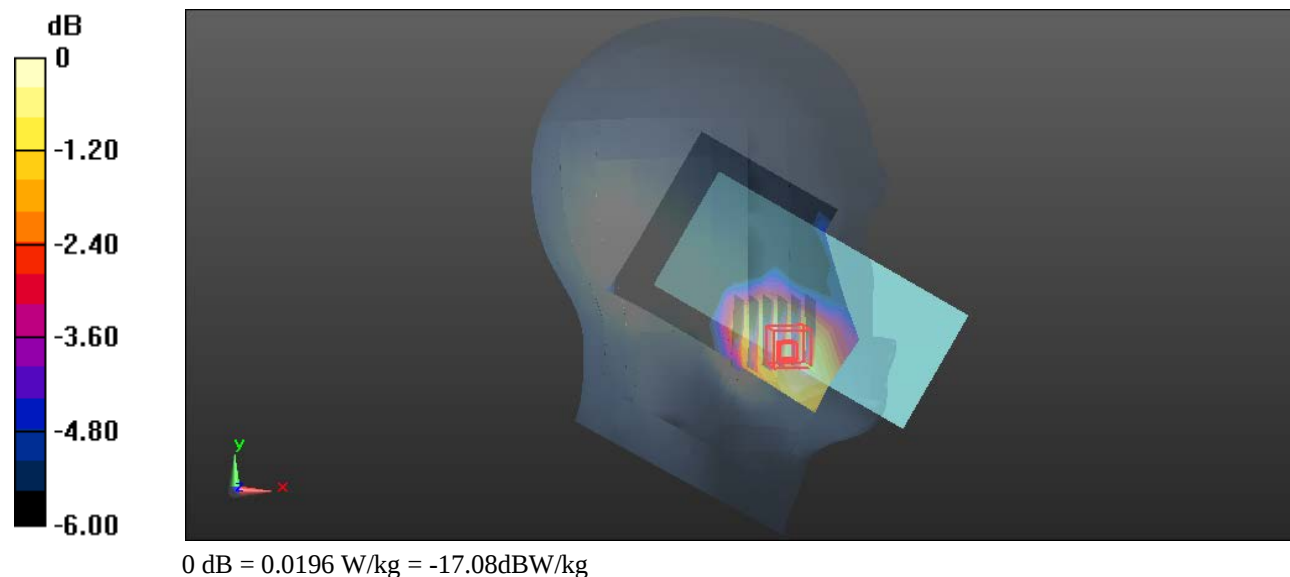

Test Plot 11#: WCDMA Band 2 Mid ANT2 Body Back

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.406$ S/m; $\epsilon_r = 40.674$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @1880 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0998 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.758 V/m; Power Drift = 0.15dB

Peak SAR (extrapolated) = 0.194 W/kg

SAR(1 g) = 0.106 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.135 W/kg

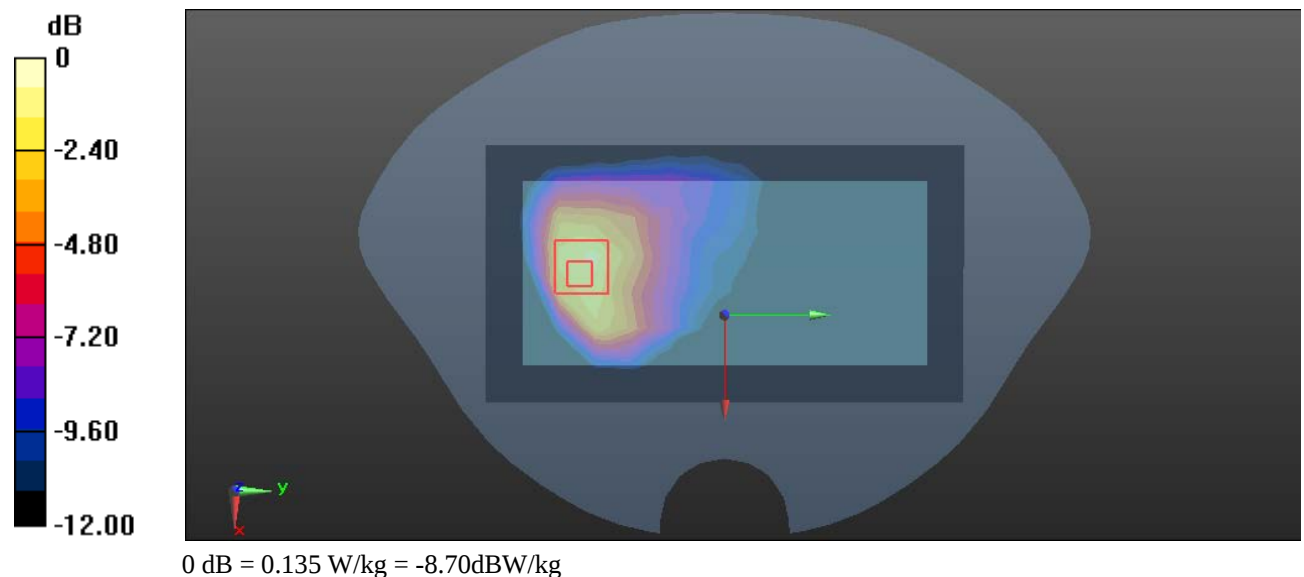

Test Plot 12#: WCDMA Band 4 Mid ANT1 Head Right Tilt

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.6 \text{ MHz}$; $\sigma = 1.375 \text{ S/m}$; $\epsilon_r = 40.818$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.56, 8.56, 7.71) @1732.6 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.574 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.10 V/m; Power Drift = 0.07dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.572 W/kg; SAR(10 g) = 0.270 W/kg

Maximum value of SAR (measured) = 0.756 W/kg

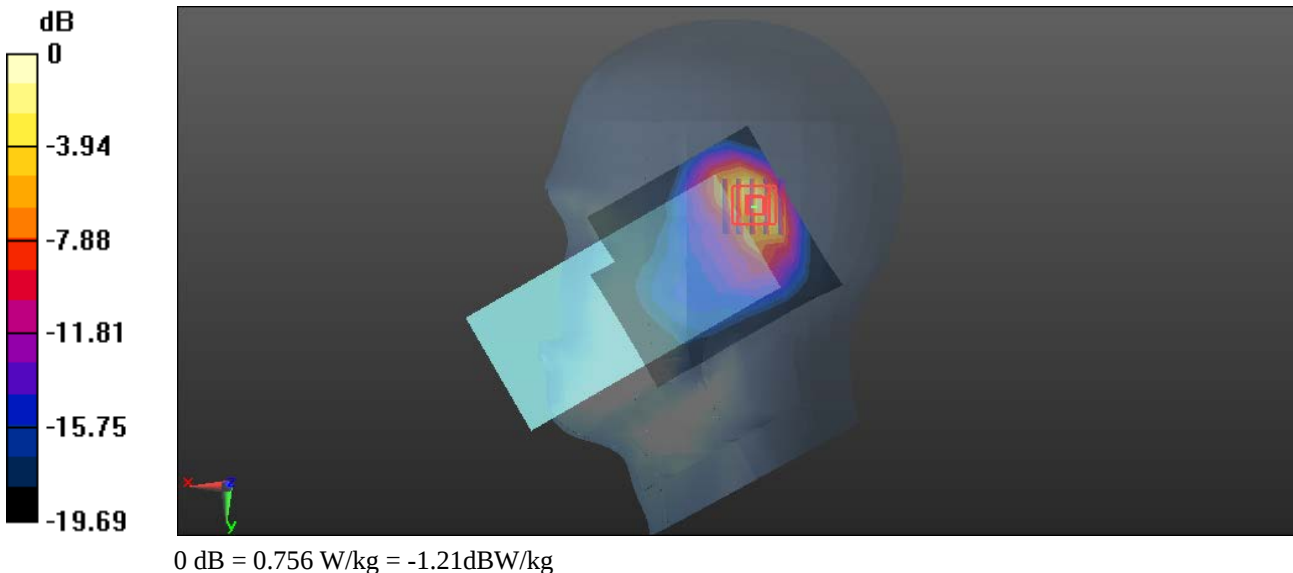

Test Plot 13#: WCDMA Band 4 Mid ANT1 Body Top

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.6 \text{ MHz}$; $\sigma = 1.375 \text{ S/m}$; $\epsilon_r = 40.818$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.56, 8.56, 7.71) @1732.6 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.190 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.292 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.378 W/kg

SAR(1 g) = 0.192 W/kg; SAR(10 g) = 0.096 W/kg

Maximum value of SAR (measured) = 0.248 W/kg

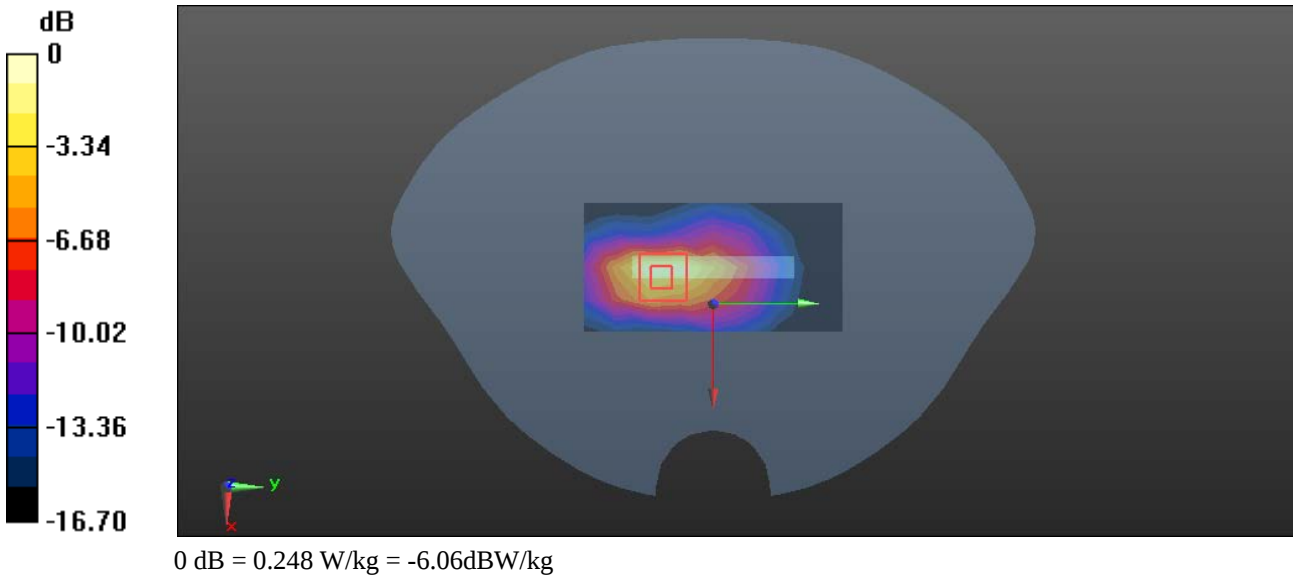

Test Plot 14#: WCDMA Band 4 Mid ANT2 Body Back

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 40.818$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.56, 8.56, 7.71) @1732.6 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0608 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.278 V/m; Power Drift = 0.11dB

Peak SAR (extrapolated) = 0.151 W/kg

SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.0949 W/kg

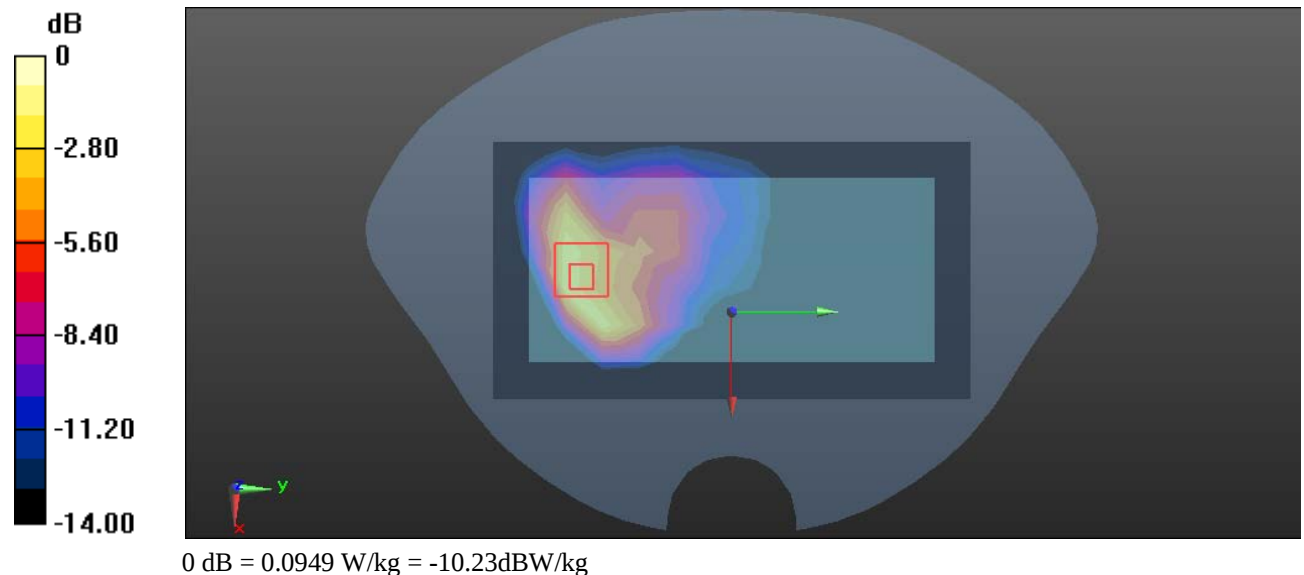

Test Plot 15#: WCDMA Band 5 Mid ANT1 Head Right Cheek

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.914 \text{ S/m}$; $\epsilon_r = 42.58$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @836.6 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.544 W/kg


Zoom Scan (6x6x7) /Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.81 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.553 W/kg; SAR(10 g) = 0.308 W/kg

Maximum value of SAR (measured) = 0.728 W/kg

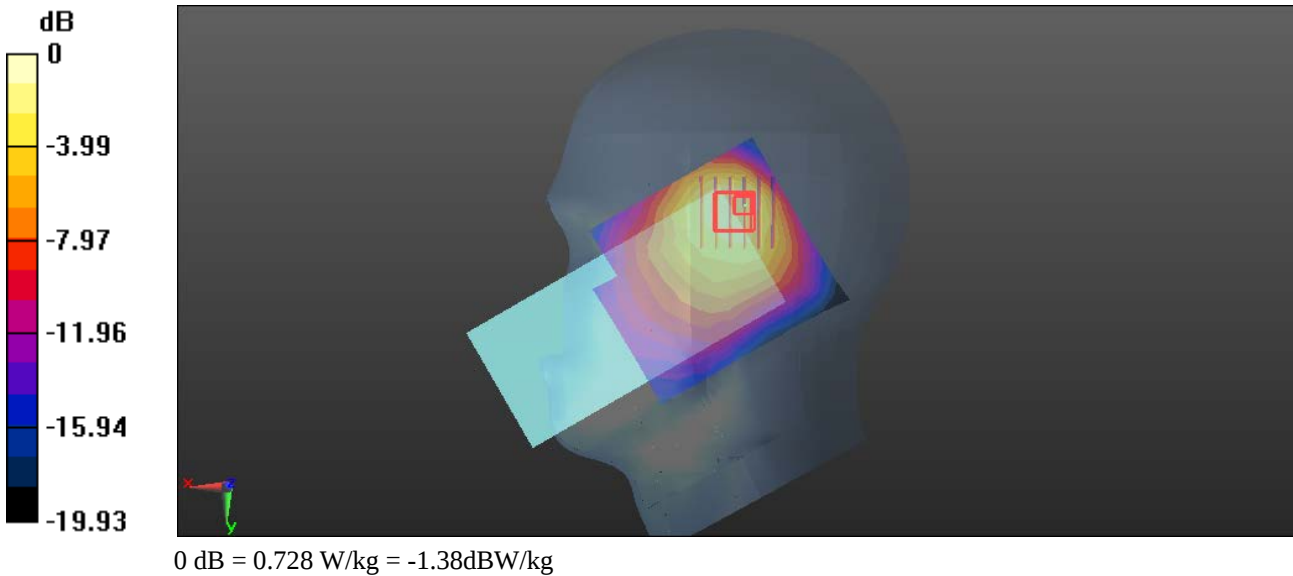

Test Plot 16#: WCDMA Band 5 Mid ANT1 Body Back

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 42.58$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @836.6 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.156 W/kg


Zoom Scan (6x6x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.684 V/m; Power Drift = 0.17dB

Peak SAR (extrapolated) = 0.258 W/kg

SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.086 W/kg

Maximum value of SAR (measured) = 0.164 W/kg

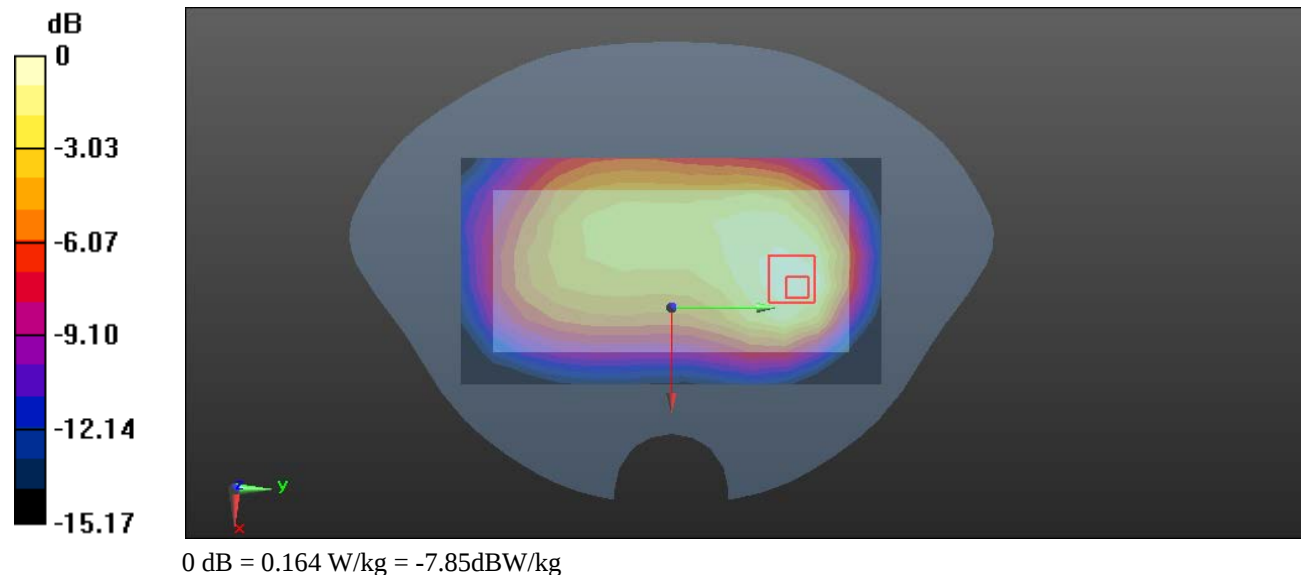

Test Plot 17#: WCDMA Band 5 Mid ANT2 Head Left Cheek

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 42.58$; $\rho = 1000$ kg/m³;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @836.6 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0561 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.469 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.0780 W/kg

SAR(1 g) = 0.053 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.0590 W/kg

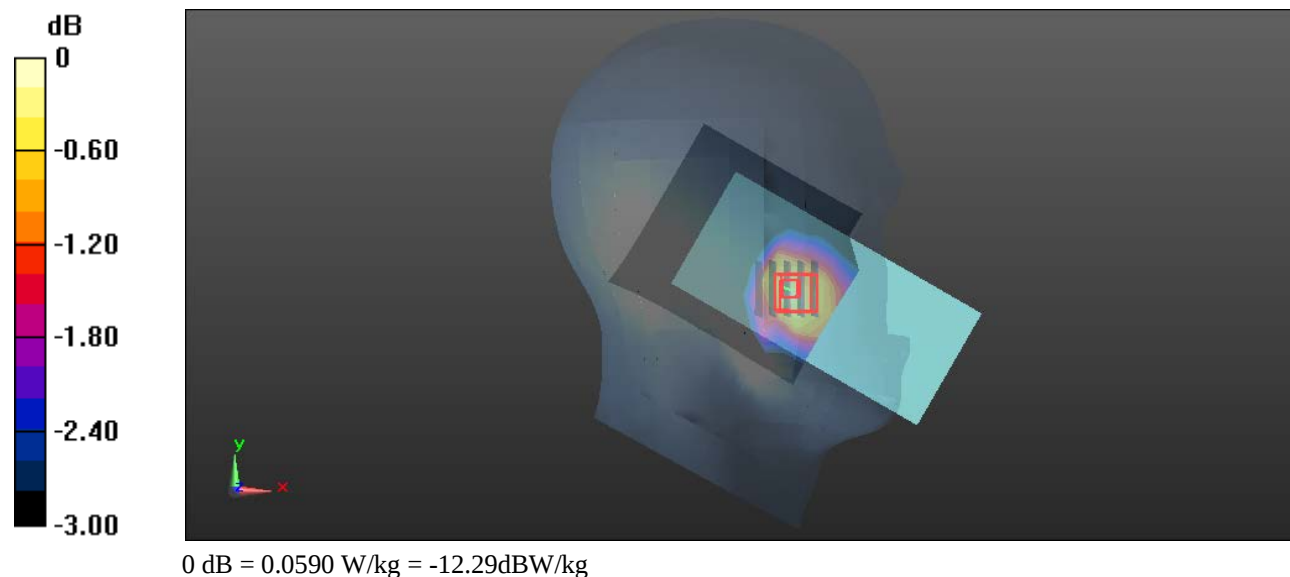

Test Plot 18#: WCDMA Band 5 Mid ANT2 Body Back

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 42.58$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @836.6 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0903 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.335 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.211 W/kg

SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.112 W/kg

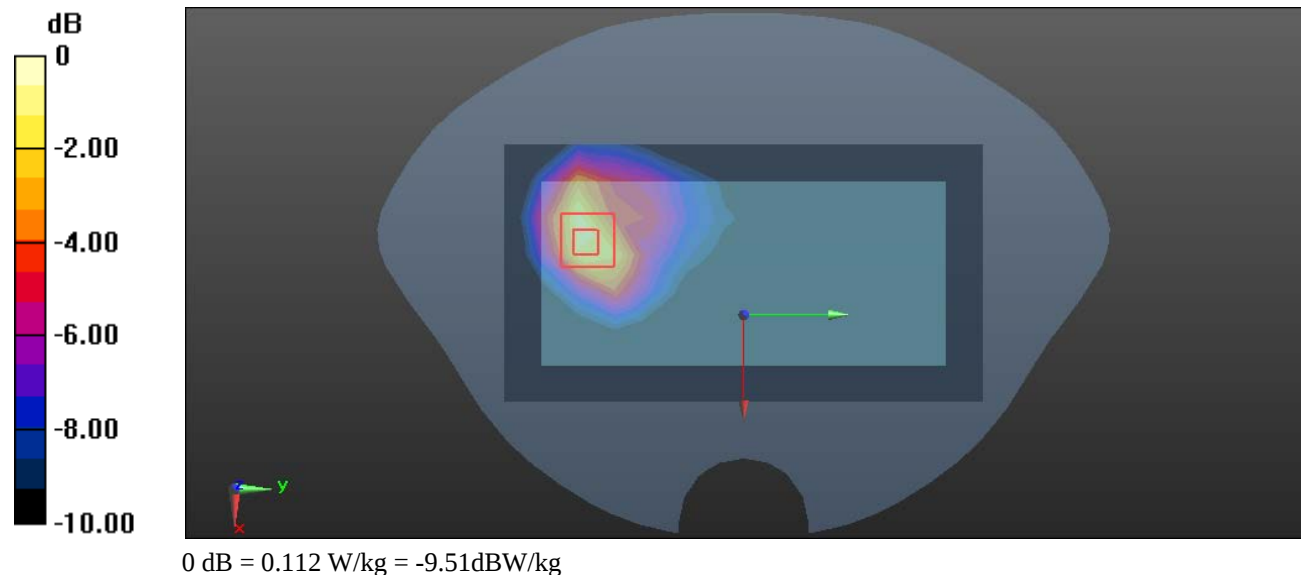

Test Plot 19#: LTE Band 2 1RB Mid ANT1 Head Right Tilt

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 40.595$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @1880 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.769 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.63 V/m; Power Drift = 0.01dB

Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 0.733 W/kg; SAR(10 g) = 0.356 W/kg

Maximum value of SAR (measured) = 0.926 W/kg

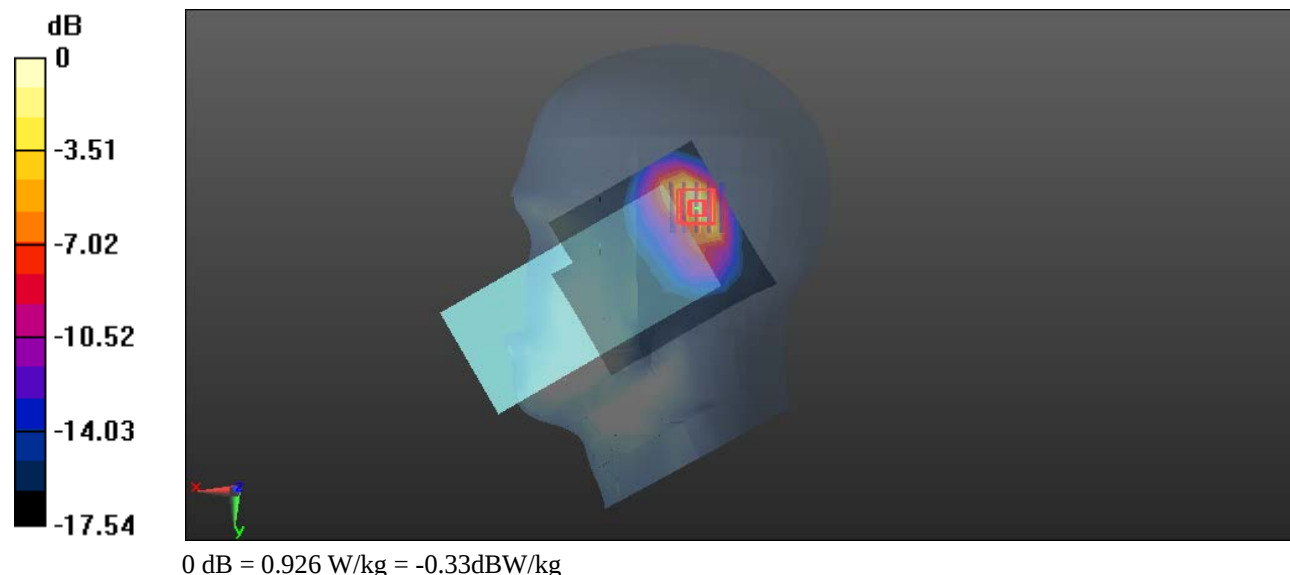

Test Plot 20#: LTE Band 2 1RB Mid ANT1 Body Top

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 40.595$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @1880 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.353 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.73 V/m; Power Drift = 0.19dB

Peak SAR (extrapolated) = 0.772 W/kg

SAR(1 g) = 0.392 W/kg; SAR(10 g) = 0.197 W/kg

Maximum value of SAR (measured) = 0.502 W/kg

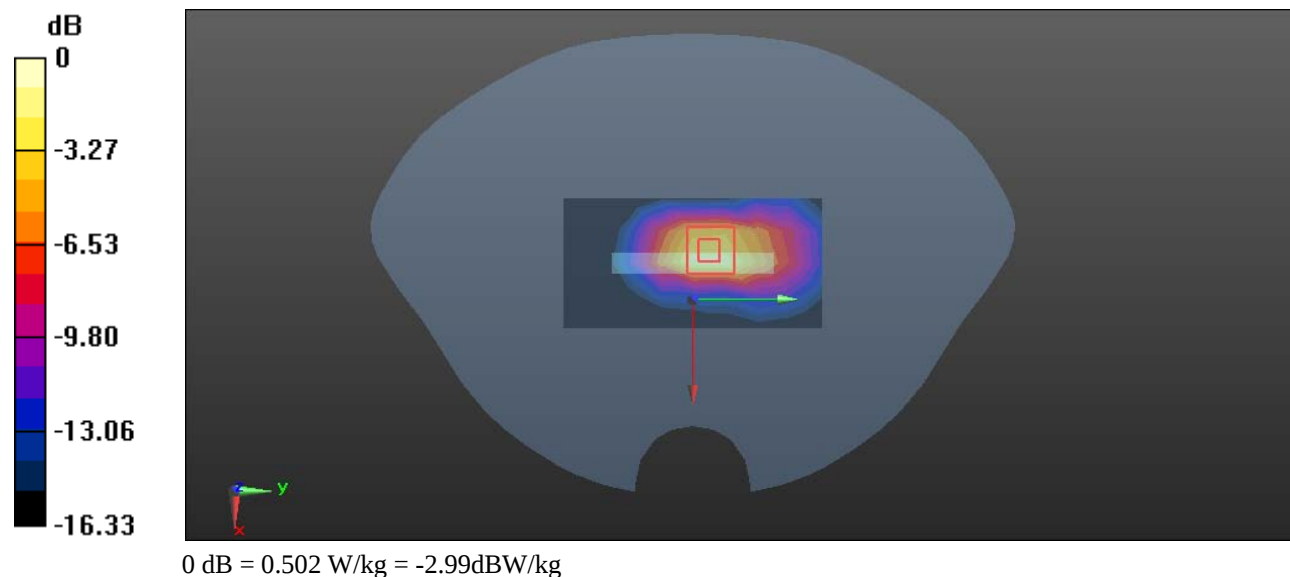

Test Plot 21#: LTE Band 2 1RB Mid ANT2 Body Back

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 40.595$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @1880 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.114 W/kg


Zoom Scan (6x6x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.746 V/m; Power Drift = 0.17dB

Peak SAR (extrapolated) = 0.174 W/kg

SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.118 W/kg

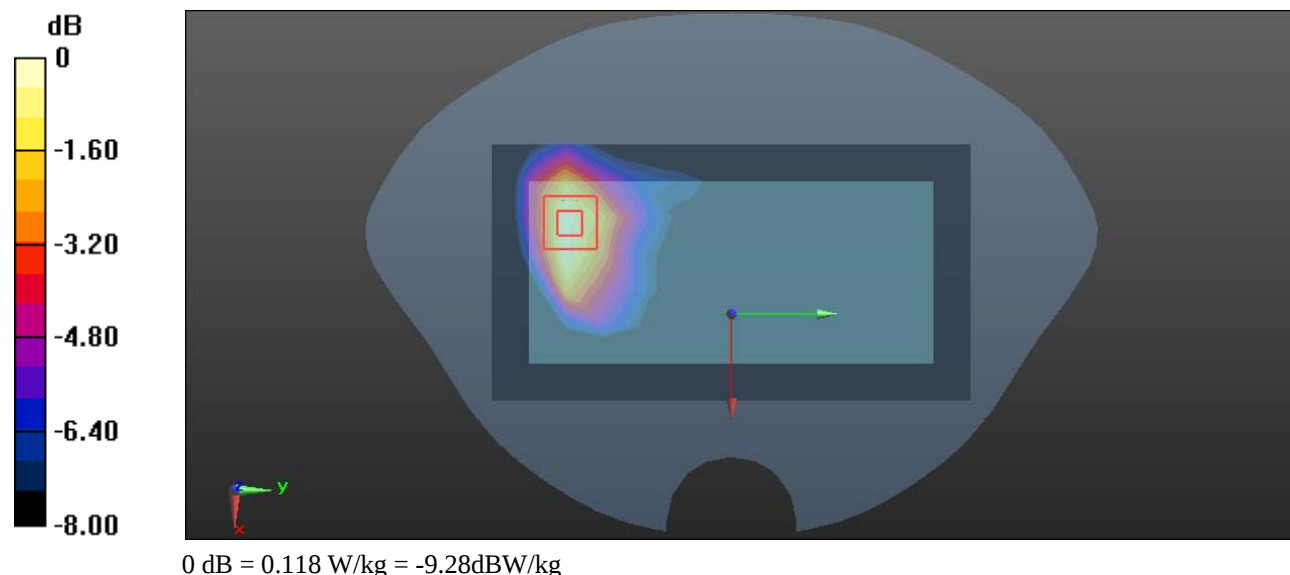

Test Plot 22#: LTE Band 26 1RB High ANT1 Head Right Cheek

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic FDD-LTE (0); Frequency: 841.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 841.5$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 42.287$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @841.5 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.08 W/kg


Zoom Scan (6x6x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.84 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 2.13 W/kg

SAR(1 g) = 0.987 W/kg; SAR(10 g) = 0.602 W/kg

Maximum value of SAR (measured) = 1.18 W/kg

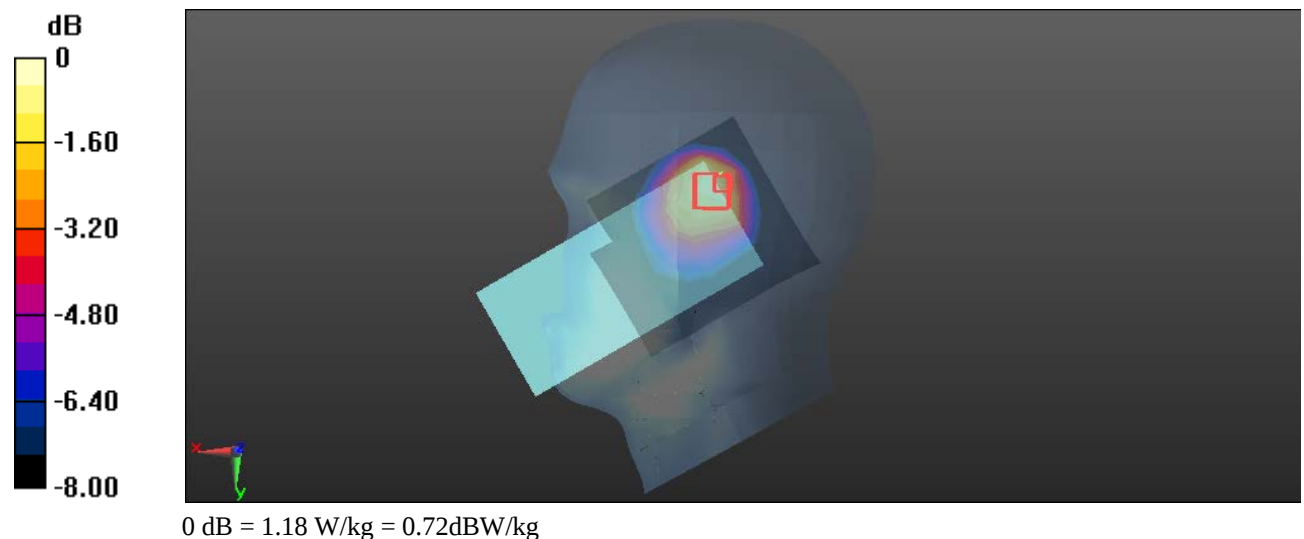

Test Plot 23#: LTE Band 26 1RB Mid ANT1 Body Back

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 42.372$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @831.5 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.211 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.09 V/m; Power Drift = 0.07dB

Peak SAR (extrapolated) = 0.299 W/kg

SAR(1 g) = 0.180 W/kg; SAR(10 g) = 0.114 W/kg

Maximum value of SAR (measured) = 0.211 W/kg

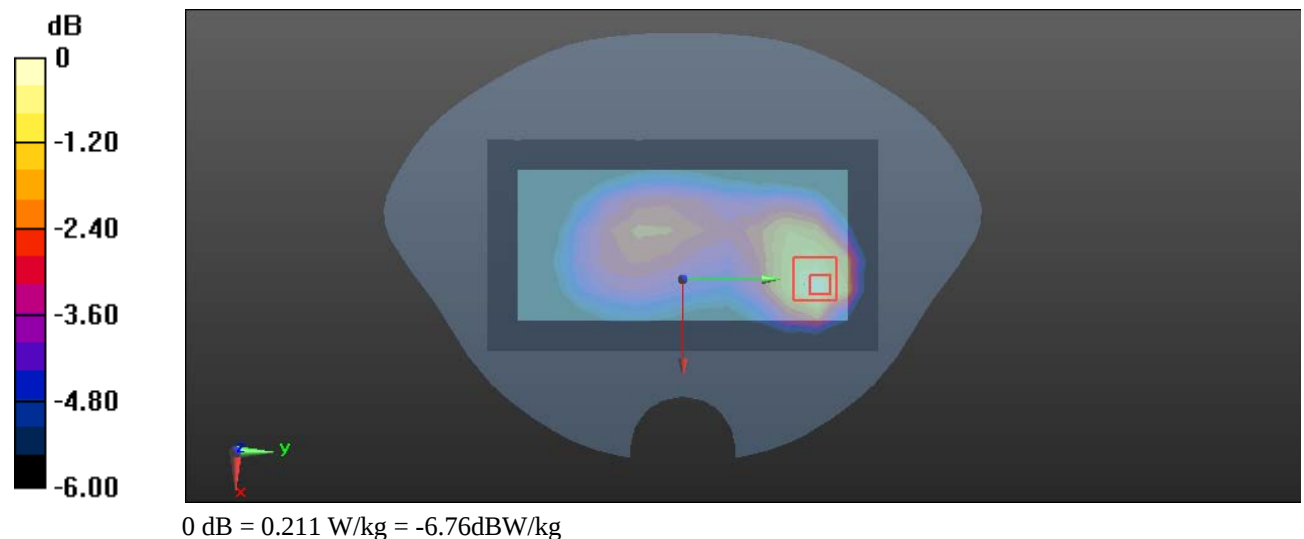

Test Plot 24#: LTE Band 26 1RB Mid ANT2 Head Left Cheek

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 42.372$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @831.5 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0257 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.047 V/m; Power Drift = 0.13dB

Peak SAR (extrapolated) = 0.0320 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0269 W/kg

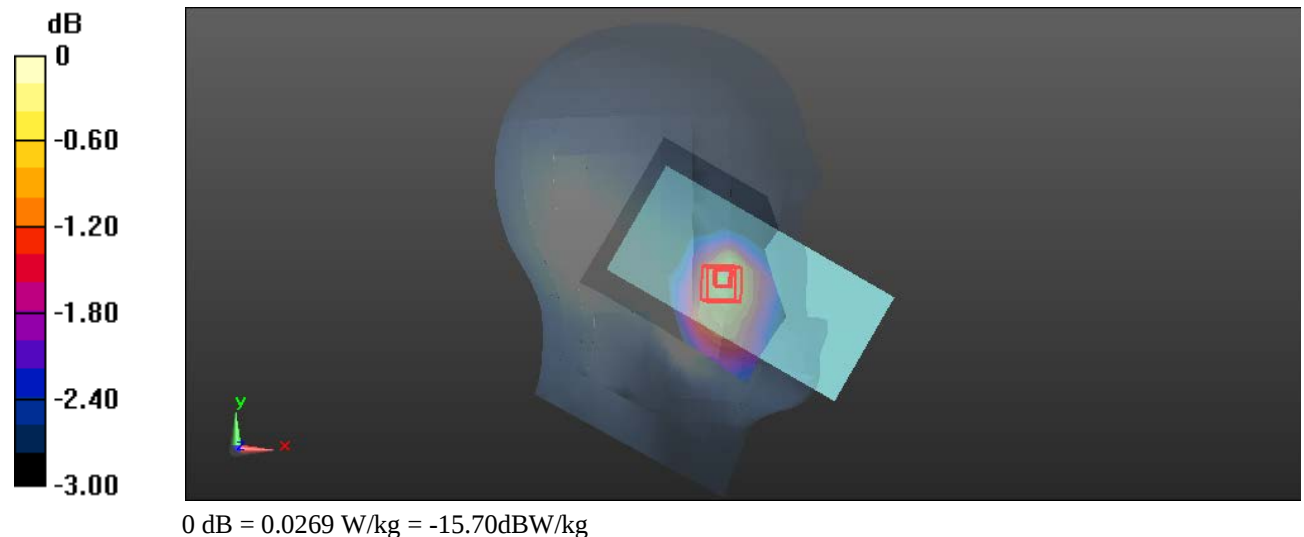

Test Plot 25#: LTE Band 26 1RB Mid ANT2 Body Back

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 42.372$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @831.5 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0807 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.042 V/m; Power Drift = 0.04dB

Peak SAR (extrapolated) = 0.135 W/kg

SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.039 W/kg

Maximum value of SAR (measured) = 0.0844 W/kg

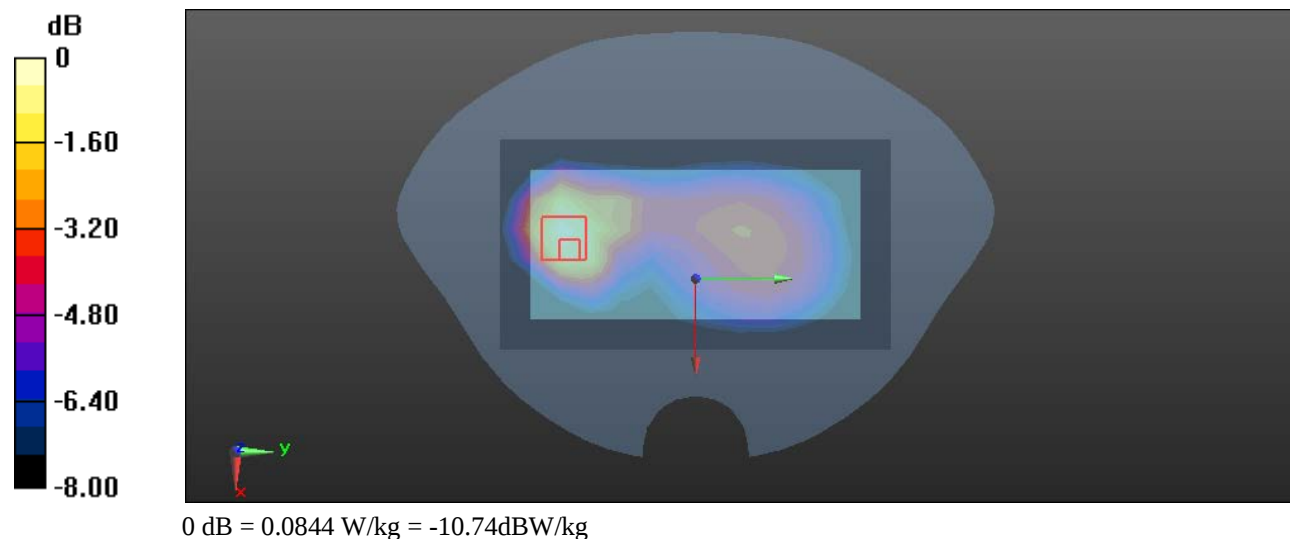

Test Plot 26#: LTE Band 7 50%RB Mid Main ANT1 Head Right Tilt

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.864$ S/m; $\epsilon_r = 39.863$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2535 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.314 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.021 V/m; Power Drift = 0.19dB

Peak SAR (extrapolated) = 0.709 W/kg

SAR(1 g) = 0.287 W/kg; SAR(10 g) = 0.131 W/kg

Maximum value of SAR (measured) = 0.393 W/kg

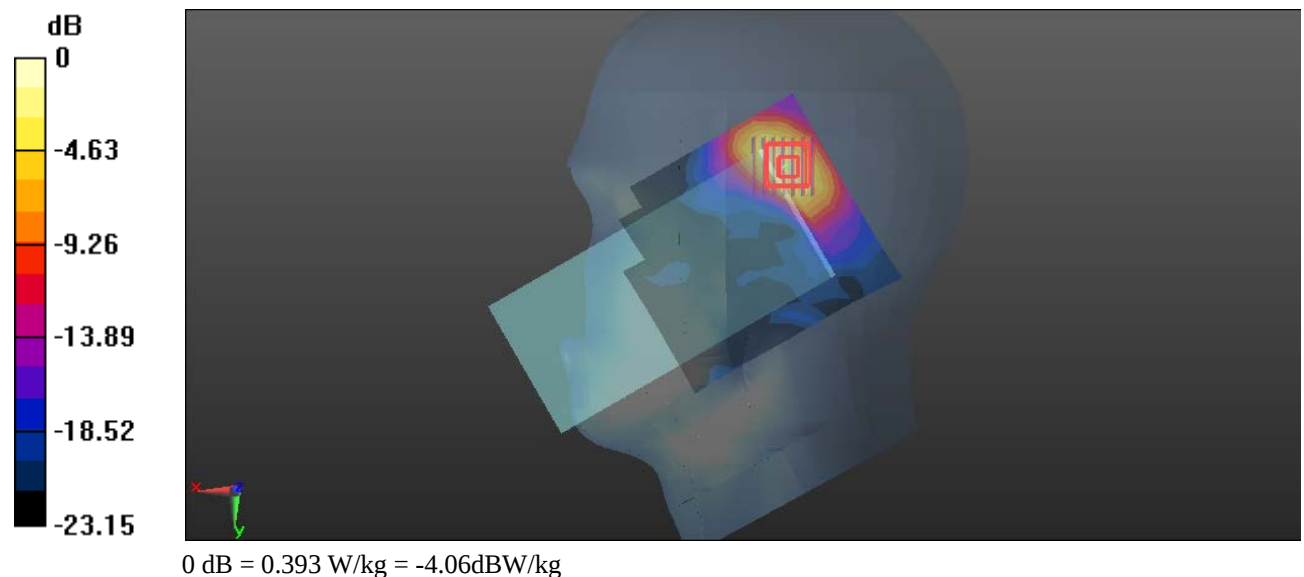

Test Plot 27#: LTE Band 7 50%RB Mid Main ANT1 Body Top

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.864$ S/m; $\epsilon_r = 39.863$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2535 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.278 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.921 V/m; Power Drift = 0.08dB

Peak SAR (extrapolated) = 0.489 W/kg

SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.104 W/kg

Maximum value of SAR (measured) = 0.295 W/kg

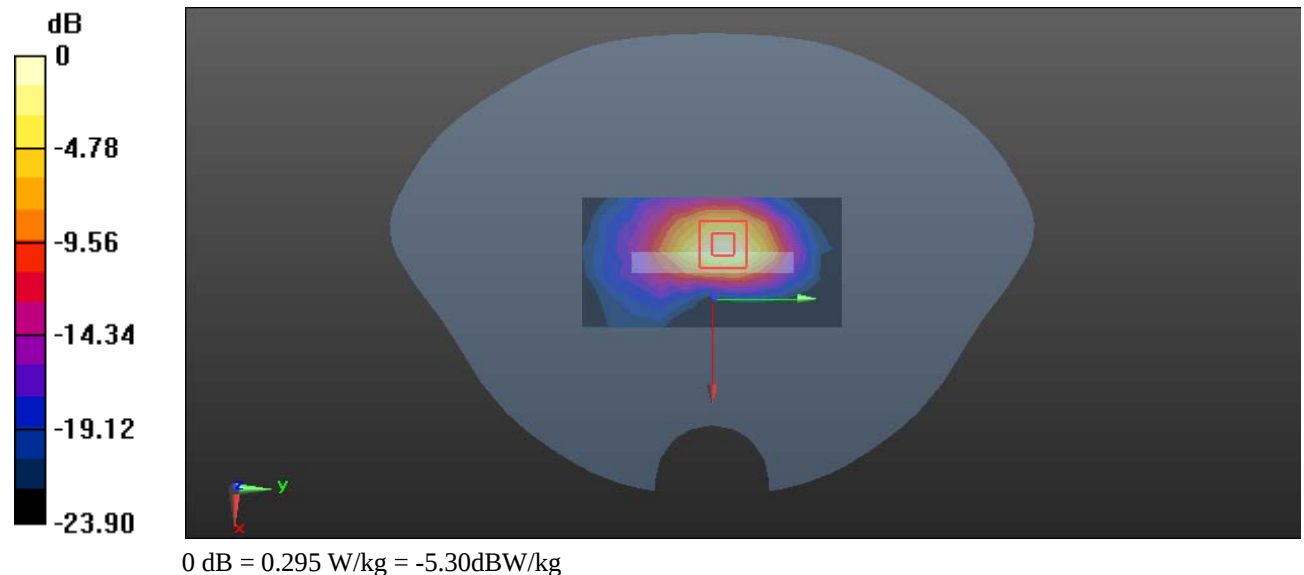

Test Plot 28#: LTE Band 7 1RB Mid ANT2 Head Left Cheek

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.864$ S/m; $\epsilon_r = 39.863$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2535 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0311 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.3220 V/m; Power Drift = 0.06dB

Peak SAR (extrapolated) = 0.0600 W/kg

SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.0326 W/kg

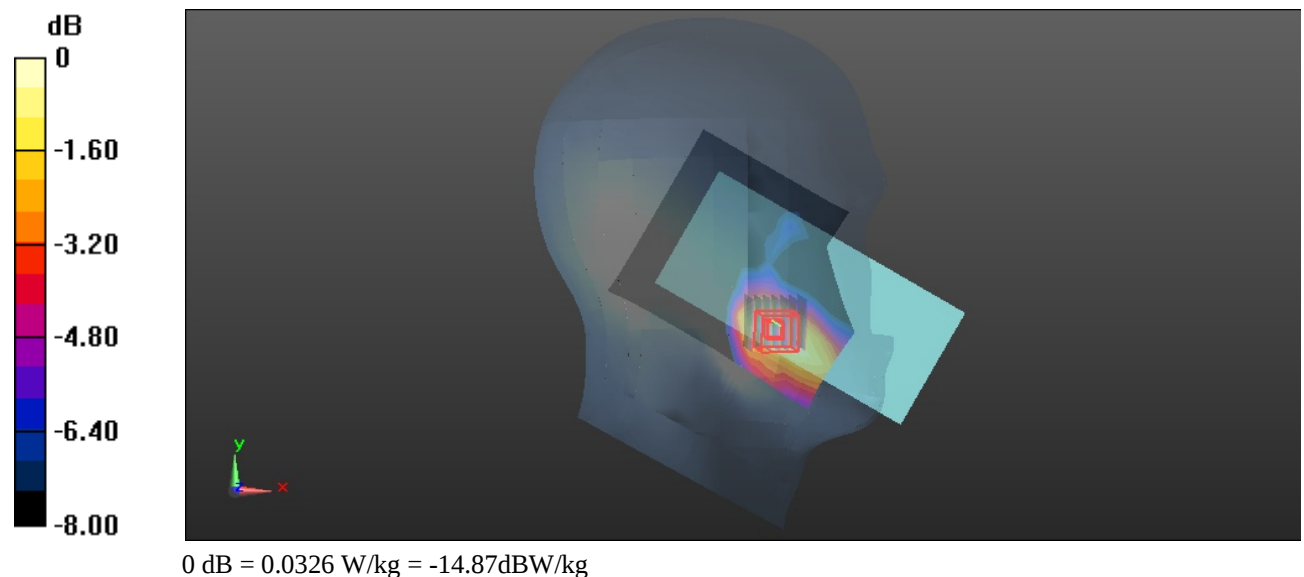

Test Plot 29#: LTE Band 7 50%RB Mid ANT2 Body Back

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.864$ S/m; $\epsilon_r = 39.863$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2535 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.143 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.316 V/m; Power Drift = 0.01dB

Peak SAR (extrapolated) = 0.253 W/kg

SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.052 W/kg

Maximum value of SAR (measured) = 0.141 W/kg

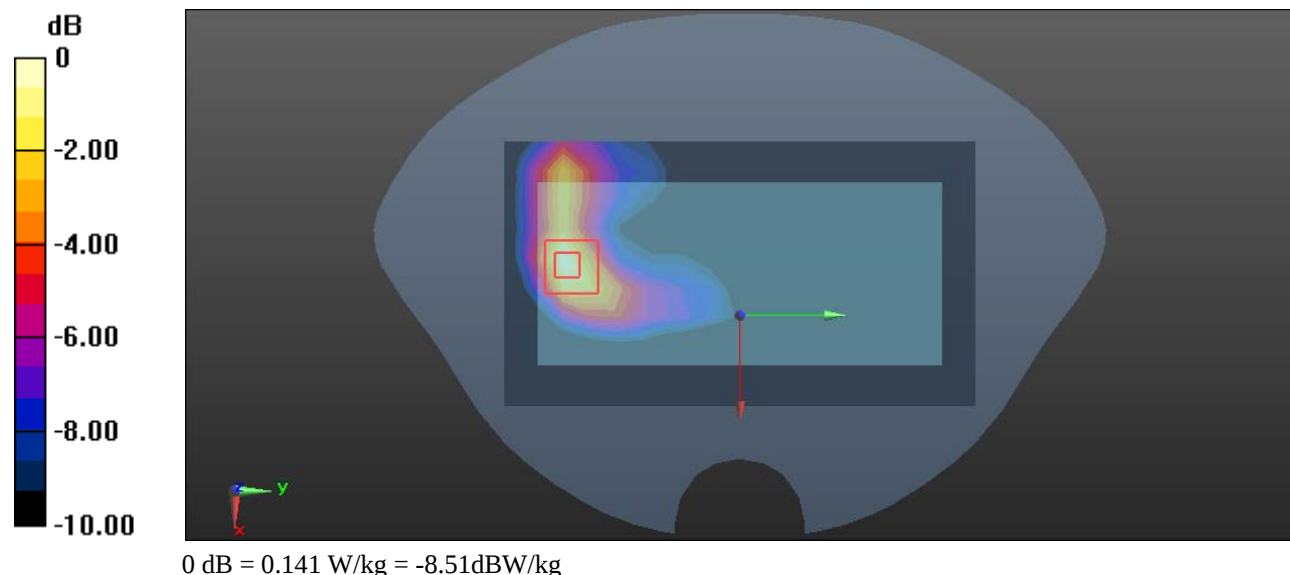

Test Plot 30#: LTE Band 12 50%RB Mid ANT1 Head Right Cheek

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 43.551$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.79, 10.07, 9.05) @707.5 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.603 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.17 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.550 W/kg; SAR(10 g) = 0.300 W/kg

Maximum value of SAR (measured) = 0.723 W/kg

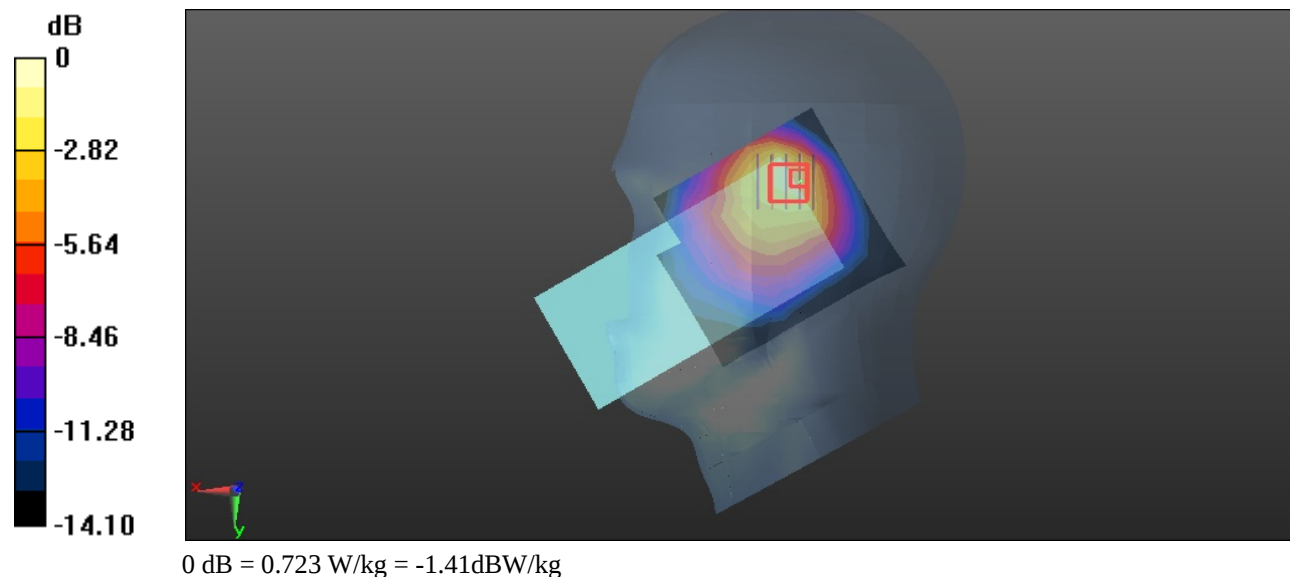

Test Plot 31#: LTE Band 12 1RB Mid ANT1 Body Left

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5 \text{ MHz}$; $\sigma = 0.884 \text{ S/m}$; $\epsilon_r = 43.551$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.79, 10.07, 9.05) @707.5 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.208 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.89 V/m; Power Drift = 0.01dB

Peak SAR (extrapolated) = 0.302 W/kg

SAR(1 g) = 0.186 W/kg; SAR(10 g) = 0.127 W/kg

Maximum value of SAR (measured) = 0.215 W/kg

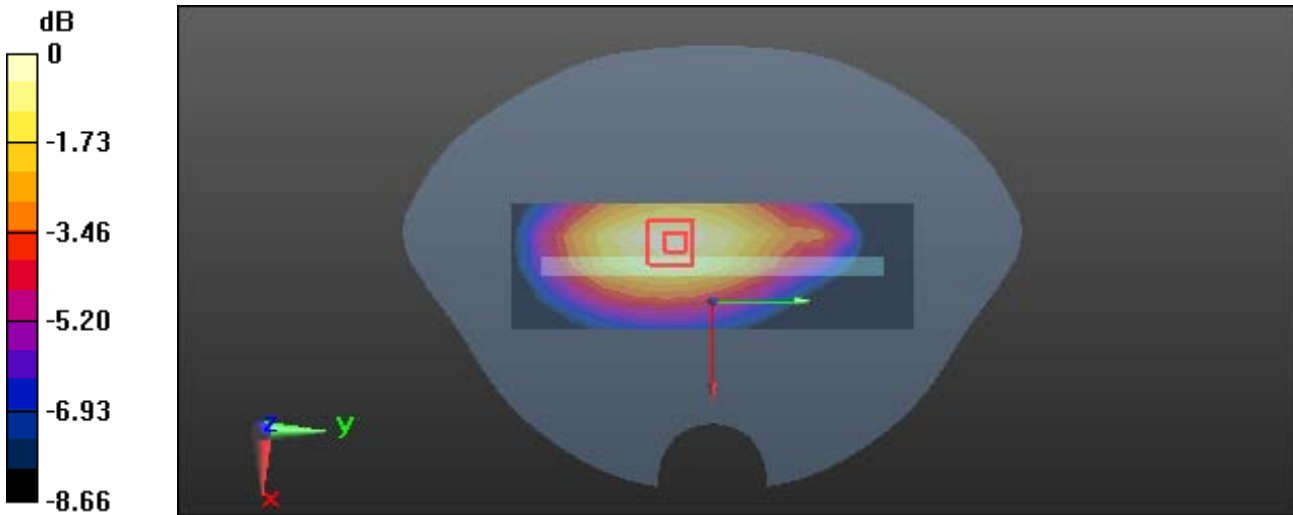

0 dB = 0.215 W/kg = -6.68dBW/kg

Test Plot 32#: LTE Band 12 1RB Mid ANT2 Head Left Cheek

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 43.551$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.79, 10.07, 9.05) @707.5 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0194 W/kg


Zoom Scan (6x6x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.664 V/m; Power Drift = 0.06dB

Peak SAR (extrapolated) = 0.0270 W/kg

SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.0204 W/kg

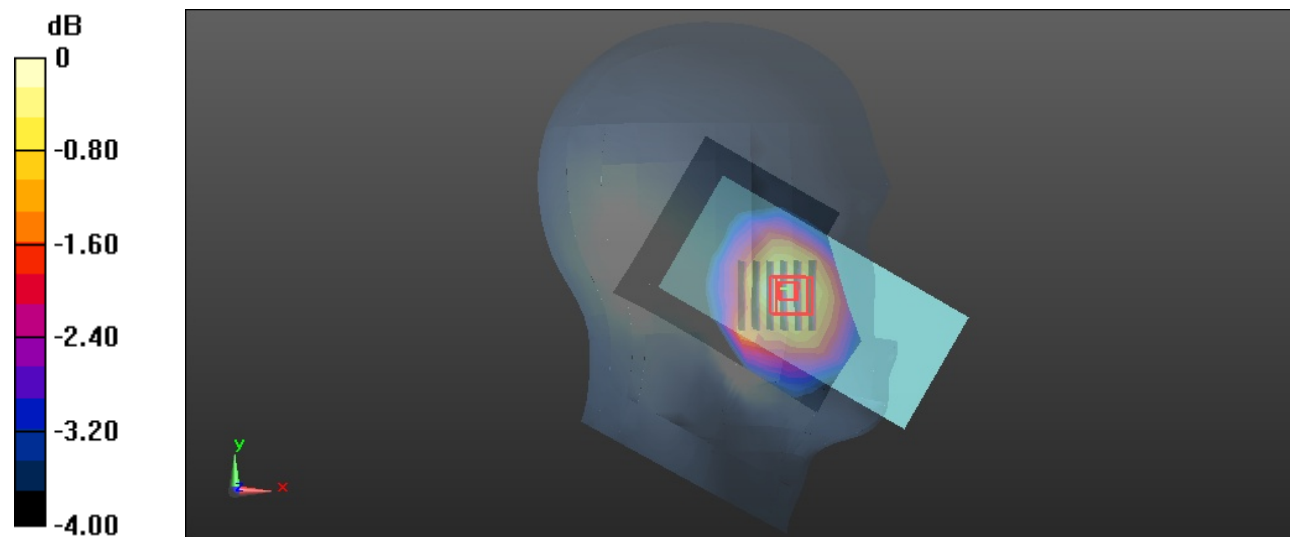

0 dB = 0.0204 W/kg = -16.90dBW/kg

Test Plot 33#: LTE Band 12 1RB Mid ANT2 Body Back

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 43.551$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.79, 10.07, 9.05) @707.5 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0502 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.989 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.0960 W/kg

SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.0537 W/kg

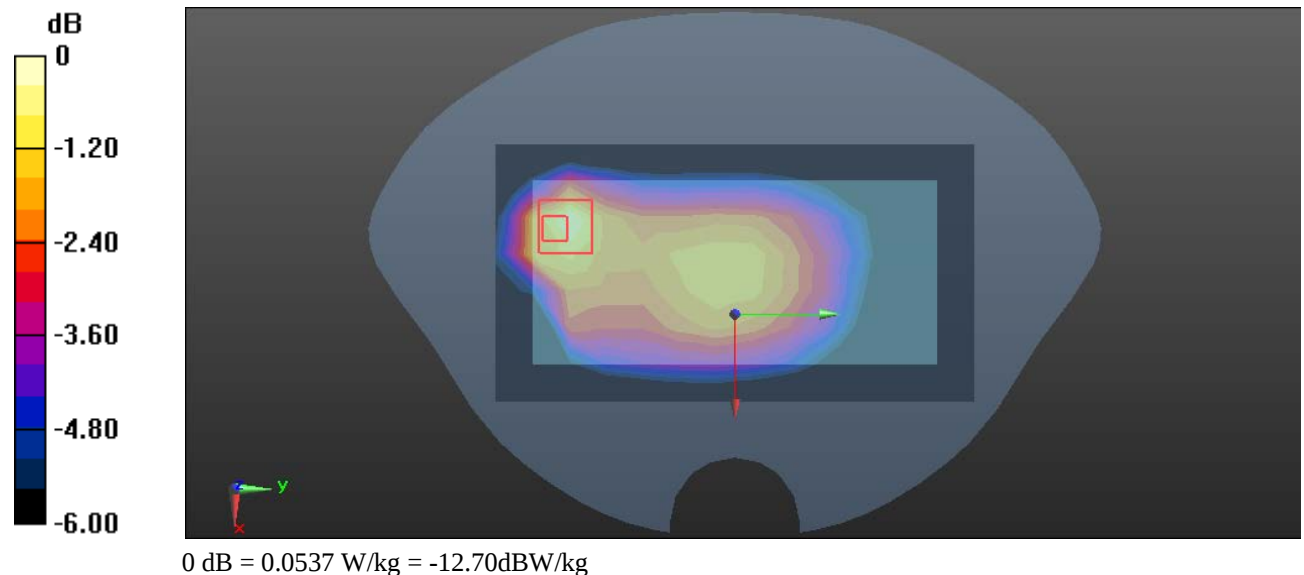

Test Plot 34#: LTE Band 38 1RB Mid ANT1 Head Right Tilt

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.929$ S/m; $\epsilon_r = 39.476$; $\rho = 1000$ kg/m³;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2595 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.985 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.741 V/m; Power Drift = 0.20dB

Peak SAR (extrapolated) = 2.23 W/kg

SAR(1 g) = 0.825 W/kg; SAR(10 g) = 0.394 W/kg

Maximum value of SAR (measured) = 1.17 W/kg

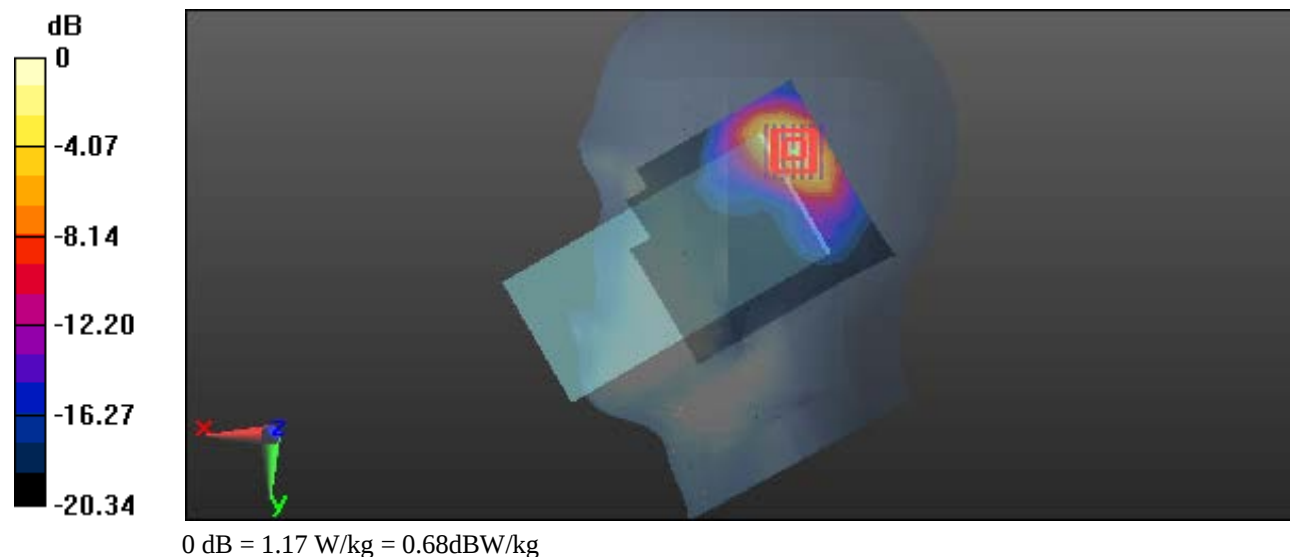

Test Plot 35#: LTE Band 38 1RB Mid ANT1 Body Top

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.929$ S/m; $\epsilon_r = 39.476$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2595 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.623 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.19 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.616 W/kg; SAR(10 g) = 0.282 W/kg

Maximum value of SAR (measured) = 0.797 W/kg

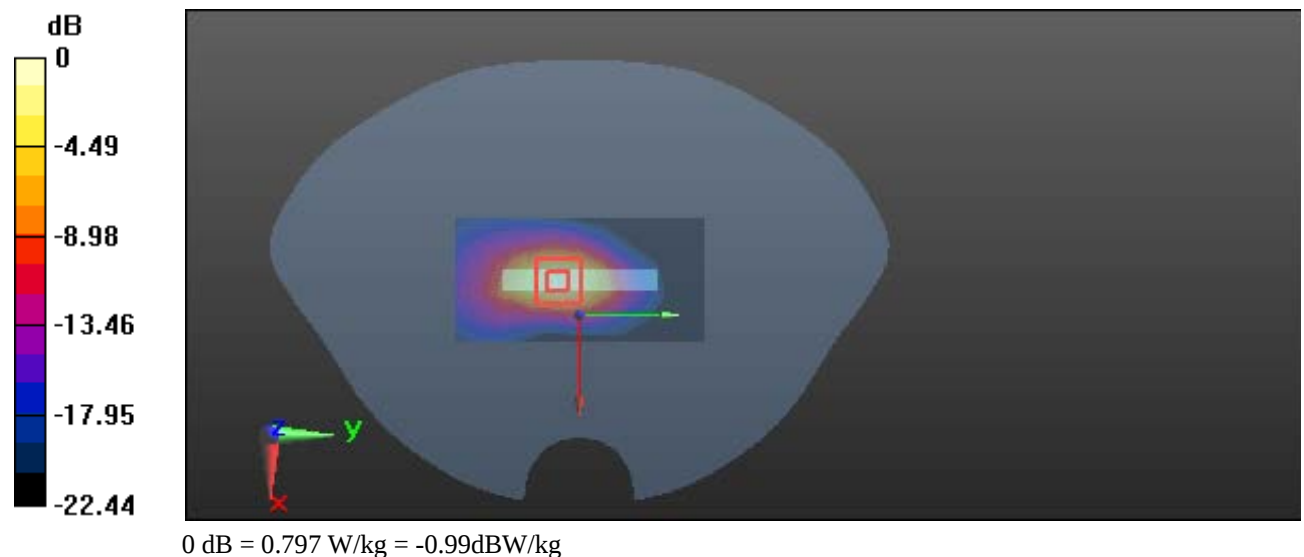

Test Plot 36#: LTE Band 38 1RB Mid ANT2 Head Left Cheek

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.929$ S/m; $\epsilon_r = 39.476$; $\rho = 1000$ kg/m³;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2595 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.129 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.274 V/m; Power Drift = 0.12dB

Peak SAR (extrapolated) = 0.209 W/kg

SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.064 W/kg

Maximum value of SAR (measured) = 0.133 W/kg

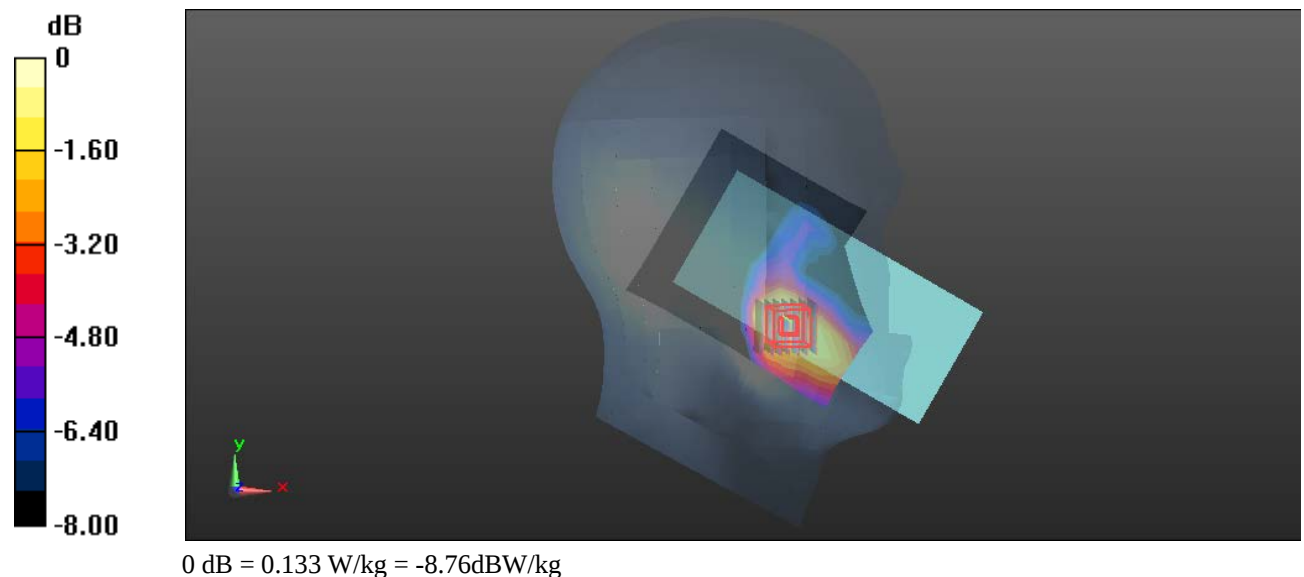

Test Plot 37#: LTE Band 38 1RB Mid ANT2 Body Bottom

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.929$ S/m; $\epsilon_r = 39.476$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2595 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.378 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.28 V/m; Power Drift = 0.05dB

Peak SAR (extrapolated) = 0.681 W/kg

SAR(1 g) = 0.326 W/kg; SAR(10 g) = 0.161 W/kg

Maximum value of SAR (measured) = 0.414 W/kg

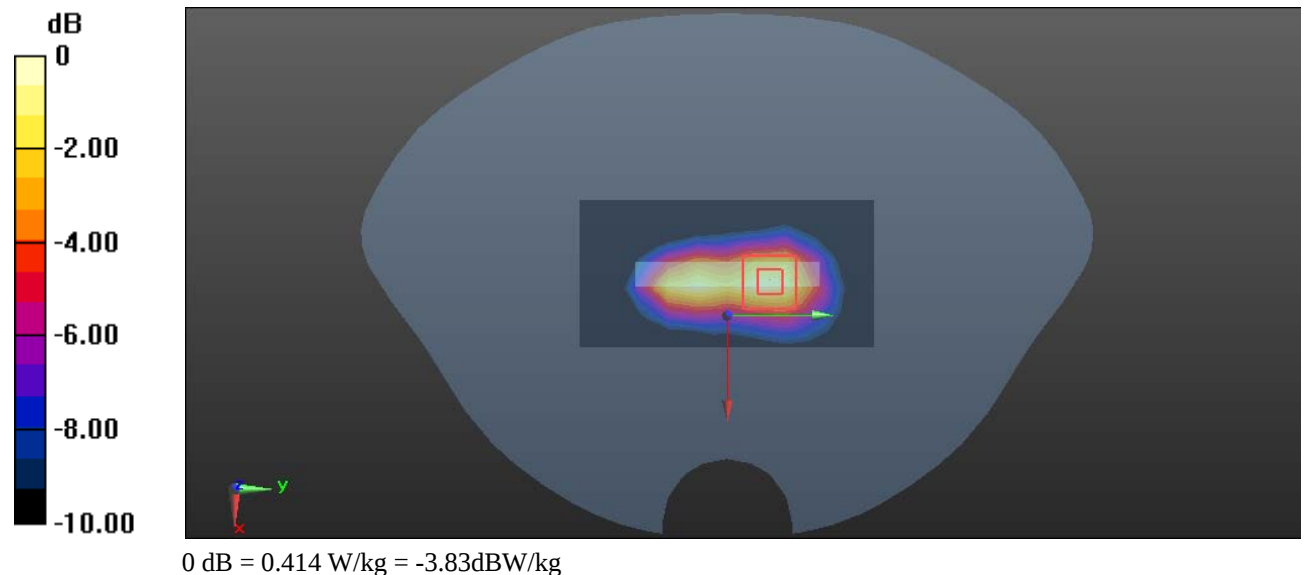

Test Plot 38#: LTE Band 41 1RB Mid ANT1 Head Right Tilt

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.917$ S/m; $\epsilon_r = 39.616$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2595 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.844 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.695 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 0.756 W/kg; SAR(10 g) = 0.351 W/kg

Maximum value of SAR (measured) = 1.01 W/kg

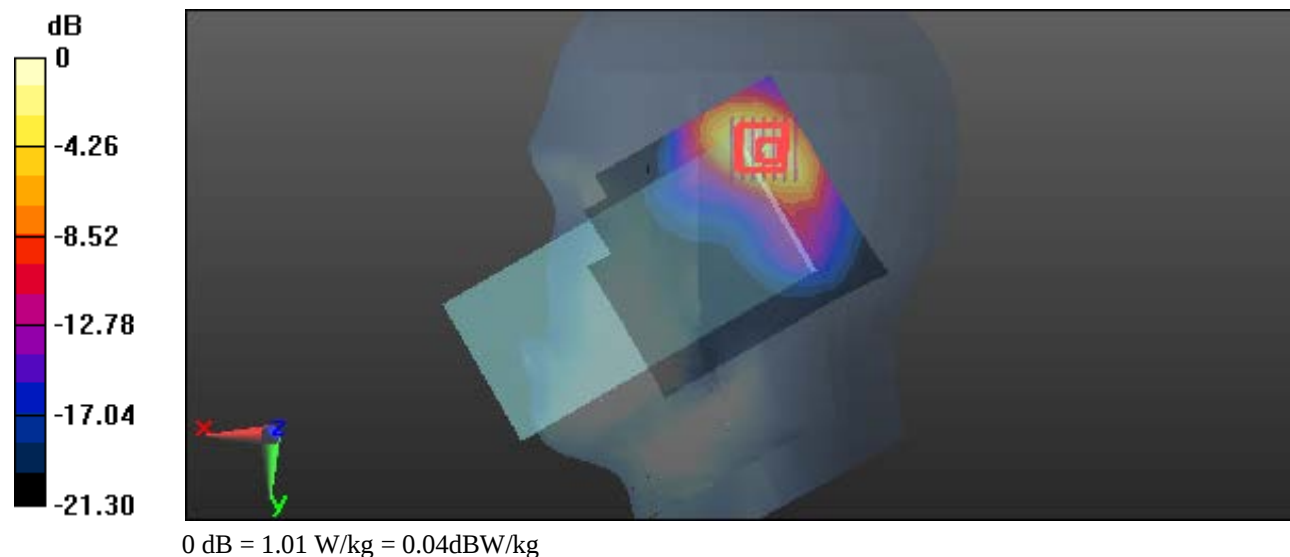

Test Plot 39#: LTE Band 41 50%RB Mid ANT1 Body Top

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.917$ S/m; $\epsilon_r = 39.616$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2595 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.532 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.99 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.533 W/kg; SAR(10 g) = 0.243 W/kg

Maximum value of SAR (measured) = 0.707 W/kg

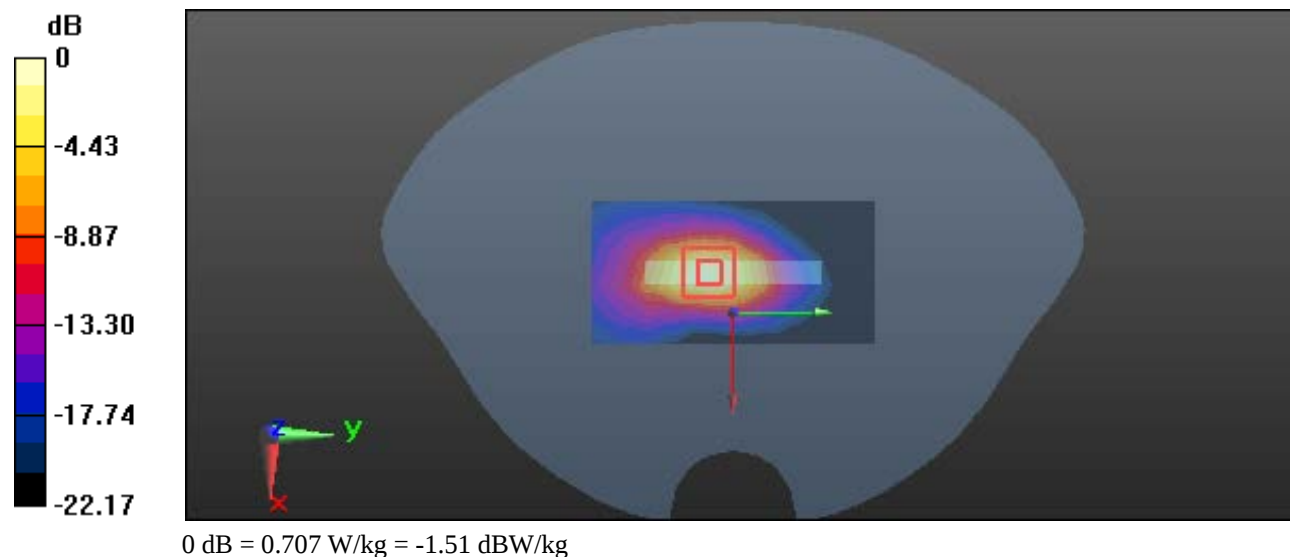

Test Plot 40#: LTE Band 41 1RB Mid ANT2 Head Left Cheek

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58
Medium parameters used: $f = 2595 \text{ MHz}$; $\sigma = 1.917 \text{ S/m}$; $\epsilon_r = 39.616$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2595 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x12x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.121 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 0.2550 V/m ; Power Drift = 0.04dB

Peak SAR (extrapolated) = 0.210 W/kg

SAR(1 g) = 0.106 W/kg ; SAR(10 g) = 0.065 W/kg

Maximum value of SAR (measured) = 0.128 W/kg

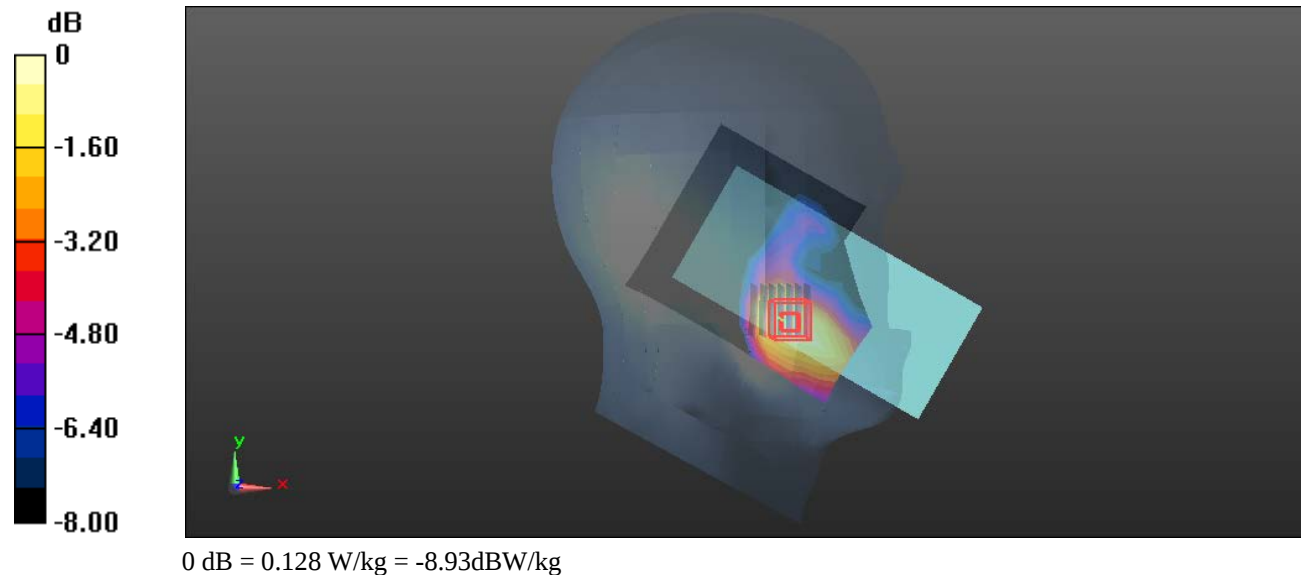

Test Plot 41#: LTE Band 41 1RB Mid ANT2 Body Bottom

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.917$ S/m; $\epsilon_r = 39.616$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2595 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.393 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.72 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.715 W/kg

SAR(1 g) = 0.336 W/kg; SAR(10 g) = 0.167 W/kg

Maximum value of SAR (measured) = 0.426 W/kg

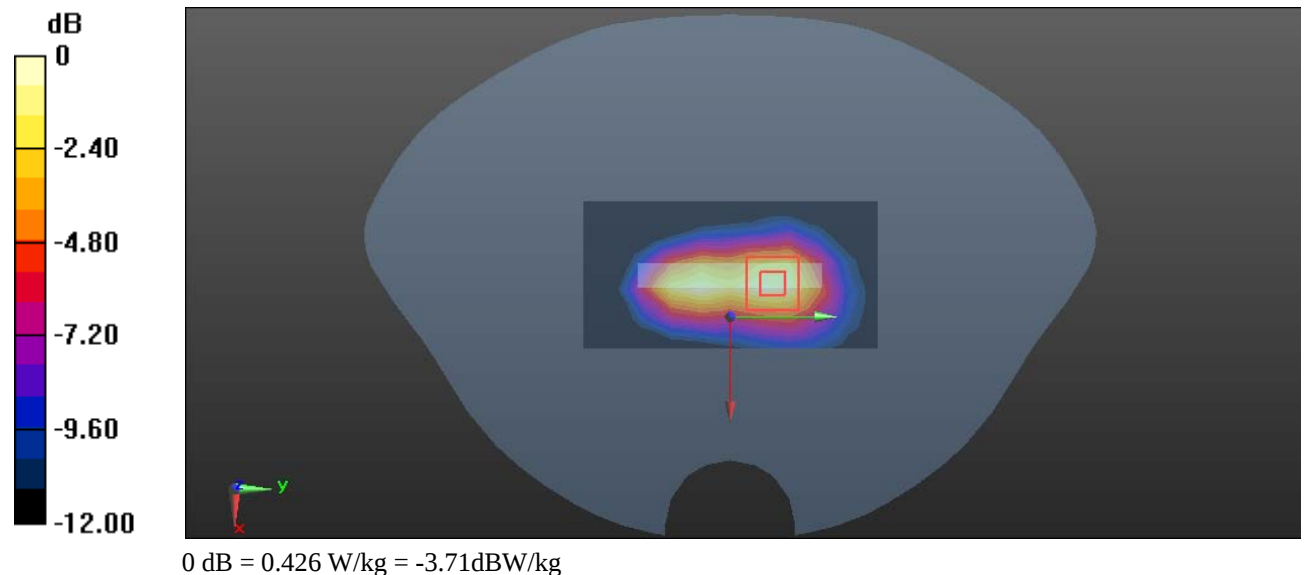

Test Plot 42#: LTE Band 66 50%RB Mid ANT1 Head Right Cheek

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.35 \text{ S/m}$; $\epsilon_r = 40.768$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.56, 8.56, 7.71) @1745 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.552 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.724 V/m; Power Drift = 0.01dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.548 W/kg; SAR(10 g) = 0.265 W/kg

Maximum value of SAR (measured) = 0.703 W/kg

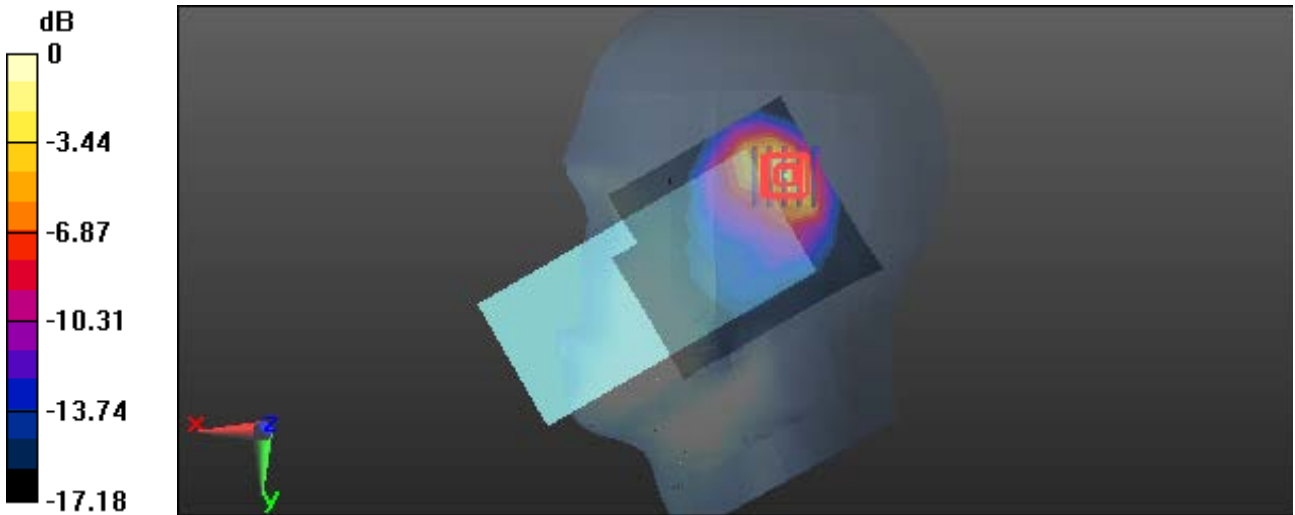

Test Plot 43#: LTE Band 66 50%RB Mid ANT1 Body Top

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.768$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.56, 8.56, 7.71) @1745 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.180 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.43 V/m; Power Drift = 0.03dB

Peak SAR (extrapolated) = 0.362 W/kg

SAR(1 g) = 0.181 W/kg; SAR(10 g) = 0.092 W/kg

Maximum value of SAR (measured) = 0.233 W/kg

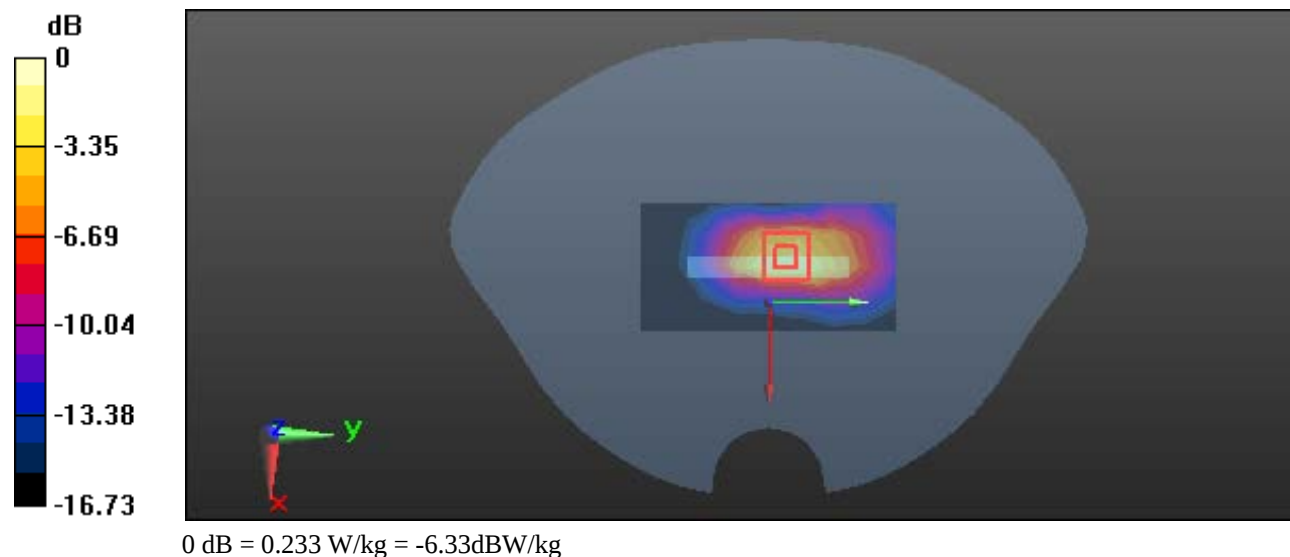

Test Plot 44#: LTE Band 66 50%RB Mid ANT2 Body Back

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.768$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.56, 8.56, 7.71) @1745 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0637 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.559 V/m; Power Drift = 0.14dB

Peak SAR (extrapolated) = 0.112 W/kg

SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.033 W/kg

Maximum value of SAR (measured) = 0.0670 W/kg

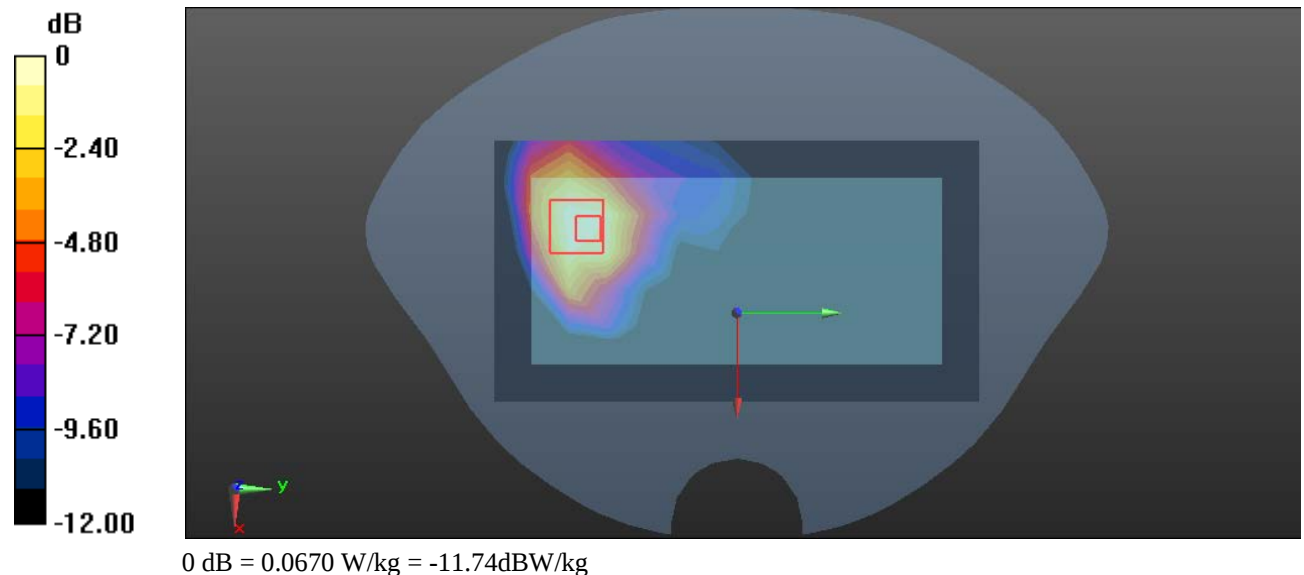

Test Plot 45#: WLAN 802.11b Mid Head Left Tilt

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: 2.4G WiFi (0); Frequency: 2437 MHz; Duty Cycle: 1:1.029
Medium parameters used: $f = 2437$ MHz; $\sigma = 1.774$ S/m; $\epsilon_r = 39.843$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.05, 7.92, 7.22) @2437 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.919 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.380 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.463 W/kg; SAR(10 g) = 0.166 W/kg

Maximum value of SAR (measured) = 0.961 W/kg

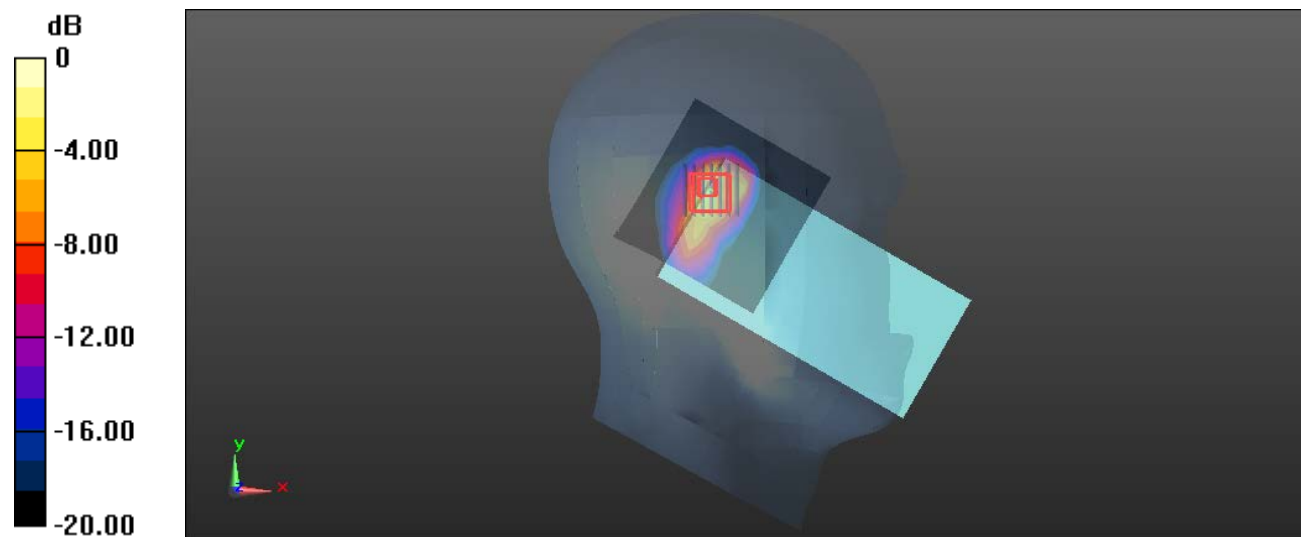

0 dB = 0.961 W/kg = -0.17dBW/kg

Test Plot 46#: WLAN 802.11b Mid Body Back

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: 2.4G WiFi (0); Frequency: 2437 MHz; Duty Cycle: 1:1.029
Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.774 \text{ S/m}$; $\epsilon_r = 39.843$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.05, 7.92, 7.22) @2437 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.127 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.355 V/m ; Power Drift = 0.01dB

Peak SAR (extrapolated) = 0.212 W/kg

SAR(1 g) = 0.084 W/kg ; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.166 W/kg

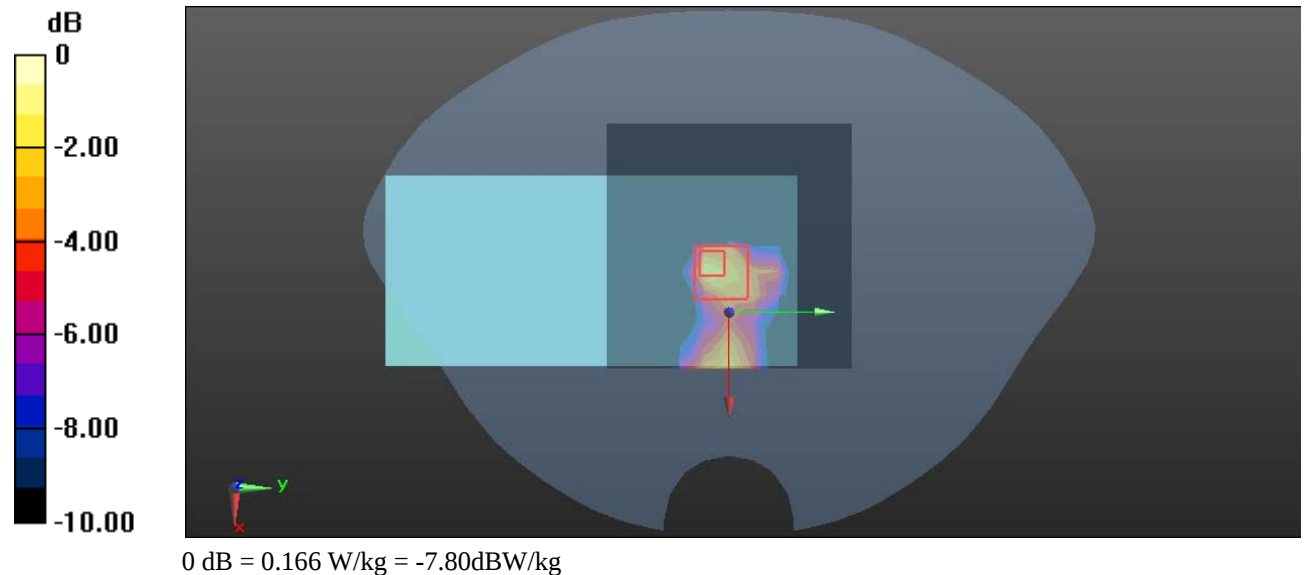

Test Plot 47#: WLAN 5.2G 802.11a Mid Head Left Tilt

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1.132
Medium parameters used: $f = 5200$ MHz; $\sigma = 4.739$ S/m; $\epsilon_r = 37.076$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.96, 5.61, 5.16) @5200 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.23 W/kg


Zoom Scan (8x8x12) /Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.9170 V/m; Power Drift = 0.03dB

Peak SAR (extrapolated) = 2.13 W/kg

SAR(1 g) = 0.483 W/kg; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 1.43 W/kg

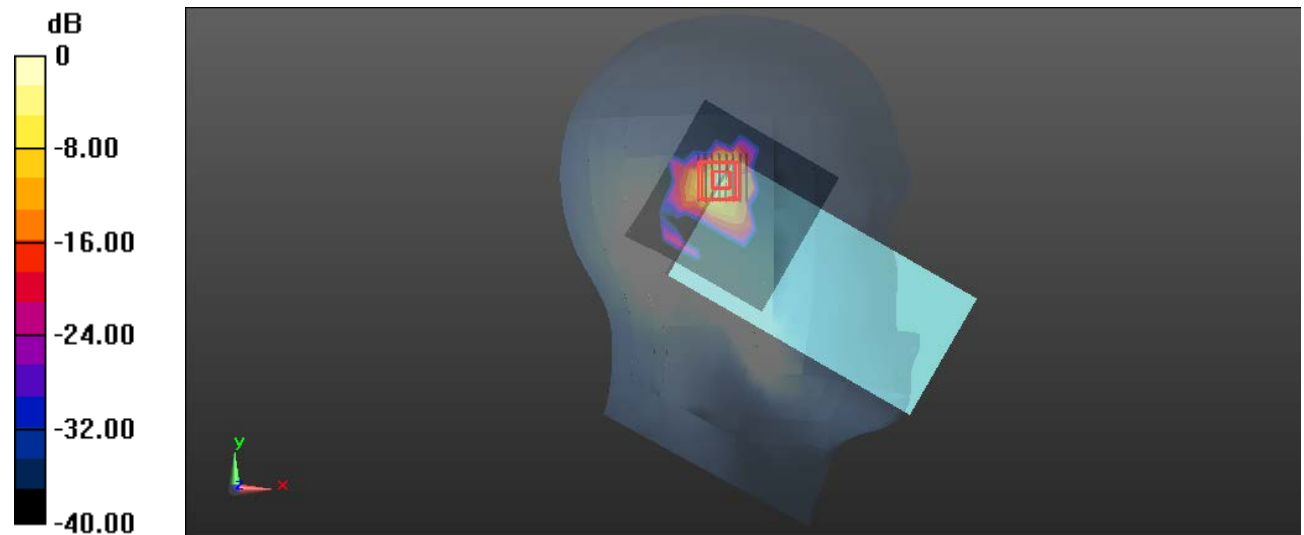

Test Plot 48#: WLAN 5.2G 802.11a Mid Body Back

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1.132
Medium parameters used: $f = 5200$ MHz; $\sigma = 4.739$ S/m; $\epsilon_r = 37.076$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.96, 5.61, 5.16) @5200 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.740 W/kg


Zoom Scan (8x8x12) /Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 8.874 V/m; Power Drift = 0.19dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.323 W/kg; SAR(10 g) = 0.091 W/kg

Maximum value of SAR (measured) = 0.773 W/kg

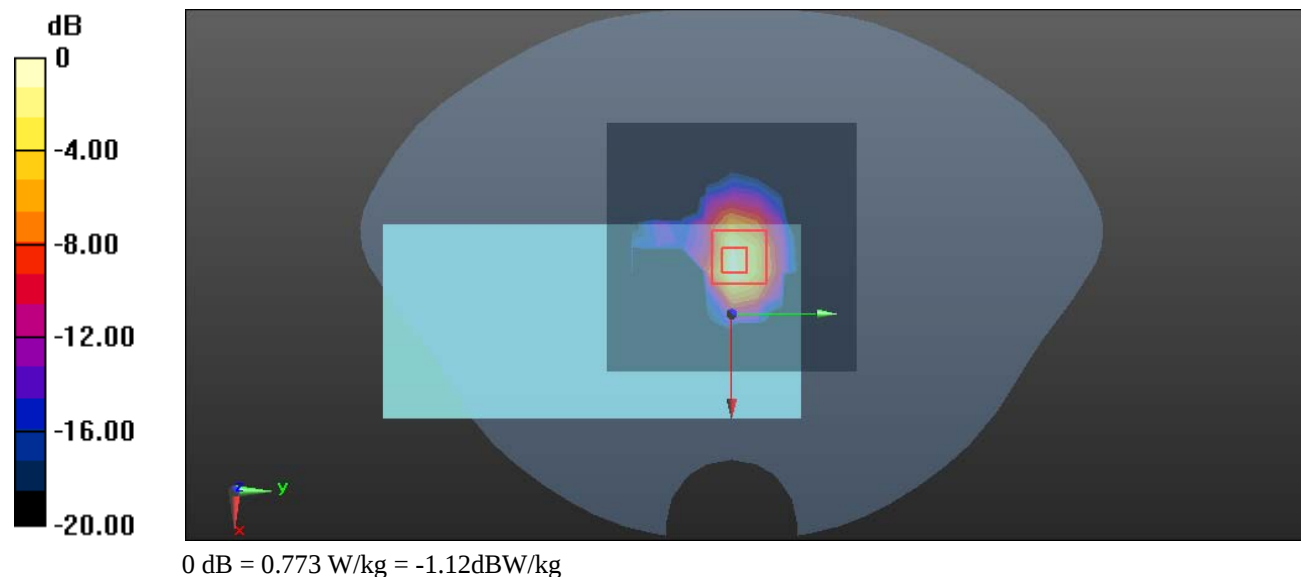

Test Plot 49#: WLAN 5.3G 802.11a Mid Head Left Tilt

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: 5.3G WiFi (0); Frequency: 5280 MHz; Duty Cycle: 1:1.132
Medium parameters used: $f = 5280 \text{ MHz}$; $\sigma = 4.816 \text{ S/m}$; $\epsilon_r = 36.65$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.96, 5.61, 5.16) @5280 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.13 W/kg


Zoom Scan (8x8x12) /Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 0.444 W/kg; SAR(10 g) = 0.099 W/kg

Maximum value of SAR (measured) = 1.29 W/kg

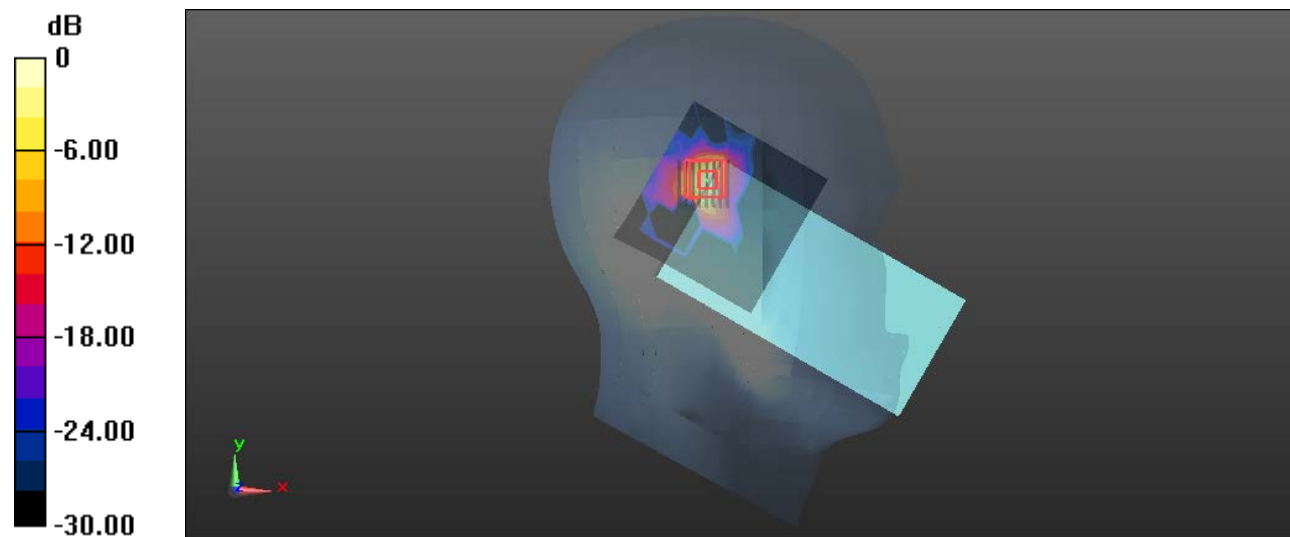

0 dB = 1.29 W/kg = 1.11dBW/kg

Test Plot 50#: WLAN 5.3G 802.11a Mid Body Back

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: 5.3G WiFi (0); Frequency: 5280 MHz; Duty Cycle: 1:1.132
Medium parameters used: $f = 5280 \text{ MHz}$; $\sigma = 4.816 \text{ S/m}$; $\epsilon_r = 36.65$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.96, 5.61, 5.16) @5280 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.705 W/kg


Zoom Scan (8x8x12) /Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 8.480 V/m; Power Drift = 0.07dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.278 W/kg; SAR(10 g) = 0.077 W/kg

Maximum value of SAR (measured) = 0.712 W/kg

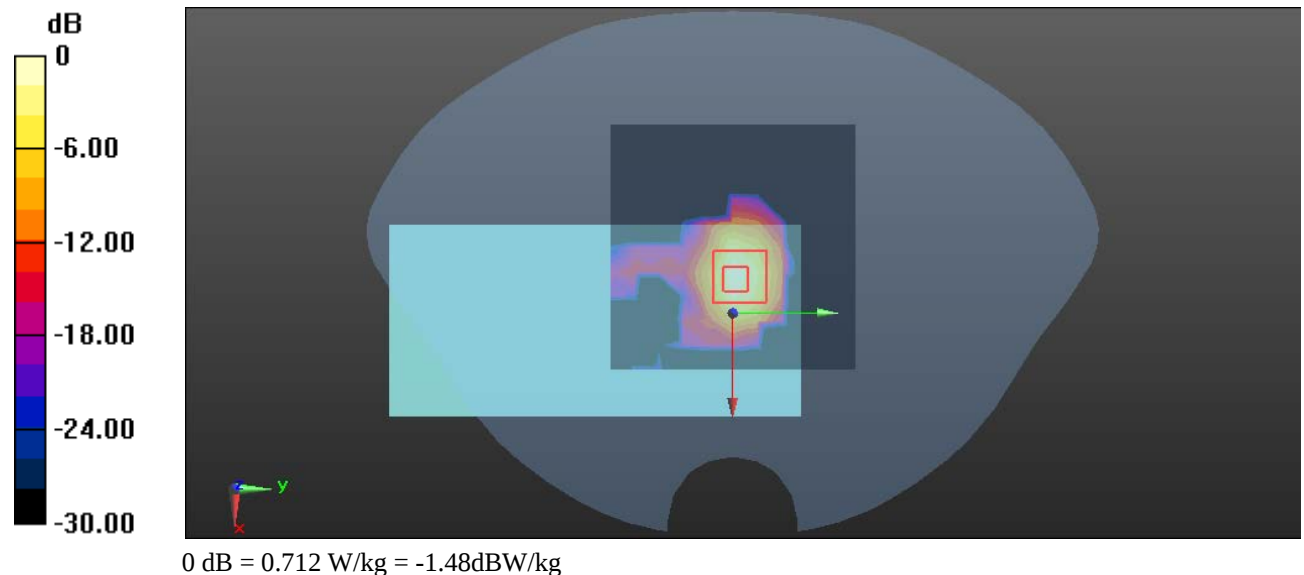

Test Plot 51#: WLAN 5.6G 802.11a Mid Head Left Tilt

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: 5.6G WiFi (0); Frequency: 5580 MHz; Duty Cycle: 1:1.132
Medium parameters used: $f = 5580 \text{ MHz}$; $\sigma = 5.161 \text{ S/m}$; $\epsilon_r = 36.418$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.38, 4.98, 4.56) @5580 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.01 W/kg


Zoom Scan (8x8x12) /Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0 V/m ; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.39 W/kg

SAR(1 g) = 0.426 W/kg ; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 1.19 W/kg

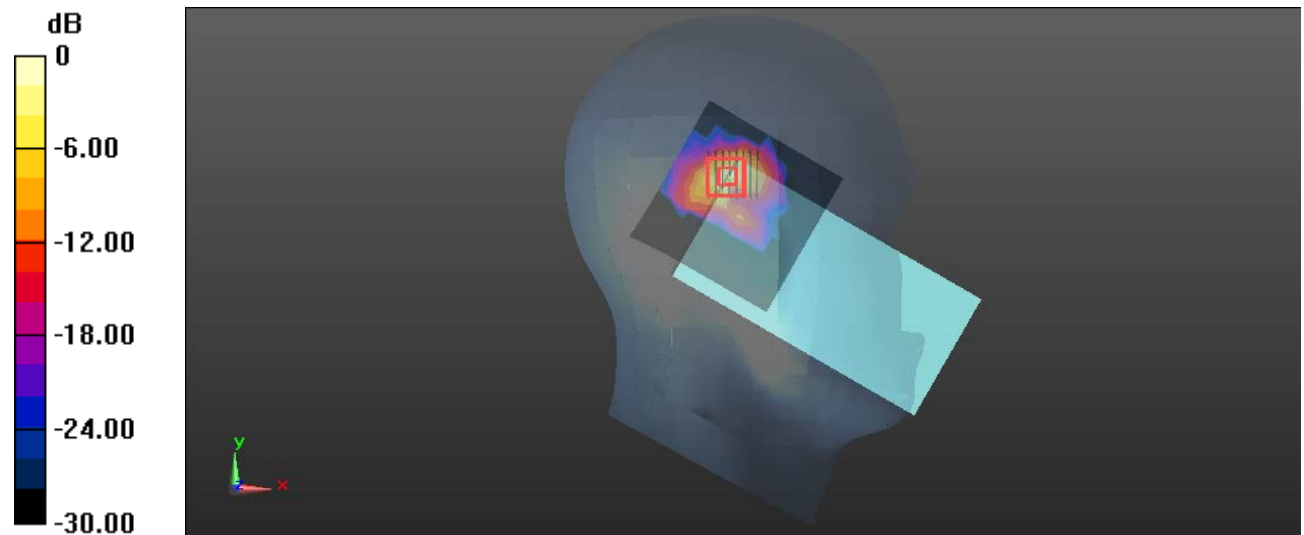

$0 \text{ dB} = 1.19 \text{ W/kg} = 0.76\text{dBW/kg}$

Test Plot 52#: WLAN 5.6G 802.11a Mid Body Back

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: 5.6G WiFi (0); Frequency: 5580 MHz; Duty Cycle: 1:1.132
Medium parameters used: $f = 5580$ MHz; $\sigma = 5.161$ S/m; $\epsilon_r = 36.418$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.38, 4.98, 4.56) @5580 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.573 W/kg


Zoom Scan (8x8x12) /Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 8.716 V/m; Power Drift = 0.16dB

Peak SAR (extrapolated) = 1.71 W/kg

SAR(1 g) = 0.277 W/kg; SAR(10 g) = 0.083 W/kg

Maximum value of SAR (measured) = 0.564 W/kg

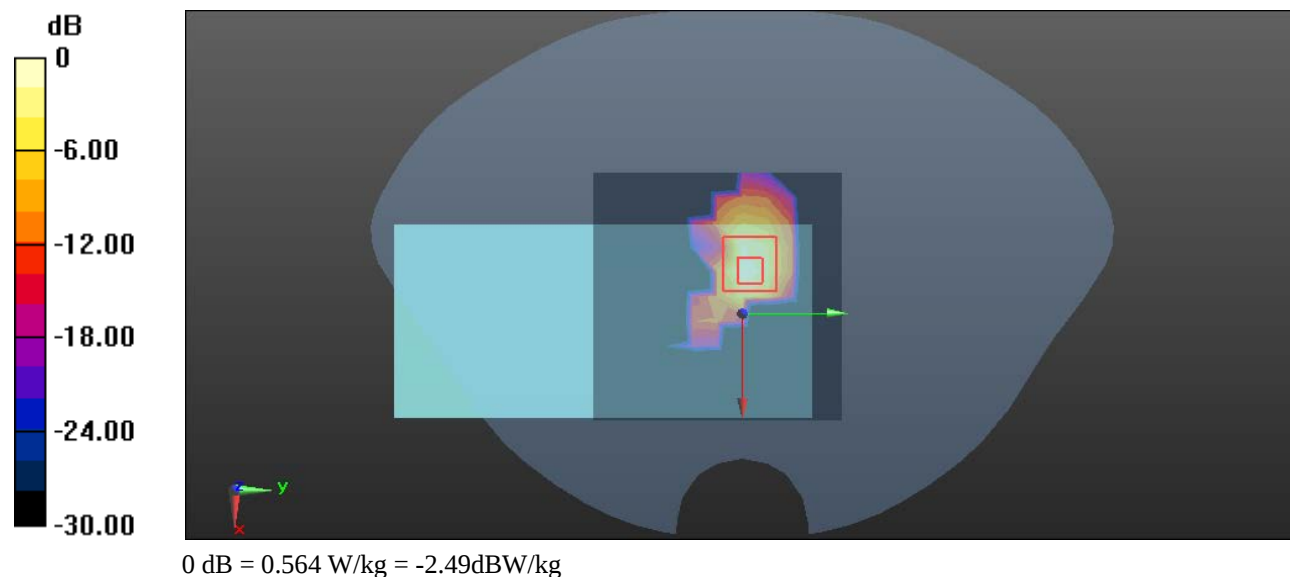

Test Plot 53#: WLAN 5.8G 802.11a Mid Head Left Tilt

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1.132

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.34 \text{ S/m}$; $\epsilon_r = 35.474$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.54, 5.16, 4.7) @5785 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.36 W/kg


Zoom Scan (8x8x12) /Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0 V/m ; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.96 W/kg

SAR(1 g) = 0.423 W/kg ; SAR(10 g) = 0.102 W/kg

Maximum value of SAR (measured) = 1.44 W/kg

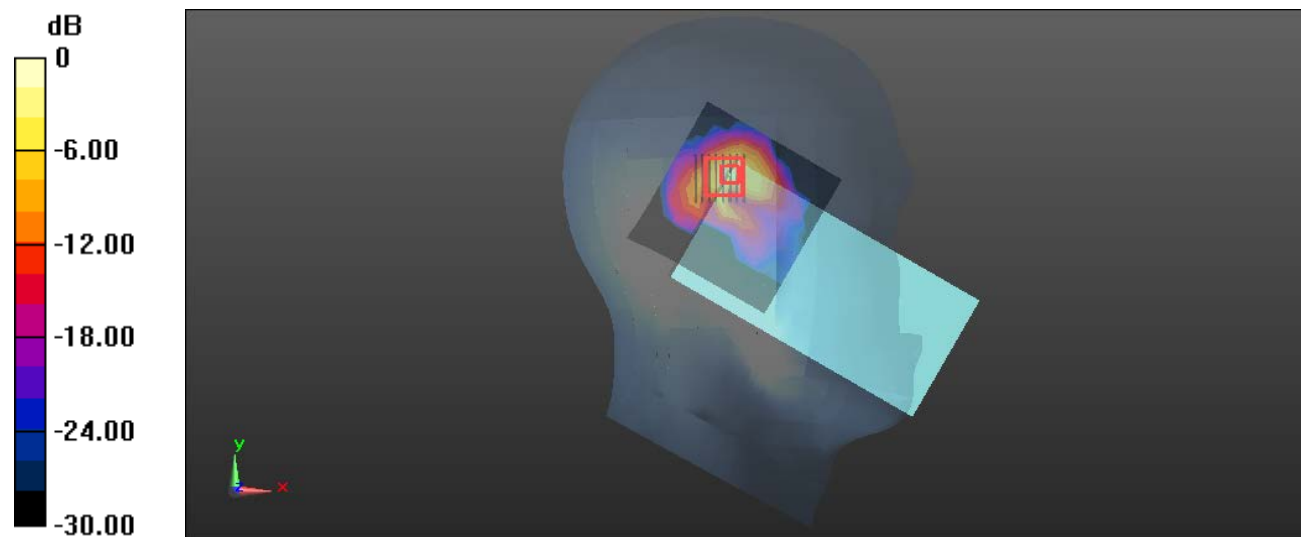

$0 \text{ dB} = 1.44 \text{ W/kg} = 1.58\text{dBW/kg}$

Test Plot 54#: WLAN 5.8G 802.11a Mid Body Back

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1.132
Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.34 \text{ S/m}$; $\epsilon_r = 35.474$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.54, 5.16, 4.7) @5785 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.998 W/kg


Zoom Scan (8x8x12) /Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 7.432 V/m ; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 2.09 W/kg

SAR(1 g) = 0.394 W/kg ; SAR(10 g) = 0.129 W/kg

Maximum value of SAR (measured) = 1.17 W/kg

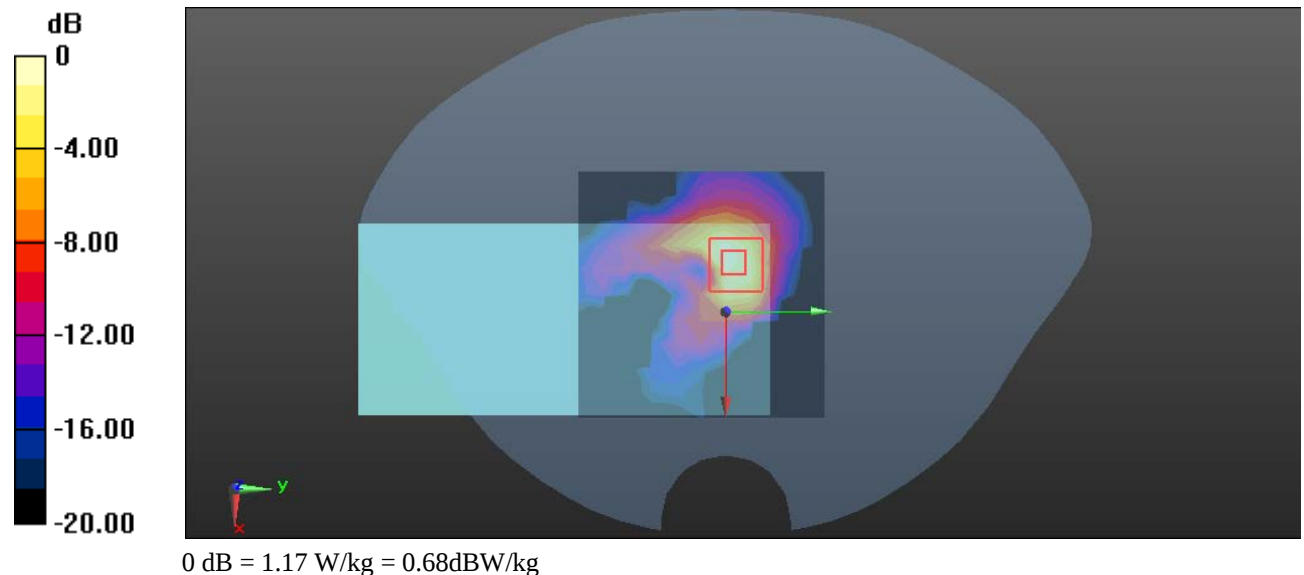

Test Plot 55#: CA_5B 1RB Mid ANT1 Head Right Cheek

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic CA (0); Frequency: 831.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 831.6 \text{ MHz}$; $\sigma = 0.906 \text{ S/m}$; $\epsilon_r = 42.372$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @831.6 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.217 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.98 V/m ; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.555 W/kg

SAR(1 g) = 0.225 W/kg ; SAR(10 g) = 0.128 W/kg

Maximum value of SAR (measured) = 0.283 W/kg

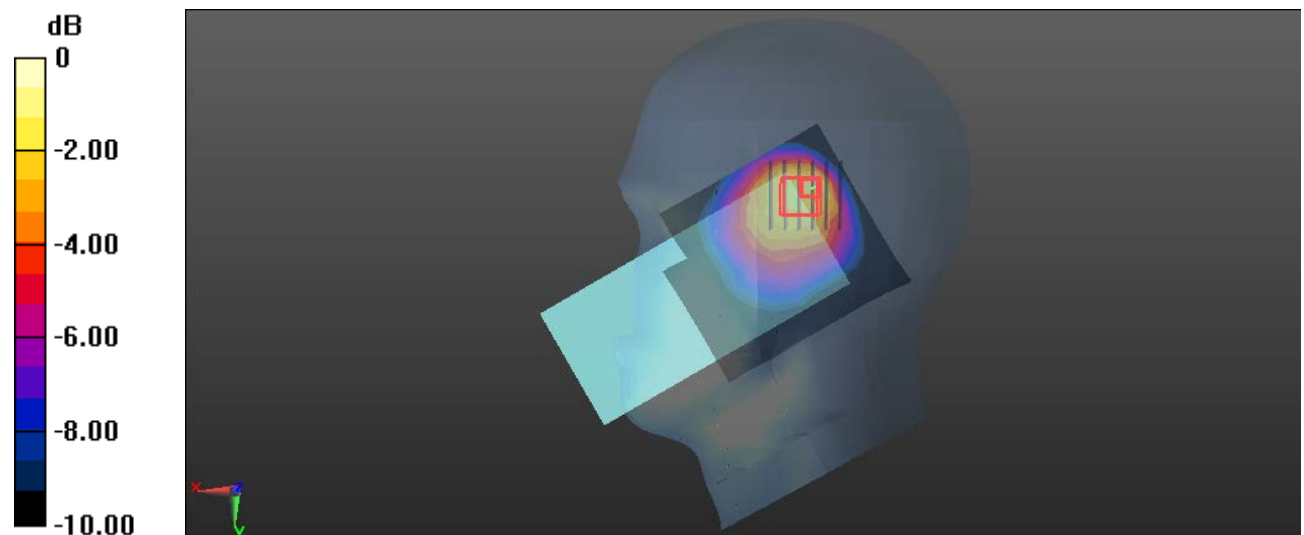

0 dB = 0.283 W/kg = -5.48 dBW/kg

Test Plot 56#: CA_5B 1RB Mid ANT1 Body Back

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic CA (0); Frequency: 831.6MHz;Duty Cycle: 1:1

Medium parameters used: $f = 831.6 \text{ MHz}$; $\sigma = 0.906 \text{ S/m}$; $\epsilon_r = 42.372$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @831.6 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0448 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.644 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0720 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.024 W/kg

Maximum value of SAR (measured) = 0.0453 W/kg

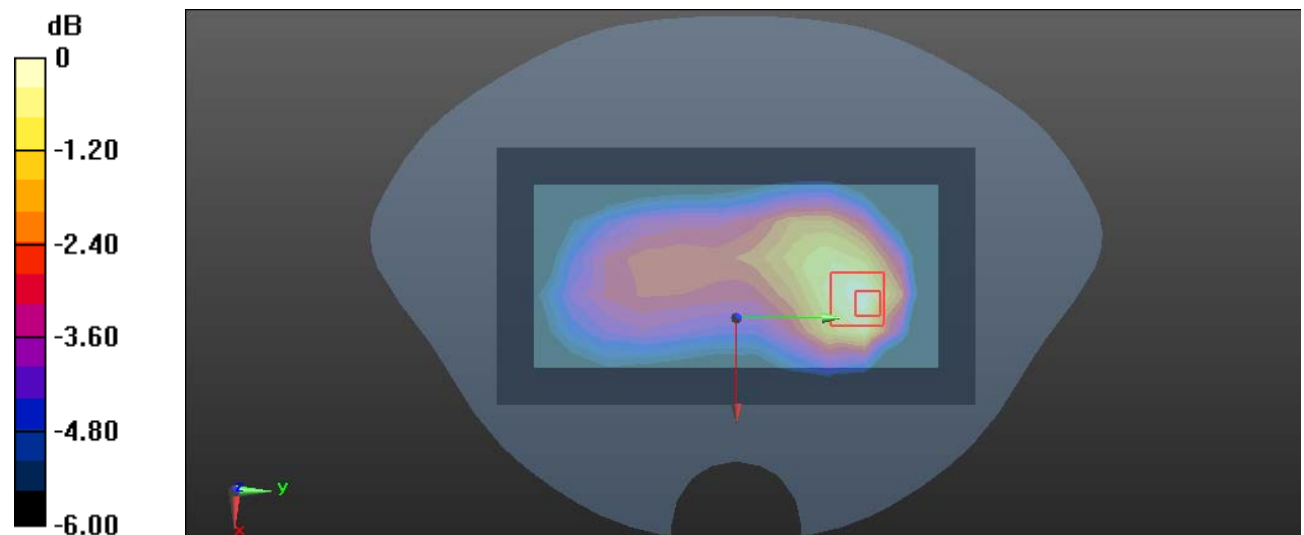

0 dB = 0.0453 W/kg = -13.44 dBW/kg

Test Plot 57#: CA_5B 1RB Mid ANT2 Body Back

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic CA (0); Frequency: 831.6MHz;Duty Cycle: 1:1

Medium parameters used: $f = 831.6 \text{ MHz}$; $\sigma = 0.906 \text{ S/m}$; $\epsilon_r = 42.372$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @831.6 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0180 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.834 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0350 W/kg

SAR(1 g) = 0.016 W/kg; SAR(10 g) = 0.00894 W/kg

Maximum value of SAR (measured) = 0.0208 W/kg

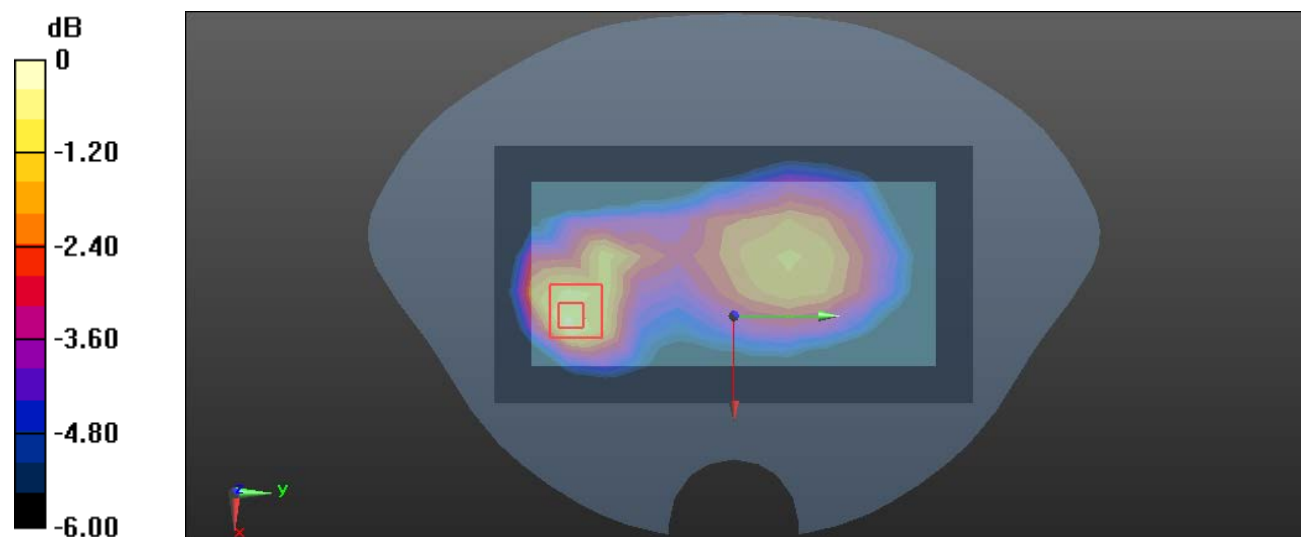

0 dB = 0.0208 W/kg = -16.82 dBW/kg

Test Plot 58#: CA_7C 1RB Mid ANT1 Head Right Tilt

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic CA (0); Frequency: 2525.1MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2525.1 \text{ MHz}$; $\sigma = 1.859 \text{ S/m}$; $\epsilon_r = 39.896$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2525.1 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x11x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.161 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.067 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.424 W/kg

SAR(1 g) = 0.174 W/kg; SAR(10 g) = 0.078 W/kg

Maximum value of SAR (measured) = 0.223 W/kg

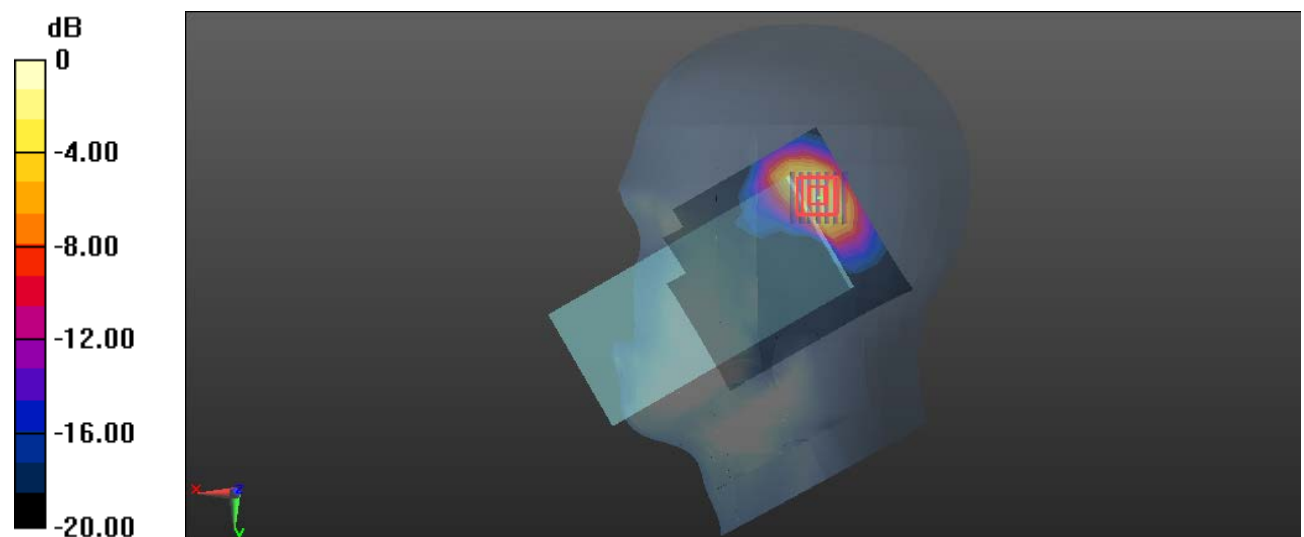

0 dB = 0.223 W/kg = -6.52 dBW/kg

Test Plot 59#: CA_7C 1RB Mid ANT1 Body Top

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic CA (0); Frequency: 2525.1MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2525.1 \text{ MHz}$; $\sigma = 1.859 \text{ S/m}$; $\epsilon_r = 39.896$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2525.1 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x11x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.139 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.463 V/m ; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.239 W/kg

SAR(1 g) = 0.112 W/kg ; SAR(10 g) = 0.052 W/kg

Maximum value of SAR (measured) = 0.147 W/kg

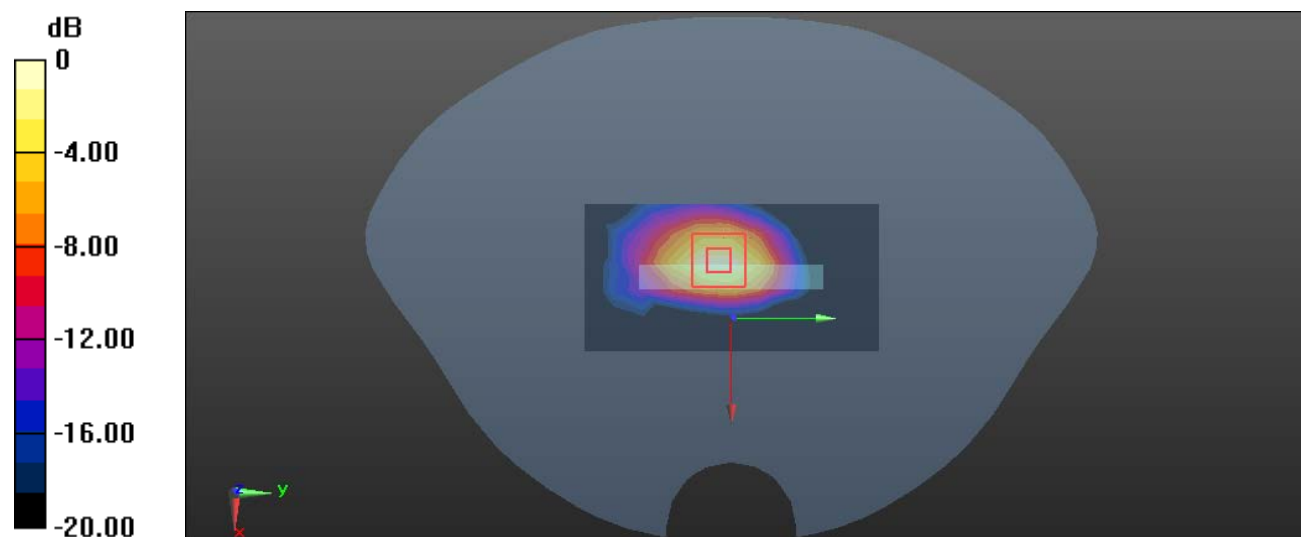

$0 \text{ dB} = 0.147 \text{ W/kg} = -8.33 \text{ dBW/kg}$

Test Plot 60#: CA_7C Mid 1RB ANT2 Head Left Cheek

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic CA (0); Frequency: 2525.1MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2525.1 \text{ MHz}$; $\sigma = 1.859 \text{ S/m}$; $\epsilon_r = 39.896$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2525.1 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x11x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.0200 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 0 V/m ; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0210 W/kg

SAR(1 g) = 0.014 W/kg ; SAR(10 g) = 0.00877 W/kg

Maximum value of SAR (measured) = 0.0172 W/kg

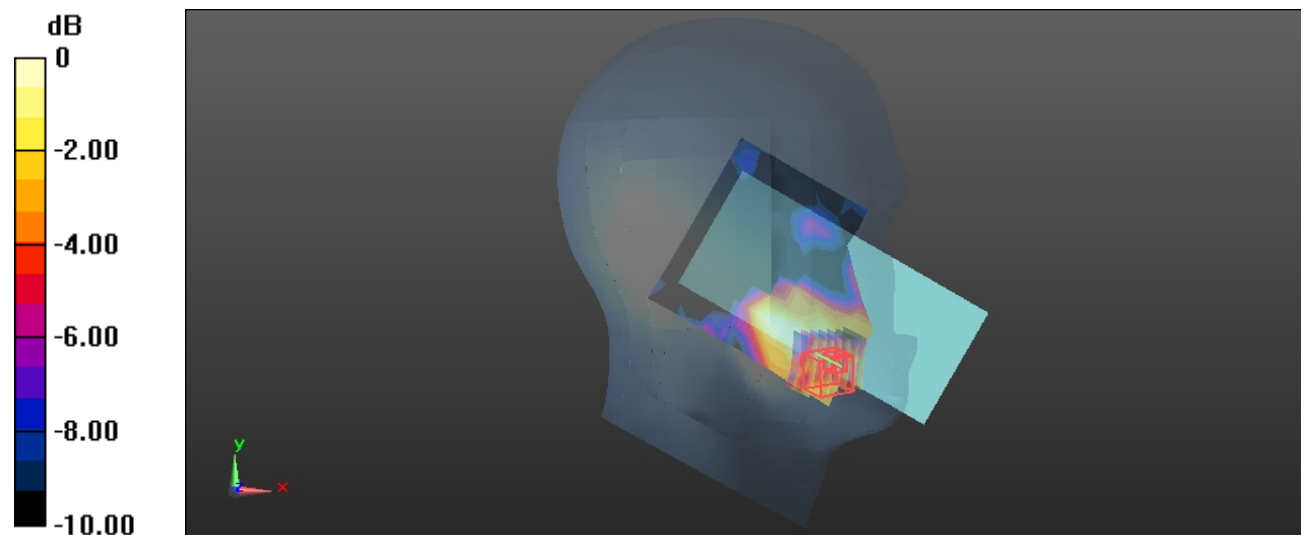

$0 \text{ dB} = 0.0172 \text{ W/kg} = -17.64 \text{ dBW/kg}$

Test Plot 61#: CA_7C Mid 1RB ANT2 Body Back

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic CA (0); Frequency: 2525.1MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2525.1 \text{ MHz}$; $\sigma = 1.859 \text{ S/m}$; $\epsilon_r = 39.896$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2525.1 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.0720 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.078 V/m ; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.153 W/kg

SAR(1 g) = 0.064 W/kg ; SAR(10 g) = 0.031 W/kg

Maximum value of SAR (measured) = 0.0828 W/kg

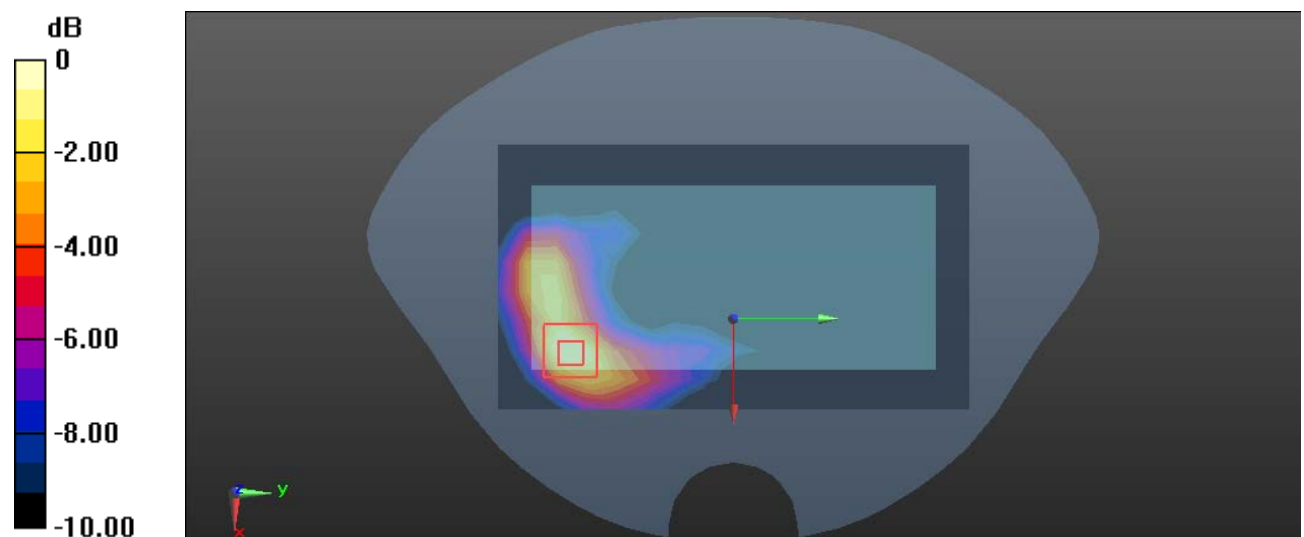

0 dB = 0.0828 W/kg = -10.82 dBW/kg

Test Plot 62#: CA_38 C RB Mid ANT1 Head Right Tilt

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic CA (0); Frequency: 2585.1MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2585.1$ MHz; $\sigma = 1.914$ S/m; $\epsilon_r = 39.605$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2585.1 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.476 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.840 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.412 W/kg; SAR(10 g) = 0.185 W/kg

Maximum value of SAR (measured) = 0.551 W/kg

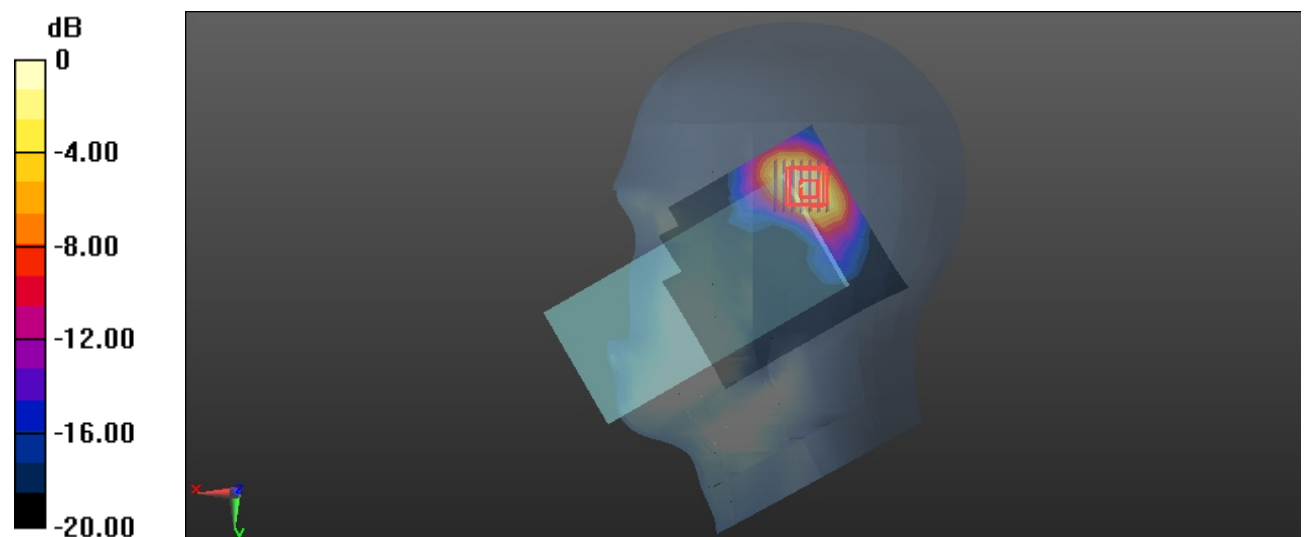

0 dB = 0.551 W/kg = -2.59 dBW/kg

Test Plot 63#: CA_38C 1RB Mid ANT1 Body Top

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic CA (0); Frequency: 2585.1MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2585.1$ MHz; $\sigma = 1.914$ S/m; $\epsilon_r = 39.605$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2585.1 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.433 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.97 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.724 W/kg

SAR(1 g) = 0.331 W/kg; SAR(10 g) = 0.151 W/kg

Maximum value of SAR (measured) = 0.441 W/kg

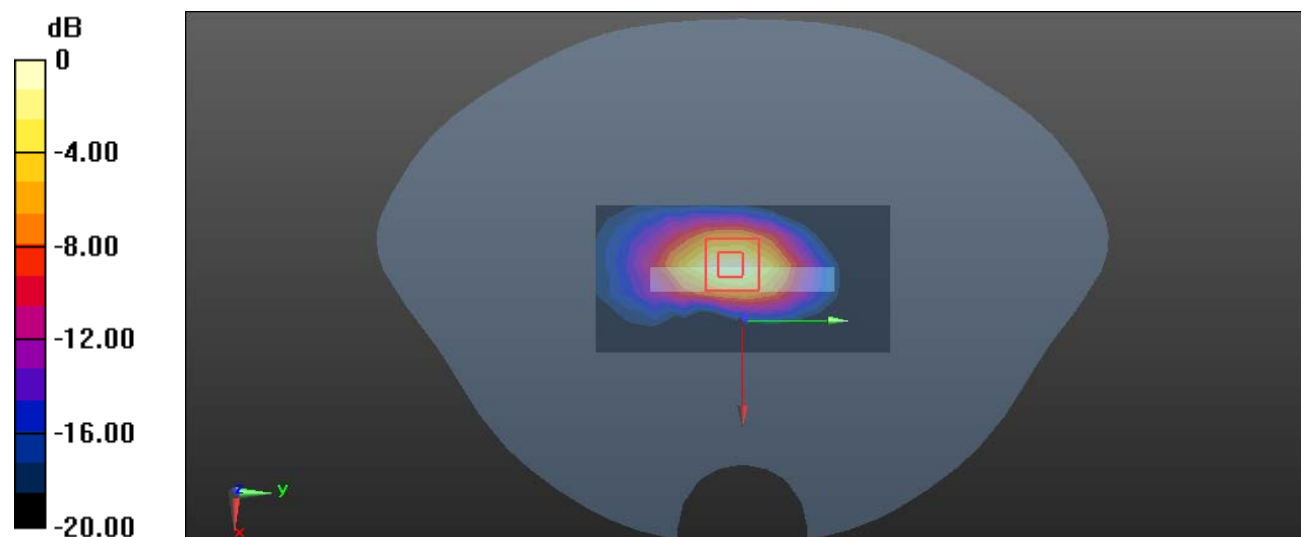

0 dB = 0.441 W/kg = -3.56 dBW/kg

Test Plot 64#: CA_38C 1RB Mid ANT2 Head Left Cheek

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic CA (0); Frequency: 2585.1MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2585.1$ MHz; $\sigma = 1.914$ S/m; $\epsilon_r = 39.605$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2585.1 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0579 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.5430 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.100 W/kg

SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.028 W/kg

Maximum value of SAR (measured) = 0.0616 W/kg

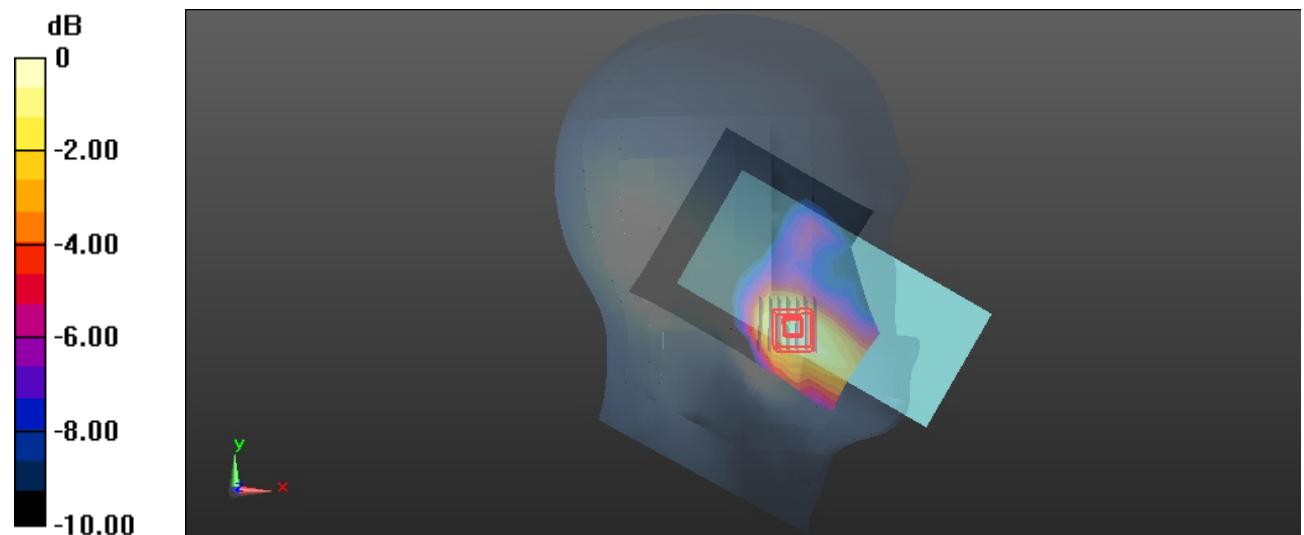

0 dB = 0.0616 W/kg = -12.10 dBW/kg

Test Plot 65#: CA_38C 1RB Mid ANT2 Body Bottom

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic CA (0); Frequency: 2585.1MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2585.1 \text{ MHz}$; $\sigma = 1.914 \text{ S/m}$; $\epsilon_r = 39.605$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2585.1 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x11x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.175 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.834 V/m ; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.331 W/kg

SAR(1 g) = 0.159 W/kg ; SAR(10 g) = 0.079 W/kg

Maximum value of SAR (measured) = 0.204 W/kg

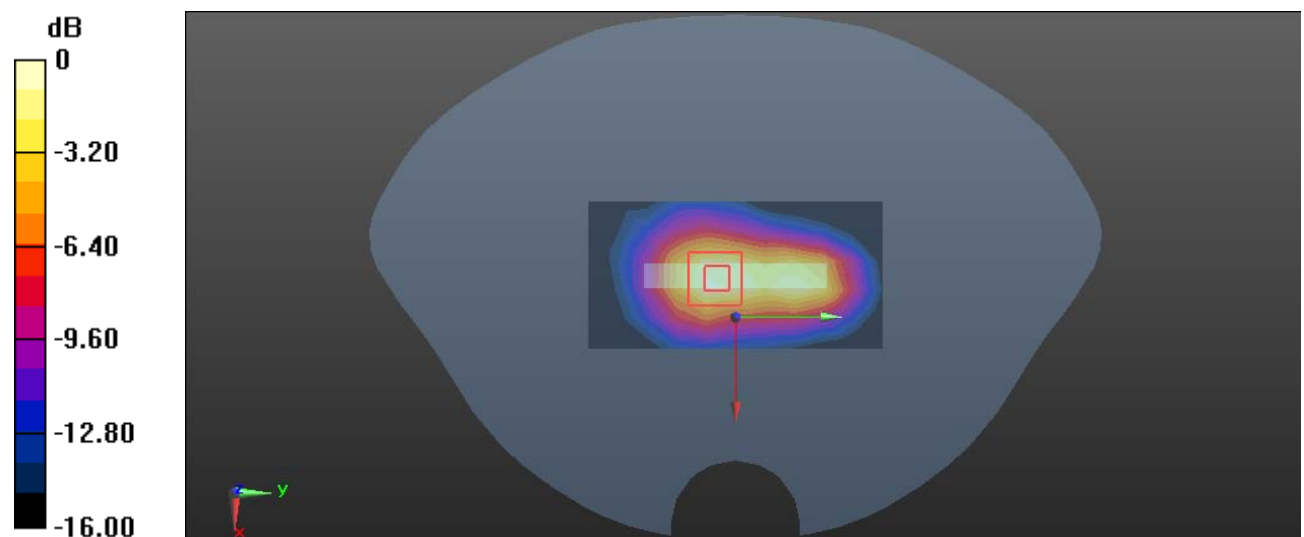

0 dB = 0.204 W/kg = -6.90 dBW/kg

Test Plot 66#: CA_41C 1RB Mid ANT1 Head Right Tilt

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic CA (0); Frequency: 2583.1MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2583.1$ MHz; $\sigma = 1.906$ S/m; $\epsilon_r = 39.794$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2583.1 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.394 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.177 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.399 W/kg; SAR(10 g) = 0.179 W/kg

Maximum value of SAR (measured) = 0.524 W/kg

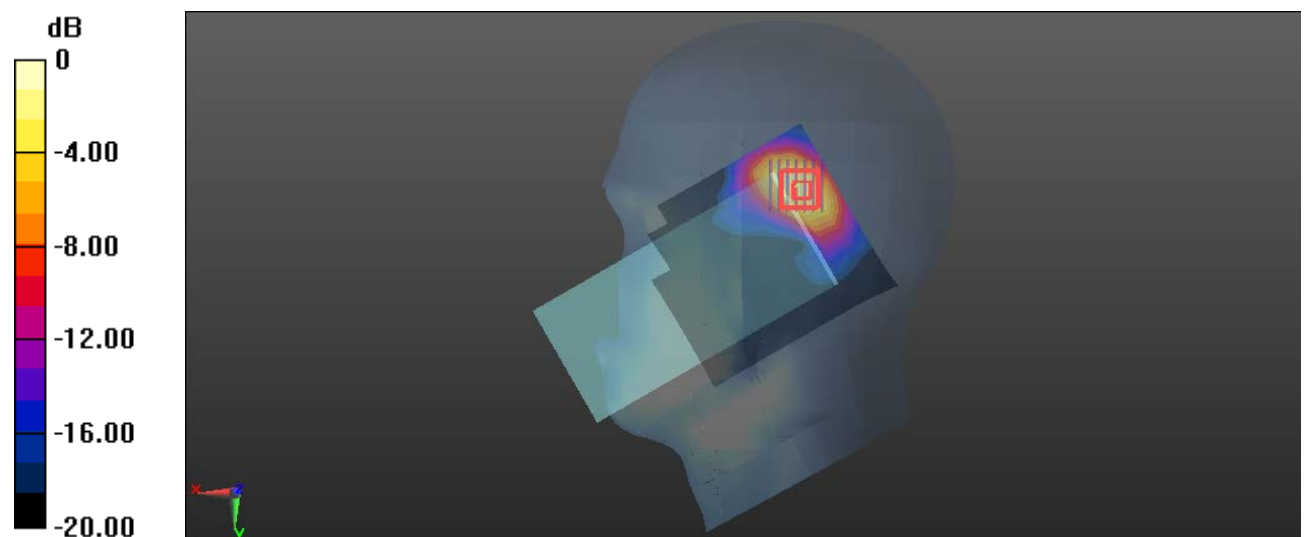

0 dB = 0.524 W/kg = -2.81 dBW/kg

Test Plot 67#: CA_41C 1RB Mid ANT1 Body Top

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic CA (0); Frequency: 2583.1MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2583.1 \text{ MHz}$; $\sigma = 1.906 \text{ S/m}$; $\epsilon_r = 39.794$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2583.1 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x11x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.367 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.63 V/m ; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.621 W/kg

SAR(1 g) = 0.284 W/kg ; SAR(10 g) = 0.131 W/kg

Maximum value of SAR (measured) = 0.376 W/kg

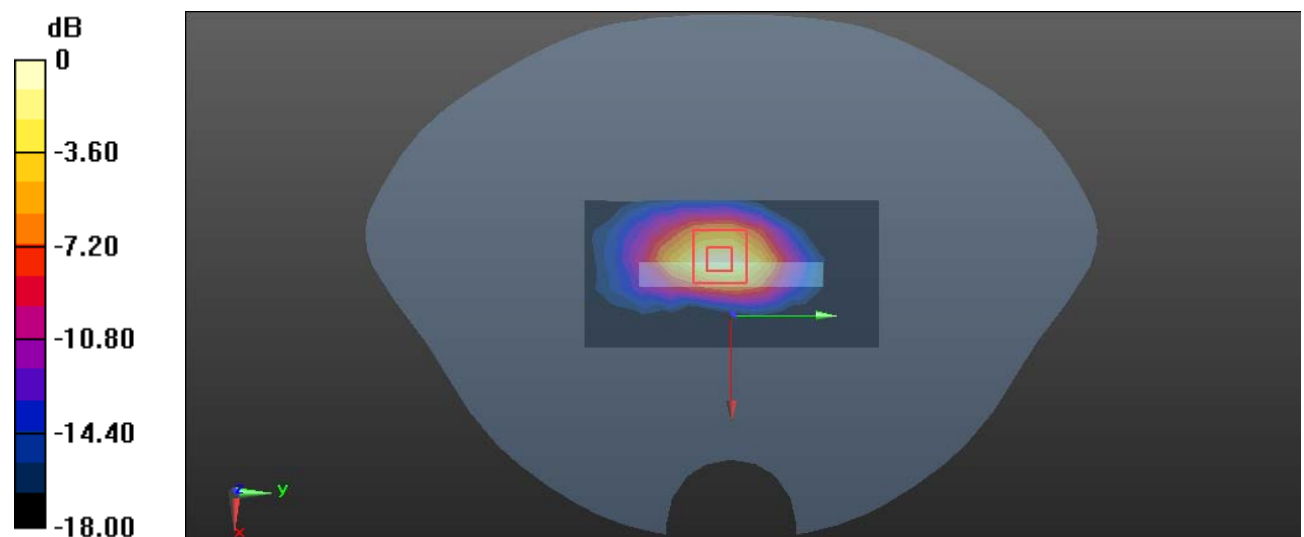

0 dB = 0.376 W/kg = -4.25 dBW/kg

Test Plot 68#: CA_41C 1RB Mid ANT2 Head Left Cheek

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic CA (0); Frequency: 2583.1MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2583.1 \text{ MHz}$; $\sigma = 1.906 \text{ S/m}$; $\epsilon_r = 39.794$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2583.1 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x12x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.0635 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 0.5120 V/m ; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.101 W/kg

SAR(1 g) = 0.051 W/kg ; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.0627 W/kg

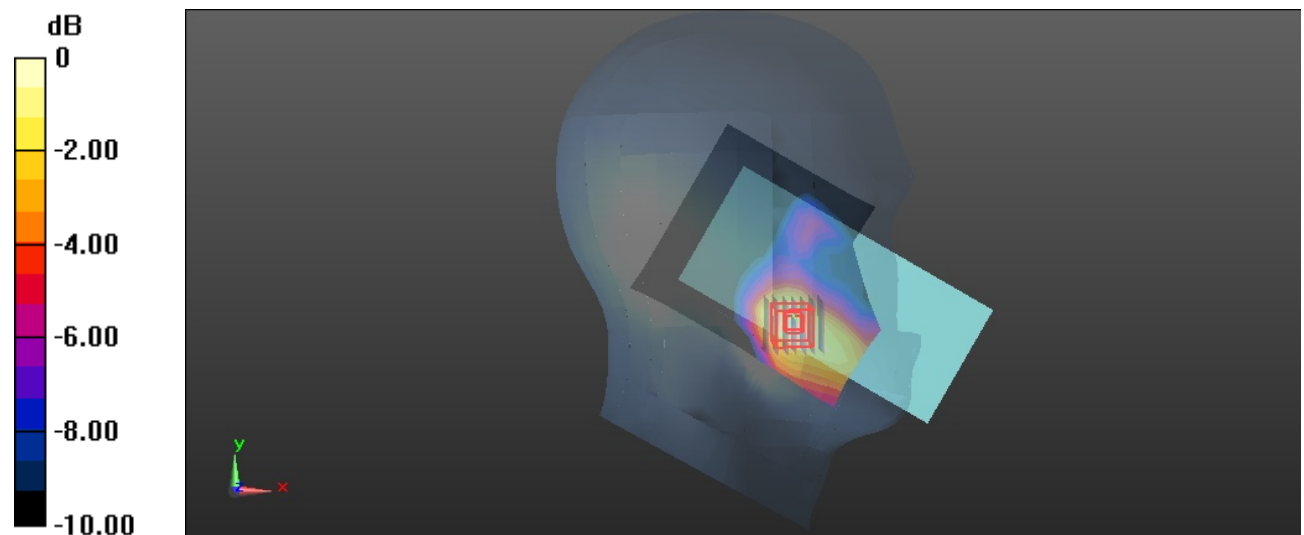

$0 \text{ dB} = 0.0627 \text{ W/kg} = -12.03 \text{ dBW/kg}$

Test Plot 69#: CA_41C 1RB Mid ANT2 Body Bottom

DUT: Mobile Phone; Type: C671L; Serial: 2YSA-1

Communication System: Generic CA (0); Frequency: 2583.1MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2583.1$ MHz; $\sigma = 1.906$ S/m; $\epsilon_r = 39.794$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2583.1 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.179 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.719 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.341 W/kg

SAR(1 g) = 0.162 W/kg; SAR(10 g) = 0.079 W/kg

Maximum value of SAR (measured) = 0.207 W/kg

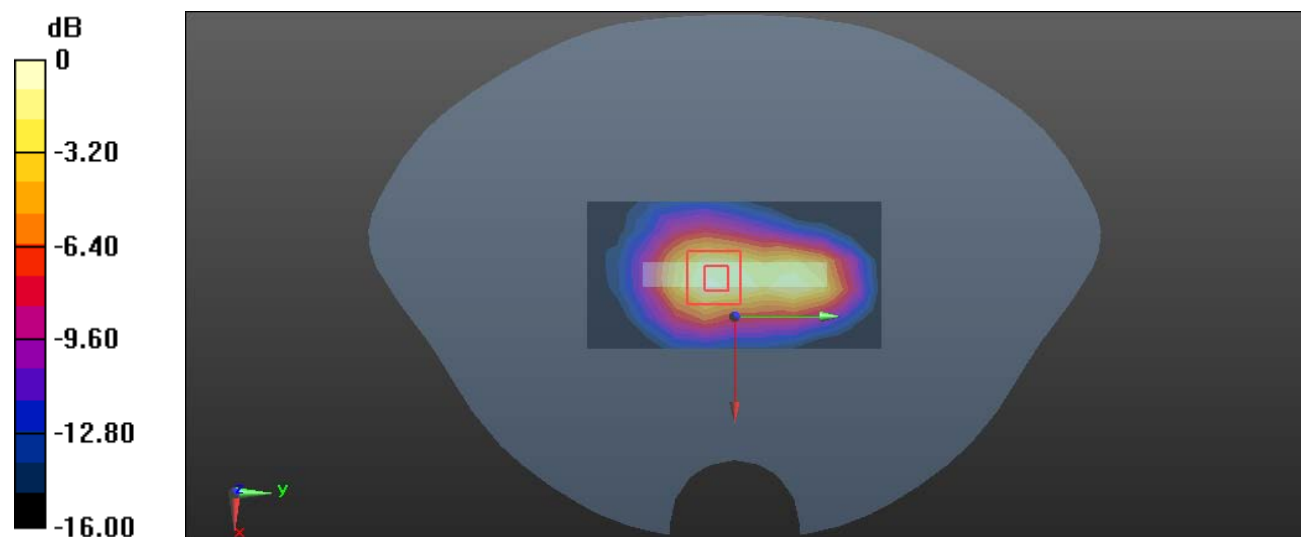

0 dB = 0.207 W/kg = -6.84 dBW/kg