




Prüfbericht-Nr.: Test Report No.:	50050152 001	Auftrags-Nr.: Order No.:	164065582	Seite 1 von 28 Page 1 of 28
Kunden-Referenz-Nr.: Client Reference No.:	429028	Auftragsdatum: Order date:	06.06.2016	
Auftraggeber: Client:	Country Mate Technology Ltd. 5/F., Block E, Hing Yip Centre 31 Hing Yip Street, Kwun Tong, Kln., Hong Kong.			
Prüfgegenstand: Test item:	Bluetooth Earbuds			
Bezeichnung / Typ-Nr.: Identification / Type No.:	NS-CAHBTSPORT, NS-CAHBTSPORT-C			
Auftrags-Inhalt: Order content:	FCC Certification and Verification			
Prüfgrundlage: Test specification:	CFR47 FCC Part 15: Subpart C Section 15.247 CFR47 FCC Part 15: Subpart C Section 15.207 CFR47 FCC Part 15: Subpart C Section 15.209 FCC KDB Publication 447498 v06 CFR47 FCC Part 15: Subpart B Section 15.107 CFR47 FCC Part 15: Subpart B Section 15.109 RSS-247 Issue 1 May 2015 RSS-102 Issue 5 March 2015 RSS-Gen Issue 4 November 2014			
Wareneingangsdatum: Date of receipt:	06.06.2016			
Prüfmuster-Nr.: Test sample No.:	A000373479-001-002, 006			
Prüfzeitraum: Testing period:	21.06.2016 - 27.06.2016			
Ort der Prüfung: Place of testing:	Shenzhen Accurate Technology Co., Ltd.			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von / tested by:  21.07.2016 Winnie Hou / Senior Project Manager		kontrolliert von / reviewed by:  29.07.2016 Owen Tian / Technical Certifier		
Datum Date	Name / Stellung Name / Position	Unterschrift Signature	Datum Date	Name / Stellung Name / Position
Sonstiges / Other: FCC ID: MV3-CAHBTSPORT, IC: 9029A-CAHBTSPORT				
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:		Prüfmuster vollständig und unbeschädigt Test item complete and undamaged		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				

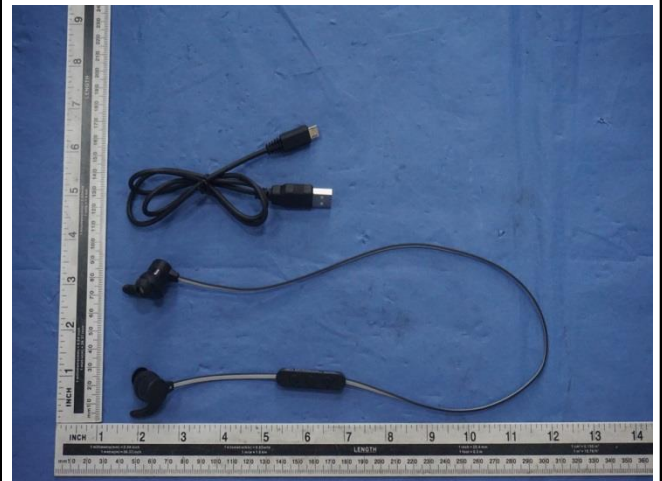

TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT

RESULT: *Passed*

5.1.2 PEAK OUTPUT POWER

RESULT: *Passed*

5.1.3 99% BANDWIDTH

RESULT: *Passed*

5.1.4 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100KHZ BANDWIDTH

RESULT: *Passed*

5.1.5 SPURIOUS EMISSION

RESULT: *Passed*

5.1.6 20dB BANDWIDTH

RESULT: *Passed*

5.1.7 FREQUENCY SEPARATION

RESULT: *Passed*

5.1.8 NUMBER OF HOPPING FREQUENCY

RESULT: *Passed*

5.1.9 TIME OF OCCUPANCY

RESULT: *Passed*

5.1.10 CONDUCTED EMISSIONS

RESULT: *Passed*

5.1.11 RADIATED EMISSION

RESULT: *Passed*

Contents

1.	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2.	TEST SITES	4
2.1	TEST FACILITIES	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	5
2.3	TRACEABILITY	6
2.4	CALIBRATION	6
2.5	MEASUREMENT UNCERTAINTY	6
2.6	LOCATION OF ORIGINAL DATA	6
2.7	STATUS OF FACILITY USED FOR TESTING	6
3.	GENERAL PRODUCT INFORMATION	7
3.1	PRODUCT FUNCTION AND INTENDED USE	7
3.2	RATINGS AND SYSTEM DETAILS	7
3.3	INDEPENDENT OPERATION MODES	8
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	9
3.5	SUBMITTED DOCUMENTS	9
4.	TEST SET-UP AND OPERATION MODES	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION	10
4.2	TEST OPERATION AND TEST SOFTWARE	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	10
4.5	TEST SETUP DIAGRAM	11
5.	TEST RESULTS	13
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	13
5.1.1	<i>Antenna Requirement</i>	<i>13</i>
5.1.2	<i>Peak Output Power</i>	<i>14</i>
5.1.3	<i>99% Bandwidth</i>	<i>15</i>
5.1.4	<i>Conducted spurious emissions measured in 100kHz Bandwidth</i>	<i>16</i>
5.1.5	<i>Spurious Emission</i>	<i>17</i>
5.1.6	<i>20dB Bandwidth</i>	<i>18</i>
5.1.7	<i>Frequency Separation</i>	<i>19</i>
5.1.8	<i>Number of hopping frequency</i>	<i>20</i>
5.1.9	<i>Time of Occupancy</i>	<i>21</i>
5.1.10	<i>Conducted emissions</i>	<i>22</i>
5.1.11	<i>Radiated Emission</i>	<i>23</i>
6.	PHOTOGRAPHS OF THE TEST SET-UP	24
7.	LIST OF TABLES	28
8.	LIST OF PHOTOGRAPHS	28

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:
Appendix 1: Test Result

2. Test Sites

2.1 Test Facilities

Shenzhen Accurate Technology Co., Ltd.

F1, Bldg. A, Changyuan New Material Port, Keyuan Rd., Science & Industry Park Nanshan District, Shenzhen 518057, P.R. China

FCC Registration No.: 752051

Test site Industry Canada No.: 5077A-2

The tests at the test site have been conducted under the supervision of a TÜV engineer.

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Type	S/N	Calibrated until
Spurious emission and Radiated emission				
Spectrum Analyzer	Rohde&Schwarz	FSV40	101495	2017-01-01
Test Receiver	Rohde&Schwarz	ESCS30	100307	2017-01-01
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	2017-01-01
Loop Antenna	Schwarzbeck	FMZB1516	1516131	2017-01-01
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	2017-01-01
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	2017-01-01
RF Switching Unit+PreAMP	Compliance Direction	RSU-M2	38322	2017-01-01
Pre-Amplifier	Rohde&Schwarz	CBLU11835 40-01	3791	2017-01-01
Radio Spectrum Test				
Spectrum Analyzer	Rohde & Schwarz	ESPI3	100396/003	2017-01-09
Spectrum Analyzer	Agilent	E7405A	MY45115511	2017-01-09
Conducted Emission				
Test Receiver	Rohde & Schwarz	ESCS30	100307	2017-01-09
L.I.S.N.	Schwarzbeck	NLSK8126	8126431	2017-01-09
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100815	2017-01-09
50Ω Coaxial Switch	Anritsu Corp	MP59B	6200283933	2017-01-09

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements are $\pm 3\text{dB}$.

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix 1 of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The Shenzhen Accurate Technology Co., Ltd. test facility located at F1, Bldg. A, Changyuan New Material Port, Keyuan Rd., Science & Industry Park Nanshan District, Shenzhen 518057, P.R. China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3. General Product Information

3.1 Product Function and Intended Use

The EUT is headset with Bluetooth function.

Two models are identical except for model number. NS-CAHBTSPORT is used at USA; NS-CAHBTSPORT-C is used at Canada.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 2: Rating of EUT

Kind of Equipment:	Bluetooth Earbuds
Type Designation:	NS-CAHBTSPORT, NS-CAHBTSPORT-C
FCC ID	MV3-CAHBTSPORT
IC	9029A-CAHBTSPORT

Table 3: Technical Specification of Bluetooth (BDR & EDR)

Technical Specification	Value
Operating Frequency band	2402 – 2480 MHz
Bluetooth Core Version	4.1
Channel Number	79 channels
Channel separation	1MHz
Extreme Temperature Range	-5°C to +50°C
Operation Voltage	DC3.7V via lithium battery
Modulation	GFSK, 8DPSK, $\pi/4$ DQPSK
Antenna Type	Internal Antenna, Non-User Replaceable
Antenna Gain	-2dBi
RF Output Power	0.00374W (5.73dBm)

Table 4: RF channel and frequency of Bluetooth (BDR & EDR mode)

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
0	2402.00	20	2422.00	40	2442.00	60	2462.00
1	2403.00	21	2423.00	41	2443.00	61	2463.00
2	2404.00	22	2424.00	42	2444.00	62	2464.00
3	2405.00	23	2425.00	43	2445.00	63	2465.00
4	2406.00	24	2426.00	44	2446.00	64	2466.00
5	2407.00	25	2427.00	45	2447.00	65	2467.00
6	2408.00	26	2428.00	46	2448.00	66	2468.00
7	2409.00	27	2429.00	47	2449.00	67	2469.00
8	2410.00	28	2430.00	48	2450.00	68	2470.00
9	2411.00	29	2431.00	49	2451.00	69	2471.00
10	2412.00	30	2432.00	50	2452.00	70	2472.00
11	2413.00	31	2433.00	51	2453.00	71	2473.00
12	2414.00	32	2434.00	52	2454.00	72	2474.00
13	2415.00	33	2435.00	53	2455.00	73	2475.00
14	2416.00	34	2436.00	54	2456.00	74	2476.00
15	2417.00	35	2437.00	55	2457.00	75	2477.00
16	2418.00	36	2438.00	56	2458.00	76	2478.00
17	2419.00	37	2439.00	57	2459.00	77	2479.00
18	2420.00	38	2440.00	58	2460.00	78	2480.00
19	2421.00	39	2441.00	59	2461.00		

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Bluetooth mode (BDR & EDR)
 - 1. Transmitting on low channel
 - 2. Transmitting on middle channel
 - 3. Transmitting on high channel
- B. On, Bluetooth hopping mode
- C. Charging
- D. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.5 Submitted Documents

- | | |
|-------------------------|----------------------|
| - Bill of Material | - Circuit Diagram |
| - PCB Layout | - Instruction Manual |
| - Photo Document | - Rating Label |
| - Technical Description | |

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.4: 2014 and ANSI C63.10: 2013.

Due to models' difference indicated in clause 3.1, full test was applied on model NS-CAHBTSPORT only.

4.3 Special Accessories and Auxiliary Equipment

The EUT was tested with following accessories:

Description	Manufacturer	Type	S/N
iPhone6S PLUS	Apple	ML6D2 CH/A	C35QJ76JGRWM
Notebook	LENOVO	ThinkPad X240	N/A
Printer	HP	HP laserjet 1015	CNFG030424

4.4 Countermeasures to achieve EMC Compliance

The test sample, which has been tested, contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

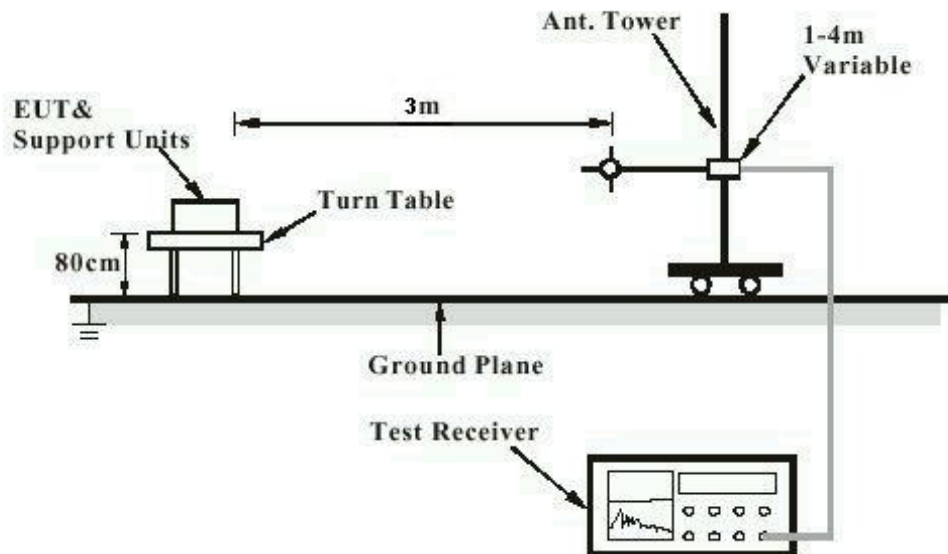


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

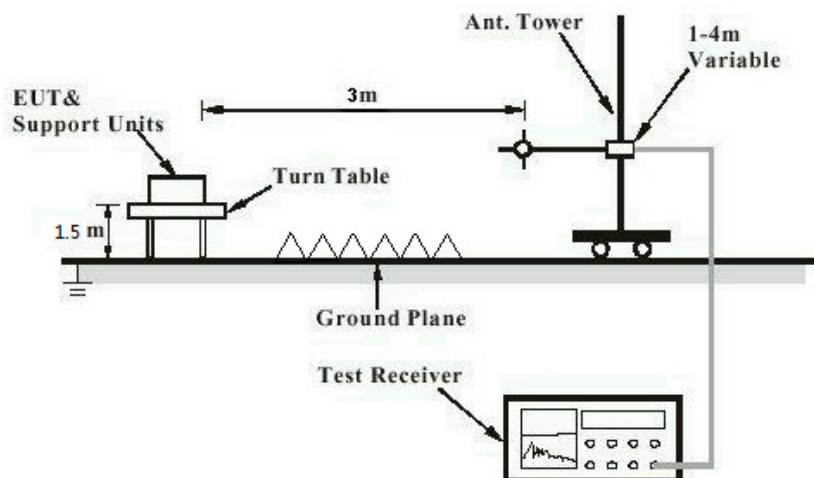


Diagram of Measurement Equipment Configuration for Mains Conduction Measurement


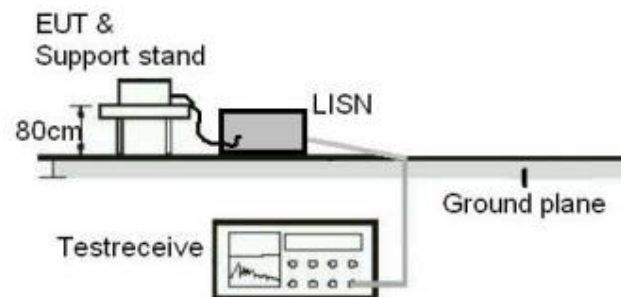


Diagram of Measurement Equipment Configuration for Conducted Transmitter Measurement

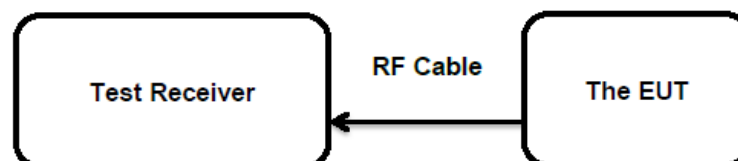

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Passed**

Test standard	:	FCC Part 15.247(b)(4) and Part 15.203 RSS-Gen 6.7
Limit	:	the use of antennas with directional gains that do not exceed 6 dBi

According to the manufacturer declared, the EUT has an internal antenna, the directional gain of antenna is -2dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT photo for details.

Note: The cable loss is taken into account in results.

5.1.3 99% Bandwidth

RESULT:**Passed**

Date of testing : 2016-06-21
Test standard : RSS-Gen clause 6.6
Basic standard : ANSI C63.10: 2013
Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
Operation Mode : A
Ambient temperature : 25°C
Relative humidity : 55%
Atmospheric pressure : 101 kPa

Table 6: Test result of 99% Bandwidth

Test Mode	Channel Frequency (MHz)	99% Bandwidth (kHz)	Limit (kHz)
BDR	2402	937.77	/
	2441	929.09	
	2480	946.45	
EDR	2402	1193.92	/
	2441	1193.92	
	2480	1198.26	

Note: The cable loss is taken into account in results.

**5.1.4 Conducted spurious emissions measured in 100kHz
Bandwidth****RESULT:****Passed**

Date of testing	:	2016-06-21
Test standard	:	FCC part 15.247(d) RSS-247 Clause 5.5
Basic standard	:	ANSI C63.10: 2013
Limit	:	20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power); In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	:	Shield room

Test setup

Test Channel	:	Low/ High
Operation mode	:	A
Ambient temperature	:	25°C
Relative humidity	:	55%
Atmospheric pressure	:	101 kPa

All emissions are more than 20dB below fundamental, details refer to Appendix 1, and compliance is achieved as well.

5.1.5 Spurious Emission

RESULT:**Passed**

Date of testing	:	2016-06-26
Test standard	:	FCC part 15.247(d) FCC Part 15.205 RSS-247 Clause 3.3
Basic standard	:	ANSI C63.10: 2013
Limits	:	Refer to 15.209(a) of FCC part 15.247(d) RSS-Gen Table 4 & Table 5
Kind of test site	:	3m Semi-Anechoic Chamber

Test setup

Test Channel	:	Low/ Middle/ High
Operation mode	:	A
Ambient temperature	:	25°C
Relative humidity	:	55%
Atmospheric pressure	:	101 kPa

Remark:

During the pretest the EUT was rotated through three orthogonal axes to determine the attitude that maximizes the emissions. After that the EUT was manually handled to find the orientation that has the maximum emission, which is the orientation shown in the test setup photos.

Testing was carried out within frequency range 9kHz to the tenth harmonics.

For details refer to Appendix 1.

Test Mode	Channel Frequency (MHz)	20dB Bandwidth (kHz)	2/3 of 20dB Bandwidth (kHz)	Limit (MHz)
BDR	2402	933.4	622.267	/
	2441	929.1	619.400	
	2480	929.1	619.400	
EDR	2402	1211.3	807.533	/
	2441	1207.0	804.667	
	2480	1207.0	804.667	

Channel	Channel Frequency (MHz)	Measured Channel Separation (MHz)	Limit (kHz)	Result
Low Channel	2402	1	≥ 25kHz or 2/3 of 20dB bandwidth	Pass
Adjacency Channel	2403			
Mid Channel	2441	1	≥ 25kHz or 2/3 of 20dB bandwidth	Pass
Adjacency Channel	2442			
High Channel	2480	1	≥ 25kHz or 2/3 of 20dB bandwidth	Pass
Adjacency Channel	2479			

5.1.8 Number of hopping frequency**RESULT:****Passed**

Date of testing : 2016-06-21
Test standard : FCC part 15.247(a)(1)(iii)
RSS-247 Clause 5.1(4)
Basic standard : ANSI C63.10: 2013
Limits : ≥ 15 non-overlapping channels
Kind of test site : Shield room

Test setup

Test Channel : Low/ Middle/ High
Operation Mode : B
Ambient temperature : 25°C
Relative humidity : 55%
Atmospheric pressure : 101 kPa

Table 9: Test result of Number of hopping frequency

Frequency Range	Measured Quantity of Hopping Channel	Limit	Result
<u>2400</u> to <u>2483.5</u> MHz	79	≥ 15	Pass

5.1.10 Conducted emissions

RESULT:**Passed**

Date of testing	:	2016-06-27
Test standard	:	FCC Part 15.107(a) & FCC Part 15.207(a) RSS-Gen Clause 8.8
Basic standard	:	ANSI C63.10: 2013 & ANSI C63.4: 2014
Frequency range	:	0.15 – 30MHz
Limits	:	FCC Part 15.207(a) & FCC Part 15.207(a) RSS-Gen Table 3
Kind of test site	:	Shield room

Test setup

Input Voltage	:	AC 120V, 60Hz via AC/DC Adapter
Operation Mode	:	B, C
Earthing	:	Not connected
Ambient temperature	:	25°C
Relative humidity	:	55%
Atmospheric pressure	:	101 kPa

For details refer to Appendix 1.

5.1.11 Radiated Emission

RESULT:**Passed**

Date of testing	:	2016-06-26
Test standard	:	FCC Part 15.109(a) & FCC Part 15.209(a) RSS-Gen 8.9
Basic standard	:	ANSI C63.4: 2014
Frequency range	:	30 - 6000MHz
Classification	:	Class B
Limit	:	FCC Part 15.109(a) & FCC Part 15.209(a) RSS-Gen Table 4
Kind of test site	:	3m Semi-Anechoic Chamber


Test setup

Input Voltage	:	AC 120V, 60Hz via AC/DC Adapter
Operation mode	:	C
Earthing	:	Not connected
Ambient temperature	:	Refer to Appendix 1
Relative humidity	:	Refer to Appendix 1
Atmospheric pressure	:	Refer to Appendix 1


Test data refer to Appendix 1.

6. Photographs of the Test Set-Up


Photograph 1: Set-up for Spurious Emissions (9kHz-30MHz)

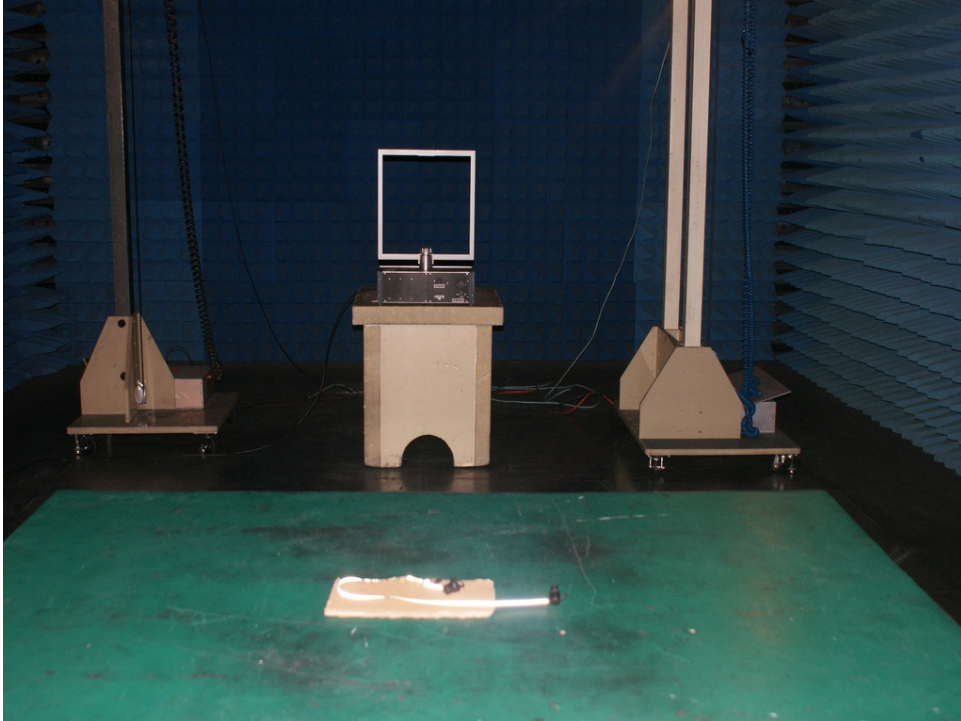


Photograph 2: Set-up for Spurious Emissions (30MHz-1GHz)

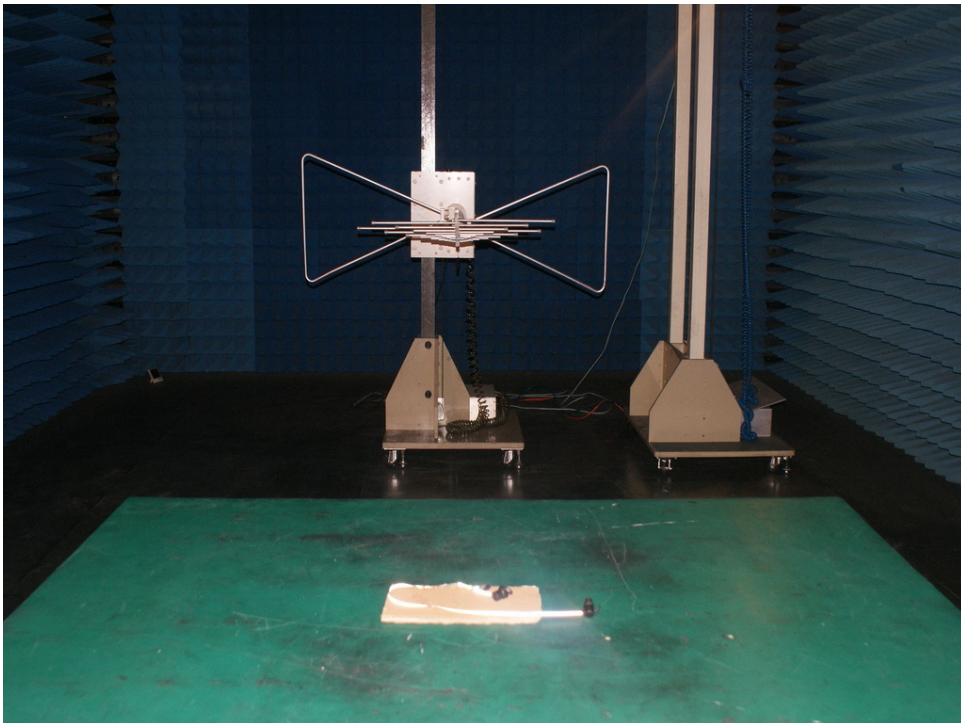

Photograph 3: Set-up for Spurious Emissions (1GHz-18GHz)

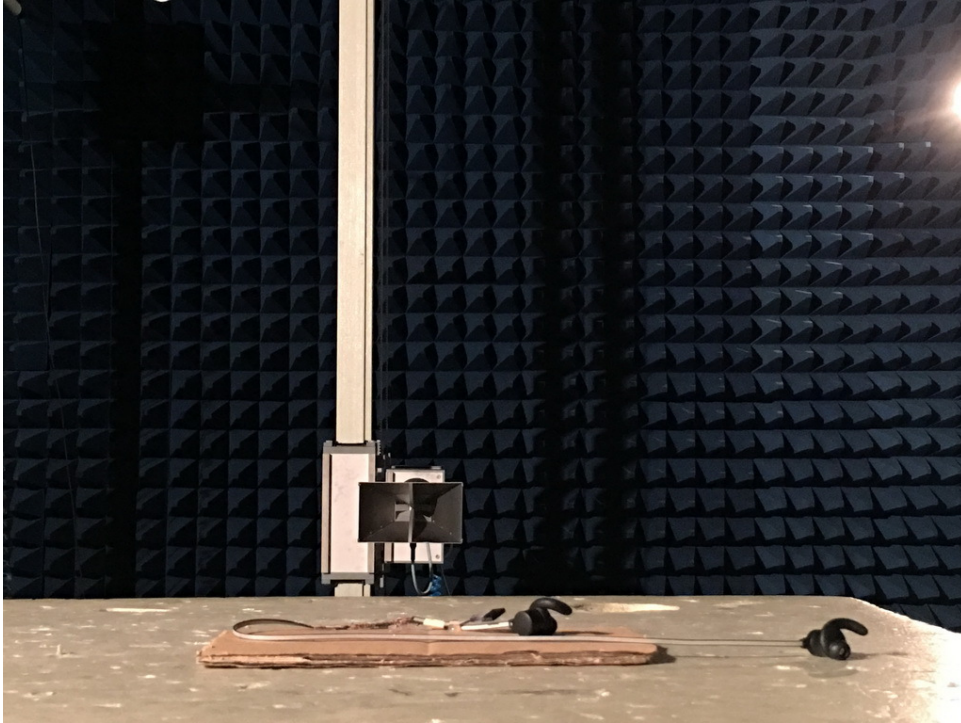


Photograph 4: Set-up for Spurious Emissions (18GHz-26GHz)

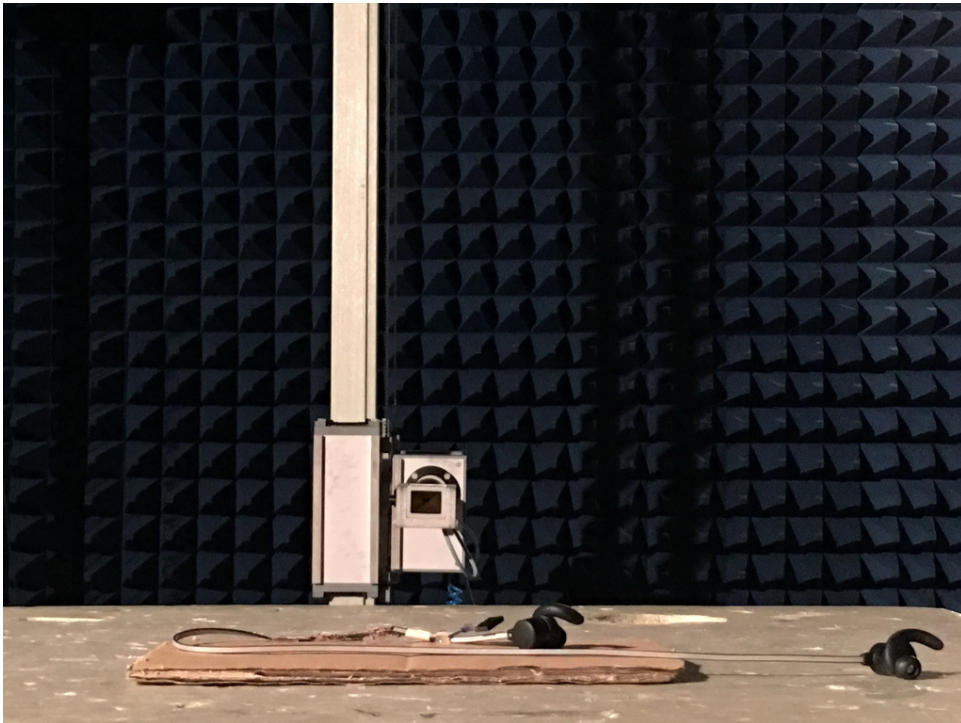

Photograph 5: Set-up for Conducted Emissions



Photograph 6: Set-up for Radiated Emissions, below 1GHz

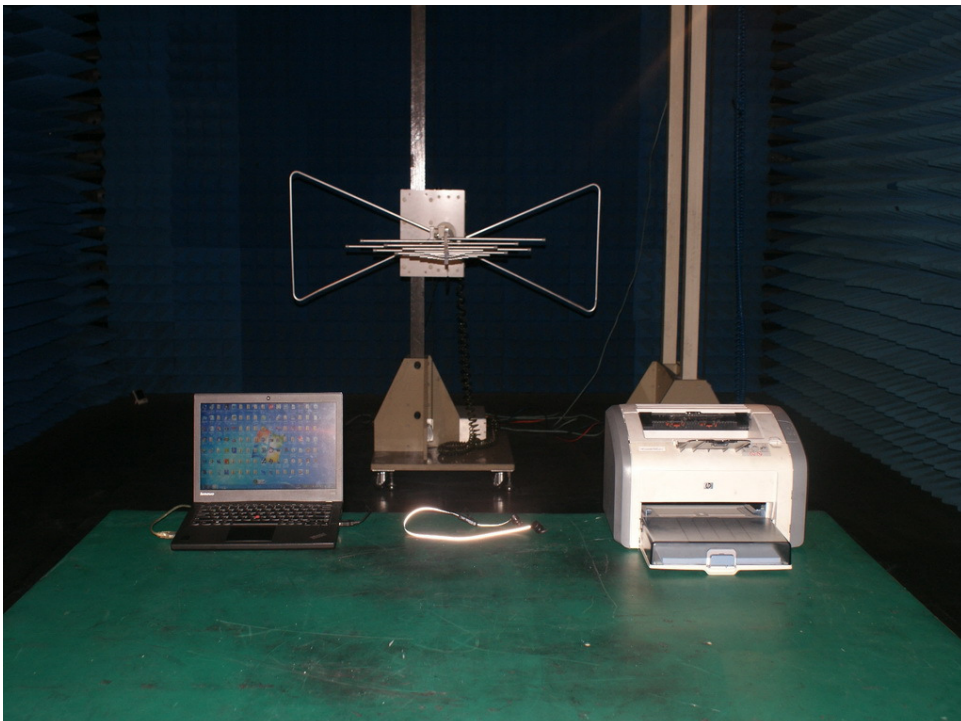

Photograph 7: Set-up for Radiated Emissions, above 1GHz



7. List of Tables

Table 1: List of Test and Measurement Equipment	5
Table 2: Rating of EUT	7
Table 3: Technical Specification of Bluetooth (BDR & EDR)	7
Table 4: RF channel and frequency of Bluetooth (BDR & EDR mode)	8
Table 5: Test result of Peak Output Power	14
Table 6: Test result of 99% Bandwidth	15
Table 7: Test result of 20dB Bandwidth	18
Table 8: Test result of Frequency Separation	19
Table 9: Test result of Number of hopping frequency	20
Table 10: Test result of Time of Occupancy	21

8. List of Photographs

Photograph 1: Set-up for Spurious Emissions (9kHz-30MHz)	24
Photograph 2: Set-up for Spurious Emissions (30MHz-1GHz)	24
Photograph 3: Set-up for Spurious Emissions (1GHz-18GHz)	25
Photograph 4: Set-up for Spurious Emissions (18GHz-26GHz)	25
Photograph 5: Set-up for Conducted Emissions	26
Photograph 6: Set-up for Radiated Emissions, below 1GHz	26
Photograph 7: Set-up for Radiated Emissions, above 1GHz	27

List of Figures

Figure 1: Test figure of spurious emissions, mode A.1, Horizontal polarity (9kHz – 30MHz)	2
Figure 2: Test figure of spurious emissions, mode A.1, Vertical polarity (9kHz – 30MHz)	3
Figure 3: Test figure of spurious emissions, mode A.1, Horizontal polarity (30MHz – 1GHz)	4
Figure 4: Test figure of spurious emissions, mode A.1, Vertical polarity (30MHz – 1GHz)	5
Figure 5: Test figure of spurious emissions, mode A.1, Horizontal polarity (1GHz – 18GHz)	6
Figure 6: Test figure of spurious emissions, mode A.1, Vertical polarity (1GHz – 18GHz)	7
Figure 7: Test figure of spurious emissions, mode A.1, Horizontal polarity (18GHz – 25GHz)	8
Figure 8: Test figure of spurious emissions, mode A.1, Vertical polarity (18GHz – 25GHz)	9
Figure 9: Test figure of spurious emissions, mode A.2, Horizontal polarity (9kHz – 30MHz)	10
Figure 10: Test figure of spurious emissions, mode A.2, Vertical polarity (9kHz – 30MHz)	11
Figure 11: Test figure of spurious emissions, mode A.2, Horizontal polarity (30MHz – 1GHz)	12
Figure 12: Test figure of spurious emissions, mode A.2, Vertical polarity (30MHz – 1GHz)	13
Figure 13: Test figure of spurious emissions, mode A.2, Horizontal polarity (1GHz – 18GHz)	14
Figure 14: Test figure of spurious emissions, mode A.2, Vertical polarity (1GHz – 18GHz)	15
Figure 15: Test figure of spurious emissions, mode A.2, Horizontal polarity (18GHz – 25GHz)	16
Figure 16: Test figure of spurious emissions, mode A.2, Vertical polarity (18GHz – 25GHz)	17
Figure 17: Test figure of spurious emissions, mode A.3, Horizontal polarity (9kHz – 30MHz)	18
Figure 18: Test figure of spurious emissions, mode A.3, Vertical polarity (9kHz – 30MHz)	19
Figure 19: Test figure of spurious emissions, mode A.3, Horizontal polarity (30MHz – 1GHz)	20
Figure 20: Test figure of spurious emissions, mode A.3, Vertical polarity (30MHz – 1GHz)	21
Figure 21: Test figure of spurious emissions, mode A.3, Horizontal polarity (1GHz – 18GHz)	22
Figure 22: Test figure of spurious emissions, mode A.3, Vertical polarity (1GHz – 18GHz)	23
Figure 23: Test figure of spurious emissions, mode A.3, Horizontal polarity (18GHz – 25GHz)	24
Figure 24: Test figure of spurious emissions, mode A.3, Vertical polarity (18GHz – 25GHz)	25
Figure 25: Test figure of Radiated emissions in restricted bands, Mode A.1, Horizontal	26
Figure 26: Test figure of Radiated emissions in restricted bands, Mode A.1, Vertical	27
Figure 27: Test figure of Radiated emissions in restricted bands, Mode A.3, Horizontal	28
Figure 28: Test figure of Radiated emissions in restricted bands, Mode A.3, Vertical	29
Figure 29: Test figure of conducted emissions in 100kHz Bandwidth, Mode A.1	30
Figure 30: Test figure of conducted emissions in 100kHz Bandwidth, Mode A.2	31
Figure 31: Test figure of conducted emissions in 100kHz Bandwidth, Mode A.3	32
Figure 32: Test figure of Frequency Band Edge in 100kHz Bandwidth, Mode A.1	33
Figure 33: Test figure of Frequency Band Edge in 100kHz Bandwidth, Mode A.3	34
Figure 34: Test figure of Conducted emissions, Mode B, line live	35
Figure 35: Test figure of Conducted emissions, Mode B, line neutral	36
Figure 36: Test figure of Conducted emissions, Mode C, line live	37
Figure 37: Test figure of Conducted emissions, Mode C, line neutral	38
Figure 38: Test figure of Radiated emissions, Mode C, Below 1GHz, Horizontal	39
Figure 39: Test figure of Radiated emissions, Mode C, Below 1GHz, Vertical	40
Figure 40: Test figure of Radiated emissions, Mode C, Above 1GHz, Horizontal	41
Figure 41: Test figure of Radiated emissions, Mode C, Above 1GHz, Vertical	42

Figure 1: Test figure of spurious emissions, mode A.1, Horizontal polarity (9kHz – 30MHz)


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3m Radiated

EUT: Bluetooth Earbuds M/N: NS-CAHBTSPORT
 Manufacturer:
 Operating Condition: TX 2402MHz
 Test Site: 2# Chamber
 Operator: LGWADE
 Test Specification: DC 3.7V
 Comment: X

SCAN TABLE: "LFRE Fin"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

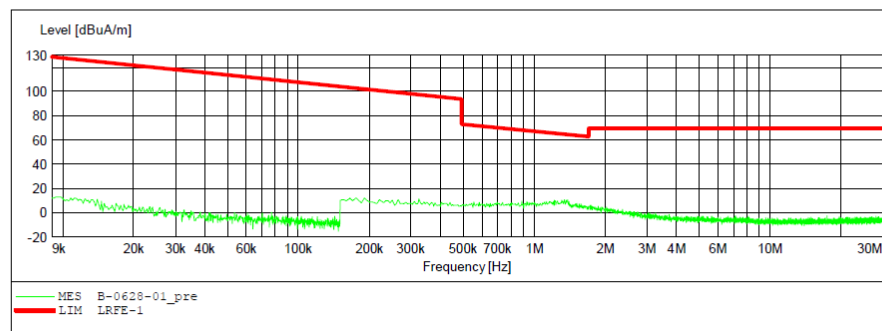

**Figure 2: Test figure of spurious emissions, mode A.1, Vertical polarity
(9kHz – 30MHz)**

ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3m Radiated

EUT: Bluetooth Earbuds M/N:NS-CAHBTSPORT
Manufacturer:
Operating Condition: TX 2402MHz
Test Site: 2# Chamber
Operator: LGWADE
Test Specification: DC 3.7V
Comment: Y

SCAN TABLE: "LFRE Fin"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

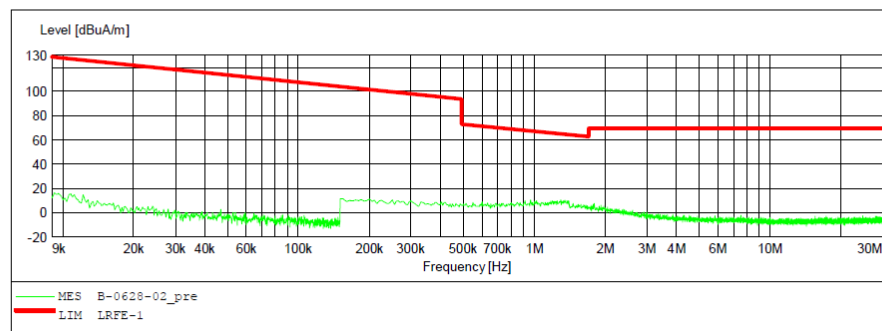


Figure 3: Test figure of spurious emissions, mode A.1, Horizontal polarity (30MHz – 1GHz)




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LGWADE #2372
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Bluetooth Earbuds
Mode: TX 2402MHz
Model: NS-CAHBTSPORT
Manufacturer:

Polarization: Horizontal
Power Source: DC 3.7V
Date: 16/06/26/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: Bluetooth

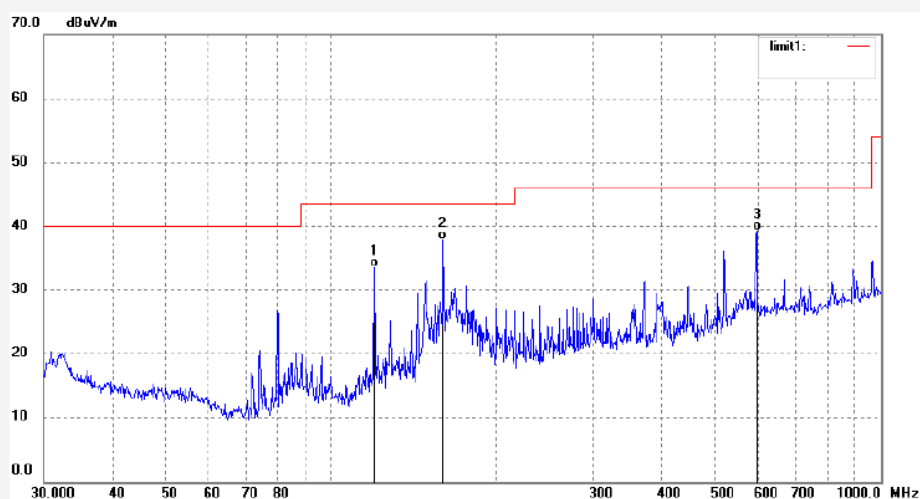

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	119.8555	46.73	-13.15	33.58	43.50	-9.92	QP			
2	159.7844	52.50	-14.57	37.93	43.50	-5.57	QP			
3	595.1327	42.27	-3.02	39.25	46.00	-6.75	QP			

Figure 4: Test figure of spurious emissions, mode A.1, Vertical polarity (30MHz – 1GHz)




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LGWADE #2373
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Bluetooth Earbuds
Mode: TX 2402MHz
Model: NS-CAHBTSPORT
Manufacturer:

Polarization: Vertical
Power Source: DC 3.7V
Date: 16/06/26/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: Bluetooth

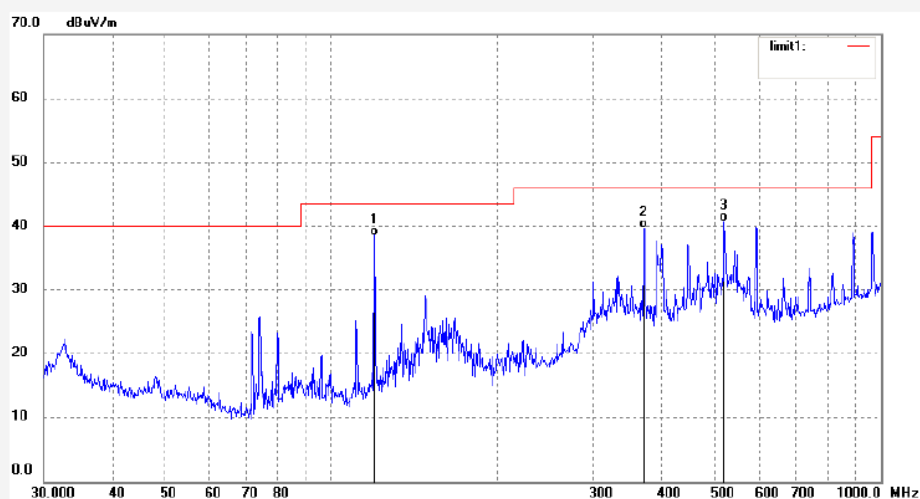

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	119.8555	51.65	-13.15	38.50	43.50	-5.00	QP			
2	370.7022	47.21	-7.50	39.71	46.00	-6.29	QP			
3	519.0648	45.06	-4.36	40.70	46.00	-5.30	QP			

Figure 5: Test figure of spurious emissions, mode A.1, Horizontal polarity (1GHz –18GHz)




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LGWADE #2335
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Bluetooth Earbuds
Mode: TX 2402MHz
Model: NS-CAHBTSPORT
Manufacturer:

Polarization: Horizontal
Power Source: DC 3.7V
Date: 16/06/26/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: Bluetooth

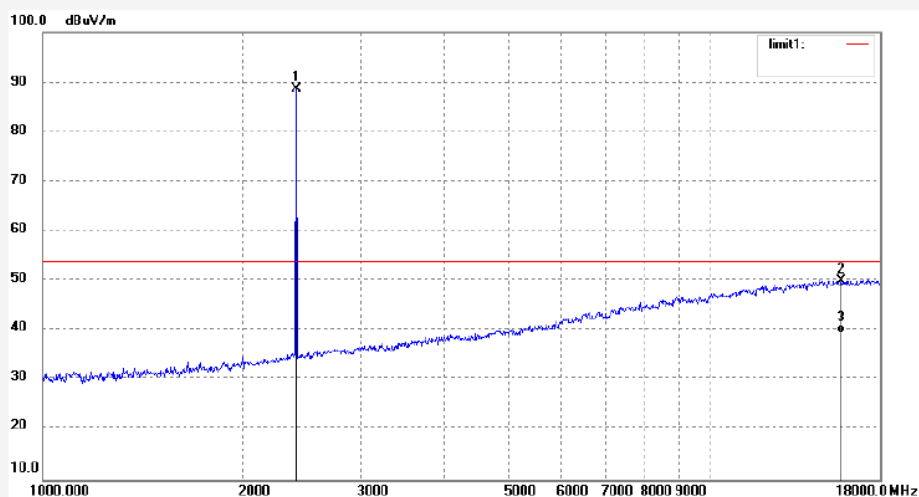

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	96.07	-7.45	88.62	/	/	peak			
2	15759.048	9.93	40.05	49.98	74.00	-24.02	peak			
3	15759.048	-0.70	40.05	39.35	54.00	-14.65	AVG			

Figure 6: Test figure of spurious emissions, mode A.1, Vertical polarity (1GHz – 18GHz)




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LGWADE #2334
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Bluetooth Earbuds
Mode: TX 2402MHz
Model: NS-CAHBTSPORT
Manufacturer:

Polarization: Vertical
Power Source: DC 3.7V
Date: 16/06/26/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: Bluetooth

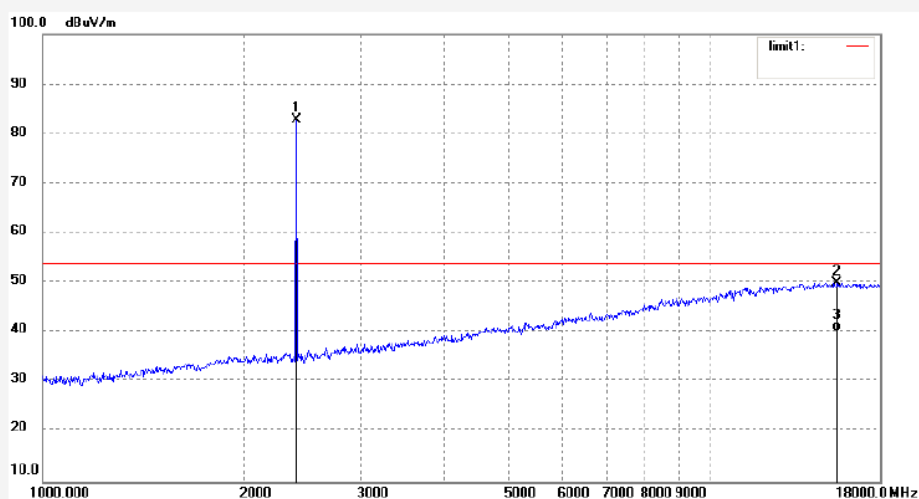

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	90.29	-7.45	82.84	/	/	peak			
2	15532.938	9.94	40.09	50.03	74.00	-23.97	peak			
3	15532.938	0.14	40.09	40.23	54.00	-13.77	AVG			

Figure 7: Test figure of spurious emissions, mode A.1, Horizontal polarity (18GHz –25GHz)




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LGWADE #2344	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 16/06/26/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Bluetooth Earbuds	Engineer Signature: LGWADE
Mode: TX 2402MHz	Distance: 3m
Model: NS-CAHBTSPORT	
Manufacturer:	

Note: Bluetooth

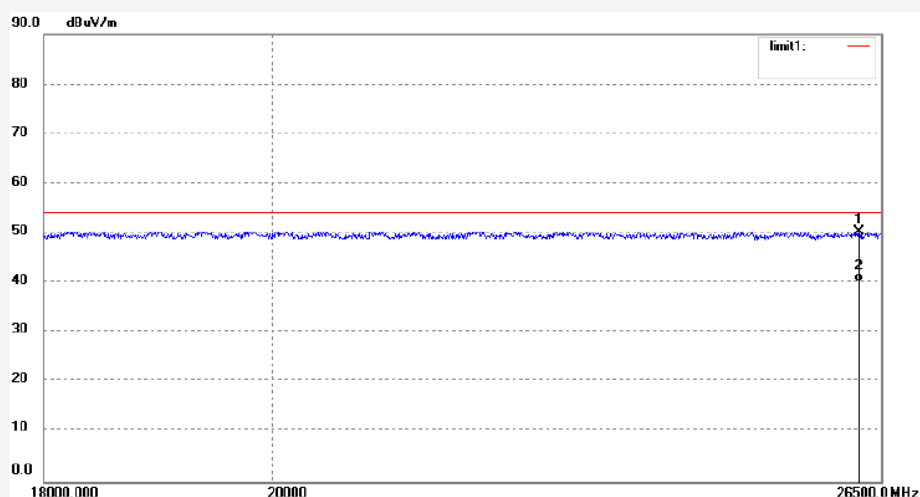

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26234.849	33.72	16.50	50.22	74.00	-23.78	peak			
2	26234.849	23.73	16.50	40.23	54.00	-13.77	AVG			

Figure 8: Test figure of spurious emissions, mode A.1, Vertical polarity (18GHz – 25GHz)




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LGWADE #2345
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Bluetooth Earbuds
Mode: TX 2402MHz
Model: NS-CAHBTSPORT
Manufacturer:

Polarization: Vertical
Power Source: DC 3.7V
Date: 16/06/26/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: Bluetooth

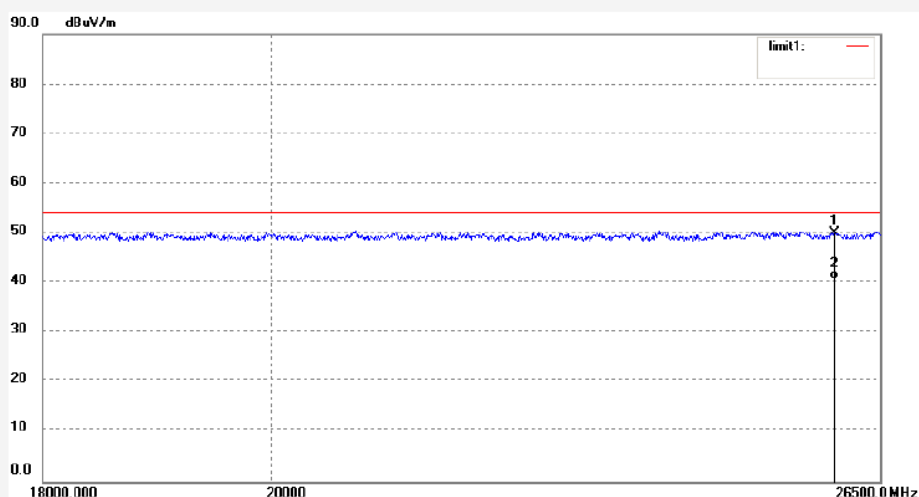

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25952.268	32.80	17.26	50.06	74.00	-23.94	peak			
2	25952.268	23.31	17.26	40.57	54.00	-13.43	AVG			

Figure 9: Test figure of spurious emissions, mode A.2, Horizontal polarity (9kHz – 30MHz)


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3m Radiated

EUT: Bluetooth Earbuds M/N: NS-CAHBTSPORT
 Manufacturer:
 Operating Condition: TX 2441MHz
 Test Site: 2# Chamber
 Operator: LGWADE
 Test Specification: DC 3.7V
 Comment: X

SCAN TABLE: "LFRE Fin"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

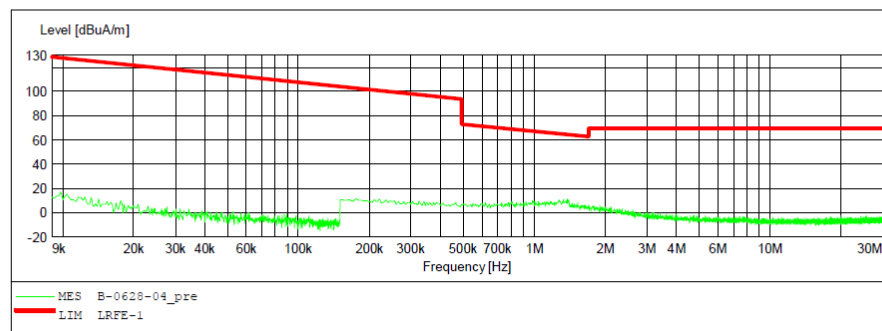

**Figure 10: Test figure of spurious emissions, mode A.2, Vertical polarity
(9kHz – 30MHz)**

ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3m Radiated

EUT: Bluetooth Earbuds M/N:NS-CAHBTSPORT
Manufacturer:
Operating Condition: TX 2441MHz
Test Site: 2# Chamber
Operator: LGWADE
Test Specification: DC 3.7V
Comment: Y

SCAN TABLE: "LFRE Fin"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

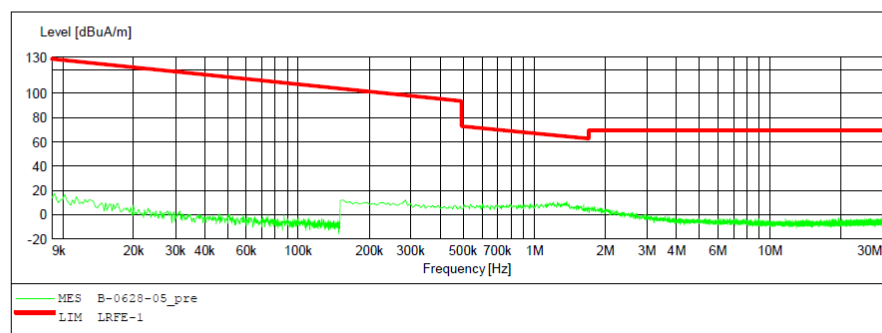


Figure 11: Test figure of spurious emissions, mode A.2, Horizontal polarity (30MHz – 1GHz)




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LGWADE #2375
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Bluetooth Earbuds
Mode: TX 2441MHz
Model: NS-CAHBTSPORT
Manufacturer:

Polarization: Horizontal
Power Source: DC 3.7V
Date: 16/06/26/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: Bluetooth

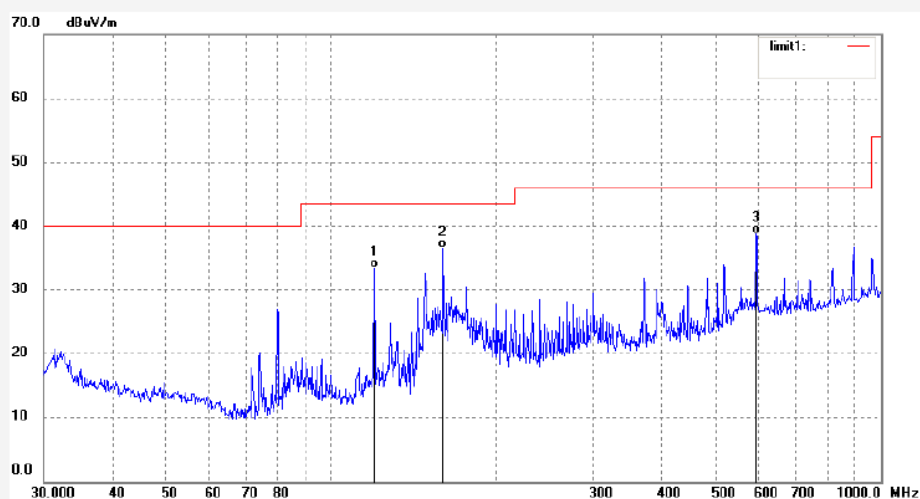

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	119.8555	46.41	-13.15	33.26	43.50	-10.24	QP			
2	159.7844	51.05	-14.57	36.48	43.50	-7.02	QP			
3	593.0497	41.72	-3.03	38.69	46.00	-7.31	QP			

Figure 12: Test figure of spurious emissions, mode A.2, Vertical polarity (30MHz – 1GHz)




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LGWADE #2374
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Bluetooth Earbuds
Mode: TX 2441MHz
Model: NS-CAHBTSPORT
Manufacturer:

Polarization: Vertical
Power Source: DC 3.7V
Date: 16/06/26/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: Bluetooth

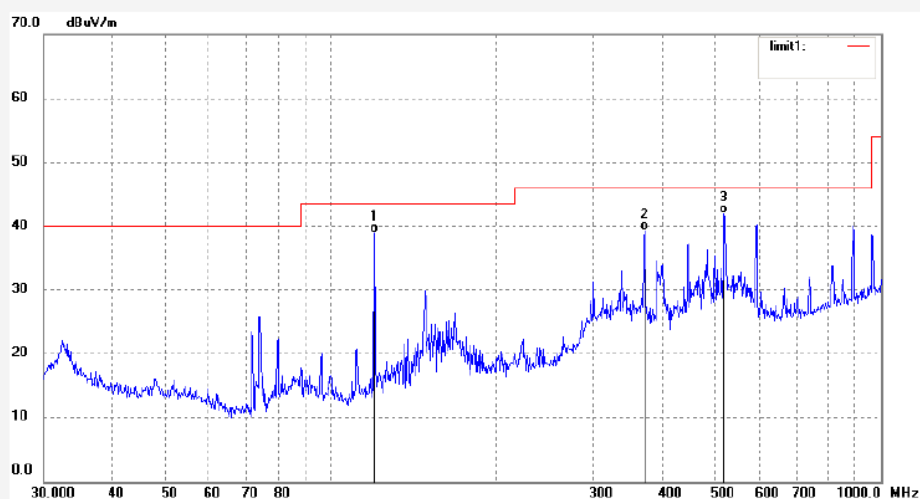

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	119.8555	52.13	-13.15	38.98	43.50	-4.52	QP			
2	372.0045	46.76	-7.48	39.28	46.00	-6.72	QP			
3	519.0648	46.34	-4.36	41.98	46.00	-4.02	QP			


Figure 13: Test figure of spurious emissions, mode A.2, Horizontal polarity (1GHz – 18GHz)



ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LGWADE #2339	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 16/06/26/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Bluetooth Earbuds	Engineer Signature: LGWADE
Mode: TX 2441MHz	Distance: 3m
Model: NS-CAHBTSPORT	
Manufacturer:	
Note: Bluetooth	

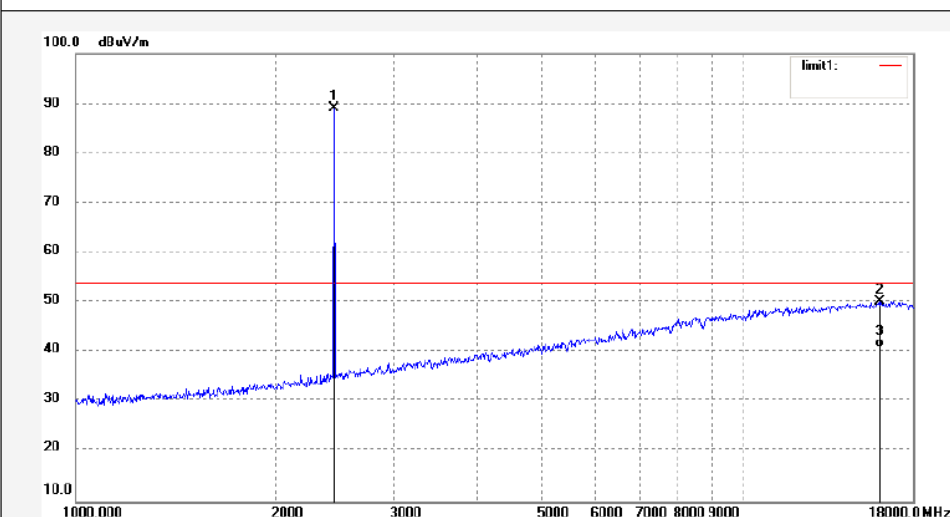

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.000	96.42	-7.35	89.07	/	/	peak			
2	16081.142	10.18	40.05	50.23	74.00	-23.77	peak			
3	16081.142	0.90	40.05	40.95	54.00	-13.05	AVG			

Figure 14: Test figure of spurious emissions, mode A.2, Vertical polarity (1GHz – 18GHz)




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LGWADE #2338
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Bluetooth Earbuds
Mode: TX 2441MHz
Model: NS-CAHBTSPORT
Manufacturer:

Polarization: Vertical
Power Source: DC 3.7V
Date: 16/06/26/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: Bluetooth

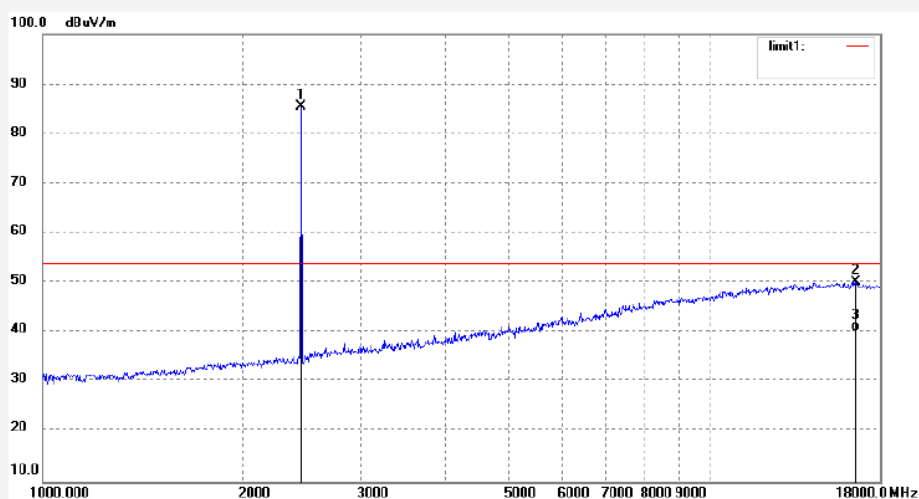

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.000	92.82	-7.35	85.47	/	/	peak			
2	16552.729	9.70	40.45	50.15	74.00	-23.85	peak			
3	16552.729	-0.09	40.45	40.36	54.00	-13.64	AVG			

Figure 15: Test figure of spurious emissions, mode A.2, Horizontal polarity (18GHz – 25GHz)




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LGWADE #2347	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 16/06/26/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Bluetooth Earbuds	Engineer Signature: LGWADE
Mode: TX 2441MHz	Distance: 3m
Model: NS-CAHBTSPORT	
Manufacturer:	

Note: Bluetooth

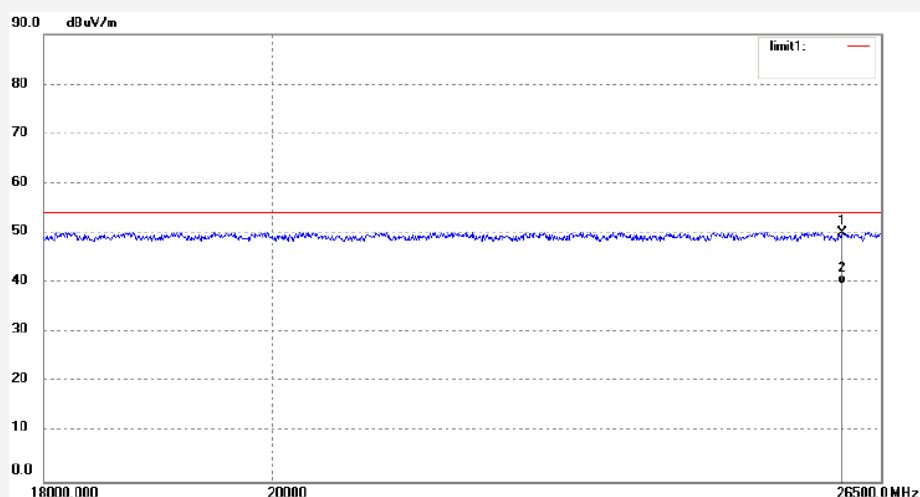

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26032.693	33.48	16.50	49.98	74.00	-24.02	peak			
2	26032.693	23.11	16.50	39.61	54.00	-14.39	AVG			

Figure 16: Test figure of spurious emissions, mode A.2, Vertical polarity (18GHz – 25GHz)



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LGWADE #2346	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 16/06/26/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Bluetooth Earbuds	Engineer Signature: LGWADE
Mode: TX 2441MHz	Distance: 3m
Model: NS-CAHBTSPORT	
Manufacturer:	

Note: Bluetooth

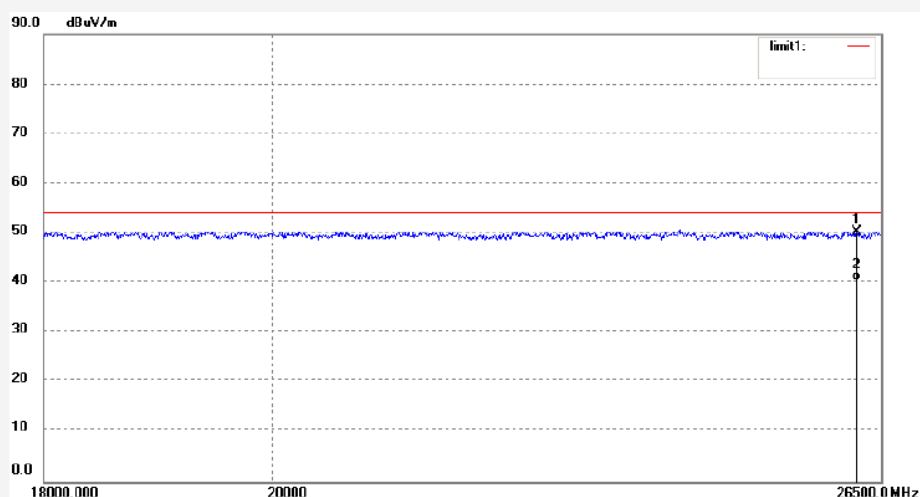

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26204.426	33.20	17.10	50.30	74.00	-23.70	peak			
2	26204.426	23.25	17.10	40.35	54.00	-13.65	AVG			

Figure 17: Test figure of spurious emissions, mode A.3, Horizontal polarity (9kHz – 30MHz)


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3m Radiated

EUT: Bluetooth Earbuds M/N: NS-CAHBTSPORT
Manufacturer:
Operating Condition: TX 2480MHz
Test Site: 2# Chamber
Operator: LGWADE
Test Specification: DC 3.7V
Comment: X

SCAN TABLE: "LFRE Fin"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

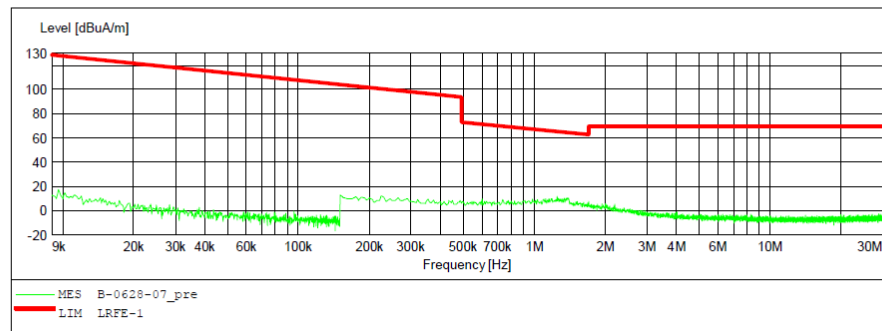

**Figure 18: Test figure of spurious emissions, mode A.3, Vertical polarity
(9kHz – 30MHz)**

ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3m Radiated

EUT: Bluetooth Earbuds M/N: NS-CAHBTSPORT
Manufacturer:
Operating Condition: TX 2480MHz
Test Site: 2# Chamber
Operator: LGWADE
Test Specification: DC 3.7V
Comment: Y

SCAN TABLE: "LFRE Fin"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

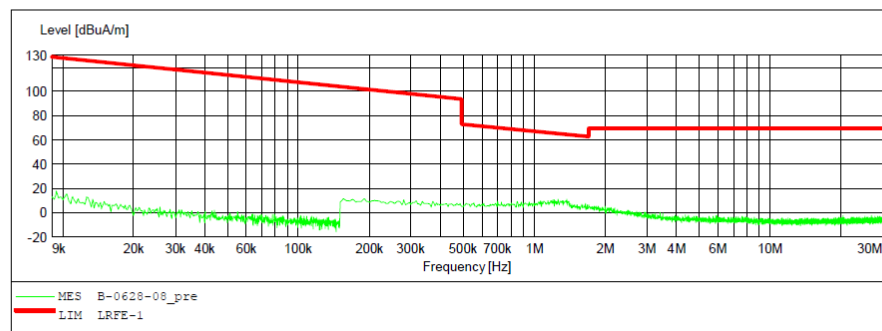


Figure 19: Test figure of spurious emissions, mode A.3, Horizontal polarity (30MHz – 1GHz)




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LGWADE #2376
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Bluetooth Earbuds
Mode: TX 2480MHz
Model: NS-CAHBTSPORT
Manufacturer:

Polarization: Horizontal
Power Source: DC 3.7V
Date: 16/06/26/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: Bluetooth

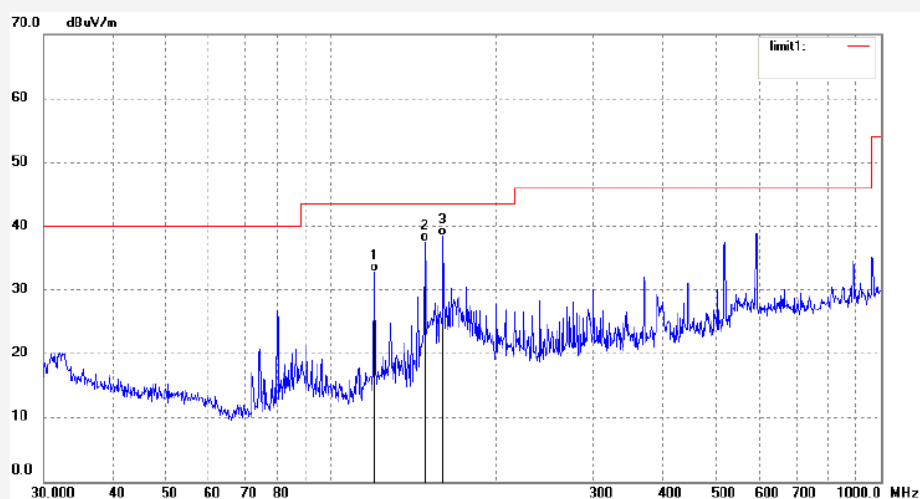

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	119.8555	45.97	-13.15	32.82	43.50	-10.68	QP			
2	147.9214	52.72	-15.19	37.53	43.50	-5.97	QP			
3	159.7844	52.95	-14.57	38.38	43.50	-5.12	QP			

Figure 20: Test figure of spurious emissions, mode A.3, Vertical polarity (30MHz – 1GHz)




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LGWADE #2377
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Bluetooth Earbuds
Mode: TX 2480MHz
Model: NS-CAHBTSPORT
Manufacturer:

Polarization: Vertical
Power Source: DC 3.7V
Date: 16/06/26/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: Bluetooth

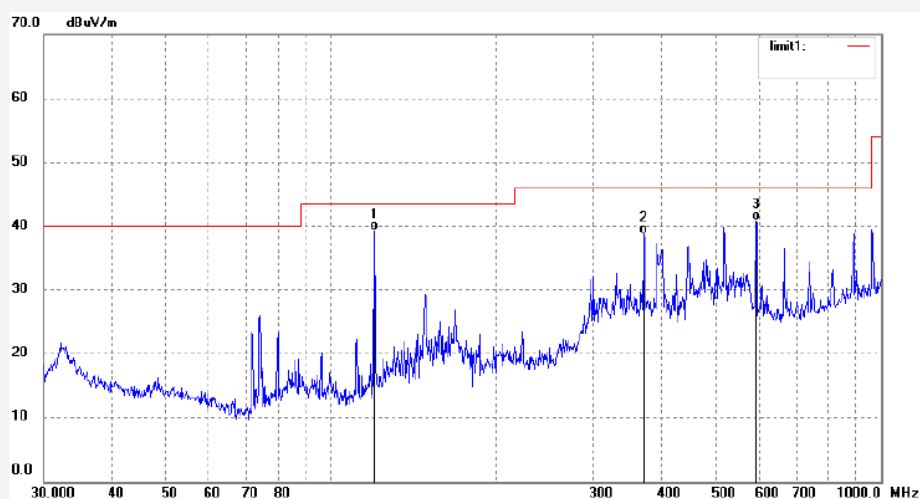

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	119.8555	52.42	-13.15	39.27	43.50	-4.23	QP			
2	370.7022	46.30	-7.50	38.80	46.00	-7.20	QP			
3	593.0497	43.81	-3.03	40.78	46.00	-5.22	QP			

Figure 21: Test figure of spurious emissions, mode A.3, Horizontal polarity (1GHz –18GHz)




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LGWADE #2340
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Bluetooth Earbuds
Mode: TX 2480MHz
Model: NS-CAHBTSPORT
Manufacturer:

Polarization: Horizontal
Power Source: DC 3.7V
Date: 16/06/26/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: Bluetooth

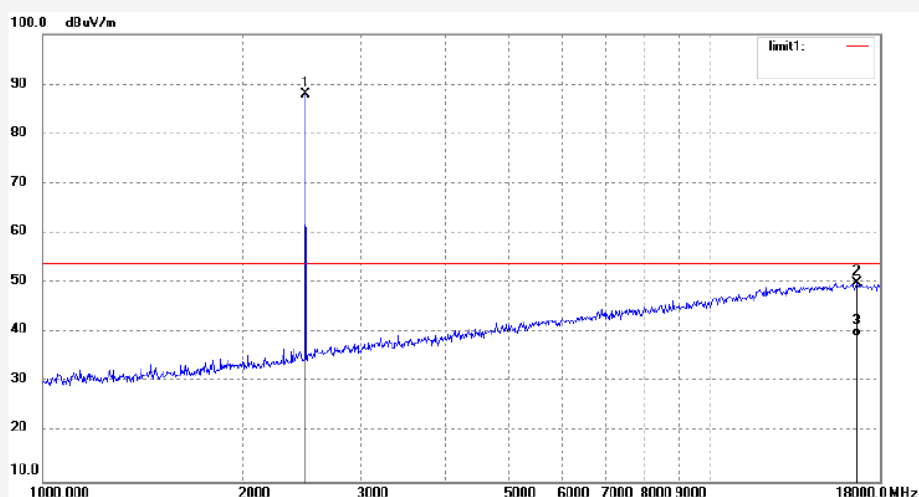

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	95.32	-7.37	87.95	/	/	peak			
2	16600.642	9.41	40.58	49.99	74.00	-24.01	peak			
3	16600.642	-1.34	40.58	39.24	54.00	-14.76	AVG			

Figure 22: Test figure of spurious emissions, mode A.3, Vertical polarity (1GHz – 18GHz)




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LGWADE #2341
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Bluetooth Earbuds
Mode: TX 2480MHz
Model: NS-CAHBTSPORT
Manufacturer:

Polarization: Vertical
Power Source: DC 3.7V
Date: 16/06/26/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: Bluetooth

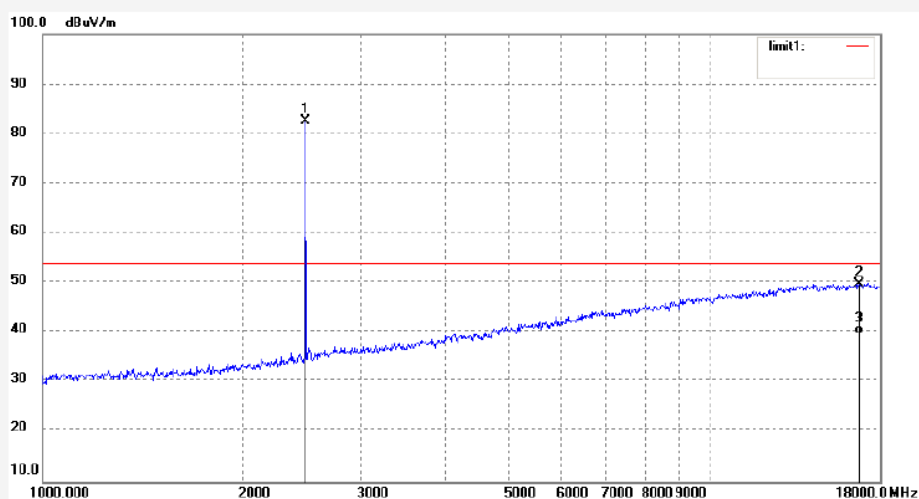

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	89.84	-7.37	82.47	/	/	peak			
2	16745.214	8.82	40.99	49.81	74.00	-24.19	peak			
3	16745.214	-1.43	40.99	39.56	54.00	-14.44	AVG			

Figure 23: Test figure of spurious emissions, mode A.3, Horizontal polarity (18GHz –25GHz)




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LGWADE #2348	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 16/06/26/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Bluetooth Earbuds	Engineer Signature: LGWADE
Mode: TX 2480MHz	Distance: 3m
Model: NS-CAHBTSPORT	
Manufacturer:	

Note: Bluetooth

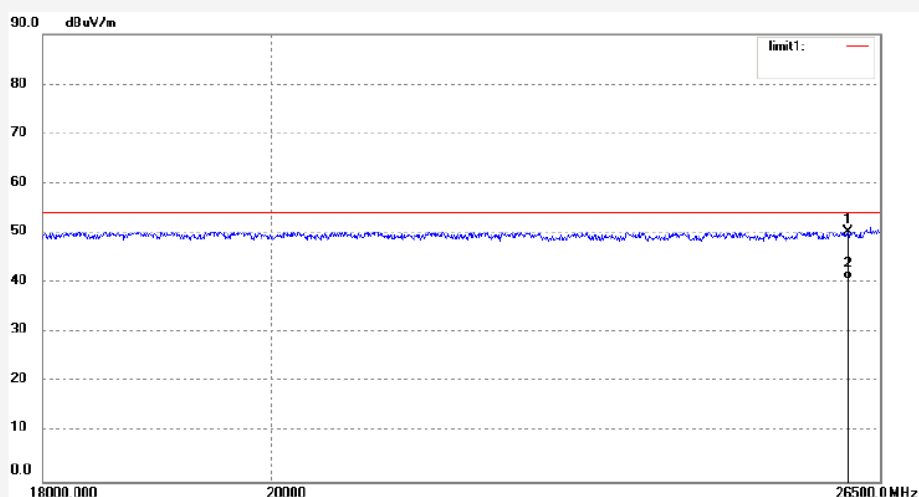

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26113.368	33.76	16.50	50.26	74.00	-23.74	peak			
2	26113.368	24.08	16.50	40.58	54.00	-13.42	AVG			

Figure 24: Test figure of spurious emissions, mode A.3, Vertical polarity (18GHz – 25GHz)



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LGWADE #2349	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 16/06/26/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Bluetooth Earbuds	Engineer Signature: LGWADE
Mode: TX 2480MHz	Distance: 3m
Model: NS-CAHBTSPORT	
Manufacturer:	

Note: Bluetooth

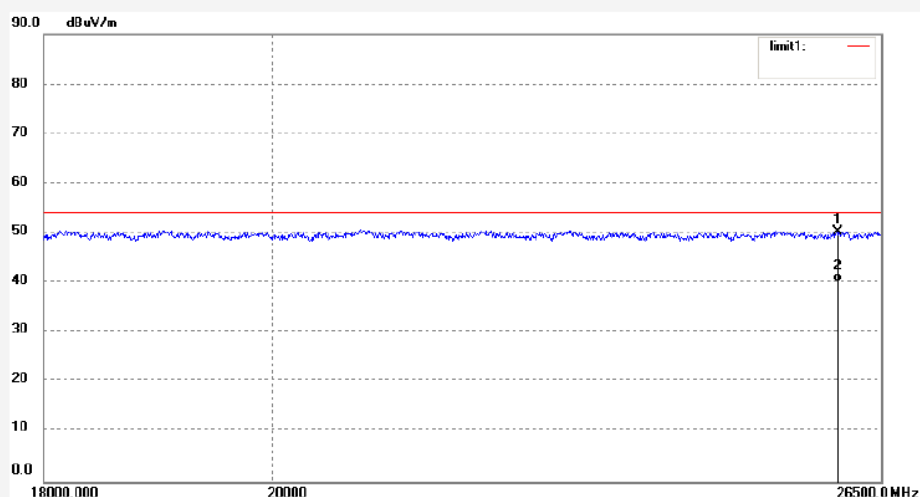

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25972.351	32.99	17.25	50.24	74.00	-23.76	peak			
2	25972.351	22.87	17.25	40.12	54.00	-13.88	AVG			

Figure 25: Test figure of Radiated emissions in restricted bands, Mode A.1, Horizontal

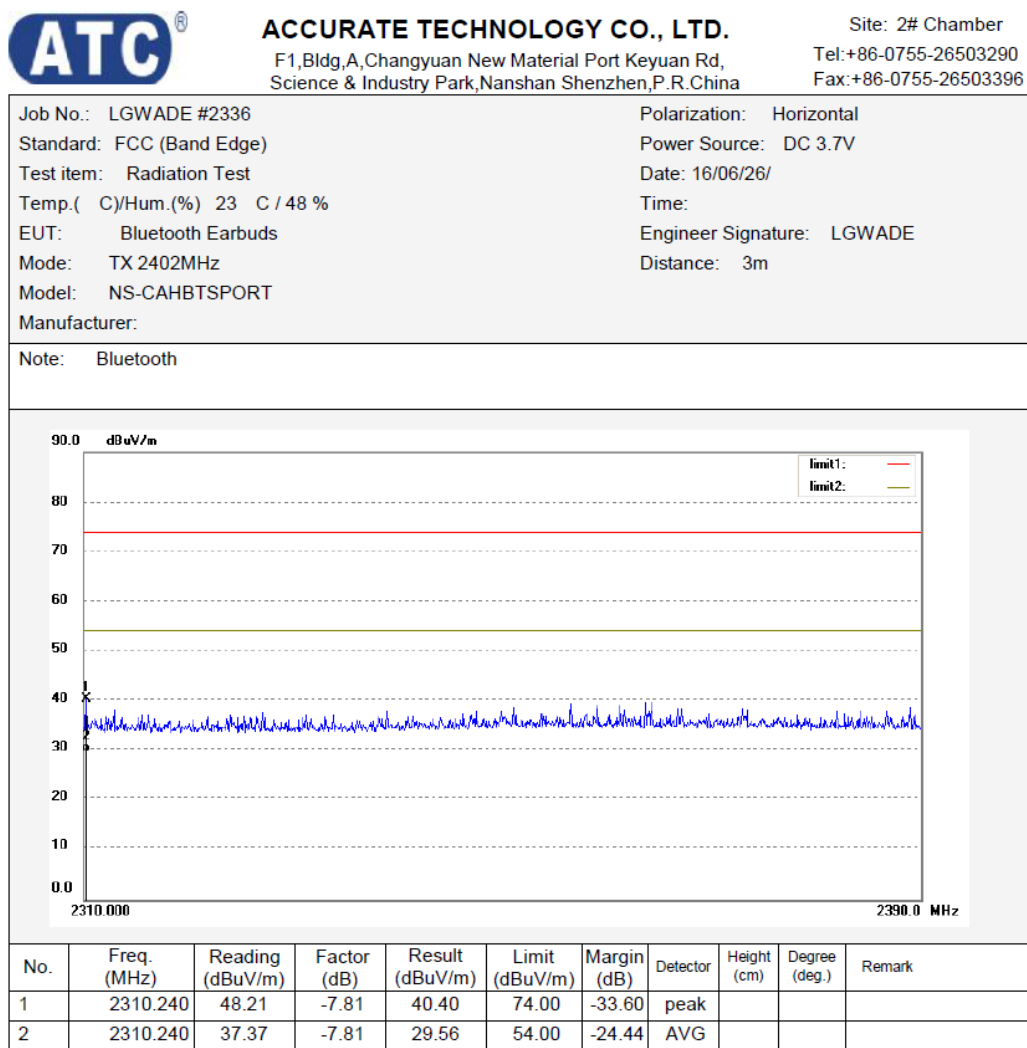


Figure 26: Test figure of Radiated emissions in restricted bands, Mode A.1, Vertical

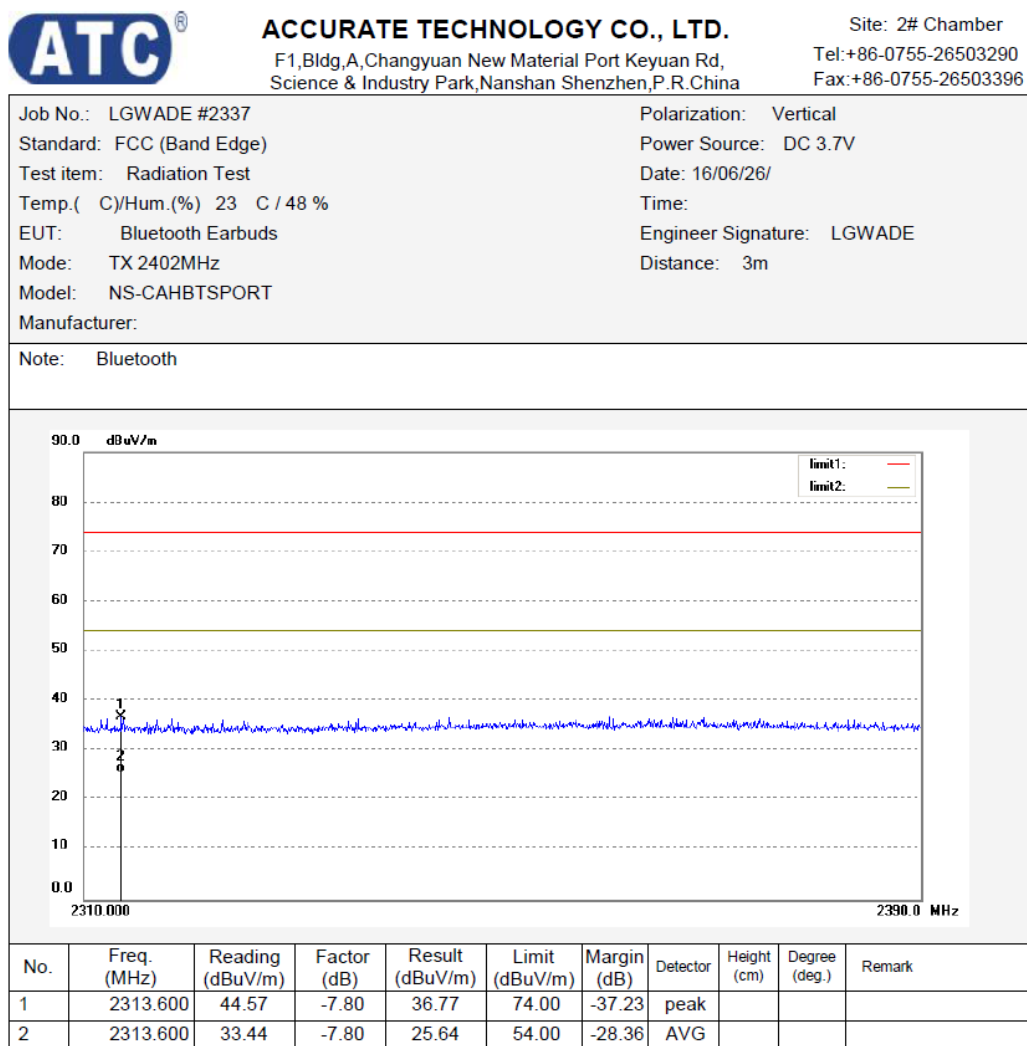


Figure 27: Test figure of Radiated emissions in restricted bands, Mode A.3, Horizontal




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LGWADE #2343	Polarization: Horizontal
Standard: FCC (Band Edge)	Power Source: DC 3.7V
Test item: Radiation Test	Date: 16/06/26/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Bluetooth Earbuds	Engineer Signature: LGWADE
Mode: TX 2480MHz	Distance: 3m
Model: NS-CAHBTSPORT	
Manufacturer:	

Note: Bluetooth

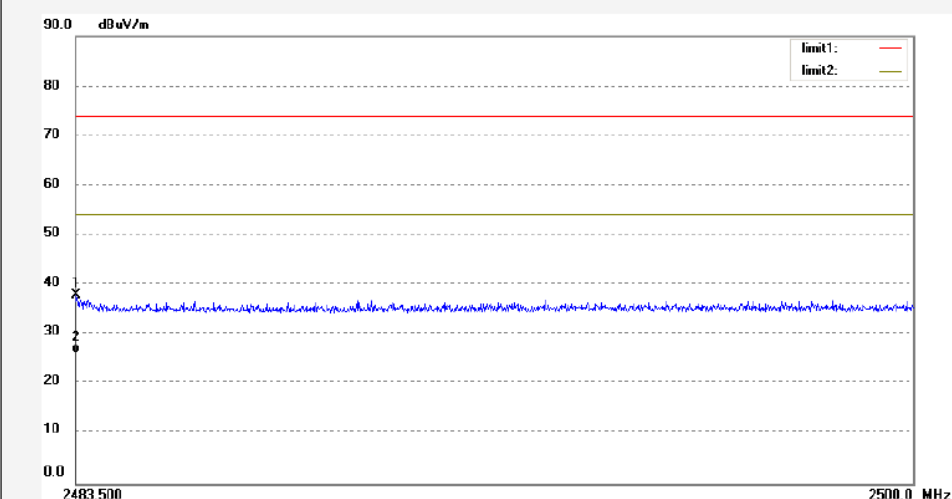

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.517	45.32	-7.37	37.95	74.00	-36.05	peak			
2	2483.517	33.47	-7.37	26.10	54.00	-27.90	AVG			

Figure 28: Test figure of Radiated emissions in restricted bands, Mode A.3, Vertical




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LGWADE #2342
Standard: FCC (Band Edge)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Bluetooth Earbuds
Mode: TX 2480MHz
Model: NS-CAHBTSPORT
Manufacturer:


Polarization: Vertical
Power Source: DC 3.7V
Date: 16/06/26/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: Bluetooth

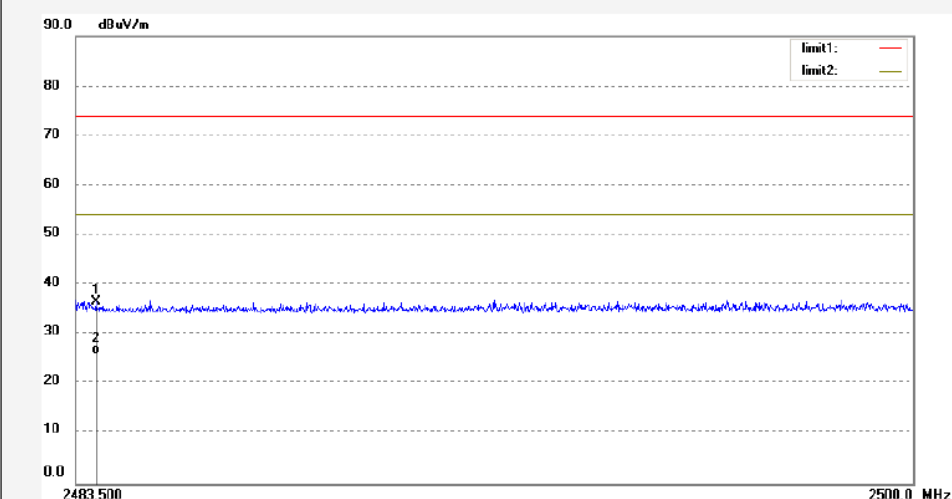


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.896	43.95	-7.38	36.57	74.00	-37.43	peak			
2	2483.896	33.27	-7.38	25.89	54.00	-28.11	AVG			

Figure 29: Test figure of conducted emissions in 100kHz Bandwidth, Mode A.1

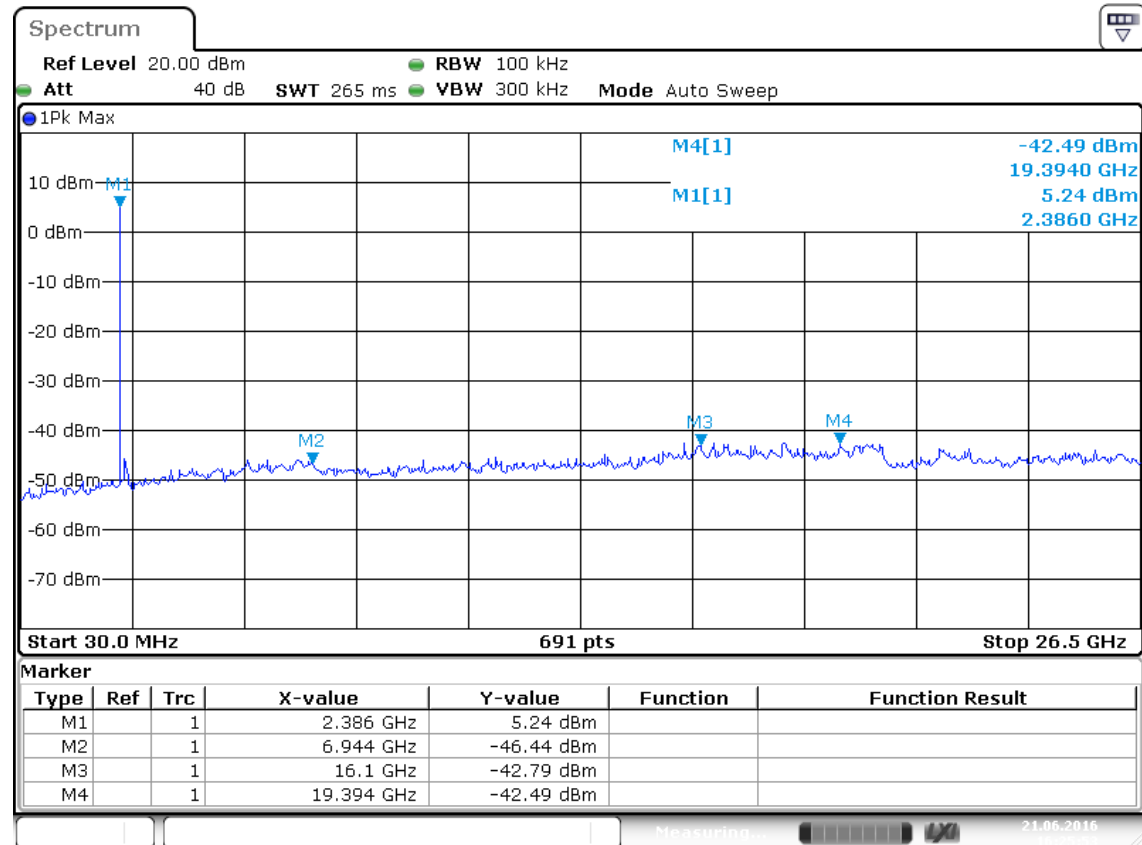


Date: 21.JUN.2016 16:25:53

Figure 30: Test figure of conducted emissions in 100kHz Bandwidth, Mode A.2

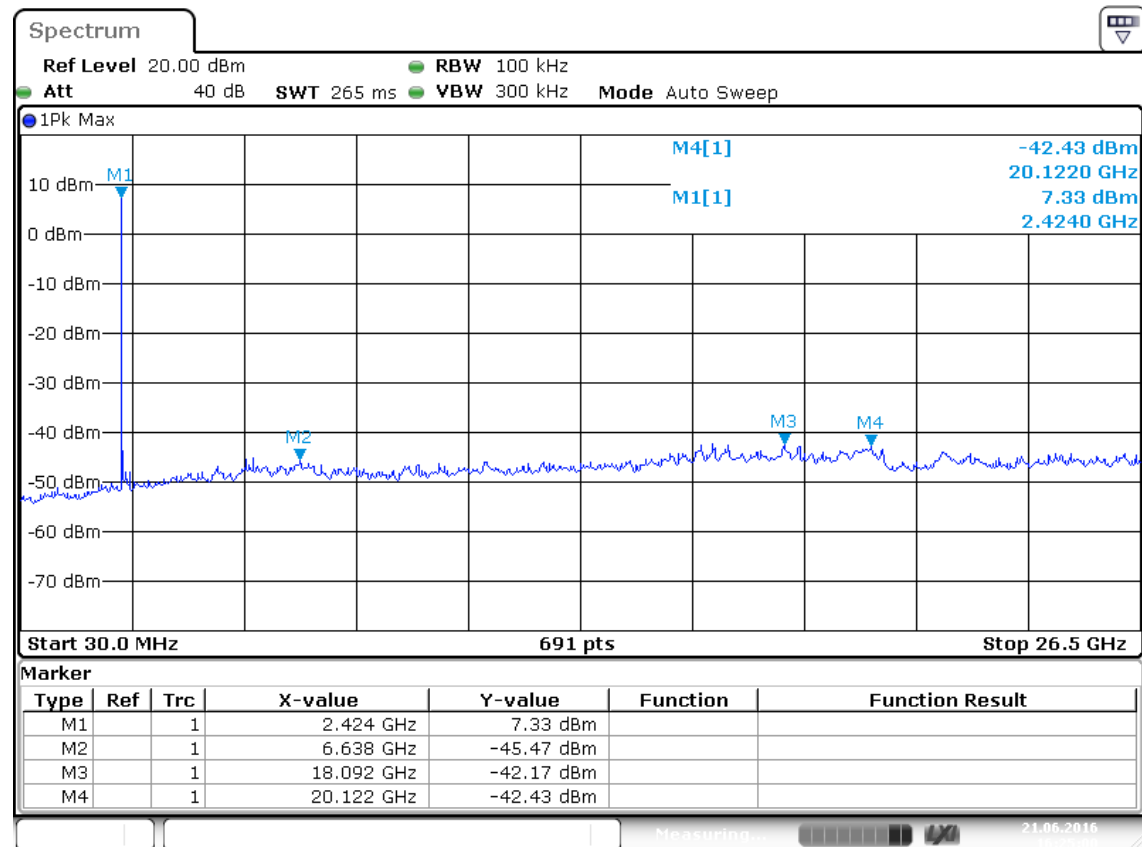


Date: 21.JUN.2016 16:25:00

Figure 31: Test figure of conducted emissions in 100kHz Bandwidth, Mode A.3

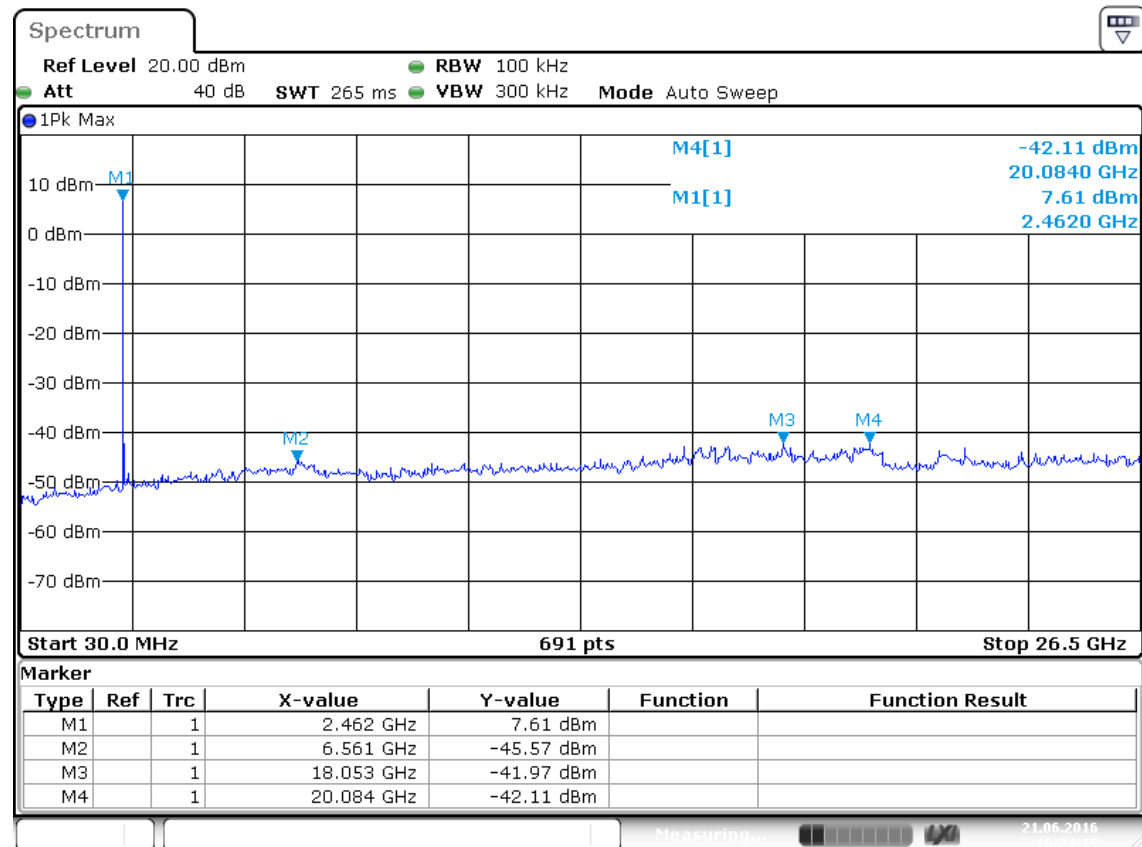


Date: 21.JUN.2016 16:24:15

Figure 32: Test figure of Frequency Band Edge in 100kHz Bandwidth, Mode A.1

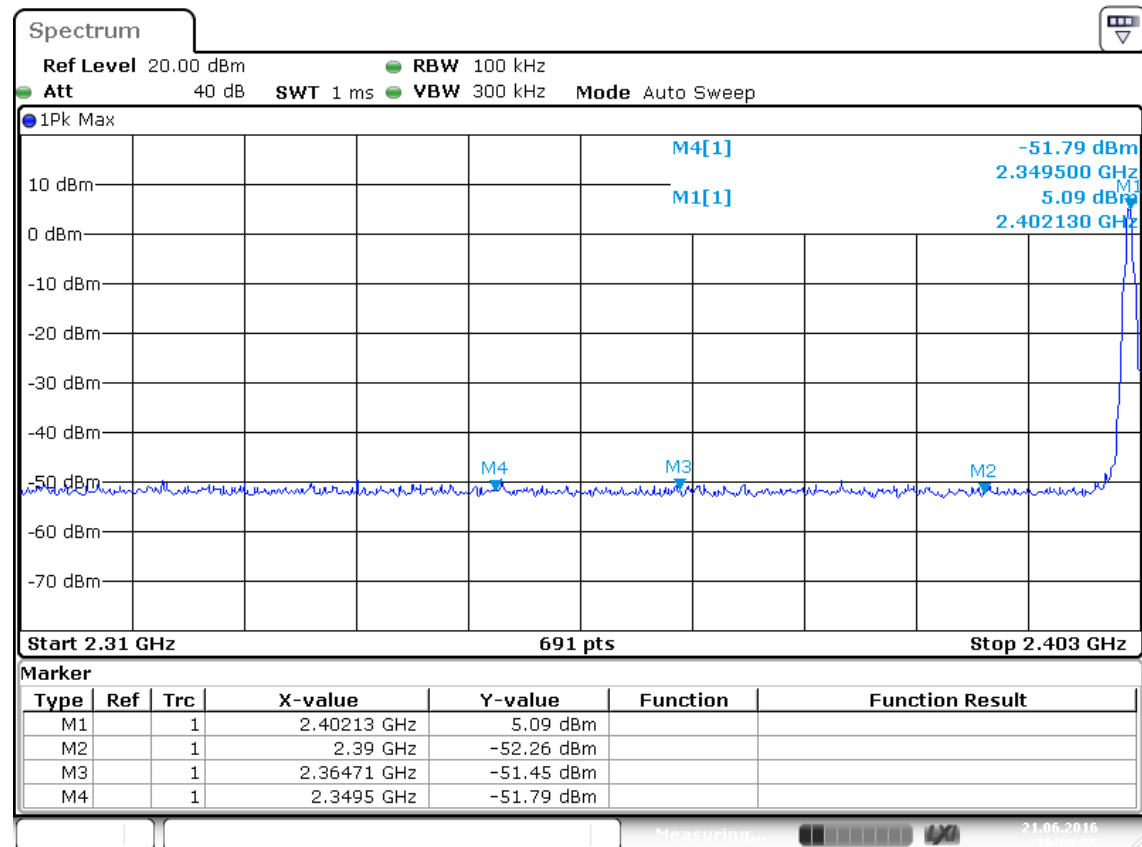

Date: 21.JUN.2016 16:09:55

Figure 33: Test figure of Frequency Band Edge in 100kHz Bandwidth, Mode A.3

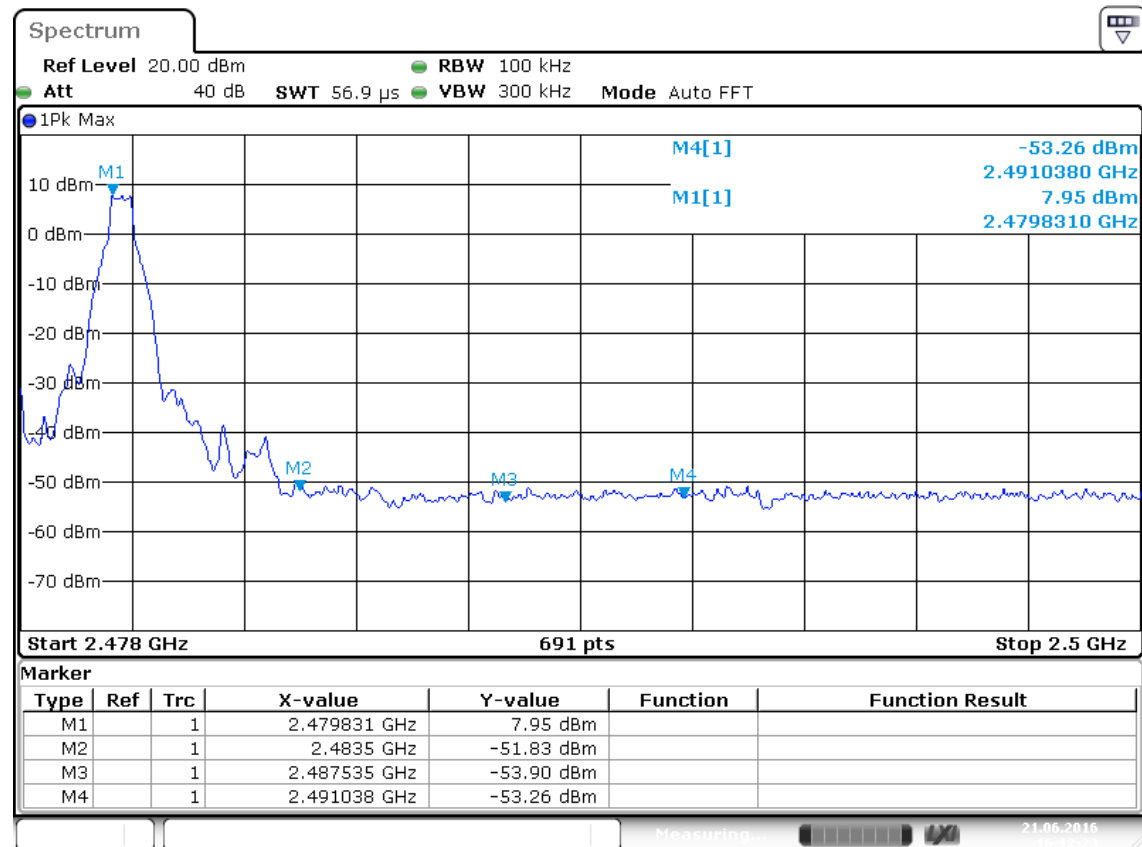

Date: 21.JUN.2016 16:12:23

Figure 34: Test figure of Conducted emissions, Mode B, line live


ACCURATE TECHNOLOGY CO.,LTD

CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: Bluetooth Earbuds M/N:NS-CAHBTSPORT
Manufacturer:
Operating Condition: TX
Test Site: 1#Shielding Room
Operator: LGWADE
Test Specification: L 120V/60Hz
Comment: Mains Port
Start of Test: 6/27/2016 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: SUB STD_VTERM2 1.70
Start Stop Step Detector Meas. IF Transducer
Frequency Frequency Width Time Bandw.
9.0 kHz 150.0 kHz 100.0 Hz QuasiPeak 1.0 s 200 Hz NSLK8126 2008
Average
150.0 kHz 30.0 MHz 5.0 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
Average

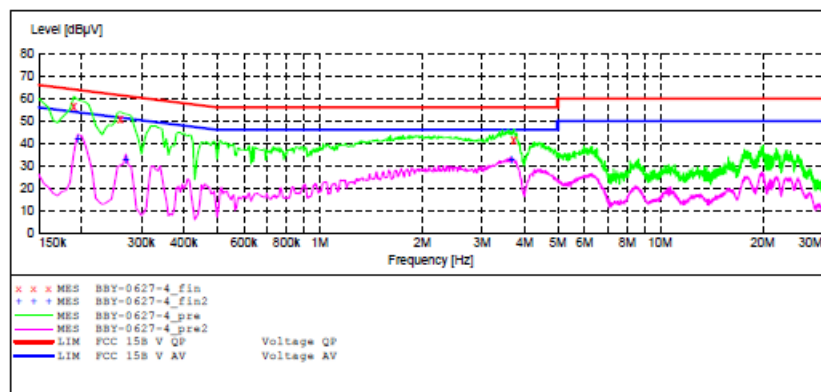

MEASUREMENT RESULT: "BBY-0627-4_fin"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.190000	56.10	10.5	64	7.9	QP	L1	GND
0.260000	50.70	10.6	61	10.7	QP	L1	GND
3.720000	41.20	11.1	56	14.8	QP	L1	GND

MEASUREMENT RESULT: "BBY-0627-4_fin2"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.195000	42.10	10.5	54	11.7	AV	L1	GND
0.270000	33.00	10.6	51	18.1	AV	L1	GND
3.650000	33.00	11.1	46	13.0	AV	L1	GND

Figure 35: Test figure of Conducted emissions, Mode B, line neutral


ACCURATE TECHNOLOGY CO.,LTD

CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: Bluetooth Earbuds M/N:NS-CAHBTSPORT
Manufacturer:
Operating Condition: TX
Test Site: 1#Shielding Room
Operator: LGWADE
Test Specification: N 120V/60Hz
Comment: Mains Port
Start of Test: 6/27/2016 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: _SUB STD_VTERM2 1.70
Start Stop Step Detector Meas. IF Transducer
Frequency Frequency Width Time Bandw.
9.0 kHz 150.0 kHz 100.0 Hz QuasiPeak 1.0 s 200 Hz NSLK8126 2008
Average
150.0 kHz 30.0 MHz 5.0 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
Average

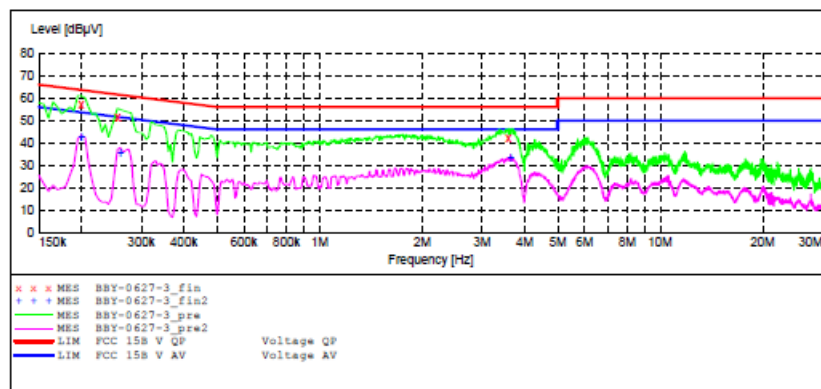

MEASUREMENT RESULT: "BBY-0627-3_fin"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.200000	56.80	10.5	64	6.8	QP	N	GND
0.255000	51.40	10.6	62	10.2	QP	N	GND
3.580000	42.20	11.1	56	13.8	QP	N	GND

MEASUREMENT RESULT: "BBY-0627-3_fin2"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.200000	42.70	10.5	54	10.9	AV	N	GND
0.260000	35.80	10.6	51	15.6	AV	N	GND
3.640000	33.40	11.1	46	12.6	AV	N	GND

Figure 36: Test figure of Conducted emissions, Mode C, line live


ACCURATE TECHNOLOGY CO.,LTD

CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: Bluetooth Earbuds M/N:NS-CAHBTSPORT
Manufacturer:
Operating Condition: Charging
Test Site: 1#Shielding Room
Operator: LGWADE
Test Specification: L 120V/60Hz
Comment: Mains Port
Start of Test: 6/27/2016 /

SCAN TABLE: "V 9K-30MHz fin"

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
150.0 kHz	30.0 MHz	5.0 kHz	Average			
			QuasiPeak	1.0 s	9 kHz	NSLK8126 2008
			Average			

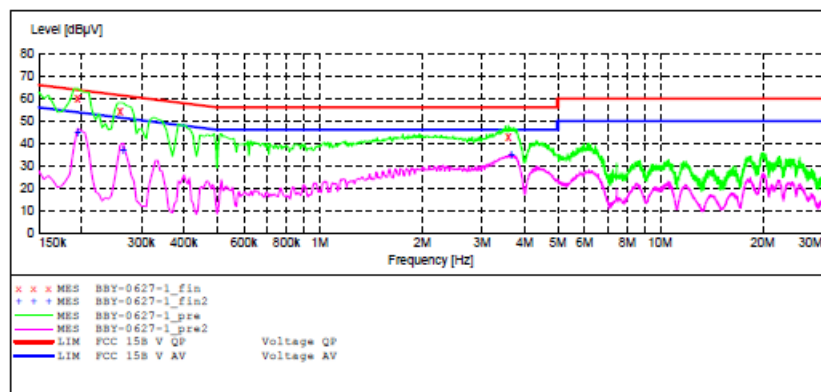

MEASUREMENT RESULT: "BBY-0627-1_fin"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.195000	60.20	10.5	64	3.6	QP	L1	GND
0.260000	54.20	10.6	61	7.2	QP	L1	GND
3.580000	42.90	11.1	56	13.1	QP	L1	GND

MEASUREMENT RESULT: "BBY-0627-1_fin2"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.195000	45.20	10.5	54	8.6	AV	L1	GND
0.265000	36.90	10.6	51	14.4	AV	L1	GND
3.650000	34.70	11.1	46	11.3	AV	L1	GND

Figure 37: Test figure of Conducted emissions, Mode C, line neutral


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: Bluetooth Earbuds M/N: NS-CAHBTSPORT
Manufacturer:
Operating Condition: Charging
Test Site: 1#Shielding Room
Operator: LGWADE
Test Specification: N 120V/60Hz
Comment: Mains Port
Start of Test: 6/27/2016 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: _SUB STD_VTERM2 1.70
Start Stop Step Detector Meas. IF Transducer
Frequency Frequency Width Time Bandw.
9.0 kHz 150.0 kHz 100.0 Hz QuasiPeak 1.0 s 200 Hz NSLK8126 2008
Average
150.0 kHz 30.0 MHz 5.0 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
Average

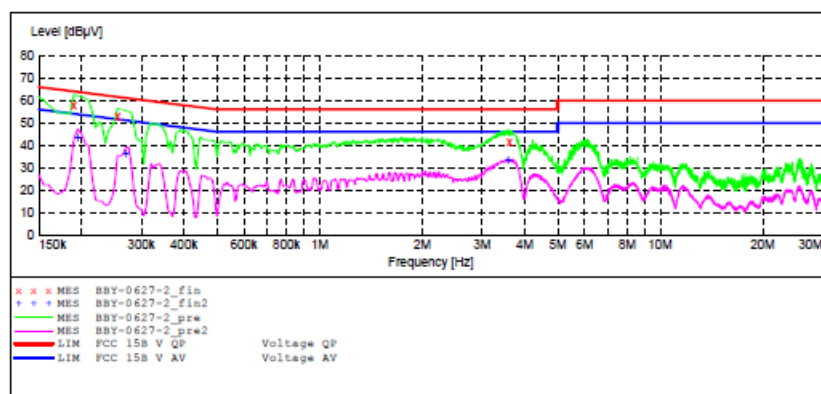

MEASUREMENT RESULT: "BBY-0627-2_fin"

6/27/2016

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.190000	58.10	10.5	64	5.9	QP	N	GND
0.255000	52.50	10.6	62	9.1	QP	N	GND
3.610000	41.50	11.1	56	14.5	QP	N	GND

MEASUREMENT RESULT: "BBY-0627-2_fin2"

6/27/2016

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.195000	43.40	10.5	54	10.4	AV	N	GND
0.270000	36.10	10.6	51	15.0	AV	N	GND
3.570000	33.40	11.1	46	12.6	AV	N	GND

Figure 38: Test figure of Radiated emissions, Mode C, Below 1GHz, Horizontal

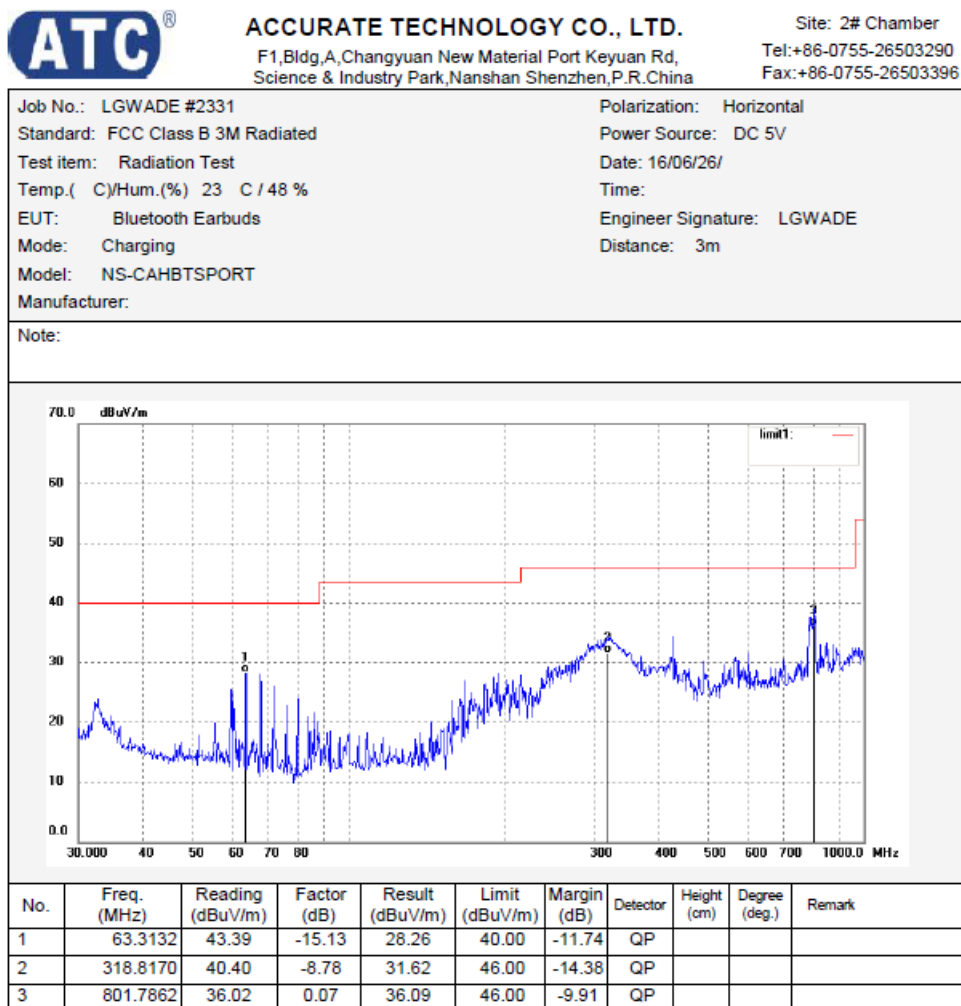


Figure 39: Test figure of Radiated emissions, Mode C, Below 1GHz, Vertical

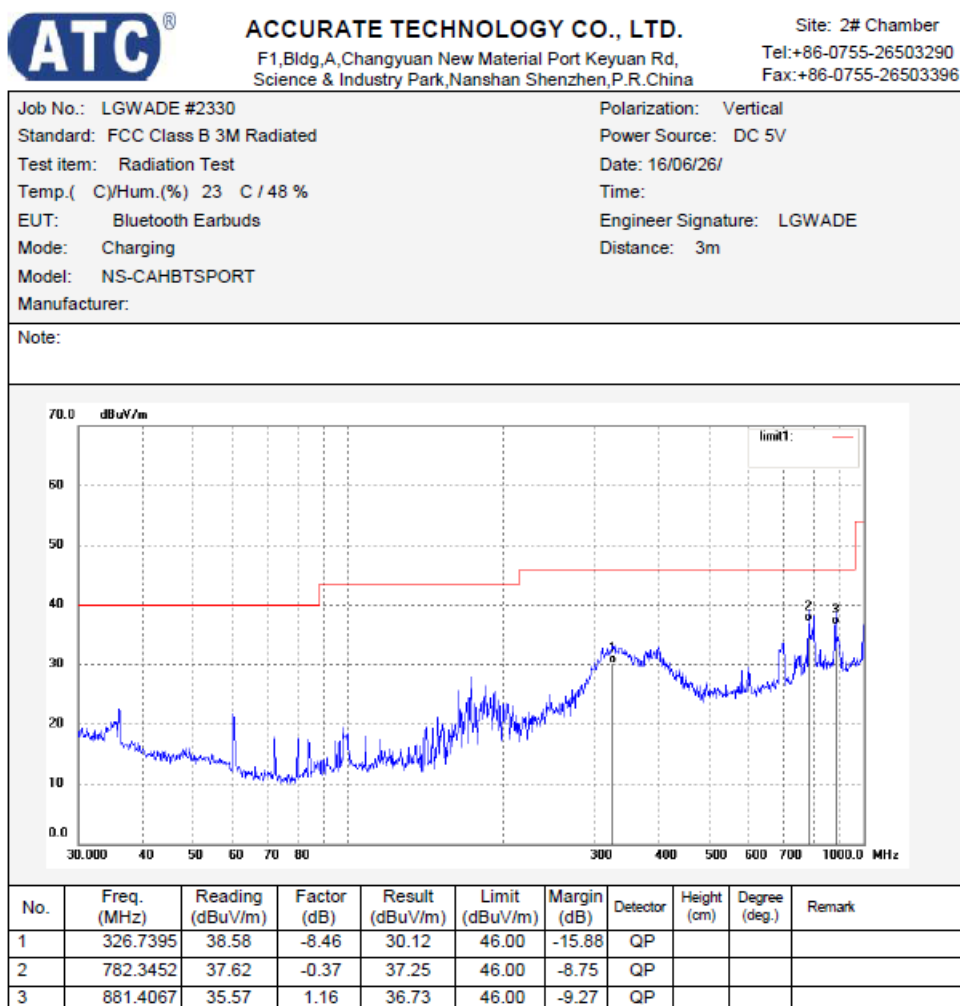


Figure 40: Test figure of Radiated emissions, Mode C, Above 1GHz, Horizontal

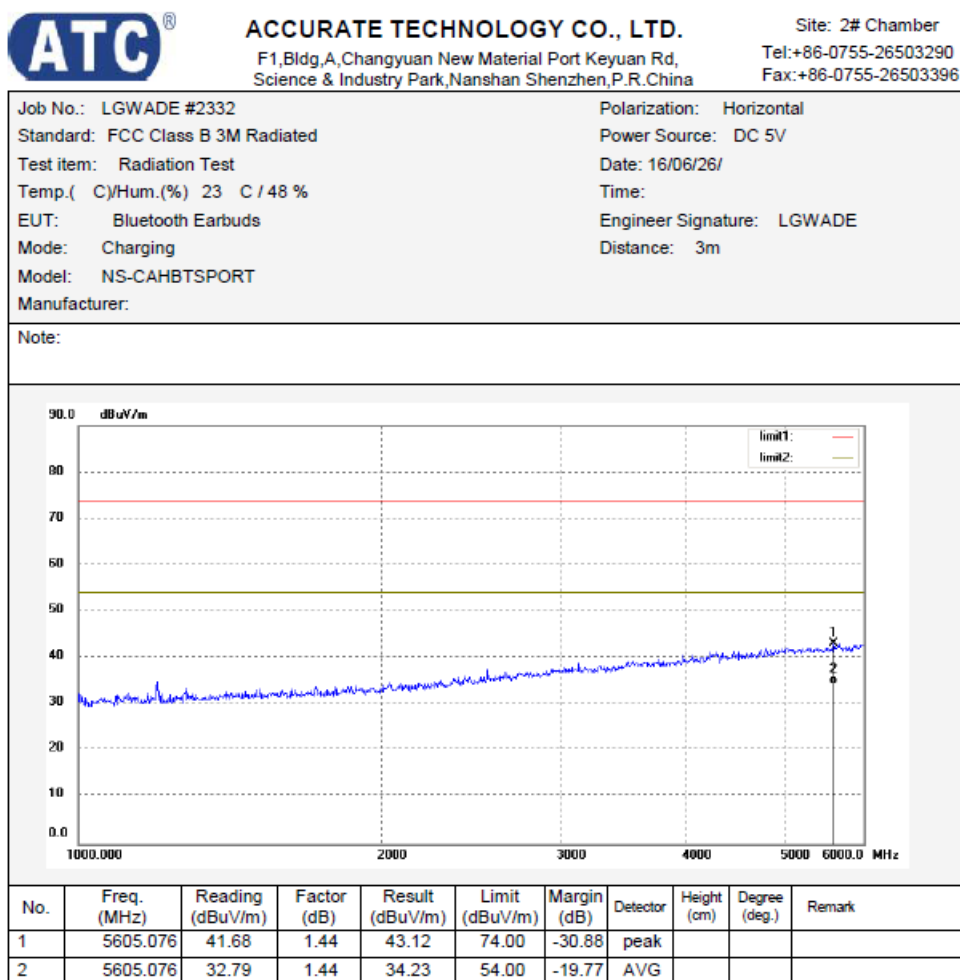


Figure 41: Test figure of Radiated emissions, Mode C, Above 1GHz, Vertical

