



REPORT No.: SZ20060303W04

TEST REPORT

APPLICANT : Great Talent Technology Limited

PRODUCT NAME : Smart phone

MODEL NAME : freedom turbo XL

BRAND NAME : Schok

FCC ID : 2ALZM-TURBOXL

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2020-06-28

TEST DATE : 2020-07-02 to 2020-07-08

ISSUE DATE : 2020-08-24

Edited by:

Zeng Xiaoying
Zeng Xiaoying (Rapporteur)

Approved by:

Peng Huarui
Peng Huarui (Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Technical Information	3
1.1. Applicant and Manufacturer Information	3
1.2. Equipment Under Test (EUT) Description	3
1.3. The Channel Number and Frequency	4
1.4. Test Standards and Results	5
1.5. Environmental Conditions	6
2. 47 CFR Part 15C Requirements	7
2.1. Antenna Requirement	7
2.2. Duty Cycle of Test Signal	8
2.3. Maximum Peak Conducted Output Power	8
2.4. Maximum Average Conducted Output Power	14
2.5. 6 dB Bandwidth	16
2.6. Conducted Spurious Emissions and Band Edge	21
2.7. Power Spectral Density (PSD)	28
2.8. Conducted Emission	33
2.9. Restricted Frequency Bands	37
2.10. Radiated Emission	44
Annex A Test Uncertainty	54
Annex B Testing Laboratory Information	55

Change History		
Version	Date	Reason for change
1.0	2020-08-24	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Great Talent Technology Limited
Applicant Address:	RM602,T3 Software Park, Nanshan, Shenzhen, China
Manufacturer:	Unimaxcomm
Manufacturer Address:	Floor 35th, HBC Huilong Centre 2nd Phase office building, Minzhi Street, Longhua District, Shenzhen, P.R. China 518057

1.2. Equipment Under Test (EUT) Description

Product Name:	Smart phone	
Serial No.:	(N/A, marked #1 by test site)	
Hardware Version:	V10_0506	
Software Version:	Q6501_SFT656128_V1.0.29-userdebug	
Equipment Type:	Bluetooth LE	
Bluetooth Version:	5.0	
Modulation Type:	GFSK	
Data Rate:	1Mbps, 2Mbps	
Operating Frequency Range:	2402MHz-2480MHz	
Antenna Type:	PIFA Antenna	
Antenna Gain:	1.96dBi	
Accessory Information:	Battery	
	Brand Name:	Milai
	Model No.:	426684P4000
	Serial No.:	(N/A, marked #1 by test site)
	Capacity:	4000mAh
	Rated Voltage:	3.85V
	Charge Limit:	4.40V

Accessory Information:	AC Adapter	
	Brand Name:	Schok
	Model No.:	BLJ-QC06HU
	Serial No.:	(N/A, marked #1 by test site)
	Rated Output:	5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
	Rated Input:	100-240V $\sim$ 50/60Hz, 0.5A

Note 1: We use the dedicated software to control the EUT continuous transmission.

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.3.The Channel Number and Frequency

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Note 1: The black bold channels were selected for test.



1.4. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	N/A	Duty Cycle of Test Signal	Jul 07, 2020	Ouyang Feng	PASS	No deviation
3	15.247(b)	Maximum Peak Conducted Output Power	Jul 07, 2020	Ouyang Feng	PASS	No deviation
4	15.247(b)	Maximum Average Conducted Output Power	Jul 07, 2020	Ouyang Feng	PASS	No deviation
5	15.247(a)	Bandwidth	Jul 07, 2020	Ouyang Feng	PASS	No deviation
6	15.247(d)	Conducted Spurious Emission and Band Edge	Jul 07, 2020	Ouyang Feng	PASS	No deviation
7	15.247(e)	Power Spectral Density (PSD)	Jul 07, 2020	Ouyang Feng	PASS	No deviation
8	15.207	Conducted Emission	Jul 02, 2020	Huang Zhiye	PASS	No deviation
9	15.247(d)	Restricted Frequency Bands	Jul 08, 2020	Gao Jianrou	PASS	No deviation
10	15.209, 15.247(d)	Radiated Emission	Jul 07&08, 2020	Gao Jianrou	PASS	No deviation

Note 1: The tests were performed according to the method of measurements prescribed in ANSIC63.10-2013 and KDB558074 D01 v05r02.



Note 2: The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The Ref offset 2.0dB means the cable loss is 2.0dB.

Note 3: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 4: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% risk level.

1.5. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106



2. 47 CFR Part 15C Requirements

2.1. Antenna Requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Test Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2. Duty Cycle of Test Signal


2.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be non constant.

2.2.2. Test Description

Test Setup:

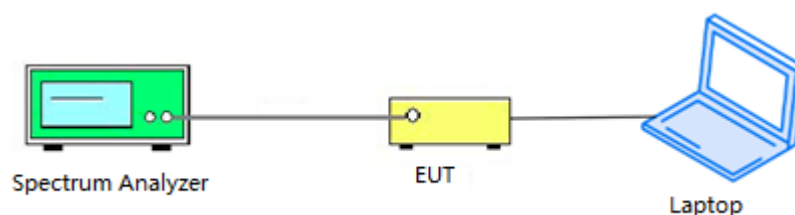

ANSI C63.10 2013 Clause 11.6 was used in order to prove compliance.

2.2.3. Test Result

Test Mode	Data Rate	Duty Cycle(%) (D)	Duty Factor ($10 \cdot \lg[1/D]$)
GFSK	1Mbps	62.90	2.01
	2Mbps	33.87	4.70

2.3. Maximum Peak Conducted Output Power


2.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

2.3.2. Test Description

The measured output power was calculated by the reading of the spectrum analyzer and calibration.

Test Setup:

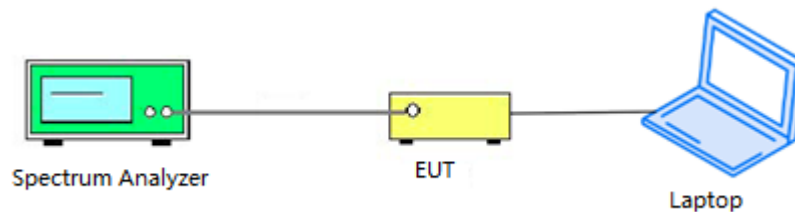

The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

2.3.3. Test Procedure

The measured output power was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for Peak Output Power test on the spectrum analyzer:

- a) Set analyzer center frequency to channel center frequency
- b) Set RBW to 1MHz
- c) Set VBW to 3MHz
- d) Set span to 3MHz
- e) Sweep time = auto couple
- f) Detector = peak
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use peak marker function to determine the peak amplitude level




2.3.4. Test Result

1Mbps

A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	4.33	0.0027	30	1	PASS
19	2440	4.54	0.0028			PASS
39	2480	5.16	0.0033			PASS

B. Test Plot:

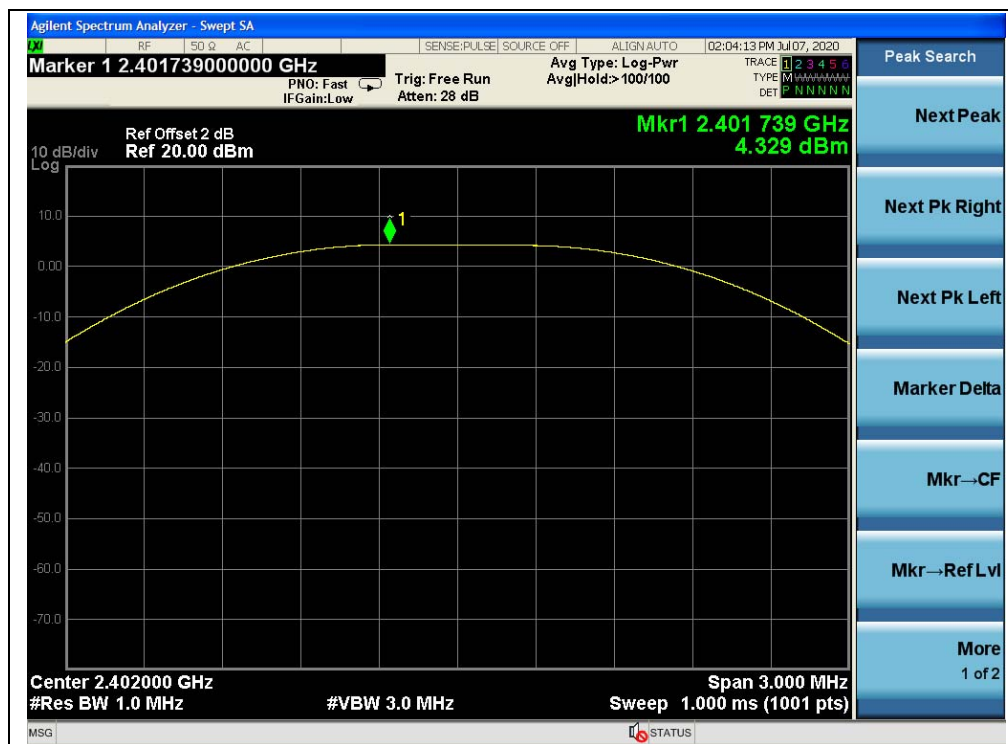

(Channel 0, 2402MHz)



(Channel 19, 2440MHz)



(Channel 39, 2480MHz)



2Mbps

A.Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	4.88	0.0031	30	1	PASS
19	2440	5.12	0.0033			PASS
39	2480	5.67	0.0037			PASS

B.Test Plot:

(Channel 0, 2402MHz)



(Channel 19, 2440MHz)



(Channel 39, 2480MHz)

2.4. Maximum Average Conducted Output Power


2.4.1. Requirement

According to FCC section 15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum average conducted output power of the intentional radiator shall not exceed 1 Watt.

2.4.2. Test Description

The measured output power was calculated by the reading of the spectrum analyzer and calibration.

Test Setup:

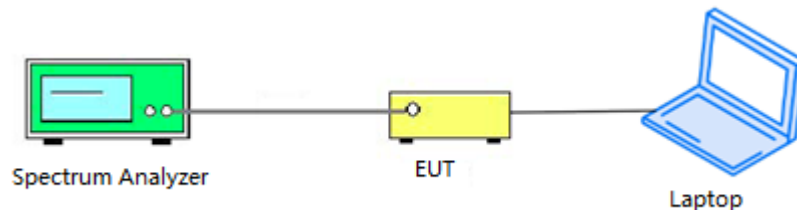

The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

2.4.3. Test Procedure

KDB 558074 Section 8.3.2 was used in order to prove compliance.

**2.4.4. Test Result****1Mbps**

Channel	Frequency (MHz)	Average Power				Limit		Verdict
		Measured	Duty Factor	Duty Factor Calculated				
		dBm		dBm	W	dBm	W	
0	2402	2.24	2.01	4.25	0.0027	30	1	PASS
19	2440	2.45		4.46	0.0028			PASS
39	2480	2.71		4.72	0.0030			PASS

2Mbps

Channel	Frequency (MHz)	Average Power				Limit		Verdict
		Measured	Duty Factor	Duty Factor Calculated				
		dBm		dBm	W	dBm	W	
0	2402	-0.67	4.07	4.03	0.0025	30	1	PASS
19	2440	-0.21		4.49	0.0028			PASS
39	2480	0.42		5.12	0.0033			PASS


2.5.6dB Bandwidth

2.5.1.Requirement

According to FCC section 15.247(a) (2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

2.5.2.Test Description

Test Setup:

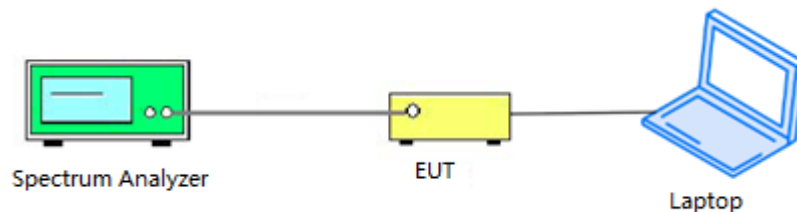

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

2.5.3.Test Procedure

The steps for the first option are as follows:

- a) Set analyzer center frequency to channel center frequency
- b) Set RBW to 100kHz
- c) Set VBW to 300kHz
- d) Detector = peak.
- e) Trace mode = max hold
- f) Sweep time = auto couple
- g) Allow the trace to fully stabilize
- h) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission



The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., $RBW = 100$ kHz, $VBW \geq 3 \times RBW$, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

2.5.4. Test Result

1Mbps

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
0	2402	0.665	≥ 500	PASS
19	2440	0.667	≥ 500	PASS
39	2480	0.665	≥ 500	PASS

B. Test Plot:



(Channel 0, 2402MHz)



(Channel 19, 2440 MHz)




(Channel 39, 2480MHz)



2Mbps

A.Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
0	2402	1.149	≥500	PASS
19	2440	1.158	≥500	PASS
39	2480	1.147	≥500	PASS

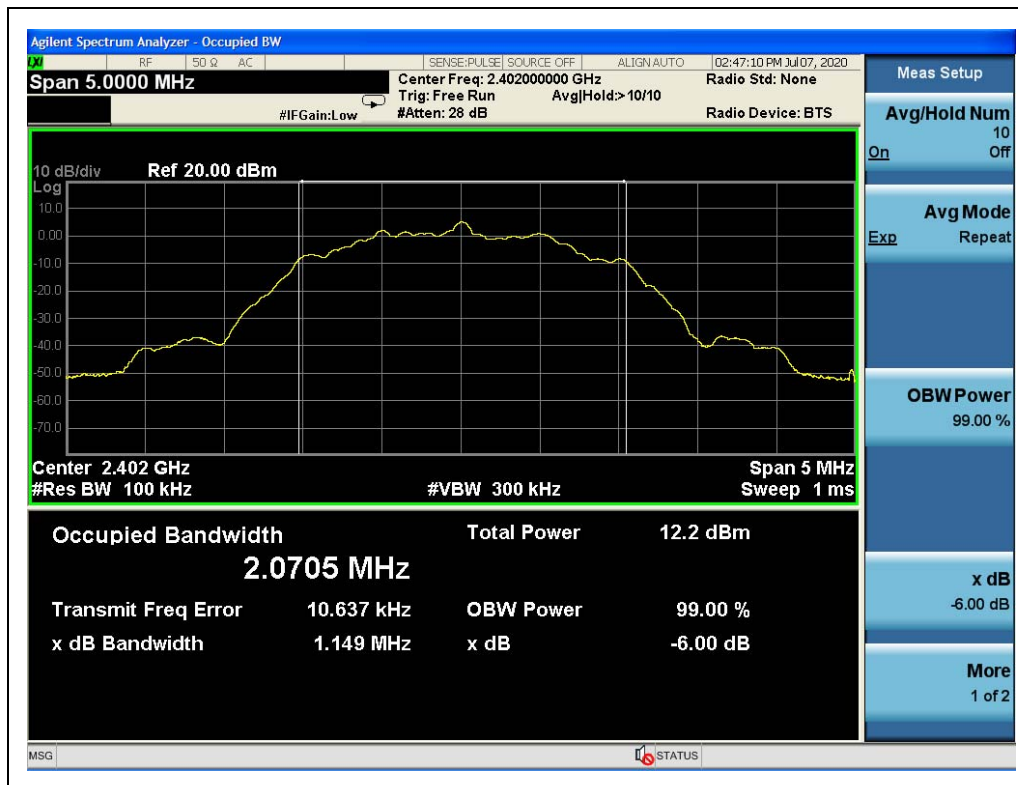B.Test Plot:

(Channel 0, 2402MHz)



(Channel 19, 2440 MHz)



(Channel 39, 2480MHz)


2.6. Conducted Spurious Emissions and Band Edge

2.6.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.6.2. Test Description

Test Setup:

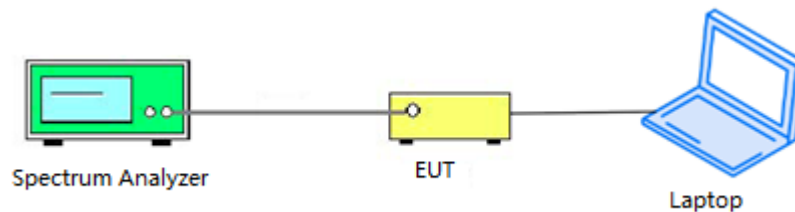

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

2.6.3. Test Procedure

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.




2.6.4. Test Result

1Mbps


A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-43.83	3.81	-16.19	PASS
19	2440	-44.20	4.15	-15.85	PASS
39	2480	-43.69	3.56	-16.44	PASS


B. Test Plot:

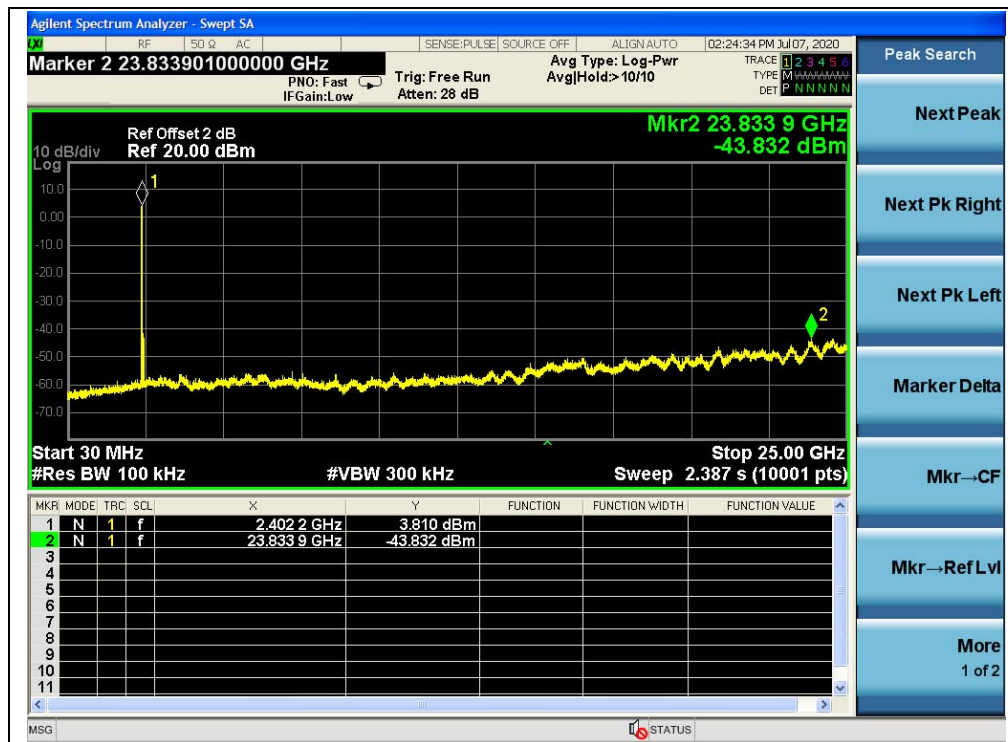


(30MHz to 25GHz, Channel 0)

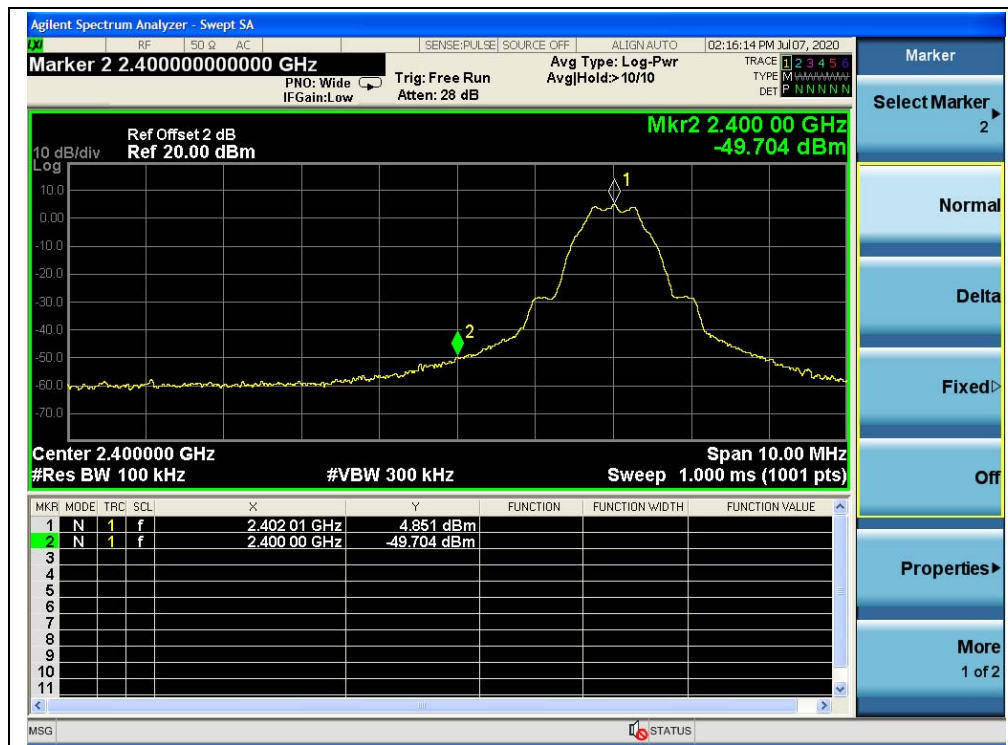

(Band Edge, Channel 0)

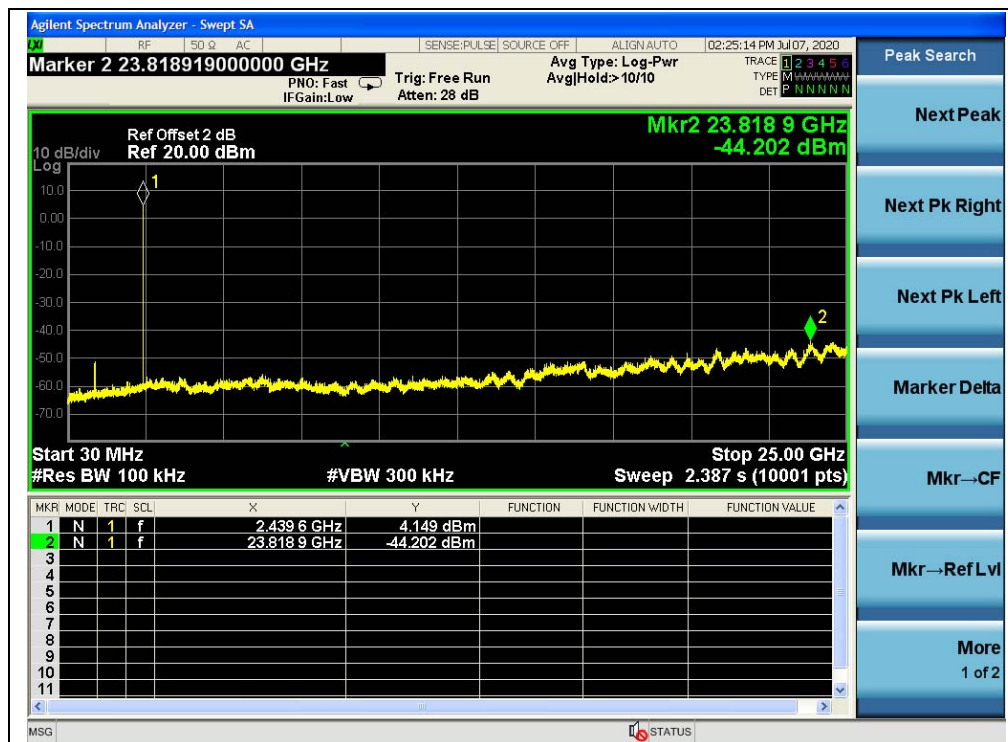

(30MHz to 25GHz, Channel 19)

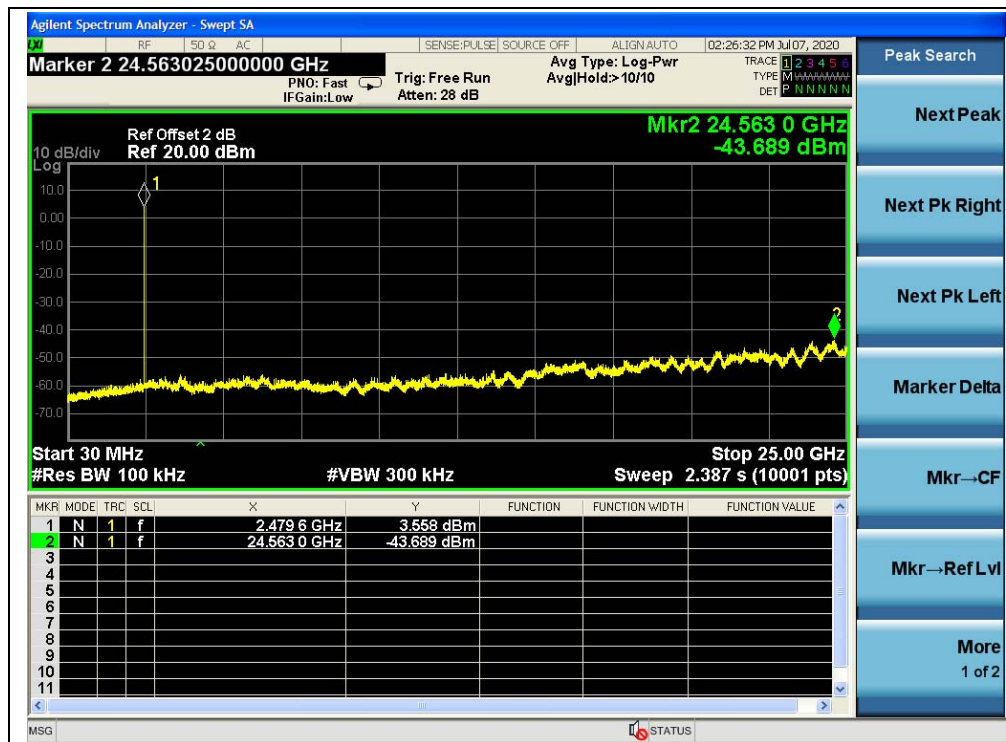

(30MHz to 25GHz, Channel 39)




(Band Edge, Channel 39)




2Mbps

A.Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-44.44	4.40	-15.60	PASS
19	2440	-43.84	-0.12	-20.12	PASS
39	2480	-44.30	1.45	-18.55	PASS

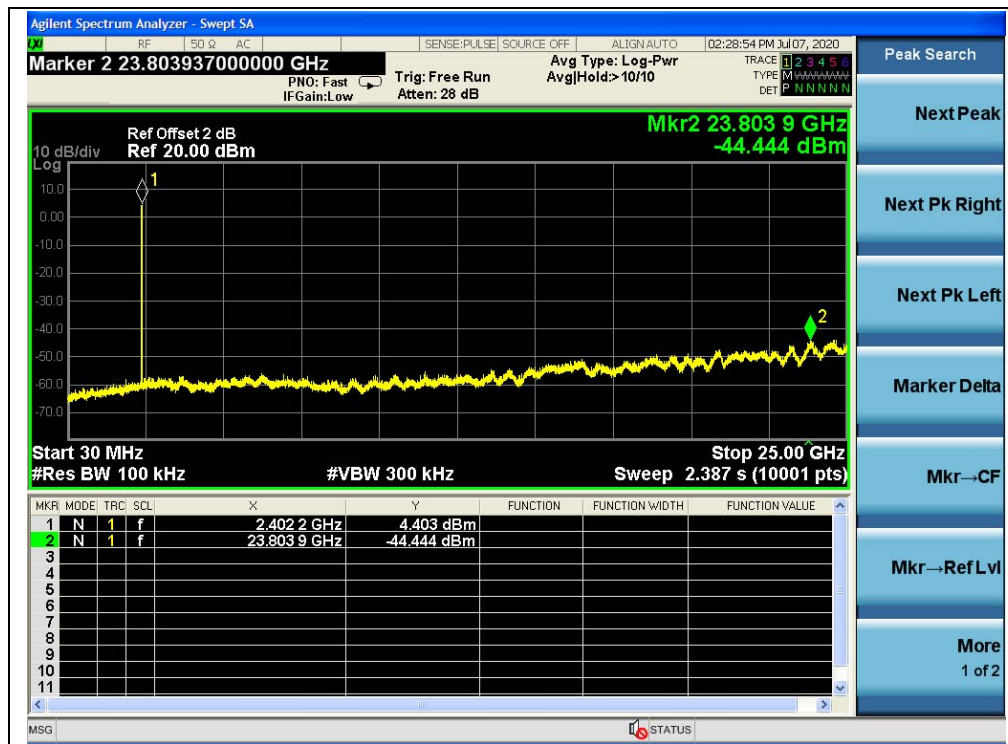B.Test Plot:

(30MHz to 25GHz, Channel 0)

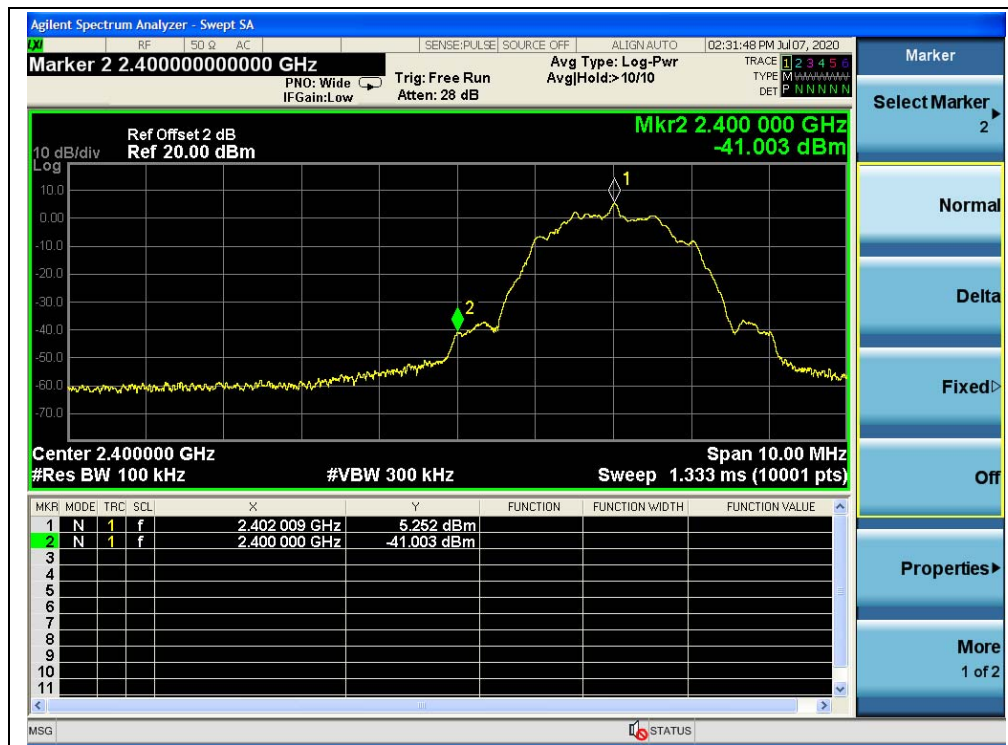

(Band Edge, Channel 0)

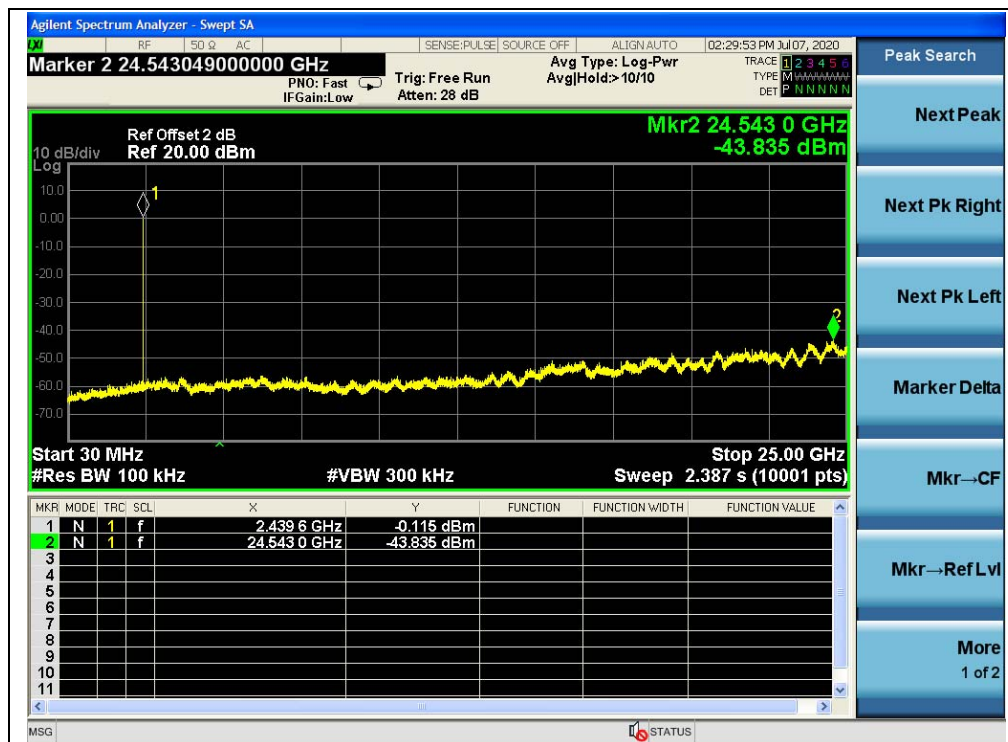

(30MHz to 25GHz, Channel 19)



(30MHz to 25GHz, Channel 39)



(Band Edge, Channel 39)


2.7. Power Spectral Density (PSD)

2.7.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

2.7.2. Test Description

Test Setup:

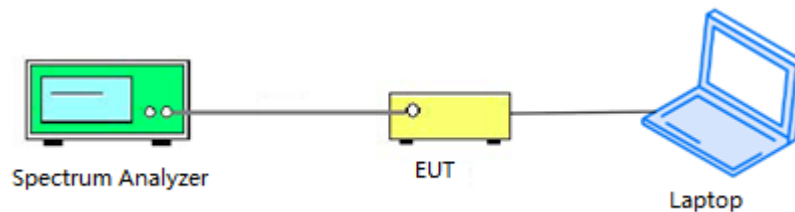

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.7.3. Test Procedure

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency
- b) Set span to 1.5 times DTS
- c) Set RBW to 3kHz
- d) Set VBW to 10kHz
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum amplitude level within the RBW



1 Mbps

Spectral Power Density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
0	2402	-9.69	8	PASS
19	2440	-9.33	8	PASS
39	2480	-8.74	8	PASS

Agilent Spectrum Analyzer - Swept SA

RF 50 Q AC SENSE:PULSE SOURCE:OFF ALIGN:AUTO 02:49:49 PM 3/10/2020

Marker 1 2.401976000000 GHz

PNO: Wide IF Gain: Low Trig: Free Run Atten: 28 dB Avg Type: Log-Pwr Avg/Hold: >10/10

TRACE 1 2 3 4 5 6
TYPE M
DET P NNNNN

Ref Offset 2 dB
Ref 20.00 dBm

**Mkr1 2.401 976 GHz
-9.685 dBm**

10 dB/div
Log

Center 2.402000 GHz
#Res BW 3.0 kHz

Span 3.000 MHz
Sweep 316.3 ms (1001 pts)

#VBW 10 kHz

MSG STATUS

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Marker Delta

Mkr→CF


Mkr→Ref Lvl

More
1 of 2

(Channel 0, 2402MHz)



(Channel 19, 2440MHz)

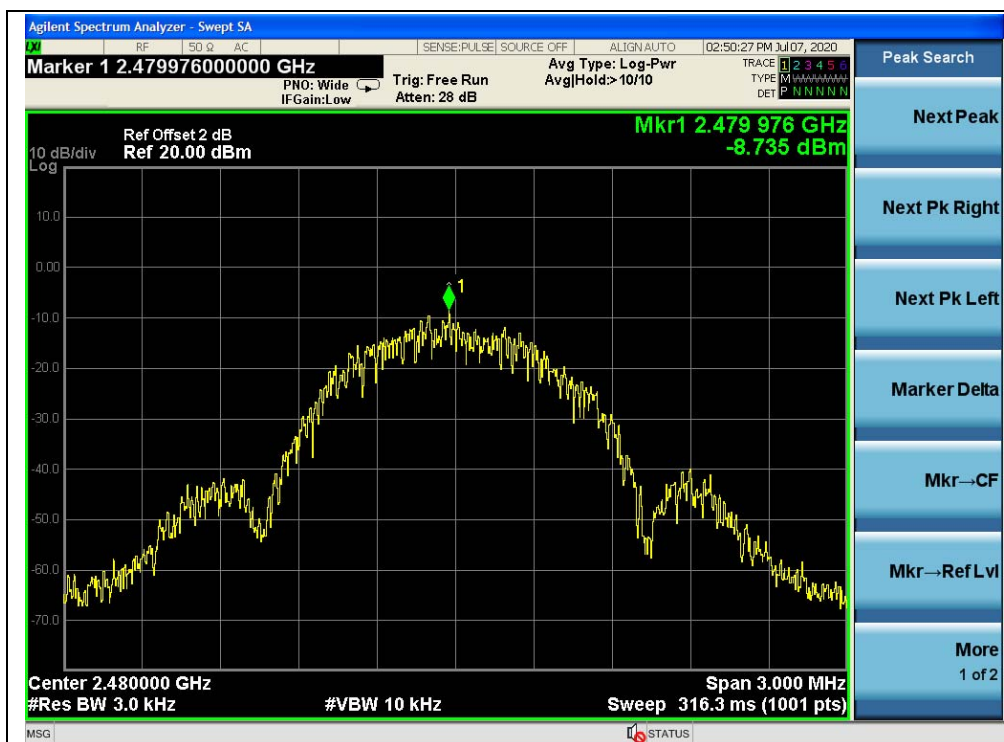


(Channel 39, 2480MHz)




2Mbps

A.Test Verdict:


Spectral Power Density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
0	2402	-13.12	8	PASS
19	2440	-13.07	8	PASS
39	2480	-12.51	8	PASS

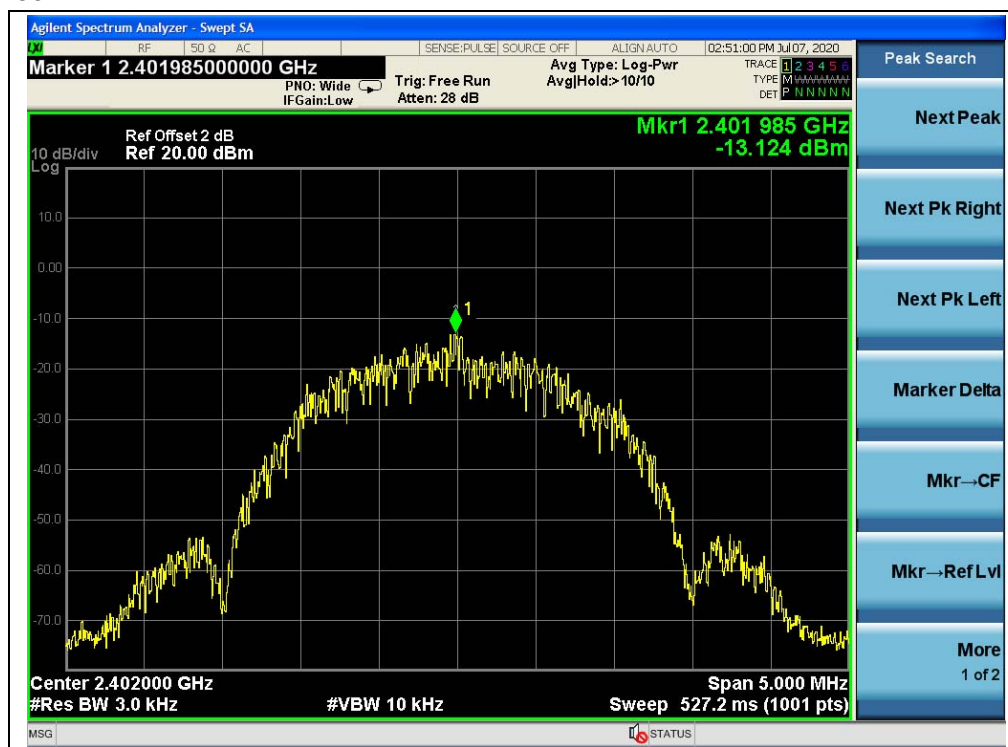B.Test Plot:

(Channel 0, 2402MHz)

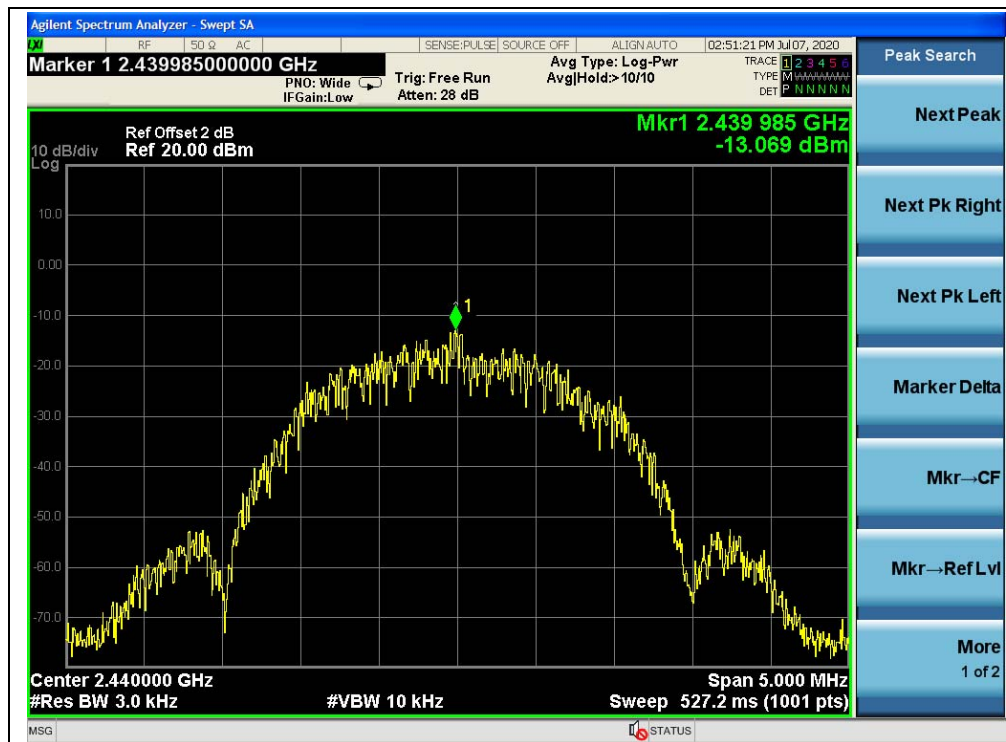

(Channel 19, 2440MHz)

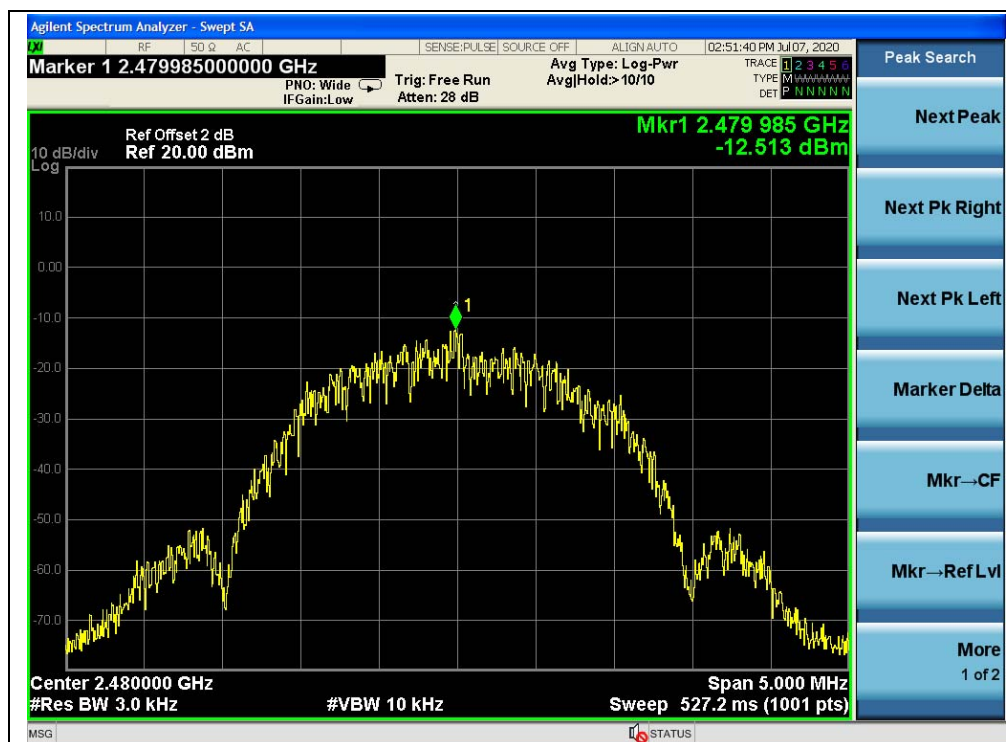

(Channel 39, 2480MHz)

2.8. Conducted Emission

2.8.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.8.2. Test Description

Test Setup:

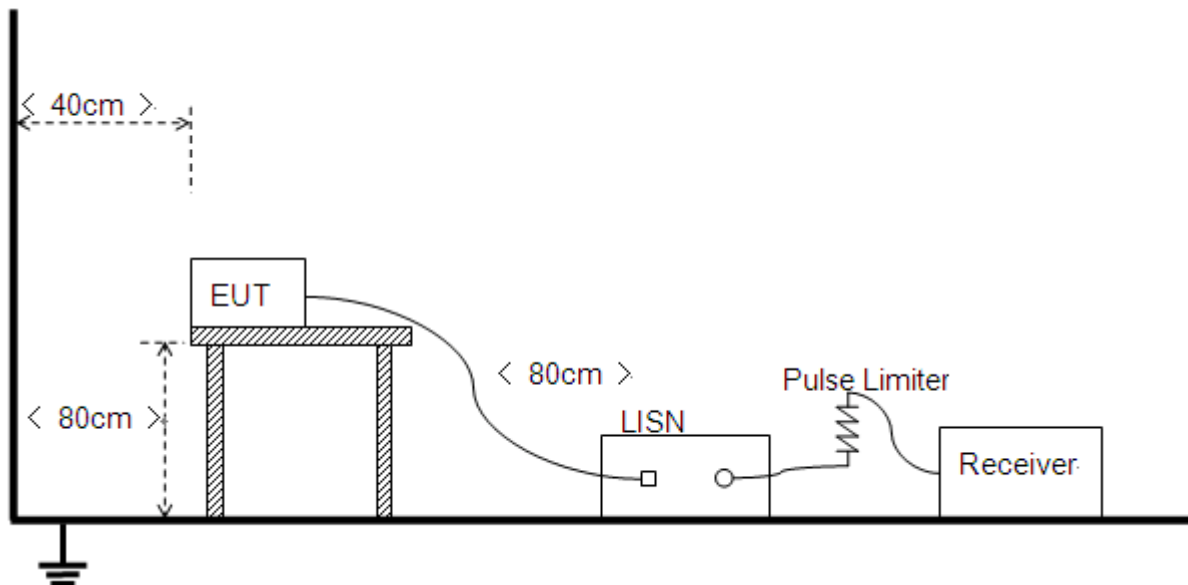

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.



2.8.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT+ADAPTER+earphone+BT TX

Test voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss [dB]} + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B.Test Plot:

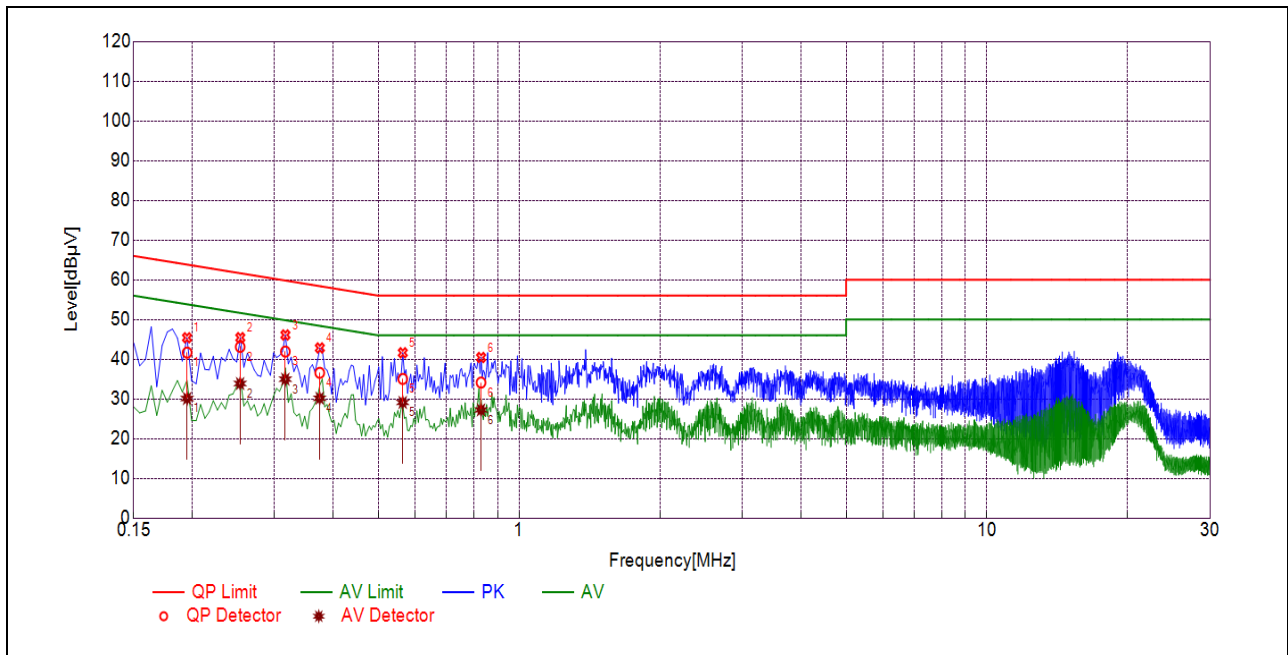

(L Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1951	41.66	30.10	63.82	53.82	Line	PASS
2	0.2533	43.11	33.87	61.65	51.65		PASS
3	0.3164	41.93	34.96	59.80	49.80		PASS
4	0.3747	36.57	30.17	58.40	48.40		PASS
5	0.5638	35.04	29.11	56.00	46.00		PASS
6	0.8289	34.12	27.23	56.00	46.00		PASS

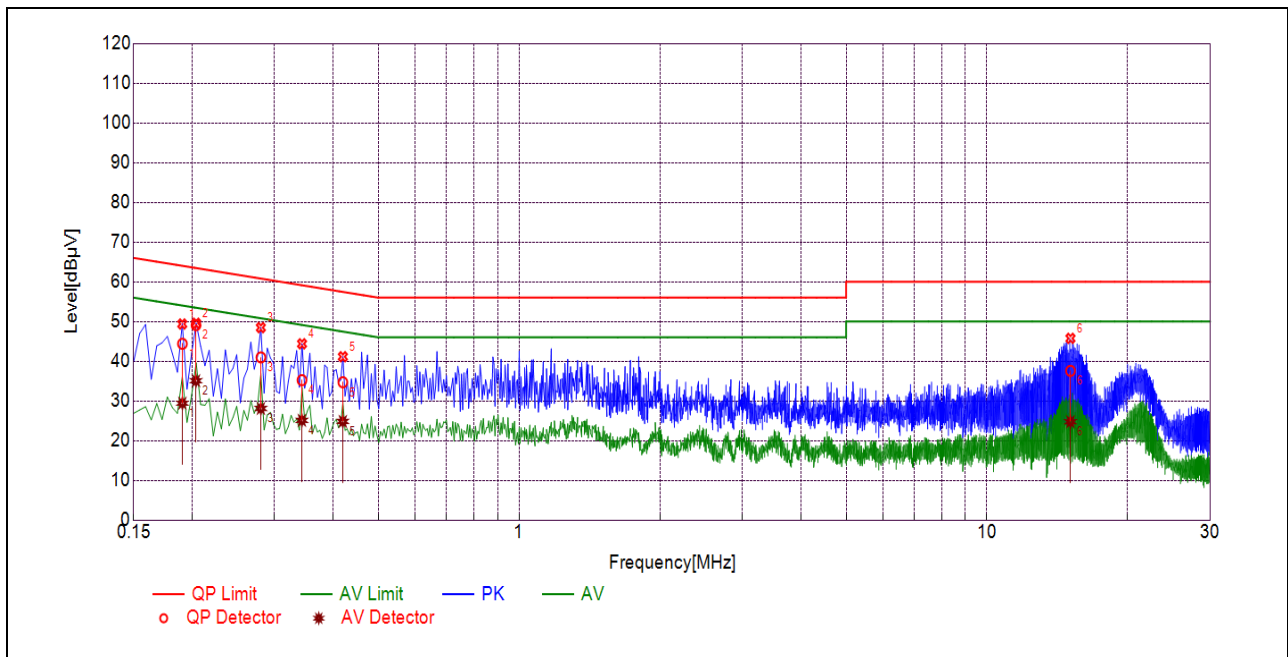

(N Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1906	44.39	29.42	64.01	54.01	Neutral	PASS
2	0.2038	49.08	35.07	63.45	53.45		PASS
3	0.2805	40.97	28.10	60.80	50.80		PASS
4	0.3433	35.23	25.10	59.12	49.12		PASS
5	0.4199	34.69	24.83	57.45	47.45		PASS
6	15.0865	37.57	24.75	60.00	50.00		PASS


2.9. Restricted Frequency Bands

2.9.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.9.2. Test Description

Test Setup

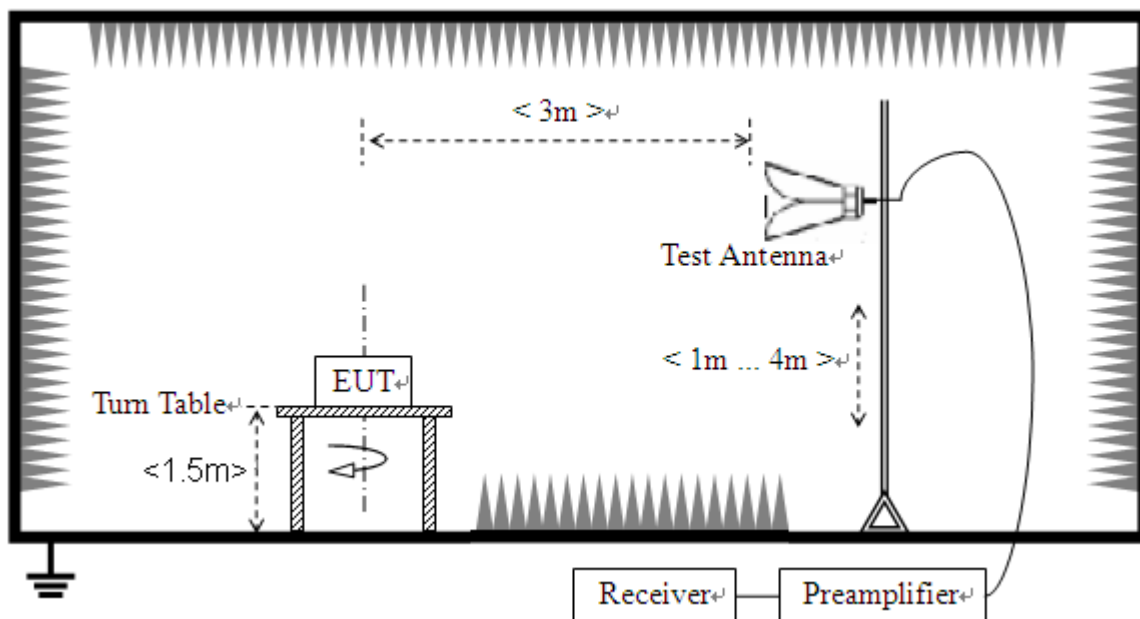

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.



2.9.3.Test Result

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.


1Mbps

A.Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
0	2342.22	PK	48.68	-29.67	32.56	51.57	74	PASS
0	2352.42	AV	47.05	-29.67	32.56	49.94	54	PASS
39	2489.33	PK	48.51	-29.67	32.56	51.40	74	PASS
39	2493.05	AV	46.19	-29.67	32.56	49.08	54	PASS




B.Test Plot:

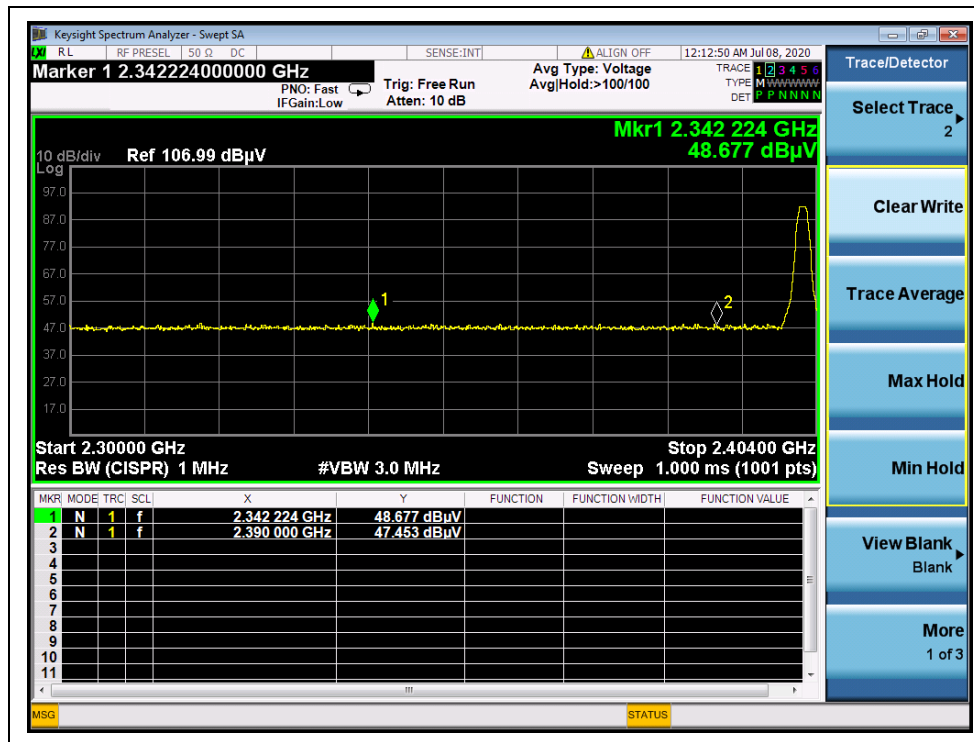


(PEAK, Channel 0)

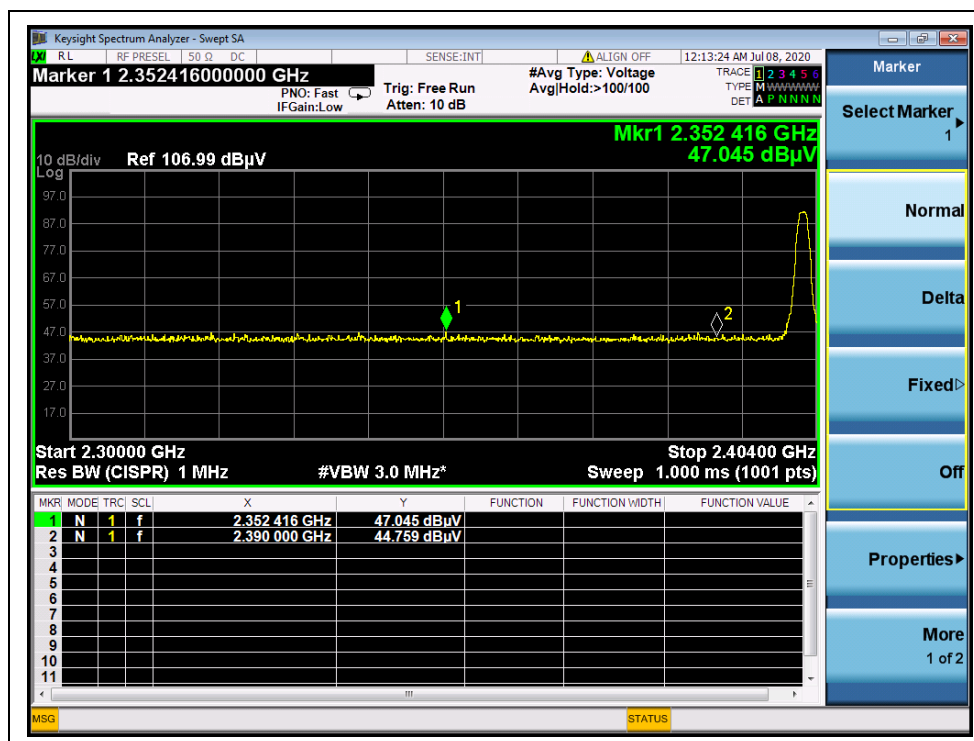

(AVERAGE, Channel 0)

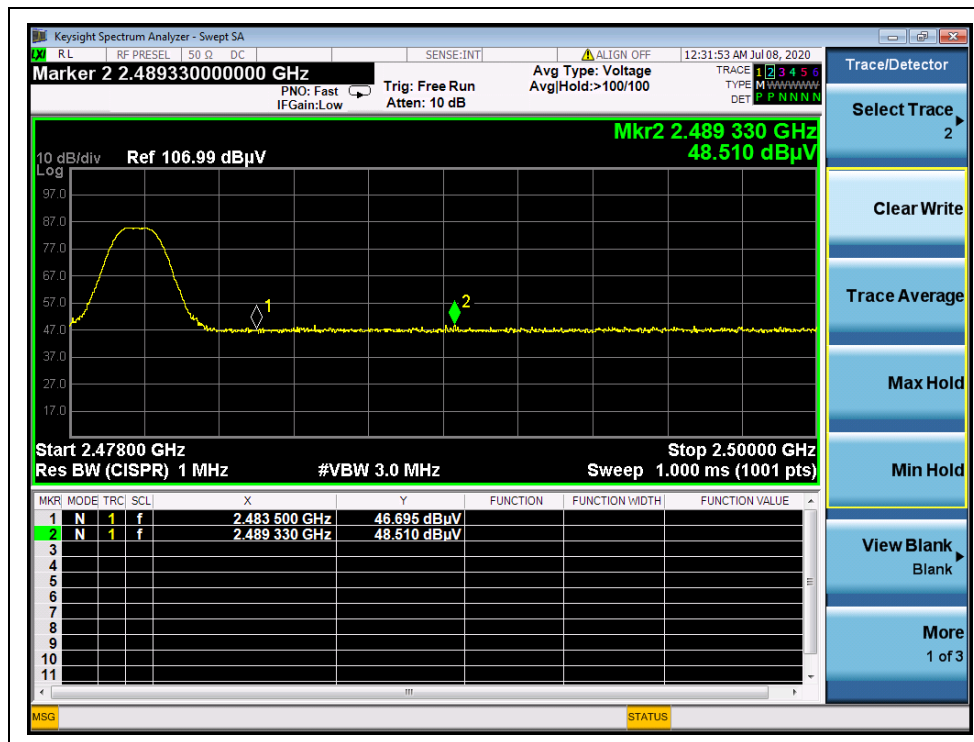

(PEAK, Channel 39)

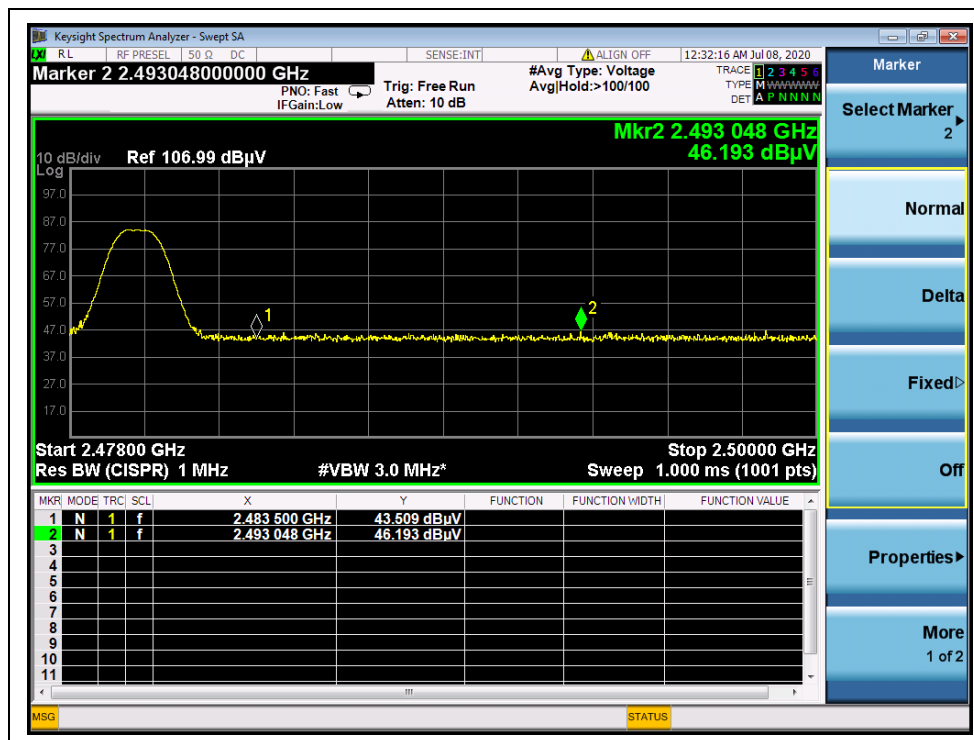

(AVERAGE, Channel 39)




2Mbps


A.Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
0	2379.77	PK	47.59	-29.67	32.56	50.48	74	PASS
0	2377.48	AV	44.84	-29.67	32.56	47.73	54	PASS
39	2488.21	PK	47.49	-29.67	32.56	50.38	74	PASS
39	2495.60	AV	45.62	-29.67	32.56	48.51	54	PASS


B.Test Plot:

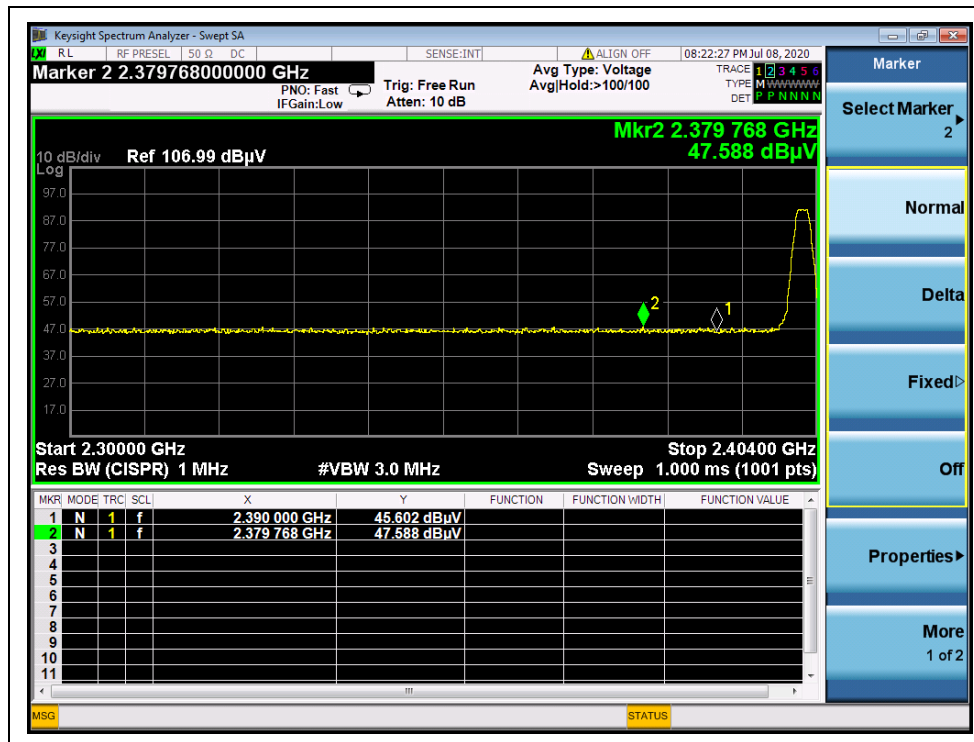


(PEAK, Channel 0)

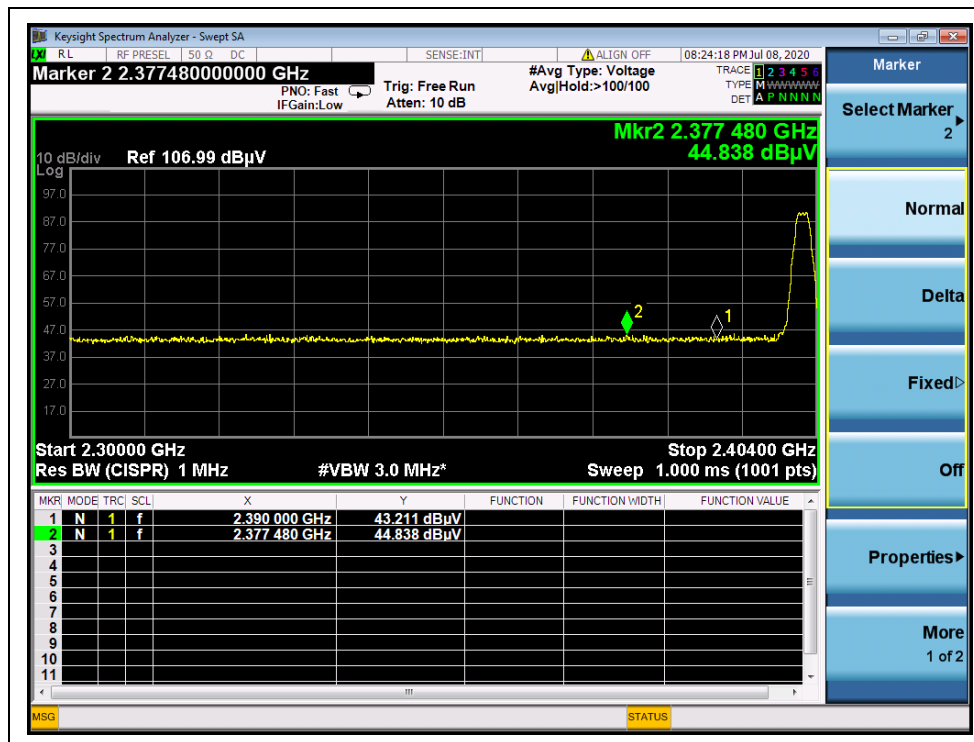

(AVERAGE, Channel 0)

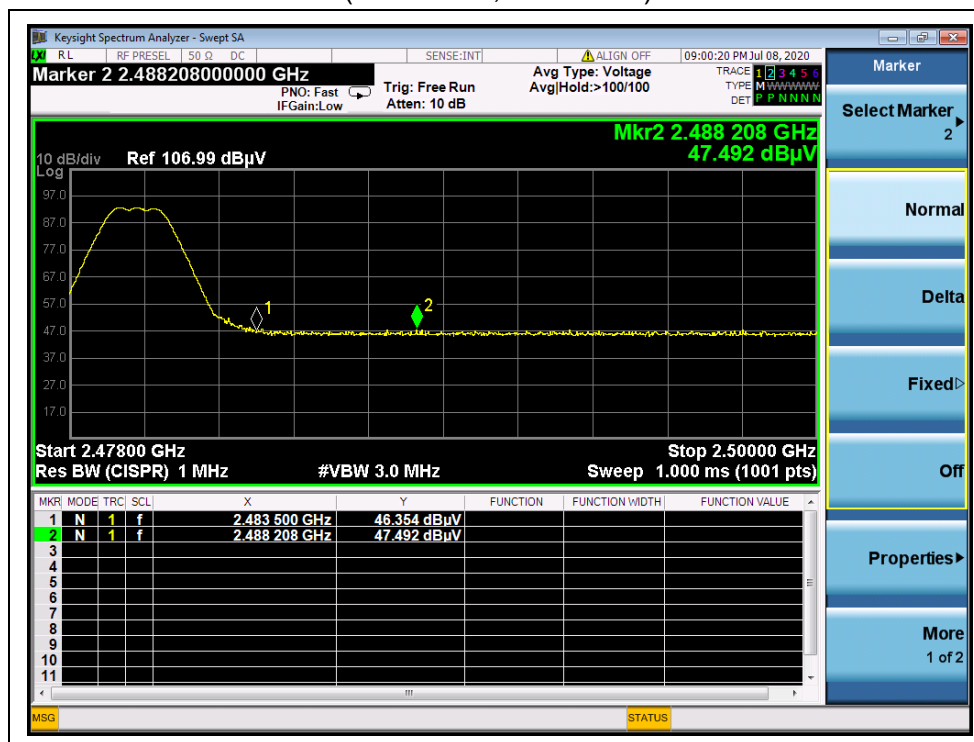

(PEAK, Channel 39)

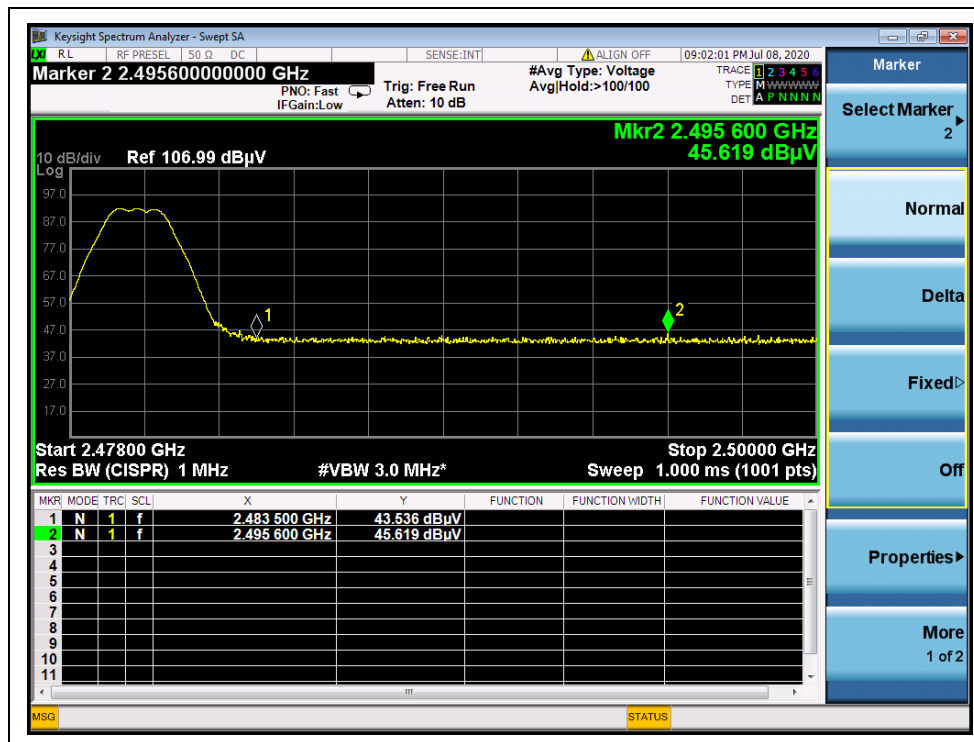

(AVERAGE, Channel 39)

2.10. Radiated Emission

2.10.1.Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3


Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

Note2:For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).


2.10.2.Test Description

Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

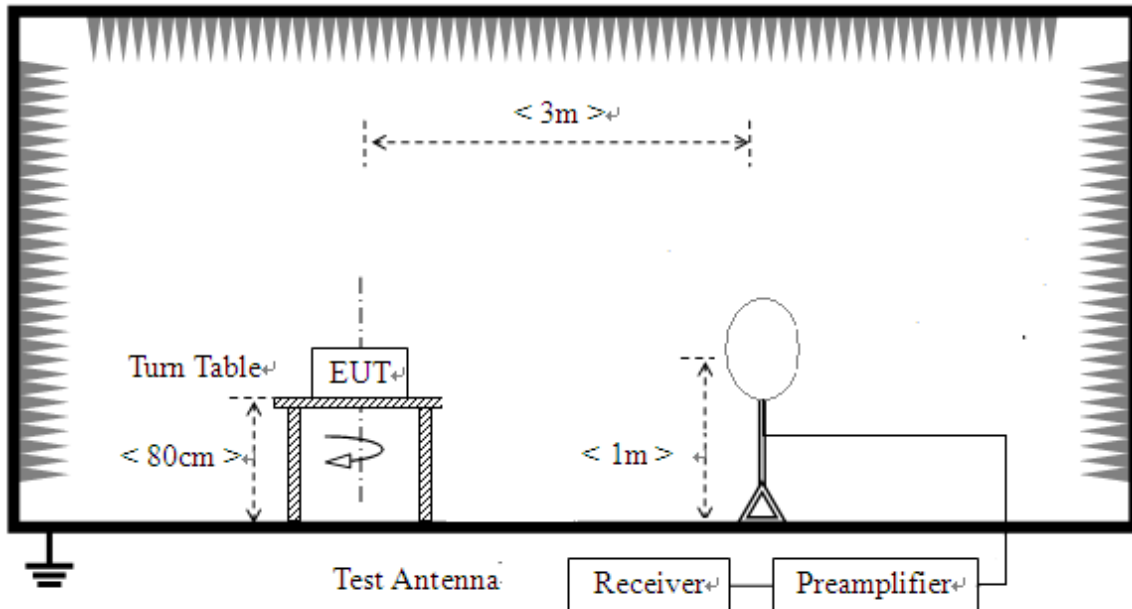

- 2) For radiated emissions from 30MHz to 1GHz

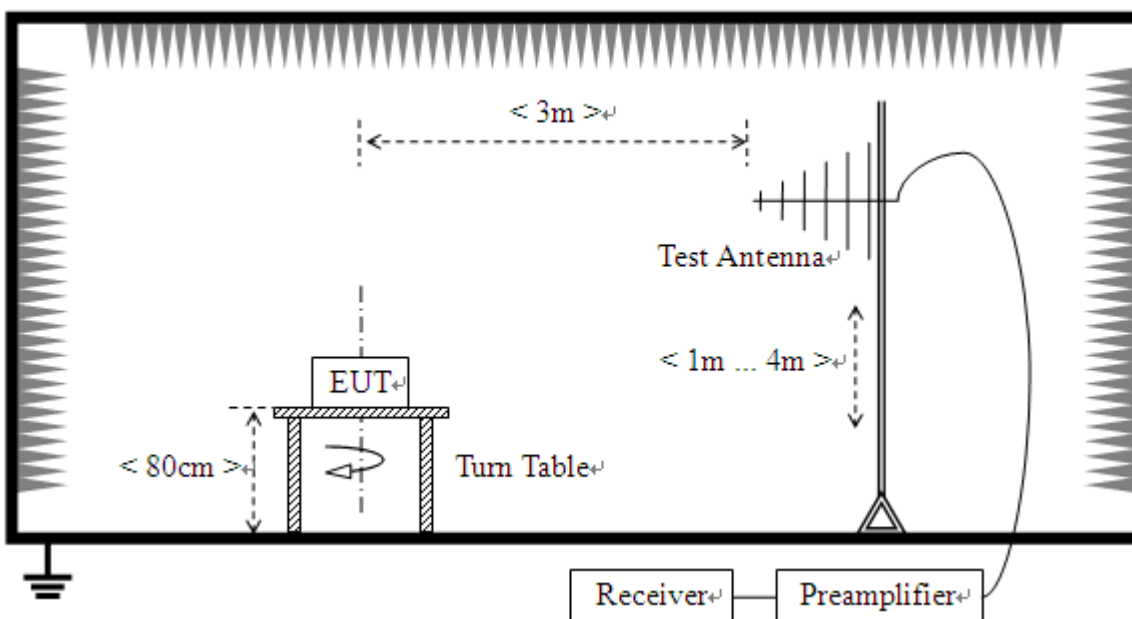

3) For radiated emissions above 1GHz

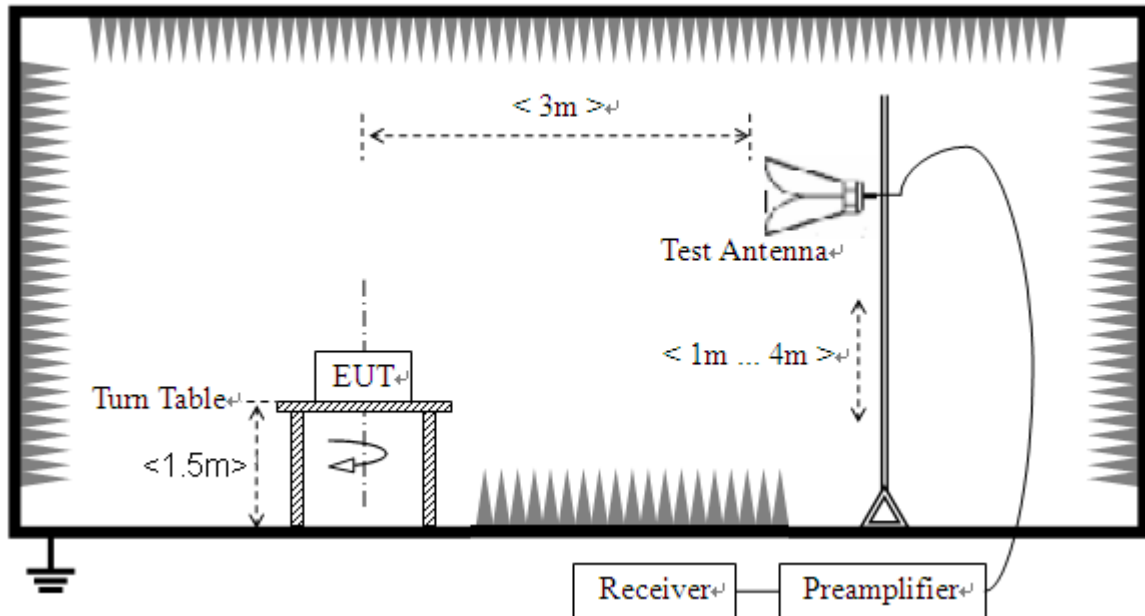

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz. Test site have a minimum area of the ground plane covered with RF absorbing material as specified in Figure 6 of ANSI C63.4: 2014.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10:2013. For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, for radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10:2013.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant



emissions, with polarization oriented for maximum response. The test antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

2.10.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.


Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


**1Mbps**

Plot for Channel 0

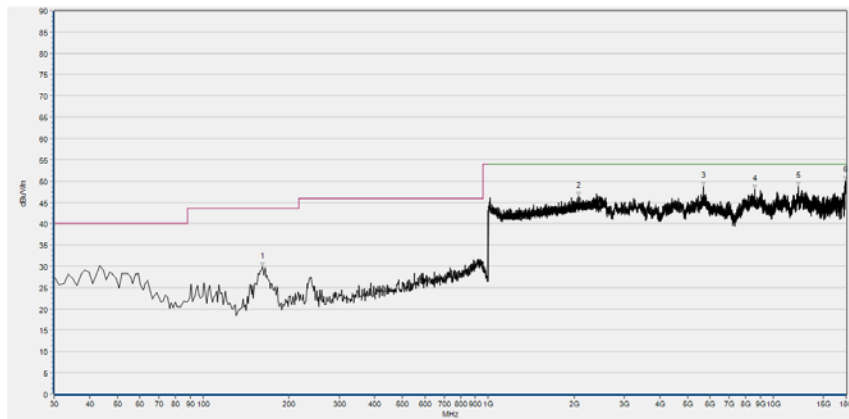

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
161.114	29.91	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2074.990	46.36	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5683.361	48.72	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8593.090	48.03	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12247.754	48.79	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
17899.182	50.16	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

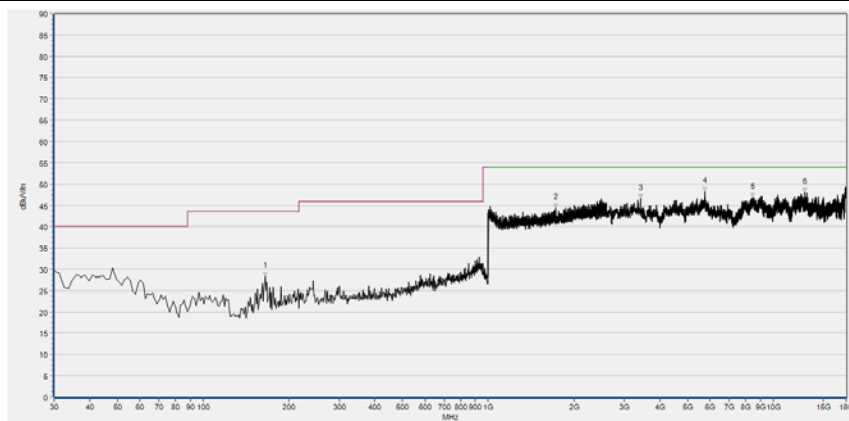


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
164.756	28.26	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1719.648	44.35	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3414.948	46.54	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5753.373	48.25	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8439.062	46.92	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12886.270	48.10	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 19

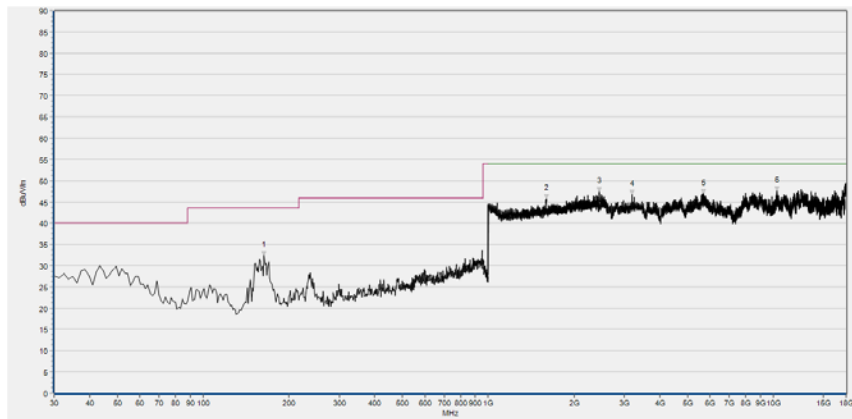

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
163.542	32.31	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1595.438	45.68	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2451.461	47.42	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3188.107	46.83	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5669.358	46.95	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10273.395	47.62	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

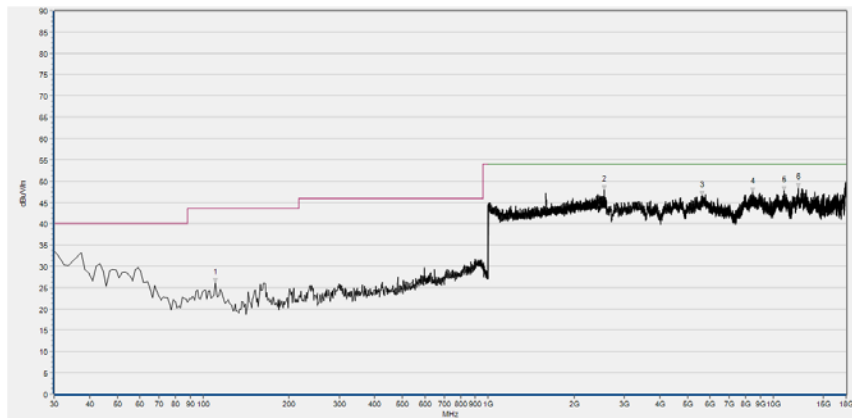


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
110.125	26.22	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2555.822	47.86	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5627.350	46.54	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8467.067	47.36	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10917.512	47.82	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12233.752	48.38	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 39

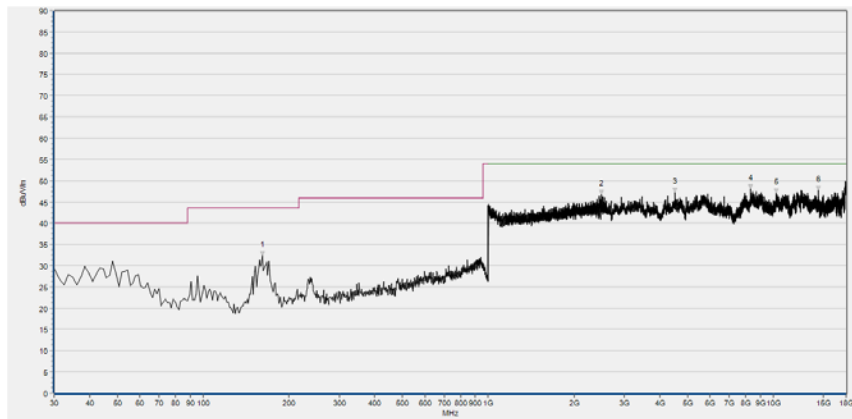

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
161.114	32.39	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2489.236	46.76	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4526.750	47.19	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8318.640	48.04	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10253.792	47.16	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
14373.341	47.73	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

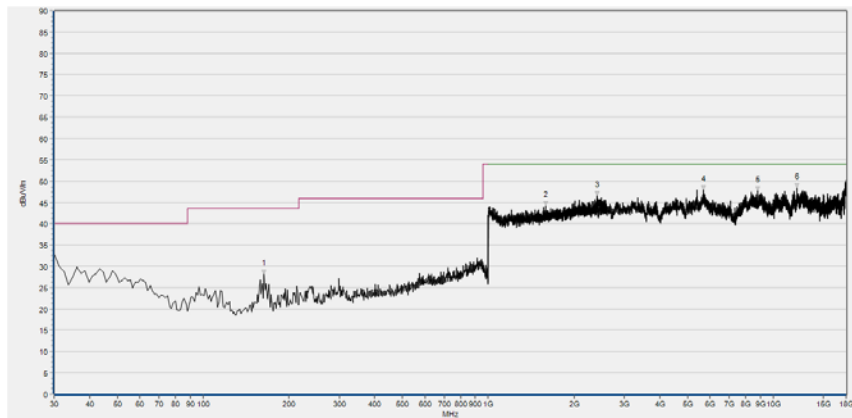


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
163.542	28.07	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1586.475	44.16	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2407.283	46.62	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5694.563	47.88	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8811.529	47.69	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12093.726	48.39	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)


**2Mbps**

Plot for Channel 0

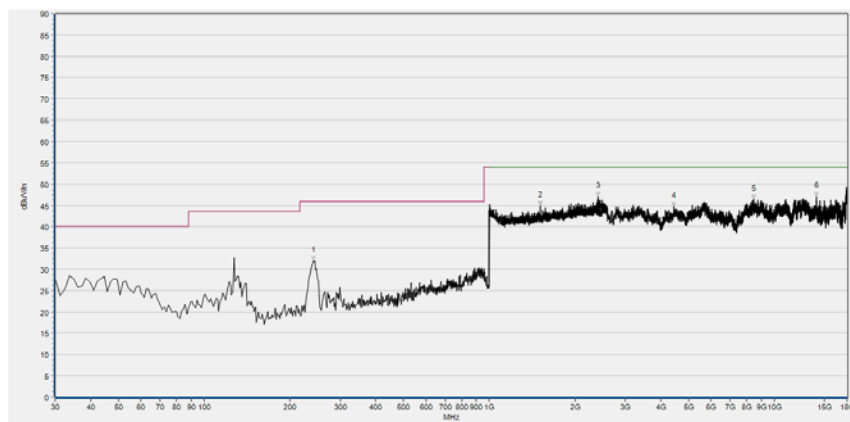

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
241.239	32.02	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1512.205	44.93	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2413.045	47.13	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4437.134	44.74	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8447.463	46.37	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
14009.274	47.02	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

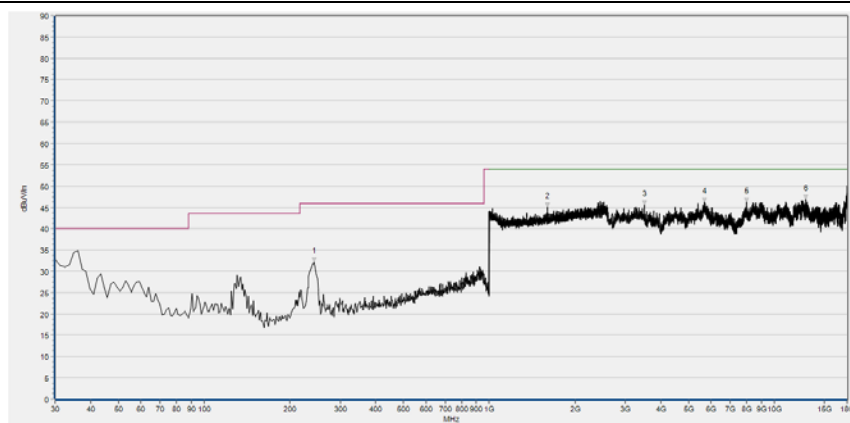


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
242.453	32.15	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1596.719	45.08	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3493.362	45.56	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5672.159	46.34	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7988.180	46.19	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12886.270	46.84	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 19

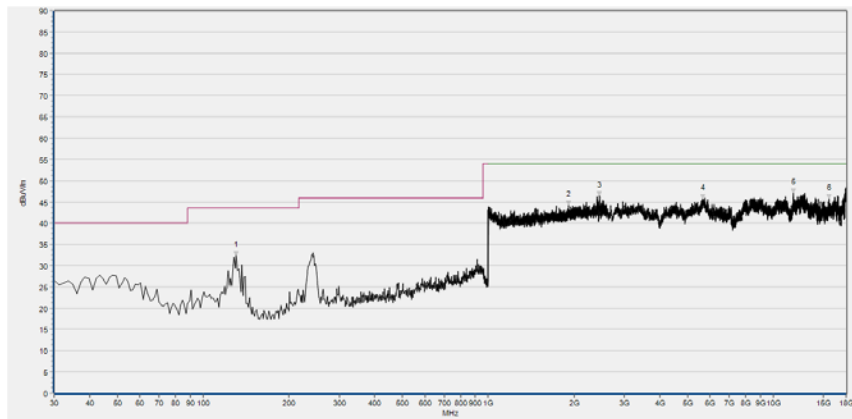

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
130.763	32.31	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1909.804	44.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2457.223	46.48	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5644.153	45.82	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
11729.660	47.06	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
15667.176	45.78	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

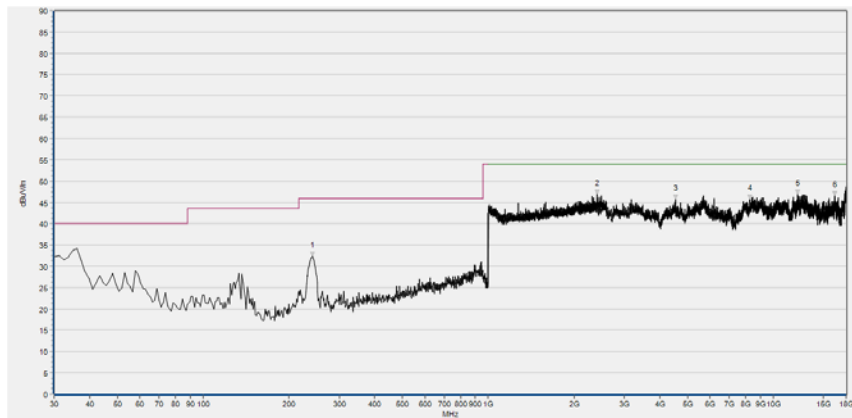


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
241.239	32.37	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2411.765	46.85	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4546.354	45.71	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8265.430	45.74	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12155.337	46.87	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
16398.109	46.55	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 39

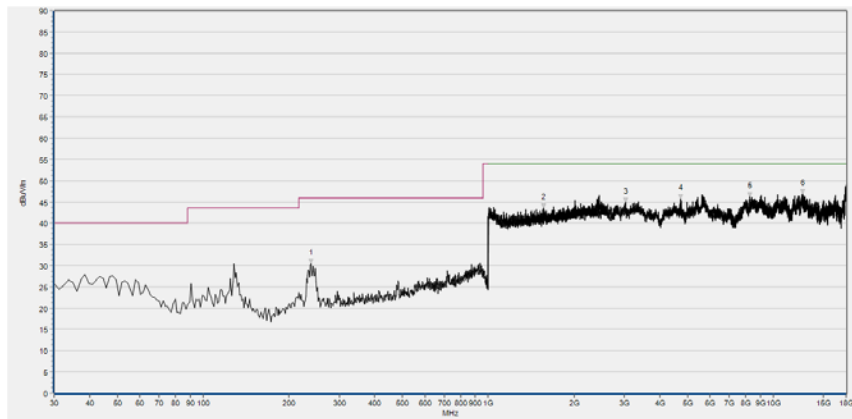

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
238.811	30.50	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1565.346	43.53	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3036.879	44.86	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4731.187	45.81	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8265.430	46.32	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12656.628	46.96	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

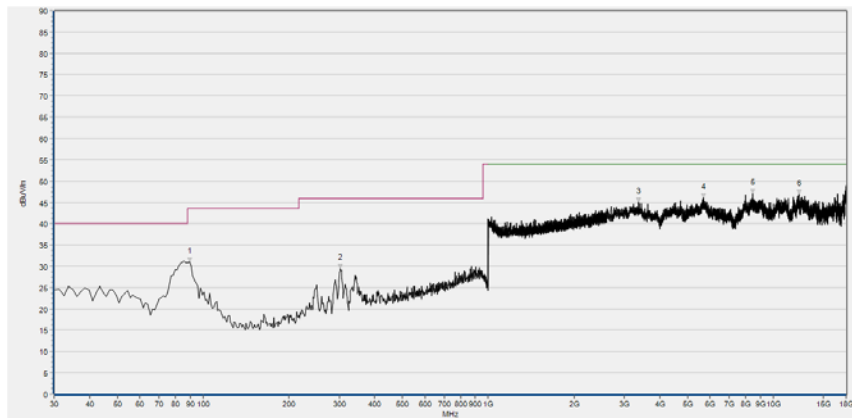

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
89.487	31.04	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
303.154	29.45	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
3367.340	45.03	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5674.959	46.12	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8461.466	47.15	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12295.363	47.00	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)



Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test Items	Uncertainty
Peak Output Power	$\pm 2.22\text{dB}$
Power Spectral Density (PSD)	$\pm 2.22\text{dB}$
Bandwidth	$\pm 5\%$
Conducted Spurious Emission	$\pm 2.77\text{dB}$
Restricted Frequency Bands	$\pm 5\%$
Radiated Emission	$\pm 2.95\text{dB}$
Conducted Emission	$\pm 2.44\text{dB}$

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2020.04.01	2021.03.31
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A
Computer	T430i	Think Pad	Lenovo	N/A	N/A

4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY56400093	N9038A	KEYSIGHT	2020.03.26	2021.03.25
LISN	8127449	NSLK 8127	Schwarzbeck	2020.03.26	2021.03.25
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2020.07.24	2021.07.23
Coaxial cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A
ADAPTER	N/A	A1374	APPLE	N/A	N/A
EARPHONE	EMC-03	VIVO	N/A	N/A	N/A

4.3 List of Software Used

Description	Manufacturer	Software Version
Test system	Tonscend	V2.6
Power Panel	Agilent	V3.8
Morlab EMCR V1.2	Morlab	V1.0
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

**4.4 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal.Due
Receiver	MY54130016	N9038A	Agilent	2020.07.21	2021.07.20
Test Antenna - Bi-Log	9163-520	VULB 9163	Schwarzbeck	2019.05.24	2022.05.23
Test Antenna - Loop	1520-022	FMZB1520	Schwarzbeck	2019.02.14	2022.02.13
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2019.07.26	2022.07.25
Test Antenna – Horn	BBHA9170 #774	BBHA 9170	Schwarzbeck	2019.07.26	2022.07.25
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable(N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	61171/61172	S020180L32 03	Tonscend	2020.07.21	2021.07.20
18-26.5GHz pre-Amplifier	46732	S10M100L38 02	Tonscend	2020.07.21	2021.07.20
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	2020.07.21	2021.07.20
Anechoic Chamber	N/A	9m*6m*6m	CRT	2020.01.06	2023.01.05

————— END OF REPORT —————