

物料承认书
SPECIFICATION FOR APPROVAL

客户名称 CUSTOMER		日期 DATE	
客户产品名称 CUSTOMER PART NAME	<u>D43.5- with holes and slots - EVA 1.0- wire 25mm</u>	供应商产品名称 VENDOR PART NAME	
客户规格型号 SPECIFICATION		规格型号 SPECIFICATION	<u>D43.5- with holes and slots - EVA 1.0- wire 25mm</u>
客户产品编码 CUSTOMER PART NO.		供应商产品编码 VENDOR PART NO.	


制作 (PRE.) :	审核(CHKD BY):	批准 (APPROVAL BY) :
-------------	--------------	--------------------

客户承认结果 (APPROVAL RESULT) : <input type="checkbox"/> 合格(OK) <input type="checkbox"/> 不合格(NG) <input type="checkbox"/> 其他 (OTHER) : 说明(REMARK):	承办(APPD):
	审核(CHKD BY):
	批准 (APPROVAL BY) :

Company:NINGBO EVERNEW ELECTRIC TECHNOLOGY CO., LTD. Address: Room 1402, Herong Building A, Ningbo, China
--

规格型号: DESC	D43.5- with holes and slots - EVA 1.0- wire 25mm	版本	客户 CUST:	
		Rev: A.0	客户料号 CUST P/N:	

一、尺寸 DIMENSION:(mm)

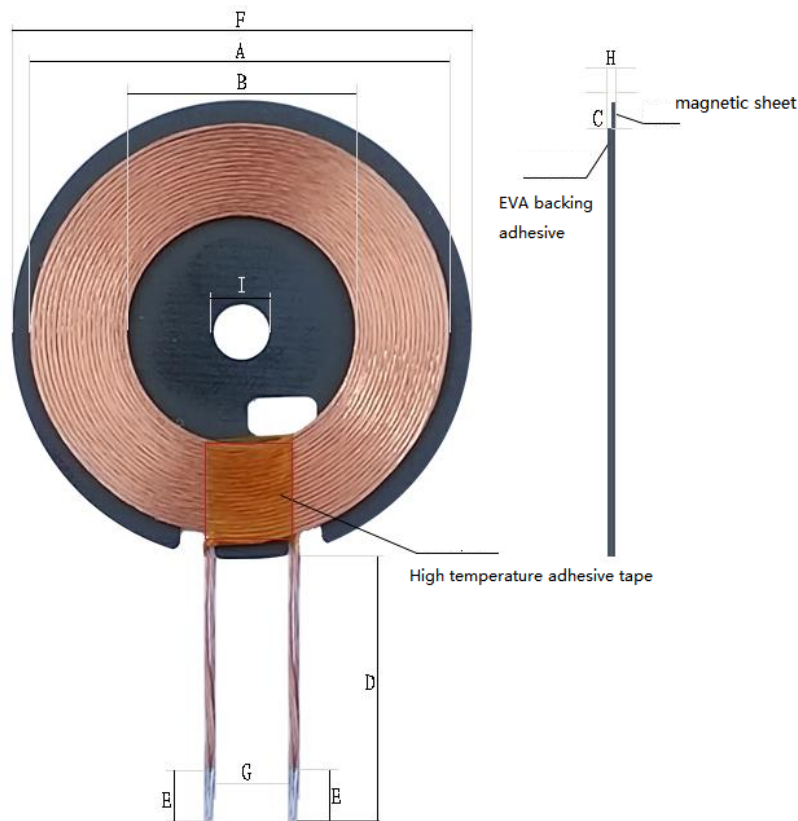

A	39mm±1.5
B	20.5mm±0.5
C	1.25mm Max
D	25mm±2
E	4mm±2
F	43.5mm±1
G	7mm
H	0.75mmMax
I	5.0mm

- Note:
1. Crossover line;
 2. Wrap 8mm (ref) width high-temperature adhesive paper 1-2Ts around the outlet position;
 3. The coil is attached to a circular hard magnetic piece with holes and slots. The size of the magnetic piece is 43.5 ± 1mm, with an inner hole of 5.0mm and a thickness of 0.6 ± 0.2mm;
 4. Environmentally friendly EVA, thickness 1.0mm;
 5. Sensitivity of 6.3UH,+20%.

二、原理图 SCHEMATIC DIAGRAM:

