

# Guidant Inc.

## Zoom Latitude Programming System Model 3120

August 6, 2004

Report No. GDMN0006.1 Revision 01

Report Prepared By:



[www.nwemc.com](http://www.nwemc.com)  
1-888-EMI-CERT

Test Report



22975 NW Evergreen Parkway  
Suite 400  
Hillsboro, Oregon 97124

## Certificate of Test

Issue Date: August 6, 2004  
Guidant Inc.

### Zoom Latitude Programming System, Model 3120

Emissions			
Specification	Test Method	Pass	Fail
FCC 15.249:2003	ANSI C63.4:2001 Fundamental Field Strength	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.249:2003	ANSI C63.4:2001 Radiated Spurious Emissions	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.207:2003	ANSI C63.4:2001 Conducted Emissions	<input checked="" type="checkbox"/>	<input type="checkbox"/>

#### Modifications made to the product

See the Modifications section of this report

Approved By:

Don Facteau, IS Manager

*This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America.*

*Product compliance is the responsibility of the client, therefore the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. This Report may only be duplicated in its entirety. The results of this test pertain only to the sample(s) tested, the specific description is noted in each of the individual sections of the test report supporting this certificate of test.*

<b>Revision Number</b>	<b>Description</b>	<b>Date</b>	<b>Page Number</b>
01	Add "Report Rev. 01" to Cover Page	8/25/04	Cover Page
01	Added Model Number to Equipment Description on Conducted Emissions Test Description Page	8/25/04	To be updated in final report revision.
01	Added Model Number to Equipment Description on Radiated Emissions Test Description Page	8/25/04	To be updated in final report revision.
01	Replaced Conducted Emissions Test Data	8/25/04	To be updated in final report revision.
01	Updated Modifications Page to Reflect Conducted Emissions Test Data	8/25/04	To be updated in final report revision.
01	Changed Date on Product Description Page	8/25/04	To be updated in final report revision.
01	Added Model Number to Equipment Description on FE Test Description Page	8/25/04	To be updated in final report revision.
01	Added Model Number to Equipment Description on Conducted Emissions Test Description Page	8/25/04	To be updated in final report revision.
01	Added Model Number to Equipment Description on SR Test Description Page	8/25/04	To be updated in final report revision.

**FCC:** Accredited by NVLAP for performance of FCC radio, digital, and ISM device testing. Our Open Area Test Sites, certification chambers, and conducted measurement facilities, have been fully described in reports filed with the FCC and accepted by the FCC in letters maintained in our files. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by the FCC as a Telecommunications Certification Body (TCB). This allows Northwest EMC to certify transmitters to FCC specifications in accordance with 47 CFR 2.960 and 2.962.



**NVLAP:** Northwest EMC, Inc. is recognized under the United States Department of Commerce, National Institute of Standards and Technology, National Voluntary Laboratory Accreditation Program for satisfactory compliance with the requirements of ISO/IEC 17025 for Testing Laboratories. The NVLAP accreditation encompasses Electromagnetic Compatibility Testing in accordance with the European Union EMC Directive 89/336/EEC, ANSI C63.4, MIL-STD 461E, DO-160D and SAE J1113. Additionally, Northwest EMC is accredited by NVLAP to perform radio testing in accordance with the European Union R&TTE Directive 1999/5/EEC, the requirements of FCC, and the RSS radio standards for Industry Canada. Accreditation has been granted to Northwest EMC, Inc. under Certificate Numbers: 200629-0, 200630-0, and 200676-0.



**Industry Canada:** Accredited by NVLAP for performance of Industry Canada RSS and ICES testing. Our Open Area Test Sites and certification chambers comply with RSS 212, Issue 1 (Provisional) and have been filed with Industry Canada and accepted. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by NIST and recognized by Industry Canada as a Certification Body (CB) per the APEC Mutual Recognition Arrangement (MRA). This allows Northwest EMC to certify transmitters to Industry Canada technical requirements.



**CAB:** Designated by NIST and validated by the European Commission as a Conformity Assessment Body (CAB) to conduct tests and approve products to the EMC directive and transmitters to the R&TTE directive, as described in the U.S. - EU Mutual Recognition Agreement



**TÜV Product Service:** Included in TÜV Product Service Group's Listing of Recognized Laboratories. It qualifies in connection with the TÜV Certification after Recognition of Agent's Testing Program for the product categories and/or standards shown in TÜV's current Listing of CARAT Laboratories available from TÜV. A certificate was issued to represent that this laboratory continues to meet TÜV's CARAT Program requirements. Certificate No. USA0401C



**TÜV Rheinland:** Authorized to carryout EMC tests by order and under supervision of TÜV Rheinland. This authorization is based on "Conditions for EMC-Subcontractors" of November 1992.



**NEMKO:** Assessed and accredited by NEMKO (Norwegian testing and certification body) for European emissions and immunity testing. As a result of NEMKO's laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification (Authorization No. ELA 119).



**Technology International:** Assessed in accordance with ISO Guide 25 defining the general international requirements for the competence of calibration and testing laboratories and with ITI assessment criteria LACO196. Based upon that assessment Interference Technology International, Ltd., has granted approval for specifications implementing the EU Directive on EMC (89/336/EEC and amendments). The scope of the approval was provided on a Schedule of Assessment supplied with the certificate and is available upon request.



**Australia/New Zealand:** The National Association of Testing Authorities (NATA), Australia has been appointed by the ACA as an accreditation body to accredit test laboratories and competent bodies for EMC standards. Accredited test reports or assessments by competent bodies must carry the NATA logo. Test reports made by an overseas laboratory that has been accredited for the relevant standards by an overseas accreditation body that has a Mutual Recognition Agreement (MRA) with NATA are also accepted as technical grounds for product conformity. The report should be endorsed with the respective logo of the accreditation body. (NVLAP)



**VCCI:** Accepted as an Associate Member to the VCCI, Acceptance No. 564. Conducted and radiated measurement facilities have been registered in accordance with Regulations for Voluntary Control Measures, Article 8. (*Registration Nos. - Evergreen: C-1071 and R-1025, Trails End: C-1877 and R-1760, Sultan: R-871, C-1784 and R-1761*)



**BSMI:** Northwest EMC has been designated by NIST and validated by C-Taipei (BSMI) as a CAB to conduct tests as described in the APEC Mutual Recognition Agreement. License No.SL2-IN-E-1017.



**GOST:** Northwest EMC, Inc. has been assessed and accredited by the Russian Certification bodies Certinform VNIINMASH, CERTINFO, SAMTES, and Federal CHEC, to perform EMC and Hygienic testing for Information Technology Products. As a result of their laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification



## SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/scope.asp>

**How important is it to understand performance criteria?**

It is the responsibility of the test laboratory to observe the results of the tests that are performed and to accurately report those results. As the responsible party (manufacturer, importer, etc) it is your responsibility to take those results, compare them against the specifications and standards, then, if appropriate make a declaration of conformity. As the responsible party it makes sense that you are fully aware of the requirements, how your device performs when tested to those requirements, and what information is being used to declare conformity.

To better assist you in making those conformity decisions, Northwest EMC has adopted a very simple, yet very clear performance assessment procedure. The following criteria is used when performing immunity or susceptibility tests:

**Performance Criteria 1:**

- ❑ The EUT exhibited no change in performance when operating as specified by the manufacturer. In this case no changes were observed during the test.
- ❑ In most cases this would be equivalent to Performance Criteria A. When operating the equipment in the modes or configurations specified by the responsible party, monitoring the parameters specified, no changes were observed. Basically nothing happened.

**Performance Criteria 2:**

- ❑ The EUT exhibited a change in performance when operating as specified by the manufacturer. In this case the equipment recovered without any operator intervention. The data sheets will detail the exact phenomena observed.
- ❑ In most cases this would be equivalent to Performance Criteria B. When operating the equipment in the modes or configurations specified by the responsible party, monitoring the parameters specified, changes were observed. The EUT was able to recover from those changes without any operator intervention.

**Performance Criteria 3:**

- ❑ The EUT exhibited a change in performance when operating as specified by the manufacturer. In this case the equipment required some operator intervention in order to recover. This intervention may be in the form of reducing the test levels, changing parameters, or even resetting the system. The data sheets will detail the exact phenomena observed.
- ❑ In most cases this would be equivalent to Performance Criteria C. When operating the equipment in the modes or configurations specified by the responsible party, monitoring the parameters specified, changes were observed. The EUT required some sort of operator intervention to recover. There was no permanent damage and the EUT appeared to function normally after completion test.

**Performance Criteria 4:**

- ❑ The EUT exhibited a change in performance when operating as specified by the manufacturer. In this case the equipment was damaged and would not recover. The data sheets will detail the exact phenomena observed.
- ❑ In most cases there is no specific criterion to compare this to, it typically ends the test. When operating the equipment in the modes or configurations specified by the responsible party, monitoring the parameters specified, changes were observed. There was no recovery; the equipment would no longer function as intended.

Each of the standards and specifications has unique performance criteria. In order to make an accurate assessment, one must compare the test results provided with the specific performance criteria. **To ensure that a responsible party is compliant with the specifications, one must read and understand those specifications. Provided below is a sample performance criteria, taken from EN 50082-1.**

**EN 50082-1 Performance Criteria**

**Performance Criteria A:** *The apparatus shall continue to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.*

**Performance Criteria B:** *The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.*

**Performance Criteria C:** *Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of controls.*

**How should a device perform in order for a declaration of conformity to be made?**

As already stated, it is the responsible party that must interpret and understand the results in such a way that a declaration of conformity is made. Having said that, we are often asked to render our opinion as to how a device should perform. Our recommendation simply follows the standards, as can be referenced below. Most of the standards and specifications offer the same performance criterion shown below as their requirements.

Test	Performance Criteria typically specified by the Standard	Equivalent Northwest EMC Performance Criteria
ESD	Performance Criteria B	Performance Criteria 1 or 2
Radiated RF	Performance Criteria A	Performance Criteria 1
EFT/Burst	Performance Criteria B	Performance Criteria 1 or 2
Surge	Performance Criteria B	Performance Criteria 1 or 2
Conducted RF	Performance Criteria A	Performance Criteria 1
Magnetic Field	Performance Criteria A	Performance Criteria 1
Voltage Dips and Variations	Performance Criteria B & C	Performance Criteria 1, 2, or 3

### What is measurement uncertainty?


When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. The following statement of measurement uncertainty is used to reflect the accuracy of the measured result as compared with its “true” value. In the case of transient tests (ESD, EFT, Surge, Voltage Dips and Interruptions), the test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements.

The following documents were the basis for determining the uncertainty levels of our measurements:

- “ISO Guide to the Expression of Uncertainty in Measurements”, October 1993
- “NIS81: The Treatment of Uncertainty in EMC Measurements”, May 1994
- “IEC CISPR 16-3 A1 f1 Ed.1: Radio-interference measurements and statistical techniques”, December 2000

### How might measurement uncertainty be applied to test results?

If the diamond marks the measured value for the test and the vertical bars bracket the range of + and – measurement uncertainty, then test results can be interpreted from the diagram below.

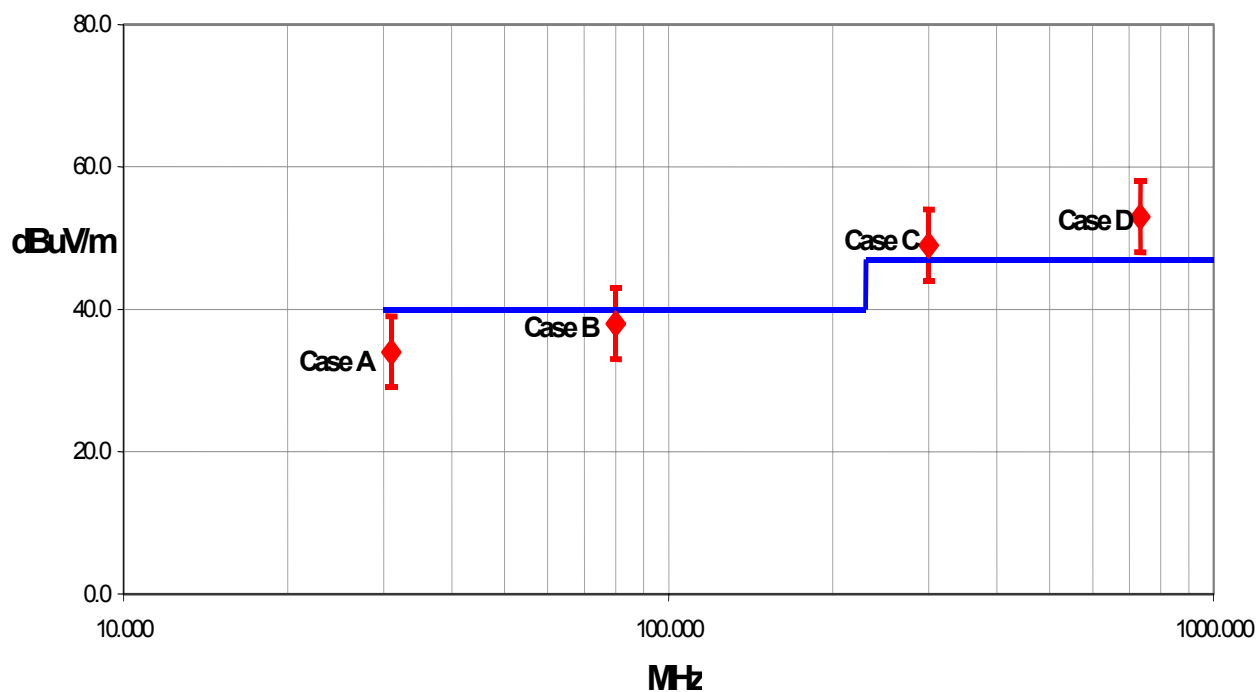

#### Test Result Scenarios:

**Case A:** Product complies.

**Case B:** Product conditionally complies. It is not possible to say with 95% confidence that the product complies.

**Case C:** Product conditionally does not comply. It is not possible to say with 95% confidence that the product does not comply.

**Case D:** Product does not comply.



**Radiated Emissions  $\leq 1$  GHz**

Value (dB)

Test Distance	Probability Distribution	Biconical Antenna		Log Periodic Antenna		Dipole Antenna	
		3m	10m	3m	10m	3m	10m
Combined standard uncertainty $u_c(y)$	normal	+ 1.86 - 1.88	+ 1.82 - 1.87	+ 2.23 - 1.41	+ 1.29 - 1.26	+ 1.31 - 1.27	+ 1.25 - 1.25
Expanded uncertainty $U$ (level of confidence $\approx 95\%$ )	normal (k=2)	+ 3.72 - 3.77	+ 3.64 - 3.73	+ 4.46 - 2.81	+ 2.59 - 2.52	+ 2.61 - 2.55	+ 2.49 - 2.49

**Radiated Emissions  $> 1$  GHz**

Value (dB)

Test Distance	Probability Distribution	Without High Pass Filter		With High Pass Filter	
		3m	10m	3m	10m
Combined standard uncertainty $u_c(y)$	normal	+ 1.29 - 1.25	+ 1.29 - 1.25	+ 1.38 - 1.35	+ 1.38 - 1.35
Expanded uncertainty $U$ (level of confidence $\approx 95\%$ )	normal (k=2)	+ 2.57 - 2.51	+ 2.57 - 2.51	+ 2.76 - 2.70	+ 2.76 - 2.70

**Conducted Emissions**

Test Distance	Probability Distribution	Value (+/- dB)	
		3m	10m
Combined standard uncertainty $u_c(y)$	normal	1.48	1.48
Expanded uncertainty $U$ (level of confidence $\approx 95\%$ )	normal (k = 2)	2.97	2.97

**Radiated Immunity**

Test Distance	Probability Distribution	Value (+/- dB)	
		3m	10m
Combined standard uncertainty $u_c(y)$	normal	1.05	1.05
Expanded uncertainty $U$ (level of confidence $\approx 95\%$ )	normal (k = 2)	2.11	2.11

**Conducted Immunity**

Test Distance	Probability Distribution	Value (+/- dB)	
		3m	10m
Combined standard uncertainty $u_c(y)$	normal	1.05	1.05
Expanded uncertainty $U$ (level of confidence $\approx 95\%$ )	normal (k = 2)	2.10	2.10

**Legend**

$u_c(y)$  = square root of the sum of squares of the individual standard uncertainties

$U$  = combined standard uncertainty multiplied by the coverage factor:  $k$ . This defines an interval about the measured result that will encompass the true value with a confidence level of approximately 95%. If a higher level of confidence is required, then  $k=3$  (CL of 99.7%) can be used. Please note that with a coverage factor of one,  $u_c(y)$  yields a confidence level of only 68%.

**California****Orange County Facility**

41 Tesla Ave.  
Irvine, CA 92618  
(888) 364-2378  
FAX (503) 844-3826

**Oregon****Evergreen Facility**

22975 NW Evergreen Pkwy.,  
Suite 400  
Hillsboro, OR 97124  
(503) 844-4066  
FAX (503) 844-3826

**Oregon****Trails End Facility**

30475 NE Trails End Lane  
Newberg, OR 97132  
(503) 844-4066  
FAX (503) 537-0735

**Washington****Sultan Facility**

14128 339<sup>th</sup> Ave. SE  
Sultan, WA 98294  
(888) 364-2378  
FAX (360) 793-2536

**Party Requesting the Test**

<b>Company Name:</b>	Guidant Inc.
<b>Address:</b>	4100 Hamline Avenue North
<b>City, State, Zip:</b>	Saint Paul, MN 55112-5798
<b>Test Requested By:</b>	Yogi Shah
<b>Model:</b>	Zoom Latitude Programming System Model 3120
<b>First Date of Test:</b>	7-01-04
<b>Last Date of Test:</b>	8-24-04
<b>Receipt Date of Samples:</b>	7-01-04
<b>Equipment Design Stage:</b>	Production
<b>Equipment Condition:</b>	No visual damage.

**Information Provided by the Party Requesting the Test**

<b>Clocks/Oscillators:</b>	40MHz, 33.3MHz, 100MHz, 66.6MHz, 4.1MHz, 41.667MHz, 6MHz, 32.768kHz, 14.318MHz, 16.67MHz, 24MHz, 25MHz, 48MHz, 16MHz, 10MHz, 210.38MHz, 833.52MHz, 13MHz
<b>I/O Ports:</b>	Parallel, USB, VGA, PCMCIA, ECG, Analog Output, Patient Simulator, Telemetry Wand

**Functional Description of the EUT (Equipment Under Test):**

The ZOOM® LATITUDE™ Programming System, which includes the Model 3120 Programmer/Recorder/Monitor (PRM), is a portable cardiac rhythm management system designed to be used with certain models of Guidant implantable pulse generators. It is a composite system operating under 15.209 using the telemetry wand and 15.249 with the single provided antenna. The Model 3120 PRM is designed to be used only with the Model 6577 Sterilizable Telemetry Wand. The Model 3120 is provided with only one available antenna, it is a RP-SMA to meet the unique antenna requirements of 47 CFR 15.203.

**Client Justification for EUT Selection:**

The product is a representative production sample.

**Client Justification for Test Selection:**

Tests required to meet the FCC requirements for approval.

Equipment modifications					
Item	Test	Date	Modification	Note	Disposition of EUT
1	Radiated Spurious Emissions	07/01/2004	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
2	Radiated Fundamental Emissions	07/02/2004	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
3	Conducted Emissions	07/15/2004	No EMI suppression devices were added or modified during this test.	Same configuration as delivered.	EUT remained at Northwest EMC.
4	Conducted Emissions	08/24/2004	Modifications made by Guidant to improve conducted emissions	Modified from previous configuration.	EUT remained at Northwest EMC.

**Justification**

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. All of the EUT parameters listed below were investigated. This includes, but may not be limited to, CPU speeds, video resolution settings, operational modes, and input voltages.

**Operating Modes Investigated:**

902-928 Radio Operating Low Channel
902-928 Radio Operating Mid Channel
902-928 Radio Operating High Channel

**Operating Modes Investigated:**

Typical
---------

**Data Rates Investigated:**

Maximum
---------

**Output Power Setting(s) Investigated:**

Maximum
---------

**Power Input Settings Investigated:**

120 VAC, 60 Hz
----------------

**Worst Case Input Power Setting used for Final Test:**

120 VAC, 60 Hz (designated by client or system limitations)
---

**Frequency Range Investigated**

<b>Start Frequency</b>	30 MHz	<b>Stop Frequency</b>	10 GHz
------------------------	--------	-----------------------	--------

**Software\Firmware Applied During Test**

<b>Operating system</b>	QNX/Red Hat Linux	<b>Version</b>	Unknown
<b>Exercise software</b>	2845 Application	<b>Version</b>	4.3

**Description**

The system was tested using standard operating production software to exercise the functions of the device during the testing.
--

**EUT and Peripherals in Test Setup Boundary**

Description	Manufacturer	Model/Part Number	Serial Number
Zoom Latitude Programming System	Guidant	NGP 3120	050336
USB Keyboard	Logitech	Y-BF37	None
USB Flash Hard Drive	PenDriveUSA	Pen Drive Plus 2.0	None

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Power	Yes	1.8	No	NGP	AC Mains
Parallel	Yes	1.6	No	NGP	Unterminated
Video	No	8.0	Yes	NGP	Unterminated
Patient cables	Yes	3.0	No	NGP	Unterminated
USB	No	1.8	No	NGP	keyboard
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					

Measurement Equipment					
Description	Manufacturer	Model	Identifier	Last Cal	Interval
Quasi-Peak Adapter	Hewlett-Packard	85650A	AQD	02/10/2004	13 mo
Spectrum Analyzer	Hewlett-Packard	8568B	AAI	02/10/2004	13 mo
Pre-Amplifier	Miteq	AM-1551	AOX	05/07/2004	13 mo
Antenna, Biconilog	EMCO	3142	AXK	05/21/2003	24 mo
Spectrum Analyzer	Hewlett Packard	8593E	AAP	03/22/2004	13 mo
Receiver	Schaffner	SCR 3101	ARC	04/28/2003	24 mo
Pre-Amplifier	Miteq	AMF-4D	APP	06/07/2004	13 mo
Antenna, Horn	EMCO	3115	AHE	10/13/2003	24 mo

### Test Description


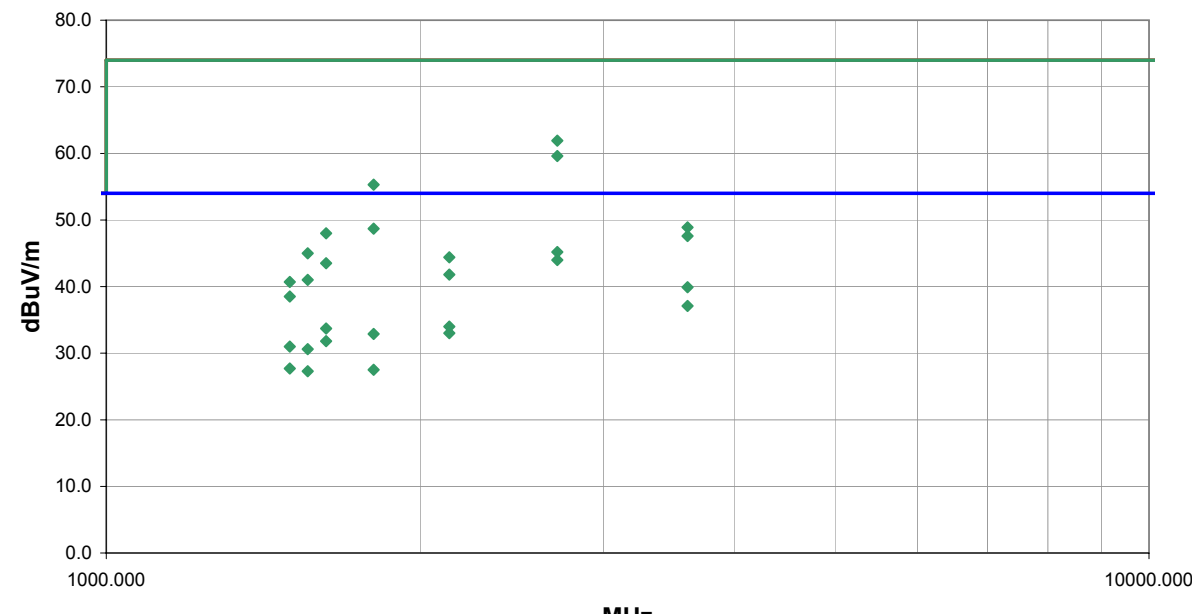
**Requirement:** Per 47 CFR 15.249, the field strength of any emissions outside the band of 902 – 928 MHz shall comply with the limits as defined in 47 CFR 15.209.

**Configuration:** The only antenna to be used with the EUT was tested. The EUT was transmitting at its high, mid and low channels. While scanning, emissions from the EUT were maximized by rotating the EUT, adjusting the measurement antenna height and polarization (per ANSI C63.4:1992).

Measurement Bandwidths			
Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 – 0.15	1.0	0.2	0.2
0.15 – 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0
Measurements were made using the bandwidths and detectors specified. No video filter was used.			


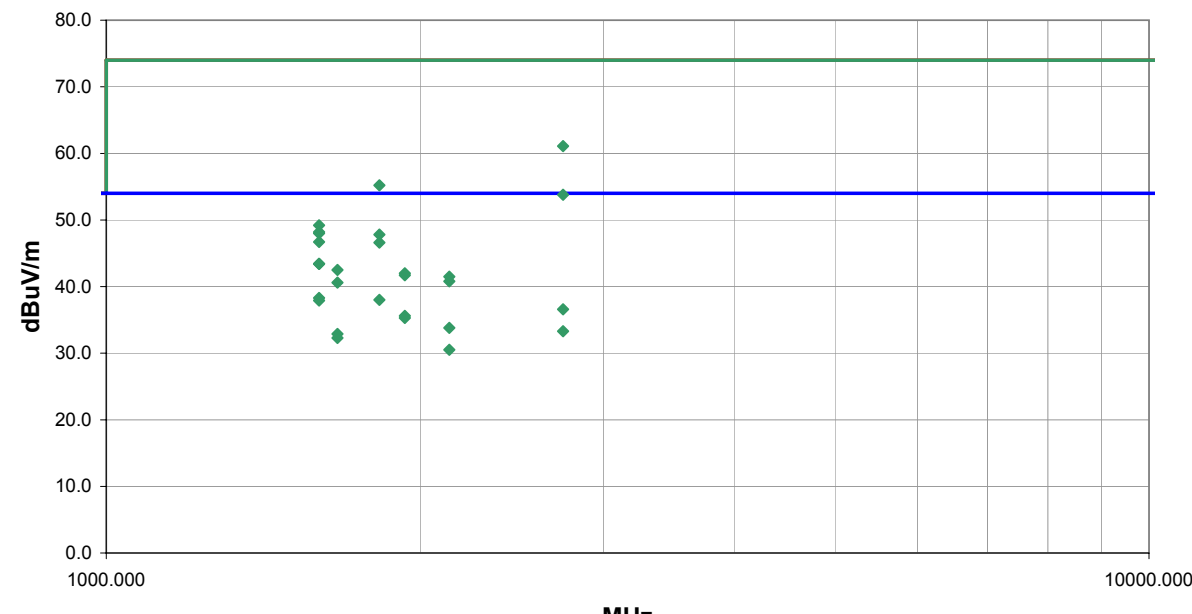
Completed by:




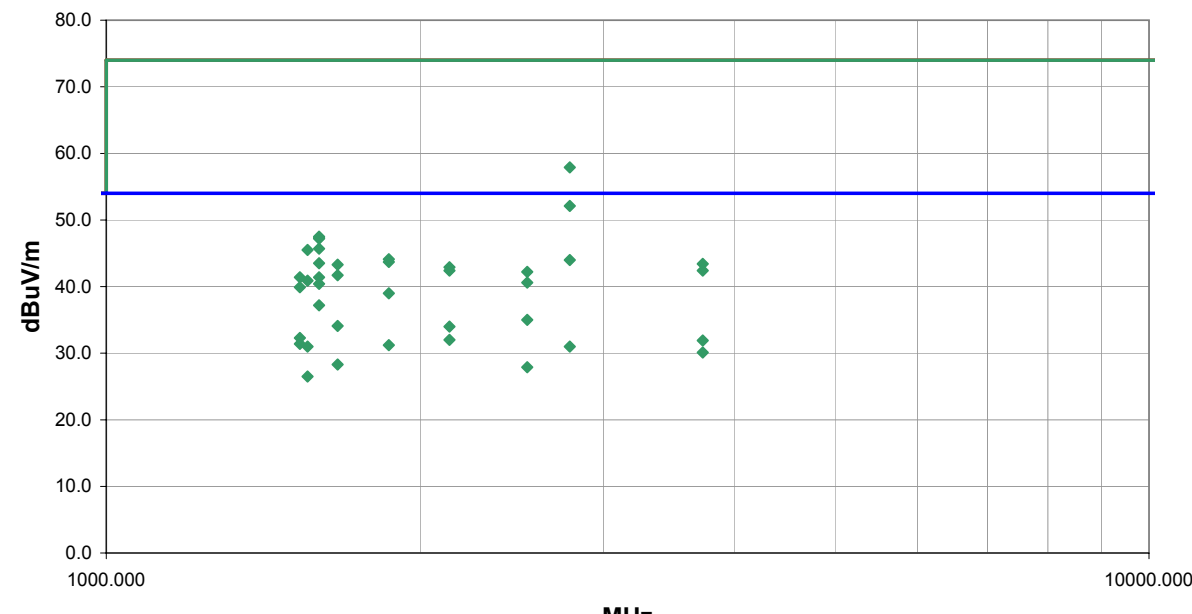
NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET				REV d4.13 05/06/2004						
EUT: Zoom Latitude Programming System Model 3120				Work Order: GDMN0006								
Serial Number: 050336				Date: 07/01/04								
Customer: Guidant Inc				Temperature: 73								
Attendees: Holli Pheil, Yogi Shah				Humidity: 45%								
Cust. Ref. No.:				Barometric Pressure: 30.01								
Tested by: Jeremiah Darden		Power: 120V/60Hz		Job Site: OC10								
TEST SPECIFICATIONS												
Specification: FCC 15.249				Year: 2003								
Method: ANSI C63.4				Year: 2001								
SAMPLE CALCULATIONS												
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation												
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator												
COMMENTS												
Set up with three PG's												
EUT OPERATING MODES												
Standard Operating Mode, Low Band 902.5												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
RESULTS							Run #					
Pass							1					
Other												
							 Tested By:					
												
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
2707.090	45.3	-0.1	233.0	1.2	3.0	0.0	V-Horn	AV	0.0	45.2	54.0	-8.8
2707.090	44.1	-0.1	295.0	2.3	3.0	0.0	H-Horn	AV	0.0	44.0	54.0	-10.0
2707.090	62.0	-0.1	233.0	1.2	3.0	0.0	V-Horn	PK	0.0	61.9	74.0	-12.1
3609.500	36.9	3.0	36.0	1.2	3.0	0.0	V-Horn	AV	0.0	39.9	54.0	-14.1
2707.090	59.7	-0.1	295.0	2.3	3.0	0.0	H-Horn	PK	0.0	59.6	74.0	-14.4
3609.500	34.1	3.0	327.0	3.0	3.0	0.0	H-Horn	AV	0.0	37.1	54.0	-16.9
1804.660	58.8	-3.5	82.0	2.0	3.0	0.0	V-Horn	PK	0.0	55.3	74.0	-18.7
2133.260	35.9	-1.9	181.0	1.2	3.0	0.0	V-Horn	AV	0.0	34.0	54.0	-20.0
1624.920	38.2	-4.5	119.0	1.3	3.0	0.0	H-Horn	AV	0.0	33.7	54.0	-20.3
2133.260	34.9	-1.9	105.0	1.3	3.0	0.0	H-Horn	AV	0.0	33.0	54.0	-21.0
1804.660	36.4	-3.5	166.0	1.3	3.0	0.0	H-Horn	AV	0.0	32.9	54.0	-21.1
1624.920	36.3	-4.5	164.0	1.2	3.0	0.0	V-Horn	AV	0.0	31.8	54.0	-22.2
1499.600	36.2	-5.2	125.0	1.2	3.0	0.0	V-Horn	AV	0.0	31.0	54.0	-23.0
1560.160	35.5	-4.9	172.0	1.2	3.0	0.0	V-Horn	AV	0.0	30.6	54.0	-23.4
3609.500	45.9	3.0	36.0	1.2	3.0	0.0	V-Horn	PK	0.0	48.9	74.0	-25.1
1804.660	52.2	-3.5	166.0	1.3	3.0	0.0	H-Horn	PK	0.0	48.7	74.0	-25.3
1624.920	52.5	-4.5	164.0	1.2	3.0	0.0	V-Horn	PK	0.0	48.0	74.0	-26.0
1499.600	32.9	-5.2	156.0	1.3	3.0	0.0	H-Horn	AV	0.0	27.7	54.0	-26.3
3609.500	44.6	3.0	327.0	3.0	3.0	0.0	H-Horn	PK	0.0	47.6	74.0	-26.4
1804.660	31.0	-3.5	82.0	2.0	3.0	0.0	V-Horn	AV	0.0	27.5	54.0	-26.5
1560.160	32.2	-4.9	135.0	1.9	3.0	0.0	H-Horn	AV	0.0	27.3	54.0	-26.7

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
1560.160	49.9	-4.9	172.0	1.2	3.0	0.0	V-Horn	PK	0.0	45.0	74.0	-29.0
2133.260	46.3	-1.9	105.0	1.3	3.0	0.0	H-Horn	PK	0.0	44.4	74.0	-29.6
1624.920	48.0	-4.5	119.0	1.3	3.0	0.0	H-Horn	PK	0.0	43.5	74.0	-30.5
2133.260	43.7	-1.9	181.0	1.2	3.0	0.0	V-Horn	PK	0.0	41.8	74.0	-32.2
1560.160	45.9	-4.9	135.0	1.9	3.0	0.0	H-Horn	PK	0.0	41.0	74.0	-33.0
1499.600	45.9	-5.2	125.0	1.2	3.0	0.0	V-Horn	PK	0.0	40.7	74.0	-33.3
1499.600	43.7	-5.2	156.0	1.3	3.0	0.0	H-Horn	PK	0.0	38.5	74.0	-35.5




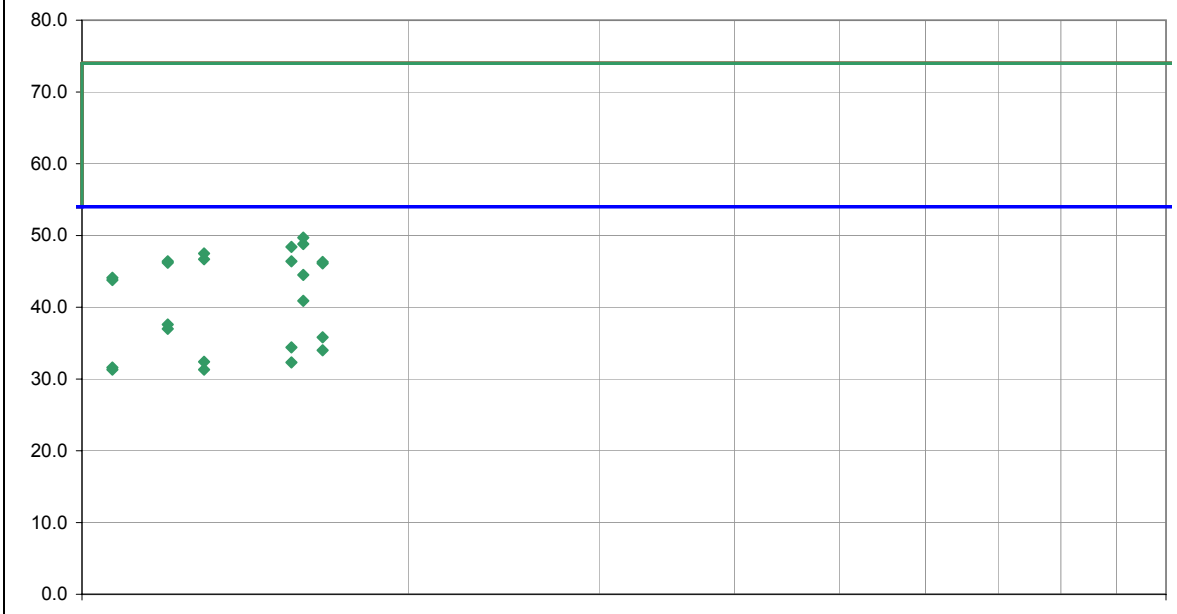
NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET								REV d4.13 05/06/2004		
EUT: Zoom Latitude Programming System Model 3120						Work Order: GDMN0006						
Serial Number: 050336						Date: 07/01/04						
Customer: Guidant Inc						Temperature: 73						
Attendees: Holli Pheil, Yogi Shah						Humidity: 45%						
Cust. Ref. No.:						Barometric Pressure: 30.01						
Tested by: Jeremiah Darden				Power: 120V/60Hz		Job Site: OC10						
TEST SPECIFICATIONS												
Specification: FCC 15.249						Year: 2003						
Method: ANSI C63.4						Year: 2001						
SAMPLE CALCULATIONS												
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation												
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator												
COMMENTS												
Set up with three PG's												
EUT OPERATING MODES												
Standard Operating Mode Mid band 914												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
RESULTS										Run #		
Pass										2		
Other												
 Tested By:												
												
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
1827.970	51.1	-3.3	80.0	2.4	3.0	0.0	V-Horn	AV	0.0	47.8	54.0	-6.2
1599.750	48.0	-4.6	175.0	1.3	3.0	0.0	V-Horn	AV	0.0	43.4	54.0	-10.6
1600.000	48.0	-4.6	180.0	1.2	3.0	0.0	V-Horn	AV	0.0	43.4	54.0	-10.6
2742.070	61.0	0.1	93.0	1.5	3.0	0.0	V-Horn	PK	0.0	61.1	74.0	-12.9
1600.000	42.9	-4.6	207.0	1.3	3.0	0.0	H-Horn	AV	0.0	38.3	54.0	-15.7
1827.970	41.3	-3.3	166.0	1.3	3.0	0.0	H-Horn	AV	0.0	38.0	54.0	-16.0
1599.750	42.5	-4.6	193.0	1.3	3.0	0.0	H-Horn	AV	0.0	37.9	54.0	-16.1
2742.070	36.5	0.1	210.0	3.8	3.0	0.0	H-Horn	AV	0.0	36.6	54.0	-17.4
1933.340	38.3	-2.7	143.0	1.2	3.0	0.0	V-Horn	AV	0.0	35.6	54.0	-18.4
1933.340	38.0	-2.7	184.0	1.3	3.0	0.0	H-Horn	AV	0.0	35.3	54.0	-18.7
1827.970	58.5	-3.3	80.0	2.4	3.0	0.0	V-Horn	PK	0.0	55.2	74.0	-18.8
2133.300	35.7	-1.9	176.0	1.2	3.0	0.0	V-Horn	AV	0.0	33.8	54.0	-20.2
2742.070	53.7	0.1	210.0	3.8	3.0	0.0	H-Horn	PK	0.0	53.8	74.0	-20.2
2742.070	33.2	0.1	93.0	1.5	3.0	0.0	V-Horn	AV	0.0	33.3	54.0	-20.7
1666.474	37.2	-4.3	144.0	1.3	3.0	0.0	H-Horn	AV	0.0	32.9	54.0	-21.1
1666.474	36.6	-4.3	180.0	1.2	3.0	0.0	V-Horn	AV	0.0	32.3	54.0	-21.7
2133.300	32.4	-1.9	197.0	1.3	3.0	0.0	H-Horn	AV	0.0	30.5	54.0	-23.5
1599.750	53.8	-4.6	175.0	1.3	3.0	0.0	V-Horn	PK	0.0	49.2	74.0	-24.8
1600.000	52.8	-4.6	207.0	1.3	3.0	0.0	H-Horn	PK	0.0	48.2	74.0	-25.8
1600.000	52.6	-4.6	180.0	1.2	3.0	0.0	V-Horn	PK	0.0	48.0	74.0	-26.0
1599.750	51.3	-4.6	193.0	1.3	3.0	0.0	H-Horn	PK	0.0	46.7	74.0	-27.3

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
1827.970	49.9	-3.3	166.0	1.3	3.0	0.0	H-Horn	PK	0.0	46.6	74.0	-27.4
1666.474	46.8	-4.3	144.0	1.3	3.0	0.0	H-Horn	PK	0.0	42.5	74.0	-31.5
1933.340	44.7	-2.7	143.0	1.2	3.0	0.0	V-Horn	PK	0.0	42.0	74.0	-32.0
1933.340	44.4	-2.7	184.0	1.3	3.0	0.0	H-Horn	PK	0.0	41.7	74.0	-32.3
2133.300	43.4	-1.9	176.0	1.2	3.0	0.0	V-Horn	PK	0.0	41.5	74.0	-32.5
2133.300	42.7	-1.9	197.0	1.3	3.0	0.0	H-Horn	PK	0.0	40.8	74.0	-33.2
1666.474	44.9	-4.3	180.0	1.2	3.0	0.0	V-Horn	PK	0.0	40.6	74.0	-33.4


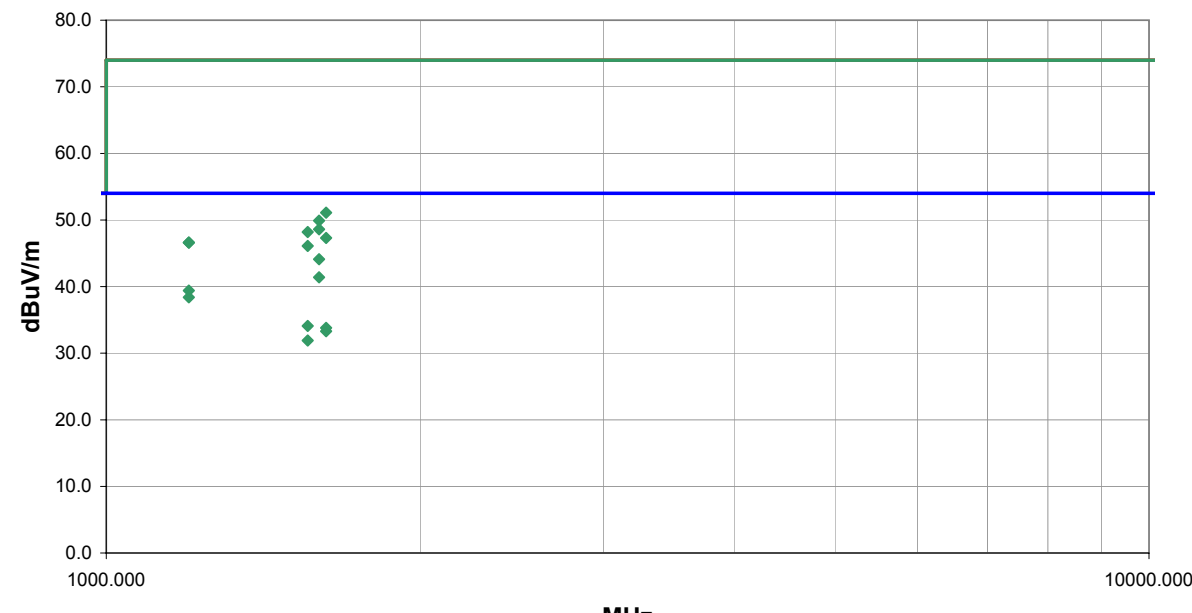
NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET		REV d4.13 05/06/2004								
EUT: Zoom Latitude Programming System Model 3120			Work Order: GDMN0006									
Serial Number: 050336			Date: 07/01/04									
Customer: Guidant Inc			Temperature: 73									
Attendees: Holli Pheil, Yogi Shah			Humidity: 45%									
Cust. Ref. No.:			Barometric Pressure: 30.01									
Tested by: Jeremiah Darden		Power: 120V/60Hz		Job Site: OC10								
TEST SPECIFICATIONS												
Specification: FCC 15.249			Year: 2003									
Method: ANSI C63.4			Year: 2001									
SAMPLE CALCULATIONS												
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation												
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator												
COMMENTS												
Set up with three PG's												
EUT OPERATING MODES												
Standard Operating Mode High band 927.5												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
RESULTS					Run #							
Pass					3							
Other												
					Tested By: 							
												
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
2782.620	43.8	0.2	88.0	1.2	3.0	0.0	V-Horn	AV	0.0	44.0	54.0	-10.0
1599.800	48.1	-4.6	179.0	1.2	3.0	0.0	V-Horn	AV	0.0	43.5	54.0	-10.5
1599.760	46.0	-4.6	172.0	1.2	3.0	0.0	V-Horn	AV	0.0	41.4	54.0	-12.6
1599.760	45.0	-4.6	134.0	1.3	3.0	0.0	H-Horn	AV	0.0	40.4	54.0	-13.6
1866.540	42.1	-3.1	151.0	1.1	3.0	0.0	V-Horn	AV	0.0	39.0	54.0	-15.0
2782.620	57.7	0.2	88.0	1.2	3.0	0.0	V-Horn	PK	0.0	57.9	74.0	-16.1
1599.800	41.8	-4.6	191.0	1.3	3.0	0.0	H-Horn	AV	0.0	37.2	54.0	-16.8
2533.110	35.9	-0.9	200.0	1.3	3.0	0.0	H-Horn	AV	0.0	35.0	54.0	-19.0
1666.674	38.4	-4.3	167.0	1.2	3.0	0.0	V-Horn	AV	0.0	34.1	54.0	-19.9
2133.420	35.9	-1.9	180.0	1.2	3.0	0.0	V-Horn	AV	0.0	34.0	54.0	-20.0
1533.306	37.4	-5.1	187.0	1.3	3.0	0.0	H-Horn	AV	0.0	32.3	54.0	-21.7
2782.620	51.9	0.2	122.0	2.3	3.0	0.0	H-Horn	PK	0.0	52.1	74.0	-21.9
2133.420	33.9	-1.9	102.0	1.3	3.0	0.0	H-Horn	AV	0.0	32.0	54.0	-22.0
3733.340	28.6	3.3	196.0	1.2	3.0	0.0	V-Horn	AV	0.0	31.9	54.0	-22.1
1533.306	36.5	-5.1	189.0	1.2	3.0	0.0	V-Horn	AV	0.0	31.4	54.0	-22.6
1866.540	34.3	-3.1	136.0	1.7	3.0	0.0	H-Horn	AV	0.0	31.2	54.0	-22.8
1559.940	35.9	-4.9	169.0	1.2	3.0	0.0	V-Horn	AV	0.0	31.0	54.0	-23.0
2782.620	30.8	0.2	122.0	2.3	3.0	0.0	H-Horn	AV	0.0	31.0	54.0	-23.0
3733.340	26.8	3.3	95.0	1.3	3.0	0.0	H-Horn	AV	0.0	30.1	54.0	-23.9
1666.674	32.6	-4.3	109.0	1.3	3.0	0.0	H-Horn	AV	0.0	28.3	54.0	-25.7
2533.110	28.8	-0.9	124.0	1.2	3.0	0.0	V-Horn	AV	0.0	27.9	54.0	-26.1

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
1599.800	52.1	-4.6	191.0	1.3	3.0	0.0	H-Horn	PK	0.0	47.5	74.0	-26.5
1599.800	51.9	-4.6	179.0	1.2	3.0	0.0	V-Horn	PK	0.0	47.3	74.0	-26.7
1599.760	51.8	-4.6	172.0	1.2	3.0	0.0	V-Horn	PK	0.0	47.2	74.0	-26.8
1559.940	31.4	-4.9	229.0	1.3	3.0	0.0	H-Horn	AV	0.0	26.5	54.0	-27.5
1599.760	50.3	-4.6	134.0	1.3	3.0	0.0	H-Horn	PK	0.0	45.7	74.0	-28.3
1559.940	50.4	-4.9	169.0	1.2	3.0	0.0	V-Horn	PK	0.0	45.5	74.0	-28.5
1866.540	47.2	-3.1	151.0	1.1	3.0	0.0	V-Horn	PK	0.0	44.1	74.0	-29.9
1866.540	46.8	-3.1	136.0	1.7	3.0	0.0	H-Horn	PK	0.0	43.7	74.0	-30.3
3733.340	40.1	3.3	196.0	1.2	3.0	0.0	V-Horn	PK	0.0	43.4	74.0	-30.6
1666.674	47.6	-4.3	167.0	1.2	3.0	0.0	V-Horn	PK	0.0	43.3	74.0	-30.7
2133.420	44.8	-1.9	180.0	1.2	3.0	0.0	V-Horn	PK	0.0	42.9	74.0	-31.1
2133.420	44.3	-1.9	102.0	1.3	3.0	0.0	H-Horn	PK	0.0	42.4	74.0	-31.6
3733.340	39.1	3.3	95.0	1.3	3.0	0.0	H-Horn	PK	0.0	42.4	74.0	-31.6
2533.110	43.1	-0.9	200.0	1.3	3.0	0.0	H-Horn	PK	0.0	42.2	74.0	-31.8
1666.674	46.0	-4.3	109.0	1.3	3.0	0.0	H-Horn	PK	0.0	41.7	74.0	-32.3
1533.306	46.5	-5.1	189.0	1.2	3.0	0.0	V-Horn	PK	0.0	41.4	74.0	-32.6
1559.940	45.8	-4.9	229.0	1.3	3.0	0.0	H-Horn	PK	0.0	40.9	74.0	-33.1
2533.110	41.5	-0.9	124.0	1.2	3.0	0.0	V-Horn	PK	0.0	40.6	74.0	-33.4
1533.306	45.0	-5.1	187.0	1.3	3.0	0.0	H-Horn	PK	0.0	39.9	74.0	-34.1


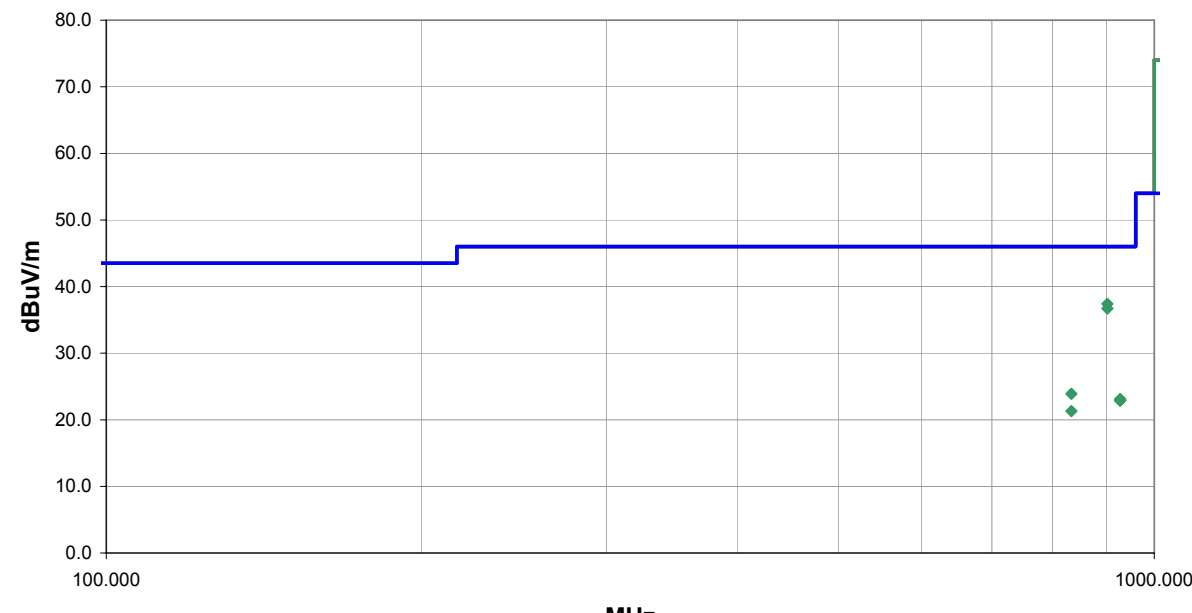
NORTHWEST <b>EMC</b>										<b>RADIATED EMISSIONS DATA SHEET</b>				REV d4.13 05/06/2004	
<b>EUT:</b> Zoom Latitude Programming System Model 3120										<b>Work Order:</b> GDMN0006					
<b>Serial Number:</b> 050336										<b>Date:</b> 07/01/04					
<b>Customer:</b> Guidant Inc										<b>Temperature:</b> 73					
<b>Attendees:</b> Holli Pheil, Yogi Shah										<b>Humidity:</b> 45%					
<b>Cust. Ref. No.:</b>										<b>Barometric Pressure:</b> 30.01					
<b>Tested by:</b> Jeremiah Darden						<b>Power:</b> 120V/60Hz		<b>Job Site:</b> OC10							
<b>TEST SPECIFICATIONS</b>															
<b>Specification:</b> FCC 15.249										<b>Year:</b> 2003					
<b>Method:</b> ANSI C63.4										<b>Year:</b> 2001					
<b>SAMPLE CALCULATIONS</b>															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
<b>COMMENTS</b>															
Set up with three PG's															
<b>EUT OPERATING MODES</b>															
Standard Operating Mode Low band 902.5															
<b>DEVIATIONS FROM TEST STANDARD</b>															
No deviations.															
<b>RESULTS</b>												<b>Run #</b>			
Pass												6			
<b>Other</b>															
(eval 10db atten. 1-2Ghz)															
 _____ Tested By:															
<b>Freq (MHz)</b>	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
1600.021	40.7	-4.6	218.0	1.3	3.0	10.0	H-Horn	AV	0.0	46.1	54.0	-7.9			
1600.021	36.4	-4.6	200.0	1.2	3.0	10.0	V-Horn	AV	0.0	41.8	54.0	-12.2			
1666.624	35.0	-4.3	113.0	1.3	3.0	10.0	H-Horn	AV	0.0	40.7	54.0	-13.3			
1066.535	36.1	-7.0	189.0	2.4	3.0	10.0	V-Horn	AV	0.0	39.1	54.0	-14.9			
1666.624	33.0	-4.3	187.0	1.2	3.0	10.0	V-Horn	AV	0.0	38.7	54.0	-15.3			
1199.829	34.9	-6.5	125.0	1.3	3.0	10.0	H-Horn	AV	0.0	38.4	54.0	-15.6			
1199.829	32.1	-6.5	231.0	1.2	3.0	10.0	V-Horn	AV	0.0	35.6	54.0	-18.4			
1560.330	29.7	-4.9	166.0	1.2	3.0	10.0	V-Horn	AV	0.0	34.8	54.0	-19.2			
1600.021	47.5	-4.6	218.0	1.3	3.0	10.0	H-Horn	PK	0.0	52.9	74.0	-21.1			
1066.535	29.6	-7.0	98.0	1.3	3.0	10.0	H-Horn	AV	0.0	32.6	54.0	-21.4			
1600.021	46.7	-4.6	200.0	1.2	3.0	10.0	V-Horn	PK	0.0	52.1	74.0	-21.9			
1560.330	25.6	-4.9	228.0	1.3	3.0	10.0	H-Horn	AV	0.0	30.7	54.0	-23.3			
1066.535	47.5	-7.0	189.0	2.4	3.0	10.0	V-Horn	PK	0.0	50.5	74.0	-23.5			
1666.624	44.3	-4.3	113.0	1.3	3.0	10.0	H-Horn	PK	0.0	50.0	74.0	-24.0			
1666.624	43.8	-4.3	187.0	1.2	3.0	10.0	V-Horn	PK	0.0	49.5	74.0	-24.5			
1560.330	43.7	-4.9	166.0	1.2	3.0	10.0	V-Horn	PK	0.0	48.8	74.0	-25.2			
1199.829	44.4	-6.5	231.0	1.2	3.0	10.0	V-Horn	PK	0.0	47.9	74.0	-26.1			
1066.535	43.5	-7.0	98.0	1.3	3.0	10.0	H-Horn	PK	0.0	46.5	74.0	-27.5			
1199.829	42.9	-6.5	125.0	1.3	3.0	10.0	H-Horn	PK	0.0	46.4	74.0	-27.6			
1560.330	40.6	-4.9	228.0	1.3	3.0	10.0	H-Horn	PK	0.0	45.7	74.0	-28.3			


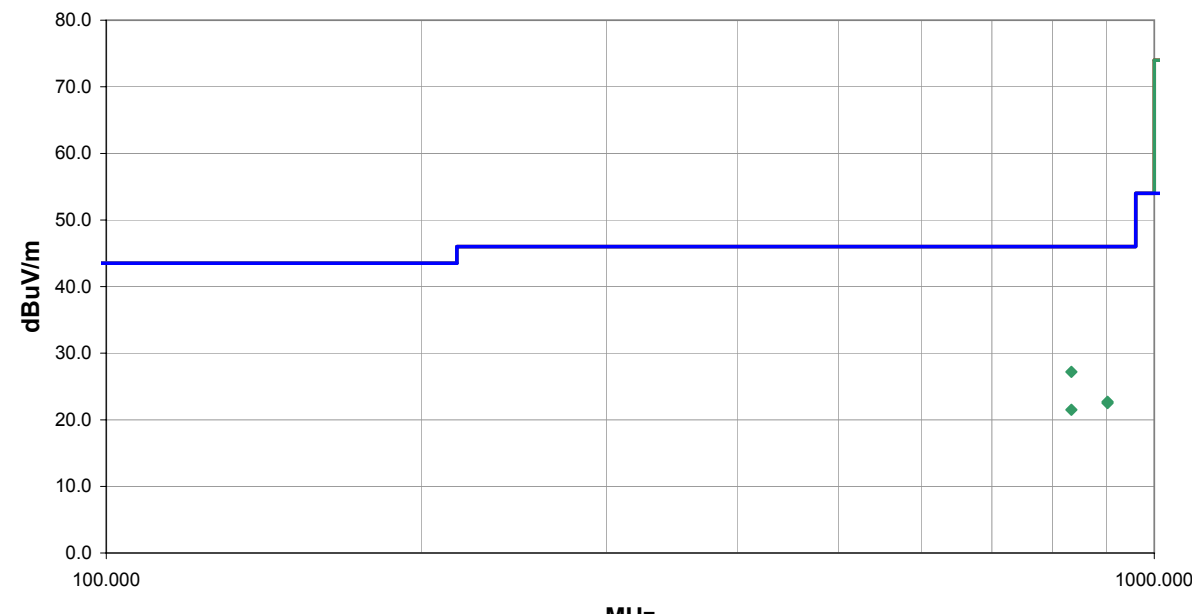
NORTHWEST EMC										REV dtd. 13 05/06/2004			
RADIATED EMISSIONS DATA SHEET													
EUT: Zoom Latitude Programming System Model 3120						Work Order: GDMN0006							
Serial Number: 050336						Date: 07/01/04							
Customer: Guidant Inc						Temperature: 73							
Attendees: Holli Pheil, Yogi Shah						Humidity: 45%							
Cust. Ref. No.:						Barometric Pressure: 30.01							
Tested by: Jeremiah Darden				Power: 120V/60Hz		Job Site: OC10							
TEST SPECIFICATIONS													
Specification: FCC 15.249						Year: 2003							
Method: ANSI C63.4						Year: 2001							
SAMPLE CALCULATIONS													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
COMMENTS													
Set up with three PG's													
EUT OPERATING MODES													
Standard Operating Mode Mid band 914													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
RESULTS										Run #			
Pass										5			
Other													
(eval 10db atten. 1-2Ghz)													
													
Tested By:													
													
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	
1599.971	39.1	-4.6	174.0	1.2	3.0	10.0	V-Horn	AV	0.0	44.5	54.0	-9.5	
1599.971	35.5	-4.6	133.0	1.3	3.0	10.0	H-Horn	AV	0.0	40.9	54.0	-13.1	
1199.942	34.1	-6.5	219.0	1.3	3.0	10.0	H-Horn	AV	0.0	37.6	54.0	-16.4	
1199.942	33.5	-6.5	213.0	1.2	3.0	10.0	V-Horn	AV	0.0	37.0	54.0	-17.0	
1667.000	30.1	-4.3	129.0	1.3	3.0	10.0	H-Horn	AV	0.0	35.8	54.0	-18.2	
1560.120	29.3	-4.9	173.0	1.2	3.0	10.0	V-Horn	AV	0.0	34.4	54.0	-19.6	
1667.000	28.3	-4.3	159.0	1.2	3.0	10.0	V-Horn	AV	0.0	34.0	54.0	-20.0	
1295.962	28.3	-5.9	317.0	1.2	3.0	10.0	V-Horn	AV	0.0	32.4	54.0	-21.6	
1560.120	27.2	-4.9	224.0	1.3	3.0	10.0	H-Horn	AV	0.0	32.3	54.0	-21.7	
1066.635	28.6	-7.0	180.0	1.2	3.0	10.0	V-Horn	AV	0.0	31.6	54.0	-22.4	
1066.635	28.3	-7.0	120.0	1.3	3.0	10.0	H-Horn	AV	0.0	31.3	54.0	-22.7	
1295.962	27.2	-5.9	132.0	2.5	3.0	10.0	H-Horn	AV	0.0	31.3	54.0	-22.7	
1599.971	44.3	-4.6	174.0	1.2	3.0	10.0	V-Horn	PK	0.0	49.7	74.0	-24.3	
1599.971	43.4	-4.6	133.0	1.3	3.0	10.0	H-Horn	PK	0.0	48.8	74.0	-25.2	
1560.120	43.3	-4.9	173.0	1.2	3.0	10.0	V-Horn	PK	0.0	48.4	74.0	-25.6	
1295.962	43.4	-5.9	317.0	1.2	3.0	10.0	V-Horn	PK	0.0	47.5	74.0	-26.5	
1295.962	42.6	-5.9	132.0	2.5	3.0	10.0	H-Horn	PK	0.0	46.7	74.0	-27.3	
1199.942	42.9	-6.5	219.0	1.3	3.0	10.0	H-Horn	PK	0.0	46.4	74.0	-27.6	
1560.120	41.3	-4.9	224.0	1.3	3.0	10.0	H-Horn	PK	0.0	46.4	74.0	-27.6	
1667.000	40.6	-4.3	129.0	1.3	3.0	10.0	H-Horn	PK	0.0	46.3	74.0	-27.7	
1199.942	42.7	-6.5	213.0	1.2	3.0	10.0	V-Horn	PK	0.0	46.2	74.0	-27.8	


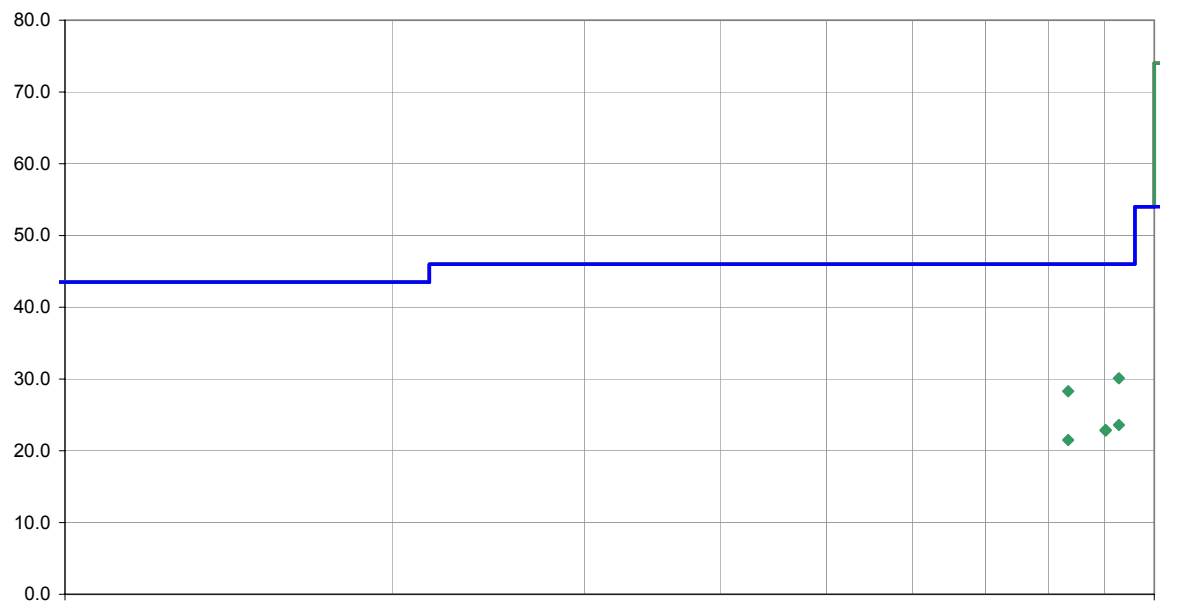
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
1667.000	40.4	-4.3	159.0	1.2	3.0	10.0	V-Horn	PK	0.0	46.1	74.0	-27.9
1066.635	41.1	-7.0	180.0	1.2	3.0	10.0	V-Horn	PK	0.0	44.1	74.0	-29.9
1066.635	40.8	-7.0	120.0	1.3	3.0	10.0	H-Horn	PK	0.0	43.8	74.0	-30.2


NORTHWEST EMC										REV dtd. 13 05/06/2004			
RADIATED EMISSIONS DATA SHEET													
EUT: Zoom Latitude Programming System Model 3120							Work Order: GDMN0006						
Serial Number: 050336							Date: 07/01/04						
Customer: Guidant Inc							Temperature: 73						
Attendees: Holli Pheil, Yogi Shah							Humidity: 45%						
Cust. Ref. No.:							Barometric Pressure: 30.01						
Tested by: Jeremiah Darden					Power: 120V/60Hz		Job Site: OC10						
TEST SPECIFICATIONS													
Specification: FCC 15.249							Year: 2003						
Method: ANSI C63.4							Year: 2001						
SAMPLE CALCULATIONS													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
COMMENTS													
Set up with three PG's													
EUT OPERATING MODES													
Standard Operating Mode High band 927.5													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
RESULTS													
Pass												Run #	
												4	
Other													
(eval 10db atten. 1-2Ghz)													
 Tested By: _____													
													
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	
1600.021	38.7	-4.6	176.0	1.2	3.0	10.0	V-Horn	AV	0.0	44.1	54.0	-9.9	
1600.021	36.0	-4.6	138.0	1.3	3.0	10.0	H-Horn	AV	0.0	41.4	54.0	-12.6	
1199.917	35.9	-6.5	147.0	1.3	3.0	10.0	H-Horn	AV	0.0	39.4	54.0	-14.6	
1199.917	34.9	-6.5	215.0	1.2	3.0	10.0	V-Horn	AV	0.0	38.4	54.0	-15.6	
1560.017	29.0	-4.9	175.0	1.2	3.0	10.0	V-Horn	AV	0.0	34.1	54.0	-19.9	
1625.000	28.2	-4.4	253.0	1.7	3.0	10.0	H-Horn	AV	0.0	33.8	54.0	-20.2	
1625.000	27.7	-4.4	152.0	1.8	3.0	10.0	V-Horn	AV	0.0	33.3	54.0	-20.7	
1560.017	26.8	-4.9	146.0	1.3	3.0	10.0	H-Horn	AV	0.0	31.9	54.0	-22.1	
1625.000	45.5	-4.4	152.0	1.8	3.0	10.0	V-Horn	PK	0.0	51.1	74.0	-22.9	
1600.021	44.5	-4.6	176.0	1.2	3.0	10.0	V-Horn	PK	0.0	49.9	74.0	-24.1	
1600.021	43.2	-4.6	138.0	1.3	3.0	10.0	H-Horn	PK	0.0	48.6	74.0	-25.4	
1560.017	43.1	-4.9	175.0	1.2	3.0	10.0	V-Horn	PK	0.0	48.2	74.0	-25.8	
1625.000	41.7	-4.4	253.0	1.7	3.0	10.0	H-Horn	PK	0.0	47.3	74.0	-26.7	
1199.917	43.1	-6.5	147.0	1.3	3.0	10.0	H-Horn	PK	0.0	46.6	74.0	-27.4	
1199.917	43.1	-6.5	215.0	1.2	3.0	10.0	V-Horn	PK	0.0	46.6	74.0	-27.4	
1560.017	41.0	-4.9	146.0	1.3	3.0	10.0	H-Horn	PK	0.0	46.1	74.0	-27.9	



NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET										REV d4.13 05/06/2004	
EUT: Zoom Latitude Programming System Model 3120							Work Order: GDMN0006						
Serial Number: 050336							Date: 07/02/04						
Customer: Guidant Inc							Temperature: 73						
Attendees: Holli Pheil, Yogi Shah							Humidity: 45%						
Cust. Ref. No.:							Barometric Pressure: 30.01						
Tested by: Jeremiah Darden					Power: 120V/60Hz		Job Site: OC10						
TEST SPECIFICATIONS													
Specification: FCC 15.249							Year: 2003						
Method: ANSI C63.4							Year: 2001						
SAMPLE CALCULATIONS													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
COMMENTS													
Set up with three PG's													
EUT OPERATING MODES													
Standard Operating Mode Low band 902.5 MHz													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
RESULTS												Run #	
Pass												7	
Other													
<div style="text-align: right; margin-right: 50px;">             Tested By:         </div>													
													
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	
902.000	6.0	31.4	175.0	1.2	3.0	0.0	V-Bilog	QP	0.0	37.4	46.0	-8.6	
902.000	5.3	31.4	168.0	1.0	3.0	0.0	H-Bilog	QP	0.0	36.7	46.0	-9.3	
833.520	-6.5	30.4	281.0	3.6	3.0	0.0	V-Bilog	QP	0.0	23.9	46.0	-22.1	
928.000	-8.4	31.5	57.0	2.5	3.0	0.0	V-Bilog	QP	0.0	23.1	46.0	-22.9	
927.500	-8.5	31.5	360.0	1.0	3.0	0.0	H-Bilog	QP	0.0	23.0	46.0	-23.0	
927.500	-8.6	31.5	237.0	1.2	3.0	0.0	V-Bilog	QP	0.0	22.9	46.0	-23.1	
928.000	-8.6	31.5	331.0	1.0	3.0	0.0	H-Bilog	QP	0.0	22.9	46.0	-23.1	
833.520	-9.1	30.4	59.0	3.3	3.0	0.0	H-Bilog	QP	0.0	21.3	46.0	-24.7	

NORTHWEST EMC										REV dtd. 13 05/06/2004			
RADIATED EMISSIONS DATA SHEET													
EUT: Zoom Latitude Programming System Model 3120						Work Order: GDMN0006							
Serial Number: 050336						Date: 07/02/04							
Customer: Guidant Inc						Temperature: 73							
Attendees: Holli Pheil, Yogi Shah						Humidity: 45%							
Cust. Ref. No.:						Barometric Pressure: 30.01							
Tested by: Jeremiah Darden				Power: 120V/60Hz		Job Site: OC10							
TEST SPECIFICATIONS													
Specification: FCC 15.249						Year: 2003							
Method: ANSI C63.4						Year: 2001							
SAMPLE CALCULATIONS													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
COMMENTS													
Set up with three PG's													
EUT OPERATING MODES													
Standard Operating Mode Mid band 914 MHz													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
RESULTS										Run #			
Pass										7			
Other													
<div style="text-align: right; margin-right: 50px;">             Tested By:         </div>													
													
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	
833.520	-3.2	30.4	278.0	1.9	3.0	0.0	V-Bilog	QP	0.0	27.2	46.0	-18.8	
902.417	-8.7	31.4	60.0	1.2	3.0	0.0	V-Bilog	QP	0.0	22.7	46.0	-23.3	
902.417	-8.9	31.4	2.0	1.0	3.0	0.0	H-Bilog	QP	0.0	22.5	46.0	-23.5	
833.520	-8.9	30.4	71.0	3.8	3.0	0.0	H-Bilog	QP	0.0	21.5	46.0	-24.5	

NORTHWEST EMC										REV d4.13 05/06/2004			
RADIATED EMISSIONS DATA SHEET													
EUT: Zoom Latitude Programming System Model 3120					Work Order: GDMN0006								
Serial Number: 050336					Date: 07/02/04								
Customer: Guidant Inc					Temperature: 73								
Attendees: Holli Pheil, Yogi Shah					Humidity: 45%								
Cust. Ref. No.:					Barometric Pressure: 30.01								
Tested by: Jeremiah Darden					Power: 120V/60Hz					Job Site: OC10			
TEST SPECIFICATIONS													
Specification: FCC 15.249					Year: 2003								
Method: ANSI C63.4					Year: 2001								
SAMPLE CALCULATIONS													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
COMMENTS													
Set up with three PG's													
EUT OPERATING MODES													
Standard Operating Mode High band 927.5 MHz													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
RESULTS													
Pass												Run #	
												9	
Other													
 Tested By: _____													
													
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	
928.000	-1.4	31.5	55.0	2.3	3.0	0.0	V-Bilog	QP	0.0	30.1	46.0	-15.9	
833.520	-2.1	30.4	68.0	1.2	3.0	0.0	V-Bilog	QP	0.0	28.3	46.0	-17.7	
928.000	-7.9	31.5	104.0	3.7	3.0	0.0	H-Bilog	QP	0.0	23.6	46.0	-22.4	
902.417	-8.5	31.4	30.0	3.7	3.0	0.0	V-Bilog	QP	0.0	22.9	46.0	-23.1	
902.417	-8.6	31.4	357.0	1.7	3.0	0.0	H-Bilog	QP	0.0	22.8	46.0	-23.2	
833.520	-8.9	30.4	67.0	1.0	3.0	0.0	H-Bilog	QP	0.0	21.5	46.0	-24.5	

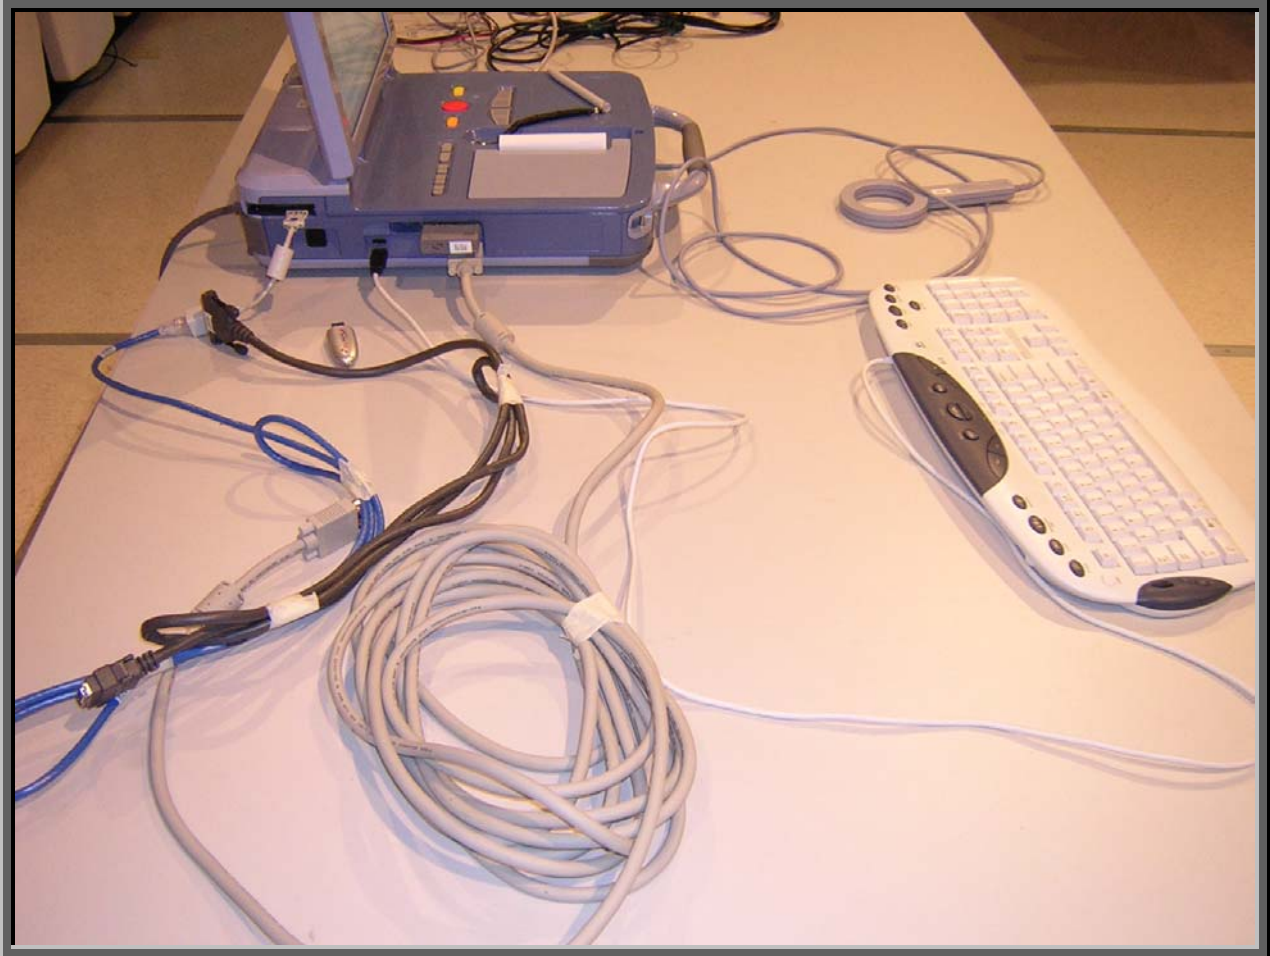



**Justification**

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. All of the EUT parameters listed below were investigated. This includes, but may not be limited to, CPU speeds, video resolution settings, operational modes, and input voltages.

**Operating Modes Investigated:**

902-928 Radio Operating Low Channel
902-928 Radio Operating Mid Channel
902-928 Radio Operating High Channel

**Operating Modes Investigated:**

Typical
---------

**Data Rates Investigated:**

Maximum
---------

**Output Power Setting(s) Investigated:**

Maximum
---------

**Power Input Settings Investigated:**

120 VAC, 60 Hz
----------------

**Worst Case Input Power Setting used for Final Test:**

120 VAC, 60 Hz (designated by client or system limitations)
---

**Frequency Range Investigated**

<b>Start Frequency</b>	902 MHz	<b>Stop Frequency</b>	928 MHz
------------------------	---------	-----------------------	---------

**Software\Firmware Applied During Test**

<b>Operating system</b>	QNX/Red Hat Linux	<b>Version</b>	Unknown
<b>Exercise software</b>	2845 Application	<b>Version</b>	4.3

**Description**

The system was tested using standard operating production software to exercise the functions of the device during the testing.
--

**EUT and Peripherals in Test Setup Boundary**

Description	Manufacturer	Model/Part Number	Serial Number
Zoom Latitude Programming System	Guidant	NGP 3120	050336
USB Keyboard	Logitech	Y-BF37	None
USB Flash Hard Drive	PenDriveUSA	Pen Drive Plus 2.0	None



**Cables**

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Power	Yes	1.8	No	NGP	AC Mains
Parallel	Yes	1.6	No	NGP	Unterminated
Video	No	8.0	Yes	NGP	Unterminated
Patient cables	Yes	3.0	No	NGP	Unterminated
USB	No	1.8	No	NGP	keyboard
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					

**Measurement Equipment**

Description	Manufacturer	Model	Identifier	Last Cal	Interval
Quasi-Peak Adapter	Hewlett-Packard	85650A	AQD	02/10/2004	13 mo
Spectrum Analyzer	Hewlett-Packard	8568B	AAI	02/10/2004	13 mo
Pre-Amplifier	Miteq	AM-1551	AOX	05/07/2004	13 mo
Antenna, Biconilog	EMCO	3142	AXK	05/21/2003	24 mo
Spectrum Analyzer	Hewlett Packard	8593E	AAP	03/22/2004	13 mo
Receiver	Schaffner	SCR 3101	ARC	04/28/2003	24 mo
Pre-Amplifier	Miteq	AMF-4D	APP	06/07/2004	13 mo
Antenna, Horn	EMCO	3115	AHE	10/13/2003	24 mo

**Test Description**


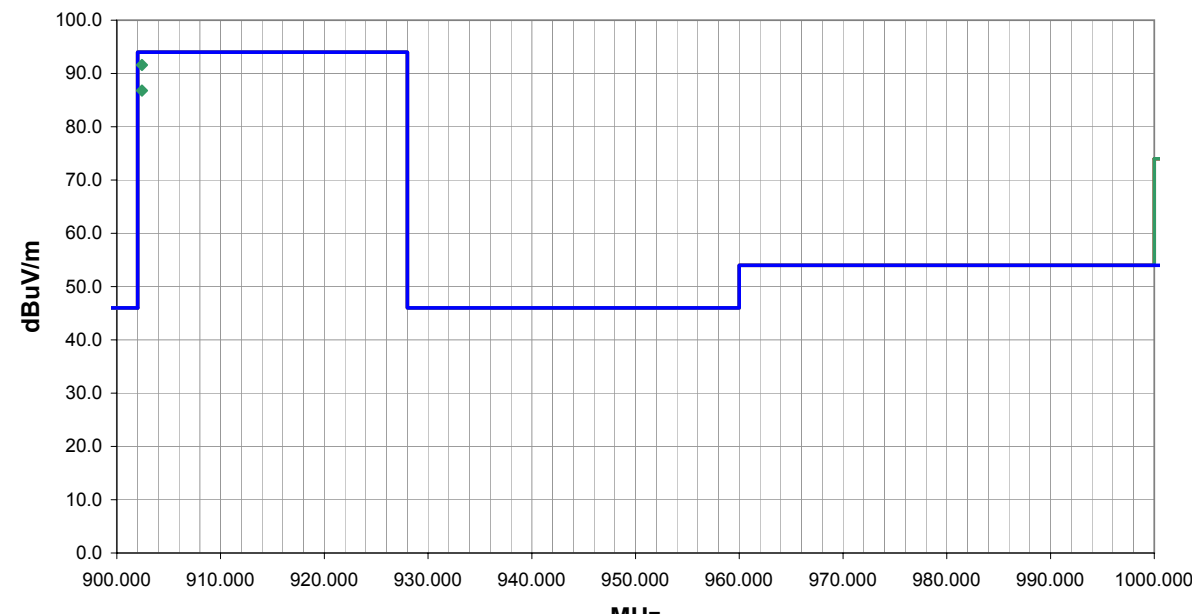
**Requirement:** Per 47 CFR 15.249, The field strength of emissions from intentional radiators operated within the specified frequency bands shall comply with the with the limits as defined in 47 CFR 15.249(a). The Field strength limits are specified at a distance of 3 meters.

**Configuration:** The only antenna to be used with the EUT was tested. The EUT was transmitting at its high, mid and low channels. While scanning, emissions from the EUT were maximized by rotating the EUT, adjusting the measurement antenna height and polarization (per ANSI C63.4:1992).


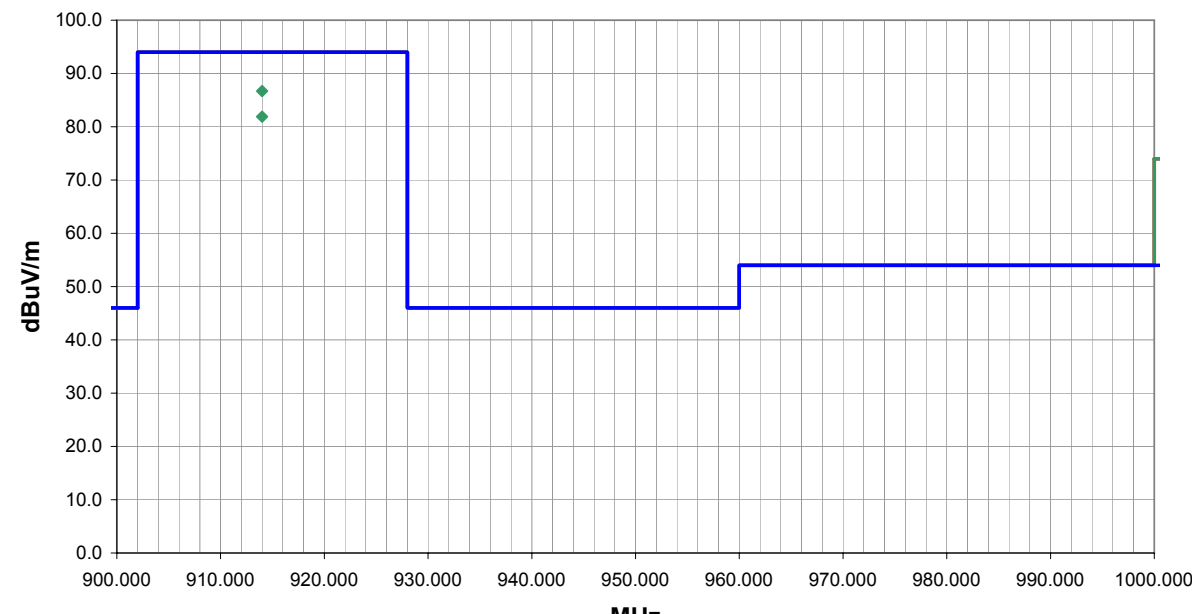
**Measurement Bandwidths**


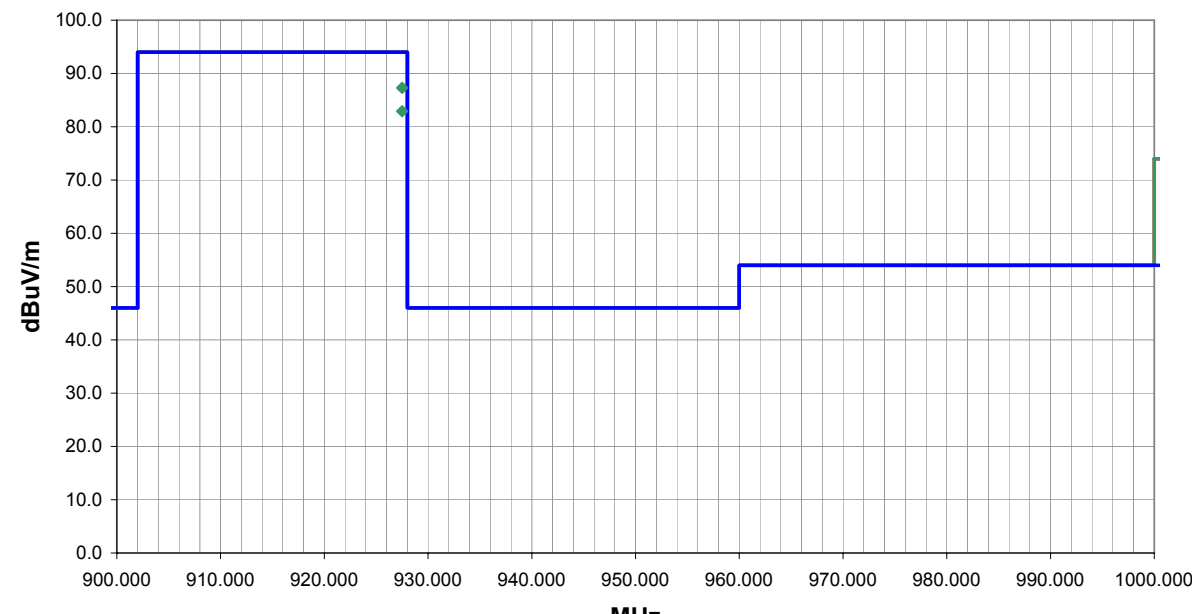
Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 – 0.15	1.0	0.2	0.2
0.15 – 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0
Measurements were made using the bandwidths and detectors specified. No video filter was used.			


**Completed by:**


NORTHWEST EMC										REV d4.13 05/06/2004			
RADIATED EMISSIONS DATA SHEET													
EUT: NGP 3120					Work Order: GDMN0006								
Serial Number: 050336					Date: 07/02/04								
Customer: Guidant Inc					Temperature: 73								
Attendees: Holli Pheil, Yogi Shah					Humidity: 45%								
Cust. Ref. No.:					Barometric Pressure: 30.01								
Tested by: Jeremiah Darden					Power: 120VAC/60Hz					Job Site: OC10			
TEST SPECIFICATIONS													
Specification: FCC 15.249(a)					Year: 2003								
Method: ANSI C63.4					Year: 2001								
SAMPLE CALCULATIONS													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
COMMENTS													
Standard Operating Mode													
EUT OPERATING MODES													
Standard Operating Mode Low band 902.5 MHz													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
RESULTS										Run #			
Pass										7			
Other													
										 Tested By:			
													
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	
902.417	60.2	31.4	201.0	1.2	3.0	0.0	V-Bilog	QP	0.0	91.6	94.0	-2.4	
902.417	55.4	31.4	171.0	1.1	3.0	0.0	H-Bilog	QP	0.0	86.8	94.0	-7.2	



NORTHWEST EMC										REV d4.13 05/06/2004			
RADIATED EMISSIONS DATA SHEET													
EUT: NGP 3120					Work Order: GDMN0006								
Serial Number: 050336					Date: 07/02/04								
Customer: Guidant Inc					Temperature: 73								
Attendees: Holli Pheil, Yogi Shah					Humidity: 45%								
Cust. Ref. No.:					Barometric Pressure: 30.01								
Tested by: Jeremiah Darden					Power: 120VAC/60Hz					Job Site: OC10			
TEST SPECIFICATIONS													
Specification: FCC 15.249(a)										Year: 2003			
Method: ANSI C63.4										Year: 2001			
SAMPLE CALCULATIONS													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
COMMENTS													
Standard Operating Mode													
EUT OPERATING MODES													
Standard Operating Mode Mid band 914 MHz													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
RESULTS										Run #			
Pass										7			
Other													
										 Tested By:			
													
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	
914.000	55.2	31.5	177.0	1.2	3.0	0.0	V-Bilog	QP	0.0	86.7	94.0	-7.3	
914.000	50.4	31.5	171.0	1.0	3.0	0.0	H-Bilog	QP	0.0	81.9	94.0	-12.1	

NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET										REV d4.13 05/06/2004	
EUT: Zoom Latitude Programming System Model 3120		Work Order: GDMN0006											
Serial Number: 050336		Date: 07/02/04											
Customer: Guidant Inc		Temperature: 73											
Attendees: Holli Pheil, Yogi Shah		Humidity: 45%											
Cust. Ref. No.:		Barometric Pressure: 30.01											
Tested by: Jeremiah Darden		Power: 120VAC/60Hz		Job Site: OC10									
TEST SPECIFICATIONS													
Specification: FCC 15.249(a)		Year: 2003											
Method: ANSI C63.4		Year: 2001											
SAMPLE CALCULATIONS													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
COMMENTS													
Standard Operating Mode													
EUT OPERATING MODES													
Standard Operating Mode High band 927.5 MHz													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
RESULTS													
Pass												Run # 9	
Other													
<div style="text-align: right;">             Tested By: _____         </div>													
													
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	
927.500	55.8	31.5	125.0	1.2	3.0	0.0	V-Bilog	QP	0.0	87.3	94.0	-6.7	
927.500	51.4	31.5	172.0	1.0	3.0	0.0	H-Bilog	QP	0.0	82.9	94.0	-11.1	

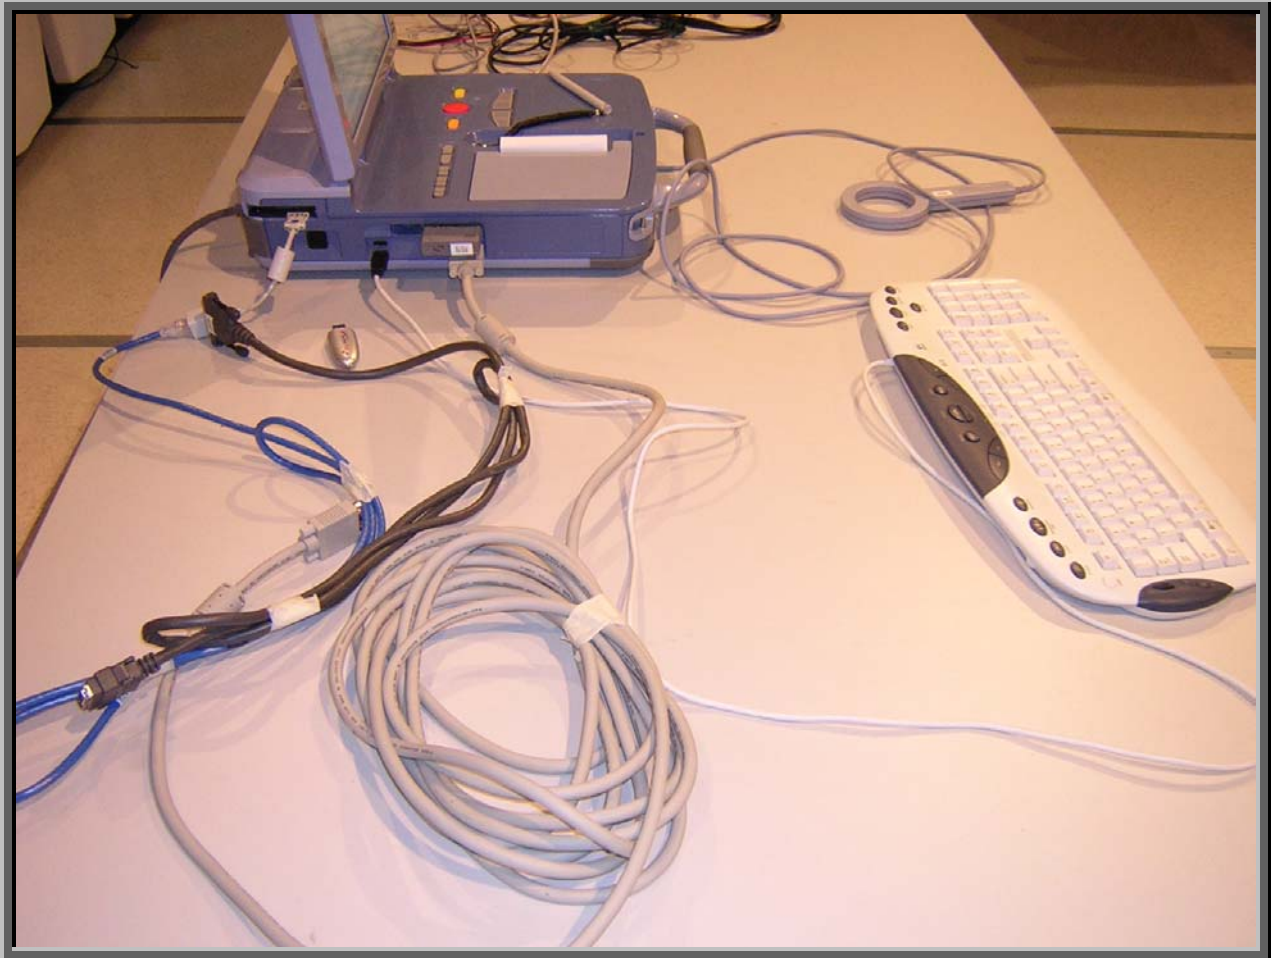



**Justification**

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. All of the EUT parameters listed below were investigated. This includes, but may not be limited to, CPU speeds, video resolution settings, operational modes, and input voltages.

**Operating Modes Investigated:**

902-928 Radio Operating Low Channel
902-928 Radio Operating Mid Channel
902-928 Radio Operating High Channel

**Power Input Settings Investigated:**

120 VAC, 60 Hz
----------------

**Software\Firmware Applied During Test**

<b>Operating system</b>	QNX/Red Hat Linux	<b>Version</b>	Unknown
<b>Exercise software</b>	2845 Application	<b>Version</b>	4.3

**Description**

The system was tested using standard operating production software to exercise the functions of the device during the testing.

**EUT and Peripherals in Test Setup Boundary**

Description	Manufacturer	Model/Part Number	Serial Number
USB Keyboard	Logitech	Y-BF37	None
USB Flash Hard Drive	PenDriveUSA	Pen Drive Plus 2.0	None
Zoom Latitude	Guidant	3120	050342
PCMCIA Card	3Com	10/100 Lan	6UK18F1DCE
Telemetry Wand	Guidant	6577	None

**Cables**

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Power	Yes	1.8	No	Zoom Latitude	AC Mains
Parallel	Yes	1.6	No	Zoom Latitude	Unterminated
Video	No	8.0	Yes	Zoom Latitude	Unterminated
USB	No	1.8	No	Zoom Latitude	Keyboard
ECG	Yes	4.0	No	Zoom Latitude	Unterminated
Slave Stimulator	Yes	3.0	No	Zoom Latitude	Unterminated
Telemetry	Yes	3.0	No	Zoom Latitude	Telemetry Wand
Analog Output	No	2.0	No	Zoom Latitude	Unterminated
Telecom	No	1.8	No	PCMCIA Card	Unterminated

PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.



**Measurement Equipment**

Description	Manufacturer	Model	Identifier	Last Cal	Interval
LISN	Solar	9252-50-24-BNC	LIA	12/16/2003	13 mo
LISN	Solar	9252-50-R-24-BNC	LIQ	12/17/2003	13 mo
Spectrum Analyzer	Hewlett Packard	8593E	AAP	03/22/2004	13 mo
Receiver	Schaffner	SCR 3101	ARC	04/28/2003	24 mo

**Test Description**


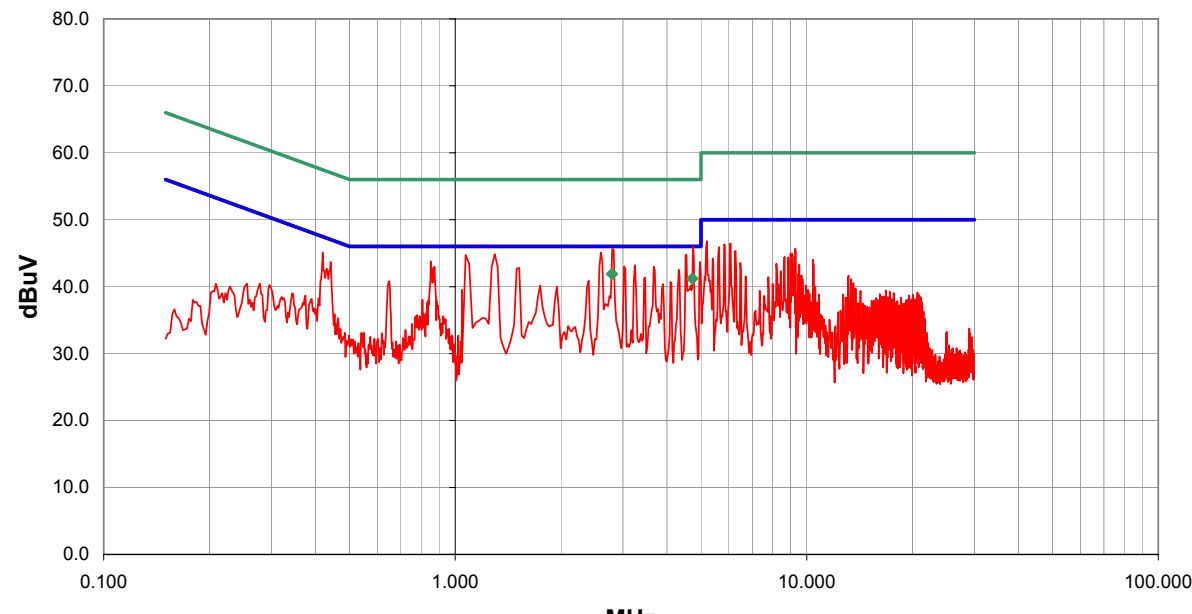
Using the mode of operation and configuration noted within this report, conducted emissions tests were performed. The frequency range investigated (scanned), is also noted in this report. Conducted power line measurements are made, unless otherwise specified, over the frequency range from 150 kHz to 30 MHz to determine the line-to-ground radio-noise voltage that is conducted from the EUT power-input terminals that are directly (or indirectly via separate transformer or power supplies) connected to a public power network. Equipment is tested with power cords that are normally used or that have electrical or shielding characteristics that are the same as those cords normally used. Typically those measurements are made using a LISN (Line Impedance Stabilization Network), the 50  $\Omega$  measuring port is terminated by a 50  $\Omega$  EMI meter or a 50  $\Omega$  resistive load. All 50  $\Omega$  measuring ports of the LISN are terminated by 50 $\Omega$ .


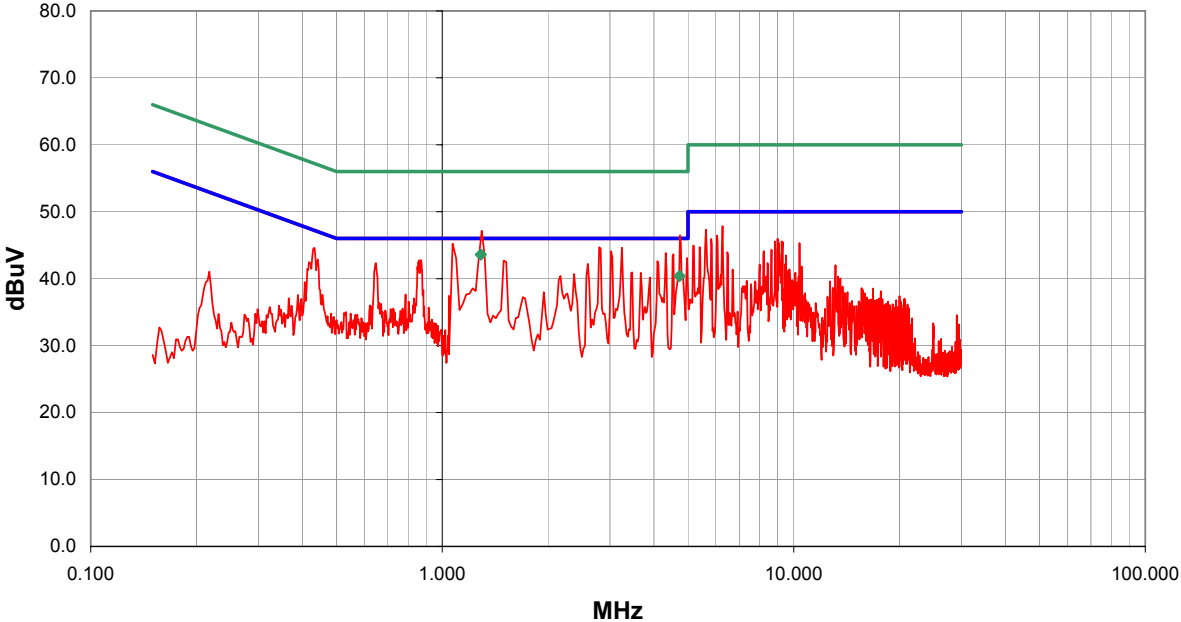
**Measurement Bandwidths**

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 – 0.15	1.0	0.2	0.2
0.15 – 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0


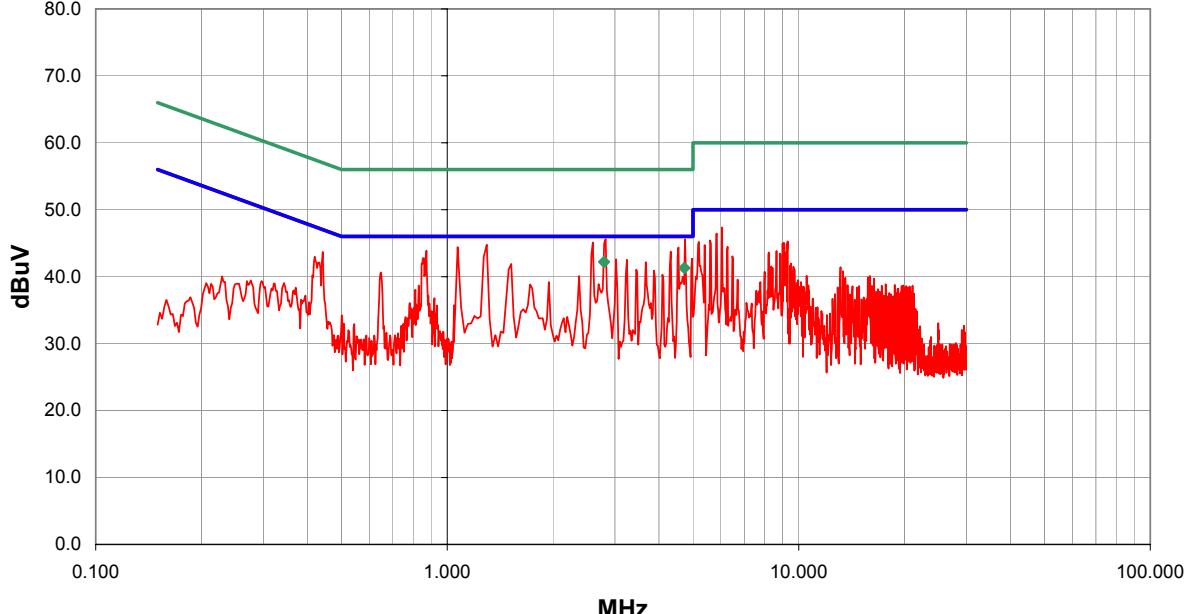
*Measurements were made using the bandwidths and detectors specified. No video filter was used.*


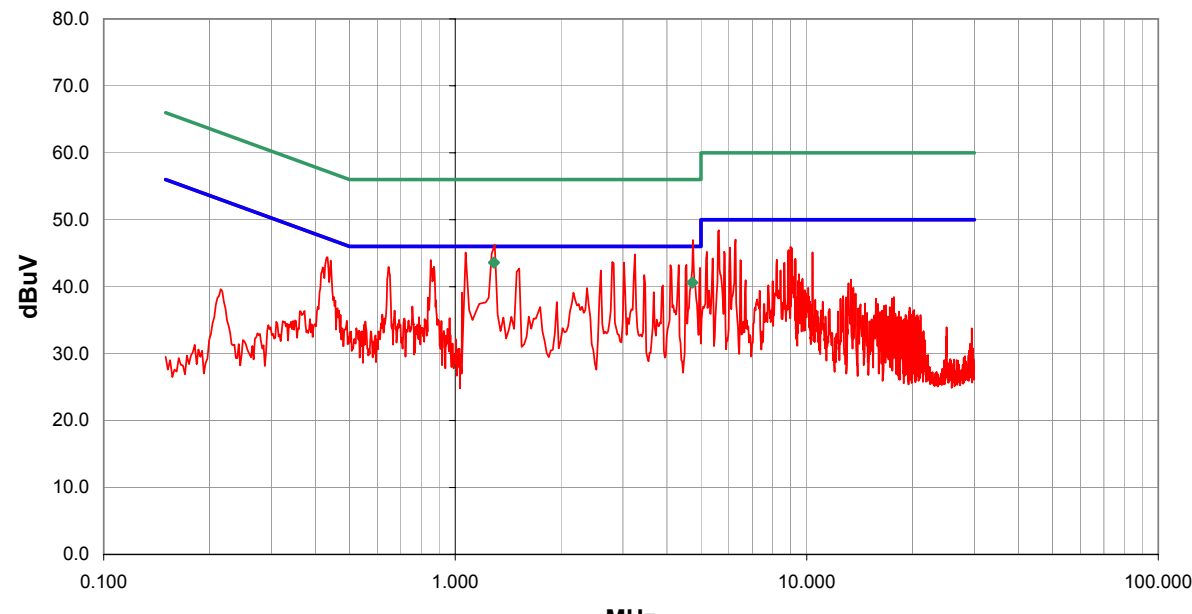
**Completed by:**


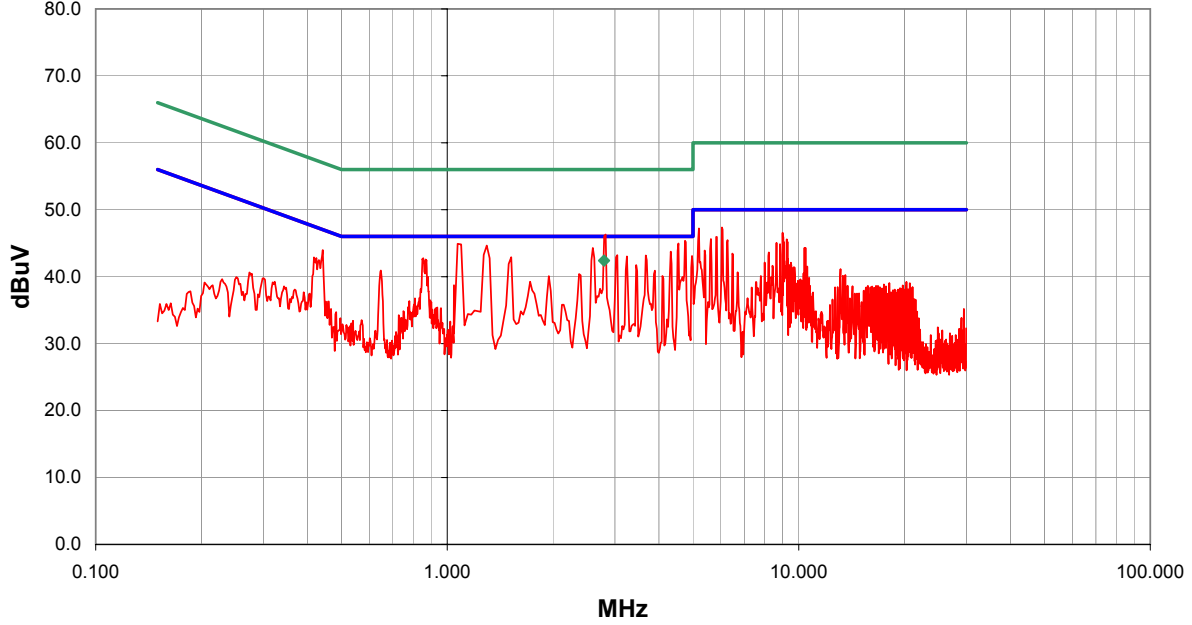

NORTHWEST EMC		CONDUCTED EMISSIONS DATA SHEET				REV df4.2 08/10/2004				
EUT: Zoom Latitude Programming System, Model 3120				Work Order: GDMN0018						
Serial Number: 050342				Date: 08/25/04						
Customer: Guidant Imc.				Temperature: 75						
Attendees: none				Humidity: 45%						
Cust. Ref. No.:				Barometric Pressure: 30.05						
Tested by: Jonathan Peng		Power: 120VAC/60Hz		Job Site: OC10						
<b>TEST SPECIFICATIONS</b>										
Specification: FCC 15.107 Class B				Year: 2003						
Method: ANSI C63.4				Year: 2001						
<b>SAMPLE CALCULATIONS</b>										
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation										
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator										
<b>COMMENTS</b>										
Typical Operation, Conducted Emissions modifications installed - Digital emissions excluded										
<b>EUT OPERATING MODES</b>										
US Radio - Low Band - Xmit Mode										
<b>DEVIATIONS FROM TEST STANDARD</b>										
No deviations.										
<b>RESULTS</b>										
Pass				Line L1		Run # 19				
Other										
				 Tested By:						
										
Freq (MHz)	Amplitude (dBuV)			Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
2.792	21.4			0.0	0.5	20.0	AV	41.9	46.0	-4.1
4.725	20.5			0.0	0.7	20.0	AV	41.2	46.0	-4.8
4.747	25.3			0.0	0.7	20.0		46.0	46.0	0.0
2.796	25.1			0.0	0.5	20.0		45.6	46.0	-0.4
2.596	24.6			0.0	0.5	20.0		45.1	46.0	-0.9
1.295	24.5			0.0	0.4	20.0		44.9	46.0	-1.1
4.547	24.1			0.0	0.7	20.0		44.8	46.0	-1.2
1.070	24.4			0.0	0.3	20.0		44.7	46.0	-1.3
4.972	23.0			0.0	0.7	20.0		43.7	46.0	-2.3
3.246	22.7			0.0	0.5	20.0		43.2	46.0	-2.8
3.021	22.5			0.0	0.5	20.0		43.0	46.0	-3.0
3.671	22.4			0.0	0.6	20.0		43.0	46.0	-3.0
5.197	26.1			0.0	0.7	20.0		46.8	50.0	-3.2
1.520	22.4			0.0	0.4	20.0		42.8	46.0	-3.2
4.322	21.9			0.0	0.6	20.0		42.5	46.0	-3.5
6.073	25.7			0.0	0.7	20.0		46.4	50.0	-3.6
5.822	25.6			0.0	0.7	20.0		46.3	50.0	-3.7
5.622	25.2			0.0	0.7	20.0		45.9	50.0	-4.1
9.274	24.8			0.0	0.9	20.0		45.7	50.0	-4.3


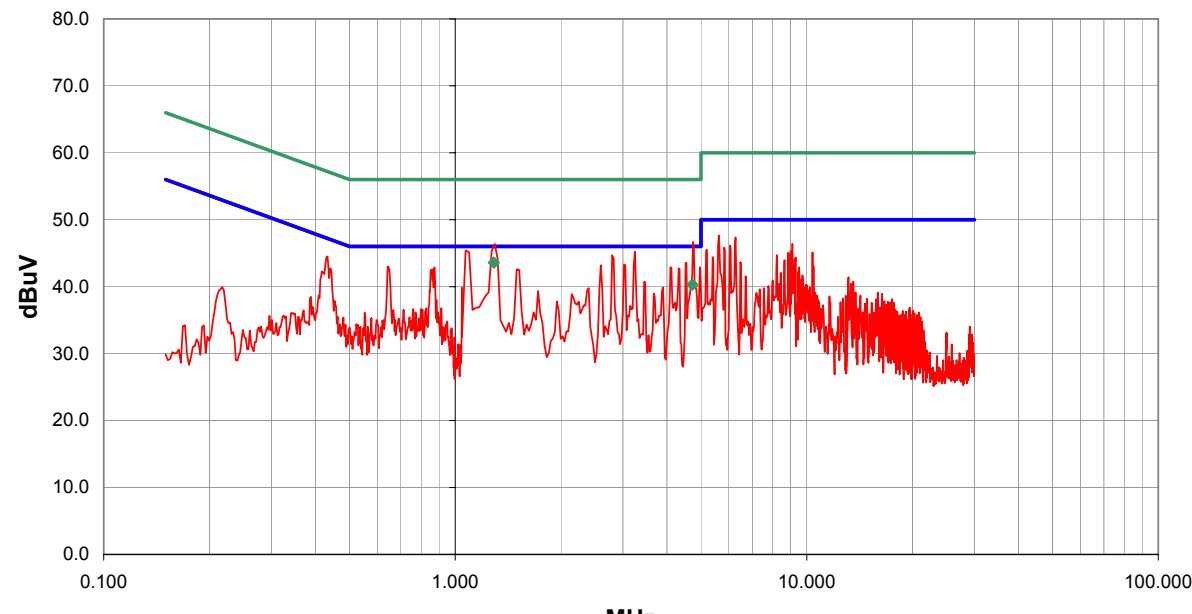
NORTHWEST EMC		CONDUCTED EMISSIONS DATA SHEET				REV df4.2 08/10/2004				
EUT: Zoom Latitude Programming System, Model 3120				Work Order: GDMN0018						
Serial Number: 050342				Date: 08/25/04						
Customer: Guidant Imc.				Temperature: 75						
Attendees: none				Humidity: 45%						
Cust. Ref. No.:				Barometric Pressure: 30.05						
Tested by: Jonathan Peng		Power: 120VAC/60Hz		Job Site: OC10						
TEST SPECIFICATIONS										
Specification: FCC 15.107 Class B				Year: 2003						
Method: ANSI C63.4				Year: 2001						
SAMPLE CALCULATIONS										
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation										
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator										
COMMENTS										
Typical Operation, Conducted Emissions modifications installed - Digital emissions excluded										
EUT OPERATING MODES										
US Radio - Low Band - Xmit Mode										
DEVIATIONS FROM TEST STANDARD										
No deviations.										
RESULTS										
Pass				Line L2		Run # 28				
Other				 Tested By:						
										
Freq (MHz)	Amplitude (dBuV)			Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
1.287	23.2			0.0	0.4	20.0	AV	43.6	46.0	-2.4
4.731	19.7			0.0	0.7	20.0	AV	40.4	46.0	-5.6
1.070	24.9			0.0	0.3	20.0		45.2	46.0	-0.8
2.796	24.2			0.0	0.5	20.0		44.7	46.0	-1.3
3.246	24.1			0.0	0.5	20.0		44.6	46.0	-1.4
3.021	23.6			0.0	0.5	20.0		44.1	46.0	-1.9
6.273	27.1			0.0	0.8	20.0		47.9	50.0	-2.1
4.322	23.2			0.0	0.6	20.0		43.8	46.0	-2.2
4.547	23.0			0.0	0.7	20.0		43.7	46.0	-2.3
5.622	26.6			0.0	0.7	20.0		47.3	50.0	-2.7
4.972	22.4			0.0	0.7	20.0		43.1	46.0	-2.9
1.495	22.3			0.0	0.4	20.0		42.7	46.0	-3.3
4.097	22.0			0.0	0.6	20.0		42.6	46.0	-3.4
6.048	25.7			0.0	0.7	20.0		46.4	50.0	-3.6
0.647	22.1			0.0	0.2	20.0		42.3	46.0	-3.7
2.596	21.7			0.0	0.5	20.0		42.2	46.0	-3.8
9.000	25.1			0.0	0.9	20.0		46.0	50.0	-4.0
5.822	25.2			0.0	0.7	20.0		45.9	50.0	-4.1
9.030	24.8			0.0	0.9	20.0		45.7	50.0	-4.3


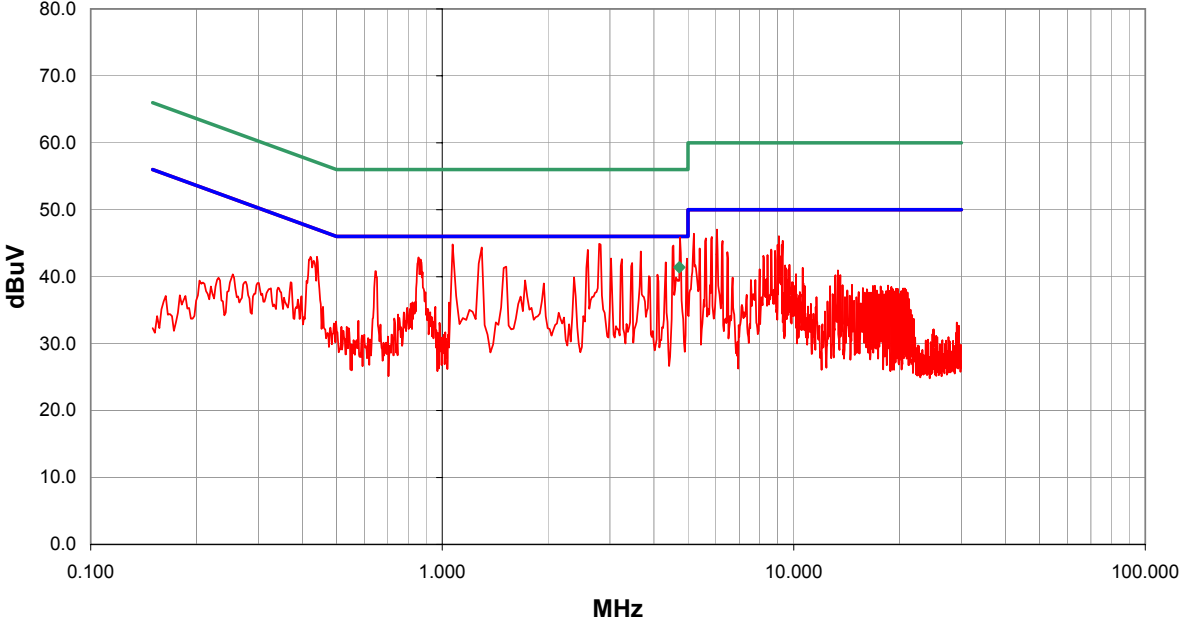



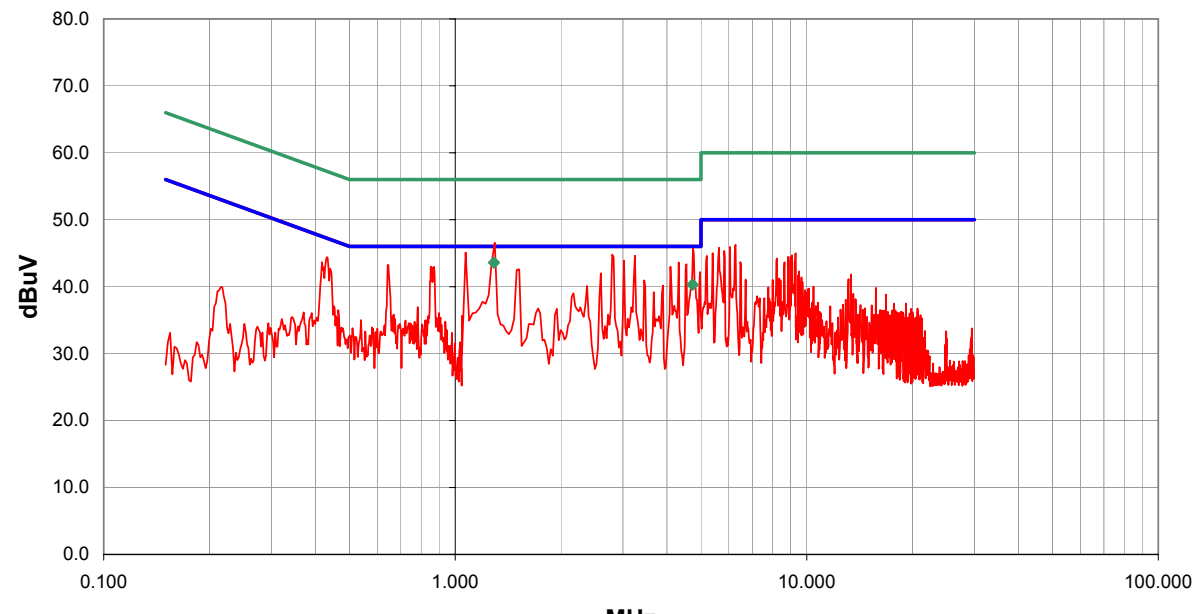
NORTHWEST EMC		CONDUCTED EMISSIONS DATA SHEET				REV df4.2 08/10/2004				
EUT: Zoom Latitude Programming System, Model 3120				Work Order: GDMN0018						
Serial Number: 050342				Date: 08/25/04						
Customer: Guidant Imc.				Temperature: 75						
Attendees: none				Humidity: 45%						
Cust. Ref. No.:				Barometric Pressure: 30.05						
Tested by: Jonathan Peng		Power: 120VAC/60Hz		Job Site: OC10						
<b>TEST SPECIFICATIONS</b>										
Specification: FCC 15.107 Class B				Year: 2003						
Method: ANSI C63.4				Year: 2001						
<b>SAMPLE CALCULATIONS</b>										
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation										
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator										
<b>COMMENTS</b>										
Typical Operation, Conducted Emissions modifications installed - Digital emissions excluded										
<b>EUT OPERATING MODES</b>										
US Radio - Low Band - Receive Mode										
<b>DEVIATIONS FROM TEST STANDARD</b>										
No deviations.										
<b>RESULTS</b>				Line		Run #				
Pass				L1		18				
Other										
				 Tested By:						
										
Freq (MHz)	Amplitude (dBuV)			Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
2.794	21.7			0.0	0.5	20.0	AV	42.2	46.0	-3.8
4.727	20.6			0.0	0.7	20.0	AV	41.3	46.0	-4.7
2.821	25.1			0.0	0.5	20.0		45.6	46.0	-0.4
4.747	24.9			0.0	0.7	20.0		45.6	46.0	-0.4
2.596	24.6			0.0	0.5	20.0		45.1	46.0	-0.9
1.295	24.4			0.0	0.4	20.0		44.8	46.0	-1.2
1.070	24.1			0.0	0.3	20.0		44.4	46.0	-1.6
4.547	23.7			0.0	0.7	20.0		44.4	46.0	-1.6
4.322	23.1			0.0	0.6	20.0		43.7	46.0	-2.3
6.048	26.6			0.0	0.7	20.0		47.3	50.0	-2.7
4.972	22.0			0.0	0.7	20.0		42.7	46.0	-3.3
3.021	22.1			0.0	0.5	20.0		42.6	46.0	-3.4
3.246	22.0			0.0	0.5	20.0		42.5	46.0	-3.5
5.847	25.7			0.0	0.7	20.0		46.4	50.0	-3.6
3.671	21.6			0.0	0.6	20.0		42.2	46.0	-3.8
1.520	21.5			0.0	0.4	20.0		41.9	46.0	-4.1
5.597	24.7			0.0	0.7	20.0		45.4	50.0	-4.6
9.299	24.4			0.0	0.9	20.0		45.3	50.0	-4.7
5.197	24.5			0.0	0.7	20.0		45.2	50.0	-4.8


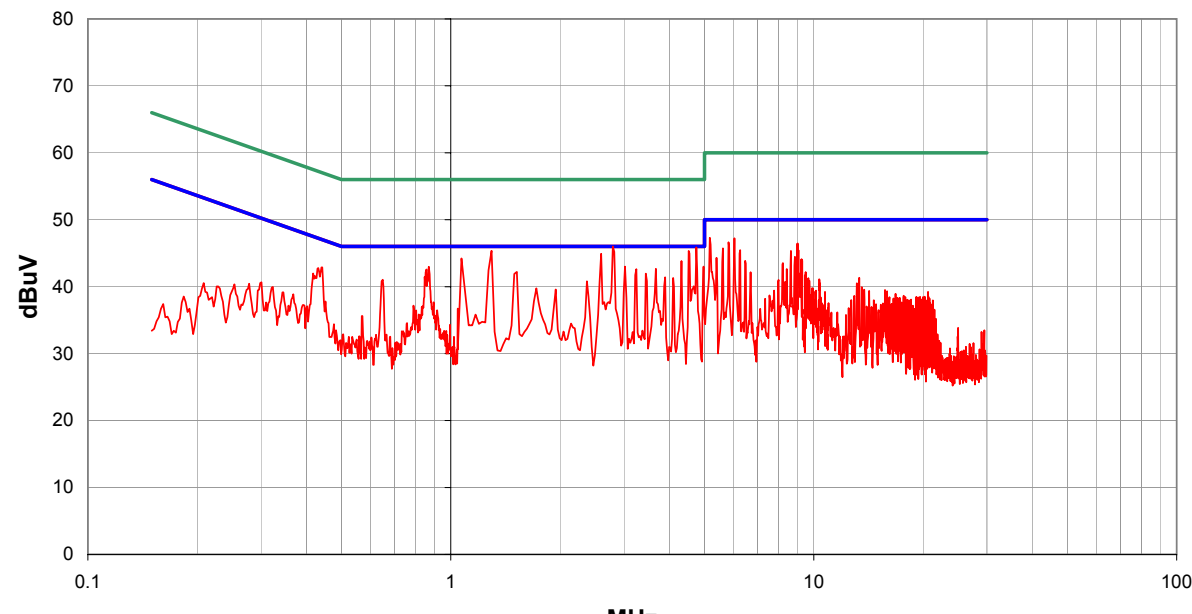
NORTHWEST EMC		CONDUCTED EMISSIONS DATA SHEET				REV df4.2 08/10/2004				
EUT: Zoom Latitude Programming System, Model 3120				Work Order: GDMN0018						
Serial Number: 050342				Date: 08/25/04						
Customer: Guidant Imc.				Temperature: 75						
Attendees: none				Humidity: 45%						
Cust. Ref. No.:				Barometric Pressure: 30.05						
Tested by: Jonathan Peng		Power: 120VAC/60Hz		Job Site: OC10						
<b>TEST SPECIFICATIONS</b>										
Specification: FCC 15.107 Class B				Year: 2003						
Method: ANSI C63.4				Year: 2001						
<b>SAMPLE CALCULATIONS</b>										
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation										
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator										
<b>COMMENTS</b>										
Typical Operation, Conducted Emissions modifications installed - Digital emissions excluded										
<b>EUT OPERATING MODES</b>										
US Radio - Low Band - Receive Mode										
<b>DEVIATIONS FROM TEST STANDARD</b>										
No deviations.										
<b>RESULTS</b>				Line		Run #				
Pass				L2		29				
Other										
				 Tested By:						
										
Freq (MHz)	Amplitude (dBuV)			Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
1.289	23.2			0.0	0.4	20.0	AV	43.6	46.0	-2.4
4.727	19.9			0.0	0.7	20.0	AV	40.6	46.0	-5.4
1.070	24.8			0.0	0.3	20.0		45.1	46.0	-0.9
3.246	24.3			0.0	0.5	20.0		44.8	46.0	-1.2
5.622	27.7			0.0	0.7	20.0		48.4	50.0	-1.6
2.796	23.2			0.0	0.5	20.0		43.7	46.0	-2.3
3.021	23.1			0.0	0.5	20.0		43.6	46.0	-2.4
4.547	22.6			0.0	0.7	20.0		43.3	46.0	-2.7
4.322	22.6			0.0	0.6	20.0		43.2	46.0	-2.8
4.097	22.6			0.0	0.6	20.0		43.2	46.0	-2.8
6.273	26.3			0.0	0.8	20.0		47.1	50.0	-2.9
0.647	22.7			0.0	0.2	20.0		42.9	46.0	-3.1
4.972	22.1			0.0	0.7	20.0		42.8	46.0	-3.2
1.520	22.3			0.0	0.4	20.0		42.7	46.0	-3.3
2.596	21.9			0.0	0.5	20.0		42.4	46.0	-3.6
9.000	25.1			0.0	0.9	20.0		46.0	50.0	-4.0
6.048	25.1			0.0	0.7	20.0		45.8	50.0	-4.2
9.074	24.9			0.0	0.9	20.0		45.8	50.0	-4.2
3.446	21.2			0.0	0.5	20.0		41.7	46.0	-4.3


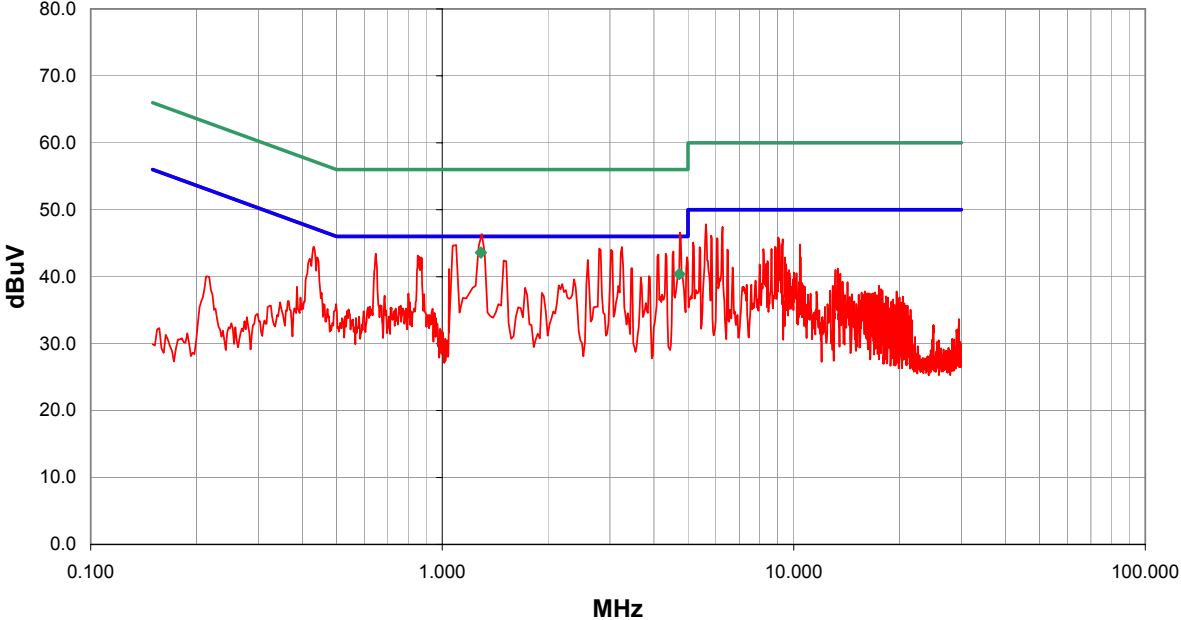
NORTHWEST EMC		CONDUCTED EMISSIONS DATA SHEET				REV df4.2 08/10/2004				
EUT: Zoom Latitude Programming System, Model 3120				Work Order: GDMN0018						
Serial Number: 050342				Date: 08/25/04						
Customer: Guidant Imc.				Temperature: 75						
Attendees: none				Humidity: 45%						
Cust. Ref. No.:				Barometric Pressure: 30.05						
Tested by: Jonathan Peng		Power: 120VAC/60Hz		Job Site: OC10						
<b>TEST SPECIFICATIONS</b>										
Specification: FCC 15.107 Class B				Year: 2003						
Method: ANSI C63.4				Year: 2001						
<b>SAMPLE CALCULATIONS</b>										
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation										
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator										
<b>COMMENTS</b>										
Typical Operation, Conducted Emissions modifications installed - Digital emissions excluded										
<b>EUT OPERATING MODES</b>										
US Radio - Mid Band - Xmit Mode										
<b>DEVIATIONS FROM TEST STANDARD</b>										
No deviations.										
<b>RESULTS</b>				Line		Run #				
Pass				L1		20				
Other										
				 Tested By:						
										
Freq (MHz)	Amplitude (dBuV)			Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
2.793	21.9			0.0	0.5	20.0	AV	42.4	46.0	-3.6
4.747	24.7			0.0	0.7	20.0		45.4	46.0	-0.6
4.547	24.3			0.0	0.7	20.0		45.0	46.0	-1.0
1.070	24.6			0.0	0.3	20.0		44.9	46.0	-1.1
1.295	24.3			0.0	0.4	20.0		44.7	46.0	-1.3
2.596	23.8			0.0	0.5	20.0		44.3	46.0	-1.7
4.322	23.1			0.0	0.6	20.0		43.7	46.0	-2.3
6.048	26.6			0.0	0.7	20.0		47.3	50.0	-2.7
5.197	26.5			0.0	0.7	20.0		47.2	50.0	-2.8
3.046	22.7			0.0	0.5	20.0		43.2	46.0	-2.8
3.671	22.6			0.0	0.6	20.0		43.2	46.0	-2.8
4.972	22.4			0.0	0.7	20.0		43.1	46.0	-2.9
3.246	22.5			0.0	0.5	20.0		43.0	46.0	-3.0
1.520	22.5			0.0	0.4	20.0		42.9	46.0	-3.1
9.000	25.7			0.0	0.9	20.0		46.6	50.0	-3.4
9.030	25.1			0.0	0.9	20.0		46.0	50.0	-4.0
5.847	25.2			0.0	0.7	20.0		45.9	50.0	-4.1
3.446	21.2			0.0	0.5	20.0		41.7	46.0	-4.3
5.622	24.9			0.0	0.7	20.0		45.6	50.0	-4.4

NORTHWEST EMC		CONDUCTED EMISSIONS DATA SHEET				REV df4.2 08/10/2004					
EUT: Zoom Latitude Programming System, Model 3120				Work Order: GDMN0018							
Serial Number: 050342				Date: 08/25/04							
Customer: Guidant Imc.				Temperature: 75							
Attendees: none				Humidity: 45%							
Cust. Ref. No.:				Barometric Pressure: 30.05							
Tested by: Jonathan Peng		Power: 120VAC/60Hz		Job Site: OC10							
<b>TEST SPECIFICATIONS</b>											
Specification: FCC 15.107 Class B				Year: 2003							
Method: ANSI C63.4				Year: 2001							
<b>SAMPLE CALCULATIONS</b>											
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation											
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator											
<b>COMMENTS</b>											
Typical Operation, Conducted Emissions modifications installed - Digital emissions excluded											
<b>EUT OPERATING MODES</b>											
US Radio - Mid Band - Xmit Mode											
<b>DEVIATIONS FROM TEST STANDARD</b>											
No deviations.											
<b>RESULTS</b>				Line		Run #					
Pass				L2		27					
Other											
				 Tested By:							
											
Freq (MHz)	Amplitude (dBuV)			Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)		Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
1.288	23.2			0.0	0.4	20.0	AV		43.6	46.0	-2.4
4.727	19.6			0.0	0.7	20.0	AV		40.3	46.0	-5.7
1.070	25.1			0.0	0.3	20.0			45.4	46.0	-0.6
3.246	24.7			0.0	0.5	20.0			45.2	46.0	-0.8
2.796	24.2			0.0	0.5	20.0			44.7	46.0	-1.3
5.622	26.9			0.0	0.7	20.0			47.6	50.0	-2.4
4.547	22.9			0.0	0.7	20.0			43.6	46.0	-2.4
6.273	26.6			0.0	0.8	20.0			47.4	50.0	-2.6
3.021	22.8			0.0	0.5	20.0			43.3	46.0	-2.7
2.596	22.7			0.0	0.5	20.0			43.2	46.0	-2.8
0.643	22.8			0.0	0.2	20.0			43.0	46.0	-3.0
4.097	22.3			0.0	0.6	20.0			42.9	46.0	-3.1
4.972	22.2			0.0	0.7	20.0			42.9	46.0	-3.1
4.322	22.1			0.0	0.6	20.0			42.7	46.0	-3.3
1.495	22.2			0.0	0.4	20.0			42.6	46.0	-3.4
9.099	25.5			0.0	0.9	20.0			46.4	50.0	-3.6
6.048	25.4			0.0	0.7	20.0			46.1	50.0	-3.9
5.822	25.1			0.0	0.7	20.0			45.8	50.0	-4.2
5.197	24.8			0.0	0.7	20.0			45.5	50.0	-4.5


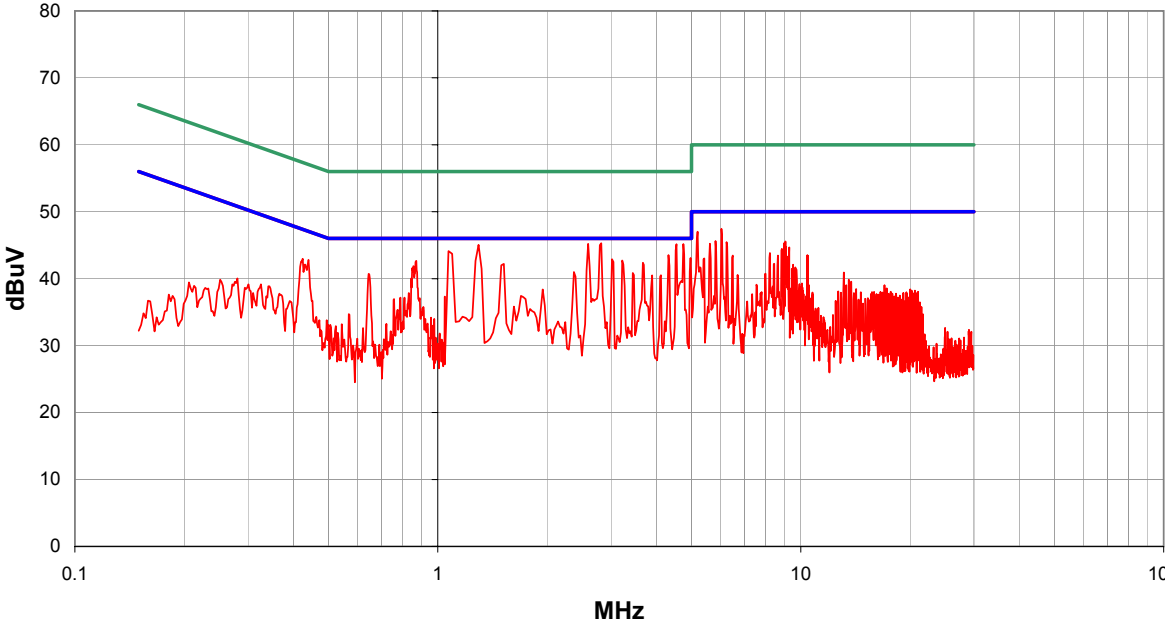
NORTHWEST EMC		CONDUCTED EMISSIONS DATA SHEET				REV df4.2 08/10/2004				
EUT: Zoom Latitude Programming System, Model 3120					Work Order: GDMN0018					
Serial Number: 050342					Date: 08/25/04					
Customer: Guidant Imc.					Temperature: 75					
Attendees: none					Humidity: 45%					
Cust. Ref. No.:					Barometric Pressure: 30.05					
Tested by: Jonathan Peng				Power: 120VAC/60Hz	Job Site: OC10					
<b>TEST SPECIFICATIONS</b>										
Specification: FCC 15.107 Class B					Year: 2003					
Method: ANSI C63.4					Year: 2001					
<b>SAMPLE CALCULATIONS</b>										
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation										
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator										
<b>COMMENTS</b>										
Typical Operation, Conducted Emissions modifications installed - Digital emissions excluded										
<b>EUT OPERATING MODES</b>										
US Radio - Mid Band - Receive Mode										
<b>DEVIATIONS FROM TEST STANDARD</b>										
No deviations.										
<b>RESULTS</b>					Line	Run #				
Pass					L1	21				
Other					 Tested By:					
										
Freq (MHz)	Amplitude (dBuV)			Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
4.727	20.7			0.0	0.7	20.0	AV	41.4	46.0	-4.6
4.747	25.2			0.0	0.7	20.0		45.9	46.0	-0.1
2.796	24.4			0.0	0.5	20.0		44.9	46.0	-1.1
1.070	24.5			0.0	0.3	20.0		44.8	46.0	-1.2
4.547	24.0			0.0	0.7	20.0		44.7	46.0	-1.3
1.295	24.0			0.0	0.4	20.0		44.4	46.0	-1.6
2.596	23.5			0.0	0.5	20.0		44.0	46.0	-2.0
3.671	23.2			0.0	0.6	20.0		43.8	46.0	-2.2
6.048	26.3			0.0	0.7	20.0		47.0	50.0	-3.0
3.021	22.2			0.0	0.5	20.0		42.7	46.0	-3.3
4.972	22.0			0.0	0.7	20.0		42.7	46.0	-3.3
3.246	22.1			0.0	0.5	20.0		42.6	46.0	-3.4
5.197	25.7			0.0	0.7	20.0		46.4	50.0	-3.6
4.322	21.5			0.0	0.6	20.0		42.1	46.0	-3.9
9.074	25.2			0.0	0.9	20.0		46.1	50.0	-3.9
3.471	21.5			0.0	0.5	20.0		42.0	46.0	-4.0
5.847	25.2			0.0	0.7	20.0		45.9	50.0	-4.1
5.622	25.0			0.0	0.7	20.0		45.7	50.0	-4.3
1.520	21.1			0.0	0.4	20.0		41.5	46.0	-4.5


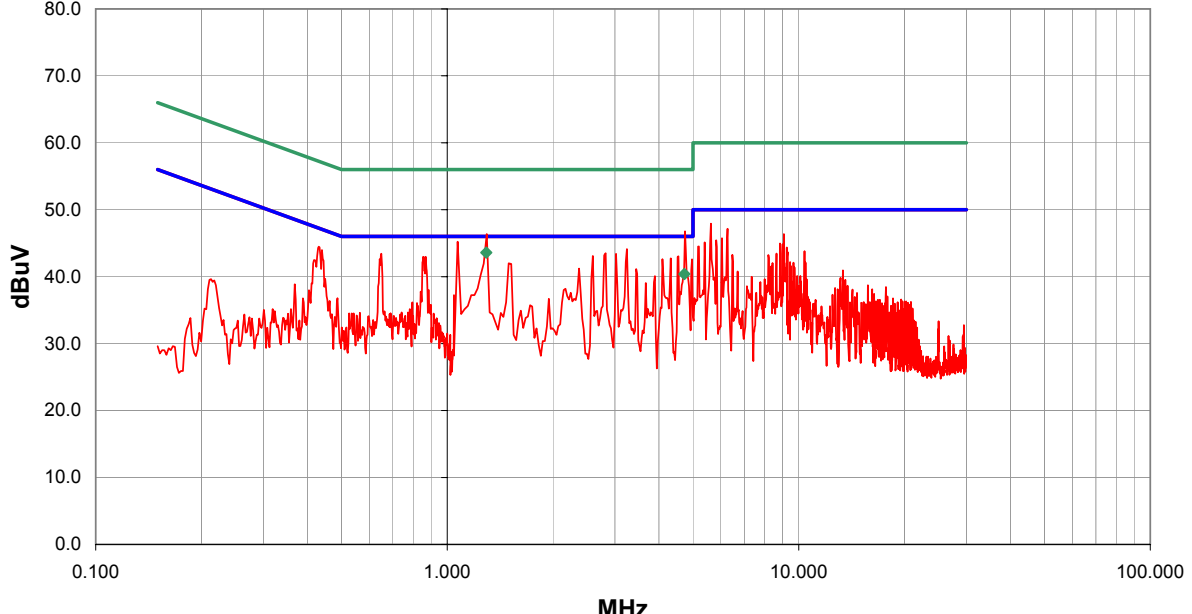
NORTHWEST EMC		CONDUCTED EMISSIONS DATA SHEET				REV df4.2 08/10/2004				
EUT: Zoom Latitude Programming System, Model 3120				Work Order: GDMN0018						
Serial Number: 050342				Date: 08/25/04						
Customer: Guidant Imc.				Temperature: 75						
Attendees: none				Humidity: 45%						
Cust. Ref. No.:				Barometric Pressure: 30.05						
Tested by: Jonathan Peng		Power: 120VAC/60Hz		Job Site: OC10						
<b>TEST SPECIFICATIONS</b>										
Specification: FCC 15.107 Class B				Year: 2003						
Method: ANSI C63.4				Year: 2001						
<b>SAMPLE CALCULATIONS</b>										
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation										
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator										
<b>COMMENTS</b>										
Typical Operation, Conducted Emissions modifications installed - Digital emissions excluded										
<b>EUT OPERATING MODES</b>										
US Radio - Mid Band - Receive Mode										
<b>DEVIATIONS FROM TEST STANDARD</b>										
No deviations.										
<b>RESULTS</b>										
Pass				Line L2		Run # 26				
Other										
				 Tested By:						
										
Freq (MHz)	Amplitude (dBuV)			Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
1.289	23.2			0.0	0.4	20.0	AV	43.6	46.0	-2.4
4.730	19.6			0.0	0.7	20.0	AV	40.3	46.0	-5.7
4.747	25.0			0.0	0.7	20.0		45.7	46.0	-0.3
1.070	24.8			0.0	0.3	20.0		45.1	46.0	-0.9
2.796	24.3			0.0	0.5	20.0		44.8	46.0	-1.2
3.246	24.1			0.0	0.5	20.0		44.6	46.0	-1.4
3.021	23.4			0.0	0.5	20.0		43.9	46.0	-2.1
4.322	23.0			0.0	0.6	20.0		43.6	46.0	-2.4
4.547	22.7			0.0	0.7	20.0		43.4	46.0	-2.6
0.645	23.0			0.0	0.2	20.0		43.2	46.0	-2.8
4.097	22.4			0.0	0.6	20.0		43.0	46.0	-3.0
1.520	22.2			0.0	0.4	20.0		42.6	46.0	-3.4
6.273	25.5			0.0	0.8	20.0		46.3	50.0	-3.7
4.972	21.5			0.0	0.7	20.0		42.2	46.0	-3.8
2.596	21.5			0.0	0.5	20.0		42.0	46.0	-4.0
6.048	25.2			0.0	0.7	20.0		45.9	50.0	-4.1
5.622	25.1			0.0	0.7	20.0		45.8	50.0	-4.2
5.822	24.6			0.0	0.7	20.0		45.3	50.0	-4.7
5.397	24.3			0.0	0.7	20.0		45.0	50.0	-5.0

NORTHWEST <b>EMC</b>		<b>CONDUCTED EMISSIONS DATA SHEET</b>				REV df4.2 08/10/2004			
EUT: Zoom Latitude Programming System, Model 3120				Work Order: GDMN0018					
Serial Number: 050342				Date: 08/25/04					
Customer: Guidant Imc.				Temperature: 75					
Attendees: none				Humidity: 45%					
Cust. Ref. No.:				Barometric Pressure: 30.05					
Tested by: Jonathan Peng		Power: 120VAC/60Hz		Job Site: OC10					
<b>TEST SPECIFICATIONS</b>									
Specification: FCC 15.107 Class B				Year: 2003					
Method: ANSI C63.4				Year: 2001					
<b>SAMPLE CALCULATIONS</b>									
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation									
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator									
<b>COMMENTS</b>									
Typical Operation, Conducted Emissions modifications installed - Digital emissions excluded									
<b>EUT OPERATING MODES</b>									
US Radio - High Band - Xmit Mode									
<b>DEVIATIONS FROM TEST STANDARD</b>									
No deviations.									
<b>RESULTS</b>				<b>Line</b>		<b>Run #</b>			
Pass				L1		23			
Other				 Tested By:					
									
<b>Freq (MHz)</b>	<b>Amplitude (dBuV)</b>		<b>Transducer (dB)</b>	<b>Cable (dB)</b>	<b>External Attenuation (dB)</b>	<b>Detector (blank equal peaks [PK] from scan)</b>	<b>Adjusted dBuV</b>	<b>Spec. Limit dBuV</b>	<b>Compared to Spec. (dB)</b>
0.431	32.6		0.0	0.2	20.0		52.8	47.2	5.6
0.866	30.6		0.0	0.3	20.0		50.9	46.0	4.9
2.796	25.5		0.0	0.5	20.0		46.0	46.0	0.0
4.747	25.2		0.0	0.7	20.0		45.9	46.0	-0.1
1.295	25.0		0.0	0.4	20.0		45.4	46.0	-0.6
4.522	24.7		0.0	0.7	20.0		45.4	46.0	-0.6
2.596	24.4		0.0	0.5	20.0		44.9	46.0	-1.1
1.070	23.9		0.0	0.3	20.0		44.2	46.0	-1.8
4.322	23.2		0.0	0.6	20.0		43.8	46.0	-2.2
5.172	26.6		0.0	0.7	20.0		47.3	50.0	-2.7
6.048	26.5		0.0	0.7	20.0		47.2	50.0	-2.8
3.021	22.5		0.0	0.5	20.0		43.0	46.0	-3.0
4.972	22.3		0.0	0.7	20.0		43.0	46.0	-3.0
3.671	22.1		0.0	0.6	20.0		42.7	46.0	-3.3
5.822	25.9		0.0	0.7	20.0		46.6	50.0	-3.4
3.246	22.1		0.0	0.5	20.0		42.6	46.0	-3.4
9.030	25.6		0.0	0.9	20.0		46.5	50.0	-3.5
9.000	25.5		0.0	0.9	20.0		46.4	50.0	-3.6
1.520	21.8		0.0	0.4	20.0		42.2	46.0	-3.8

NORTHWEST EMC		CONDUCTED EMISSIONS DATA SHEET				REV df4.2 08/10/2004				
EUT: Zoom Latitude Programming System, Model 3120				Work Order: GDMN0018						
Serial Number: 050342				Date: 08/25/04						
Customer: Guidant Imc.				Temperature: 75						
Attendees: none				Humidity: 45%						
Cust. Ref. No.:				Barometric Pressure: 30.05						
Tested by: Jonathan Peng		Power: 120VAC/60Hz		Job Site: OC10						
<b>TEST SPECIFICATIONS</b>										
Specification: FCC 15.107 Class B				Year: 2003						
Method: ANSI C63.4				Year: 2001						
<b>SAMPLE CALCULATIONS</b>										
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation										
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator										
<b>COMMENTS</b>										
Typical Operation, Conducted Emissions modifications installed - Digital emissions excluded										
<b>EUT OPERATING MODES</b>										
US Radio - High Band - Xmit Mode										
<b>DEVIATIONS FROM TEST STANDARD</b>										
No deviations.										
<b>RESULTS</b>										
Pass				Line L2		Run # 24				
Other										
				 Tested By:						
										
Freq (MHz)	Amplitude (dBuV)			Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
1.289	23.2			0.0	0.4	20.0	AV	43.6	46.0	-2.4
4.729	19.7			0.0	0.7	20.0	AV	40.4	46.0	-5.6
1.095	24.4			0.0	0.3	20.0		44.7	46.0	-1.3
3.246	23.9			0.0	0.5	20.0		44.4	46.0	-1.6
2.796	23.7			0.0	0.5	20.0		44.2	46.0	-1.8
3.021	23.5			0.0	0.5	20.0		44.0	46.0	-2.0
5.622	27.1			0.0	0.7	20.0		47.8	50.0	-2.2
4.547	23.1			0.0	0.7	20.0		43.8	46.0	-2.2
6.273	26.7			0.0	0.8	20.0		47.5	50.0	-2.5
4.322	22.8			0.0	0.6	20.0		43.4	46.0	-2.6
0.647	23.2			0.0	0.2	20.0		43.4	46.0	-2.6
4.122	22.7			0.0	0.6	20.0		43.3	46.0	-2.7
4.972	22.2			0.0	0.7	20.0		42.9	46.0	-3.1
2.596	22.0			0.0	0.5	20.0		42.5	46.0	-3.5
1.495	22.0			0.0	0.4	20.0		42.4	46.0	-3.6
5.822	25.4			0.0	0.7	20.0		46.1	50.0	-3.9
9.030	25.0			0.0	0.9	20.0		45.9	50.0	-4.1
6.048	25.0			0.0	0.7	20.0		45.7	50.0	-4.3
9.299	24.7			0.0	0.9	20.0		45.6	50.0	-4.4



NORTHWEST EMC		CONDUCTED EMISSIONS DATA SHEET				REV df4.2 08/10/2004				
EUT: Zoom Latitude Programming System, Model 3120				Work Order: GDMN0018						
Serial Number: 050342				Date: 08/25/04						
Customer: Guidant Imc.				Temperature: 75						
Attendees: none				Humidity: 45%						
Cust. Ref. No.:				Barometric Pressure: 30.05						
Tested by: Jonathan Peng		Power: 120VAC/60Hz		Job Site: OC10						
<b>TEST SPECIFICATIONS</b>										
Specification: FCC 15.107 Class B				Year: 2003						
Method: ANSI C63.4				Year: 2001						
<b>SAMPLE CALCULATIONS</b>										
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation										
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator										
<b>COMMENTS</b>										
Typical Operation, Conducted Emissions modifications installed - Digital emissions excluded										
<b>EUT OPERATING MODES</b>										
US Radio - High Band - Receive Mode										
<b>DEVIATIONS FROM TEST STANDARD</b>										
No deviations.										
<b>RESULTS</b>				Line		Run #				
Pass				L1		22				
Other				 Tested By:						
										
Freq (MHz)	Amplitude (dBuV)			Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.431	31.9			0.0	0.2	20.0		52.1	47.2	4.9
0.866	30.5			0.0	0.3	20.0		50.8	46.0	4.8
2.821	24.8			0.0	0.5	20.0		45.3	46.0	-0.7
2.596	24.7			0.0	0.5	20.0		45.2	46.0	-0.8
4.747	24.5			0.0	0.7	20.0		45.2	46.0	-0.8
4.547	24.5			0.0	0.7	20.0		45.2	46.0	-0.8
1.295	24.7			0.0	0.4	20.0		45.1	46.0	-0.9
1.070	23.8			0.0	0.3	20.0		44.1	46.0	-1.9
4.322	22.9			0.0	0.6	20.0		43.5	46.0	-2.5
6.048	26.7			0.0	0.7	20.0		47.4	50.0	-2.6
4.972	22.4			0.0	0.7	20.0		43.1	46.0	-2.9
5.197	26.3			0.0	0.7	20.0		47.0	50.0	-3.0
3.021	22.4			0.0	0.5	20.0		42.9	46.0	-3.1
3.221	22.2			0.0	0.5	20.0		42.7	46.0	-3.3
3.671	21.8			0.0	0.6	20.0		42.4	46.0	-3.6
1.520	21.8			0.0	0.4	20.0		42.2	46.0	-3.8
5.822	24.9			0.0	0.7	20.0		45.6	50.0	-4.4
9.074	24.7			0.0	0.9	20.0		45.6	50.0	-4.4
6.248	24.7			0.0	0.7	20.0		45.4	50.0	-4.6

NORTHWEST EMC		CONDUCTED EMISSIONS DATA SHEET				REV df4.2 08/10/2004				
EUT: Zoom Latitude Programming System, Model 3120				Work Order: GDMN0018						
Serial Number: 050342				Date: 08/25/04						
Customer: Guidant Imc.				Temperature: 75						
Attendees: none				Humidity: 45%						
Cust. Ref. No.:				Barometric Pressure: 30.05						
Tested by: Jonathan Peng		Power: 120VAC/60Hz		Job Site: OC10						
<b>TEST SPECIFICATIONS</b>										
Specification: FCC 15.107 Class B				Year: 2003						
Method: ANSI C63.4				Year: 2001						
<b>SAMPLE CALCULATIONS</b>										
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation										
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator										
<b>COMMENTS</b>										
Typical Operation, Conducted Emissions modifications installed - Digital emissions excluded										
<b>EUT OPERATING MODES</b>										
US Radio - High Band - Receive Mode										
<b>DEVIATIONS FROM TEST STANDARD</b>										
No deviations.										
<b>RESULTS</b>										
Pass				Line L2		Run # 25				
Other										
				 Tested By:						
										
Freq (MHz)	Amplitude (dBuV)			Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
1.292	23.2			0.0	0.4	20.0	AV	43.6	46.0	-2.4
4.728	19.7			0.0	0.7	20.0	AV	40.4	46.0	-5.6
1.070	24.9			0.0	0.3	20.0		45.2	46.0	-0.8
3.246	23.6			0.0	0.5	20.0		44.1	46.0	-1.9
5.622	27.2			0.0	0.7	20.0		47.9	50.0	-2.1
2.821	23.0			0.0	0.5	20.0		43.5	46.0	-2.5
0.649	23.2			0.0	0.2	20.0		43.4	46.0	-2.6
3.021	22.9			0.0	0.5	20.0		43.4	46.0	-2.6
6.273	26.4			0.0	0.8	20.0		47.2	50.0	-2.8
2.596	22.6			0.0	0.5	20.0		43.1	46.0	-2.9
4.547	22.4			0.0	0.7	20.0		43.1	46.0	-2.9
4.322	22.1			0.0	0.6	20.0		42.7	46.0	-3.3
4.097	22.0			0.0	0.6	20.0		42.6	46.0	-3.4
4.972	21.9			0.0	0.7	20.0		42.6	46.0	-3.4
9.074	25.5			0.0	0.9	20.0		46.4	50.0	-3.6
1.495	21.6			0.0	0.4	20.0		42.0	46.0	-4.0
6.048	25.0			0.0	0.7	20.0		45.7	50.0	-4.3
5.822	24.7			0.0	0.7	20.0		45.4	50.0	-4.6
2.371	20.7			0.0	0.5	20.0		41.2	46.0	-4.8

